

**FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 Issue 4**

TEST REPORT

For

Digital Media Device

MODEL NUMBER: SU8E72

REPORT NUMBER: 4792150437-1-RF-3

ISSUE DATE: May 25, 2026

FCC ID: 2A4DH-2284

IC ID: 24273-2284

Prepared for

Amazon.com Services LLC

410 Terry Avenue N, Seattle, Washington, 98109 United States

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	May 25, 2026	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Conducted Output Power	ANSI C63.10-2020, Clause 11.9.2.3.1	FCC Part 15.247 (b)(3) RSS-247 Clause 6.3.2	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2020, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 6.3.1 (a) RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2020, Clause 11.10.5	FCC Part 15.247 (e) RSS-247 Clause 6.3.1 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2020, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 6.6	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2020, Clause 11.12	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 6.6 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2020, Clause 11.6	None; for reporting purposes only.	Pass
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2020, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass

Note:

This report is also performed according to ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 standards.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <FCC 47 CFR PART 15 SUBPART C, ISSED RSS-247 Issue 4> when <Simple Acceptance> decision rule is applied. Decision rule for statement of conformity: The measurement uncertainty is not taken into account for statement of conformity.

CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>9</i>
5.3. <i>MAXIMUM POWER</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>11</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	<i>12</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED	13
7. ANTENNA PORT TEST RESULTS	16
7.1. <i>CONDUCTED OUTPUT POWER</i>	<i>16</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH</i>	<i>17</i>
7.3. <i>POWER SPECTRAL DENSITY</i>	<i>19</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION</i>	<i>20</i>
7.5. <i>DUTY CYCLE</i>	<i>22</i>
8. RADIATED TEST RESULTS	23
8.1. <i>RESTRICTED BANDEGE</i>	<i>31</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)</i>	<i>67</i>
8.3. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)</i>	<i>79</i>
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	<i>103</i>
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	<i>109</i>
8.6. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i>	<i>113</i>
9. ANTENNA REQUIREMENT	115
10. AC POWER LINE CONDUCTED EMISSION	116
11. TEST DATA OF BT0	122

11.1.	APPENDIX A: DTS BANDWIDTH	122
11.1.1.	Test Result	122
11.1.2.	Test Graphs	123
11.2.	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	127
11.2.1.	Test Result	127
11.2.2.	Test Graphs	128
11.3.	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	132
11.3.1.	Test Result	132
11.4.	APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	133
11.4.1.	Test Result	133
11.4.2.	Test Graphs	134
11.5.	APPENDIX E: BAND EDGE MEASUREMENTS	138
11.5.1.	Test Result	138
11.5.2.	Test Graphs	139
11.6.	APPENDIX F: CONDUCTED SPURIOUS EMISSION	142
11.6.1.	Test Result	142
11.6.2.	Test Graphs	143
11.7.	APPENDIX G: DUTY CYCLE	155
11.7.1.	Test Result	155
11.7.2.	Test Graphs	156
12.	TEST DATA OF BT1	158
12.1.	APPENDIX A: DTS BANDWIDTH	158
12.1.1.	Test Result	158
12.1.2.	Test Graphs	159
12.2.	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	163
12.2.1.	Test Result	163
12.2.2.	Test Graphs	164
12.3.	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	168
12.3.1.	Test Result	168
12.4.	APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	169
12.4.1.	Test Result	169
12.4.2.	Test Graphs	170
12.5.	APPENDIX E: BAND EDGE MEASUREMENTS	174
12.5.1.	Test Result	174
12.5.2.	Test Graphs	175
12.6.	APPENDIX F: CONDUCTED SPURIOUS EMISSION	178
12.6.1.	Test Result	178
12.6.2.	Test Graphs	179
12.7.	APPENDIX G: DUTY CYCLE	191
12.7.1.	Test Result	191
12.7.2.	Test Graphs	192
END OF REPORT		193

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Amazon.com Services LLC
Address: 410 Terry Avenue N, Seattle, Washington, 98109 United States

Manufacturer Information


Company Name: Amazon.com Services LLC
Address: 410 Terry Avenue N, Seattle, Washington, 98109 United States

EUT Information

EUT Name: Digital Media Device
Model: SU8E72
Brand: Amazon
Sample Received Date: April 8, 2026
Sample Status: Normal
Sample ID: 9871647
Date of Tested: April 8, 2026 to May 25, 2026


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR PART 15 SUBPART C ISED RSS-247 Issue 4	Pass

Prepared By:



James Qin
Senior Project Engineer

Checked By:



Kebo Zhang
Operations Leader

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC 47 CFR PART 15 SUBPART C
ISED RSS-247 Issue 4, KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site
v01r01, FCC 47 CFR Part 2, ANSI C63.10-2020, ANSI C63.10-2020 + Cor.1-2023, ANSI C63.10-2020 +
Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
------------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	4.36 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.47 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.65 dB (1 GHz ~ 18 GHz)
	4.73 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

Remark: For Radiated Emission measurements (200 MHz - 18 GHz), the EUT support table is made of Expanded Polystyrene (EPS). This material is characterized by a low dielectric constant, as recognized in CISPR 16-1-4, to minimize its influence on field strength measurements. This influence has been considered in the uncertainty budget.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Digital Media Device
Model	SU8E72

Frequency Range:	2402 MHz to 2480 MHz	
Type of Modulation:	GFSK	
Data Rate	BLE 1M	1 Mbps
	BLE 2M	2 Mbps
	BLE 125k	125 kbps
	BLE 500k	500 kbps
Normal Test Voltage:	AC 120 V, 60 Hz	

5.2. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2466	/	/

5.3. MAXIMUM POWER

BT0			
Test Mode	Frequency (MHz)	Channel Number	Maximum Average Output Power (dBm)
LE 1M	2402 ~ 2480	0-39[40]	6.95
LE 2M	2402 ~ 2480	0-39[40]	6.96
BLE 125k	2402 ~ 2480	0-39[40]	6.94
BLE 500k	2402 ~ 2480	0-39[40]	6.99

BT1			
Test Mode	Frequency (MHz)	Channel Number	Maximum Average Output Power (dBm)
LE 1M	2402 ~ 2480	0-39[40]	8.26
LE 2M	2402 ~ 2480	0-39[40]	8.03
BLE 125k	2402 ~ 2480	0-39[40]	8.09
BLE 500k	2402 ~ 2480	0-39[40]	7.89

Note:

1. Maximum peak output power = measured value + cable loss (provided by UL)

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
LE 1M	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz
LE 2M	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz
BLE 125k	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz
BLE 500k	CH 0(Low Channel), CH 19(MID Channel), CH 39(High Channel)	2402 MHz, 2440 MHz, 2480 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software Version		Compliance tool		
Modulation Type	Transmit Antenna Number	Test Software setting value		
		CH 0	CH 19	CH 39
GFSK(1Mbps)	BT0	7	7	7
GFSK(2Mbps)	BT0	7	7	7
BLE 125k	BT0	7	7	7
BLE 500k	BT0	7	7	7
GFSK(1Mbps)	BT1	7	7	7
GFSK(2Mbps)	BT1	7	7	7
BLE 125k	BT1	7	7	7
BLE 500k	BT1	7	7	7

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
BT0	2402-2480	LDS IFA antenna + mini coaxial cable	3
BT1	2402-2480	LDS IFA antenna + mini coaxial cable	3

Note: The antenna gain is provided by client.

Test Mode	Transmit and Receive Mode	Description
LE 1M	☒ 1TX, 1RX	BT0 and BT1 can be used as transmitting/receiving antenna.
LE 2M	☒ 1TX, 1RX	BT0 and BT1 can be used as transmitting/receiving antenna.
BLE 125k	☒ 1TX, 1RX	BT0 and BT1 can be used as transmitting/receiving antenna.
BLE 500k	☒ 1TX, 1RX	BT0 and BT1 can be used as transmitting/receiving antenna.

5.7. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	Laptop	Lenovo	E14	\
2	Debug board	\	\	\


I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	\	\	1.0	\

ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	AC Adaptor	\	LA33NA	Input: AC 100-240V, 1.0A Output: DC 20V=1.75A, 35W

SETUP DIAGRAM FOR TESTS

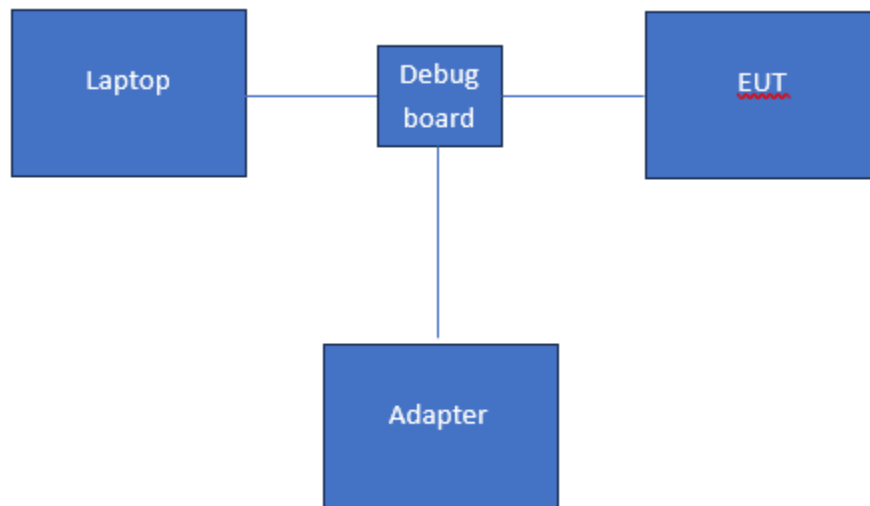

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Dec.26,2025	Dec.25,2026
Vector Signal Generator	R&S	SMBV100A	261637	Sep.12, 2025	Sep.11, 2026
Signal Generator	R&S	SMB100A	178553	Sep.12, 2025	Sep.11, 2026
Signal Analyzer	R&S	FSV40	101118	Sep.12, 2025	Sep.11, 2026
Software					
Description		Manufacturer	Name	Version	
For R&S TS 8997 Test System		Rohde & Schwarz	EMC 32	10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.12, 2025	Sep.11, 2026
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.12, 2025	Sep.11, 2026
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.12, 2025	Sep.11, 2026
DC power supply	TSSTAKASAGO	ZX-400L	409150160137	Sep.12, 2025	Sep.11, 2026
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.12, 2025	Sep.11, 2026
Attenuator	Aglient	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026
RF Control Unit	Tonscend	JS0806-2	23B80620666	Dec.26,2025	Dec.25,2026
Software					
Description	Manufacturer	Name			Version
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System			V3.2.22

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.12, 2025	Sep.11, 2026
Two-Line V-Network	R&S	ENV216	101983	Sep.12, 2025	Sep.11, 2026
Software					

Description	Manufacturer	Name	Version
Test Software for Conducted Emissions	Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions(Below 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.12, 2025	Sep.11, 2026
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.12, 2025	Sep.11, 2026
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Software					
Description	Manufacturer	Name	Version		
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1		

Radiated Emissions(Above 1G)					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Signal Analyzer	R&S	FSV40	101117	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-001-3000	TRS-302-00051	Sep.12, 2025	Sep.11, 2026
Horn Antenna	ETS-Lindgren	3117	00213191	Jan.29,2026	Jan.28,2029
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.12, 2025	Sep.11, 2026
High Gain Horn Antenna	Schwarzbeck	BBHA-9170	697	Jun. 30, 2024	Jun. 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00002	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.12, 2025	Sep.11, 2026
Highpass Filter	Wainwright	WHKX10-2700-3000-1800-40SS	24	Sep.12, 2025	Sep.11, 2026
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Sep.12, 2025	Sep.11, 2026
Software					
Description	Manufacturer	Name	Version		
Test Software for Radiated Emission	Tonscend	JS32-RE	5.0.0		
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1		

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Sep.16, 2025	Sep.15, 2026
Barometer	Yiyi	Baro	N/A	Sep.19, 2025	Sep.18, 2026
Attenuator	Agilent	8495B	2814a12853	Sep.12, 2025	Sep.11, 2026

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247(b)(3) ISED RSS-247 6.3.2	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2020 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.1°C	Relative Humidity	54.6%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60HZ

TEST DATE / ENGINEER

Test Date	April 16, 2026	Test By	Bairong Liu
-----------	----------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data"

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR 15.247(a)(2) ISED RSS-247 6.3.1(a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 1 % to 5 % of the OBW but not less than 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

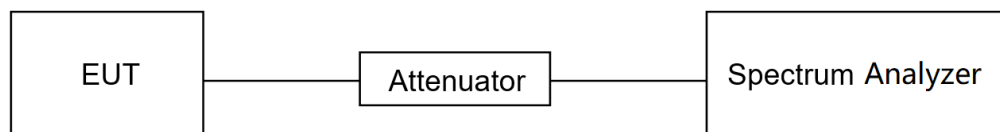

TEST ENVIRONMENT

Temperature	25.1℃	Relative Humidity	54.6%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60HZ

TEST DATE / ENGINEER

Test Date	April 16, 2026	Test By	Bairong Liu
-----------	----------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data"

7.3. POWER SPECTRAL DENSITY

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 47 CFR §15.247 (e) ISED RSS-247 6.3.1 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.10.5.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$> 1.5 \times \text{OBW bandwidth}$
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.1°C	Relative Humidity	54.6%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60HZ

TEST DATE / ENGINEER

Test Date	April 16, 2026	Test By	Bairong Liu
-----------	----------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data"

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

LIMITS

FCC 47 CFR Part15 (15.247) Subpart C ISED RSS-247 ISSUE 4		
Section	Test Item	Limit
FCC 47 CFR §15.247 (d) ISED RSS-247 6.6	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.11.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	$\geq 1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span/RBW}$
Trace	Max hold
Sweep time	No faster than coupled (auto) time

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

TEST SETUP**TEST ENVIRONMENT**

Temperature	25.1℃	Relative Humidity	54.6%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60HZ

TEST DATE / ENGINEER

Test Date	April 16, 2026	Test By	Bairong Liu
-----------	----------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data"

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2020 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP



TEST ENVIRONMENT

Temperature	25.1°C	Relative Humidity	54.6%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60HZ

TEST DATE / ENGINEER

Test Date	April 16, 2026	Test By	Bairong Liu
-----------	----------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data"

8. RADIATED TEST RESULTS

LIMITS

Please refer to FCC 47 CFR §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	369.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC 47 CFR §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

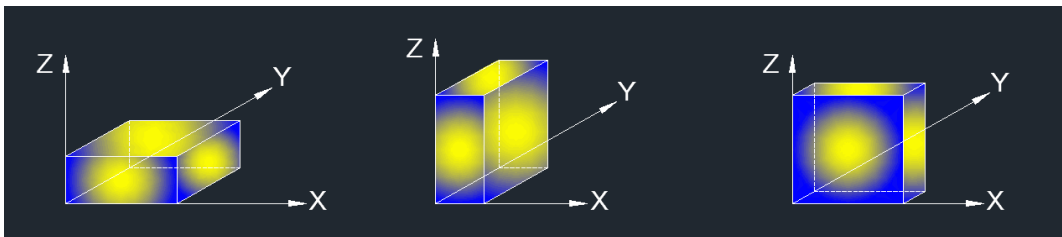

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (Y axis) data recorded in the report.

For Restricted Bandedge:**Note:**

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):**Note:**

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):**Note:**

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):**Note:**

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

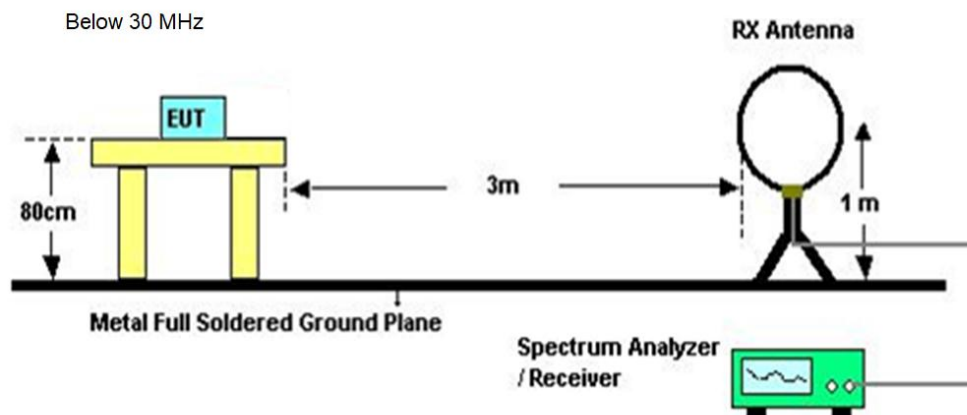

Below 1 GHz and above 30 MHz

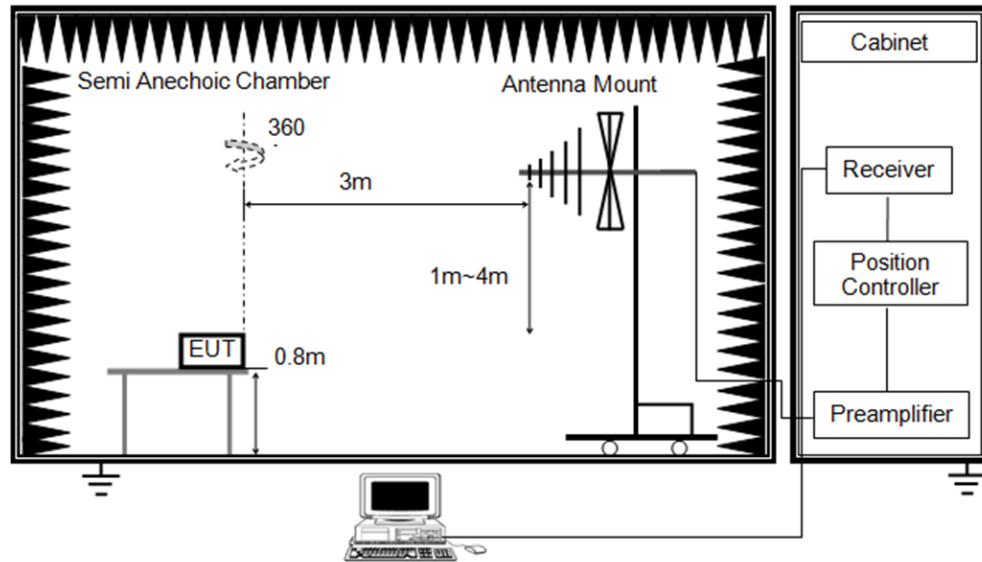

Above 1GHz

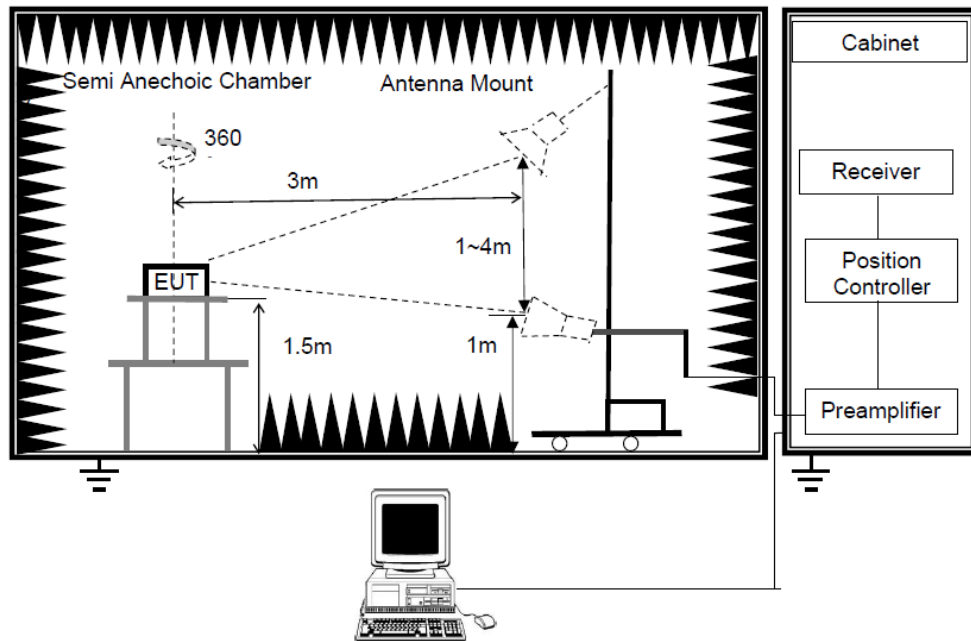

TEST ENVIRONMENT

Temperature	22.3℃	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	April 21, 2026	Test By	Leslie Xie
-----------	----------------	---------	------------

TEST RESULTS

8.1. RESTRICTED BANDEDGE


BT0			
Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

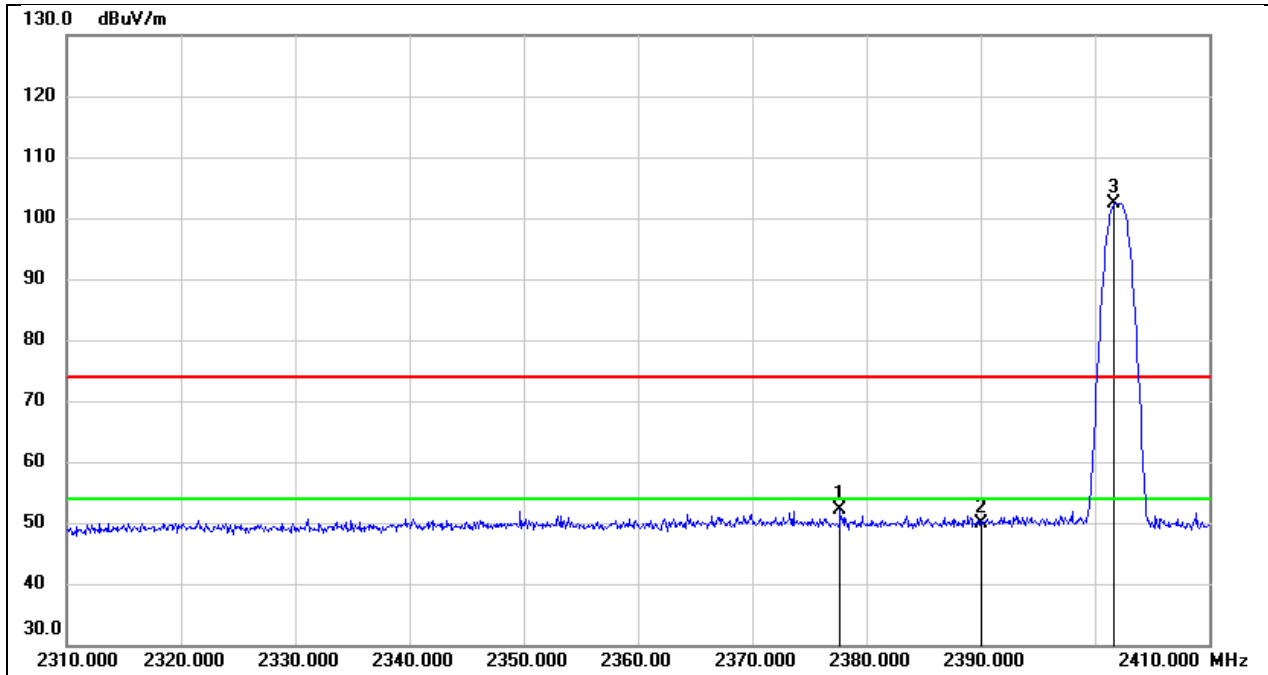

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.700	41.52	10.58	52.10	74.00	-21.90	peak
2	2390.000	39.32	10.67	49.99	74.00	-24.01	peak
3	2401.700	91.67	10.74	102.41	\	\	Fundamental

BT0


Test Mode:	BLE 1M AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

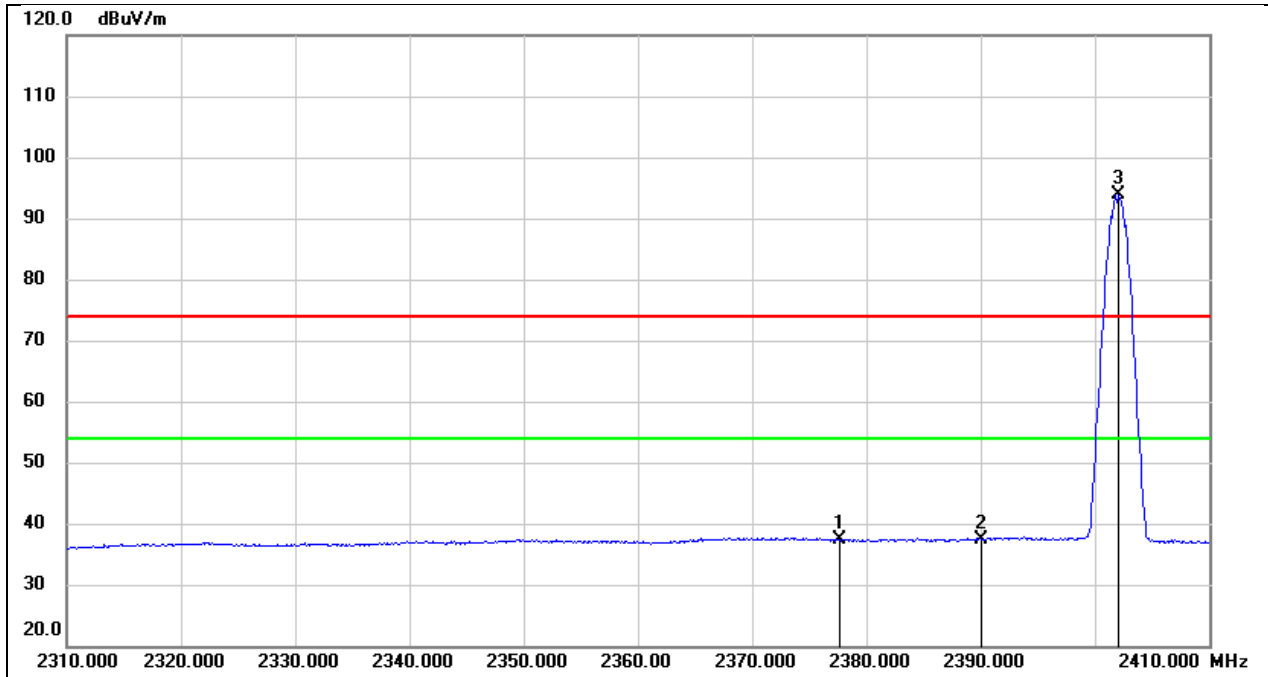

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.700	26.72	10.58	37.30	54.00	-16.70	AVG
2	2390.000	26.75	10.67	37.42	54.00	-16.58	AVG
3	2402.000	83.18	10.74	93.92	\	\	Fundamental

BT0


Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

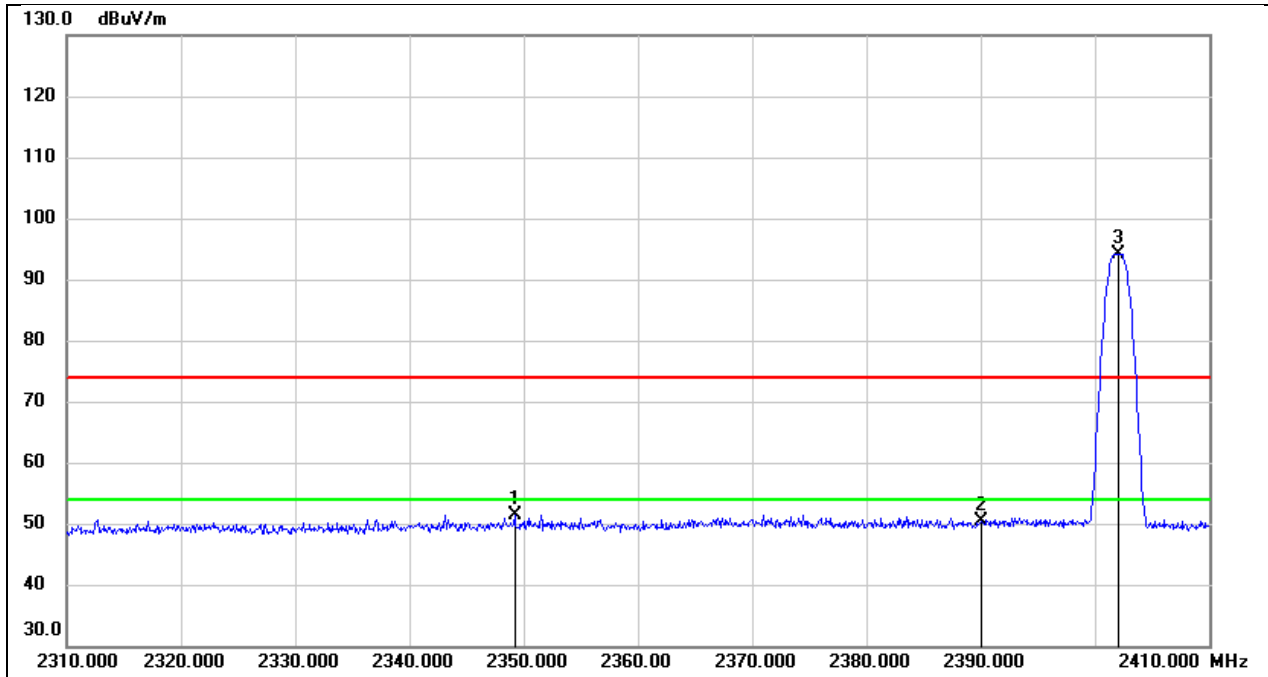

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2349.200	41.11	10.36	51.47	74.00	-22.53	peak
2	2390.000	39.76	10.67	50.43	74.00	-23.57	peak
3	2402.100	83.47	10.75	94.22	\	\	Fundamental

BT0


Test Mode:	BLE 1M AV	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

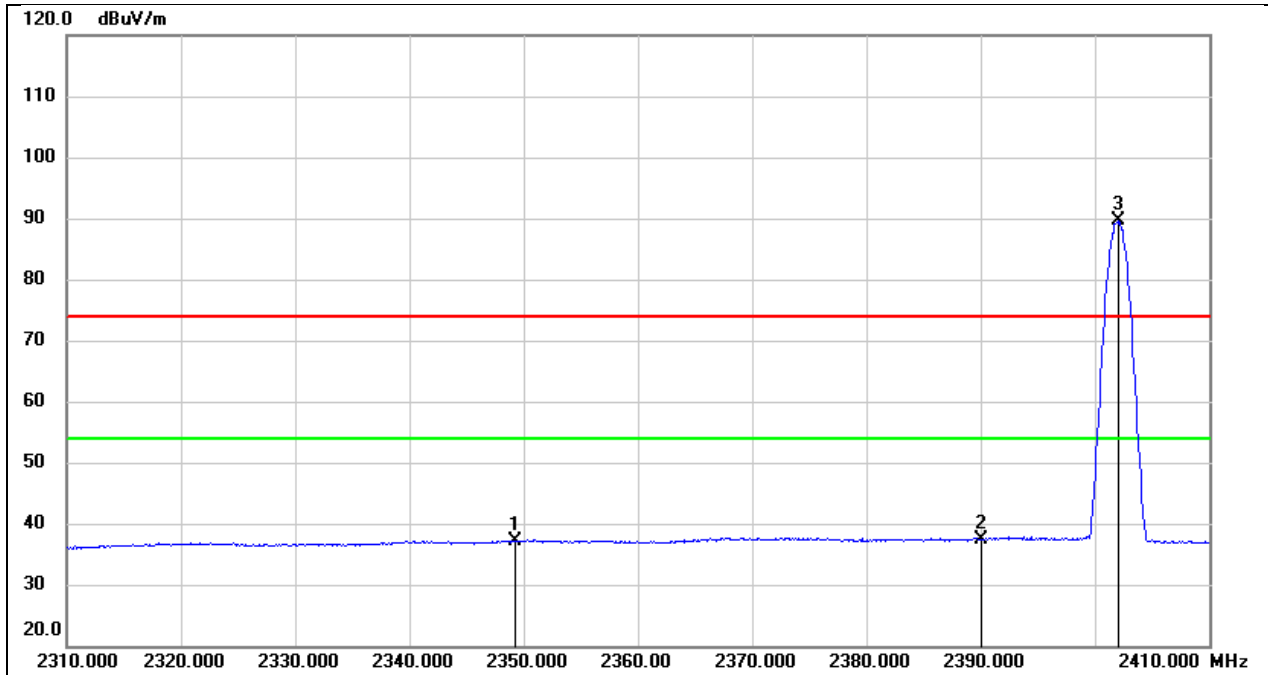

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2349.200	26.81	10.36	37.17	54.00	-16.83	AVG
2	2390.000	26.67	10.67	37.34	54.00	-16.66	AVG
3	2402.000	79.00	10.74	89.74	\	\	Fundamental

BT0


Test Mode:	BLE 1M PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

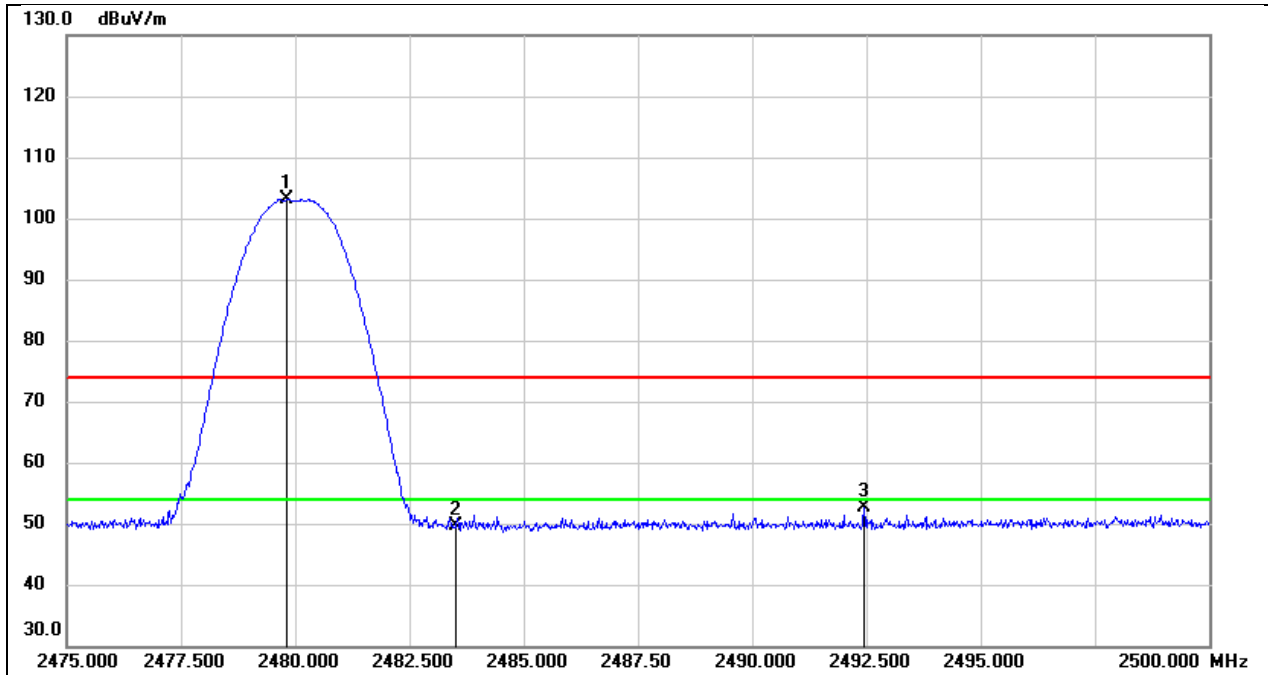

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.825	92.01	11.14	103.15	\	\	Fundamental
2	2483.500	38.48	11.16	49.64	74.00	-24.36	peak
3	2492.450	41.35	11.20	52.55	74.00	-21.45	peak

BT0


Test Mode:	BLE 1M AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

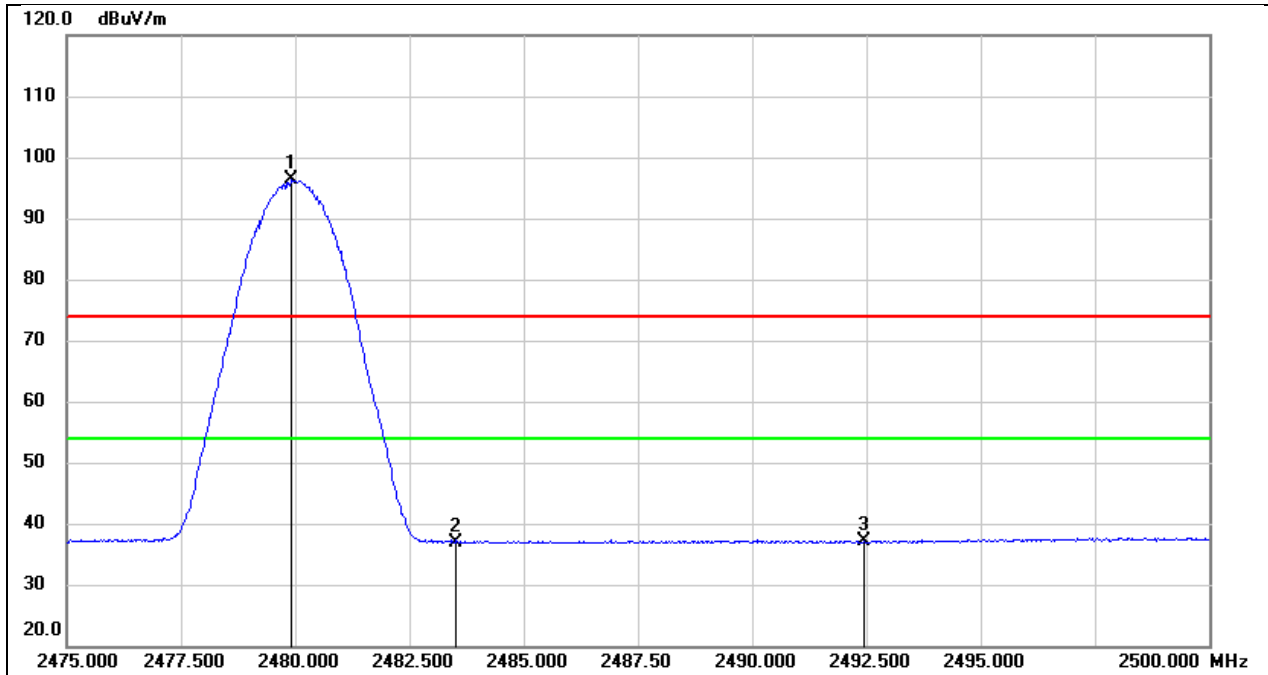

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.925	85.18	11.14	96.32	\	\	Fundamental
2	2483.500	25.78	11.16	36.94	54.00	-17.06	AVG
3	2492.450	25.85	11.20	37.05	54.00	-16.95	AVG

BT0


Test Mode:	BLE 2M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

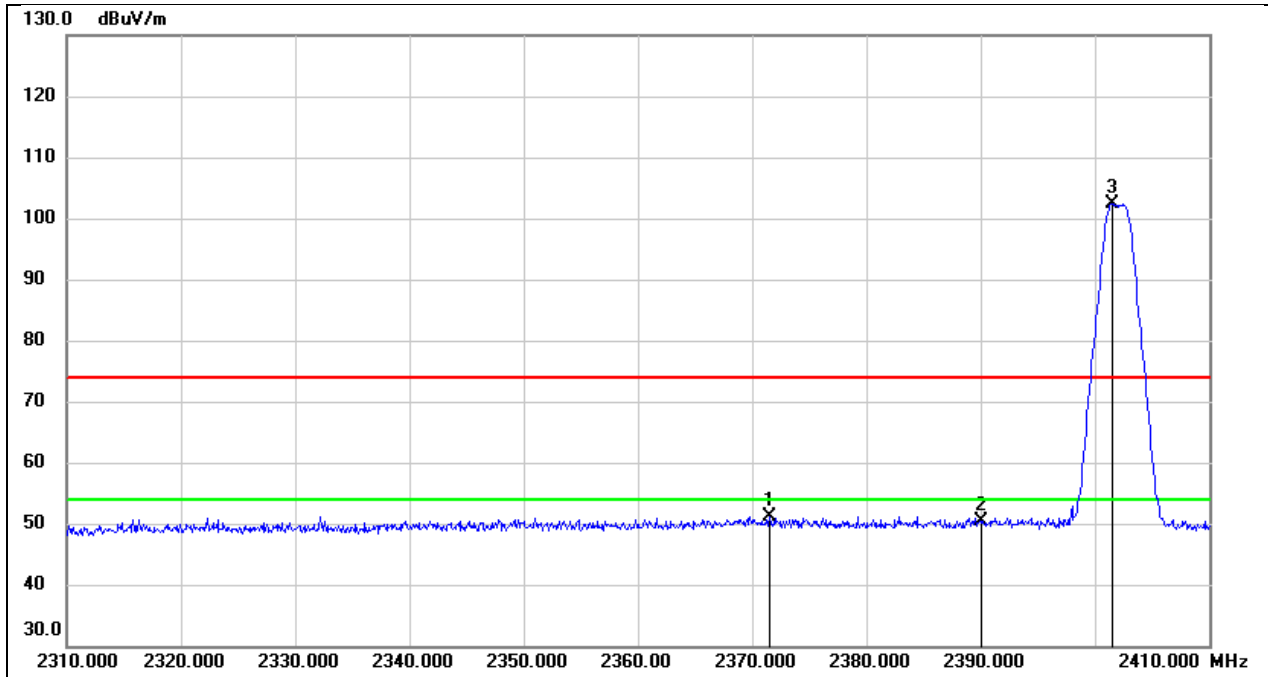

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.500	40.71	10.52	51.23	74.00	-22.77	peak
2	2390.000	39.65	10.67	50.32	74.00	-23.68	peak
3	2401.500	91.57	10.74	102.31	\	\	Fundamental


BT0

Test Mode:	BLE 2M AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

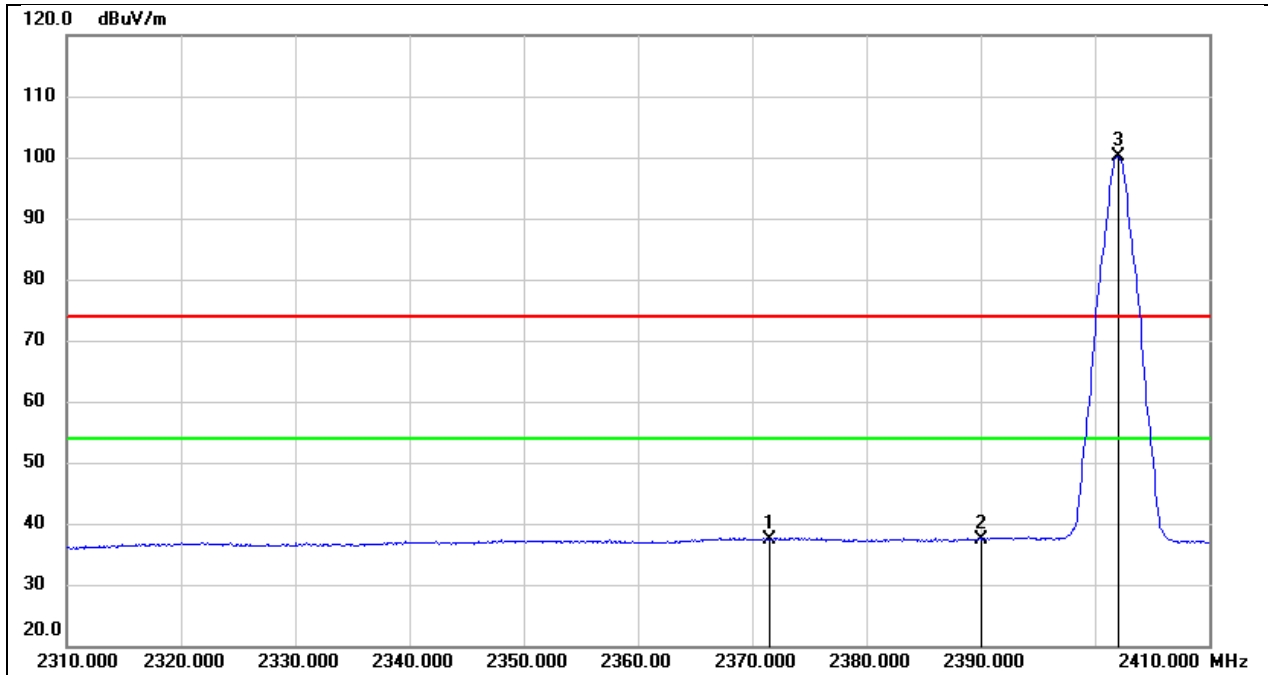

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2371.500	26.88	10.52	37.40	54.00	-16.60	AVG
2	2390.000	26.74	10.67	37.41	54.00	-16.59	AVG
3	2402.000	89.44	10.74	100.18	\	\	Fundamental


BT0			
Test Mode:	BLE 2M PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

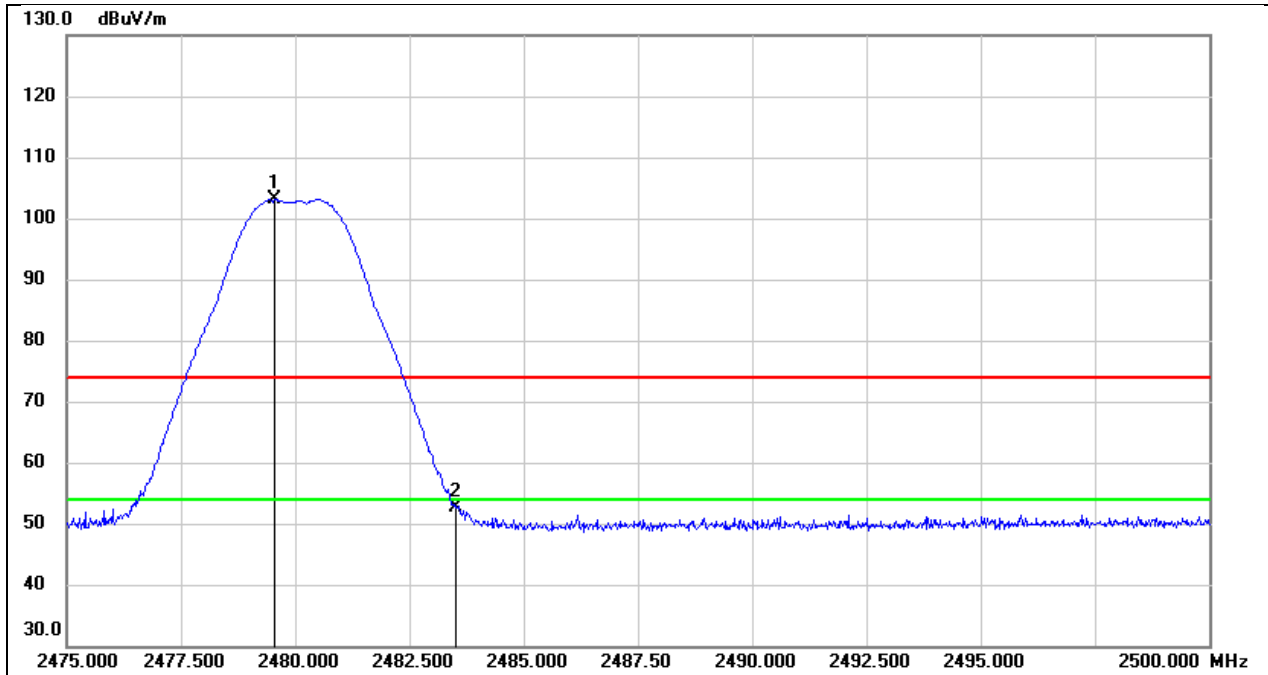

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.550	91.94	11.14	103.08	\	\	Fundamental
2	2483.500	41.36	11.16	52.52	74.00	-21.48	peak

BT0


Test Mode:	BLE 2M AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

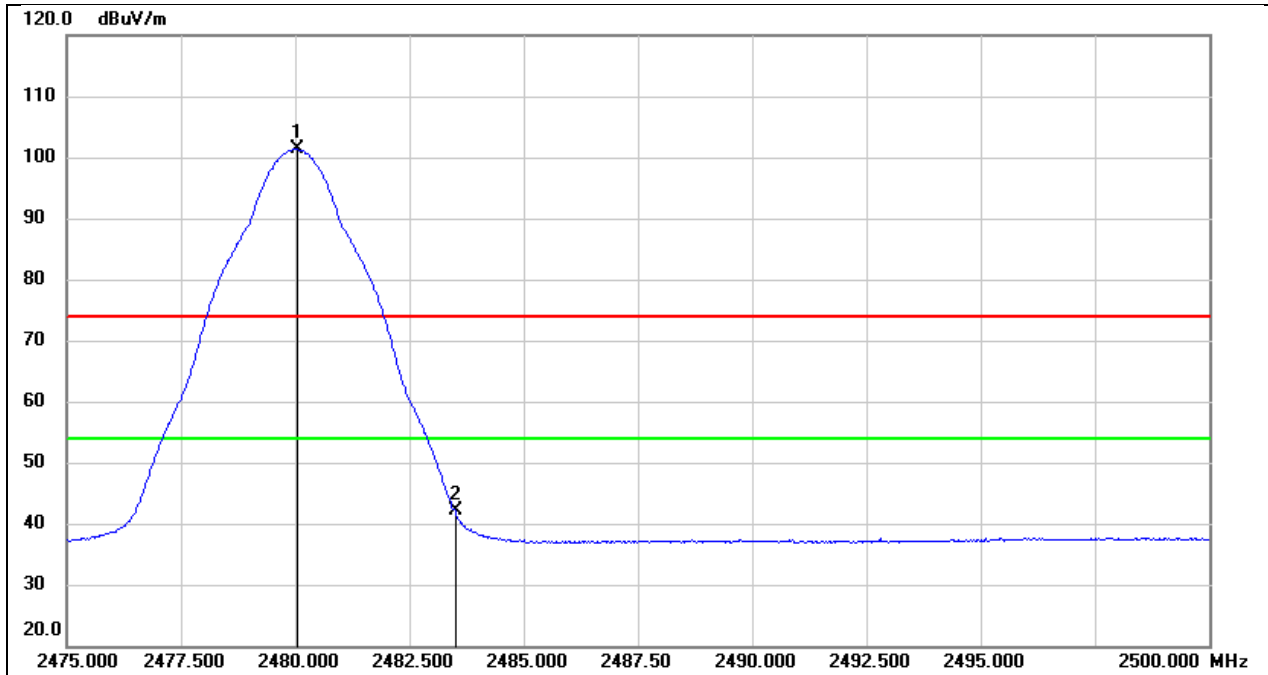

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.050	90.22	11.14	101.36	\	\	Fundamental
2	2483.500	30.95	11.16	42.11	54.00	-11.89	AVG

BT0


Test Mode:	BLE 125k PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

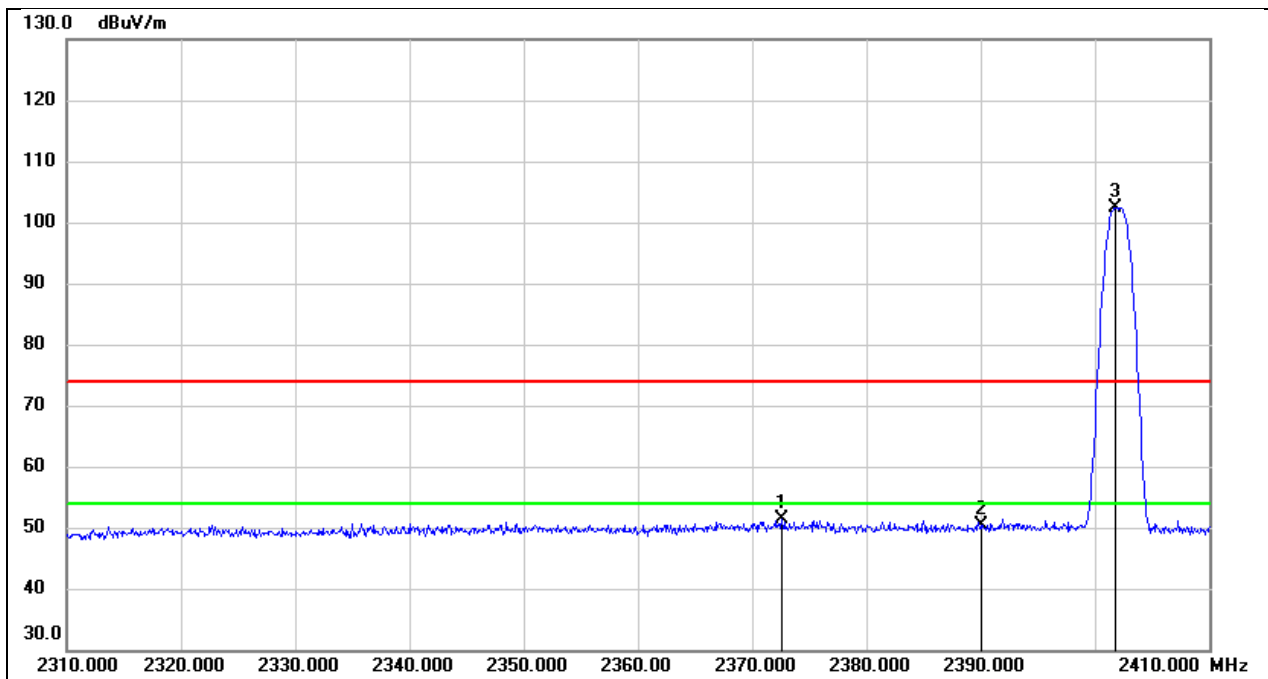

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2372.600	40.96	10.53	51.49	74.00	-22.51	peak
2	2390.000	39.64	10.67	50.31	74.00	-23.69	peak
3	2401.800	91.65	10.74	102.39	\	\	Fundamental

BT0


Test Mode:	BLE 125k AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

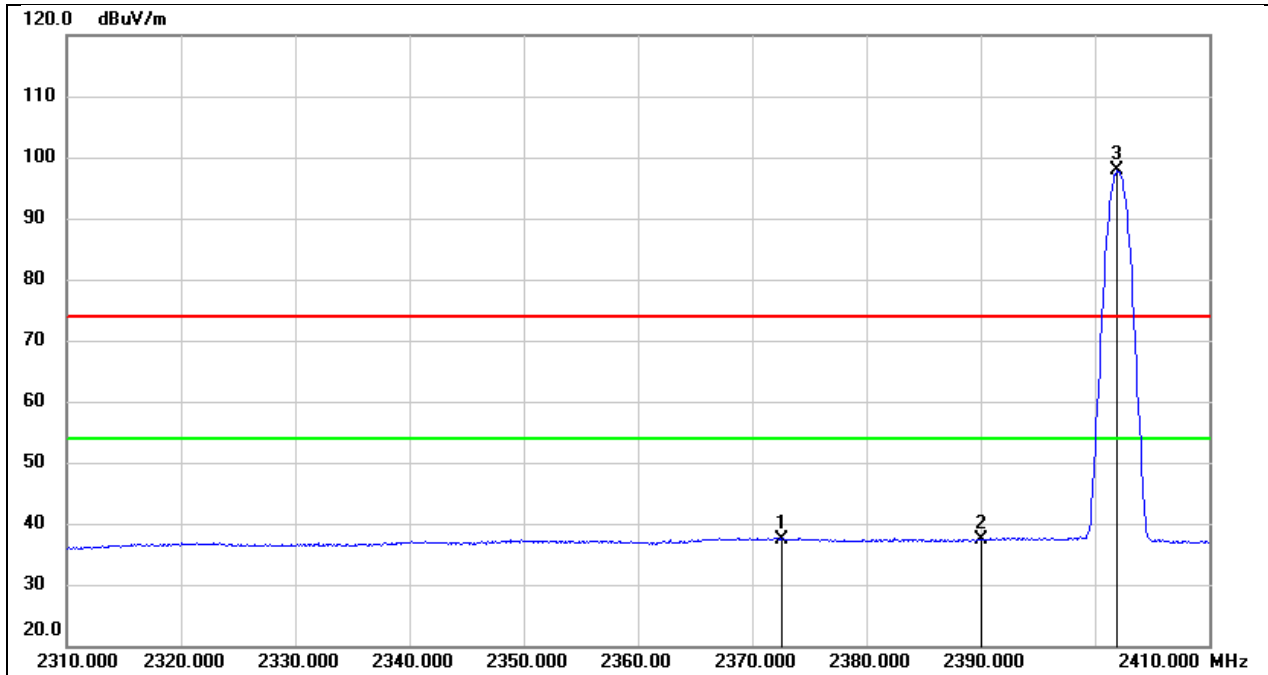

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2372.600	26.92	10.53	37.45	54.00	-16.55	AVG
2	2390.000	26.63	10.67	37.30	54.00	-16.70	AVG
3	2401.900	87.04	10.74	97.78	\	\	Fundamental

BT0


Test Mode:	BLE 125k PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

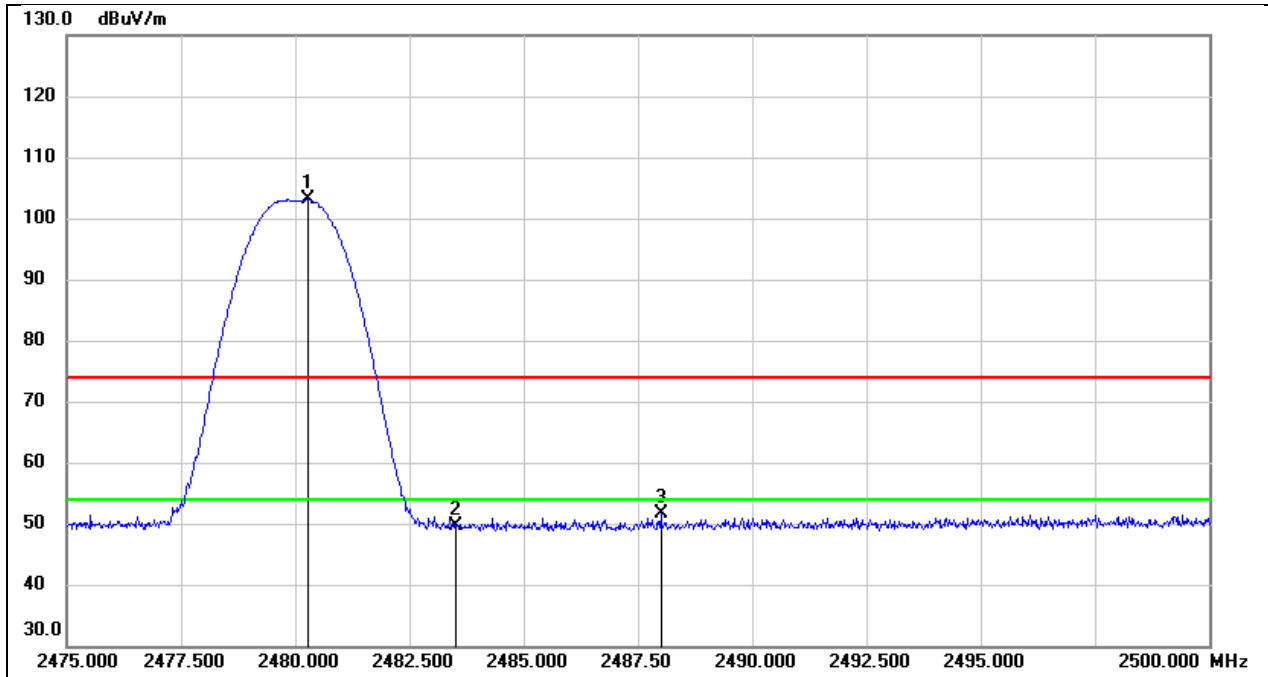

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.275	91.96	11.14	103.10	\	\	Fundamental
2	2483.500	38.57	11.16	49.73	74.00	-24.27	peak
3	2488.000	40.42	11.18	51.60	74.00	-22.40	peak

BT0


Test Mode:	BLE 125k AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

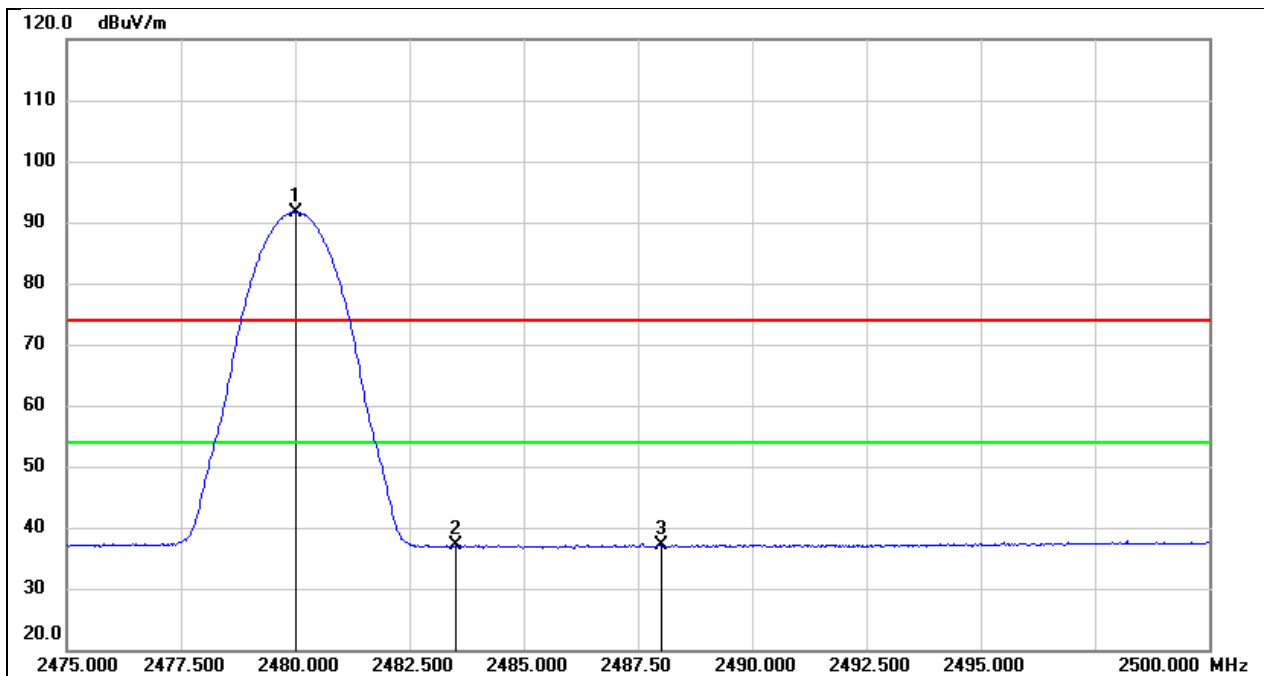

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.975	80.58	11.14	91.72	\	\	Fundamental
2	2483.500	25.95	11.16	37.11	54.00	-16.89	AVG
3	2488.000	25.84	11.18	37.02	54.00	-16.98	AVG

BT0


Test Mode:	BLE 500k PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

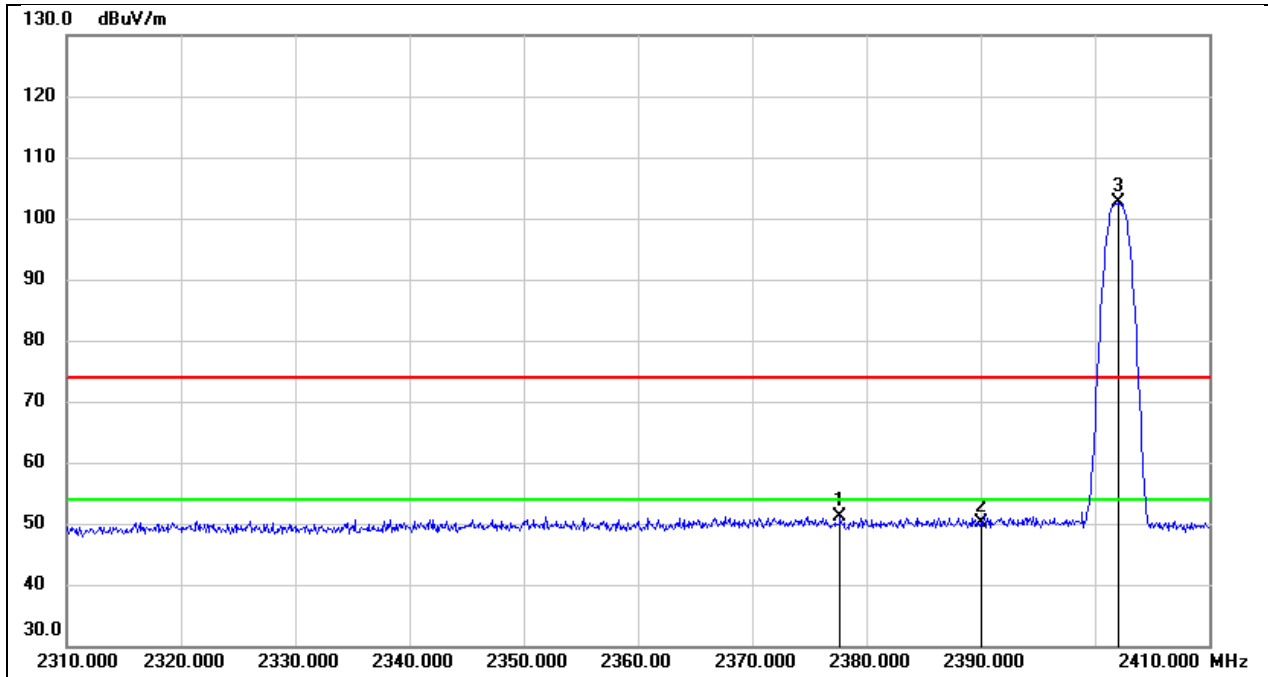

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.700	40.62	10.58	51.20	74.00	-22.80	peak
2	2390.000	39.34	10.67	50.01	74.00	-23.99	peak
3	2402.100	91.78	10.75	102.53	\	\	Fundamental

BT0


Test Mode:	BLE 500k AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

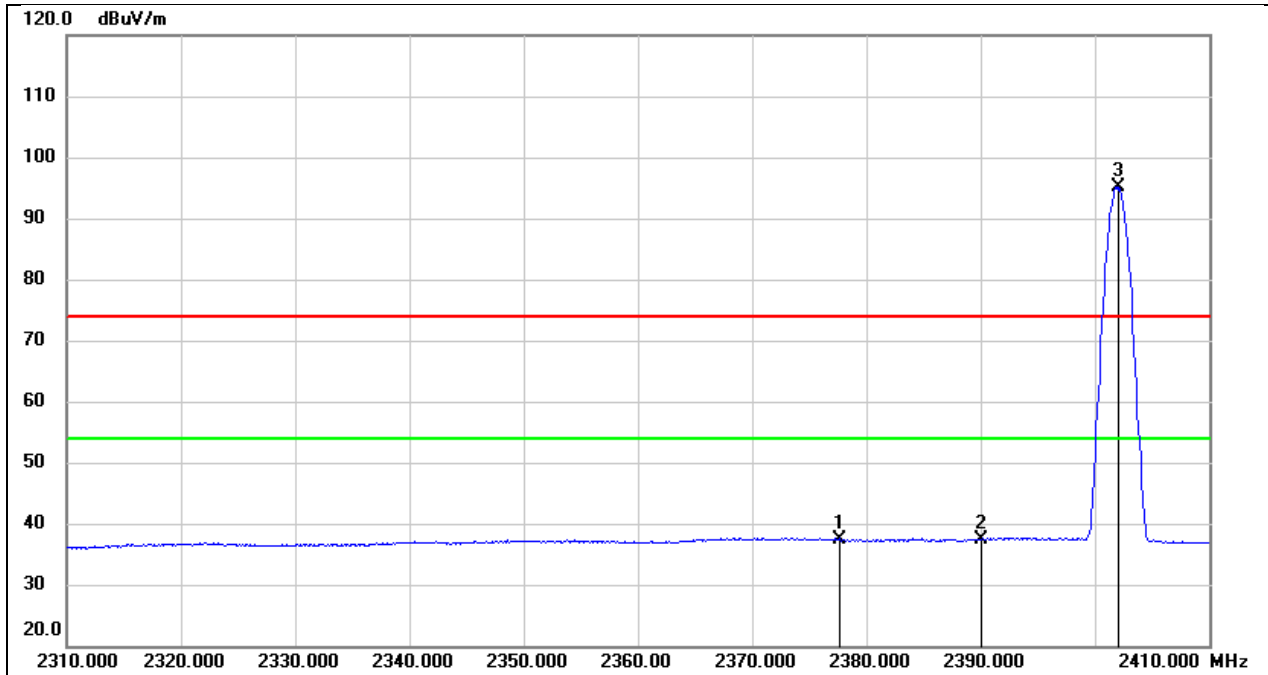

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.700	26.72	10.58	37.30	54.00	-16.70	AVG
2	2390.000	26.73	10.67	37.40	54.00	-16.60	AVG
3	2402.100	84.36	10.75	95.11	\	\	Fundamental

BT0


Test Mode:	BLE 500k PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

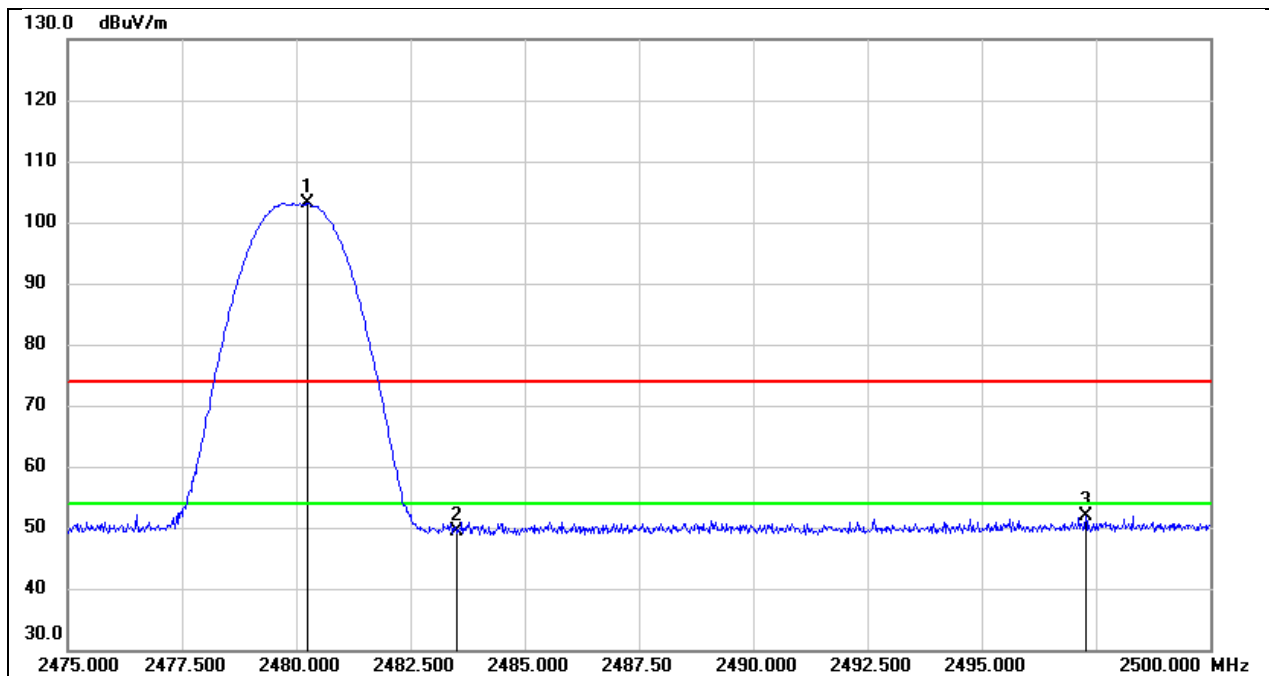

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.250	92.04	11.14	103.18	\	\	Fundamental
2	2483.500	38.22	11.16	49.38	74.00	-24.62	peak
3	2497.275	40.63	11.23	51.86	74.00	-22.14	peak

BT0


Test Mode:	BLE 500k AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

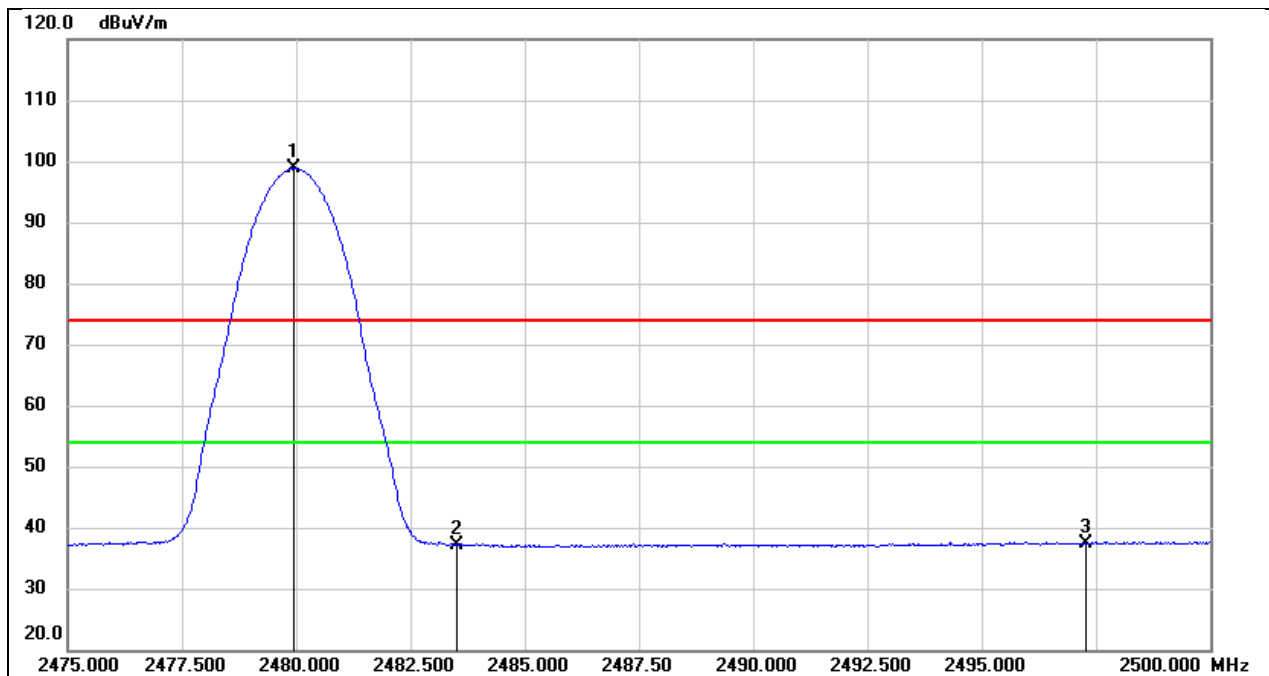

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.950	87.70	11.14	98.84	\	\	Fundamental
2	2483.500	26.00	11.16	37.16	54.00	-16.84	AVG
3	2497.275	26.22	11.23	37.45	54.00	-16.55	AVG

BT1


Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

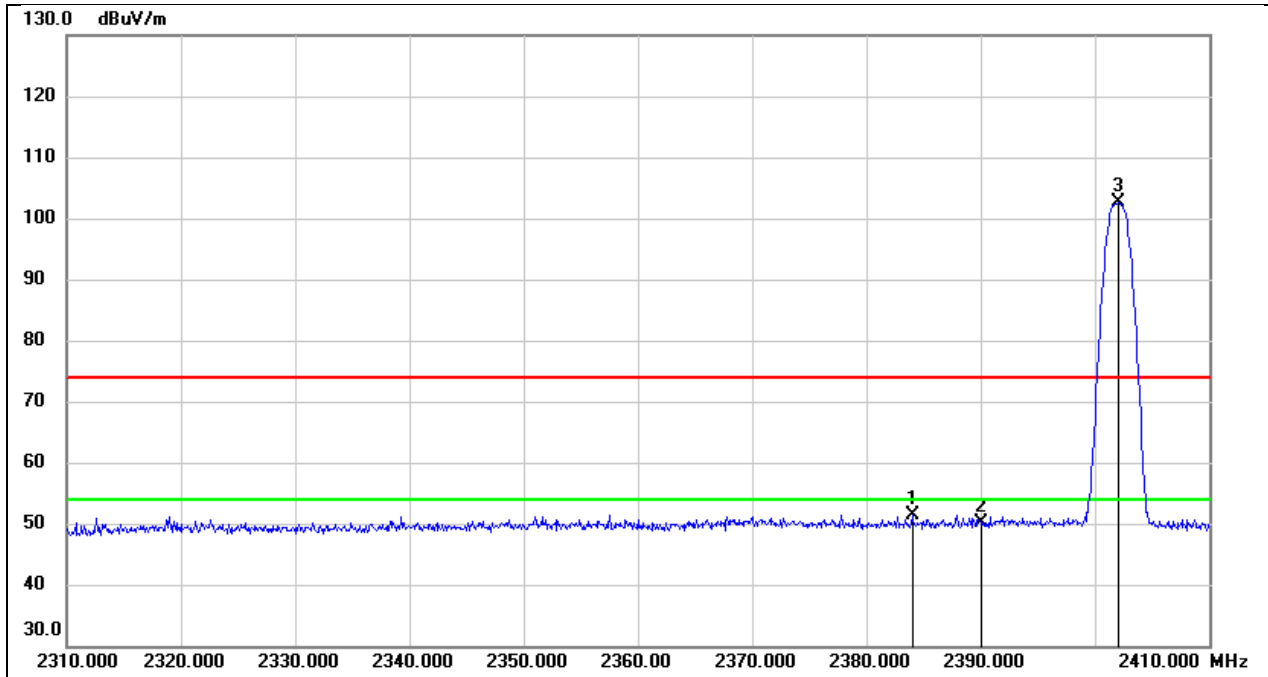

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.000	40.87	10.62	51.49	74.00	-22.51	peak
2	2390.000	39.41	10.67	50.08	74.00	-23.92	peak
3	2402.000	91.80	10.74	102.54	\	\	Fundamental

BT1


Test Mode:	BLE 1M AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

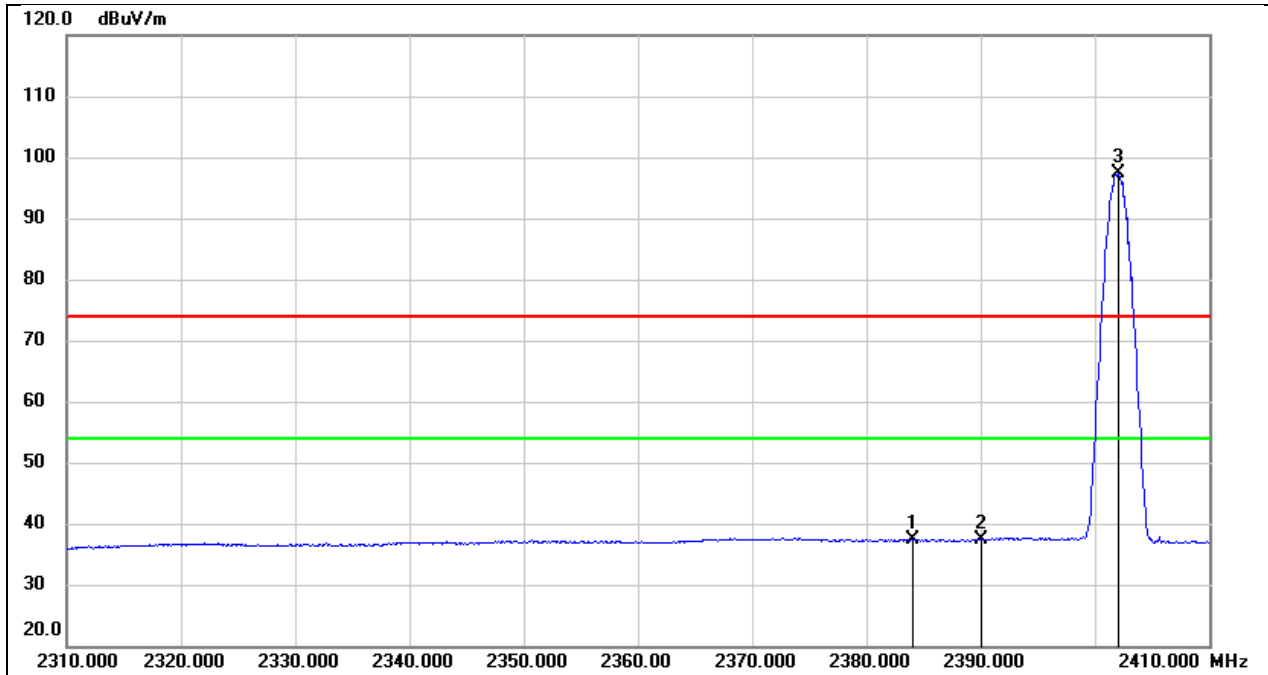

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.000	26.86	10.62	37.48	54.00	-16.52	AVG
2	2390.000	26.67	10.67	37.34	54.00	-16.66	AVG
3	2402.000	86.76	10.74	97.50	\	\	Fundamental

BT1


Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

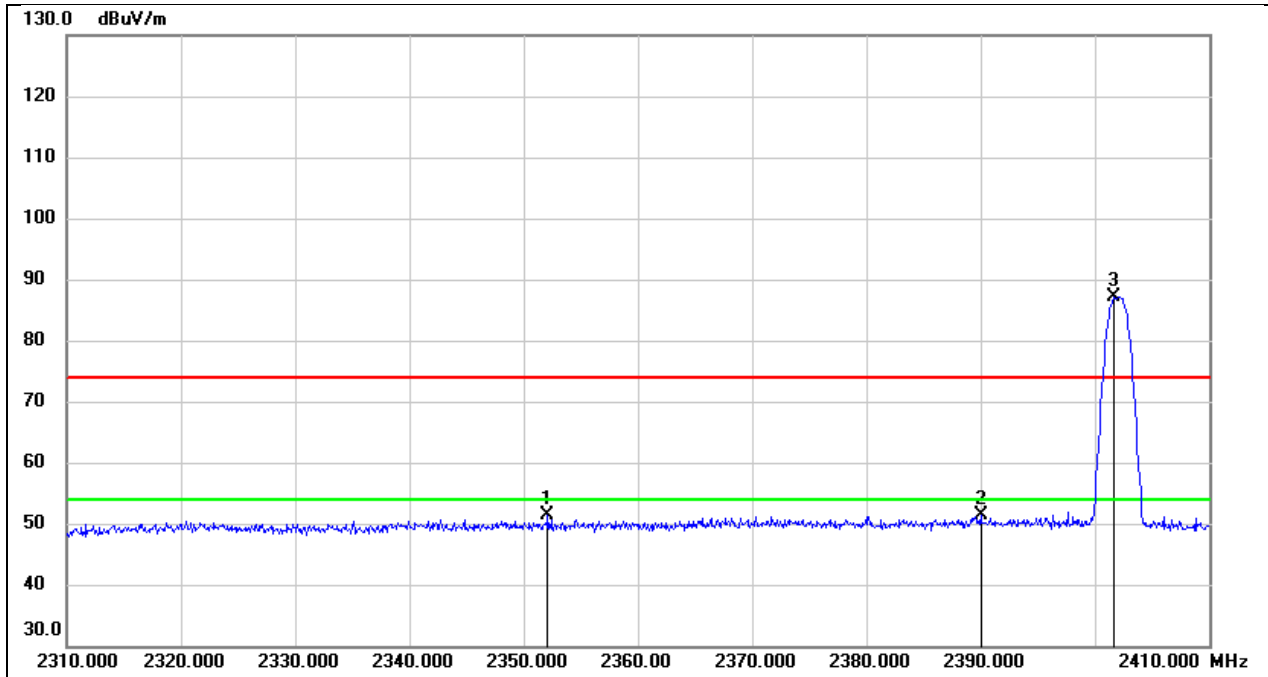

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2352.100	41.08	10.39	51.47	74.00	-22.53	peak
2	2390.000	40.70	10.67	51.37	74.00	-22.63	peak
3	2401.700	76.43	10.74	87.17	\	\	Fundamental

BT1


Test Mode:	BLE 1M AV	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

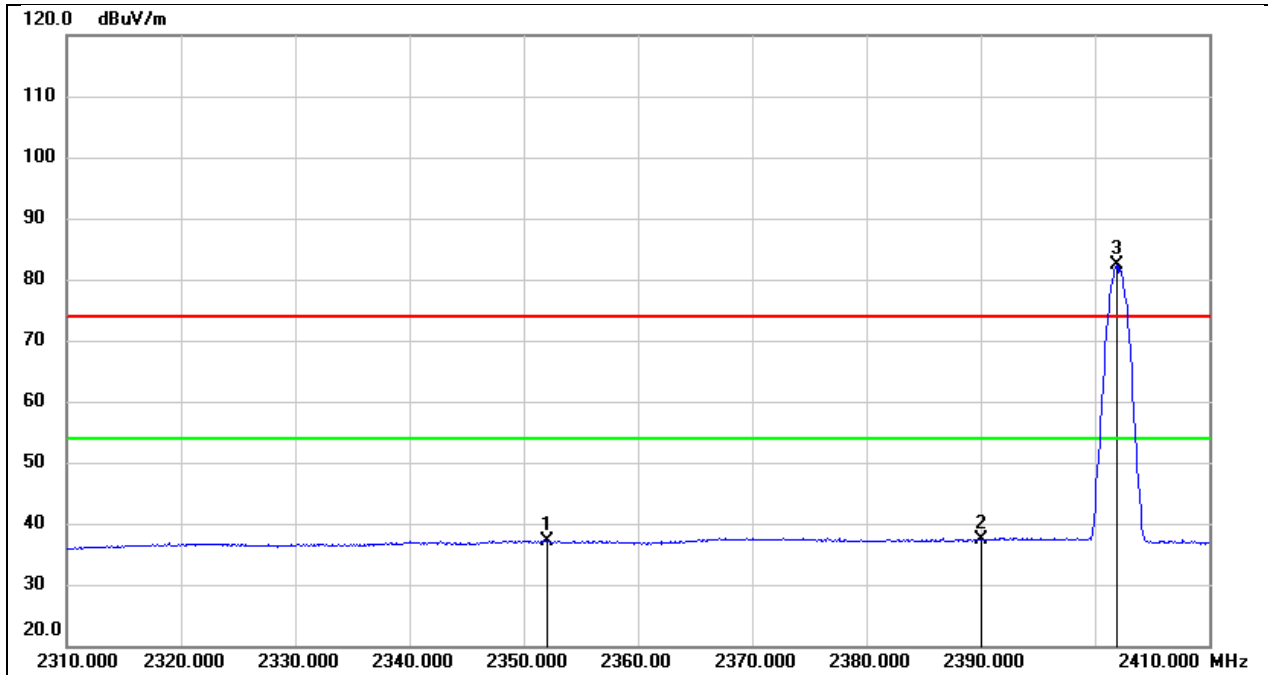

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2352.100	26.76	10.38	37.14	54.00	-16.86	AVG
2	2390.000	26.72	10.67	37.39	54.00	-16.61	AVG
3	2401.900	71.71	10.74	82.45	\	\	Fundamental

BT1


Test Mode:	BLE 1M PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

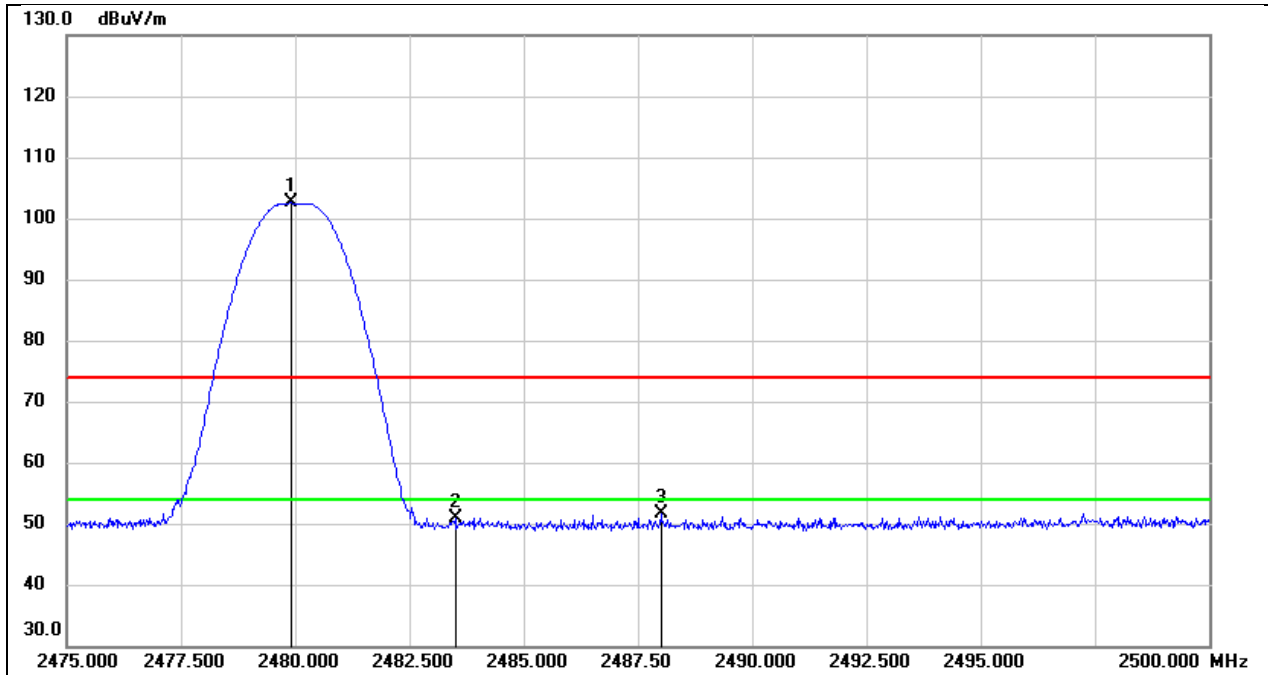

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.925	91.38	11.14	102.52	\	\	Fundamental
2	2483.500	39.72	11.16	50.88	74.00	-23.12	peak
3	2488.000	40.50	11.18	51.68	74.00	-22.32	peak

BT1


Test Mode:	BLE 1M AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

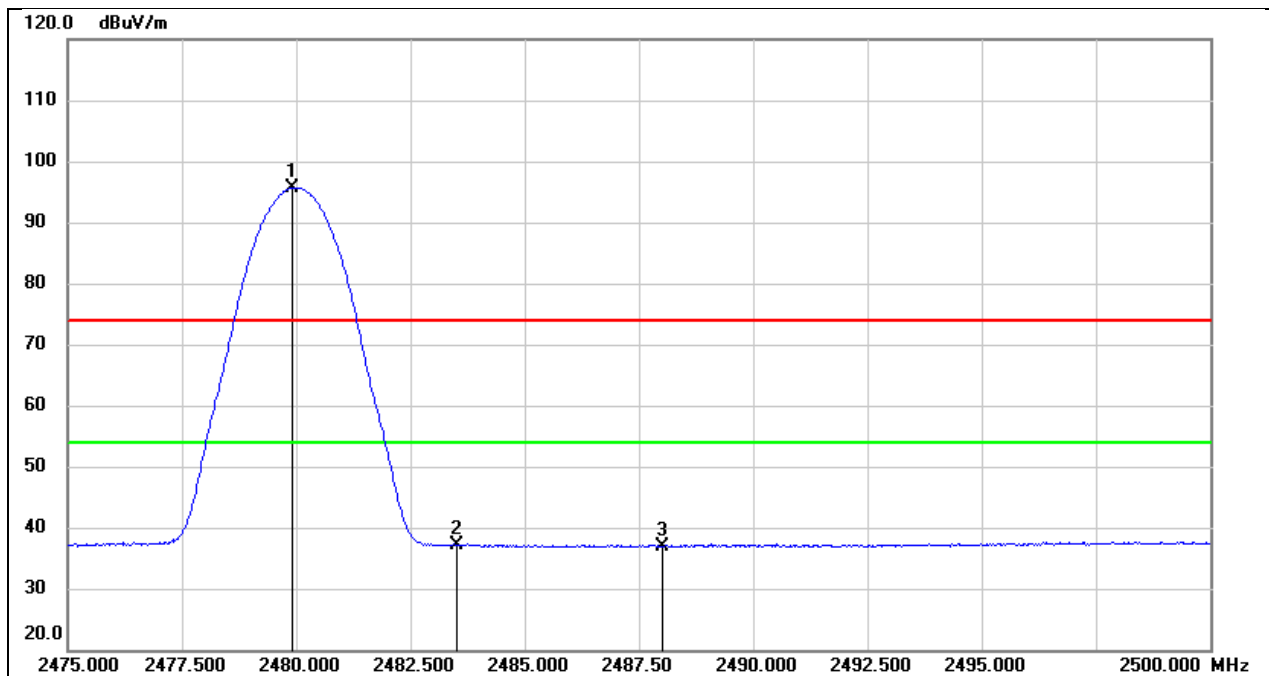

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.925	84.58	11.14	95.72	\	\	Fundamental
2	2483.500	26.05	11.16	37.21	54.00	-16.79	AVG
3	2488.000	25.75	11.18	36.93	54.00	-17.07	AVG

BT1


Test Mode:	BLE 2M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

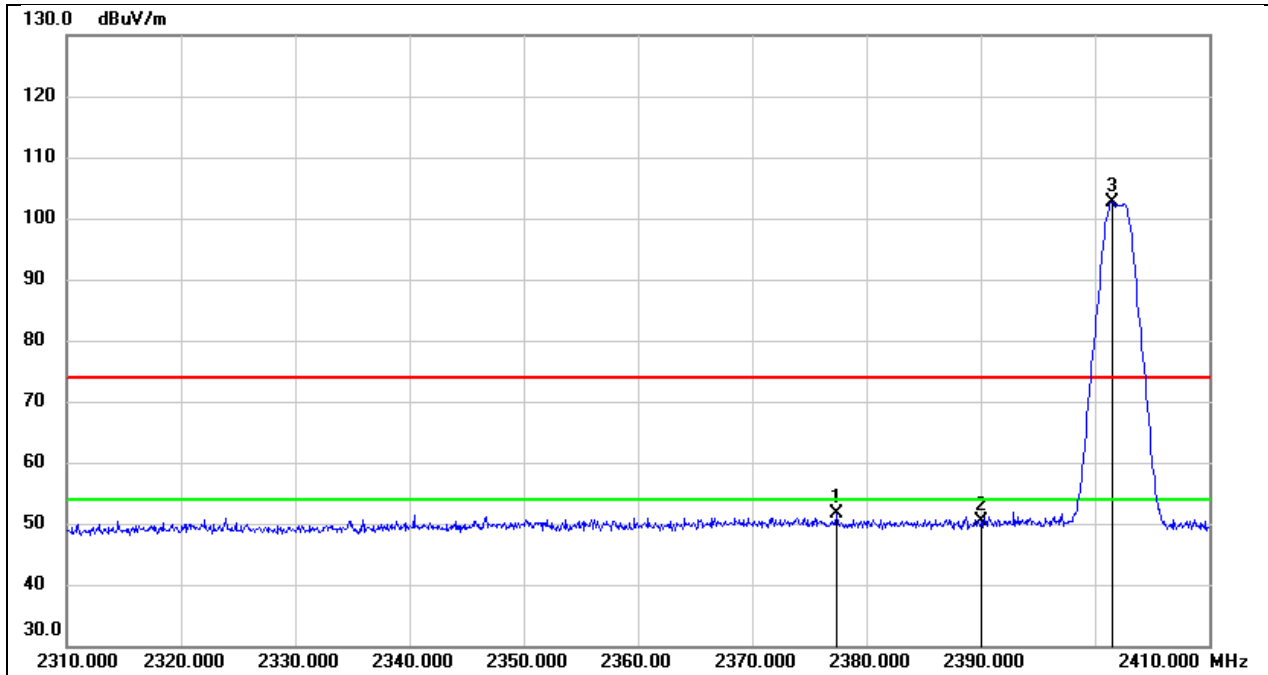

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.400	40.98	10.57	51.55	74.00	-22.45	peak
2	2390.000	39.59	10.67	50.26	74.00	-23.74	peak
3	2401.500	91.80	10.74	102.54	\	\	Fundamental

BT1


Test Mode:	BLE 2M AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

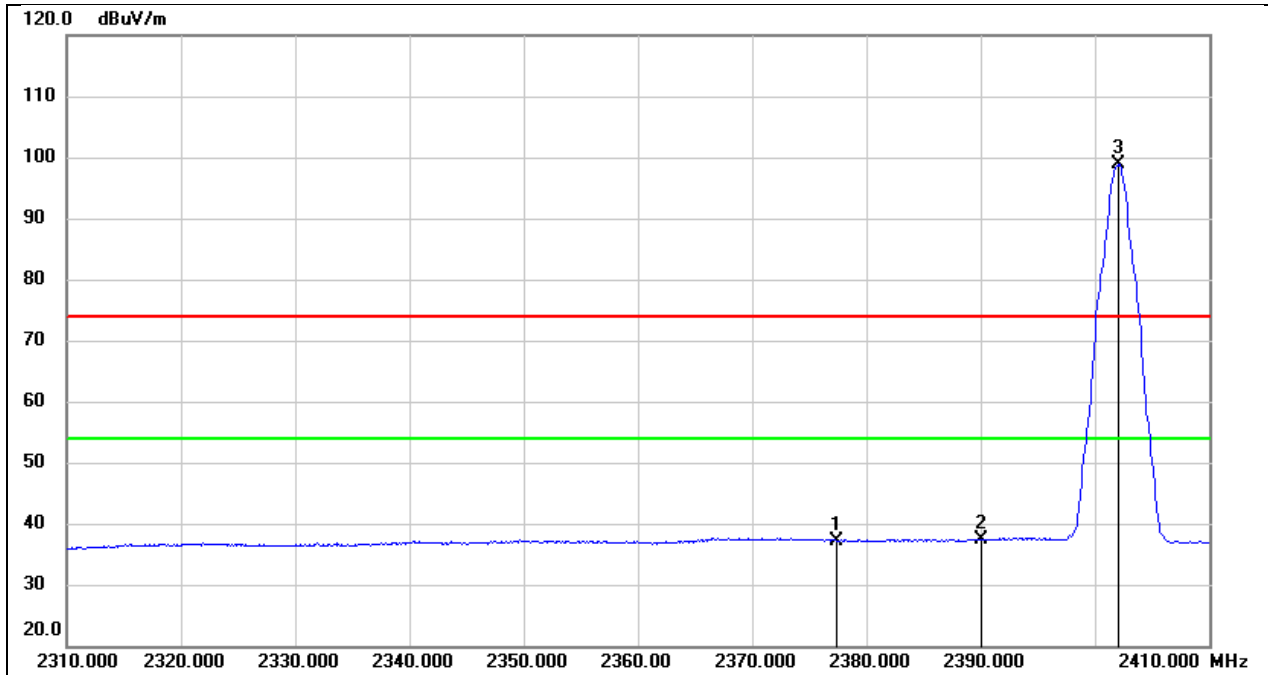

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.400	26.66	10.57	37.23	54.00	-16.77	AVG
2	2390.000	26.65	10.67	37.32	54.00	-16.68	AVG
3	2402.100	88.18	10.75	98.93	\	\	Fundamental

BT1


Test Mode:	BLE 2M PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

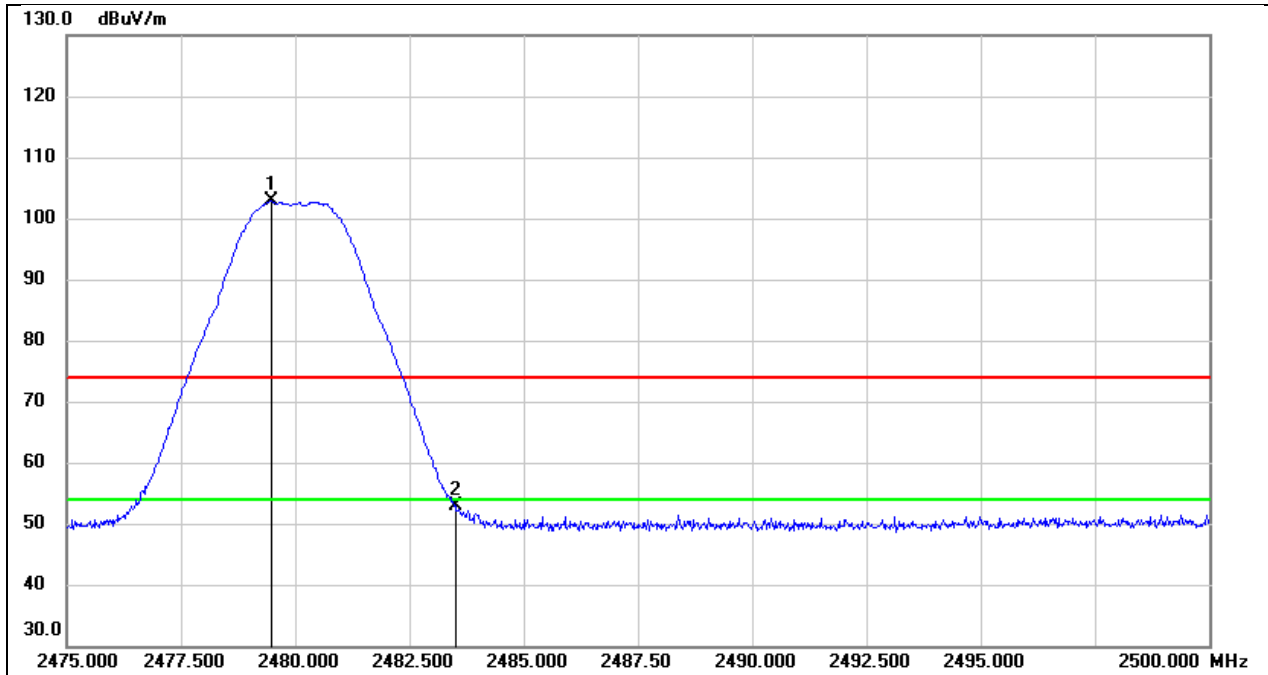

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.475	91.64	11.14	102.78	\	\	Fundamental
2	2483.500	41.78	11.16	52.94	74.00	-21.06	peak

BT1


Test Mode:	BLE 2M AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

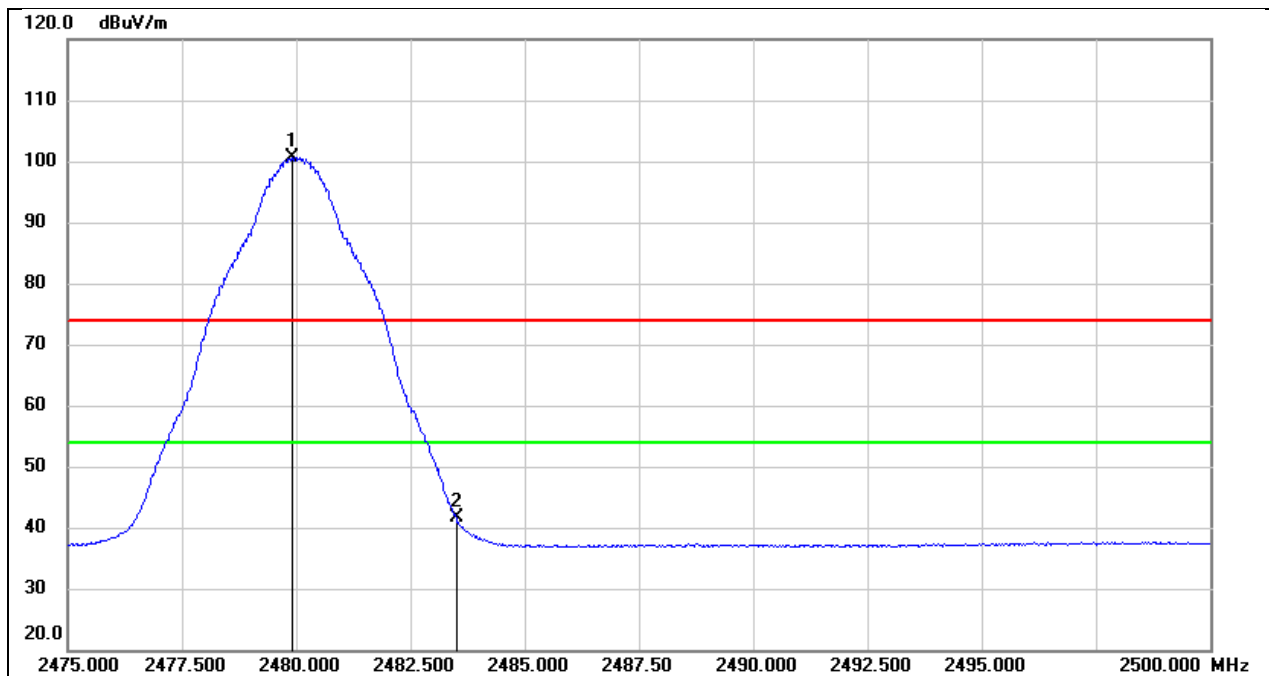

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.925	89.60	11.14	100.74	\	\	Fundamental
2	2483.500	30.46	11.16	41.62	54.00	-12.38	AVG

BT1


Test Mode:	BLE 125k PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

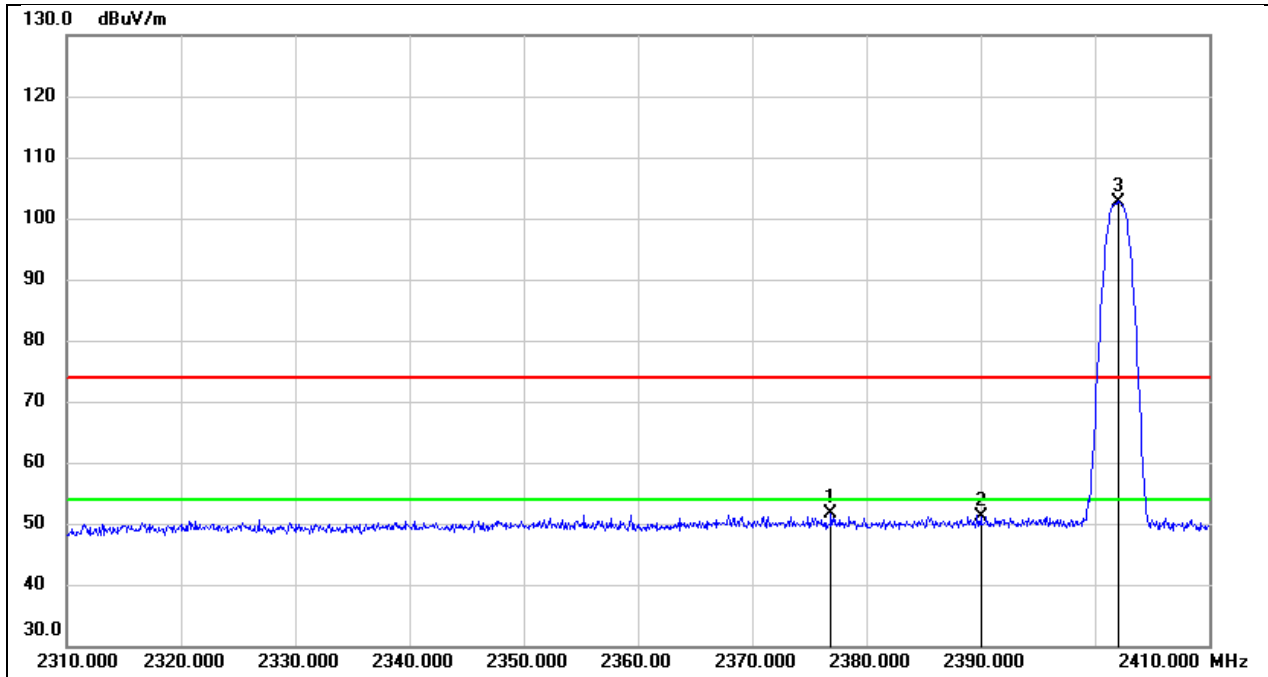

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.900	40.96	10.56	51.52	74.00	-22.48	peak
2	2390.000	40.36	10.67	51.03	74.00	-22.97	peak
3	2402.000	92.01	10.74	102.75	\	\	Fundamental

BT1


Test Mode:	BLE 125k AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

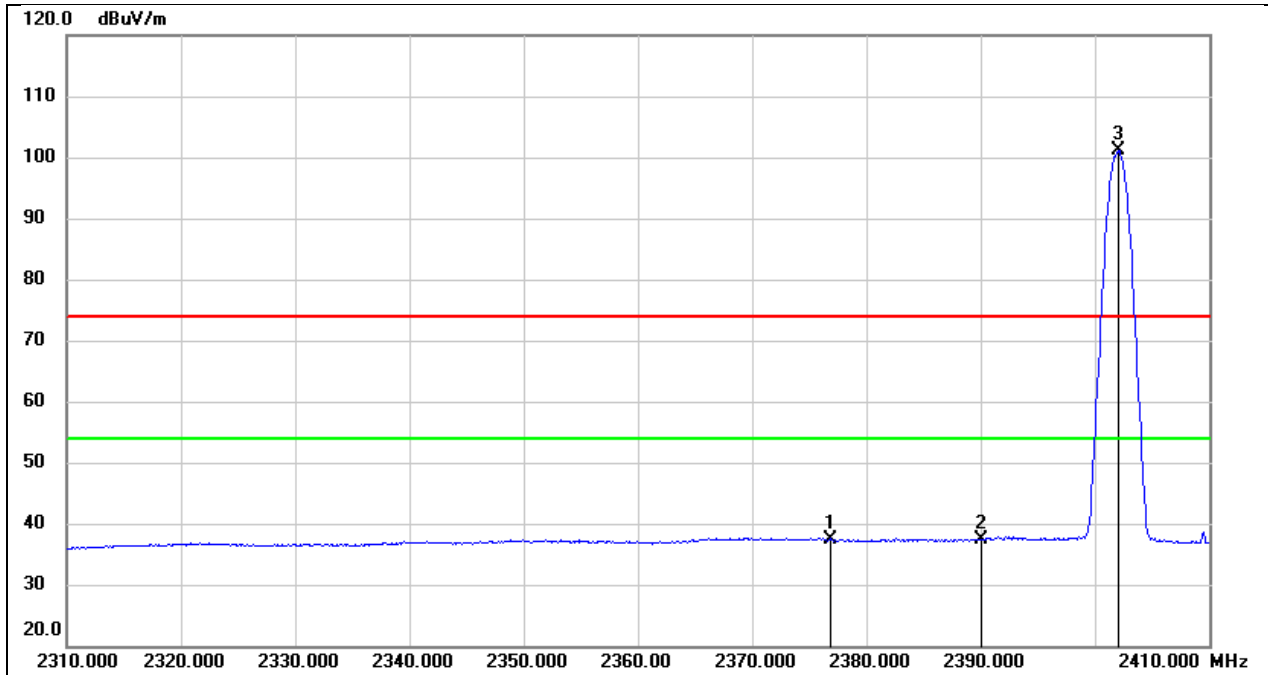

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2376.900	26.90	10.56	37.46	54.00	-16.54	AVG
2	2390.000	26.74	10.67	37.41	54.00	-16.59	AVG
3	2402.000	90.31	10.74	101.05	\	\	Fundamental

BT1


Test Mode:	BLE 125k PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

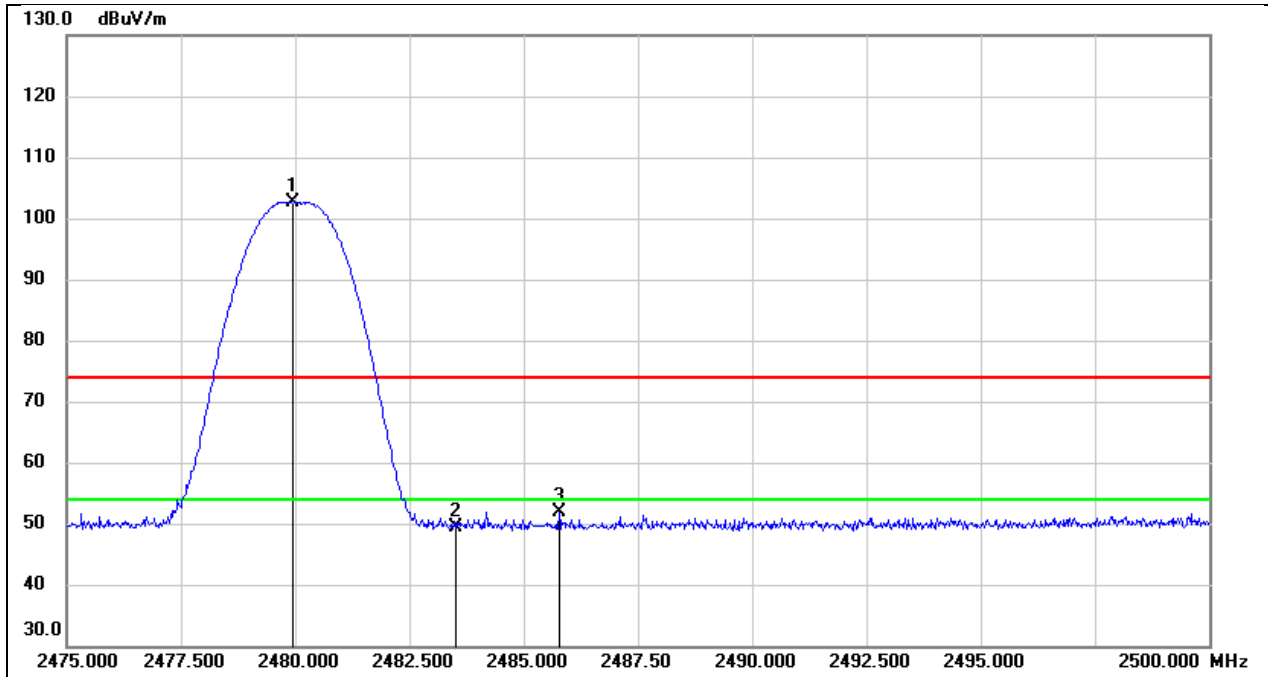

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.950	91.61	11.14	102.75	\	\	Fundamental
2	2483.500	38.26	11.16	49.42	74.00	-24.58	peak
3	2485.775	40.80	11.17	51.97	74.00	-22.03	peak

BT1


Test Mode:	BLE 125k AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

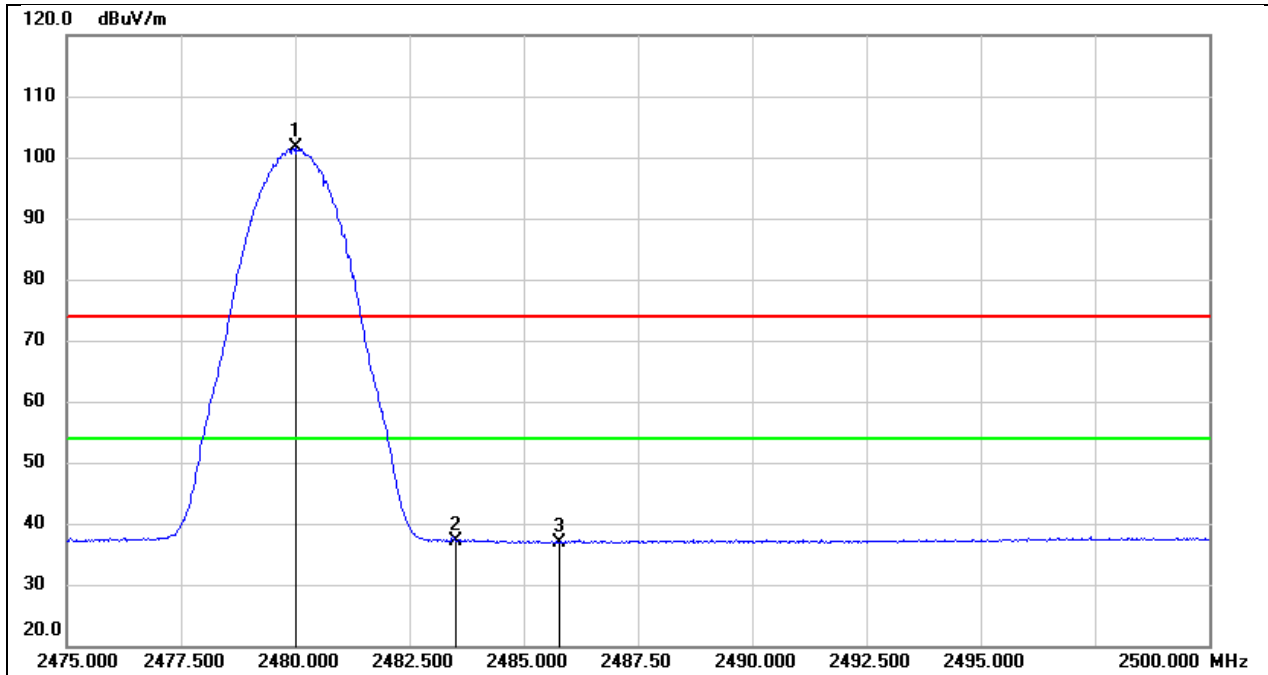

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.025	90.41	11.14	101.55	\	\	Fundamental
2	2483.500	26.02	11.16	37.18	54.00	-16.82	AVG
3	2485.775	25.81	11.17	36.98	54.00	-17.02	AVG

BT1


Test Mode:	BLE 500k PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

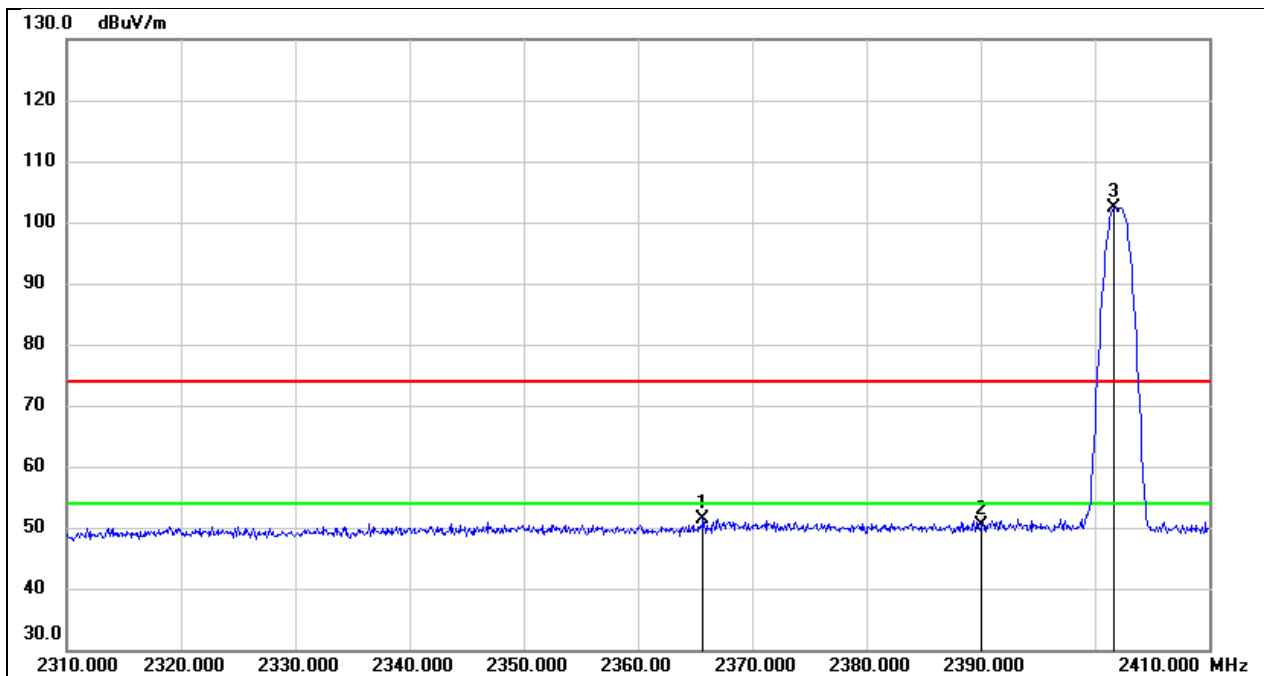

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.700	40.98	10.49	51.47	74.00	-22.53	peak
2	2390.000	39.76	10.67	50.43	74.00	-23.57	peak
3	2401.700	91.71	10.74	102.45	\	\	Fundamental

BT1


Test Mode:	BLE 500k AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

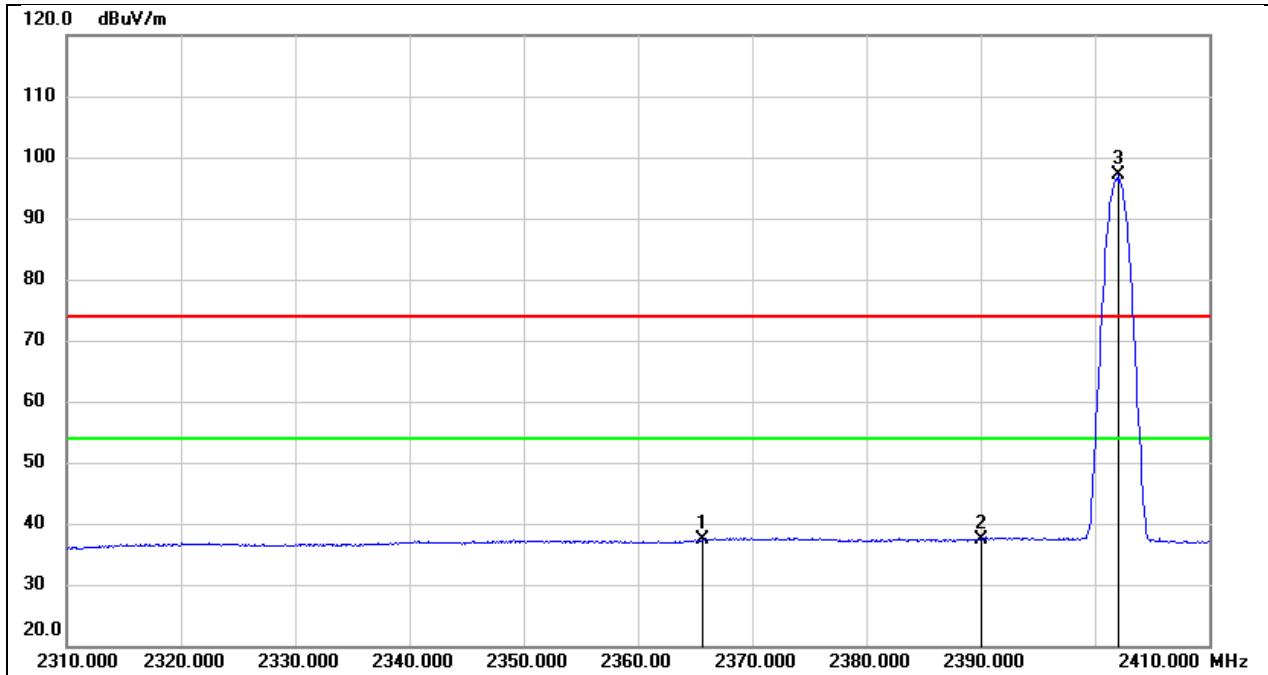

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2365.700	26.87	10.49	37.36	54.00	-16.64	AVG
2	2390.000	26.60	10.67	37.27	54.00	-16.73	AVG
3	2402.000	86.30	10.74	97.04	\	\	Fundamental

BT1


Test Mode:	BLE 500k PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

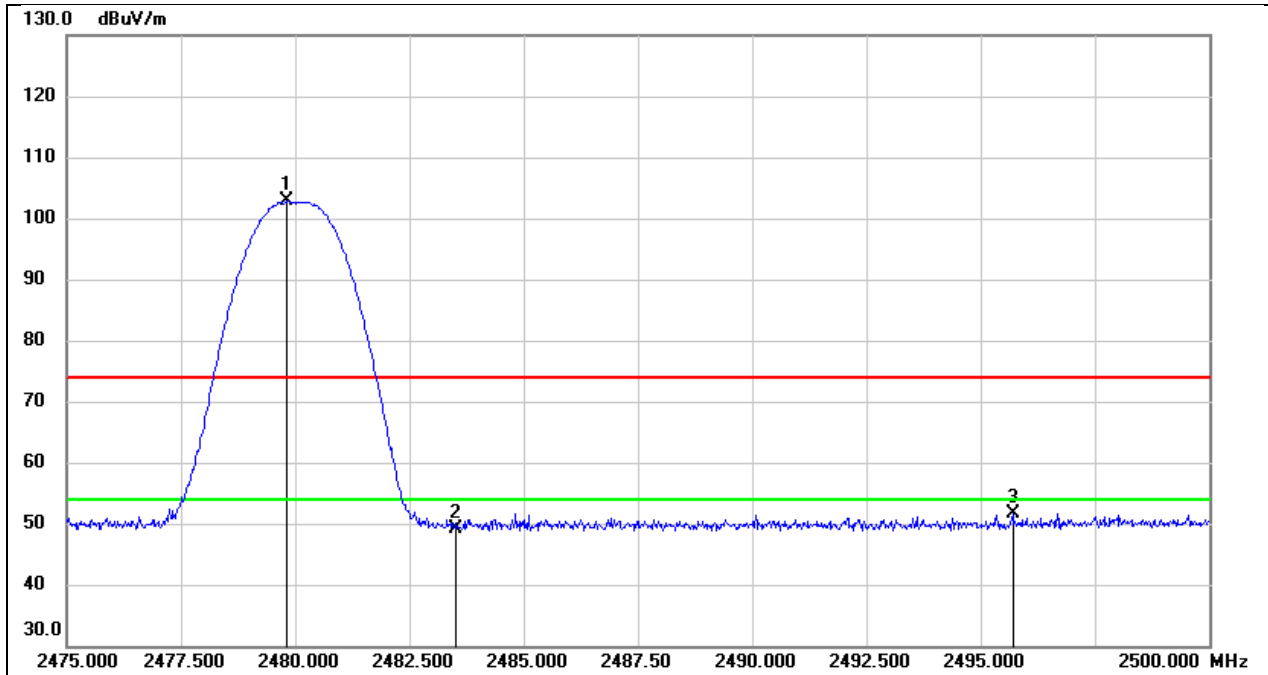

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.825	91.62	11.14	102.76	\	\	Fundamental
2	2483.500	38.03	11.16	49.19	74.00	-24.81	peak
3	2495.700	40.43	11.21	51.64	74.00	-22.36	peak

BT1


Test Mode:	BLE 500k AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

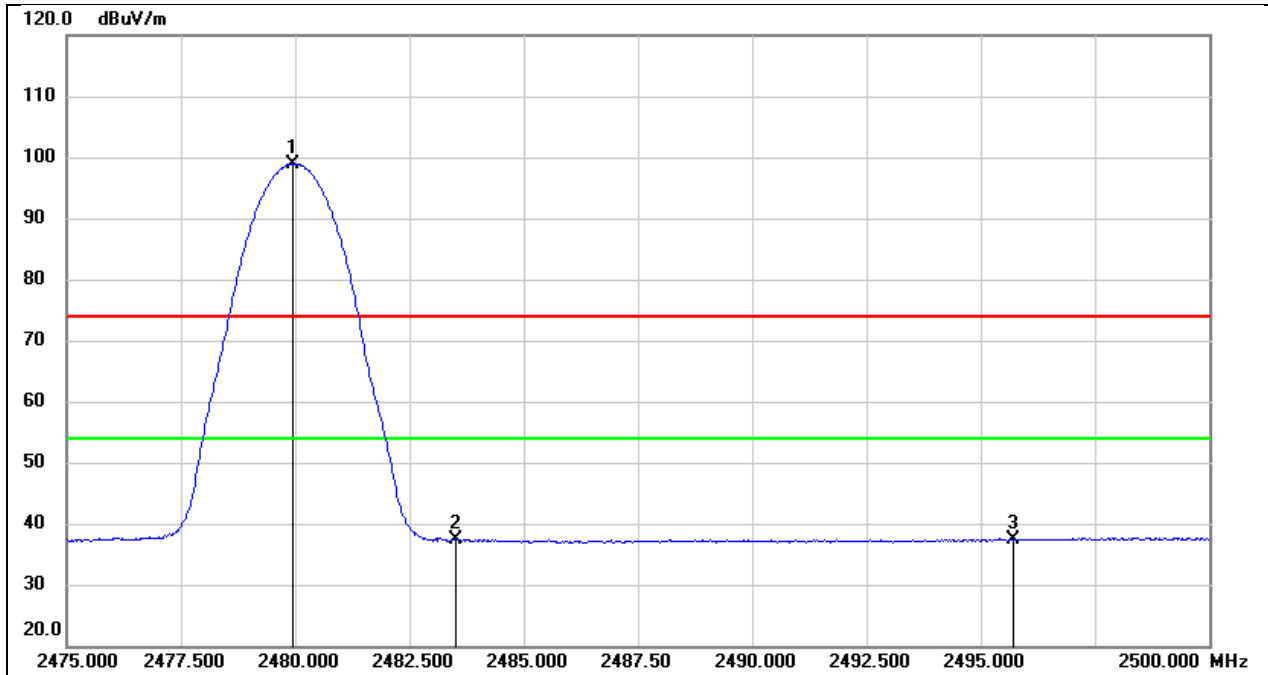

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.950	87.85	11.14	98.99	\	\	Fundamental
2	2483.500	26.14	11.16	37.30	54.00	-16.70	AVG
3	2495.700	26.25	11.21	37.46	54.00	-16.54	AVG

8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)


BT0			
Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

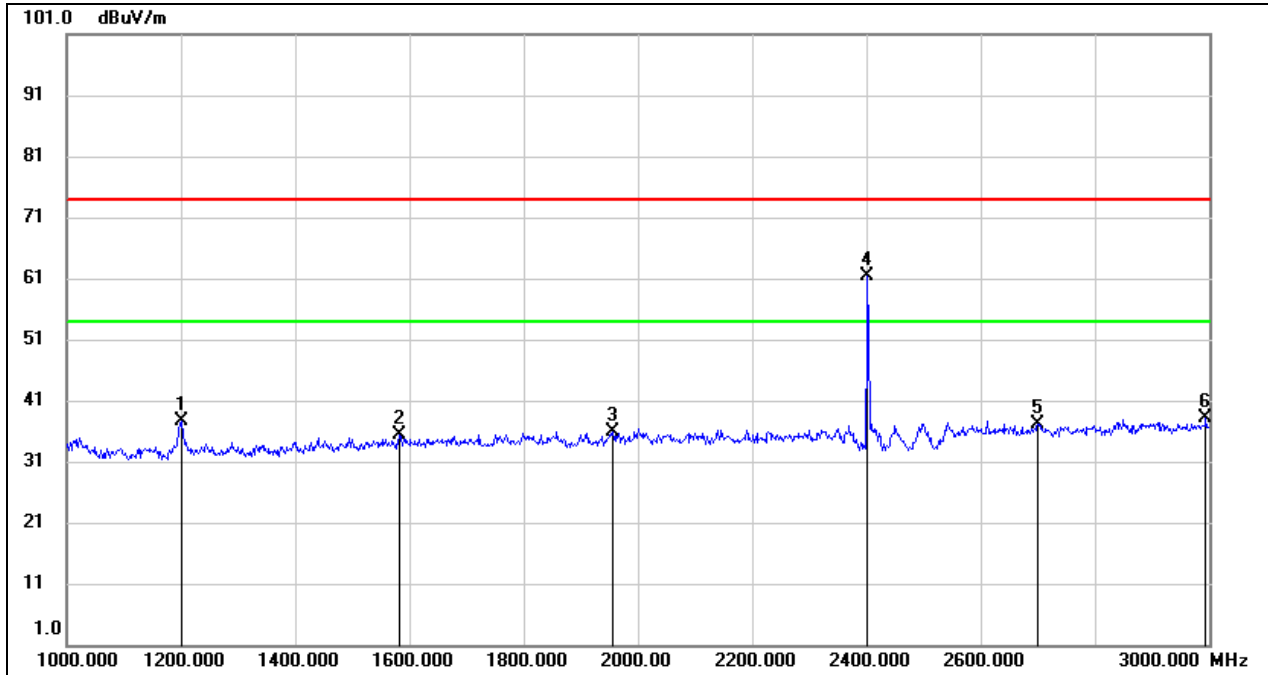

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	50.55	-13.01	37.54	74.00	-36.46	peak
2	1582.000	46.77	-11.35	35.42	74.00	-38.58	peak
3	1956.000	45.86	-9.91	35.95	74.00	-38.05	peak
4	2402.000	69.85	-8.46	61.39	\	\	Fundamental
5	2700.000	44.39	-7.17	37.22	74.00	-36.78	peak
6	2994.000	44.14	-6.06	38.08	74.00	-35.92	peak

BT0


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

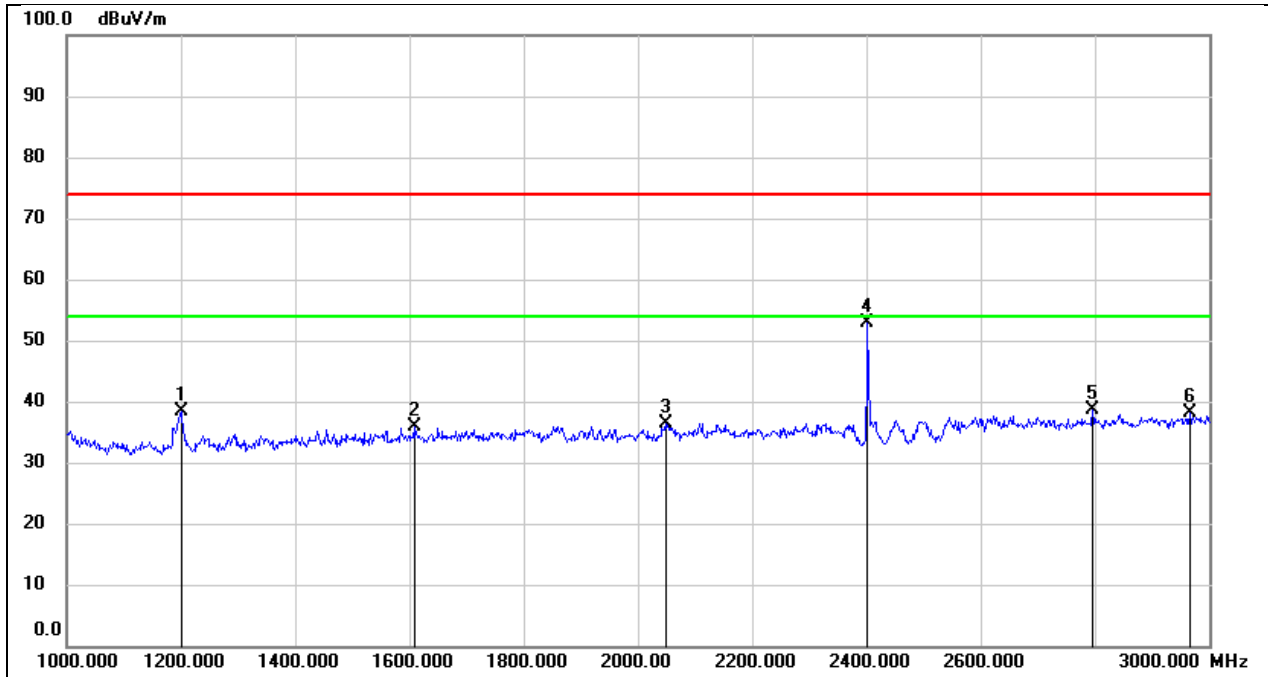

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	51.27	-13.01	38.26	74.00	-35.74	peak
2	1608.000	47.14	-11.27	35.87	74.00	-38.13	peak
3	2048.000	46.18	-9.71	36.47	74.00	-37.53	peak
4	2402.000	61.24	-8.46	52.78	\	\	Fundamental
5	2796.000	45.47	-6.82	38.65	74.00	-35.35	peak
6	2966.000	44.38	-6.17	38.21	74.00	-35.79	peak

BT0


Test Mode:	GFSK	Frequency(MHz):	2441
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

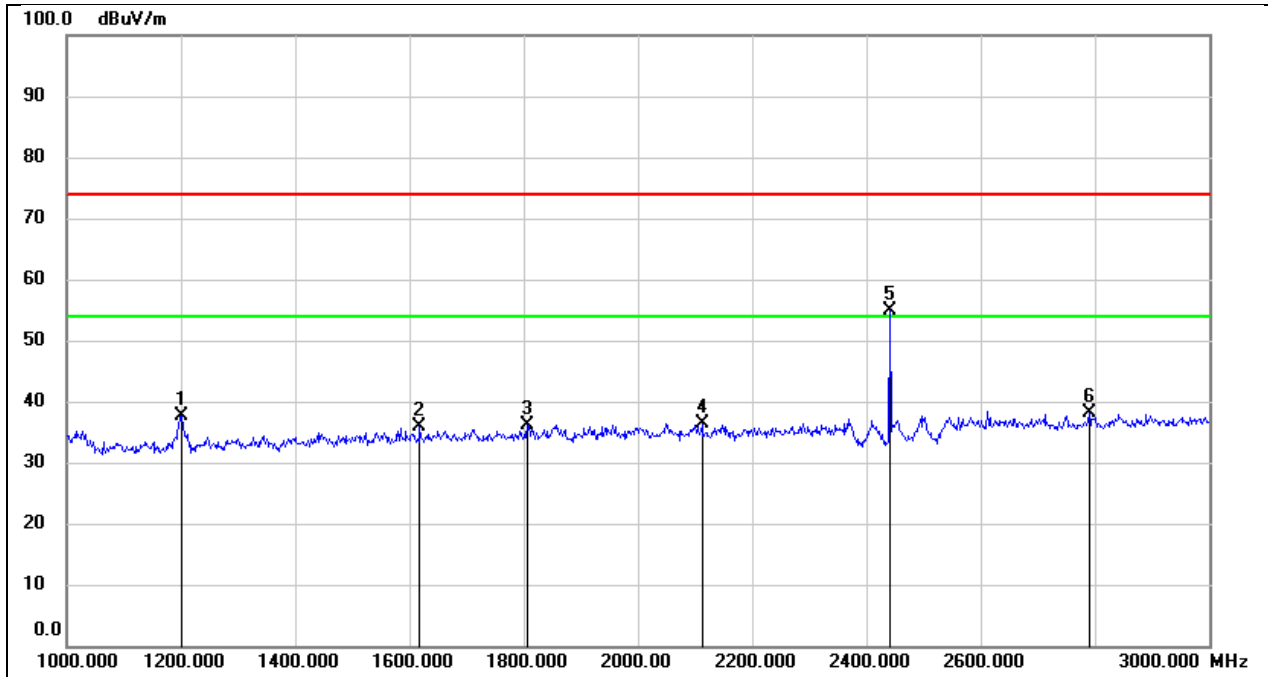

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1202.000	50.60	-13.00	37.60	74.00	-36.40	peak
2	1618.000	47.10	-11.23	35.87	74.00	-38.13	peak
3	1806.000	46.63	-10.57	36.06	74.00	-37.94	peak
4	2112.000	46.03	-9.70	36.33	74.00	-37.67	peak
5	2442.000	63.13	-8.26	54.87	\	\	Fundamental
6	2790.000	44.97	-6.84	38.13	74.00	-35.87	peak

BT0


Test Mode:	GFSK	Frequency(MHz):	2441
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

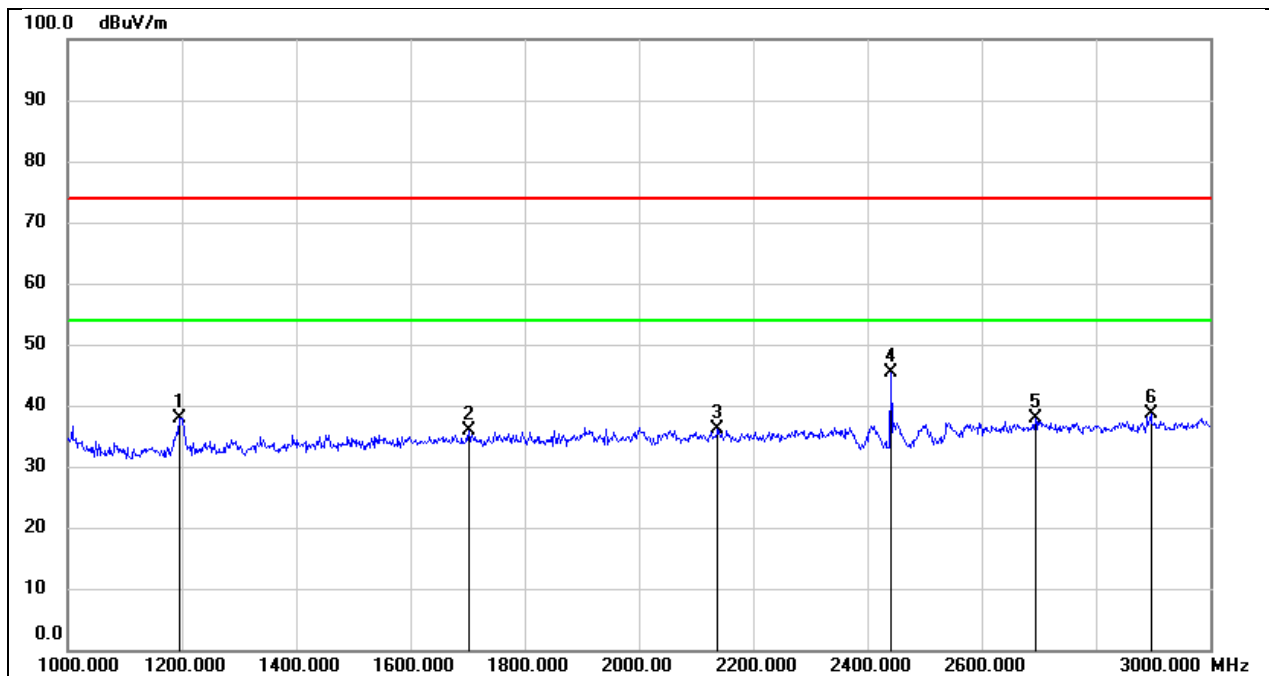

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1196.000	50.93	-13.03	37.90	74.00	-36.10	peak
2	1702.000	46.72	-10.94	35.78	74.00	-38.22	peak
3	2138.000	45.81	-9.71	36.10	74.00	-37.90	peak
4	2442.000	53.75	-8.26	45.49	\	\	Fundamental
5	2694.000	45.15	-7.19	37.96	74.00	-36.04	peak
6	2896.000	45.16	-6.44	38.72	74.00	-35.28	peak

BT0


Test Mode:	GFSK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

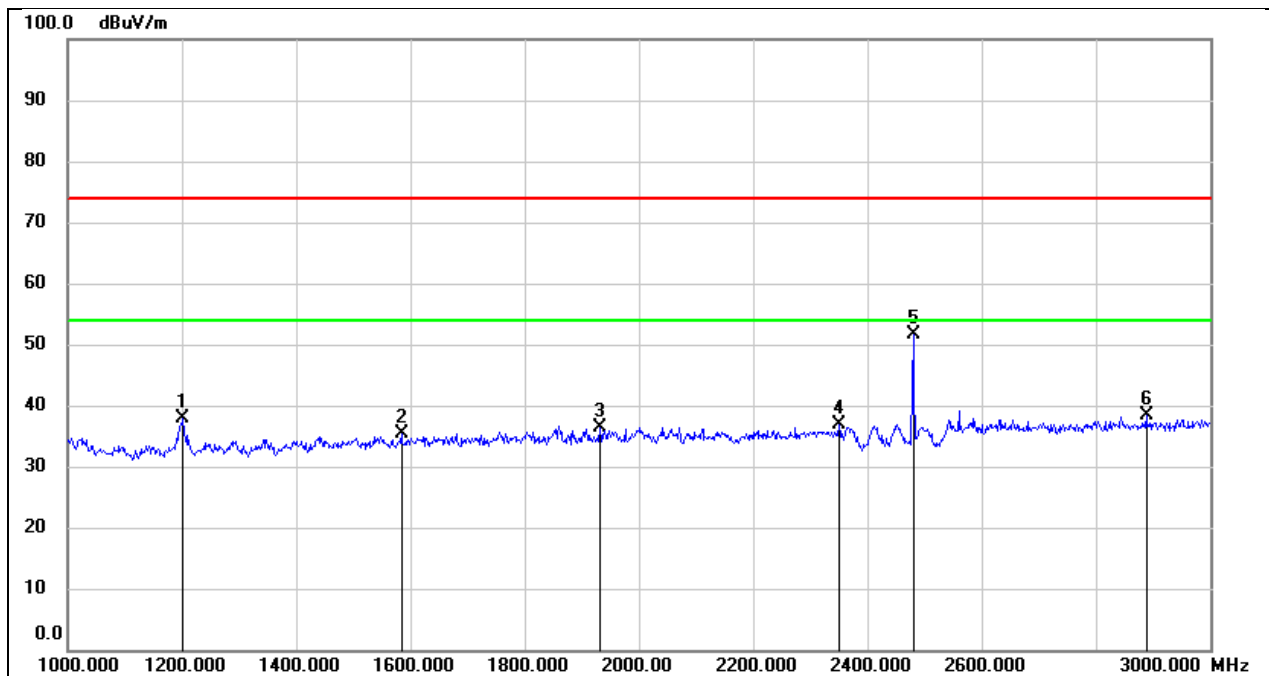

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1202.000	50.85	-13.00	37.85	74.00	-36.15	peak
2	1584.000	46.72	-11.35	35.37	74.00	-38.63	peak
3	1932.000	46.49	-10.01	36.48	74.00	-37.52	peak
4	2350.000	45.70	-8.78	36.92	74.00	-37.08	peak
5	2480.000	59.82	-8.08	51.74	\	\	Fundamental
6	2888.000	44.75	-6.48	38.27	74.00	-35.73	peak

BT0


Test Mode:	GFSK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

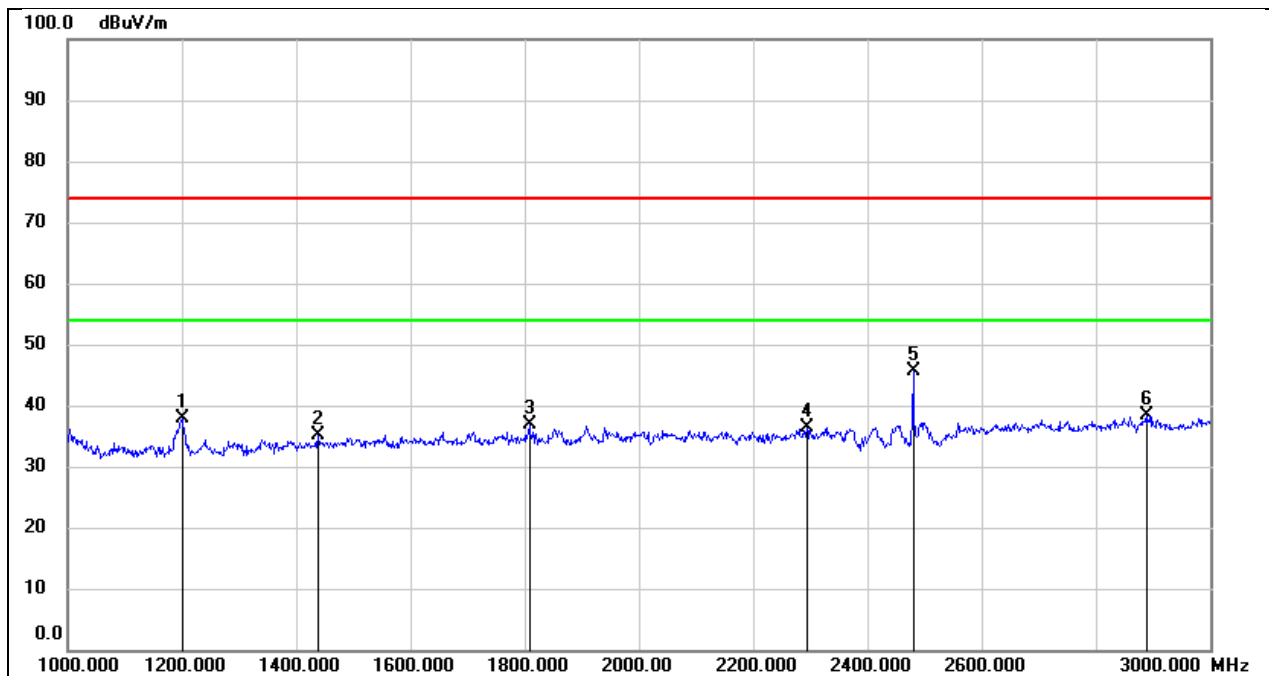

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	50.98	-13.01	37.97	74.00	-36.03	peak
2	1438.000	46.95	-11.92	35.03	74.00	-38.97	peak
3	1808.000	47.48	-10.57	36.91	74.00	-37.09	peak
4	2294.000	45.54	-9.12	36.42	74.00	-37.58	peak
5	2480.000	53.73	-8.08	45.65	\	\	Fundamental
6	2888.000	44.81	-6.48	38.33	74.00	-35.67	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

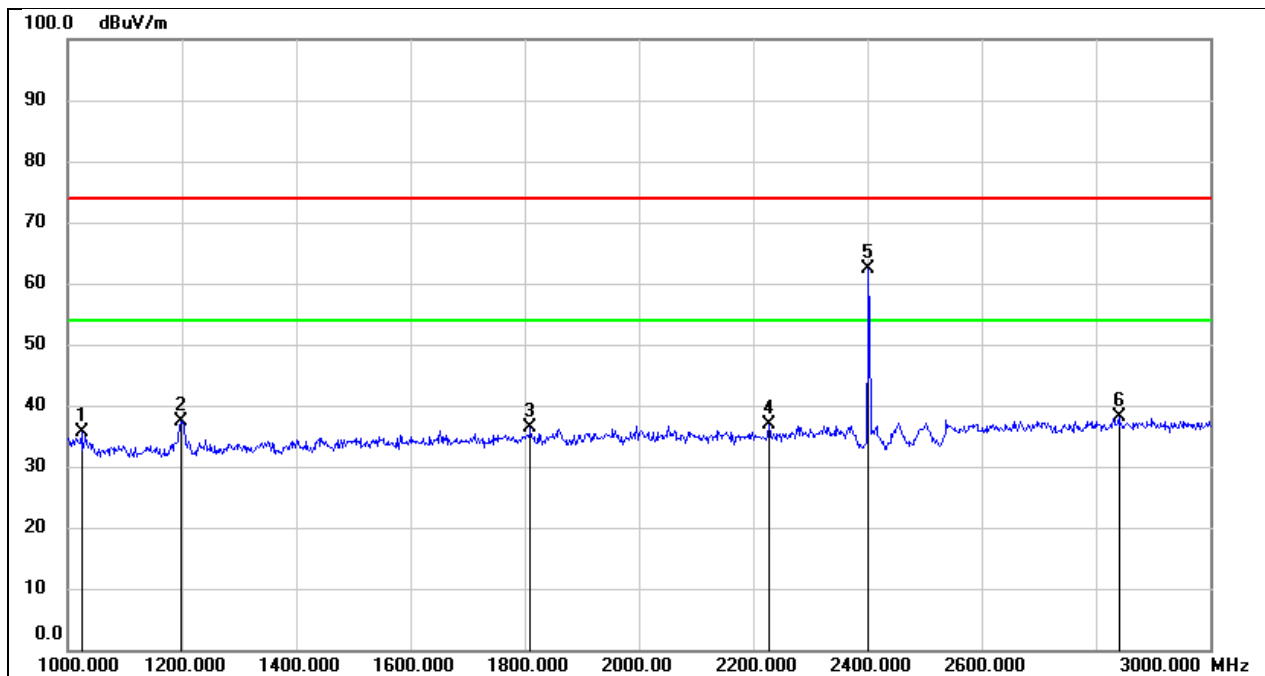

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1024.000	49.41	-13.79	35.62	74.00	-38.38	peak
2	1198.000	50.49	-13.02	37.47	74.00	-36.53	peak
3	1810.000	46.89	-10.55	36.34	74.00	-37.66	peak
4	2228.000	46.53	-9.54	36.99	74.00	-37.01	peak
5	2402.000	70.83	-8.46	62.37	\	\	Fundamental
6	2840.000	44.76	-6.65	38.11	74.00	-35.89	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

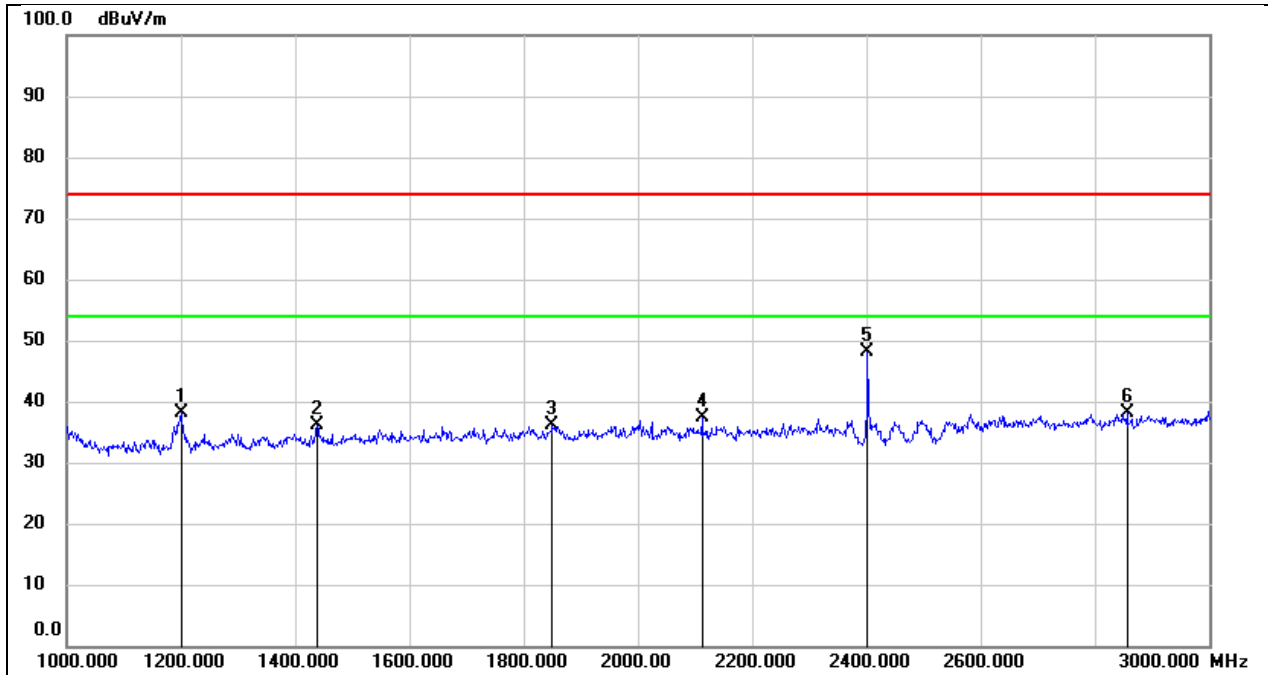

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	51.23	-13.01	38.22	74.00	-35.78	peak
2	1438.000	48.03	-11.92	36.11	74.00	-37.89	peak
3	1850.000	46.47	-10.38	36.09	74.00	-37.91	peak
4	2112.000	47.02	-9.70	37.32	74.00	-36.68	peak
5	2402.000	56.70	-8.46	48.24	\	\	Fundamental
6	2856.000	44.62	-6.60	38.02	74.00	-35.98	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2441
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

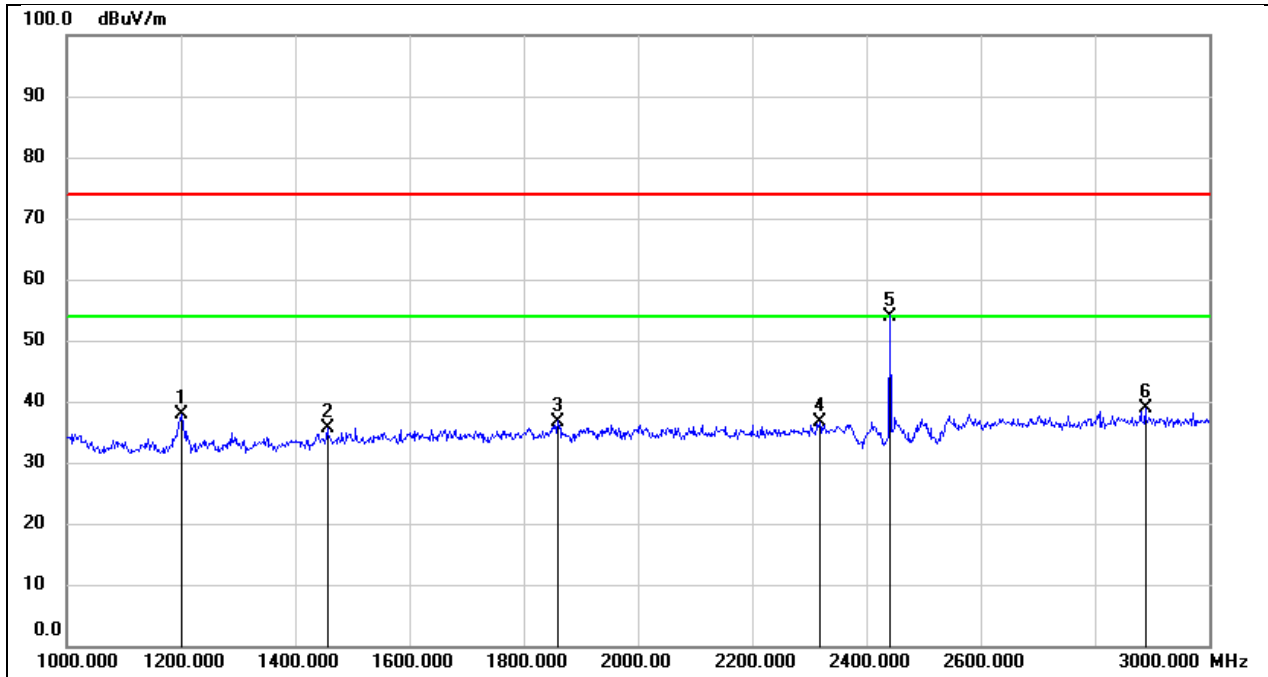

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1202.000	50.79	-13.00	37.79	74.00	-36.21	peak
2	1456.000	47.46	-11.83	35.63	74.00	-38.37	peak
3	1860.000	47.08	-10.33	36.75	74.00	-37.25	peak
4	2318.000	45.53	-8.97	36.56	74.00	-37.44	peak
5	2442.000	62.26	-8.26	54.00	\	\	Fundamental
6	2888.000	45.37	-6.48	38.89	74.00	-35.11	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2441
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

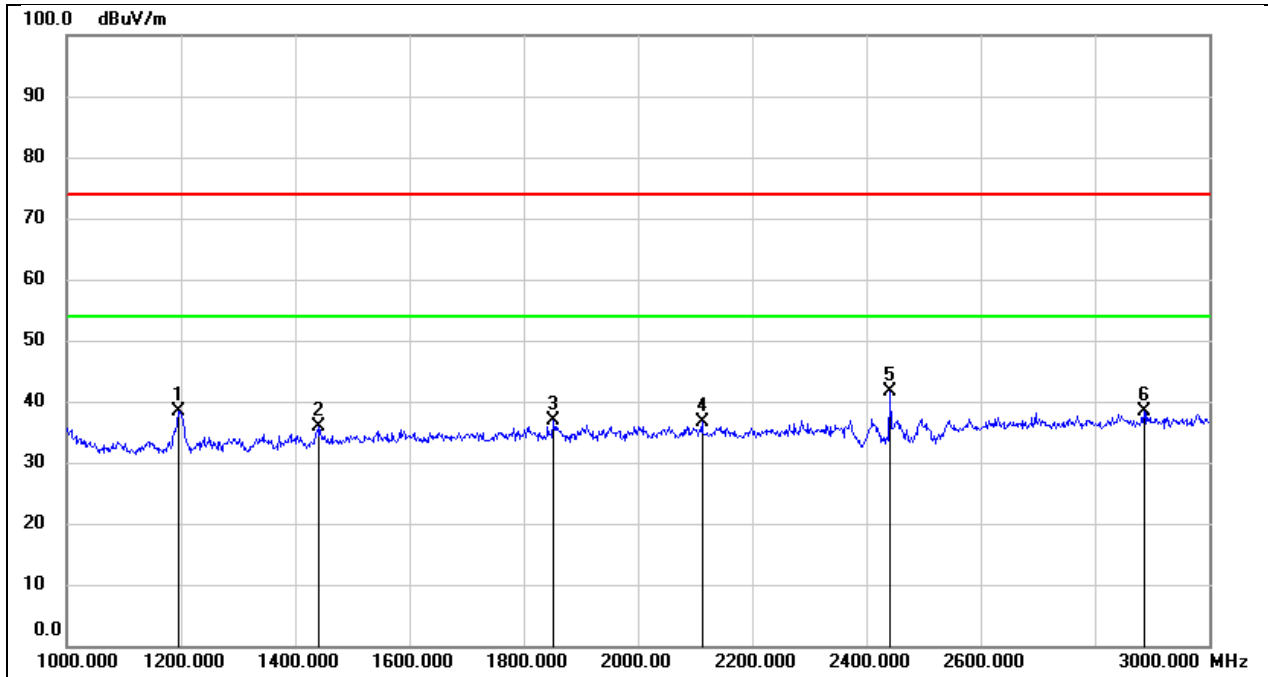

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1196.000	51.45	-13.03	38.42	74.00	-35.58	peak
2	1440.000	47.84	-11.91	35.93	74.00	-38.07	peak
3	1852.000	47.33	-10.37	36.96	74.00	-37.04	peak
4	2112.000	46.35	-9.70	36.65	74.00	-37.35	peak
5	2442.000	49.83	-8.26	41.57	\	\	Fundamental
6	2886.000	44.76	-6.48	38.28	74.00	-35.72	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

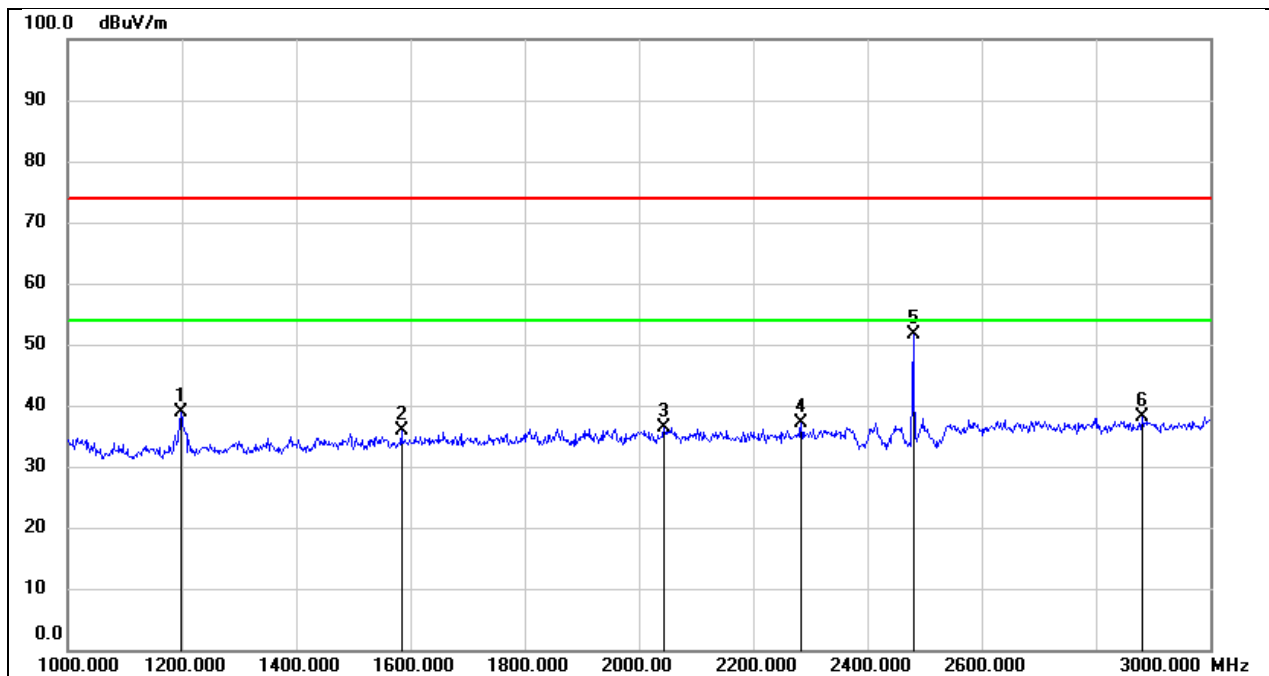

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1198.000	51.92	-13.02	38.90	74.00	-35.10	peak
2	1584.000	47.22	-11.35	35.87	74.00	-38.13	peak
3	2044.000	46.02	-9.71	36.31	74.00	-37.69	peak
4	2284.000	46.33	-9.19	37.14	74.00	-36.86	peak
5	2480.000	59.63	-8.08	51.55	\	\	Fundamental
6	2882.000	44.64	-6.50	38.14	74.00	-35.86	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

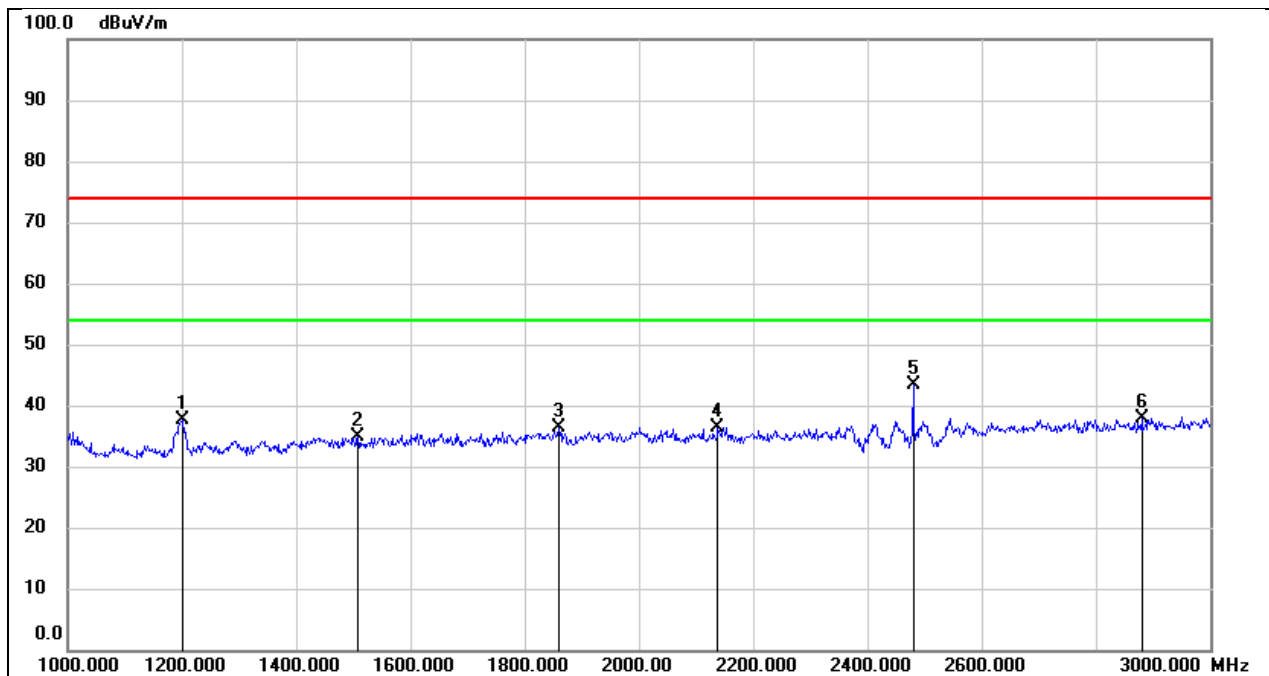

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1200.000	50.57	-13.01	37.56	74.00	-36.44	peak
2	1508.000	46.60	-11.62	34.98	74.00	-39.02	peak
3	1860.000	46.70	-10.33	36.37	74.00	-37.63	peak
4	2138.000	46.19	-9.71	36.48	74.00	-37.52	peak
5	2480.000	51.46	-8.08	43.38	\	\	Fundamental
6	2880.000	44.35	-6.50	37.85	74.00	-36.15	peak

8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)


BT0			
Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

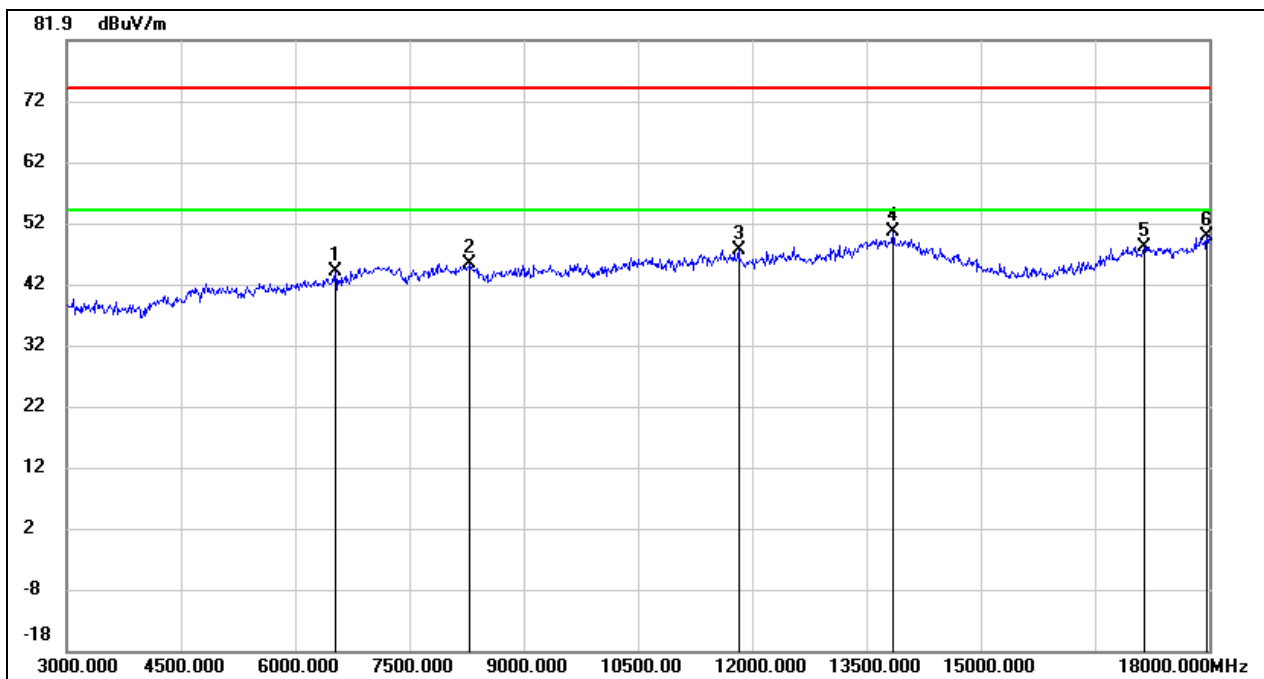

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6525.000	39.57	4.54	44.11	74.00	-29.89	peak
2	8295.000	37.08	8.12	45.20	74.00	-28.80	peak
3	11820.000	29.70	17.80	47.50	74.00	-26.50	peak
4	13845.000	27.00	23.46	50.46	74.00	-23.54	peak
5	17145.000	24.58	23.45	48.03	74.00	-25.97	peak
6	17970.000	21.91	27.79	49.70	74.00	-24.30	peak

BT0


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

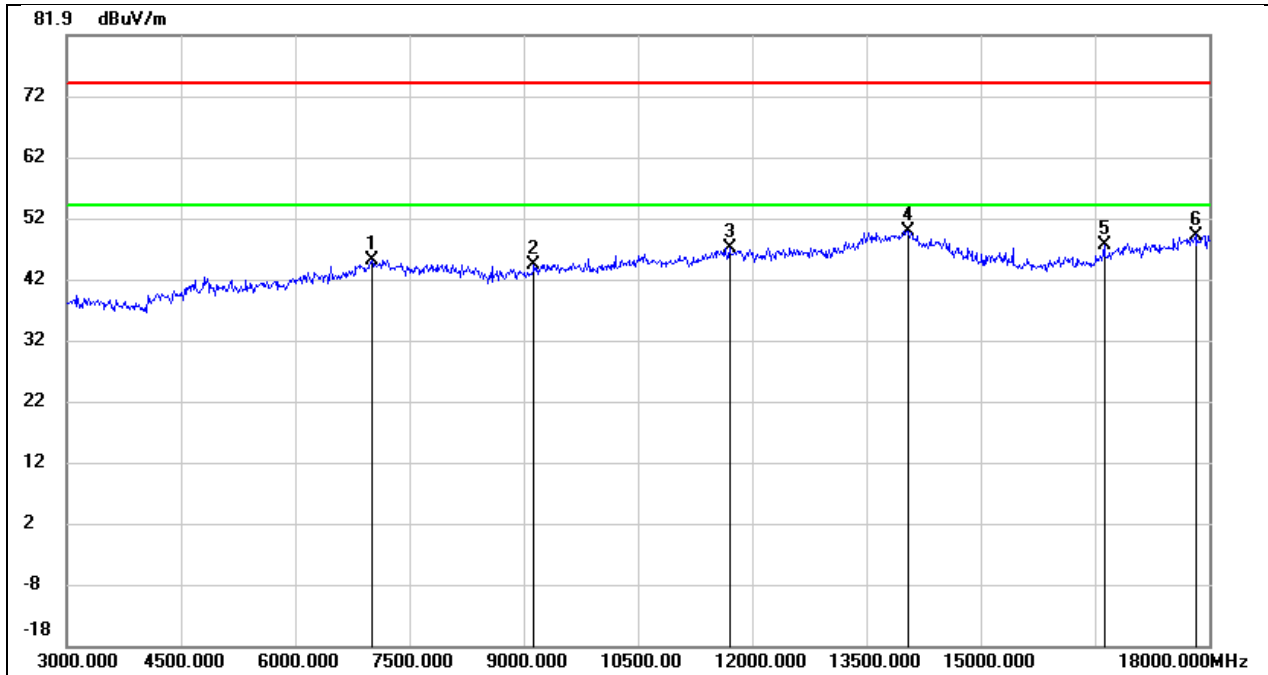

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7005.000	39.03	6.02	45.05	74.00	-28.95	peak
2	9135.000	34.49	9.84	44.33	74.00	-29.67	peak
3	11700.000	29.66	17.44	47.10	74.00	-26.90	peak
4	14055.000	26.06	23.74	49.80	74.00	-24.20	peak
5	16620.000	26.43	21.19	47.62	74.00	-26.38	peak
6	17820.000	22.31	26.84	49.15	74.00	-24.85	peak

BT0


Test Mode:	GFSK	Frequency(MHz):	2441
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

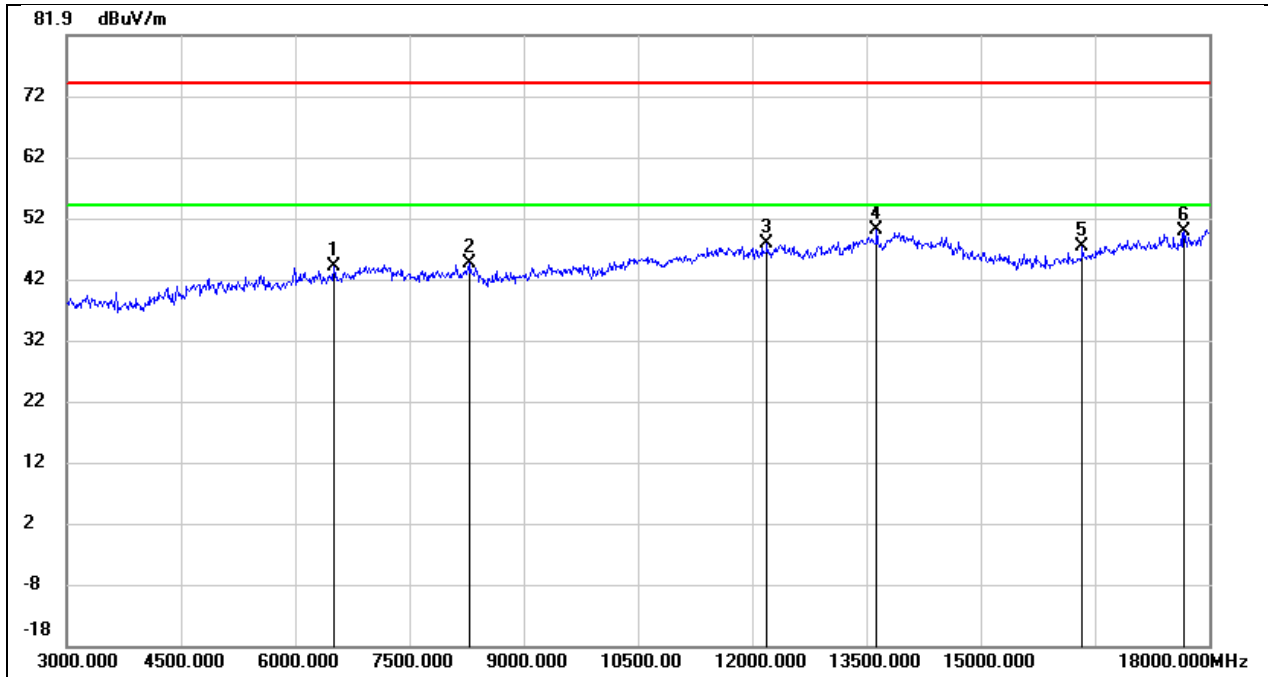

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6510.000	39.60	4.51	44.11	74.00	-29.89	peak
2	8295.000	36.40	8.12	44.52	74.00	-29.48	peak
3	12195.000	28.97	18.71	47.68	74.00	-26.32	peak
4	13635.000	27.19	22.84	50.03	74.00	-23.97	peak
5	16335.000	27.11	20.05	47.16	74.00	-26.84	peak
6	17670.000	23.82	25.92	49.74	74.00	-24.26	peak

BT0


Test Mode:	GFSK	Frequency(MHz):	2441
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

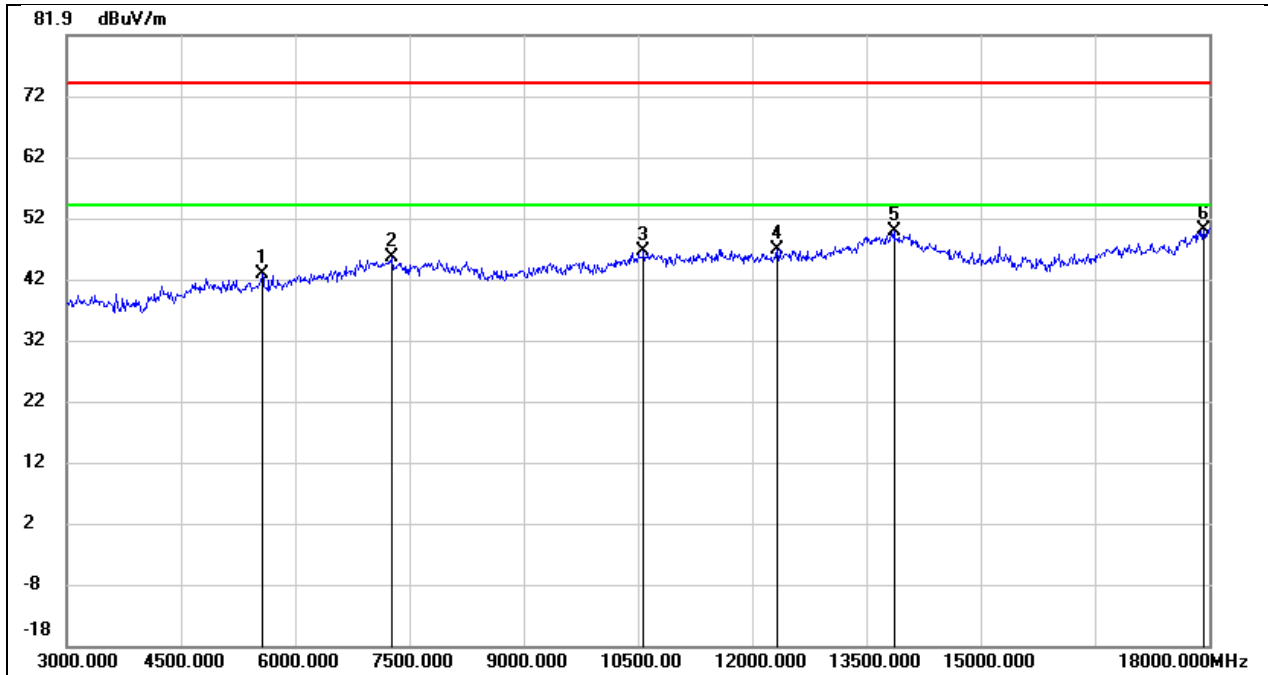

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5565.000	40.85	1.84	42.69	74.00	-31.31	peak
2	7275.000	38.83	6.69	45.52	74.00	-28.48	peak
3	10575.000	32.20	14.23	46.43	74.00	-27.57	peak
4	12330.000	27.86	18.88	46.74	74.00	-27.26	peak
5	13860.000	26.22	23.52	49.74	74.00	-24.26	peak
6	17925.000	22.52	27.50	50.02	74.00	-23.98	peak

BT0


Test Mode:	GFSK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

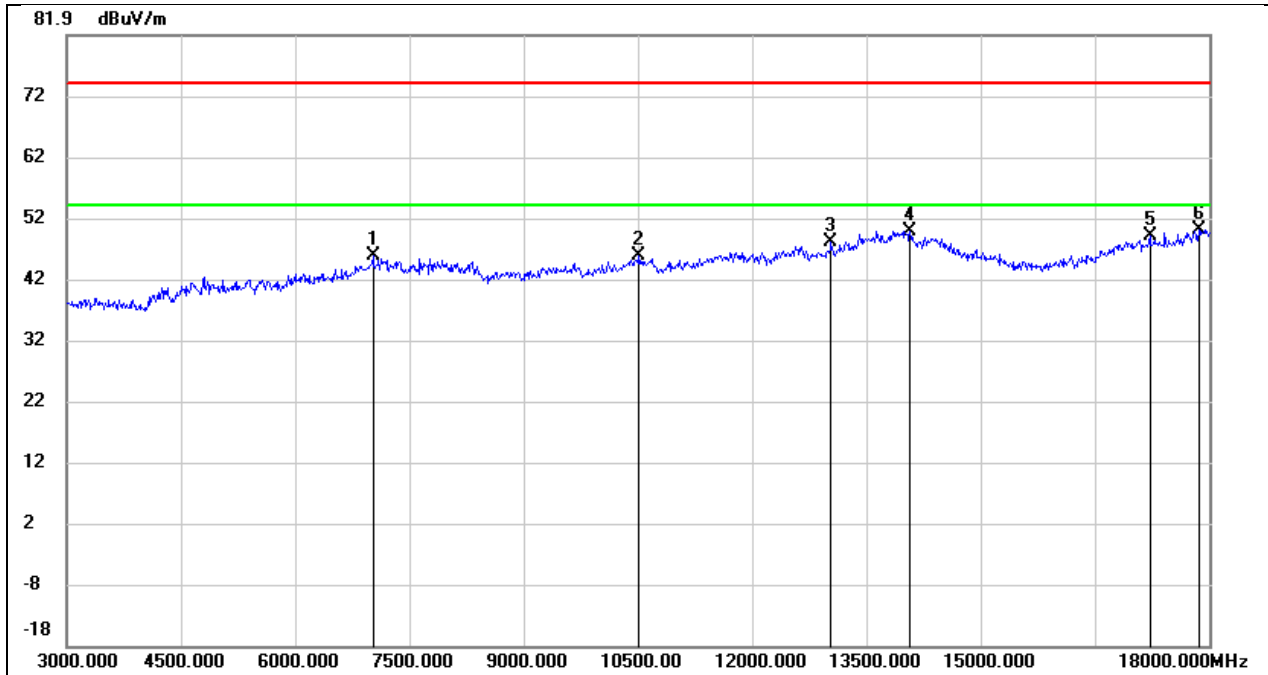

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7020.000	39.70	6.08	45.78	74.00	-28.22	peak
2	10515.000	31.63	14.08	45.71	74.00	-28.29	peak
3	13035.000	28.16	19.92	48.08	74.00	-25.92	peak
4	14070.000	26.18	23.65	49.83	74.00	-24.17	peak
5	17220.000	25.27	23.75	49.02	74.00	-24.98	peak
6	17865.000	22.98	27.13	50.11	74.00	-23.89	peak

BT0


Test Mode:	GFSK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

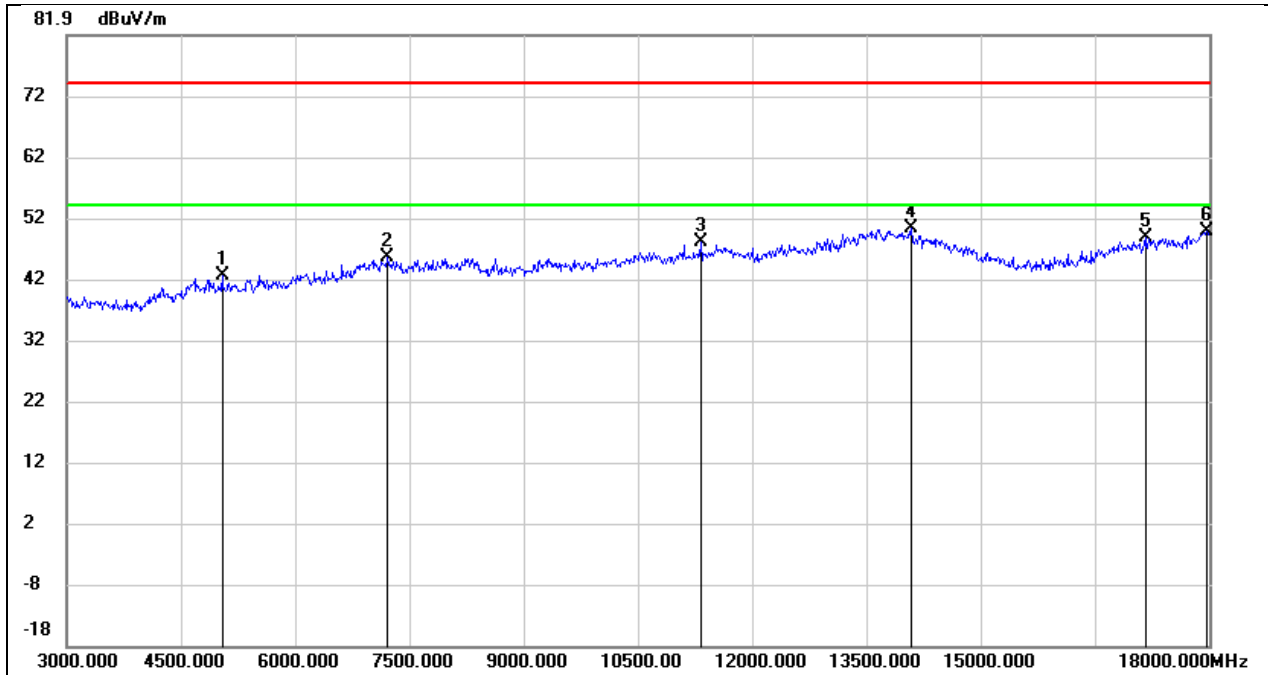

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5040.000	41.80	0.67	42.47	74.00	-31.53	peak
2	7215.000	38.88	6.74	45.62	74.00	-28.38	peak
3	11325.000	31.64	16.33	47.97	74.00	-26.03	peak
4	14085.000	26.74	23.57	50.31	74.00	-23.69	peak
5	17160.000	25.33	23.51	48.84	74.00	-25.16	peak
6	17970.000	21.91	27.79	49.70	74.00	-24.30	peak

BT0


Test Mode:	8DPSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

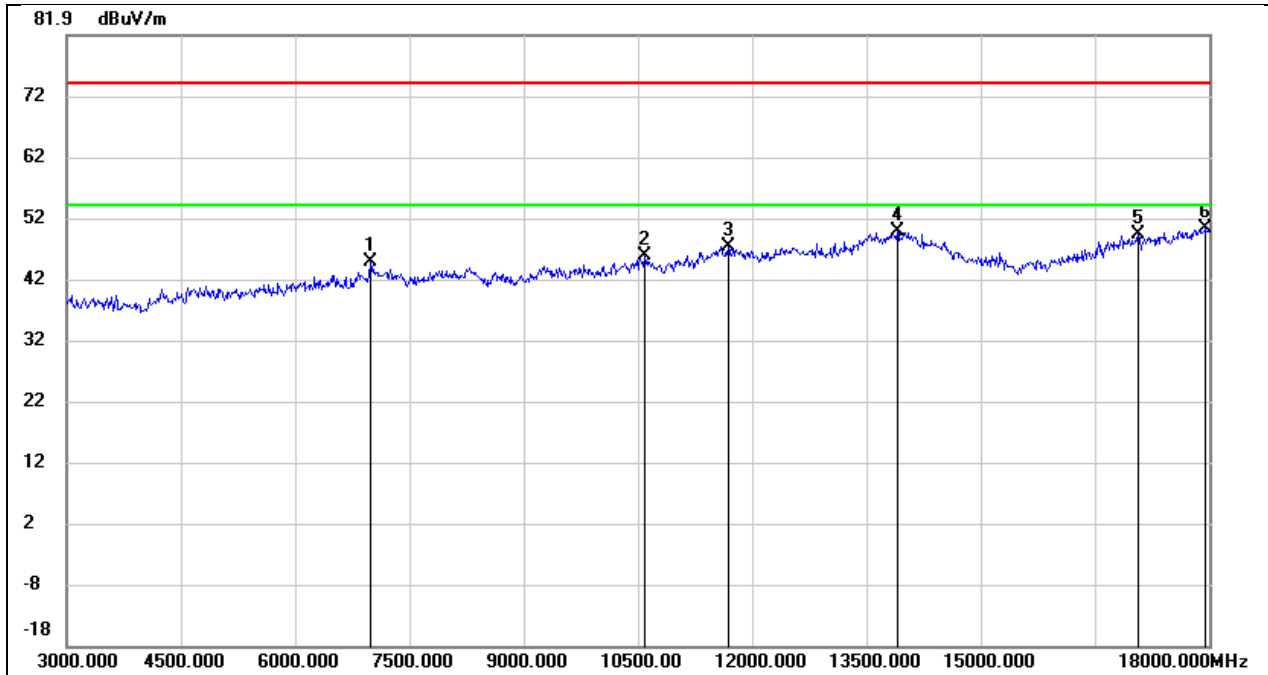

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6990.000	38.69	5.97	44.66	74.00	-29.34	peak
2	10590.000	31.49	14.27	45.76	74.00	-28.24	peak
3	11685.000	29.97	17.41	47.38	74.00	-26.62	peak
4	13905.000	25.98	23.69	49.67	74.00	-24.33	peak
5	17070.000	26.02	23.14	49.16	74.00	-24.84	peak
6	17955.000	22.66	27.69	50.35	74.00	-23.65	peak

BT0


Test Mode:	8DPSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

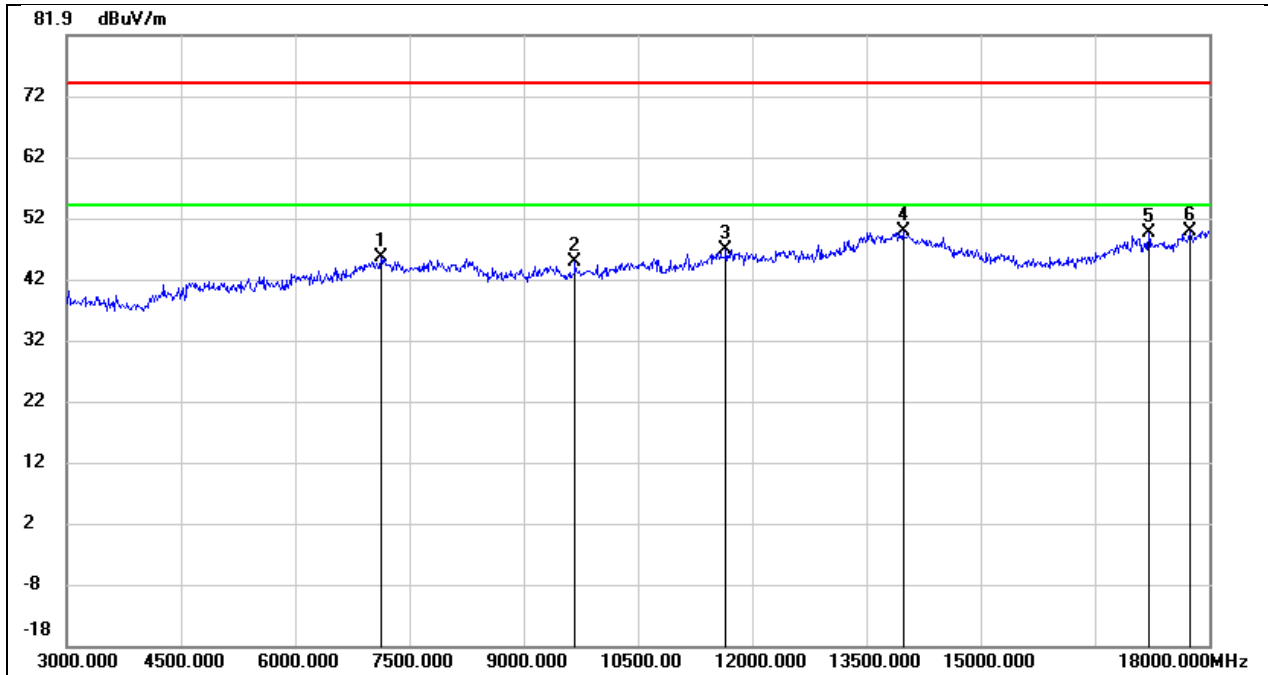

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7125.000	38.99	6.47	45.46	74.00	-28.54	peak
2	9675.000	33.05	11.69	44.74	74.00	-29.26	peak
3	11655.000	29.39	17.32	46.71	74.00	-27.29	peak
4	13980.000	25.70	23.98	49.68	74.00	-24.32	peak
5	17205.000	25.75	23.70	49.45	74.00	-24.55	peak
6	17745.000	23.43	26.39	49.82	74.00	-24.18	peak

BT0


Test Mode:	8DPSK	Frequency(MHz):	2441
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

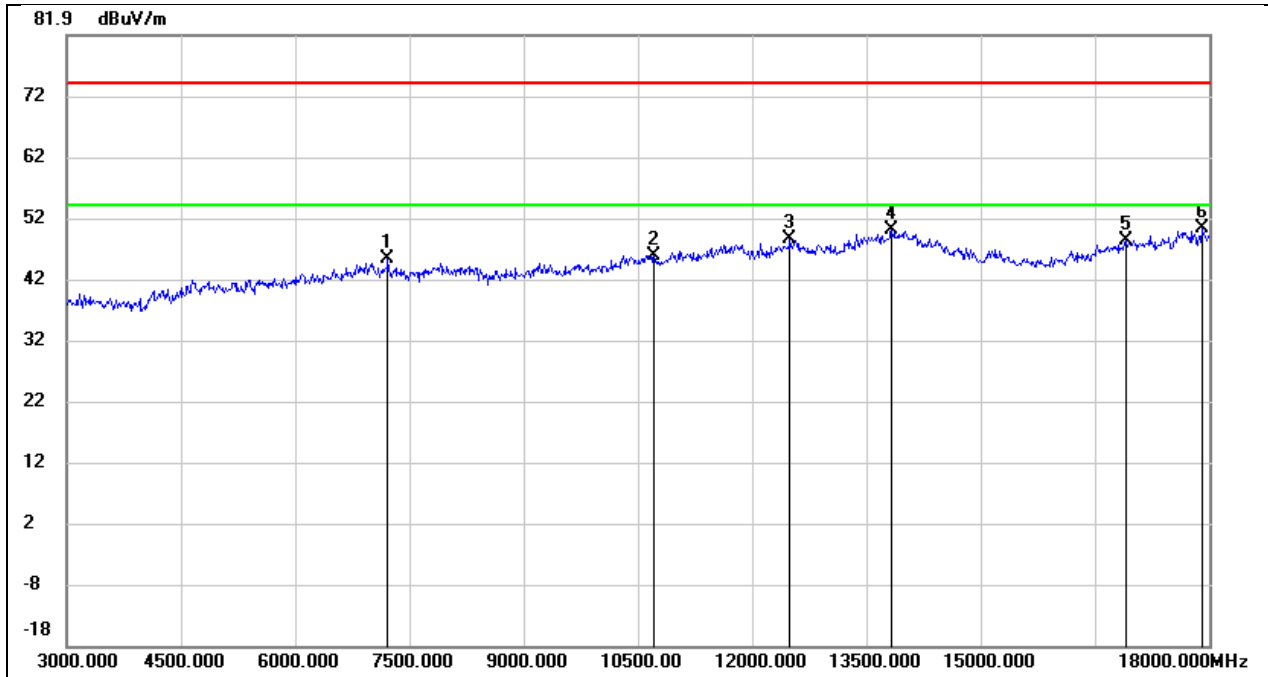

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7215.000	38.61	6.74	45.35	74.00	-28.65	peak
2	10710.000	31.25	14.61	45.86	74.00	-28.14	peak
3	12495.000	29.30	19.12	48.42	74.00	-25.58	peak
4	13830.000	26.61	23.41	50.02	74.00	-23.98	peak
5	16905.000	25.93	22.39	48.32	74.00	-25.68	peak
6	17910.000	22.96	27.41	50.37	74.00	-23.63	peak

BT0


Test Mode:	8DPSK	Frequency(MHz):	2441
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

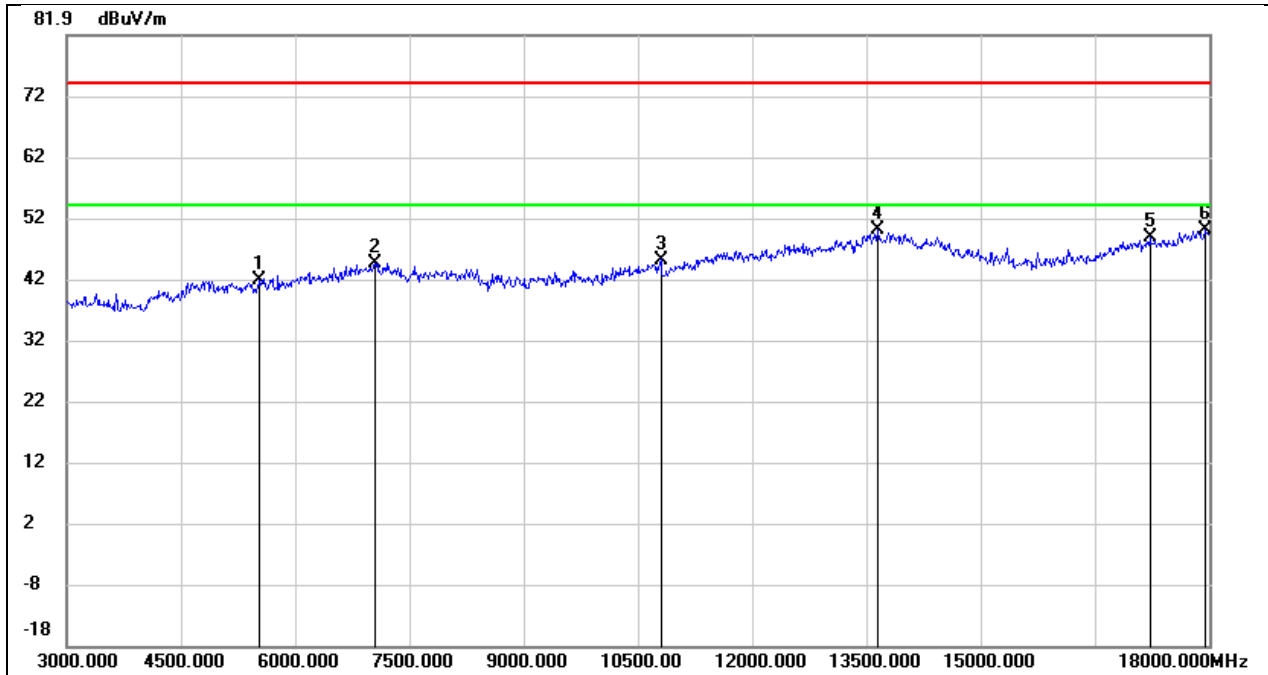

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5535.000	39.98	1.78	41.76	74.00	-32.24	peak
2	7050.000	38.41	6.19	44.60	74.00	-29.40	peak
3	10800.000	30.28	14.87	45.15	74.00	-28.85	peak
4	13650.000	27.12	22.88	50.00	74.00	-24.00	peak
5	17220.000	25.12	23.75	48.87	74.00	-25.13	peak
6	17940.000	22.44	27.61	50.05	74.00	-23.95	peak

BT0


Test Mode:	8DPSK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

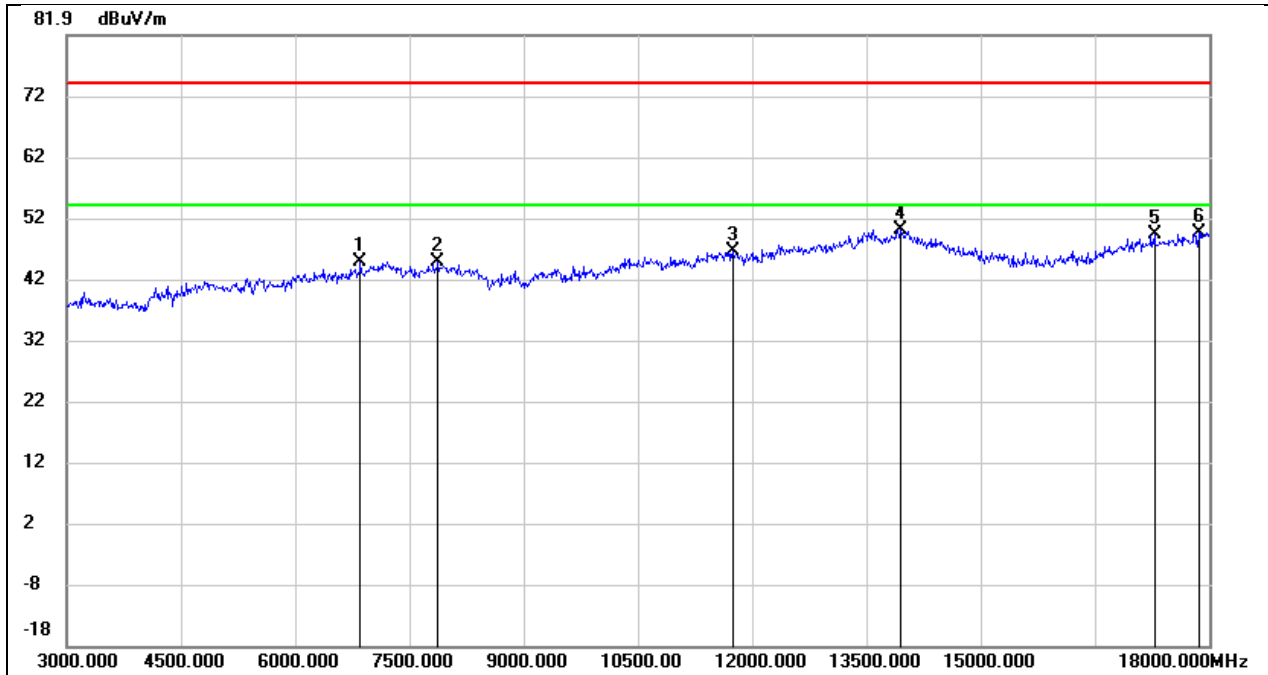

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6855.000	39.25	5.53	44.78	74.00	-29.22	peak
2	7875.000	37.24	7.66	44.90	74.00	-29.10	peak
3	11745.000	29.04	17.58	46.62	74.00	-27.38	peak
4	13950.000	26.12	23.87	49.99	74.00	-24.01	peak
5	17280.000	25.32	23.97	49.29	74.00	-24.71	peak
6	17865.000	22.47	27.13	49.60	74.00	-24.40	peak

BT0


Test Mode:	8DPSK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

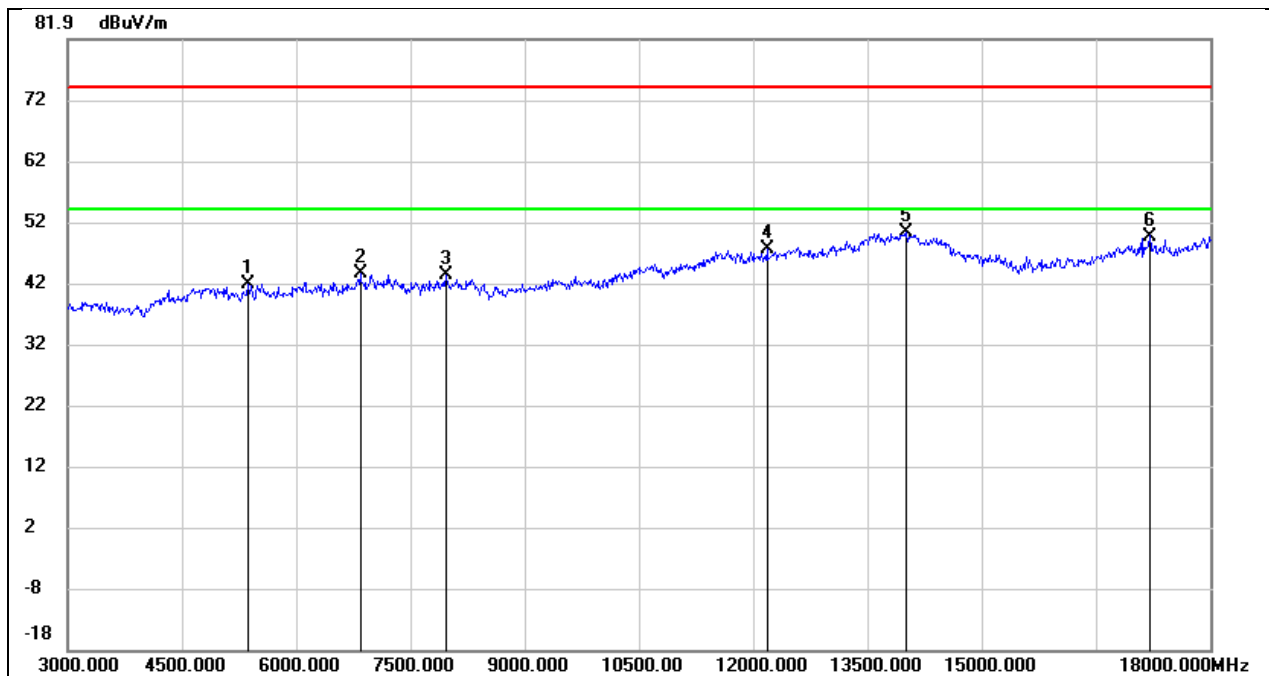

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5370.000	40.27	1.51	41.78	74.00	-32.22	peak
2	6840.000	37.95	5.47	43.42	74.00	-30.58	peak
3	7965.000	35.43	7.88	43.31	74.00	-30.69	peak
4	12180.000	28.73	18.69	47.42	74.00	-26.58	peak
5	14010.000	26.26	24.00	50.26	74.00	-23.74	peak
6	17205.000	25.95	23.70	49.65	74.00	-24.35	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

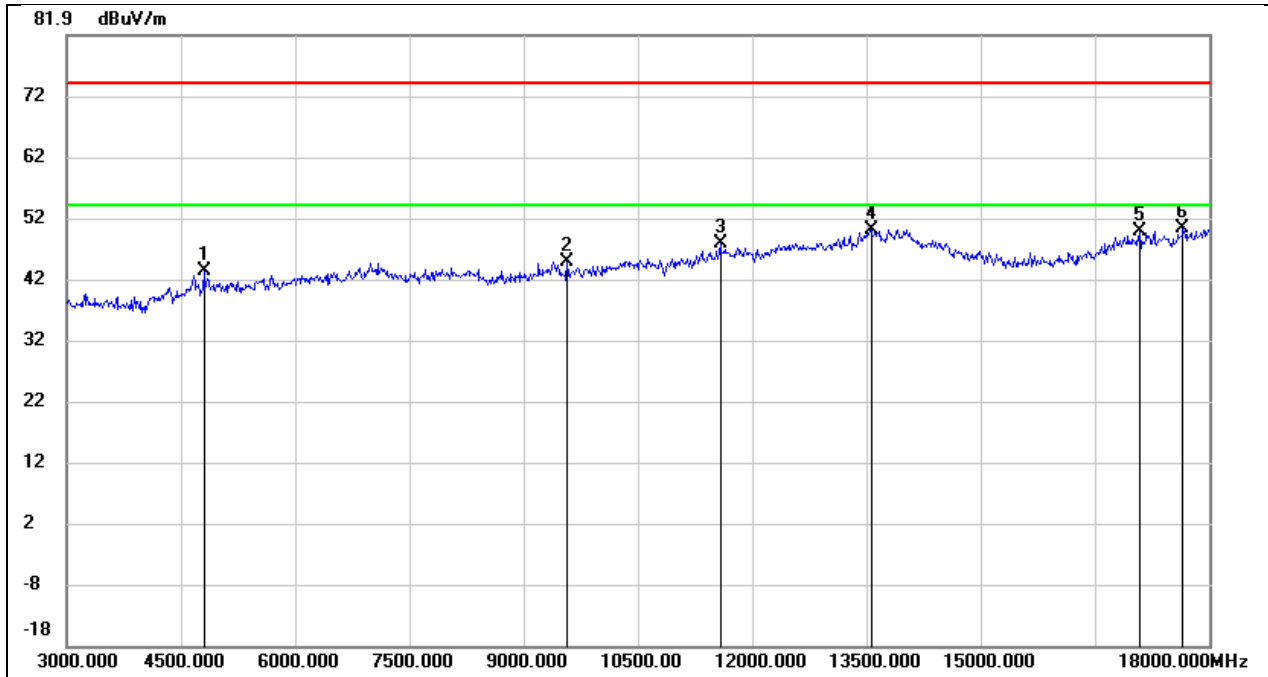

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	42.99	0.19	43.18	74.00	-30.82	peak
2	9570.000	33.50	11.26	44.76	74.00	-29.24	peak
3	11580.000	30.59	17.08	47.67	74.00	-26.33	peak
4	13560.000	27.49	22.64	50.13	74.00	-23.87	peak
5	17085.000	26.53	23.19	49.72	74.00	-24.28	peak
6	17655.000	24.40	25.82	50.22	74.00	-23.78	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

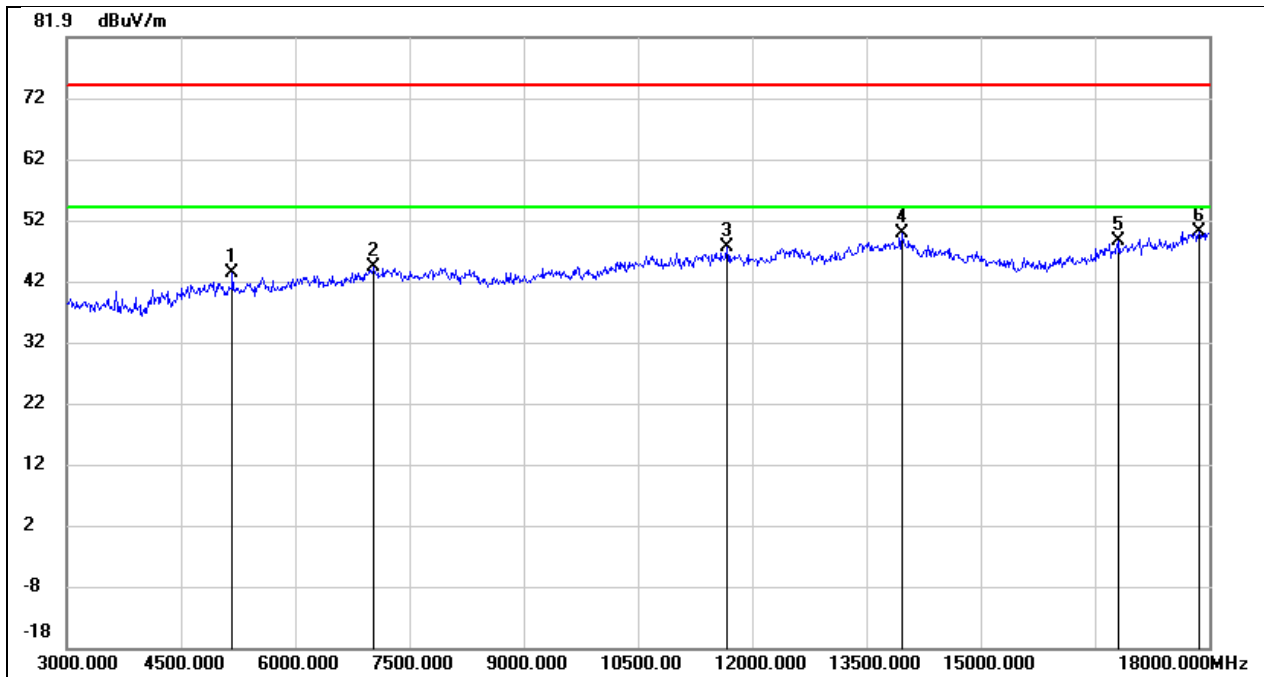

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5175.000	42.29	0.88	43.17	74.00	-30.83	peak
2	7035.000	38.16	6.13	44.29	74.00	-29.71	peak
3	11670.000	30.10	17.36	47.46	74.00	-26.54	peak
4	13965.000	25.84	23.93	49.77	74.00	-24.23	peak
5	16815.000	26.45	21.96	48.41	74.00	-25.59	peak
6	17865.000	22.89	27.13	50.02	74.00	-23.98	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2441
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

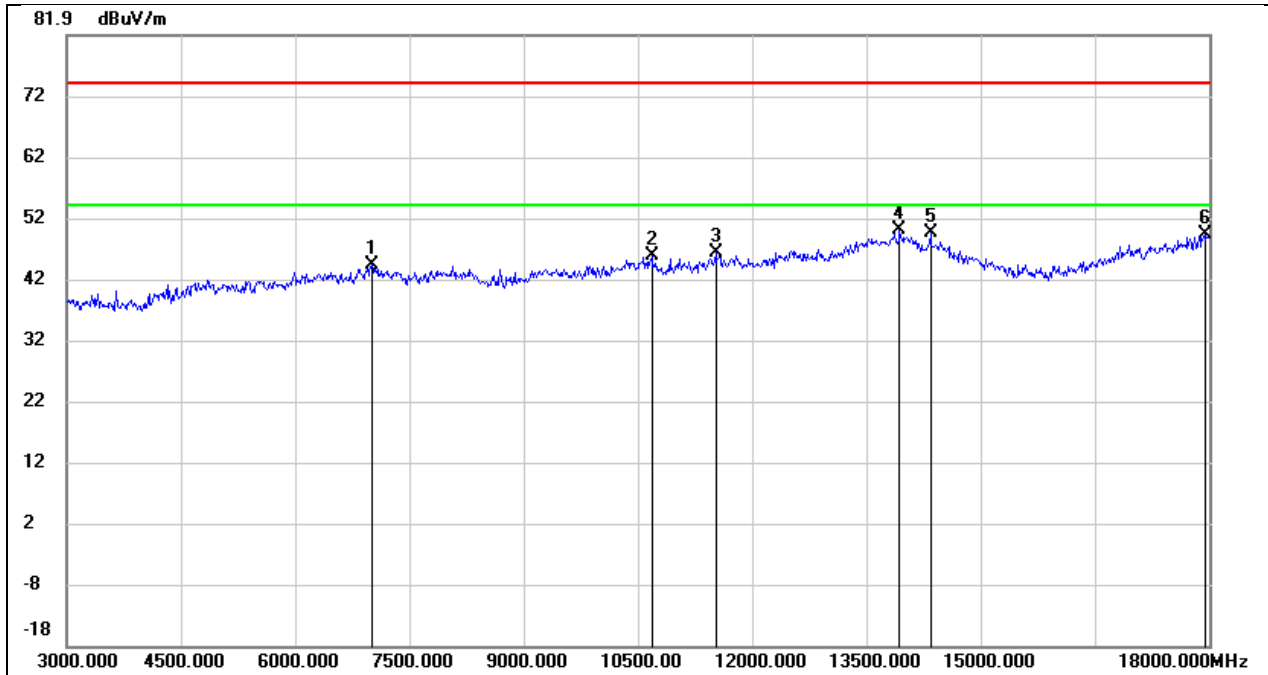

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7005.000	38.14	6.02	44.16	74.00	-29.84	peak
2	10680.000	31.24	14.53	45.77	74.00	-28.23	peak
3	11520.000	29.36	16.89	46.25	74.00	-27.75	peak
4	13935.000	26.11	23.81	49.92	74.00	-24.08	peak
5	14340.000	27.17	22.28	49.45	74.00	-24.55	peak
6	17940.000	21.67	27.61	49.28	74.00	-24.72	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2441
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

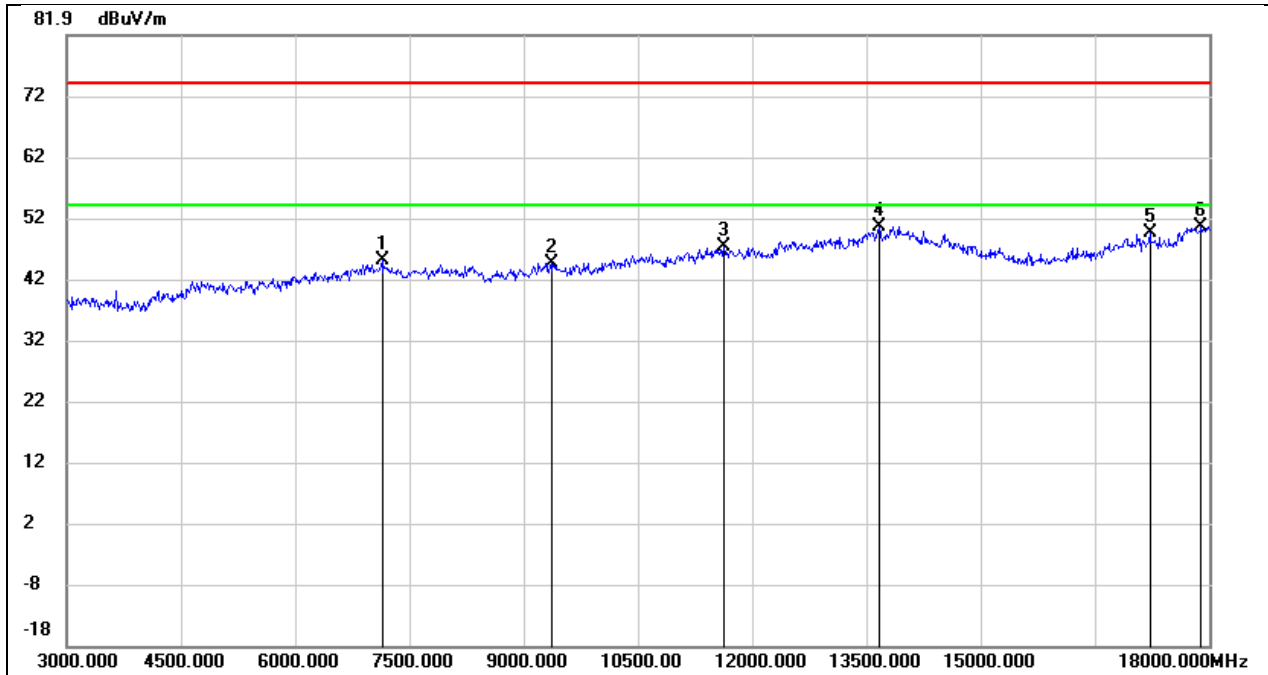

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7140.000	38.42	6.52	44.94	74.00	-29.06	peak
2	9360.000	34.00	10.63	44.63	74.00	-29.37	peak
3	11625.000	29.97	17.23	47.20	74.00	-26.80	peak
4	13665.000	27.68	22.92	50.60	74.00	-23.40	peak
5	17220.000	25.77	23.75	49.52	74.00	-24.48	peak
6	17895.000	23.14	27.32	50.46	74.00	-23.54	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

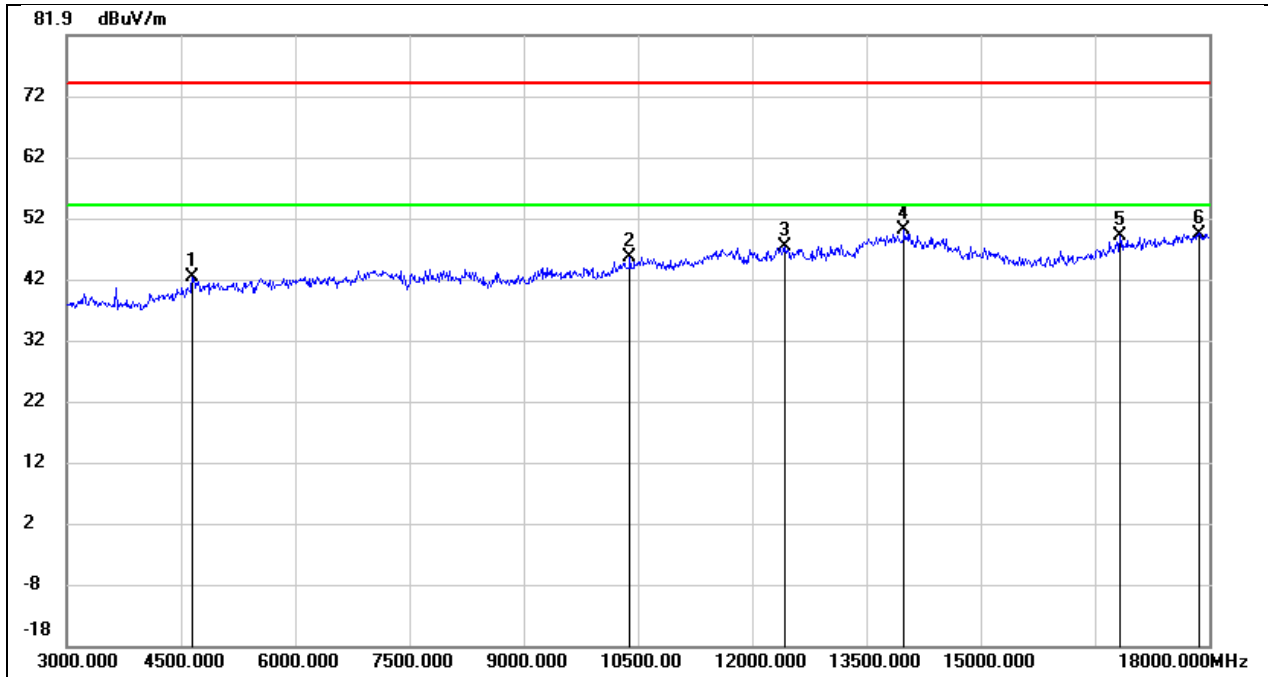

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4650.000	42.61	-0.22	42.39	74.00	-31.61	peak
2	10395.000	31.80	13.75	45.55	74.00	-28.45	peak
3	12420.000	28.27	18.99	47.26	74.00	-26.74	peak
4	13995.000	26.00	24.04	50.04	74.00	-23.96	peak
5	16830.000	26.89	22.04	48.93	74.00	-25.07	peak
6	17865.000	22.27	27.13	49.40	74.00	-24.60	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

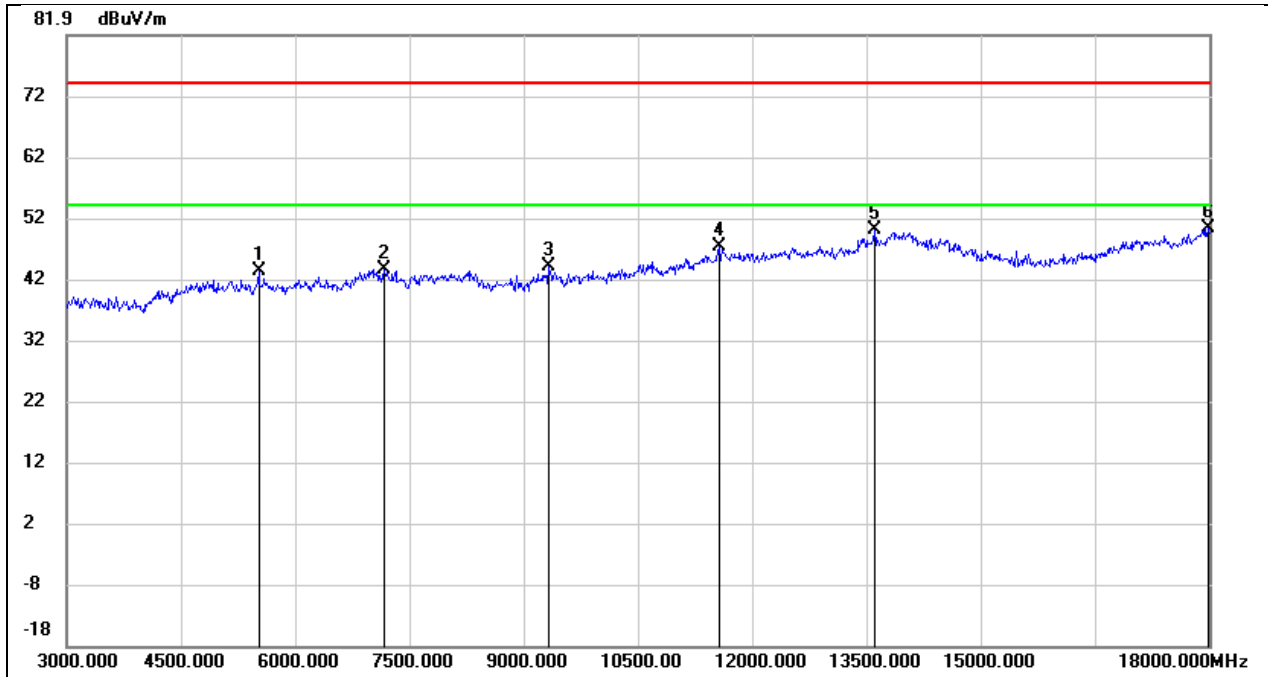

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5520.000	41.59	1.76	43.35	74.00	-30.65	peak
2	7170.000	37.01	6.64	43.65	74.00	-30.35	peak
3	9330.000	33.42	10.53	43.95	74.00	-30.05	peak
4	11565.000	30.14	17.03	47.17	74.00	-26.83	peak
5	13605.000	27.25	22.75	50.00	74.00	-24.00	peak
6	17985.000	22.42	27.88	50.30	74.00	-23.70	peak

BT1


Test Mode:	8DPSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

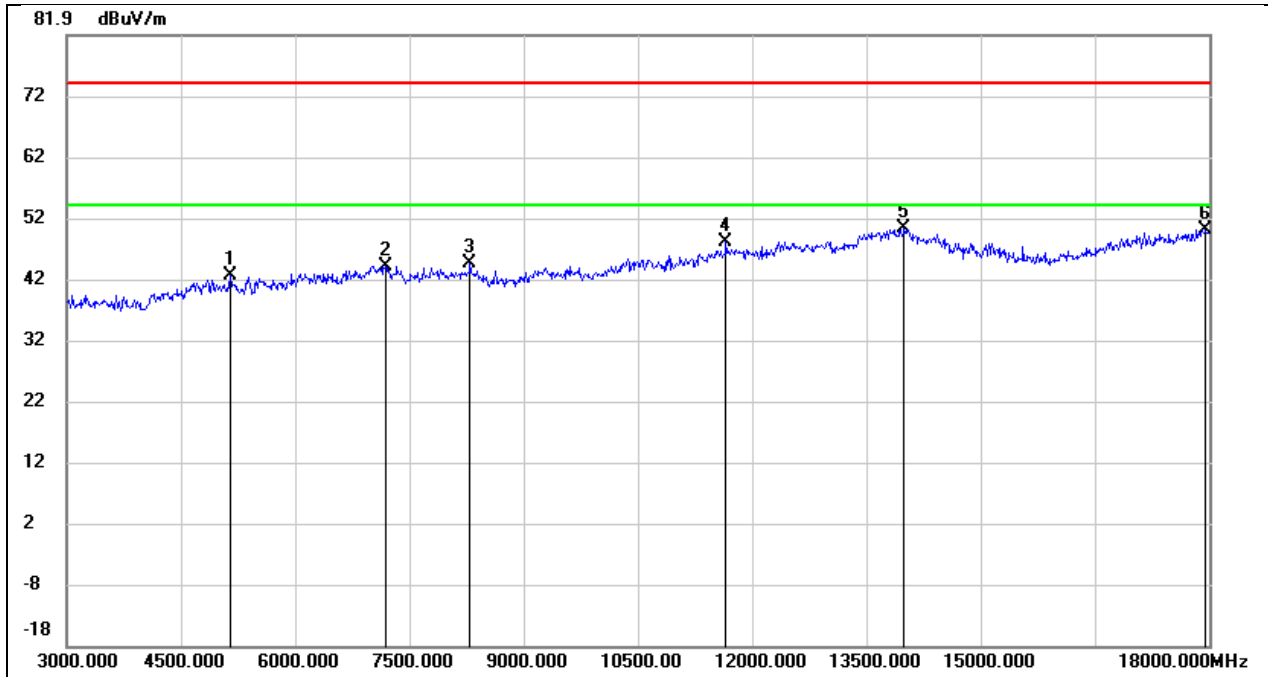

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.000	41.57	0.84	42.41	74.00	-31.59	peak
2	7185.000	37.44	6.69	44.13	74.00	-29.87	peak
3	8295.000	36.39	8.12	44.51	74.00	-29.49	peak
4	11655.000	30.81	17.32	48.13	74.00	-25.87	peak
5	13995.000	26.30	24.04	50.34	74.00	-23.66	peak
6	17955.000	22.42	27.69	50.11	74.00	-23.89	peak

BT1


Test Mode:	8DPSK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

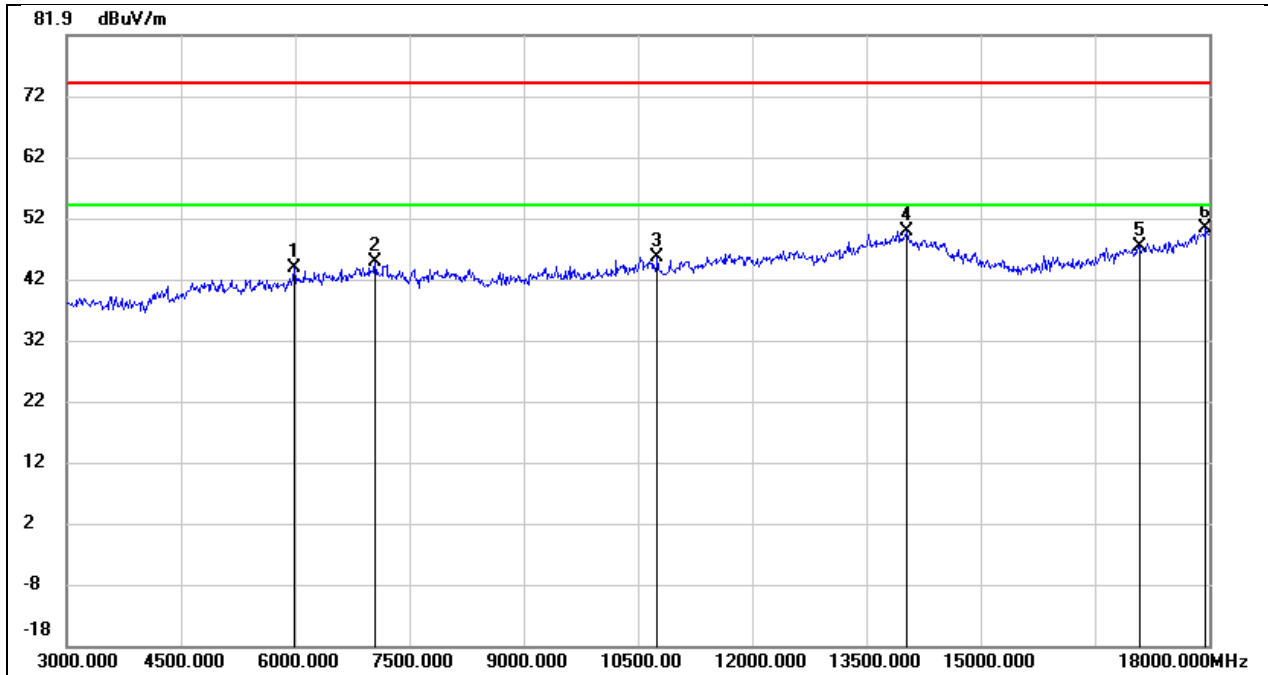

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5985.000	41.14	2.53	43.67	74.00	-30.33	peak
2	7050.000	38.51	6.19	44.70	74.00	-29.30	peak
3	10755.000	30.89	14.74	45.63	74.00	-28.37	peak
4	14025.000	25.82	23.92	49.74	74.00	-24.26	peak
5	17085.000	24.17	23.19	47.36	74.00	-26.64	peak
6	17955.000	22.71	27.69	50.40	74.00	-23.60	peak

BT1


Test Mode:	8DPSK	Frequency(MHz):	2441
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

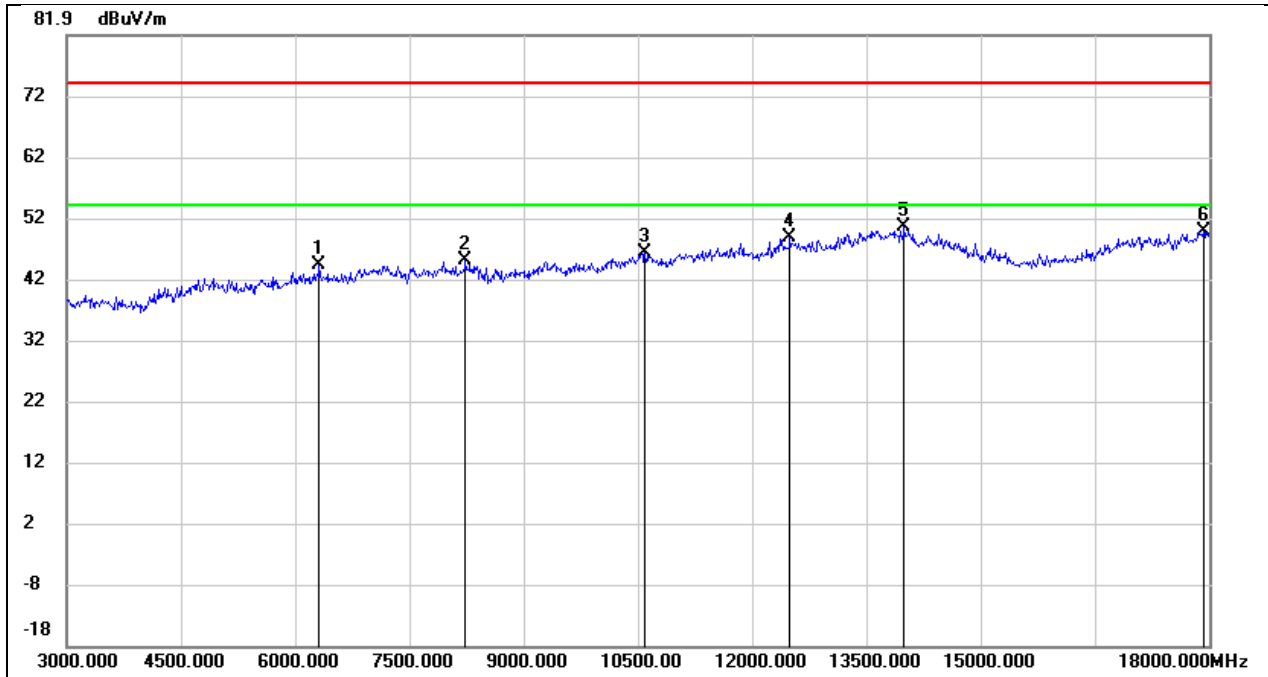

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6315.000	40.41	3.79	44.20	74.00	-29.80	peak
2	8235.000	36.91	8.08	44.99	74.00	-29.01	peak
3	10590.000	31.95	14.27	46.22	74.00	-27.78	peak
4	12495.000	29.57	19.12	48.69	74.00	-25.31	peak
5	13995.000	26.42	24.04	50.46	74.00	-23.54	peak
6	17925.000	22.36	27.50	49.86	74.00	-24.14	peak

BT1


Test Mode:	8DPSK	Frequency(MHz):	2441
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

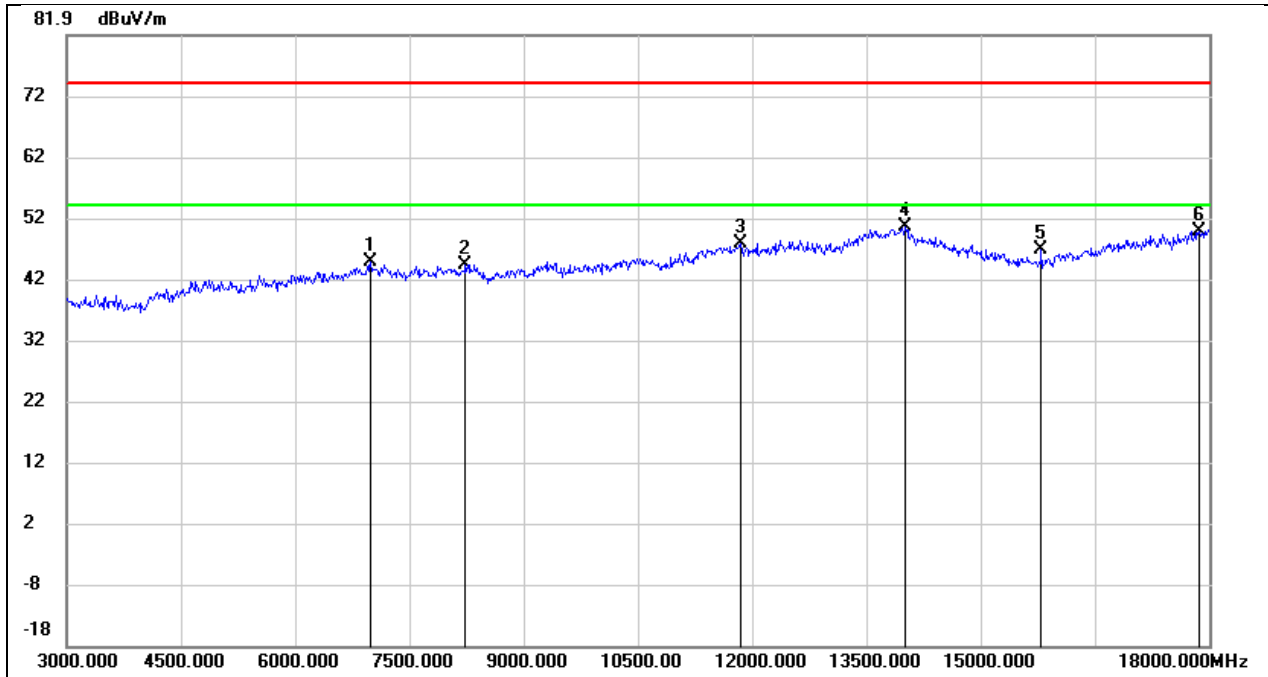

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6990.000	38.77	5.97	44.74	74.00	-29.26	peak
2	8235.000	36.31	8.08	44.39	74.00	-29.61	peak
3	11850.000	29.95	17.88	47.83	74.00	-26.17	peak
4	14010.000	26.41	24.00	50.41	74.00	-23.59	peak
5	15795.000	28.00	18.82	46.82	74.00	-27.18	peak
6	17865.000	22.68	27.13	49.81	74.00	-24.19	peak

BT1


Test Mode:	8DPSK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

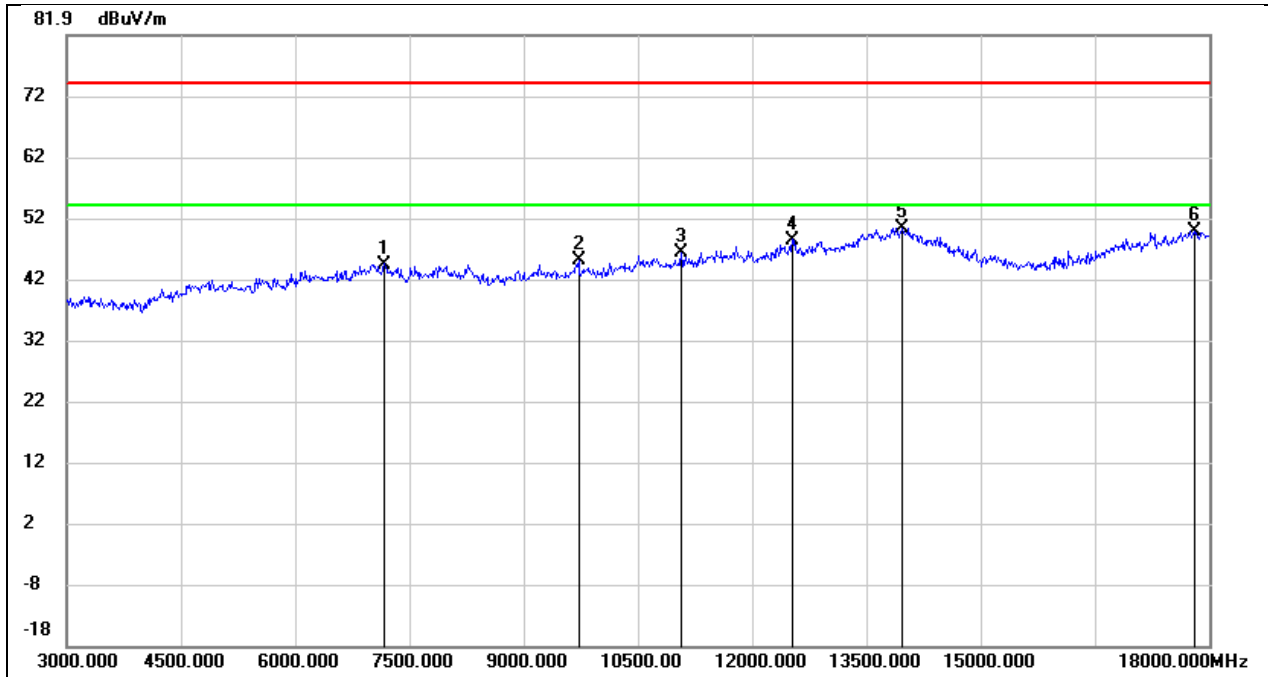

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7170.000	37.76	6.64	44.40	74.00	-29.60	peak
2	9720.000	33.02	11.89	44.91	74.00	-29.09	peak
3	11070.000	30.69	15.60	46.29	74.00	-27.71	peak
4	12525.000	29.24	19.16	48.40	74.00	-25.60	peak
5	13965.000	26.47	23.93	50.40	74.00	-23.60	peak
6	17805.000	23.03	26.75	49.78	74.00	-24.22	peak

BT1

Test Mode:	8DPSK	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

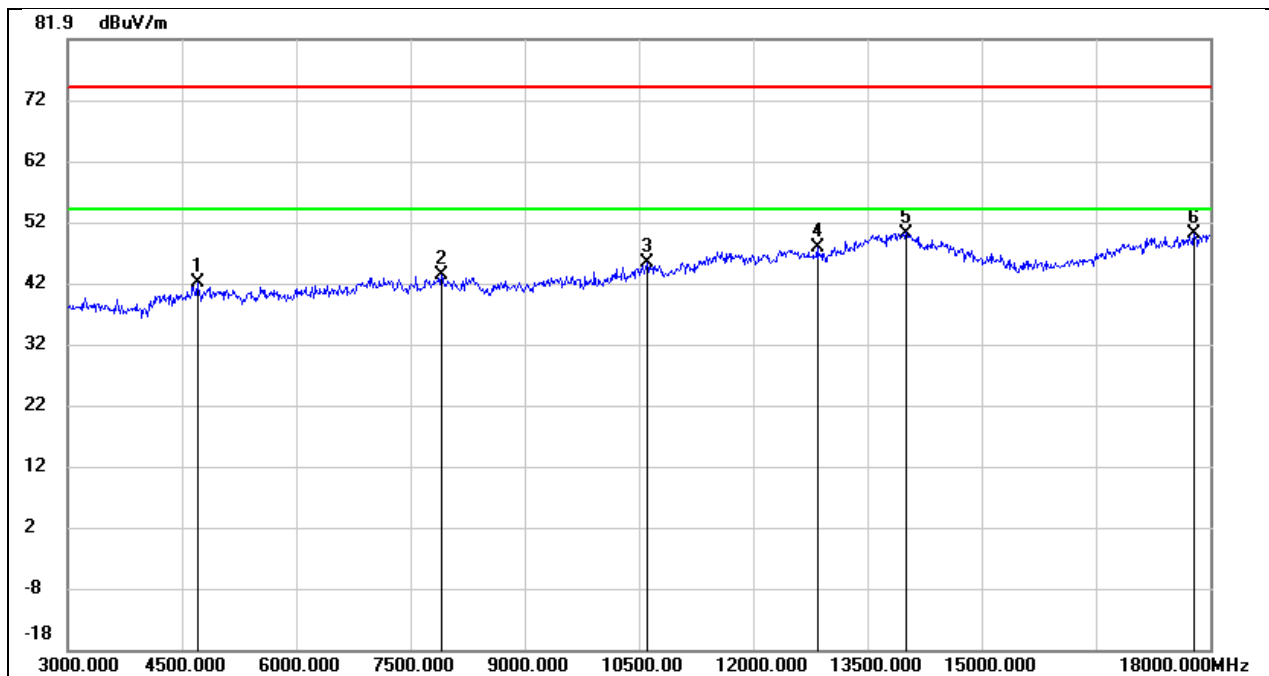


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4710.000	41.98	-0.05	41.93	74.00	-32.07	peak
2	7905.000	35.42	7.74	43.16	74.00	-30.84	peak
3	10605.000	30.93	14.31	45.24	74.00	-28.76	peak
4	12840.000	28.16	19.52	47.68	74.00	-26.32	peak
5	14010.000	26.15	24.00	50.15	74.00	-23.85	peak
6	17790.000	23.47	26.66	50.13	74.00	-23.87	peak

8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

BT0


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

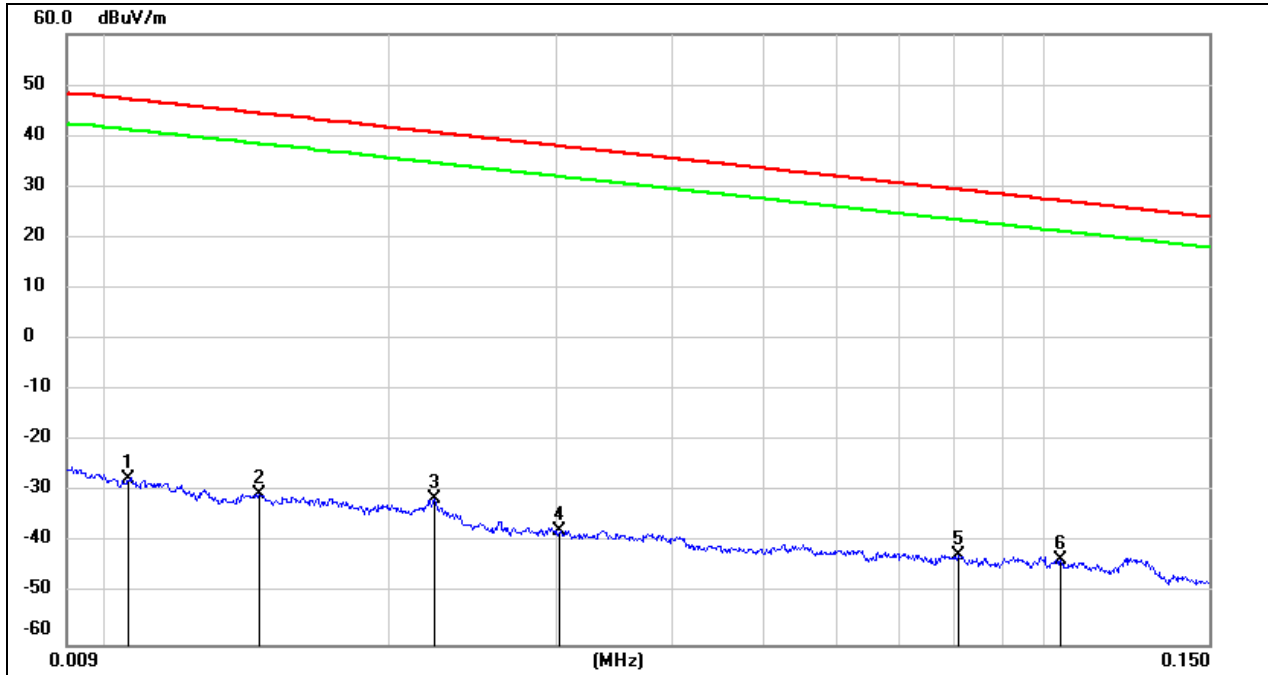

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0105	74.10	-101.40	-27.30	47.18	-78.80	-4.32	-74.48	peak
2	0.0145	71.05	-101.38	-30.33	44.37	-81.83	-7.13	-74.70	peak
3	0.0223	69.86	-101.35	-31.49	40.63	-82.99	-10.87	-72.12	peak
4	0.0303	63.85	-101.39	-37.54	37.97	-89.04	-13.53	-75.51	peak
5	0.0806	59.18	-101.63	-42.45	29.47	-93.95	-22.03	-71.92	peak
6	0.1042	58.42	-101.78	-43.36	27.25	-94.86	-24.25	-70.61	peak

BT0


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

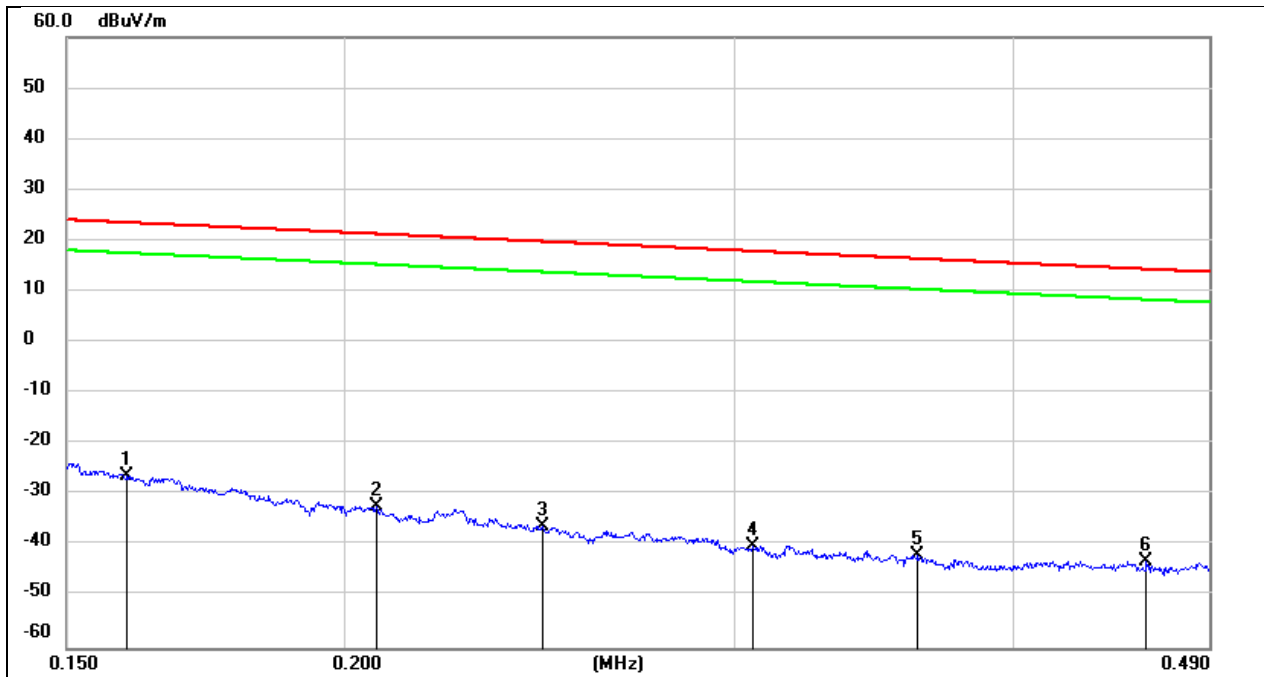

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1597	75.35	-101.65	-26.30	23.54	-77.80	-27.96	-49.84	peak
2	0.2068	69.45	-101.73	-32.28	21.29	-83.78	-30.21	-53.57	peak
3	0.2459	65.64	-101.80	-36.16	19.79	-87.66	-31.71	-55.95	peak
4	0.3054	61.84	-101.86	-40.02	17.90	-91.52	-33.60	-57.92	peak
5	0.3623	59.93	-101.92	-41.99	16.42	-93.49	-35.08	-58.41	peak
6	0.4591	58.96	-102.02	-43.06	14.36	-94.56	-37.14	-57.42	peak

BT0


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

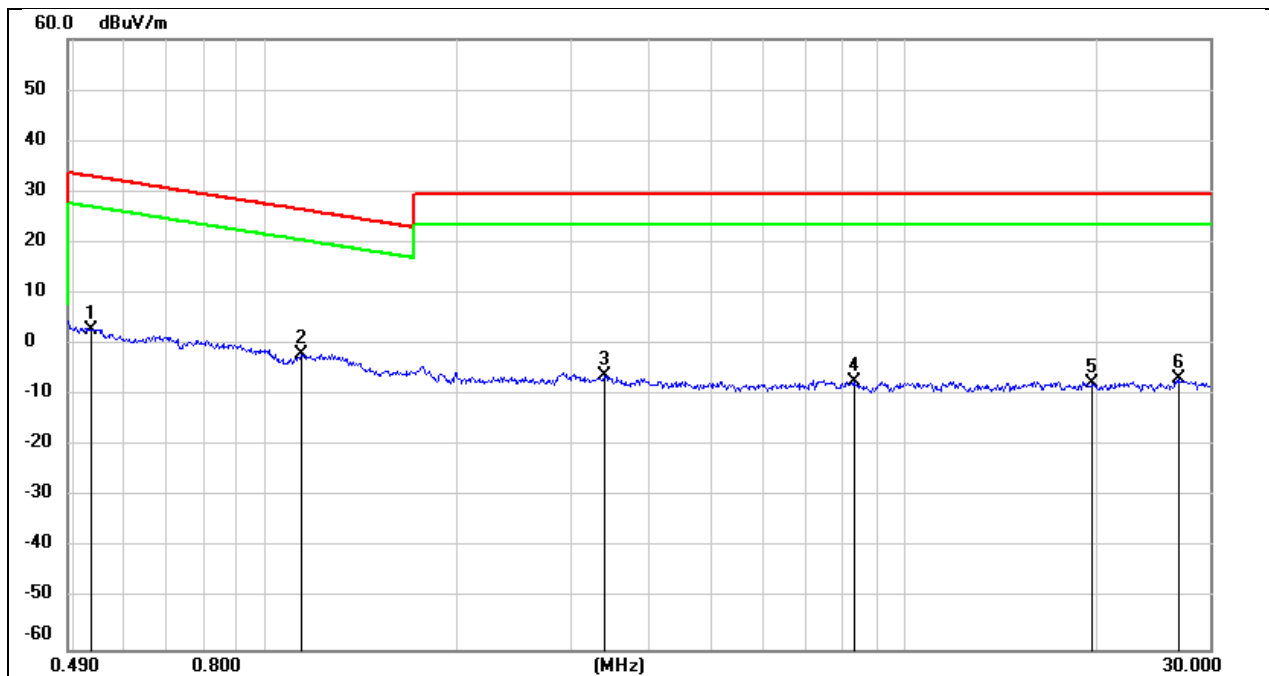

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5361	64.96	-62.08	2.88	33.02	-48.62	-18.48	-30.14	peak
2	1.1391	60.34	-62.21	-1.87	26.47	-53.37	-25.03	-28.34	peak
3	3.3887	55.24	-61.48	-6.24	29.54	-57.74	-21.96	-35.78	peak
4	8.3397	53.69	-61.03	-7.34	29.54	-58.84	-21.96	-36.88	peak
5	19.701	53.24	-60.84	-7.60	29.54	-59.10	-21.96	-37.14	peak
6	26.8719	53.54	-60.27	-6.73	29.54	-58.23	-21.96	-36.27	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

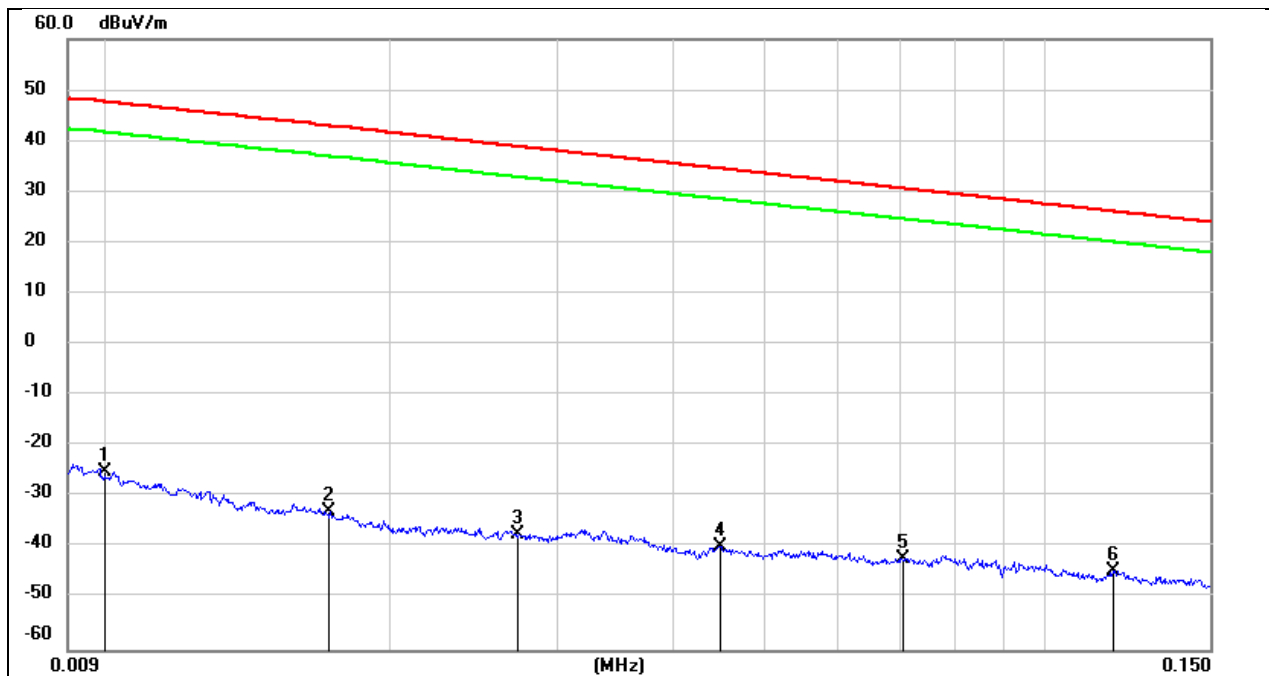

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.01	76.35	-101.40	-25.05	47.60	-76.55	-3.90	-72.65	peak
2	0.0171	68.38	-101.36	-32.98	42.94	-84.48	-8.56	-75.92	peak
3	0.0273	63.99	-101.38	-37.39	38.88	-88.89	-12.62	-76.27	peak
4	0.0449	61.85	-101.46	-39.61	34.56	-91.11	-16.94	-74.17	peak
5	0.0704	59.42	-101.57	-42.15	30.65	-93.65	-20.85	-72.80	peak
6	0.1183	57.18	-101.74	-44.56	26.14	-96.06	-25.36	-70.70	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

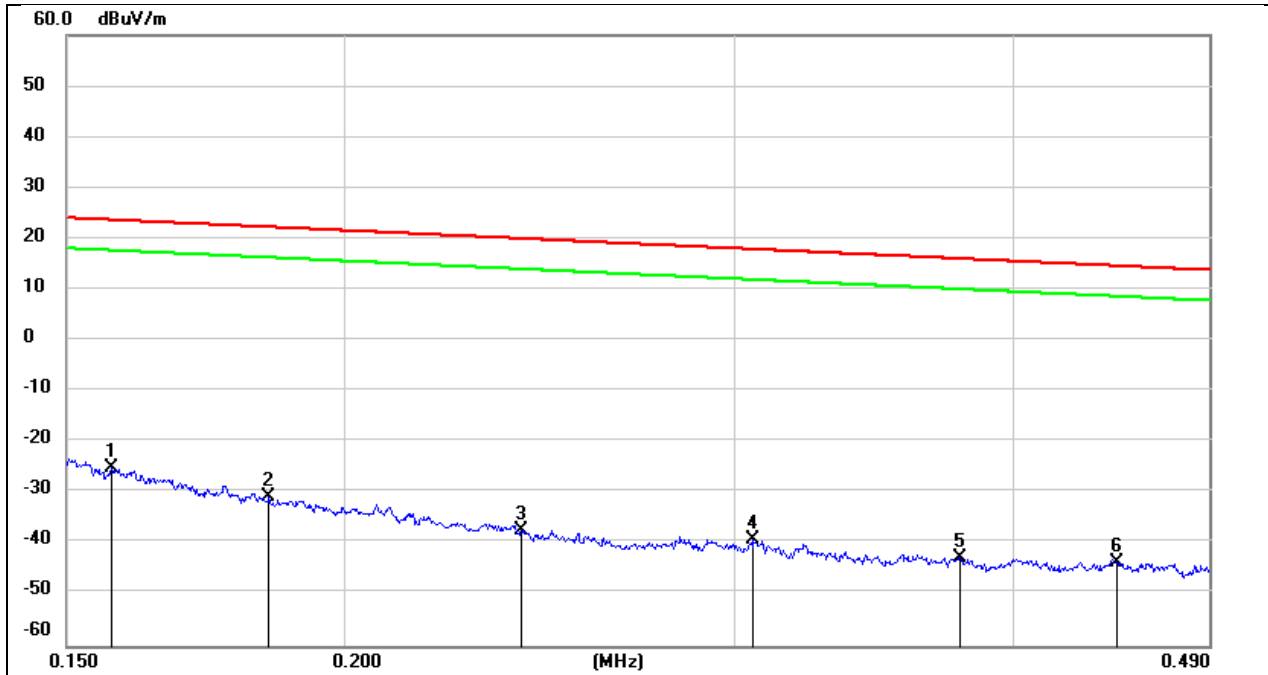

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.157	76.53	-101.65	-25.12	23.68	-76.62	-27.82	-48.80	peak
2	0.1849	71.04	-101.70	-30.66	22.27	-82.16	-29.23	-52.93	peak
3	0.2404	64.45	-101.78	-37.33	19.98	-88.83	-31.52	-57.31	peak
4	0.3057	62.76	-101.86	-39.10	17.90	-90.60	-33.60	-57.00	peak
5	0.3785	59.31	-101.94	-42.63	16.04	-94.13	-35.46	-58.67	peak
6	0.4455	58.31	-102.01	-43.70	14.63	-95.20	-36.87	-58.33	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

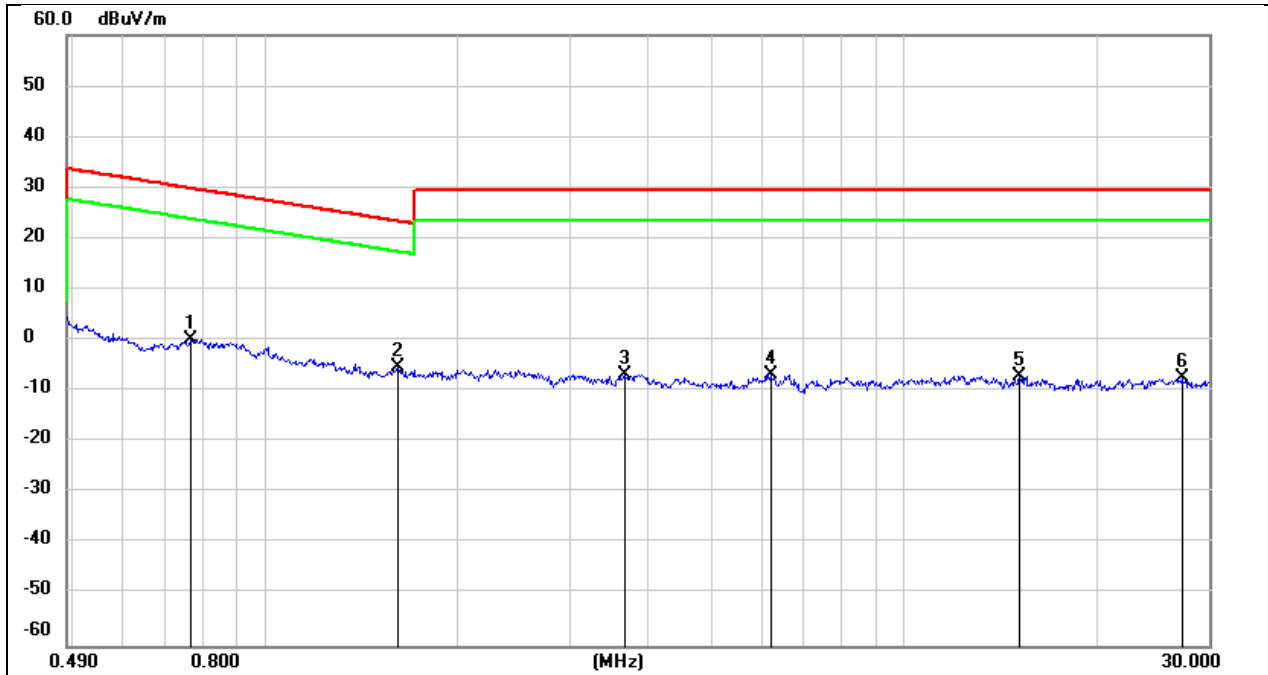

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.7641	62.42	-62.12	0.30	29.94	-51.20	-21.56	-29.64	peak
2	1.6149	56.62	-62.00	-5.38	23.44	-56.88	-28.06	-28.82	peak
3	3.6493	54.60	-61.42	-6.82	29.54	-58.32	-21.96	-36.36	peak
4	6.1852	54.60	-61.33	-6.73	29.54	-58.23	-21.96	-36.27	peak
5	15.1859	54.05	-61.01	-6.96	29.54	-58.46	-21.96	-36.50	peak
6	27.1966	52.81	-60.24	-7.43	29.54	-58.93	-21.96	-36.97	peak

8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)


BT0			
Test Mode:	GFSK	Frequency(MHz):	2402(18
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

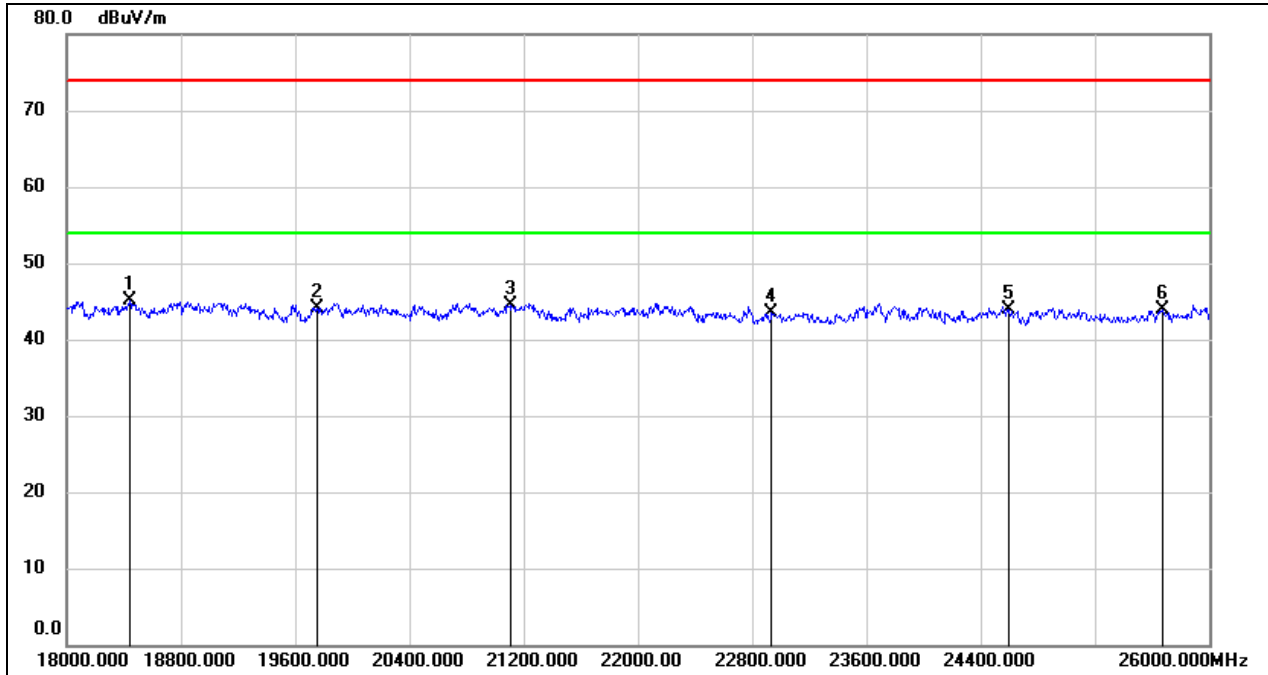

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18440.000	50.33	-5.32	45.01	74.00	-28.99	peak
2	19752.000	49.38	-5.25	44.13	74.00	-29.87	peak
3	21104.000	49.35	-4.83	44.52	74.00	-29.48	peak
4	22936.000	46.94	-3.50	43.44	74.00	-30.56	peak
5	24592.000	46.16	-2.32	43.84	74.00	-30.16	peak
6	25672.000	44.78	-0.97	43.81	74.00	-30.19	peak

BT0


Test Mode:	GFSK	Frequency(MHz):	2402(18
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

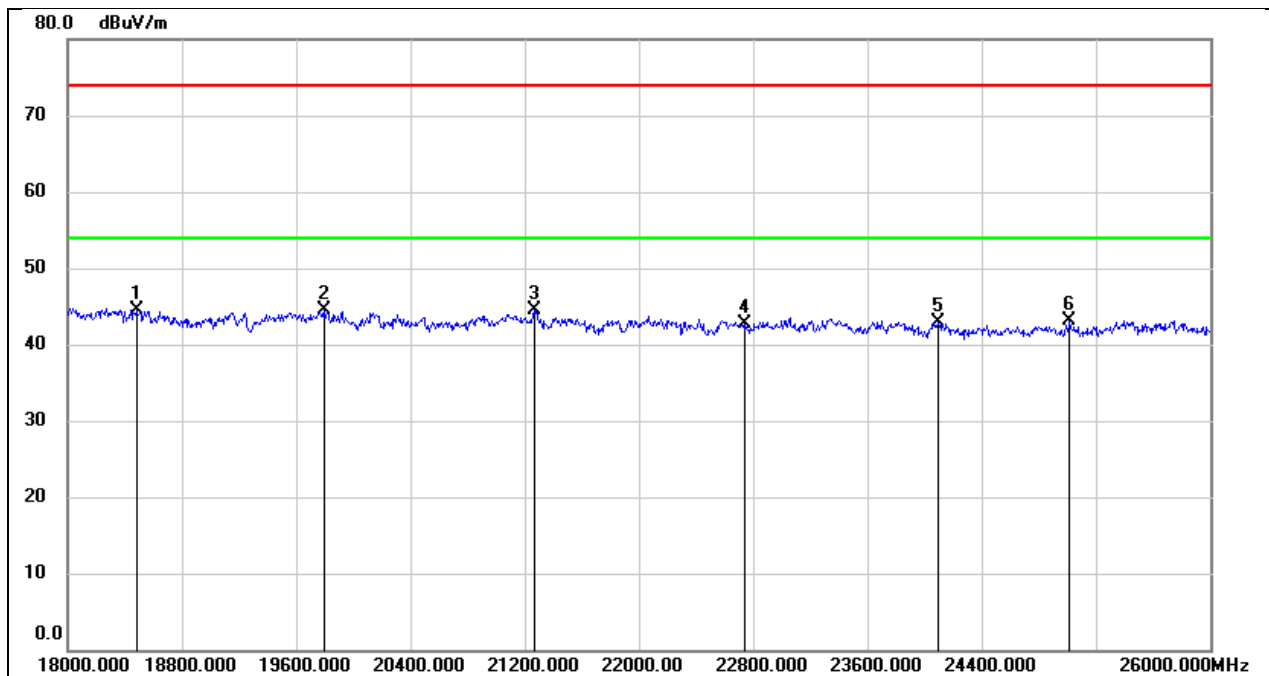

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18480.000	49.84	-5.28	44.56	74.00	-29.44	peak
2	19792.000	49.70	-5.29	44.41	74.00	-29.59	peak
3	21264.000	49.35	-4.76	44.59	74.00	-29.41	peak
4	22744.000	46.42	-3.69	42.73	74.00	-31.27	peak
5	24096.000	45.61	-2.78	42.83	74.00	-31.17	peak
6	25016.000	45.08	-2.07	43.01	74.00	-30.99	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2402(18
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

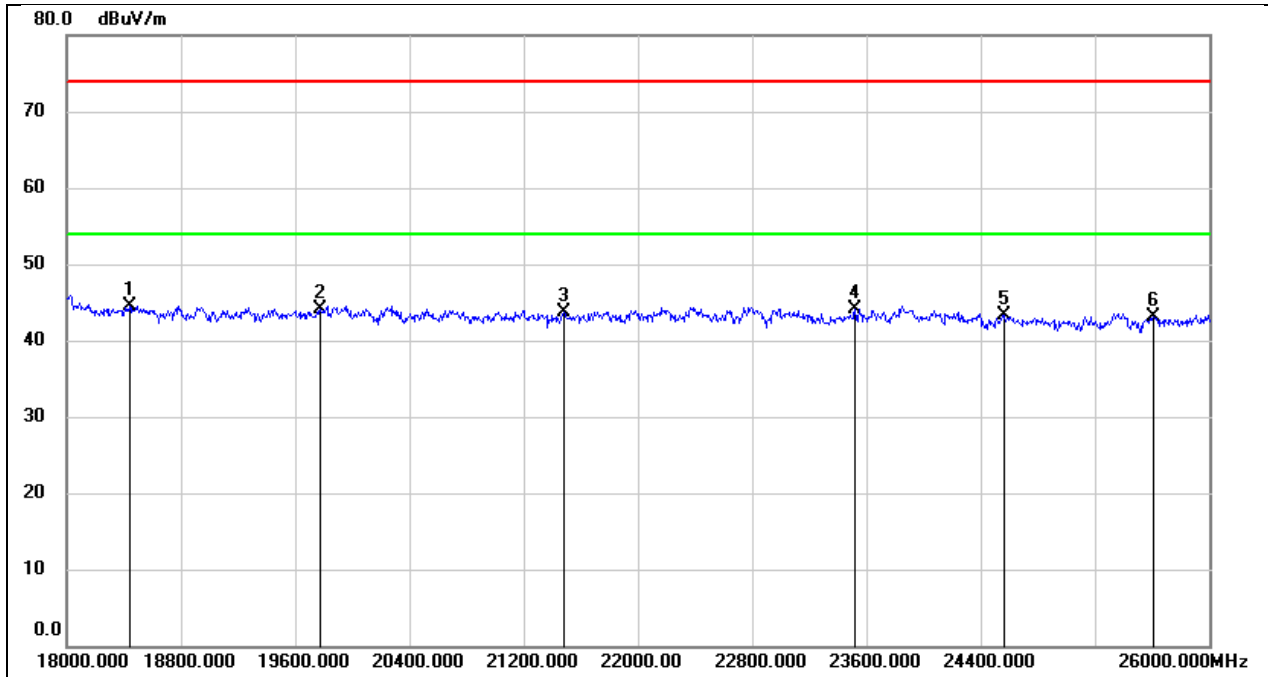

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18440.000	49.83	-5.32	44.51	74.00	-29.49	peak
2	19776.000	49.37	-5.28	44.09	74.00	-29.91	peak
3	21480.000	48.45	-4.70	43.75	74.00	-30.25	peak
4	23520.000	47.29	-3.14	44.15	74.00	-29.85	peak
5	24568.000	45.59	-2.33	43.26	74.00	-30.74	peak
6	25608.000	44.43	-1.27	43.16	74.00	-30.84	peak

BT1


Test Mode:	GFSK	Frequency(MHz):	2402(18
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

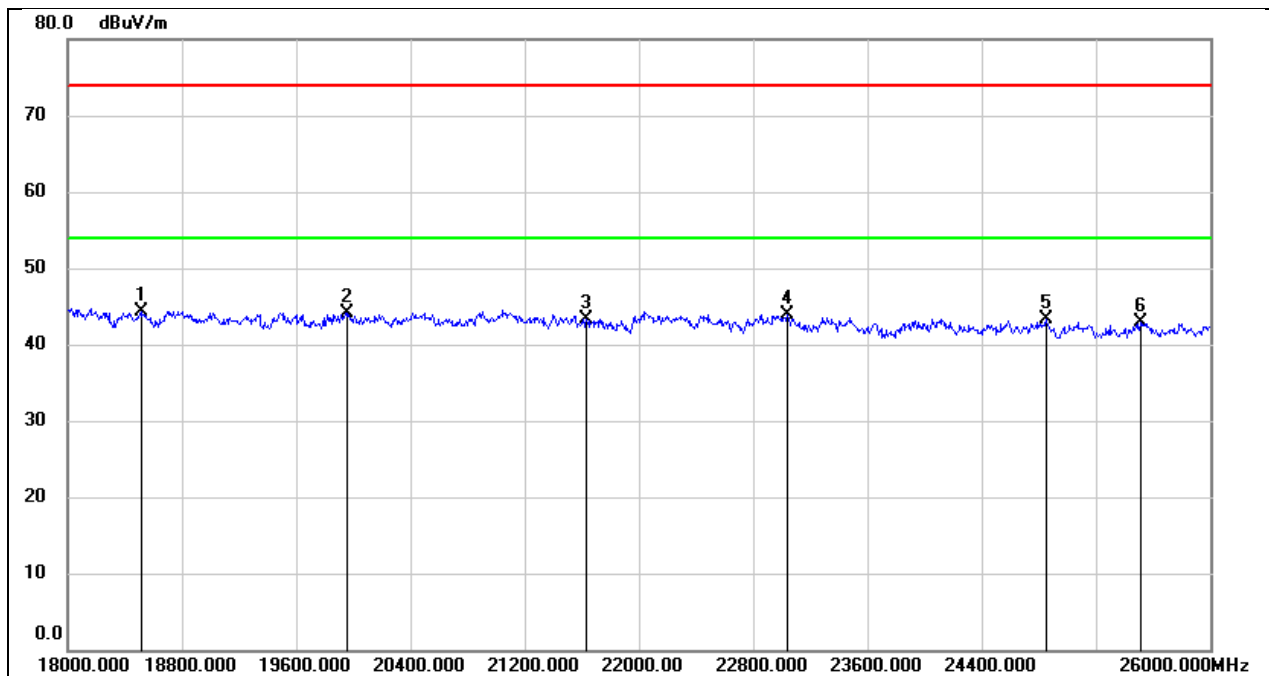

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18512.000	49.50	-5.26	44.24	74.00	-29.76	peak
2	19960.000	49.56	-5.42	44.14	74.00	-29.86	peak
3	21632.000	47.75	-4.50	43.25	74.00	-30.75	peak
4	23040.000	47.33	-3.43	43.90	74.00	-30.10	peak
5	24848.000	45.46	-2.23	43.23	74.00	-30.77	peak
6	25512.000	44.54	-1.73	42.81	74.00	-31.19	peak


8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V 60HZ

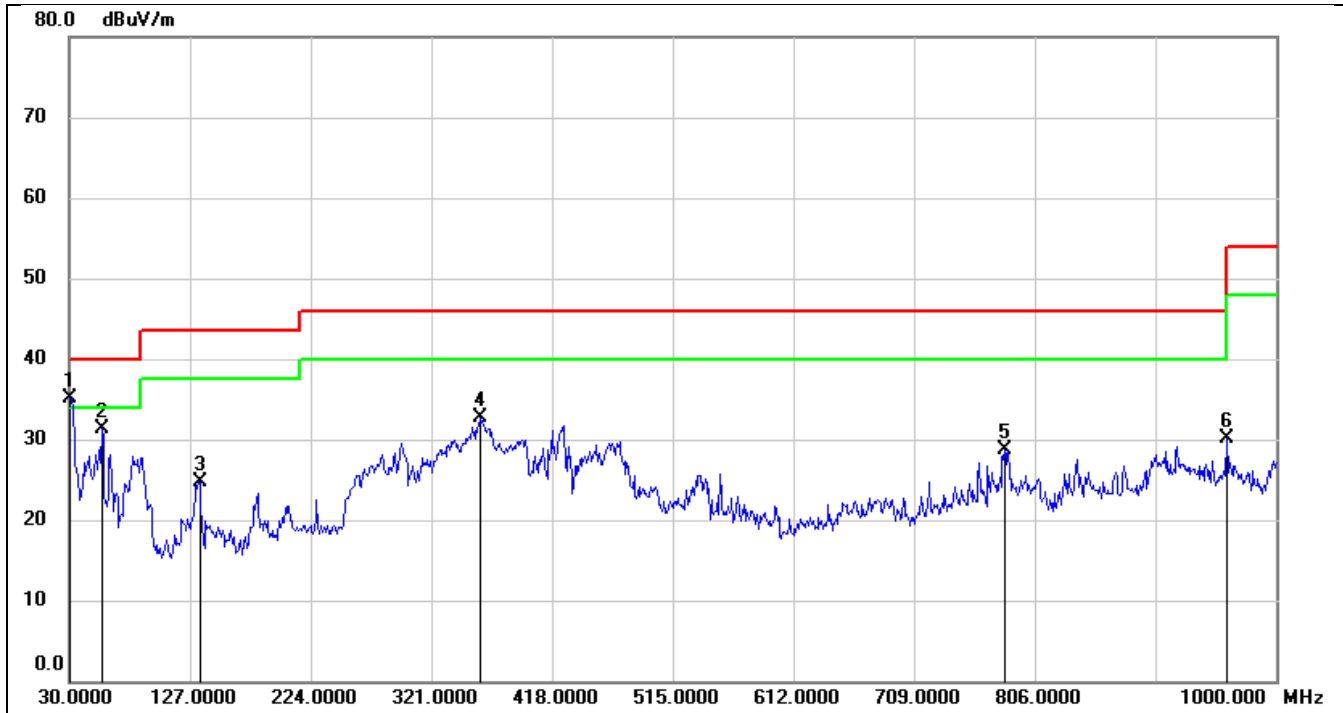

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	49.75	-14.58	35.17	40.00	-4.83	peak
2	56.1900	46.45	-15.18	31.27	40.00	-8.73	peak
3	134.7600	39.01	-14.32	24.69	43.50	-18.81	peak
4	360.7700	42.15	-9.45	32.70	46.00	-13.30	peak
5	781.7500	31.66	-2.90	28.76	46.00	-17.24	peak
6	960.2300	30.55	-0.45	30.10	54.00	-23.90	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V 60HZ

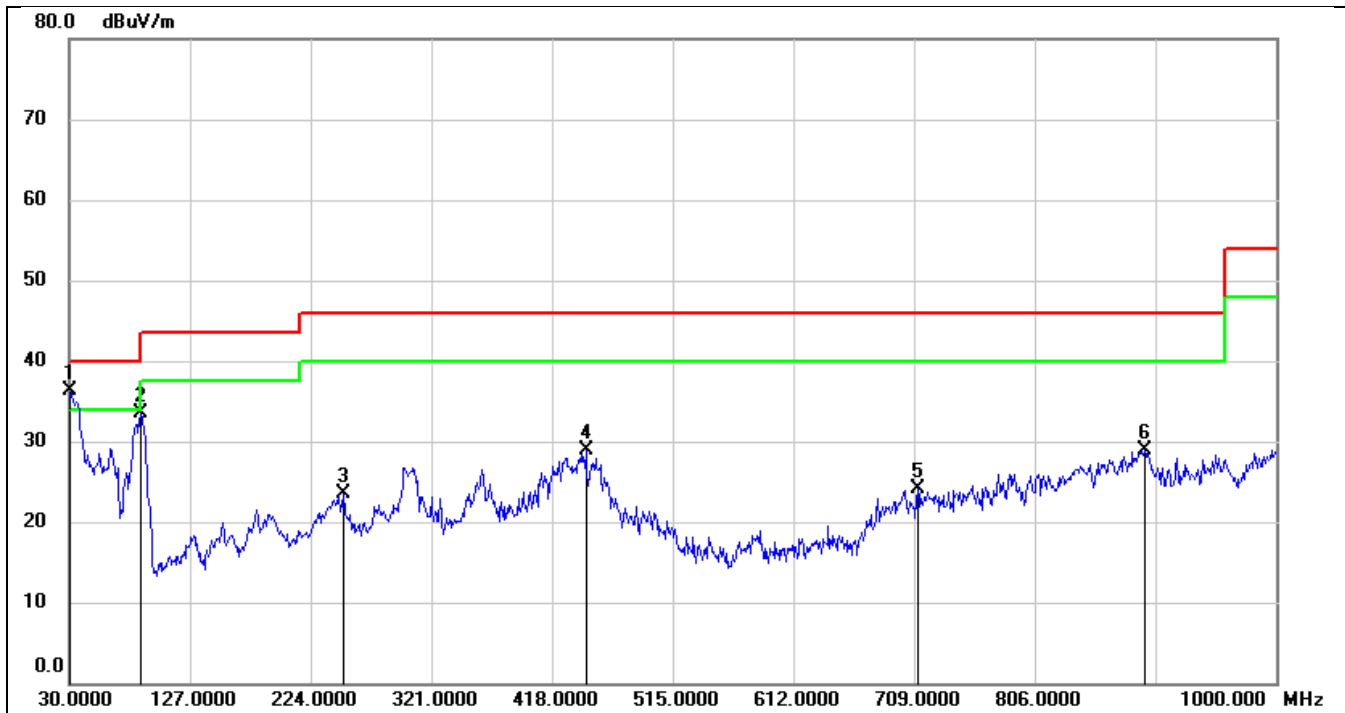

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	50.87	-14.52	36.35	40.00	-3.65	peak
2	87.2300	50.05	-16.62	33.43	40.00	-6.57	peak
3	250.1900	38.04	-14.60	23.44	46.00	-22.56	peak
4	445.1600	37.01	-8.02	28.99	46.00	-17.01	peak
5	711.9099	28.13	-3.94	24.19	46.00	-21.81	peak
6	894.2700	29.52	-0.62	28.90	46.00	-17.10	peak

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to FCC 47 CFR §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

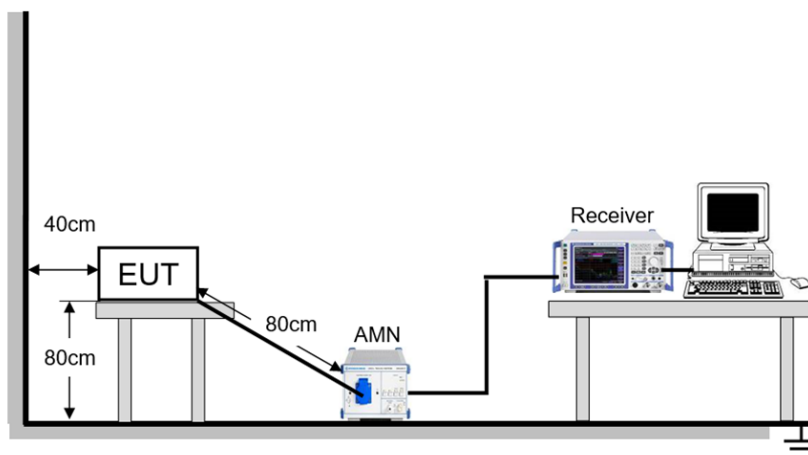

TEST ENVIRONMENT


Temperature	24.4 °C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	April 26, 2026	Test By	Johnson Liu
-----------	----------------	---------	-------------

TEST RESULTS

BT0			
Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Line		

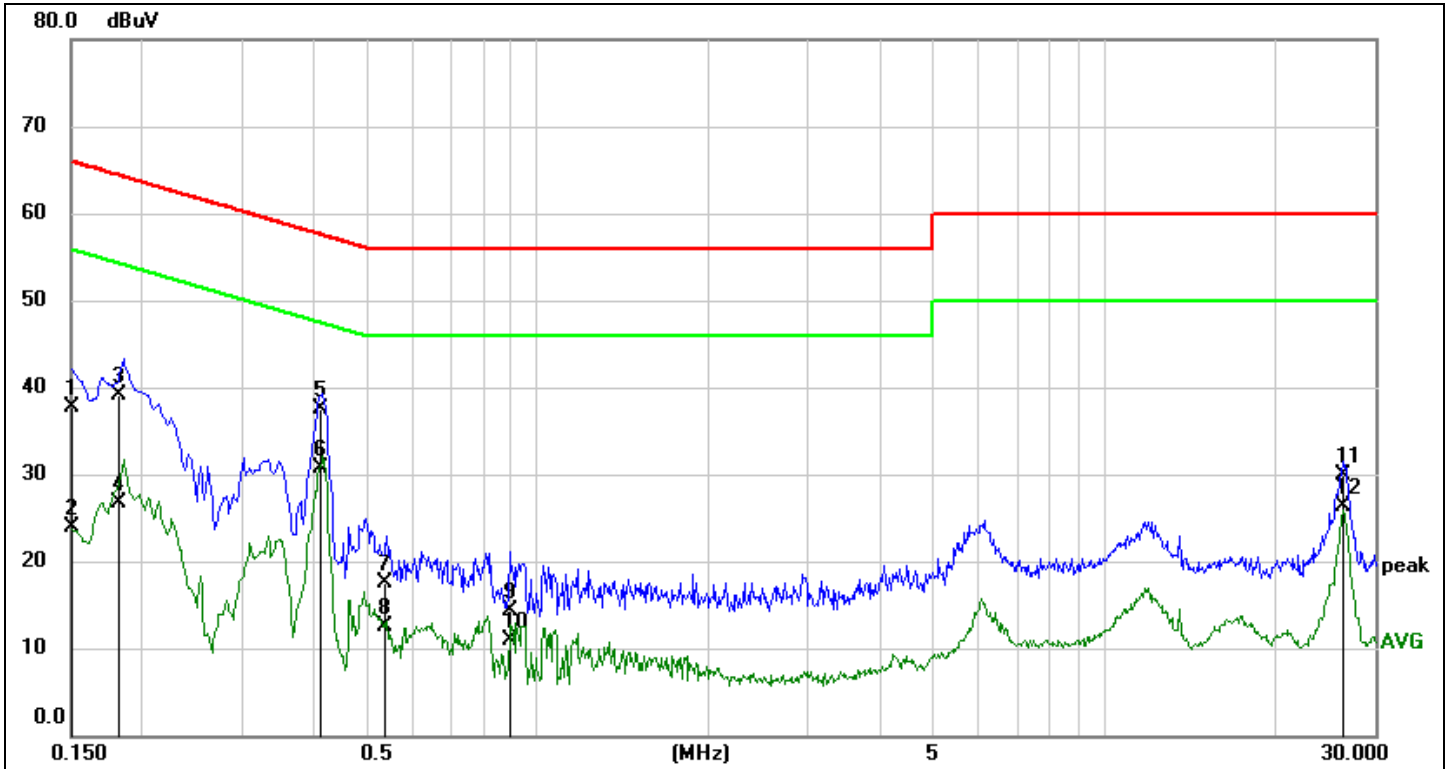


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1508	27.83	9.84	37.67	65.96	-28.29	QP
2	0.1508	14.05	9.84	23.89	55.96	-32.07	AVG
3	0.1821	29.38	9.71	39.09	64.39	-25.30	QP
4	0.1821	16.96	9.71	26.67	54.39	-27.72	AVG
5	0.4139	27.81	9.71	37.52	57.57	-20.05	QP
6	0.4139	21.06	9.71	30.77	47.57	-16.80	AVG
7	0.5367	7.89	9.70	17.59	56.00	-38.41	QP
8	0.5367	2.75	9.70	12.45	46.00	-33.55	AVG
9	0.8985	4.68	9.66	14.34	56.00	-41.66	QP
10	0.8985	1.21	9.66	10.87	46.00	-35.13	AVG
11	26.3330	20.09	9.72	29.81	60.00	-30.19	QP
12	26.3330	16.59	9.72	26.31	50.00	-23.69	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

BT0			
Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Neutral		

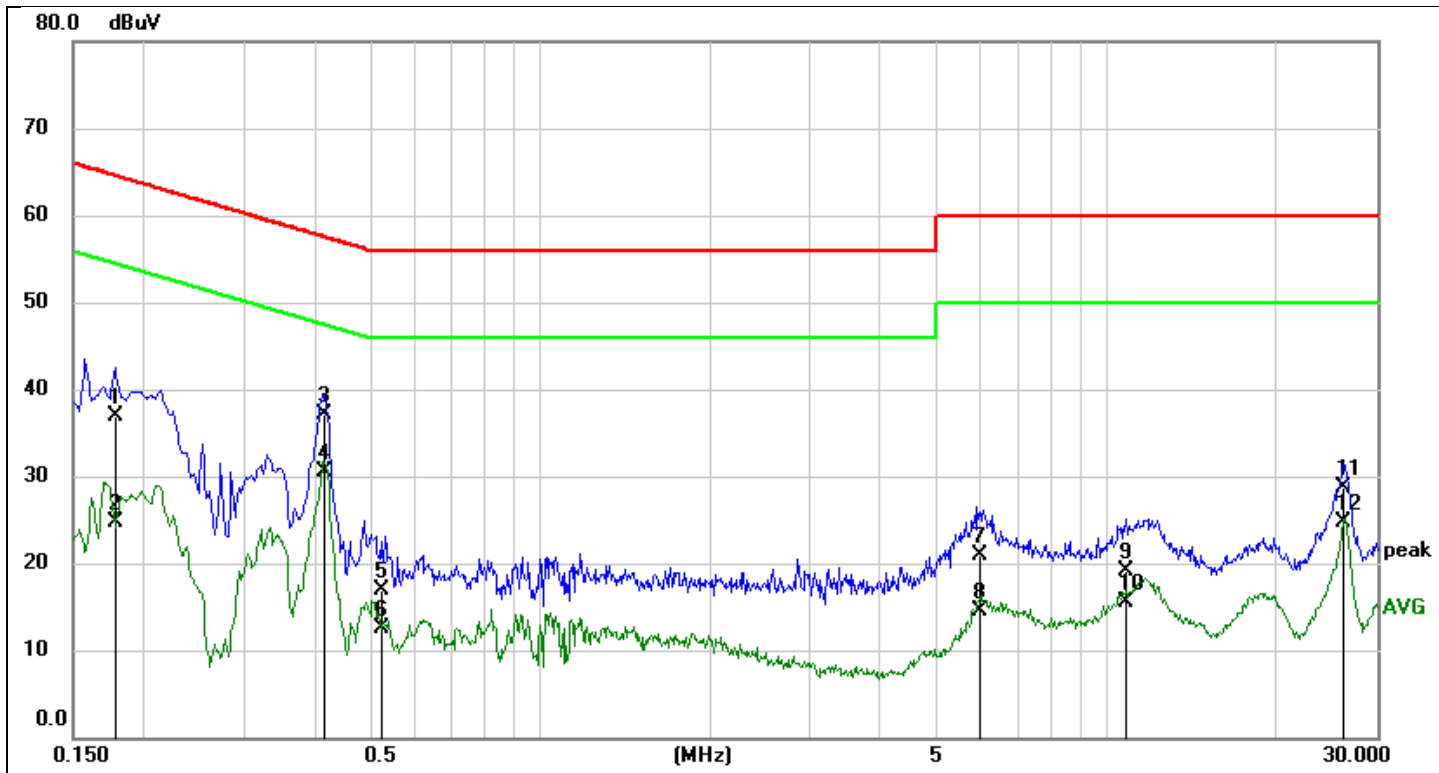


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1782	27.28	9.54	36.82	64.57	-27.75	QP
2	0.1782	15.07	9.54	24.61	54.57	-29.96	AVG
3	0.4142	27.54	9.61	37.15	57.56	-20.41	QP
4	0.4142	20.83	9.61	30.44	47.56	-17.12	AVG
5	0.5294	7.26	9.64	16.90	56.00	-39.10	QP
6	0.5294	2.88	9.64	12.52	46.00	-33.48	AVG
7	6.0028	11.32	9.66	20.98	60.00	-39.02	QP
8	6.0028	4.84	9.66	14.50	50.00	-35.50	AVG
9	10.8608	9.22	9.81	19.03	60.00	-40.97	QP
10	10.8608	5.66	9.81	15.47	50.00	-34.53	AVG
11	26.2850	19.05	9.66	28.71	60.00	-31.29	QP
12	26.2850	15.07	9.66	24.73	50.00	-25.27	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

BT1			
Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Line		

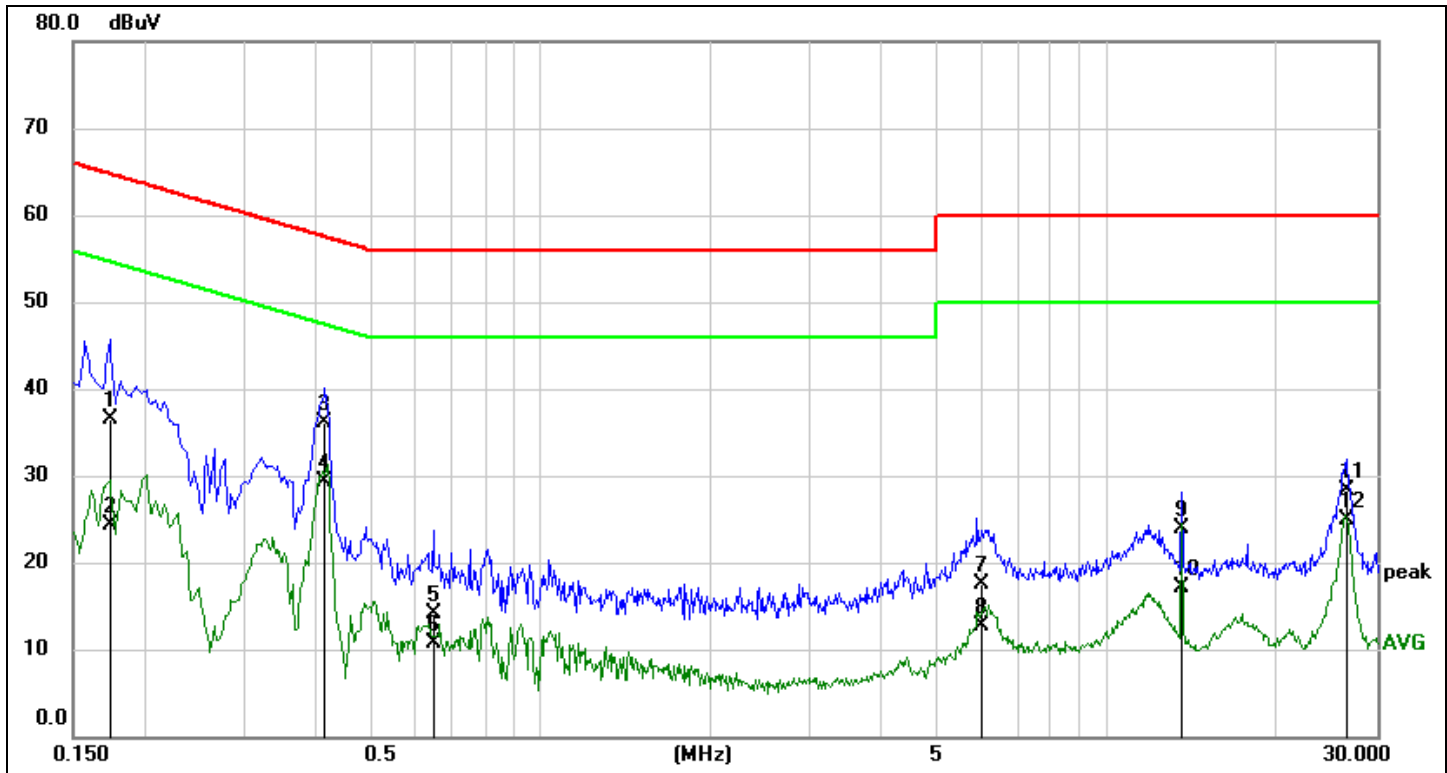


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1734	26.80	9.75	36.55	64.80	-28.25	QP
2	0.1734	14.52	9.75	24.27	54.80	-30.53	AVG
3	0.4150	26.35	9.71	36.06	57.55	-21.49	QP
4	0.4150	19.63	9.71	29.34	47.55	-18.21	AVG
5	0.6521	4.62	9.58	14.20	56.00	-41.80	QP
6	0.6521	1.03	9.58	10.61	46.00	-35.39	AVG
7	6.0015	7.64	9.83	17.47	60.00	-42.53	QP
8	6.0015	2.94	9.83	12.77	50.00	-37.23	AVG
9	13.5598	14.18	9.78	23.96	60.00	-36.04	QP
10	13.5598	7.32	9.78	17.10	50.00	-32.90	AVG
11	26.4757	18.63	9.72	28.35	60.00	-31.65	QP
12	26.4757	15.28	9.72	25.00	50.00	-25.00	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

BT1			
Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Neutral		

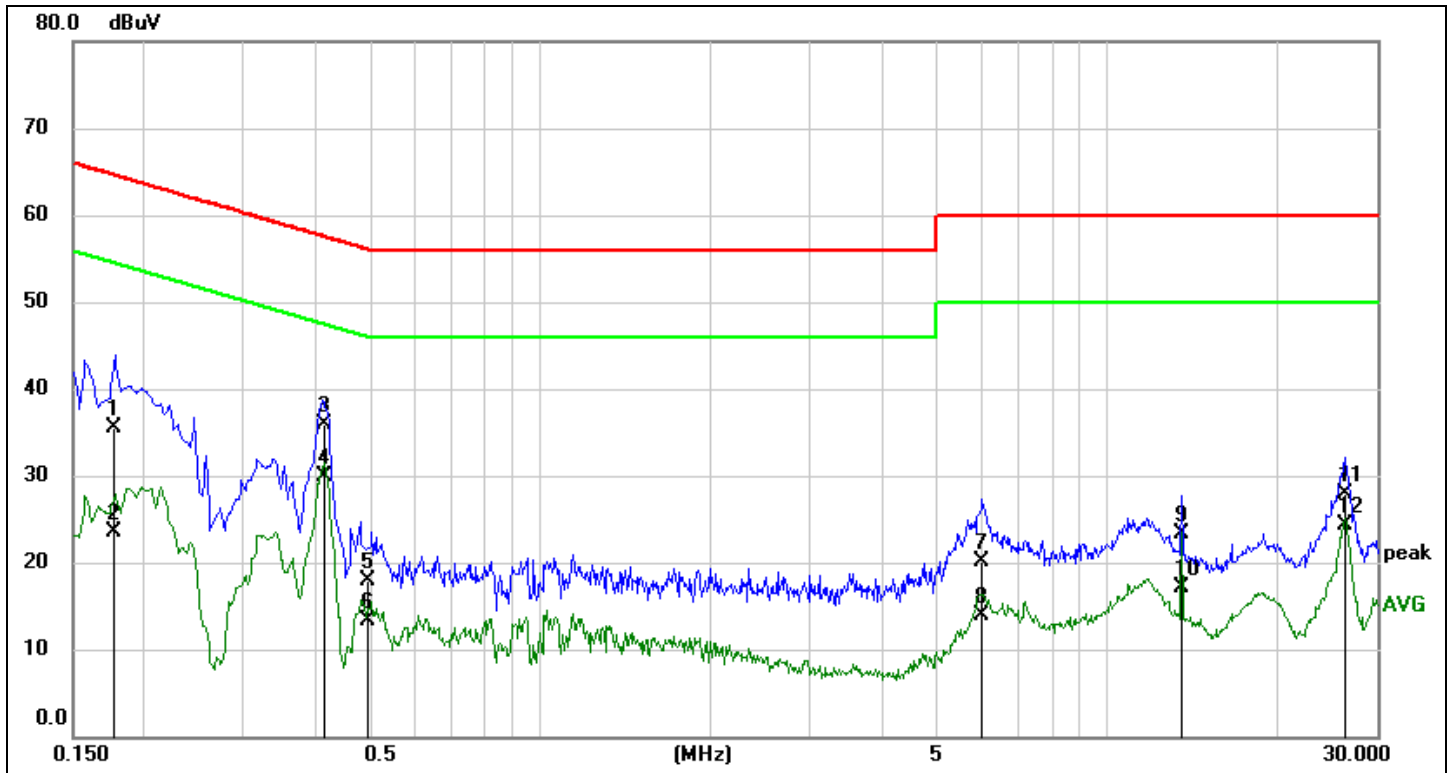

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1768	25.93	9.54	35.47	64.63	-29.16	QP
2	0.1768	14.03	9.54	23.57	54.63	-31.06	AVG
3	0.4170	26.28	9.61	35.89	57.51	-21.62	QP
4	0.4170	20.26	9.61	29.87	47.51	-17.64	AVG
5	0.4980	8.21	9.64	17.85	56.03	-38.18	QP
6	0.4980	3.73	9.64	13.37	46.03	-32.66	AVG
7	5.9992	10.36	9.66	20.02	60.00	-39.98	QP
8	5.9992	4.23	9.66	13.89	50.00	-36.11	AVG
9	13.5598	13.57	9.77	23.34	60.00	-36.66	QP
10	13.5598	7.41	9.77	17.18	50.00	-32.82	AVG
11	26.3329	18.24	9.66	27.90	60.00	-32.10	QP
12	26.3329	14.57	9.66	24.23	50.00	-25.77	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.


11. TEST DATA OF BT0

11.1. APPENDIX A: DTS BANDWIDTH


11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.71	2401.64	2402.35	≥ 0.5	PASS
		2440	0.70	2439.64	2440.34	≥ 0.5	PASS
		2480	0.71	2479.63	2480.34	≥ 0.5	PASS
BLE_2M	Ant1	2402	1.17	2401.41	2402.58	≥ 0.5	PASS
		2440	1.23	2439.35	2440.58	≥ 0.5	PASS
		2480	1.18	2479.41	2480.58	≥ 0.5	PASS
BLE_125K	Ant1	2402	0.69	2401.65	2402.34	≥ 0.5	PASS
		2440	0.69	2439.65	2440.34	≥ 0.5	PASS
		2480	0.69	2479.65	2480.34	≥ 0.5	PASS
BLE_500K	Ant1	2402	0.65	2401.68	2402.33	≥ 0.5	PASS
		2440	0.66	2439.67	2440.33	≥ 0.5	PASS
		2480	0.66	2479.67	2480.33	≥ 0.5	PASS


11.1.2. Test Graphs

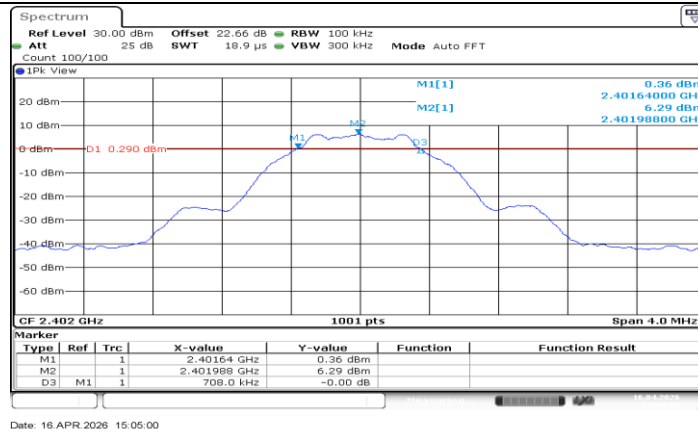


BLE 1M Ant1 2402

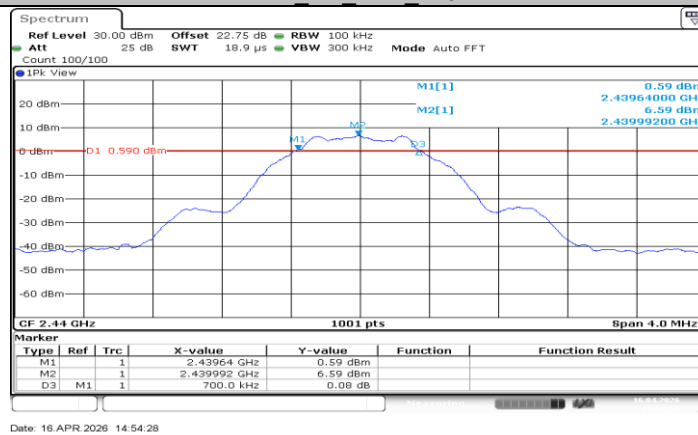


BLE 1M Ant1 2440

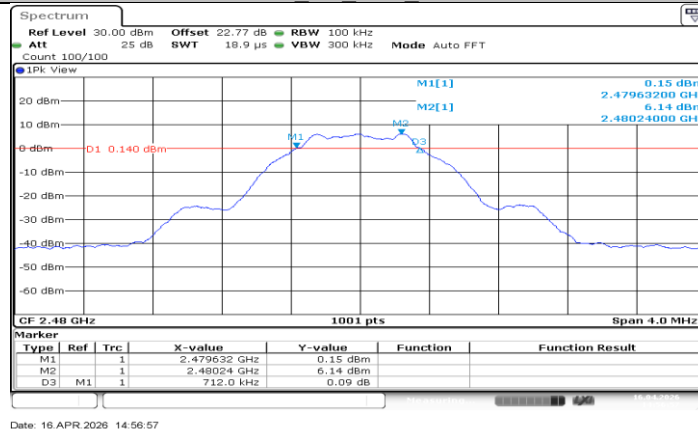


BLE 1M Ant1 2480

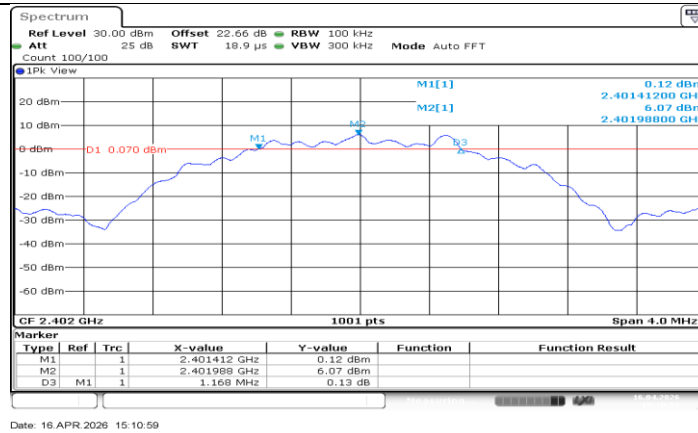


BLE 2M Ant1 2402

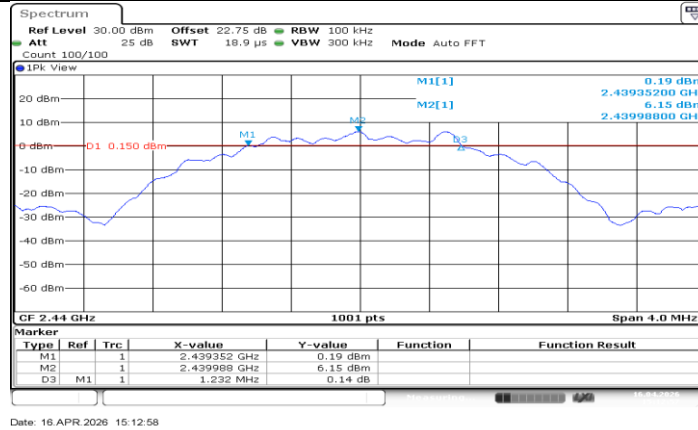


BLE 2M Ant1 2440

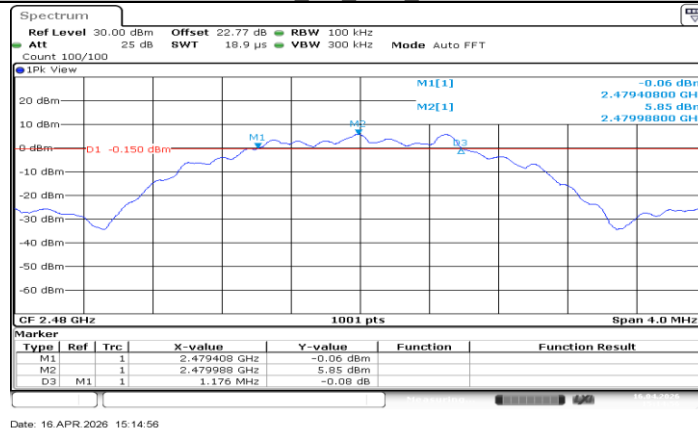


BLE 2M Ant1 2480

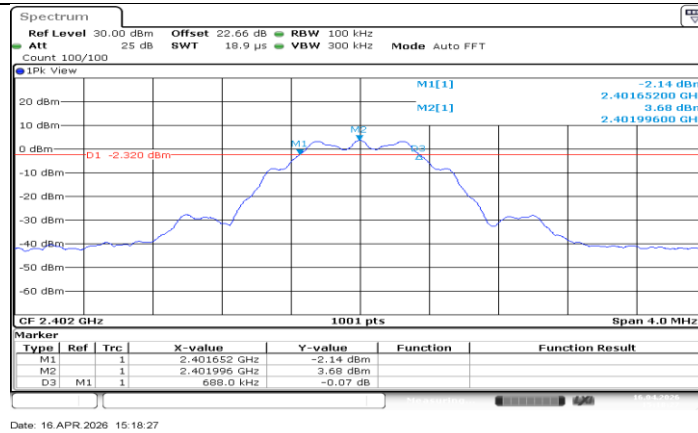


BLE 125K Ant1 2402

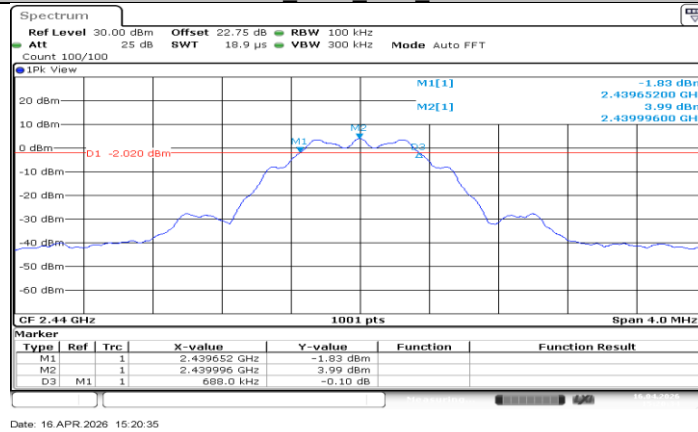


BLE 125K Ant1 2440

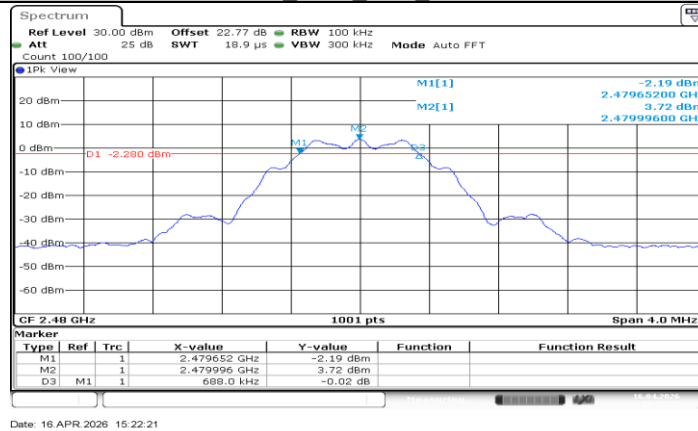


BLE 125K Ant1 2480

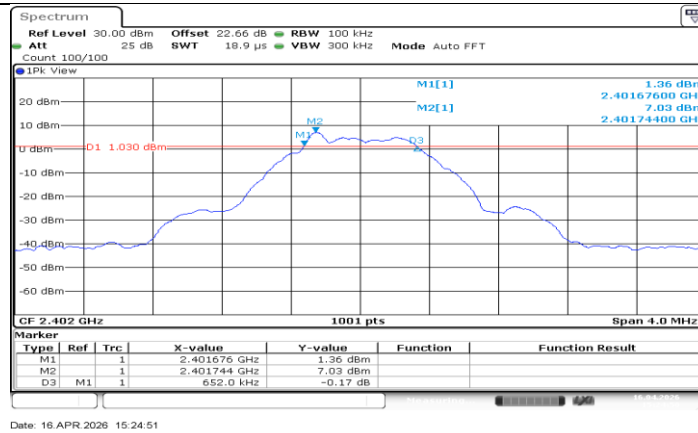

BLE 500K Ant1 2402

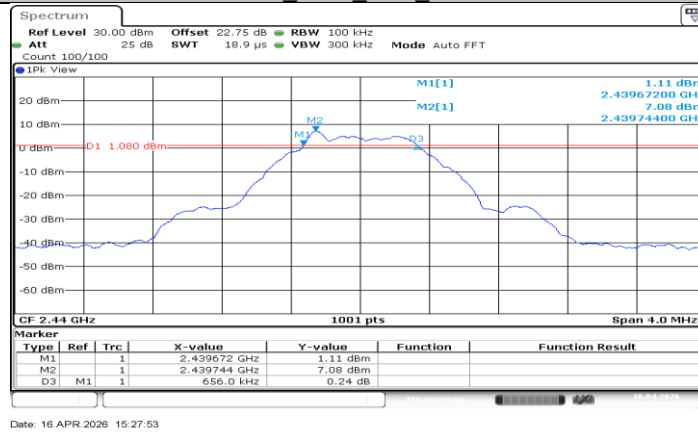

BLE 500K Ant1 2440

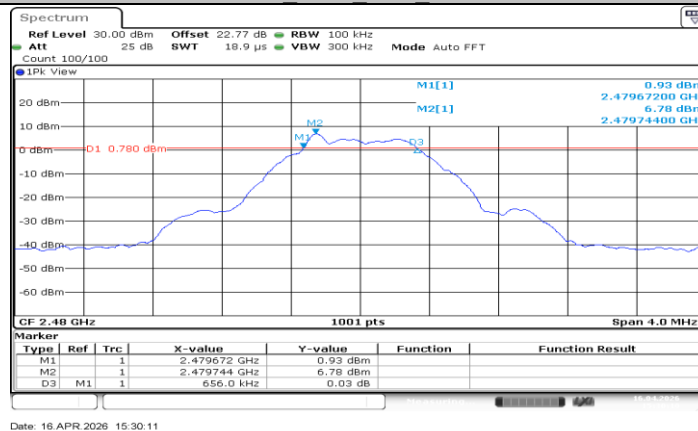


BLE 500K Ant1 2480

11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH


11.2.1. Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
BLE_1M	Ant1	2402	1.0350	2401.4885	2402.5235	PASS
		2440	1.0390	2439.4845	2440.5235	PASS
		2480	1.0350	2479.4885	2480.5235	PASS
BLE_2M	Ant1	2402	2.0539	2400.9850	2403.0390	PASS
		2440	2.0539	2438.9850	2441.0390	PASS
		2480	2.0539	2478.9850	2481.0390	PASS
BLE_125K	Ant1	2402	1.0470	2401.4725	2402.5195	PASS
		2440	1.0470	2439.4725	2440.5195	PASS
		2480	1.0470	2479.4725	2480.5195	PASS
BLE_500K	Ant1	2402	1.0190	2401.4885	2402.5075	PASS
		2440	1.0190	2439.4885	2440.5075	PASS
		2480	1.0190	2479.4885	2480.5075	PASS


11.2.2. Test Graphs

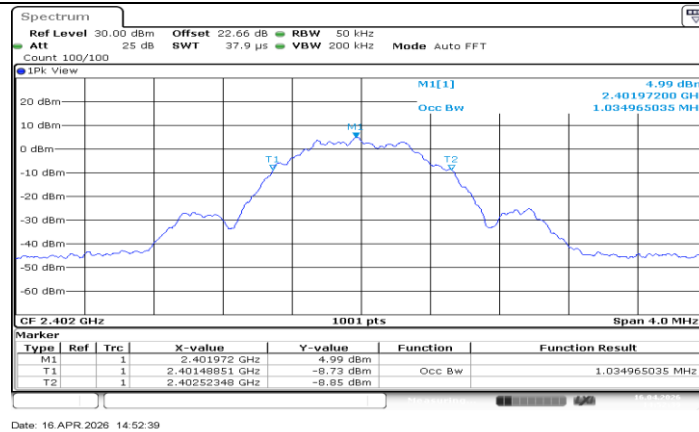


BLE 1M Ant1 2402

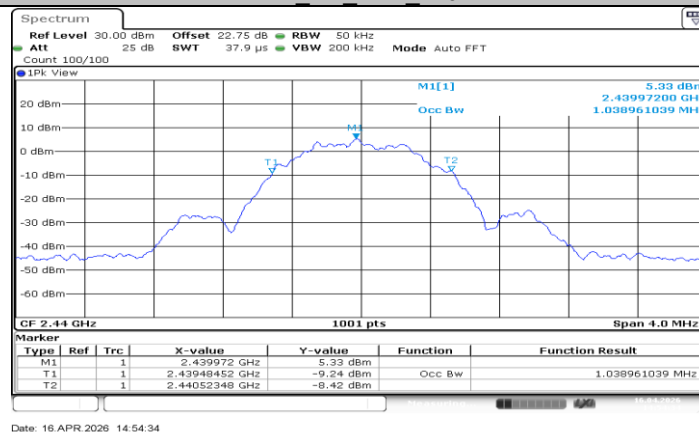


BLE 1M Ant1 2440

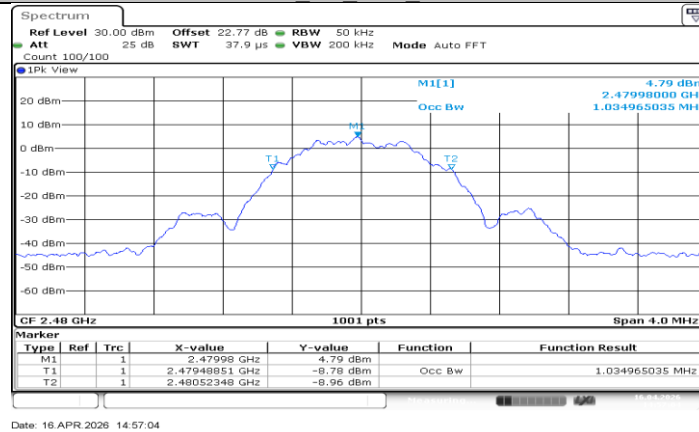


BLE 1M Ant1 2480

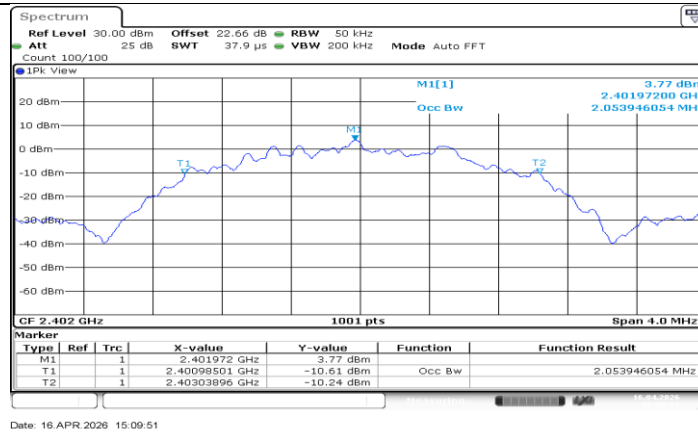


BLE 2M Ant1 2402

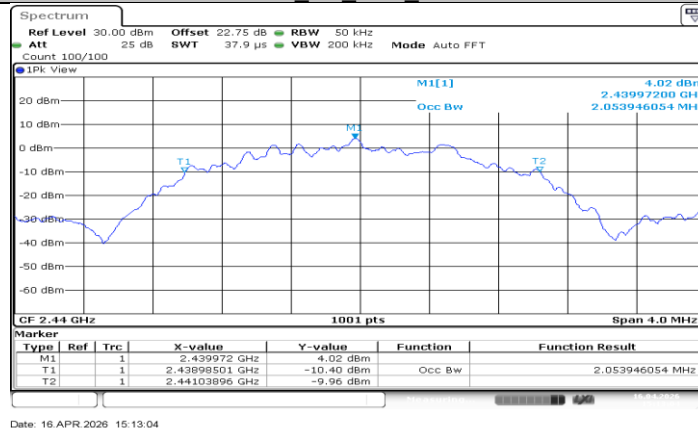


BLE 2M Ant1 2440

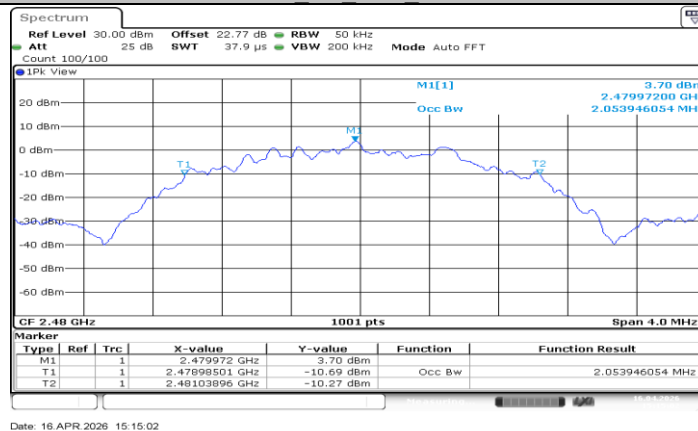


BLE 2M Ant1 2480

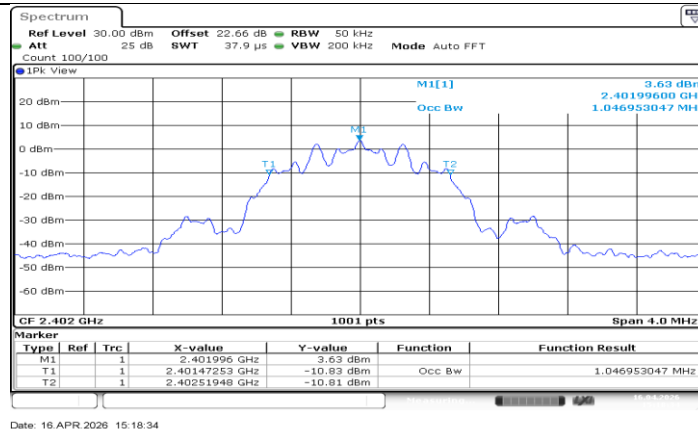


BLE 125K Ant1 2402

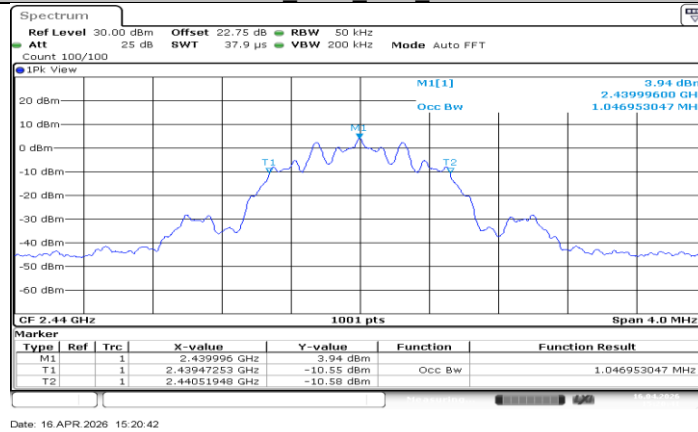


BLE 125K Ant1 2440

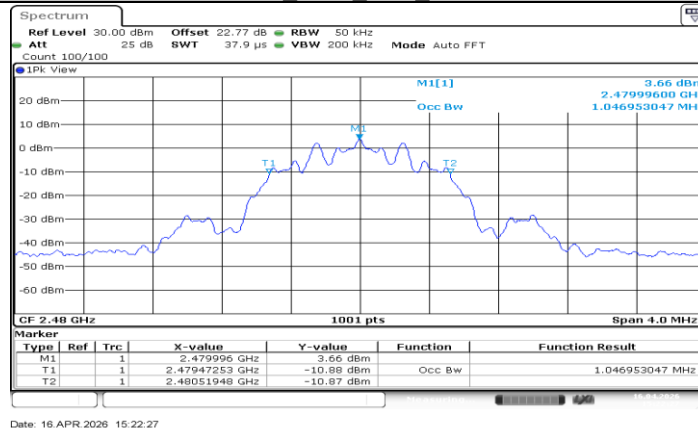


BLE 125K Ant1 2480

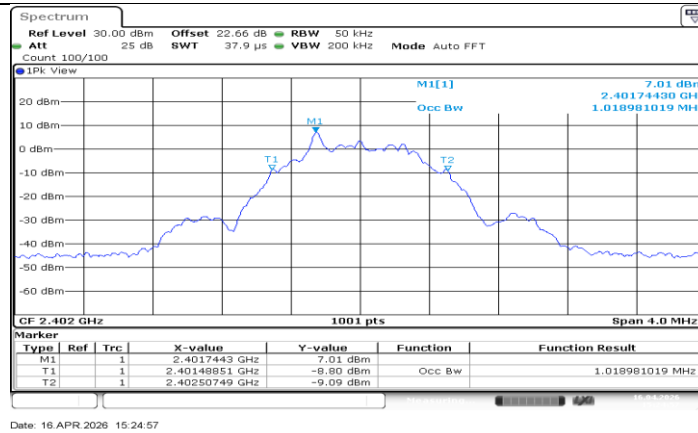

BLE 500K Ant1 2402

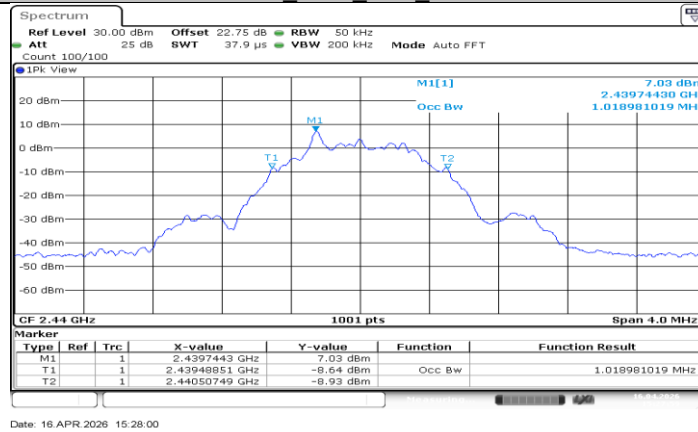

BLE 500K Ant1 2440

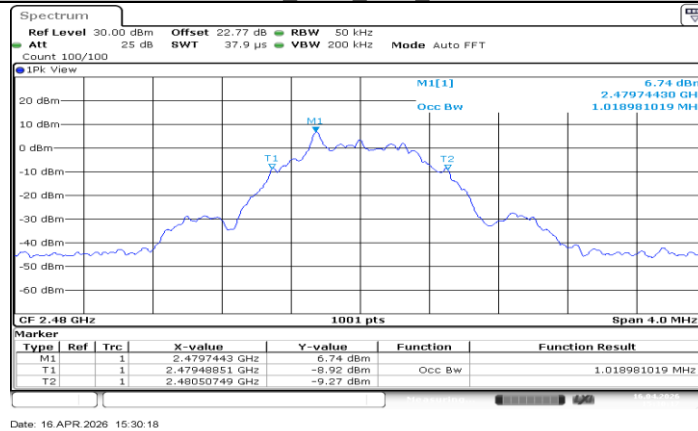

BLE 500K Ant1 2480

11.3. APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER

11.3.1. Test Result


Test Mode	Antenna	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	6.84	≤30	PASS
		2440	6.95	≤30	PASS
		2480	6.72	≤30	PASS
BLE_2M	Ant1	2402	6.86	≤30	PASS
		2440	6.96	≤30	PASS
		2480	6.74	≤30	PASS
BLE_125K	Ant1	2402	6.84	≤30	PASS
		2440	6.94	≤30	PASS
		2480	6.73	≤30	PASS
BLE_500K	Ant1	2402	6.99	≤30	PASS
		2440	6.75	≤30	PASS
		2480	6.75	≤30	PASS

11.4. APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY


11.4.1. Test Result

Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-10.06	≤8.00	PASS
		2440	-12.02	≤8.00	PASS
		2480	-12.42	≤8.00	PASS
BLE_2M	Ant1	2402	-17.04	≤8.00	PASS
		2440	-18.73	≤8.00	PASS
		2480	-19.75	≤8.00	PASS
BLE_125K	Ant1	2402	-0.07	≤8.00	PASS
		2440	-2.01	≤8.00	PASS
		2480	-2.34	≤8.00	PASS
BLE_500K	Ant1	2402	-0.34	≤8.00	PASS
		2440	-4.82	≤8.00	PASS
		2480	-5.15	≤8.00	PASS


11.4.2. Test Graphs

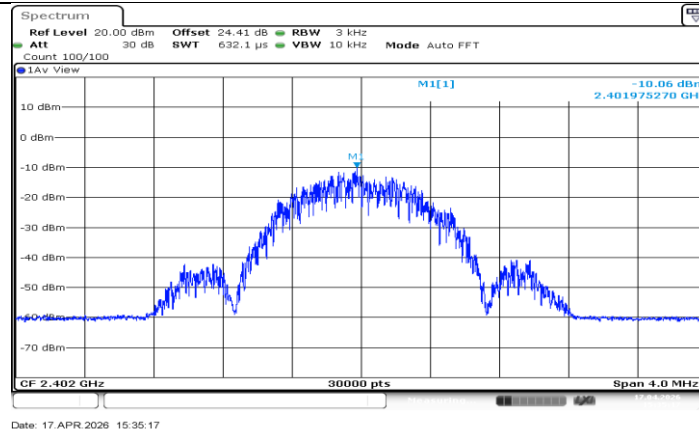


BLE 1M Ant1 2402

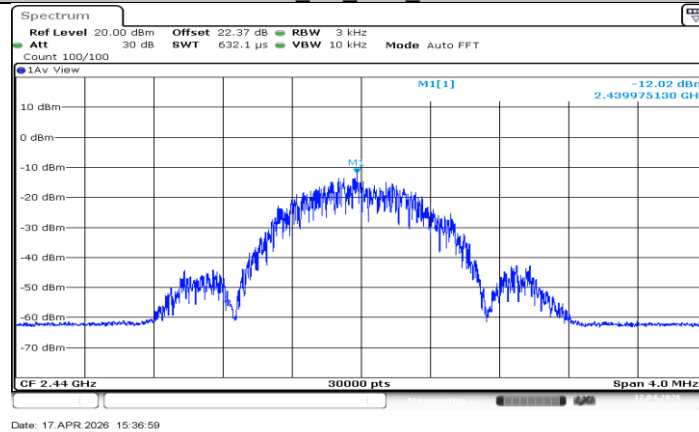


BLE 1M Ant1 2440

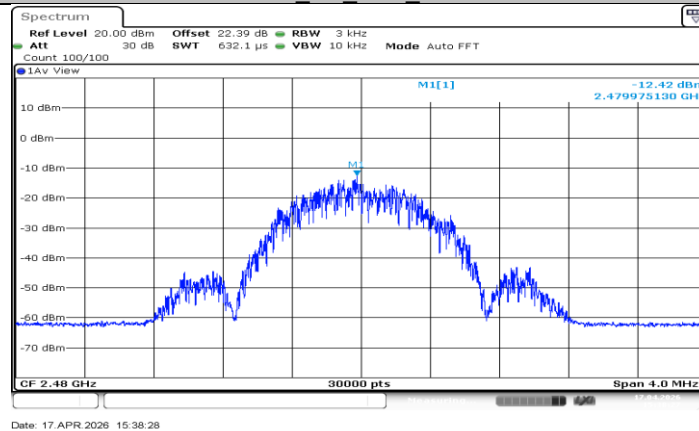


BLE 1M Ant1 2480

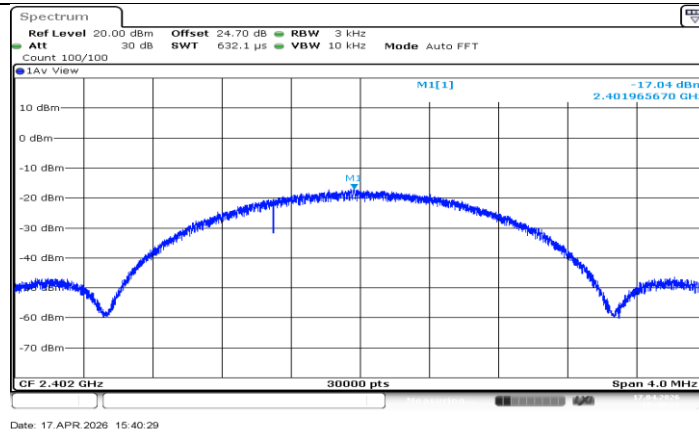


BLE 2M Ant1 2402

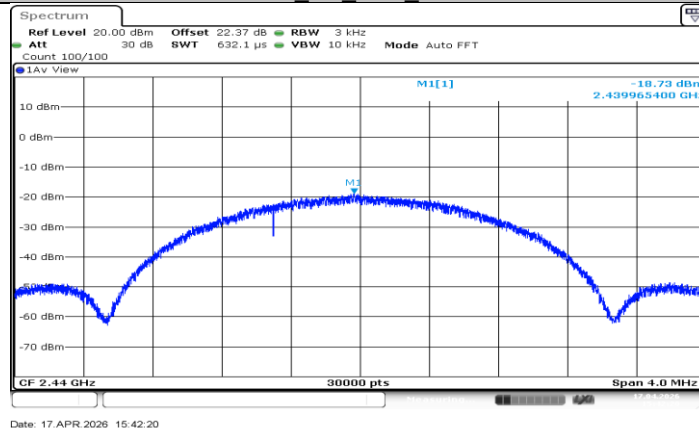


BLE 2M Ant1 2440

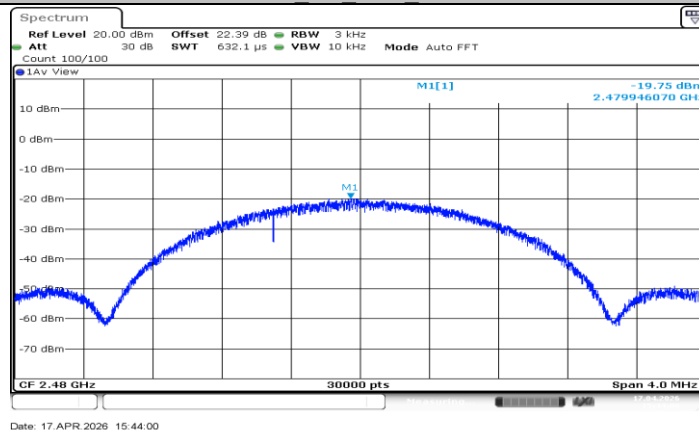


BLE 2M Ant1 2480

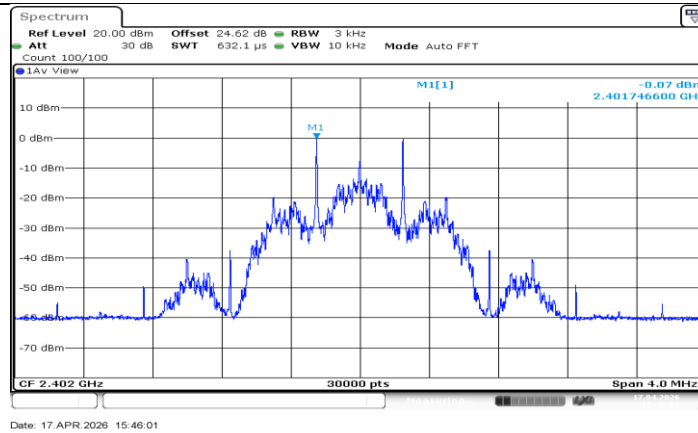


BLE_125K_Ant1_2402

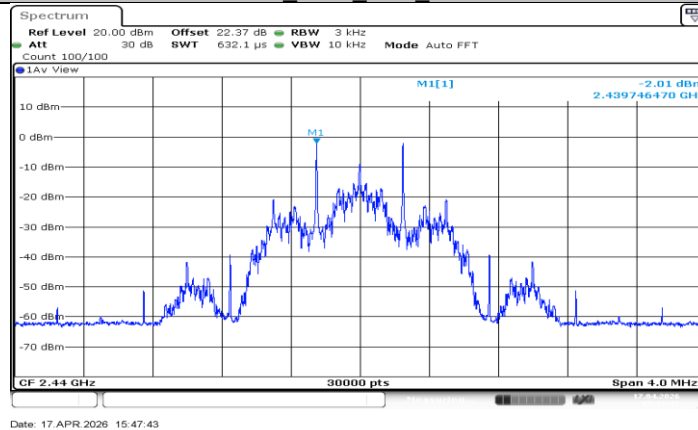


BLE_125K_Ant1_2440

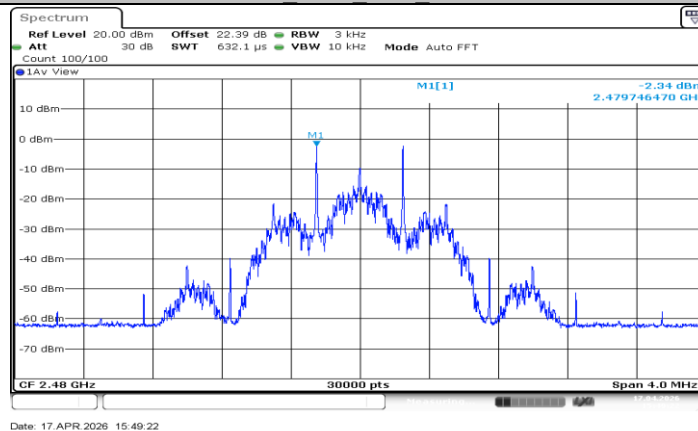


BLE_125K_Ant1_2480

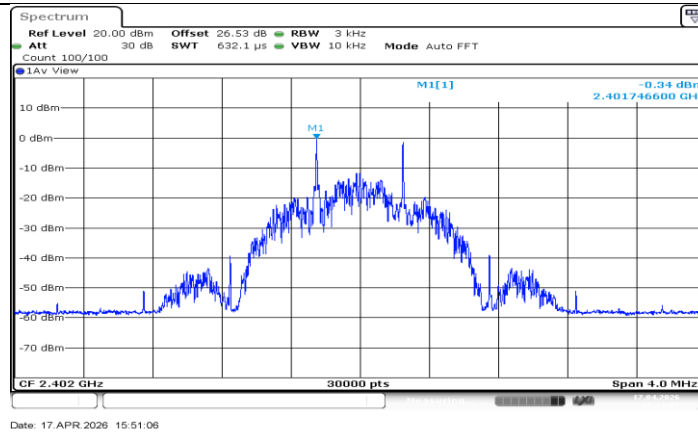

BLE_500K_Ant1_2402

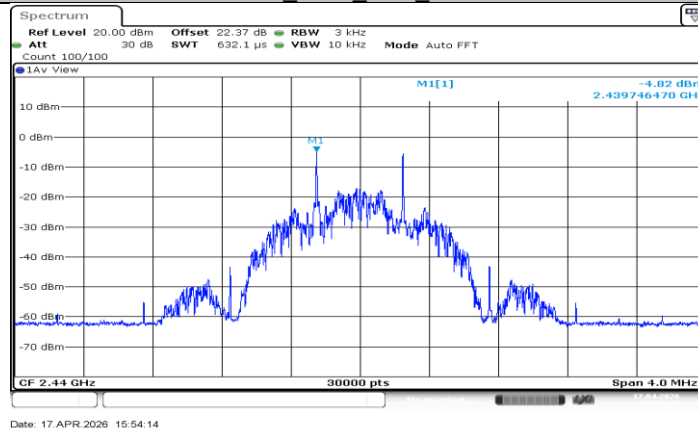

BLE_500K_Ant1_2440

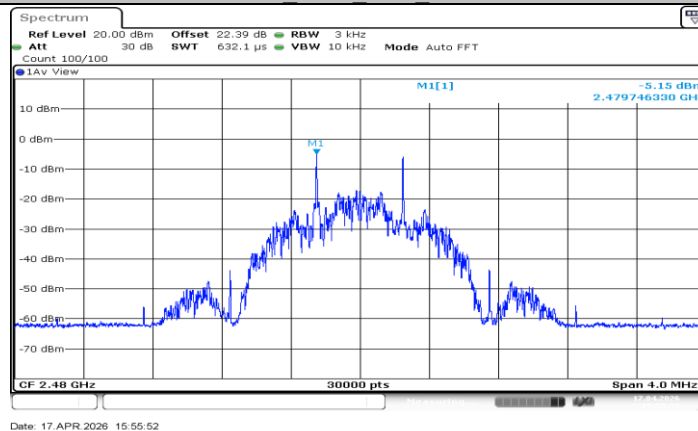


BLE_500K_Ant1_2480

11.5. APPENDIX E: BAND EDGE MEASUREMENTS


11.5.1. Test Result

Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	5.86	-45.71	≤-24.14	PASS
		High	2480	5.83	-45.24	≤-24.17	PASS
BLE_2M	Ant1	Low	2402	5.38	-26.16	≤-24.62	PASS
		High	2480	5.72	-45.56	≤-24.28	PASS
BLE_125K	Ant1	Low	2402	3.64	-46.27	≤-26.36	PASS
		High	2480	3.50	-41.85	≤-26.5	PASS
BLE_500K	Ant1	Low	2402	6.89	-46.35	≤-23.11	PASS
		High	2480	6.78	-44.96	≤-23.22	PASS


11.5.2. Test Graphs

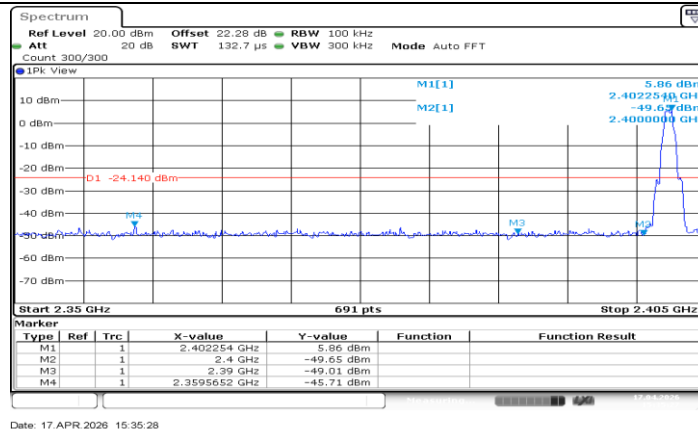


BLE 1M Ant1 Low 2402

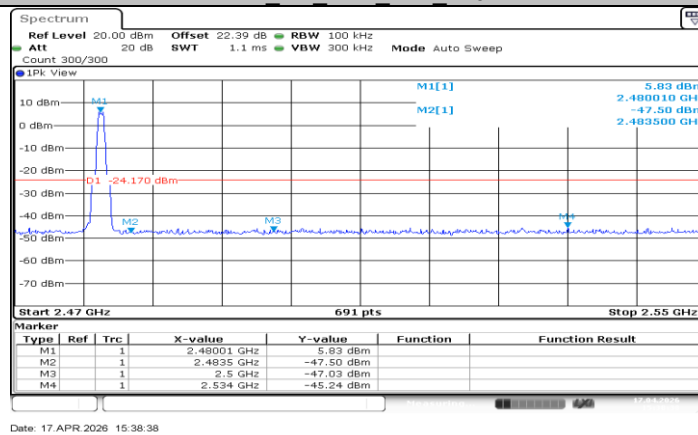


BLE 1M Ant1 High 2480

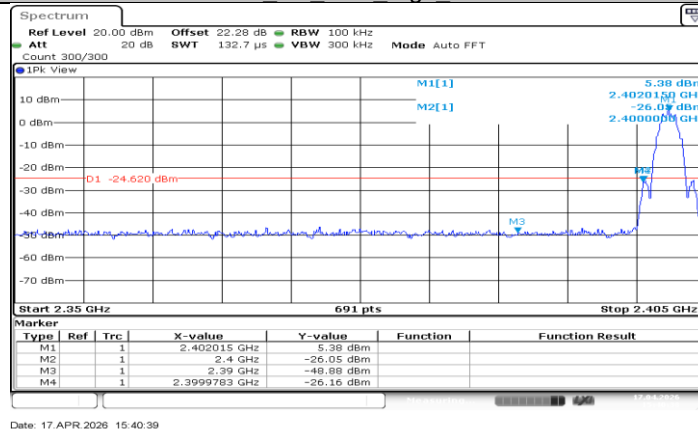


BLE 2M Ant1 Low 2402

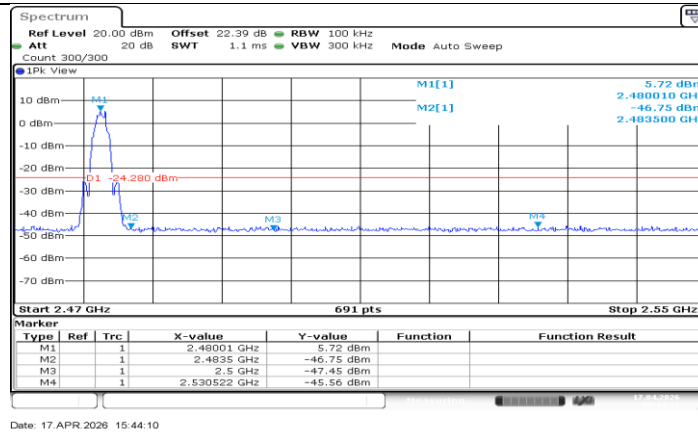


BLE 2M Ant1 High 2480

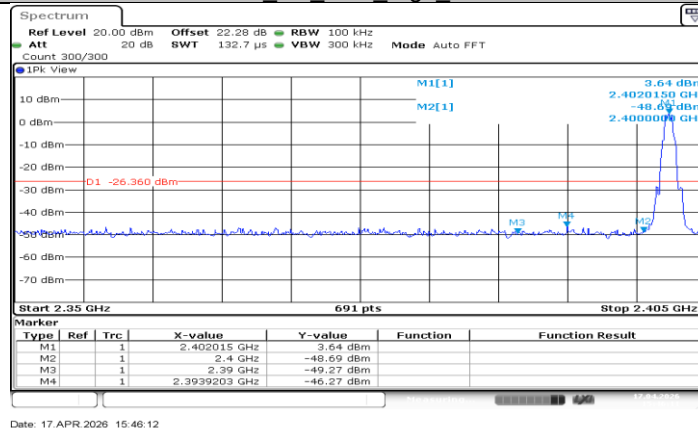


BLE 125K Ant1 Low 2402

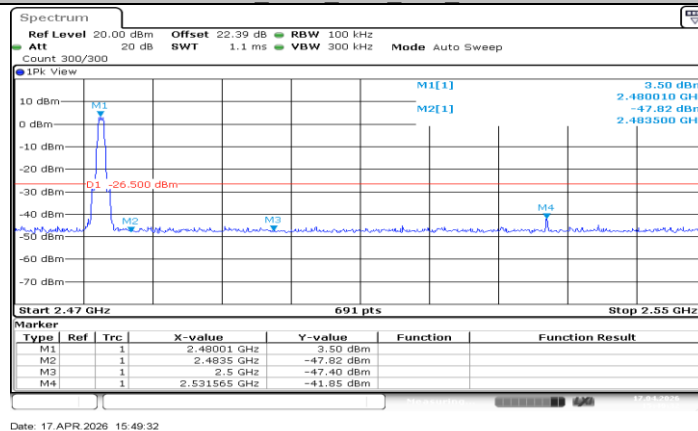

BLE 125K Ant1 High 2480

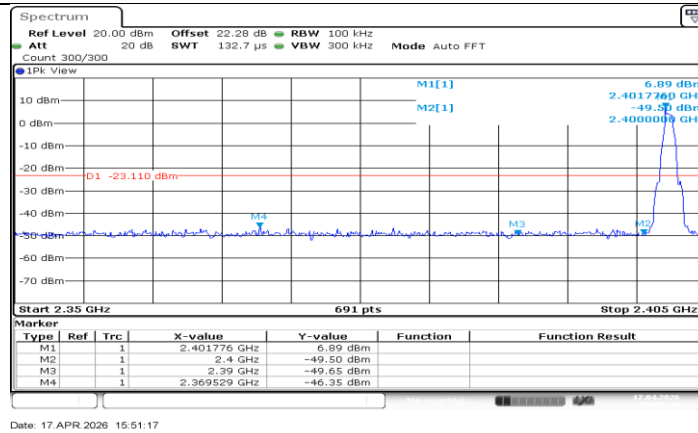

BLE_500K Ant1 Low_2402

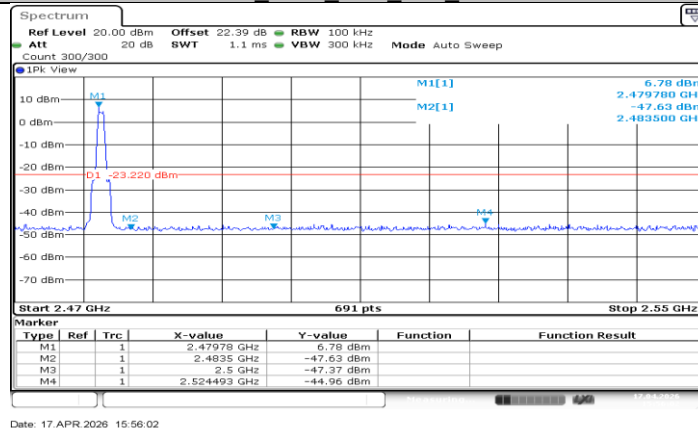

BLE_500K Ant1_High_2480

11.6. APPENDIX F: CONDUCTED SPURIOUS EMISSION

11.6.1. Test Result

Test Mode	Antenna	Frequency[MHz]	FreqRange [MHz]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	6.25	---	PASS
			30~1000	-44.25	≤-23.75	PASS
			1000~26500	-39.9	≤-23.75	PASS
		2440	Reference	6.52	---	PASS
			30~1000	-45.44	≤-23.48	PASS
			1000~26500	-39.28	≤-23.48	PASS
		2480	Reference	5.85	---	PASS
			30~1000	-45.53	≤-24.15	PASS
			1000~26500	-40.18	≤-24.15	PASS
BLE_2M	Ant1	2402	Reference	5.96	---	PASS
			30~1000	-44.94	≤-24.04	PASS
			1000~26500	-40.41	≤-24.04	PASS
		2440	Reference	6.01	---	PASS
			30~1000	-44.93	≤-23.99	PASS
			1000~26500	-39.3	≤-23.99	PASS
		2480	Reference	5.69	---	PASS
			30~1000	-45.12	≤-24.31	PASS
			1000~26500	-39.99	≤-24.31	PASS
BLE_125K	Ant1	2402	Reference	3.68	---	PASS
			30~1000	-45.31	≤-26.32	PASS
			1000~26500	-39.87	≤-26.32	PASS
		2440	Reference	3.98	---	PASS
			30~1000	-44.99	≤-26.02	PASS
			1000~26500	-39.81	≤-26.02	PASS
		2480	Reference	3.48	---	PASS
			30~1000	-44.91	≤-26.52	PASS
			1000~26500	-39.51	≤-26.52	PASS
BLE_500K	Ant1	2402	Reference	7.03	---	PASS
			30~1000	-44.87	≤-22.97	PASS
			1000~26500	-40.26	≤-22.97	PASS
		2440	Reference	6.99	---	PASS
			30~1000	-45.06	≤-23.01	PASS
			1000~26500	-39.99	≤-23.01	PASS
		2480	Reference	6.88	---	PASS
			30~1000	-44.9	≤-23.12	PASS
			1000~26500	-39.7	≤-23.12	PASS