



## Appendix A

### RF Test Data for BT LE(Conducted Measurement)

Product Name: Essential Oil Diffuser

Test Model: VO-1023G

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 23.8℃     |
| Relative Humidity: | 52.1%     |
| ATM Pressure:      | 100.0 kPa |
| Test Engineer:     | Jay Luo   |
| Supervised by:     | Nick Peng |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## A.1 -6dB Bandwidth


| Condition | Mode   | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|--------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | BLE 1M | 2402            | Ant1    | 0.66                  | $\geq 0.5$                  | Pass    |
| NVNT      | BLE 1M | 2440            | Ant1    | 0.662                 | $\geq 0.5$                  | Pass    |
| NVNT      | BLE 1M | 2480            | Ant1    | 0.652                 | $\geq 0.5$                  | Pass    |






## Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

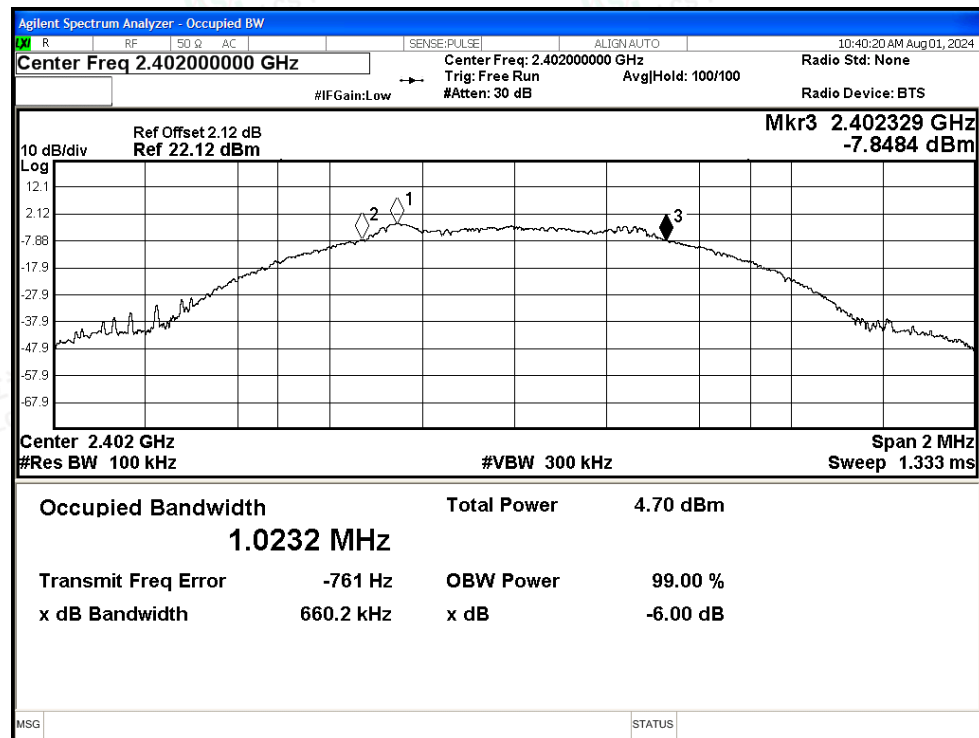

-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

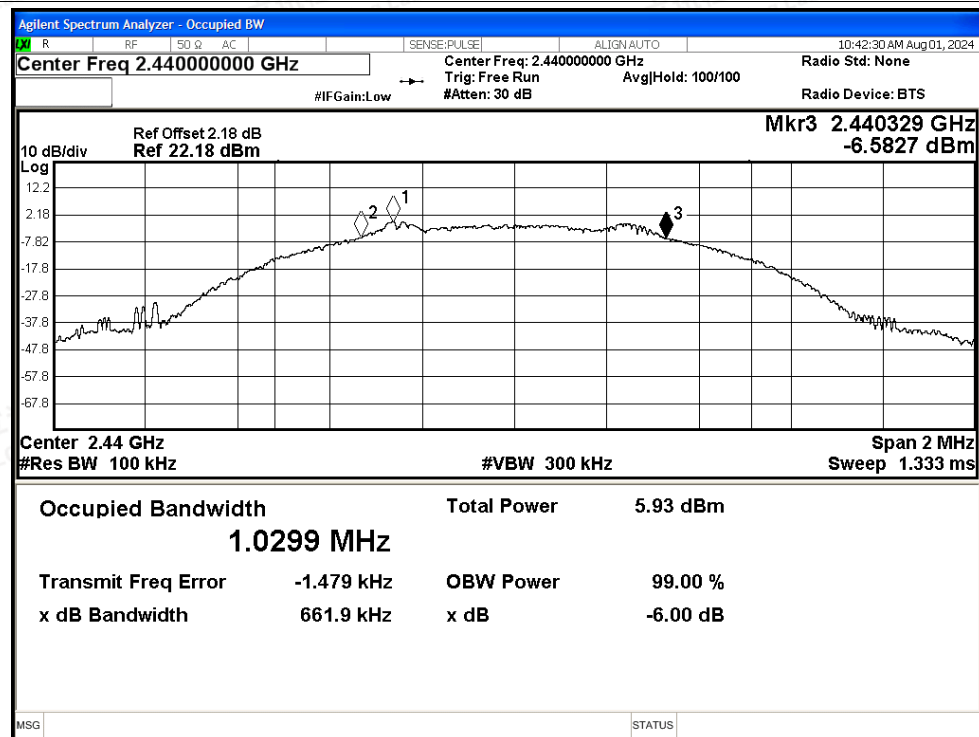


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

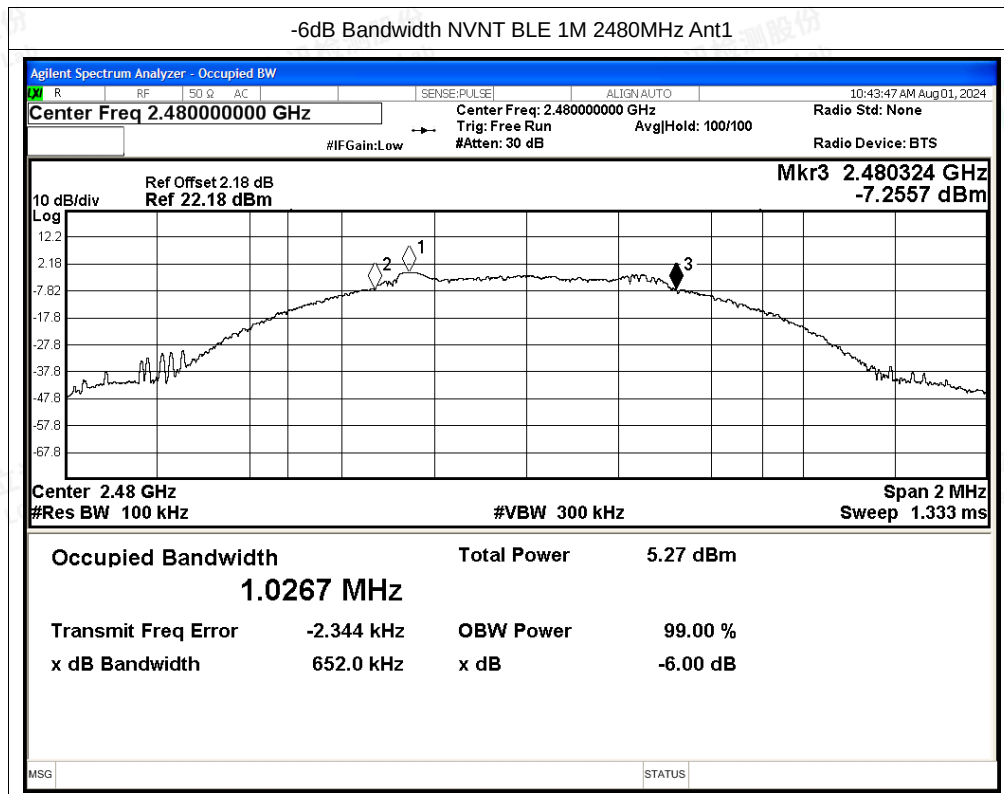



## A.2 Maximum Peak Conducted Output Power

| Condition | Mode   | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|--------|-----------------|---------|-----------------------|-------------|---------|
| NVNT      | BLE 1M | 2402            | Ant1    | -0.15                 | 30          | Pass    |
| NVNT      | BLE 1M | 2440            | Ant1    | 0.25                  | 30          | Pass    |
| NVNT      | BLE 1M | 2480            | Ant1    | -0.4                  | 30          | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity





## Test Graphs

Power NVNT BLE 1M 2402MHz Ant1

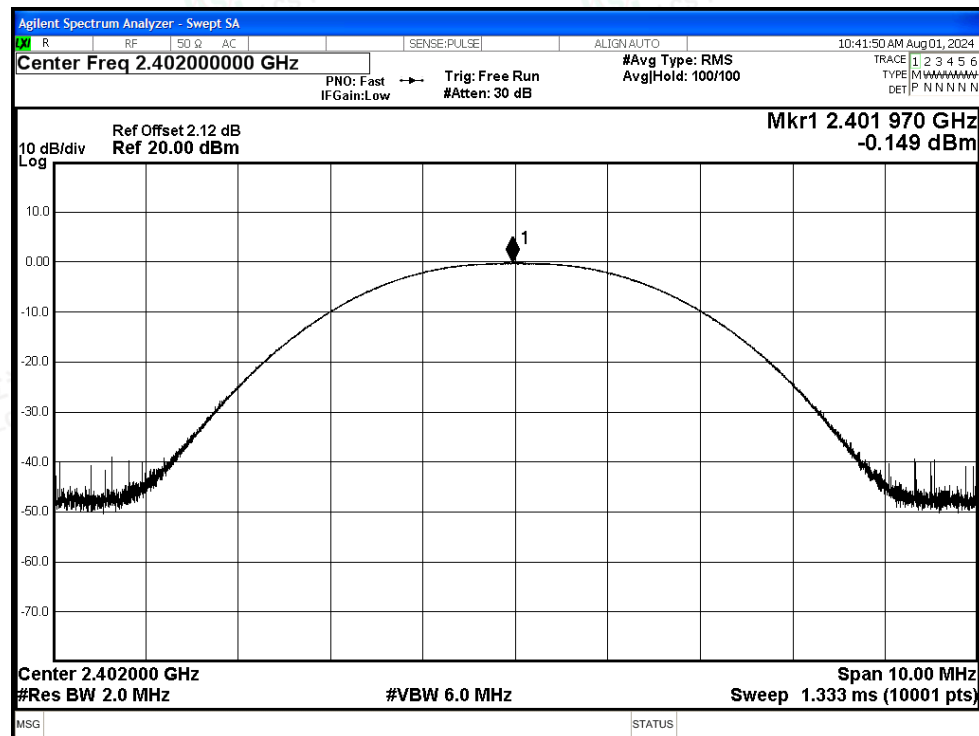

Power NVNT BLE 1M 2440MHz Ant1

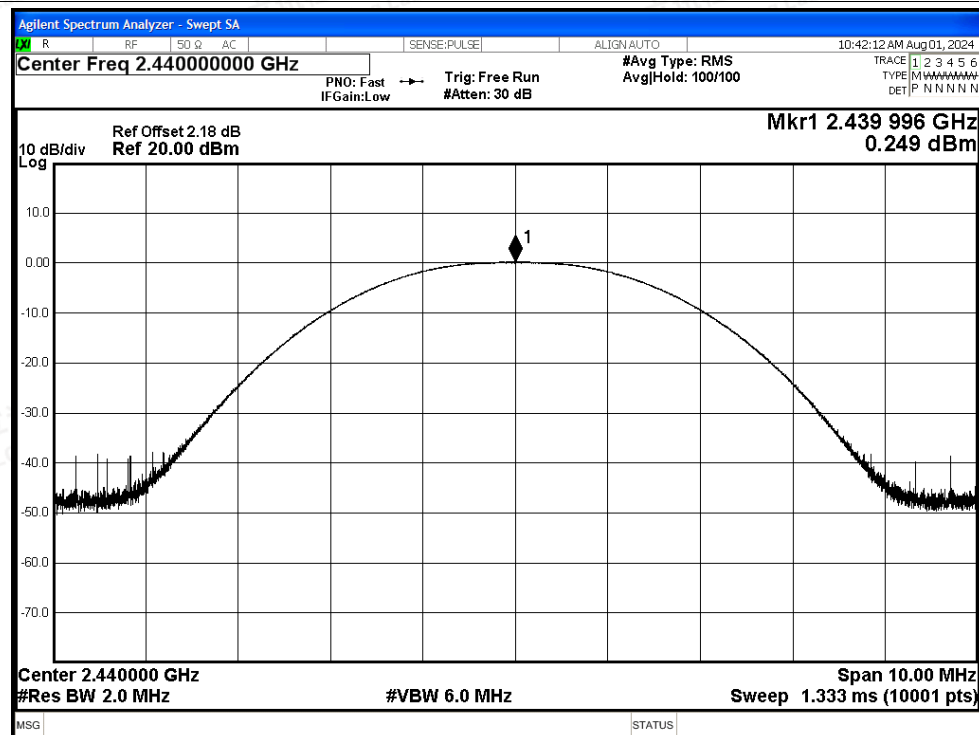

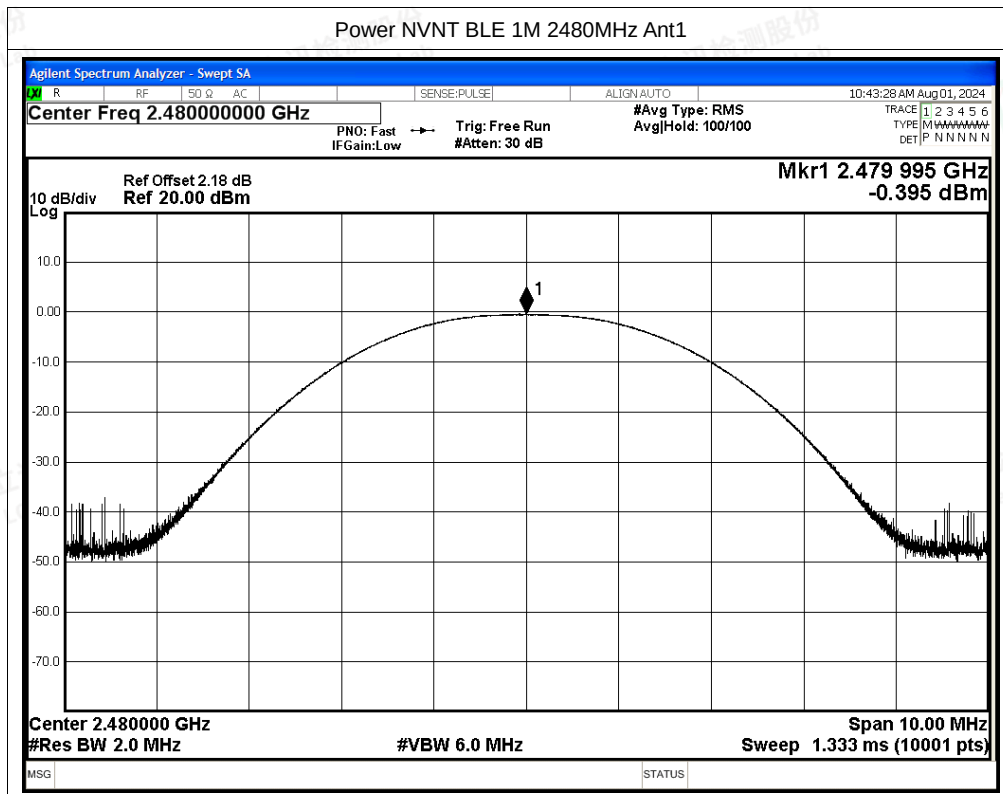



### A.3 Maximum Power Spectral Density Level

| Condition | Mode   | Frequency (MHz) | Antenna | Conducted PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|-----------|--------|-----------------|---------|--------------------------|------------------|---------|
| NVNT      | BLE 1M | 2402            | Ant1    | -18.2                    | 8                | Pass    |
| NVNT      | BLE 1M | 2440            | Ant1    | -16.79                   | 8                | Pass    |
| NVNT      | BLE 1M | 2480            | Ant1    | -17.32                   | 8                | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity





## Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

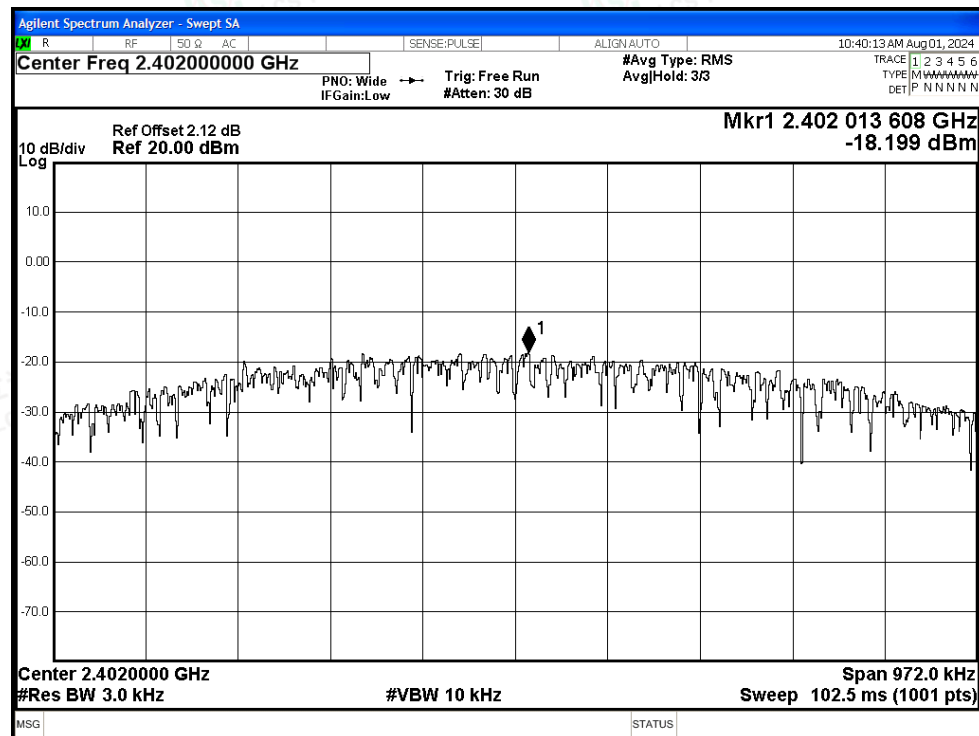

PSD NVNT BLE 1M 2440MHz Ant1

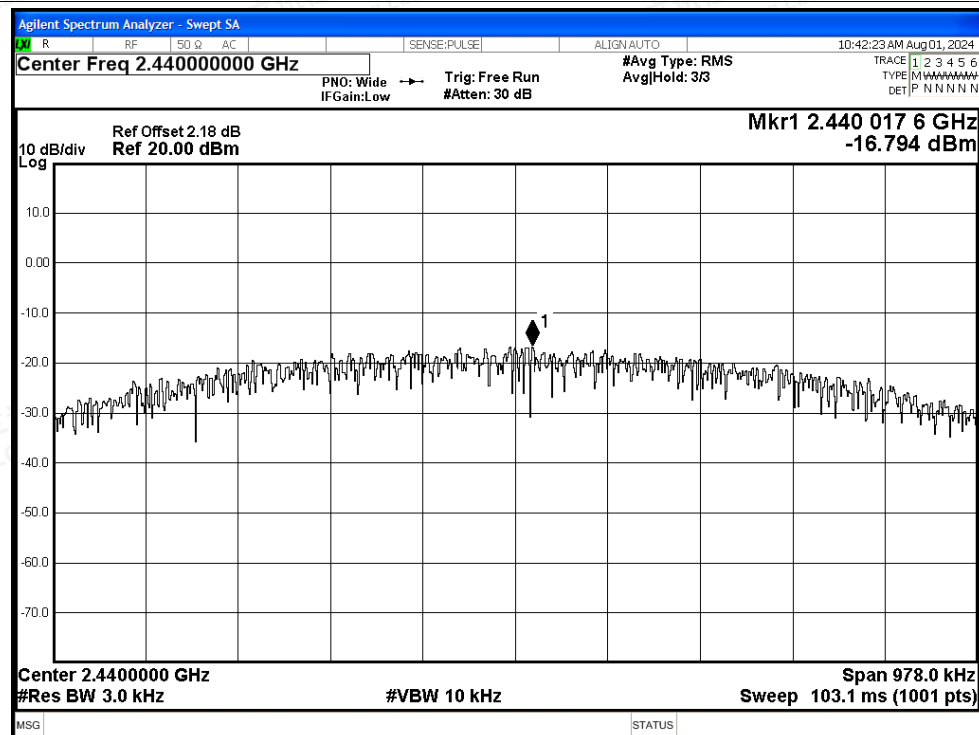

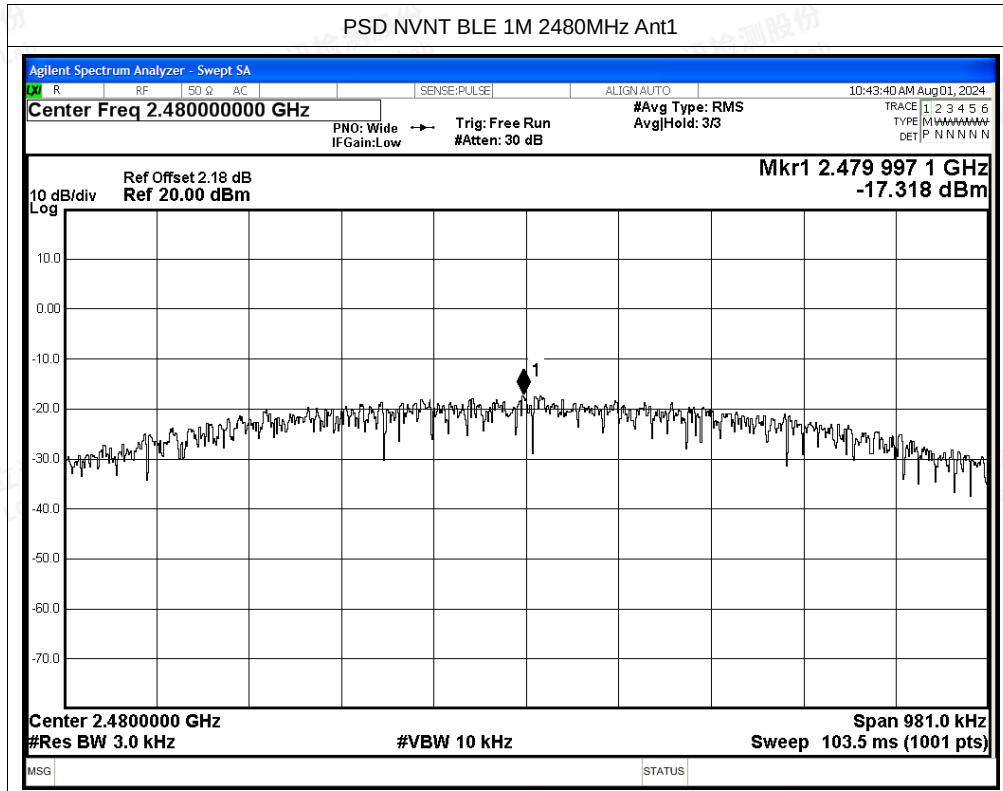



## A.4 Band Edge

| Condition | Mode   | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|--------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | BLE 1M | 2402            | Ant1    | -55.39          | -20         | Pass    |
| NVNT      | BLE 1M | 2480            | Ant1    | -55.77          | -20         | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

## Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

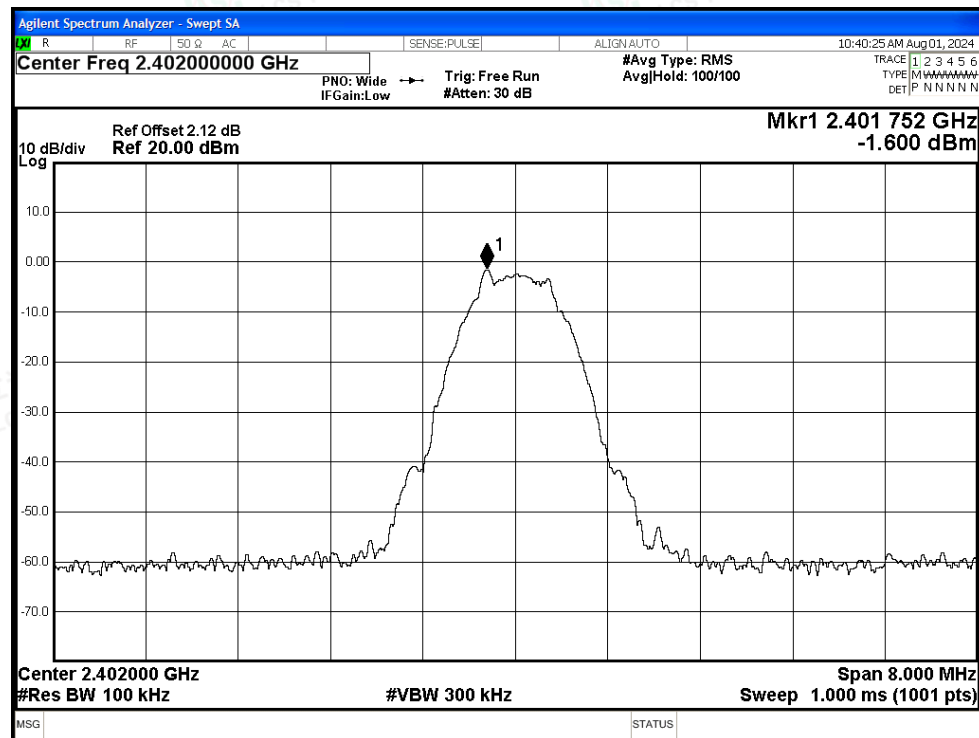

## Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

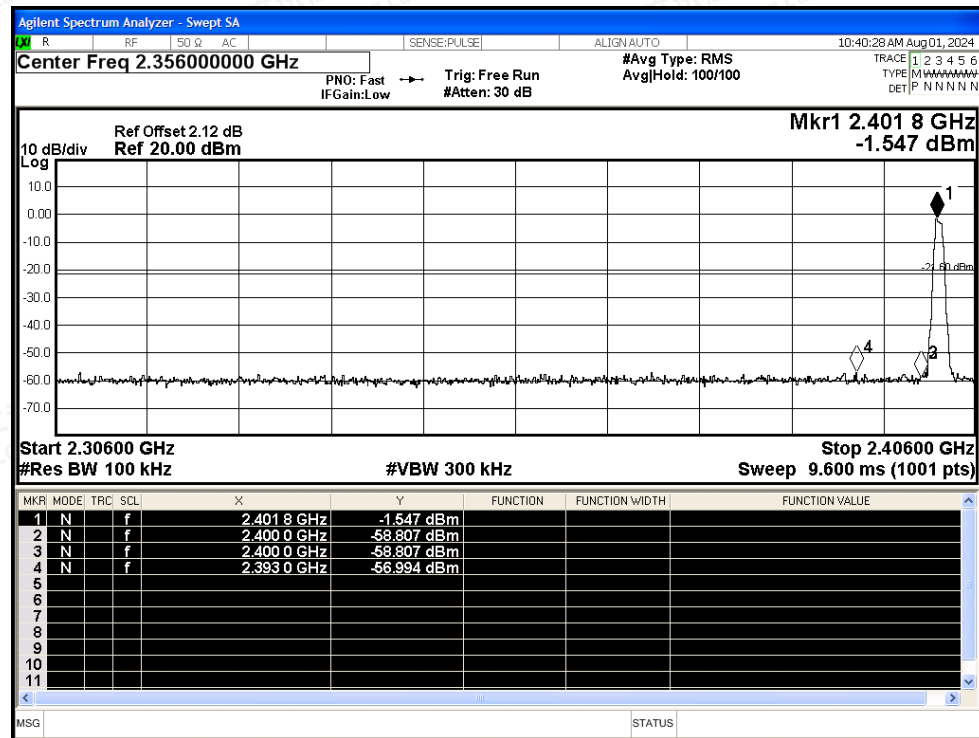

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

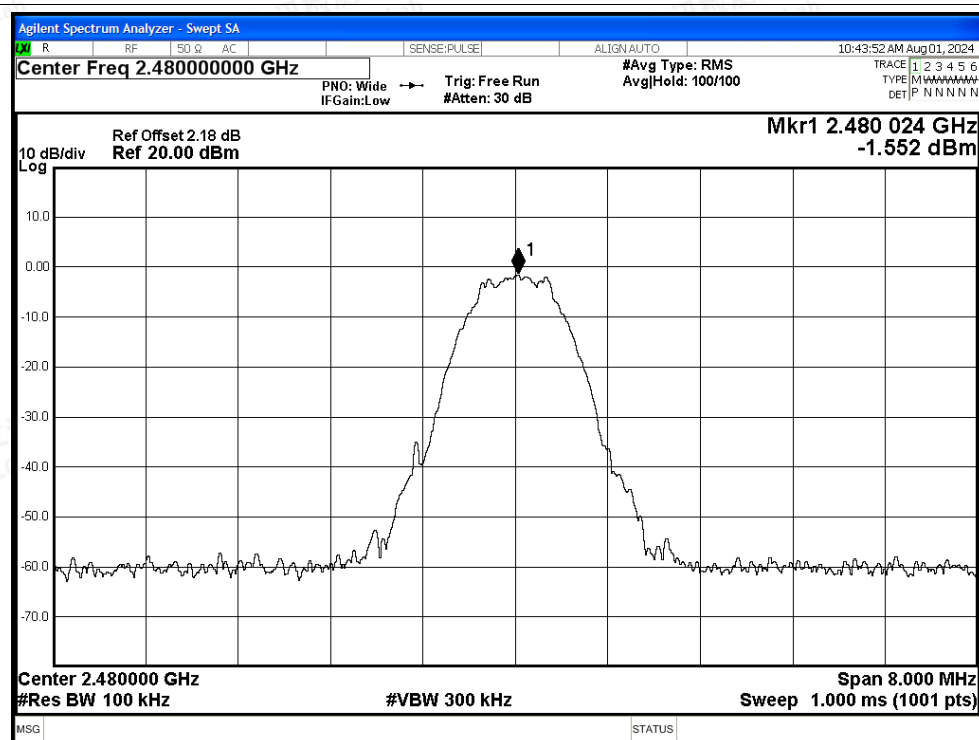

## Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

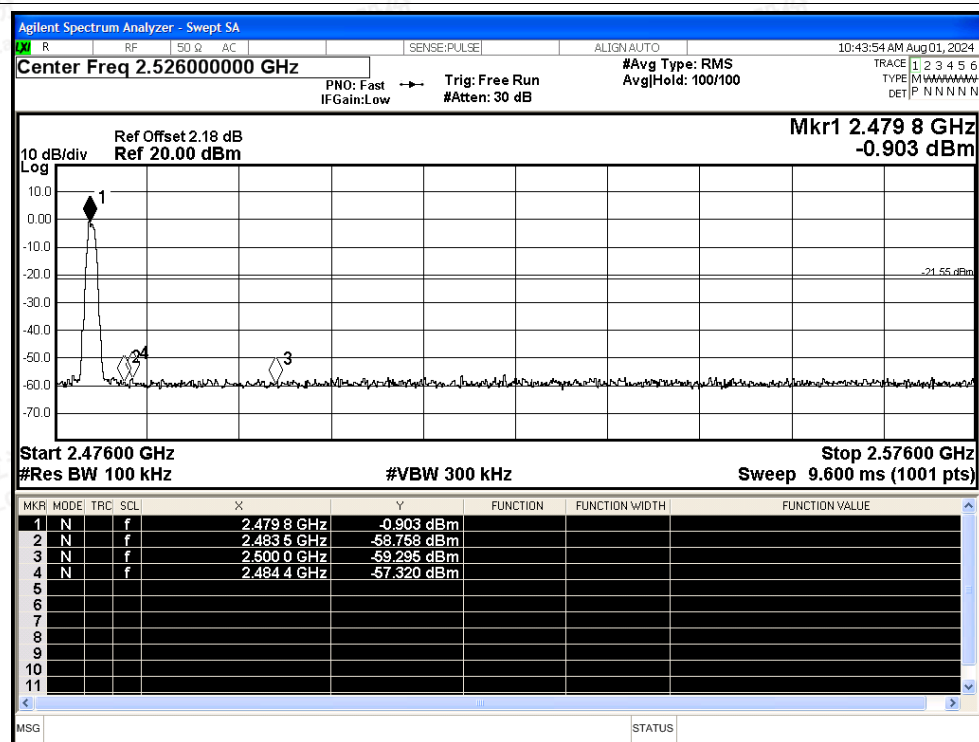

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## A.5 Conducted RF Spurious Emission

| Condition | Mode   | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|--------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | BLE 1M | 2402            | Ant1    | -53.23          | -20         | Pass    |
| NVNT      | BLE 1M | 2440            | Ant1    | -54.88          | -20         | Pass    |
| NVNT      | BLE 1M | 2480            | Ant1    | -54.19          | -20         | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: [webmaster@lcs-cert.com](mailto:webmaster@lcs-cert.com) | Web: [www.lcs-cert.com](http://www.lcs-cert.com)  
Scan code to check authenticity




## Test Graphs

## Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

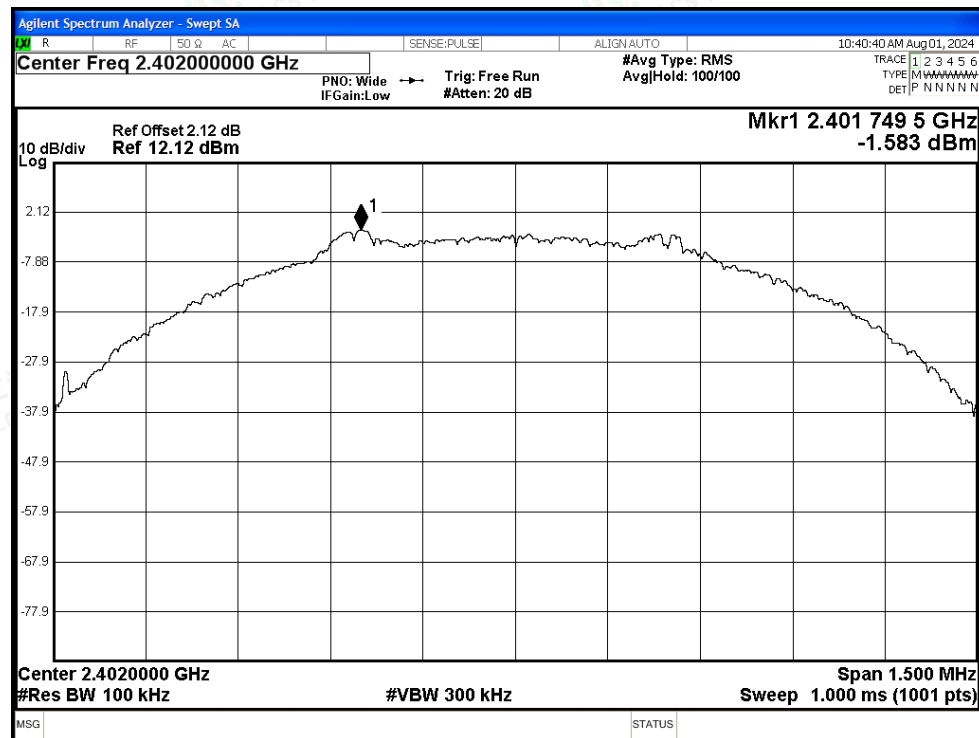

## Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

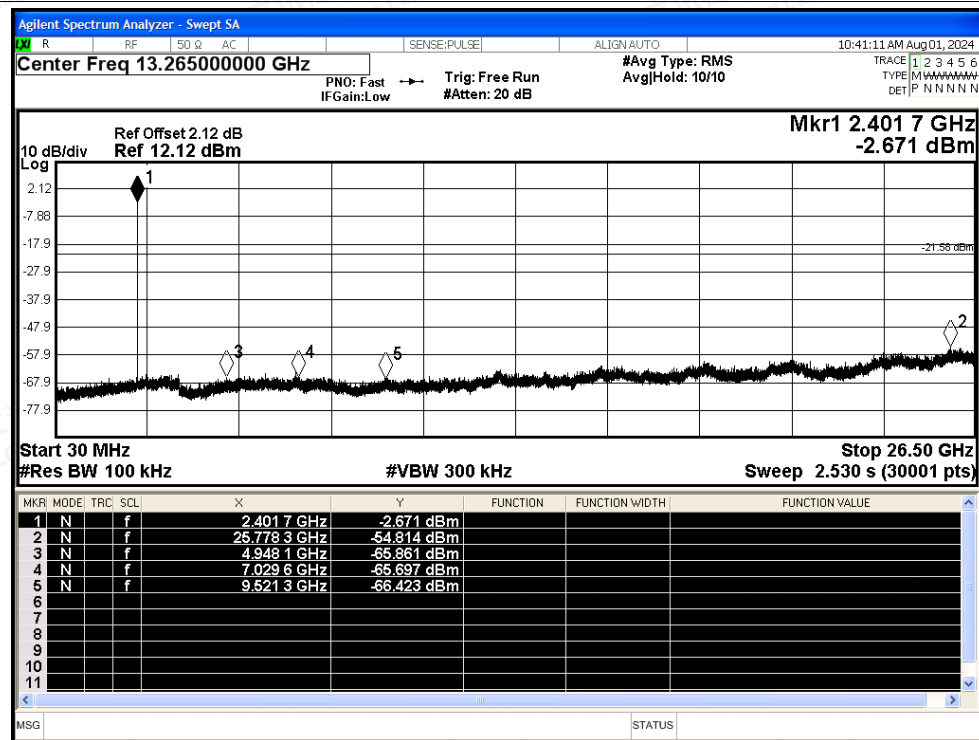

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

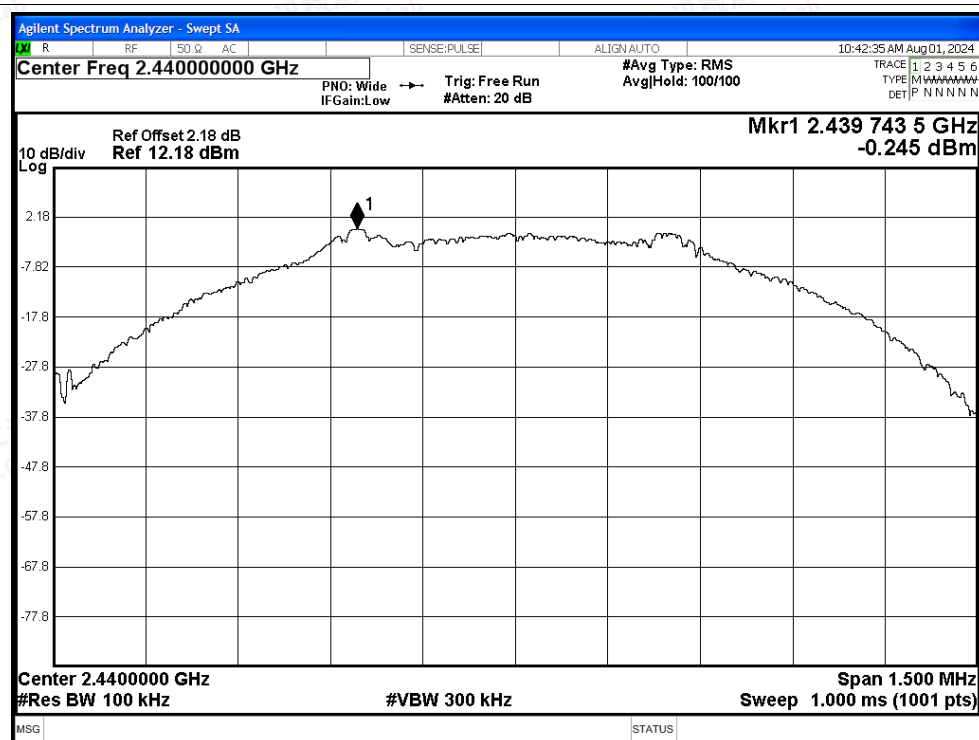

## Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

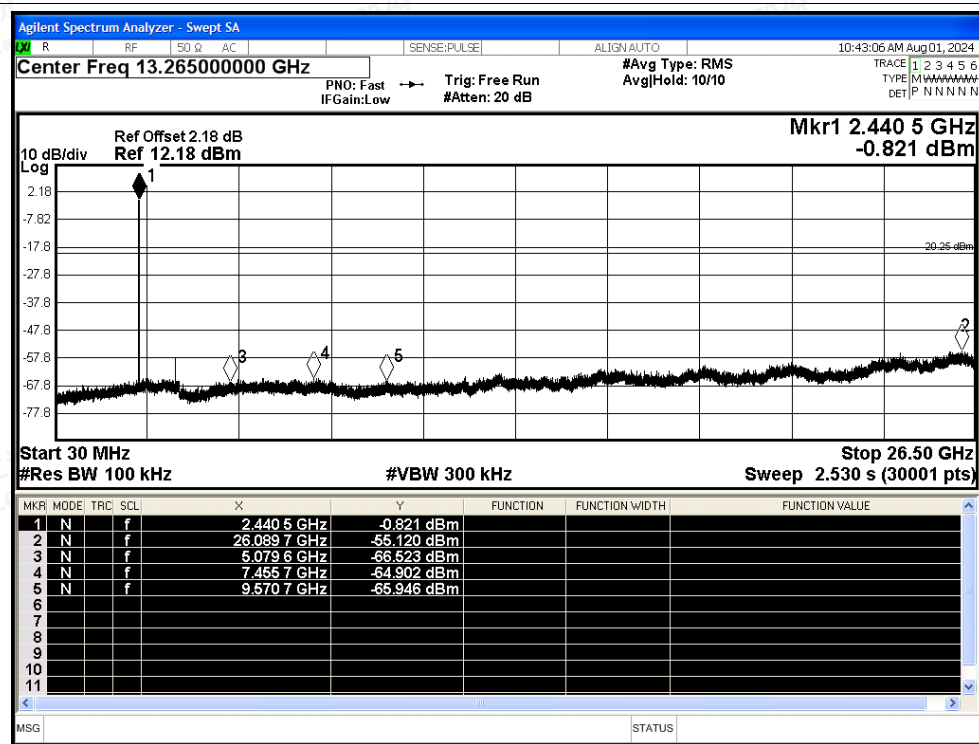

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

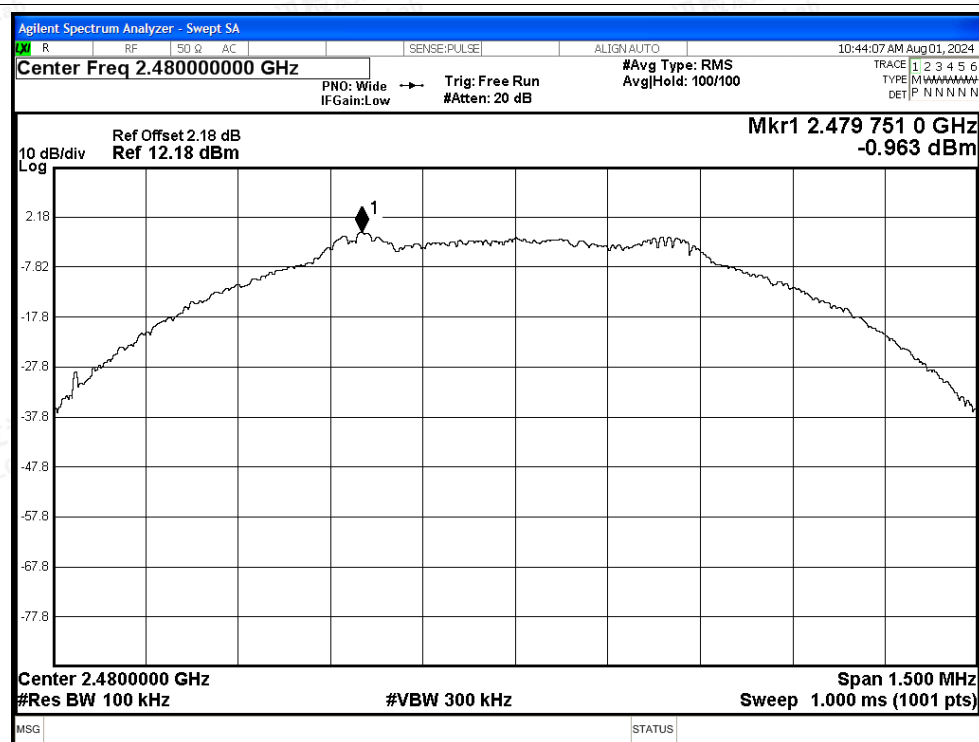

## Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

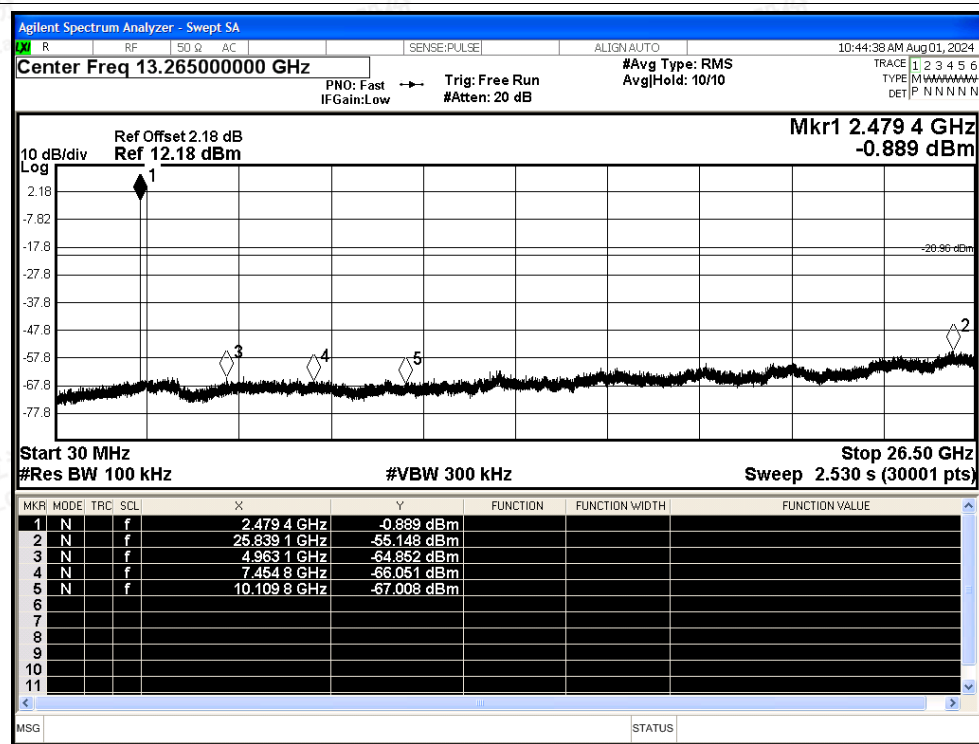

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## A.6 Duty Cycle

| Condition | Mode   | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|--------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | BLE 1M | 2402            | Ant1    | 87.39          | 0.59                   | 0.61      |
| NVNT      | BLE 1M | 2440            | Ant1    | 87.39          | 0.59                   | 0.61      |
| NVNT      | BLE 1M | 2480            | Ant1    | 87.39          | 0.59                   | 0.61      |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

## Duty Cycle NVNT BLE 1M 2402MHz Ant1

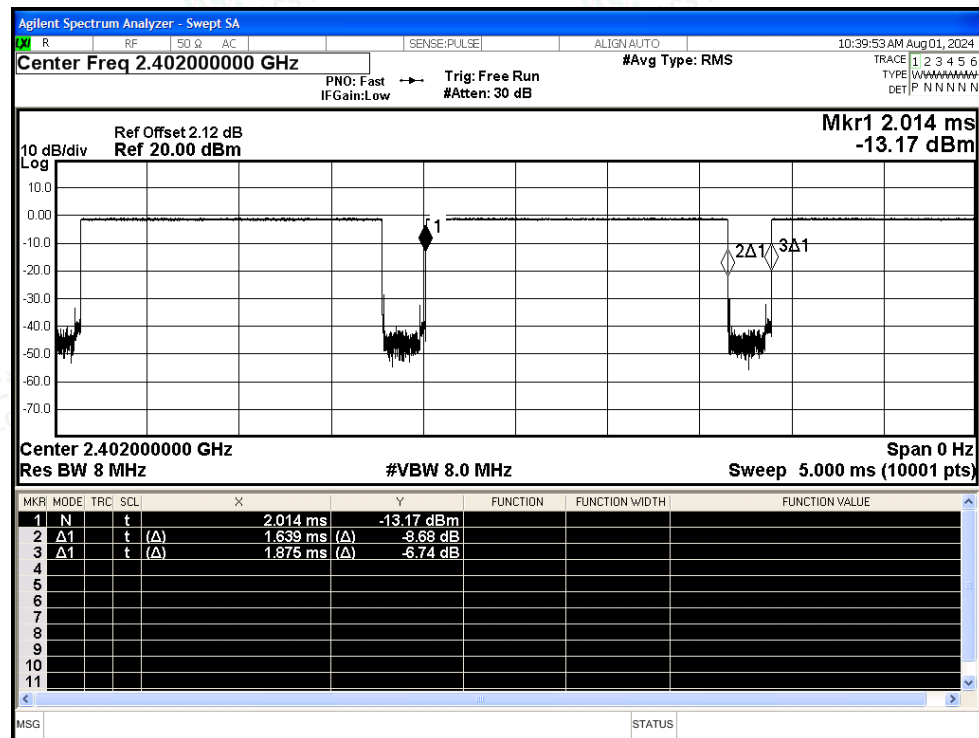

## Duty Cycle NVNT BLE 1M 2440MHz Ant1

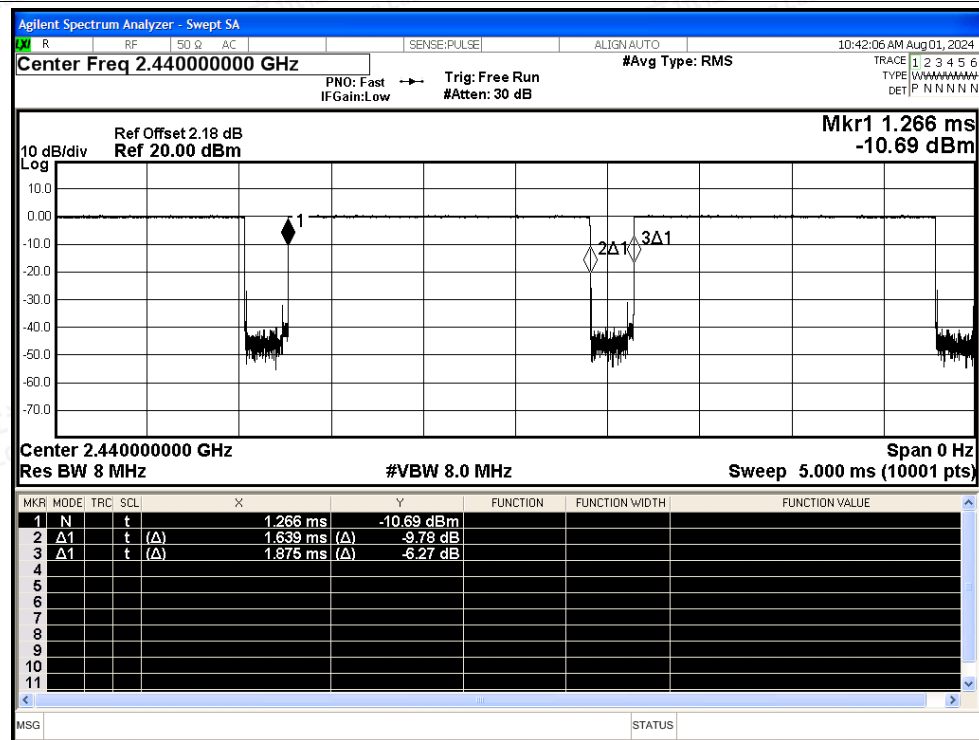


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

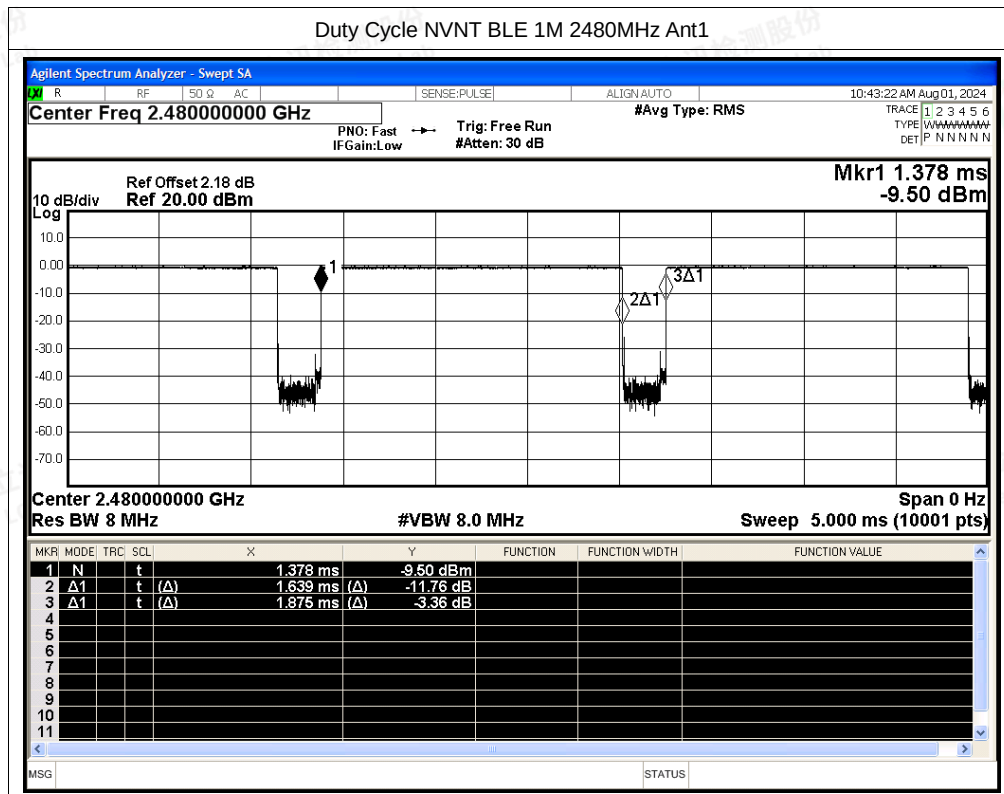



## A.7 Restrict Band

| Condition | Mode   | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|--------|-----------------|---------|-----------------|-------------|------------|------------------|------------|----------|----------------|---------|
| NVNT      | BLE 1M | 2402            | Ant1    | 2310            | -51.01      | 2          | -                | 46.25      | Peak     | 74             | Pass    |
| NVNT      | BLE 1M | 2402            | Ant1    | 2310            | -58.67      | 2          | 0.59             | 39.18      | Average  | 54             | Pass    |
| NVNT      | BLE 1M | 2402            | Ant1    | 2373.264        | -47.16      | 2          | -                | 50.1       | Peak     | 74             | Pass    |
| NVNT      | BLE 1M | 2402            | Ant1    | 2363.664        | -57.52      | 2          | 0.59             | 40.33      | Average  | 54             | Pass    |
| NVNT      | BLE 1M | 2402            | Ant1    | 2390            | -50.96      | 2          | -                | 46.3       | Peak     | 74             | Pass    |
| NVNT      | BLE 1M | 2402            | Ant1    | 2390            | -58.97      | 2          | 0.59             | 38.88      | Average  | 54             | Pass    |
| NVNT      | BLE 1M | 2480            | Ant1    | 2483.5          | -49.66      | 2          | -                | 47.6       | Peak     | 74             | Pass    |
| NVNT      | BLE 1M | 2480            | Ant1    | 2483.5          | -57.62      | 2          | 0.59             | 40.23      | Average  | 54             | Pass    |
| NVNT      | BLE 1M | 2480            | Ant1    | 2485.312        | -43.56      | 2          | -                | 53.7       | Peak     | 74             | Pass    |
| NVNT      | BLE 1M | 2480            | Ant1    | 2489.104        | -57.1       | 2          | 0.59             | 40.75      | Average  | 54             | Pass    |
| NVNT      | BLE 1M | 2480            | Ant1    | 2500            | -49.82      | 2          | -                | 47.44      | Peak     | 74             | Pass    |
| NVNT      | BLE 1M | 2480            | Ant1    | 2500            | -58.02      | 2          | 0.59             | 39.83      | Average  | 54             | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

## Restrict Band NVNT BLE 1M 2402MHz Ant1 Peak

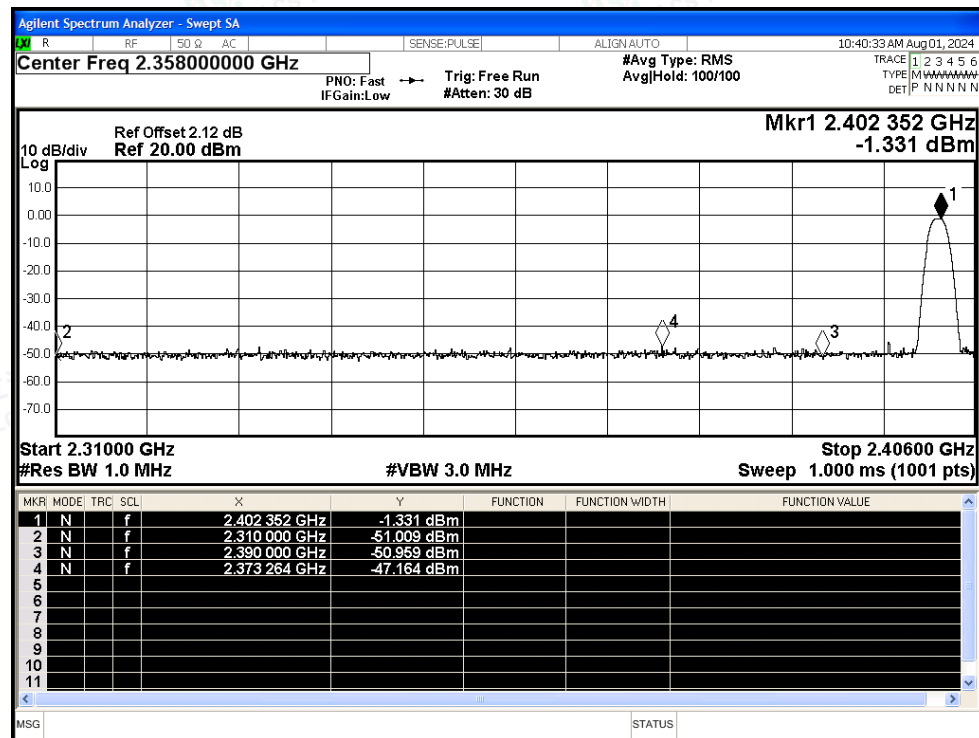

## Restrict Band NVNT BLE 1M 2402MHz Ant1 Average

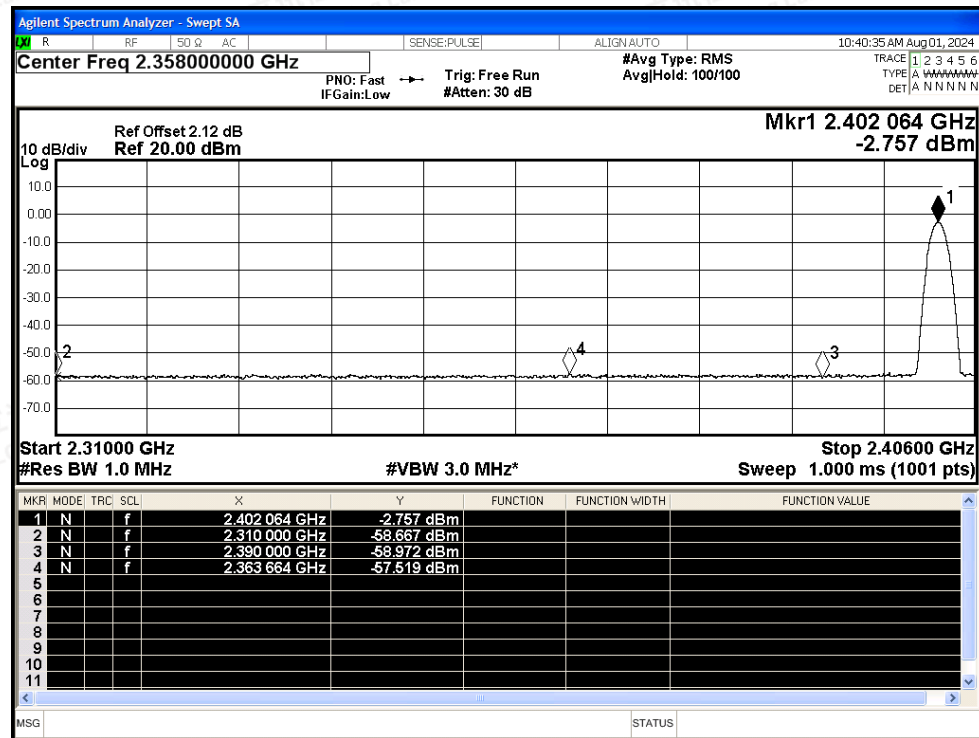

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT BLE 1M 2480MHz Ant1 Peak

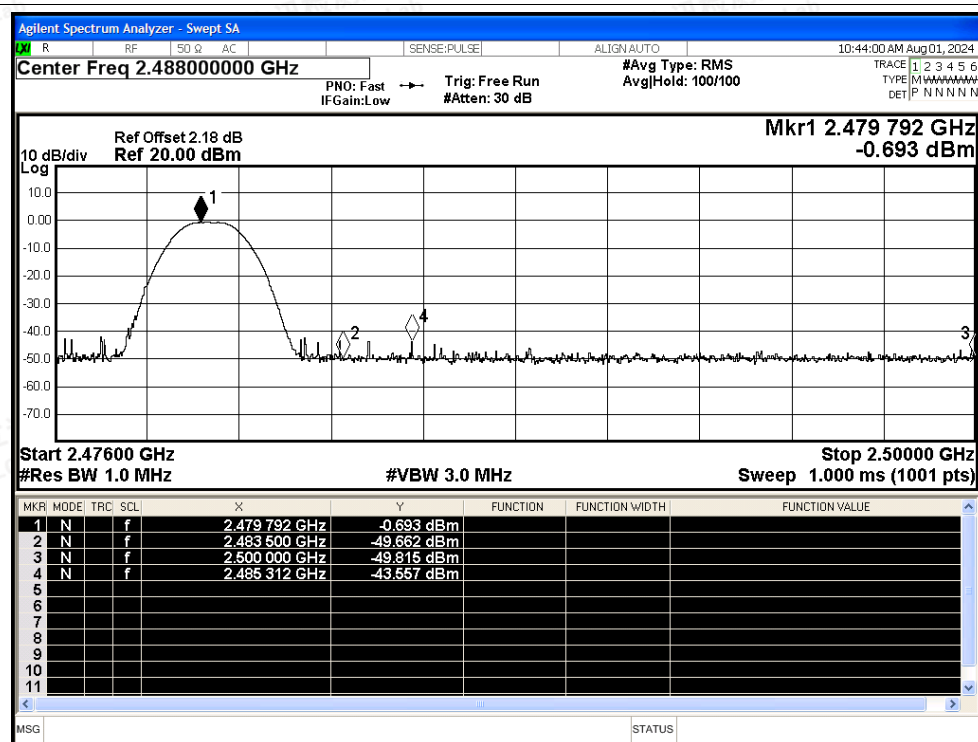

## Restrict Band NVNT BLE 1M 2480MHz Ant1 Average

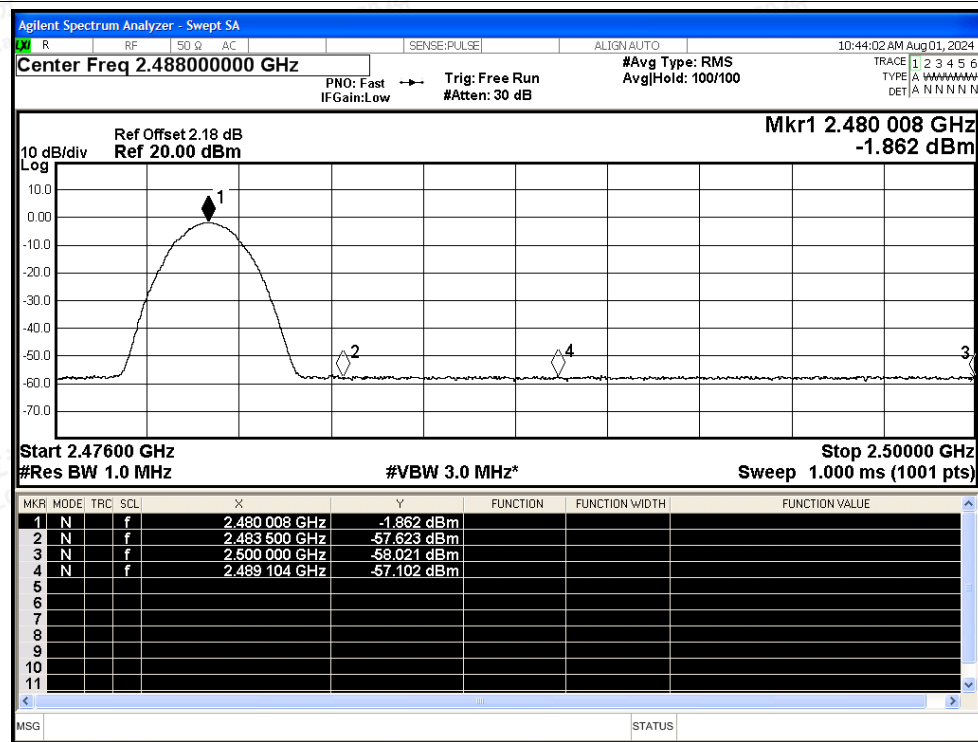

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity