


BARK COLLAR

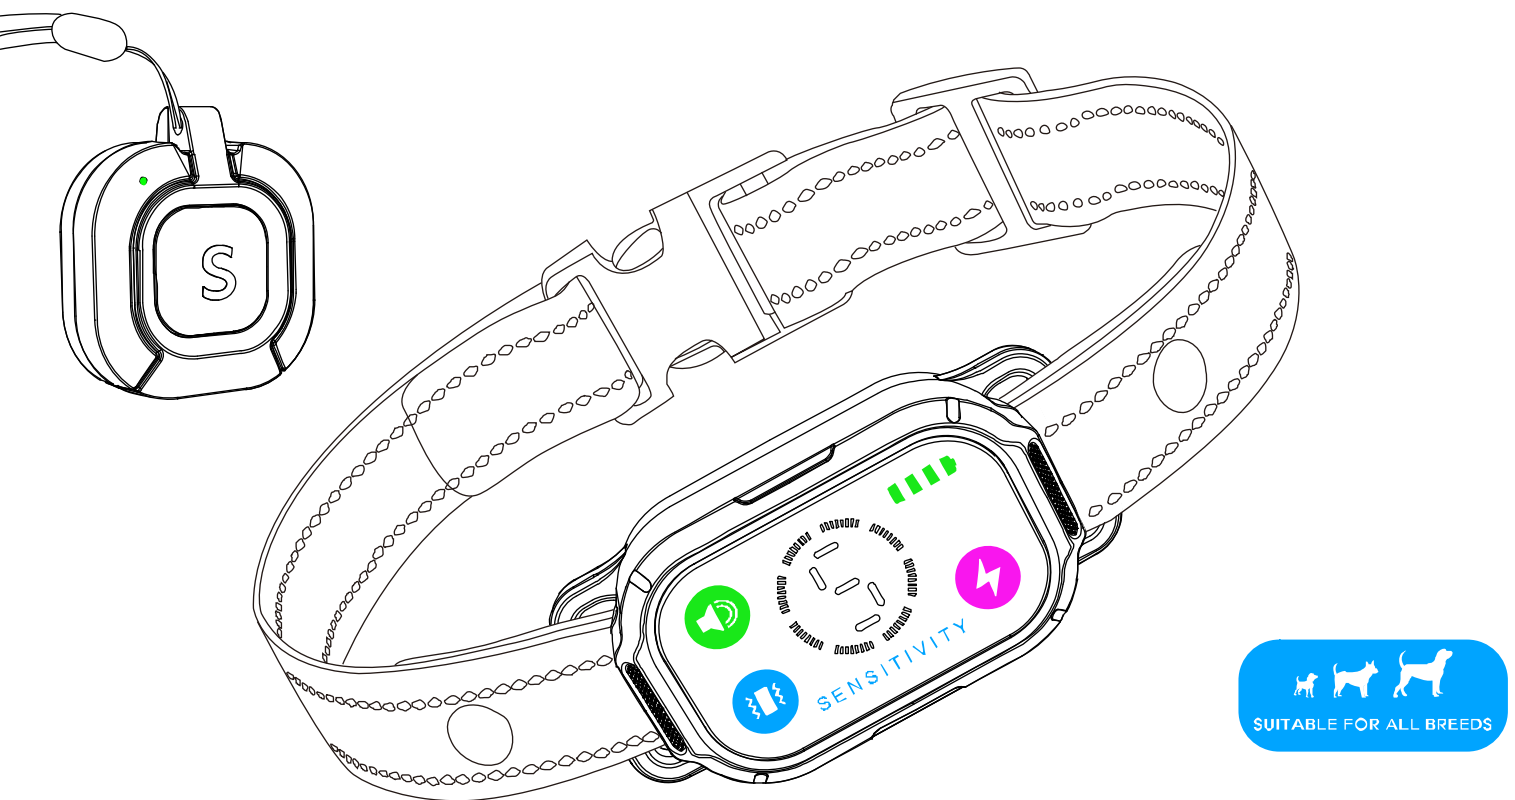


SUITABLE FOR ALL BREEDS

USER MANUAL

MODEL: S9

Please read the operating instructions carefully before using the product. Pay special attention to all warnings and safety instructions. Keep this manual for later reference.

Important Safety Information



NOT for
aggressive dogs!




For dogs over 6 months



Keep out reach of Children!
For DOG use only!

- DO NOT leave the collar on the dog for more than 12 hours per day.
- When possible, re-position the collar on the dog's neck every 1 to 2 hours.
- Check the fit to prevent excessive pressure; follow the instructions in this manual.
- DO NOT connect an extra leash to the collar, which will cause excessive pressure on the contacts.
- Clean the contact area on your dog's neck and the spring prongs of the collar with a damp cloth every week.

Product Information




Bark Collar



Remote Tag




User Manual





Magnetic
Charging Cable




Test Bulb




Wrist Strap

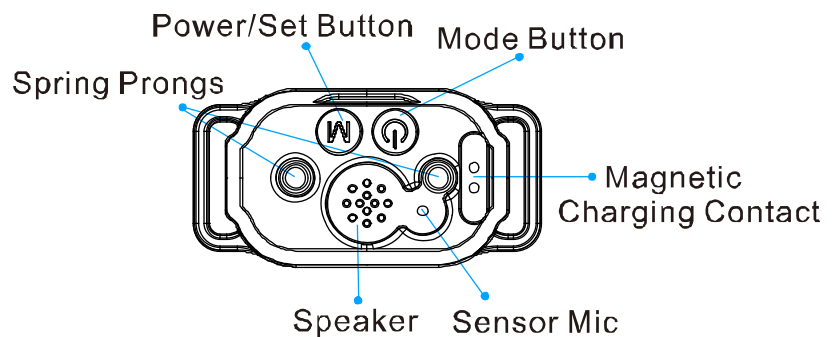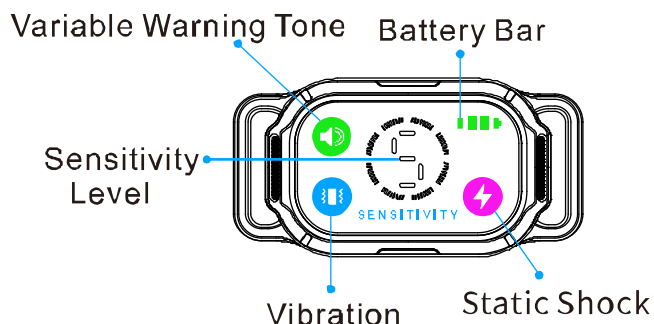

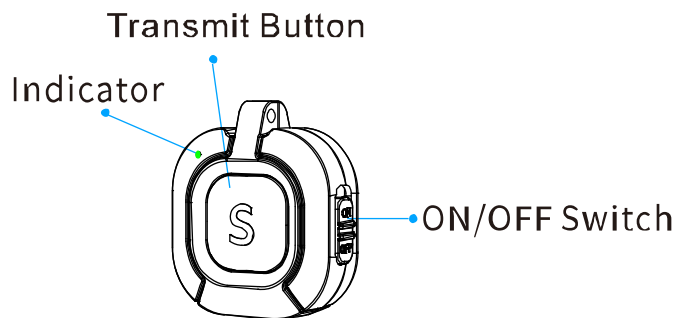

Test The Product

1A. Charge Bark Control Collar before use.

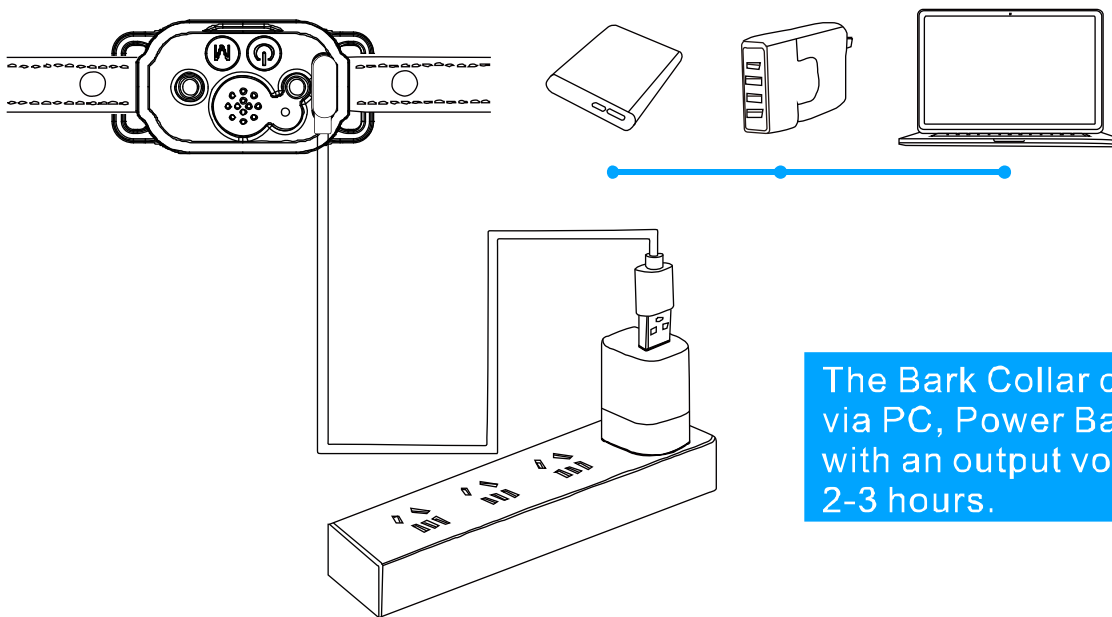

The Bark Collar can be charged via PC, Power Bank or Charger with an output voltage of 5V for 2-3 hours.


Description of Charging

-  When the Bark Collar is on charge, the Battery Bar blinks from left to right and the Indicator blinks fast.
-  When the Bark Collar is fully charged, Battery Bar stop blinking and the Indicator becomes solid.
-  A Beeping will be delivered if the Bark Collar is not on charge with a 5V-rated charger.

Note:

1. Make sure to use a 5V-rated charger to charge the Bark Collar.
2. Use the magnetic charging cable in the package when charging. Other charging cables may not be suitable for this Bark Collar and may cause electric damage.
3. The charger, power bank and other charging devices shown in the above picture are not included in the box.

1B. Power on the Bark Collar

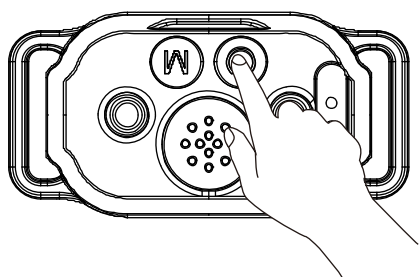

Press and hold the Power Button for 3 seconds to power it on.




The display will turn on with a vibration /beeping.

1C. Set the Bark Collar to Test Mode

Set the Bark Collar to Test Mode by pressing the Power/Set Button until the display shows 0.

After that, imitate a dog bark towards the Sensor Mic located at the back of the Bark Collar.

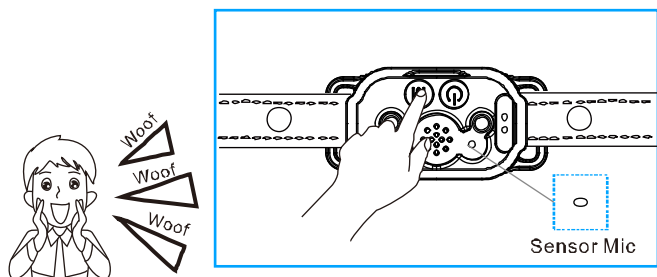


- Press the Power/Set Button to get to the Test Mode, and make sure the digit shows 0 before the test.

1D. The Response of the Bark Collar in the Test Mode



When the Bark Collar is set to the Test Mode, no matter what mode it is in, it will deliver a Tone, a Vibration and a Static Shock after you imitate a dog bark towards the Sensor Mic.

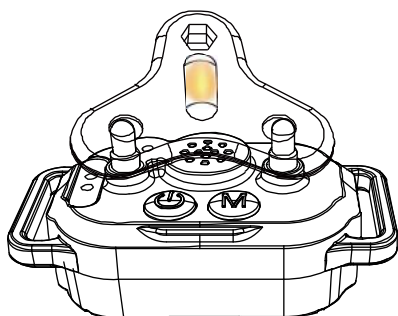


Hold the Test Bulb Tool on the Spring Prongs when test the shock function.


If the Bark Collar responds as described above, you've succeeded in setting up the Bark Collar properly.

How to Set the Automatic Modes?

The following instruction will guide you on how to switch modes.

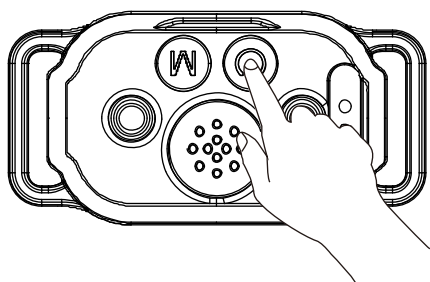

1. Power on the Bark Collar by pressing and holding the Power/Set Button for 3 seconds.

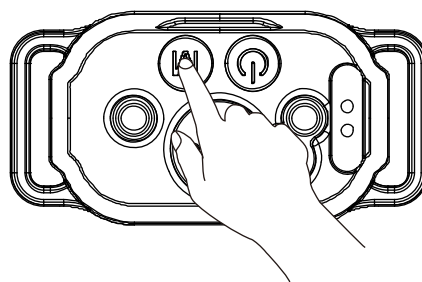

2. Press the Mode Button to switch modes, the mode icons will be changed.


3. Four Main Training Modes:

 Variable Warning Tone Mode 6 Variable Warning Tone of different frequencies in 6 steps.	 Vibration Mode 3 different levels of Vibration in 3 steps.
 Variable Warning Tone + Vibration Mode 6 Variable Warning Tone+3 different levels of Vibration Working collaboratively in 6 steps.	 Variable Warning Tone + Vibration + Static Shock Mode 6 Variable Warning Tone+High level Vibration+6 level Static Shock working collaboratively in 6 steps.


How to Use Remote Tag?

Usually the Automatic Modes can stop the dog barking. With the Remote Tag, you can manually stop the excessive barking in some situations or from dogs with behavior issues and not well-trained. Use it only when necessary.


1. Slide to Power On the Remote Tag.



2. Press the Transmit Button on the Remote Tag till the green indicator lights up and then release. The Bark Collar will deliver a Tone + Vibration.

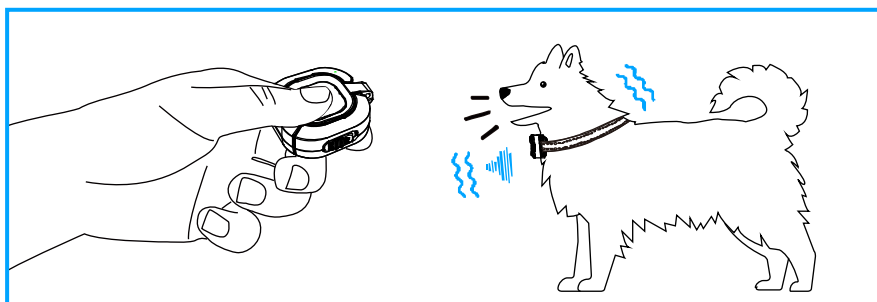


3. Press and hold the Transmit Button for 1.5 seconds, the product will activate Tone+Vibration indicated by green indicator, after which the Static Shock +Tone will be activated indicated by the red indicator.

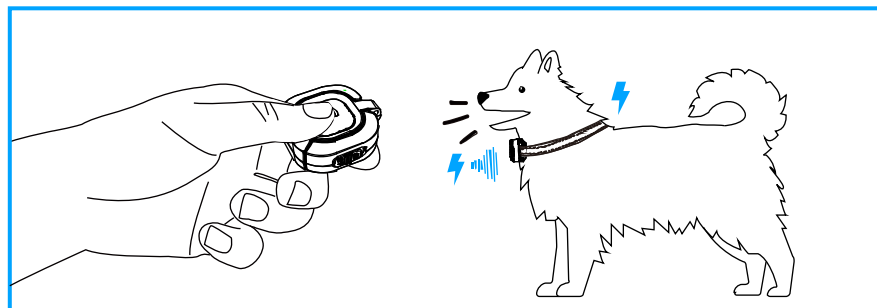

How to Pair the Remote Tag to the Bark Collar?

In case the Bark Collar is not responding to the Remote Tag, please follow these steps to pair them up:

1. Press and hold the Mode Button on the Bark Collar for 3 seconds to enter the Pairing Mode. You will hear a Beeping tone and the Display will light up. You will now have 10 seconds to complete the pairing.
2. Press the Transmit Button on the Remote Tag. The Bark Collar will beep 3 times and respond correspondingly.

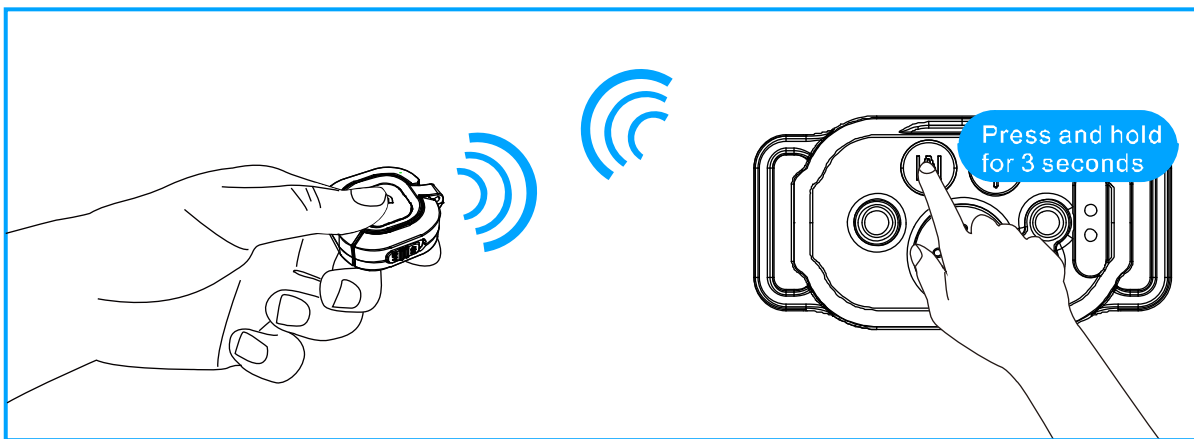

Tips:


The Bark Collar is paired up to the Remote Tag by factory default setting. If you can not pair your device successfully, it may be due to signal interference. Please try pairing again in a different location or contact our service center.

How to Replace A New Battery


The Remote Tag comes with a 3V lithium coin cell battery (CR2032) installed.

If indicator on Remote Tag is not responding, you will need to purchase a new battery and replace it by yourself.


[Here are instructions for coin cell battery replacement.](#)

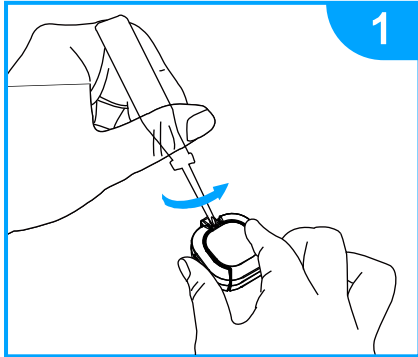


1. Use a Phillips Screwdriver to disassemble the Remote Tag.

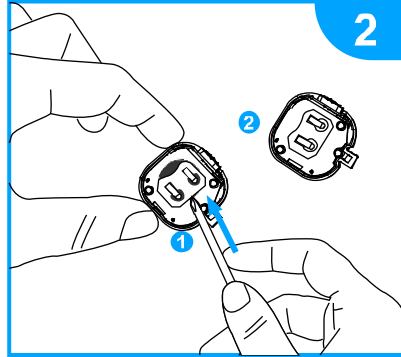

2. Take out the old battery from the battery holder.

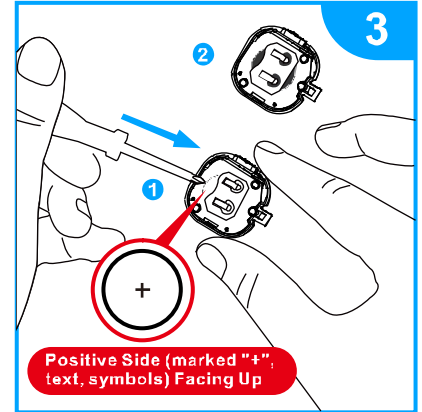


3. Prepare a new battery, then install it into the battery holder.
 Note: 1. The new battery is not included in the package, you need to buy it yourself.
 2. Install the coin battery with the positive side (marked "+", text, symbols) facing up to prevent damage to the Remote Tag.

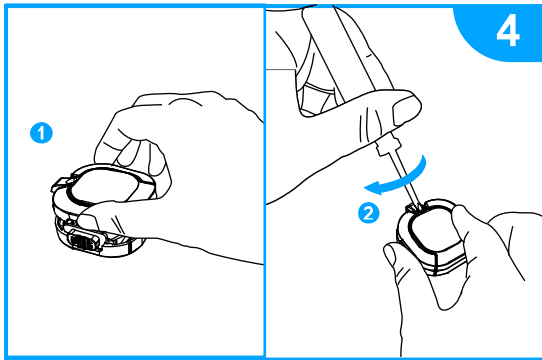

4. Use a Phillips Screwdriver to assemble the Remote Tag.

Put the Bark Collar on Your Dog

Note: have a look if you have a small dog!

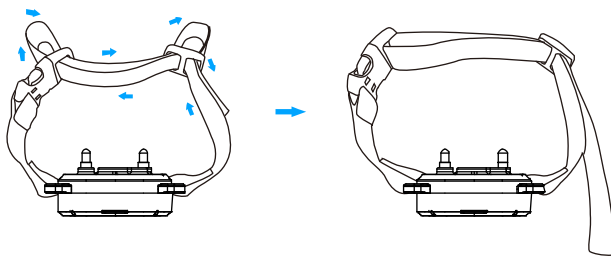

Please ensure to fit the Bark Collar snugly, yet loose enough to allow one finger to fit between the strap and your dog's neck.



Great! Now you have successfully put the Bark Collar on your dog and it's ready for training!

Display & Indicator

Display on Bark Collar

Modes Icons



Variable Warning Tone



Vibration



Static Shock

Protection Mode



Product is in 30 seconds of protection period.

Battery Bar



The Battery Bar indicates battery status.

Sensitivity Level




Adjust the Sensitivity Level from 1-5 by pressing the Power On/Off Button (Level 5 is the most sensitive while level 1 is the least sensitive)

Test Mode




When the Bark Collar is set on Test Mode, the digit shows 0 and then will show 5 after the test is completed, or if the test is not operated within 5 seconds.

Indicator on Remote Tag




1. Press the Transmit Button, the green indicator will light up.



2. Press and hold the Transmit Button, the green indicator will light up first, followed by the red indicator.

How the Bark Collar Works?

1. Automatic Modes:

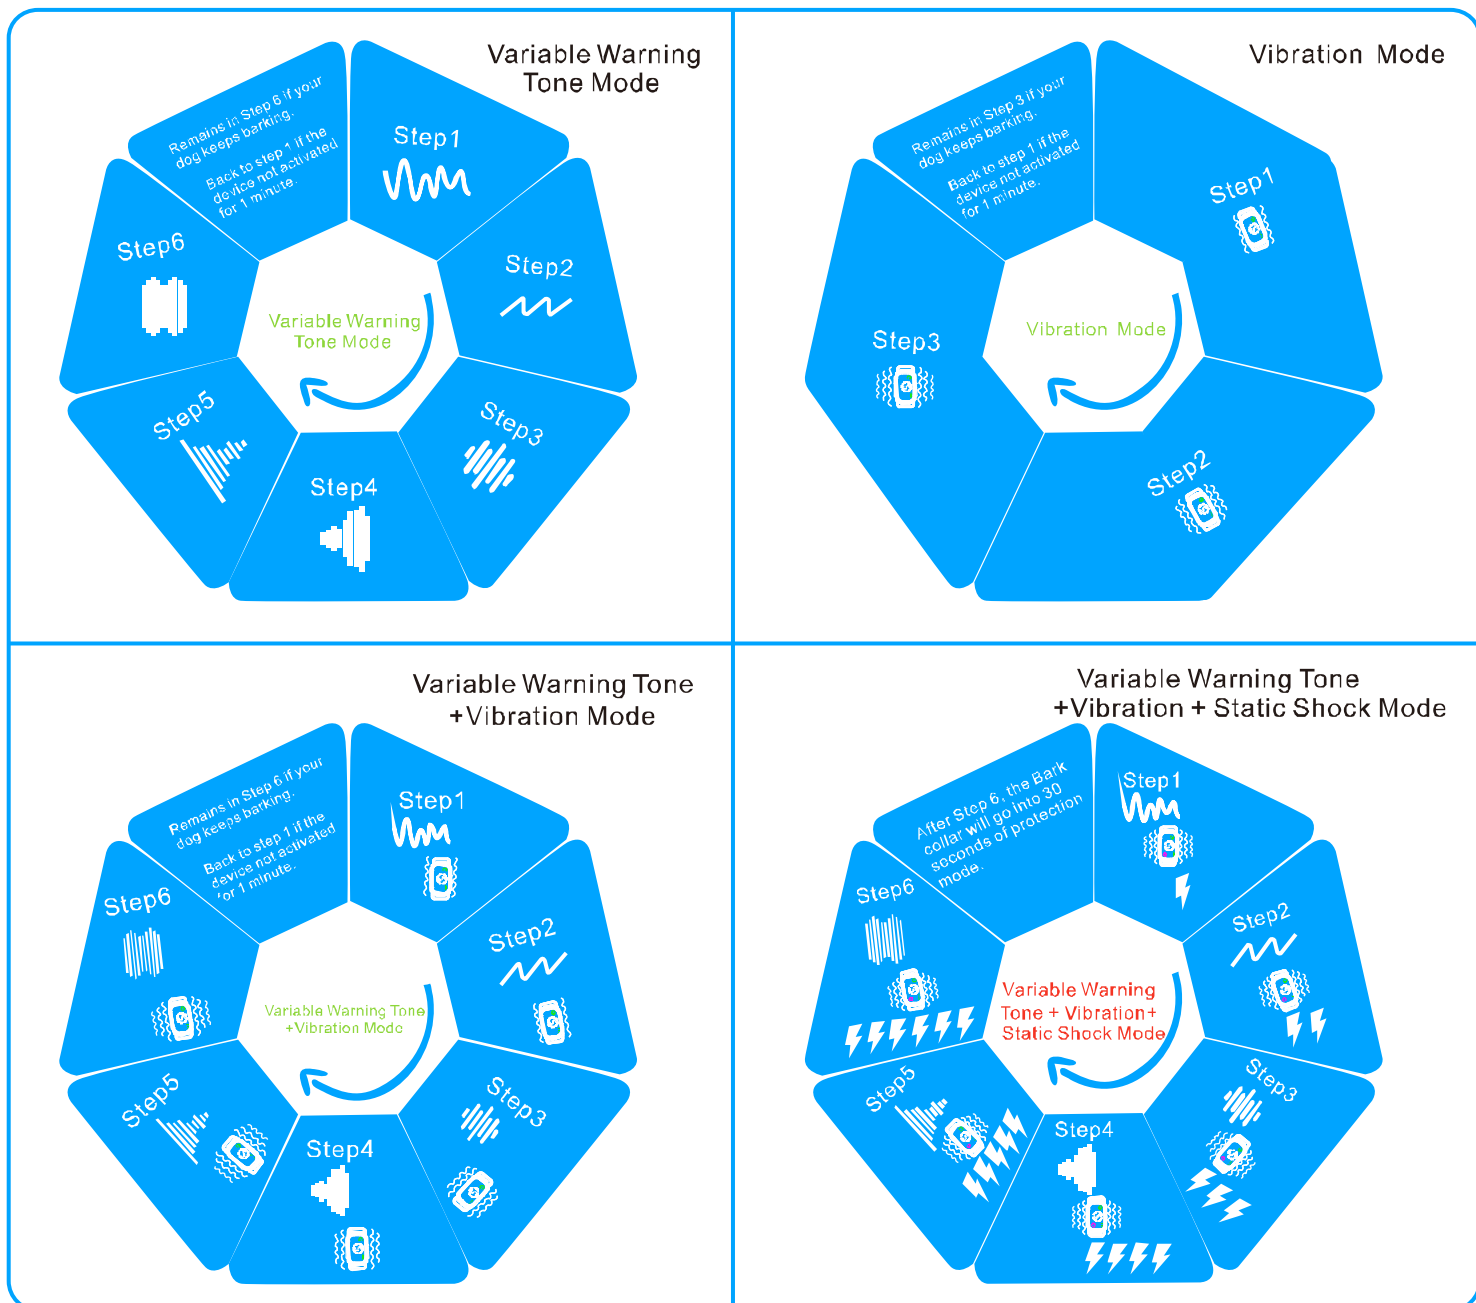

Icon Description:





NOTES:

- 1.The Bark Collar will go to the next step if your dog keeps barking within 1 minute.
- 2.The Bark Collar will automatically go back to Step 1 if it is not activated within 1 minute.

2. Manual Modes:

Press Transmit Button: Tone+Vibration;

Press & Hold Transmit Button for 1.5s: Tone+Vibration; Static Shock +Tone

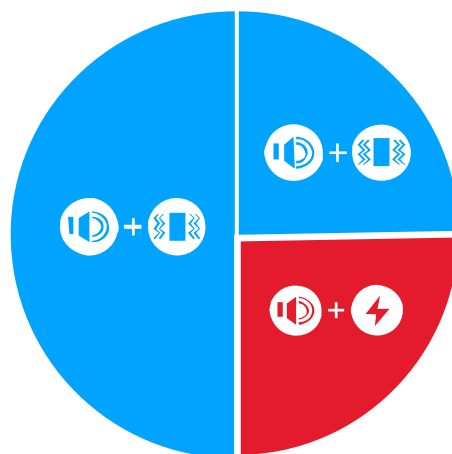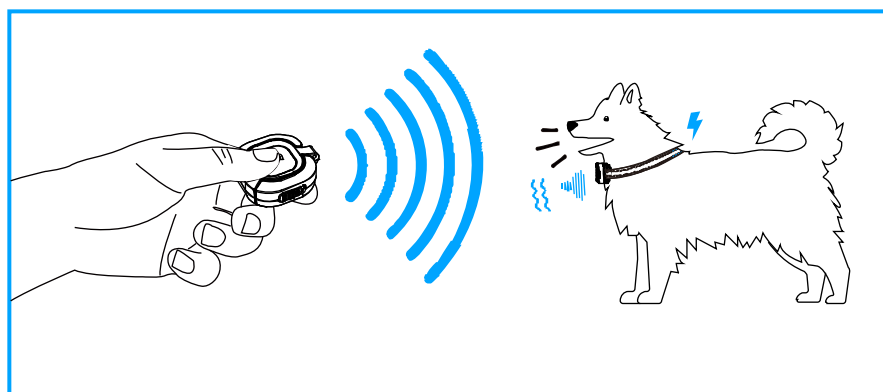

Frequently Asked Questions Answers

Q: Why doesn't the product work when the dog barks?

A: Please first ensure to fit the product snugly, yet loose enough to allow one finger to fit between the strap and your pet's neck. Some dogs has weak barking, in this case you will need to level up the sensitivity level. Thick coat on the neck area may also have small chance to decrease the sensing from the barking, trim the coat near the area where you place the product.

Q: Why is the product triggered sometimes in a noisy environment though the dog isn't barking?

A: Though we have optimized the barking detection to the best, some environment noises may have similar frequency to barking, which may have small chance to activate the product. Please lower the sensitivity level.

Q: Can I use the product when there are other dogs playing around?

A: Dogs will bark when playing and get excited, for the comfort and safety of your pet, we don't suggest using this product in such environment.

Q: How do I know if I can use this product for my pet?

A: The product is designed for healthy dogs over 6 months old, weighing no less than 8 pounds.

Most importantly, this product cannot be used on unhealthy or aggressive dogs, and if you are unsure whether this product is appropriate for your pet, please consult your veterinarian or a certified trainer.

Q: Can this product stop my dog's howl?

A: No, this Bark Control Collar is designed to detect the barking only. It cannot detect or stop the howling.

Q: Can I charge this product with any type of charger?

A: No, you are suggested to charge this product with charger of 5V output voltage, because charger with output voltage of 9V or 12V may cause damage to the product. The product will stop charging automatically if input voltage becomes too high and the power indicator turns red.

Q: Will my dog stop barking completely?

A: The Bark Control Collar effectively and humanely stops all barking when it is worn. It should only be worn during periods of unwanted barking.

Q: Is the Bark Control Collar safe and humane?

A: Yes. The Bark Control Collar is designed to get your dog's attention, not to punish him. However, the initial Static Shock correction may startle your dog.

Q: When should I use the remote tag?

A: Use the remote tag to manually stop the barking when you feel the automatic modes cannot avoid the excessive barking.

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- ◆ Reorient or relocate the receiving antenna.
- ◆ Increase the separation between the equipment and receiver.
- ◆ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ◆ Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement.
The device can be used in portable exposure condition without restriction

Model:S9
Version:1.0
Made in P.R.C
303.S9NNN-8131