FCC PART 24TEST REPORT
Part 24 Subpart E

Report Reference No.....: HK2011193870-1E

FCC ID.....: 2AYD7-INB1

Compiled by
(position+printed name+signature)..: File administrators Gary Qian

Supervised by
(position+printed name+signature)..: Technique principal Eden Hu

Approved by
(position+printed name+signature)..: Manager Jason Zhou

Date of issue.....: Dec. 24, 2020

Testing Laboratory Name .....: **Shenzhen HUAK Testing Technology Co., Ltd.**

Address .....: 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao' an District, Shenzhen,China

Applicant's name.....: **igloocompany Pte. Ltd.**

Address .....: 67 Ayer Rajah Crescent #06-14/21, Singapore 139950

Test specification .....**:**

Standard .....: **FCC CFR Title 47 Part 2, Part 24E**

TRF Originator.....: Shenzhen HUAK Testing Technology Co., Ltd.

Shenzhen HUAK Testing Technology Co., Ltd.All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd.as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd.takess no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description .....: Smart IoT Deadbolt

Trade Mark .....: N/A

Manufacturer.....: **igloocompany Pte. Ltd.**

Model/Type reference.....: INB1

Listed Models .....: N/A

Modulation Type .....: QPSK, 16QAM

Rating .....: DC 6V from Battery

Hardware version .....: V1.06

Software version.....: V1.06

Result.....: **PASS**

TEST REPORT

Test Report No. :	HK2011193870-1E	Dec. 24, 2020 Date of issue

Equipment under Test	:	Smart IoT Deadbolt
Model /Type	:	INB1
Listed Models	:	N/A
Applicant	:	**igloocompany Pte. Ltd.**
Address	:	67 Ayer Rajah Crescent #06-14/21, Singapore 139950
Manufacturer	:	**igloocompany Pte. Ltd.**
Address	:	67 Ayer Rajah Crescent #06-14/21, Singapore 139950

Test Result:	**PASS**

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revison History

Revision	Issue Date	Revisions	Revised By
V1.0	Dec. 24, 2020	Initial Issue	Jasou Zhou

Contents

1 TEST STANDARDS 5

2 SUMMARY 6

2.1 General Remarks 6
2.2 Product Description 6
2.3 Equipment under Test 6
2.4 Short description of the Equipment under Test (EUT) 6
2.5 Test frequency list 7
2.6 Normal Accessory setting 7
2.7 EUT configuration 7
2.8 Related Submittal(s) / Grant (s) 7
2.9 Modifications 7
2.10 GeneralTest Conditions/Configurations 8

3 TEST ENVIRONMENT 9

3.1 Address of the test laboratory 9
3.2 Environmental conditions 9
3.3 Test Description 9
3.4 Equipments Used during the Test 10

4 TEST CONDITIONS AND RESULTS 11

4.1 Output Power 11
4.2 Peak-to-Average Ratio (PAR) 17
4.3 Occupied Bandwidth and Emission Bandwidth 24
4.4 Band Edge compliance 31
4.5 Spurious Emssion on Antenna Port 38
4.6 Radiated Spurious Emssion 57
4.7 Frequency Stability 64

5 TEST SETUP PHOTOS OF THE EUT 66

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Part 24 :PUBLIC MOBILE SERVICES
TIA/EIA 603 D June 2010:Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.
47 CFR FCC Part 15 Subpart B: - Unintentional Radiators
FCC Part 2: FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS
KDB971168 D01:v02r02MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS
FCC KDB 971168D01 v03r01 Power Meas License Digital Systems

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Nov. 19, 2020
Testing commenced on	:	Nov. 19, 2020
Testing concluded on	:	Dec. 24, 2020

2.2 Product Description

The **igloocompany Pte. Ltd.**'s Model:MAS-501 or the "EUT" as referred to in this report; more general information as follows,for more details, refer to the user's manual of the EUT.

Name of EUT	Smart IoT Deadbolt
Model/Type reference:	INB1
List Model:	N/A
Power supply:	DC 6V from Battery
Modilation Type	QPSK,16QAM
Antenna Type	Internal Antenna
Antenna Gain	1dBi
Operation Frequency Band	LTE Band 2
Operation frequency	LTE Band 2: 1850~1910 MHz(TX), 1930~1990 MHz(RX)
LTE Release	R8
Extreme temp. Tolerance	-30°C to +70°C
Extreme vol. Limits	5.1VDC to 6.9VDC (nominal: 6VDC)

2.3 Equipment under Test

Power supply system utilised

Power supply voltage	:	○	120V/ 60 Hz	○	115V/60Hz
		○	12 V DC	○	24 V DC
		●	Other (specified in blank below)		

DC 6V from Battery

2.4 Short description of the Equipment under Test (EUT)

2.4.1 GeneralDescription

This is a Smart IoT Deadbolt .

For more details, refer to the user's manual of the EUT

2.5 Test frequency list

TX Channel Bandwidth	Frequency (MHz)	channel
1.4 MHz	1850.7	18607
	1880.0	18900
	1909.3	19193
3 MHz	1851.5	18615
	1880.0	18900
	1908.5	19185
5 MHz	1852.5	18625
	1880.0	18900
	1907.5	19175
10 MHz	1855.0	18650
	1880.0	18900
	1905.0	19150
15 MHz	1857.5	18675
	1880.0	18900
	1902.5	19125
20 MHz	1860.0	18700
	1880.0	18900
	1900.0	19100

2.6 Normal Accessory setting

Fully charged battery was used during the test.

2.7 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

○	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
○	Multimeter	Manufacturer :	/
		Model No. :	/

2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID:** 2AYD7-INB1 filing to comply with FCC Part 24, Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.

2.10 GeneralTest Conditions/Configurations

2.10.1 TestEnvironment

EnvironmentParameter	SelectedValuesDuringTests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	5.1V
	VN	6V
	VH	6.9V

NOTE:VL=lowerextreme testvoltageVN=nominalvoltage
VH=upperextreme testvoltageTN=normaltemperature

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen HUAK Testing Technology Co., Ltd.
1F, Building No. 13A, Zhonghaixin Science and Technology City, No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District, Shenzhen, Guangdong, China

3.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.3 Test Description

PCSBand (1850-1915MHz pairedwith 1930-1995MHz)

Test Item	FCCRuleNo.	Requirements	Verdict
Effective(Isotropic)RadiatedOutputPower	Part§2.1046, Part§24.232	EIRP ≤ 2W	Pass
Peak-AverageRatio	Part§2.1046, Part§24.232	FCC:Limit≤13dB	Pass
Bandwidth	Part§2.1049 RSS-133	OBW: Nolimit. EBW: Nolimit.	Pass
BandEdgesCompliance	Part§2.1051, Part§24.238	≤ -13dBm/1%*EBW, In1MHzbandsimmediatelyoutsideandadjacentto Thefrequency block.	Pass
SpuriousEmissionatAntennaTerminals	Part§2.1051, Part§24.238	≤-13dBm/1MHz, from9kHzto10thharmonicsbut outsideauthorized Operatingfrequency ranges.	Pass
Field Strengthof Spurious Radiation	Part§2.1053, Part§24.238	≤ -13dBm/1MHz.	Pass
Frequency Stability	Part§2.1055, Part§24.235	FCC:withinauthorizedfrequency block.	Pass
NOTE 1:For theverdict,the“N/A”denotes“not applicable”,the“N/T”denotes “nottested”.			

Remark:
1. The measurement uncertainty is not included in the test result.

3.4 Equipment Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	ENV216	R&S	HKE-059	Jun. 18, 2020	Jun. 17, 2021
LISN	R&S	ENV216	HKE-002	Jun. 18, 2020	Jun. 17, 2021
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Jun. 18, 2020	Jun. 17, 2021
Receiver	R&S	ESCI 7	HKE-010	Jun. 18, 2020	Jun. 17, 2021
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 18, 2020	Jun. 17, 2021
Horn antenna	Schwarzbeck	9120D	HKE-013	Jun. 18, 2020	Jun. 17, 2021
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Jun. 18, 2020	Jun. 17, 2021
Preamplifier	EMCI	EMC051845SE	HKE-015	Jun. 18, 2020	Jun. 17, 2021
Preamplifier	Agilent	83051A	HKE-016	Jun. 18, 2020	Jun. 17, 2021
Temperature and humidity meter	Boyang	HTC-1	HKE-075	Jun. 18, 2020	Jun. 17, 2021
High pass filter unit	Tonscend	JS0806-F	HKE-055	Jun. 18, 2020	Jun. 17, 2021
RF cable	Times	1-40G	HKE-034	Jun. 18, 2020	Jun. 17, 2021
Power meter	Agilent	E4419B	HKE-085	Jun. 18, 2020	Jun. 17, 2021
Power Sensor	Agilent	E9300A	HKE-086	Jun. 18, 2020	Jun. 17, 2021
Wireless Communication Test Set	R&S	CMW500	HKE-026	Jun. 18, 2020	Jun. 17, 2021
Wireless Communication Test Set	R&S	CMU200	HKE-029	Jun. 18, 2020	Jun. 17, 2021
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	Jun. 18, 2020	Jun. 17, 2021

4 TEST CONDITIONS AND RESULTS

4.1 Output Power

4.1.1 Coducted Output Power

TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

TEST CONFIGURATION

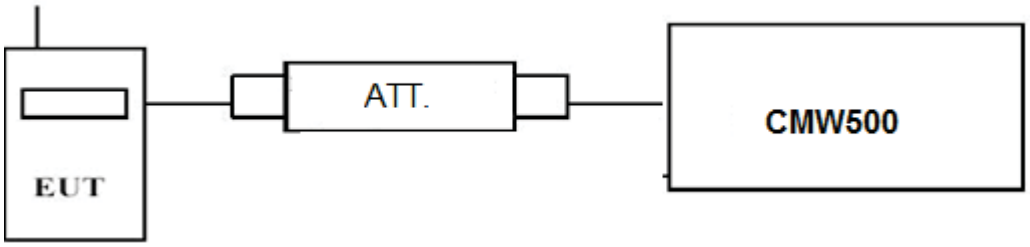

TEST PROCEDURE

Conducted Power Measurement:

a) Place the EUT on a bench and set it in transmitting mode.
b) Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
c) EUT Communicate with CMW500 then selects a channel for testing.
d) Add a correction factor to the display CMW500, and then test.

TEST RESULTS

Remark:

1. *We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2;*

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Burst Average Power [dBm]	
			QPSK	16QAM
1.4 MHz	1850.7	1 RB low	24.34	23.49
		1 RB high	24.08	23.34
		50% RB mid	24.30	22.86
		100% RB	24.31	22.98
	1880.0	1 RB low	23.97	23.16
		1 RB high	23.77	23.25
		50% RB mid	23.84	22.71
		100% RB	24.12	22.91
	1909.3	1 RB low	23.97	23.58
		1 RB high	23.93	23.55
		50% RB mid	23.83	22.70
		100% RB	24.13	22.79
3 MHz	1851.5	1 RB low	24.12	23.32
		1 RB high	24.06	23.36
		50% RB mid	23.28	22.55
		100% RB	23.45	22.65
	1880.0	1 RB low	23.71	23.00
		1 RB high	23.60	22.81
		50% RB mid	22.97	22.12
		100% RB	22.99	22.19
	1908.5	1 RB low	23.61	22.99

		1 RB high	23.82	22.92
		50% RB mid	22.99	22.16
		100% RB	22.93	22.28
5 MHz	1852.5	1 RB low	24.37	22.90
		1 RB high	24.34	22.65
		50% RB mid	23.30	22.42
		100% RB	23.41	22.44
	1880.0	1 RB low	23.87	22.93
		1 RB high	23.75	23.16
		50% RB mid	23.03	22.05
		100% RB	22.91	22.23
	1907.5	1 RB low	23.99	22.39
		1 RB high	24.02	22.19
		50% RB mid	23.06	22.05
		100% RB	22.89	22.07
10 MHz	1855.0	1 RB low	24.21	23.07
		1 RB high	24.34	23.15
		50% RB mid	23.20	22.45
		100% RB	23.41	22.58
	1880.0	1 RB low	23.93	23.59
		1 RB high	23.66	23.32
		50% RB mid	23.53	22.54
		100% RB	23.36	22.58
	1905.0	1 RB low	24.36	23.18
		1 RB high	24.27	23.10
		50% RB mid	23.42	22.40
		100% RB	23.30	22.37
15 MHz	1857.5	1 RB low	23.72	23.16
		1 RB high	23.63	22.72
		50% RB mid	22.97	22.97
		100% RB	22.83	23.14
	1880.0	1 RB low	23.72	23.49
		1 RB high	23.82	23.44
		50% RB mid	23.28	23.46
		100% RB	23.62	23.41
	1902.5	1 RB low	23.83	22.62
		1 RB high	23.94	22.61
		50% RB mid	22.51	22.83
		100% RB	22.78	22.61
20 MHz	1860.0	1 RB low	24.12	22.89
		1 RB high	24.31	22.74
		50% RB mid	23.19	22.55
		100% RB	23.14	22.38
	1880.0	1 RB low	24.35	23.31
		1 RB high	24.05	23.75
		50% RB mid	22.96	22.13
		100% RB	23.07	22.09
	1900.0	1 RB low	24.01	22.55
		1 RB high	24.27	23.21
		50% RB mid	23.46	22.66
		100% RB	23.46	22.53

4.1.2. Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT.
Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p.

TEST CONFIGURATION

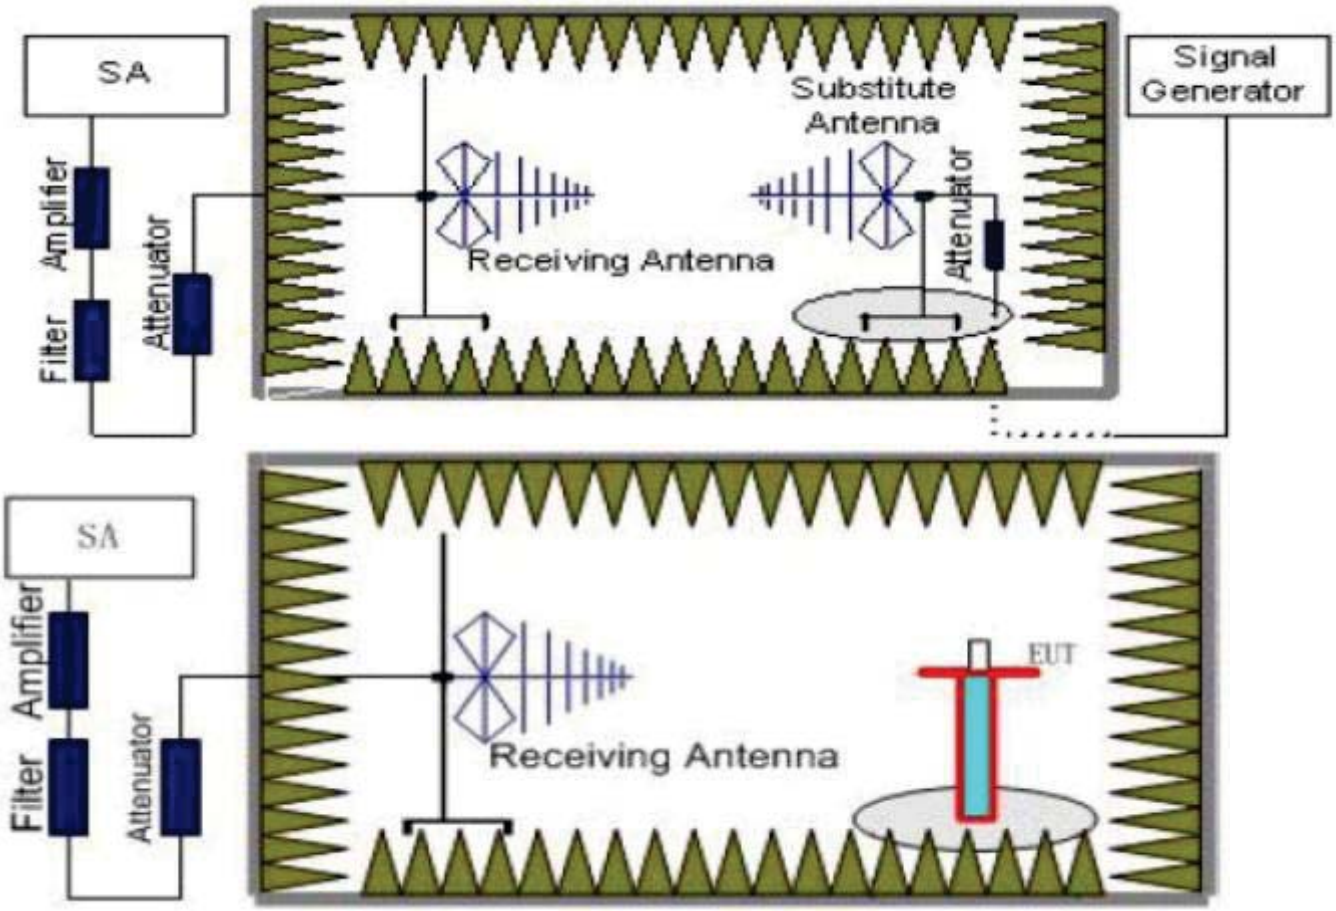

TEST PROCEDURE

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna.In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest isconnected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}) ,the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
   The measurement results are obtained as described below:
   Power(EIRP)=P_{Mea}- P_{Ag} - P_{cl}+ G_a
   We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below:
   Power(EIRP)=P_{Mea}- P_{cl}+ G_a
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST RESULTS

Radiated Measurement:

Remark:
1. *We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.*
2. *EIRP=P_{Mea}(dBm)-P_{cl}(dB)+P_{Ag}(dB)+G_a(dBi)*
3. *We measured both Horizontal and Vertical direction, recorded worst case direction.*

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-14.41	3.41	10.24	33.60	26.02	33.01	6.99	V
1880.0	-15.91	3.49	10.24	33.60	24.44	33.01	8.57	V
1909.3	-15.39	3.55	10.23	33.60	24.89	33.01	8.12	V
1850.7	-14.72	3.41	10.24	33.60	25.71	33.01	7.30	H
1880.0	-16.14	3.49	10.24	33.60	24.21	33.01	8.80	H
1909.3	-15.48	3.55	10.23	33.60	24.80	33.01	8.21	H

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-14.92	3.41	10.24	33.60	25.51	33.01	7.50	V
1880.0	-15.43	3.49	10.24	33.60	24.92	33.01	8.09	V
1908.5	-15.92	3.55	10.23	33.60	24.36	33.01	8.65	V
1851.5	-14.33	3.41	10.24	33.60	26.10	33.01	6.91	H
1880.0	-15.55	3.49	10.24	33.60	24.80	33.01	8.21	H
1908.5	-14.82	3.55	10.23	33.60	25.46	33.01	7.55	H

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-14.99	3.41	10.24	33.60	25.44	33.01	7.57	V
1880.0	-15.99	3.49	10.24	33.60	24.36	33.01	8.65	V
1907.5	-15.31	3.55	10.23	33.60	24.97	33.01	8.04	V
1852.5	-14.89	3.41	10.24	33.60	25.54	33.01	7.47	H
1880.0	-15.76	3.49	10.24	33.60	24.59	33.01	8.42	H
1907.5	-14.68	3.55	10.23	33.60	25.60	33.01	7.41	H

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-14.82	3.41	10.24	33.60	25.61	33.01	7.40	V
1880.0	-15.81	3.49	10.24	33.60	24.54	33.01	8.47	V
1905.0	-15.98	3.55	10.23	33.60	24.30	33.01	8.71	V
1855.0	-14.21	3.41	10.24	33.60	26.22	33.01	6.79	H
1880.0	-15.42	3.49	10.24	33.60	24.93	33.01	8.08	H
1905.0	-15.12	3.55	10.23	33.60	25.16	33.01	7.85	H

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-15.15	3.41	10.24	33.60	25.28	33.01	7.73	V
1880.0	-15.23	3.49	10.24	33.60	25.12	33.01	7.89	V
1902.5	-16.16	3.55	10.23	33.60	24.12	33.01	8.89	V
1857.5	-14.46	3.41	10.24	33.60	25.97	33.01	7.04	H
1880.0	-16.15	3.49	10.24	33.60	24.20	33.01	8.81	H
1902.5	-15.33	3.55	10.23	33.60	24.95	33.01	8.06	H

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-14.30	3.41	10.24	33.60	26.13	33.01	6.88	V
1880.0	-15.79	3.49	10.24	33.60	24.56	33.01	8.45	V
1900.0	-16.12	3.55	10.23	33.60	24.16	33.01	8.85	V
1860.0	-14.71	3.41	10.24	33.60	25.72	33.01	7.29	H
1880.0	-16.10	3.49	10.24	33.60	24.25	33.01	8.76	H
1900.0	-15.41	3.55	10.23	33.60	24.87	33.01	8.14	H

LTE FDD Band 2_Channel Bandwidth 1.4MHz_16QAM

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1850.7	-14.58	3.41	10.24	33.60	25.85	33.01	7.16	V
1880.0	-15.91	3.49	10.24	33.60	24.44	33.01	8.57	V
1909.3	-15.95	3.55	10.23	33.60	24.33	33.01	8.68	V
1850.7	-15.09	3.41	10.24	33.60	25.34	33.01	7.67	H
1880.0	-16.28	3.49	10.24	33.60	24.07	33.01	8.94	H
1909.3	-15.50	3.55	10.23	33.60	24.78	33.01	8.23	H

LTE FDD Band 2_Channel Bandwidth 3MHz_16QAM

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1851.5	-14.64	3.41	10.24	33.60	25.79	33.01	7.22	V
1880.0	-15.58	3.49	10.24	33.60	24.77	33.01	8.24	V
1908.5	-15.47	3.55	10.23	33.60	24.81	33.01	8.20	V
1851.5	-15.13	3.41	10.24	33.60	25.30	33.01	7.71	H
1880.0	-16.14	3.49	10.24	33.60	24.21	33.01	8.80	H
1908.5	-14.91	3.55	10.23	33.60	25.37	33.01	7.64	H

LTE FDD Band 2_Channel Bandwidth 5MHz_16QAM

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1852.5	-15.27	3.41	10.24	33.60	25.16	33.01	7.85	V
1880.0	-16.3	3.49	10.24	33.60	24.05	33.01	8.96	V
1907.5	-16.01	3.55	10.23	33.60	24.27	33.01	8.74	V
1852.5	-14.06	3.41	10.24	33.60	26.37	33.01	6.64	H
1880.0	-16.2	3.49	10.24	33.60	24.15	33.01	8.86	H
1907.5	-15.69	3.55	10.23	33.60	24.59	33.01	8.42	H

LTE FDD Band 2_Channel Bandwidth 10MHz_16QAM

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1855.0	-14.51	3.41	10.24	33.60	25.92	33.01	7.09	V
1880.0	-16.05	3.49	10.24	33.60	24.30	33.01	8.71	V
1905.0	-16.16	3.55	10.23	33.60	24.12	33.01	8.89	V
1855.0	-14.25	3.41	10.24	33.60	26.18	33.01	6.83	H
1880.0	-15.45	3.49	10.24	33.60	24.90	33.01	8.11	H
1905.0	-15.07	3.55	10.23	33.60	25.21	33.01	7.80	H

LTE FDD Band 2_Channel Bandwidth 15MHz_16QAM

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1857.5	-15.01	3.41	10.24	33.60	25.42	33.01	7.59	V
1880.0	-15.27	3.49	10.24	33.60	25.08	33.01	7.93	V
1902.5	-15.48	3.55	10.23	33.60	24.80	33.01	8.21	V
1857.5	-14.92	3.41	10.24	33.60	25.51	33.01	7.50	H
1880.0	-15.51	3.49	10.24	33.60	24.84	33.01	8.17	H
1902.5	-14.86	3.55	10.23	33.60	25.42	33.01	7.59	H

LTE FDD Band 2_Channel Bandwidth 20MHz_16QAM

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1860.0	-14.56	3.41	10.24	33.60	25.87	33.01	7.14	V
1880.0	-15.26	3.49	10.24	33.60	25.09	33.01	7.92	V
1900.0	-15.63	3.55	10.23	33.60	24.65	33.01	8.36	V
1860.0	-14.84	3.41	10.24	33.60	25.59	33.01	7.42	H
1880.0	-16.34	3.49	10.24	33.60	24.01	33.01	9.00	H
1900.0	-14.54	3.55	10.23	33.60	25.74	33.01	7.27	H

4.2 Peak-to-Average Ratio (PAR)

LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

TEST CONFIGURATION

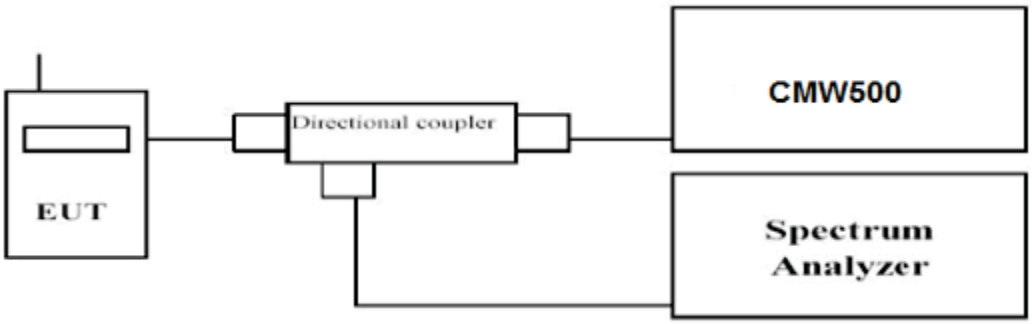

TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
   1). for continuous transmissions, set to 1 ms,
   2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

TEST RESULTS

Remark:

1. *We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.*

LTE FDD Band 2				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR(dB)	
			QPSK	16QAM
1.4 MHz	1850.7	*1RB#0*	8.47	9.59
	1880.0		9.78	9.10
	1909.3		8.51	9.01
3 MHz	1851.5	*1RB#0*	8.54	10.39
	1880.0		8.42	8.42
	1908.5		9.37	10.32
5 MHz	1852.5	*1RB#0*	9.56	9.53
	1880.0		9.37	9.23
	1907.5		9.67	9.62
10 MHz	1855.0	*1RB#0*	10.07	8.95
	1880.0		8.48	8.46
	1905.0		9.42	9.60
15 MHz	1857.5	*1RB#0*	10.42	8.65
	1880.0		8.39	8.43
	1902.5		9.91	9.83
20 MHz	1860.0	*1RB#0*	7.87	8.19
	1880.0		9.46	9.47
	1900.0		8.06	8.97

LTE FDD Band 2 – 1.4 MHz Channel BandwidthPAPR	
QPSK	16QAM
Low Channel	
1RB#0	1RB#0
Middle Channel	
1RB#0	1RB#0
High Channel	
1RB#0	1RB#0

LTE FDD Band 2–3MHz Channel BandwidthPAPR	
QPSK	16QAM
Low Channel	
1RB#0	1RB#0
Middle Channel	
1RB#0	1RB#0
High Channel	
1RB#0	1RB#0

LTE FDD Band 2–5MHz Channel BandwidthPAPR	
QPSK	16QAM
Low Channel	
1RB#0	1RB#0
Middle Channel	
1RB#0	1RB#0
High Channel	
1RB#0	1RB#0

LTE FDD Band 2–10MHz Channel BandwidthPAPR	
QPSK	16QAM
Low Channel	
1RB#0	1RB#0
Middle Channel	
1RB#0	1RB#0
High Channel	
1RB#0	1RB#0

LTE FDD Band 2– 15 MHz Channel BandwidthPAPR	
QPSK	16QAM
Low Channel	
1RB#0	1RB#0
Middle Channel	
	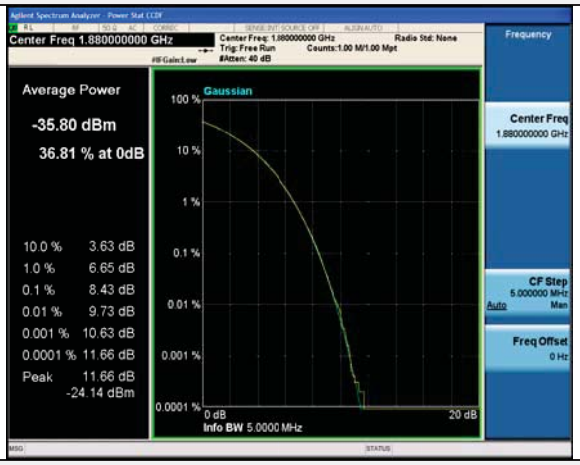
1RB#0	1RB#0
High Channel	
1RB#0	1RB#0

LTE FDD Band 2–20MHz Channel BandwidthPAPR	
QPSK	16QAM
Low Channel	
1RB#0	1RB#0
Middle Channel	
1RB#0	1RB#0
High Channel	
	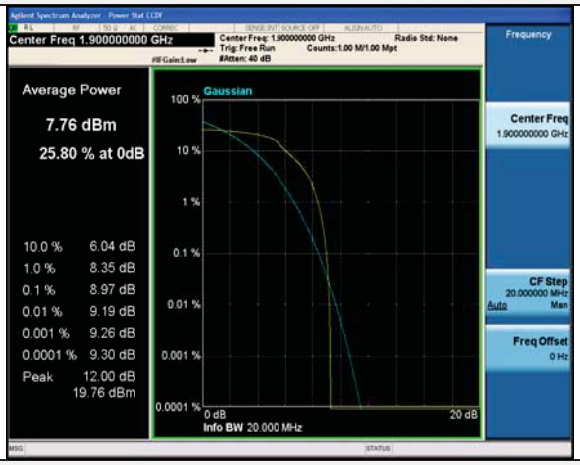
1RB#0	1RB#0

4.3 Occupied Bandwidth and Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

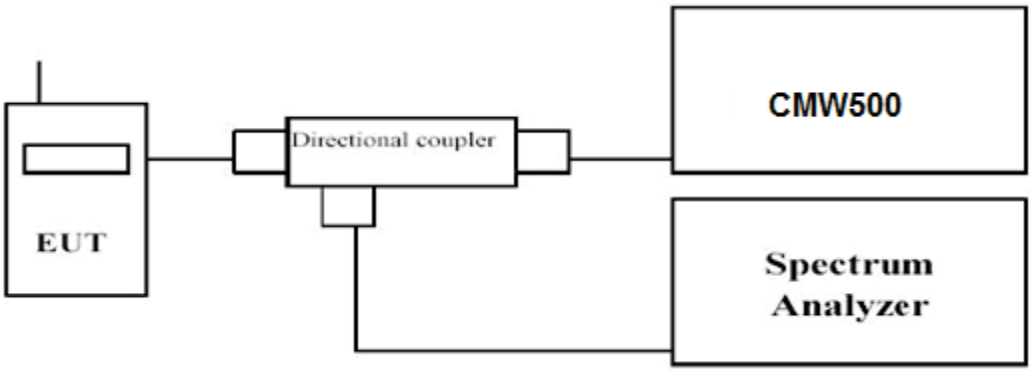

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.
Set RBWwas set to about 1% of emission BW, VBW≥3 times RBW.
-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth isthe delta frequency between the two points where the display line intersects the signal trace.

TEST RESULTS

Remark:

1. *We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.*

LTE FDD Band 2						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	99% Occupied bandwidth (MHz)	-26dBc Emission bandwidth (MHz)	99% Occupied bandwidth (MHz)	-26dBc Emission bandwidth (MHz)
			QPSK	QPSK	16QAM	16QAM
1.4 MHz	*6RB#0*	1850.7	1.0871	1.218	1.0886	1.230
		1880.0	1.0877	1.245	1.0870	1.227
		1909.3	1.0888	1.244	1.0863	1.243
3 MHz	*6RB#0*	1851.5	1.1064	1.256	1.1029	1.252
		1880.0	1.1048	1.247	1.1057	1.259
		1908.5	1.1052	1.273	1.1093	1.259
5 MHz	*6RB#0*	1852.5	1.1525	1.336	1.1545	1.333
		1880.0	1.1588	1.332	1.1544	1.333
		1907.5	1.1522	1.332	1.1540	1.332
10 MHz	*6RB#0*	1855.0	1.1690	1.352	1.1583	1.358
		1880.0	1.1647	1.360	1.1637	1.354
		1905.0	1.1519	1.341	1.1562	1.345
15 MHz	*6RB#0*	1857.5	1.4398	1.806	1.4299	1.800
		1880.0	1.4369	1.794	1.4347	1.794
		1902.5	1.4386	1.807	1.4382	1.807
20 MHz	*6RB#0*	1860.0	1.7605	2.279	1.7694	2.278
		1880.0	1.7644	2.302	1.7832	2.282
		1900.0	1.7821	2.300	1.7648	2.305

LTE FDD Band 2 – 1.4 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth	
QPSK	16QAM
Low Channel	
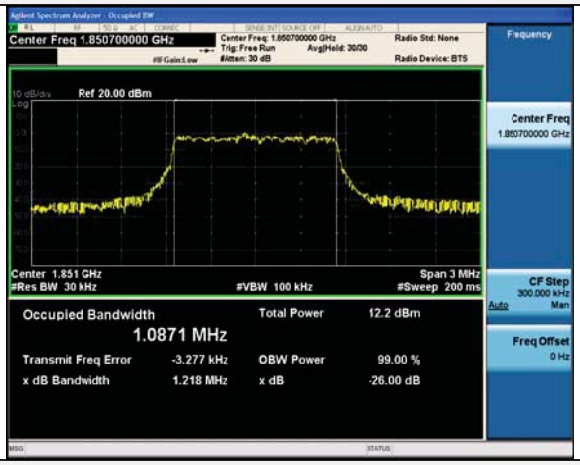	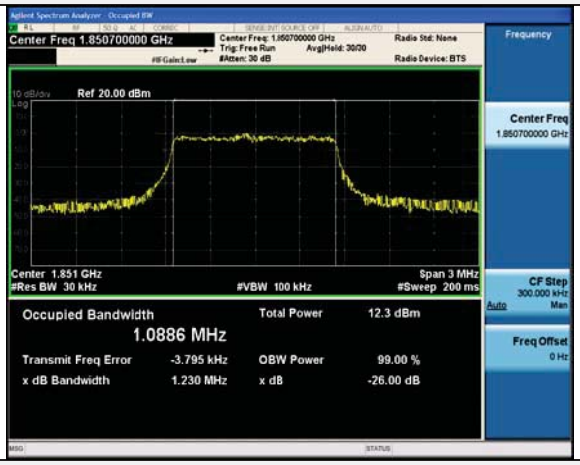
6RB#0	6RB#0
Middle Channel	
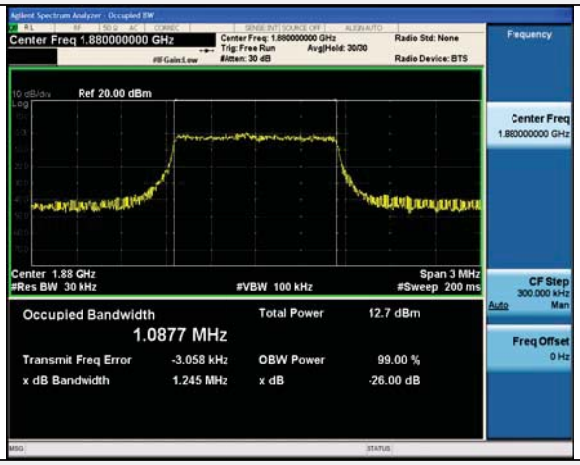	
6RB#0	6RB#0
High Channel	
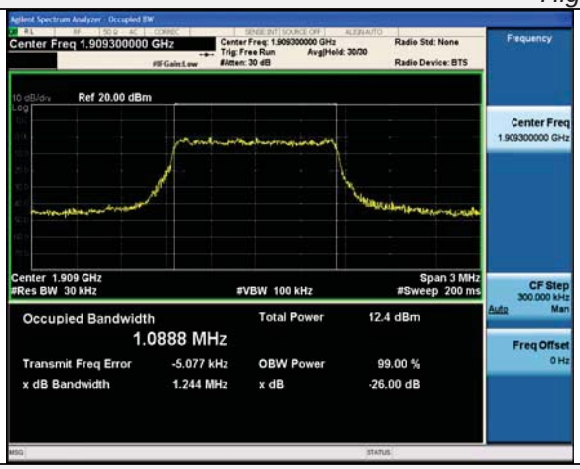	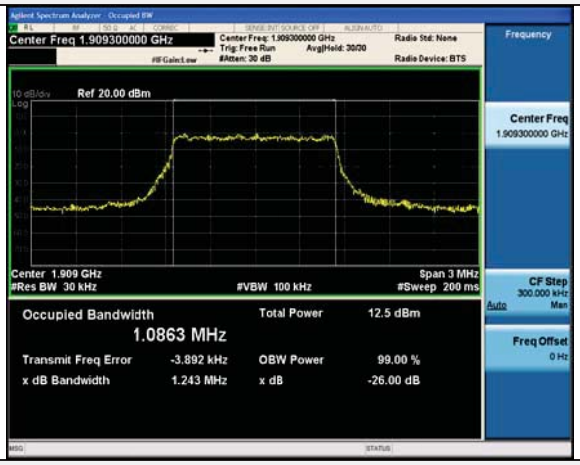
6RB#0	6RB#0

LTE FDD Band 2–3MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth	
QPSK	16QAM
Low Channel	
	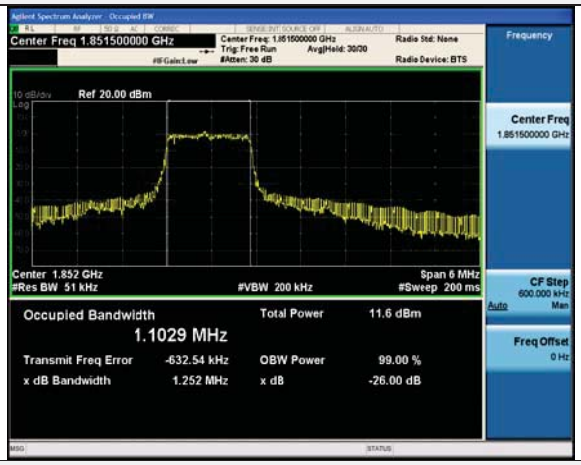
6RB#0	6RB#0
Middle Channel	
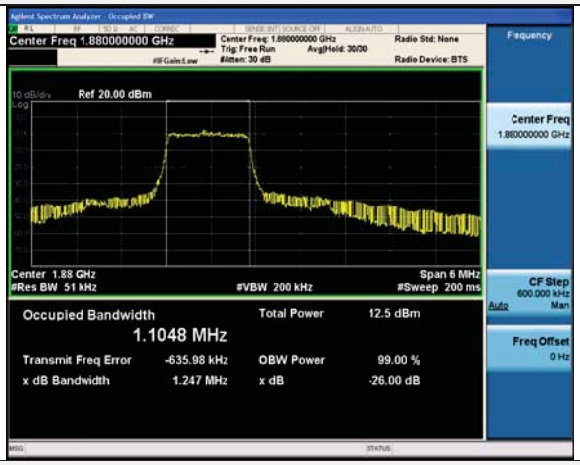	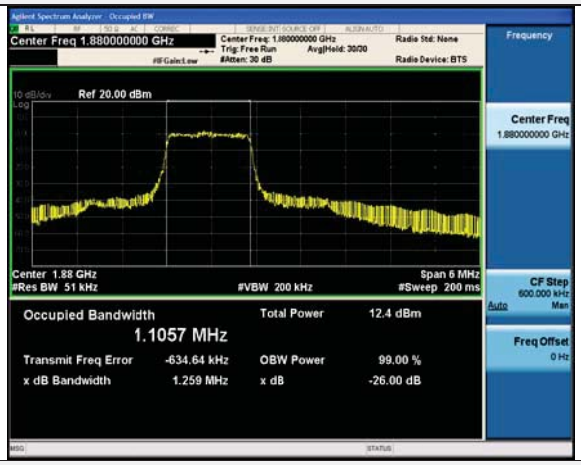
6RB#0	6RB#0
High Channel	
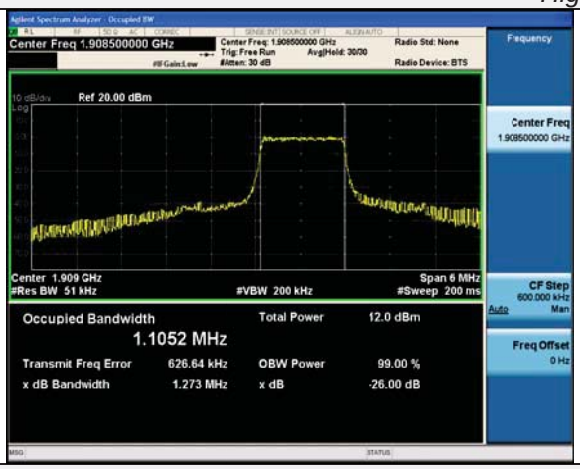	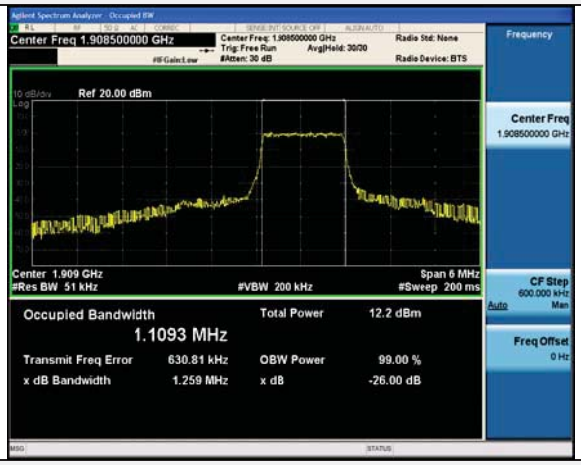
6RB#0	6RB#0

LTE FDD Band 2–5MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth	
QPSK	16QAM
Low Channel	
	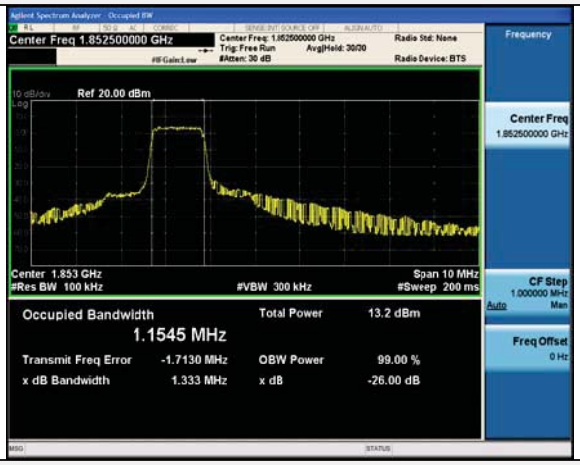
6RB#0	6RB#0
Middle Channel	
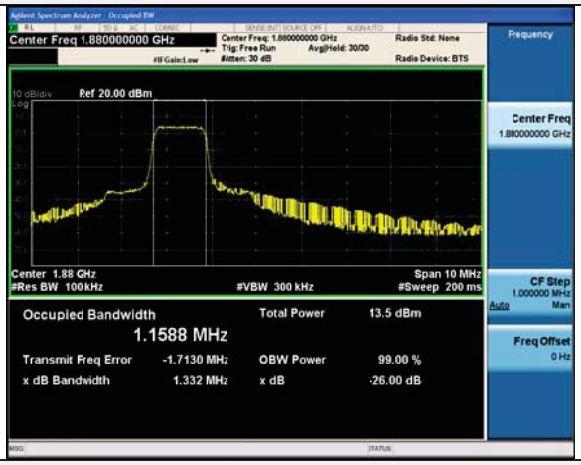	
6RB#0	6RB#0
High Channel	
	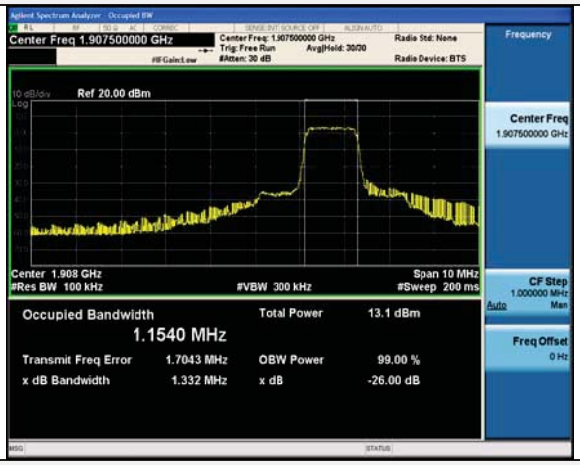
6RB#0	6RB#0

LTE FDD Band 2–10MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth	
QPSK	16QAM
Low Channel	
	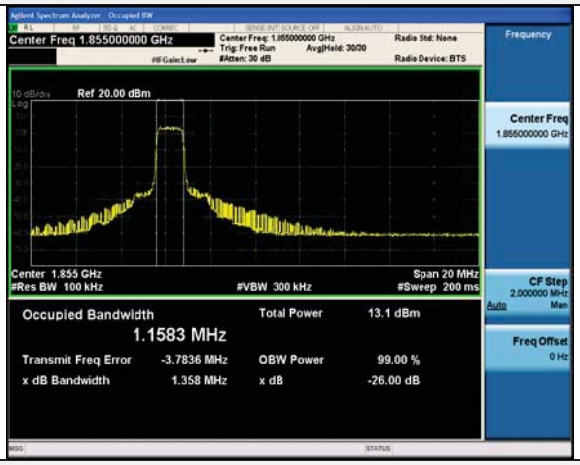
6RB#0	6RB#0
Middle Channel	
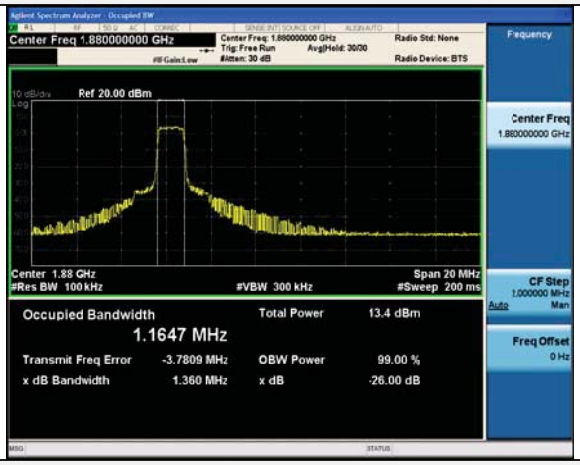	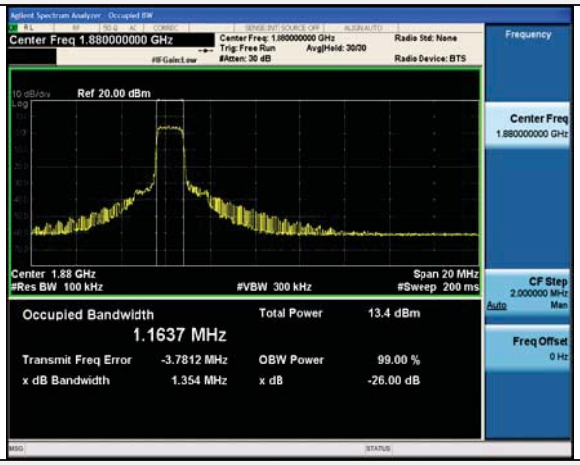
6RB#0	6RB#0
High Channel	
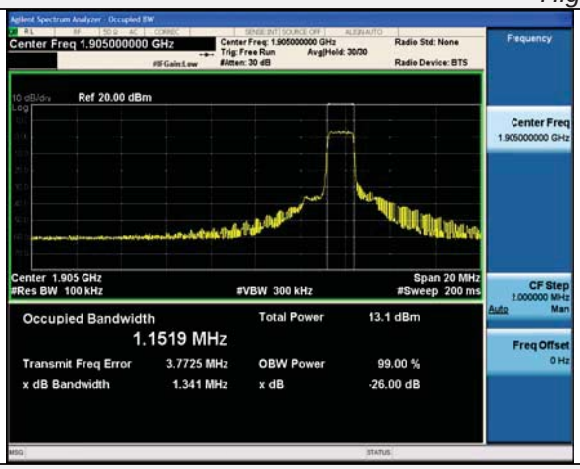	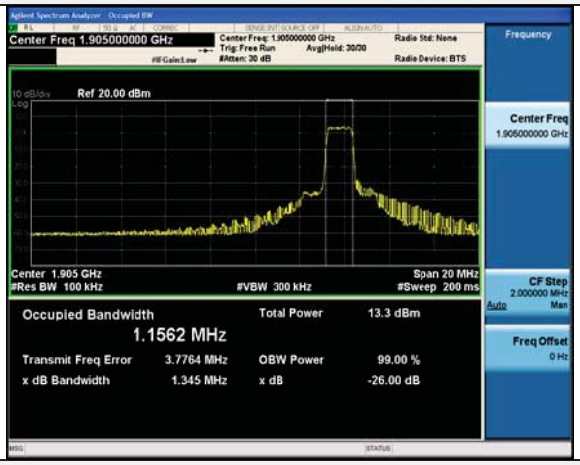
6RB#0	6RB#0

LTE FDD Band 2–15MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth	
QPSK	16QAM
Low Channel	
	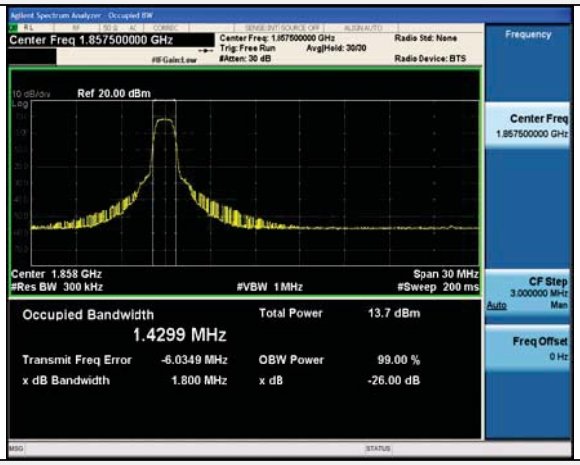
6RB#0	6RB#0
Middle Channel	
	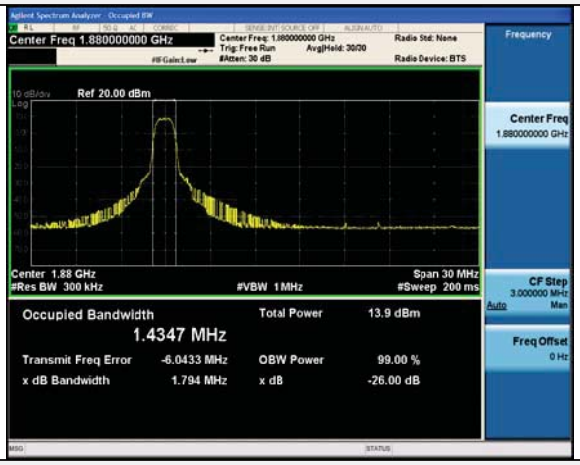
6RB#0	6RB#0
High Channel	
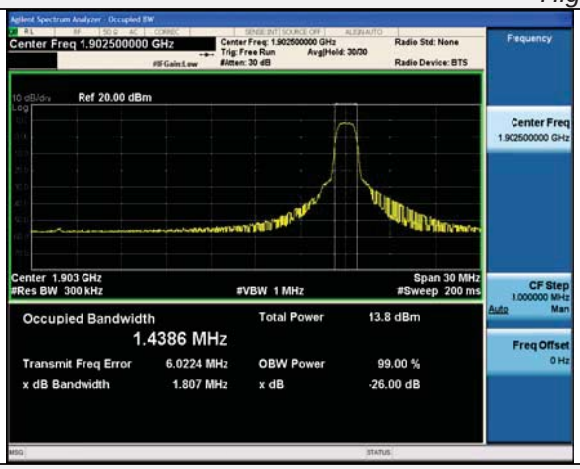	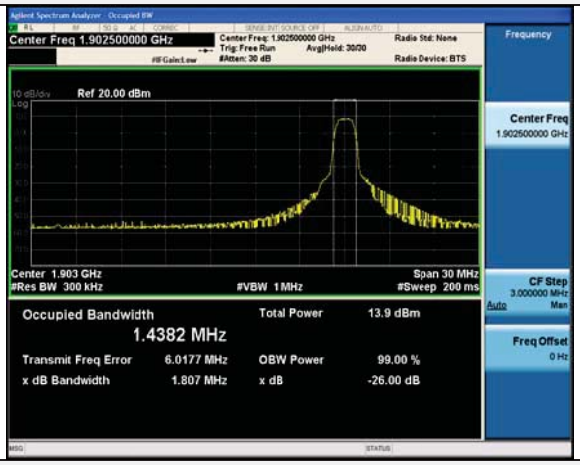
6RB#0	6RB#0

LTE FDD Band 2–20MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth	
QPSK	16QAM
Low Channel	
	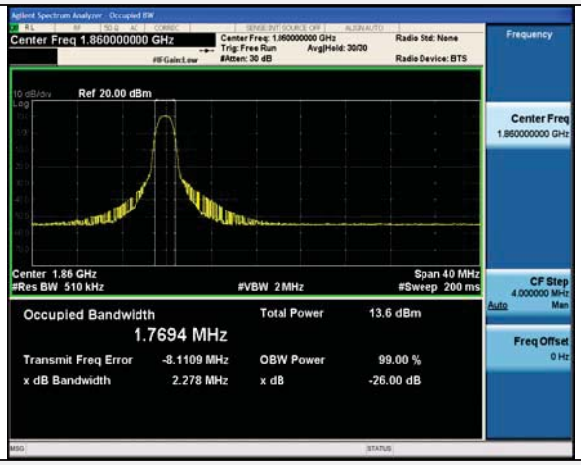
6RB#0	6RB#0
Middle Channel	
	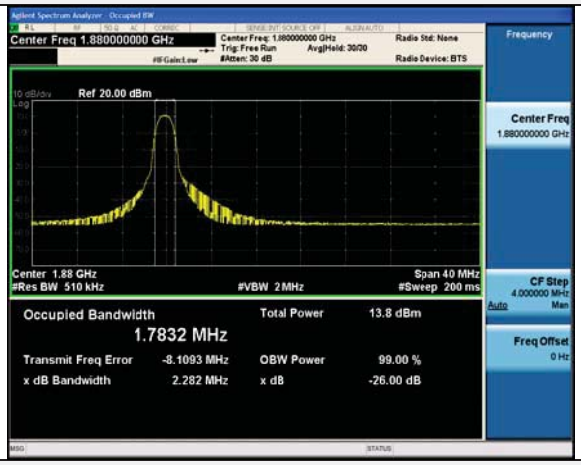
6RB#0	6RB#0
High Channel	
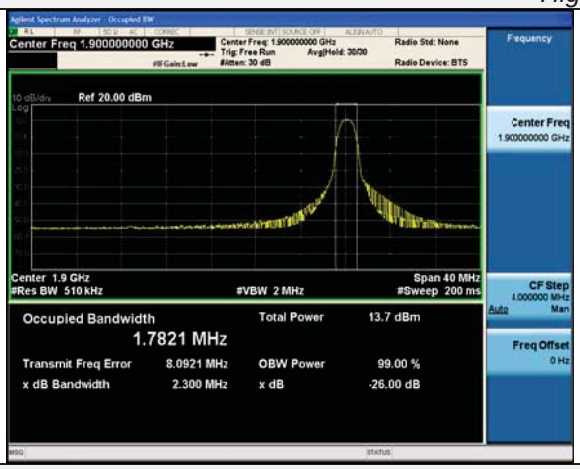	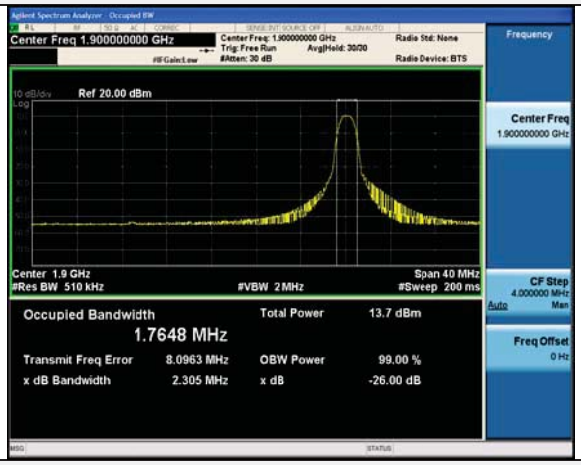
6RB#0	6RB#0

4.4 Band Edge compliance

LIMIT

Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10log(P) dB.

TEST CONFIGURATION

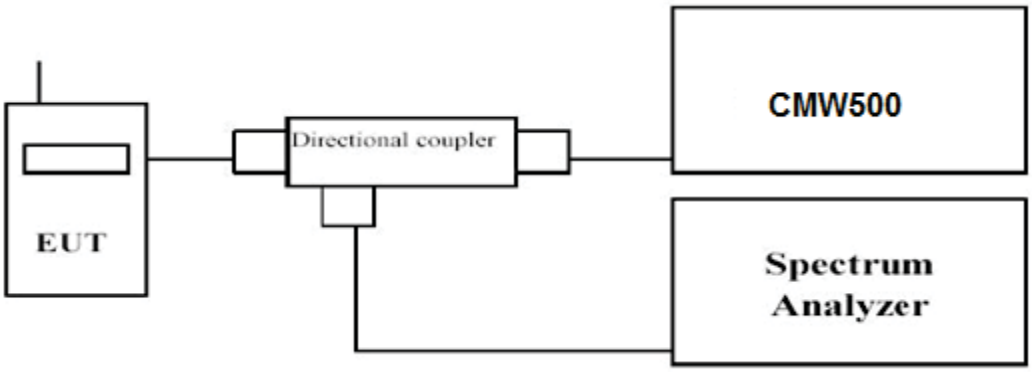

TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowestand highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

TEST RESULTS

Remark:

1. *We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.*

LTE FDD Band 2 – 1.4 MHz Channel BandwidthBand Edge Compliance	
QPSK	16QAM
Low Channel	
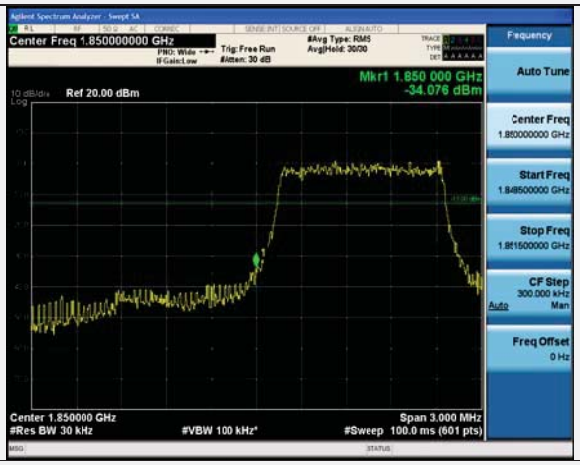	
6RB#0	6RB#0
High Channel	
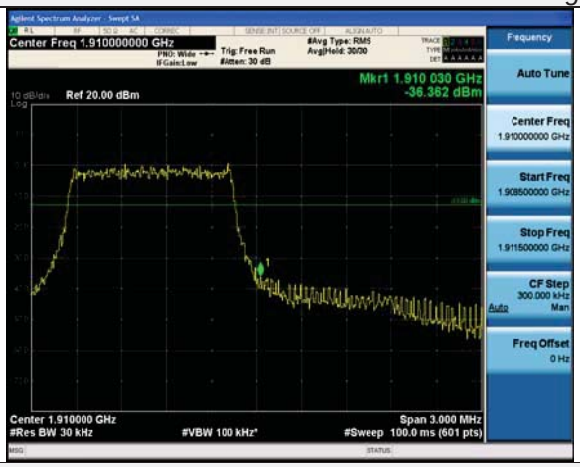	
6RB#0	6RB#0

LTE FDD Band 2–3MHz Channel BandwidthBand Edge Compliance	
QPSK	16QAM
Low Channel	
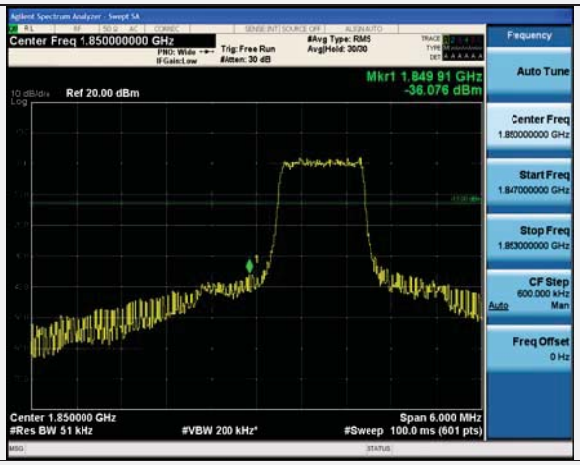	
6RB#0	6RB#0
High Channel	
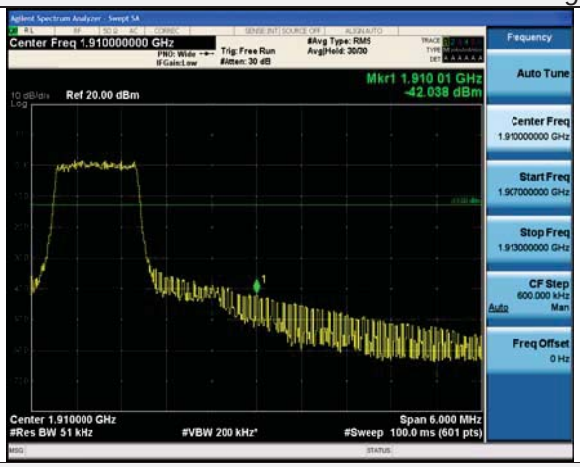	
6RB#0	6RB#0

LTE FDD Band 2–5MHz Channel BandwidthBand Edge Compliance	
QPSK	16QAM
Low Channel	
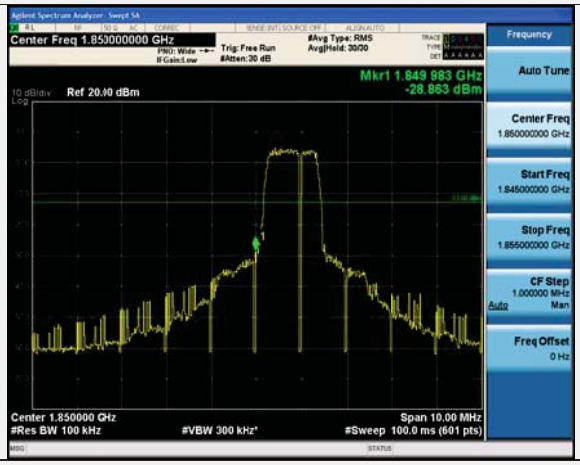	
6RB#0	6RB#0
High Channel	
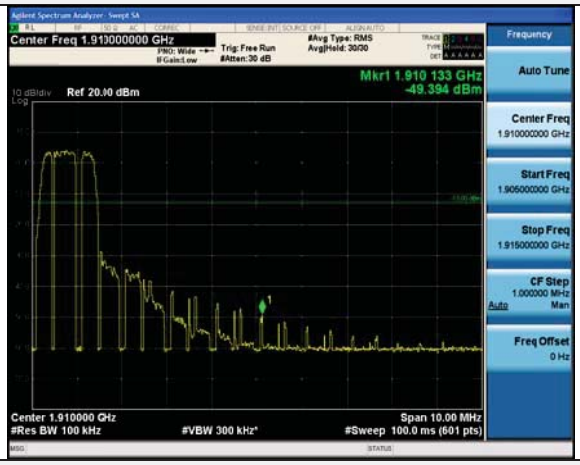	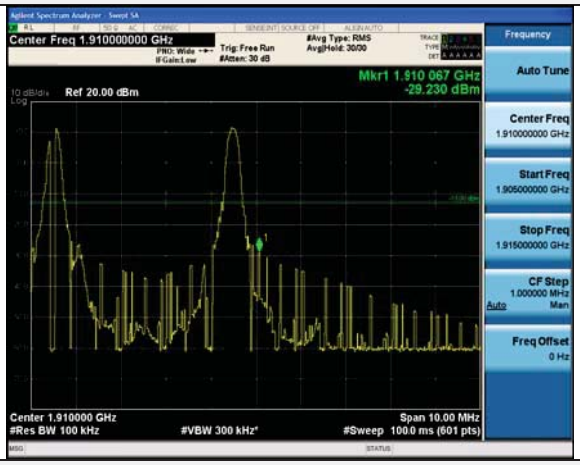
6RB#0	6RB#0

LTE FDD Band 2 – 10 MHz Channel Bandwidth Band Edge Compliance	
QPSK	16QAM
Low Channel	
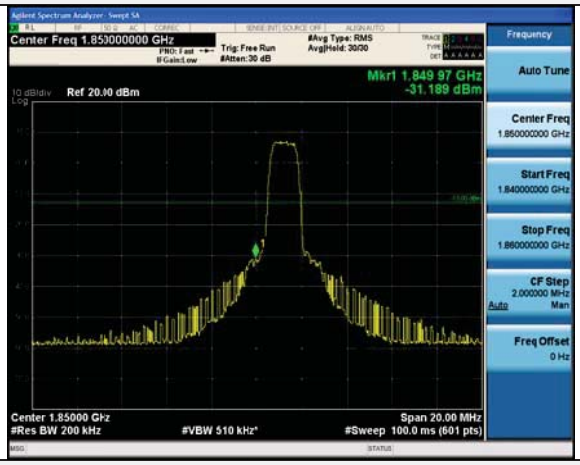	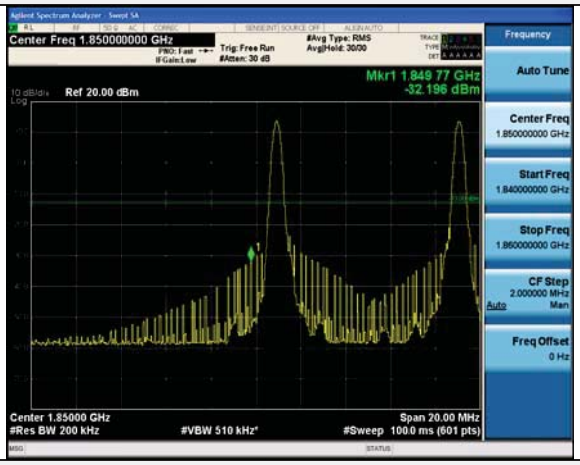
6RB#0	6RB#0
High Channel	
	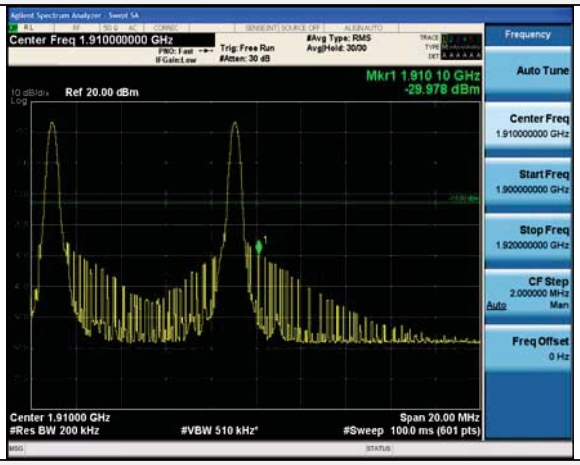
6RB#0	6RB#0

LTE FDD Band 2–15MHz Channel BandwidthBand Edge Compliance	
QPSK	16QAM
Low Channel	
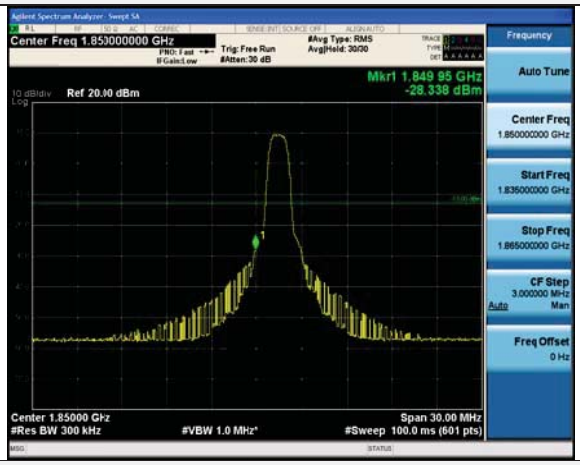	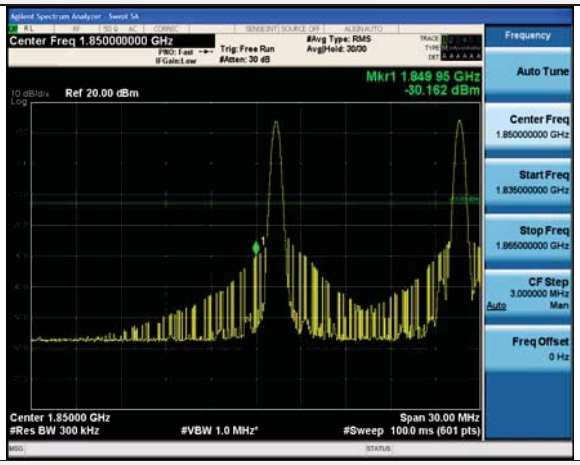
6RB#0	6RB#0
High Channel	
	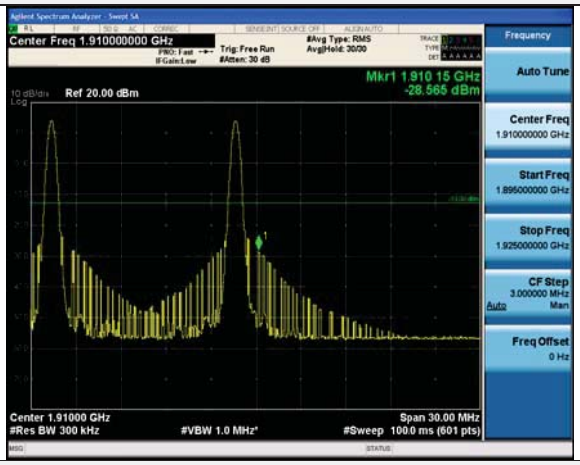
6RB#0	6RB#0

LTE FDD Band 2–20MHz Channel BandwidthBand Edge Compliance	
QPSK	16QAM
Low Channel	
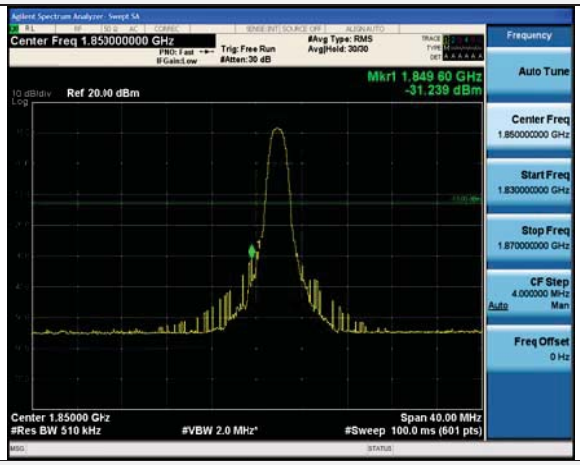	
6RB#0	6RB#0
High Channel	
6RB#0	6RB#0

4.5 Spurious Emssion on Antenna Port

LIMIT

Per FCC §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10log(P) dB.

TEST CONFIGURATION

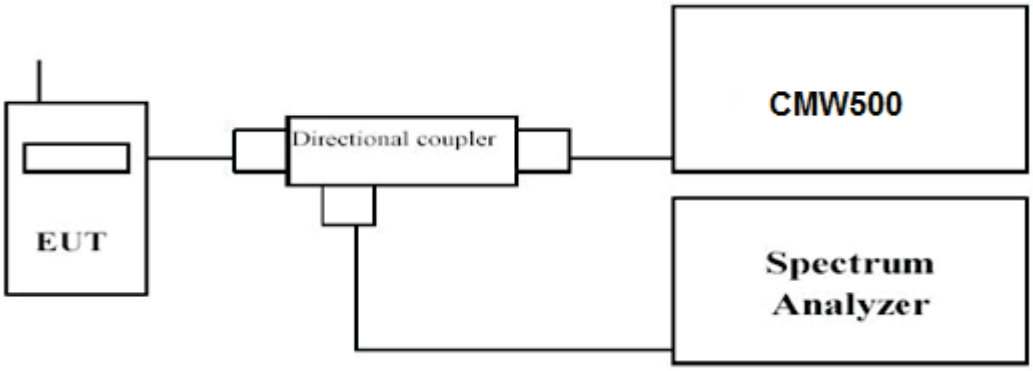

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

a. Place the EUT on a bench and set it in transmitting mode.
b. Connect a low loss RF cable from the antenna port to a spectrum analyzer andCMW500 by a Directional Couple.
c. EUT Communicate with CMW500, then select a channel for testing.
d. Add a correction factor to the display of spectrum, and then test.
e. The resolution bandwidth of the spectrum analyzer was setsufficient scans were taken to show the out of band Emission if any up to10th harmonic.
f. Please refer to following tables for test antenna conducted emissions.

Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 2	0.01~20	1 MHz	3 MHz	Auto

TEST RESULTS

Remark:

1. *We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case at the QPSK Mode for each Channel Bandwidth of LTE FDD Band 2*

LTE FDD Band 2-1.4MHz Channel Bandwidth	
Low Channel	
QPSK	
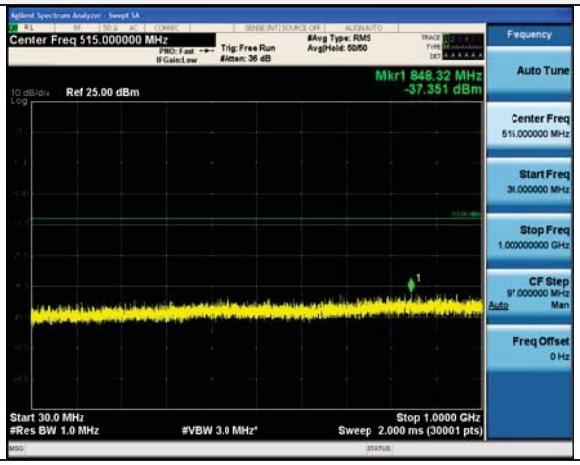	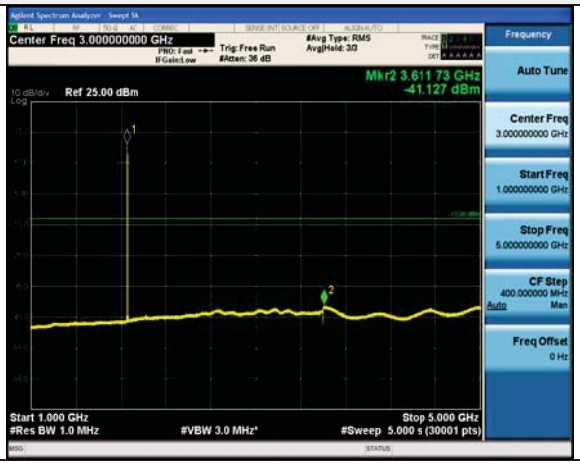
30MHz~1GHz	1GHz~5GHz
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-1.4MHz Channel Bandwidth	
Middle Channel	
QPSK	
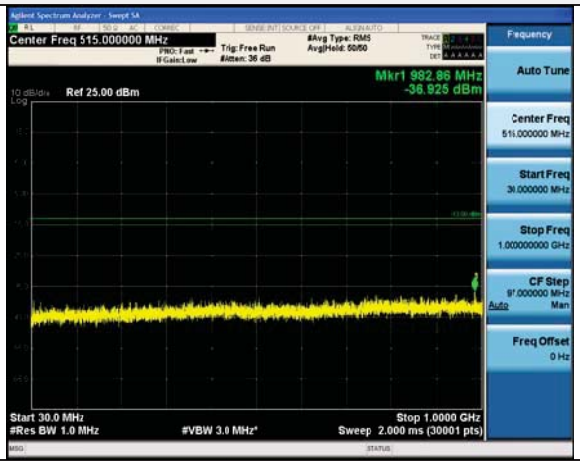	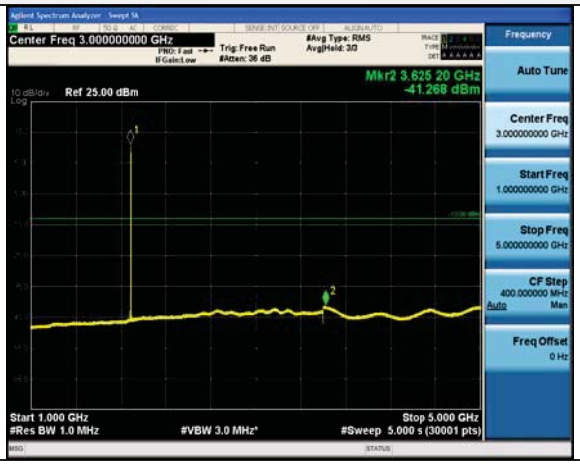
30MHz~1GHz	1GHz~5GHz
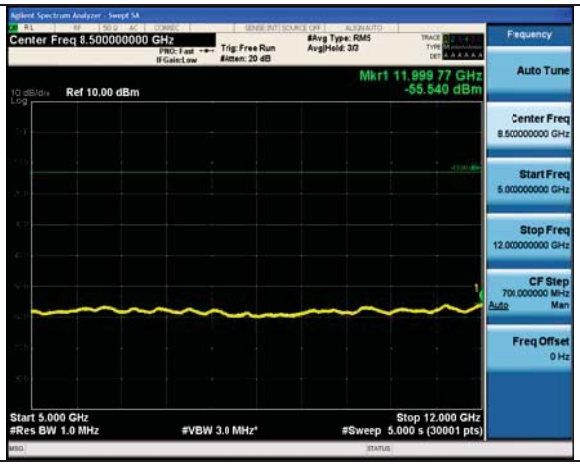	
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-1.4MHz Channel Bandwidth	
High Channel	
QPSK	
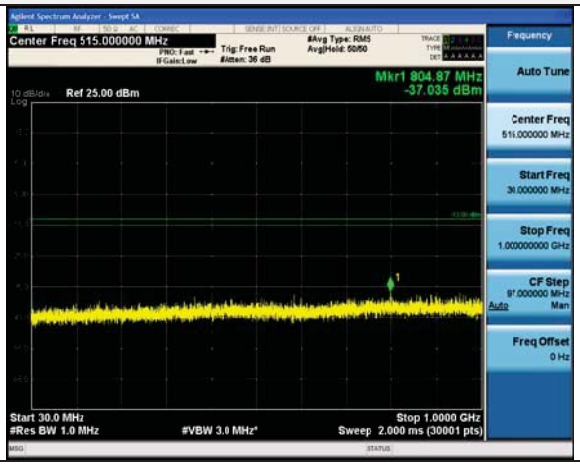	
30MHz~1GHz	1GHz~5GHz
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-3MHz Channel Bandwidth	
Low Channel	
QPSK	
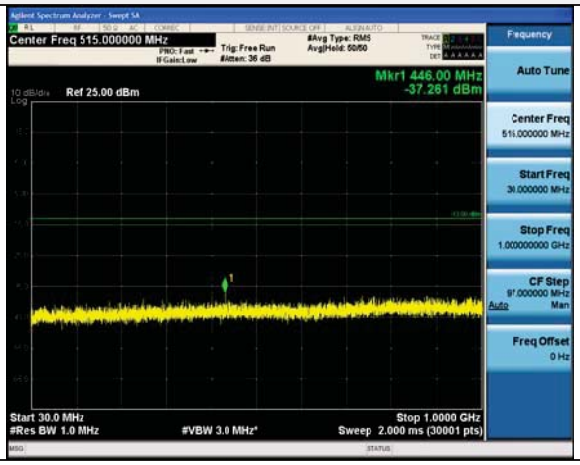	
30MHz~1GHz	1GHz~5GHz
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-3MHz Channel Bandwidth	
Middle Channel	
QPSK	
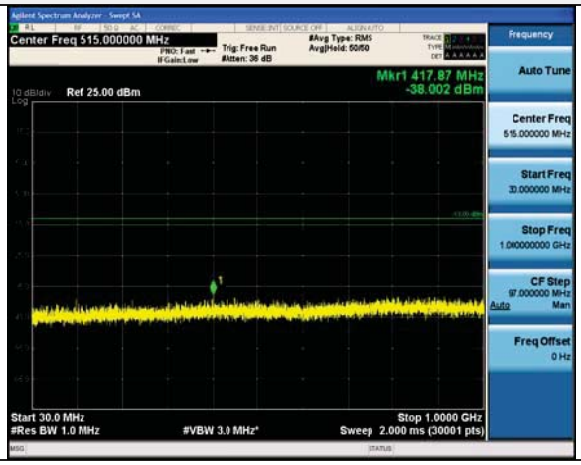	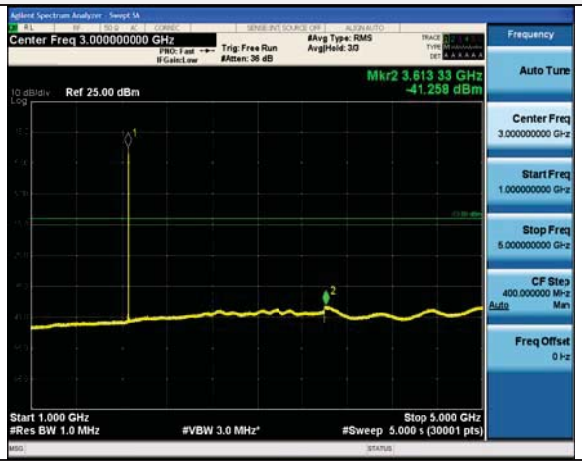
30MHz~1GHz	1GHz~5GHz
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-3MHz Channel Bandwidth	
High Channel	
QPSK	
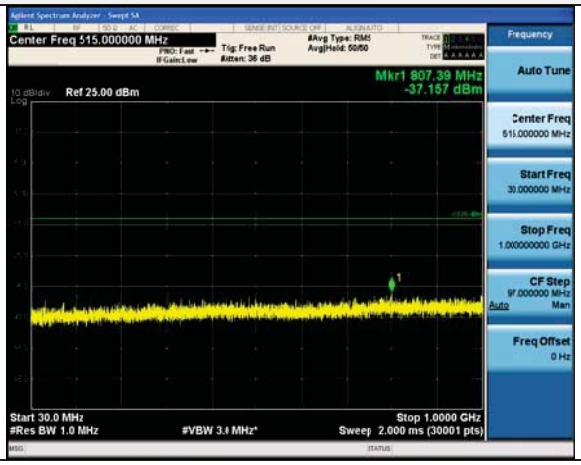	
30MHz~1GHz	1GHz~5GHz
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-5 MHz Channel Bandwidth	
Low Channel	
QPSK	
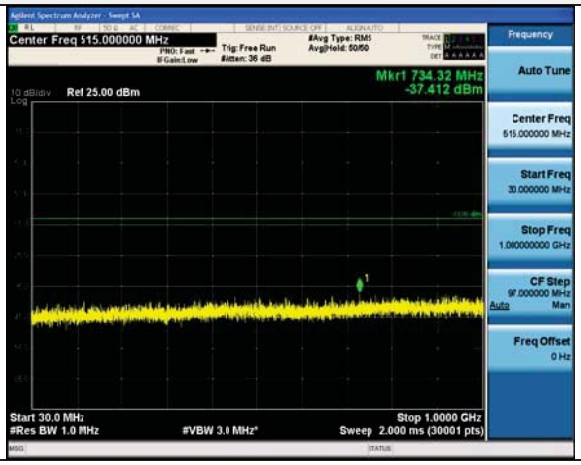	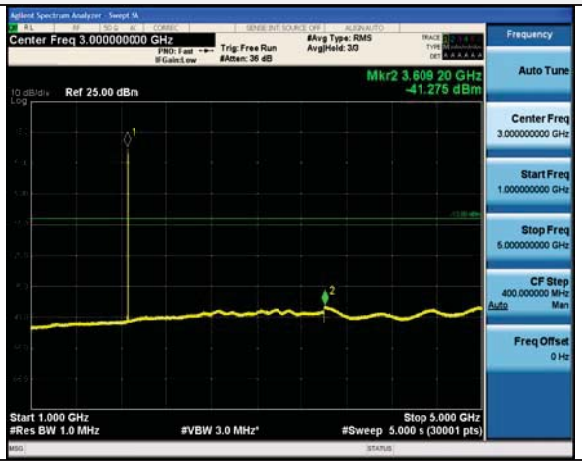
30MHz~1GHz	1GHz~5GHz
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-5 MHz Channel Bandwidth	
Middle Channel	
QPSK	
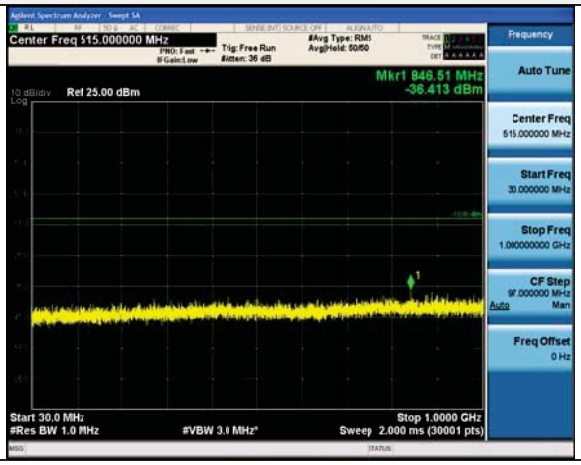	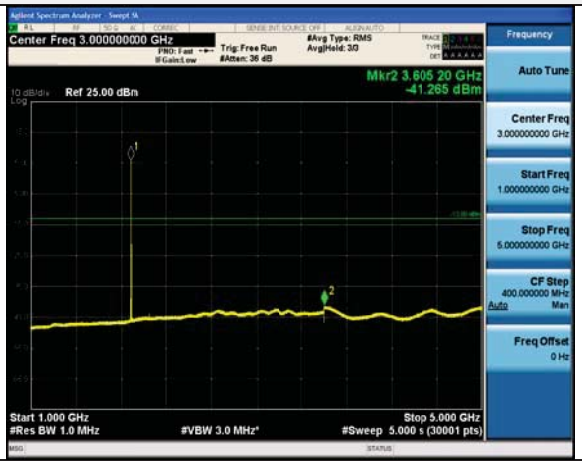
30MHz~1GHz	1GHz~5GHz
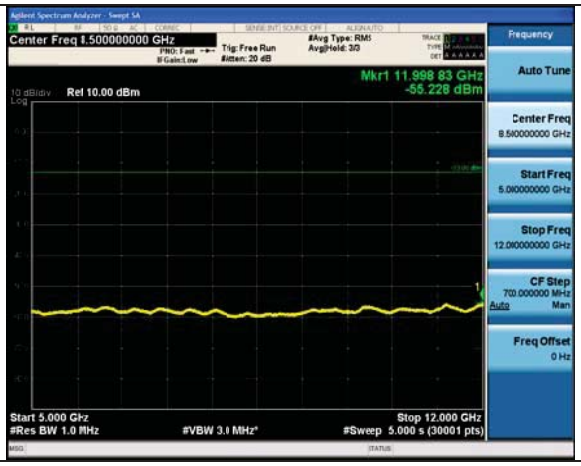	
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-5 MHz Channel Bandwidth	
High Channel	
QPSK	
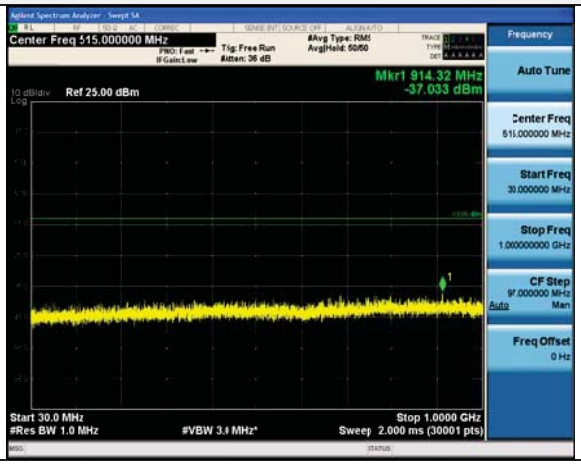	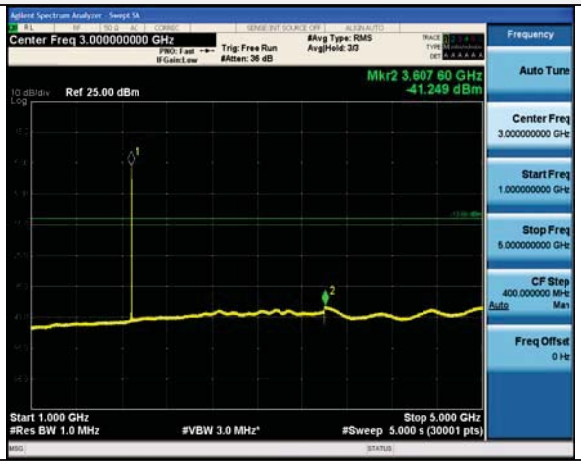
30MHz~1GHz	1GHz~5GHz
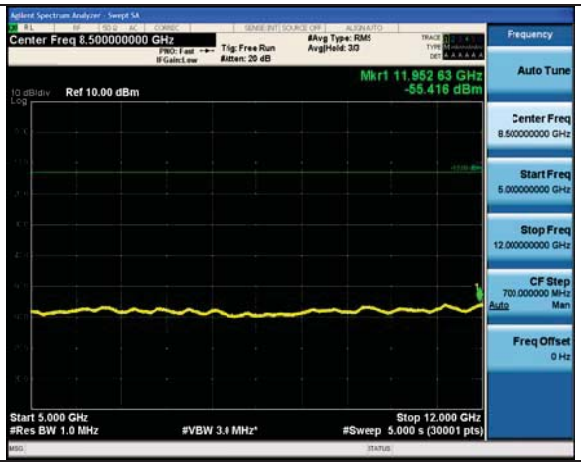	
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-10 MHz Channel Bandwidth	
Low Channel	
QPSK	
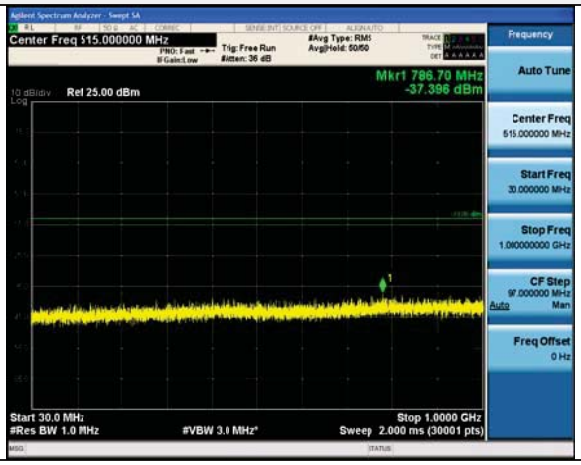	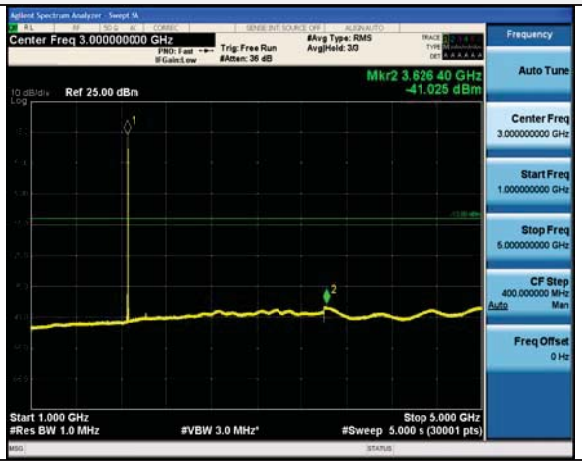
30MHz~1GHz	1GHz~5GHz
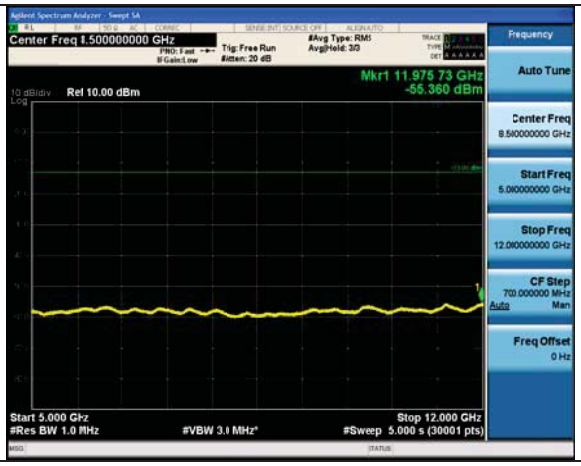	
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-10 MHz Channel Bandwidth	
Middle Channel	
QPSK	
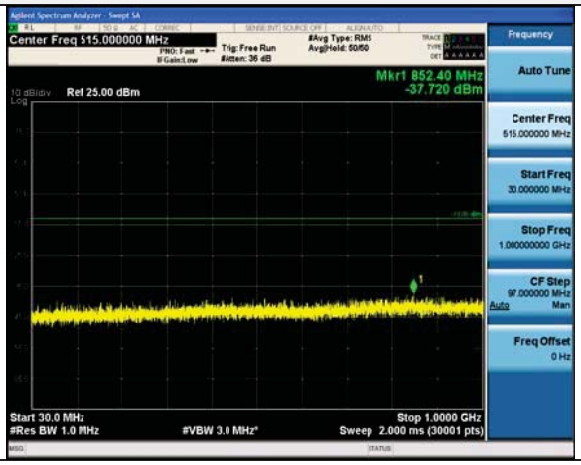	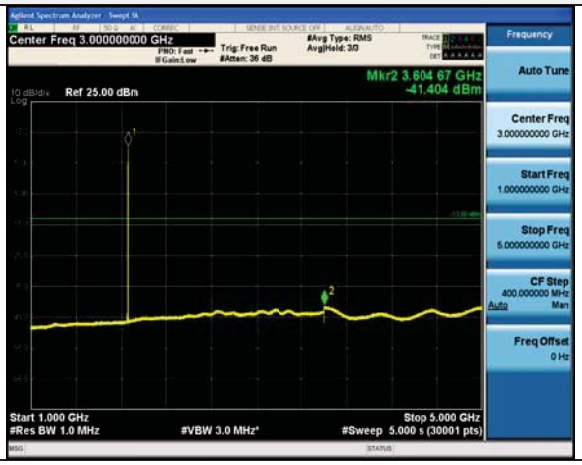
30MHz~1GHz	1GHz~5GHz
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-10 MHz Channel Bandwidth	
High Channel	
QPSK	
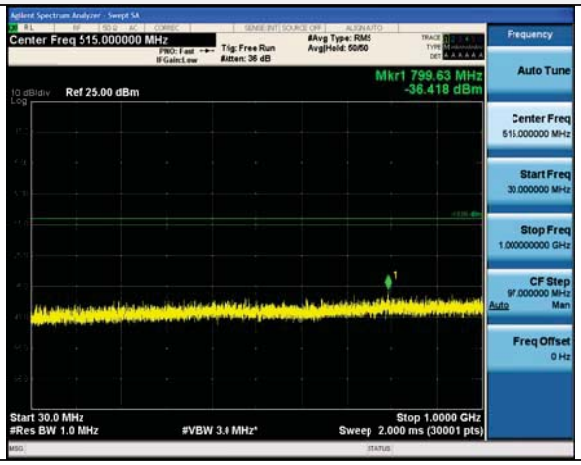	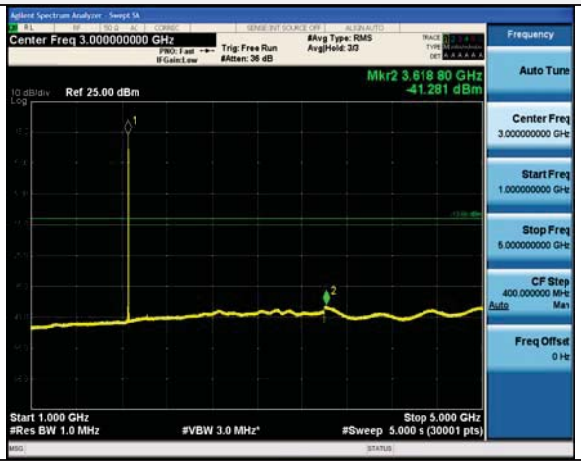
30MHz~1GHz	1GHz~5GHz
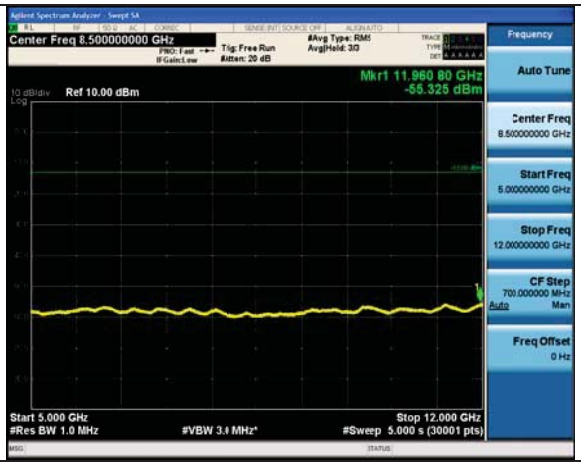	
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-15 MHz Channel Bandwidth	
Low Channel	
QPSK	
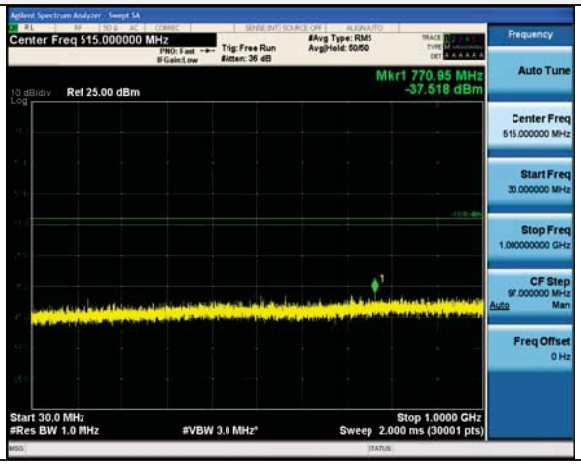	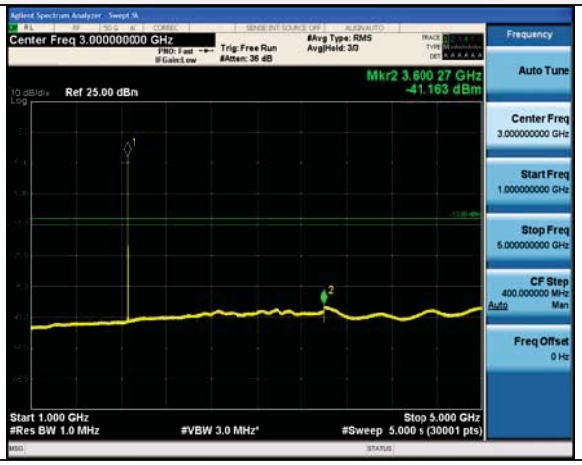
30MHz~1GHz	1GHz~5GHz
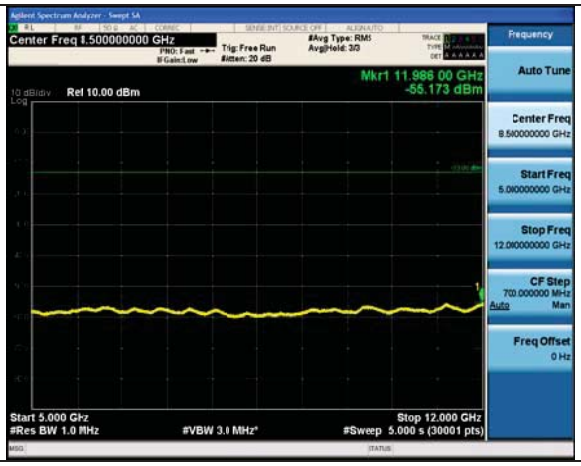	
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-15 MHz Channel Bandwidth	
Middle Channel	
QPSK	
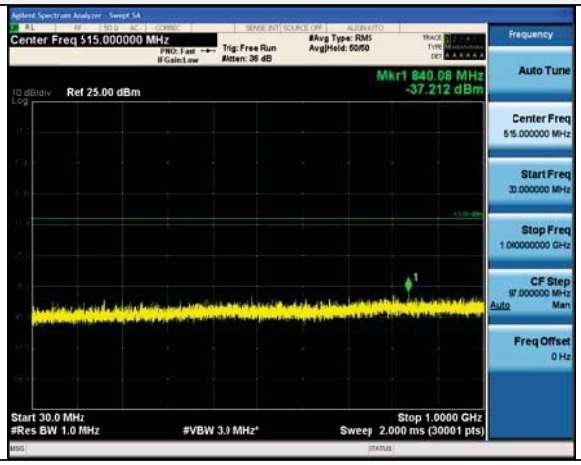	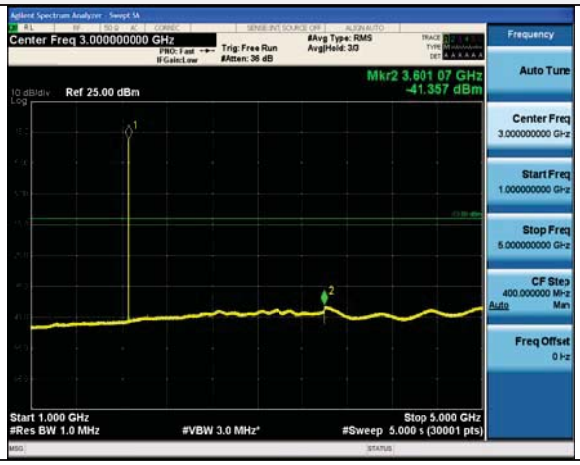
30MHz~1GHz	*1GHz~5GHz*
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-15 MHz Channel Bandwidth	
High Channel	
QPSK	
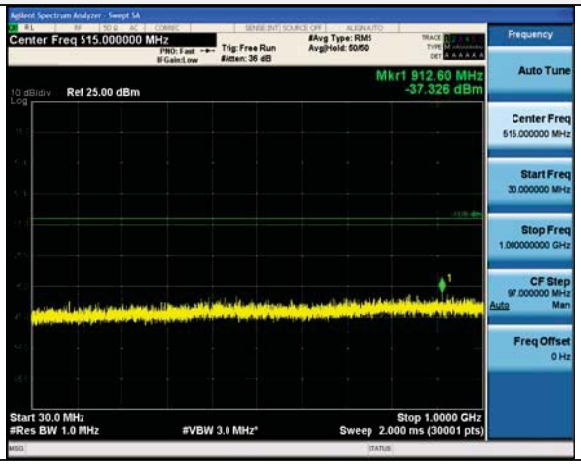	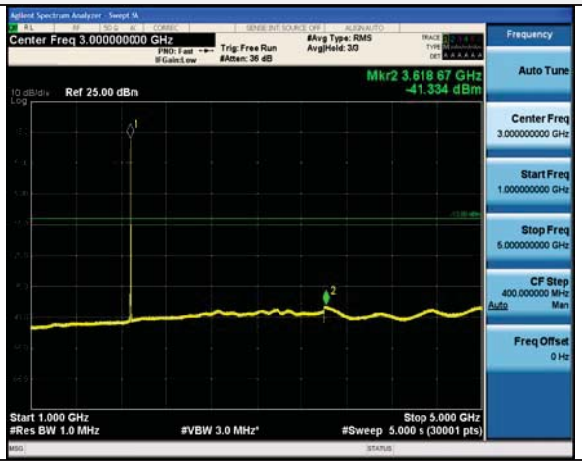
30MHz~1GHz	1GHz~5GHz
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-20 MHz Channel Bandwidth	
Low Channel	
QPSK	
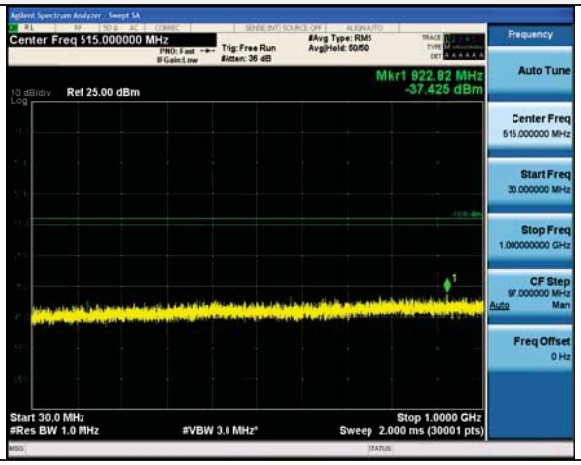	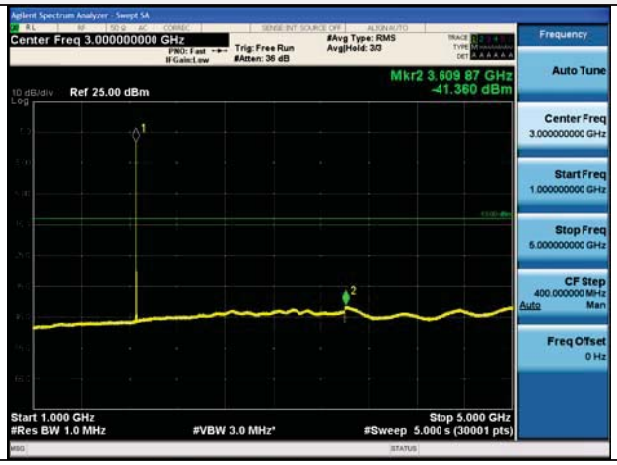
30MHz~1GHz	1GHz~5GHz
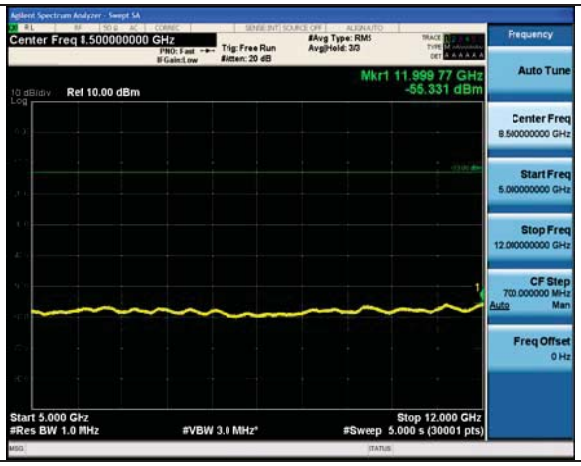	
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-20 MHz Channel Bandwidth	
Middle Channel	
QPSK	
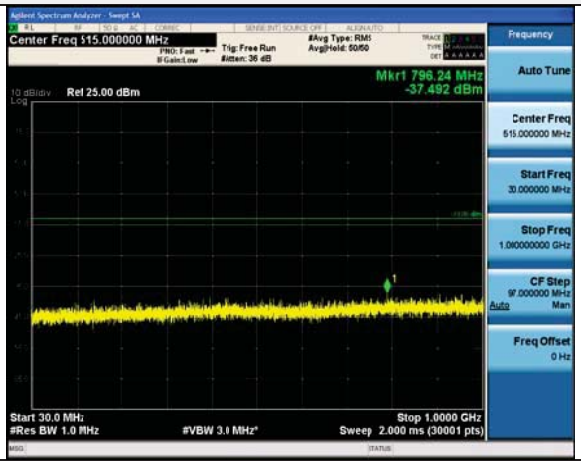	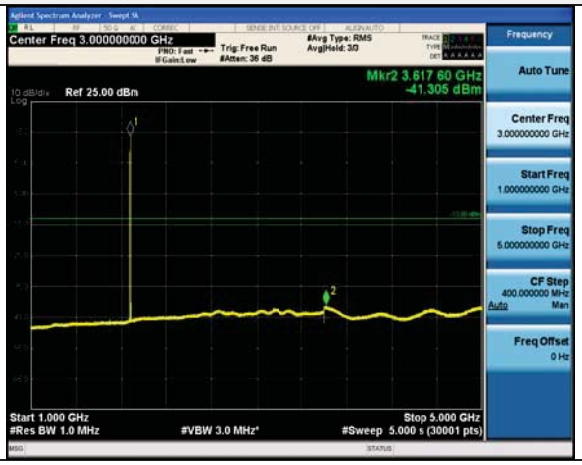
30MHz~1GHz	1GHz~5GHz
5GHz~12GHz	12GHz~26.5GHz

LTE FDD Band 2-20 MHz Channel Bandwidth	
High Channel	
QPSK	
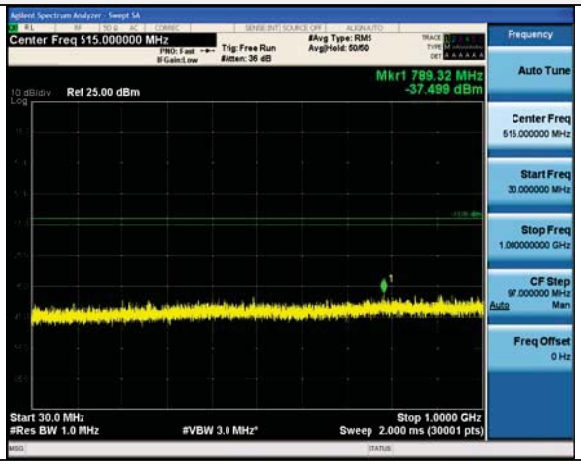	
30MHz~1GHz	1GHz~5GHz
5GHz~12GHz	12GHz~26.5GHz

4.6 Radiated Spurious Emssion

TEST APPLICABLE

Per FCC §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10log(P) dB.

TEST CONFIGURATION

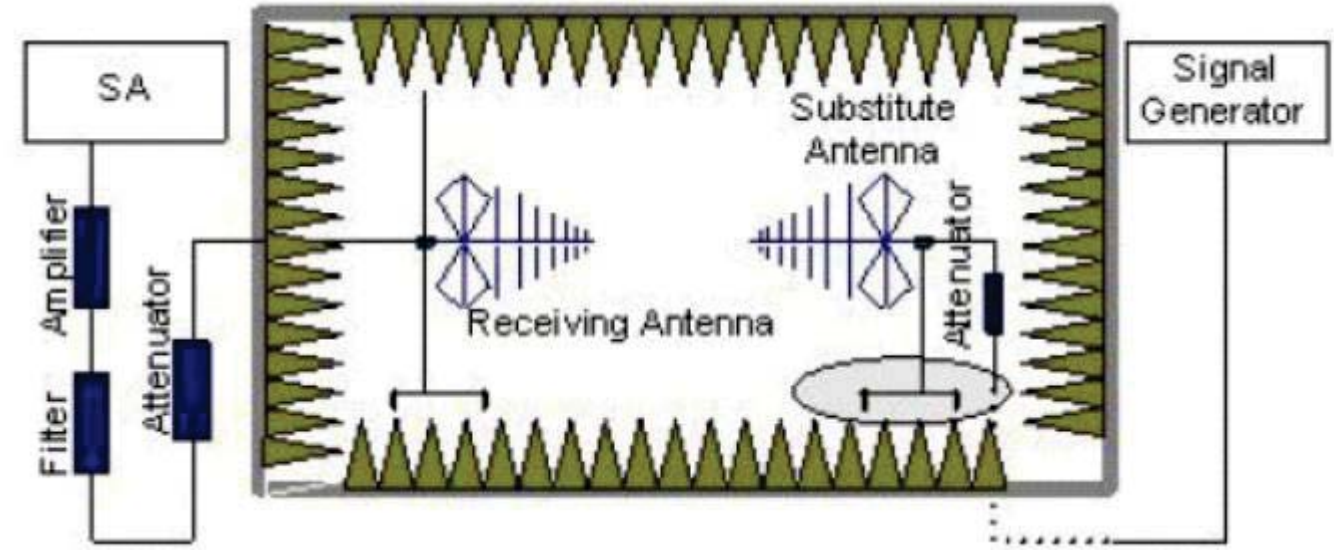

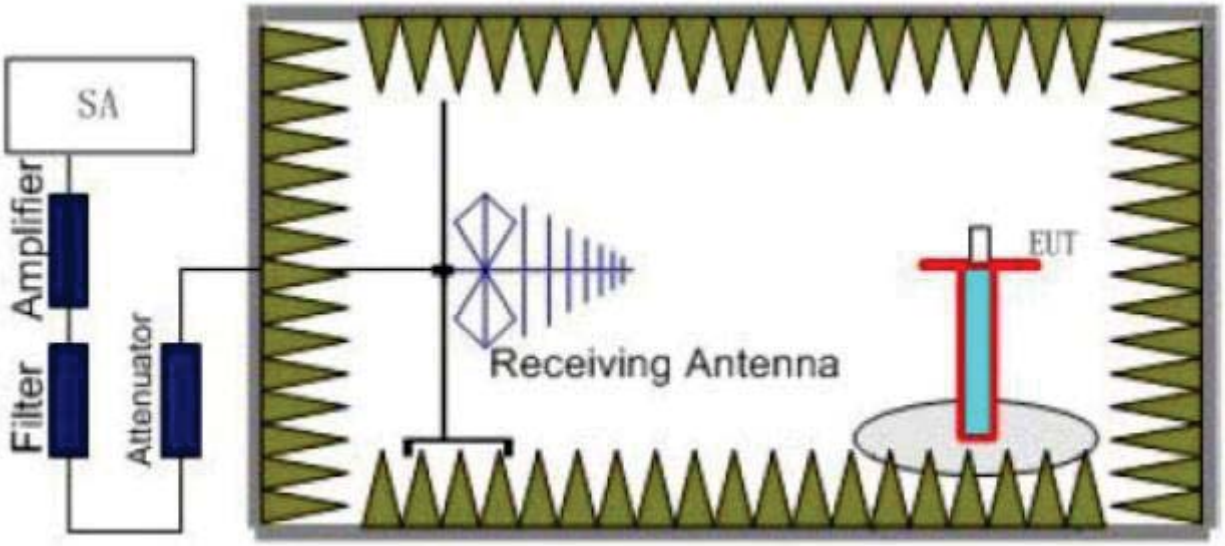

TEST PROCEDURE

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna.In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest isconnected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}) ,the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
   The measurement results are obtained as described below:
   Power(EIRP)=P_{Mea}- P_{Ag} - P_{cl}+ G_a
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.
8. In order to make sure test results more clearly,we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 2	0.03~1	100KHz	300KHz	10
	1~20	1 MHz	3 MHz	2

TEST LIMITS

According to 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.
The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
LTE FDD Band 2	Low	30MHz -20GHz	PASS
	Middle	30MHz -20GHz	PASS
	High	30MHz -20GHz	PASS

Radiated Measurement:

Remark:
1. *We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.*
2. *EIRP=P_{Mea}(dBm)-P_{cl}(dB) +G_a(dBi)*
3. *Not recorded other points as values lower than limits.*
4. *Margin = Limit – EIRP*

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK_ Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3701.4	-43.32	4.39	3.00	12.34	-35.37	-13.00	22.37	H
5552.1	-48.8	5.31	3.00	13.52	-40.59	-13.00	27.59	H
3701.4	-50.95	4.39	3.00	12.34	-43	-13.00	30.00	V
5552.1	-53.95	5.31	3.00	13.52	-45.74	-13.00	32.74	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK_ Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-40.78	4.41	3.00	12.34	-32.85	-13.00	19.85	H
5640.0	-48.54	5.38	3.00	13.58	-40.34	-13.00	27.34	H
3760.0	-43.1	4.41	3.00	12.34	-35.17	-13.00	22.17	V
5640.0	-44.81	5.38	3.00	13.58	-36.61	-13.00	23.61	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_QPSK_ High Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3818.6	-43.81	4.45	3.00	12.45	-35.81	-13.00	22.81	H
5727.9	-47.79	5.47	3.00	13.66	-39.6	-13.00	26.60	H
3818.6	-45.9	4.45	3.00	12.45	-37.9	-13.00	24.90	V
5727.9	-49.64	5.48	3.00	13.66	-41.46	-13.00	28.46	V

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK_ Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3703.0	-43.96	4.39	3.00	12.34	-36.01	-13.00	23.01	H
5554.5	-48.86	5.31	3.00	13.52	-40.65	-13.00	27.65	H
3703.0	-50.88	4.39	3.00	12.34	-42.93	-13.00	29.93	V
5554.5	-53.75	5.31	3.00	13.52	-45.54	-13.00	32.54	V

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK_ Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-40.42	4.41	3.00	12.34	-32.49	-13.00	19.49	H
5640.0	-48.21	5.38	3.00	13.58	-40.01	-13.00	27.01	H
3760.0	-42.68	4.41	3.00	12.34	-34.75	-13.00	21.75	V
5640.0	-44.99	5.38	3.00	13.58	-36.79	-13.00	23.79	V

LTE FDD Band 2_Channel Bandwidth 3MHz_QPSK_ High Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3817.0	-43.55	4.45	3.00	12.45	-35.55	-13.00	22.55	H
5725.5	-48.41	5.47	3.00	13.66	-40.22	-13.00	27.22	H
3817.0	-46.13	4.45	3.00	12.45	-38.13	-13.00	25.13	V
5725.5	-49.84	5.48	3.00	13.66	-41.66	-13.00	28.66	V

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK_ Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3705.0	-44.03	4.39	3.00	12.34	-36.08	-13.00	23.08	H
5557.5	-48.94	5.31	3.00	13.52	-40.73	-13.00	27.73	H
3705.0	-50.61	4.39	3.00	12.34	-42.66	-13.00	29.66	V
5557.5	-53.57	5.31	3.00	13.52	-45.36	-13.00	32.36	V

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK_ Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-40.89	4.41	3.00	12.34	-32.96	-13.00	19.96	H
5640.0	-47.86	5.38	3.00	13.58	-39.66	-13.00	26.66	H
3760.0	-43.24	4.41	3.00	12.34	-35.31	-13.00	22.31	V
5640.0	-44.61	5.38	3.00	13.58	-36.41	-13.00	23.41	V

LTE FDD Band 2_Channel Bandwidth 5MHz_QPSK_ High Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3815.0	-43.69	4.45	3.00	12.45	-35.69	-13.00	22.69	*H*
5722.5	-48.11	5.47	3.00	13.66	-39.92	-13.00	26.92	*H*
3815.0	-46.28	4.45	3.00	12.45	-38.28	-13.00	25.28	*V*
5722.5	-49.45	5.48	3.00	13.66	-41.27	-13.00	28.27	*V*

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK_ Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3710.0	-43.85	4.39	3.00	12.34	-35.9	-13.00	22.90	H
5565.0	-49.16	5.31	3.00	13.52	-40.95	-13.00	27.95	H
3710.0	-51.1	4.39	3.00	12.34	-43.15	-13.00	30.15	V
5565.0	-54.05	5.31	3.00	13.52	-45.84	-13.00	32.84	V

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK_ Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-41.18	4.41	3.00	12.34	-33.25	-13.00	20.25	H
5640.0	-48	5.38	3.00	13.58	-39.8	-13.00	26.80	H
3760.0	-43.59	4.41	3.00	12.34	-35.66	-13.00	22.66	V
5640.0	-44.97	5.38	3.00	13.58	-36.77	-13.00	23.77	V

LTE FDD Band 2_Channel Bandwidth 10MHz_QPSK_ High Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3810.0	-43.64	4.45	3.00	12.45	-35.64	-13.00	22.64	H
5715.0	-48.02	5.47	3.00	13.66	-39.83	-13.00	26.83	H
3810.0	-45.92	4.45	3.00	12.45	-37.92	-13.00	24.92	V
5715.0	-49.18	5.48	3.00	13.66	-41	-13.00	28.00	V

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK_ Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3715.0	-43.52	4.39	3.00	12.34	-35.57	-13.00	22.57	H
5572.5	-49.5	5.31	3.00	13.52	-41.29	-13.00	28.29	H
3715.0	-50.28	4.39	3.00	12.34	-42.33	-13.00	29.33	V
5572.5	-54.06	5.31	3.00	13.52	-45.85	-13.00	32.85	V

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK_ Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-40.48	4.41	3.00	12.34	-32.55	-13.00	19.55	H
5640.0	-48.17	5.38	3.00	13.58	-39.97	-13.00	26.97	H
3760.0	-42.99	4.41	3.00	12.34	-35.06	-13.00	22.06	V
5640.0	-44.5	5.38	3.00	13.58	-36.3	-13.00	23.30	V

LTE FDD Band 2_Channel Bandwidth 15MHz_QPSK_ High Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3805.0	-43.17	4.45	3.00	12.45	-35.17	-13.00	22.17	H
5707.5	-47.79	5.47	3.00	13.66	-39.6	-13.00	26.60	H
3805.0	-46.13	4.45	3.00	12.45	-38.13	-13.00	25.13	V
5707.5	-49.17	5.48	3.00	13.66	-40.99	-13.00	27.99	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK_ Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3720.0	-44.24	4.39	3.00	12.34	-36.29	-13.00	23.29	H
5580.0	-49.07	5.31	3.00	13.52	-40.86	-13.00	27.86	H
3720.0	-50.55	4.39	3.00	12.34	-42.6	-13.00	29.60	V
5580.0	-53.54	5.31	3.00	13.52	-45.33	-13.00	32.33	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK_ Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-41.15	4.41	3.00	12.34	-33.22	-13.00	20.22	H
5640.0	-47.88	5.38	3.00	13.58	-39.68	-13.00	26.68	H
3760.0	-43.18	4.41	3.00	12.34	-35.25	-13.00	22.25	V
5640.0	-44.51	5.38	3.00	13.58	-36.31	-13.00	23.31	V

LTE FDD Band 2_Channel Bandwidth 20MHz_QPSK_ High Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3800.0	-43.27	4.45	3.00	12.45	-35.27	-13.00	22.27	H
5700.0	-47.72	5.47	3.00	13.66	-39.53	-13.00	26.53	H
3800.0	-46.52	4.45	3.00	12.45	-38.52	-13.00	25.52	V
5700.0	-49.54	5.48	3.00	13.66	-41.36	-13.00	28.36	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_16QAM _ Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3701.4	-43.6	4.39	3.00	12.34	-35.65	-13.00	22.65	H
5552.1	-49.35	5.31	3.00	13.52	-41.14	-13.00	28.14	H
3701.4	-50.61	4.39	3.00	12.34	-42.66	-13.00	29.66	V
5552.1	-53.58	5.31	3.00	13.52	-45.37	-13.00	32.37	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_16QAM _ Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-40.9	4.41	3.00	12.34	-32.97	-13.00	19.97	H
5640.0	-48.24	5.38	3.00	13.58	-40.04	-13.00	27.04	H
3760.0	-43.5	4.41	3.00	12.34	-35.57	-13.00	22.57	V
5640.0	-44.65	5.38	3.00	13.58	-36.45	-13.00	23.45	V

LTE FDD Band 2_Channel Bandwidth 1.4MHz_16QAM _ High Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3818.6	-43.47	4.45	3.00	12.45	-35.47	-13.00	22.47	H
5727.9	-48.2	5.47	3.00	13.66	-40.01	-13.00	27.01	H
3818.6	-46.42	4.45	3.00	12.45	-38.42	-13.00	25.42	V
5727.9	-49.39	5.48	3.00	13.66	-41.21	-13.00	28.21	V

LTE FDD Band 2_Channel Bandwidth 3MHz_16QAM _ Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3703.0	-44.24	4.39	3.00	12.34	-36.29	-13.00	23.29	H
5554.5	-48.88	5.31	3.00	13.52	-40.67	-13.00	27.67	H
3703.0	-50.98	4.39	3.00	12.34	-43.03	-13.00	30.03	V
5554.5	-53.64	5.31	3.00	13.52	-45.43	-13.00	32.43	V

LTE FDD Band 2_Channel Bandwidth 3MHz_16QAM _ Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-41.14	4.41	3.00	12.34	-33.21	-13.00	20.21	H
5640.0	-48.01	5.38	3.00	13.58	-39.81	-13.00	26.81	H
3760.0	-43.02	4.41	3.00	12.34	-35.09	-13.00	22.09	V
5640.0	-45.21	5.38	3.00	13.58	-37.01	-13.00	24.01	V

LTE FDD Band 2_Channel Bandwidth 3MHz_16QAM _ High Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3817.0	-43.9	4.45	3.00	12.45	-35.9	-13.00	22.90	H
5725.5	-47.72	5.47	3.00	13.66	-39.53	-13.00	26.53	H
3817.0	-46.38	4.45	3.00	12.45	-38.38	-13.00	25.38	V
5725.5	-49.34	5.48	3.00	13.66	-41.16	-13.00	28.16	V

LTE FDD Band 2_Channel Bandwidth 5MHz_16QAM _ Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3705.0	-43.47	4.39	3.00	12.34	-35.52	-13.00	22.52	H
5557.5	-49.21	5.31	3.00	13.52	-41	-13.00	28.00	H
3705.0	-50.94	4.39	3.00	12.34	-42.99	-13.00	29.99	V
5557.5	-53.56	5.31	3.00	13.52	-45.35	-13.00	32.35	V

LTE FDD Band 2_Channel Bandwidth 5MHz_16QAM _ Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-40.44	4.41	3.00	12.34	-32.51	-13.00	19.51	H
5640.0	-48.03	5.38	3.00	13.58	-39.83	-13.00	26.83	H
3760.0	-43.41	4.41	3.00	12.34	-35.48	-13.00	22.48	V
5640.0	-45.18	5.38	3.00	13.58	-36.98	-13.00	23.98	V

LTE FDD Band 2_Channel Bandwidth 5MHz_16QAM _ High Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3815.0	-43.54	4.45	3.00	12.45	-35.54	-13.00	22.54	H
5722.5	-48.07	5.47	3.00	13.66	-39.88	-13.00	26.88	H
3815.0	-46.51	4.45	3.00	12.45	-38.51	-13.00	25.51	V
5722.5	-49.75	5.48	3.00	13.66	-41.57	-13.00	28.57	V

LTE FDD Band 2_Channel Bandwidth 10MHz_16QAM _ Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3710.0	-44.18	4.39	3.00	12.34	-36.23	-13.00	23.23	H
5565.0	-49.05	5.31	3.00	13.52	-40.84	-13.00	27.84	H
3710.0	-51.15	4.39	3.00	12.34	-43.2	-13.00	30.20	V
5565.0	-54.23	5.31	3.00	13.52	-46.02	-13.00	33.02	V

LTE FDD Band 2_Channel Bandwidth 10MHz_16QAM _ Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-41.07	4.41	3.00	12.34	-33.14	-13.00	20.14	H
5640.0	-48.31	5.38	3.00	13.58	-40.11	-13.00	27.11	H
3760.0	-43.53	4.41	3.00	12.34	-35.6	-13.00	22.60	V
5640.0	-44.46	5.38	3.00	13.58	-36.26	-13.00	23.26	V

LTE FDD Band 2_Channel Bandwidth 10MHz_16QAM _ High Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3810.0	-43.32	4.45	3.00	12.45	-35.32	-13.00	22.32	H
5715.0	-47.79	5.47	3.00	13.66	-39.6	-13.00	26.60	H
3810.0	-46.43	4.45	3.00	12.45	-38.43	-13.00	25.43	V
5715.0	-49.59	5.48	3.00	13.66	-41.41	-13.00	28.41	V

LTE FDD Band 2_Channel Bandwidth 15MHz_16QAM _ Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3715.0	-44.07	4.39	3.00	12.34	-36.12	-13.00	23.12	H
5572.5	-49.78	5.31	3.00	13.52	-41.57	-13.00	28.57	H
3715.0	-51.01	4.39	3.00	12.34	-43.06	-13.00	30.06	V
5572.5	-54.08	5.31	3.00	13.52	-45.87	-13.00	32.87	V

LTE FDD Band 2_Channel Bandwidth 15MHz_16QAM _ Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-41.16	4.41	3.00	12.34	-33.23	-13.00	20.23	H
5640.0	-47.94	5.38	3.00	13.58	-39.74	-13.00	26.74	H
3760.0	-43.44	4.41	3.00	12.34	-35.51	-13.00	22.51	V
5640.0	-44.83	5.38	3.00	13.58	-36.63	-13.00	23.63	V

LTE FDD Band 2_Channel Bandwidth 15MHz_16QAM _ High Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3805.0	-43.86	4.45	3.00	12.45	-35.86	-13.00	22.86	H
5707.5	-48.09	5.47	3.00	13.66	-39.9	-13.00	26.90	H
3805.0	-46.49	4.45	3.00	12.45	-38.49	-13.00	25.49	V
5707.5	-49.54	5.48	3.00	13.66	-41.36	-13.00	28.36	V

LTE FDD Band 2_Channel Bandwidth 20MHz_16QAM _ Low Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3720.0	-43.84	4.39	3.00	12.34	-35.89	-13.00	22.89	H
5580.0	-49.69	5.31	3.00	13.52	-41.48	-13.00	28.48	H
3720.0	-50.77	4.39	3.00	12.34	-42.82	-13.00	29.82	V
5580.0	-53.43	5.31	3.00	13.52	-45.22	-13.00	32.22	V

LTE FDD Band 2_Channel Bandwidth 20MHz_16QAM _ Middle Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.0	-40.94	4.41	3.00	12.34	-33.01	-13.00	20.01	H
5640.0	-48.26	5.38	3.00	13.58	-40.06	-13.00	27.06	H
3760.0	-43.27	4.41	3.00	12.34	-35.34	-13.00	22.34	V
5640.0	-44.79	5.38	3.00	13.58	-36.59	-13.00	23.59	V

LTE FDD Band 2_Channel Bandwidth 20MHz_16QAM _ High Channel

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	Diatance	G_a Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3800.0	-43.6	4.45	3.00	12.45	-35.6	-13.00	22.60	H
5700.0	-48.61	5.47	3.00	13.66	-40.42	-13.00	27.42	H
3800.0	-46.56	4.45	3.00	12.45	-38.56	-13.00	25.56	V
5700.0	-49.68	5.48	3.00	13.66	-41.5	-13.00	28.50	V

4.7 Frequency Stability

LIMIT

According to §24.235, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

TEST CONFIGURATION

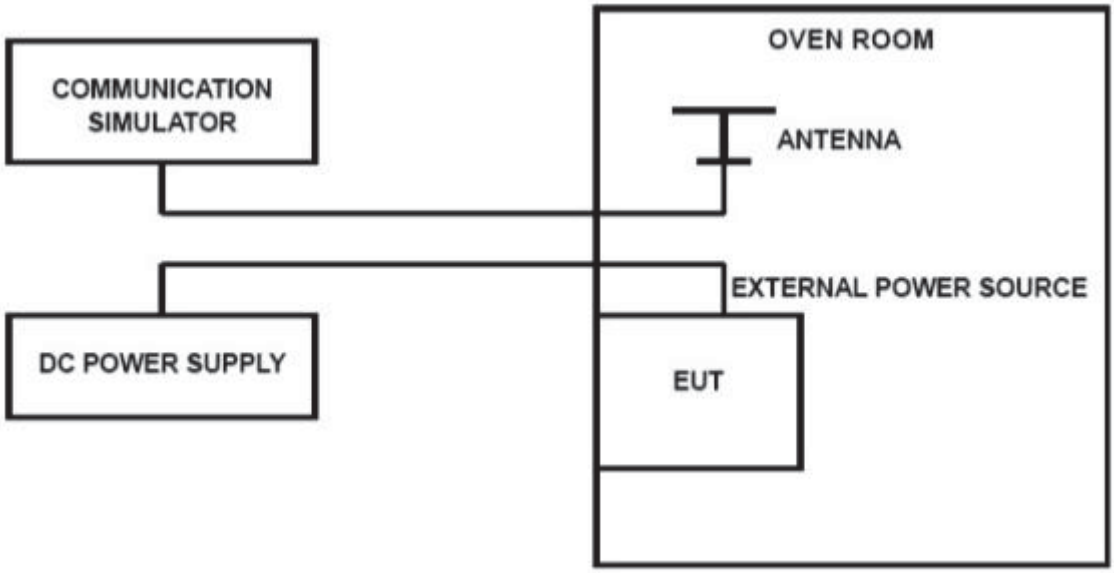

TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

Frequency Stability Under Temperature Variations:
In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.
1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30℃.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 2, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10℃ increments from -30℃ to +50℃. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50℃.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 ℃ increments from +50℃ to -30℃. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5℃ during the measurement procedure.

Frequency Stability Under Voltage Variations:
Set chamber temperature to 20℃. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.
Reduce the input voltage to specify extreme voltage variation (±15%) and endpoint, recordthe maximum frequency change.

TEST RESULTS

Remark:
1. We testedall RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case.

LTE Band 2, 1.4MHz bandwidth , QPSK (worst case of all bandwidths)

LTE FDD Band 2					
DC Power	**Temperature (℃)**	**Frequency error(Hz)**	**Frequency error(ppm)**	**Limit (ppm)**	**Verdict**
5.1	20	2.7	0.001459	2.50	PASS
6	20	8.3	0.004415	2.50	PASS
6.9	20	8.9	0.004661	2.50	PASS
6	-30	2.7	0.001459	2.50	PASS
6	-20	6.4	0.003404	2.50	PASS
6	-10	4.7	0.002540	2.50	PASS
6	0	0.3	0.000160	2.50	PASS
6	10	5.5	0.002881	2.50	PASS
6	20	4.6	0.002486	2.50	PASS
6	30	9.6	0.005106	2.50	PASS
6	40	6.4	0.003352	2.50	PASS
6	50	3.9	0.002074	2.50	PASS

LTE Band 2, 1.4MHz bandwidth , 16QAM (worst case of all bandwidths)

LTE FDD Band 2					
DC Power	**Temperature (℃)**	**Frequency error(Hz)**	**Frequency error(ppm)**	**Limit (ppm)**	**Verdict**
5.1	20	5.0	0.002702	2.50	PASS
6	20	8.9	0.004734	2.50	PASS
6.9	20	7.0	0.003666	2.50	PASS
6	-30	2.7	0.001459	2.50	PASS
6	-20	6.8	0.003617	2.50	PASS
6	-10	7.7	0.004033	2.50	PASS
6	0	4.6	0.002486	2.50	PASS
6	10	0.3	0.000160	2.50	PASS
6	20	0.7	0.000367	2.50	PASS
6	30	6.3	0.003404	2.50	PASS
6	40	2.5	0.001330	2.50	PASS
6	50	3.4	0.001781	2.50	PASS

5 Test Setup Photos of the EUT

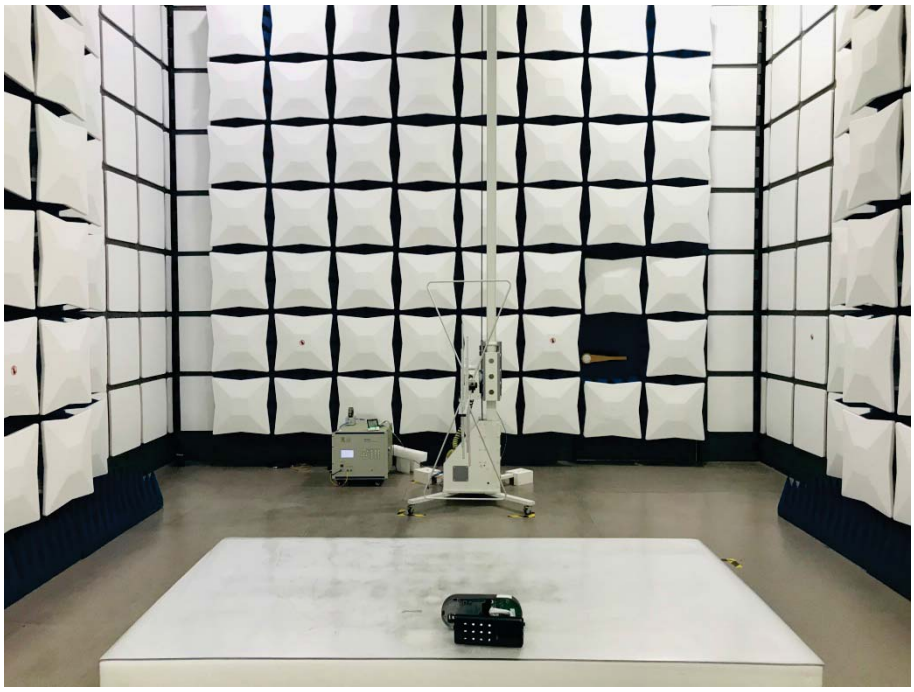

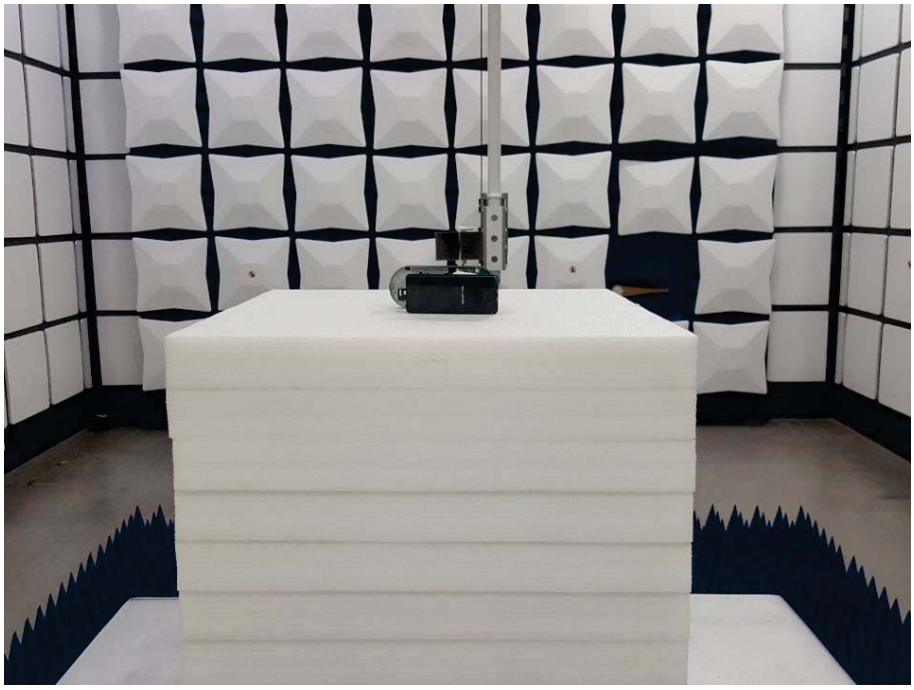

**********End of Report**********