



Research and development of Shenzhen Ruifeng Electronic Technology Co., LTD

Acknowledgment Letter

SPECIFICATION FOR APPROVAL

Customer Name	Shiyutong		
Customer Project Name	PM	Project Name	PM
Customer P/N		SDC P/N	WF4584B-B45R-A
Band	WIFI2. 4G/BT		
Version	A0		
Designer Information			
RF Engineer	Fu Xuerong	R&D Diretor	Xia Chenglei
ME Engineer	Huang Zongbao		

Approval				Customer Approval	
	Prepared By	Checked By	Approval By	Checked By	Approval By
Signature	Huang Zongbao	Fu Xuerong	Xia Chenglei		
Date	2023. 5. 26	2023. 5. 26	2023. 5. 26		


Change Log				
Version	Change Description	Person in Charge	Approval By	Date

Catalogue

No.	Item	Page No.
1	Drawing or Product Image	3
2	Dimensions Test Report	4
3	RF Performance Test Report	5-7
4	Reliability Test Report1	8
5	Package Document	9
6	RoHS Control list for Sample	10
7	Install Wizard or Other	10

Drawing or Product Image

1		2		3		4		5		6		7		8	
A		B		C		D		A		B		C		D	
Edition		Change content		Design		Date									
A0				Li Yao Na		2023.05.26									

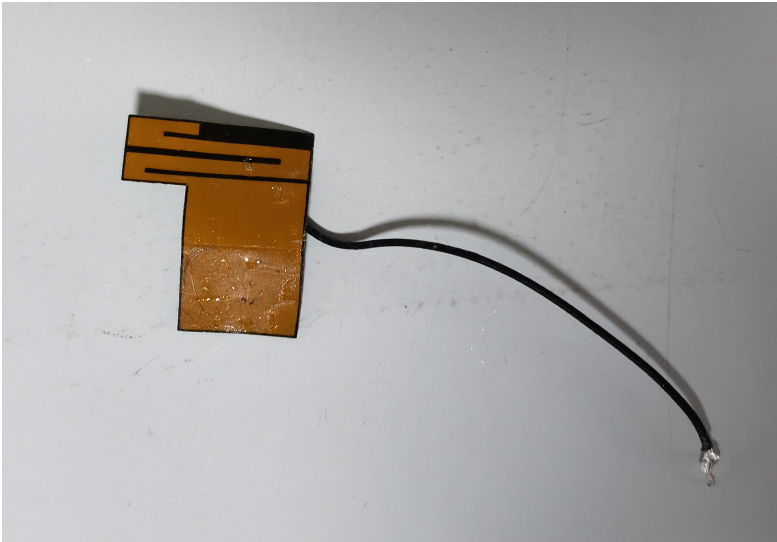

3		EVA foam		Stick 18.8(L)*14.52(W)*0.5(T)mm EVA foam single side		foam1	
2		Cable		500-81 Cable Black, 50Ω		45	
1		FPC		FPC- black oil black word half and half base material, do antioxidant treatment 3M 9471 back glue		1	
NO				DESCRIPTION		QTY	
				Research and development of Shenzhen Ruiheng Electronic Technology Co., LTD			



Name		WF antenna		Customer mode		PM	
Design		Li Yao Na		Finished material number		WF4584B-B45R-A	
Audit				proportion Edition		Page number	
Approve				Unit		View	
				mm		1/1	


Sample Dimensions Test Report

Test Date	2023. 5. 26	Sample Qty.	3	Inspector	Xu Yanfang
Dimension No.	Standard	Sample 1	Sample 2	Sample 3	Pass/NG
①length	18.8±0.2mm	18.8	18.9	18.8	Pass
②width	14.52±0.2mm	14.52	14.62	14.52	Pass
③thickness	0.1±0.03mm	0.1	0.1	0.1	Pass
④Line length	45±2mm	45	46	46	Pass
⑤					
⑥					
⑦					
Conclusion					PASS
Inspector & Date	Xu Yanfang 2023. 5. 26		Approval & Date		

RF Performance Test Report

Antenna Test Equipment Introduction


Test of antenna input characteristics using **Agilent E5071C** and **Agilent 5062A** vector network analyzer; The radiation pattern of the antenna are tested using the guangping 3D near field Anechoic Chamber, and the instrument is used to agilent8960 E5515 and Agilent E4438C. The test coordinates of the darkroom are as follows:

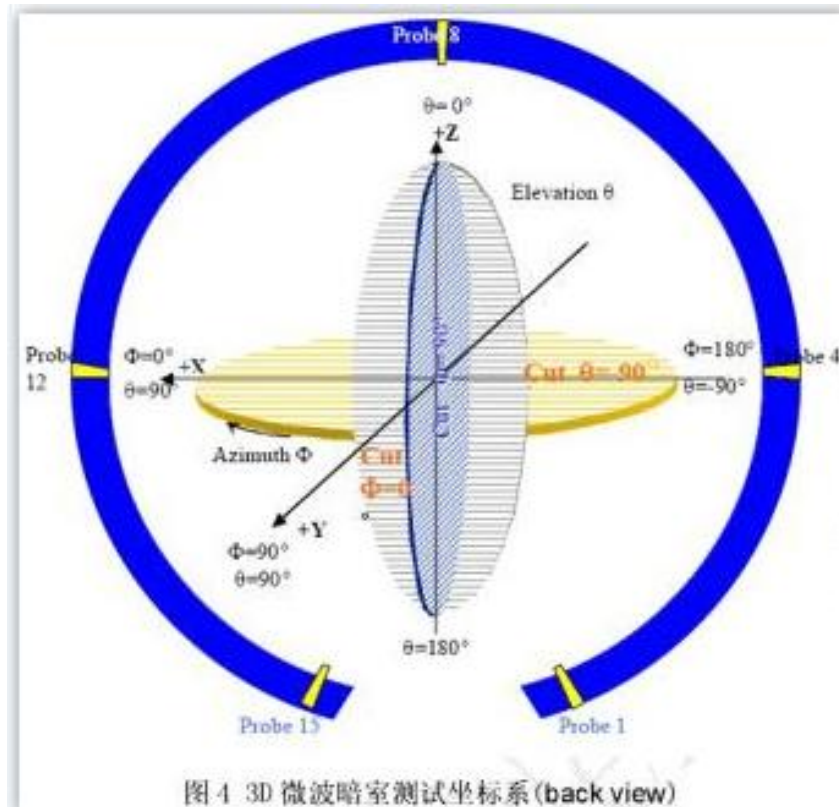1. **S11 Parameter-VSWR**

Measuring Method is a 50Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the S11 parameter, Keeping this fixture away from metal at least 20cm.


S11 Parameter-VSWR

frequency (MHZ)	2400	2450	2500
standing-wave ratio	1.62	1.41	1.62

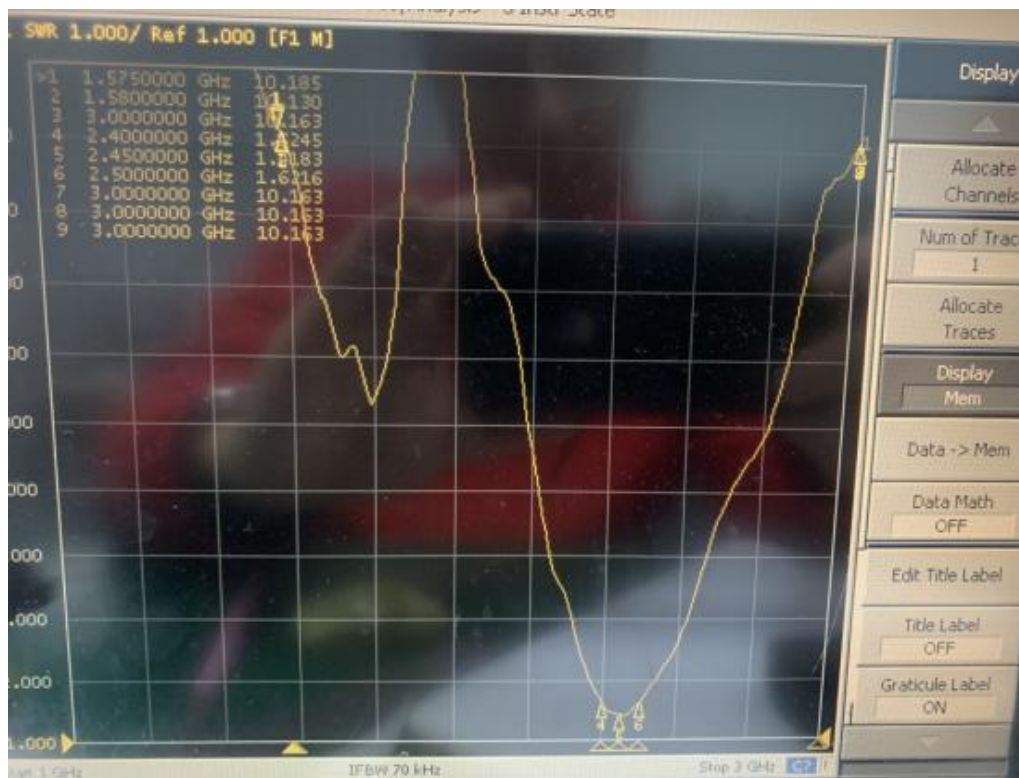


2. Antenna Matching Network

Antenna

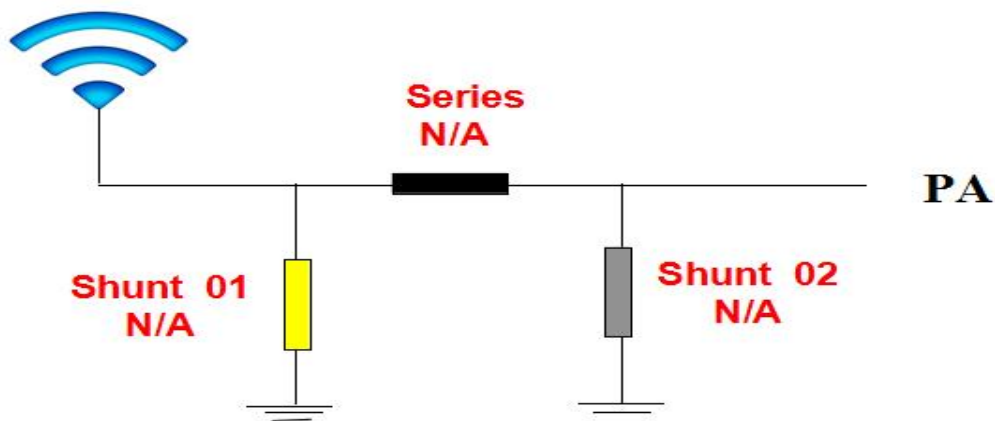

3. Gain & Efficiency

Frequency (MHz)	Efficiency (%)	Peak GAIN (dBi)
2400	31.74	-0.59
2450	29.65	-0.51
2500	28.15	-0.93

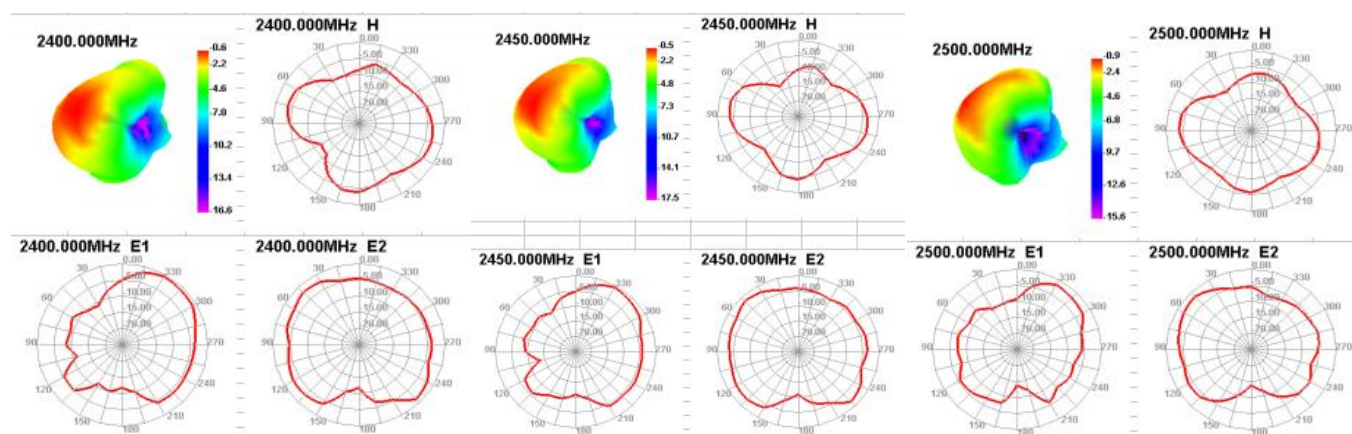

Reliability Test Report

Test Date	2023. 5. 26	Sample Qty.	3	Inspector	Xu Yanfang	
Test Item	Requirement	testing equipment	Sample 1	Sample 2	Sample 3	PASS/NG
high temperature storage	Expose to +85 °C for 24 hours, recover for 2 hours, and conduct testing	Constant temperature and humidity box	OK	OK	OK	Pass
low temperature storage	Expose to -40 °C for 24 hours, recover for 2 hours, and perform testing	Constant temperature and humidity box	OK	OK	OK	Pass
High temperature operation	Powered on for 24 hours at +60 °C	Constant temperature and humidity box	OK	OK	OK	Pass
Low temperature operation	Powered on for 24 hours at -20 °C	Constant temperature and humidity box	OK	OK	OK	Pass
Salt spray test	(5 ± 0. 5)% sodium chloride, pH Value is 6. 5~7. 2, Temperature of experimental chamber (35 ± 2) °C ☐ 24H ☒ 48H	Salt spray testing machine	OK	OK	OK	Pass
Connector riveting and pulling force	1. 13 Wire diameter ≥ 10N 0. 81 Wire diameter ≥ 8N RG174 ≥ 60N RG178 ≥ 50N	Push-pull force gauge	≥ 10N	≥ 10N	≥ 10N	Pass
Conclusion						Pass
Inspector & Date	Xu Yanfang 2023. 5. 26		Approval & Date			

Product ROHS Composition Declaration Form

product name	Uniform material	Harmful substance content(PPM)					HS test report number	Date of HS test report
		Pb	Cd	Hg	Cr	Br		
WIFI&BT antenna terminal	FPC	ND	ND	ND	ND	ND	UNIB21042707HR-01	2023. 5. 26
		ND	ND	ND	ND	ND		
		ND	ND	ND	ND	ND		
		ND	ND	ND	ND	ND		
		ND	ND	ND	ND	ND		
	wire rod	ND	ND	ND	ND	ND		
		ND	ND	ND	ND	ND		
		ND	ND	ND	ND	ND		
	terminal	ND	ND	ND	ND	ND		

Install Wizard or Other

setup script:

Take 1 PCS of product, tear off the release paper on the back of the FPC by hand, and then align the FPC positioning hole position with the shell positioning hole position (positioning rib position or positioning line), and attach it flat to the shell, as shown in the following figure:

Installation process precautions:

- ☐Ensure that the FPC is fully attached to the housing after pasting the antenna;
- ☐Align the positioning hole with the position of the casing positioning column;
- ☐Align FPC edge with shell edge;
- ☐When attaching the terminal to the PCBA end of the motherboard, please first align the terminals and then snap them vertically;
- ☐When disassembling antenna terminals, it is necessary to use a tool (such as a special pry bar) to vertically lift the terminals and not directly pull the wires for disassembly