



FCC RADIO TEST REPORT

FCC ID : 2AYOA-4010
Equipment : AI GLASSES
Brand Name : Ray-Ban Meta or Ray-Ban
Model Name : RW7001, RW7002
Applicant : Luxottica Group S.p.A.
Piazzale Cadorna 3 20123 Milan, Italy
Manufacturer : Luxottica Group S.p.A.
Piazzale Cadorna 3 20123 Milan, Italy
Standard : FCC Part 15 Subpart E §15.407

The product was received on Dec. 10, 2025 and testing was performed from Dec. 10, 2025 to Dec. 11, 2025. We, Sporton International (USA) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International (USA) Inc., the test report shall not be reproduced except in full.

Approved by: Neil Kao

Sporton International (USA) Inc.
1175 Montague Expressway, Milpitas, CA 95035



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
3 Test Result	9
3.1 Contention Based Protocol.....	9
4 List of Measuring Equipment.....	12
Appendix A. Contention Based Protocol Test Results	
Appendix B. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR251105039	01	Initial issue of report	Dec. 29, 2025
FR251105039	02	Revised Product Feature of Equipment Under Test. This report is an updated version, replacing the report issued on Dec. 29, 2025.	Dec. 31, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(d)(6)	Contention Based Protocol	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth, Bluetooth-LE, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and Wi-Fi 6GHz 802.11a/ax.		
Antenna Type WLAN: IFA Antenna Bluetooth: IFA Antenna		
Antenna information for Directional Gain		
5925 MHz ~ 6425 MHz	Peak Gain (dBi)	1.74
6425 MHz ~ 6525 MHz	Peak Gain (dBi)	0.26
6525 MHz ~ 6875 MHz	Peak Gain (dBi)	0.68
6875 MHz ~ 7125 MHz	Peak Gain (dBi)	1.53
Sample	Model Name	Product Marketing Name
Sample 1	RW7002	RayBan Meta Scriber
Sample 2	RW7001	RayBan Meta Blazer Large
Sample 3	RW7001	RayBan Meta Blazer

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. There are three samples of EUT. The manufacturer declares that all the equipment share the same radio characteristics and Software/Firmware, the only differences between each of them are color of frames, lenses, and sizes which certainly do not affect the test results. Therefore, only Sample 1 was tested.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International (USA) Inc.
Test Site Location	1175 Montague Expressway, Milpitas, CA 95035 TEL : 408 9043300
Test Site No.	Sporton Site No. DFS01-CA



1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC Part 15 Subpart E
- ♦ ANSI C63.10-2020

Remark: All the test items were validated and recorded in accordance with the standards without any modification during the testing.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency and Channel

BW 20M	Channel	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	Channel	7				23			
	Freq. (MHz)	5985				6065			
BW 160M	Channel	15							
	Freq. (MHz)	6025							

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							

BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							

BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							



BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							

BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							

BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							

BW 20M	Channel	225	229
	Freq. (MHz)	7075	7095
BW 40M	Channel	227	
	Freq. (MHz)	7085	

3 Test Result

3.1 Contention Based Protocol

3.1.1 Limit of Contention Based Protocol

<FCC 14-30 CFR 15.407>

(d)(6)All U-NII transmitters, except for standard power access points and fixed client devices, operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v03

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

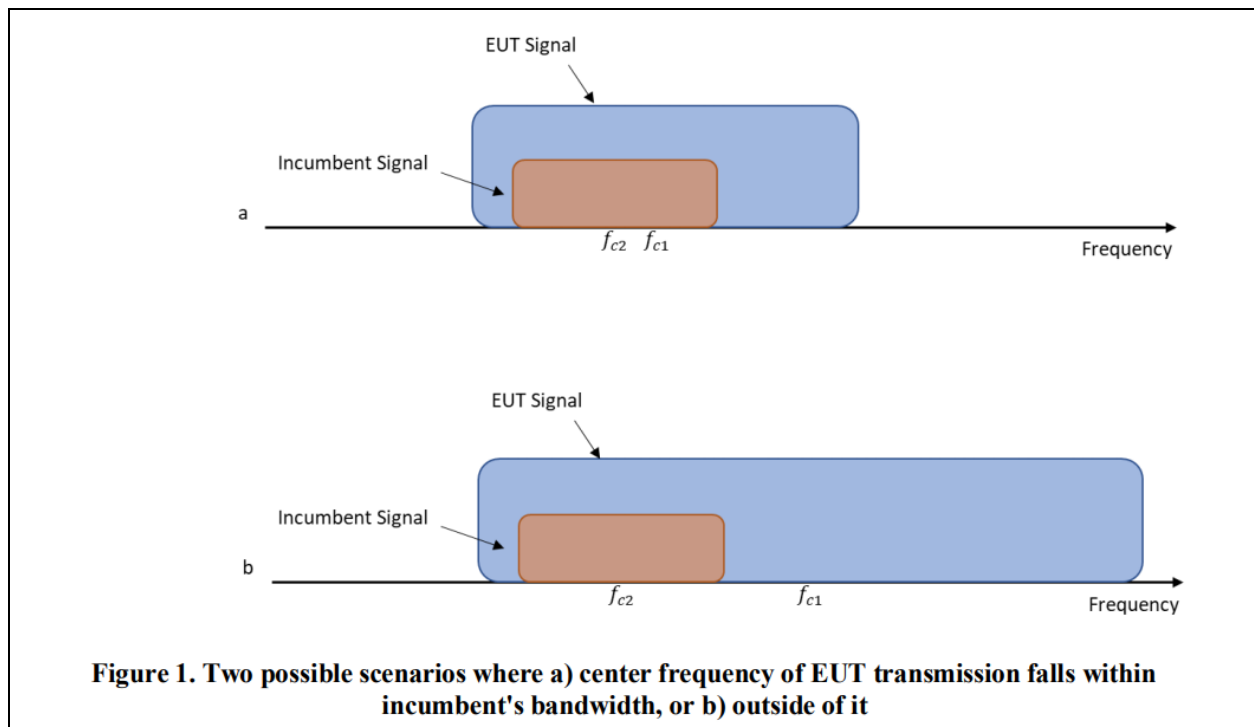

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v03.


Section I) Contention Based Protocol

Conducted method Step-by-Step Procedure, Conducted Setup

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
4. Connect the output port of the EUT to the signal analyzer 2, as shown in test setup Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
5. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
6. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
7. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in test setup Figure 2.
8. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.

9. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
10. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
11. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.
12. For the contention-based protocol test where only one channel in each supported sub-band needs to be tested. The narrowest and widest bandwidth in each channel shall be measured EUT was driven in MIMO mode, the interferer level was injected to both chains to monitor the performance, while the interferer level is determined according the lowest antenna gain among both antennas (i.e, lower interferer level).

3.1.4 Test Setup

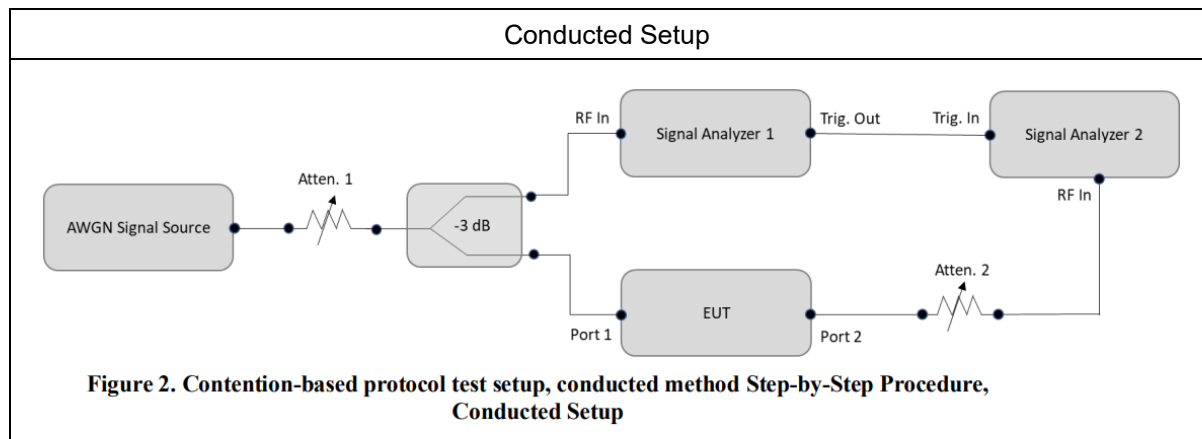

3.1.5 Support Unit used in test configuration and system

Please refer to Appendix A.

3.1.6 Minimum Antenna gain for Contention Based Protocol Test

Please refer to Appendix A.

3.1.7 Test Summary of Contention Based Protocol Test

Please refer to Appendix A.

3.1.8 Test Plots of Contention Based Protocol Test

Please refer to Appendix A.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Vector Signal Generator	Keysight	N5182B	MY57300963	9KHz~6GHz	Mar. 26, 2025	Dec. 10, 2025~ Dec. 11, 2025	Mar. 25, 2026	CBP (DFS01-CA)
Frequency Extender for EXG or MXG	Keysight	N5182BX07	MY59360230	9kHz~7.2GHz	Mar. 26, 2025	Dec. 10, 2025~ Dec. 11, 2025	Mar. 25, 2026	CBP (DFS01-CA)
Spectrum Analyzer	R&S	FSV3013	101697	10Hz~13.6GHz	Sep. 24, 2025	Dec. 10, 2025~ Dec. 11, 2025	Sep. 23, 2026	CBP (DFS01-CA)
Hygrometer	Testo	608-H1	45142588	Temperature & Humidity	Aug. 08, 2025	Dec. 10, 2025~ Dec. 11, 2025	Aug. 07, 2026	CBP (DFS01-CA)
Manual Step Attenuator	Keysight	8496B	MY42151805	N/A	Feb. 28, 2025	Dec. 10, 2025~ Dec. 11, 2025	Feb. 27, 2026	CBP (DFS01-CA)
Manual Step Attenuator	Keysight	8494B	MY42158324	N/A	Feb. 28, 2025	Dec. 10, 2025~ Dec. 11, 2025	Feb. 27, 2026	CBP (DFS01-CA)
Power Divider	Warison	WDIV-2I0.5-26.5S20-01	WRIBEBML2B1	0.5GHz-26.5GHz	Calibration from System	Dec. 10, 2025~ Dec. 11, 2025	Calibration from System	CBP (DFS01-CA)
Power Divider	Woken	0120A04058001M	DDTB6SW3G2	0.5GHz-8GHz	Calibration from System	Dec. 10, 2025~ Dec. 11, 2025	Calibration from System	CBP (DFS01-CA)
Coupler	Woken	0110A05801M-10	CCMEBCW1A1	0.5GHz-8GHz	Calibration from System	Dec. 10, 2025~ Dec. 11, 2025	Calibration from System	CBP (DFS01-CA)



Appendix A. Contention Based Protocol Test Result

EUT Information

Test Date	2025/12/10 ~ 2025/12/11
Test Engineer	Rebecca Li
Antenna Gain	<UNII-5>: 1.74 dBi <UNII-6>: 0.26 dBi <UNII-7>: 0.68 dBi <UNII-8>: 1.53 dBi
Temperature	17.1~19.5°C
Humidity	51.5~54.7%
IMEI/SN	<pre>C:\Users\Administrator\Desktop>adb for meta>adb shell getprop ro.vendor.build.fingerprint meta/florian/florian:12/SQ3A.220605.009.A1/909830062301291:userdebug/test-keys</pre>
HW	
SW	

Support Units used in Test

Instrument	Manufacturer	Model No.	Characteristics
Companion Device (AP)	ASUS	GT-AXE11000	Dual Band AP
Terminal (NB Server)	MSI	GP62 6QE	LAN



A1. Test Summary of Contention Based Protocol Test

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 5	6135	20	6135	-81.35	100	-62	-83.09	21.09
				Result: Stop Transmission				
				-84.35	< 90	-62	-86.09	24.09
				Result: Minimal Operation				
				-85.35	0	-62	-87.09	25.09
				Result: Normal Operation				
	6345	160	6270	-79.34	100	-62	-81.08	19.08
				Result: Stop Transmission				
				-82.34	< 90	-62	-84.08	22.08
				Result: Minimal Operation				
				-83.34	0	-62	-85.08	23.08
				Result: Normal Operation				
			6345	-70.09	100	-62	-71.83	9.83
				Result: Stop Transmission				
				-79.09	< 90	-62	-80.83	18.83
				Result: Minimal Operation				
				-80.09	0	-62	-81.83	19.83
				Result: Normal Operation				
			6420	-77.2	100	-62	-78.94	16.94
				Result: Stop Transmission				
				-83.2	< 90	-62	-84.94	22.94
				Result: Minimal Operation				
				-84.2	0	-62	-85.94	23.94
				Result: Normal Operation				

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (1.74 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 6	6455	20	6455	-80.23	100	-62	-80.49	18.49
					Result: Stop Transmission			
				-85.23	< 90	-62	-85.49	23.49
					Result: Minimal Operation			
				-86.23	0	-62	-86.49	24.49
					Result: Normal Operation			
	6505	160	6430	-79.32	100	-62	-79.58	17.58
					Result: Stop Transmission			
				-82.32	< 90	-62	-82.58	20.58
					Result: Minimal Operation			
				-83.32	0	-62	-83.58	21.58
					Result: Normal Operation			
			6505	-73.28	100	-62	-73.54	11.54
					Result: Stop Transmission			
				-78.28	< 90	-62	-78.54	16.54
					Result: Minimal Operation			
				-79.28	0	-62	-79.54	17.54
					Result: Normal Operation			
			6580	-77.35	100	-62	-77.61	15.61
					Result: Stop Transmission			
				-81.35	< 90	-62	-81.61	19.61
					Result: Minimal Operation			
				-82.35	0	-62	-82.61	20.61
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (0.26 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 7	6695	20	6695	-81.59	100	-62	-82.27	20.27
					Result: Stop Transmission			
				-84.59	< 90	-62	-85.27	23.27
					Result: Minimal Operation			
				-85.59	0	-62	-86.27	24.27
					Result: Normal Operation			
	6665	160	6590	-79.02	100	-62	-79.70	17.70
					Result: Stop Transmission			
				-84.02	< 90	-62	-84.70	22.70
					Result: Minimal Operation			
				-85.02	0	-62	-85.70	23.70
					Result: Normal Operation			
			6665	-73.46	100	-62	-74.14	12.14
					Result: Stop Transmission			
				-76.46	< 90	-62	-77.14	15.14
					Result: Minimal Operation			
				-77.46	0	-62	-78.14	16.14
					Result: Normal Operation			
			6740	-78.04	100	-62	-78.72	16.72
					Result: Stop Transmission			
				-81.04	< 90	-62	-81.72	19.72
					Result: Minimal Operation			
				-82.04	0	-62	-82.72	20.72
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (0.68 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.

Note 3: Margin = Regulated Threshold level - Adjusted Power.



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 8	7015	20	7015	-72.96	100	-62	-74.49	12.49
					Result: Stop Transmission			
				-83.96	< 90	-62	-85.49	23.49
					Result: Minimal Operation			
				-84.96	0	-62	-86.49	24.49
					Result: Normal Operation			
	6985	160	6910	-77.87	100	-62	-79.40	17.40
					Result: Stop Transmission			
				-81.87	< 90	-62	-83.40	21.40
					Result: Minimal Operation			
				-82.87	0	-62	-84.40	22.40
					Result: Normal Operation			
			6985	-71.71	100	-62	-73.24	11.24
					Result: Stop Transmission			
				-76.71	< 90	-62	-78.24	16.24
					Result: Minimal Operation			
				-77.71	0	-62	-79.24	17.24
					Result: Normal Operation			
			7060	-73.92	100	-62	-75.45	13.45
					Result: Stop Transmission			
				-77.92	< 90	-62	-79.45	17.45
					Result: Minimal Operation			
				-78.92	0	-62	-80.45	18.45
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (1.53 dBi).

Note 2: The antenna gain has included the path loss between RF connector and antenna.





Note 3: Margin = Regulated Threshold level - Adjusted Power.

CBP verify with frequency domain plots




The device does not support channel puncturing with regards to Contention Based Protocol.

The entire bandwidth 160MHz stops transmission after the incumbent signal appears.

Otherwise, the entire 160MHz bandwidth is reduced to 40MHz or 80MHz.

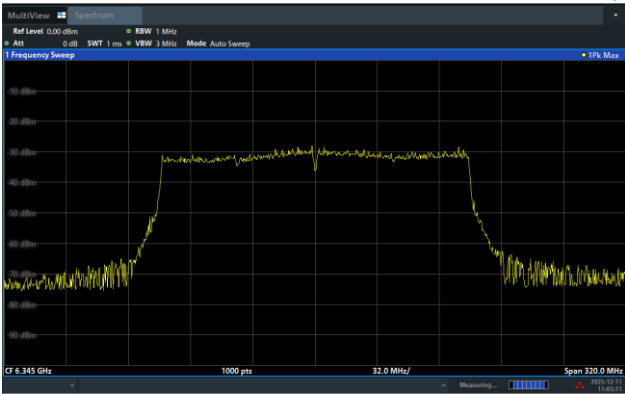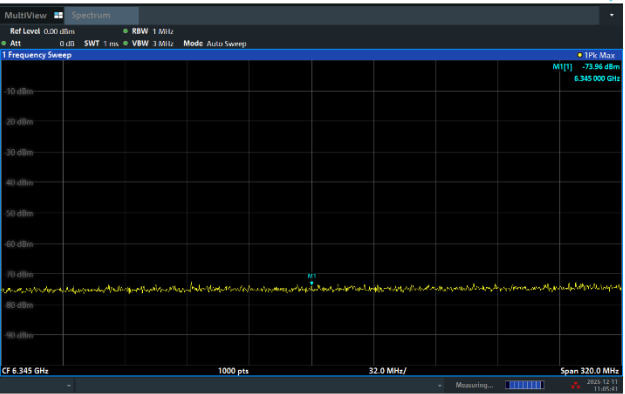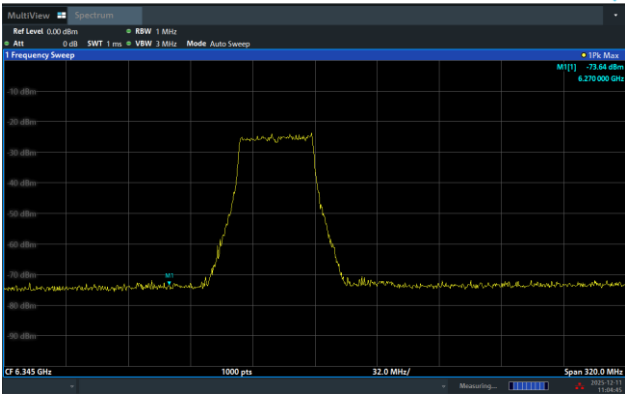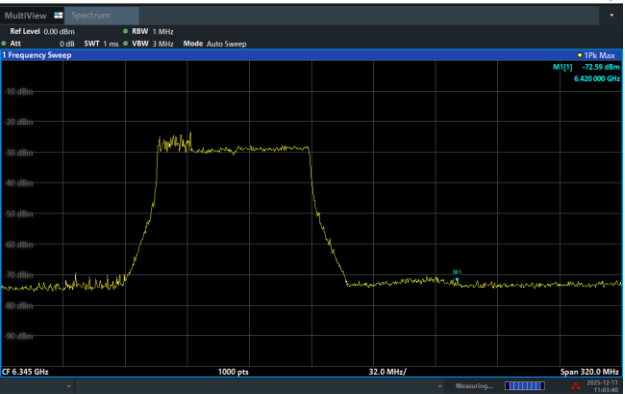Before incumbent injected on 160MHz channel	After 10MHz incumbent injected on center of channel, the entire 160MHz bandwidth stops transmission.
	
After 10MHz incumbent injected on bottom of channel, the EUT bandwidth is reduced from 160MHz to 40MHz channel.	After 10MHz incumbent injected on top of channel, the EUT bandwidth is reduced from 160MHz to 80MHz channel.
	


A2. Test Plots of Contention Based Protocol Test

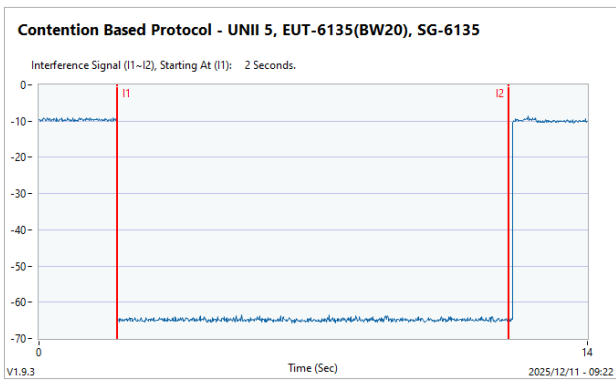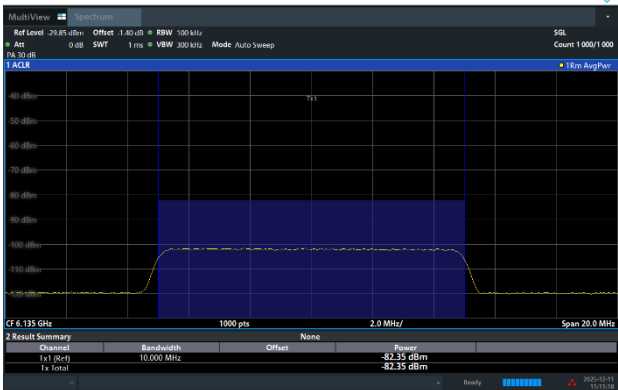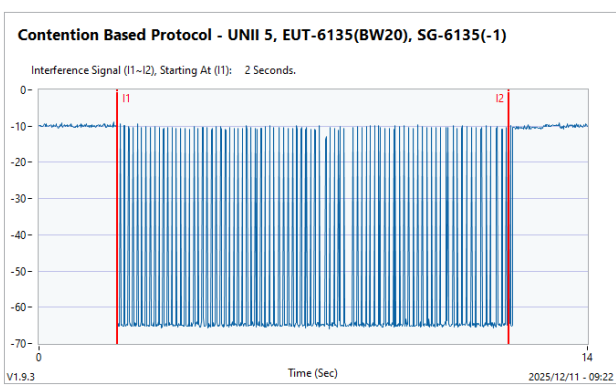Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)	
802.11ax (HE20) / 6135MHz Threshold Level (TL) = -81.35dBm 	802.11ax (HE20) / CH37 Test result is pass due to no transmission occur. 
802.11ax (HE20) / 6135MHz Threshold Level (TL) = -82.35dBm 	802.11ax (HE20) / CH37 Transmit when the interferer is 1dB lower. 

Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)



802.11ax (HE160) / 6270MHz (Lower edge)
Threshold Level (TL) = -79.34dBm

802.11ax (HE160) / CH79 (Lower edge)
Test result is pass due to no transmission occur.

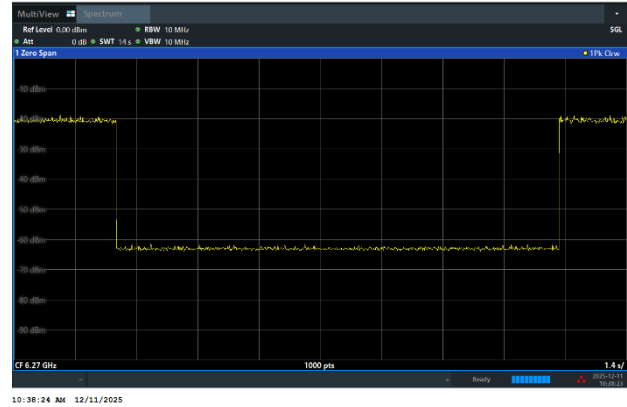

802.11ax (HE160) / 6270MHz (Lower edge)
Threshold Level (TL) = -80.35dBm


802.11ax (HE160) / CH79 (Lower edge)
Transmit when the interferer is 1dB lower.

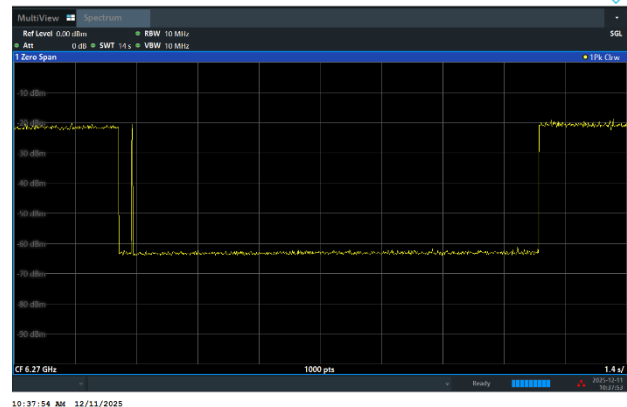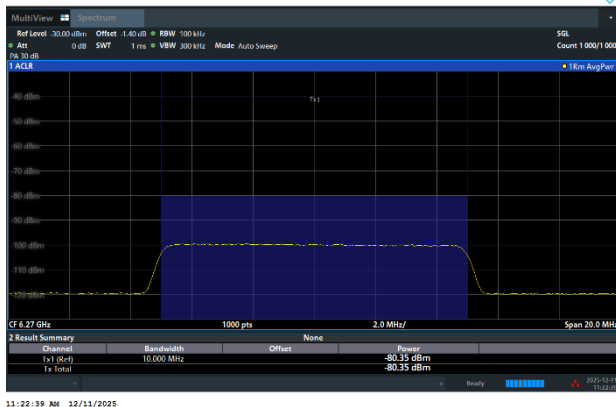




Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)

802.11ax (HE160) / 6345MHz (Middle)
Threshold Level (TL) = -70.09dBm

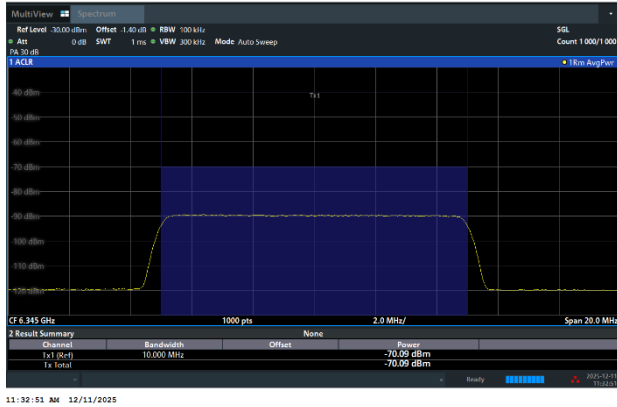


11:32:51 AM 12/11/2025

802.11ax (HE160) / CH79 (Middle)
Test result is pass due to no transmission occur.

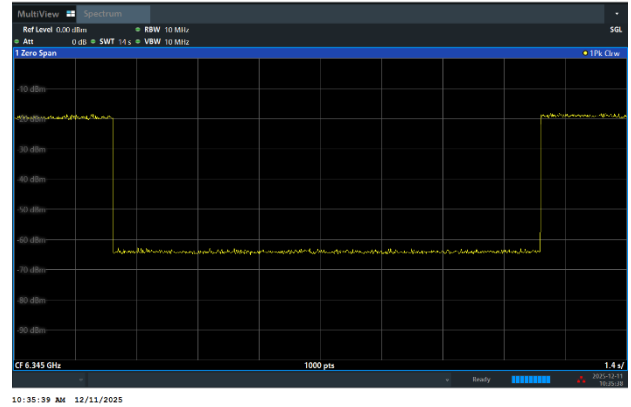


10:35:39 AM 12/11/2025

802.11ax (HE160) / 6345MHz (Middle)
Threshold Level (TL) = -71.04dBm

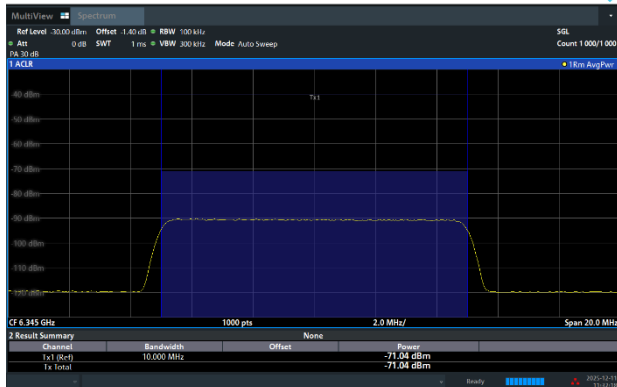

11:32:18 AM 12/11/2025

802.11ax (HE160) / CH79 (Middle)
Transmit when the interferer is 1dB lower.

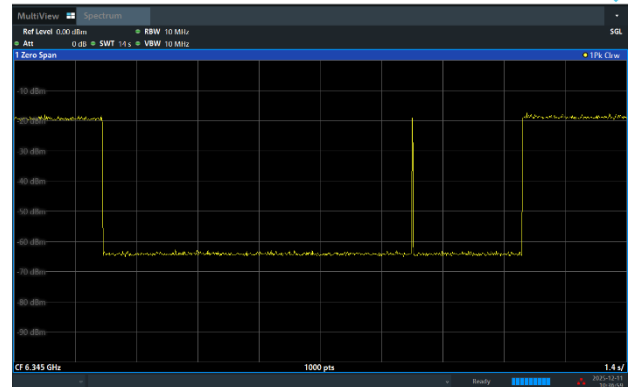


10:37:00 AM 12/11/2025



Contention Based Protocol Result Plots on U-NII 5 (AWGN Interference)


802.11ax (HE160) / 6420MHz (Upper edge)
Threshold Level (TL) = -77.20dBm

802.11ax (HE160) / CH79 (Upper edge)
Test result is pass due to no transmission occur.

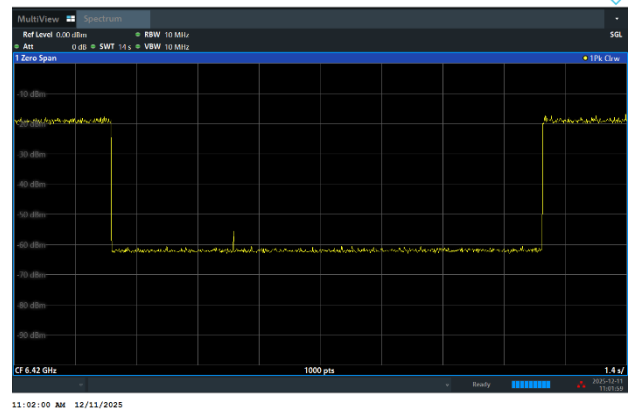

802.11ax (HE160) / 6420MHz (Upper edge)
Threshold Level (TL) = -78.19dBm

802.11ax (HE160) / CH79 (Upper edge)
Transmit when the interferer is 1dB lower.

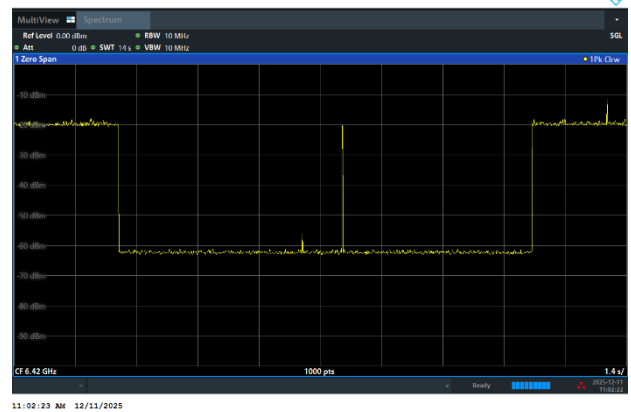




Contention Based Protocol Result Plots on U-NII 6 (AWGN Interference)

802.11ax (HE20) / 6455MHz
Threshold Level (TL) = -80.23dBm

802.11ax (HE20) / CH101
Test result is pass due to no transmission occur.




Contention Based Protocol - UNII 6, EUT-6455(BW20), SG-6455

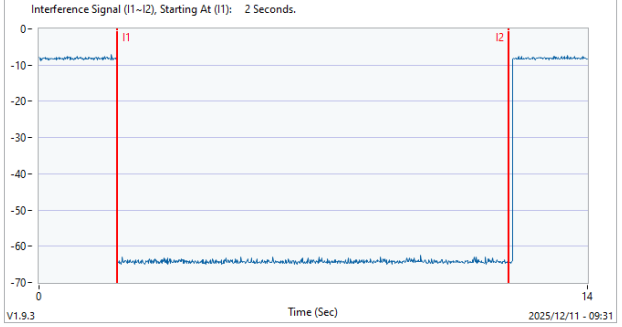


802.11ax (HE20) / 6455MHz
Threshold Level (TL) = -81.21dBm

802.11ax (HE20) / CH101
Transmit when the interferer is 1dB lower.

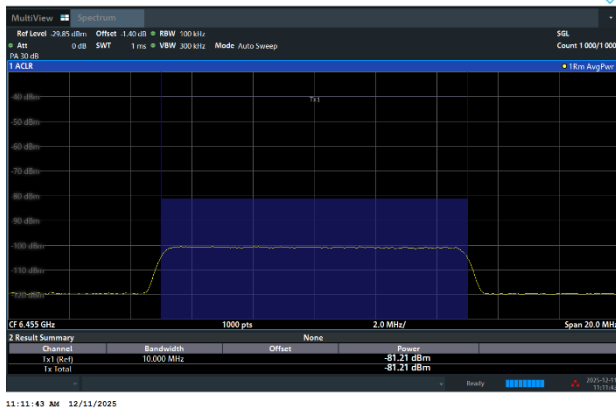

Contention Based Protocol - UNII 6, EUT-6455(BW20), SG-6455(-1)

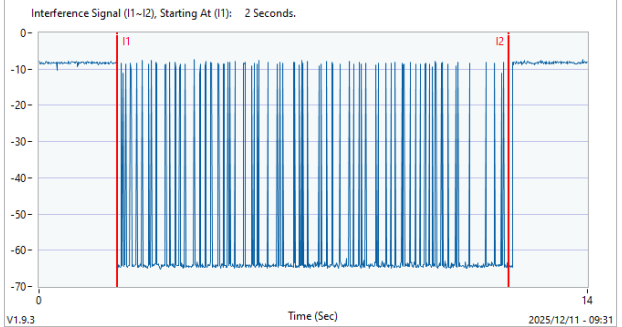




Contention Based Protocol Result Plots on U-NII 6 (AWGN Interference)



802.11ax (HE160) / 6430MHz (Lower edge)
Threshold Level (TL) = -79.32dBm

802.11ax (HE160) / CH111 (Lower edge)
Test result is pass due to no transmission occur.

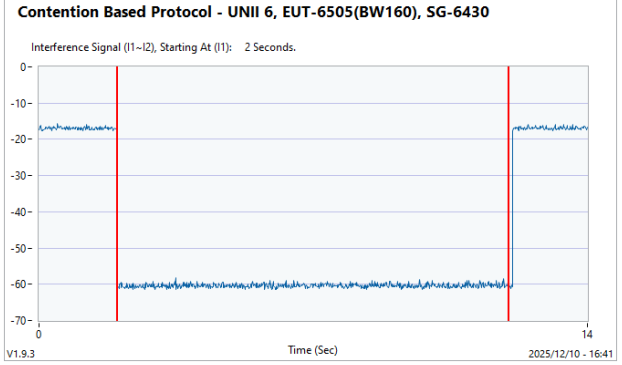

802.11ax (HE160) / 6430MHz (Lower edge)
Threshold Level (TL) = -80.33dBm

802.11ax (HE160) / CH111 (Lower edge)
Transmit when the interferer is 1dB lower.

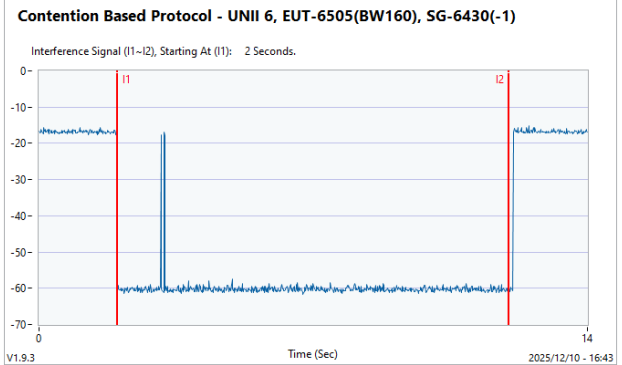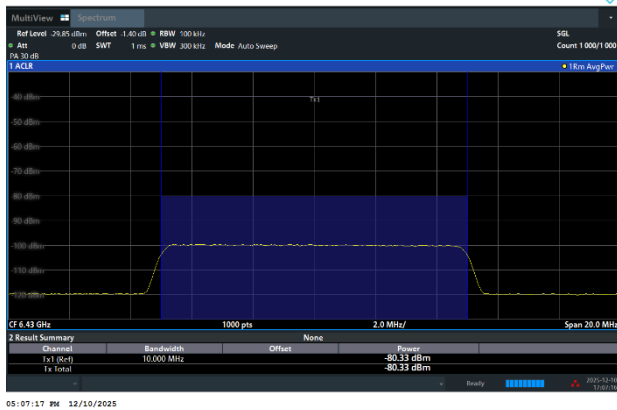




Contention Based Protocol Result Plots on U-NII 6 (AWGN Interference)

802.11ax (HE160) / 6505MHz (Middle)
Threshold Level (TL) = -73.28dBm

802.11ax (HE160) / CH111 (Middle)
Test result is pass due to no transmission occur.




Contention Based Protocol - UNII 6, EUT-6505(BW160), SG-6505

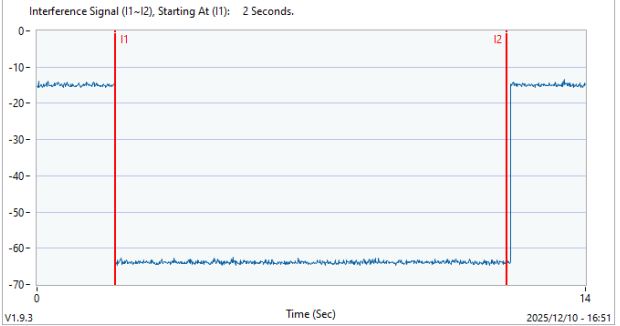


802.11ax (HE160) / 6505MHz (Middle)
Threshold Level (TL) = -74.31dBm

802.11ax (HE160) / CH111 (Middle)
Transmit when the interferer is 1dB lower.

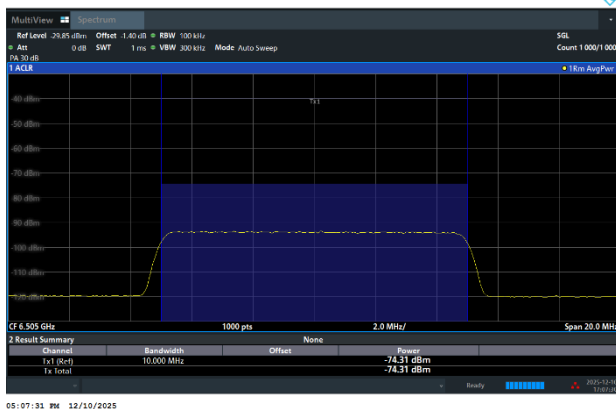

Contention Based Protocol - UNII 6, EUT-6505(BW160), SG-6505(-1)


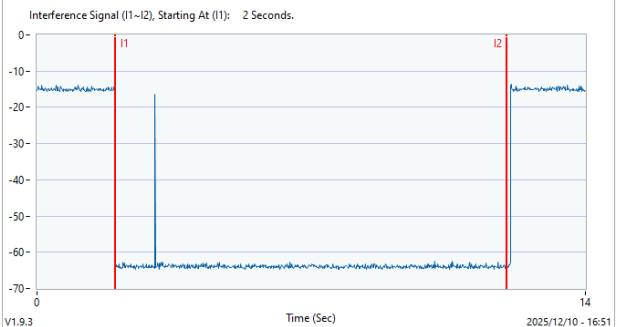




Contention Based Protocol Result Plots on U-NII 6 (AWGN Interference)



802.11ax (HE160) / 6580MHz (Upper edge)
Threshold Level (TL) = -77.35dBm

802.11ax (HE160) / CH111 (Upper edge)
Test result is pass due to no transmission occur.

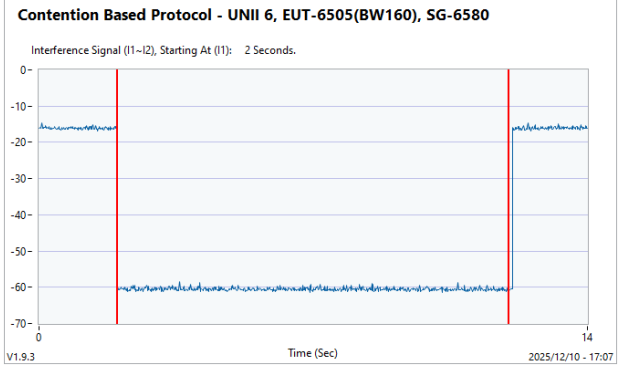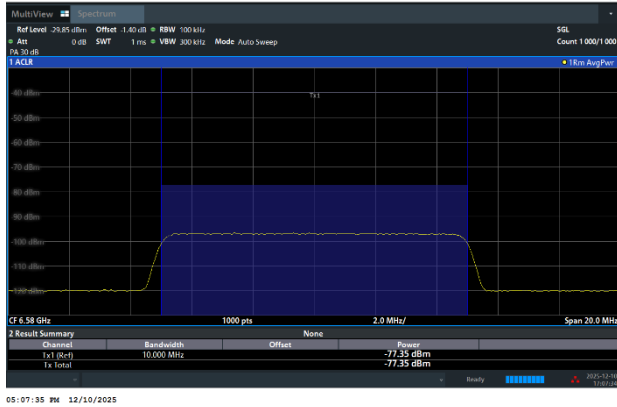

802.11ax (HE160) / 6580MHz (Upper edge)
Threshold Level (TL) = -78.30dBm

802.11ax (HE160) / CH111 (Upper edge)
Transmit when the interferer is 1dB lower.

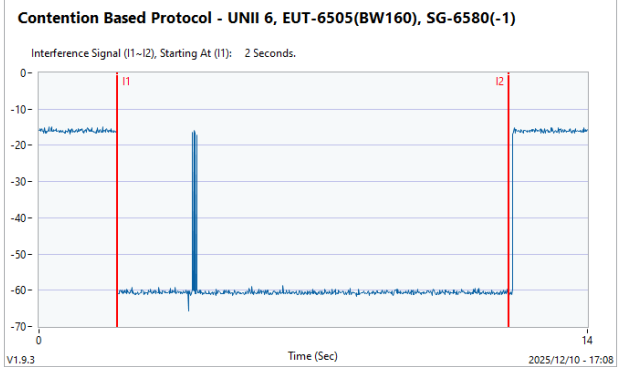
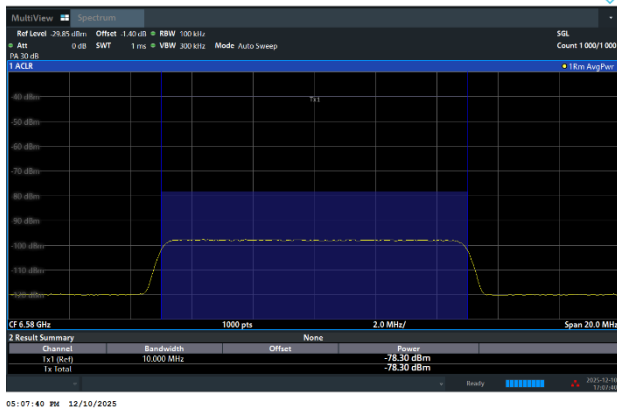




Contention Based Protocol Result Plots on U-NII 7 (AWGN Interference)



802.11ax (HE20) / 6695MHz
Threshold Level (TL) = -81.59dBm

802.11ax (HE20) / CH149
Test result is pass due to no transmission occur.

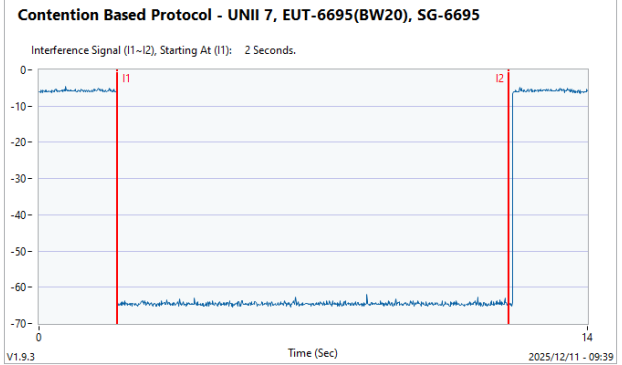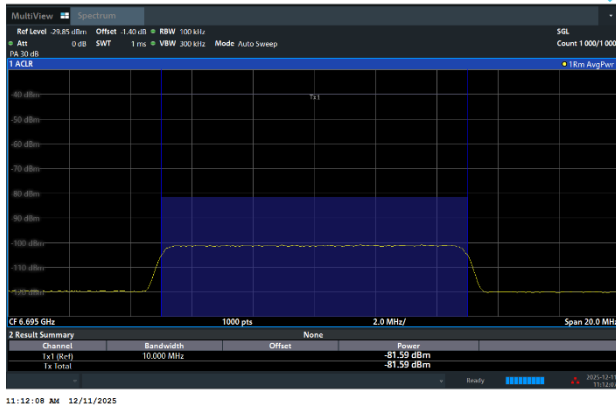

802.11ax (HE20) / 6695MHz
Threshold Level (TL) = -82.62dBm

802.11ax (HE20) / CH149
Transmit when the interferer is 1dB lower.

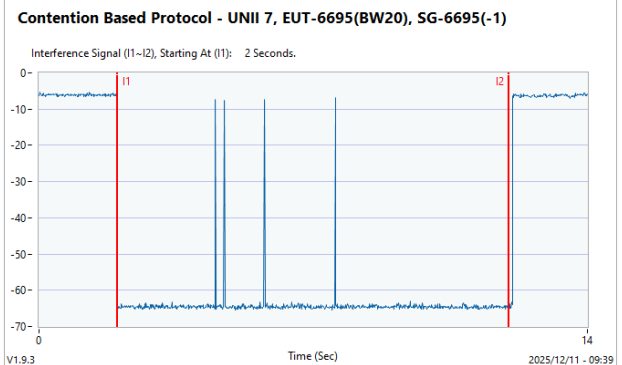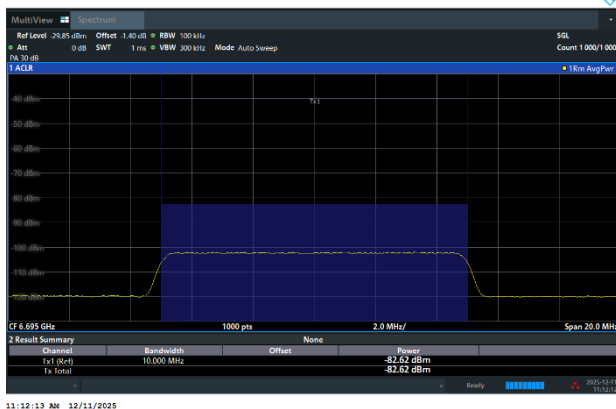





Contention Based Protocol Result Plots on U-NII 7 (AWGN Interference)

802.11ax (HE160) / 6590MHz (Lower edge)
Threshold Level (TL) = -79.02dBm

802.11ax (HE160) / CH143 (Lower edge)
Test result is pass due to no transmission occur.

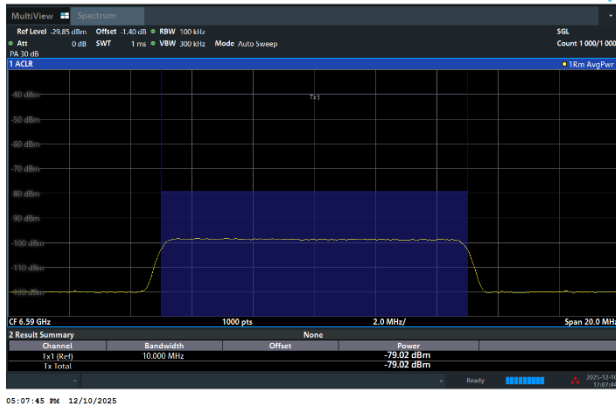


Contention Based Protocol - UNII 7, EUT-6665(BW160), SG-6590

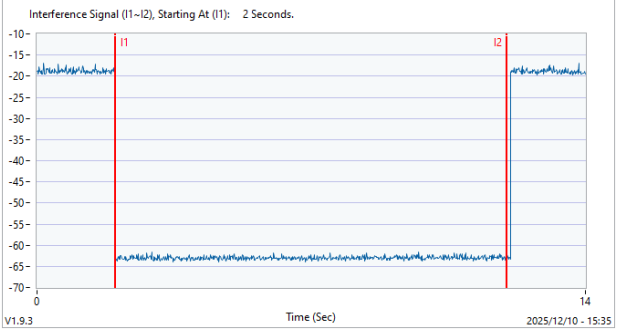


802.11ax (HE160) / 6590MHz (Lower edge)
Threshold Level (TL) = -80.03dBm

802.11ax (HE160) / CH143 (Lower edge)
Transmit when the interferer is 1dB lower.

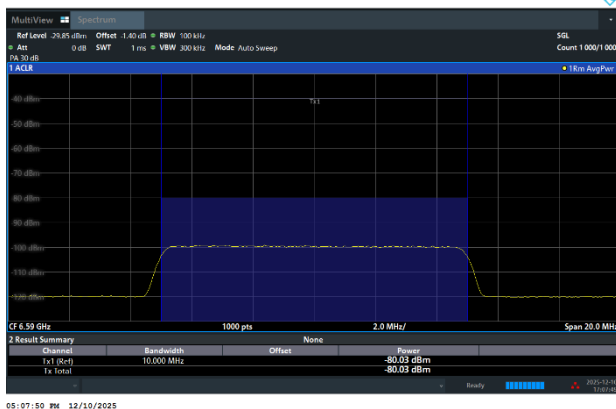

Contention Based Protocol - UNII 7, EUT-6665(BW160), SG-6590(-1)

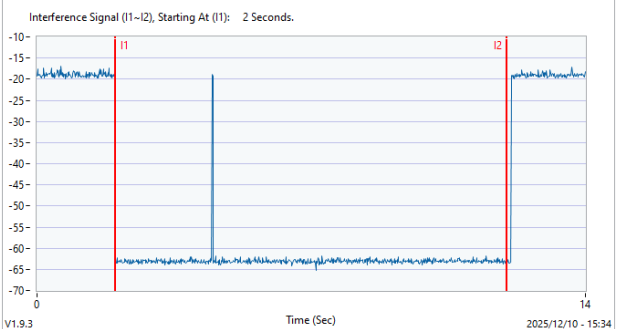




Contention Based Protocol Result Plots on U-NII 7 (AWGN Interference)



802.11ax (HE160) / 6665MHz (Middle)
Threshold Level (TL) = -73.46dBm

802.11ax (HE160) / CH143 (Middle)
Test result is pass due to no transmission occur.

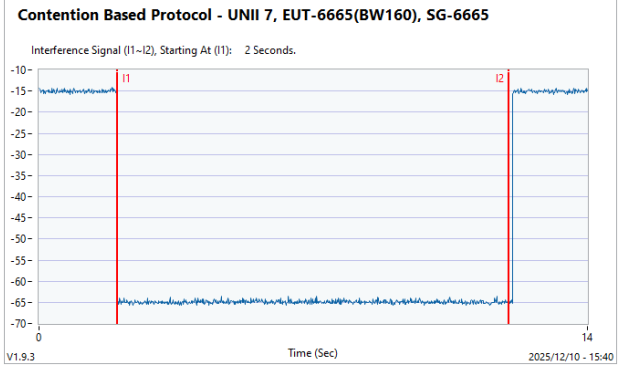

802.11ax (HE160) / 6665MHz (Middle)
Threshold Level (TL) = -74.48dBm

802.11ax (HE160) / CH143 (Middle)
Transmit when the interferer is 1dB lower.

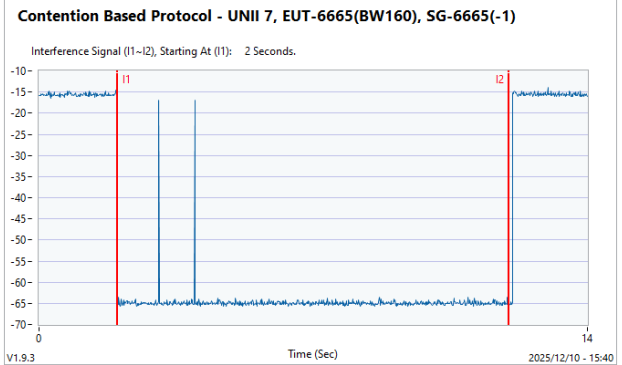
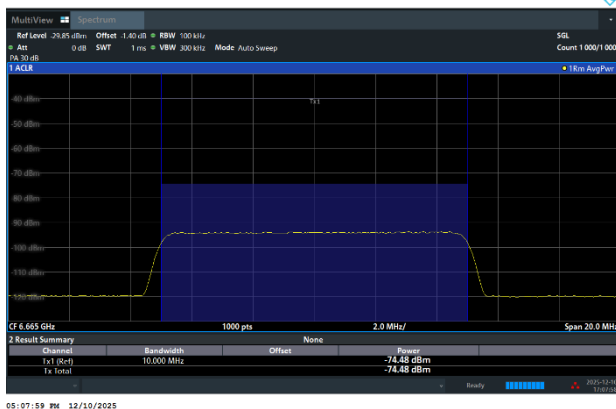




Contention Based Protocol Result Plots on U-NII 7 (AWGN Interference)



802.11ax (HE160) / 6740MHz (Upper edge)
Threshold Level (TL) = -78.04dBm

802.11ax (HE160) / CH143 (Upper edge)
Test result is pass due to no transmission occur.

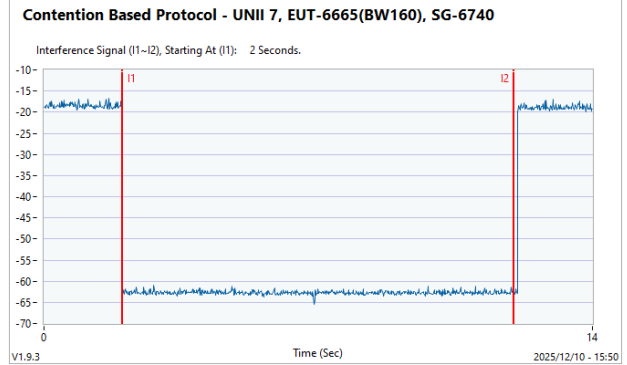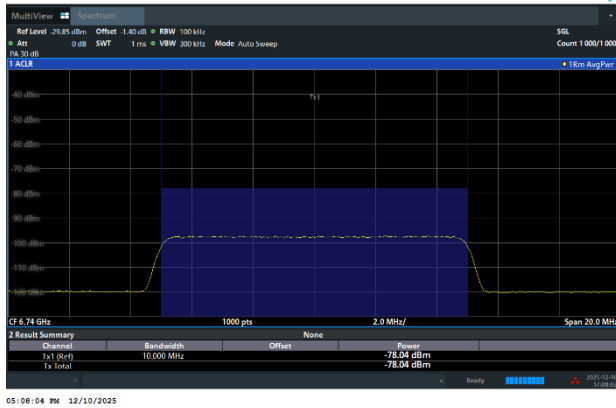

802.11ax (HE160) / 6740MHz (Upper edge)
Threshold Level (TL) = -79.01dBm

802.11ax (HE160) / CH143 (Upper edge)
Transmit when the interferer is 1dB lower.

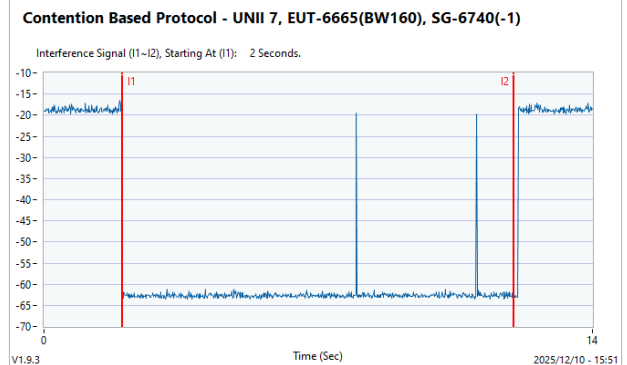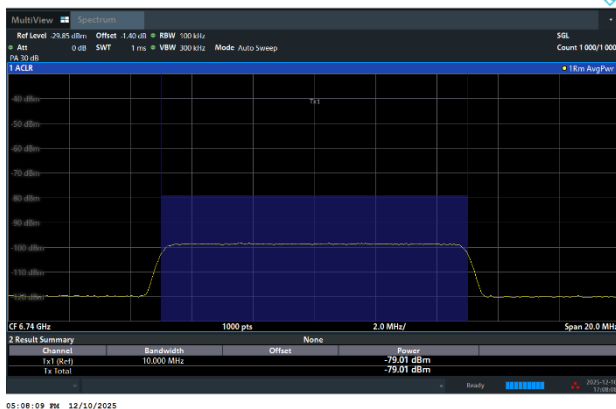




Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)

802.11ax (HE20) / 7015MHz
Threshold Level (TL) = -72.96dBm




802.11ax (HE20) / CH213
Test result is pass due to no transmission occur.

Contention Based Protocol - UNII 8, EUT-7015(BW20), SG-7015

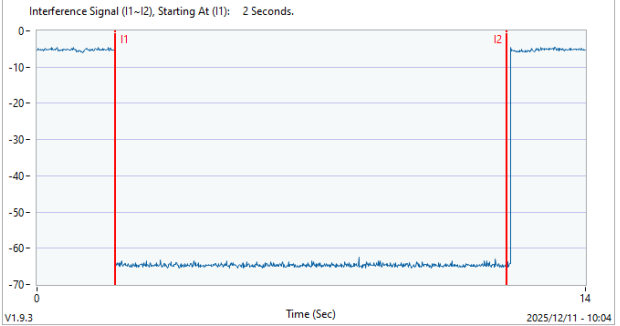


802.11ax (HE20) / 7015MHz
Threshold Level (TL) = -73.97dBm

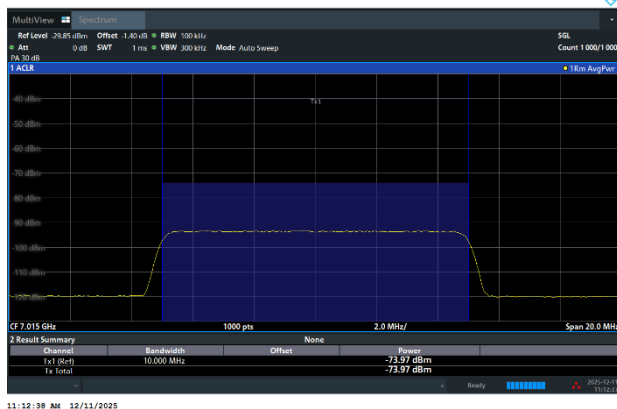

802.11ax (HE20) / CH213
Transmit when the interferer is 1dB lower.

Contention Based Protocol - UNII 8, EUT-7015(BW20), SG-7015(-1)

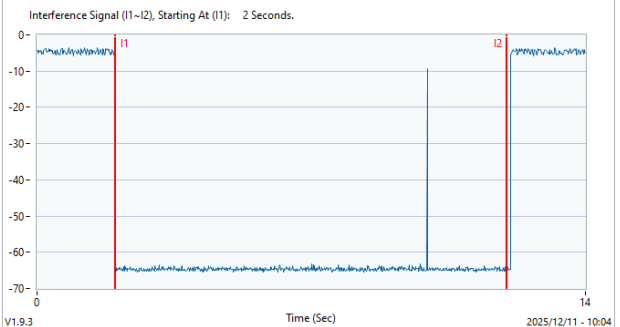




Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)

802.11ax (HE160) / 6910MHz (Lower edge)
Threshold Level (TL) = -77.87dBm

802.11ax (HE160) / CH207 (Lower edge)
Test result is pass due to no transmission occur.



Contention Based Protocol - UNII 8, EUT-6985(BW160), SG-6910

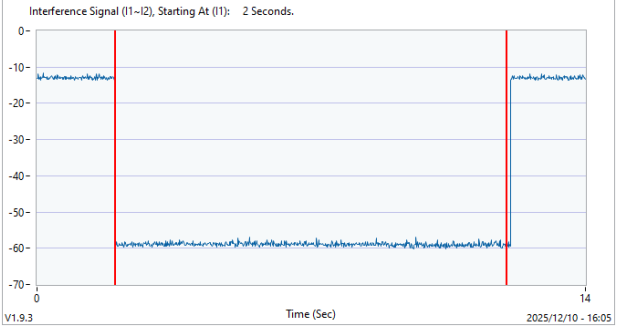


802.11ax (HE160) / 6910MHz (Lower edge)
Threshold Level (TL) = -78.81dBm

802.11ax (HE160) / CH207 (Lower edge)
Transmit when the interferer is 1dB lower.



Contention Based Protocol - UNII 8, EUT-6985(BW160), SG-6910(-1)

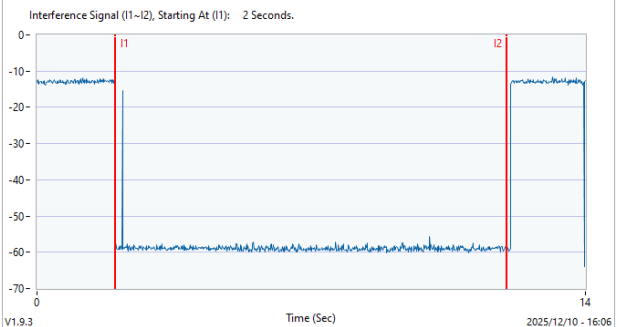




Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)

802.11ax (HE160) / 6985MHz (Middle)
Threshold Level (TL) = -71.71dBm

802.11ax (HE160) / CH207 (Middle)
Test result is pass due to no transmission occur.




Contention Based Protocol - UNII 8, EUT-6985(BW160), SG-6985

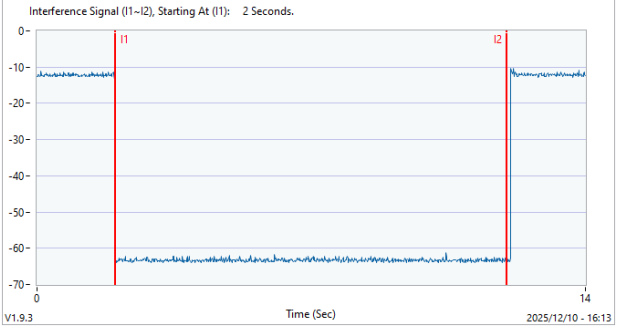


802.11ax (HE160) / 6985MHz (Middle)
Threshold Level (TL) = -72.71dBm

802.11ax (HE160) / CH207 (Middle)
Transmit when the interferer is 1dB lower.

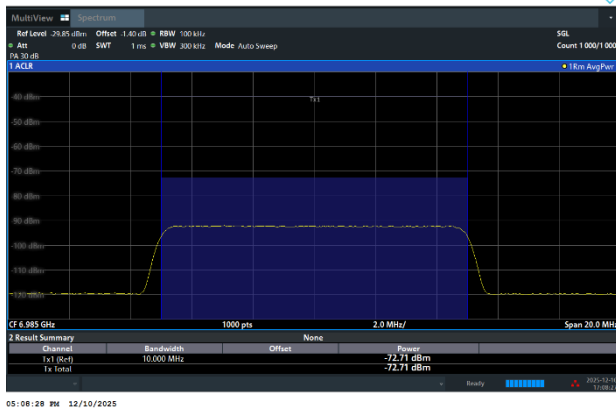


Contention Based Protocol - UNII 8, EUT-6985(BW160), SG-6985(-1)

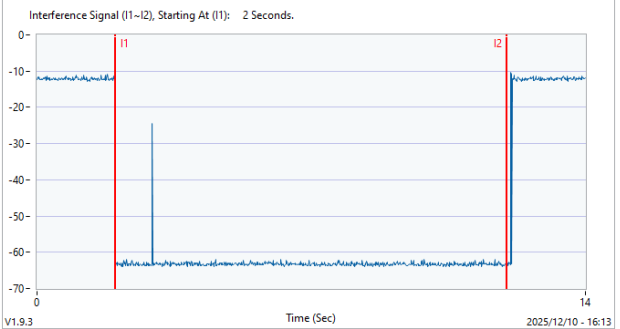

Contention Based Protocol Result Plots on U-NII 8 (AWGN Interference)


802.11ax (HE160) / 7060MHz (Upper edge)
Threshold Level (TL) = -73.92dBm

802.11ax (HE160) / CH207 (Upper edge)
Test result is pass due to no transmission occur.

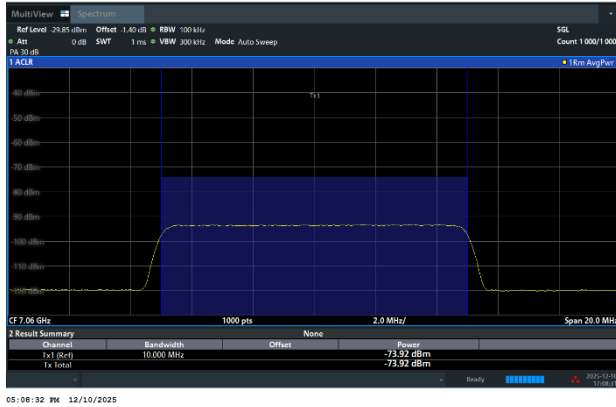


Contention Based Protocol - UNII 8, EUT-6985(BW160), SG-7060

Interference Signal (I1-I2), Starting At (I1): 2 Seconds.

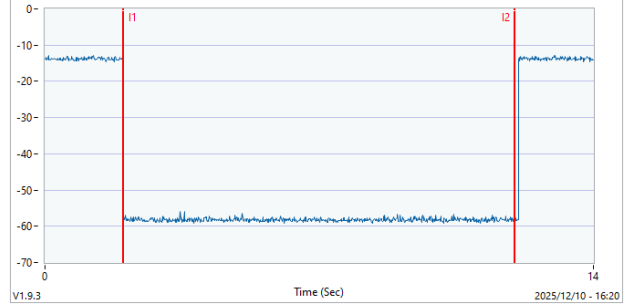

802.11ax (HE160) / 7060MHz (Upper edge)
Threshold Level (TL) = -74.94dBm

802.11ax (HE160) / CH207 (Upper edge)
Transmit when the interferer is 1dB lower.

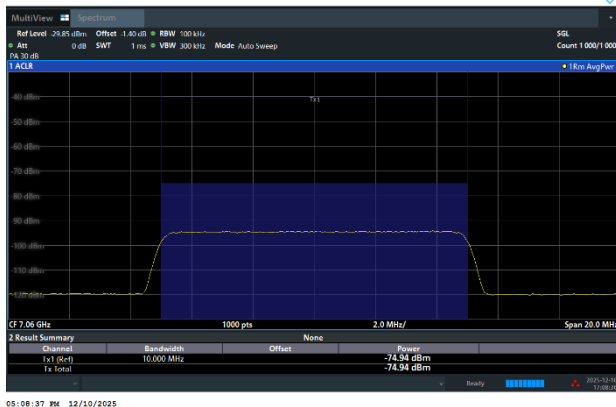

Contention Based Protocol - UNII 8, EUT-6985(BW160), SG-7060(-1)

Interference Signal (I1-I2), Starting At (I1): 2 Seconds.

