



FCC RF Test Report

APPLICANT : Luxottica Group S.p.A.
EQUIPMENT : AI GLASSES
BRAND NAME : Ray-Ban Meta or Ray-Ban
MODEL NAME : RW4011, RW4011V, RW4015, RW4015V, RW4016, RW4016V
FCC ID : 2AYOA-4010
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Apr. 14, 2026 ~ May 20, 2026

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	10
2.3 Connection Diagram of Test System.....	10
2.4 EUT Operation Test Setup	10
3 TEST RESULT	11
3.1 Maximum Conducted Output Power Measurement	11
3.2 Unwanted Emissions Measurement	14
4 LIST OF MEASURING EQUIPMENT	19
5 MEASUREMENT UNCERTAINTY	20
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. DUTY CYCLE PLOTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5O1706-01D	Rev. 01	Initial issue of report	Apr. 30, 2026
FR5O1706-01D	Rev. 02	1. Added verified conducted power 2. Added descriptions of samples 1234 and the worst LF mode to the table. This report is an updated version, replacing the report issued on Apr. 30, 2026	May 20, 2026



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.2	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.24 dB at 5149.76 MHz

Note: This is a variant report. The change note could be referred to Product Equality Declaration which is exhibit separately. According to the change, only the related test cases were verified from original report (Sporton Report Number FR5O1534D).

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Luxottica Group S.p.A.

Piazzale Cadorna 3 20123 Milan, Italy

1.2 Manufacturer

Luxottica Group S.p.A.

Piazzale Cadorna 3 20123 Milan, Italy

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	AI GLASSES
Brand Name	Ray-Ban Meta or Ray-Ban
Model Name	RW4011, RW4011V, RW4015, RW4015V, RW4016, RW4016V
FCC ID	2AYOA-4010
SN Code	Conducted/Radiation:4237X05J1L001W/4337W06J21001G/ 4337V16J22000P/4337T05J2Y0009
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four samples of EUT. The manufacturer declares that all the equipment share the same radio characteristics and Software/Firmware, the only differences between each of them are color of frames, lenses, and sizes.

Sample	Model Name
Sample 1	RW4016
Sample 1	RW4016V
Sample 2	RW4015
Sample 2	RW4015V
Sample 3	RW4011
Sample 3	RW4011V
Sample 4	RW4011
Sample 4	RW4011V

3. Differences between model numbers RW4011, RW4015, RW4016 and RW4011V, RW4015V, RW4016V: The glasses are 100% the same between V models and the others without V at the end of model code. Only difference is the eyeglasses lenses that will be mounted on the frame.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ TH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2020+Cor.1-2023

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	-	-
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825



Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640
	-	-	114 ^{##}	5570

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710	-	-

Note:


1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "[#]" are 80MHz bandwidth.
3. The above Frequency and Channel in "^{##}" are 160MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE40	MCS0
802.11ax HE80	MCS0

2.3 Connection Diagram of Test System

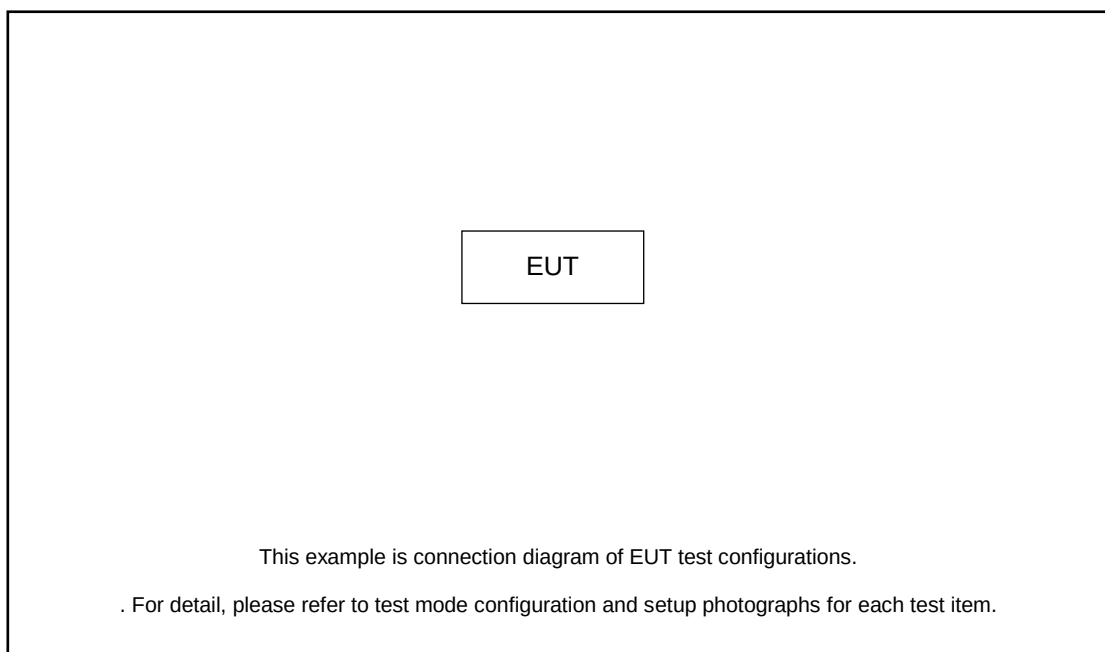

2.4 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

3 Test Result

3.1 Maximum Conducted Output Power Measurement

3.1.1 Limit of Maximum Conducted Output Power

<CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log₁₀ B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.1.4 Test Setup

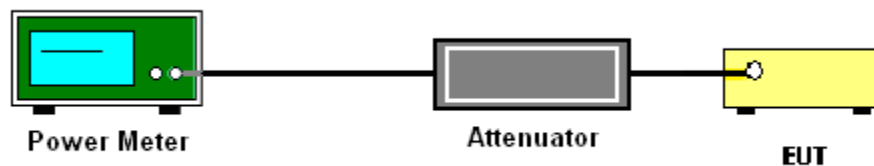



3.1.5 Test Result of Maximum Conducted Output Power

U-NII-1										
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	Power Setting
11a	6Mbps	1	44	Full	5220	16.34	23.98	0.20	Pass	16.5

U-NII-2C											
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
VHT160	MCS0	1	114	Full	5570	16.22	23.98	1.74	26.99	Pass	16
HE160	MCS0	1	114	Full	5570	16.31	23.98	1.74	26.99	Pass	16

U-NII-3										
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	Power Setting
HT20	MCS0	1	157	Full	5785	16.16	30.00	1.98	Pass	16
HT40	MCS0	1	159	Full	5795	16.12	30.00	1.98	Pass	16.5
VHT20	MCS0	1	157	Full	5785	16.23	30.00	1.98	Pass	16
VHT40	MCS0	1	159	Full	5795	16.27	30.00	1.98	Pass	16.5
VHT80	MCS0	1	155	Full	5775	16.31	30.00	1.98	Pass	16.5
HE20	MCS0	1	157	Full	5785	16.32	30.00	1.98	Pass	16
HE40	MCS0	1	151	Full	5755	16.33	30.00	1.98	Pass	16.5
HE80	MCS0	1	155	Full	5775	16.39	30.00	1.98	Pass	16.5

3.2 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.2.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.2.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.2.4 Test Setup


For radiated emissions below 30MHz

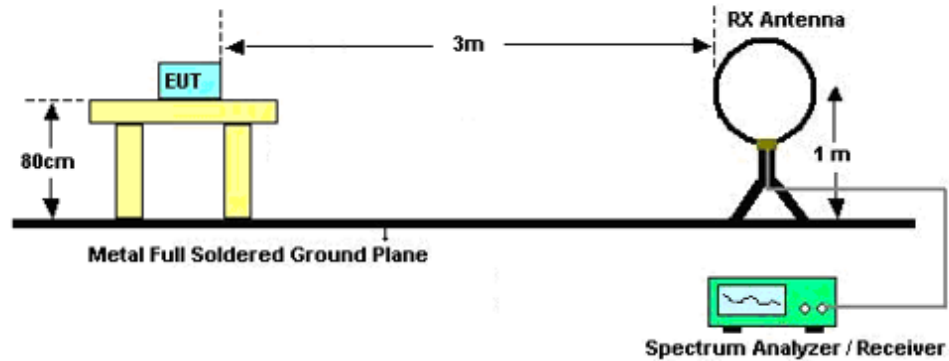

For radiated emissions from 30MHz to 1GHz

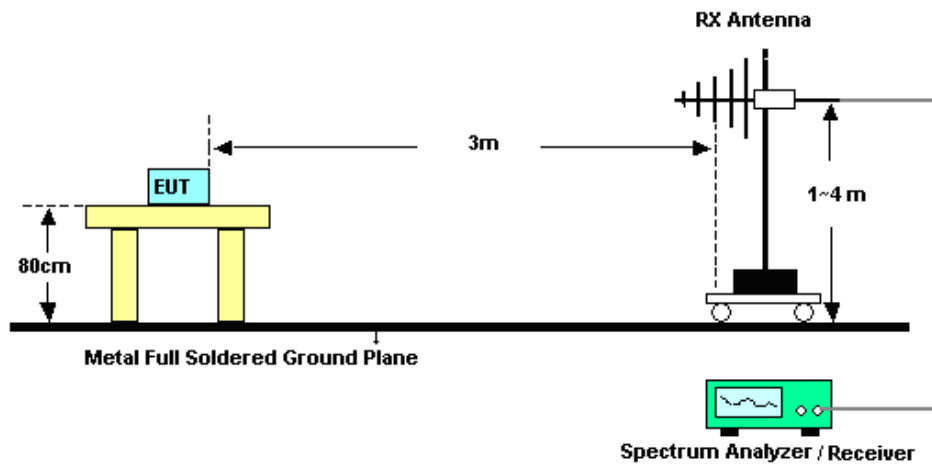

For radiated emissions above 1GHz

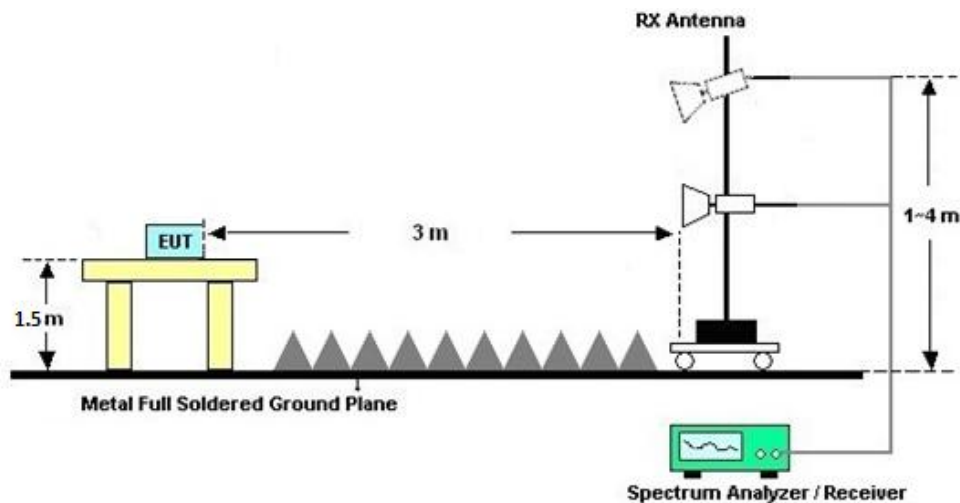



3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.2.7 Duty Cycle

Please refer to Appendix B.

3.2.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 02, 2026	Apr. 14, 2026	Apr. 01, 2027	Radiation (03CH03-SZ)
EXA Signal Analyzer	KEYSIGHT	N9010B	MY59071191	10KHz~44GHz	Mar. 27, 2026	Apr. 14, 2026	Mar. 26, 2027	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 25, 2025	Apr. 14, 2026	Dec. 24, 2026	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Sep. 13, 2025	Apr. 14, 2026	Sep. 12, 2026	Radiation (03CH03-SZ)
Double Ridge Guide Antenna	ETS-Lindgren	Burgeon-3117	00240107	1GHz~18GHz	Jul. 13, 2025	Apr. 14, 2026	Jul. 12, 2026	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2025	Apr. 14, 2026	Jul. 02, 2026	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 03, 2025	Apr. 14, 2026	Apr. 02, 2027	Radiation (03CH03-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Apr. 02, 2026	Apr. 14, 2026	Apr. 01, 2027	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 13, 2025	Apr. 14, 2026	Oct. 12, 2026	Radiation (03CH03-SZ)
HF Amplifier	Keysight	83017A	MY53270357	500MHz~26.5GHz	Apr. 02, 2026	Apr. 14, 2026	Apr. 01, 2027	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 13, 2026	Apr. 14, 2026	Oct. 12, 2027	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 14, 2026	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 14, 2026	NCR	Radiation (03CH03-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Mar. 26, 2026	May 20, 2026	Mar. 25, 2027	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 24, 2025	May 20, 2026	Dec. 23, 2026	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct.13, 2025	May 20, 2026	Oct. 12, 2026	Conducted (TH01-SZ)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

----- THE END -----



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Reid Huang	Relative Humidity :	48~49%
		Temperature :	24~25°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Sample
Mode 1	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-	1
Mode 2	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Full RU	1
Mode 3	U-NII-2C	5.47-5.725	1	802.11ax HE40	102	5510	MCS0	Full RU	1
Mode 4	U-NII-3	5.725-5.85	1	802.11ax HE80	155	5775	MCS0	Full RU	1
Mode 5	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-	2
Mode 6	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Full RU	2
Mode 7	U-NII-2C	5.47-5.725	1	802.11ax HE40	102	5510	MCS0	Full RU	2
Mode 8	U-NII-3	5.725-5.85	1	802.11ax HE80	155	5775	MCS0	Full RU	2
Mode 9	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-	3
Mode 10	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Full RU	3
Mode 11	U-NII-2C	5.47-5.725	1	802.11ax HE40	102	5510	MCS0	Full RU	3
Mode 12	U-NII-3	5.725-5.85	1	802.11ax HE80	155	5775	MCS0	Full RU	3
Mode 13	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-	4
Mode 14	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Full RU	4
Mode 15	U-NII-2C	5.47-5.725	1	802.11ax HE40	102	5510	MCS0	Full RU	4
Mode 16	U-NII-3	5.725-5.85	1	802.11ax HE80	155	5775	MCS0	Full RU	4
Mode 17	U-NII-1	5.15-5.25	1	802.11a_LF	36	5180	6Mbps	-	2
Mode 18	U-NII-3	5.725-5.85	1	802.11ax HE80_LF	155	5775	MCS0	Full RU	4





Only the worst-case LF mode shall be reflected in the report.







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.94	50.15	54.00	-3.85	H	AVERAGE	Pass	Band Edge
1	802.11a	36	15540.00	45.17	54.00	-8.83	H	Average	Pass	Harmonic
2	802.11ax HE80	58	5380.95	50.09	54.00	-3.91	H	AVERAGE	Pass	Band Edge
2	802.11ax HE80	58	15870.00	44.96	54.00	-9.04	H	Average	Pass	Harmonic
3	802.11ax HE40	102	5459.92	47.38	54.00	-6.62	H	AVERAGE	Pass	Band Edge
3	802.11ax HE40	102	11020.00	41.03	54.00	-12.97	V	Average	Pass	Harmonic
4	802.11ax HE80	155	5638.15	56.73	68.30	-11.57	H	PEAK	Pass	Band Edge
4	802.11ax HE80	155	11550.00	42.13	54.00	-11.87	V	Average	Pass	Harmonic
5	802.11a	36	5149.76	50.76	54.00	-3.24	H	AVERAGE	Pass	Band Edge
5	802.11a	36	15540.00	45.38	54.00	-8.62	V	Average	Pass	Harmonic
6	802.11ax HE80	58	5356.81	50.62	54.00	-3.38	H	AVERAGE	Pass	Band Edge
6	802.11ax HE80	58	15870.00	44.45	54.00	-9.55	V	Average	Pass	Harmonic
7	802.11ax HE40	102	5459.60	48.71	54.00	-5.29	H	AVERAGE	Pass	Band Edge
7	802.11ax HE40	102	11020.00	39.49	54.00	-14.51	H	Average	Pass	Harmonic
8	802.11ax HE80	155	5623.28	53.30	68.30	-15.00	V	PEAK	Pass	Band Edge
8	802.11ax HE80	155	11550.00	41.04	54.00	-12.96	H	Average	Pass	Harmonic
9	802.11a	36	5149.94	50.23	54.00	-3.77	V	AVERAGE	Pass	Band Edge
9	802.11a	36	15540.00	44.73	54.00	-9.27	V	Average	Pass	Harmonic
10	802.11ax HE80	58	5350.01	49.15	54.00	-4.85	V	AVERAGE	Pass	Band Edge
10	802.11ax HE80	58	15870.00	43.46	54.00	-10.54	V	Average	Pass	Harmonic
11	802.11ax HE40	102	5459.76	47.39	54.00	-6.61	V	AVERAGE	Pass	Band Edge
11	802.11ax HE40	102	11020.00	40.49	54.00	-13.51	H	Average	Pass	Harmonic
12	802.11ax HE80	155	5650.40	55.08	68.60	-13.52	V	PEAK	Pass	Band Edge
12	802.11ax HE80	155	11550.00	41.50	54.00	-12.50	V	Average	Pass	Harmonic
13	802.11a	36	5149.94	50.58	54.00	-3.42	H	AVERAGE	Pass	Band Edge
13	802.11a	36	15540.00	44.64	54.00	-9.36	V	Average	Pass	Harmonic
14	802.11ax HE80	58	5373.81	47.73	54.00	-6.27	H	AVERAGE	Pass	Band Edge
14	802.11ax HE80	58	15870.00	45.46	54.00	-8.54	V	Average	Pass	Harmonic
15	802.11ax HE40	102	5459.44	48.73	54.00	-5.27	H	AVERAGE	Pass	Band Edge
15	802.11ax HE40	102	11020.00	40.72	54.00	-13.28	V	Average	Pass	Harmonic
16	802.11ax HE80	155	5644.10	53.86	68.30	-14.44	V	PEAK	Pass	Band Edge
16	802.11ax HE80	155	11550.00	42.47	54.00	-11.53	V	Average	Pass	Harmonic
17	802.11a_LF	36	665.35	27.77	46.00	-18.23	V	Peak	Pass	LF
18	802.11ax HE80_LF	155	697.36	28.41	46.00	-17.59	V	Peak	Pass	LF

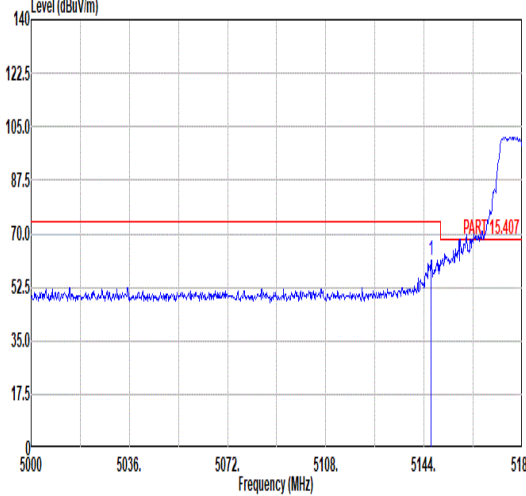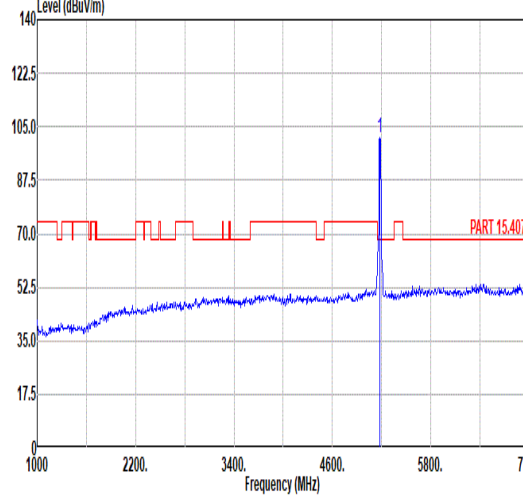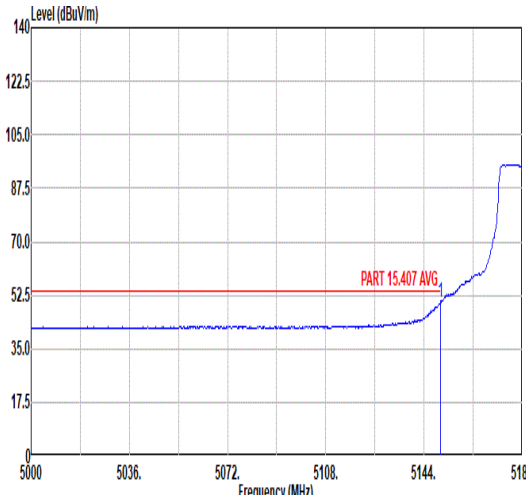
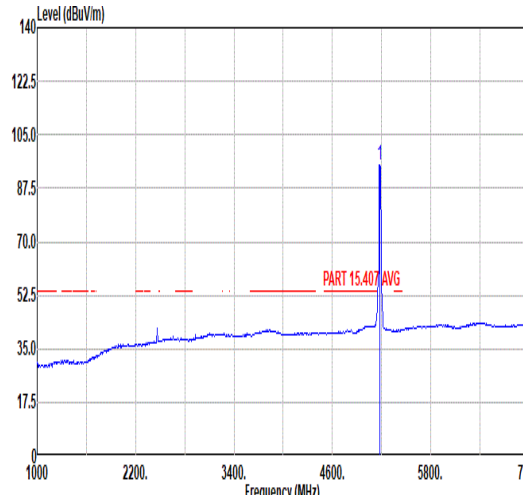


Mode	1																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Apos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.70</td><td>61.43</td><td>74.00</td><td>-12.57</td><td>48.78</td><td>34.95</td><td>9.95</td><td>32.25</td><td>395</td><td>263</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5146.70	61.43	74.00	-12.57	48.78	34.95	9.95	32.25	395	263	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Apos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>101.30</td><td>-----</td><td>-----</td><td>88.57</td><td>34.98</td><td>9.97</td><td>32.22</td><td>395</td><td>263</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	101.30	-----	-----	88.57	34.98	9.97	32.22	395	263
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5146.70	61.43	74.00	-12.57	48.78	34.95	9.95	32.25	395	263	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	101.30	-----	-----	88.57	34.98	9.97	32.22	395	263	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Apos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>50.15</td><td>54.00</td><td>-3.85</td><td>37.49</td><td>34.95</td><td>9.96</td><td>32.25</td><td>395</td><td>263</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	50.15	54.00	-3.85	37.49	34.95	9.96	32.25	395	263	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Apos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.15</td><td>-----</td><td>-----</td><td>82.42</td><td>34.98</td><td>9.97</td><td>32.22</td><td>395</td><td>263</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Apos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	95.15	-----	-----	82.42	34.98	9.97	32.22	395	263
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.94	50.15	54.00	-3.85	37.49	34.95	9.96	32.25	395	263	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Apos	TPos																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	95.15	-----	-----	82.42	34.98	9.97	32.22	395	263	AVERAGE																																																																															

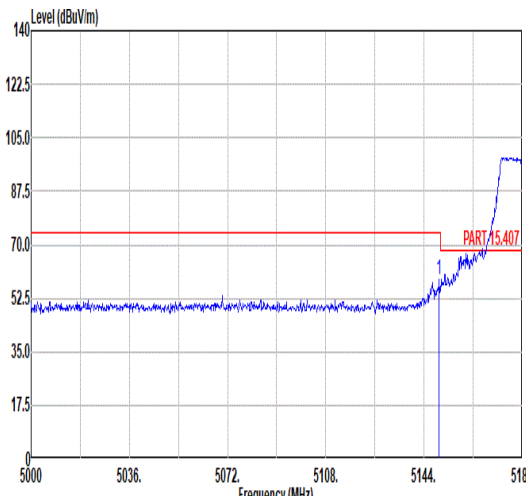
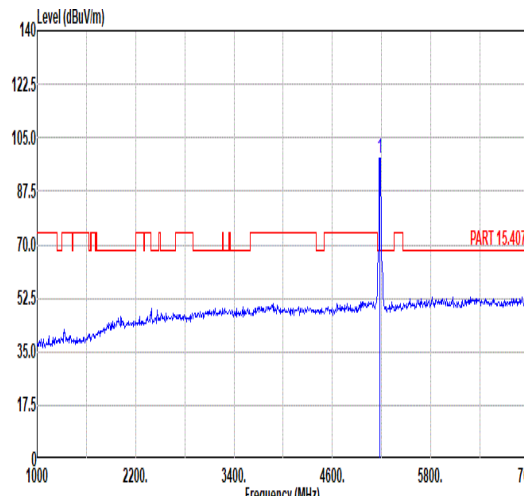
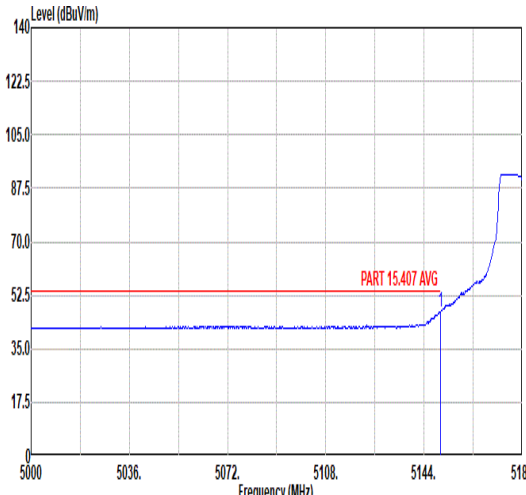
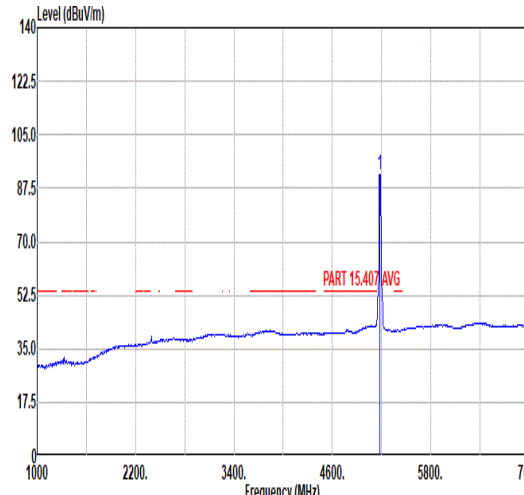


Mode	1																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.58</td><td>58.63</td><td>74.00</td><td>-15.37</td><td>45.97</td><td>34.95</td><td>9.96</td><td>32.25</td><td>100</td><td>67</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.58	58.63	74.00	-15.37	45.97	34.95	9.96	32.25	100	67	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>98.23</td><td>-----</td><td>-----</td><td>85.50</td><td>34.98</td><td>9.97</td><td>32.22</td><td>100</td><td>67</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	98.23	-----	-----	85.50	34.98	9.97	32.22	100	67
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.58	58.63	74.00	-15.37	45.97	34.95	9.96	32.25	100	67	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	98.23	-----	-----	85.50	34.98	9.97	32.22	100	67	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>47.02</td><td>54.00</td><td>-6.98</td><td>34.36</td><td>34.95</td><td>9.96</td><td>32.25</td><td>100</td><td>67</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	47.02	54.00	-6.98	34.36	34.95	9.96	32.25	100	67	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>92.16</td><td>-----</td><td>-----</td><td>79.43</td><td>34.98</td><td>9.97</td><td>32.22</td><td>100</td><td>67</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	92.16	-----	-----	79.43	34.98	9.97	32.22	100	67
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.94	47.02	54.00	-6.98	34.36	34.95	9.96	32.25	100	67	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	92.16	-----	-----	79.43	34.98	9.97	32.22	100	67	AVERAGE																																																																															

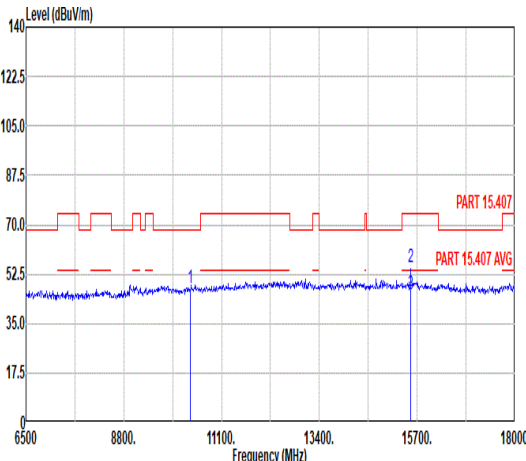
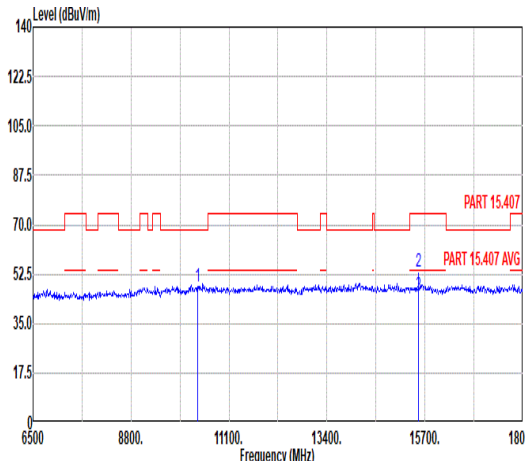


Mode	1																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Horizontal								Vertical																																																																																																																			
Peak Avg																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 10360.00</td><td>47.32</td><td>68.30</td><td>-20.98</td><td>56.47</td><td>37.22</td><td>13.25</td><td>59.62</td><td>-- -- Peak</td></tr><tr><td>2 15540.00</td><td>54.81</td><td>74.00</td><td>-19.19</td><td>56.62</td><td>40.22</td><td>15.86</td><td>57.89</td><td>105 241 Peak</td></tr><tr><td>3 15540.00</td><td>45.17</td><td>54.00</td><td>-8.83</td><td>46.98</td><td>40.22</td><td>15.86</td><td>57.89</td><td>105 241 Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 10360.00	47.32	68.30	-20.98	56.47	37.22	13.25	59.62	-- -- Peak	2 15540.00	54.81	74.00	-19.19	56.62	40.22	15.86	57.89	105 241 Peak	3 15540.00	45.17	54.00	-8.83	46.98	40.22	15.86	57.89	105 241 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 10360.00</td><td>48.21</td><td>68.30</td><td>-20.09</td><td>57.36</td><td>37.22</td><td>13.25</td><td>59.62</td><td>-- -- Peak</td></tr><tr><td>2 15540.00</td><td>53.60</td><td>74.00</td><td>-20.40</td><td>55.41</td><td>40.22</td><td>15.86</td><td>57.89</td><td>145 105 Peak</td></tr><tr><td>3 15540.00</td><td>44.93</td><td>54.00</td><td>-9.07</td><td>46.74</td><td>40.22</td><td>15.86</td><td>57.89</td><td>145 105 Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 10360.00	48.21	68.30	-20.09	57.36	37.22	13.25	59.62	-- -- Peak	2 15540.00	53.60	74.00	-20.40	55.41	40.22	15.86	57.89	145 105 Peak	3 15540.00	44.93	54.00	-9.07	46.74	40.22	15.86	57.89	145 105 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																				
1 10360.00	47.32	68.30	-20.98	56.47	37.22	13.25	59.62	-- -- Peak																																																																																																																				
2 15540.00	54.81	74.00	-19.19	56.62	40.22	15.86	57.89	105 241 Peak																																																																																																																				
3 15540.00	45.17	54.00	-8.83	46.98	40.22	15.86	57.89	105 241 Average																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																				
1 10360.00	48.21	68.30	-20.09	57.36	37.22	13.25	59.62	-- -- Peak																																																																																																																				
2 15540.00	53.60	74.00	-20.40	55.41	40.22	15.86	57.89	145 105 Peak																																																																																																																				
3 15540.00	44.93	54.00	-9.07	46.74	40.22	15.86	57.89	145 105 Average																																																																																																																				

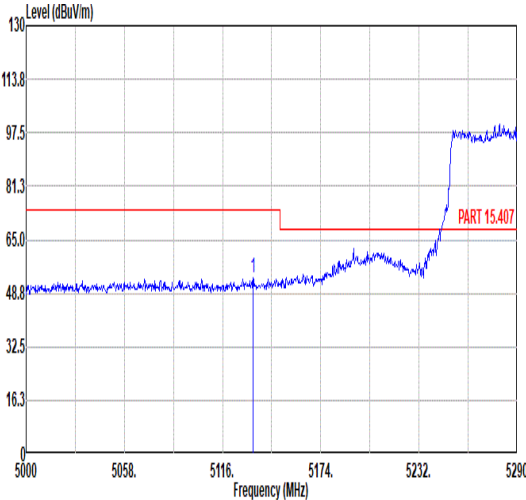
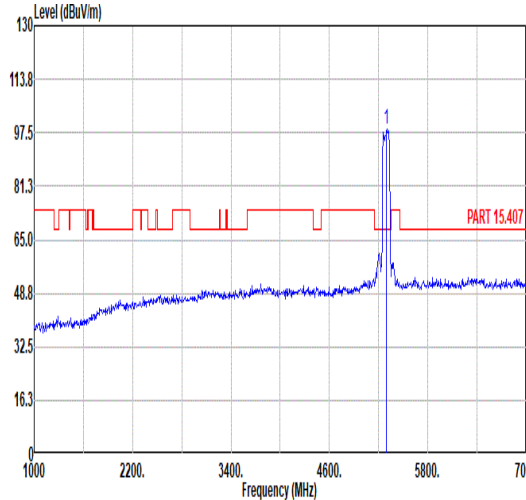
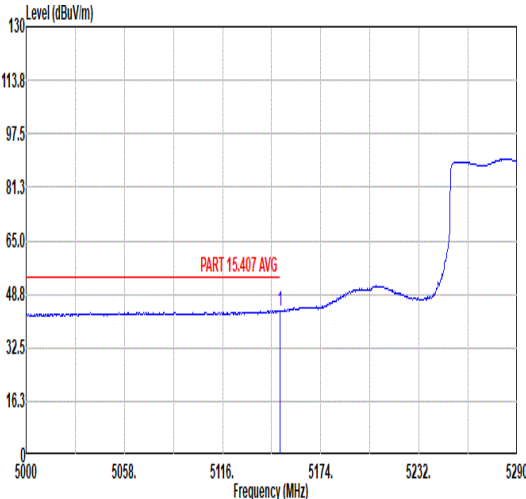
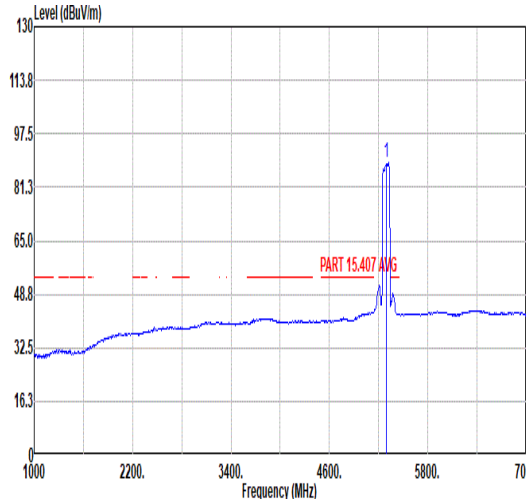


Mode	2																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5133.98</td><td>53.27</td><td>74.00</td><td>-20.73</td><td>40.63</td><td>34.94</td><td>9.95</td><td>32.25</td><td>381</td><td>279</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5133.98	53.27	74.00	-20.73	40.63	34.94	9.95	32.25	381	279	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>98.83</td><td>-----</td><td>-----</td><td>85.66</td><td>35.20</td><td>10.15</td><td>32.18</td><td>381</td><td>279</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	98.83	-----	-----	85.66	35.20	10.15	32.18	381	279
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5133.98	53.27	74.00	-20.73	40.63	34.94	9.95	32.25	381	279	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5290.00	98.83	-----	-----	85.66	35.20	10.15	32.18	381	279	PEAK																																																																															
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.93</td><td>43.78</td><td>54.00</td><td>-10.22</td><td>31.12</td><td>34.95</td><td>9.96</td><td>32.25</td><td>381</td><td>279</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.93	43.78	54.00	-10.22	31.12	34.95	9.96	32.25	381	279	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>88.65</td><td>-----</td><td>-----</td><td>75.45</td><td>35.20</td><td>10.18</td><td>32.18</td><td>381</td><td>279</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	88.65	-----	-----	75.45	35.20	10.18	32.18	381	279
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.93	43.78	54.00	-10.22	31.12	34.95	9.96	32.25	381	279	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5290.00	88.65	-----	-----	75.45	35.20	10.18	32.18	381	279	AVERAGE																																																																															

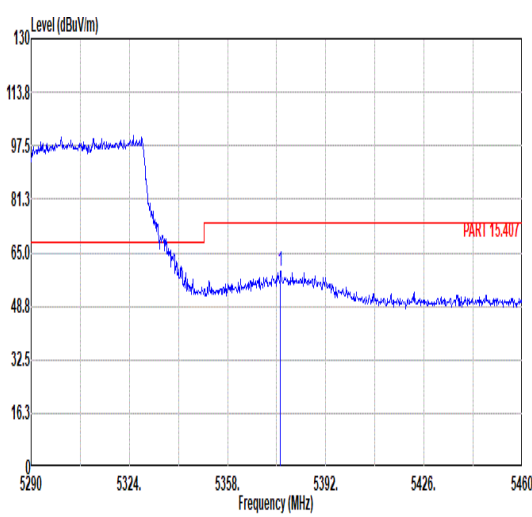
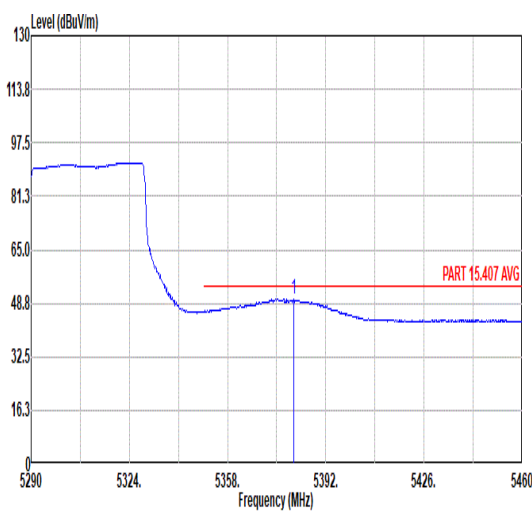


Mode	2																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5376.36</td><td>59.41</td><td>74.00</td><td>-14.59</td><td>46.13</td><td>35.20</td><td>10.25</td><td>32.17</td><td>381</td><td>279</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5376.36	59.41	74.00	-14.59	46.13	35.20	10.25	32.17	381	279	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5376.36	59.41	74.00	-14.59	46.13	35.20	10.25	32.17	381	279	PEAK																															
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5380.95</td><td>50.09</td><td>54.00</td><td>-3.91</td><td>36.81</td><td>35.20</td><td>10.26</td><td>32.18</td><td>381</td><td>279</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5380.95	50.09	54.00	-3.91	36.81	35.20	10.26	32.18	381	279	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5380.95	50.09	54.00	-3.91	36.81	35.20	10.26	32.18	381	279	AVERAGE																															

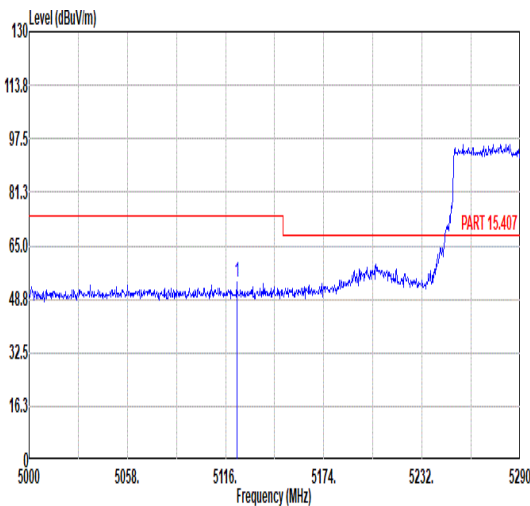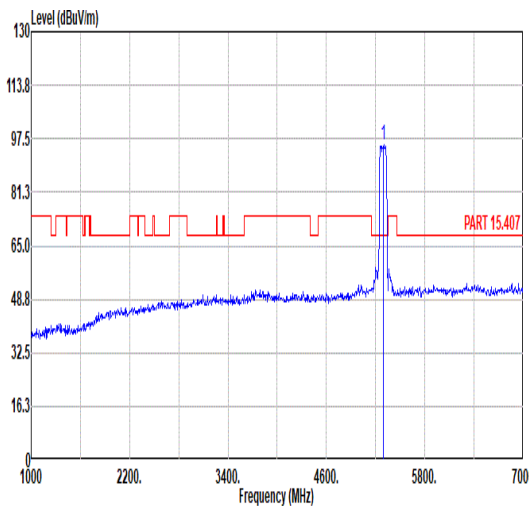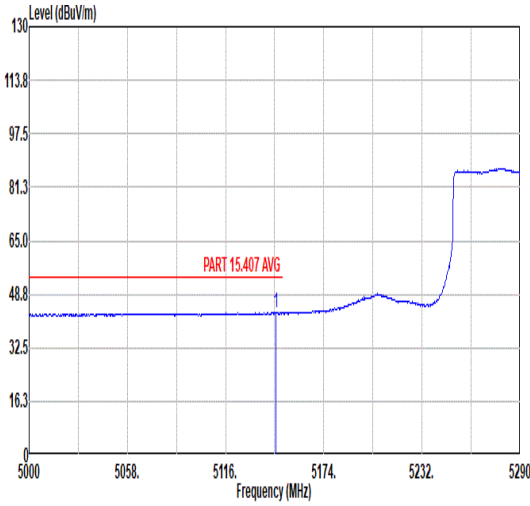
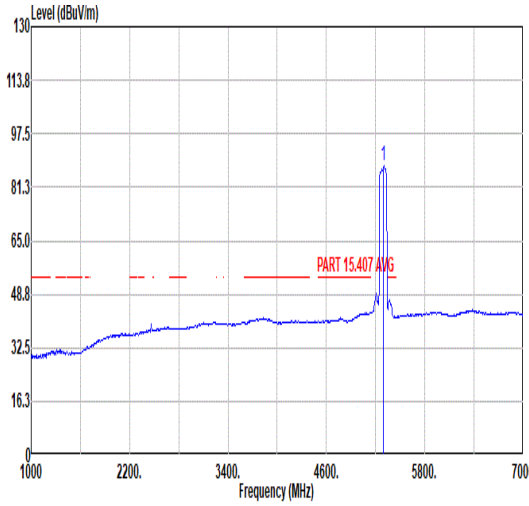


Mode	2																																																																																											
	Band Edge - L																																																																																											
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																											
ANT	1																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5122.67</td><td>53.90</td><td>74.00</td><td>-20.10</td><td>41.28</td><td>34.93</td><td>9.94</td><td>32.25</td><td>100</td><td>181</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5122.67	53.90	74.00	-20.10	41.28	34.93	9.94	32.25	100	181	PEAK	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>95.47</td><td>-----</td><td>-----</td><td>82.30</td><td>35.20</td><td>10.15</td><td>32.18</td><td>100</td><td>181</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	95.47	-----	-----	82.30	35.20	10.15	32.18	100	181	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5122.67	53.90	74.00	-20.10	41.28	34.93	9.94	32.25	100	181	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5290.00	95.47	-----	-----	82.30	35.20	10.15	32.18	100	181	PEAK																																																																																	
Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5145.58</td><td>43.29</td><td>54.00</td><td>-10.71</td><td>30.64</td><td>34.95</td><td>9.95</td><td>32.25</td><td>100</td><td>181</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5145.58	43.29	54.00	-10.71	30.64	34.95	9.95	32.25	100	181	AVERAGE	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>87.76</td><td>-----</td><td>-----</td><td>74.59</td><td>35.20</td><td>10.15</td><td>32.18</td><td>100</td><td>181</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	87.76	-----	-----	74.59	35.20	10.15	32.18	100	181	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5145.58	43.29	54.00	-10.71	30.64	34.95	9.95	32.25	100	181	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5290.00	87.76	-----	-----	74.59	35.20	10.15	32.18	100	181	AVERAGE																																																																																	



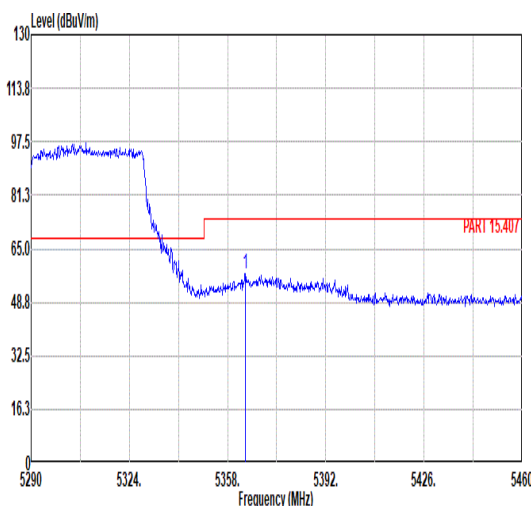
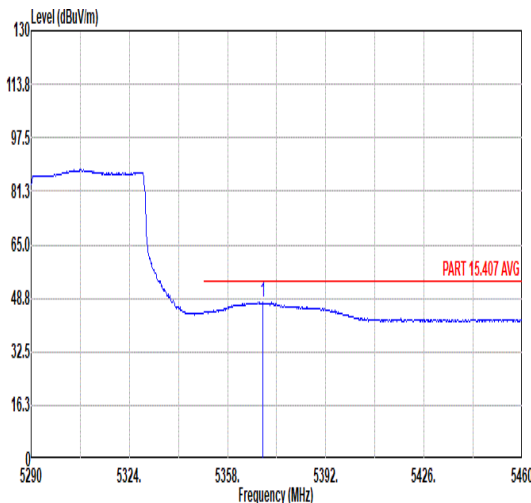


Mode	2																																																				
	Band Edge - R																																																				
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																				
ANT	1																																																				
Pol.	Vertical										Fundamental																																										
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5364.12</td><td>57.26</td><td>74.00</td><td>-16.74</td><td>44.00</td><td>35.20</td><td>10.23</td><td>32.17</td><td>100</td><td>181</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5364.12	57.26	74.00	-16.74	44.00	35.20	10.23	32.17	100	181	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5364.12	57.26	74.00	-16.74	44.00	35.20	10.23	32.17	100	181	PEAK																																										
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5370.24</td><td>47.46</td><td>54.00</td><td>-6.54</td><td>34.19</td><td>35.20</td><td>10.24</td><td>32.17</td><td>100</td><td>181</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5370.24	47.46	54.00	-6.54	34.19	35.20	10.24	32.17	100	181	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5370.24	47.46	54.00	-6.54	34.19	35.20	10.24	32.17	100	181	AVERAGE																																										

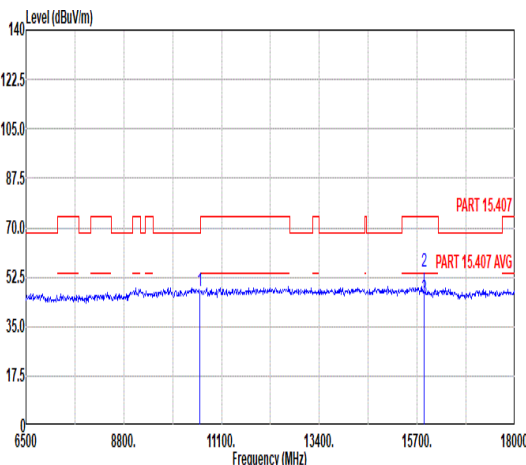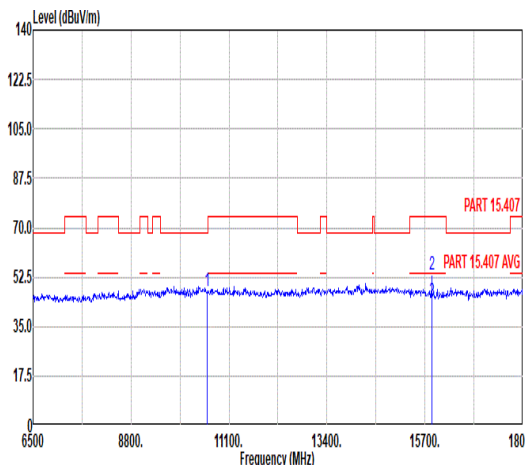


Mode	2																																																																																																																																			
	Harmonic																																																																																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal								Vertical																																																																																																																											
Peak Avg																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10580.00</td><td>47.66</td><td>68.30</td><td>-20.64</td><td>56.31</td><td>37.39</td><td>13.50</td><td>59.54</td><td>-- Peak</td></tr><tr><td>2</td><td>15870.00</td><td>54.58</td><td>74.00</td><td>-19.42</td><td>56.79</td><td>40.42</td><td>15.98</td><td>58.61</td><td>100 236 Peak</td></tr><tr><td>3</td><td>15870.00</td><td>44.96</td><td>54.00</td><td>-9.04</td><td>47.17</td><td>40.42</td><td>15.98</td><td>58.61</td><td>100 236 Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	10580.00	47.66	68.30	-20.64	56.31	37.39	13.50	59.54	-- Peak	2	15870.00	54.58	74.00	-19.42	56.79	40.42	15.98	58.61	100 236 Peak	3	15870.00	44.96	54.00	-9.04	47.17	40.42	15.98	58.61	100 236 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10580.00</td><td>47.73</td><td>68.30</td><td>-20.57</td><td>56.38</td><td>37.39</td><td>13.50</td><td>59.54</td><td>-- Peak</td></tr><tr><td>2</td><td>15870.00</td><td>53.29</td><td>74.00</td><td>-20.71</td><td>55.50</td><td>40.42</td><td>15.98</td><td>58.61</td><td>136 285 Peak</td></tr><tr><td>3</td><td>15870.00</td><td>43.88</td><td>54.00</td><td>-10.12</td><td>46.09</td><td>40.42</td><td>15.98</td><td>58.61</td><td>136 285 Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	10580.00	47.73	68.30	-20.57	56.38	37.39	13.50	59.54	-- Peak	2	15870.00	53.29	74.00	-20.71	55.50	40.42	15.98	58.61	136 285 Peak	3	15870.00	43.88	54.00	-10.12	46.09	40.42	15.98	58.61	136 285 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																												
	Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																											
1	10580.00	47.66	68.30	-20.64	56.31	37.39	13.50	59.54	-- Peak																																																																																																																											
2	15870.00	54.58	74.00	-19.42	56.79	40.42	15.98	58.61	100 236 Peak																																																																																																																											
3	15870.00	44.96	54.00	-9.04	47.17	40.42	15.98	58.61	100 236 Average																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																											
1	10580.00	47.73	68.30	-20.57	56.38	37.39	13.50	59.54	-- Peak																																																																																																																											
2	15870.00	53.29	74.00	-20.71	55.50	40.42	15.98	58.61	136 285 Peak																																																																																																																											
3	15870.00	43.88	54.00	-10.12	46.09	40.42	15.98	58.61	136 285 Average																																																																																																																											

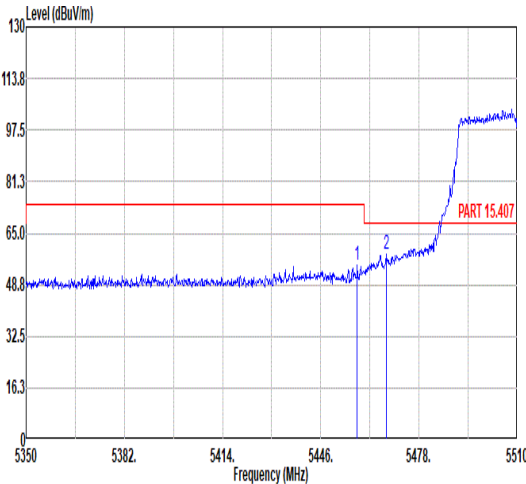
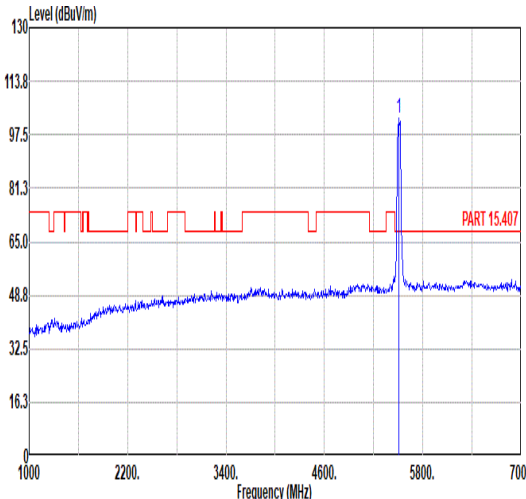
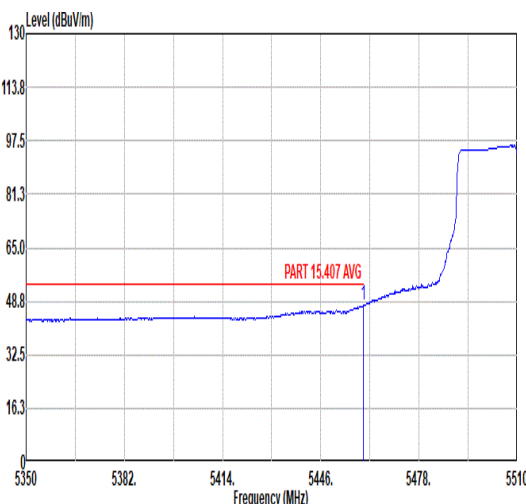
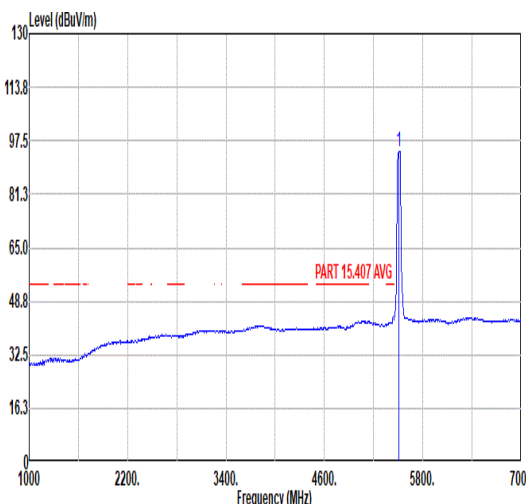


Mode	3																																																																																		
	Band Edge - L																																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																		
ANT	1																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5457.84</td><td>54.97</td><td>74.00</td><td>-19.03</td><td>41.73</td><td>35.20</td><td>10.30</td><td>32.26 367 282 PEAK</td></tr><tr><td>2</td><td>5467.28</td><td>58.41</td><td>68.30</td><td>-9.89</td><td>45.17</td><td>35.20</td><td>10.30</td><td>32.26 367 282 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	5457.84	54.97	74.00	-19.03	41.73	35.20	10.30	32.26 367 282 PEAK	2	5467.28	58.41	68.30	-9.89	45.17	35.20	10.30	32.26 367 282 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>102.72</td><td>-----</td><td>-----</td><td>89.48</td><td>35.21</td><td>10.30</td><td>32.27 367 282 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	5510.00	102.72	-----	-----	89.48	35.21	10.30	32.27 367 282 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																												
1	5457.84	54.97	74.00	-19.03	41.73	35.20	10.30	32.26 367 282 PEAK																																																																											
2	5467.28	58.41	68.30	-9.89	45.17	35.20	10.30	32.26 367 282 PEAK																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																												
1	5510.00	102.72	-----	-----	89.48	35.21	10.30	32.27 367 282 PEAK																																																																											
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5459.92</td><td>47.38</td><td>54.00</td><td>-6.62</td><td>34.14</td><td>35.20</td><td>10.30</td><td>32.26 367 282 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	5459.92	47.38	54.00	-6.62	34.14	35.20	10.30	32.26 367 282 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>94.32</td><td>-----</td><td>-----</td><td>81.08</td><td>35.21</td><td>10.30</td><td>32.27 367 282 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	5510.00	94.32	-----	-----	81.08	35.21	10.30	32.27 367 282 AVERAGE									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																												
1	5459.92	47.38	54.00	-6.62	34.14	35.20	10.30	32.26 367 282 AVERAGE																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																												
1	5510.00	94.32	-----	-----	81.08	35.21	10.30	32.27 367 282 AVERAGE																																																																											

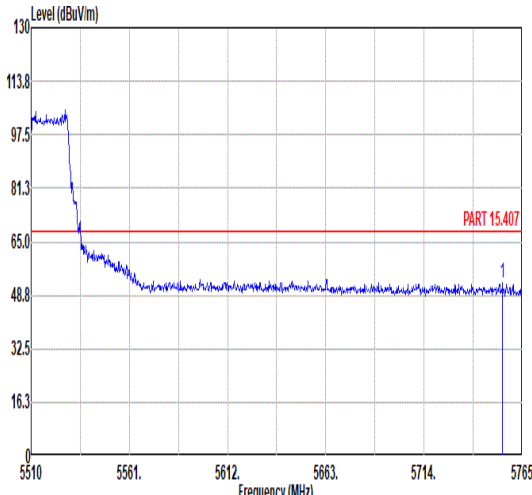


Mode	3																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5754.80</td><td>52.41</td><td>68.30</td><td>-15.89</td><td>38.75</td><td>35.62</td><td>10.39</td><td>32.35</td><td>367</td><td>282</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5754.80	52.41	68.30	-15.89	38.75	35.62	10.39	32.35	367	282	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5754.80	52.41	68.30	-15.89	38.75	35.62	10.39	32.35	367	282	PEAK																															

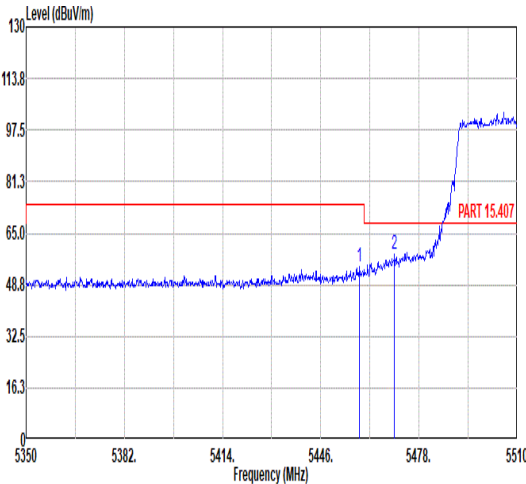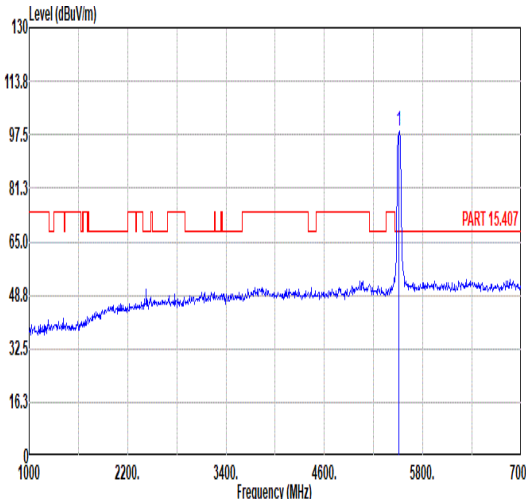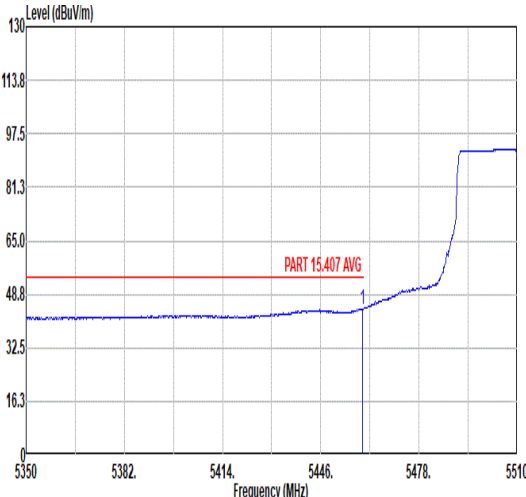
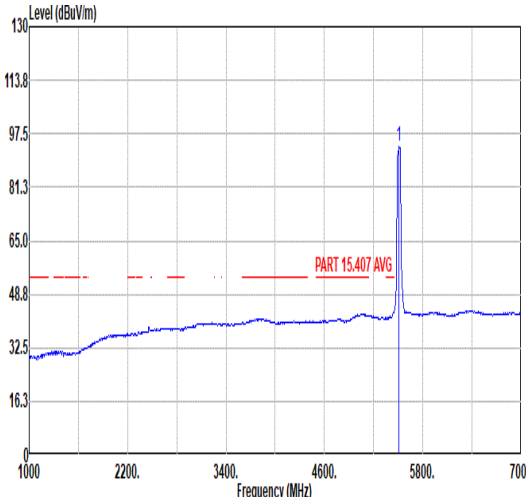


Mode	3																																																																																													
	Band Edge - L																																																																																													
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																													
ANT	1																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.64</td><td>54.24</td><td>74.00</td><td>-19.76</td><td>41.00</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>276</td><td>PEAK</td></tr><tr><td>2</td><td>5470.00</td><td>58.20</td><td>68.30</td><td>-10.10</td><td>44.96</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>276</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.64	54.24	74.00	-19.76	41.00	35.20	10.30	32.26	100	276	PEAK	2	5470.00	58.20	68.30	-10.10	44.96	35.20	10.30	32.26	100	276	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>98.73</td><td>-----</td><td>-----</td><td>85.50</td><td>35.21</td><td>10.30</td><td>32.28</td><td>100</td><td>276</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	98.73	-----	-----	85.50	35.21	10.30	32.28	100	276	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5458.64	54.24	74.00	-19.76	41.00	35.20	10.30	32.26	100	276	PEAK																																																																																			
2	5470.00	58.20	68.30	-10.10	44.96	35.20	10.30	32.26	100	276	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5510.00	98.73	-----	-----	85.50	35.21	10.30	32.28	100	276	PEAK																																																																																			
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.60</td><td>44.36</td><td>54.00</td><td>-9.64</td><td>31.12</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>276</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.60	44.36	54.00	-9.64	31.12	35.20	10.30	32.26	100	276	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>93.61</td><td>-----</td><td>-----</td><td>80.37</td><td>35.21</td><td>10.30</td><td>32.27</td><td>100</td><td>276</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	93.61	-----	-----	80.37	35.21	10.30	32.27	100	276	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5459.60	44.36	54.00	-9.64	31.12	35.20	10.30	32.26	100	276	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5510.00	93.61	-----	-----	80.37	35.21	10.30	32.27	100	276	AVERAGE																																																																																			



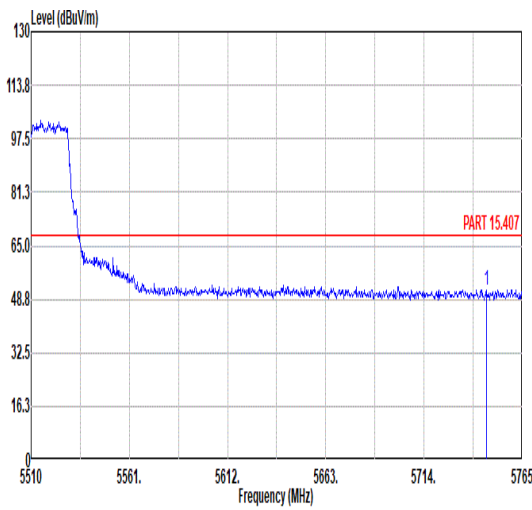


Mode	3																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5746.39</td><td>51.70</td><td>68.30</td><td>-16.60</td><td>38.07</td><td>35.61</td><td>10.38</td><td>32.36</td><td>100</td><td>276</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5746.39	51.70	68.30	-16.60	38.07	35.61	10.38	32.36	100	276	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5746.39	51.70	68.30	-16.60	38.07	35.61	10.38	32.36	100	276	PEAK																															

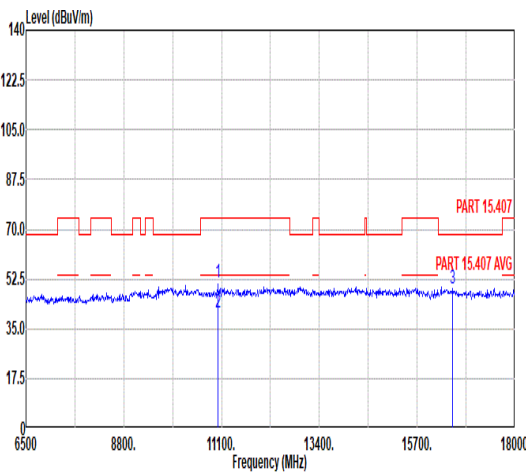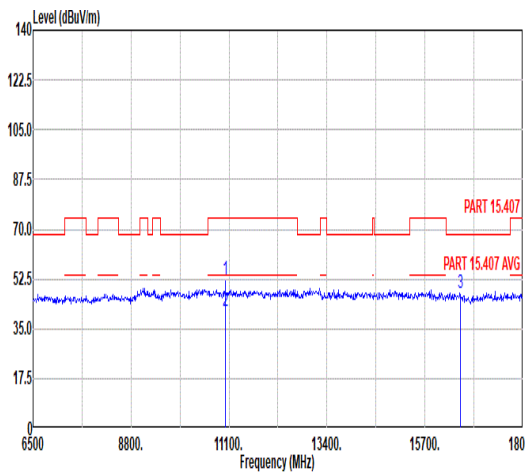


Mode	3																																																																																																																																																								
	Harmonic																																																																																																																																																								
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																																																																																								
ANT	1																																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																																		
Peak Avg																																																																																																																																																									
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11020.00</td><td>51.49</td><td>74.00</td><td>-22.51</td><td>58.60</td><td>37.92</td><td>13.63</td><td>58.66</td><td>122</td><td>280</td><td>Peak</td></tr><tr><td>2</td><td>11020.00</td><td>40.49</td><td>54.00</td><td>-13.51</td><td>47.60</td><td>37.92</td><td>13.63</td><td>58.66</td><td>122</td><td>280</td><td>Average</td></tr><tr><td>3</td><td>16530.00</td><td>48.89</td><td>68.30</td><td>-19.41</td><td>49.25</td><td>41.37</td><td>16.45</td><td>58.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11020.00	51.49	74.00	-22.51	58.60	37.92	13.63	58.66	122	280	Peak	2	11020.00	40.49	54.00	-13.51	47.60	37.92	13.63	58.66	122	280	Average	3	16530.00	48.89	68.30	-19.41	49.25	41.37	16.45	58.18	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11020.00</td><td>52.30</td><td>74.00</td><td>-21.70</td><td>59.41</td><td>37.92</td><td>13.63</td><td>58.66</td><td>100</td><td>326</td><td>Peak</td></tr><tr><td>2</td><td>11020.00</td><td>41.03</td><td>54.00</td><td>-12.97</td><td>48.14</td><td>37.92</td><td>13.63</td><td>58.66</td><td>100</td><td>326</td><td>Average</td></tr><tr><td>3</td><td>16530.00</td><td>47.60</td><td>68.30</td><td>-20.70</td><td>47.96</td><td>41.37</td><td>16.45</td><td>58.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11020.00	52.30	74.00	-21.70	59.41	37.92	13.63	58.66	100	326	Peak	2	11020.00	41.03	54.00	-12.97	48.14	37.92	13.63	58.66	100	326	Average	3	16530.00	47.60	68.30	-20.70	47.96	41.37	16.45	58.18	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	11020.00	51.49	74.00	-22.51	58.60	37.92	13.63	58.66	122	280	Peak																																																																																																																																														
2	11020.00	40.49	54.00	-13.51	47.60	37.92	13.63	58.66	122	280	Average																																																																																																																																														
3	16530.00	48.89	68.30	-19.41	49.25	41.37	16.45	58.18	--	--	Peak																																																																																																																																														
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																
1	11020.00	52.30	74.00	-21.70	59.41	37.92	13.63	58.66	100	326	Peak																																																																																																																																														
2	11020.00	41.03	54.00	-12.97	48.14	37.92	13.63	58.66	100	326	Average																																																																																																																																														
3	16530.00	47.60	68.30	-20.70	47.96	41.37	16.45	58.18	--	--	Peak																																																																																																																																														

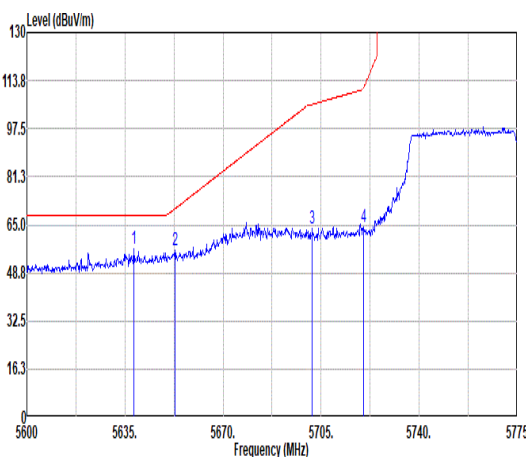
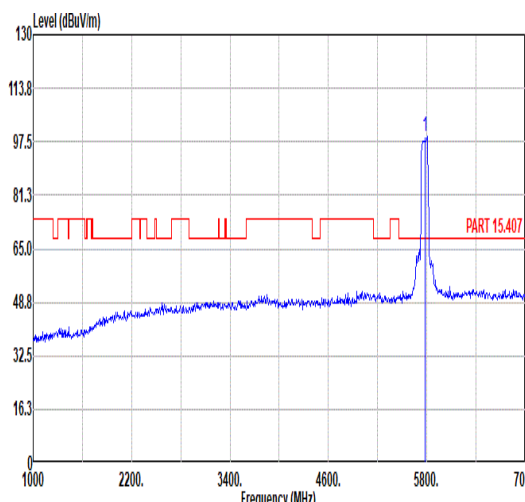
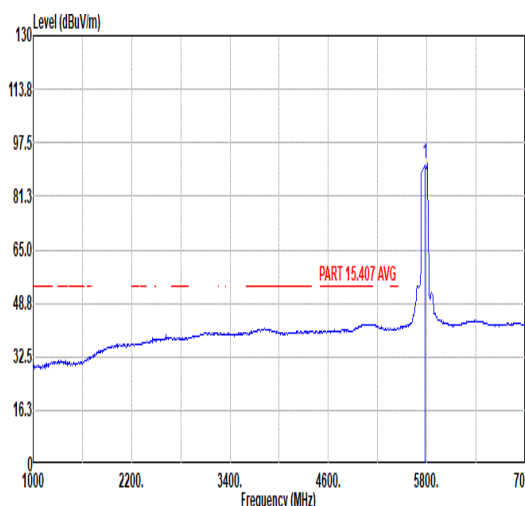


Mode	4																																																																																																																					
	Band Edge - L																																																																																																																					
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																					
ANT	1																																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																																				
Peak	 Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue trace with a red limit line. Four peaks are marked with vertical lines and numbered 1 to 4. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 5600 to 5775 MHz. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5638.15</td><td>56.73</td><td>68.30</td><td>-11.57</td><td>43.33</td><td>35.37</td><td>10.33</td><td>32.30</td><td>100</td><td>159</td><td>PEAK</td></tr><tr><td>2</td><td>5652.85</td><td>56.33</td><td>70.41</td><td>-14.08</td><td>42.90</td><td>35.41</td><td>10.33</td><td>32.31</td><td>100</td><td>159</td><td>PEAK</td></tr><tr><td>3</td><td>5701.85</td><td>63.58</td><td>105.72</td><td>-42.14</td><td>50.05</td><td>35.52</td><td>10.36</td><td>32.35</td><td>100</td><td>159</td><td>PEAK</td></tr><tr><td>4</td><td>5720.05</td><td>64.10</td><td>110.91</td><td>-46.81</td><td>50.53</td><td>35.56</td><td>10.37</td><td>32.36</td><td>100</td><td>159</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5638.15	56.73	68.30	-11.57	43.33	35.37	10.33	32.30	100	159	PEAK	2	5652.85	56.33	70.41	-14.08	42.90	35.41	10.33	32.31	100	159	PEAK	3	5701.85	63.58	105.72	-42.14	50.05	35.52	10.36	32.35	100	159	PEAK	4	5720.05	64.10	110.91	-46.81	50.53	35.56	10.37	32.36	100	159	PEAK	 Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue trace with a red limit line. A single peak is marked with a vertical line and labeled 1. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>98.97</td><td>-----</td><td>-----</td><td>85.14</td><td>35.75</td><td>10.43</td><td>32.35</td><td>100</td><td>159</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	98.97	-----	-----	85.14	35.75	10.43	32.35	100	159	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5638.15	56.73	68.30	-11.57	43.33	35.37	10.33	32.30	100	159	PEAK																																																																																																											
2	5652.85	56.33	70.41	-14.08	42.90	35.41	10.33	32.31	100	159	PEAK																																																																																																											
3	5701.85	63.58	105.72	-42.14	50.05	35.52	10.36	32.35	100	159	PEAK																																																																																																											
4	5720.05	64.10	110.91	-46.81	50.53	35.56	10.37	32.36	100	159	PEAK																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5775.00	98.97	-----	-----	85.14	35.75	10.43	32.35	100	159	PEAK																																																																																																											
Avg	Blank	 Fundamental Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue trace with a red limit line. A single peak is marked with a vertical line and labeled 1. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>91.25</td><td>-----</td><td>-----</td><td>77.42</td><td>35.75</td><td>10.43</td><td>32.35</td><td>100</td><td>159</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	91.25	-----	-----	77.42	35.75	10.43	32.35	100	159	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5775.00	91.25	-----	-----	77.42	35.75	10.43	32.35	100	159	AVERAGE																																																																																																											

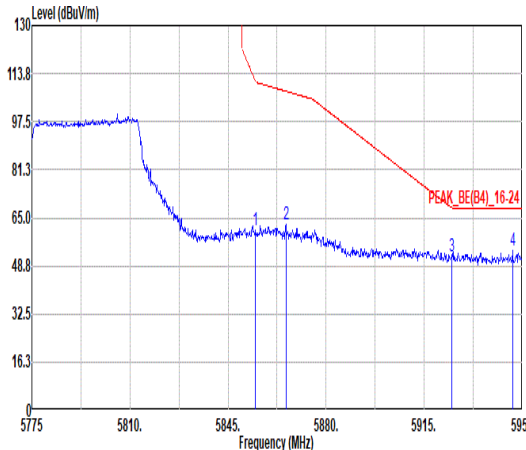


Mode	4																																																																			
	Band Edge - R																																																																			
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																			
ANT	1																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.80</td><td>60.78</td><td>111.26</td><td>-50.48</td><td>46.84</td><td>35.88</td><td>10.46</td><td>32.40</td><td>100</td><td>159 PEAK</td></tr><tr><td>2</td><td>5865.65</td><td>62.69</td><td>107.82</td><td>-45.13</td><td>48.72</td><td>35.91</td><td>10.47</td><td>32.41</td><td>100</td><td>159 PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>52.09</td><td>68.35</td><td>-16.26</td><td>37.99</td><td>36.03</td><td>10.53</td><td>32.46</td><td>100</td><td>159 PEAK</td></tr><tr><td>4</td><td>5946.50</td><td>53.93</td><td>68.30</td><td>-14.37</td><td>39.83</td><td>36.05</td><td>10.54</td><td>32.49</td><td>100</td><td>159 PEAK</td></tr></table>		Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	60.78	111.26	-50.48	46.84	35.88	10.46	32.40	100	159 PEAK	2	5865.65	62.69	107.82	-45.13	48.72	35.91	10.47	32.41	100	159 PEAK	3	5924.80	52.09	68.35	-16.26	37.99	36.03	10.53	32.46	100	159 PEAK	4	5946.50	53.93	68.30	-14.37	39.83	36.05	10.54	32.49	100	159 PEAK	Blank
	Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5854.80	60.78	111.26	-50.48	46.84	35.88	10.46	32.40	100	159 PEAK																																																										
2	5865.65	62.69	107.82	-45.13	48.72	35.91	10.47	32.41	100	159 PEAK																																																										
3	5924.80	52.09	68.35	-16.26	37.99	36.03	10.53	32.46	100	159 PEAK																																																										
4	5946.50	53.93	68.30	-14.37	39.83	36.05	10.54	32.49	100	159 PEAK																																																										

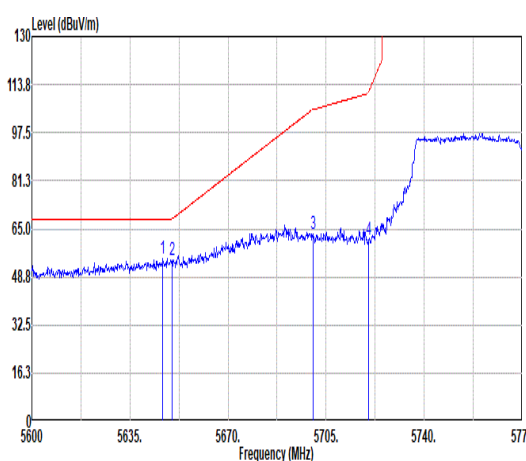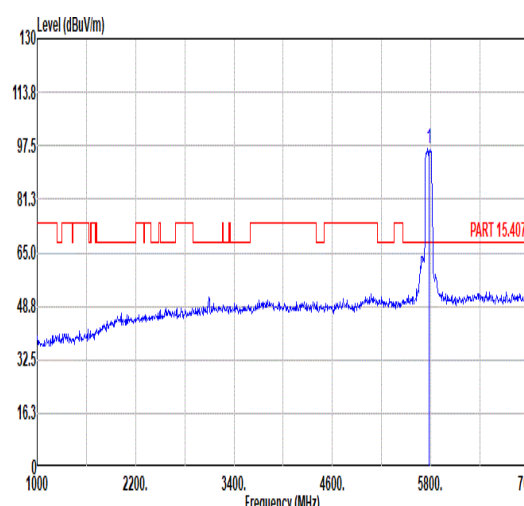
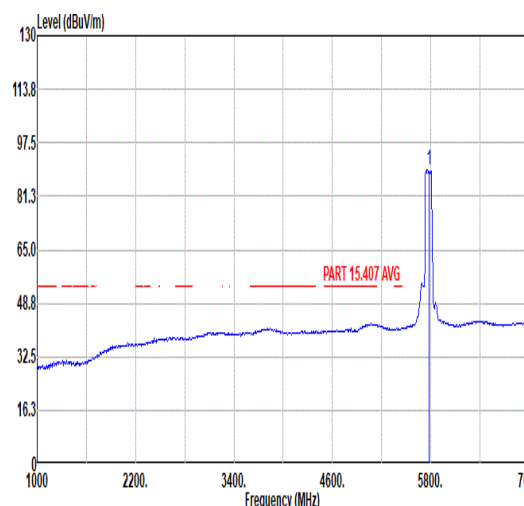


Mode	4																																																																																																																											
	Band Edge - L																																																																																																																											
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Vertical					Fundamental																																																																																																																						
Peak																																																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5646.73</td><td>55.08</td><td>68.30</td><td>-13.22</td><td>41.67</td><td>35.39</td><td>10.33</td><td>32.31</td><td>100</td><td>119</td><td>PEAK</td></tr><tr><td>2</td><td>5650.05</td><td>54.53</td><td>68.34</td><td>-13.81</td><td>41.11</td><td>35.40</td><td>10.33</td><td>32.31</td><td>100</td><td>119</td><td>PEAK</td></tr><tr><td>3</td><td>5700.45</td><td>63.26</td><td>105.33</td><td>-42.07</td><td>49.73</td><td>35.52</td><td>10.36</td><td>32.35</td><td>100</td><td>119</td><td>PEAK</td></tr><tr><td>4</td><td>5720.05</td><td>61.09</td><td>110.91</td><td>-49.82</td><td>47.52</td><td>35.56</td><td>10.37</td><td>32.36</td><td>100</td><td>119</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5646.73	55.08	68.30	-13.22	41.67	35.39	10.33	32.31	100	119	PEAK	2	5650.05	54.53	68.34	-13.81	41.11	35.40	10.33	32.31	100	119	PEAK	3	5700.45	63.26	105.33	-42.07	49.73	35.52	10.36	32.35	100	119	PEAK	4	5720.05	61.09	110.91	-49.82	47.52	35.56	10.37	32.36	100	119	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>96.44</td><td>-----</td><td>82.76</td><td>35.64</td><td>10.39</td><td>32.35</td><td>100</td><td>119</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	96.44	-----	82.76	35.64	10.39	32.35	100	119
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5646.73	55.08	68.30	-13.22	41.67	35.39	10.33	32.31	100	119	PEAK																																																																																																																	
2	5650.05	54.53	68.34	-13.81	41.11	35.40	10.33	32.31	100	119	PEAK																																																																																																																	
3	5700.45	63.26	105.33	-42.07	49.73	35.52	10.36	32.35	100	119	PEAK																																																																																																																	
4	5720.05	61.09	110.91	-49.82	47.52	35.56	10.37	32.36	100	119	PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5775.00	96.44	-----	82.76	35.64	10.39	32.35	100	119	PEAK																																																																																																																		
Avg	Blank																																																																																																																											
						<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>89.32</td><td>-----</td><td>75.65</td><td>35.63</td><td>10.39</td><td>32.35</td><td>100</td><td>119</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	89.32	-----	75.65	35.63	10.39	32.35	100	119	AVERAGE																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	5775.00	89.32	-----	75.65	35.63	10.39	32.35	100	119	AVERAGE																																																																																																																		




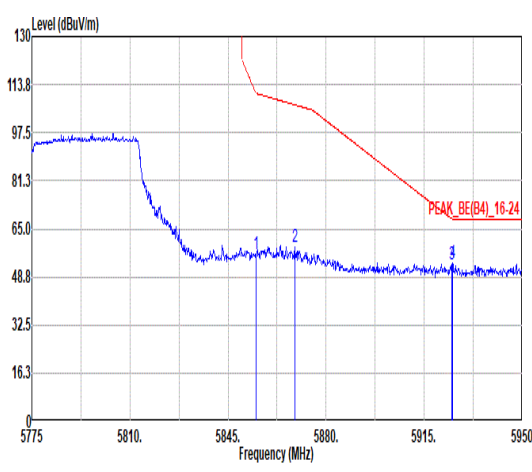


Mode	4																																																																			
	Band Edge - R																																																																			
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																			
ANT	1																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.98</td><td>56.25</td><td>110.86</td><td>-54.61</td><td>42.31</td><td>35.88</td><td>10.46</td><td>32.40</td><td>100</td><td>119 PEAK</td></tr><tr><td>2</td><td>5868.80</td><td>59.02</td><td>106.93</td><td>-47.91</td><td>45.03</td><td>35.92</td><td>10.48</td><td>32.41</td><td>100</td><td>119 PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>52.93</td><td>68.35</td><td>-15.42</td><td>38.83</td><td>36.03</td><td>10.53</td><td>32.46</td><td>100</td><td>119 PEAK</td></tr><tr><td>4</td><td>5925.15</td><td>53.24</td><td>68.30</td><td>-15.06</td><td>39.14</td><td>36.03</td><td>10.53</td><td>32.46</td><td>100</td><td>119 PEAK</td></tr></table>		Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.98	56.25	110.86	-54.61	42.31	35.88	10.46	32.40	100	119 PEAK	2	5868.80	59.02	106.93	-47.91	45.03	35.92	10.48	32.41	100	119 PEAK	3	5924.80	52.93	68.35	-15.42	38.83	36.03	10.53	32.46	100	119 PEAK	4	5925.15	53.24	68.30	-15.06	39.14	36.03	10.53	32.46	100	119 PEAK	Blank
	Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5854.98	56.25	110.86	-54.61	42.31	35.88	10.46	32.40	100	119 PEAK																																																										
2	5868.80	59.02	106.93	-47.91	45.03	35.92	10.48	32.41	100	119 PEAK																																																										
3	5924.80	52.93	68.35	-15.42	38.83	36.03	10.53	32.46	100	119 PEAK																																																										
4	5925.15	53.24	68.30	-15.06	39.14	36.03	10.53	32.46	100	119 PEAK																																																										



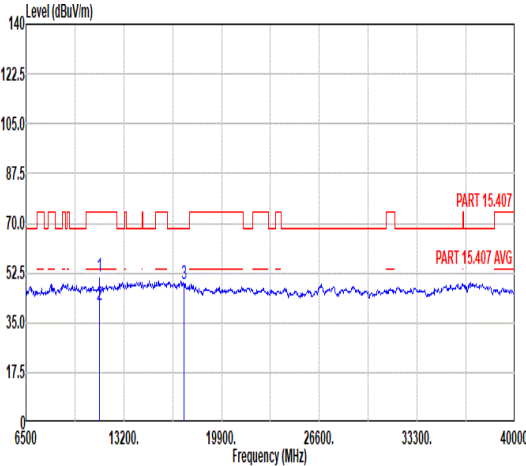
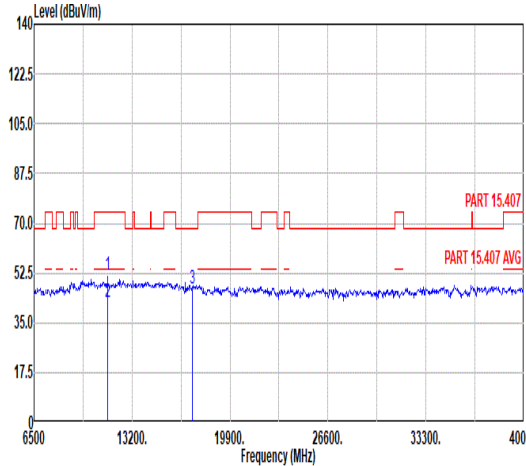


Mode	4																																																																																																																																																									
	Harmonic																																																																																																																																																									
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																																																									
ANT	1																																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																																			
Peak Avg																																																																																																																																																										
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11550.00</td><td>51.00</td><td>74.00</td><td>-23.00</td><td>56.45</td><td>38.44</td><td>13.95</td><td>57.84</td><td>120</td><td>312</td><td>Peak</td><td></td></tr><tr><td>2 11550.00</td><td>41.04</td><td>54.00</td><td>-12.96</td><td>46.49</td><td>38.44</td><td>13.95</td><td>57.84</td><td>120</td><td>312</td><td>Average</td><td></td></tr><tr><td>3 17325.00</td><td>48.52</td><td>68.30</td><td>-19.78</td><td>47.24</td><td>42.41</td><td>16.86</td><td>57.99</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 11550.00	51.00	74.00	-23.00	56.45	38.44	13.95	57.84	120	312	Peak		2 11550.00	41.04	54.00	-12.96	46.49	38.44	13.95	57.84	120	312	Average		3 17325.00	48.52	68.30	-19.78	47.24	42.41	16.86	57.99	--	--	Peak		<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11550.00</td><td>51.93</td><td>74.00</td><td>-22.07</td><td>57.38</td><td>38.44</td><td>13.95</td><td>57.84</td><td>162</td><td>280</td><td>Peak</td><td></td></tr><tr><td>2 11550.00</td><td>42.13</td><td>54.00</td><td>-11.87</td><td>47.58</td><td>38.44</td><td>13.95</td><td>57.84</td><td>162</td><td>280</td><td>Average</td><td></td></tr><tr><td>3 17325.00</td><td>47.00</td><td>68.30</td><td>-21.30</td><td>45.72</td><td>42.41</td><td>16.86</td><td>57.99</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 11550.00	51.93	74.00	-22.07	57.38	38.44	13.95	57.84	162	280	Peak		2 11550.00	42.13	54.00	-11.87	47.58	38.44	13.95	57.84	162	280	Average		3 17325.00	47.00	68.30	-21.30	45.72	42.41	16.86	57.99	--	--	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1 11550.00	51.00	74.00	-23.00	56.45	38.44	13.95	57.84	120	312	Peak																																																																																																																																																
2 11550.00	41.04	54.00	-12.96	46.49	38.44	13.95	57.84	120	312	Average																																																																																																																																																
3 17325.00	48.52	68.30	-19.78	47.24	42.41	16.86	57.99	--	--	Peak																																																																																																																																																
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1 11550.00	51.93	74.00	-22.07	57.38	38.44	13.95	57.84	162	280	Peak																																																																																																																																																
2 11550.00	42.13	54.00	-11.87	47.58	38.44	13.95	57.84	162	280	Average																																																																																																																																																
3 17325.00	47.00	68.30	-21.30	45.72	42.41	16.86	57.99	--	--	Peak																																																																																																																																																

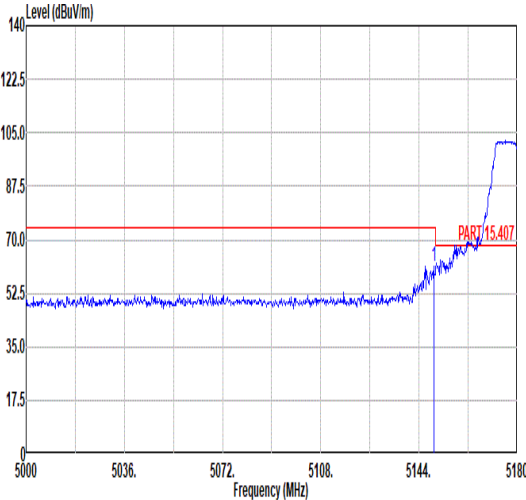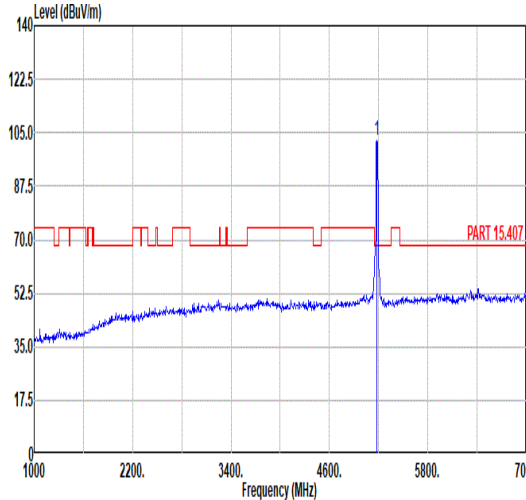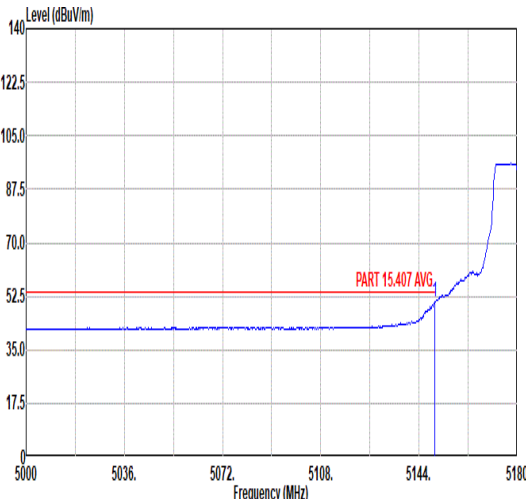
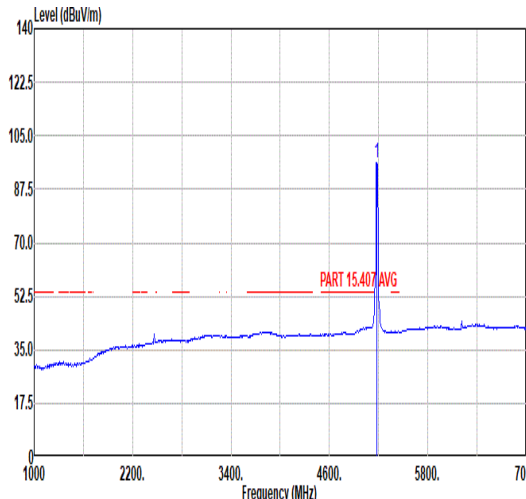


Mode	5																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.40</td><td>61.45</td><td>74.00</td><td>-12.55</td><td>48.79</td><td>34.95</td><td>9.96</td><td>32.25</td><td>148</td><td>85</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.40	61.45	74.00	-12.55	48.79	34.95	9.96	32.25	148	85	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>102.46</td><td>-----</td><td>-----</td><td>89.73</td><td>34.98</td><td>9.97</td><td>32.22</td><td>148</td><td>85</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	102.46	-----	-----	89.73	34.98	9.97	32.22	148	85
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.40	61.45	74.00	-12.55	48.79	34.95	9.96	32.25	148	85	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	102.46	-----	-----	89.73	34.98	9.97	32.22	148	85	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.76</td><td>50.76</td><td>54.00</td><td>-3.24</td><td>38.10</td><td>34.95</td><td>9.96</td><td>32.25</td><td>148</td><td>85</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.76	50.76	54.00	-3.24	38.10	34.95	9.96	32.25	148	85	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>96.09</td><td>-----</td><td>-----</td><td>83.36</td><td>34.98</td><td>9.97</td><td>32.22</td><td>148</td><td>85</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	96.09	-----	-----	83.36	34.98	9.97	32.22	148	85
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.76	50.76	54.00	-3.24	38.10	34.95	9.96	32.25	148	85	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	96.09	-----	-----	83.36	34.98	9.97	32.22	148	85	AVERAGE																																																																															

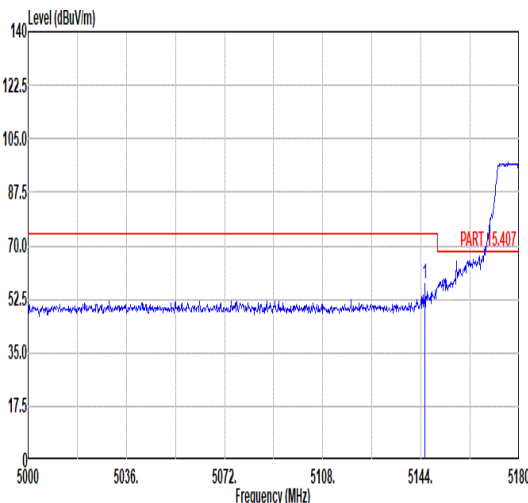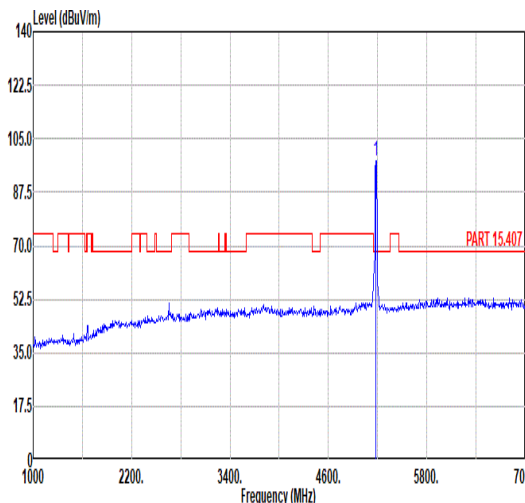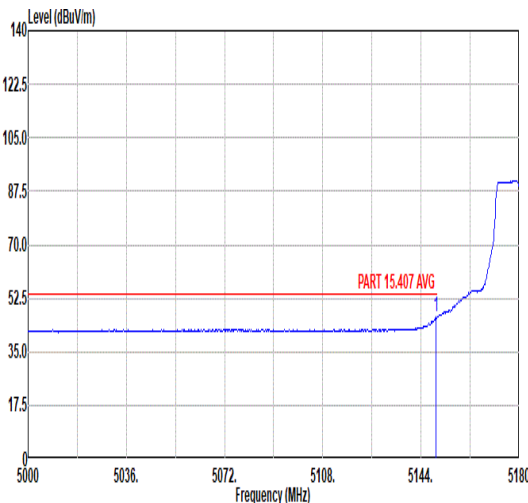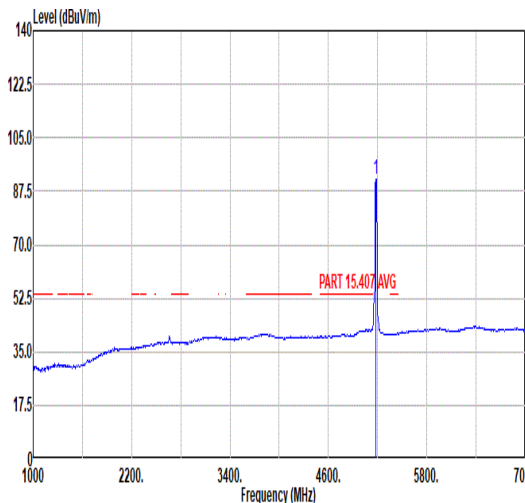

Mode	5																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.44</td><td>57.59</td><td>74.00</td><td>-16.41</td><td>44.94</td><td>34.95</td><td>9.95</td><td>32.25</td><td>100</td><td>115</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5145.44	57.59	74.00	-16.41	44.94	34.95	9.95	32.25	100	115	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>97.73</td><td>-----</td><td>-----</td><td>84.97</td><td>34.99</td><td>9.98</td><td>32.21</td><td>100</td><td>115</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	97.73	-----	-----	84.97	34.99	9.98	32.21	100	115
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5145.44	57.59	74.00	-16.41	44.94	34.95	9.95	32.25	100	115	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	97.73	-----	-----	84.97	34.99	9.98	32.21	100	115	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.40</td><td>46.23</td><td>54.00</td><td>-7.77</td><td>33.57</td><td>34.95</td><td>9.96</td><td>32.25</td><td>100</td><td>115</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.40	46.23	54.00	-7.77	33.57	34.95	9.96	32.25	100	115	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>91.52</td><td>-----</td><td>-----</td><td>78.76</td><td>34.99</td><td>9.98</td><td>32.21</td><td>100</td><td>115</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	91.52	-----	-----	78.76	34.99	9.98	32.21	100	115
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.40	46.23	54.00	-7.77	33.57	34.95	9.96	32.25	100	115	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	91.52	-----	-----	78.76	34.99	9.98	32.21	100	115	AVERAGE																																																																															

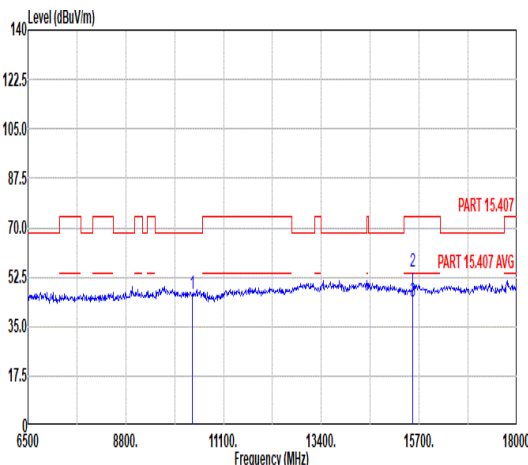
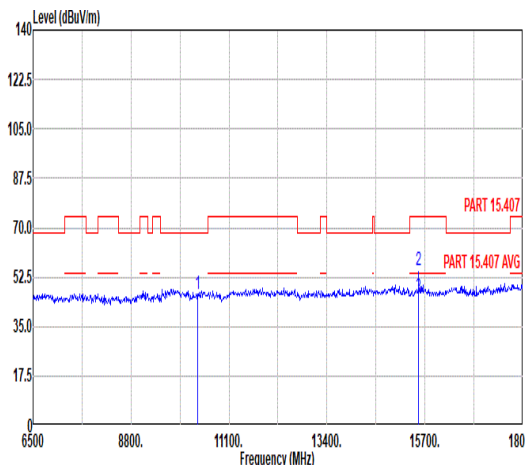


Mode	5																																																																																																													
	Harmonic																																																																																																													
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 10360.00</td><td>46.47</td><td>68.30</td><td>-21.83</td><td>55.62</td><td>37.22</td><td>13.25</td><td>59.62</td><td>-- -- Peak</td></tr><tr><td>2 15540.00</td><td>54.34</td><td>74.00</td><td>-19.66</td><td>56.15</td><td>40.22</td><td>15.86</td><td>57.89</td><td>241 165 Peak</td></tr><tr><td>3 15540.00</td><td>43.74</td><td>54.00</td><td>-10.26</td><td>45.55</td><td>40.22</td><td>15.86</td><td>57.89</td><td>241 165 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 10360.00	46.47	68.30	-21.83	55.62	37.22	13.25	59.62	-- -- Peak	2 15540.00	54.34	74.00	-19.66	56.15	40.22	15.86	57.89	241 165 Peak	3 15540.00	43.74	54.00	-10.26	45.55	40.22	15.86	57.89	241 165 Average	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 10360.00</td><td>46.35</td><td>68.30</td><td>-21.95</td><td>55.50</td><td>37.22</td><td>13.25</td><td>59.62</td><td>-- -- Peak</td></tr><tr><td>2 15540.00</td><td>54.74</td><td>74.00</td><td>-19.26</td><td>56.55</td><td>40.22</td><td>15.86</td><td>57.89</td><td>124 250 Peak</td></tr><tr><td>3 15540.00</td><td>45.38</td><td>54.00</td><td>-8.62</td><td>47.19</td><td>40.22</td><td>15.86</td><td>57.89</td><td>124 250 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 10360.00	46.35	68.30	-21.95	55.50	37.22	13.25	59.62	-- -- Peak	2 15540.00	54.74	74.00	-19.26	56.55	40.22	15.86	57.89	124 250 Peak	3 15540.00	45.38	54.00	-8.62	47.19	40.22	15.86	57.89	124 250 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																						
1 10360.00	46.47	68.30	-21.83	55.62	37.22	13.25	59.62	-- -- Peak																																																																																																						
2 15540.00	54.34	74.00	-19.66	56.15	40.22	15.86	57.89	241 165 Peak																																																																																																						
3 15540.00	43.74	54.00	-10.26	45.55	40.22	15.86	57.89	241 165 Average																																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																						
1 10360.00	46.35	68.30	-21.95	55.50	37.22	13.25	59.62	-- -- Peak																																																																																																						
2 15540.00	54.74	74.00	-19.26	56.55	40.22	15.86	57.89	124 250 Peak																																																																																																						
3 15540.00	45.38	54.00	-8.62	47.19	40.22	15.86	57.89	124 250 Average																																																																																																						







Mode	6																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5013.92</td><td>52.44</td><td>74.00</td><td>-21.56</td><td>40.02</td><td>34.82</td><td>9.86</td><td>32.26</td><td>156</td><td>76</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5013.92	52.44	74.00	-21.56	40.02	34.82	9.86	32.26	156	76	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>97.98</td><td>-----</td><td>-----</td><td>84.78</td><td>35.20</td><td>10.18</td><td>32.18</td><td>156</td><td>76</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	97.98	-----	-----	84.78	35.20	10.18	32.18	156	76
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5013.92	52.44	74.00	-21.56	40.02	34.82	9.86	32.26	156	76	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5290.00	97.98	-----	-----	84.78	35.20	10.18	32.18	156	76	PEAK																																																																																
Avg																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5146.16</td><td>43.43</td><td>54.00</td><td>-10.57</td><td>30.78</td><td>34.95</td><td>9.95</td><td>32.25</td><td>156</td><td>76</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5146.16	43.43	54.00	-10.57	30.78	34.95	9.95	32.25	156	76	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>88.79</td><td>-----</td><td>-----</td><td>75.59</td><td>35.20</td><td>10.18</td><td>32.18</td><td>156</td><td>76</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	88.79	-----	-----	75.59	35.20	10.18	32.18	156	76
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5146.16	43.43	54.00	-10.57	30.78	34.95	9.95	32.25	156	76	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5290.00	88.79	-----	-----	75.59	35.20	10.18	32.18	156	76	AVERAGE																																																																																

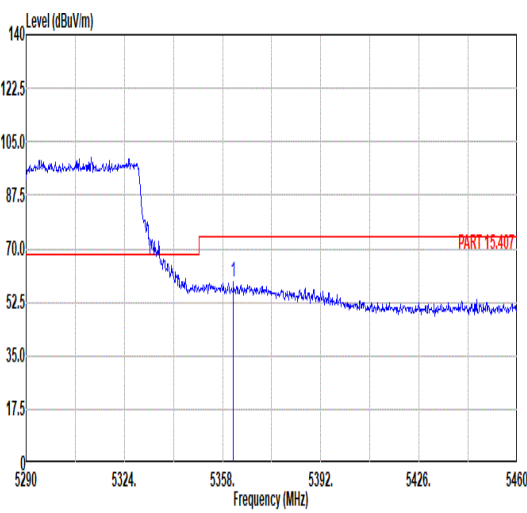
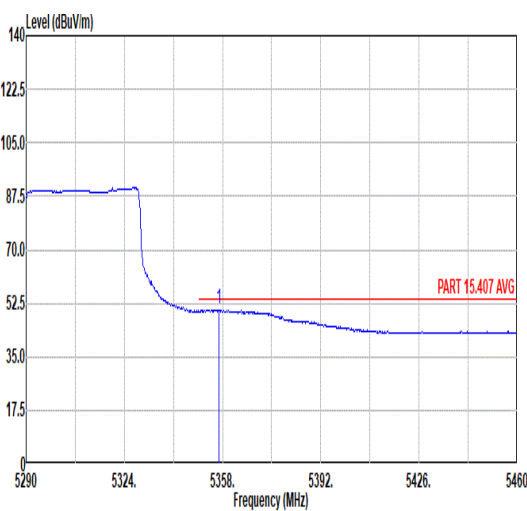


Mode	6																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5361.74</td><td>59.03</td><td>74.00</td><td>-14.97</td><td>45.77</td><td>35.20</td><td>10.23</td><td>32.17</td><td>156</td><td>76</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5361.74	59.03	74.00	-14.97	45.77	35.20	10.23	32.17	156	76	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5361.74	59.03	74.00	-14.97	45.77	35.20	10.23	32.17	156	76	PEAK																															
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5356.81</td><td>50.62</td><td>54.00</td><td>-3.38</td><td>37.37</td><td>35.20</td><td>10.22</td><td>32.17</td><td>156</td><td>76</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5356.81	50.62	54.00	-3.38	37.37	35.20	10.22	32.17	156	76	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5356.81	50.62	54.00	-3.38	37.37	35.20	10.22	32.17	156	76	AVERAGE																															

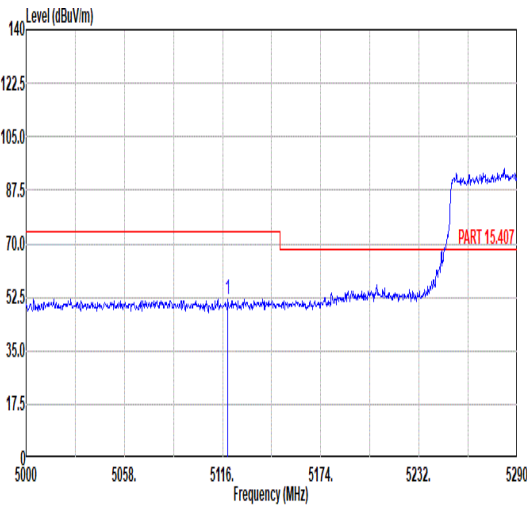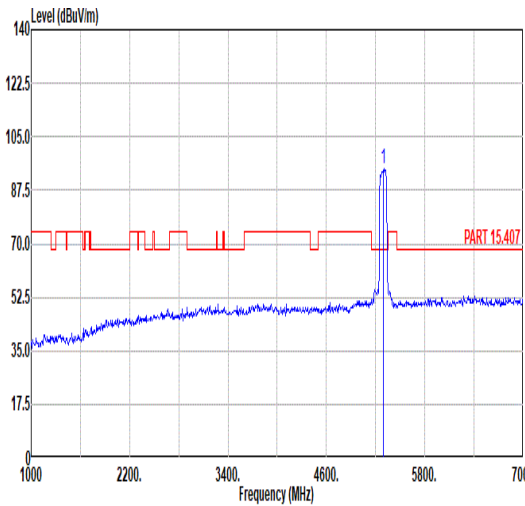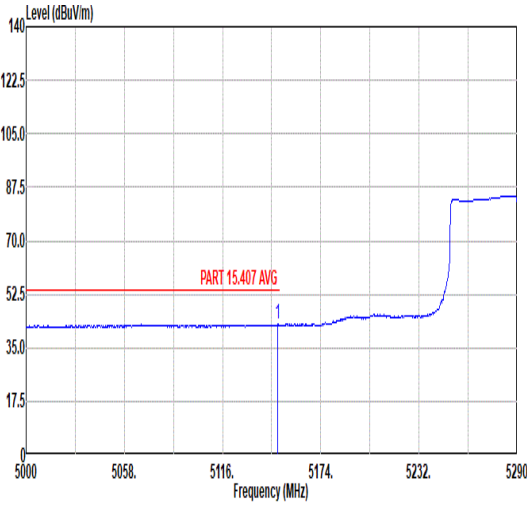
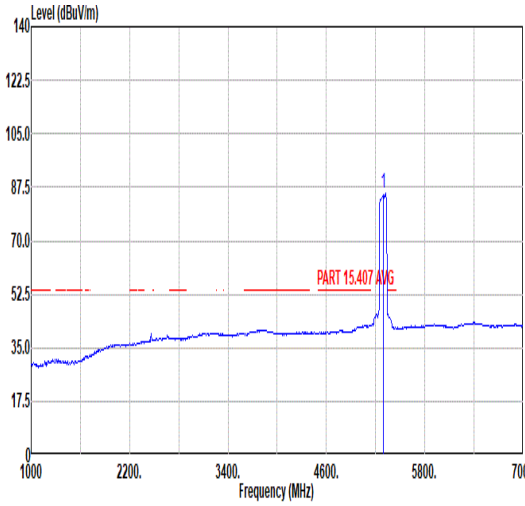


Mode	6																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																										
ANT	1																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5119.19</td><td>51.92</td><td>74.00</td><td>-22.08</td><td>39.31</td><td>34.92</td><td>9.94</td><td>32.25</td><td>100</td><td>118</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5119.19	51.92	74.00	-22.08	39.31	34.92	9.94	32.25	100	118	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>94.83</td><td>-----</td><td>-----</td><td>81.67</td><td>35.20</td><td>10.14</td><td>32.18</td><td>100</td><td>118</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	94.83	-----	-----	81.67	35.20	10.14	32.18	100	118
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5119.19	51.92	74.00	-22.08	39.31	34.92	9.94	32.25	100	118	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5290.00	94.83	-----	-----	81.67	35.20	10.14	32.18	100	118	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.48</td><td>42.57</td><td>54.00</td><td>-11.43</td><td>29.91</td><td>34.95</td><td>9.96</td><td>32.25</td><td>100</td><td>118</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.48	42.57	54.00	-11.43	29.91	34.95	9.96	32.25	100	118	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>85.61</td><td>-----</td><td>-----</td><td>72.41</td><td>35.20</td><td>10.18</td><td>32.18</td><td>100</td><td>118</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	85.61	-----	-----	72.41	35.20	10.18	32.18	100	118
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5148.48	42.57	54.00	-11.43	29.91	34.95	9.96	32.25	100	118	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5290.00	85.61	-----	-----	72.41	35.20	10.18	32.18	100	118	AVERAGE																																																																																



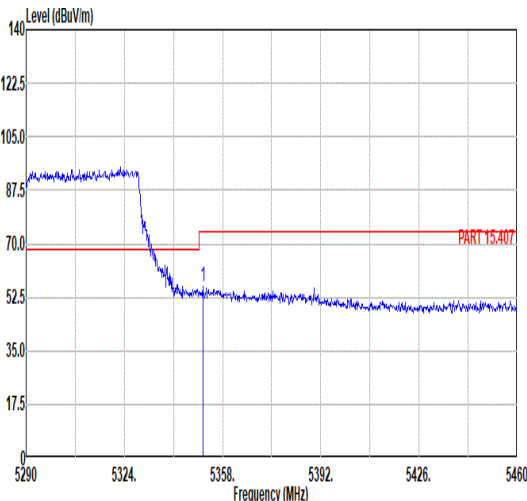
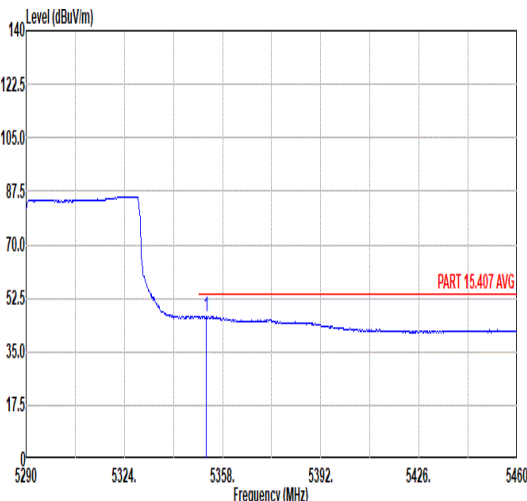


Mode	6																																																	
	Band Edge - R																																																	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																	
ANT	1																																																	
Pol.	Vertical					Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.20</td><td>55.83</td><td>74.00</td><td>-18.17</td><td>42.59</td><td>35.20</td><td>10.21</td><td>32.17</td><td>100</td><td>118 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.20	55.83	74.00	-18.17	42.59	35.20	10.21	32.17	100	118 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																								
1	5351.20	55.83	74.00	-18.17	42.59	35.20	10.21	32.17	100	118 PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.22</td><td>46.58</td><td>54.00</td><td>-7.42</td><td>33.33</td><td>35.20</td><td>10.22</td><td>32.17</td><td>100</td><td>118 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5352.22	46.58	54.00	-7.42	33.33	35.20	10.22	32.17	100	118 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																								
1	5352.22	46.58	54.00	-7.42	33.33	35.20	10.22	32.17	100	118 AVERAGE																																								

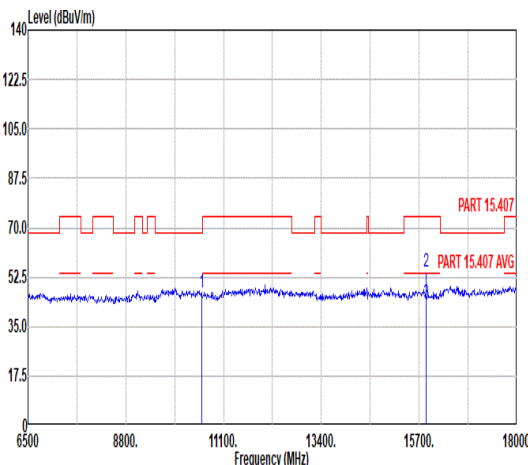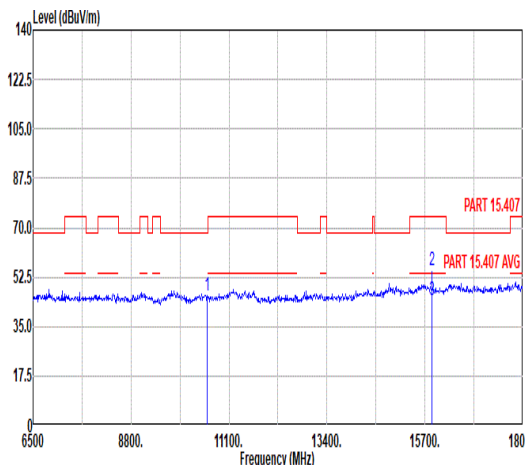


Mode	6																																																																																																																																			
	Harmonic																																																																																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal								Vertical																																																																																																																											
Peak Avg																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10580.00</td><td>46.76</td><td>68.30</td><td>-21.54</td><td>55.41</td><td>37.39</td><td>13.50</td><td>59.54</td><td>--</td><td>-- Peak</td></tr><tr><td>2 15870.00</td><td>54.45</td><td>74.00</td><td>-19.55</td><td>56.66</td><td>40.42</td><td>15.98</td><td>58.61</td><td>132</td><td>241 Peak</td></tr><tr><td>3 15870.00</td><td>43.16</td><td>54.00</td><td>-10.84</td><td>45.37</td><td>40.42</td><td>15.98</td><td>58.61</td><td>132</td><td>241 Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10580.00	46.76	68.30	-21.54	55.41	37.39	13.50	59.54	--	-- Peak	2 15870.00	54.45	74.00	-19.55	56.66	40.42	15.98	58.61	132	241 Peak	3 15870.00	43.16	54.00	-10.84	45.37	40.42	15.98	58.61	132	241 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10580.00</td><td>45.84</td><td>68.30</td><td>-22.46</td><td>54.49</td><td>37.39</td><td>13.50</td><td>59.54</td><td>--</td><td>-- Peak</td></tr><tr><td>2 15870.00</td><td>55.06</td><td>74.00</td><td>-18.94</td><td>57.27</td><td>40.42</td><td>15.98</td><td>58.61</td><td>124</td><td>251 Peak</td></tr><tr><td>3 15870.00</td><td>44.45</td><td>54.00</td><td>-9.55</td><td>46.66</td><td>40.42</td><td>15.98</td><td>58.61</td><td>124</td><td>251 Average</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10580.00	45.84	68.30	-22.46	54.49	37.39	13.50	59.54	--	-- Peak	2 15870.00	55.06	74.00	-18.94	57.27	40.42	15.98	58.61	124	251 Peak	3 15870.00	44.45	54.00	-9.55	46.66	40.42	15.98	58.61	124	251 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																												
	Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1 10580.00	46.76	68.30	-21.54	55.41	37.39	13.50	59.54	--	-- Peak																																																																																																																											
2 15870.00	54.45	74.00	-19.55	56.66	40.42	15.98	58.61	132	241 Peak																																																																																																																											
3 15870.00	43.16	54.00	-10.84	45.37	40.42	15.98	58.61	132	241 Average																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1 10580.00	45.84	68.30	-22.46	54.49	37.39	13.50	59.54	--	-- Peak																																																																																																																											
2 15870.00	55.06	74.00	-18.94	57.27	40.42	15.98	58.61	124	251 Peak																																																																																																																											
3 15870.00	44.45	54.00	-9.55	46.66	40.42	15.98	58.61	124	251 Average																																																																																																																											

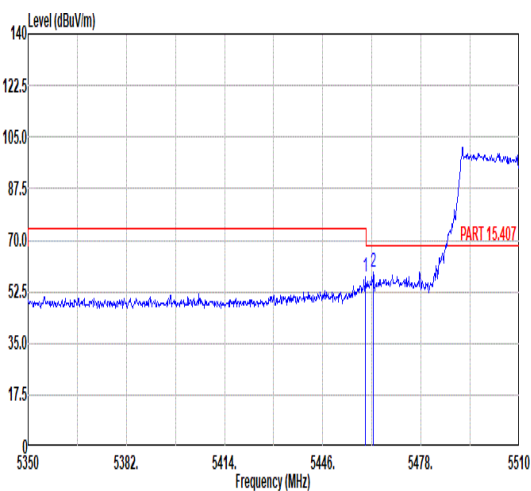
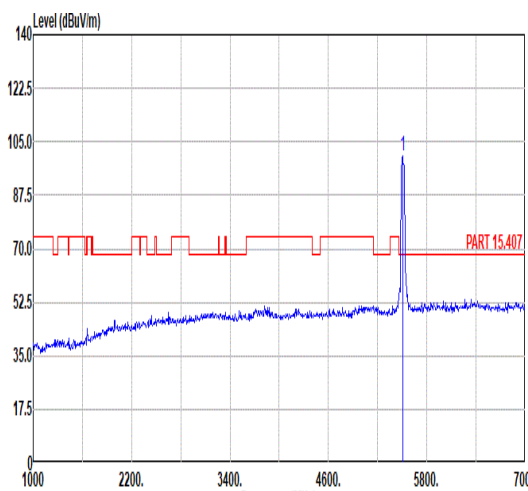
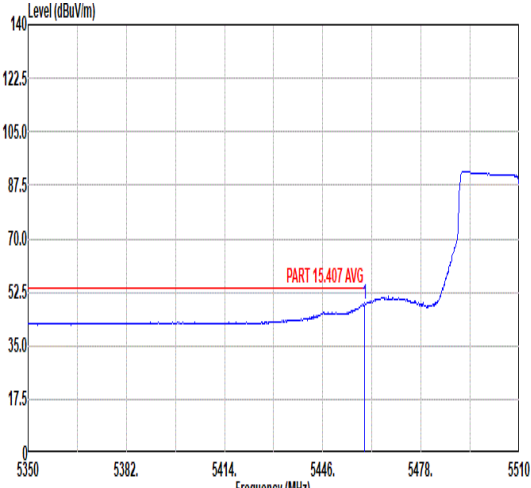
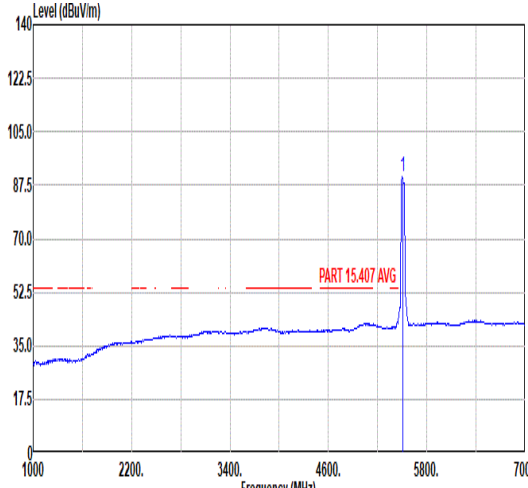


Mode	7																																																																																													
	Band Edge - L																																																																																													
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal	Fundamental																																																																																												
Peak	 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue trace with a sharp peak at 5459.92 MHz. A red limit line is at 70.0 dBuV/m. The peak is labeled 'PART 15.407'. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.92</td><td>57.56</td><td>74.00</td><td>-16.44</td><td>44.32</td><td>35.20</td><td>10.30</td><td>32.26</td><td>384</td><td>79</td><td>PEAK</td></tr><tr><td>2</td><td>5462.48</td><td>59.06</td><td>68.30</td><td>-9.24</td><td>45.82</td><td>35.20</td><td>10.30</td><td>32.26</td><td>384</td><td>79</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.92	57.56	74.00	-16.44	44.32	35.20	10.30	32.26	384	79	PEAK	2	5462.48	59.06	68.30	-9.24	45.82	35.20	10.30	32.26	384	79	PEAK	 Graph showing Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a blue trace with a sharp peak at 5510.00 MHz. A red limit line is at 70.0 dBuV/m. The peak is labeled 'PART 15.407'. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>100.33</td><td>-----</td><td>-----</td><td>87.10</td><td>35.20</td><td>10.30</td><td>32.27</td><td>384</td><td>79</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	100.33	-----	-----	87.10	35.20	10.30	32.27	384	79	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5459.92	57.56	74.00	-16.44	44.32	35.20	10.30	32.26	384	79	PEAK																																																																																			
2	5462.48	59.06	68.30	-9.24	45.82	35.20	10.30	32.26	384	79	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5510.00	100.33	-----	-----	87.10	35.20	10.30	32.27	384	79	PEAK																																																																																			
Avg	 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a blue trace with a peak at 5459.60 MHz. A red limit line is at 52.5 dBuV/m. The peak is labeled 'PART 15.407 AVG'. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.60</td><td>48.71</td><td>54.00</td><td>-5.29</td><td>35.47</td><td>35.20</td><td>10.30</td><td>32.26</td><td>384</td><td>79</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.60	48.71	54.00	-5.29	35.47	35.20	10.30	32.26	384	79	AVERAGE	 Graph showing Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a blue trace with a peak at 5510.00 MHz. A red limit line is at 52.5 dBuV/m. The peak is labeled 'PART 15.407 AVG'. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>90.50</td><td>-----</td><td>-----</td><td>77.27</td><td>35.20</td><td>10.30</td><td>32.27</td><td>384</td><td>79</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	90.50	-----	-----	77.27	35.20	10.30	32.27	384	79	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5459.60	48.71	54.00	-5.29	35.47	35.20	10.30	32.26	384	79	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5510.00	90.50	-----	-----	77.27	35.20	10.30	32.27	384	79	AVERAGE																																																																																			

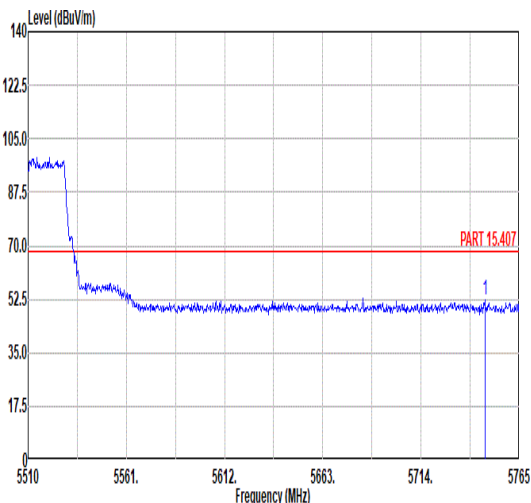


Mode	7																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5747.15</td><td>52.31</td><td>68.30</td><td>-15.99</td><td>38.68</td><td>35.61</td><td>10.38</td><td>32.36</td><td>384</td><td>79</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5747.15	52.31	68.30	-15.99	38.68	35.61	10.38	32.36	384	79	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5747.15	52.31	68.30	-15.99	38.68	35.61	10.38	32.36	384	79	PEAK																															

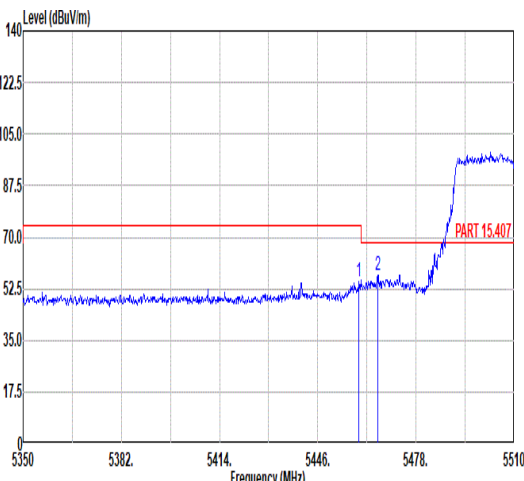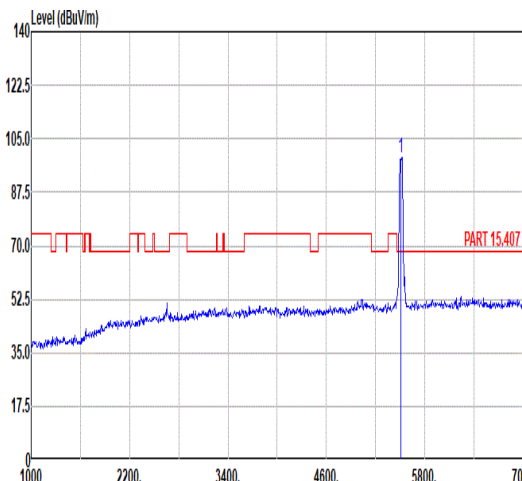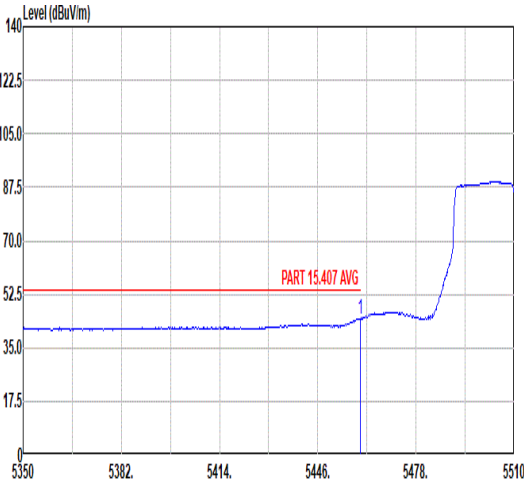
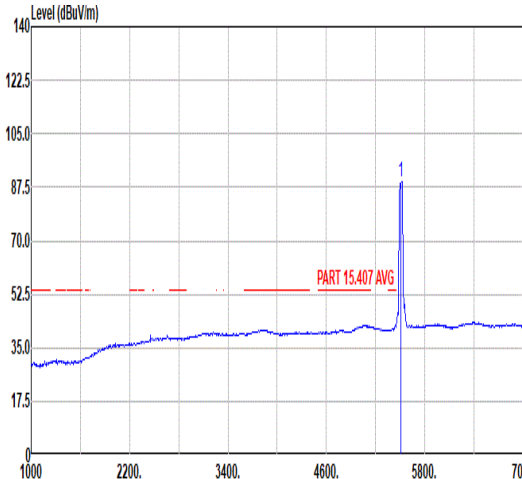


		7																																																																																																						
Mode		Band Edge - L																																																																																																						
		U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																																						
ANT		1																																																																																																						
Pol.		Vertical					Fundamental																																																																																																	
Peak																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5459.44</td><td>54.89</td><td>74.00</td><td>-19.11</td><td>41.65</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>116</td><td>PEAK</td></tr><tr><td>2</td><td>5465.52</td><td>56.89</td><td>68.30</td><td>-11.41</td><td>43.65</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>116</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5459.44	54.89	74.00	-19.11	41.65	35.20	10.30	32.26	100	116	PEAK	2	5465.52	56.89	68.30	-11.41	43.65	35.20	10.30	32.26	100	116	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5510.00</td><td>98.94</td><td>-----</td><td>-----</td><td>85.71</td><td>35.21</td><td>10.30</td><td>32.28</td><td>100</td><td>116</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5510.00	98.94	-----	-----	85.71	35.21	10.30	32.28	100	116
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																	
1	5459.44	54.89	74.00	-19.11	41.65	35.20	10.30	32.26	100	116	PEAK																																																																																													
2	5465.52	56.89	68.30	-11.41	43.65	35.20	10.30	32.26	100	116	PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																	
1	5510.00	98.94	-----	-----	85.71	35.21	10.30	32.28	100	116	PEAK																																																																																													
Avg																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5459.92</td><td>44.63</td><td>54.00</td><td>-9.37</td><td>31.39</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>116</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5459.92	44.63	54.00	-9.37	31.39	35.20	10.30	32.26	100	116	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5510.00</td><td>89.28</td><td>-----</td><td>-----</td><td>76.05</td><td>35.21</td><td>10.30</td><td>32.28</td><td>100</td><td>116</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5510.00	89.28	-----	-----	76.05	35.21	10.30	32.28	100	116	AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																	
1	5459.92	44.63	54.00	-9.37	31.39	35.20	10.30	32.26	100	116	AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																	
1	5510.00	89.28	-----	-----	76.05	35.21	10.30	32.28	100	116	AVERAGE																																																																																													



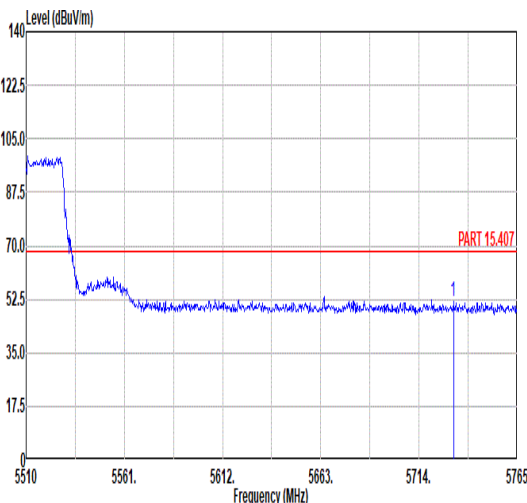


Mode	7																																																		
	Band Edge - R																																																		
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5731.85</td><td>51.52</td><td>68.30</td><td>-16.78</td><td>37.92</td><td>35.58</td><td>10.38</td><td>32.36</td><td>100</td><td>116</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5731.85	51.52	68.30	-16.78	37.92	35.58	10.38	32.36	100	116	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5731.85	51.52	68.30	-16.78	37.92	35.58	10.38	32.36	100	116	PEAK																																								

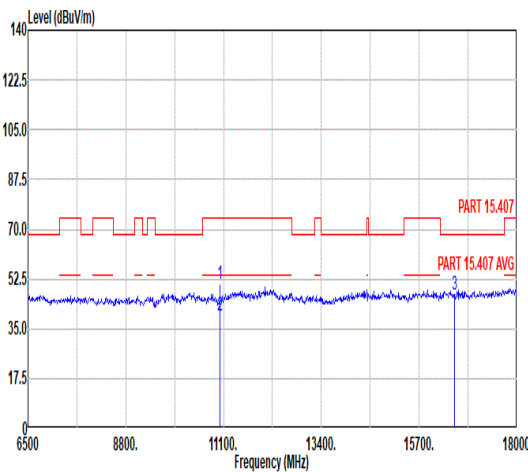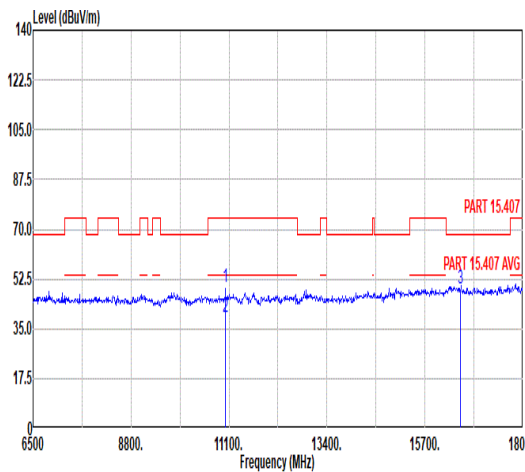


Mode	7																																																																											
	Harmonic																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal																																																																											
Peak Avg																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11020.00</td><td>50.49</td><td>74.00</td><td>-23.51</td><td>57.60</td><td>37.92</td><td>13.63</td><td>58.66</td><td>132</td><td>141</td><td>Peak</td></tr><tr><td>2</td><td>11020.00</td><td>39.49</td><td>54.00</td><td>-14.51</td><td>46.60</td><td>37.92</td><td>13.63</td><td>58.66</td><td>132</td><td>141</td><td>Average</td></tr><tr><td>3</td><td>16530.00</td><td>47.24</td><td>68.30</td><td>-21.06</td><td>47.60</td><td>41.37</td><td>16.45</td><td>58.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11020.00	50.49	74.00	-23.51	57.60	37.92	13.63	58.66	132	141	Peak	2	11020.00	39.49	54.00	-14.51	46.60	37.92	13.63	58.66	132	141	Average	3	16530.00	47.24	68.30	-21.06	47.60	41.37	16.45	58.18	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	11020.00	50.49	74.00	-23.51	57.60	37.92	13.63	58.66	132	141	Peak																																																																	
2	11020.00	39.49	54.00	-14.51	46.60	37.92	13.63	58.66	132	141	Average																																																																	
3	16530.00	47.24	68.30	-21.06	47.60	41.37	16.45	58.18	--	--	Peak																																																																	
Vertical																																																																												
																																																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11020.00</td><td>49.82</td><td>74.00</td><td>-24.18</td><td>56.93</td><td>37.92</td><td>13.63</td><td>58.66</td><td>125</td><td>45</td><td>Peak</td></tr><tr><td>2</td><td>11020.00</td><td>39.13</td><td>54.00</td><td>-14.87</td><td>46.24</td><td>37.92</td><td>13.63</td><td>58.66</td><td>125</td><td>45</td><td>Average</td></tr><tr><td>3</td><td>16530.00</td><td>49.25</td><td>68.30</td><td>-19.05</td><td>49.61</td><td>41.37</td><td>16.45</td><td>58.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11020.00	49.82	74.00	-24.18	56.93	37.92	13.63	58.66	125	45	Peak	2	11020.00	39.13	54.00	-14.87	46.24	37.92	13.63	58.66	125	45	Average	3	16530.00	49.25	68.30	-19.05	49.61	41.37	16.45	58.18	--	--	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	11020.00	49.82	74.00	-24.18	56.93	37.92	13.63	58.66	125	45	Peak																																																																	
2	11020.00	39.13	54.00	-14.87	46.24	37.92	13.63	58.66	125	45	Average																																																																	
3	16530.00	49.25	68.30	-19.05	49.61	41.37	16.45	58.18	--	--	Peak																																																																	

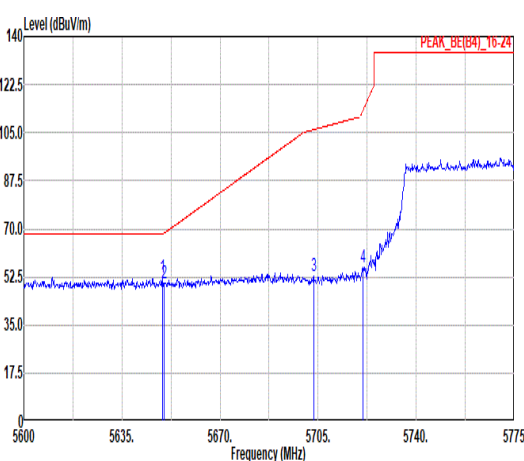
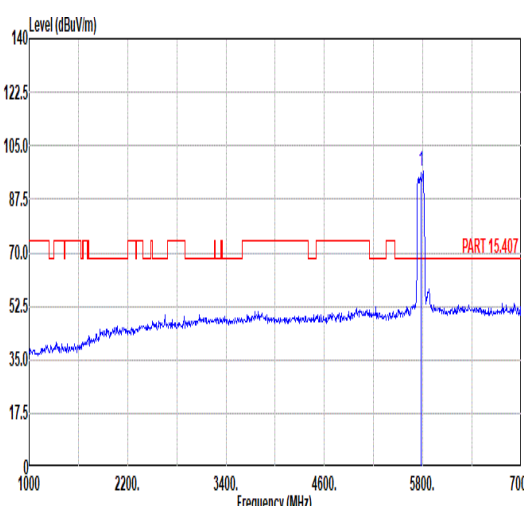
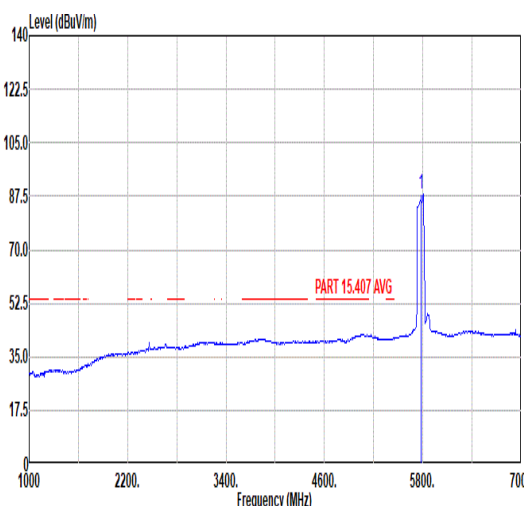


Mode	8																																																																																																																					
	Band Edge - L																																																																																																																					
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																					
ANT	1																																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																																				
Peak	 Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a rising signal level from 5600 MHz to 5775 MHz, with a peak labeled 'PEAK_BE(BA)_10-24' at approximately 5775 MHz. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5649.35</td><td>52.51</td><td>68.30</td><td>-15.79</td><td>39.09</td><td>35.40</td><td>10.33</td><td>32.31</td><td>255</td><td>96</td><td>PEAK</td></tr><tr><td>2</td><td>5650.05</td><td>50.14</td><td>68.34</td><td>-18.20</td><td>36.72</td><td>35.40</td><td>10.33</td><td>32.31</td><td>255</td><td>96</td><td>PEAK</td></tr><tr><td>3</td><td>5703.43</td><td>52.65</td><td>106.16</td><td>-53.51</td><td>39.12</td><td>35.52</td><td>10.36</td><td>32.35</td><td>255</td><td>96</td><td>PEAK</td></tr><tr><td>4</td><td>5720.93</td><td>56.00</td><td>112.91</td><td>-56.91</td><td>42.43</td><td>35.56</td><td>10.37</td><td>32.36</td><td>255</td><td>96</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5649.35	52.51	68.30	-15.79	39.09	35.40	10.33	32.31	255	96	PEAK	2	5650.05	50.14	68.34	-18.20	36.72	35.40	10.33	32.31	255	96	PEAK	3	5703.43	52.65	106.16	-53.51	39.12	35.52	10.36	32.35	255	96	PEAK	4	5720.93	56.00	112.91	-56.91	42.43	35.56	10.37	32.36	255	96	PEAK	 Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a sharp peak at 5775 MHz labeled 'PART 15.407'. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>96.54</td><td>-----</td><td>-----</td><td>82.73</td><td>35.74</td><td>10.42</td><td>32.35</td><td>255</td><td>96</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	96.54	-----	-----	82.73	35.74	10.42	32.35	255	96	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5649.35	52.51	68.30	-15.79	39.09	35.40	10.33	32.31	255	96	PEAK																																																																																																											
2	5650.05	50.14	68.34	-18.20	36.72	35.40	10.33	32.31	255	96	PEAK																																																																																																											
3	5703.43	52.65	106.16	-53.51	39.12	35.52	10.36	32.35	255	96	PEAK																																																																																																											
4	5720.93	56.00	112.91	-56.91	42.43	35.56	10.37	32.36	255	96	PEAK																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5775.00	96.54	-----	-----	82.73	35.74	10.42	32.35	255	96	PEAK																																																																																																											
Avg	Blank	 Fundamental Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a sharp peak at 5775 MHz labeled 'PART 15.407 AVG'. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>88.46</td><td>-----</td><td>-----</td><td>74.63</td><td>35.75</td><td>10.43</td><td>32.35</td><td>255</td><td>96</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	88.46	-----	-----	74.63	35.75	10.43	32.35	255	96	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5775.00	88.46	-----	-----	74.63	35.75	10.43	32.35	255	96	AVERAGE																																																																																																											

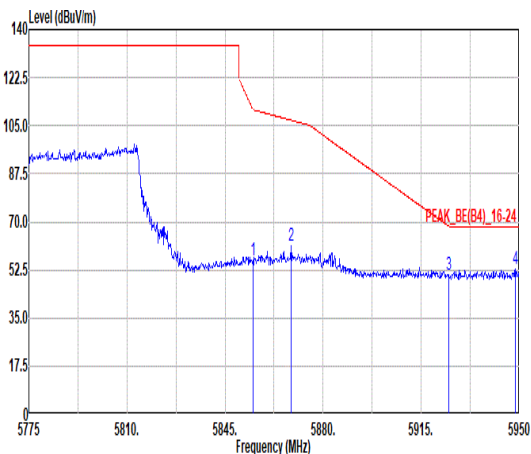


Mode	8																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																												
ANT	1																																																																												
Pol.	Horizontal						Fundamental																																																																						
Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.98</td><td>56.08</td><td>110.86</td><td>-54.78</td><td>42.14</td><td>35.88</td><td>10.46</td><td>32.40</td><td>255</td><td>96 PEAK</td></tr><tr><td>2</td><td>5868.63</td><td>61.26</td><td>106.98</td><td>-45.72</td><td>47.27</td><td>35.92</td><td>10.48</td><td>32.41</td><td>255</td><td>96 PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>50.96</td><td>68.35</td><td>-17.39</td><td>36.86</td><td>36.03</td><td>10.53</td><td>32.46</td><td>255</td><td>96 PEAK</td></tr><tr><td>4</td><td>5948.60</td><td>52.60</td><td>68.30</td><td>-15.70</td><td>38.49</td><td>36.05</td><td>10.55</td><td>32.49</td><td>255</td><td>96 PEAK</td></tr></table>							Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.98	56.08	110.86	-54.78	42.14	35.88	10.46	32.40	255	96 PEAK	2	5868.63	61.26	106.98	-45.72	47.27	35.92	10.48	32.41	255	96 PEAK	3	5924.80	50.96	68.35	-17.39	36.86	36.03	10.53	32.46	255	96 PEAK	4	5948.60	52.60	68.30	-15.70	38.49	36.05	10.55	32.49	255	96 PEAK	Blank				
	Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	5854.98	56.08	110.86	-54.78	42.14	35.88	10.46	32.40	255	96 PEAK																																																																			
2	5868.63	61.26	106.98	-45.72	47.27	35.92	10.48	32.41	255	96 PEAK																																																																			
3	5924.80	50.96	68.35	-17.39	36.86	36.03	10.53	32.46	255	96 PEAK																																																																			
4	5948.60	52.60	68.30	-15.70	38.49	36.05	10.55	32.49	255	96 PEAK																																																																			

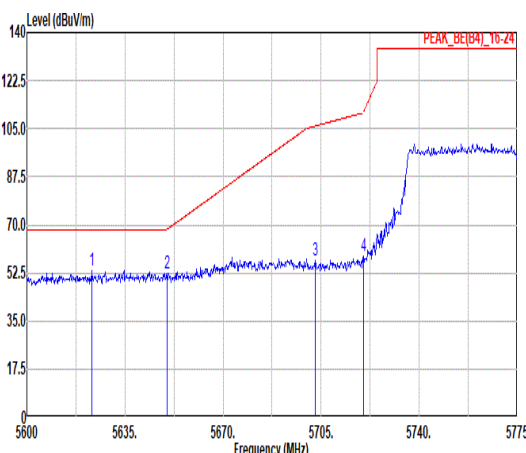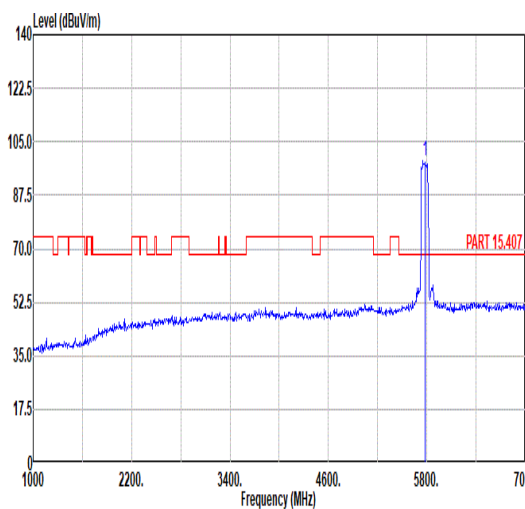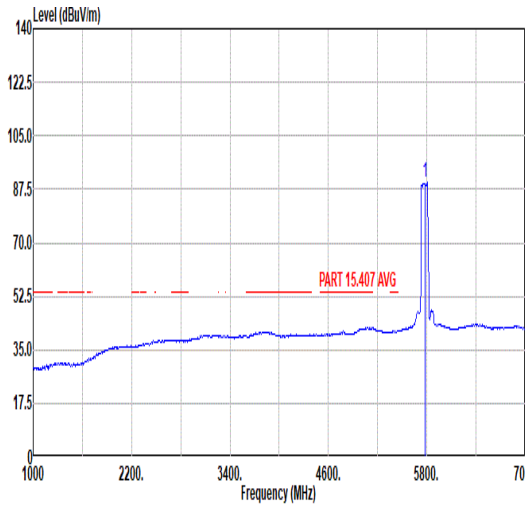

Mode	8																																																																																																																							
	Band Edge - L																																																																																																																							
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																							
ANT	1																																																																																																																							
Pol.	Vertical					Fundamental																																																																																																																		
Peak																																																																																																																								
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5623.28	53.30	68.30	-15.00	39.93	35.34	10.32	32.29	100	100	PEAK	2	5650.05	52.54	68.34	-15.80	39.12	35.40	10.33	32.31	100	100	PEAK	3	5702.90	57.09	106.01	-48.92	43.56	35.52	10.36	32.35	100	100	PEAK	4	5720.05	58.90	110.91	-52.01	45.33	35.56	10.37	32.36	100	100	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5775.00</td><td>98.55</td><td>-----</td><td>-----</td><td>84.89</td><td>35.62</td><td>10.39</td><td>32.35</td><td>100</td><td>100</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	98.55	-----	-----	84.89	35.62	10.39	32.35	100	100
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	5623.28	53.30	68.30	-15.00	39.93	35.34	10.32	32.29	100	100	PEAK																																																																																																													
2	5650.05	52.54	68.34	-15.80	39.12	35.40	10.33	32.31	100	100	PEAK																																																																																																													
3	5702.90	57.09	106.01	-48.92	43.56	35.52	10.36	32.35	100	100	PEAK																																																																																																													
4	5720.05	58.90	110.91	-52.01	45.33	35.56	10.37	32.36	100	100	PEAK																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	5775.00	98.55	-----	-----	84.89	35.62	10.39	32.35	100	100	PEAK																																																																																																													
Avg	Blank																																																																																																																							
						<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5775.00</td><td>89.65</td><td>-----</td><td>-----</td><td>75.84</td><td>35.74</td><td>10.42</td><td>32.35</td><td>100</td><td>100</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	89.65	-----	-----	75.84	35.74	10.42	32.35	100	100	AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	5775.00	89.65	-----	-----	75.84	35.74	10.42	32.35	100	100	AVERAGE																																																																																																													




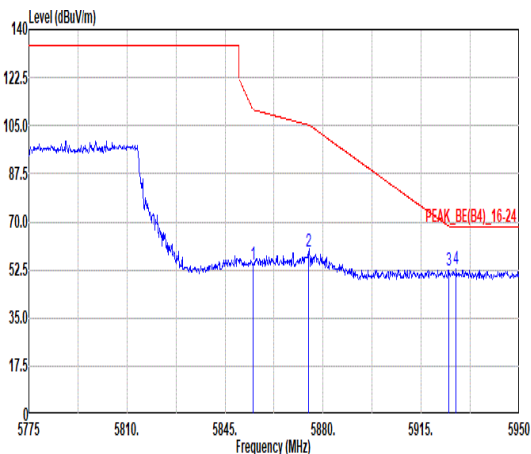


Mode	8																																																																											
	Band Edge - R																																																																											
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																											
ANT	1																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5854.98</td><td>54.49</td><td>110.86</td><td>-56.37</td><td>40.55</td><td>35.88</td><td>10.46</td><td>32.40</td><td>100</td><td>100</td><td>PEAK</td></tr><tr><td>2</td><td>5874.75</td><td>59.16</td><td>105.27</td><td>-46.11</td><td>45.15</td><td>35.94</td><td>10.48</td><td>32.41</td><td>100</td><td>100</td><td>PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>52.13</td><td>68.35</td><td>-16.22</td><td>38.03</td><td>36.03</td><td>10.53</td><td>32.46</td><td>100</td><td>100</td><td>PEAK</td></tr><tr><td>4</td><td>5927.43</td><td>52.95</td><td>68.30</td><td>-15.35</td><td>38.85</td><td>36.03</td><td>10.53</td><td>32.46</td><td>100</td><td>100</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5854.98	54.49	110.86	-56.37	40.55	35.88	10.46	32.40	100	100	PEAK	2	5874.75	59.16	105.27	-46.11	45.15	35.94	10.48	32.41	100	100	PEAK	3	5924.80	52.13	68.35	-16.22	38.03	36.03	10.53	32.46	100	100	PEAK	4	5927.43	52.95	68.30	-15.35	38.85	36.03	10.53	32.46	100	100	PEAK	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																	
1	5854.98	54.49	110.86	-56.37	40.55	35.88	10.46	32.40	100	100	PEAK																																																																	
2	5874.75	59.16	105.27	-46.11	45.15	35.94	10.48	32.41	100	100	PEAK																																																																	
3	5924.80	52.13	68.35	-16.22	38.03	36.03	10.53	32.46	100	100	PEAK																																																																	
4	5927.43	52.95	68.30	-15.35	38.85	36.03	10.53	32.46	100	100	PEAK																																																																	







Mode	8																																																																											
	Harmonic																																																																											
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal																																																																											
Peak Avg																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11550.00</td><td>52.14</td><td>74.00</td><td>-21.86</td><td>57.59</td><td>38.44</td><td>13.95</td><td>57.84</td><td>224</td><td>153</td><td>Peak</td></tr><tr><td>2</td><td>11550.00</td><td>41.04</td><td>54.00</td><td>-12.96</td><td>46.49</td><td>38.44</td><td>13.95</td><td>57.84</td><td>224</td><td>153</td><td>Average</td></tr><tr><td>3</td><td>17325.00</td><td>46.74</td><td>68.30</td><td>-21.56</td><td>45.46</td><td>42.41</td><td>16.86</td><td>57.99</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	52.14	74.00	-21.86	57.59	38.44	13.95	57.84	224	153	Peak	2	11550.00	41.04	54.00	-12.96	46.49	38.44	13.95	57.84	224	153	Average	3	17325.00	46.74	68.30	-21.56	45.46	42.41	16.86	57.99	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	11550.00	52.14	74.00	-21.86	57.59	38.44	13.95	57.84	224	153	Peak																																																																	
2	11550.00	41.04	54.00	-12.96	46.49	38.44	13.95	57.84	224	153	Average																																																																	
3	17325.00	46.74	68.30	-21.56	45.46	42.41	16.86	57.99	--	--	Peak																																																																	
Vertical																																																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11550.00</td><td>50.84</td><td>74.00</td><td>-23.16</td><td>56.29</td><td>38.44</td><td>13.95</td><td>57.84</td><td>132</td><td>246</td><td>Peak</td></tr><tr><td>2</td><td>11550.00</td><td>40.74</td><td>54.00</td><td>-13.26</td><td>46.19</td><td>38.44</td><td>13.95</td><td>57.84</td><td>132</td><td>246</td><td>Average</td></tr><tr><td>3</td><td>17325.00</td><td>47.90</td><td>68.30</td><td>-20.40</td><td>46.62</td><td>42.41</td><td>16.86</td><td>57.99</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11550.00	50.84	74.00	-23.16	56.29	38.44	13.95	57.84	132	246	Peak	2	11550.00	40.74	54.00	-13.26	46.19	38.44	13.95	57.84	132	246	Average	3	17325.00	47.90	68.30	-20.40	46.62	42.41	16.86	57.99	--	--	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	11550.00	50.84	74.00	-23.16	56.29	38.44	13.95	57.84	132	246	Peak																																																																	
2	11550.00	40.74	54.00	-13.26	46.19	38.44	13.95	57.84	132	246	Average																																																																	
3	17325.00	47.90	68.30	-20.40	46.62	42.41	16.86	57.99	--	--	Peak																																																																	

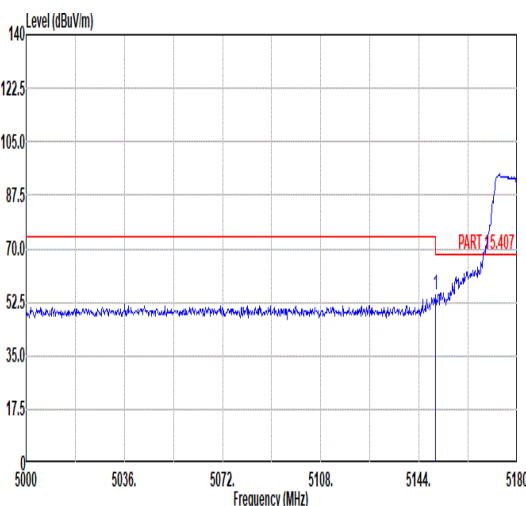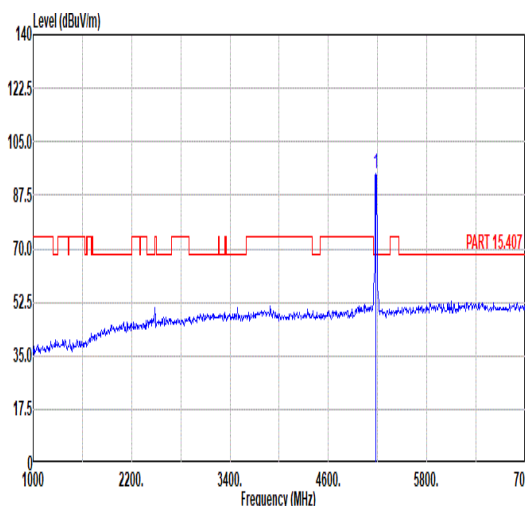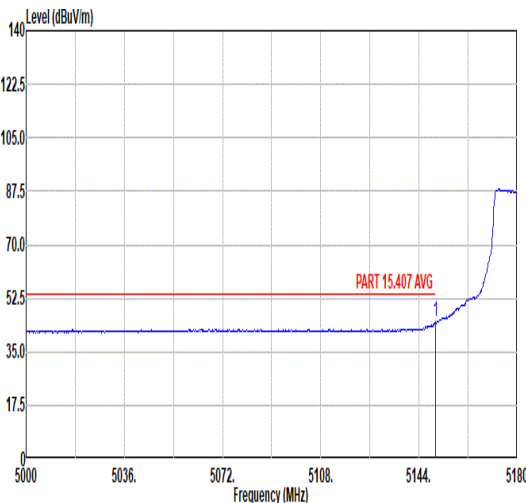
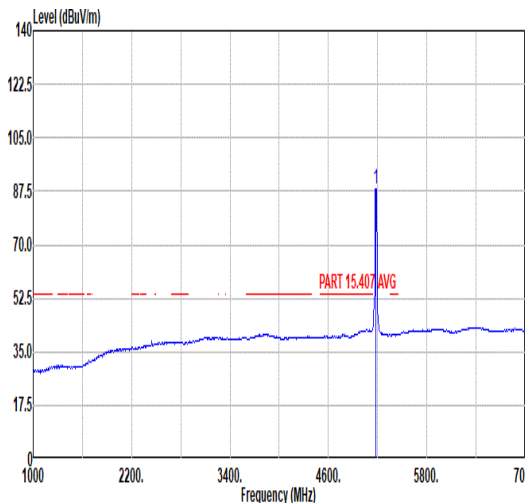


Mode	9																																																																																										
	Band Edge																																																																																										
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>54.72</td><td>74.00</td><td>-19.28</td><td>42.06</td><td>34.95</td><td>9.96</td><td>32.25</td><td>100</td><td>40</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	54.72	74.00	-19.28	42.06	34.95	9.96	32.25	100	40	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>94.49</td><td>-----</td><td>-----</td><td>81.75</td><td>34.98</td><td>9.98</td><td>32.22</td><td>100</td><td>40</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	94.49	-----	-----	81.75	34.98	9.98	32.22	100	40
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.94	54.72	74.00	-19.28	42.06	34.95	9.96	32.25	100	40	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	94.49	-----	-----	81.75	34.98	9.98	32.22	100	40	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>44.67</td><td>54.00</td><td>-9.33</td><td>32.01</td><td>34.95</td><td>9.96</td><td>32.25</td><td>100</td><td>40</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	44.67	54.00	-9.33	32.01	34.95	9.96	32.25	100	40	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>88.03</td><td>-----</td><td>-----</td><td>75.29</td><td>34.98</td><td>9.98</td><td>32.22</td><td>100</td><td>40</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	88.03	-----	-----	75.29	34.98	9.98	32.22	100	40
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.94	44.67	54.00	-9.33	32.01	34.95	9.96	32.25	100	40	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	88.03	-----	-----	75.29	34.98	9.98	32.22	100	40	AVERAGE																																																																																

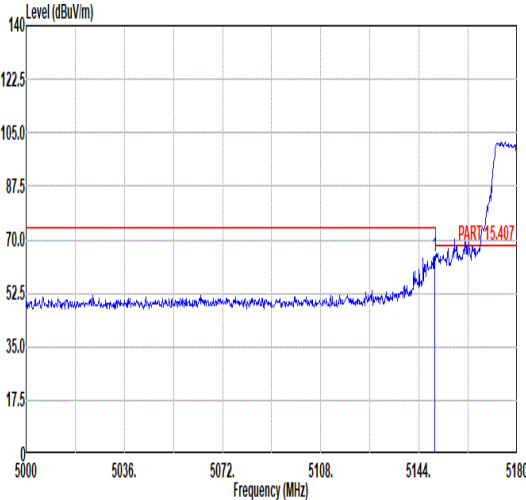
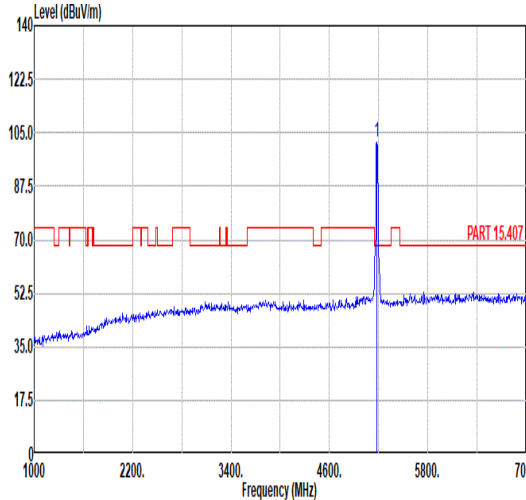
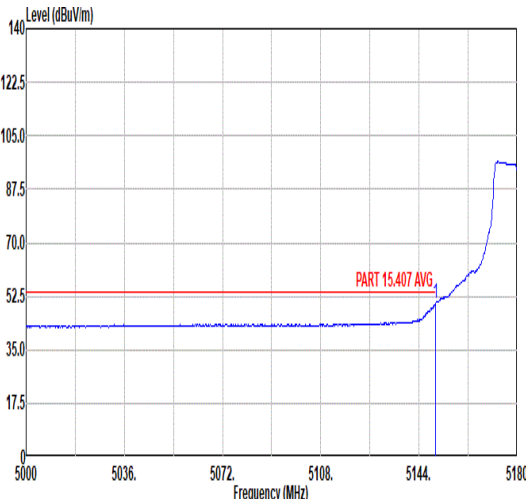
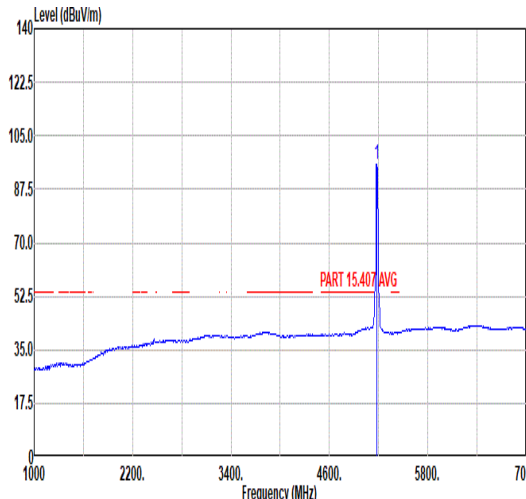


Mode	9																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.76</td><td>64.44</td><td>74.00</td><td>-9.56</td><td>51.78</td><td>34.95</td><td>9.96</td><td>32.25</td><td>100</td><td>294</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.76	64.44	74.00	-9.56	51.78	34.95	9.96	32.25	100	294	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>101.99</td><td>-----</td><td>-----</td><td>89.26</td><td>34.98</td><td>9.97</td><td>32.22</td><td>100</td><td>294</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	101.99	-----	-----	89.26	34.98	9.97	32.22	100	294
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.76	64.44	74.00	-9.56	51.78	34.95	9.96	32.25	100	294	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	101.99	-----	-----	89.26	34.98	9.97	32.22	100	294	PEAK																																																																															
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.94</td><td>50.23</td><td>54.00</td><td>-3.77</td><td>37.57</td><td>34.95</td><td>9.96</td><td>32.25</td><td>100</td><td>294</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	50.23	54.00	-3.77	37.57	34.95	9.96	32.25	100	294	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>95.62</td><td>-----</td><td>-----</td><td>82.89</td><td>34.98</td><td>9.97</td><td>32.22</td><td>100</td><td>294</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	95.62	-----	-----	82.89	34.98	9.97	32.22	100	294
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.94	50.23	54.00	-3.77	37.57	34.95	9.96	32.25	100	294	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	95.62	-----	-----	82.89	34.98	9.97	32.22	100	294	AVERAGE																																																																															

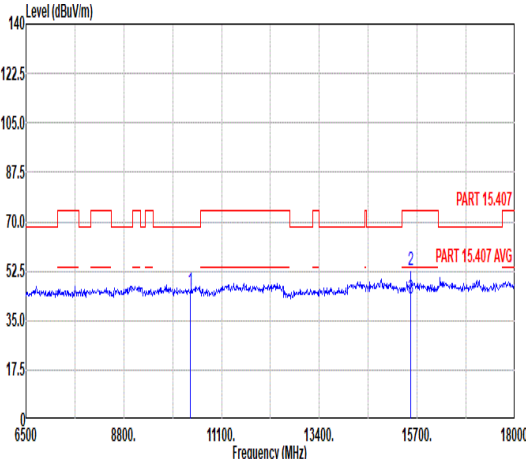
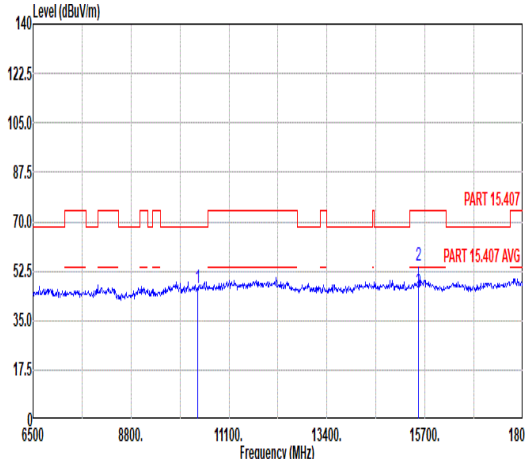


Mode	9																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																																													
ANT	1																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																							
Peak Avg																																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>45.47</td><td>68.30</td><td>-22.83</td><td>54.62</td><td>37.22</td><td>13.25</td><td>59.62</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>52.74</td><td>74.00</td><td>-21.26</td><td>54.55</td><td>40.22</td><td>15.86</td><td>57.89</td><td>125</td><td>256</td><td>Peak</td></tr><tr><td>3</td><td>15540.00</td><td>42.74</td><td>54.00</td><td>-11.26</td><td>44.55</td><td>40.22</td><td>15.86</td><td>57.89</td><td>125</td><td>256</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	45.47	68.30	-22.83	54.62	37.22	13.25	59.62	--	--	Peak	2	15540.00	52.74	74.00	-21.26	54.55	40.22	15.86	57.89	125	256	Peak	3	15540.00	42.74	54.00	-11.26	44.55	40.22	15.86	57.89	125	256	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.57</td><td>68.30</td><td>-21.73</td><td>55.72</td><td>37.22</td><td>13.25</td><td>59.62</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>54.34</td><td>74.00</td><td>-19.66</td><td>56.15</td><td>40.22</td><td>15.86</td><td>57.89</td><td>124</td><td>141</td><td>Peak</td></tr><tr><td>3</td><td>15540.00</td><td>44.73</td><td>54.00</td><td>-9.27</td><td>46.54</td><td>40.22</td><td>15.86</td><td>57.89</td><td>124</td><td>141</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.57	68.30	-21.73	55.72	37.22	13.25	59.62	--	--	Peak	2	15540.00	54.34	74.00	-19.66	56.15	40.22	15.86	57.89	124	141	Peak	3	15540.00	44.73	54.00	-9.27	46.54	40.22	15.86	57.89	124	141	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	10360.00	45.47	68.30	-22.83	54.62	37.22	13.25	59.62	--	--	Peak																																																																																																																																			
2	15540.00	52.74	74.00	-21.26	54.55	40.22	15.86	57.89	125	256	Peak																																																																																																																																			
3	15540.00	42.74	54.00	-11.26	44.55	40.22	15.86	57.89	125	256	Average																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	10360.00	46.57	68.30	-21.73	55.72	37.22	13.25	59.62	--	--	Peak																																																																																																																																			
2	15540.00	54.34	74.00	-19.66	56.15	40.22	15.86	57.89	124	141	Peak																																																																																																																																			
3	15540.00	44.73	54.00	-9.27	46.54	40.22	15.86	57.89	124	141	Average																																																																																																																																			

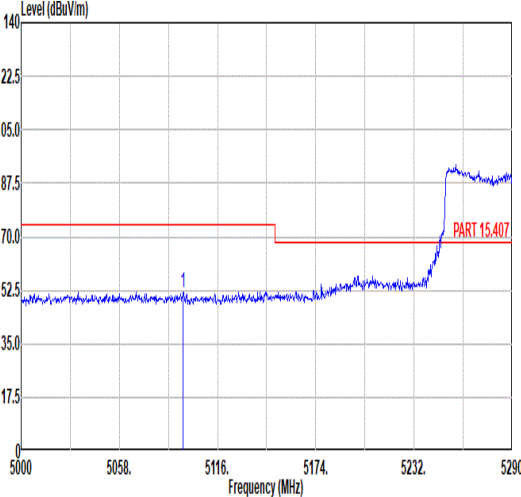
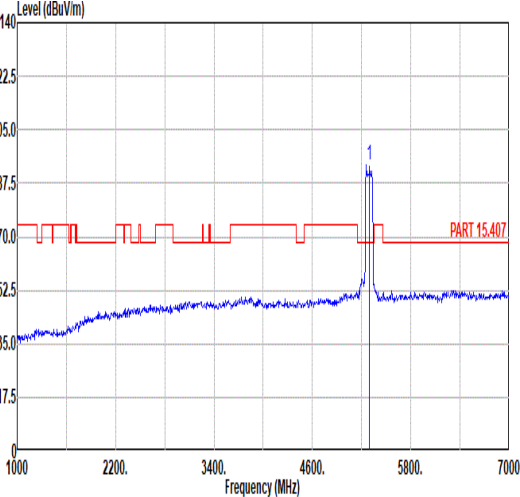
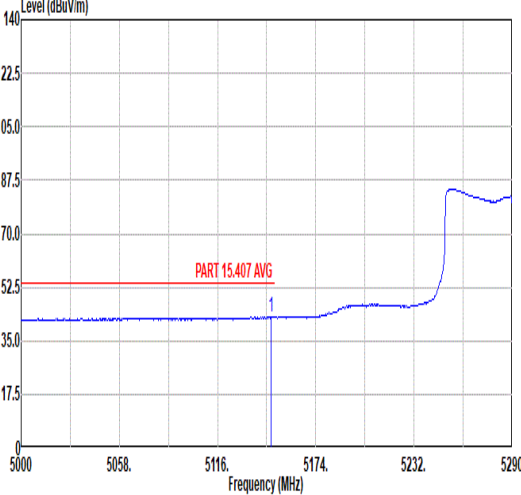
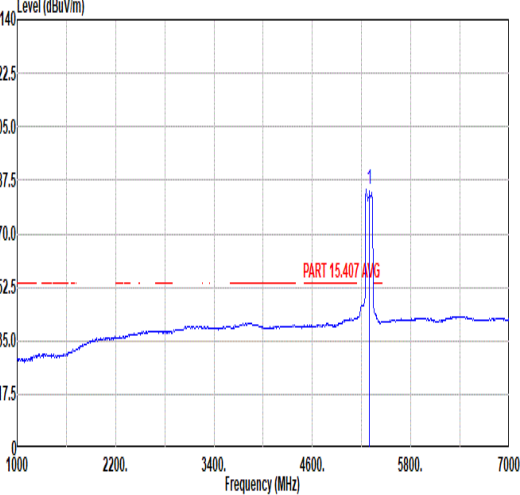


Mode	10																																																																																								
	Band Edge - L																																																																																								
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																								
ANT	1																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5095.70</td><td>52.03</td><td>74.00</td><td>-21.97</td><td>39.46</td><td>34.90</td><td>9.92</td><td>32.25</td><td>318</td><td>107</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5095.70	52.03	74.00	-21.97	39.46	34.90	9.92	32.25	318	107	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>93.65</td><td>-----</td><td>-----</td><td>80.65</td><td>35.12</td><td>10.08</td><td>32.20</td><td>318</td><td>107</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	93.65	-----	-----	80.65	35.12	10.08	32.20	318	107
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5095.70	52.03	74.00	-21.97	39.46	34.90	9.92	32.25	318	107	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5290.00	93.65	-----	-----	80.65	35.12	10.08	32.20	318	107	PEAK																																																																														
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.61</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>30.16</td><td>34.95</td><td>9.95</td><td>32.25</td><td>318</td><td>107</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.61	42.81	54.00	-11.19	30.16	34.95	9.95	32.25	318	107	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>84.30</td><td>-----</td><td>-----</td><td>71.32</td><td>35.11</td><td>10.07</td><td>32.20</td><td>318</td><td>107</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	84.30	-----	-----	71.32	35.11	10.07	32.20	318	107
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5147.61	42.81	54.00	-11.19	30.16	34.95	9.95	32.25	318	107	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5290.00	84.30	-----	-----	71.32	35.11	10.07	32.20	318	107	AVERAGE																																																																														

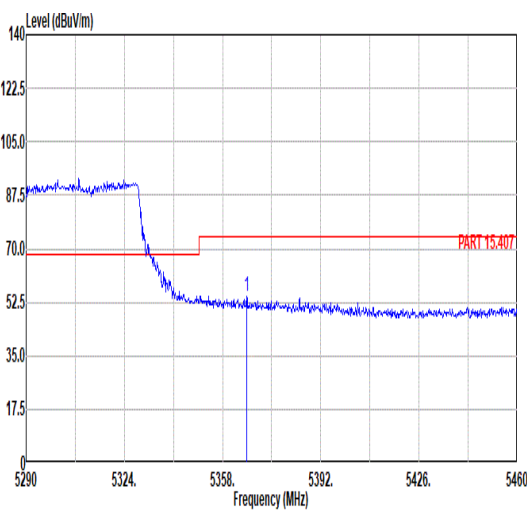
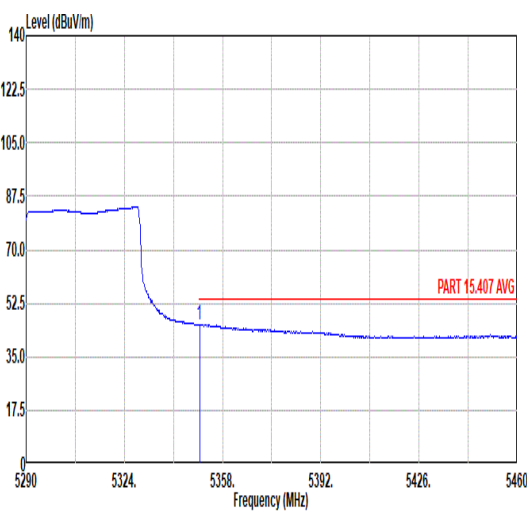


Mode	10																																																				
	Band Edge - R																																																				
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																				
ANT	1																																																				
Pol.	Horizontal						Fundamental																																														
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5366.33</td><td>54.64</td><td>74.00</td><td>-19.36</td><td>41.37</td><td>35.20</td><td>10.24</td><td>32.17</td><td>318</td><td>107</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5366.33	54.64	74.00	-19.36	41.37	35.20	10.24	32.17	318	107	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5366.33	54.64	74.00	-19.36	41.37	35.20	10.24	32.17	318	107	PEAK																																										
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.01</td><td>45.64</td><td>54.00</td><td>-8.36</td><td>32.40</td><td>35.20</td><td>10.21</td><td>32.17</td><td>318</td><td>107</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5350.01	45.64	54.00	-8.36	32.40	35.20	10.21	32.17	318	107	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5350.01	45.64	54.00	-8.36	32.40	35.20	10.21	32.17	318	107	AVERAGE																																										

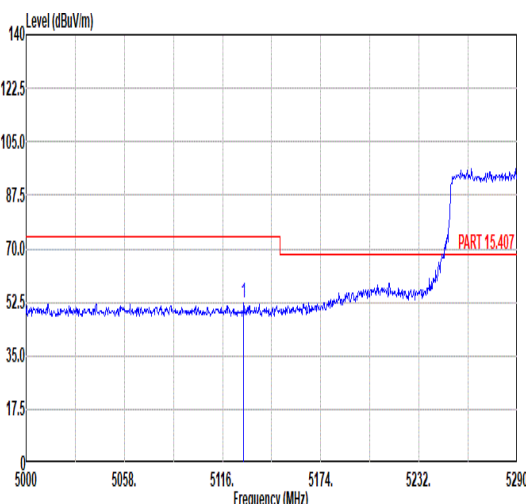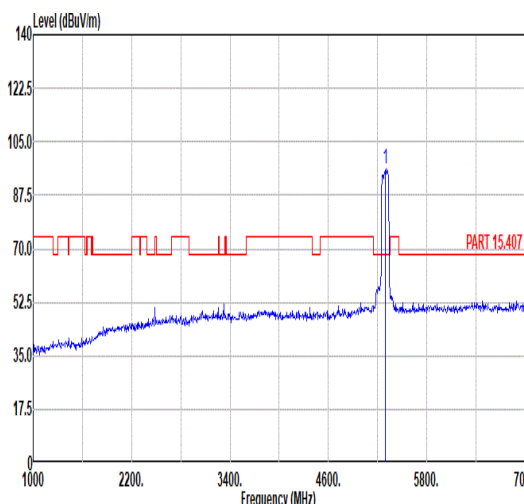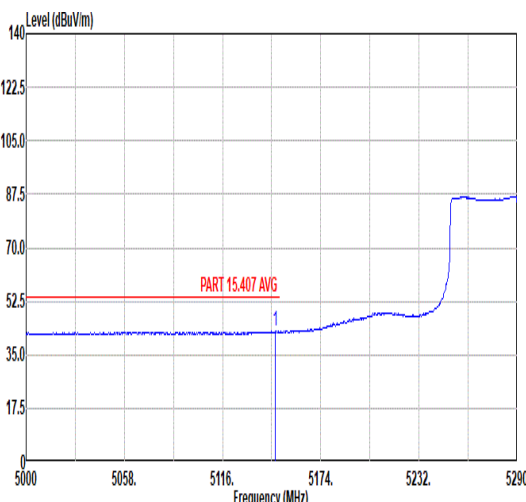
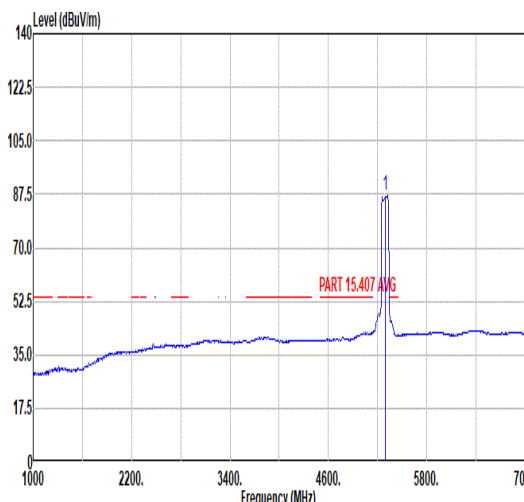


Mode	10																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																										
ANT	1																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5128.47	52.04	74.00	-21.96	39.42	34.93	9.94	32.25	100	348	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>95.97</td><td>-----</td><td>-----</td><td>82.81</td><td>35.20</td><td>10.14</td><td>32.18</td><td>100</td><td>348</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	95.97	-----	-----	82.81	35.20	10.14	32.18	100	348	PEAK					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5128.47	52.04	74.00	-21.96	39.42	34.93	9.94	32.25	100	348	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5290.00	95.97	-----	-----	82.81	35.20	10.14	32.18	100	348	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.32</td><td>42.63</td><td>54.00</td><td>-11.37</td><td>29.98</td><td>34.95</td><td>9.95</td><td>32.25</td><td>100</td><td>348</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.32	42.63	54.00	-11.37	29.98	34.95	9.95	32.25	100	348	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>87.21</td><td>-----</td><td>-----</td><td>74.01</td><td>35.20</td><td>10.18</td><td>32.18</td><td>100</td><td>348</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	87.21	-----	-----	74.01	35.20	10.18	32.18	100	348
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5147.32	42.63	54.00	-11.37	29.98	34.95	9.95	32.25	100	348	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5290.00	87.21	-----	-----	74.01	35.20	10.18	32.18	100	348	AVERAGE																																																																																



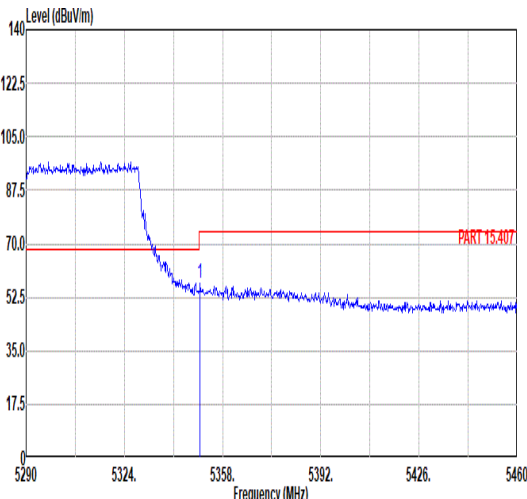
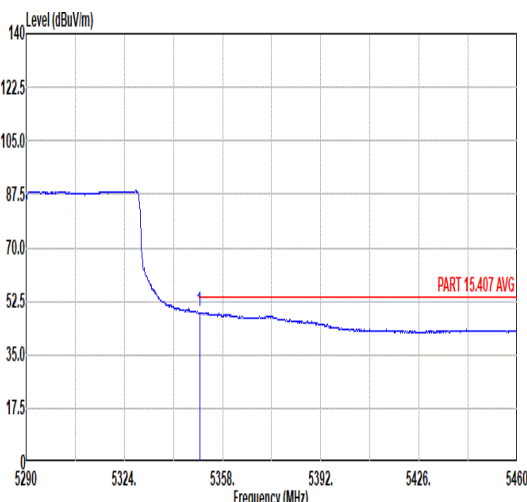


Mode	10																																																	
	Band Edge - R																																																	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																	
ANT	1																																																	
Pol.	Vertical					Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.18</td><td>57.10</td><td>74.00</td><td>-16.90</td><td>43.86</td><td>35.20</td><td>10.21</td><td>32.17</td><td>100</td><td>348</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.18	57.10	74.00	-16.90	43.86	35.20	10.21	32.17	100	348	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5350.18	57.10	74.00	-16.90	43.86	35.20	10.21	32.17	100	348	PEAK																																							
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.01</td><td>49.15</td><td>54.00</td><td>-4.85</td><td>35.91</td><td>35.20</td><td>10.21</td><td>32.17</td><td>100</td><td>348</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.01	49.15	54.00	-4.85	35.91	35.20	10.21	32.17	100	348	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5350.01	49.15	54.00	-4.85	35.91	35.20	10.21	32.17	100	348	AVERAGE																																							

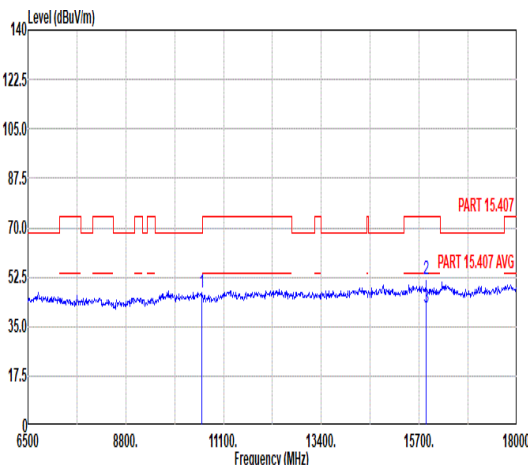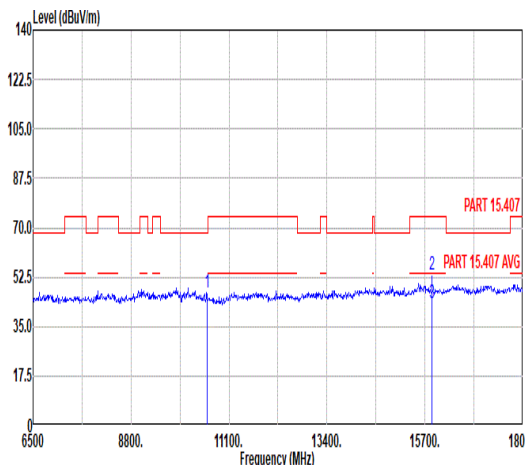


Mode	10																																																																																																													
	Harmonic																																																																																																													
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10580.00</td><td>46.88</td><td>68.30</td><td>-21.42</td><td>55.53</td><td>37.39</td><td>13.50</td><td>59.54</td><td>-- -- Peak</td></tr><tr><td>2 15870.00</td><td>51.79</td><td>74.00</td><td>-22.21</td><td>54.00</td><td>40.42</td><td>15.98</td><td>58.61</td><td>125 336 Peak</td></tr><tr><td>3 15870.00</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>44.03</td><td>40.42</td><td>15.98</td><td>58.61</td><td>125 336 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 10580.00	46.88	68.30	-21.42	55.53	37.39	13.50	59.54	-- -- Peak	2 15870.00	51.79	74.00	-22.21	54.00	40.42	15.98	58.61	125 336 Peak	3 15870.00	41.82	54.00	-12.18	44.03	40.42	15.98	58.61	125 336 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10580.00</td><td>46.84</td><td>68.30</td><td>-21.46</td><td>55.49</td><td>37.39</td><td>13.50</td><td>59.54</td><td>-- -- Peak</td></tr><tr><td>2 15870.00</td><td>53.45</td><td>74.00</td><td>-20.55</td><td>55.66</td><td>40.42</td><td>15.98</td><td>58.61</td><td>224 113 Peak</td></tr><tr><td>3 15870.00</td><td>43.46</td><td>54.00</td><td>-10.54</td><td>45.67</td><td>40.42</td><td>15.98</td><td>58.61</td><td>224 113 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 10580.00	46.84	68.30	-21.46	55.49	37.39	13.50	59.54	-- -- Peak	2 15870.00	53.45	74.00	-20.55	55.66	40.42	15.98	58.61	224 113 Peak	3 15870.00	43.46	54.00	-10.54	45.67	40.42	15.98	58.61	224 113 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																						
1 10580.00	46.88	68.30	-21.42	55.53	37.39	13.50	59.54	-- -- Peak																																																																																																						
2 15870.00	51.79	74.00	-22.21	54.00	40.42	15.98	58.61	125 336 Peak																																																																																																						
3 15870.00	41.82	54.00	-12.18	44.03	40.42	15.98	58.61	125 336 Average																																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																						
1 10580.00	46.84	68.30	-21.46	55.49	37.39	13.50	59.54	-- -- Peak																																																																																																						
2 15870.00	53.45	74.00	-20.55	55.66	40.42	15.98	58.61	224 113 Peak																																																																																																						
3 15870.00	43.46	54.00	-10.54	45.67	40.42	15.98	58.61	224 113 Average																																																																																																						

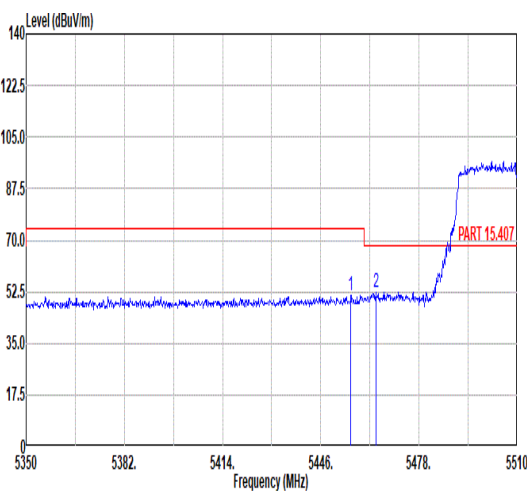
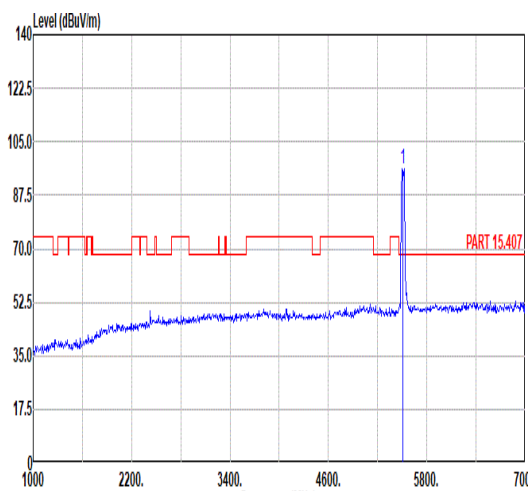
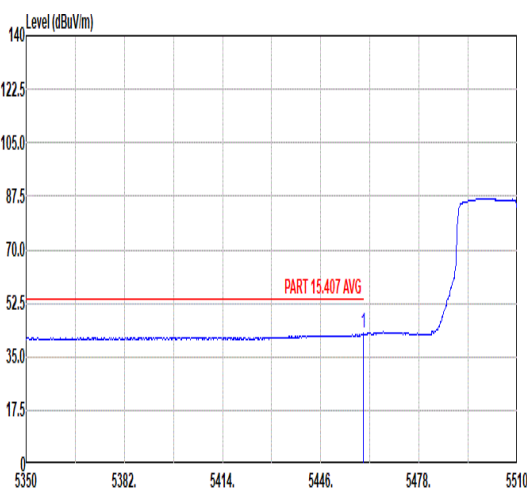
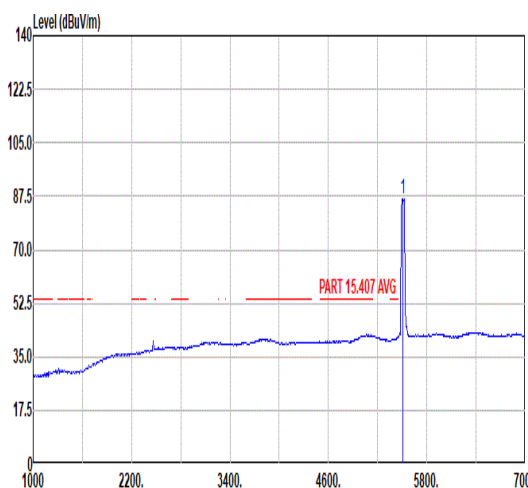


Mode	11																																																																																																							
	Band Edge - L																																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																																							
ANT	1																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																	
Peak																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5455.76</td><td>51.33</td><td>74.00</td><td>-22.67</td><td>38.09</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>38</td><td>PEAK</td></tr><tr><td>2</td><td>5463.92</td><td>52.34</td><td>68.30</td><td>-15.96</td><td>39.10</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>38</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5455.76	51.33	74.00	-22.67	38.09	35.20	10.30	32.26	100	38	PEAK	2	5463.92	52.34	68.30	-15.96	39.10	35.20	10.30	32.26	100	38	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>96.26</td><td>-----</td><td>-----</td><td>83.03</td><td>35.20</td><td>10.30</td><td>32.27</td><td>100</td><td>38</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	96.26	-----	-----	83.03	35.20	10.30	32.27	100	38
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5455.76	51.33	74.00	-22.67	38.09	35.20	10.30	32.26	100	38	PEAK																																																																																													
2	5463.92	52.34	68.30	-15.96	39.10	35.20	10.30	32.26	100	38	PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	96.26	-----	-----	83.03	35.20	10.30	32.27	100	38	PEAK																																																																																													
Avg																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.76</td><td>42.54</td><td>54.00</td><td>-11.46</td><td>29.30</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>38</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.76	42.54	54.00	-11.46	29.30	35.20	10.30	32.26	100	38	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>86.77</td><td>-----</td><td>-----</td><td>73.53</td><td>35.22</td><td>10.30</td><td>32.28</td><td>100</td><td>38</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	86.77	-----	-----	73.53	35.22	10.30	32.28	100	38	AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.76	42.54	54.00	-11.46	29.30	35.20	10.30	32.26	100	38	AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	86.77	-----	-----	73.53	35.22	10.30	32.28	100	38	AVERAGE																																																																																													

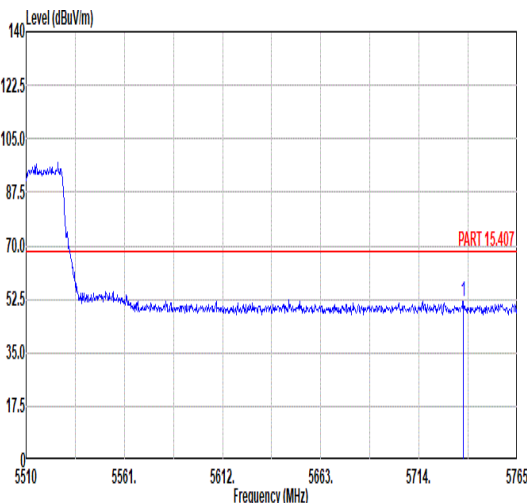


Mode	11																																																		
	Band Edge - R																																																		
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																		
ANT	1																																																		
Pol.	Horizontal						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5736.95</td><td>51.85</td><td>68.30</td><td>-16.45</td><td>38.24</td><td>35.59</td><td>10.38</td><td>32.36</td><td>100</td><td>38</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5736.95	51.85	68.30	-16.45	38.24	35.59	10.38	32.36	100	38	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5736.95	51.85	68.30	-16.45	38.24	35.59	10.38	32.36	100	38	PEAK																																								

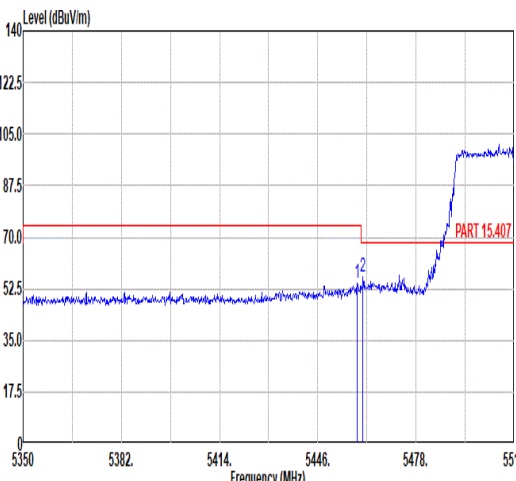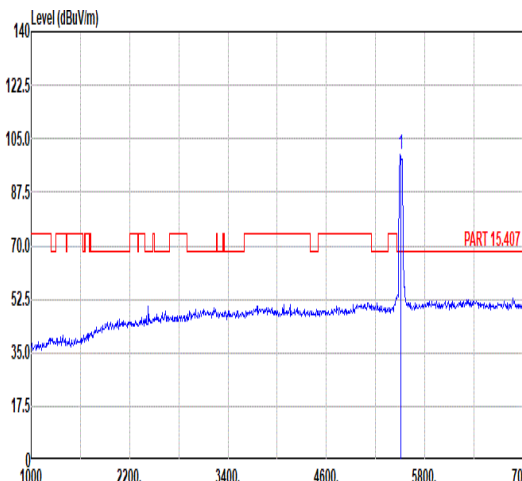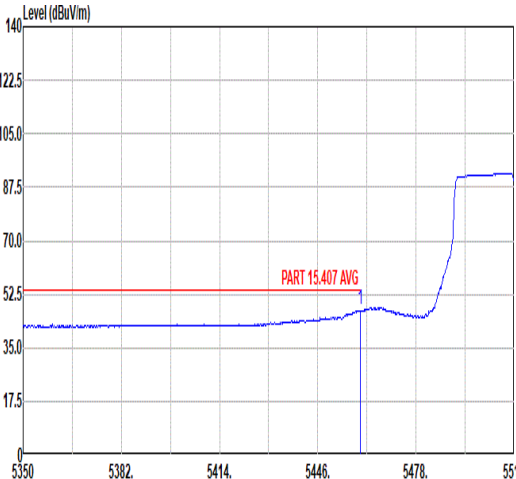
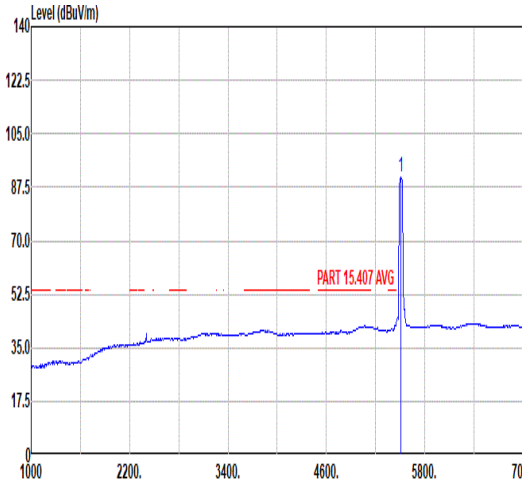


Mode	11																																																															
	Band Edge - L																																																															
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																															
ANT	1																																																															
Pol.	Vertical																																																															
Peak																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.80</td><td>54.15</td><td>74.00</td><td>-19.85</td><td>40.91</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>332</td><td>PEAK</td></tr><tr><td>2</td><td>5460.72</td><td>56.55</td><td>68.30</td><td>-11.75</td><td>43.31</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>332</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.80	54.15	74.00	-19.85	40.91	35.20	10.30	32.26	100	332	PEAK	2	5460.72	56.55	68.30	-11.75	43.31	35.20	10.30	32.26	100	332	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	5458.80	54.15	74.00	-19.85	40.91	35.20	10.30	32.26	100	332	PEAK																																																					
2	5460.72	56.55	68.30	-11.75	43.31	35.20	10.30	32.26	100	332	PEAK																																																					
Fundamental																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>99.68</td><td>-----</td><td>-----</td><td>86.45</td><td>35.20</td><td>10.30</td><td>32.27</td><td>100</td><td>332</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	99.68	-----	-----	86.45	35.20	10.30	32.27	100	332	PEAK												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	5510.00	99.68	-----	-----	86.45	35.20	10.30	32.27	100	332	PEAK																																																					
Avg																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.76</td><td>47.39</td><td>54.00</td><td>-6.61</td><td>34.15</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>332</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.76	47.39	54.00	-6.61	34.15	35.20	10.30	32.26	100	332	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	5459.76	47.39	54.00	-6.61	34.15	35.20	10.30	32.26	100	332	AVERAGE																																																					
AVERAGE																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>90.87</td><td>-----</td><td>-----</td><td>77.64</td><td>35.20</td><td>10.30</td><td>32.27</td><td>100</td><td>332</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	90.87	-----	-----	77.64	35.20	10.30	32.27	100	332	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	5510.00	90.87	-----	-----	77.64	35.20	10.30	32.27	100	332	AVERAGE																																																					



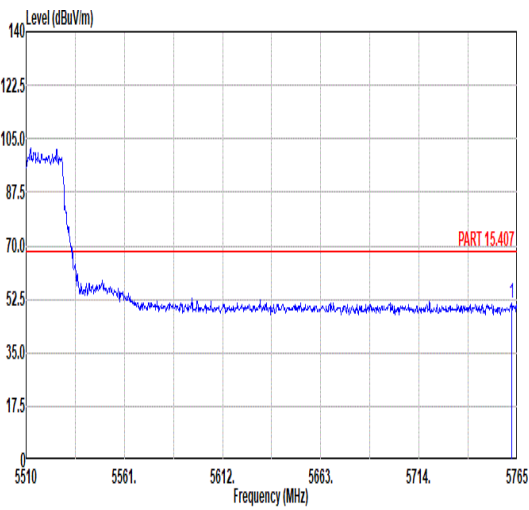


Mode	11																																																		
	Band Edge - R																																																		
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5761.94</td><td>51.21</td><td>68.30</td><td>-17.09</td><td>37.53</td><td>35.64</td><td>10.39</td><td>32.35</td><td>100</td><td>332</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5761.94	51.21	68.30	-17.09	37.53	35.64	10.39	32.35	100	332	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5761.94	51.21	68.30	-17.09	37.53	35.64	10.39	32.35	100	332	PEAK																																								

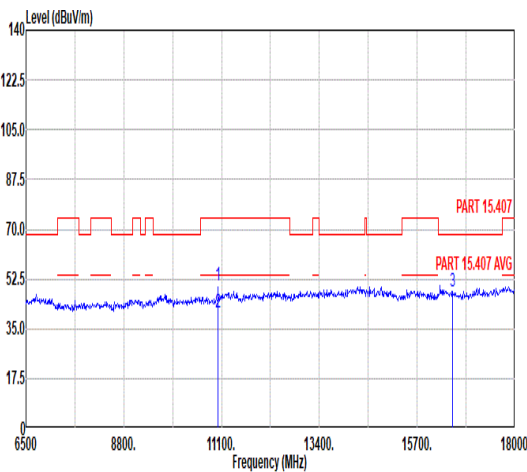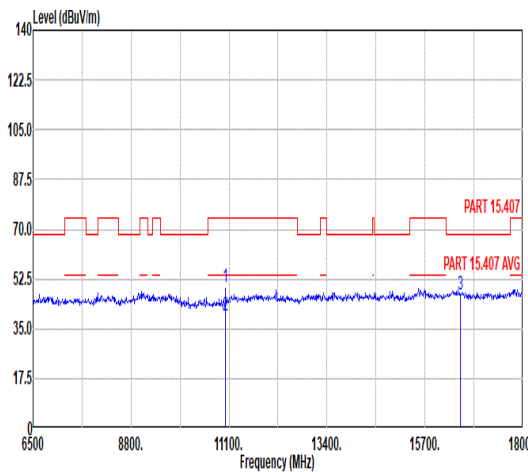


Mode	11																																																																											
	Harmonic																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal						Vertical																																																																					
Peak Avg																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11020.00</td><td>50.10</td><td>74.00</td><td>-23.90</td><td>57.21</td><td>37.92</td><td>13.63</td><td>58.66</td><td>132</td><td>225</td><td>Peak</td></tr><tr><td>2</td><td>11020.00</td><td>40.49</td><td>54.00</td><td>-13.51</td><td>47.60</td><td>37.92</td><td>13.63</td><td>58.66</td><td>132</td><td>225</td><td>Average</td></tr><tr><td>3</td><td>16530.00</td><td>47.93</td><td>68.30</td><td>-20.37</td><td>48.29</td><td>41.37</td><td>16.45</td><td>58.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11020.00	50.10	74.00	-23.90	57.21	37.92	13.63	58.66	132	225	Peak	2	11020.00	40.49	54.00	-13.51	47.60	37.92	13.63	58.66	132	225	Average	3	16530.00	47.93	68.30	-20.37	48.29	41.37	16.45	58.18	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	11020.00	50.10	74.00	-23.90	57.21	37.92	13.63	58.66	132	225	Peak																																																																	
2	11020.00	40.49	54.00	-13.51	47.60	37.92	13.63	58.66	132	225	Average																																																																	
3	16530.00	47.93	68.30	-20.37	48.29	41.37	16.45	58.18	--	--	Peak																																																																	
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11020.00</td><td>49.49</td><td>74.00</td><td>-24.51</td><td>56.60</td><td>37.92</td><td>13.63</td><td>58.66</td><td>132</td><td>225</td><td>Peak</td></tr><tr><td>2</td><td>11020.00</td><td>39.49</td><td>54.00</td><td>-14.51</td><td>46.60</td><td>37.92</td><td>13.63</td><td>58.66</td><td>132</td><td>225</td><td>Average</td></tr><tr><td>3</td><td>16530.00</td><td>47.28</td><td>68.30</td><td>-21.02</td><td>47.64</td><td>41.37</td><td>16.45</td><td>58.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11020.00	49.49	74.00	-24.51	56.60	37.92	13.63	58.66	132	225	Peak	2	11020.00	39.49	54.00	-14.51	46.60	37.92	13.63	58.66	132	225	Average	3	16530.00	47.28	68.30	-21.02	47.64	41.37	16.45	58.18	--	--	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	11020.00	49.49	74.00	-24.51	56.60	37.92	13.63	58.66	132	225	Peak																																																																	
2	11020.00	39.49	54.00	-14.51	46.60	37.92	13.63	58.66	132	225	Average																																																																	
3	16530.00	47.28	68.30	-21.02	47.64	41.37	16.45	58.18	--	--	Peak																																																																	

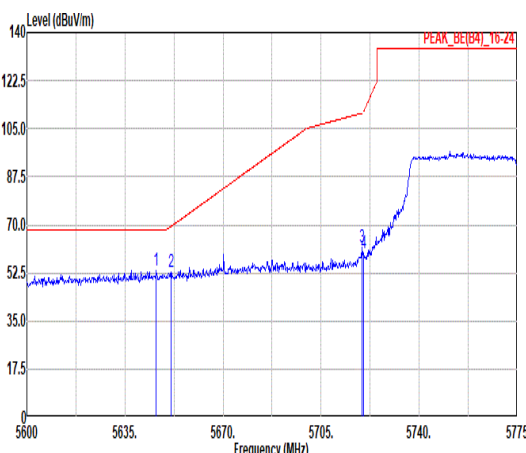
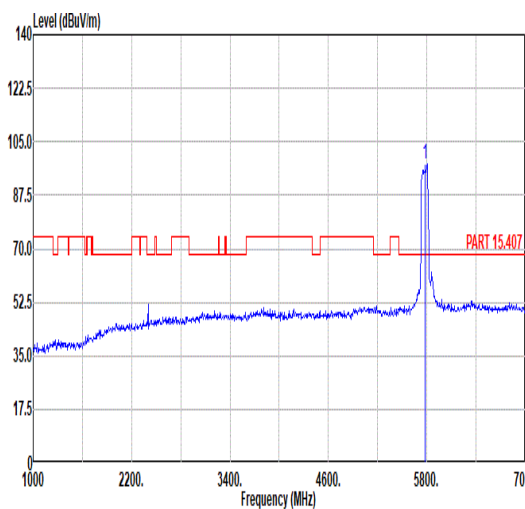
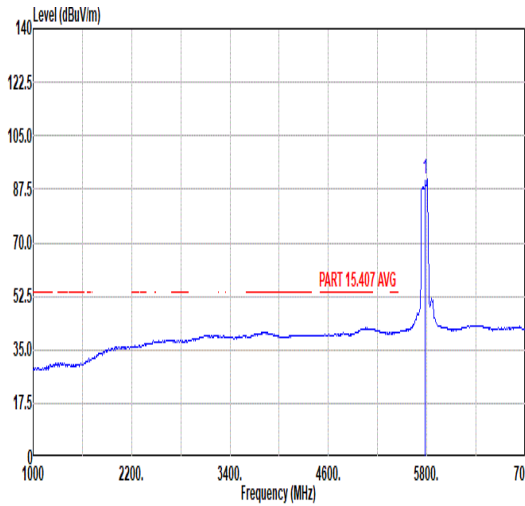


Mode	12																																																																																																																												
	Band Edge - L																																																																																																																												
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Horizontal						Fundamental																																																																																																																						
Peak																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5646.20</td><td>53.29</td><td>68.30</td><td>-15.01</td><td>39.88</td><td>35.39</td><td>10.33</td><td>32.31</td><td>296</td><td>35</td><td>PEAK</td></tr><tr><td>2</td><td>5651.45</td><td>52.90</td><td>69.37</td><td>-16.47</td><td>39.48</td><td>35.40</td><td>10.33</td><td>32.31</td><td>296</td><td>35</td><td>PEAK</td></tr><tr><td>3</td><td>5719.70</td><td>61.65</td><td>110.72</td><td>-49.07</td><td>48.09</td><td>35.55</td><td>10.37</td><td>32.36</td><td>296</td><td>35</td><td>PEAK</td></tr><tr><td>4</td><td>5720.05</td><td>59.56</td><td>110.91</td><td>-51.35</td><td>45.99</td><td>35.56</td><td>10.37</td><td>32.36</td><td>296</td><td>35</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5646.20	53.29	68.30	-15.01	39.88	35.39	10.33	32.31	296	35	PEAK	2	5651.45	52.90	69.37	-16.47	39.48	35.40	10.33	32.31	296	35	PEAK	3	5719.70	61.65	110.72	-49.07	48.09	35.55	10.37	32.36	296	35	PEAK	4	5720.05	59.56	110.91	-51.35	45.99	35.56	10.37	32.36	296	35	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5775.00</td><td>97.54</td><td>-----</td><td>-----</td><td>83.73</td><td>35.74</td><td>10.42</td><td>32.35</td><td>296</td><td>35</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5775.00	97.54	-----	-----	83.73	35.74	10.42	32.35	296	35
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																					
1	5646.20	53.29	68.30	-15.01	39.88	35.39	10.33	32.31	296	35	PEAK																																																																																																																		
2	5651.45	52.90	69.37	-16.47	39.48	35.40	10.33	32.31	296	35	PEAK																																																																																																																		
3	5719.70	61.65	110.72	-49.07	48.09	35.55	10.37	32.36	296	35	PEAK																																																																																																																		
4	5720.05	59.56	110.91	-51.35	45.99	35.56	10.37	32.36	296	35	PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																					
1	5775.00	97.54	-----	-----	83.73	35.74	10.42	32.35	296	35	PEAK																																																																																																																		
Avg	Blank																																																																																																																												
							<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5775.00</td><td>90.82</td><td>-----</td><td>-----</td><td>76.99</td><td>35.75</td><td>10.43</td><td>32.35</td><td>296</td><td>35</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5775.00	90.82	-----	-----	76.99	35.75	10.43	32.35	296	35	AVERAGE																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																					
1	5775.00	90.82	-----	-----	76.99	35.75	10.43	32.35	296	35	AVERAGE																																																																																																																		

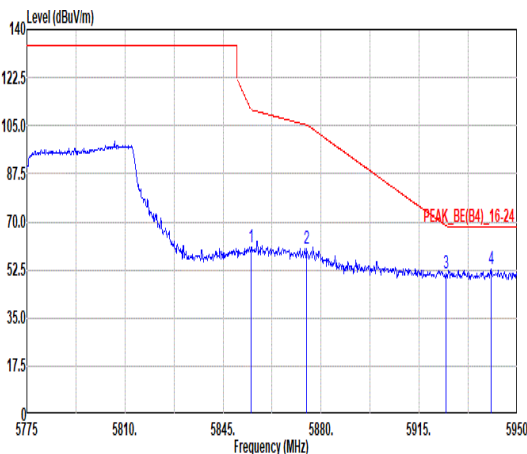


Mode	12																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5854.98</td><td>60.82</td><td>110.86</td><td>-50.04</td><td></td><td>46.88</td><td>35.88</td><td>10.46</td><td>32.40</td><td>296</td><td>35</td><td>PEAK</td></tr><tr><td>2</td><td>5874.75</td><td>60.34</td><td>105.27</td><td>-44.93</td><td></td><td>46.33</td><td>35.94</td><td>10.48</td><td>32.41</td><td>296</td><td>35</td><td>PEAK</td></tr><tr><td>3</td><td>5924.63</td><td>51.17</td><td>68.48</td><td>-17.31</td><td></td><td>37.07</td><td>36.03</td><td>10.53</td><td>32.46</td><td>296</td><td>35</td><td>PEAK</td></tr><tr><td>4</td><td>5940.73</td><td>52.57</td><td>68.30</td><td>-15.73</td><td></td><td>38.47</td><td>36.04</td><td>10.54</td><td>32.48</td><td>296</td><td>35</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg		1	5854.98	60.82	110.86	-50.04		46.88	35.88	10.46	32.40	296	35	PEAK	2	5874.75	60.34	105.27	-44.93		46.33	35.94	10.48	32.41	296	35	PEAK	3	5924.63	51.17	68.48	-17.31		37.07	36.03	10.53	32.46	296	35	PEAK	4	5940.73	52.57	68.30	-15.73		38.47	36.04	10.54	32.48	296	35	PEAK	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.98	60.82	110.86	-50.04		46.88	35.88	10.46	32.40	296	35	PEAK																																																																				
2	5874.75	60.34	105.27	-44.93		46.33	35.94	10.48	32.41	296	35	PEAK																																																																				
3	5924.63	51.17	68.48	-17.31		37.07	36.03	10.53	32.46	296	35	PEAK																																																																				
4	5940.73	52.57	68.30	-15.73		38.47	36.04	10.54	32.48	296	35	PEAK																																																																				

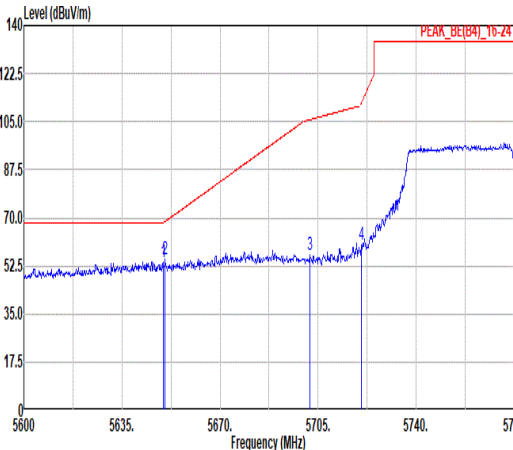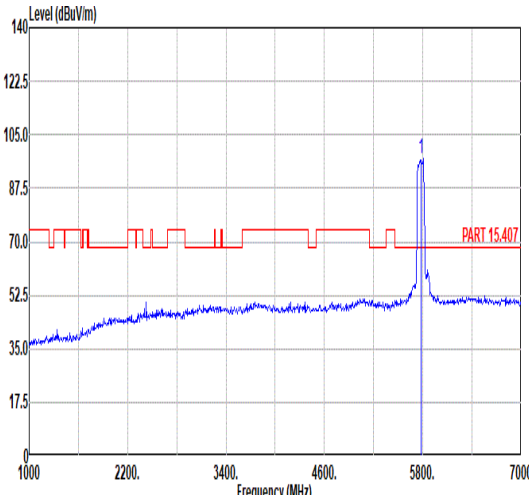
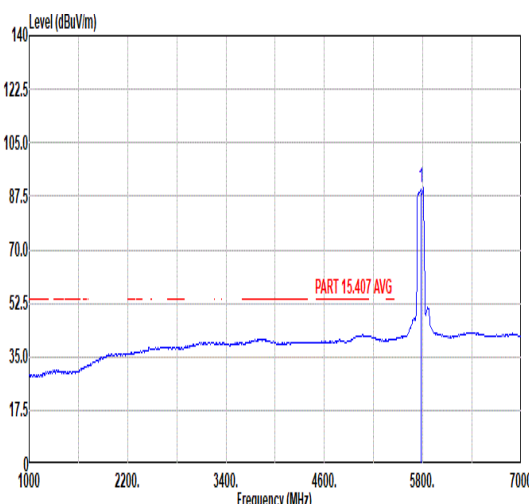


Mode	12																																																																																																																												
	Band Edge - L																																																																																																																												
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Vertical						Fundamental																																																																																																																						
Peak																																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5649.70</td><td>54.04</td><td>68.30</td><td>-14.26</td><td>40.62</td><td>35.40</td><td>10.33</td><td>32.31</td><td>100</td><td>351</td><td>PEAK</td></tr><tr><td>2</td><td>5650.40</td><td>55.08</td><td>68.60</td><td>-13.52</td><td>41.66</td><td>35.40</td><td>10.33</td><td>32.31</td><td>100</td><td>351</td><td>PEAK</td></tr><tr><td>3</td><td>5702.20</td><td>56.64</td><td>105.82</td><td>-49.18</td><td>43.11</td><td>35.52</td><td>10.36</td><td>32.35</td><td>100</td><td>351</td><td>PEAK</td></tr><tr><td>4</td><td>5720.40</td><td>60.30</td><td>111.71</td><td>-51.41</td><td>46.73</td><td>35.56</td><td>10.37</td><td>32.36</td><td>100</td><td>351</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5649.70	54.04	68.30	-14.26	40.62	35.40	10.33	32.31	100	351	PEAK	2	5650.40	55.08	68.60	-13.52	41.66	35.40	10.33	32.31	100	351	PEAK	3	5702.20	56.64	105.82	-49.18	43.11	35.52	10.36	32.35	100	351	PEAK	4	5720.40	60.30	111.71	-51.41	46.73	35.56	10.37	32.36	100	351	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>97.09</td><td>-----</td><td>-----</td><td>83.26</td><td>35.75</td><td>10.43</td><td>32.35</td><td>100</td><td>351</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5775.00	97.09	-----	-----	83.26	35.75	10.43	32.35	100	351
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																					
1	5649.70	54.04	68.30	-14.26	40.62	35.40	10.33	32.31	100	351	PEAK																																																																																																																		
2	5650.40	55.08	68.60	-13.52	41.66	35.40	10.33	32.31	100	351	PEAK																																																																																																																		
3	5702.20	56.64	105.82	-49.18	43.11	35.52	10.36	32.35	100	351	PEAK																																																																																																																		
4	5720.40	60.30	111.71	-51.41	46.73	35.56	10.37	32.36	100	351	PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																					
1	5775.00	97.09	-----	-----	83.26	35.75	10.43	32.35	100	351	PEAK																																																																																																																		
Avg	Blank																																																																																																																												
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>90.14</td><td>-----</td><td>-----</td><td>76.31</td><td>35.75</td><td>10.43</td><td>32.35</td><td>100</td><td>351</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5775.00	90.14	-----	-----	76.31	35.75	10.43	32.35	100	351	AVERAGE																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																					
1	5775.00	90.14	-----	-----	76.31	35.75	10.43	32.35	100	351	AVERAGE																																																																																																																		




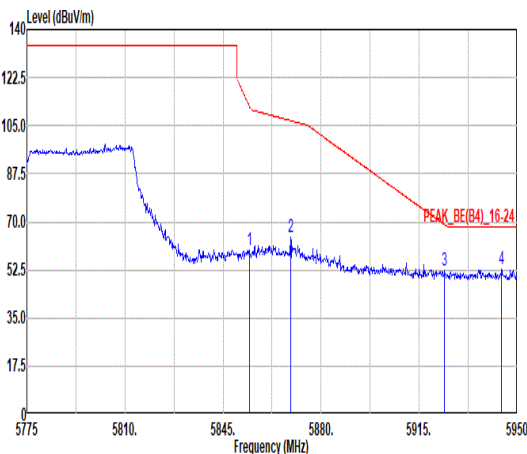


Mode	12																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5854.45</td><td>59.63</td><td>112.05</td><td>-52.42</td><td></td><td>45.69</td><td>35.88</td><td>10.46</td><td>32.40</td><td>100</td><td>351</td><td>PEAK</td></tr><tr><td>2</td><td>5869.15</td><td>64.29</td><td>106.84</td><td>-42.55</td><td></td><td>50.30</td><td>35.92</td><td>10.48</td><td>32.41</td><td>100</td><td>351</td><td>PEAK</td></tr><tr><td>3</td><td>5924.10</td><td>52.15</td><td>68.86</td><td>-16.71</td><td></td><td>38.06</td><td>36.03</td><td>10.52</td><td>32.46</td><td>100</td><td>351</td><td>PEAK</td></tr><tr><td>4</td><td>5944.40</td><td>52.90</td><td>68.30</td><td>-15.40</td><td></td><td>38.80</td><td>36.05</td><td>10.54</td><td>32.49</td><td>100</td><td>351</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg		1	5854.45	59.63	112.05	-52.42		45.69	35.88	10.46	32.40	100	351	PEAK	2	5869.15	64.29	106.84	-42.55		50.30	35.92	10.48	32.41	100	351	PEAK	3	5924.10	52.15	68.86	-16.71		38.06	36.03	10.52	32.46	100	351	PEAK	4	5944.40	52.90	68.30	-15.40		38.80	36.05	10.54	32.49	100	351	PEAK	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.45	59.63	112.05	-52.42		45.69	35.88	10.46	32.40	100	351	PEAK																																																																				
2	5869.15	64.29	106.84	-42.55		50.30	35.92	10.48	32.41	100	351	PEAK																																																																				
3	5924.10	52.15	68.86	-16.71		38.06	36.03	10.52	32.46	100	351	PEAK																																																																				
4	5944.40	52.90	68.30	-15.40		38.80	36.05	10.54	32.49	100	351	PEAK																																																																				



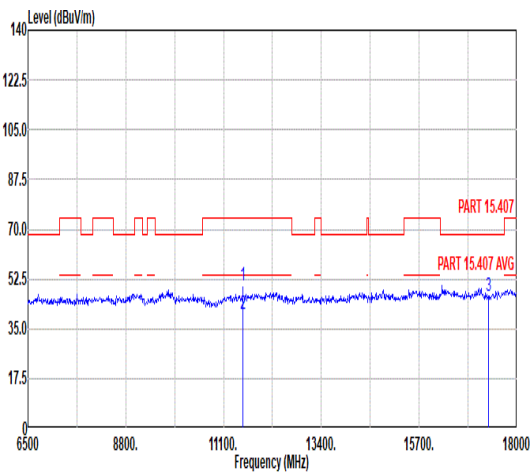
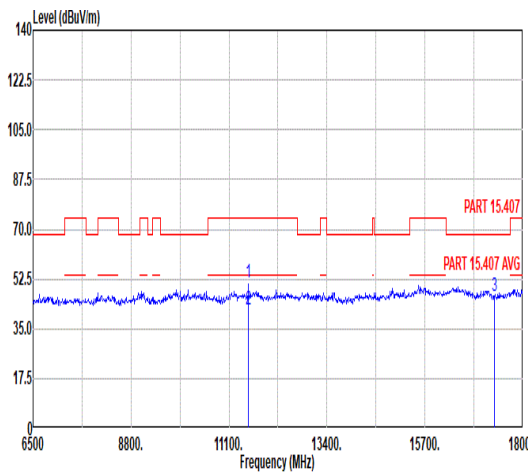


Mode	12																																																																																																																																																									
	Harmonic																																																																																																																																																									
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																																																									
ANT	1																																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																																			
Peak Avg																																																																																																																																																										
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11550.00</td><td>50.14</td><td>74.00</td><td>-23.86</td><td>55.59</td><td>38.44</td><td>13.95</td><td>57.84</td><td>135</td><td>210</td><td>Peak</td></tr><tr><td>2</td><td>11550.00</td><td>40.14</td><td>54.00</td><td>-13.86</td><td>45.59</td><td>38.44</td><td>13.95</td><td>57.84</td><td>135</td><td>210</td><td>Average</td></tr><tr><td>3</td><td>17325.00</td><td>46.50</td><td>68.30</td><td>-21.80</td><td>45.22</td><td>42.41</td><td>16.86</td><td>57.99</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11550.00	50.14	74.00	-23.86	55.59	38.44	13.95	57.84	135	210	Peak	2	11550.00	40.14	54.00	-13.86	45.59	38.44	13.95	57.84	135	210	Average	3	17325.00	46.50	68.30	-21.80	45.22	42.41	16.86	57.99	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11550.00</td><td>51.47</td><td>74.00</td><td>-22.53</td><td>56.92</td><td>38.44</td><td>13.95</td><td>57.84</td><td>232</td><td>24</td><td>Peak</td></tr><tr><td>2</td><td>11550.00</td><td>41.50</td><td>54.00</td><td>-12.50</td><td>46.95</td><td>38.44</td><td>13.95</td><td>57.84</td><td>232</td><td>24</td><td>Average</td></tr><tr><td>3</td><td>17325.00</td><td>46.54</td><td>68.30</td><td>-21.76</td><td>45.26</td><td>42.41</td><td>16.86</td><td>57.99</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11550.00	51.47	74.00	-22.53	56.92	38.44	13.95	57.84	232	24	Peak	2	11550.00	41.50	54.00	-12.50	46.95	38.44	13.95	57.84	232	24	Average	3	17325.00	46.54	68.30	-21.76	45.26	42.41	16.86	57.99	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1	11550.00	50.14	74.00	-23.86	55.59	38.44	13.95	57.84	135	210	Peak																																																																																																																																															
2	11550.00	40.14	54.00	-13.86	45.59	38.44	13.95	57.84	135	210	Average																																																																																																																																															
3	17325.00	46.50	68.30	-21.80	45.22	42.41	16.86	57.99	--	--	Peak																																																																																																																																															
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																	
1	11550.00	51.47	74.00	-22.53	56.92	38.44	13.95	57.84	232	24	Peak																																																																																																																																															
2	11550.00	41.50	54.00	-12.50	46.95	38.44	13.95	57.84	232	24	Average																																																																																																																																															
3	17325.00	46.54	68.30	-21.76	45.26	42.41	16.86	57.99	--	--	Peak																																																																																																																																															

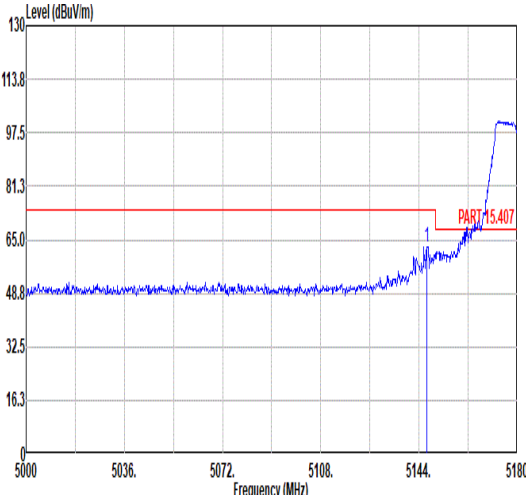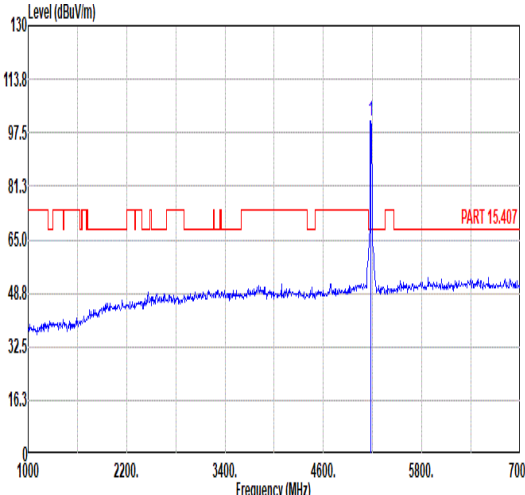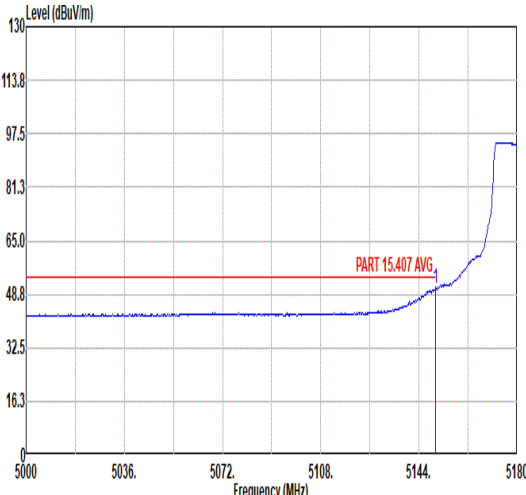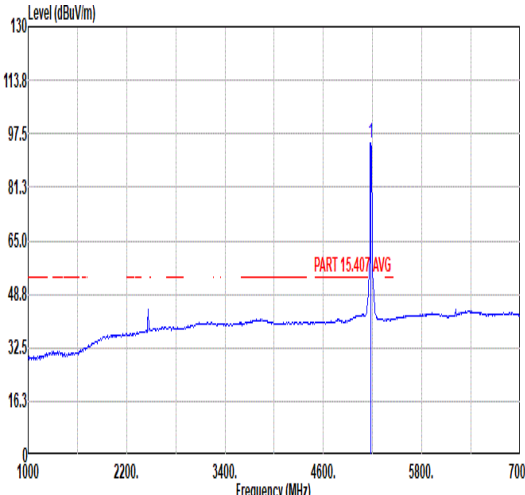

Mode	13																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.88</td><td>62.94</td><td>74.00</td><td>-11.06</td><td>50.29</td><td>34.95</td><td>9.95</td><td>32.25</td><td>118</td><td>296</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5146.88	62.94	74.00	-11.06	50.29	34.95	9.95	32.25	118	296	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>100.82</td><td>-----</td><td>-----</td><td>88.11</td><td>34.97</td><td>9.97</td><td>32.23</td><td>118</td><td>296</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	100.82	-----	-----	88.11	34.97	9.97	32.23	118	296
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5146.88	62.94	74.00	-11.06	50.29	34.95	9.95	32.25	118	296	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	100.82	-----	-----	88.11	34.97	9.97	32.23	118	296	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>50.58</td><td>54.00</td><td>-3.42</td><td>37.92</td><td>34.95</td><td>9.96</td><td>32.25</td><td>118</td><td>296</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	50.58	54.00	-3.42	37.92	34.95	9.96	32.25	118	296	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>94.67</td><td>-----</td><td>-----</td><td>81.94</td><td>34.98</td><td>9.97</td><td>32.22</td><td>118</td><td>296</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	94.67	-----	-----	81.94	34.98	9.97	32.22	118	296
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.94	50.58	54.00	-3.42	37.92	34.95	9.96	32.25	118	296	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	94.67	-----	-----	81.94	34.98	9.97	32.22	118	296	AVERAGE																																																																															

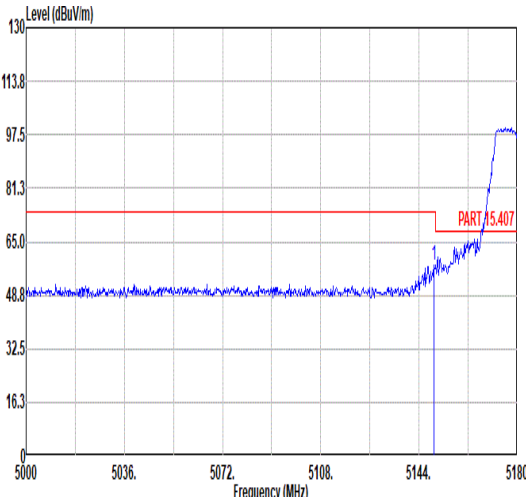
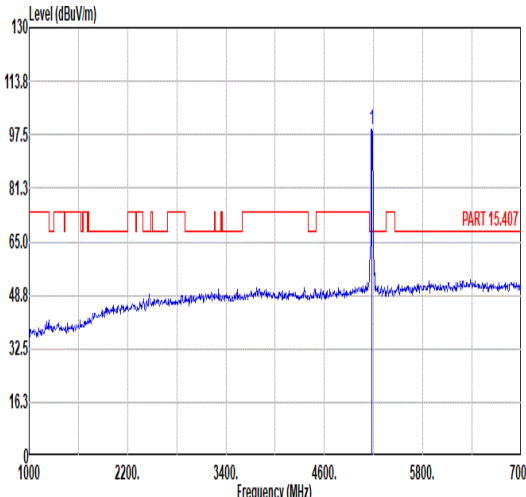
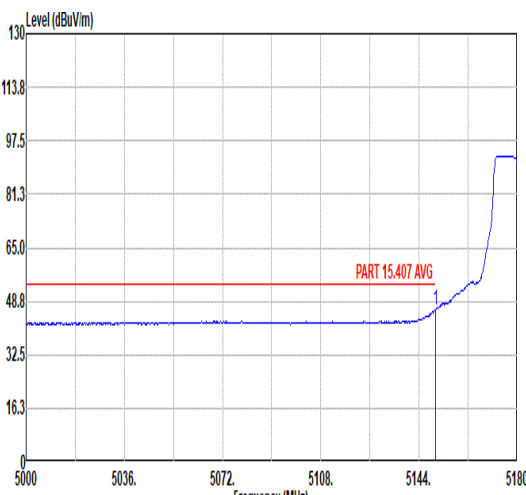
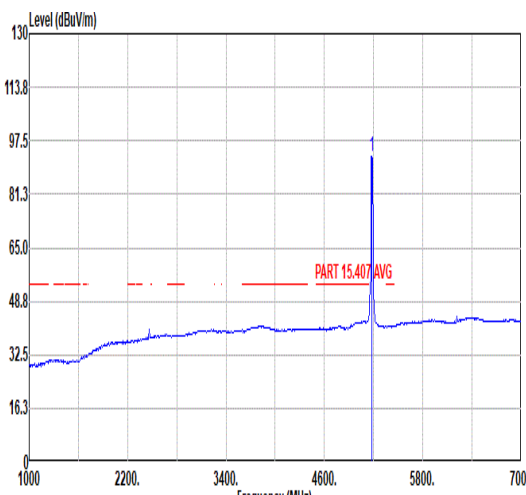


Mode	13																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.58</td><td>57.84</td><td>74.00</td><td>-16.16</td><td>45.18</td><td>34.95</td><td>9.96</td><td>32.25</td><td>100</td><td>156</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.58	57.84	74.00	-16.16	45.18	34.95	9.96	32.25	100	156	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>99.27</td><td>-----</td><td>-----</td><td>86.54</td><td>34.98</td><td>9.97</td><td>32.22</td><td>100</td><td>156</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	99.27	-----	-----	86.54	34.98	9.97	32.22	100	156
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.58	57.84	74.00	-16.16	45.18	34.95	9.96	32.25	100	156	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	99.27	-----	-----	86.54	34.98	9.97	32.22	100	156	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.94</td><td>46.07</td><td>54.00</td><td>-7.93</td><td>33.41</td><td>34.95</td><td>9.96</td><td>32.25</td><td>100</td><td>156</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	46.07	54.00	-7.93	33.41	34.95	9.96	32.25	100	156	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>92.79</td><td>-----</td><td>-----</td><td>80.06</td><td>34.98</td><td>9.97</td><td>32.22</td><td>100</td><td>156</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	92.79	-----	-----	80.06	34.98	9.97	32.22	100	156
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.94	46.07	54.00	-7.93	33.41	34.95	9.96	32.25	100	156	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	92.79	-----	-----	80.06	34.98	9.97	32.22	100	156	AVERAGE																																																																															





Mode	13																																																																																																																																															
	Harmonic																																																																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																																															
ANT	1																																																																																																																																															
Pol.	Horizontal										Vertical																																																																																																																																					
Peak Avg																																																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>44.79</td><td>68.30</td><td>-23.51</td><td>53.94</td><td>37.22</td><td>13.25</td><td>59.62</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>55.57</td><td>40.22</td><td>15.86</td><td>57.89</td><td>125</td><td>221</td><td>Peak</td></tr><tr><td>3</td><td>15540.00</td><td>44.38</td><td>54.00</td><td>-9.62</td><td>46.19</td><td>40.22</td><td>15.86</td><td>57.89</td><td>125</td><td>221</td><td>Average</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	44.79	68.30	-23.51	53.94	37.22	13.25	59.62	--	--	Peak	2	15540.00	53.76	74.00	-20.24	55.57	40.22	15.86	57.89	125	221	Peak	3	15540.00	44.38	54.00	-9.62	46.19	40.22	15.86	57.89	125	221	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.89</td><td>68.30</td><td>-21.41</td><td>56.04</td><td>37.22</td><td>13.25</td><td>59.62</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>54.73</td><td>74.00</td><td>-19.27</td><td>56.54</td><td>40.22</td><td>15.86</td><td>57.89</td><td>122</td><td>124</td><td>Peak</td></tr><tr><td>3</td><td>15540.00</td><td>44.64</td><td>54.00</td><td>-9.36</td><td>46.45</td><td>40.22</td><td>15.86</td><td>57.89</td><td>122</td><td>124</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.89	68.30	-21.41	56.04	37.22	13.25	59.62	--	--	Peak	2	15540.00	54.73	74.00	-19.27	56.54	40.22	15.86	57.89	122	124	Peak	3	15540.00	44.64	54.00	-9.36	46.45	40.22	15.86	57.89	122	124	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																								
Freq	Level	Line	Level	Factor	Loss	Factor		Remark																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																							
1	10360.00	44.79	68.30	-23.51	53.94	37.22	13.25	59.62	--	--	Peak																																																																																																																																					
2	15540.00	53.76	74.00	-20.24	55.57	40.22	15.86	57.89	125	221	Peak																																																																																																																																					
3	15540.00	44.38	54.00	-9.62	46.19	40.22	15.86	57.89	125	221	Average																																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																									
Freq	Level	Line	Level	Factor	Loss	Factor		Remark																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																							
1	10360.00	46.89	68.30	-21.41	56.04	37.22	13.25	59.62	--	--	Peak																																																																																																																																					
2	15540.00	54.73	74.00	-19.27	56.54	40.22	15.86	57.89	122	124	Peak																																																																																																																																					
3	15540.00	44.64	54.00	-9.36	46.45	40.22	15.86	57.89	122	124	Average																																																																																																																																					

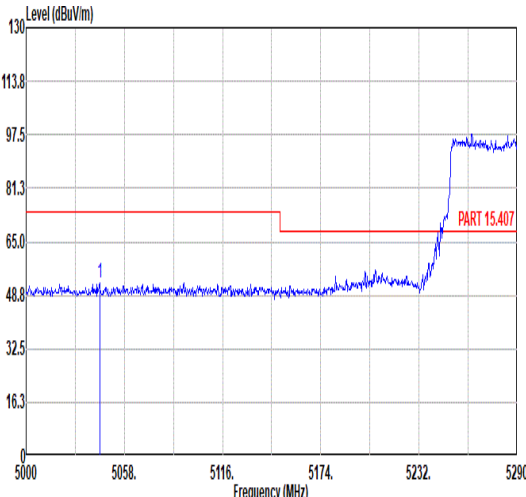
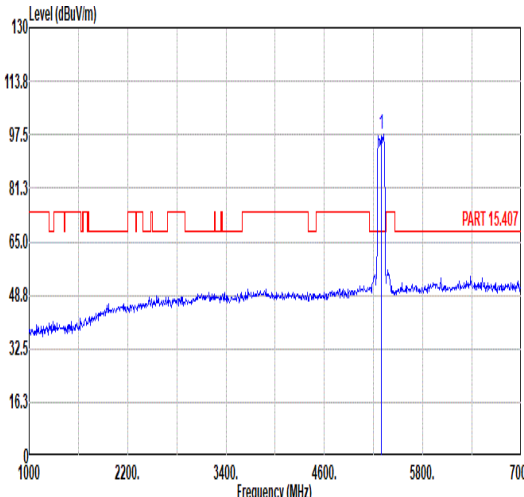
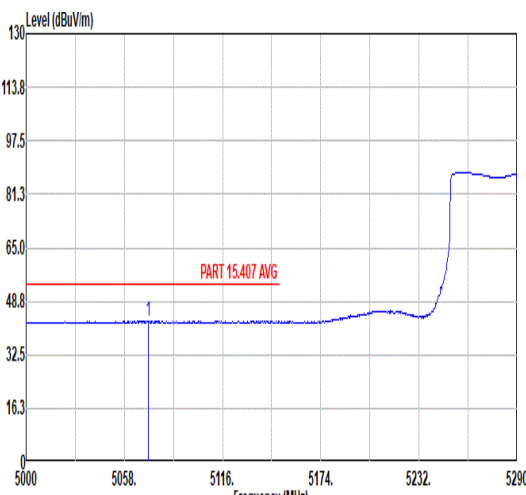
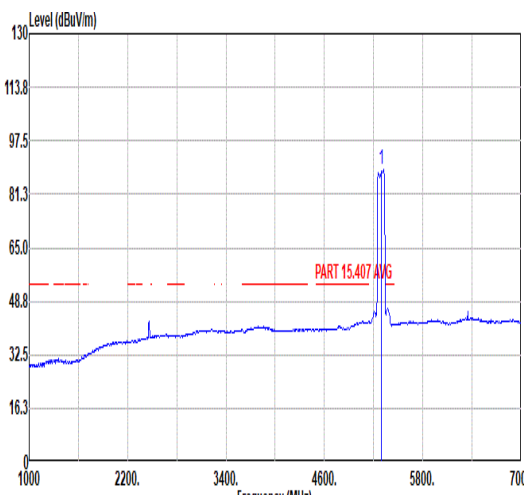


Mode	14																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5043.50</td><td>52.36</td><td>74.00</td><td>-21.64</td><td>39.89</td><td>34.85</td><td>9.88</td><td>32.26</td><td>100</td><td>299</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5043.50	52.36	74.00	-21.64	39.89	34.85	9.88	32.26	100	299	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>97.45</td><td>-----</td><td>-----</td><td>84.26</td><td>35.20</td><td>10.17</td><td>32.18</td><td>100</td><td>299</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	97.45	-----	-----	84.26	35.20	10.17	32.18	100	299
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5043.50	52.36	74.00	-21.64	39.89	34.85	9.88	32.26	100	299	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5290.00	97.45	-----	-----	84.26	35.20	10.17	32.18	100	299	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5072.21</td><td>42.78</td><td>54.00</td><td>-11.22</td><td>30.25</td><td>34.88</td><td>9.90</td><td>32.25</td><td>100</td><td>299</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5072.21	42.78	54.00	-11.22	30.25	34.88	9.90	32.25	100	299	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>88.61</td><td>-----</td><td>-----</td><td>75.41</td><td>35.20</td><td>10.18</td><td>32.18</td><td>100</td><td>299</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	88.61	-----	-----	75.41	35.20	10.18	32.18	100	299
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5072.21	42.78	54.00	-11.22	30.25	34.88	9.90	32.25	100	299	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5290.00	88.61	-----	-----	75.41	35.20	10.18	32.18	100	299	AVERAGE																																																																																

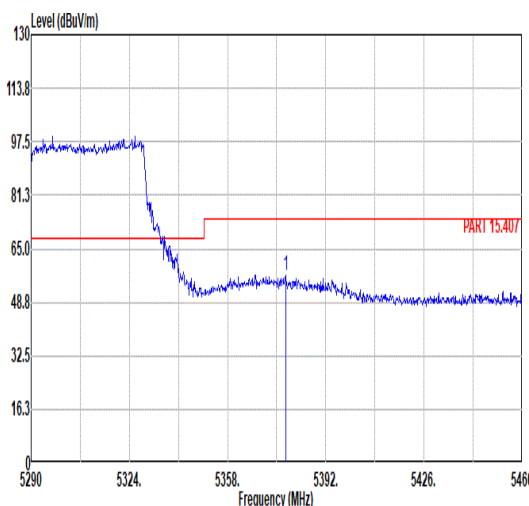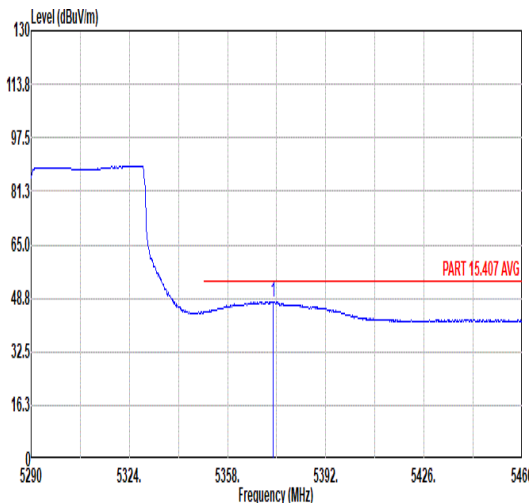

Mode	14																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5378.06</td><td>56.86</td><td>74.00</td><td>-17.14</td><td>43.59</td><td>35.20</td><td>10.25</td><td>32.18</td><td>100</td><td>299</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5378.06	56.86	74.00	-17.14	43.59	35.20	10.25	32.18	100	299	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5378.06	56.86	74.00	-17.14	43.59	35.20	10.25	32.18	100	299	PEAK																															
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5373.81</td><td>47.73</td><td>54.00</td><td>-6.27</td><td>34.45</td><td>35.20</td><td>10.25</td><td>32.17</td><td>100</td><td>299</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5373.81	47.73	54.00	-6.27	34.45	35.20	10.25	32.17	100	299	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5373.81	47.73	54.00	-6.27	34.45	35.20	10.25	32.17	100	299	AVERAGE																															

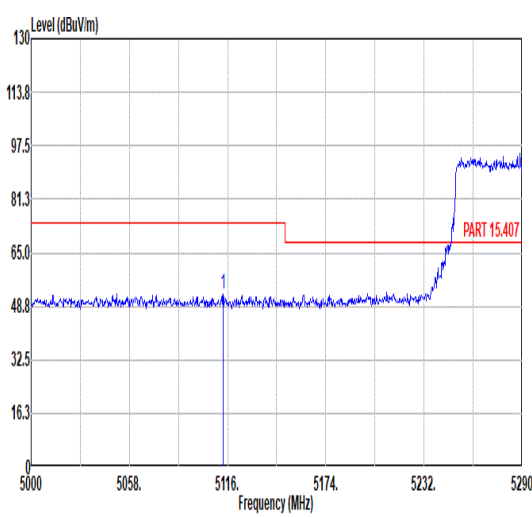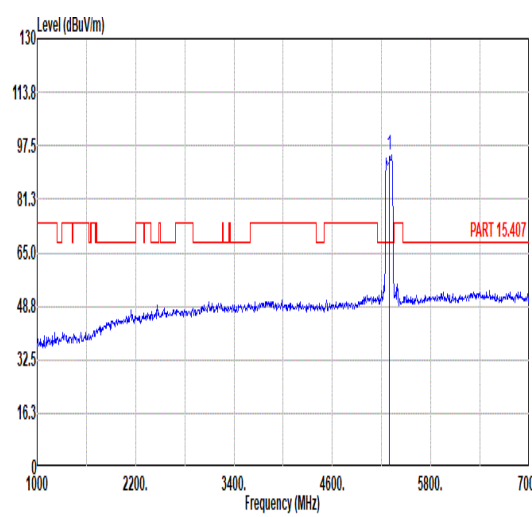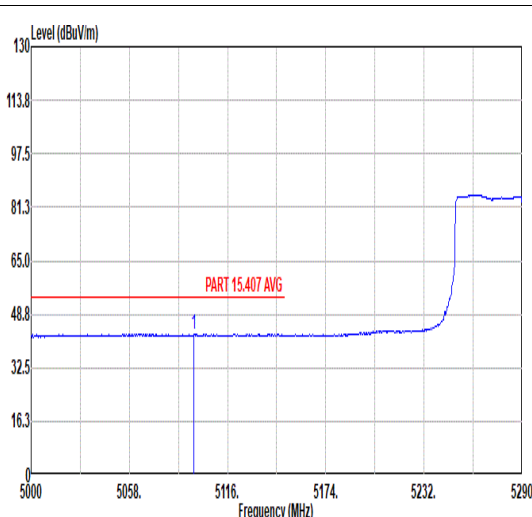
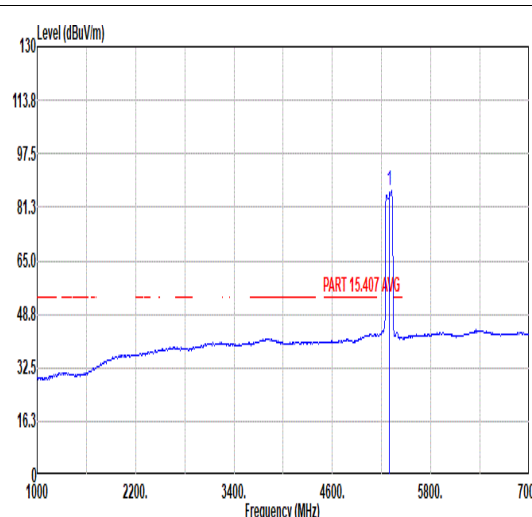


Mode	14																																																		
	Band Edge - L																																																		
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																		
ANT	1																																																		
Pol.	Vertical																																																		
Peak																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5113.39</td><td>52.67</td><td>74.00</td><td>-21.33</td><td>40.07</td><td>34.92</td><td>9.93</td><td>32.25</td><td>100</td><td>154</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5113.39	52.67	74.00	-21.33	40.07	34.92	9.93	32.25	100	154	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5113.39	52.67	74.00	-21.33	40.07	34.92	9.93	32.25	100	154	PEAK																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>94.92</td><td>-----</td><td>-----</td><td>81.72</td><td>35.20</td><td>10.18</td><td>32.18</td><td>100</td><td>154</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	94.92	-----	-----	81.72	35.20	10.18	32.18	100	154	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5290.00	94.92	-----	-----	81.72	35.20	10.18	32.18	100	154	PEAK																																								
Avg																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5095.99</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>30.09</td><td>34.90</td><td>9.92</td><td>32.25</td><td>100</td><td>154</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5095.99	42.66	54.00	-11.34	30.09	34.90	9.92	32.25	100	154	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5095.99	42.66	54.00	-11.34	30.09	34.90	9.92	32.25	100	154	AVERAGE																																								
AVERAGE																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>86.20</td><td>-----</td><td>-----</td><td>73.01</td><td>35.20</td><td>10.17</td><td>32.18</td><td>100</td><td>154</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	86.20	-----	-----	73.01	35.20	10.17	32.18	100	154	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5290.00	86.20	-----	-----	73.01	35.20	10.17	32.18	100	154	AVERAGE																																								







Mode	14																																																		
	Band Edge - R																																																		
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5385.37</td><td>54.34</td><td>74.00</td><td>-19.66</td><td>41.06</td><td>35.20</td><td>10.26</td><td>32.18</td><td>100</td><td>154</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5385.37	54.34	74.00	-19.66	41.06	35.20	10.26	32.18	100	154	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5385.37	54.34	74.00	-19.66	41.06	35.20	10.26	32.18	100	154	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5378.57</td><td>43.65</td><td>54.00</td><td>-10.35</td><td>30.38</td><td>35.20</td><td>10.25</td><td>32.18</td><td>100</td><td>154</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5378.57	43.65	54.00	-10.35	30.38	35.20	10.25	32.18	100	154	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5378.57	43.65	54.00	-10.35	30.38	35.20	10.25	32.18	100	154	AVERAGE																																								

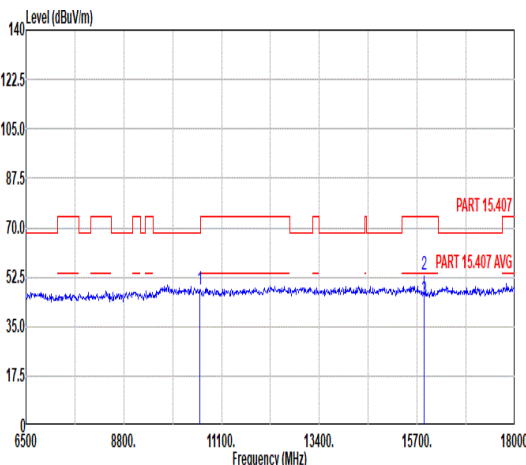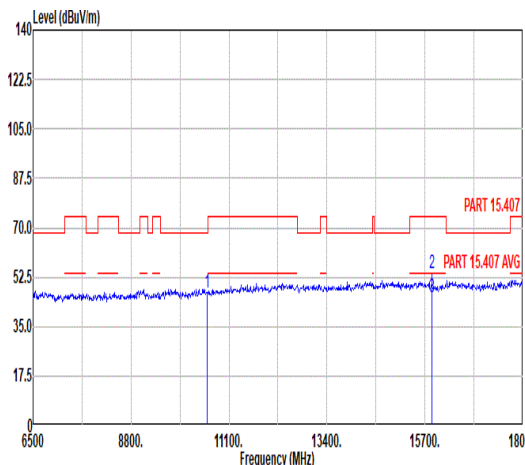


Mode	14																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal							Vertical																																																																																																																										
Peak Avg																																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10580.00</td><td>48.24</td><td>68.30</td><td>-20.06</td><td>56.89</td><td>37.39</td><td>13.50</td><td>59.54</td><td>-- Peak</td></tr><tr><td>2</td><td>15870.00</td><td>53.45</td><td>74.00</td><td>-20.55</td><td>55.66</td><td>40.42</td><td>15.98</td><td>58.61</td><td>102 145 Peak</td></tr><tr><td>3</td><td>15870.00</td><td>44.58</td><td>54.00</td><td>-9.42</td><td>46.79</td><td>40.42</td><td>15.98</td><td>58.61</td><td>102 145 Average</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	10580.00	48.24	68.30	-20.06	56.89	37.39	13.50	59.54	-- Peak	2	15870.00	53.45	74.00	-20.55	55.66	40.42	15.98	58.61	102 145 Peak	3	15870.00	44.58	54.00	-9.42	46.79	40.42	15.98	58.61	102 145 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10580.00</td><td>47.12</td><td>68.30</td><td>-21.18</td><td>55.77</td><td>37.39</td><td>13.50</td><td>59.54</td><td>-- Peak</td></tr><tr><td>2</td><td>15870.00</td><td>54.09</td><td>74.00</td><td>-19.91</td><td>56.30</td><td>40.42</td><td>15.98</td><td>58.61</td><td>122 145 Peak</td></tr><tr><td>3</td><td>15870.00</td><td>45.46</td><td>54.00</td><td>-8.54</td><td>47.67</td><td>40.42</td><td>15.98</td><td>58.61</td><td>122 145 Average</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	10580.00	47.12	68.30	-21.18	55.77	37.39	13.50	59.54	-- Peak	2	15870.00	54.09	74.00	-19.91	56.30	40.42	15.98	58.61	122 145 Peak	3	15870.00	45.46	54.00	-8.54	47.67	40.42	15.98	58.61	122 145 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																									
1	10580.00	48.24	68.30	-20.06	56.89	37.39	13.50	59.54	-- Peak																																																																																																																									
2	15870.00	53.45	74.00	-20.55	55.66	40.42	15.98	58.61	102 145 Peak																																																																																																																									
3	15870.00	44.58	54.00	-9.42	46.79	40.42	15.98	58.61	102 145 Average																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																									
1	10580.00	47.12	68.30	-21.18	55.77	37.39	13.50	59.54	-- Peak																																																																																																																									
2	15870.00	54.09	74.00	-19.91	56.30	40.42	15.98	58.61	122 145 Peak																																																																																																																									
3	15870.00	45.46	54.00	-8.54	47.67	40.42	15.98	58.61	122 145 Average																																																																																																																									

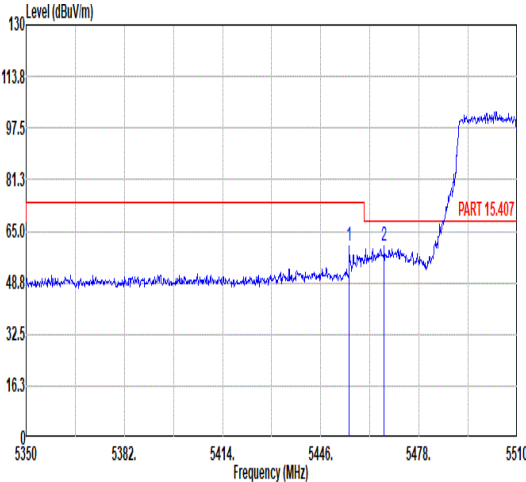
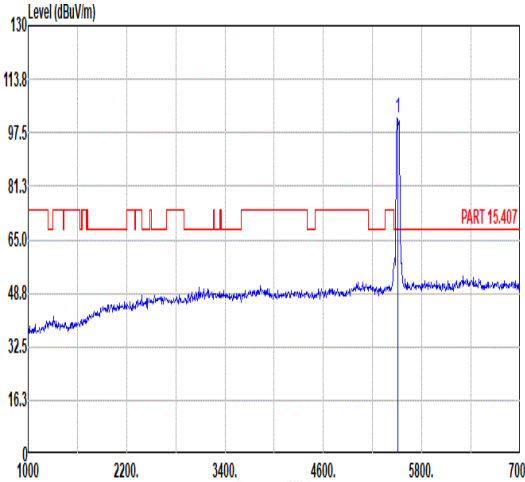
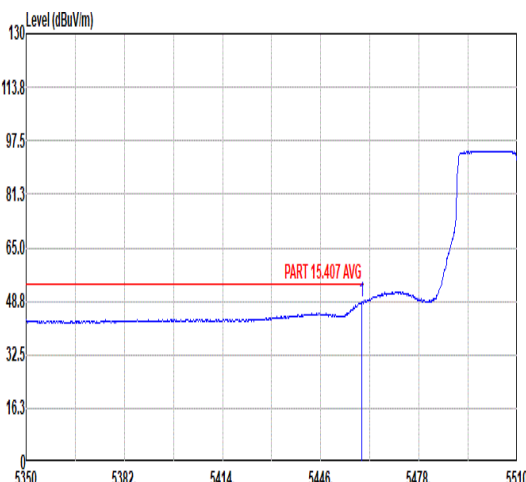
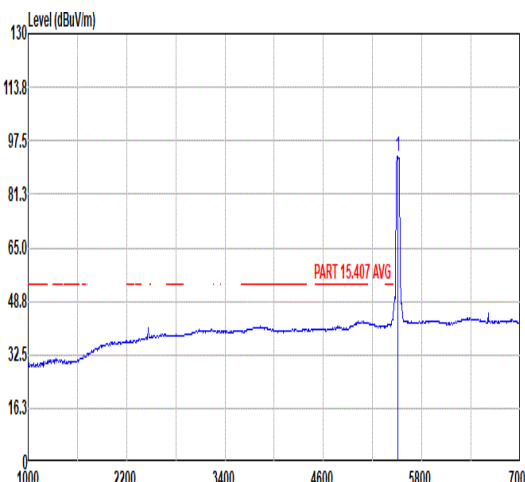


Mode	15																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																																						
ANT	1																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																
Peak																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5455.28</td><td>60.21</td><td>74.00</td><td>-13.79</td><td>46.97</td><td>35.20</td><td>10.30</td><td>32.26</td><td>105</td><td>302</td><td>PEAK</td></tr><tr><td>2</td><td>5466.64</td><td>60.29</td><td>68.30</td><td>-8.01</td><td>47.05</td><td>35.20</td><td>10.30</td><td>32.26</td><td>105</td><td>302</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5455.28	60.21	74.00	-13.79	46.97	35.20	10.30	32.26	105	302	PEAK	2	5466.64	60.29	68.30	-8.01	47.05	35.20	10.30	32.26	105	302	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>102.24</td><td>-----</td><td>-----</td><td>89.01</td><td>35.20</td><td>10.30</td><td>32.27</td><td>105</td><td>302</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	102.24	-----	-----	89.01	35.20	10.30	32.27	105	302	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5455.28	60.21	74.00	-13.79	46.97	35.20	10.30	32.26	105	302	PEAK																																																																																												
2	5466.64	60.29	68.30	-8.01	47.05	35.20	10.30	32.26	105	302	PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5510.00	102.24	-----	-----	89.01	35.20	10.30	32.27	105	302	PEAK																																																																																												
Avg																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.44</td><td>48.73</td><td>54.00</td><td>-5.27</td><td>35.49</td><td>35.20</td><td>10.30</td><td>32.26</td><td>105</td><td>302</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.44	48.73	54.00	-5.27	35.49	35.20	10.30	32.26	105	302	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>92.72</td><td>-----</td><td>-----</td><td>79.49</td><td>35.20</td><td>10.30</td><td>32.27</td><td>105</td><td>302</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	92.72	-----	-----	79.49	35.20	10.30	32.27	105	302	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5459.44	48.73	54.00	-5.27	35.49	35.20	10.30	32.26	105	302	AVERAGE																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5510.00	92.72	-----	-----	79.49	35.20	10.30	32.27	105	302	AVERAGE																																																																																												

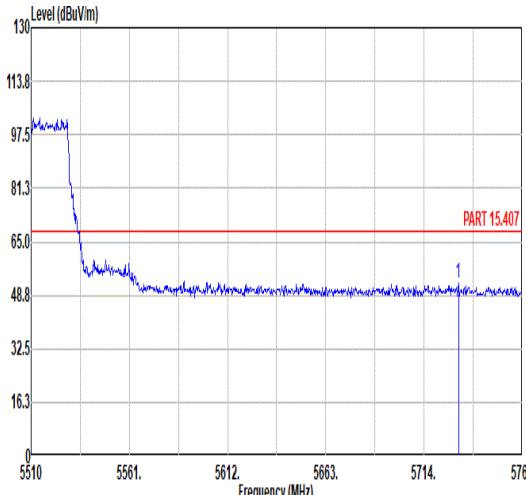


Mode	15																																																		
	Band Edge - R																																																		
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																		
ANT	1																																																		
Pol.	Horizontal						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5731.85</td><td>52.42</td><td>68.30</td><td>-15.88</td><td>38.82</td><td>35.58</td><td>10.38</td><td>32.36</td><td>105</td><td>302</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5731.85	52.42	68.30	-15.88	38.82	35.58	10.38	32.36	105	302	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5731.85	52.42	68.30	-15.88	38.82	35.58	10.38	32.36	105	302	PEAK																																								

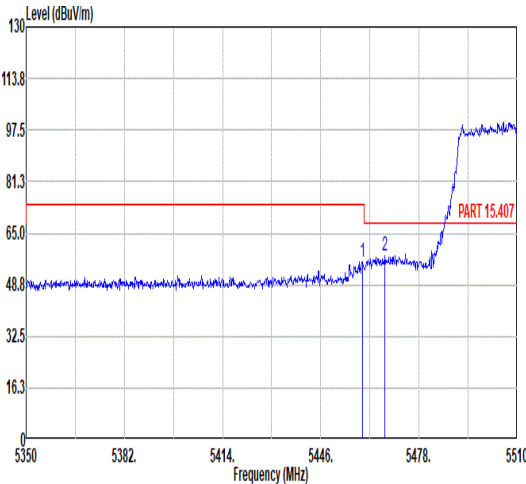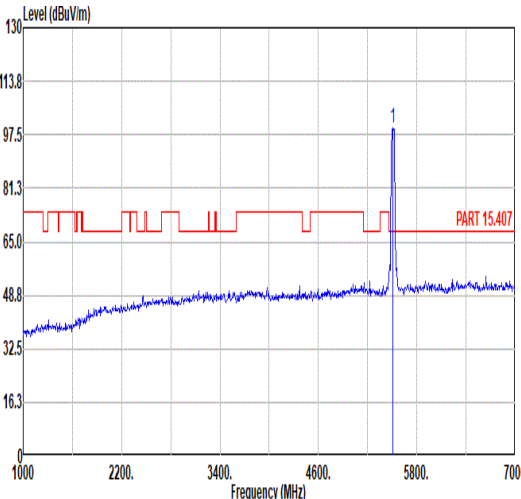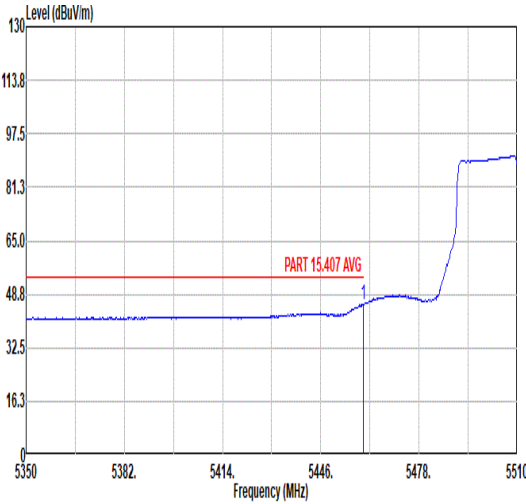
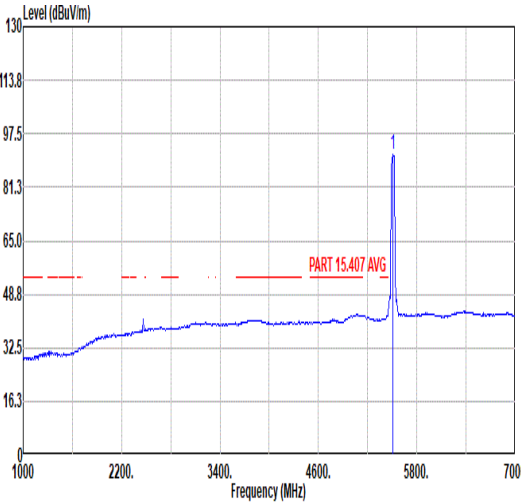


		15																																																																																																												
Mode		Band Edge - L																																																																																																												
		U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																																												
ANT		1																																																																																																												
Pol.		Vertical					Fundamental																																																																																																							
Peak																																																																																																														
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5459.60	56.13	74.00	-17.87	42.89	35.20	10.30	32.26	103	209	PEAK	2	5466.96	57.69	68.30	-10.61	44.45	35.20	10.30	32.26	103	209	PEAK			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5510.00	99.61	-----	86.37	35.21	10.30	32.27	103	209		PEAK				
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5459.60	56.13	74.00	-17.87	42.89	35.20	10.30	32.26	103	209	PEAK																																																																																																			
2	5466.96	57.69	68.30	-10.61	44.45	35.20	10.30	32.26	103	209	PEAK																																																																																																			
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5510.00	99.61	-----	86.37	35.21	10.30	32.27	103	209		PEAK																																																																																																			
Avg																																																																																																														
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5459.76	45.62	54.00	-8.38	32.38	35.20	10.30	32.26	103	209	AVERAGE			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	5510.00	91.03	-----	77.79	35.21	10.30	32.27	103	209		AVERAGE																
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5459.76	45.62	54.00	-8.38	32.38	35.20	10.30	32.26	103	209	AVERAGE																																																																																																			
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5510.00	91.03	-----	77.79	35.21	10.30	32.27	103	209		AVERAGE																																																																																																			



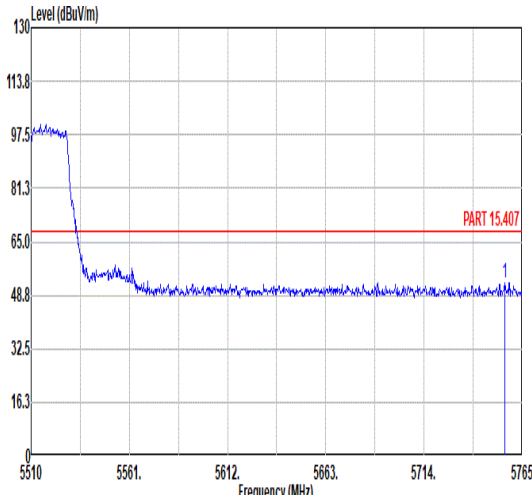


Mode	15																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5755.82</td><td>52.47</td><td>68.30</td><td>-15.83</td><td>38.80</td><td>35.63</td><td>10.39</td><td>32.35</td><td>103</td><td>209</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5755.82	52.47	68.30	-15.83	38.80	35.63	10.39	32.35	103	209	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5755.82	52.47	68.30	-15.83	38.80	35.63	10.39	32.35	103	209	PEAK																															

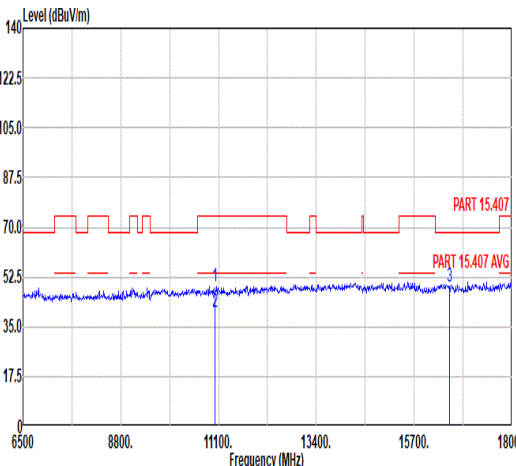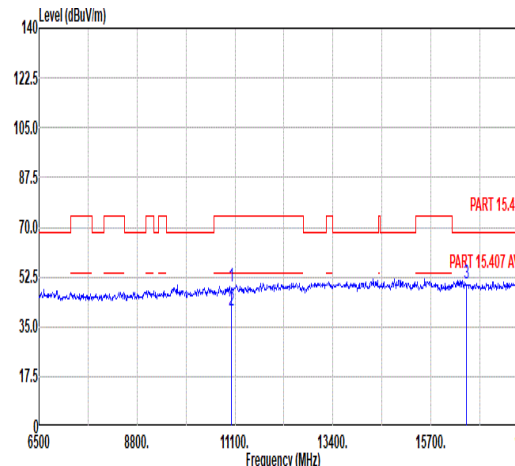


Mode	15																																																																																	
	Harmonic																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal						Vertical																																																																											
Peak Avg																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11020.00</td><td>49.00</td><td>74.00</td><td>-25.00</td><td>56.11</td><td>37.92</td><td>13.63</td><td>58.66</td><td>100</td><td>211</td><td>Peak</td><td></td></tr><tr><td>2 11020.00</td><td>39.93</td><td>54.00</td><td>-14.07</td><td>47.04</td><td>37.92</td><td>13.63</td><td>58.66</td><td>100</td><td>211</td><td>Average</td><td></td></tr><tr><td>3 16530.00</td><td>49.14</td><td>68.30</td><td>-19.16</td><td>49.50</td><td>41.37</td><td>16.45</td><td>58.18</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 11020.00	49.00	74.00	-25.00	56.11	37.92	13.63	58.66	100	211	Peak		2 11020.00	39.93	54.00	-14.07	47.04	37.92	13.63	58.66	100	211	Average		3 16530.00	49.14	68.30	-19.16	49.50	41.37	16.45	58.18	--	--	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11020.00	49.00	74.00	-25.00	56.11	37.92	13.63	58.66	100	211	Peak																																																																								
2 11020.00	39.93	54.00	-14.07	47.04	37.92	13.63	58.66	100	211	Average																																																																								
3 16530.00	49.14	68.30	-19.16	49.50	41.37	16.45	58.18	--	--	Peak																																																																								
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11020.00</td><td>49.13</td><td>74.00</td><td>-24.87</td><td>56.24</td><td>37.92</td><td>13.63</td><td>58.66</td><td>136</td><td>245</td><td>Peak</td><td></td></tr><tr><td>2 11020.00</td><td>40.72</td><td>54.00</td><td>-13.28</td><td>47.83</td><td>37.92</td><td>13.63</td><td>58.66</td><td>136</td><td>245</td><td>Average</td><td></td></tr><tr><td>3 16530.00</td><td>50.06</td><td>68.30</td><td>-18.24</td><td>50.42</td><td>41.37</td><td>16.45</td><td>58.18</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 11020.00	49.13	74.00	-24.87	56.24	37.92	13.63	58.66	136	245	Peak		2 11020.00	40.72	54.00	-13.28	47.83	37.92	13.63	58.66	136	245	Average		3 16530.00	50.06	68.30	-18.24	50.42	41.37	16.45	58.18	--	--	Peak		
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11020.00	49.13	74.00	-24.87	56.24	37.92	13.63	58.66	136	245	Peak																																																																								
2 11020.00	40.72	54.00	-13.28	47.83	37.92	13.63	58.66	136	245	Average																																																																								
3 16530.00	50.06	68.30	-18.24	50.42	41.37	16.45	58.18	--	--	Peak																																																																								

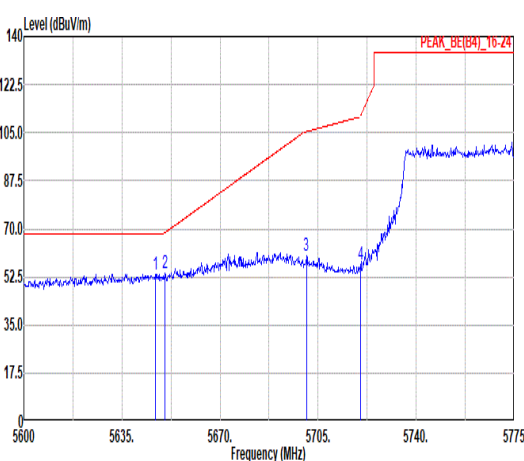
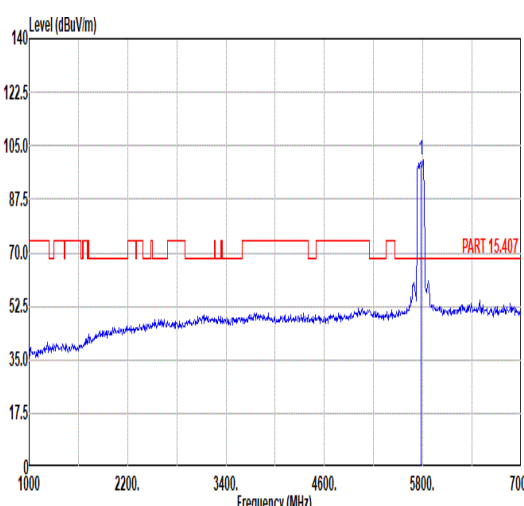
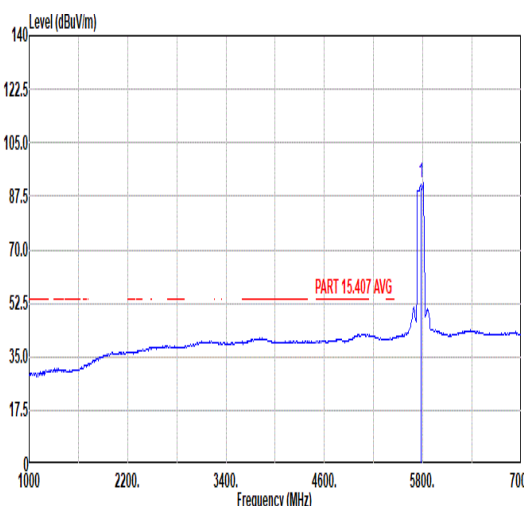


Mode	16																																																																																																																													
	Band Edge - L																																																																																																																													
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																																							
Peak																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5646.90</td><td>53.60</td><td>68.30</td><td>-14.70</td><td>40.19</td><td>35.39</td><td>10.33</td><td>32.31</td><td>100</td><td>236</td><td>PEAK</td></tr><tr><td>2</td><td>5650.40</td><td>53.91</td><td>68.60</td><td>-14.69</td><td>40.49</td><td>35.40</td><td>10.33</td><td>32.31</td><td>100</td><td>236</td><td>PEAK</td></tr><tr><td>3</td><td>5700.80</td><td>60.40</td><td>105.42</td><td>-45.02</td><td>46.87</td><td>35.52</td><td>10.36</td><td>32.35</td><td>100</td><td>236</td><td>PEAK</td></tr><tr><td>4</td><td>5720.05</td><td>57.29</td><td>110.91</td><td>-53.62</td><td>43.72</td><td>35.56</td><td>10.37</td><td>32.36</td><td>100</td><td>236</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5646.90	53.60	68.30	-14.70	40.19	35.39	10.33	32.31	100	236	PEAK	2	5650.40	53.91	68.60	-14.69	40.49	35.40	10.33	32.31	100	236	PEAK	3	5700.80	60.40	105.42	-45.02	46.87	35.52	10.36	32.35	100	236	PEAK	4	5720.05	57.29	110.91	-53.62	43.72	35.56	10.37	32.36	100	236	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5775.00</td><td>100.47</td><td>-----</td><td>-----</td><td>86.66</td><td>35.74</td><td>10.42</td><td>32.35</td><td>100</td><td>236</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	100.47	-----	-----	86.66	35.74	10.42	32.35	100	236
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	5646.90	53.60	68.30	-14.70	40.19	35.39	10.33	32.31	100	236	PEAK																																																																																																																			
2	5650.40	53.91	68.60	-14.69	40.49	35.40	10.33	32.31	100	236	PEAK																																																																																																																			
3	5700.80	60.40	105.42	-45.02	46.87	35.52	10.36	32.35	100	236	PEAK																																																																																																																			
4	5720.05	57.29	110.91	-53.62	43.72	35.56	10.37	32.36	100	236	PEAK																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	5775.00	100.47	-----	-----	86.66	35.74	10.42	32.35	100	236	PEAK																																																																																																																			
Avg	Blank																																																																																																																													
							<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5775.00</td><td>91.91</td><td>-----</td><td>-----</td><td>78.08</td><td>35.75</td><td>10.43</td><td>32.35</td><td>100</td><td>236</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	91.91	-----	-----	78.08	35.75	10.43	32.35	100	236	AVERAGE																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	5775.00	91.91	-----	-----	78.08	35.75	10.43	32.35	100	236	AVERAGE																																																																																																																			

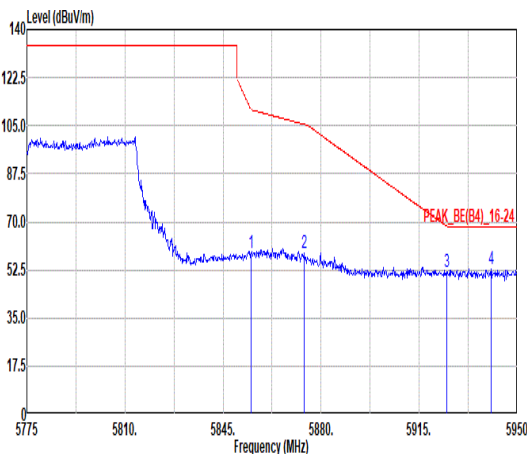


Mode	16																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5854.98</td><td>58.41</td><td>110.86</td><td>-52.45</td><td></td><td>44.47</td><td>35.88</td><td>10.46</td><td>32.40</td><td>100</td><td>236</td><td>PEAK</td></tr><tr><td>2</td><td>5874.05</td><td>58.62</td><td>105.47</td><td>-46.85</td><td></td><td>44.61</td><td>35.94</td><td>10.48</td><td>32.41</td><td>100</td><td>236</td><td>PEAK</td></tr><tr><td>3</td><td>5924.98</td><td>51.92</td><td>68.22</td><td>-16.30</td><td></td><td>37.82</td><td>36.03</td><td>10.53</td><td>32.46</td><td>100</td><td>236</td><td>PEAK</td></tr><tr><td>4</td><td>5940.55</td><td>53.07</td><td>68.30</td><td>-15.23</td><td></td><td>38.97</td><td>36.04</td><td>10.54</td><td>32.48</td><td>100</td><td>236</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg		1	5854.98	58.41	110.86	-52.45		44.47	35.88	10.46	32.40	100	236	PEAK	2	5874.05	58.62	105.47	-46.85		44.61	35.94	10.48	32.41	100	236	PEAK	3	5924.98	51.92	68.22	-16.30		37.82	36.03	10.53	32.46	100	236	PEAK	4	5940.55	53.07	68.30	-15.23		38.97	36.04	10.54	32.48	100	236	PEAK	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.98	58.41	110.86	-52.45		44.47	35.88	10.46	32.40	100	236	PEAK																																																																				
2	5874.05	58.62	105.47	-46.85		44.61	35.94	10.48	32.41	100	236	PEAK																																																																				
3	5924.98	51.92	68.22	-16.30		37.82	36.03	10.53	32.46	100	236	PEAK																																																																				
4	5940.55	53.07	68.30	-15.23		38.97	36.04	10.54	32.48	100	236	PEAK																																																																				

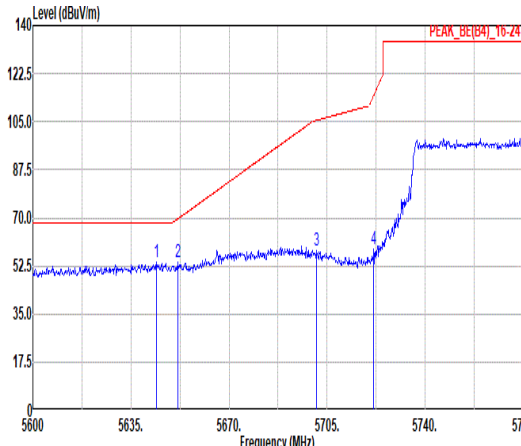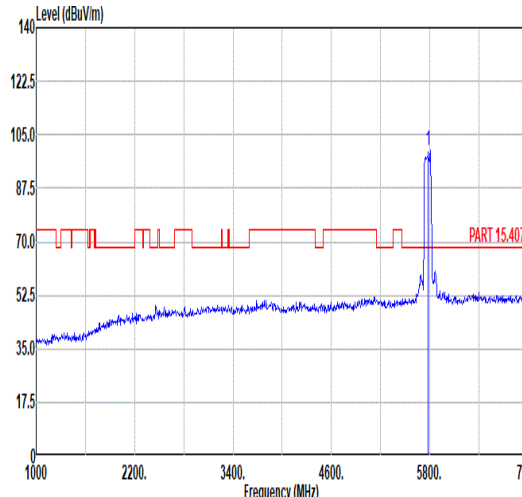
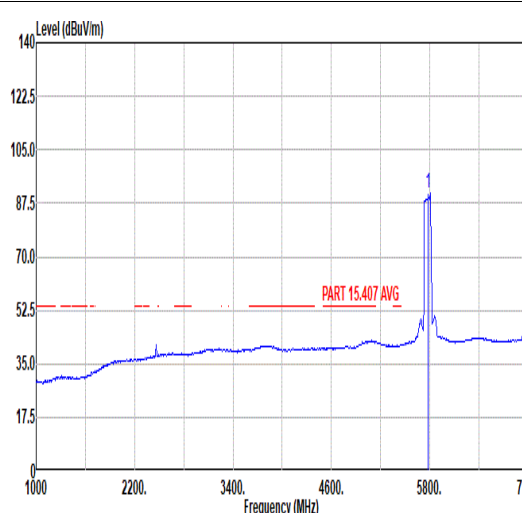


Mode	16																																																																																																																					
	Band Edge - L																																																																																																																					
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																					
ANT	1																																																																																																																					
Pol.	Vertical						Fundamental																																																																																																															
Peak																																																																																																																						
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5644.10	53.86	68.30	-14.44	40.45	35.39	10.33	32.31	100	193	PEAK	2	5651.63	54.11	69.50	-15.39	40.69	35.40	10.33	32.31	100	193	PEAK	3	5701.33	57.85	105.57	-47.72	44.32	35.52	10.36	32.35	100	193	PEAK	4	5721.63	58.83	114.51	-55.68	45.26	35.56	10.37	32.36	100	193	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>100.10</td><td>-----</td><td>-----</td><td>86.27</td><td>35.75</td><td>10.43</td><td>32.35</td><td>100</td><td>193</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5775.00	100.10	-----	-----	86.27	35.75	10.43	32.35	100	193
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																														
1	5644.10	53.86	68.30	-14.44	40.45	35.39	10.33	32.31	100	193	PEAK																																																																																																											
2	5651.63	54.11	69.50	-15.39	40.69	35.40	10.33	32.31	100	193	PEAK																																																																																																											
3	5701.33	57.85	105.57	-47.72	44.32	35.52	10.36	32.35	100	193	PEAK																																																																																																											
4	5721.63	58.83	114.51	-55.68	45.26	35.56	10.37	32.36	100	193	PEAK																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																														
1	5775.00	100.10	-----	-----	86.27	35.75	10.43	32.35	100	193	PEAK																																																																																																											
Avg	Blank																																																																																																																					
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>90.89</td><td>-----</td><td>-----</td><td>77.06</td><td>35.75</td><td>10.43</td><td>32.35</td><td>100</td><td>193</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5775.00	90.89	-----	-----	77.06	35.75	10.43	32.35	100	193	AVERAGE																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																														
1	5775.00	90.89	-----	-----	77.06	35.75	10.43	32.35	100	193	AVERAGE																																																																																																											


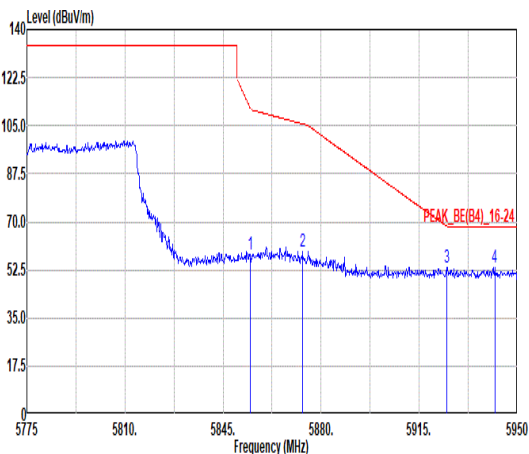


Mode	16																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Level</th><th>Cable Loss</th><th>Preamp Loss</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dBm</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5854.80</td><td>57.94</td><td>111.26</td><td>-53.32</td><td>44.00</td><td>35.88</td><td>10.46</td><td>32.40</td><td>100</td><td>193</td><td>PEAK</td></tr><tr><td>2</td><td>5873.35</td><td>59.40</td><td>105.66</td><td>-46.26</td><td>45.40</td><td>35.93</td><td>10.48</td><td>32.41</td><td>100</td><td>193</td><td>PEAK</td></tr><tr><td>3</td><td>5924.98</td><td>53.40</td><td>68.22</td><td>-14.82</td><td>39.30</td><td>36.03</td><td>10.53</td><td>32.46</td><td>100</td><td>193</td><td>PEAK</td></tr><tr><td>4</td><td>5941.95</td><td>53.62</td><td>68.30</td><td>-14.68</td><td>39.51</td><td>36.05</td><td>10.54</td><td>32.48</td><td>100</td><td>193</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dBm	dB	dB	cm	deg		1	5854.80	57.94	111.26	-53.32	44.00	35.88	10.46	32.40	100	193	PEAK	2	5873.35	59.40	105.66	-46.26	45.40	35.93	10.48	32.41	100	193	PEAK	3	5924.98	53.40	68.22	-14.82	39.30	36.03	10.53	32.46	100	193	PEAK	4	5941.95	53.62	68.30	-14.68	39.51	36.05	10.54	32.48	100	193	PEAK	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dBm	dB	dB	cm	deg																																																																
1	5854.80	57.94	111.26	-53.32	44.00	35.88	10.46	32.40	100	193	PEAK																																																															
2	5873.35	59.40	105.66	-46.26	45.40	35.93	10.48	32.41	100	193	PEAK																																																															
3	5924.98	53.40	68.22	-14.82	39.30	36.03	10.53	32.46	100	193	PEAK																																																															
4	5941.95	53.62	68.30	-14.68	39.51	36.05	10.54	32.48	100	193	PEAK																																																															

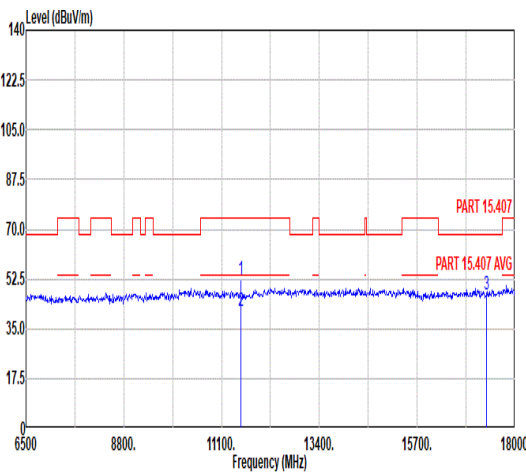
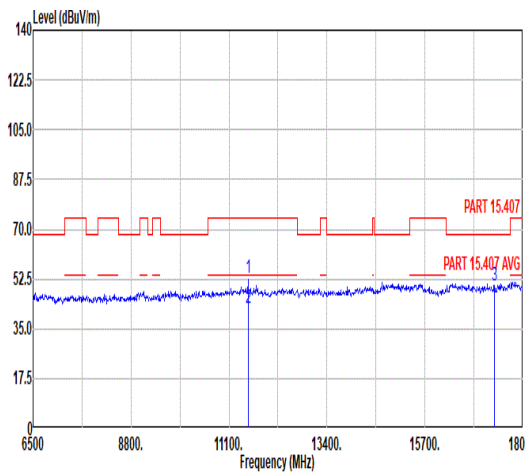


Mode	16																																																																																																																																		
	Harmonic																																																																																																																																		
	U-NII-3_5.725-5.85_802.11ax HE80_CH155_Full RU_5775MHz																																																																																																																																		
ANT	1																																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																																												
Peak Avg																																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11550.00</td><td>52.14</td><td>74.00</td><td>-21.86</td><td>57.59</td><td>38.44</td><td>13.95</td><td>57.84</td><td>100</td><td>325</td><td>Peak</td></tr><tr><td>2 11550.00</td><td>41.14</td><td>54.00</td><td>-12.86</td><td>46.59</td><td>38.44</td><td>13.95</td><td>57.84</td><td>100</td><td>325</td><td>Average</td></tr><tr><td>3 17325.00</td><td>46.79</td><td>68.30</td><td>-21.51</td><td>45.51</td><td>42.41</td><td>16.86</td><td>57.99</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11550.00	52.14	74.00	-21.86	57.59	38.44	13.95	57.84	100	325	Peak	2 11550.00	41.14	54.00	-12.86	46.59	38.44	13.95	57.84	100	325	Average	3 17325.00	46.79	68.30	-21.51	45.51	42.41	16.86	57.99	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 11550.00</td><td>52.81</td><td>74.00</td><td>-21.19</td><td>58.26</td><td>38.44</td><td>13.95</td><td>57.84</td><td>123</td><td>50</td><td>Peak</td></tr><tr><td>2 11550.00</td><td>42.47</td><td>54.00</td><td>-11.53</td><td>47.92</td><td>38.44</td><td>13.95</td><td>57.84</td><td>123</td><td>50</td><td>Average</td></tr><tr><td>3 17325.00</td><td>50.18</td><td>68.30</td><td>-18.12</td><td>48.90</td><td>42.41</td><td>16.86</td><td>57.99</td><td>--</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11550.00	52.81	74.00	-21.19	58.26	38.44	13.95	57.84	123	50	Peak	2 11550.00	42.47	54.00	-11.53	47.92	38.44	13.95	57.84	123	50	Average	3 17325.00	50.18	68.30	-18.12	48.90	42.41	16.86	57.99	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1 11550.00	52.14	74.00	-21.86	57.59	38.44	13.95	57.84	100	325	Peak																																																																																																																									
2 11550.00	41.14	54.00	-12.86	46.59	38.44	13.95	57.84	100	325	Average																																																																																																																									
3 17325.00	46.79	68.30	-21.51	45.51	42.41	16.86	57.99	--	--	Peak																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1 11550.00	52.81	74.00	-21.19	58.26	38.44	13.95	57.84	123	50	Peak																																																																																																																									
2 11550.00	42.47	54.00	-11.53	47.92	38.44	13.95	57.84	123	50	Average																																																																																																																									
3 17325.00	50.18	68.30	-18.12	48.90	42.41	16.86	57.99	--	--	Peak																																																																																																																									

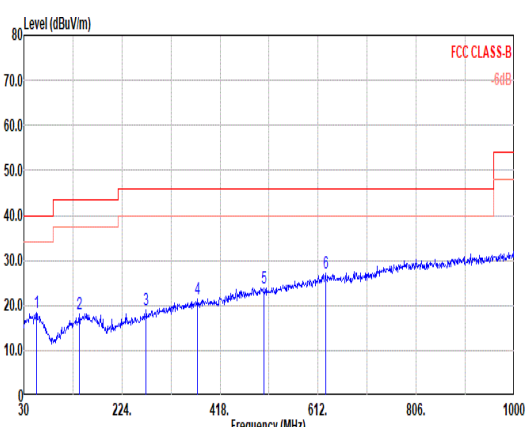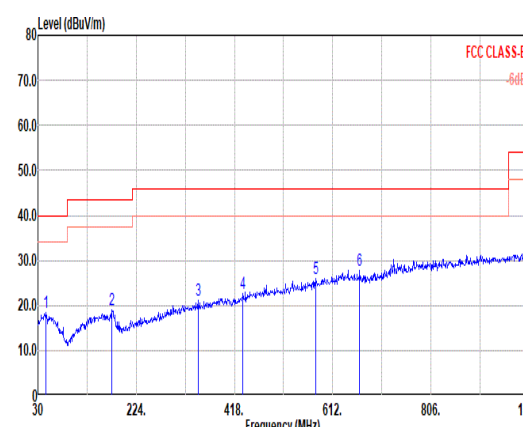

Mode	17																																																																																																																																																																																														
	LF																																																																																																																																																																																														
	U-NII-1_5.15-5.25_802.11a_LF_CH36_5180MHz																																																																																																																																																																																														
ANT	1																																																																																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																																																																																								
Peak Avg																																																																																																																																																																																															
	<table><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>55.22</td><td>18.29</td><td>40.00</td><td>-21.71</td><td>33.16</td><td>19.37</td><td>0.76</td><td>35.00</td><td>-- Peak</td></tr><tr><td>2</td><td>139.61</td><td>18.16</td><td>43.50</td><td>-25.34</td><td>33.70</td><td>18.12</td><td>1.24</td><td>34.90</td><td>-- Peak</td></tr><tr><td>3</td><td>271.53</td><td>19.10</td><td>46.00</td><td>-26.90</td><td>33.91</td><td>18.24</td><td>1.71</td><td>34.76</td><td>-- Peak</td></tr><tr><td>4</td><td>373.38</td><td>21.36</td><td>46.00</td><td>-24.64</td><td>33.26</td><td>20.78</td><td>2.02</td><td>34.70</td><td>-- Peak</td></tr><tr><td>5</td><td>505.30</td><td>23.98</td><td>46.00</td><td>-22.02</td><td>32.67</td><td>23.44</td><td>2.37</td><td>34.50</td><td>-- Peak</td></tr><tr><td>6</td><td>626.55</td><td>27.23</td><td>46.00</td><td>-18.77</td><td>32.80</td><td>26.17</td><td>2.66</td><td>34.40</td><td>-- Peak</td></tr></table>							Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	55.22	18.29	40.00	-21.71	33.16	19.37	0.76	35.00	-- Peak	2	139.61	18.16	43.50	-25.34	33.70	18.12	1.24	34.90	-- Peak	3	271.53	19.10	46.00	-26.90	33.91	18.24	1.71	34.76	-- Peak	4	373.38	21.36	46.00	-24.64	33.26	20.78	2.02	34.70	-- Peak	5	505.30	23.98	46.00	-22.02	32.67	23.44	2.37	34.50	-- Peak	6	626.55	27.23	46.00	-18.77	32.80	26.17	2.66	34.40	-- Peak	<table><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>45.52</td><td>18.54</td><td>40.00</td><td>-21.46</td><td>33.11</td><td>19.61</td><td>0.68</td><td>34.86</td><td>-- Peak</td></tr><tr><td>2</td><td>175.50</td><td>19.04</td><td>43.50</td><td>-24.46</td><td>35.08</td><td>17.46</td><td>1.40</td><td>34.90</td><td>-- Peak</td></tr><tr><td>3</td><td>346.22</td><td>21.09</td><td>46.00</td><td>-24.91</td><td>33.72</td><td>20.14</td><td>1.93</td><td>34.70</td><td>-- Peak</td></tr><tr><td>4</td><td>434.49</td><td>22.57</td><td>46.00</td><td>-23.43</td><td>32.66</td><td>22.34</td><td>2.20</td><td>34.63</td><td>-- Peak</td></tr><tr><td>5</td><td>578.05</td><td>25.96</td><td>46.00</td><td>-20.04</td><td>32.60</td><td>25.25</td><td>2.56</td><td>34.45</td><td>-- Peak</td></tr><tr><td>6</td><td>665.35</td><td>27.77</td><td>46.00</td><td>-18.23</td><td>32.93</td><td>26.51</td><td>2.73</td><td>34.40</td><td>-- Peak</td></tr></table>							Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	45.52	18.54	40.00	-21.46	33.11	19.61	0.68	34.86	-- Peak	2	175.50	19.04	43.50	-24.46	35.08	17.46	1.40	34.90	-- Peak	3	346.22	21.09	46.00	-24.91	33.72	20.14	1.93	34.70	-- Peak	4	434.49	22.57	46.00	-23.43	32.66	22.34	2.20	34.63	-- Peak	5	578.05	25.96	46.00	-20.04	32.60	25.25	2.56	34.45	-- Peak	6	665.35	27.77	46.00	-18.23	32.93	26.51	2.73	34.40
	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																						
	MHz	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																																							
1	55.22	18.29	40.00	-21.71	33.16	19.37	0.76	35.00	-- Peak																																																																																																																																																																																						
2	139.61	18.16	43.50	-25.34	33.70	18.12	1.24	34.90	-- Peak																																																																																																																																																																																						
3	271.53	19.10	46.00	-26.90	33.91	18.24	1.71	34.76	-- Peak																																																																																																																																																																																						
4	373.38	21.36	46.00	-24.64	33.26	20.78	2.02	34.70	-- Peak																																																																																																																																																																																						
5	505.30	23.98	46.00	-22.02	32.67	23.44	2.37	34.50	-- Peak																																																																																																																																																																																						
6	626.55	27.23	46.00	-18.77	32.80	26.17	2.66	34.40	-- Peak																																																																																																																																																																																						
	Freq	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																						
	MHz	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																																																																																							
1	45.52	18.54	40.00	-21.46	33.11	19.61	0.68	34.86	-- Peak																																																																																																																																																																																						
2	175.50	19.04	43.50	-24.46	35.08	17.46	1.40	34.90	-- Peak																																																																																																																																																																																						
3	346.22	21.09	46.00	-24.91	33.72	20.14	1.93	34.70	-- Peak																																																																																																																																																																																						
4	434.49	22.57	46.00	-23.43	32.66	22.34	2.20	34.63	-- Peak																																																																																																																																																																																						
5	578.05	25.96	46.00	-20.04	32.60	25.25	2.56	34.45	-- Peak																																																																																																																																																																																						
6	665.35	27.77	46.00	-18.23	32.93	26.51	2.73	34.40	-- Peak																																																																																																																																																																																						

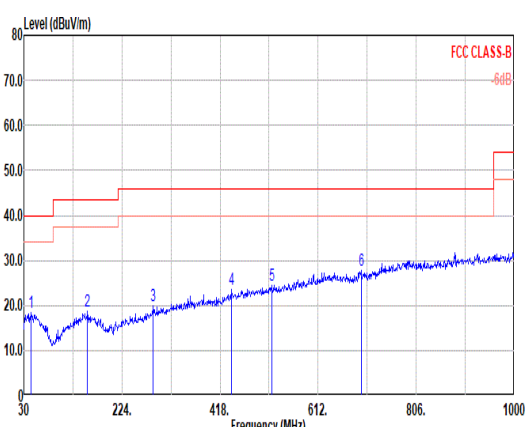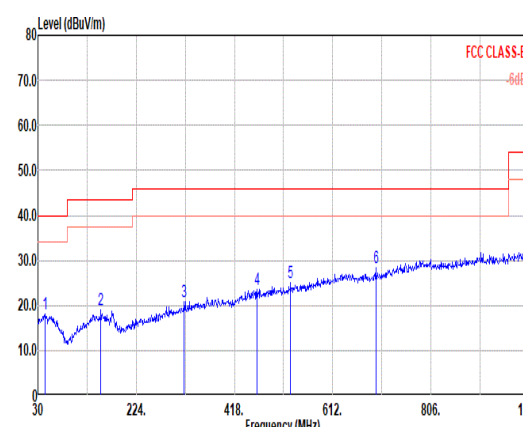


Mode	18																																																																																																																																																																																																																															
	LF																																																																																																																																																																																																																															
	U-NII-3_5.725-5.85_802.11ax HE80_LF_CH155_Full RU_5775MHz																																																																																																																																																																																																																															
ANT	1																																																																																																																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																																																																																																																									
Peak Avg																																																																																																																																																																																																																																
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>44.55</td><td>18.34</td><td>40.00</td><td>-21.66</td><td>32.88</td><td>19.61</td><td>0.67</td><td>34.82</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>156.10</td><td>18.62</td><td>43.50</td><td>-24.88</td><td>33.59</td><td>18.63</td><td>1.30</td><td>34.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>286.08</td><td>20.04</td><td>46.00</td><td>-25.96</td><td>34.32</td><td>18.69</td><td>1.76</td><td>34.73</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>440.31</td><td>23.41</td><td>46.00</td><td>-22.59</td><td>33.33</td><td>22.49</td><td>2.21</td><td>34.62</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>519.85</td><td>24.57</td><td>46.00</td><td>-21.43</td><td>32.97</td><td>23.69</td><td>2.41</td><td>34.50</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>697.36</td><td>27.64</td><td>46.00</td><td>-18.36</td><td>32.19</td><td>27.05</td><td>2.80</td><td>34.40</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	44.55	18.34	40.00	-21.66	32.88	19.61	0.67	34.82	--	--	Peak	2	156.10	18.62	43.50	-24.88	33.59	18.63	1.30	34.90	--	--	Peak	3	286.08	20.04	46.00	-25.96	34.32	18.69	1.76	34.73	--	--	Peak	4	440.31	23.41	46.00	-22.59	33.33	22.49	2.21	34.62	--	--	Peak	5	519.85	24.57	46.00	-21.43	32.97	23.69	2.41	34.50	--	--	Peak	6	697.36	27.64	46.00	-18.36	32.19	27.05	2.80	34.40	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>44.55</td><td>18.07</td><td>40.00</td><td>-21.93</td><td>32.61</td><td>19.61</td><td>0.67</td><td>34.82</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>154.16</td><td>19.01</td><td>43.50</td><td>-24.49</td><td>33.86</td><td>18.75</td><td>1.30</td><td>34.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>319.06</td><td>20.92</td><td>46.00</td><td>-25.08</td><td>34.23</td><td>19.54</td><td>1.85</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>462.62</td><td>23.58</td><td>46.00</td><td>-22.42</td><td>32.98</td><td>22.90</td><td>2.27</td><td>34.57</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>528.58</td><td>24.94</td><td>46.00</td><td>-21.06</td><td>33.18</td><td>23.83</td><td>2.43</td><td>34.50</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>697.36</td><td>28.41</td><td>46.00</td><td>-17.59</td><td>32.96</td><td>27.05</td><td>2.80</td><td>34.40</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	44.55	18.07	40.00	-21.93	32.61	19.61	0.67	34.82	--	--	Peak	2	154.16	19.01	43.50	-24.49	33.86	18.75	1.30	34.90	--	--	Peak	3	319.06	20.92	46.00	-25.08	34.23	19.54	1.85	34.70	--	--	Peak	4	462.62	23.58	46.00	-22.42	32.98	22.90	2.27	34.57	--	--	Peak	5	528.58	24.94	46.00	-21.06	33.18	23.83	2.43	34.50	--	--	Peak	6	697.36	28.41	46.00	-17.59	32.96	27.05	2.80	34.40	--	--
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																							
1	44.55	18.34	40.00	-21.66	32.88	19.61	0.67	34.82	--	--	Peak																																																																																																																																																																																																																					
2	156.10	18.62	43.50	-24.88	33.59	18.63	1.30	34.90	--	--	Peak																																																																																																																																																																																																																					
3	286.08	20.04	46.00	-25.96	34.32	18.69	1.76	34.73	--	--	Peak																																																																																																																																																																																																																					
4	440.31	23.41	46.00	-22.59	33.33	22.49	2.21	34.62	--	--	Peak																																																																																																																																																																																																																					
5	519.85	24.57	46.00	-21.43	32.97	23.69	2.41	34.50	--	--	Peak																																																																																																																																																																																																																					
6	697.36	27.64	46.00	-18.36	32.19	27.05	2.80	34.40	--	--	Peak																																																																																																																																																																																																																					
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																							
1	44.55	18.07	40.00	-21.93	32.61	19.61	0.67	34.82	--	--	Peak																																																																																																																																																																																																																					
2	154.16	19.01	43.50	-24.49	33.86	18.75	1.30	34.90	--	--	Peak																																																																																																																																																																																																																					
3	319.06	20.92	46.00	-25.08	34.23	19.54	1.85	34.70	--	--	Peak																																																																																																																																																																																																																					
4	462.62	23.58	46.00	-22.42	32.98	22.90	2.27	34.57	--	--	Peak																																																																																																																																																																																																																					
5	528.58	24.94	46.00	-21.06	33.18	23.83	2.43	34.50	--	--	Peak																																																																																																																																																																																																																					
6	697.36	28.41	46.00	-17.59	32.96	27.05	2.80	34.40	--	--	Peak																																																																																																																																																																																																																					


Appendix B. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.30	-	-	10Hz
802.11ax HE40	100	-	-	10Hz
802.11ax HE80	100	-	-	10Hz

802.11a

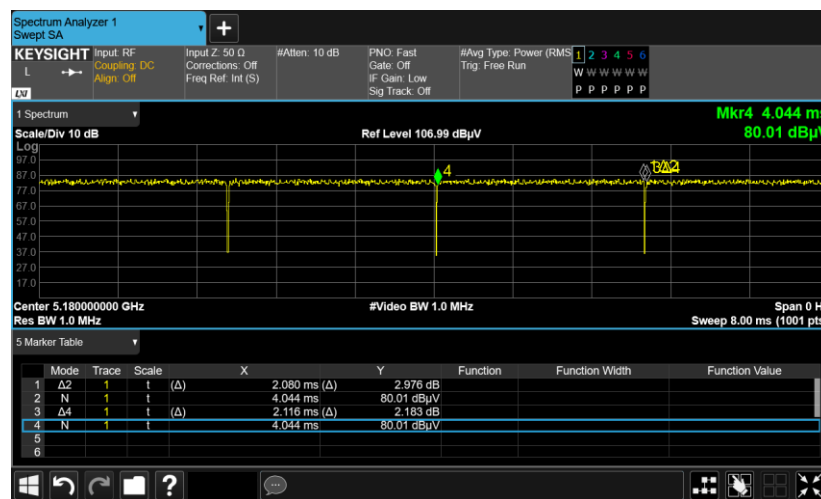

802.11ax HE40

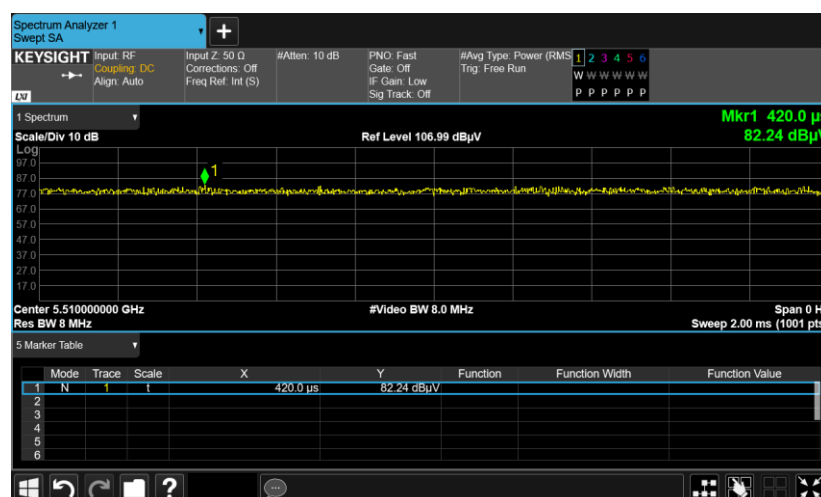



802.11ax HE80

