



FCC RF Test Report

APPLICANT : Luxottica Group S.p.A.
EQUIPMENT : AI GLASSES
BRAND NAME : Ray-Ban Meta or Ray-Ban
MODEL NAME : RW4011, RW4011V, RW4015, RW4015V, RW4016, RW4016V
FCC ID : 2AYOA-4010
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : 15E 6 GHz Low Power Indoor Client (6XD)
TEST DATE(S) : Apr. 14, 2026 ~ May 20, 2026

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



Table of Contents

1	General Description	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test	5
1.4	Product Specification of Equipment Under Test	6
1.5	Modification of EUT	6
1.6	Testing Location	6
1.7	Test Software	6
1.8	Applicable Standards	7
2	Test Configuration of Equipment Under Test	8
2.1	Carrier Frequency and Channel	8
2.2	Test Mode	10
2.3	Connection Diagram of Test System	10
2.4	EUT Operation Test Setup	10
3	Test Result	11
3.1	Unwanted Emissions Measurement	13
4	List of Measuring Equipment	17
5	Measurement Uncertainty	18
	Appendix A. Radiated Spurious Emission	
	Appendix B. Radiated Spurious Emission Plots	
	Appendix C. Duty Cycle Plots	
	Appendix D. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR5O1706-01E	01	Initial issue of report	Apr. 30, 2026
FR5O1706-01E	02	1. Added verified conducted power 2. Added descriptions of samples 1234 and the worst LF mode to the table This report is an updated version, replacing the report issued on Apr. 30, 2026	May 20, 2026



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(8)	Maximum Conducted Output Power	Reporting only	-
3.2	15.407(b)	Unwanted Emissions	Pass	Under limit 8.95 dB at 17865.00 MHz

Note: This is a variant report. The change note could be referred to Product Equality Declaration which is exhibit separately. According to the change, only the related test cases were verified from original report (Sporton Report Number FR5O1534F).

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Luxottica Group S.p.A.

Piazzale Cadorna 3 20123 Milan, Italy

1.2 Manufacturer

Luxottica Group S.p.A.

Piazzale Cadorna 3 20123 Milan, Italy

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	AI GLASSES
Brand Name	Ray-Ban Meta or Ray-Ban
Model Name	RW4011, RW4011V, RW4015, RW4015V, RW4016, RW4016V
FCC ID	2AYOA-4010
SN Code	Conducted/Radiation:4237X05J1L001W/4337W06J21001G/ 4337V16J22000P/4337T05J2Y0009
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four samples of EUT. The manufacturer declares that all the equipment share the same radio characteristics and Software/Firmware, the only differences between each of them are color of frames, lenses, and sizes.

Sample	Model Name
Sample 1	RW4016
Sample 1	RW4016V
Sample 2	RW4015
Sample 2	RW4015V
Sample 3	RW4011
Sample 3	RW4011V
Sample 4	RW4011
Sample 4	RW4011V

3. Differences between model numbers RW4011, RW4015, RW4016 and RW4011V, RW4015V, RW4016V: The glasses are 100% the same between V models and the others without V at the end of model code. Only difference is the eyeglasses lenses that will be mounted on the frame.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	U-NII-5: 5925 MHz ~ 6425 MHz U-NII-6: 6425 MHz ~ 6525 MHz U-NII-7: 6525 MHz ~ 6875 MHz U-NII-8: 6875 MHz ~ 7125 MHz
Type of Modulation	802.11a: OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2020+Cor.1-2023

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y/Z plane) were recorded in this report.

2.1 Carrier Frequency and Channel

<U-NII-5, 6, 7, 8>

BW 20M	Channel	-	1	5	9	13	17	21	25	29
	Freq. (MHz)	-	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3			11		19		27	
	Freq. (MHz)	5965			6005		6045		6085	
BW 80M	Channel	7					23			
	Freq. (MHz)	5985					6065			
BW 160M	Channel	15								
	Freq. (MHz)	6025								

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							

BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							



BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							

BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							

BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							

BW 20M	Channel	225	229	
	Freq. (MHz)	7075	7095	
BW 40M	Channel	227		
	Freq. (MHz)	7085		




2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps

2.3 Connection Diagram of Test System

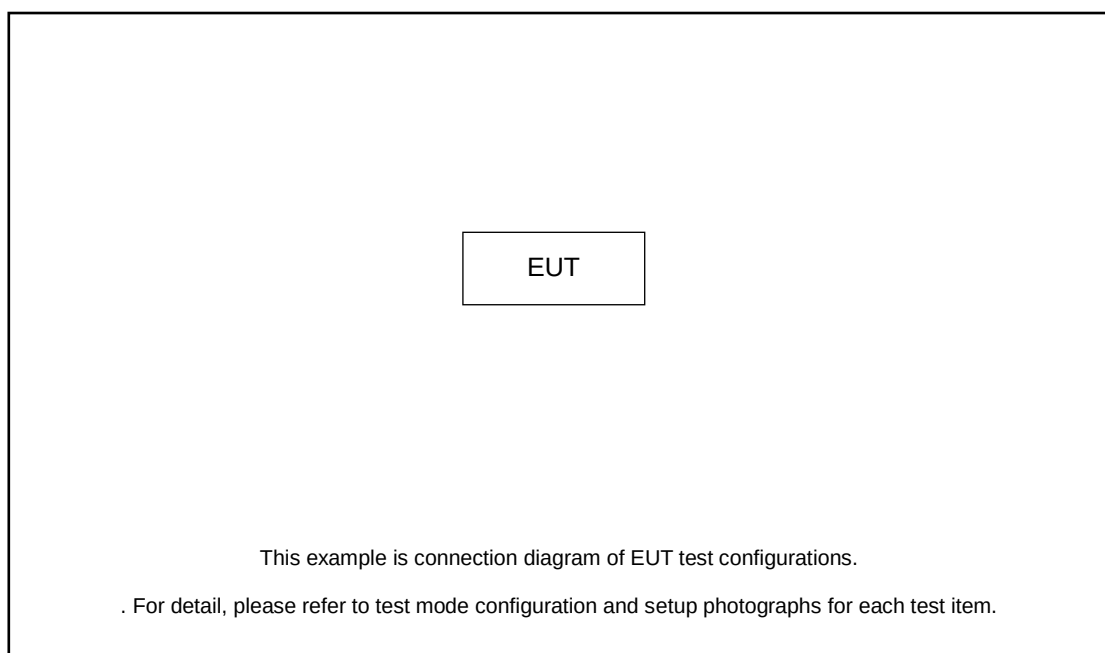

2.4 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT TX Tool) was provided and enabled to make EUT continuously transmit.

3 Test Result

3.1 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

3.1.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

(a)(7) For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

(a)(5) For an indoor access point operating in the 5.925-7.125 GHz band, the maximum e.i.r.p. over the frequency band of operation must not exceed 30dBm.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.


3.1.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.1.4 Test Setup

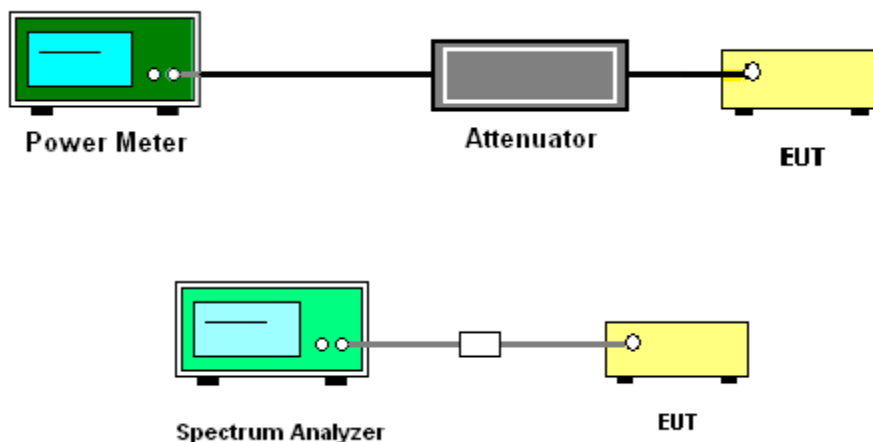

3.1.5 Test Result of Fundamental Maximum EIRP

U-NII-5 single antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting
AX160	MCS0	1	15	6025	Full	15.24	1.74	16.98	24.00	Pass	15

U-NII-6 single antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting
11a	6Mbps	1	105	6475	Full	7.73	0.26	7.99	24.00	Pass	7
AX20	MCS0	1	97	6435	Full	8.21	0.26	8.47	24.00	Pass	7
AX40	MCS0	1	99	6445	Full	11.31	0.26	11.57	24.00	Pass	10.5

U-NII-6 single antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Power Setting
AX80	MCS0	1	119	6545	Full	14.25	0.68	14.93	24.00	Pass	13.5

3.2 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.2.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.2
- 7 (Peak)	88.2

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.




3.2.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.2.4 Test Setup


For radiated emissions below 30MHz

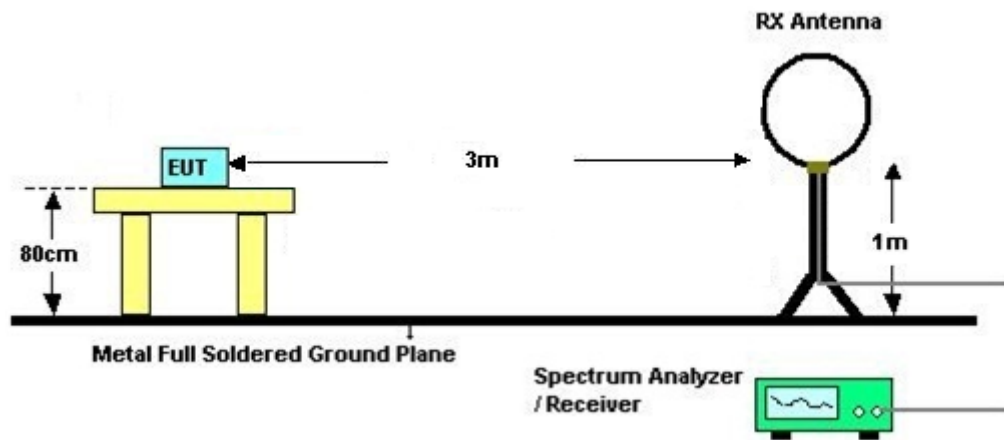

For radiated emissions from 30MHz to 1GHz

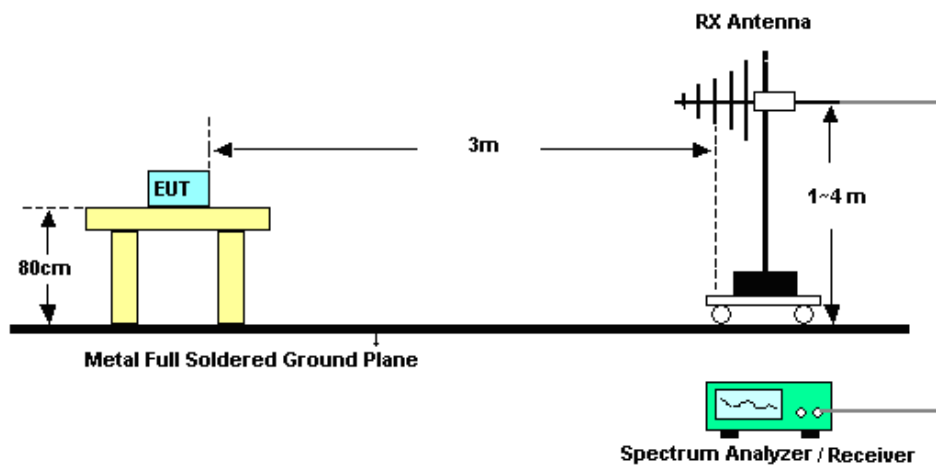

For radiated emissions above 1GHz

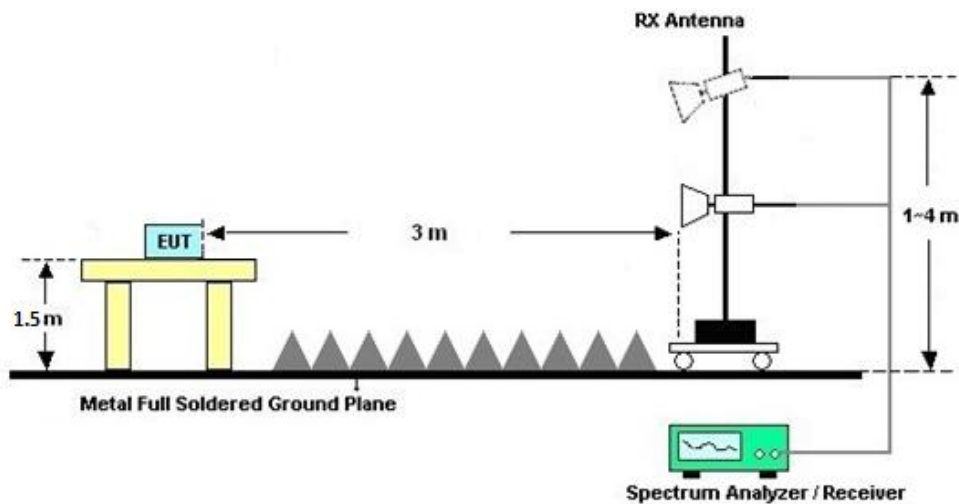



3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A

3.2.7 Duty Cycle

Please refer to Appendix B.

3.2.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix A.

The emission level above 18GHz is checked that the emission level is noise floor only, so it is not reflected in the report.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 02, 2026	Apr. 14, 2026	Apr. 01, 2027	Radiation (03CH03-SZ)
EXA Signal Analyzer	KEYSIGHT	N9010B	MY59071191	10KHz~44GHz	Mar. 27, 2026	Apr. 14, 2026	Mar. 26, 2027	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 25, 2025	Apr. 14, 2026	Dec. 24, 2026	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Sep. 13, 2025	Apr. 14, 2026	Sep. 12, 2026	Radiation (03CH03-SZ)
Double Ridge Guide Antenna	ETS-Lindgren	Burgeon-3117	00240107	1GHz~18GHz	Jul. 13, 2025	Apr. 14, 2026	Jul. 12, 2026	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2025	Apr. 14, 2026	Jul. 02, 2026	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 03, 2025	Apr. 14, 2026	Apr. 02, 2027	Radiation (03CH03-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Apr. 02, 2026	Apr. 14, 2026	Apr. 01, 2027	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 13, 2025	Apr. 14, 2026	Oct. 12, 2026	Radiation (03CH03-SZ)
HF Amplifier	Keysight	83017A	MY53270357	500MHz~26.5GHz	Apr. 02, 2026	Apr. 14, 2026	Apr. 01, 2027	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 13, 2026	Apr. 14, 2026	Oct. 12, 2027	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 14, 2026	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 14, 2026	NCR	Radiation (03CH03-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Mar. 26, 2026	May 20, 2026	Mar. 25, 2027	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 24, 2025	May 20, 2026	Dec. 23, 2026	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct.13, 2025	May 20, 2026	Oct. 12, 2026	Conducted (TH01-SZ)

NCR: No Calibration Required



5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 1.34 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

----- THE END -----



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Reid Huang	Relative Humidity :	48~49%
		Temperature :	24~25°C

Radiated Spurious Emission Test Modes





Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Sample
Mode 1	U-NII-5	5.925-6.425	1	802.11a	1	5955	6Mbps	-	1
Mode 2	U-NII-5	5.925-6.425	1	802.11a	1	5955	6Mbps	-	2
Mode 3	U-NII-5	5.925-6.425	1	802.11a	1	5955	6Mbps	-	3
Mode 4	U-NII-5	5.925-6.425	1	802.11a	1	5955	6Mbps	-	4
Mode 5	U-NII-5	5.925-6.425	1	802.11a_LF	1	5955	6Mbps	-	4

Only the worst-case LF mode shall be reflected in the report.





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	1	5903.65	43.18	68.20	-25.02	H	AVERAGE	Pass	Band Edge
	802.11a	1	17865.00	44.07	54.00	-9.93	V	Average	Pass	Harmonic
2	802.11a	1	5912.49	43.23	68.20	-24.97	V	AVERAGE	Pass	Band Edge
	802.11a	1	17865.00	44.87	54.00	-9.13	H	Average	Pass	Harmonic
3	802.11a	1	5893.90	43.09	68.20	-25.11	V	AVERAGE	Pass	Band Edge
	802.11a	1	17865.00	44.33	54.00	-9.67	V	Average	Pass	Harmonic
4	802.11a	1	5921.85	43.32	68.20	-24.88	V	AVERAGE	Pass	Band Edge
	802.11a	1	17865.00	45.05	54.00	-8.95	V	Average	Pass	Harmonic
5	802.11a_LF	1	546.04	25.09	46.00	-20.91	H	Peak	Pass	LF

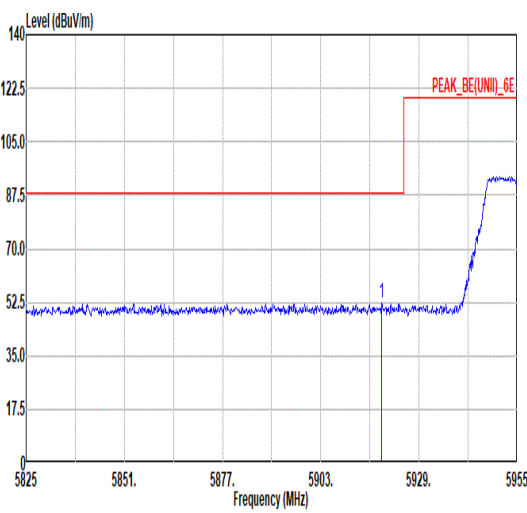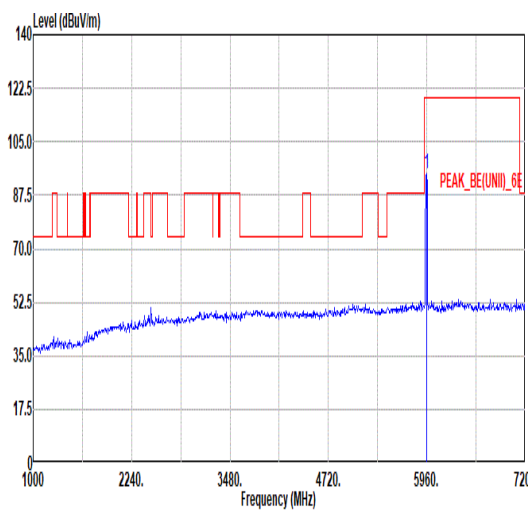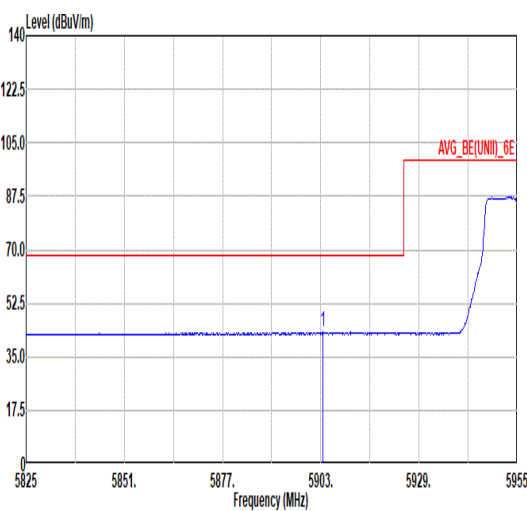
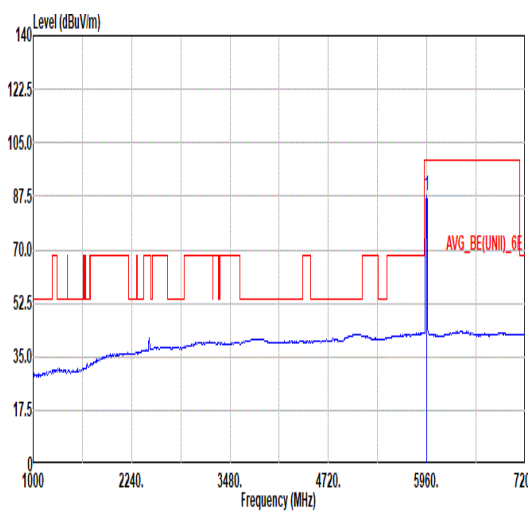


Mode	1																																																		
	Band Edge																																																		
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																		
ANT	1																																																		
Pol.	Horizontal																																																		
Peak																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5919.12</td><td>52.27</td><td>88.20</td><td>-35.93</td><td>38.18</td><td>36.02</td><td>10.52</td><td>32.45</td><td>100</td><td>156</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5919.12	52.27	88.20	-35.93	38.18	36.02	10.52	32.45	100	156	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5919.12	52.27	88.20	-35.93	38.18	36.02	10.52	32.45	100	156	PEAK																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>94.48</td><td>-----</td><td>-----</td><td>80.36</td><td>36.06</td><td>10.56</td><td>32.50</td><td>100</td><td>156</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	94.48	-----	-----	80.36	36.06	10.56	32.50	100	156	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5955.00	94.48	-----	-----	80.36	36.06	10.56	32.50	100	156	PEAK																																								
Avg																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5903.65</td><td>43.18</td><td>68.20</td><td>-25.02</td><td>29.09</td><td>36.01</td><td>10.51</td><td>32.43</td><td>100</td><td>156</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5903.65	43.18	68.20	-25.02	29.09	36.01	10.51	32.43	100	156	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5903.65	43.18	68.20	-25.02	29.09	36.01	10.51	32.43	100	156	AVERAGE																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>87.65</td><td>-----</td><td>-----</td><td>73.53</td><td>36.06</td><td>10.56</td><td>32.50</td><td>100</td><td>156</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	87.65	-----	-----	73.53	36.06	10.56	32.50	100	156	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5955.00	87.65	-----	-----	73.53	36.06	10.56	32.50	100	156	AVERAGE																																								

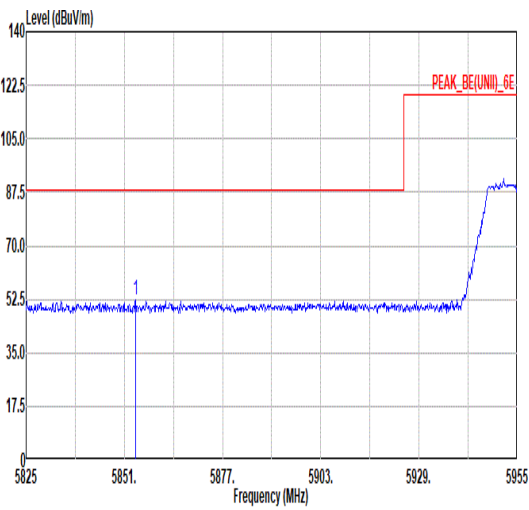
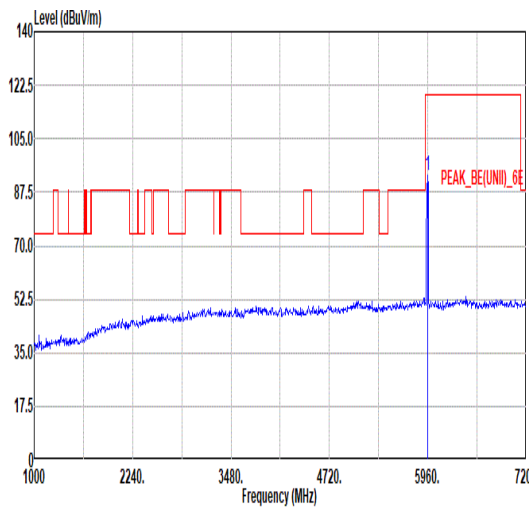
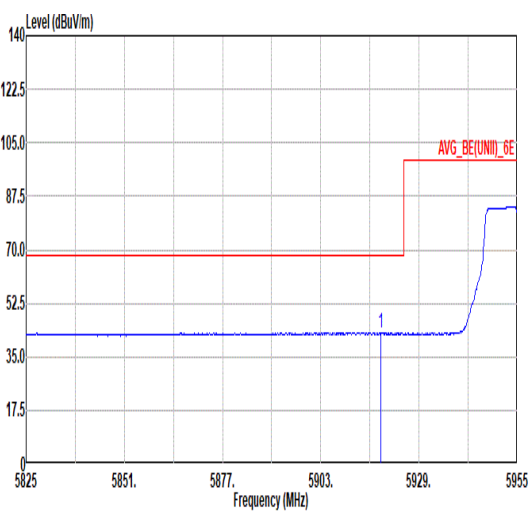
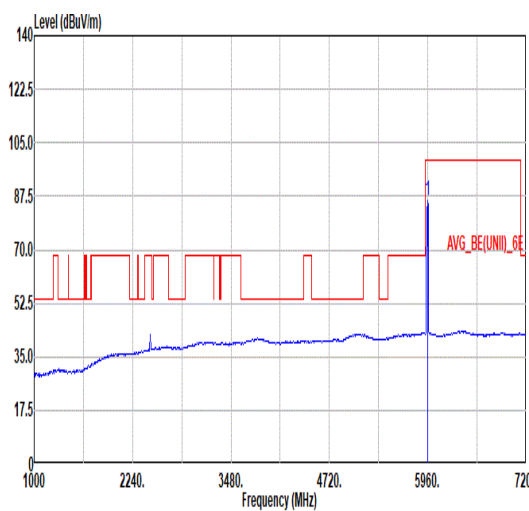


Mode	1																																																																																	
	Band Edge																																																																																	
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5853.99</td><td>52.33</td><td>88.20</td><td>-35.87</td><td>38.39</td><td>35.88</td><td>10.46</td><td>32.40</td><td>394</td><td>153</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5853.99	52.33	88.20	-35.87	38.39	35.88	10.46	32.40	394	153	PEAK	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>92.81</td><td>-----</td><td>-----</td><td>78.69</td><td>36.06</td><td>10.56</td><td>32.50</td><td>394</td><td>153</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	92.81	-----	-----	78.69	36.06	10.56	32.50	394	153	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5853.99	52.33	88.20	-35.87	38.39	35.88	10.46	32.40	394	153	PEAK																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5955.00	92.81	-----	-----	78.69	36.06	10.56	32.50	394	153	PEAK																																																																							
Avg	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5918.86</td><td>42.88</td><td>68.20</td><td>-25.32</td><td>28.79</td><td>36.02</td><td>10.52</td><td>32.45</td><td>394</td><td>153</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5918.86	42.88	68.20	-25.32	28.79	36.02	10.52	32.45	394	153	AVERAGE	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>85.99</td><td>-----</td><td>-----</td><td>71.87</td><td>36.06</td><td>10.56</td><td>32.50</td><td>394</td><td>153</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	85.99	-----	-----	71.87	36.06	10.56	32.50	394	153	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5918.86	42.88	68.20	-25.32	28.79	36.02	10.52	32.45	394	153	AVERAGE																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5955.00	85.99	-----	-----	71.87	36.06	10.56	32.50	394	153	AVERAGE																																																																							



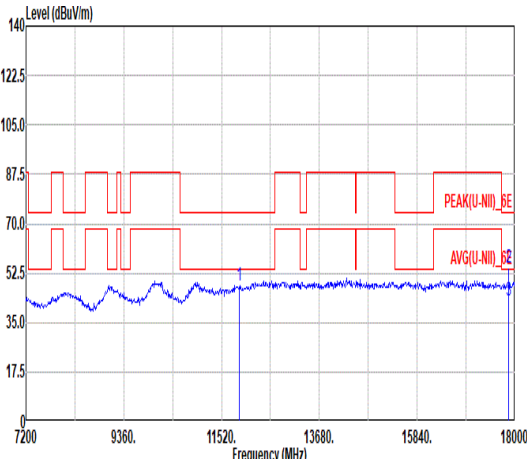
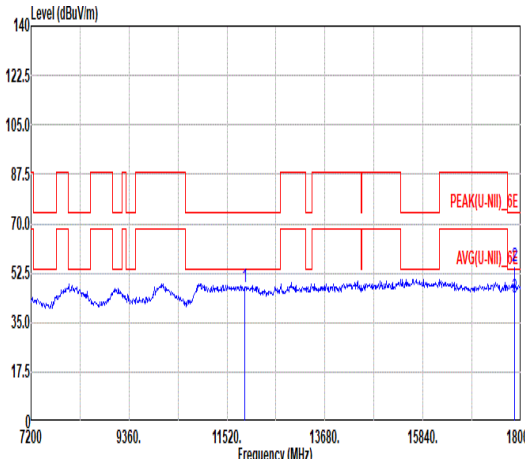


Mode	1																																																																											
	Harmonic																																																																											
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal						Vertical																																																																					
Peak Avg																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11910.00</td><td>47.97</td><td>74.00</td><td>-26.03</td><td>53.15</td><td>38.73</td><td>14.22</td><td>58.13</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17865.00</td><td>54.44</td><td>74.00</td><td>-19.56</td><td>53.43</td><td>41.50</td><td>17.10</td><td>57.59</td><td>124</td><td>125</td><td>Peak</td></tr><tr><td>3</td><td>17865.00</td><td>42.87</td><td>54.00</td><td>-11.13</td><td>41.86</td><td>41.50</td><td>17.10</td><td>57.59</td><td>124</td><td>125</td><td>Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	11910.00	47.97	74.00	-26.03	53.15	38.73	14.22	58.13	--	--	Peak	2	17865.00	54.44	74.00	-19.56	53.43	41.50	17.10	57.59	124	125	Peak	3	17865.00	42.87	54.00	-11.13	41.86	41.50	17.10	57.59	124	125	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																			
1	11910.00	47.97	74.00	-26.03	53.15	38.73	14.22	58.13	--	--	Peak																																																																	
2	17865.00	54.44	74.00	-19.56	53.43	41.50	17.10	57.59	124	125	Peak																																																																	
3	17865.00	42.87	54.00	-11.13	41.86	41.50	17.10	57.59	124	125	Average																																																																	
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11910.00</td><td>47.38</td><td>74.00</td><td>-26.62</td><td>52.56</td><td>38.73</td><td>14.22</td><td>58.13</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17865.00</td><td>55.04</td><td>74.00</td><td>-18.96</td><td>54.03</td><td>41.50</td><td>17.10</td><td>57.59</td><td>241</td><td>124</td><td>Peak</td></tr><tr><td>3</td><td>17865.00</td><td>44.07</td><td>54.00</td><td>-9.93</td><td>43.06</td><td>41.50</td><td>17.10</td><td>57.59</td><td>241</td><td>124</td><td>Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	11910.00	47.38	74.00	-26.62	52.56	38.73	14.22	58.13	--	--	Peak	2	17865.00	55.04	74.00	-18.96	54.03	41.50	17.10	57.59	241	124	Peak	3	17865.00	44.07	54.00	-9.93	43.06	41.50	17.10	57.59	241	124	Average	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																			
1	11910.00	47.38	74.00	-26.62	52.56	38.73	14.22	58.13	--	--	Peak																																																																	
2	17865.00	55.04	74.00	-18.96	54.03	41.50	17.10	57.59	241	124	Peak																																																																	
3	17865.00	44.07	54.00	-9.93	43.06	41.50	17.10	57.59	241	124	Average																																																																	

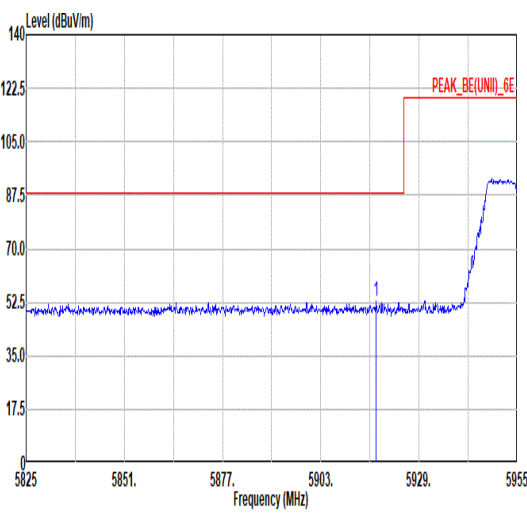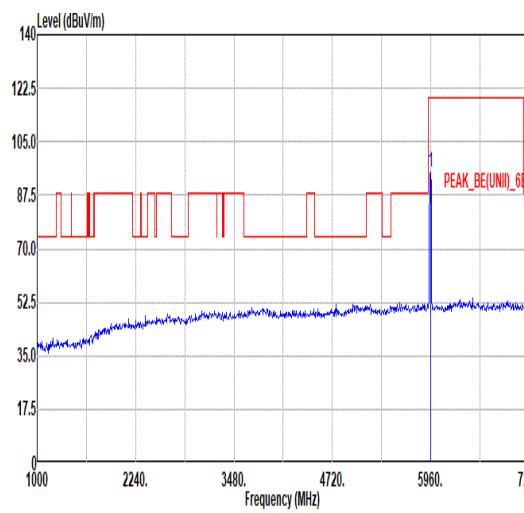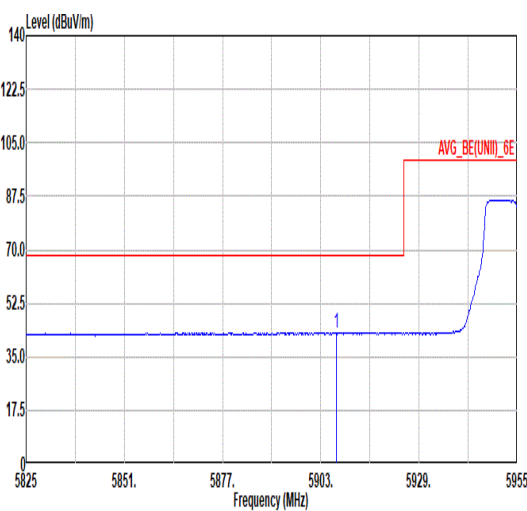
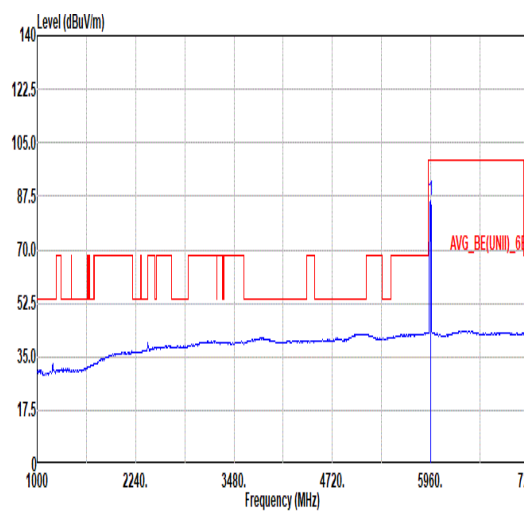


Mode	2																																																																																											
	Band Edge																																																																																											
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5917.69</td><td>52.77</td><td>88.20</td><td>-35.43</td><td>38.68</td><td>36.02</td><td>10.52</td><td>32.45</td><td>100</td><td>146</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5917.69	52.77	88.20	-35.43	38.68	36.02	10.52	32.45	100	146	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>95.08</td><td>-----</td><td>-----</td><td>80.96</td><td>36.06</td><td>10.56</td><td>32.50</td><td>100</td><td>146</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	95.08	-----	-----	80.96	36.06	10.56	32.50	100	146	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5917.69	52.77	88.20	-35.43	38.68	36.02	10.52	32.45	100	146	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5955.00	95.08	-----	-----	80.96	36.06	10.56	32.50	100	146	PEAK																																																																																	
Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5907.03</td><td>43.03</td><td>68.20</td><td>-25.17</td><td>28.95</td><td>36.01</td><td>10.51</td><td>32.44</td><td>100</td><td>146</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5907.03	43.03	68.20	-25.17	28.95	36.01	10.51	32.44	100	146	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>86.15</td><td>-----</td><td>-----</td><td>72.03</td><td>36.06</td><td>10.56</td><td>32.50</td><td>100</td><td>146</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	86.15	-----	-----	72.03	36.06	10.56	32.50	100	146	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5907.03	43.03	68.20	-25.17	28.95	36.01	10.51	32.44	100	146	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5955.00	86.15	-----	-----	72.03	36.06	10.56	32.50	100	146	AVERAGE																																																																																	

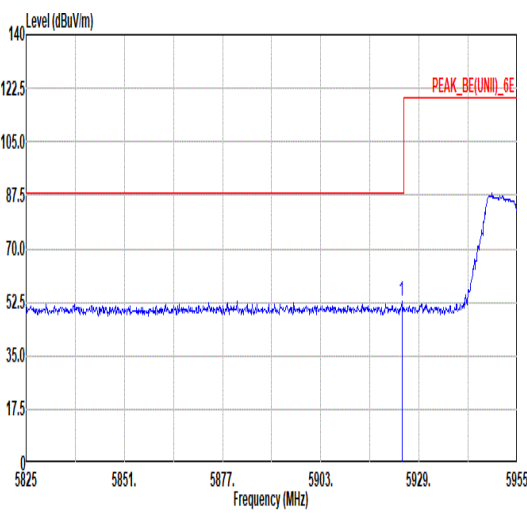
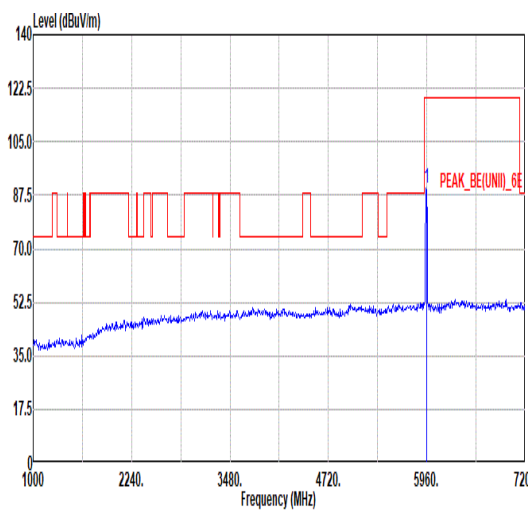
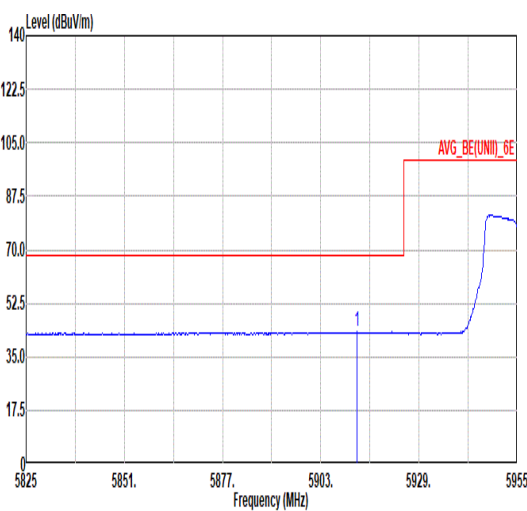
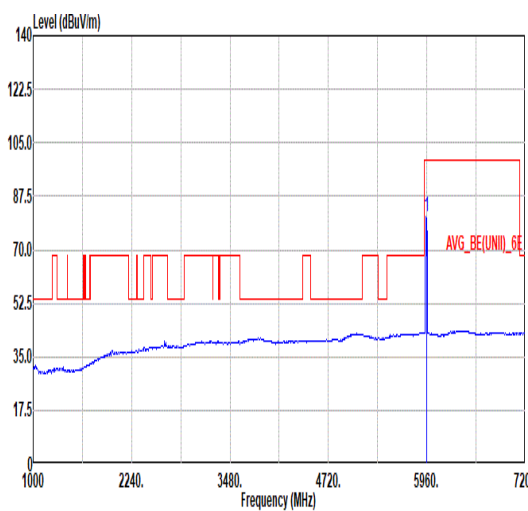


Mode	2																																																		
	Band Edge																																																		
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																		
ANT	1																																																		
Pol.	Vertical																																																		
Peak																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.45</td><td>52.75</td><td>88.20</td><td>-35.45</td><td>38.65</td><td>36.03</td><td>10.53</td><td>32.46</td><td>100</td><td>15</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5924.45	52.75	88.20	-35.45	38.65	36.03	10.53	32.46	100	15	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5924.45	52.75	88.20	-35.45	38.65	36.03	10.53	32.46	100	15	PEAK																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>89.75</td><td>75.64</td><td>14.11</td><td>36.05</td><td>10.55</td><td>32.49</td><td>100</td><td>15</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	89.75	75.64	14.11	36.05	10.55	32.49	100	15	PEAK	
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5955.00	89.75	75.64	14.11	36.05	10.55	32.49	100	15	PEAK																																									
Avg																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5912.49</td><td>43.23</td><td>68.20</td><td>-24.97</td><td>29.14</td><td>36.02</td><td>10.51</td><td>32.44</td><td>100</td><td>15</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5912.49	43.23	68.20	-24.97	29.14	36.02	10.51	32.44	100	15	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5912.49	43.23	68.20	-24.97	29.14	36.02	10.51	32.44	100	15	AVERAGE																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>80.84</td><td>66.73</td><td>14.11</td><td>36.05</td><td>10.55</td><td>32.49</td><td>100</td><td>15</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	80.84	66.73	14.11	36.05	10.55	32.49	100	15	AVERAGE	
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5955.00	80.84	66.73	14.11	36.05	10.55	32.49	100	15	AVERAGE																																									



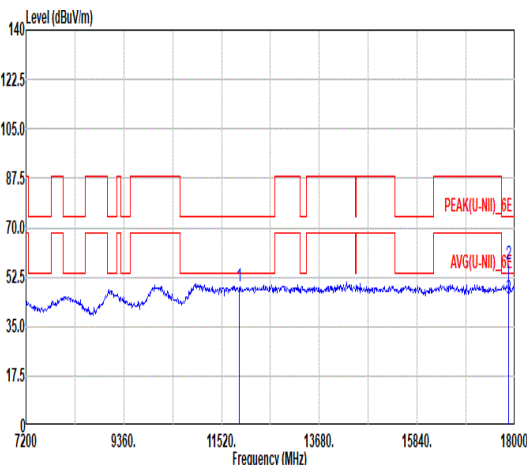
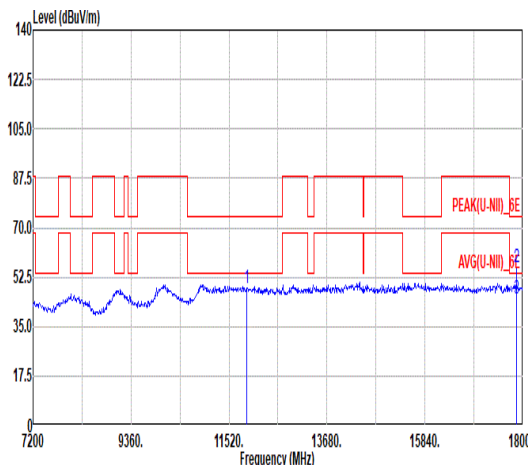


Mode	2																																																																																																																																											
	Harmonic																																																																																																																																											
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																																																																											
ANT	1																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11910.00</td><td>48.97</td><td>74.00</td><td>-25.03</td><td>54.15</td><td>38.73</td><td>14.22</td><td>58.13</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17865.00</td><td>56.90</td><td>74.00</td><td>-17.10</td><td>55.89</td><td>41.50</td><td>17.10</td><td>57.59</td><td>143</td><td>215</td><td>Peak</td></tr><tr><td>3</td><td>17865.00</td><td>44.87</td><td>54.00</td><td>-9.13</td><td>43.86</td><td>41.50</td><td>17.10</td><td>57.59</td><td>143</td><td>215</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11910.00	48.97	74.00	-25.03	54.15	38.73	14.22	58.13	--	--	Peak	2	17865.00	56.90	74.00	-17.10	55.89	41.50	17.10	57.59	143	215	Peak	3	17865.00	44.87	54.00	-9.13	43.86	41.50	17.10	57.59	143	215	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11910.00</td><td>48.38</td><td>74.00</td><td>-25.62</td><td>53.56</td><td>38.73</td><td>14.22</td><td>58.13</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17865.00</td><td>55.94</td><td>74.00</td><td>-18.06</td><td>54.93</td><td>41.50</td><td>17.10</td><td>57.59</td><td>100</td><td>240</td><td>Peak</td></tr><tr><td>3</td><td>17865.00</td><td>44.73</td><td>54.00</td><td>-9.27</td><td>43.72</td><td>41.50</td><td>17.10</td><td>57.59</td><td>100</td><td>240</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11910.00	48.38	74.00	-25.62	53.56	38.73	14.22	58.13	--	--	Peak	2	17865.00	55.94	74.00	-18.06	54.93	41.50	17.10	57.59	100	240	Peak	3	17865.00	44.73	54.00	-9.27	43.72	41.50	17.10	57.59	100	240	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
	Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																			
1	11910.00	48.97	74.00	-25.03	54.15	38.73	14.22	58.13	--	--	Peak																																																																																																																																	
2	17865.00	56.90	74.00	-17.10	55.89	41.50	17.10	57.59	143	215	Peak																																																																																																																																	
3	17865.00	44.87	54.00	-9.13	43.86	41.50	17.10	57.59	143	215	Average																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																			
1	11910.00	48.38	74.00	-25.62	53.56	38.73	14.22	58.13	--	--	Peak																																																																																																																																	
2	17865.00	55.94	74.00	-18.06	54.93	41.50	17.10	57.59	100	240	Peak																																																																																																																																	
3	17865.00	44.73	54.00	-9.27	43.72	41.50	17.10	57.59	100	240	Average																																																																																																																																	

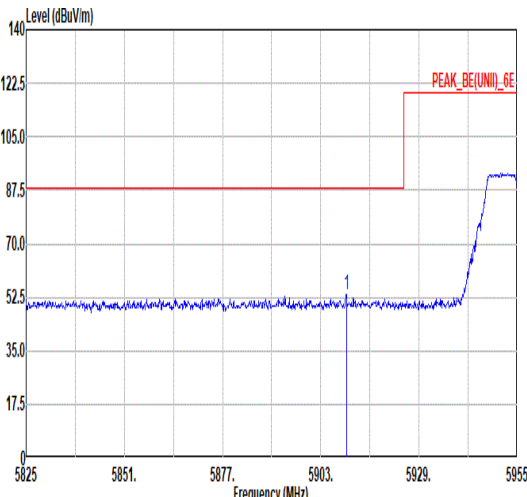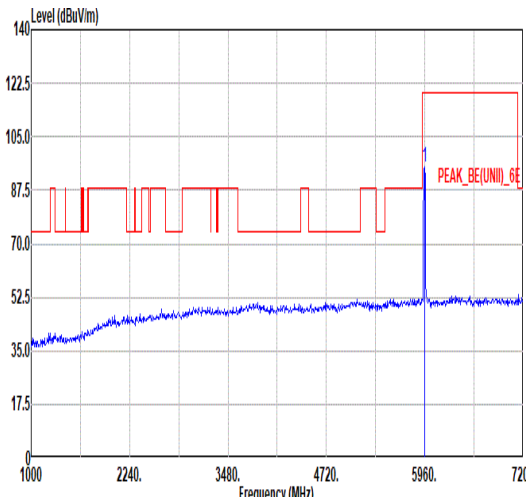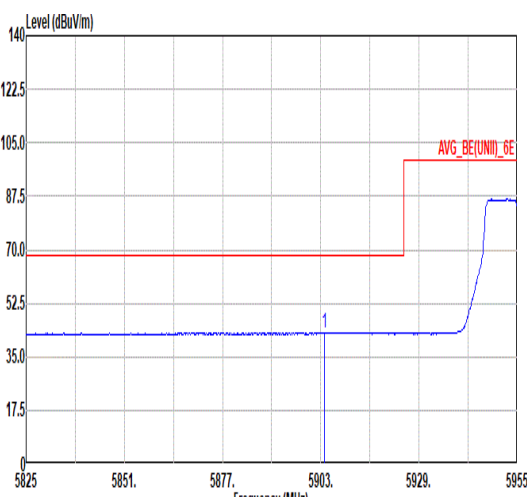
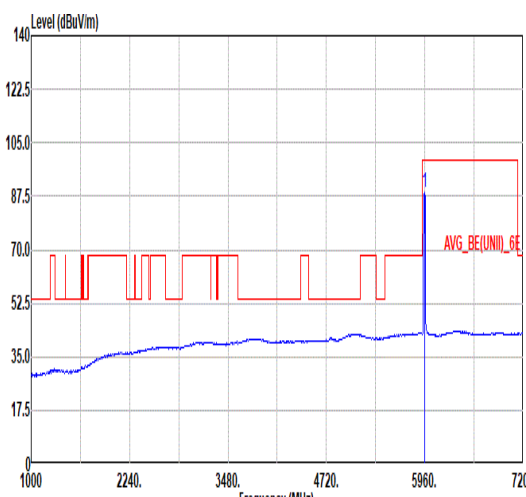


Mode	3																																																																																				
	Band Edge																																																																																				
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																				
ANT	1																																																																																				
Pol.	Horizontal					Fundamental																																																																															
Peak																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5909.76</td><td>53.35</td><td>88.20</td><td>-34.85</td><td>39.27</td><td>36.01</td><td>10.51</td><td>32.44</td><td>314 232 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5909.76	53.35	88.20	-34.85	39.27	36.01	10.51	32.44	314 232 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>94.93</td><td>-----</td><td>-----</td><td>80.81</td><td>36.06</td><td>10.56</td><td>32.50</td><td>314 232 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	94.93	-----	-----	80.81	36.06	10.56	32.50
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	5909.76	53.35	88.20	-34.85	39.27	36.01	10.51	32.44	314 232 PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	5955.00	94.93	-----	-----	80.81	36.06	10.56	32.50	314 232 PEAK																																																																												
Avg																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5903.91</td><td>43.03</td><td>68.20</td><td>-25.17</td><td>28.94</td><td>36.01</td><td>10.51</td><td>32.43</td><td>314 232 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5903.91	43.03	68.20	-25.17	28.94	36.01	10.51	32.43	314 232 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>88.52</td><td>-----</td><td>-----</td><td>74.40</td><td>36.06</td><td>10.56</td><td>32.50</td><td>314 232 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	88.52	-----	-----	74.40	36.06	10.56	32.50
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	5903.91	43.03	68.20	-25.17	28.94	36.01	10.51	32.43	314 232 AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	5955.00	88.52	-----	-----	74.40	36.06	10.56	32.50	314 232 AVERAGE																																																																												

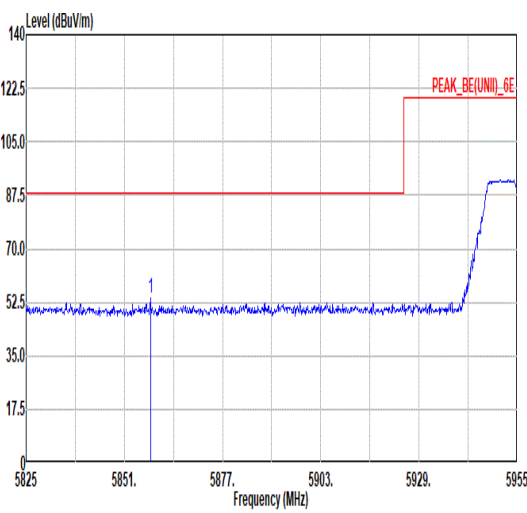
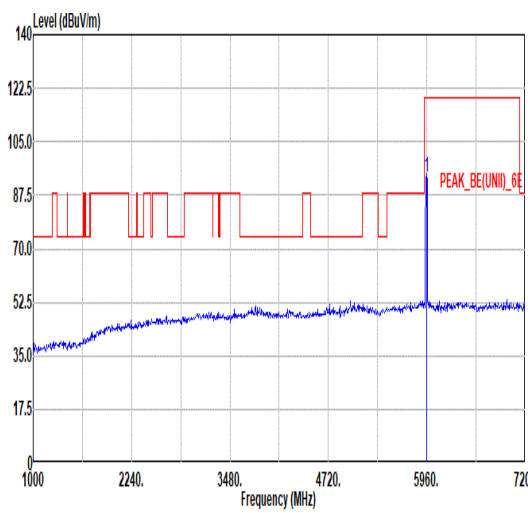
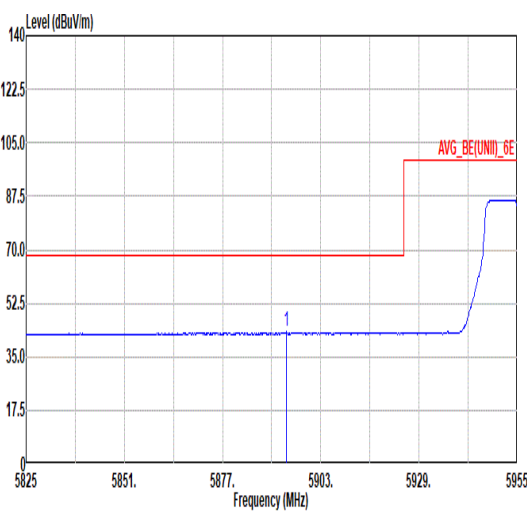
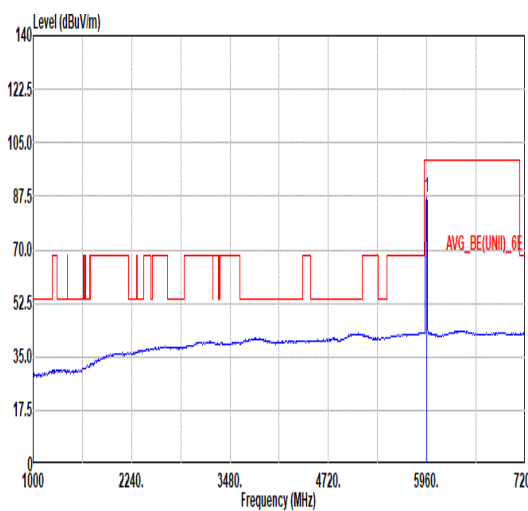


Mode	3																																																																																										
	Band Edge																																																																																										
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																										
ANT	1																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5857.89</td><td>53.64</td><td>88.20</td><td>-34.56</td><td>39.69</td><td>35.89</td><td>10.47</td><td>32.41</td><td>339</td><td>289</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5857.89	53.64	88.20	-34.56	39.69	35.89	10.47	32.41	339	289	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>93.63</td><td>-----</td><td>-----</td><td>79.51</td><td>36.06</td><td>10.56</td><td>32.50</td><td>339</td><td>289</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	93.63	-----	-----	79.51	36.06	10.56	32.50	339	289
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5857.89	53.64	88.20	-34.56	39.69	35.89	10.47	32.41	339	289	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5955.00	93.63	-----	-----	79.51	36.06	10.56	32.50	339	289	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5893.90</td><td>43.09</td><td>68.20</td><td>-25.11</td><td>29.02</td><td>35.99</td><td>10.50</td><td>32.42</td><td>339</td><td>289</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5893.90	43.09	68.20	-25.11	29.02	35.99	10.50	32.42	339	289	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>87.12</td><td>-----</td><td>-----</td><td>73.00</td><td>36.06</td><td>10.56</td><td>32.50</td><td>339</td><td>289</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	87.12	-----	-----	73.00	36.06	10.56	32.50	339	289
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5893.90	43.09	68.20	-25.11	29.02	35.99	10.50	32.42	339	289	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5955.00	87.12	-----	-----	73.00	36.06	10.56	32.50	339	289	AVERAGE																																																																																



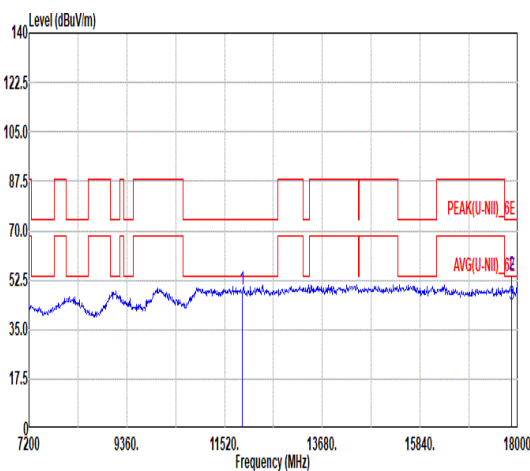
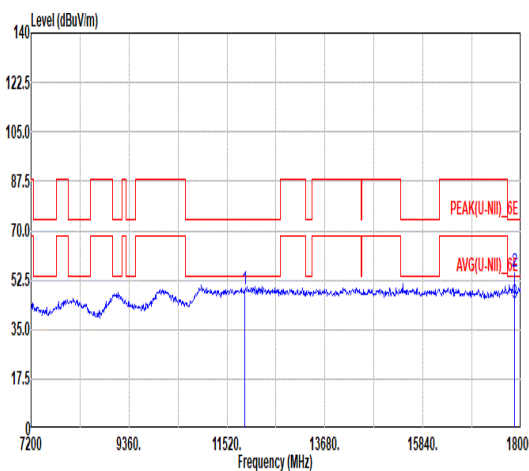


Mode	3																																																																																																																																			
	Harmonic																																																																																																																																			
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal												Vertical																																																																																																																							
Peak Avg																																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11910.00</td><td>49.08</td><td>74.00</td><td>-24.92</td><td>54.26</td><td>38.73</td><td>14.22</td><td>58.13</td><td>-- -- Peak</td></tr><tr><td>2</td><td>17865.00</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>53.26</td><td>41.50</td><td>17.10</td><td>57.59</td><td>120 216 Peak</td></tr><tr><td>3</td><td>17865.00</td><td>43.77</td><td>54.00</td><td>-10.23</td><td>42.76</td><td>41.50</td><td>17.10</td><td>57.59</td><td>120 216 Average</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	11910.00	49.08	74.00	-24.92	54.26	38.73	14.22	58.13	-- -- Peak	2	17865.00	54.27	74.00	-19.73	53.26	41.50	17.10	57.59	120 216 Peak	3	17865.00	43.77	54.00	-10.23	42.76	41.50	17.10	57.59	120 216 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11910.00</td><td>49.17</td><td>74.00</td><td>-24.83</td><td>54.35</td><td>38.73</td><td>14.22</td><td>58.13</td><td>-- -- Peak</td></tr><tr><td>2</td><td>17865.00</td><td>55.44</td><td>74.00</td><td>-18.56</td><td>54.43</td><td>41.50</td><td>17.10</td><td>57.59</td><td>162 275 Peak</td></tr><tr><td>3</td><td>17865.00</td><td>44.33</td><td>54.00</td><td>-9.67</td><td>43.32</td><td>41.50</td><td>17.10</td><td>57.59</td><td>162 275 Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	11910.00	49.17	74.00	-24.83	54.35	38.73	14.22	58.13	-- -- Peak	2	17865.00	55.44	74.00	-18.56	54.43	41.50	17.10	57.59	162 275 Peak	3	17865.00	44.33	54.00	-9.67	43.32	41.50	17.10	57.59	162 275 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																											
1	11910.00	49.08	74.00	-24.92	54.26	38.73	14.22	58.13	-- -- Peak																																																																																																																											
2	17865.00	54.27	74.00	-19.73	53.26	41.50	17.10	57.59	120 216 Peak																																																																																																																											
3	17865.00	43.77	54.00	-10.23	42.76	41.50	17.10	57.59	120 216 Average																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																																											
1	11910.00	49.17	74.00	-24.83	54.35	38.73	14.22	58.13	-- -- Peak																																																																																																																											
2	17865.00	55.44	74.00	-18.56	54.43	41.50	17.10	57.59	162 275 Peak																																																																																																																											
3	17865.00	44.33	54.00	-9.67	43.32	41.50	17.10	57.59	162 275 Average																																																																																																																											

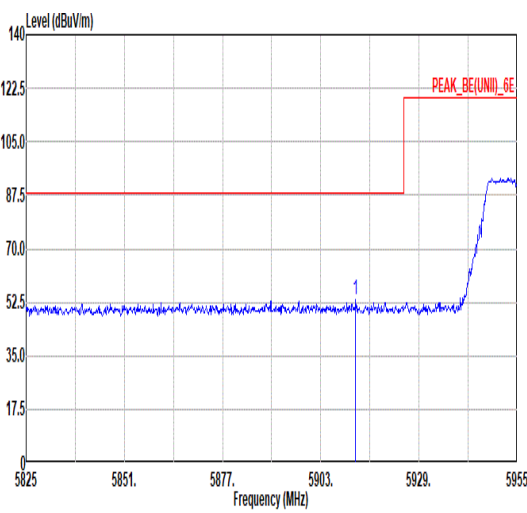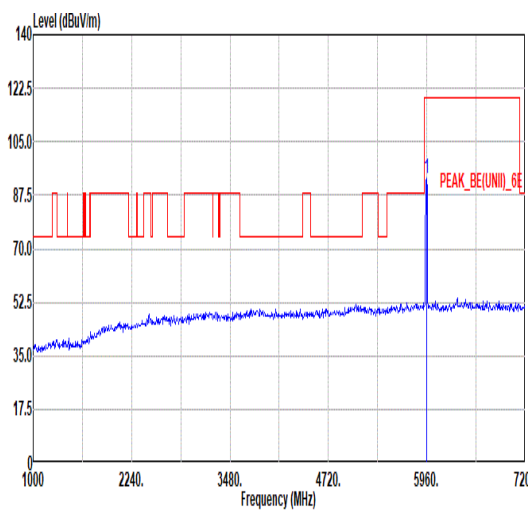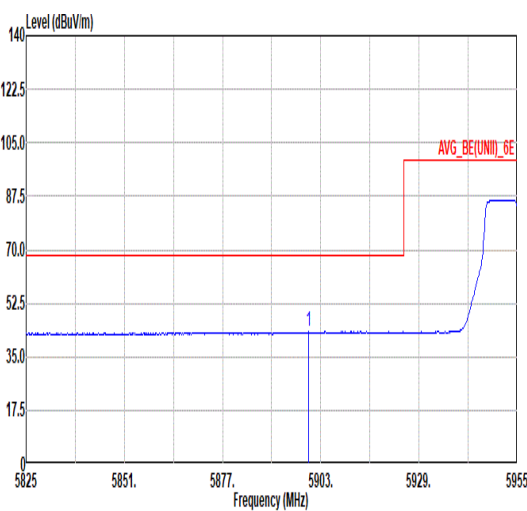
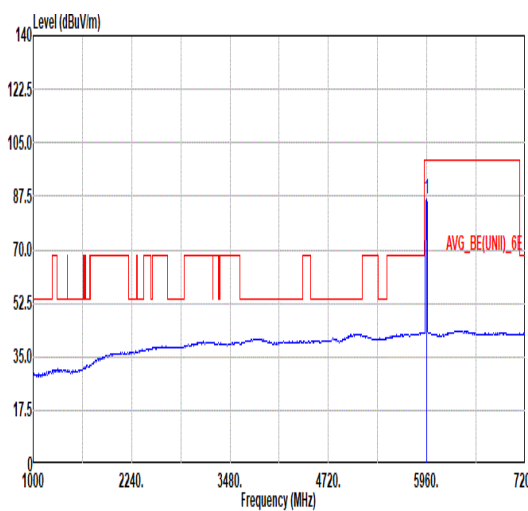


Mode	4																																																																																						
	Band Edge																																																																																						
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																						
ANT	1																																																																																						
Pol.	Horizontal					Fundamental																																																																																	
Peak																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5912.23</td><td>53.13</td><td>88.20</td><td>-35.07</td><td>39.04</td><td>36.02</td><td>10.51</td><td>32.44</td><td>100</td><td>19 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5912.23	53.13	88.20	-35.07	39.04	36.02	10.51	32.44	100	19 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>93.17</td><td>-----</td><td>-----</td><td>79.05</td><td>36.06</td><td>10.56</td><td>32.50</td><td>100</td><td>19 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	93.17	-----	-----	79.05	36.06	10.56	32.50	100
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5912.23	53.13	88.20	-35.07	39.04	36.02	10.51	32.44	100	19 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5955.00	93.17	-----	-----	79.05	36.06	10.56	32.50	100	19 PEAK																																																																													
Avg																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5899.75</td><td>43.23</td><td>68.20</td><td>-24.97</td><td>29.16</td><td>36.00</td><td>10.50</td><td>32.43</td><td>100</td><td>19 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5899.75	43.23	68.20	-24.97	29.16	36.00	10.50	32.43	100	19 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>86.54</td><td>-----</td><td>-----</td><td>72.42</td><td>36.06</td><td>10.56</td><td>32.50</td><td>100</td><td>19 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	86.54	-----	-----	72.42	36.06	10.56	32.50	100
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5899.75	43.23	68.20	-24.97	29.16	36.00	10.50	32.43	100	19 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5955.00	86.54	-----	-----	72.42	36.06	10.56	32.50	100	19 AVERAGE																																																																													

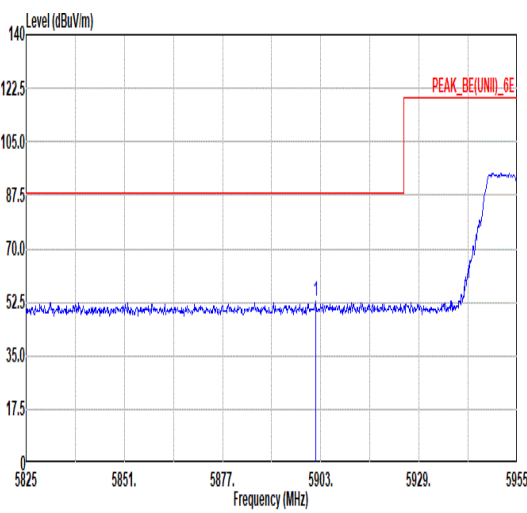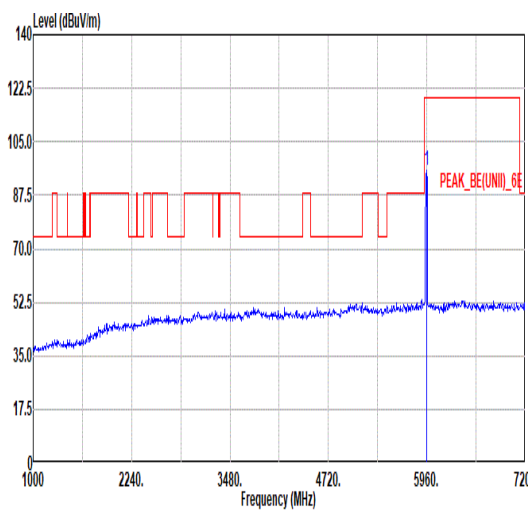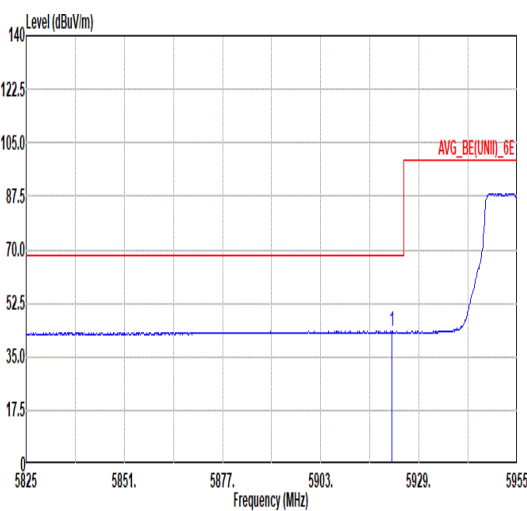
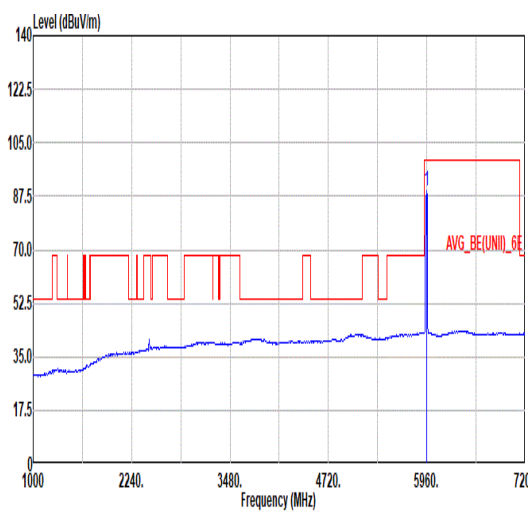


Mode	4																																																																																						
	Band Edge																																																																																						
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																						
ANT	1																																																																																						
Pol.	Vertical					Fundamental																																																																																	
Peak																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5901.57</td><td>52.61</td><td>88.20</td><td>-35.59</td><td>38.53</td><td>36.01</td><td>10.50</td><td>32.43</td><td>173</td><td>14 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5901.57	52.61	88.20	-35.59	38.53	36.01	10.50	32.43	173	14 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>95.50</td><td>-----</td><td>-----</td><td>81.38</td><td>36.06</td><td>10.56</td><td>32.50</td><td>173</td><td>14 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	95.50	-----	-----	81.38	36.06	10.56	32.50	173
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5901.57	52.61	88.20	-35.59	38.53	36.01	10.50	32.43	173	14 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5955.00	95.50	-----	-----	81.38	36.06	10.56	32.50	173	14 PEAK																																																																													
Avg																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5921.85</td><td>43.32</td><td>68.20</td><td>-24.88</td><td>29.23</td><td>36.03</td><td>10.52</td><td>32.46</td><td>173</td><td>14 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5921.85	43.32	68.20	-24.88	29.23	36.03	10.52	32.46	173	14 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>89.04</td><td>-----</td><td>-----</td><td>74.92</td><td>36.06</td><td>10.56</td><td>32.50</td><td>173</td><td>14 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5955.00	89.04	-----	-----	74.92	36.06	10.56	32.50	173
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5921.85	43.32	68.20	-24.88	29.23	36.03	10.52	32.46	173	14 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																														
1	5955.00	89.04	-----	-----	74.92	36.06	10.56	32.50	173	14 AVERAGE																																																																													

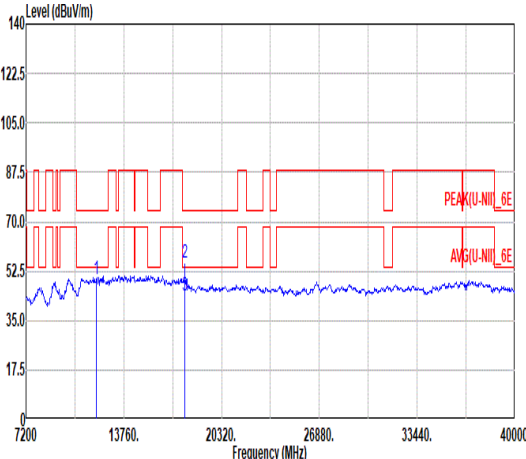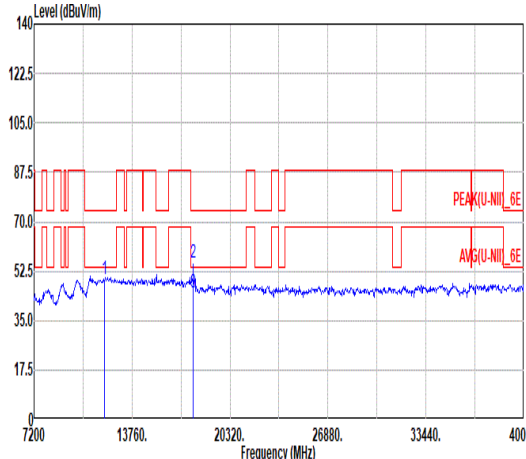

Mode	4																																																																																																																																										
	Harmonic																																																																																																																																										
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																																																																										
ANT	1																																																																																																																																										
Pol.	Horizontal						Vertical																																																																																																																																				
Peak Avg																																																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11910.00</td><td>49.79</td><td>74.00</td><td>-24.21</td><td>54.97</td><td>38.73</td><td>14.22</td><td>58.13</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17865.00</td><td>55.44</td><td>74.00</td><td>-18.56</td><td>54.43</td><td>41.50</td><td>17.10</td><td>57.59</td><td>120</td><td>216</td><td>Peak</td></tr><tr><td>3</td><td>17865.00</td><td>43.78</td><td>54.00</td><td>-10.22</td><td>42.77</td><td>41.50</td><td>17.10</td><td>57.59</td><td>120</td><td>216</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11910.00	49.79	74.00	-24.21	54.97	38.73	14.22	58.13	--	--	Peak	2	17865.00	55.44	74.00	-18.56	54.43	41.50	17.10	57.59	120	216	Peak	3	17865.00	43.78	54.00	-10.22	42.77	41.50	17.10	57.59	120	216	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11910.00</td><td>49.40</td><td>74.00</td><td>-24.60</td><td>54.58</td><td>38.73</td><td>14.22</td><td>58.13</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17865.00</td><td>55.57</td><td>74.00</td><td>-18.43</td><td>54.56</td><td>41.50</td><td>17.10</td><td>57.59</td><td>162</td><td>275</td><td>Peak</td></tr><tr><td>3</td><td>17865.00</td><td>45.05</td><td>54.00</td><td>-8.95</td><td>44.04</td><td>41.50</td><td>17.10</td><td>57.59</td><td>162</td><td>275</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11910.00	49.40	74.00	-24.60	54.58	38.73	14.22	58.13	--	--	Peak	2	17865.00	55.57	74.00	-18.43	54.56	41.50	17.10	57.59	162	275	Peak	3	17865.00	45.05	54.00	-8.95	44.04	41.50	17.10	57.59	162	275
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																		
1	11910.00	49.79	74.00	-24.21	54.97	38.73	14.22	58.13	--	--	Peak																																																																																																																																
2	17865.00	55.44	74.00	-18.56	54.43	41.50	17.10	57.59	120	216	Peak																																																																																																																																
3	17865.00	43.78	54.00	-10.22	42.77	41.50	17.10	57.59	120	216	Average																																																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																		
1	11910.00	49.40	74.00	-24.60	54.58	38.73	14.22	58.13	--	--	Peak																																																																																																																																
2	17865.00	55.57	74.00	-18.43	54.56	41.50	17.10	57.59	162	275	Peak																																																																																																																																
3	17865.00	45.05	54.00	-8.95	44.04	41.50	17.10	57.59	162	275	Average																																																																																																																																

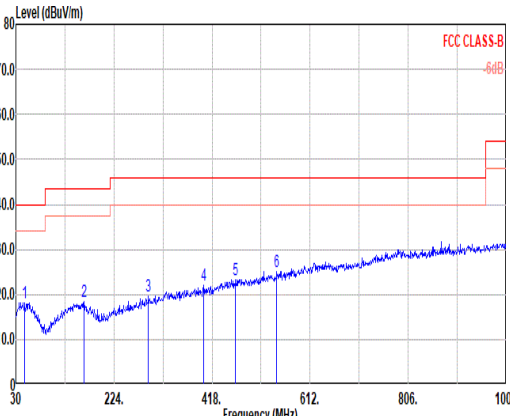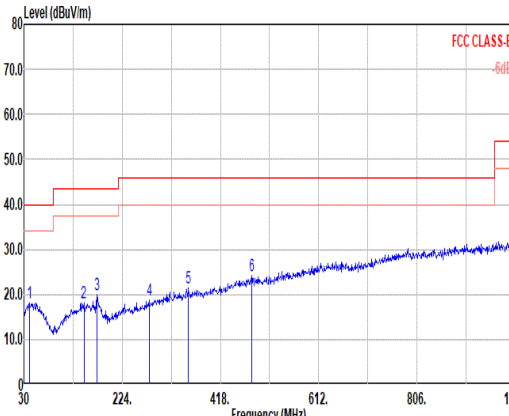

Mode	5																																																																																																																																																																																																																															
	LF																																																																																																																																																																																																																															
	U-NII-5_5.925-6.425_802.11a_LF_CH1_5955MHz																																																																																																																																																																																																																															
ANT	1																																																																																																																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																																																																																																																									
Peak Avg																																																																																																																																																																																																																																
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>47.46</td><td>18.25</td><td>40.00</td><td>-21.75</td><td>32.86</td><td>19.62</td><td>0.69</td><td>34.92</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>164.83</td><td>18.27</td><td>43.50</td><td>-25.23</td><td>33.73</td><td>18.10</td><td>1.34</td><td>34.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>291.90</td><td>19.57</td><td>46.00</td><td>-26.43</td><td>33.64</td><td>18.88</td><td>1.77</td><td>34.72</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>401.51</td><td>22.08</td><td>46.00</td><td>-23.92</td><td>33.20</td><td>21.46</td><td>2.12</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>464.56</td><td>23.38</td><td>46.00</td><td>-22.62</td><td>32.75</td><td>22.93</td><td>2.27</td><td>34.57</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>546.04</td><td>25.09</td><td>46.00</td><td>-20.91</td><td>32.99</td><td>24.12</td><td>2.48</td><td>34.50</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	47.46	18.25	40.00	-21.75	32.86	19.62	0.69	34.92	--	--	Peak	2	164.83	18.27	43.50	-25.23	33.73	18.10	1.34	34.90	--	--	Peak	3	291.90	19.57	46.00	-26.43	33.64	18.88	1.77	34.72	--	--	Peak	4	401.51	22.08	46.00	-23.92	33.20	21.46	2.12	34.70	--	--	Peak	5	464.56	23.38	46.00	-22.62	32.75	22.93	2.27	34.57	--	--	Peak	6	546.04	25.09	46.00	-20.91	32.99	24.12	2.48	34.50	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>40.67</td><td>18.00</td><td>40.00</td><td>-22.00</td><td>32.71</td><td>19.35</td><td>0.64</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>148.34</td><td>18.23</td><td>43.50</td><td>-25.27</td><td>33.04</td><td>18.82</td><td>1.27</td><td>34.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>173.56</td><td>19.80</td><td>43.50</td><td>-23.70</td><td>35.74</td><td>17.57</td><td>1.39</td><td>34.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>277.35</td><td>18.71</td><td>46.00</td><td>-27.29</td><td>33.30</td><td>18.42</td><td>1.73</td><td>34.74</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>354.95</td><td>21.32</td><td>46.00</td><td>-24.68</td><td>33.72</td><td>20.34</td><td>1.96</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>479.11</td><td>24.24</td><td>46.00</td><td>-21.76</td><td>33.37</td><td>23.10</td><td>2.31</td><td>34.54</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	40.67	18.00	40.00	-22.00	32.71	19.35	0.64	34.70	--	--	Peak	2	148.34	18.23	43.50	-25.27	33.04	18.82	1.27	34.90	--	--	Peak	3	173.56	19.80	43.50	-23.70	35.74	17.57	1.39	34.90	--	--	Peak	4	277.35	18.71	46.00	-27.29	33.30	18.42	1.73	34.74	--	--	Peak	5	354.95	21.32	46.00	-24.68	33.72	20.34	1.96	34.70	--	--	Peak	6	479.11	24.24	46.00	-21.76	33.37	23.10	2.31	34.54	--	--
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																							
1	47.46	18.25	40.00	-21.75	32.86	19.62	0.69	34.92	--	--	Peak																																																																																																																																																																																																																					
2	164.83	18.27	43.50	-25.23	33.73	18.10	1.34	34.90	--	--	Peak																																																																																																																																																																																																																					
3	291.90	19.57	46.00	-26.43	33.64	18.88	1.77	34.72	--	--	Peak																																																																																																																																																																																																																					
4	401.51	22.08	46.00	-23.92	33.20	21.46	2.12	34.70	--	--	Peak																																																																																																																																																																																																																					
5	464.56	23.38	46.00	-22.62	32.75	22.93	2.27	34.57	--	--	Peak																																																																																																																																																																																																																					
6	546.04	25.09	46.00	-20.91	32.99	24.12	2.48	34.50	--	--	Peak																																																																																																																																																																																																																					
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																							
1	40.67	18.00	40.00	-22.00	32.71	19.35	0.64	34.70	--	--	Peak																																																																																																																																																																																																																					
2	148.34	18.23	43.50	-25.27	33.04	18.82	1.27	34.90	--	--	Peak																																																																																																																																																																																																																					
3	173.56	19.80	43.50	-23.70	35.74	17.57	1.39	34.90	--	--	Peak																																																																																																																																																																																																																					
4	277.35	18.71	46.00	-27.29	33.30	18.42	1.73	34.74	--	--	Peak																																																																																																																																																																																																																					
5	354.95	21.32	46.00	-24.68	33.72	20.34	1.96	34.70	--	--	Peak																																																																																																																																																																																																																					
6	479.11	24.24	46.00	-21.76	33.37	23.10	2.31	34.54	--	--	Peak																																																																																																																																																																																																																					

Appendix B. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	98.30	-	-	10Hz

802.11a

