

FCC SAR Test Report

APPLICANT : Amazon.com Services LLC
EQUIPMENT : Digital Media Device
MODEL NAME : SP24NE
FCC ID : 2A4DH-2945
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied.....	5
4. Equipment Under Test (EUT) Information.....	6
4.1 General Information	6
5. RF Exposure Limits.....	7
5.1 Uncontrolled Environment.....	7
5.2 Controlled Environment.....	7
5.3 RF Exposure limit for above 6GHz.....	8
6. Specific Absorption Rate (SAR).....	9
6.1 Introduction	9
6.2 SAR Definition.....	9
7. System Description and Setup	10
7.1 E-Field Probe	11
7.2 Data Acquisition Electronics (DAE)	11
7.3 Phantom.....	12
7.4 Device Holder.....	13
8. Measurement Procedures	14
8.1 Spatial Peak SAR Evaluation.....	14
8.2 Power Reference Measurement.....	15
8.3 Area Scan	15
8.4 Zoom Scan.....	16
8.5 Volume Scan Procedures.....	16
8.6 Power Drift Monitoring.....	16
9. Test Equipment List.....	17
10. System Verification	18
10.1 Tissue Simulating Liquids.....	18
10.2 Tissue Verification	18
10.3 System Performance Check Results.....	19
10.4 PD System Verification Results.....	20
11. RF Exposure Positions.....	21
11.1 SAR Testing for device	21
11.2 Miscellaneous Testing Considerations.....	21
12. Conducted RF Output Power (Unit: dBm).....	22
13. Antenna Location.....	29
14. SAR Test Results	30
14.1 Body SAR	32
14.2 6GHz PD Test Result	33
14.3 Repeated SAR Measurement	33
15. Simultaneous Transmission Analysis.....	34
15.1 Body Exposure Conditions	34
16. Uncertainty Assessment	35
17. References.....	38
Appendix.....	39
Appendix A. Plots of System Performance Check	39
Appendix B. Plots of High SAR Measurement	39
Appendix C. DASY Calibration Certificate.....	39
Appendix D. Test Setup Photos.....	39

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA4N2622-01	Rev. 01	Initial issue of report	Oct. 15, 2025
FA4N2622-01	Rev. 02	Added accessory Verification data This report is an updated version, replacing the report issued on Oct. 15, 2025.	Nov. 13, 2025
FA4N2622-01	Rev. 03	Updated Equipment Name This report is an updated version, replacing the report issued on Nov. 13, 2025.	Feb. 09, 2026
FA4N2622-01	Rev. 04	Updated page 6&21 and Appendix B This report is an updated version, replacing the report issued on Feb. 09, 2026.	Apr. 08, 2026

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Amazon.com Services LLC, Digital Media Device, SP24NE**, are as follows.

Highest 1g SAR Summary				
Equipment Class	Frequency Band		Body (Separation 0mm)	Highest Total Exposure Ratio (Ratio ≤ 1.0)
			1g SAR (W/kg)	
DTS	WLAN	2.4GHz WLAN	0.68	0.79
NII		5GHz WLAN	1.24	
6XD		6GHz WLAN	0.70	
DSS	Bluetooth	2.4GHz Bluetooth	<0.10	

Equipment Class	Frequency Band	Measured APD	Scaled PD
		Body (W/m ²)	psPD (W/m ²)
6XD	6GHz WLAN	4.15	4.44
Date of Testing:		2025/9/15 ~ 2025/10/31	

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093), and Human Exposure to RF Radiation Limits (1.0 mW/cm²=10 W/m²) specified in FCC 47 CFR part 1.1310 and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR04-KS, SAR07-KS	CN1257	314309

Applicant	
Company Name	Amazon.com Services LLC
Address	410 Terry Avenue N, Seattle, WA 98109-5210, United States

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- IEC/IEEE 62209-1528:2020
- IEC TR 63170:2018
- IEC 62479:2010
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D04 Interim General RF Exposure Guidance v01
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- SPEAG DASY6 Application Note (Interim Procedure for Device Operation at 6GHz-10GHz)

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Digital Media Device
Model Name	SP24NE
FCC ID	2A4DH-2945
S/N	GN44D1015344002L
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2472 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz WLAN 6GHz U-NII 5: 5925 MHz ~ 6425 MHz WLAN 6GHz U-NII 6: 6425 MHz ~ 6525 MHz WLAN 6GHz U-NII 7: 6525 MHz ~ 6875 MHz WLAN 6GHz U-NII 8: 6875 MHz ~ 7125 MHz Bluetooth: 2402 MHz ~ 2480 MHz WPT: 110 KHz ~ 165 KHz
Mode	WLAN 2.4GHz 802.11b/g/n HT20 WLAN 2.4GHz 802.11ax HE20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac/ax VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 WLAN 6GHz 802.11a/ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE WPT: ASK
Remark: 1. This device has no voice function. 2. The 2.4GHz/5GHz/6GHz WLAN can transmit in SISO/MIMO mode. WLAN2.4GHz 11b/g and WLAN5GHz/6GHz 11a support SISO mode only. 3. This device will be equipped with one accessory, and the worst-case configuration was verified to satisfy SAR compliance. 4. RF exposure report for WPC (Wireless power charging) will be separately submitted.	

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

5.3 RF Exposure limit for above 6GHz

According to ANSI/IEEE C95.1-1992, the criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio frequency (RF) radiation as specified in §1.1310. The unit of power density evaluation is W/m² or mW/cm².

Peak Spatially Averaged Power Density was evaluated over a square area of 4cm² per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500			f/300	6
1500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500			f/1500	30
1500-100,000			1.0	30

Note: 1.0 mW/cm² is 10 W/m²

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

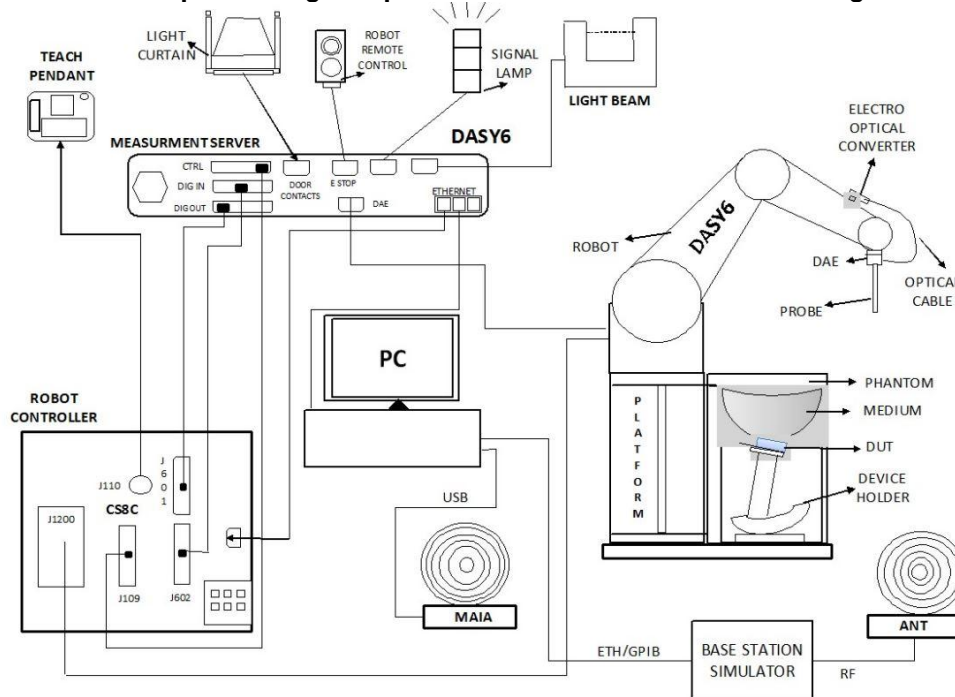

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 or Win10 and the DASY5 or DASY6 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

Note: 1. DASY6 software used: DASY6 mmWave V3.0.0.841 and older generations and used the developed Plane-to-Plane Phase Reconstruction (PTP-PR) Algorithm which was used in PD measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	4 MHz – 10 GHz Linearity: ± 0.2 dB (30 MHz – 10 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

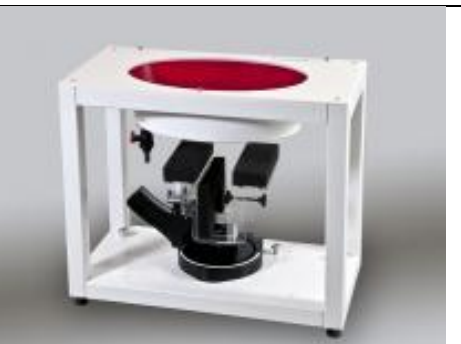Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	1095	Feb. 08, 2024	Feb. 06, 2026
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	Sep. 23, 2022	Sep. 21, 2025
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	Sep. 17, 2025	Sep. 16, 2026
SPEAG	6500MHz System Validation Kit	D6.5GHzV2	1026	Jan. 28, 2025	Jan. 27, 2026
SPEAG	5G Verification Source	10GHz	2005	Dec. 04, 2024	Dec. 03, 2025
SPEAG	Data Acquisition Electronics	DAE4	1650	Nov. 25, 2024	Nov. 24, 2025
SPEAG	Data Acquisition Electronics	DAE4	1358	Jul. 15, 2025	Jul. 14, 2026
SPEAG	Dosimetric E-Field Probe	EX3DV4	7706	May 22, 2025	May 21, 2026
SPEAG	Dosimetric E-Field Probe	EX3DV4	7918	Mar. 24, 2025	Mar. 23, 2026
SPEAG	EUmmWV Probe Tip Protection	EUmmWV4	9553	Nov. 15, 2024	Nov. 14, 2025
SPEAG	mmWave Phantom	mmWave	1065	NCR	NCR
SPEAG	ELI Phantom	ELI V8.0	TP-2135	NCR	NCR
Beichuang	Thermo-Hygrometer	HTC-1	1959634	May 27, 2025	May 26, 2026
Beichuang	Thermo-Hygrometer	HTC-1	1959632	May 27, 2025	May 26, 2026
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Rohde & Schwarz	Signal Generator	SMB100A	100455	Jan. 02, 2025	Jan. 01, 2026
Keysight	Preamplifier	83017A	MY57280106	Apr. 18, 2025	Apr. 17, 2026
Agilent	ENA Series Network Analyzer	E5071C	MY46112129	Jul. 02, 2025	Jul. 01, 2026
SPEAG	Dielectric Probe Kit	DAK-3.5	1071	Feb. 24, 2025	Feb. 23, 2026
Anritsu	Vector Signal Generator	MG3710A	6201682672	Jan. 03, 2025	Jan. 02, 2026
Rohde & Schwarz	Power Meter	NRVD	102081	Jul. 02, 2025	Jul. 01, 2026
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	Jul. 02, 2025	Jul. 01, 2026
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	Jul. 02, 2025	Jul. 01, 2026
Rohde & Schwarz	Power Sensor	NRP50S	101385	Oct. 15, 2024	Oct. 14, 2025
Rohde & Schwarz	Power Sensor	NRP50S	101385	Oct. 14, 2025	Oct. 13, 2026
R&S	BLUETOOTH TESTER	CBT	101246	Jul. 03, 2025	Jul. 02, 2026
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	Oct. 11, 2024	Oct. 10, 2025
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	Oct. 11, 2025	Oct. 10, 2026
TES	DIGITAC THERMOMETER	TYPE-K	220305411	Jan. 02, 2025	Jan. 01, 2026
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	
ET Industries	Dual Directional Coupler	C-058-10	N/A	Note 1	
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
mini-circuits	amplifier	ZVE-3W-83+	162601250	Note 1	

Note:

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
- The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1.



Fig 10.1 Photo of Liquid Height for Body SAR

10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
2450	55.0	0	0	0	0	45.0	1.80	39.2

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Liquid Temp (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
2450	22.7	1.76	39.3	1.8	39.2	-2.22	0.26	±5.0	2025-09-15
5250	22.7	4.72	36.4	4.71	35.95	0.21	1.25	±5.0	2025-09-16
5600	22.7	5.03	35.8	5.07	35.5	-0.79	0.85	±5.0	2025-09-17
5750	22.7	5.19	35.8	5.22	35.35	-0.57	1.27	±5.0	2025-09-18
6500	22.6	6.1	34.1	6.07	34.5	0.49	-1.16	±5.0	2025-09-18
2450	22.6	1.77	39.2	1.80	39.20	-1.67	0.00	±5	2025-10-29
5250	22.7	4.64	36.5	4.71	35.95	-1.49	1.53	±5	2025-10-31
5600	22.8	4.98	36.0	5.07	35.50	-1.78	1.41	±5	2025-10-31
5800	22.9	5.20	35.7	5.27	35.30	-1.33	1.13	±5	2025-10-31
6500	22.8	6.12	34.0	6.07	34.50	0.82	-1.45	±5	2025-10-31

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2025-09-15	2450	50.00	D2450V2 - 1095	EX3DV4 - SN7918	DAE4 Sn1358	2.540	52.600	50.800	-3.42	1.200	24.700	24.000	-2.83
2025-09-16	5250	50.00	D5GHzV2 - 1113	EX3DV4 - SN7918	DAE4 Sn1358	4.010	81.500	80.200	-1.60	1.130	23.300	22.600	-3.00
2025-09-17	5600	50.00	D5GHzV2 - 1113	EX3DV4 - SN7918	DAE4 Sn1358	4.310	82.600	86.200	4.36	1.240	23.700	24.800	4.64
2025-09-18	5750	50.00	D5GHzV2 - 1113	EX3DV4 - SN7918	DAE4 Sn1358	4.010	80.800	80.200	-0.74	1.150	23.000	23.000	0.00
2025-09-18	6500	50.00	D6.5GHzV2 - 1026	EX3DV4 - SN7706	DAE4 Sn1650	15.200	296.000	304.000	2.70	2.980	54.800	59.600	8.76
2025-10-29	2450	50	D2450V2-1095	EX3DV4 - SN7918	DAE4 Sn1358	2.69	52.600	53.8	2.28	1.27	24.700	25.4	2.83
2025-10-31	5250	50	D5GHzV2-1113	EX3DV4 - SN7918	DAE4 Sn1358	4.12	78.100	82.4	5.51	1.20	22.400	24	7.14
2025-10-31	5600	50	D5GHzV2-1113	EX3DV4 - SN7918	DAE4 Sn1358	4.36	80.000	87.2	9.00	1.16	23.000	23.2	0.87
2025-10-31	5800	50	D5GHzV2-1113	EX3DV4 - SN7918	DAE4 Sn1358	4.13	77.900	82.6	6.03	1.19	22.300	23.8	6.73
2025-10-31	6500	50	D6.5GHzV2-1026	EX3DV4 - SN7706	DAE4 Sn1358	15.20	296.000	304	2.70	2.87	54.800	57.4	4.74

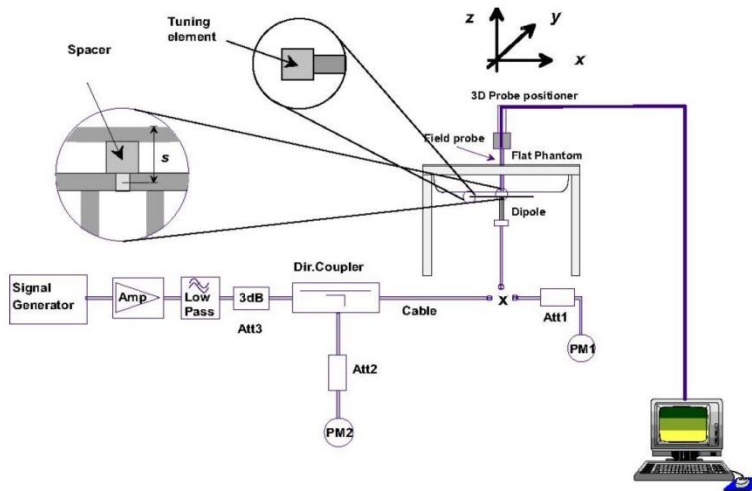


Fig 10.3.1 System Performance Check Setup




Fig 10.3.2 Setup Photo

10.4 PD System Verification Results

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check. The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

Frequency (GHz)	5G Verification Source	Probe S/N	DAE S/N	Distance (mm)	Input Power (mW)	Measured psPDn+ 4 cm ² (W/m ²)	Normalized ⁽¹⁾ psPDn+ 4 cm ² (W/m ²)	Targeted psPDn+ 4 cm ² (W/m ²)	Deviation (dB)	Measured psPDtot+ 4 cm ² (W/m ²)	Normalized ⁽¹⁾ psPDtot+ 4 cm ² (W/m ²)	Targeted psPDtot+ 4 cm ² (W/m ²)	Deviation (dB)	Measured psPDmod+ 4 cm ² (W/m ²)	Normalized ⁽¹⁾ psPDmod+ 4 cm ² (W/m ²)	Targeted psPDmod+ 4 cm ² (W/m ²)	Deviation (dB)	Date
10	10GHz_2005	9553	1650	10	100	97	153.7	171	-0.46	97.7	154.8	172	-0.46	101	160.0	177	-0.44	2025/9/17

Note: (1) means the measured PD was normalized to Prad power which can be referred to DASY Calibration Certificate in appendix C.

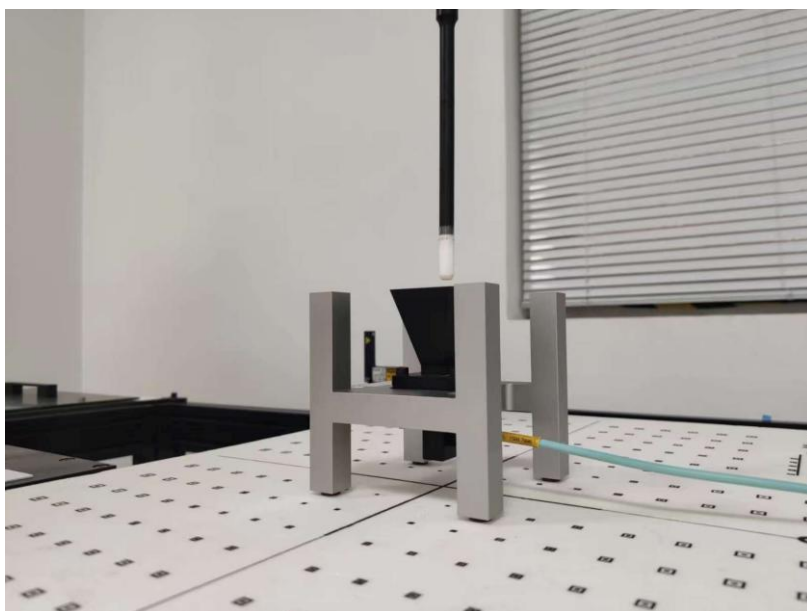

System Verification Setup Photo



11. RF Exposure Positions

11.1 SAR Testing for device

This device can be used also in full sized EUT exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the EUT should be tested for SAR compliance with the EUT touching the phantom. The SAR exclusion threshold in KDB 447498 D04v01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent EUT edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

11.2 Miscellaneous Testing Considerations

- Evaluate SAR using 6-7 GHz parameters per IEC/IEEE 62209-1528:2020.
- Per procedures of KDB Pubs. 447498 and 248227, and applicable product-specific procedures among KDB Pubs.
- Where supported by the test system, also report estimated absorbed (epithelial) power density (for reference purposes only, not specifically for compliance) and estimated incident PD, derived from measured SAR.
- In addition, for the highest SAR test configurations evaluate incident PD using the mmw near-field probe and total-field/power-density reconstruction method (2 mm closest meas. plane)
 - Adjust measured results per amount that measurement uncertainty exceeds 30 % (see e.g. IEC 62479:2010)

<EUT Setup Photos>

Please refer to Appendix D for the test setup photos.

12. Conducted RF Output Power (Unit: dBm)

<WLAN Conducted Power>

General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC EUT or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
6. Per April 2019 TCB workshops, General principles of FCC KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax SAR testing. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power also higher than RU (OFDMA)
7. In applying the test guidance, the IEEE 802.11 mode with the maximum output power (out of all modes) should be considered for testing
8. For modes with the same maximum output power, the guidance from section 5.3.2 a) of FCC KDB Publication 248227 D01 should be applied, with 802.11ax being considered as the highest 802.11 mode for the appropriate frequency bands
9. When SAR testing for 802.11ax is required
 - a. If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power
 - b. Otherwise, consider the fully allocated channel for SAR testing

- c. When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel
10. 802.11 ax supports both full tone size mode and partial tone size mode, after verification on partial tone size mode that partial size tone mode power will not be higher than full tone size mode, therefore, full tone mode power was chosen to be measured in this report.
11. The 2.4GHz/5GHz/6GHz WLAN can transmit in SISO/MIMO antenna mode.
12. For the conducted power measurement is MIMO chains transmitting simultaneously and measured the separately conducted power for both chains and then based on the conducted power of two antennas respectively to calculate sum of the power for MIMO mode.

【2.4GHz WLAN_Ant 1】

Mode	Channel	Frequency (MHz)	Ant 1		
			Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b 1Mbps	1	2412	19.79	20.00	100.00
	6	2437	19.78	20.00	
	11	2462	19.69	20.00	
	12	2467	19.42	19.50	
	13	2472	17.62	18.00	
802.11g 6Mbps	1	2412	17.39	17.50	97.89
	6	2437	17.52	18.00	
	11	2462	16.30	16.50	
	12	2467	17.20	17.50	
	13	2472	13.18	13.50	
802.11n-HT20 MCS0	1	2412	15.95	16.00	97.38
	6	2437	17.42	17.50	
	11	2462	16.90	17.00	
	12	2467	17.20	17.50	
	13	2472	12.60	13.00	
802.11ax-HE20 MCS0	1	2412	16.16	16.50	94.22
	6	2437	17.62	18.00	
	11	2462	17.11	17.50	
	12	2467	17.40	17.50	
	13	2472	12.79	13.00	

【2.4GHz WLAN_Ant 3】

Mode	Channel	Frequency (MHz)	Ant 3		
			Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11b 1Mbps	1	2412	20.15	20.50	100.00
	6	2437	19.92	20.00	
	11	2462	19.77	20.00	
	12	2467	19.51	20.00	
	13	2472	17.66	18.00	
802.11g 6Mbps	1	2412	17.62	18.00	97.89
	6	2437	17.51	18.00	
	11	2462	17.02	17.50	
	12	2467	17.06	17.50	
	13	2472	13.07	13.50	
802.11n-HT20 MCS0	1	2412	15.93	16.00	97.38
	6	2437	17.65	18.00	
	11	2462	16.73	17.00	
	12	2467	17.25	17.50	
	13	2472	12.37	12.50	
802.11ax-HE20 MCS0	1	2412	16.10	16.50	94.22
	6	2437	17.82	18.00	
	11	2462	16.92	17.00	
	12	2467	17.44	17.50	
	13	2472	12.54	13.00	

**【2.4GHz WLAN_Ant 1+3】**

			Ant 1+3		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
802.11n-HT20 MCS0	1	2412	18.95	19.00	97.38
	6	2437	20.54	21.00	
	11	2462	19.82	20.00	
	12	2467	20.23	20.50	
	13	2472	15.49	15.50	
802.11ax-HE20 MCS0	1	2412	19.14	19.50	94.22
	6	2437	20.73	21.00	
	11	2462	20.03	20.50	
	12	2467	20.43	20.50	
	13	2472	15.68	16.00	

【5.2GHz WLAN_Ant 2+3】

			Ant 2+3(2)		Ant 2+3(3)		Ant 2+3		Duty Cycle %
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	
802.11a 6Mbps	36	5180	15.07	15.50	14.48	14.50			97.97
	40	5200	15.12	15.50	14.47	14.50			
	44	5220	15.02	15.50	14.46	14.50			
	48	5240	15.04	15.50	14.55	15.00			
802.11n-HT20 MCS0	36	5180	15.02	15.50	14.45	14.50	17.75	18.00	97.28
	40	5200	15.14	15.50	14.47	14.50	17.83	18.00	
	44	5220	14.98	15.00	14.35	14.50	17.69	18.00	
	48	5240	14.99	15.00	14.53	15.00	17.78	18.00	
802.11n-HT40 MCS0	38	5190	15.35	15.50	14.59	15.00	18.00	18.00	94.92
	46	5230	15.24	15.50	14.64	15.00	17.96	18.00	
802.11ac-VHT20 MCS0	36	5180	15.14	15.50	14.58	15.00	17.88	18.00	96.11
	40	5200	15.24	15.50	14.56	15.00	17.92	18.00	
	44	5220	15.08	15.50	14.48	14.50	17.80	18.00	
	48	5240	15.07	15.50	14.64	15.00	17.87	18.00	
802.11ac-VHT40 MCS0	38	5190	15.58	16.00	14.83	15.00	18.23	18.50	90.67
	46	5230	15.49	15.50	14.87	15.00	18.20	18.50	
802.11ac-VHT80 MCS0	42	5210	13.48	13.50	12.86	13.00	16.19	16.50	96.98
802.11ax-HE20 MCS0	36	5180	15.28	15.50	14.72	15.00	18.02	18.50	94.21
	40	5200	15.37	15.50	14.73	15.00	18.07	18.50	
	44	5220	15.23	15.50	14.64	15.00	17.96	18.00	
	48	5240	15.18	15.50	14.75	15.00	17.98	18.00	
802.11ax-HE40 MCS0	38	5190	15.66	16.00	14.92	15.00	18.32	18.50	90.13
	46	5230	15.54	16.00	14.97	15.00	18.27	18.50	
802.11ax-HE80 MCS0	42	5210	13.51	14.00	12.93	13.00	16.24	16.50	97.14



【5.3GHz WLAN_Ant 2+3】

Mode	Channel	Frequency (MHz)	Ant 2+3(2)		Ant 2+3(3)		Ant 2+3		Duty Cycle %
			Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	
802.11a 6Mbps	52	5260	14.80	15.00	15.01	15.50			97.97
	56	5280	14.87	15.00	14.98	15.00			
	60	5300	14.28	14.50	14.68	15.00			
	64	5320	14.37	14.50	14.64	15.00			
802.11n-HT20 MCS0	52	5260	14.78	15.00	15.02	15.50	17.91	18.00	97.28
	56	5280	14.85	15.00	14.85	15.00	17.86	18.00	
	60	5300	14.32	14.50	14.58	15.00	17.46	17.50	
	64	5320	14.30	14.50	14.67	15.00	17.50	18.00	
802.11n-HT40 MCS0	54	5270	14.94	15.00	14.92	15.00	17.94	18.00	94.92
	62	5310	14.59	15.00	14.84	15.00	17.73	18.00	
802.11ac-VHT20 MCS0	52	5260	14.89	15.00	15.11	15.50	18.01	18.50	96.11
	56	5280	14.92	15.00	14.97	15.00	17.96	18.00	
	60	5300	14.41	14.50	14.68	15.00	17.56	18.00	
	64	5320	14.43	14.50	14.77	15.00	17.61	18.00	
802.11ac-VHT40 MCS0	54	5270	15.18	15.50	15.14	15.50	18.17	18.50	90.67
	62	5310	14.84	15.00	15.11	15.50	17.99	18.00	
802.11ac-VHT80 MCS0	58	5290	13.83	14.00	14.03	14.50	16.94	17.00	96.98
802.11ac-VHT160 MCS0	50	5250	12.00	12.50	11.40	11.50	14.72	15.00	95.43
802.11ax-HE20 MCS0	52	5260	15.03	15.50	15.27	15.50	18.16	18.50	94.21
	56	5280	15.07	15.50	15.08	15.50	18.09	18.50	
	60	5300	14.54	15.00	14.81	15.00	17.69	18.00	
	64	5320	14.55	15.00	14.92	15.00	17.75	18.00	
802.11ax-HE40 MCS0	54	5270	15.26	15.50	15.24	15.50	18.26	18.50	90.13
	62	5310	14.93	15.00	15.21	15.50	18.08	18.50	
802.11ax-HE80 MCS0	58	5290	13.85	14.00	14.11	14.50	16.99	17.00	97.14
802.11ax-HE160 MCS0	50	5250	12.13	12.50	11.42	11.50	14.80	15.00	94.44

【5.5GHz WLAN_Ant 2+3】

Mode	Channel	Frequency (MHz)	Ant 2+3(2)		Ant 2+3(3)		Ant 2+3		Duty Cycle %
			Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	
802.11a 6Mbps	100	5500	13.79	14.00	13.50	14.00			97.97
	116	5580	13.63	14.00	13.82	14.00			
	124	5620	13.67	14.00	13.68	14.00			
	132	5660	13.60	14.00	13.88	14.00			
	140	5700	13.51	14.00	13.47	13.50			
	144	5720	13.60	14.00	13.73	14.00			
802.11n-HT20 MCS0	100	5500	13.83	14.00	13.50	14.00	16.68	17.00	97.28
	116	5580	13.67	14.00	13.64	14.00	16.67	17.00	
	124	5620	13.58	14.00	13.63	14.00	16.62	17.00	
	132	5660	13.50	14.00	13.71	14.00	16.62	17.00	
	144	5720	13.54	14.00	13.68	14.00	16.62	17.00	
802.11n-HT40 MCS0	102	5510	14.03	14.50	13.64	14.00	16.85	17.00	94.92
	110	5550	14.07	14.50	13.75	14.00	16.92	17.00	
	126	5630	13.44	13.50	13.52	14.00	16.49	16.50	
	134	5670	13.50	14.00	13.65	14.00	16.59	17.00	
	142	5710	13.85	14.00	13.78	14.00	16.83	17.00	
802.11ac-VHT20 MCS0	100	5500	13.94	14.00	13.62	14.00	16.79	17.00	96.11
	116	5580	13.78	14.00	13.77	14.00	16.79	17.00	
	124	5620	13.71	14.00	13.75	14.00	16.74	17.00	
	132	5660	13.62	14.00	13.84	14.00	16.74	17.00	
	144	5720	13.65	14.00	13.79	14.00	16.73	17.00	
802.11ac-VHT40 MCS0	102	5510	14.28	14.50	13.89	14.00	17.10	17.50	90.67
	110	5550	14.35	14.50	14.03	14.50	17.20	17.50	



	126	5630	13.72	14.00	13.80	14.00	16.77	17.00	
	134	5670	13.76	14.00	13.92	14.00	16.85	17.00	
	142	5710	14.11	14.50	14.04	14.50	17.09	17.50	
802.11ac-VHT80 MCS0	106	5530	14.06	14.50	13.62	14.00	16.86	17.00	96.98
	122	5610	13.77	14.00	13.58	14.00	16.69	17.00	
	138	5690	13.97	14.00	13.97	14.00	16.98	17.00	
802.11ac-VHT160 MCS0	114	5570	12.84	13.00	12.80	13.00	15.83	16.00	95.43
802.11ax-HE20 MCS0	100	5500	14.08	14.50	13.77	14.00	16.94	17.00	94.21
	116	5580	13.92	14.00	13.91	14.00	16.93	17.00	
	124	5620	13.85	14.00	13.89	14.00	16.88	17.00	
	132	5660	13.77	14.00	13.98	14.00	16.89	17.00	
	144	5720	13.82	14.00	13.93	14.00	16.89	17.00	
802.11ax-HE40 MCS0	102	5510	14.37	14.50	14.02	14.50	17.21	17.50	90.13
	110	5550	14.42	14.50	14.17	14.50	17.31	17.50	
	126	5630	13.81	14.00	13.92	14.00	16.88	17.00	
	134	5670	13.84	14.00	14.06	14.50	16.96	17.00	
	142	5710	14.21	14.50	14.17	14.50	17.20	17.50	
802.11ax-HE80 MCS0	106	5530	14.11	14.50	13.73	14.00	16.93	17.00	97.14
	122	5610	13.83	14.00	13.69	14.00	16.77	17.00	
	138	5690	14.05	14.50	14.05	14.50	17.06	17.50	
802.11ax-HE160 MCS0	114	5570	12.96	13.00	12.88	13.00	15.93	16.00	94.44

【5.8GHz WLAN_Ant 2+3】

Mode	Channel	Frequency (MHz)	Ant 2+3(2)		Ant 2+3(3)		Ant 2+3		Duty Cycle %
			Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	
802.11a 6Mbps	149	5745	13.50	14.00	13.51	14.00			97.97
	157	5785	13.58	14.00	13.74	14.00			
	165	5825	13.21	13.50	13.81	14.00			
802.11n-HT20 MCS0	149	5745	13.34	13.50	13.39	13.50	16.38	16.50	97.28
	157	5785	13.39	13.50	13.63	14.00	16.52	17.00	
	165	5825	13.22	13.50	13.78	14.00	16.52	17.00	
802.11n-HT40 MCS0	151	5755	13.52	14.00	13.44	13.50	16.49	16.50	94.92
	159	5795	13.54	14.00	13.75	14.00	16.66	17.00	
802.11ac-VHT20 MCS0	149	5745	13.45	13.50	13.51	14.00	16.49	16.50	96.11
	157	5785	13.52	14.00	13.74	14.00	16.64	17.00	
	165	5825	13.32	13.50	13.88	14.00	16.62	17.00	
802.11ac-VHT40 MCS0	151	5755	13.77	14.00	13.71	14.00	16.75	17.00	90.67
	159	5795	13.81	14.00	14.03	14.50	16.93	17.00	
802.11ac-VHT80 MCS0	155	5775	13.93	14.00	13.91	14.00	16.93	17.00	96.98
802.11ax-HE20 MCS0	149	5745	13.60	14.00	13.66	14.00	16.64	17.00	94.21
	157	5785	13.66	14.00	13.90	14.00	16.79	17.00	
	165	5825	13.46	13.50	14.03	14.50	16.76	17.00	
802.11ax-HE40 MCS0	151	5755	13.86	14.00	13.82	14.00	16.85	17.00	90.13
	159	5795	13.88	14.00	14.14	14.50	17.02	17.50	
802.11ax-HE80 MCS0	155	5775	13.99	14.00	14.00	14.50	17.01	17.50	97.14




【6GHz WLAN_Ant 2+3_For FCC】

Mode	Channel	Frequency (MHz)	Ant 2+3(2)		Ant 2+3(3)		Ant 2+3		Duty Cycle %
			Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	
802.11a 6Mbps	1	5955	3.83	4.00	4.01	4.50			97.86
	57	6235	3.72	4.00	3.74	4.00			
	113	6515	4.04	4.50	4.13	4.50			
	173	6815	3.80	4.00	3.58	4.00			
	233	7115	4.21	4.50	4.02	4.50			
802.11ax-HE20 MCS0	1	5955	4.79	5.00	5.01	5.50	7.91	8.00	94.03
	57	6235	4.75	5.00	4.83	5.00	7.80	8.00	
	113	6515	4.29	4.50	3.68	4.00	7.01	7.50	
	173	6815	4.42	4.50	4.64	5.00	7.54	8.00	
	233	7115	4.82	5.00	4.75	5.00	7.80	8.00	
802.11ax-HE40 MCS0	3	5965	7.36	7.50	7.51	8.00	10.45	10.50	89.85
	59	6245	7.20	7.50	7.52	8.00	10.37	10.50	
	107	6485	7.10	7.50	7.10	7.50	10.11	10.50	
	171	6805	6.86	7.00	7.03	7.50	9.96	10.00	
	227	7085	7.74	8.00	7.85	8.00	10.81	11.00	
802.11ax-HE80 MCS0	7	5985	11.49	11.50	11.80	12.00	14.66	15.00	96.59
	71	6305	11.48	11.50	11.61	12.00	14.56	15.00	
	119	6545	11.84	12.00	11.39	11.50	14.63	15.00	
	167	6785	11.39	11.50	11.78	12.00	14.60	15.00	
	215	7025	11.63	12.00	11.96	12.00	14.81	15.00	
802.11ax-HE160 MCS0	15	6025	11.94	12.00	12.14	12.50	15.05	15.50	93.80
	47	6185	12.36	12.50	12.27	12.50	15.33	15.50	
	111	6505	12.14	12.50	11.94	12.00	15.05	15.50	
	143	6665	12.20	12.50	12.06	12.50	15.14	15.50	
	207	6985	12.11	12.50	12.17	12.50	15.15	15.50	

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle are 76.61%, as following figure, Bluetooth SAR scaling need further consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation.

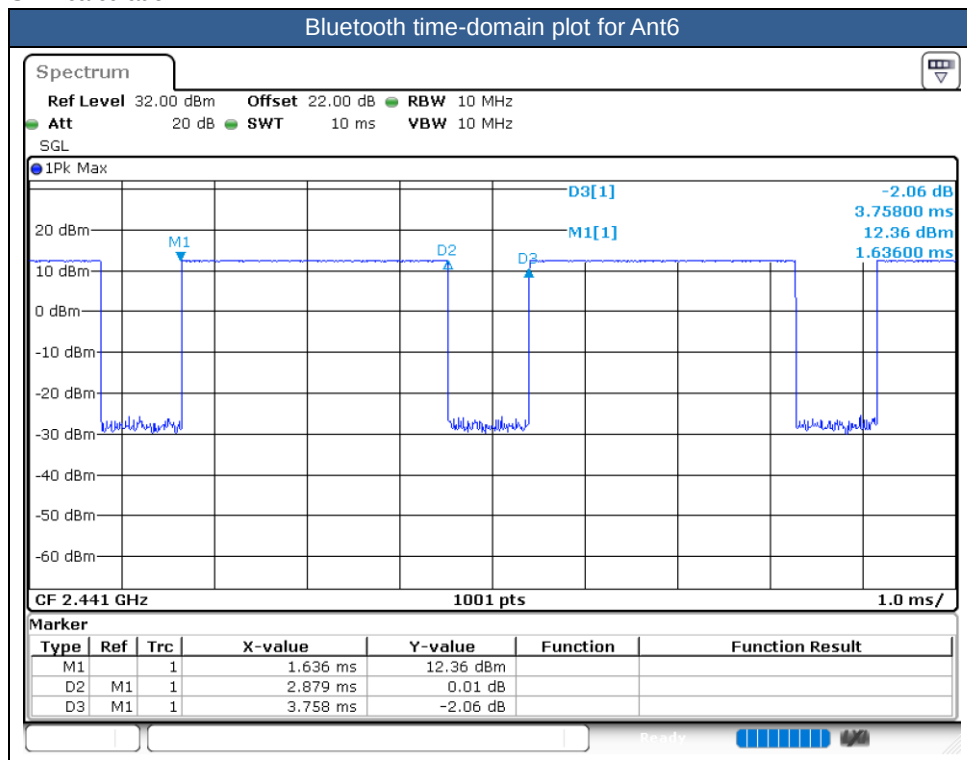

【Bluetooth】

			Ant 1		
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit	Duty Cycle %
BR / EDR 1Mbps	0	2402	12.61	13.00	76.61
	39	2441	12.68	13.00	
	78	2480	12.63	13.00	
BR / EDR 2Mbps	0	2402	9.93	10.00	30.51
	39	2441	10.02	10.50	
	78	2480	9.73	10.00	
BR / EDR 3Mbps	0	2402	9.95	10.00	30.51
	39	2441	10.04	10.50	
	78	2480	9.90	10.00	
LE 1Mbps	0	2402	12.60	13.00	61.34
	19	2440	12.63	13.00	
	39	2480	12.51	13.00	
LE 2Mbps	0	2402	12.37	12.50	31.95
	19	2440	12.51	13.00	
	39	2480	12.47	12.50	

13. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

<SAR test exclusion table>

General Note:

1. Per KDB 447498 D04v01, Maximum power defines the thresholds in general for either available maximum time-averaged power or maximum time-averaged ERP, whichever is greater.
2. Per KDB 447498 D04v01, the separation distance is the smallest distance from any part of the antenna or radiating structure for all persons, during operation at the applicable ERP. for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. Per KDB 447498 D04v01, the SAR-based exemption formula of § 1.1307(b)(3)(i)(B), repeated here as Formula (B.2), applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold P_{th} (mW). This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by Formula (B.2).
 - a. This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by Formula (B.2).

$$ERP_{20\text{ cm}} (\text{mW}) = \begin{cases} 2040f & 0.3\text{ GHz} < f \leq 1.5\text{ GHz} \\ 3060 & 1.5\text{ GHz} < f \leq 6\text{ GHz} \end{cases} \quad [\text{B.1}]$$

$$P_{th} (\text{mW}) = \begin{cases} ERP_{20\text{ cm}} (d/20\text{ cm})^x & d \leq 20\text{ cm} \\ ERP_{20\text{ cm}} & 20\text{ cm} < d \leq 40\text{ cm} \end{cases} \quad [\text{B.2}]$$

Where $x = -\log_{10}\left(\frac{60}{ERP_{20\text{ cm}}\sqrt{f}}\right)$ and f is in GHz

b. and f is in GHz, d is the separation distance (cm), and $ERP_{20\text{ cm}}$ is per Formula (B.1).

4. Per KDB 447498 D04v01, at 100 MHz to 6 GHz, the SAR test exclusion threshold is determined according to the following:

Exposure Position	Wireless Interface	BT	2.4GHz WLAN Ant 1	2.4GHz WLAN ANT 3	2.4GHz WLAN ANT 1+3	5GHz WLAN ANT 2+3	6GHz WLAN ANT 2+3
	Calculated Frequency (MHz)	2480	2462	2462	2462	5825	5985.0
	Maximum power (dBm)	13	20	20.5	21	18.5	15.5
	Maximum rated power(mW)	20.0	100.0	112.0	126.0	71.0	35.48
Bottom Face	Separation distance(mm)	5.0	5.0	5.0	5.0	5.0	5.0
	exclusion threshold	2.7	2.7	2.7	2.7	1.4	1.3
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	5.0	5.0	78.0	5.0	5.0	5.0
	exclusion threshold	2.7	2.7	509.8	2.7	1.4	1.3
	Testing required?	Yes	Yes	No	Yes	Yes	Yes
Edge 2	Separation distance(mm)	24.2	24.2	246.0	24.2	76.9	76.9
	exclusion threshold	54.8	55.0	3060.0	55.0	415.0	412.7
	Testing required?	No	Yes	No	Yes	No	No
Edge 3	Separation distance(mm)	161.0	161.0	67.3	67.3	67.3	67.3
	exclusion threshold	2024.3	2025.0	385.0	385.0	314.1	312.1
	Testing required?	No	No	No	No	No	No
Edge 4	Separation distance(mm)	203.6	203.6	5.0	5.0	5.0	5.0
	exclusion threshold	3060.0	3060.0	2.7	2.7	1.4	1.3
	Testing required?	No	No	Yes	Yes	Yes	Yes

14. SAR Test Results

General Note:

1. Per KDB 447498 D04v01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For SAR testing of Bluetooth signal with 83.3% theoretical duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle) *83.3%".
 - d. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D04v01, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per FCC guidance, SAR was performed using 6.5 GHz SAR probe calibration factors.
5. Per October 2020 TCB Workshop Interim procedures, start instead with a minimum of 5 test channels across the full band, then adapt and apply conducted power and SAR test reduction procedures of KDB Pub. 248227 v02r02.
6. For testing the WLAN 6GHz of this DUT, the selection of test channels was based on FCC guidance, with five channels selected across the entire WLAN 6GHz Bands.
7. For determination of the scaling factor for report SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. Further simplification chose the worse SAR value and the worst scaling factor from each transmit chain perform reported SAR calculation conservatively. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain.
8. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. 802.11ax supports full tone size and partial tone size, after verification for the partial tone size mode power level will not higher than full tone size power level, so chose full tone power to be measured in this report.
7. SISO and MIMO all supported by WLAN2.4GHz/WLAN5GHz/WLAN6GHz, for SISO mode power is less than per chain power of MIMO mode. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power, so only chose MIMO mode to perform SAR testing.
8. For the conducted power measurement is MIMO chains transmitting simultaneously and measured the separately conducted power for both chains and then based on the conducted power of two antennas respectively to calculate sum of the power for MIMO mode.

Power Density General Notes:

1. The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
2. Batteries are fully charged at the beginning of the measurements.
3. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements.
4. Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
6. Per FCC guidance and equipment manufacturer guidance, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor.
7. Per April 2021 TCB Workshop and KDB 388624 D02v18r08, For the highest SAR test configurations also measure incident PD (total) using power-density reconstruction method in 2 mm closest measurement plane.
8. Per October 2020 TCB Workshop, PTP-PR algorithm was used during psPD measurement and calculations.
9. The measurement procedure consists of measuring the PD_{inc} at two different distances: 2 mm (compliance distance) and $\lambda/5$. The grid extents should be large enough to fully capture the transmitted energy. The grid step should be fine enough to demonstrate that the integrated Power Density iPD_n fulfill the criterion described below. Since iPD ratio between the two distances is ≥ -1 dB, the grid step (0.0625) was sufficient for determining compliance at d=2mm.

$$10 \cdot \log_{10} \frac{iPD_n(2mm)}{iPD_n(\lambda/5)} \geq -1$$



14.1 Body SAR

[WLAN 2.4GHz_5GHz SAR]

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 1	1	2412	19.79	20.00	1.05	100.0	1.0	0.13	0.084	0.088
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 1	1	2412	19.79	20.00	1.05	100.0	1.0	-0.06	0.507	0.532
	WLAN2.4GHz accessory	802.11b 1Mbps	Edge 1	0mm	Ant 1	1	2412	19.79	20	1.05	100	1	0.08	0.486	0.510
	WLAN2.4GHz	802.11b 1Mbps	Edge 2	0mm	Ant 1	1	2412	19.79	20.00	1.05	100.0	1.0	0.18	0.198	0.208
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	Ant 1	1	2412	19.79	20.00	1.05	100.0	1.0	0.12	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Edge 4	0mm	Ant 1	1	2412	19.79	20.00	1.05	100.0	1.0	0.10	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	Ant 3	1	2412	20.15	20.50	1.084	100.0	1.0	-0.17	0.089	0.096
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	Ant 3	1	2412	20.15	20.50	1.084	100.0	1.0	0.11	0.040	0.044
	WLAN2.4GHz	802.11b 1Mbps	Edge 2	0mm	Ant 3	1	2412	20.15	20.50	1.084	100.0	1.0	0.09	0.001	0.001
	WLAN2.4GHz	802.11b 1Mbps	Edge 3	0mm	Ant 3	1	2412	20.15	20.50	1.084	100.0	1.0	-0.09	0.001	0.001
01	WLAN2.4GHz	802.11b 1Mbps	Edge 4	0mm	Ant 3	1	2412	20.15	20.50	1.084	100.0	1.0	0.05	0.623	0.675
	WLAN2.4GHz accessory	802.11b 1Mbps	Edge 4	0mm	Ant 3	1	2412	20.15	20.5	1.084	100	1.0	0.08	0.571	0.619
	WLAN2.4GHz	802.11n-HT20 MCS0	Bottom Face	0mm	Ant 1+3	6	2437	20.54	21.00	1.112	97.38	1.027	-0.10	0.057	0.065
	WLAN2.4GHz	802.11n-HT20 MCS0	Edge 1	0mm	Ant 1+3	6	2437	20.54	21.00	1.112	97.38	1.027	0.14	0.253	0.289
	WLAN2.4GHz	802.11n-HT20 MCS0	Edge 2	0mm	Ant 1+3	6	2437	20.54	21.00	1.112	97.38	1.027	0.11	0.109	0.124
	WLAN2.4GHz	802.11n-HT20 MCS0	Edge 3	0mm	Ant 1+3	6	2437	20.54	21.00	1.112	97.38	1.027	-0.02	0.001	0.001
	WLAN2.4GHz	802.11n-HT20 MCS0	Edge 4	0mm	Ant 1+3	6	2437	20.54	21.00	1.112	97.38	1.027	-0.03	0.382	0.436
	WLAN2.4GHz accessory	802.11n-HT20 MCS0	Edge 4	0mm	Ant 1+3	6	2437	20.54	21	1.112	97.38	1.027	0.01	0.343	0.392
	WLAN5GHz	802.11ac-VHT40 MCS0	Bottom Face	0mm	Ant 2+3(2)	38	5190	15.58	16.00	1.102	90.67	1.103	0.09	0.102	0.124
02	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Ant 2+3(2)	38	5190	15.58	16.00	1.102	90.67	1.103	-0.05	1.020	1.240
	WLAN5GHz accessory	802.11ac-VHT40 MCS0	Edge 1	0mm	Ant 2+3(2)	38	5190	15.58	16	1.102	90.67	1.103	0.03	0.969	1.178
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Ant 2+3(2)	46	5230	15.49	15.50	1.002	90.67	1.103	-0.03	0.894	0.989
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 2	0mm	Ant 2+3(2)	38	5190	15.58	16.00	1.102	90.67	1.103	0.09	0.052	0.064
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 3	0mm	Ant 2+3(2)	38	5190	15.58	16.00	1.102	90.67	1.103	0.11	0.001	0.002
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 4	0mm	Ant 2+3(2)	38	5190	15.58	16.00	1.102	90.67	1.103	0.17	0.408	0.496
	WLAN5GHz	802.11ac-VHT40 MCS0	Bottom Face	0mm	Ant 2+3(3)	54	5270	15.14	15.50	1.086	90.67	1.103	-0.13	0.124	0.148
03	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Ant 2+3(3)	54	5270	15.14	15.50	1.086	90.67	1.103	-0.05	0.988	1.183
	WLAN5GHz accessory	802.11ac-VHT40 MCS0	Edge 1	0mm	Ant 2+3(3)	54	5270	15.14	15.5	1.086	90.67	1.103	-0.08	0.971	1.163
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	Ant 2+3(3)	62	5310	15.11	15.50	1.094	90.67	1.103	-0.17	0.955	1.152
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 2	0mm	Ant 2+3(3)	54	5270	15.14	15.50	1.086	90.67	1.103	-0.15	0.001	0.002
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 3	0mm	Ant 2+3(3)	54	5270	15.14	15.50	1.086	90.67	1.103	0.05	0.094	0.112
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 4	0mm	Ant 2+3(3)	54	5270	15.14	15.50	1.086	90.67	1.103	-0.17	0.387	0.464
	WLAN5GHz	802.11ax-HE80 MCS0	Bottom Face	0mm	Ant 2+3(2)	138	5690	14.05	14.50	1.109	97.14	1.029	0.03	0.129	0.147
04	WLAN5GHz	802.11ax-HE80 MCS0	Edge 1	0mm	Ant 2+3(2)	138	5690	14.05	14.50	1.109	97.14	1.029	0.01	1.070	1.221
	WLAN5GHz accessory	802.11ax-HE80 MCS0	Edge 1	0mm	Ant 2+3(2)	138	5690	14.05	14.5	1.109	97.14	1.029	0.01	0.981	1.119
	WLAN5GHz	802.11ax-HE80 MCS0	Edge 1	0mm	Ant 2+3(3)	110	5550	14.03	14.50	1.114	90.67	1.103	0.03	0.955	1.173
	WLAN5GHz	802.11ax-HE80 MCS0	Edge 1	0mm	Ant 2+3(2)	106	5530	14.11	14.50	1.094	97.14	1.029	0.06	1.010	1.137
	WLAN5GHz	802.11ax-HE80 MCS0	Edge 1	0mm	Ant 2+3(3)	122	5610	13.69	14.00	1.074	97.14	1.029	-0.08	0.985	1.089
	WLAN5GHz	802.11ax-HE80 MCS0	Edge 2	0mm	Ant 2+3(2)	138	5690	14.05	14.50	1.109	97.14	1.029	-0.03	0.001	0.001
	WLAN5GHz	802.11ax-HE80 MCS0	Edge 3	0mm	Ant 2+3(2)	138	5690	14.05	14.50	1.109	97.14	1.029	0.05	0.075	0.086
	WLAN5GHz	802.11ax-HE80 MCS0	Edge 4	0mm	Ant 2+3(2)	138	5690	14.05	14.50	1.109	97.14	1.029	0.04	0.656	0.749
	WLAN5GHz	802.11ax-HE80 MCS0	Bottom Face	0mm	Ant 2+3(3)	155	5775	14.00	14.50	1.122	97.14	1.029	0.06	0.100	0.115
05	WLAN5GHz	802.11ax-HE80 MCS0	Edge 1	0mm	Ant 2+3(3)	155	5775	14.00	14.50	1.122	97.14	1.029	-0.09	1.050	1.212
	WLAN5GHz accessory	802.11ax-HE80 MCS0	Edge 1	0mm	Ant 2+3(3)	155	5775	14	14.5	1.122	97.14	1.029	0.08	0.994	1.148
	WLAN5GHz	802.11ax-HE40 MCS0	Edge 1	0mm	Ant 2+3(3)	159	5795	14.14	14.50	1.086	90.13	1.11	0.01	0.936	1.128
	WLAN5GHz	802.11ax-HE80 MCS0	Edge 2	0mm	Ant 2+3(3)	155	5775	14.00	14.50	1.122	97.14	1.029	0.02	0.001	0.001
	WLAN5GHz	802.11ax-HE80 MCS0	Edge 3	0mm	Ant 2+3(3)	155	5775	14.00	14.50	1.122	97.14	1.029	-0.03	0.023	0.027
	WLAN5GHz	802.11ax-HE80 MCS0	Edge 4	0mm	Ant 2+3(3)	155	5775	14.00	14.50	1.122	97.14	1.029	0.05	0.596	0.688

[WLAN 6GHz SAR]

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Measured APD (W/m ²)
	WLAN6GHz	802.11ax-HE160 MCS0	Bottom Face	0mm	Ant 2+3(3)	47	6185	12.27	12.50	1.054	93.8	1.066	-0.04	0.063	0.071	0.421
06	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant 2+3(3)	47	6185	12.27	12.50	1.054	93.8	1.066	0.01	0.621	0.698	4.150
	WLAN6GHz accessory	802.11ax-HE160 MCS0	Edge 1	0mm	Ant 2+3(3)	47	6185	12.27	12.5	1.054	93.8	1.066	-0.08	0.604	0.679	3.91
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant 2+3(3)	15	6025	12.14	12.5	1.086	93.8	1.066	0.03	0.447	0.517	2.93
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant 2+3(2)	111	6505	12.14	12.5	1.086	93.8	1.066	0.01	0.339	0.392	2.16
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant 2+3(3)	143	6665	12.06	12.5	1.107	93.8	1.066	-0.02	0.321	0.379	2.08
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	0mm	Ant 2+3(2)	207	6985	12.11	12.5	1.094	93.8	1.066	-0.09	0.286	0.334	1.79
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 2	0mm	Ant 2+3(3)	47	6185	12.27	12.50	1.054	93.8	1.066	0.15	0.002	0.002	0.013
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 3	0mm	Ant 2+3(3)	47	6185	12.27	12.50	1.054	93.8	1.066	0.12	0.002	0.002	0.013
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 4	0mm	Ant 2+3(3)	47	6185	12.27	12.50	1.054	93.8	1.066	0.15	0.454	0.510	3.030

【Bluetooth SAR】

Plot No	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
07	Bluetooth	1Mbps	Bottom Face	0mm	Ant 1	39	2441	12.68	13.00	1.076	76.61	1.087	-0.07	0.001	0.001
	Bluetooth	1Mbps	Edge 1	0mm	Ant 1	39	2441	12.68	13.00	1.076	76.61	1.087	0.05	0.014	0.016
	Bluetooth	1Mbps	Edge 2	0mm	Ant 1	39	2441	12.68	13.00	1.076	76.61	1.087	-0.18	0.001	0.001
	Bluetooth	1Mbps	Edge 3	0mm	Ant 1	39	2441	12.68	13.00	1.076	76.61	1.087	0.15	0.001	0.001
	Bluetooth	1Mbps	Edge 4	0mm	Ant 1	39	2441	12.68	13.00	1.076	76.61	1.087	0.01	0.001	0.001

14.2 6GHz PD Test Result

<WLAN PD>

Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Grid Step (A)	iPDn	iPD ratio (≥ -1)	Normal psPD (W/m ²)	Total psPD (W/m ²)
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2+3(3)	15	6025	12.14	0.0625	1.33	0.75	1.99	2.63
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	8.59mm	Ant 2+3(3)	15	6025	12.14	0.15	1.12		1.47	1.56
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2+3(2)	207	6985	12.11	0.0625	0.982	0.53	0.527	0.874
WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	10mm	Ant 2+3(2)	207	6985	12.11	0.15	0.869		0.309	0.436

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Grid Step (A)	Scaling Factor for Measurement Uncertainty	Power Drift (dB)	Normal psPD (W/m ²)	Scaled Normal psPD (W/m ²)	Total psPD (W/m ²)	Scaled Total psPD (W/m ²)
01	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2+3(3)	47	6185	12.27	12.50	1.054	100	1.000	0.0625	1.5535	0.03	0.205	0.34	0.211	0.35
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2+3(3)	15	6025	12.14	12.50	1.086	100	1.000	0.0625	1.5535	-0.01	1.99	3.36	2.63	4.44
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2+3(2)	111	6505	12.14	12.50	1.086	100	1.000	0.0625	1.5535	0.01	0.118	0.20	0.123	0.21
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2+3(3)	143	6665	12.06	12.50	1.107	100	1.000	0.0625	1.5535	0.01	1.4	2.41	1.67	2.87
	WLAN6GHz	802.11ax-HE160 MCS0	Edge 1	2mm	Ant 2+3(2)	207	6985	12.11	12.50	1.094	100	1.000	0.0625	1.5535	0.03	0.527	0.90	0.874	1.49

14.3 Repeated SAR Measurement

【Repeat SAR 1g - FCC】

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-Up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Ratio
1st	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0.0	Ant 2+3(2)	38	5190	15.58	16.00	1.102	90.67	1.103	-0.05	1.020	1.240	-
2nd	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0.0	Ant 2+3(2)	38	5190	15.58	16.00	1.102	90.67	1.103	0.03	0.989	1.202	1.03
1st	WLAN5GHz	802.11ax-HE80 MCS0	Edge 1	0.0	Ant 2+3(2)	138	5690	14.05	14.50	1.109	97.14	1.029	0.01	1.070	1.221	-
2nd	WLAN5GHz	802.11ax-HE80 MCS0	Edge 1	0.0	Ant 2+3(2)	138	5690	14.05	14.50	1.109	97.14	1.029	0.03	1.050	1.198	1.02
1st	WLAN5GHz	802.11ax-HE80 MCS0	Edge 1	0.0	Ant 2+3(3)	155	5775	14.00	14.50	1.122	97.14	1.029	-0.09	1.050	1.212	-
2nd	WLAN5GHz	802.11ax-HE80 MCS0	Edge 1	0.0	Ant 2+3(3)	155	5775	14.00	14.50	1.122	97.14	1.029	0.01	1.020	1.178	1.03

General Note:

- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
- Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
- The ratio is the difference in percentage between original and repeated *measured* SAR.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Digital Media DEVICE
		Body
1.	WLAN5GHz + Bluetooth	Yes
2.	WLAN6GHz + Bluetooth	Yes
3.	WLAN5GHz + Bluetooth + WPT	Yes
4.	WLAN6GHz + Bluetooth + WPT	Yes

General Note:

- WLAN2.4GHz/WLAN5GHz/WLAN6GHz MIMO SAR can represent SISO SAR to do co-located SAR analysis.
- According to the EUT characteristic, WLAN 2.4GHz and Bluetooth cannot transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz/WLAN 6GHz and Bluetooth can transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz/WLAN 6GHz and WLAN 2.4GHz cannot transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz and WLAN 6GHz cannot transmit simultaneously.
- All licensed modes share the same antenna part and cannot transmit simultaneously.
- The reported SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D04v01, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.

15.1 Body Exposure Conditions

Exposure Position	1	2	3	4	5	6	4+6 Summed 1g SAR (W/kg)	5+6 Summed 1g SAR (W/kg)
	2.4GHz WLAN Ant 1 1g SAR (W/kg)	2.4GHz WLAN Ant 3 1g SAR (W/kg)	2.4GHz WLAN Ant 1+3 1g SAR (W/kg)	5GHz WLAN Ant 2+3 1g SAR (W/kg)	6GHz WLAN Ant 2+3 1g SAR (W/kg)	Bluetooth Ant 1 1g SAR (W/kg)		
Bottom Face	0.088	0.096	0.065	0.148	0.071	0.001	0.15	0.07
Edge 1	0.532	0.044	0.289	1.240	0.698	0.016	1.26	0.71
Edge 2	0.208	0.001	0.124	0.064	0.002	0.001	0.07	0.00
Edge 3	0.001	0.001	0.001	0.112	0.002	0.001	0.11	0.00
Edge 4	0.001	0.675	0.436	0.749	0.510	0.001	0.75	0.51

<Total exposure ratio>

Max 1g SAR	WPT SAR	TER
(W/Kg)	(W/Kg)	Reported SAR/1.6 + WPT SAR /1.6 Summation
1.26	0.00051	0.79

Remark: WPT SAR value is from another WPT SAR report which is submitted separately.

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu

16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

Declaration of Conformity:

The test results with all measurement uncertainty excluded is presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Uncertainty Budget According to IEC/IEEE 62209-1528 (Frequency band: 4 MHz - 10 GHz range)							
Error Description	Uncert. Value (±%)	Prob. Dist.	Div.	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System errors							
Probe calibration	18.6	N	2	1	1	9.3	9.3
Probe calibration drift	1.7	R	1.732	1	1	1.0	1.0
Probe linearity and detection Limit	4.7	R	1.732	1	1	2.7	2.7
Broadband signal	2.8	R	1.732	1	1	1.6	1.6
Probe isotropy	7.6	R	1.732	1	1	4.4	4.4
Other probe and data acquisition errors	2.4	N	1	1	1	2.4	2.4
RF ambient and noise	1.8	N	1	1	1	1.8	1.8
Probe positioning errors	0.006	N	1	0.5	0.5	0.0	0.0
Data processing errors	4.0	N	1	1	1	4.0	4.0
Phantom and Device Errors							
Measurement of phantom conductivity (σ)	2.5	N	1	0.78	0.71	2.0	1.8
Temperature effects (medium)	5.4	R	1.732	0.78	0.71	2.4	2.2
Shell permittivity	14.0	R	1.732	0.5	0.5	4.0	4.0
Distance between the radiating element of the DUT and the phantom medium	2.0	N	1	2	2	4.0	4.0
Repeatability of positioning the DUT or source against the phantom	1.0	N	1	1	1	1.0	1.0
Device holder effects	3.6	N	1	1	1	3.6	3.6
Effect of operating mode on probe sensitivity	2.4	R	1.732	1	1	1.4	1.4
Time-average SAR	1.7	R	1.732	1	1	1.0	1.0
Variation in SAR due to drift in output of DUT	2.5	N	1	1	1	2.5	2.5
Validation antenna uncertainty (validation measurement only)	0.0	N	1	1	1	0.0	0.0
Uncertainty in accepted power (validation measurement only)	0.0	N	1	1	1	0.0	0.0
Correction to the SAR results							
Phantom deviation from target (ϵ', σ)	1.9	N	1	1	0.84	1.9	1.6
SAR scaling	0.0	R	1.732	1	1	0.0	0.0
Combined Std. Uncertainty						14.5%	14.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						29.0%	28.8%

SAR Uncertainty Budget for frequency range 4MHz to 10GHz

cDASY6 Module mmWave Uncertainty Budget Evaluation Distances to the Antennas > $\lambda/2\pi$ In Compliance with IEC TR 63170					
Error Description	Uncertainty Value (±dB)	Probability	Divisor	(Ci)	Standard Uncertainty (±dB)
Uncertainty terms dependent on the measurement system					
Probe Calibration	0.49	N	1	1	0.49
Probe correction	0.00	R	1.732	1	0.00
Frequency response	0.20	R	1.732	1	0.12
Sensor cross coupling	0.00	R	1.732	1	0.00
Isotropy	0.50	R	1.732	1	0.29
Linearity	0.20	R	1.732	1	0.12
Probe scattering	0.00	R	1.732	1	0.00
Probe positioning offset	0.30	R	1.732	1	0.17
Probe positioning repeatability	0.04	R	1.732	1	0.02
Sensor mechanical offset	0.00	R	1.732	1	0.00
Probe spatial resolution	0.00	R	1.732	1	0.00
Field impedance dependence	0.00	R	1.732	1	0.00
Amplitude and phase drift	0.00	R	1.732	1	0.00
Amplitude and phase noise	0.04	R	1.732	1	0.02
Measurement area truncation	0.00	R	1.732	1	0.00
Data acquisition	0.03	N	1	1	0.03
Sampling	0.00	R	1.732	1	0.00
Field reconstruction	2.00	R	1.732	1	1.15
Forward transformation	0.00	R	1.732	1	0.00
Power density scaling	0.00	R	1.732	1	0.00
Spatial averaging	0.10	R	1.732	1	0.06
System detection limit	0.04	R	1.732	1	0.02
Uncertainty terms dependent on the DUT and environmental factors					
Probe coupling with DUT	0.00	R	1.732	1	0.0
Modulation response	0.40	R	1.732	1	0.2
Integration time	0.00	R	1.732	1	0.0
Response time	0.00	R	1.732	1	0.0
Device holder influence	0.10	R	1.732	1	0.1
DUT alignment	0.00	R	1.732	1	0.0
RF ambient conditions	0.04	R	1.732	1	0.0
Ambient reflections	0.04	R	1.732	1	0.0
Immunity / secondary reception	0.00	R	1.732	1	0.0
Drift of the DUT		R	1.732	1	
Combined Std. Uncertainty					1.34
Expanded STD Uncertainty (95%)					2.68
PD Uncertainty Budget					

17. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.
- [6] FCC KDB 447498 D04 v01, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Nov 2021
- [7] FCC KDB 865664 D01 v01r04, “SAR Measurement Requirements for 100 MHz to 6 GHz”, Aug 2015.
- [8] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.
- [9] FCC KDB 616217 D04 v01r02, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, Oct 2015
- [10] IEC/IEEE 62209-1528:2020, “Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)”, Oct. 2020
- [11] IEC 62479:2010 Assessment of the compliance of low power electronic and electrical equipment with the basic restrictions related to human exposure to electromagnetic fields (10 MHz to 300 GHz)
- [12] IEC TR 63170: 2018 Measurement procedure for the evaluation of power density related to human exposure to radio frequency fields from wireless communication devices operating between 6 GHz and 100 GHz
- [13] SPEAG DASY6 System Handbook
- [14] SPEAG DASY6 Application Note (Interim Procedures for Devices Operating at 6-10 GHz)

Appendixes

Please refer to separated files for the following appendixes

Appendix A. Plots of System Performance Check

Appendix B. Plots of High SAR Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Test Setup Photos

-----THE END-----