



FCC RF Test Report

APPLICANT : Amazon.com Services LLC
EQUIPMENT : Digital Media Device
MODEL NAME : SP24NE
FCC ID : 2A4DH-2945
STANDARD : FCC Part 15 Subpart C §15.209
CLASSIFICATION : (DCD) Part 15 Low Power Transmitter Below 1705 kHz
TEST DATE(S) : Sep. 23, 2025 ~ Oct. 20, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Applicant.....	5
1.2 Product Feature of Equipment Under Test	5
1.3 Modification of EUT	5
1.4 Test Location	5
1.5 Test Software	6
1.6 Applied Standards	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode	7
2.2 Connection Diagram of Test System	7
2.3 Support Unit used in test configuration and system.....	7
3 Test Result	8
3.1 20dB and 99% Occupied Bandwidth Measurement	8
3.2 Radiated Emission Measurement	12
3.3 AC Conducted Emission Measurement	21
3.4 Antenna Requirements.....	25
4 List of Measuring Equipment.....	26
5 Measurement Uncertainty	27



History of this test report

Report No.	Version	Description	Issued Date
FR4N2622-01D	01	Initial issue of report	Oct. 30, 2025
FR4N2622-01D	02	1. Updated the information of Equipment name 2. Updated the version of ANSI C63.10 3. Updated Section 3.1.3 Test Procedures This report is an updated version, replacing the report issued on Oct. 30, 2025.	Feb. 09, 2026
FR4N2622-01D	03	Updated description in Section 2.2 This report is an updated version, replacing the report issued on Feb. 09, 2026.	Apr. 08, 2026



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	2.1049	20dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.209	Radiated Emission	Pass	Under limit 4.56 dB at 42.37 MHz
3.3	15.207	AC Conducted Emission	Pass	Under limit 10.36 dB at 0.537 MHz
3.4	15.203	Antenna Requirements	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Amazon.com Services LLC

410 Terry Avenue N, Seattle, WA 98109-5210, United States

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Device
Model Name	SP24NE
FCC ID	2A4DH-2945
SN Code	Conducted: PN446P0253440212 Conduction: GN44D1015344002F Radiation: GUW4E30353140159
WPT Frequency Range	110~165KHz
WPT Type of Modulation	ASK
WPT Antenna Type	Coil Antenna

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 10CH01-KS 03CH02-KS TH01-KS	CN1257	314309



1.5 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	10CH01-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.209, §15.207
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2020+Cor.1-2023

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.


2 Test Configuration of Equipment Under Test

2.1 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 1000 MHz).
- b. AC power line Conducted Emission was tested under maximum output power.

Test Items	Function Type
AC Conducted Emission	Mode 1: WPT + Battery Level < 10% Mode 2: WPT + Battery Level 50%(40%~60%) Mode 3: WPT + Battery Level >90%
Radiated Emission	Mode 1: WPT + Battery Level

2.2 Connection Diagram of Test System

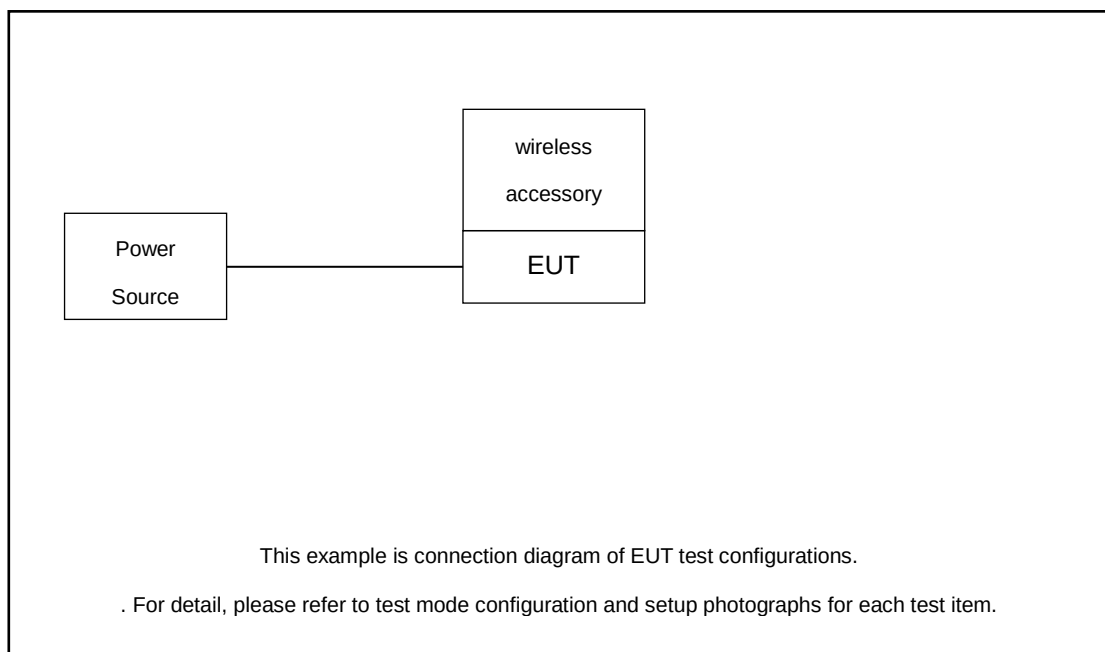

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adaptor	N/A	N/A	N/A	N/A	N/A

3 Test Result

3.1 20dB and 99% Occupied Bandwidth Measurement

3.1.1 Limit of 20dB and 99% Occupied Bandwidth

Reporting only, 99% OBW shall not located within 15.205 restricted bands.

3.1.2 Measuring Instruments


See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The 20dB and 99% Occupied bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT, while the EUT is in operation.
2. Set the RBW=300Hz, the VBW=300Hz, Sweep=auto; Detector=peak, Trace=max hold;
3. Measure and record the results in the test report.

Remark: Because the measured signal is CW adjusting the RBW would not be practical since measured bandwidth will always changes with RBW.

3.1.4 Test Setup

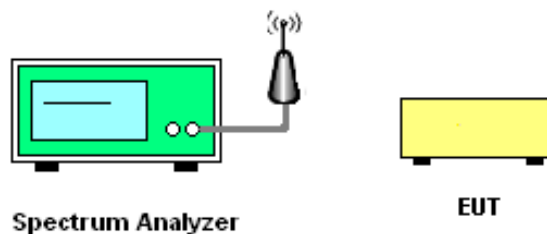




3.1.5 Test Result of 20dB and 99% Bandwidth


Mode 1

20 dB Bandwidth Plot

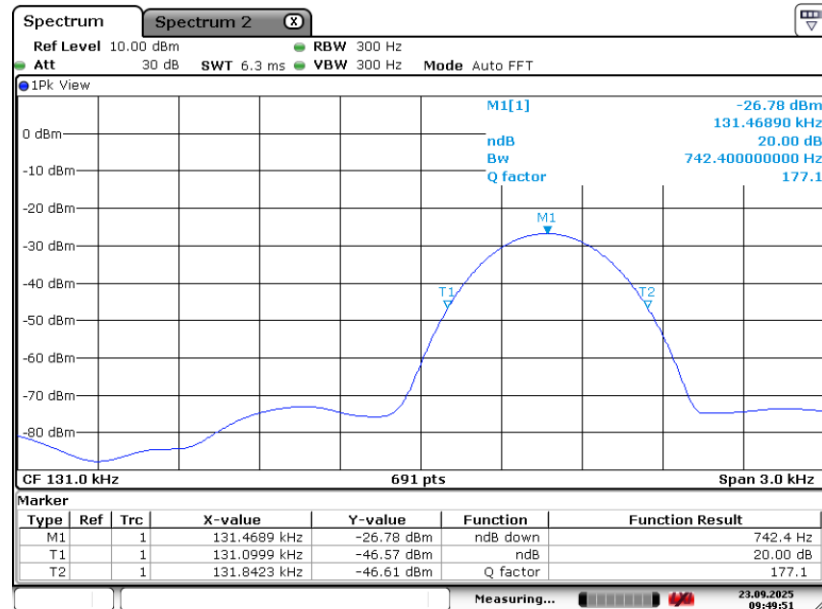

Date: 23.SEP.2025 09:49:51

99% Occupied Bandwidth Plot

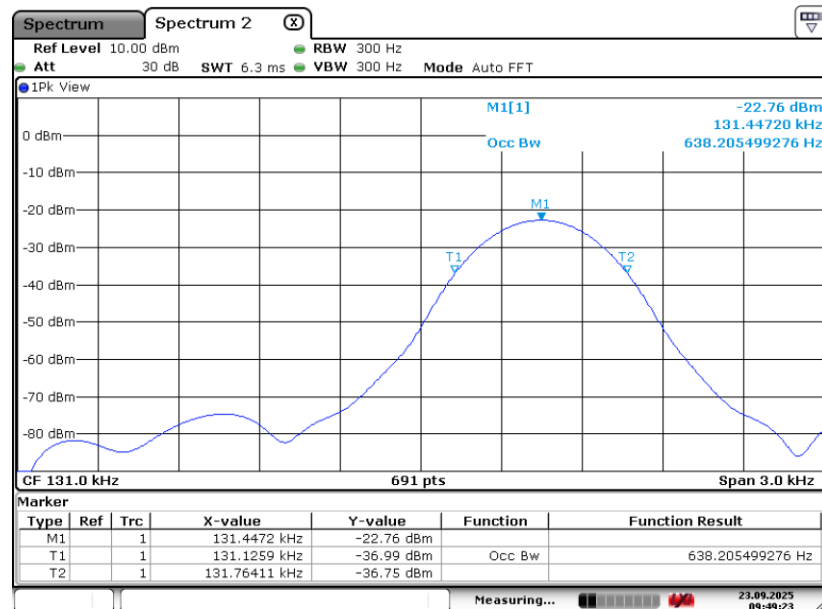


Date: 23.SEP.2025 09:49:22




Mode 2

20 dB Bandwidth Plot

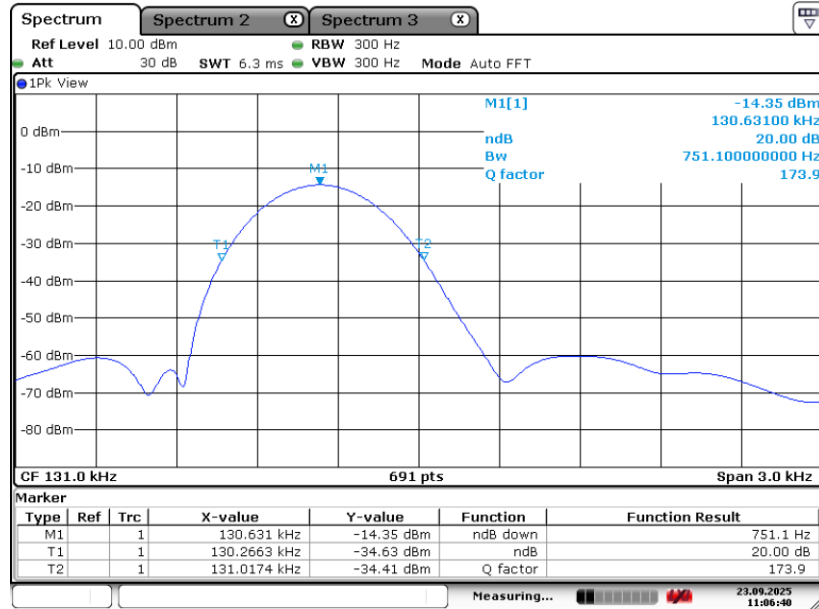

Date: 23.SEP.2025 11:06:40

99% Occupied Bandwidth Plot

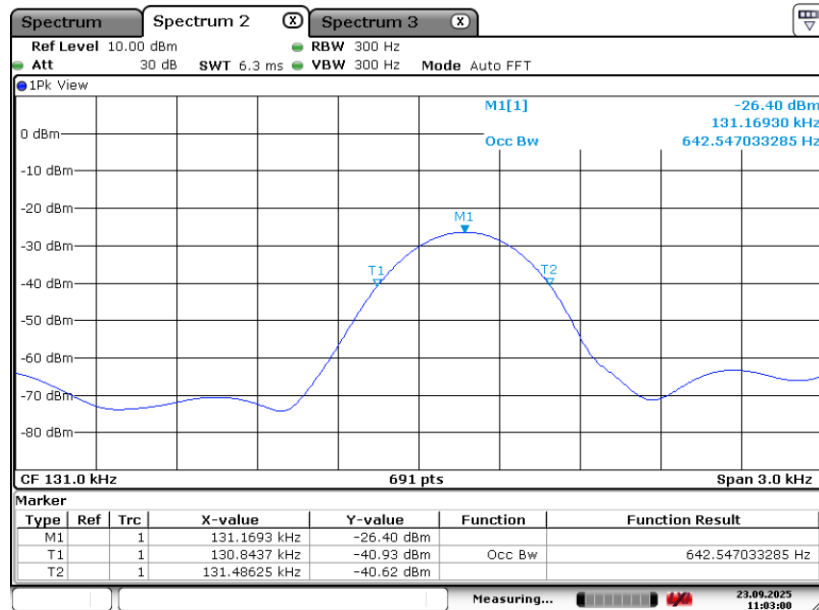


Date: 23.SEP.2025 11:03:00




Mode 3

20 dB Bandwidth Plot

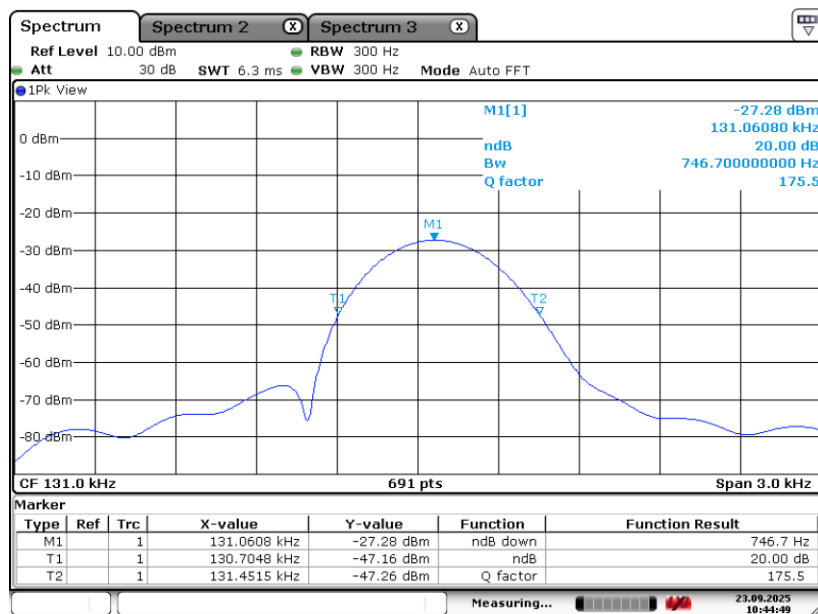

Date: 23.SEP.2025 10:44:49

99% Occupied Bandwidth Plot

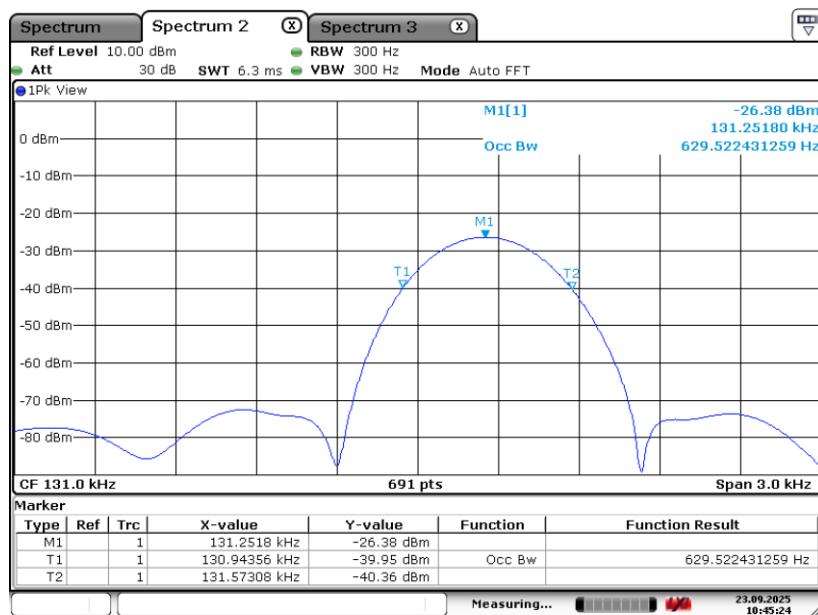

Date: 23.SEP.2025 10:45:23

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW

3.2 Radiated Emission Measurement

3.2.1 Limit of Radiated Emission

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Receiver Parameter	Setting
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For radiated emissions from 9kHz to 1GHz test distance is 3m

For 9kHz ~ 30MHz

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
3. specific line (dBμV/m) = $20 \log$ Emission level (μV/m)
4. Limit line = specific limits (dBμV/m) + distance extrapolation factor.

3.2.2 Measuring Instruments


See list of measuring equipment of this test report.

3.2.3 Measuring Instrument Setting

Follow the guidelines in C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.2.4 Test Setup of Radiated Emission


For radiated emissions below 30MHz

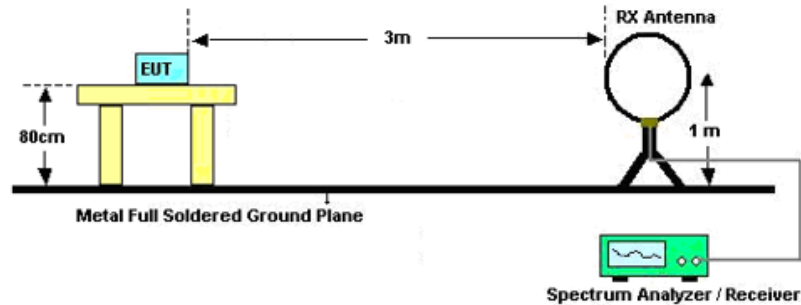

Note:

1. There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.
2. Tested for radiated below 30 MHz using a loop antenna in accordance with C63.10, the antenna was positioned in three antenna orientations: horizontal, vertical, and ground-parallel three polarization's, the worst case is horizontal & vertical polarization, test data of two mode was reported.

For radiated emissions above 30MHz

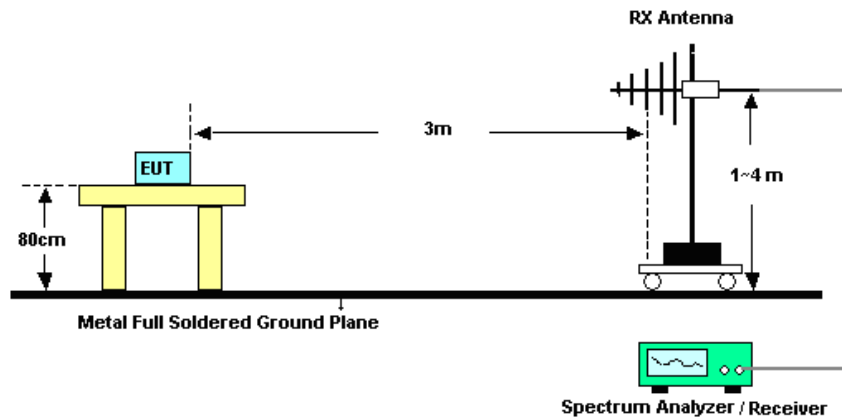




3.2.5 Test Result of Fundamental Emission


Frequency (MHz)	Level (dBuV/m) @3m	Distance Factor (dB)	Corrected level @300m (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Remark	Pol/Phase
0.1311	77.19	80	-2.81	25.25	-28.06	57.42	19.69	0.08	AV	Perpendicular
0.13125	71.93	80	-8.07	25.24	-33.31	52.16	19.69	0.08	AV	Parallel

Note: The field strength is tested at 3m distance then convert to 300m by adding distance factor $40 \cdot \log(d1/d2)$

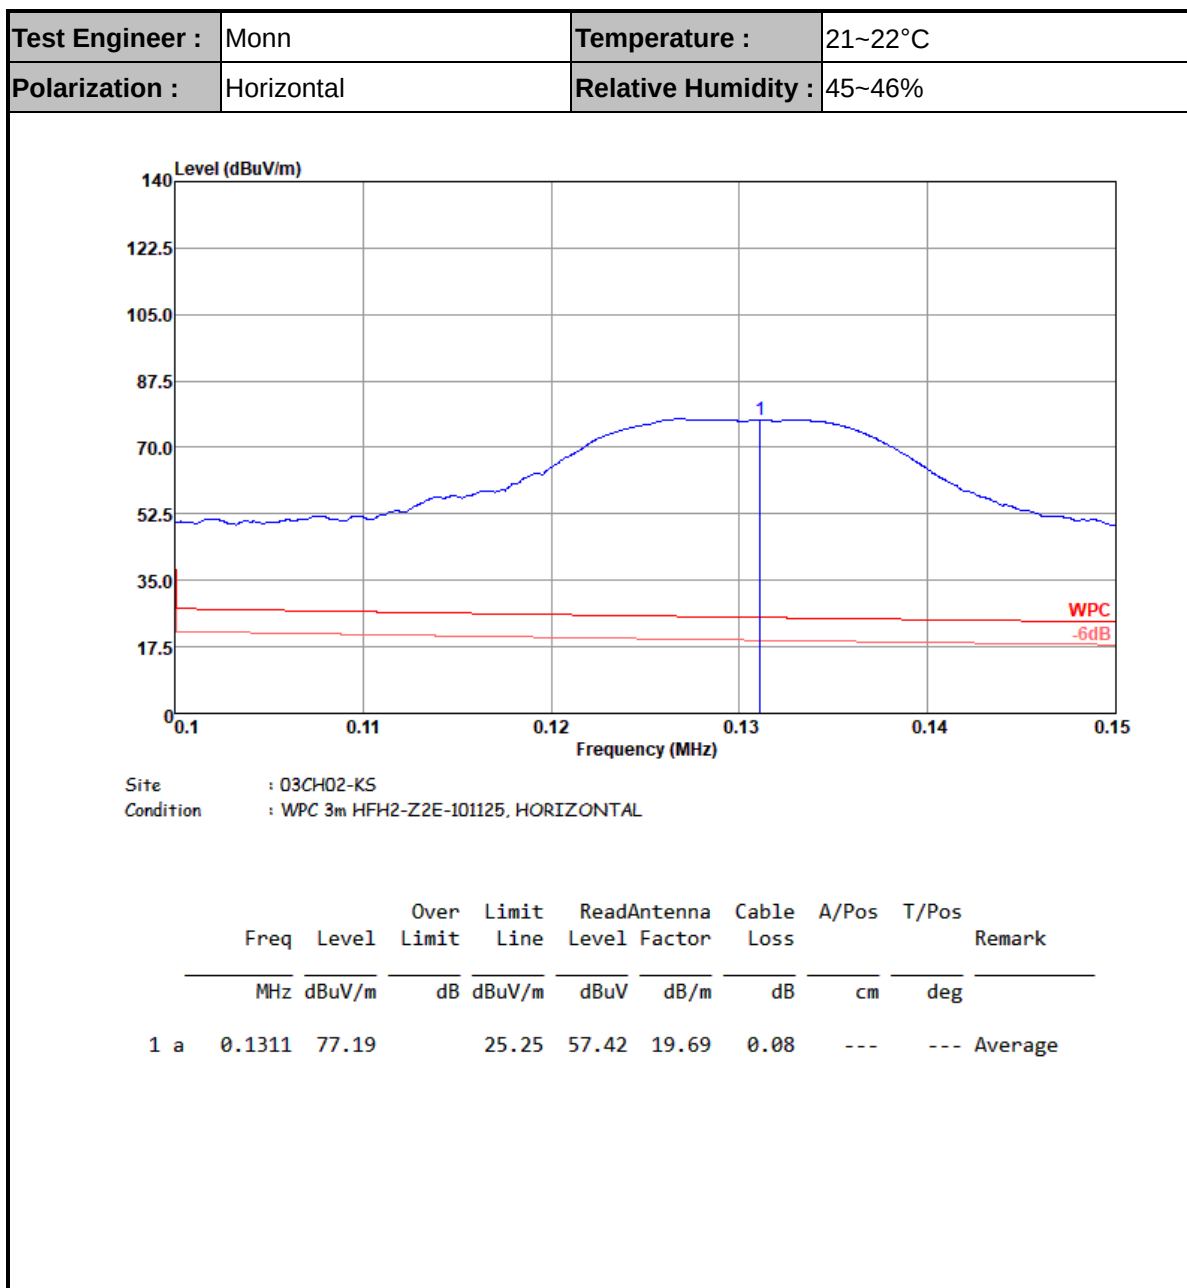



Test Engineer :	Monn	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	45~46%

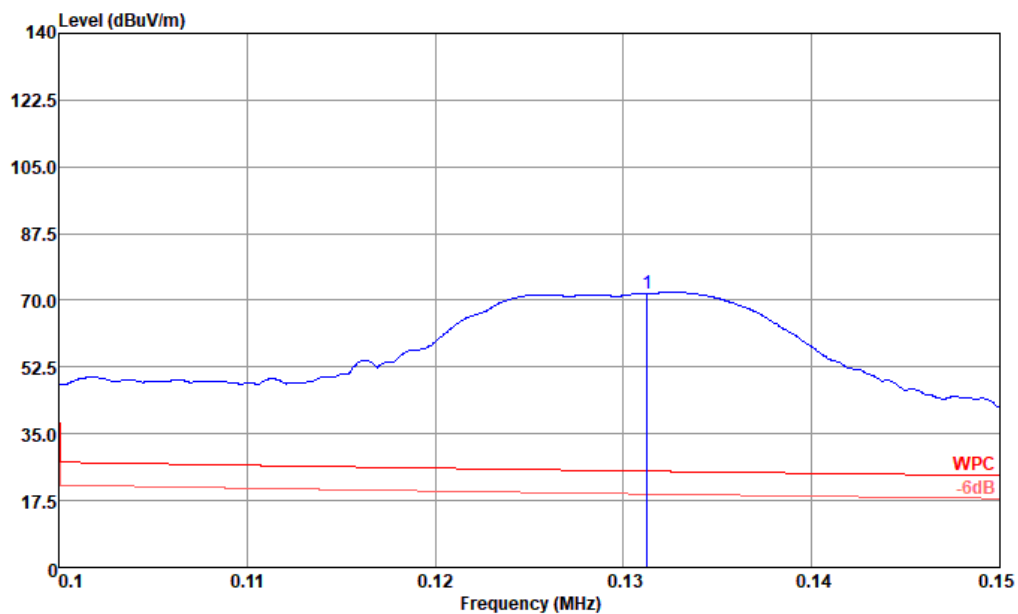

Site : 03CH02-KS
Condition : WPC 3m HFH2-Z2E-101125, VERTICAL
Project : 4N2622-01

	Freq	Level	Limit	Line	Level	Factor	Cable	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1 a	0.1313	71.93	--	25.24	52.16	19.69	0.08	---	---	Average



3.2.6 Test Result of Radiated Emission (9kHz ~ 30MHz)


Frequency (MHz)	Level (dBuV/m) @3m	Distance Factor (dB)	Corrected Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Remark	Pol/Phase
0.03	65.82	80	-14.18	38.64	-52.82	45.96	19.8	0.06	Average	HORIZONTAL
0.06	57.12	80	-22.88	32.51	-55.39	37.35	19.7	0.07	Average	HORIZONTAL
0.43	49.85	40	9.85	14.87	-5.02	30.23	19.53	0.09	QP	HORIZONTAL
5.38	26.32	40	-13.68	29.5	-43.18	6.84	19.33	0.15	QP	HORIZONTAL
17.03	26.81	40	-13.19	29.5	-42.69	6.8	19.7	0.31	QP	HORIZONTAL
27.31	27.49	40	-12.51	29.5	-42.01	6.89	20.17	0.43	QP	HORIZONTAL
0.03	56.55	80	-23.45	38.13	-61.58	36.69	19.8	0.06	Average	VERTICAL
0.06	50.2	80	-29.8	32.13	-61.93	30.43	19.7	0.07	Average	VERTICAL
0.67	38.83	40	-1.17	31.12	-32.29	19.23	19.5	0.1	QP	VERTICAL
3.51	28.29	40	-11.71	29.5	-41.21	8.74	19.42	0.13	QP	VERTICAL
9.50	29.53	40	-10.47	29.5	-39.97	9.84	19.5	0.19	QP	VERTICAL
27.83	27.41	40	-12.59	29.5	-42.09	6.78	20.19	0.44	QP	VERTICAL

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
3. Corrected Level = Level @3m (dBuV/m) - distance extrapolation factor.



Test Engineer :	Monn	Temperature :	21~22°C
Polarization :	Horizontal	Relative Humidity :	45~46%

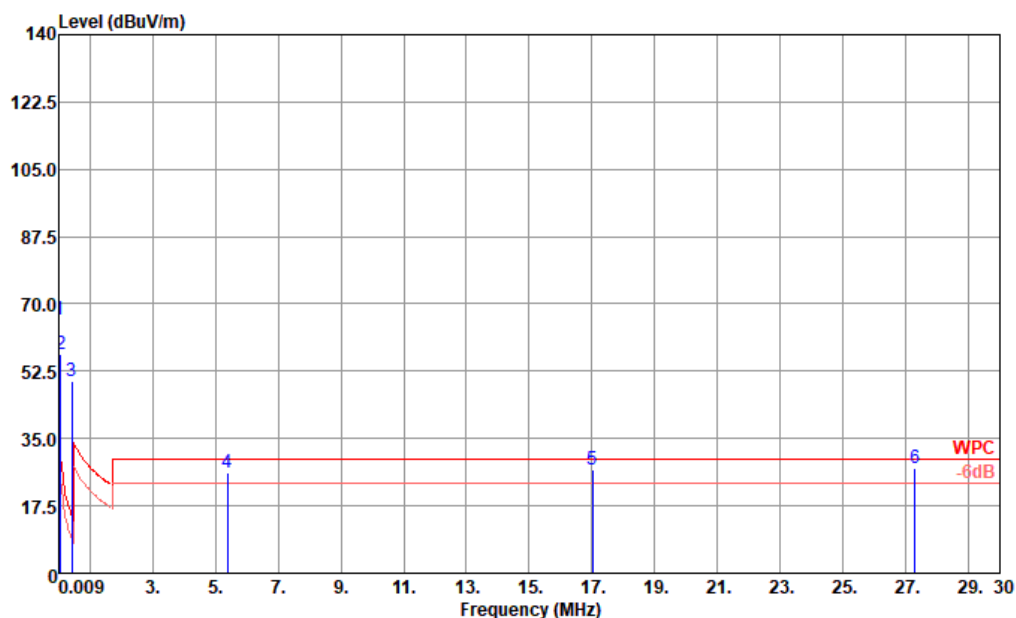


Site : 03CH02-KS
Condition : WPC 3m HFH2-Z2E-101125, HORIZONTAL

		Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	A/Pos	T/Pos	Remark	
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	a	0.0280	65.82		38.64	45.96	19.80	0.06	---	---	Average
2	*	0.0568	57.12		32.51	37.35	19.70	0.07	---	---	Average
3	q	0.4331	49.85		14.87	30.23	19.53	0.09	---	---	QP
4	!	5.3780	26.32		29.50	6.84	19.33	0.15	---	---	QP
5	!	17.0270	26.81		29.50	6.80	19.70	0.31	---	---	QP
6	!	27.3050	27.49		29.50	6.89	20.17	0.43	---	---	QP



Test Engineer :	Monn	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	45~46%

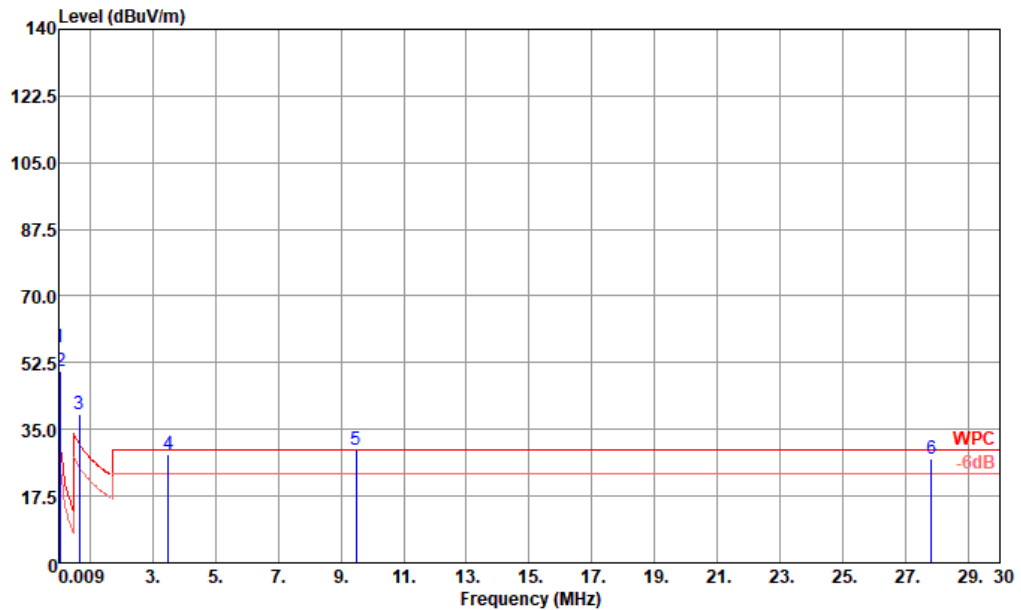


Site : 03CH02-KS
Condition : WPC 3m HFH2-Z2E-101125, VERTICAL

		Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	A/Pos	T/Pos	Remark	
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	a	0.0297	56.55		38.13	36.69	19.80	0.06	---	---	Average
2	*	0.0593	50.20		32.13	30.43	19.70	0.07	---	---	Average
3	q	0.6662	38.83		31.12	19.23	19.50	0.10	---	---	QP
4	!	3.5060	28.29		29.50	8.74	19.42	0.13	---	---	QP
5	*	9.4960	29.53		29.50	9.84	19.50	0.19	---	---	QP
6	!	27.8300	27.41		29.50	6.78	20.19	0.44	---	---	QP




3.2.7 Test Result of Radiated Emission (30MHz ~ 1000MHz)

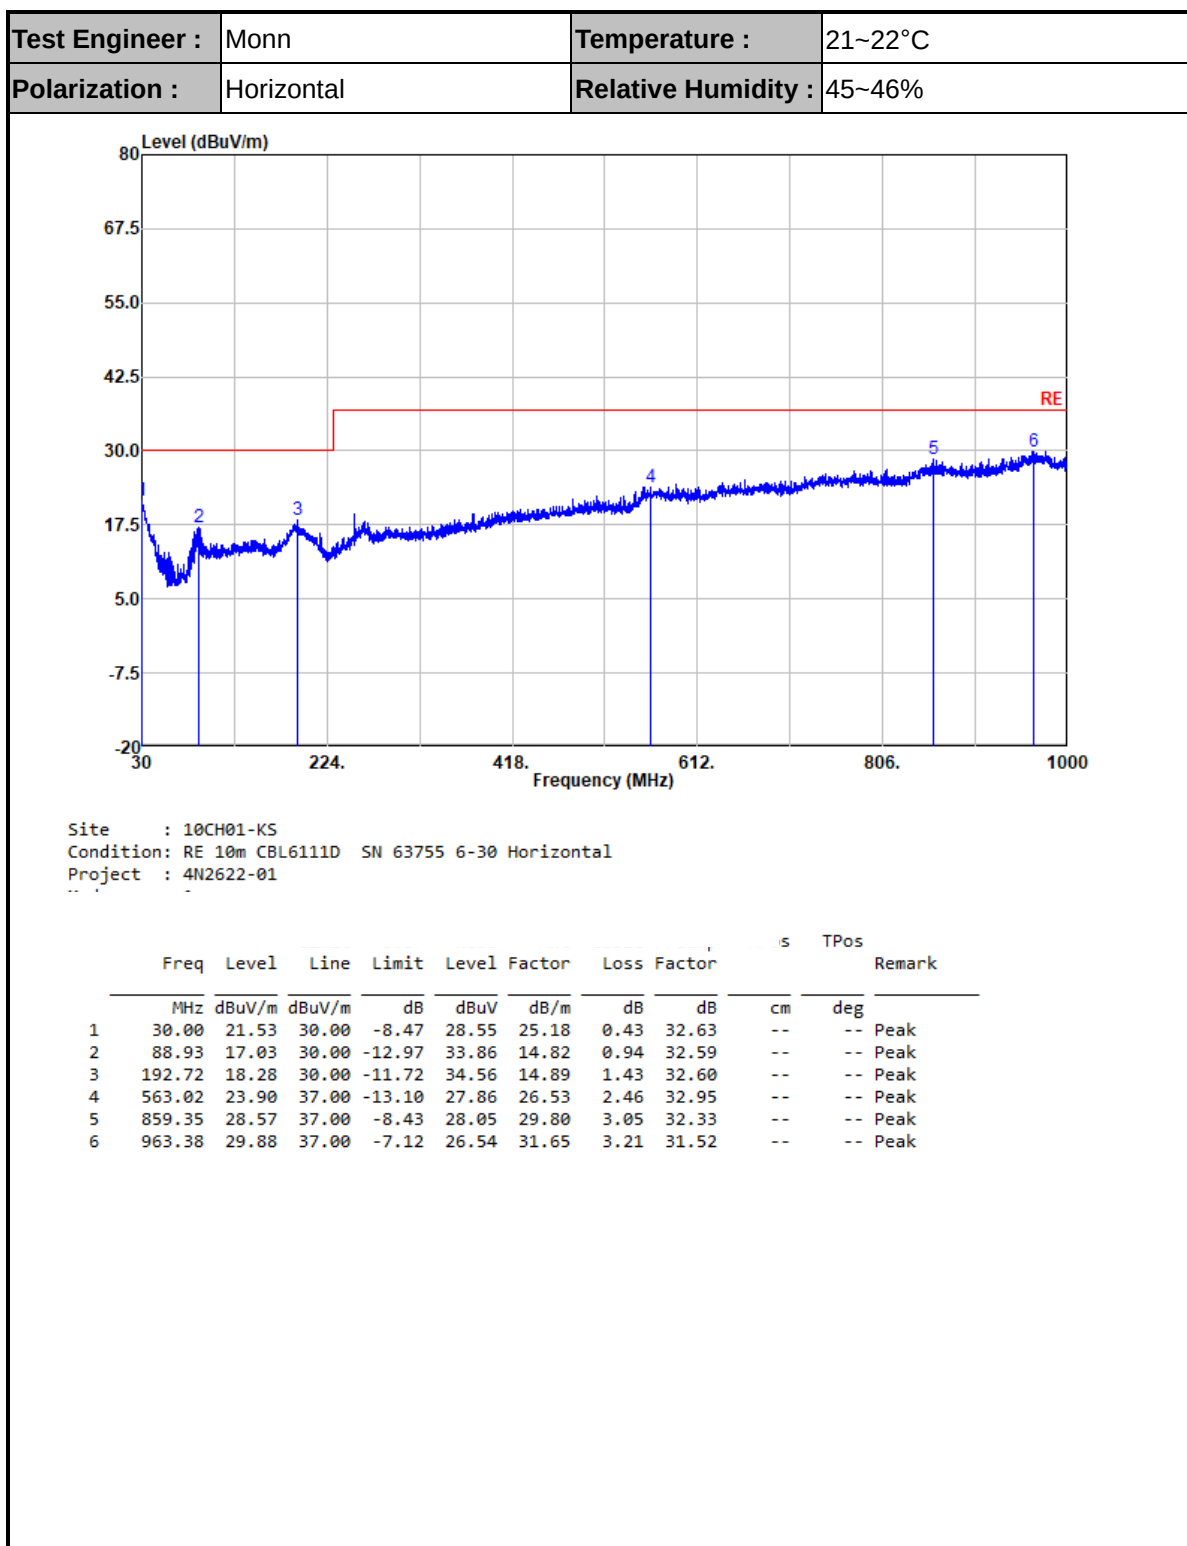



Test Engineer :	Monn	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	45~46%

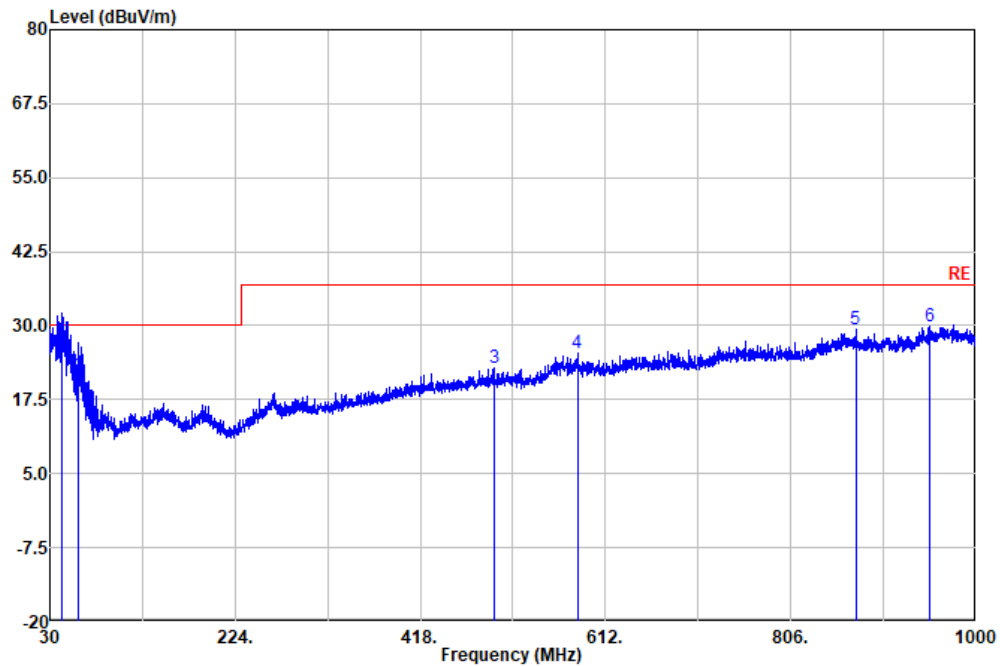

Site : 10CH01-KS
Condition: RE 10m CBL6111D SN 63161 6-30 Vertical

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	42.37	25.44	30.00	-4.56	38.80	18.67	0.61	32.64	100	94	QP
2	60.31	21.38	30.00	-8.62	41.30	11.94	0.77	32.63	100	53	QP
3	494.87	22.78	37.00	-14.22	29.07	24.15	2.42	32.86	--	--	Peak
4	582.42	25.39	37.00	-11.61	29.61	26.12	2.63	32.97	--	--	Peak
5	873.90	29.35	37.00	-7.65	28.90	29.44	3.22	32.21	--	--	Peak
6	950.77	29.99	37.00	-7.01	27.42	30.90	3.35	31.68	--	--	Peak

3.3 AC Conducted Emission Measurement

3.3.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.3.4 Test Setup

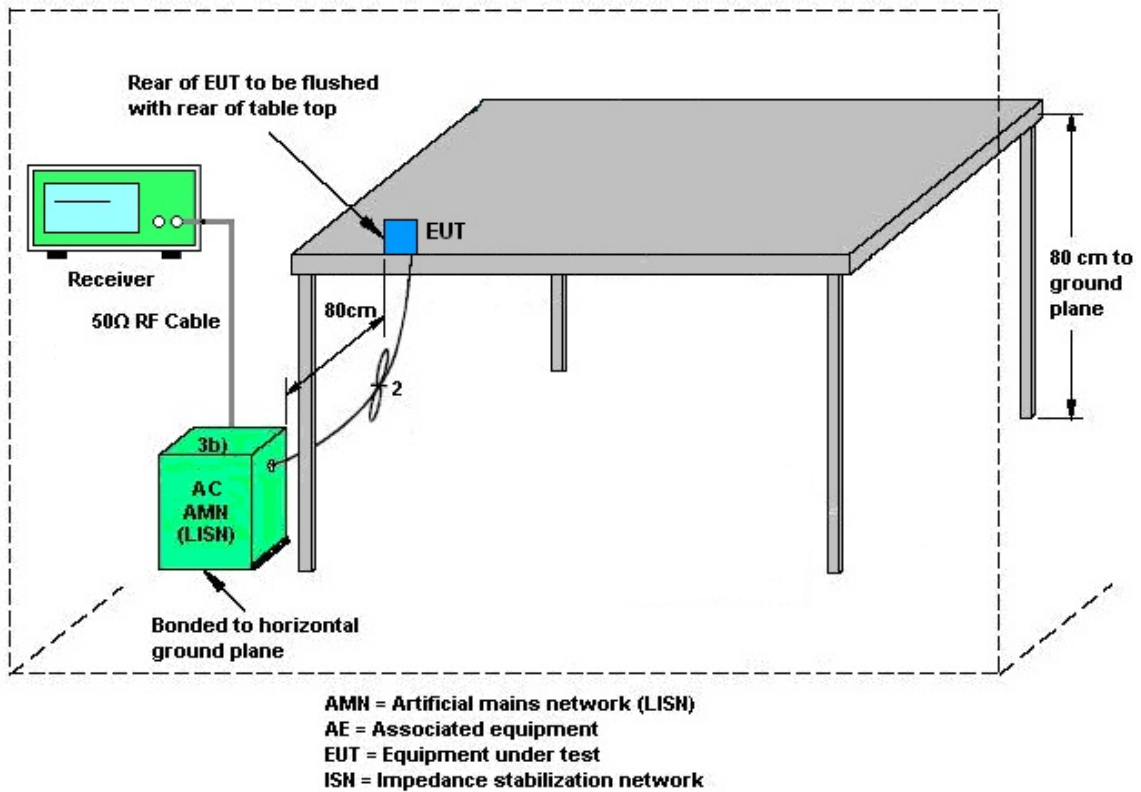




3.3.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

Full Spectrum

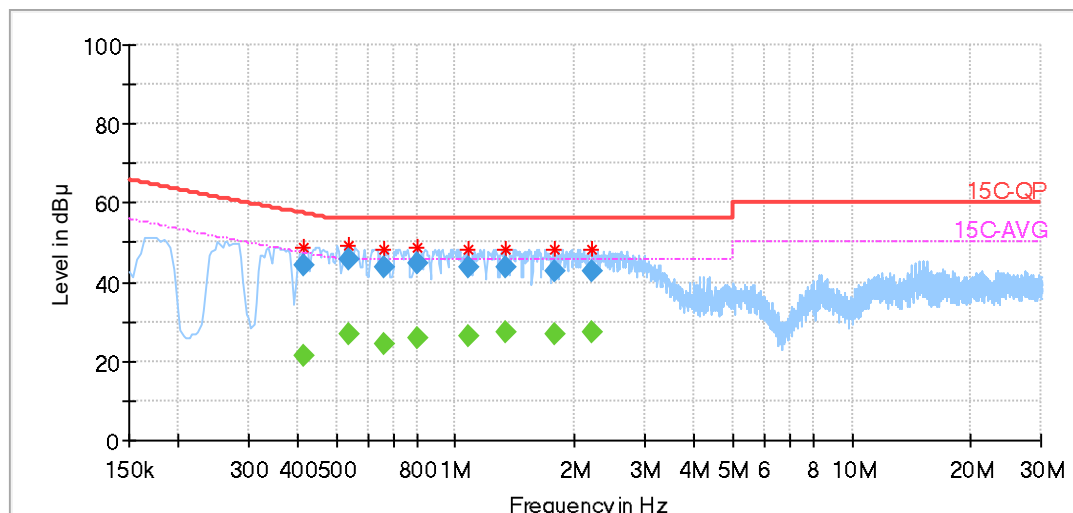


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.414150	---	21.49	47.44	25.95	L1	OFF	10.3
0.414150	44.27	---	57.46	13.19	L1	OFF	10.3
0.537281	---	27.03	46.00	18.97	L1	OFF	10.3
0.537281	45.64	---	56.00	10.36	L1	OFF	10.3
0.663375	---	24.32	46.00	21.68	L1	OFF	10.3
0.663375	43.87	---	56.00	12.13	L1	OFF	10.3
0.803738	---	26.07	46.00	19.93	L1	OFF	10.3
0.803738	44.65	---	56.00	11.35	L1	OFF	10.3
1.072388	---	26.17	46.00	19.83	L1	OFF	10.3
1.072388	43.71	---	56.00	12.29	L1	OFF	10.3
1.339556	---	27.34	46.00	18.66	L1	OFF	10.3
1.339556	43.55	---	56.00	12.45	L1	OFF	10.3
1.785825	---	27.00	46.00	19.00	L1	OFF	10.3
1.785825	42.73	---	56.00	13.27	L1	OFF	10.3
2.199225	---	27.44	46.00	18.56	L1	OFF	10.3
2.199225	42.66	---	56.00	13.34	L1	OFF	10.3



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

Full Spectrum

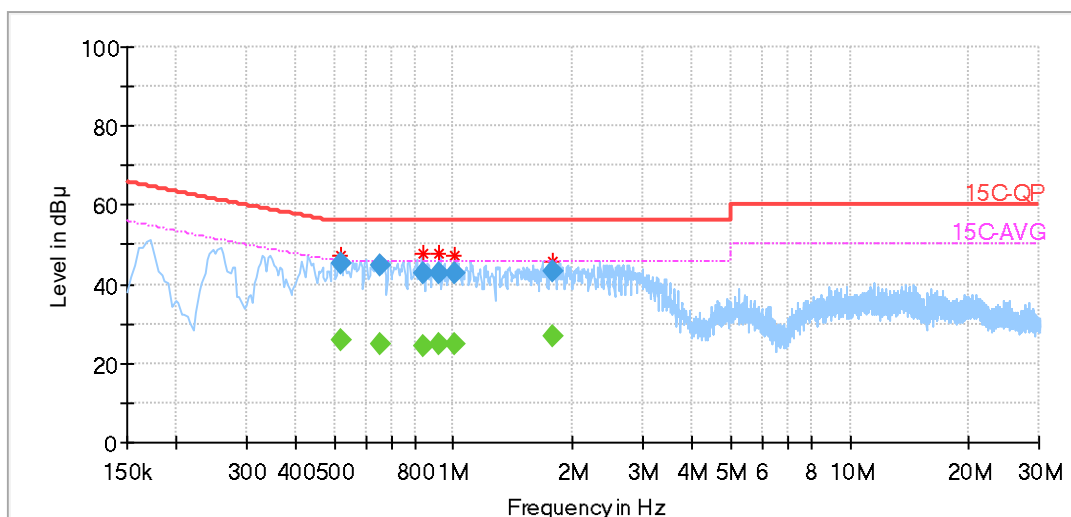

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.517912	---	26.02	46.00	19.98	N	OFF	10.3
0.517912	45.06	---	56.00	10.94	N	OFF	10.3
0.654487	---	24.80	46.00	21.20	N	OFF	10.3
0.654487	44.68	---	56.00	11.32	N	OFF	10.3
0.841050	---	24.51	46.00	21.49	N	OFF	10.3
0.841050	43.01	---	56.00	12.99	N	OFF	10.3
0.921470	---	25.12	46.00	20.88	N	OFF	10.3
0.921470	42.55	---	56.00	13.45	N	OFF	10.3
1.010572	---	24.97	46.00	21.03	N	OFF	10.3
1.010572	42.56	---	56.00	13.44	N	OFF	10.3
1.770710	---	26.78	46.00	19.22	N	OFF	10.4
1.770710	43.13	---	56.00	12.87	N	OFF	10.4



3.4 Antenna Requirements

3.4.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Sep. 23, 2025	Oct. 09, 2025	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 10, 2024	Sep. 28, 2025	Oct. 09, 2025	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 09, 2025	Sep. 28, 2025	Sep. 08, 2026	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 02, 2025	Sep. 28, 2025	Jan. 01, 2026	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Sep. 28, 2025	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Sep. 28, 2025	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Sep. 28, 2025	NCR	Radiation (03CH02-KS)
Bilog Antenna	TESEQ	CBL6111D	63161	30MHz~1GHz	Oct. 26, 2024	Sep. 28, 2025	Oct. 25, 2025	Radiation (10CH01-KS)
Bilog Antenna	TESEQ	CBL6111D	63755	30MHz~1GHz	Oct. 26, 2024	Sep. 28, 2025	Oct. 25, 2025	Radiation (10CH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44G,MAX 30dB	Oct. 10, 2024	Sep. 28, 2025	Oct. 09, 2025	Radiation (10CH01-KS)
EMI test receive	R&S	ESR7	102631	9KHz~7GHz	Oct. 09, 2025	Sep. 28, 2025	Oct. 08, 2026	Radiation (10CH01-KS)
Amplifier	SONOMA	310N	422544	9KHz ~1GHZ	Oct. 10, 2025	Sep. 28, 2025	Oct. 09, 2026	Radiation (10CH01-KS)
Amplifier	SONOMA	310N	422545	9KHz ~1GHZ	Oct. 10, 2025	Sep. 28, 2025	Oct. 09, 2026	Radiation (10CH01-KS)
Bore-site Antenna Mast	EM	MBD-400-1	NA	1 m~4 m	NCR	Sep. 28, 2025	NCR	Radiation (10CH01-KS)
Antenna Mast	EM	MBD-400-1	NA	1 m~4 m	NCR	Sep. 28, 2025	NCR	Radiation (10CH01-KS)
Controller	EM	3000-1	NA	NA	NCR	Sep. 28, 2025	NCR	Radiation (10CH01-KS)
Turn Table	EM	T-300-1	NA	0~360 degree	NCR	Sep. 28, 2025	NCR	Radiation (10CH01-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 17, 2025	Oct. 20, 2025	Apr. 16, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 09, 2025	Oct. 20, 2025	Oct. 08, 2026	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 17, 2025	Oct. 20, 2025	Apr. 16, 2026	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2025	Oct. 20, 2025	Oct. 08, 2026	Conduction (CO01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Occupied Channel Bandwidth	$\pm 0.384\%$
----------------------------	---------------

Uncertainty of AC Conducted Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.84dB
--	--------

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz) - 03CH02

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.30dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) - 10CH01 (Horizontal)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.04dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz) - 10CH01 (Vertical)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.04dB
--	--------

----- THE END -----