FCC TEST REPORT

Test report
On Behalf of
SHENZHEN DA YAO TECHNOLOGY CO., LTD.
For
Wireless network card
Model No.: DY-AX210-Pro, DY-AX210-Plus, DY-AX200-Pro, DY-AX200-Plus, DY-7265-Pro, DY-7265-Plus, DY-I225-Pro, DY-I225-Plus, NIC-AX210-Pro, NIC-AX210-Plus, NIC-AX200-Pro, NIC-AX200-Plus

FCC ID: 2AYTJAX210-Pro

Prepared for :	**SHENZHEN DA YAO TECHNOLOGY CO., LTD.** **Room 901, No. 25001 06, Junxin Road, Niuhu Community, Guanlan Street, Longhua District, Shenzhen, China**
Prepared By :	**Shenzhen HUAK Testing Technology Co., Ltd.** **1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China**
Date of Test:	**Jan. 15, 2021 ~ Jan. 22, 2021**
Date of Report:	**Jan. 22, 2021**
Report Number:	**HK2101180242-5E**

TEST RESULT CERTIFICATION

Applicant's name .....:	SHENZHEN DA YAO TECHNOLOGY CO., LTD.
Address .....:	Room 901, No. 25001 06, Junxin Road, Niuhu Community, Guanlan Street, Longhua District, Shenzhen, China
Manufacture's Name.....:	SHENZHEN DA YAO TECHNOLOGY CO., LTD.
Address .....:	Room 901, No. 25001 06, Junxin Road, Niuhu Community, Guanlan Street, Longhua District, Shenzhen, China

Product description

Trade Mark:	Heng Tek ®
Product name ..... :	Wireless network card
Model and/or type reference .:	DY-AX210-Pro, DY-AX210-Plus, DY-AX200-Pro, DY-AX200-Plus, DY-7265-Pro, DY-7265-Plus, DY-I225-Pro, DY-I225-Plus, NIC-AX210-Pro, NIC-AX210-Plus, NIC-AX200-Pro, NIC-AX200-Plus
Standards .....:	FCC Rules and Regulations Part 15 Subpart C Section 15.407 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test.....:

Date (s) of performance of tests .....:	Jan. 15, 2021 ~ Jan. 22, 2021
Date of Issue.....:	Jan. 22, 2021
Test Result .....:	Pass

Testing Engineer : Gary Qian

(Gary Qian)

Technical Manager : Eden Hu

(Eden Hu)

Authorized Signatory : Jason Zhou

(Jason Zhou)

TABLE OF CONTENTS

1. Test Result Summary 5
   1.1. TEST PROCEDURES AND RESULTS 5
   1.2. TEST FACILITY 5
   1.3. MEASUREMENT UNCERTAINTY 6
2. EUT Description 7
   2.1. GENERAL DESCRIPTION OF EUT 7
   2.2. OPERATION FREQUENCY EACH OF CHANNEL 8
   2.3. OPERATION OF EUT DURING TESTING 8
   2.4. DESCRIPTION OF TEST SETUP 9
3. Genera Information 10
   3.1. TEST ENVIRONMENT AND MODE 10
   3.2. DESCRIPTION OF SUPPORT UNITS 11
4. Test Results and Measurement Data 12
   4.1. CONDUCTED EMISSION 12
   4.2. MAXIMUM CONDUCTED OUTPUT POWER 16
   4.3. 6DB EMISSION BANDWIDTH 18
   4.4. 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH 20
   4.5. POWER SPECTRAL DENSITY 21
   4.6. BAND EDGE 23
   4.7. SPURIOUS EMISSION 62
   4.8. FREQUENCY STABILITY MEASUREMENT 80
   4.9. ANTENNA REQUIREMENT 82
   4.10. PHOTOGRAPHS OF TEST SETUP 83
   4.11. PHOTOS OF THE EUT 85

** Modifited History **

Revison	Description	Issued Data	Remark
Revsion 1.0	Initial Test Report Release	Jan. 22, 2021	Jason Zhou

1. Test Result Summary

1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a)	compliance *
6dB Emission Bandwidth	§15.407(e)	compliance *
26dB Emission Bandwidth& 99% Occupied Bandwidth	§15.407(a)	N/A
Power Spectral Density	§15.407(a)	compliance *
Band edge	§15.407(b)/15.209/15.205	compliance *
Radiated Emission	§15.407(b)/15.209/15.205	PASS
Frequency Stability	§15.407(g)	compliance *

Note:

1. PASS: Test item meets the requirement.

2. N/A: Test case does not apply to the test object.

*3. For the verdict, the " compliance *" Test data refers to FCC ID: PD9AX210NG, and report number is: 200611-03.TR03.*

1.2. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

1.3. Measurement Uncertainty

The reported uncertainty of measurement y ± U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	±0.37dB
2	RF power, conducted	±3.35dB
3	Spurious emissions, conducted	±2.20dB
4	All emissions, radiated(<1G)	±3.90dB
5	All emissions, radiated(>1G)	±4.28dB
6	Temperature	±0.1°C
7	Humidity	±1.0%

2. EUT Description

2.1. GENERAL DESCRIPTION OF EUT

Equipment	Wireless network card
Model Name	DY-AX210-Pro
Serial No.	DY-AX210-Plus, DY-AX200-Pro, DY-AX200-Plus, DY-7265-Pro, DY-7265-Plus, DY-I225-Pro, DY-I225-Plus, NIC-AX210-Pro, NIC-AX210-Plus, NIC-AX200-Pro, NIC-AX200-Plus
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: DY-AX210-Pro
Trade Mark	Heng Tek ®
FCC ID	2AYTJAX210-Pro
Operation Frequency:	IEEE 802.11a/n/ac(HT20)5.745GHz-5.825GHz IEEE 802.11n/ac(HT40)5.755GHz-5.795GHz IEEE 802.11ac(HT80) 5.775GHz
Modulation Technology:	IEEE 802.11a/n/ac
Modulation Type	OFDM
Antenna Type	External Antenna
Antenna Gain	Antenna 1:0dBi Antenna 2:0dBi MIMO: 1.010dBi
Power Source	DC 3.3V
Power Supply:	DC 3.3V
Note: The EUT incorporates a MIMO function. Physically, it provides two completed transmitters and receivers(2T2 R), two transmit signals are completely correlated, then, Direction gain=GANT+10*log(2)dBi.	

2.2. Operation Frequency each of channel

802.11a/802.11n(HT20) 802.11ac(HT20)		802.11n(HT40)/ 802.11ac(HT40)		802.11ac(HT80)	
Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745	151	5755	155	5775
153	5765	159	5790		
157	5785				
161	5805				
165	5825				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. Operation of EUT during testing

Band IV (5725 - 5850 MHz)		
For 802.11a/n (HT20)/ac(HT20)		
Channel Number	Channel	Frequency (MHz）
149	Low	5745
157	Mid	5785
165	High	5825

For 802.11n (HT40)/ ac(HT40)		
Channel Number	Channel	Frequency (MHz）
151	Low	5755
159	High	5795

For 802.11ac(HT80)		
Channel Number	Channel	Frequency (MHz）
155	/	5775

2.4. DESCRIPTION OF TEST SETUP

O Operation of EUT during below 1GHz and Above1GHz Radiation testing:



The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position

3. Genera Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(HT20)/ac(HT40)/ac(HT80)	MCS0
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

4. Test Results and Measurement Data

4.1. Conducted Emission

4.1.1. Test Specification

<table>
<tr><td>Test Requirement:</td><td>FCC Part15 C Section 15.207</td></tr>
<tr><td>Test Method:</td><td>ANSI C63.10:2013</td></tr>
<tr><td>Frequency Range:</td><td>150 kHz to 30 MHz</td></tr>
<tr><td>Receiver setup:</td><td>RBW=9 kHz, VBW=30 kHz, Sweep time=auto</td></tr>
<tr><td>Limits:</td><td>
<table>
<tr><td rowspan="2">Frequency range (MHz)</td><td colspan="2">Limit (dBuV)</td></tr>
<tr><td>Quasi-peak</td><td>Average</td></tr>
<tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr>
<tr><td>0.5-5</td><td>56</td><td>46</td></tr>
<tr><td>5-30</td><td>60</td><td>50</td></tr>
</table>
</td></tr>
<tr><td>Test Setup:</td><td>
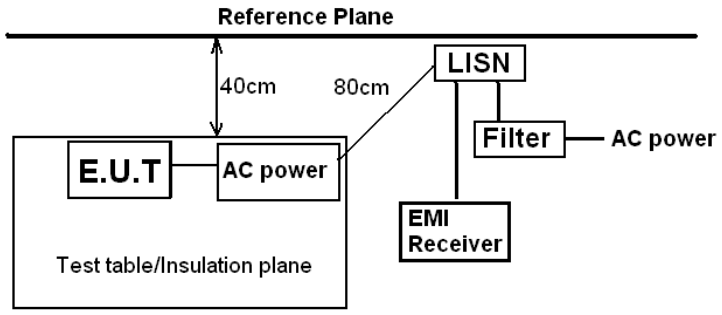

Remark:
E.U.T: Equipment Under Test
LISN: Line Impedence Stabilization Network
Test table height=0.8m
</td></tr>
<tr><td>Test Mode:</td><td>Tx Mode</td></tr>
<tr><td>Test Procedure:</td><td>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</td></tr>
<tr><td>Test Result:</td><td>Pass</td></tr>
</table>

4.1.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)					
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Date**	**Calibration Due**
Receiver	R&S	ESR-7	HKE-010	Jun. 18, 2020	Jun. 17, 2021
LISN	R&S	ENV216	HKE-002	Jun. 18, 2020	Jun. 17, 2021
Coax cable (9KHz-30MHz)	Times	381806-002	N/A	Jun. 18, 2020	Jun. 17, 2021
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A	N/A

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

4.1.3. Test data

Test Specification: Line

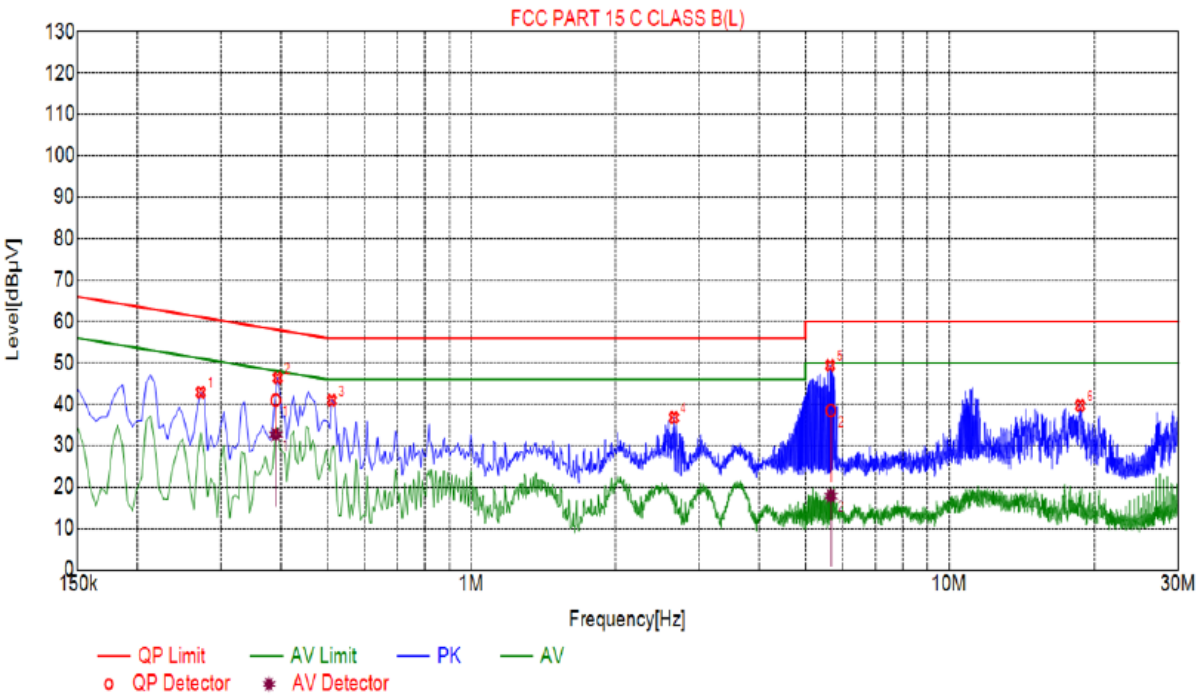

Suspected List								
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Reading [dBµV]	Detector	Type
1	0.2715	42.88	20.03	61.07	18.19	22.85	PK	L
2	0.3930	46.37	20.04	58.00	11.63	26.33	PK	L
3	0.5100	40.92	20.04	56.00	15.08	20.88	PK	L
4	2.6565	36.76	20.21	56.00	19.24	16.55	PK	L
5	5.6400	49.36	20.25	60.00	10.64	29.11	PK	L
6	18.6945	39.68	20.06	60.00	20.32	19.62	PK	L

Final Data List											
NO.	Freq. [MHz]	Correction factor[dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	QP Reading [dBµV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	AV Reading [dBµV]	Type
1	0.3896	20.04	40.98	58.07	17.09	20.94	32.65	48.07	15.42	12.61	L
2	5.6606	20.25	38.48	60.00	21.52	18.23	17.89	50.00	32.11	-2.36	L

Remark: Margin = Limit – Level
Correction factor = Cable lose + LISN insertion loss
Level=Test receiver reading + correction factor

Test Specification: Neutral

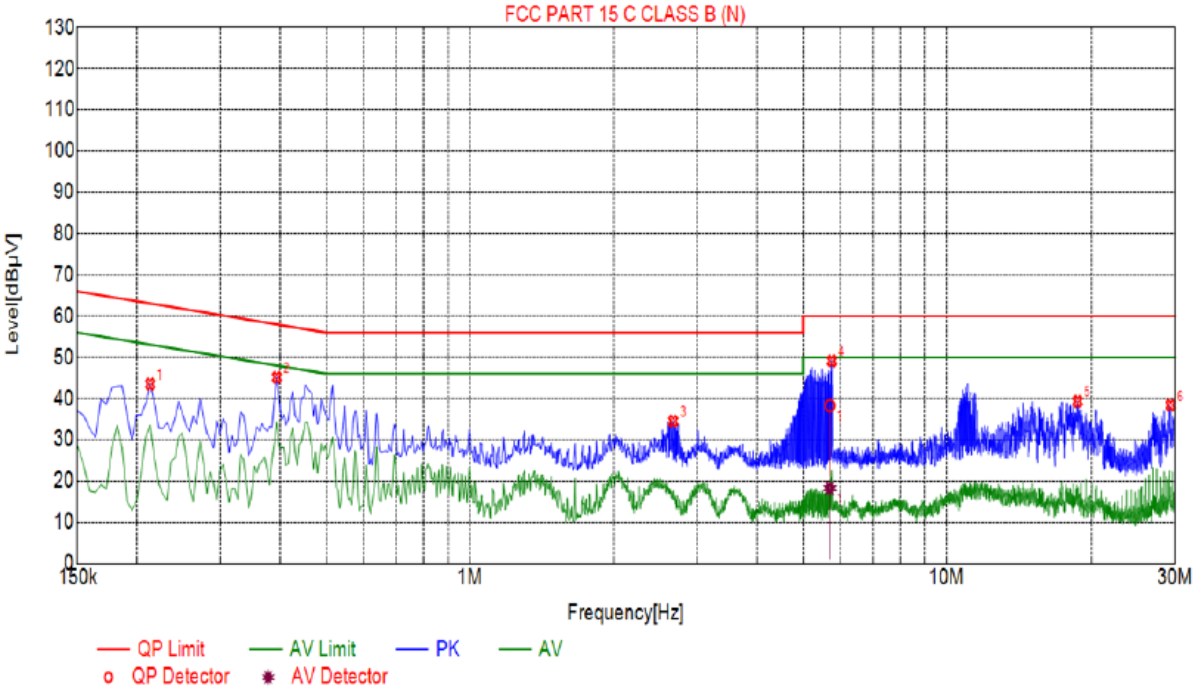

Suspected List

NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Reading [dBµV]	Detector	Type
1	0.2130	43.52	20.05	63.09	19.57	23.47	PK	N
2	0.3930	45.12	20.04	58.00	12.88	25.08	PK	N
3	2.6700	34.50	20.21	56.00	21.50	14.29	PK	N
4	5.7480	49.13	20.24	60.00	10.87	28.89	PK	N
5	18.7305	39.30	20.06	60.00	20.70	19.24	PK	N
6	29.3325	38.37	20.26	60.00	21.63	18.11	PK	N

Final Data List

NO.	Freq. [MHz]	Correction factor[dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	QP Reading [dBµV]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	AV Reading [dBµV]	Type
1	5.6981	20.24	38.27	60.00	21.73	18.03	18.29	50.00	31.71	-1.95	N

Remark: Margin = Limit – Level
Correction factor = Cable lose + LISN insertion loss
Level=Test receiver reading + correction factor

4.2. Maximum Conducted Output Power

4.2.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407(a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02.r01 Section E
Limit:	Frequency Band (MHz): Limit 5725-5850: 1 W
Test Setup:	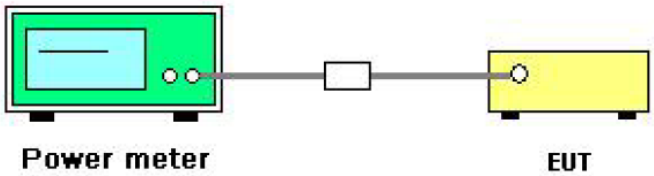
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 5. Measure the conducted output power and record the results in the test report.
Test Result:	PASS
Remark:	Conducted output power= measurement power +10log(1/x) X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power

4.2.2. Test Instruments

RF Test Room					
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Date**	**Calibration Due**
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	Jun. 17, 2021
Power meter	Agilent	E4419B	HKE-085	Jun. 18, 2020	Jun. 17, 2021
Power Sensor	Agilent	E9300A	HKE-086	Jun. 18, 2020	Jun. 17, 2021
RF cable	Times	1-40G	HKE-034	Jun. 18, 2020	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 18, 2020	Jun. 17, 2021

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

Test Data

N/A*

Note: Test data refers to FCC ID: PD9AX210NG, and report number is:200611-03.TR03

4.3. 6dB Emission Bandwidth

4.3.1. Test Specification

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01r04 Section C
Limit:	>500kHz
Test Setup:	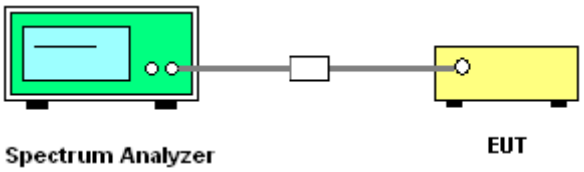
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

4.3.2. Test Instruments

RF Test Room					
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Date**	**Calibration Due**
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	Jun. 17, 2021
RF cable	Times	1-40G	HKE-034	Jun. 18, 2020	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 18, 2020	Jun. 17, 2021

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

4.3.3. Test data

N/A*

Note: Test data refers to FCC ID: PD9AX210NG, and report number is:200611-03.TR03

4.4. 26dB Bandwidth and 99% Occupied Bandwidth

4.4.1. Test Specification

Test Requirement:	47 CFR Part 15C Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Limit:	No restriction limits
Test Setup:	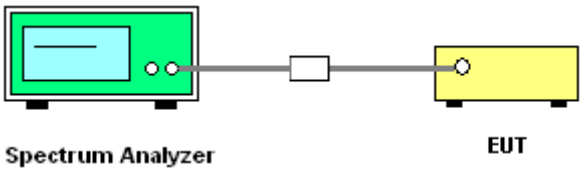
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth RBW = 1% EBW, VBW≥3RBW, In order to make an accurate measurement. 4. Measure and record the results in the test report.
Test Result:	N/A

4.4.2. Test Instruments

RF Test Room					
Equipment	**Ma**			**Calibration Date**	**Calibration Due**
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	Jun. 17, 2021
RF cable	Times	1-40G	HKE-034	Jun. 18, 2020	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 18, 2020	Jun. 17, 2021

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

4.4.3. Test Result

N/A

4.5. Power Spectral Density

4.5.1. Test Specification

Test Requirement:	FCC Part15 E Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F
Limit:	≤30.00dBm/500KHz for Band IV 5725MHz-5850MHz
Test Setup:	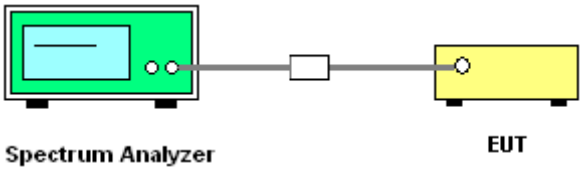
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510 kHz/1 MHz, VBW ≥ 3*RBW, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level. 4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment.
Test Result:	PASS

4.5.2. Test Instruments

RF Test Room					
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Date**	**Calibration Due**
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	Jun. 17, 2021
RF cable	Times	1-40G	HKE-034	Jun. 18, 2020	Jun. 17, 2021
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Jun. 18, 2020	Jun. 17, 2021

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

4.5.3. Test data

N/A*

Note: Test data refers to FCC ID: PD9AX210NG, and report number is:200611-03.TR03

4.6. Band edge

4.6.1. Test Specification

Test Requirement:	FCC CFR47 Part 15E Section 15.407
Test Method:	ANSI C63.10 2013
Limit:	(1)For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. The limit of frequency below 1GHz and which fall in restricted ba nds should complies 15.209.
Test Setup:	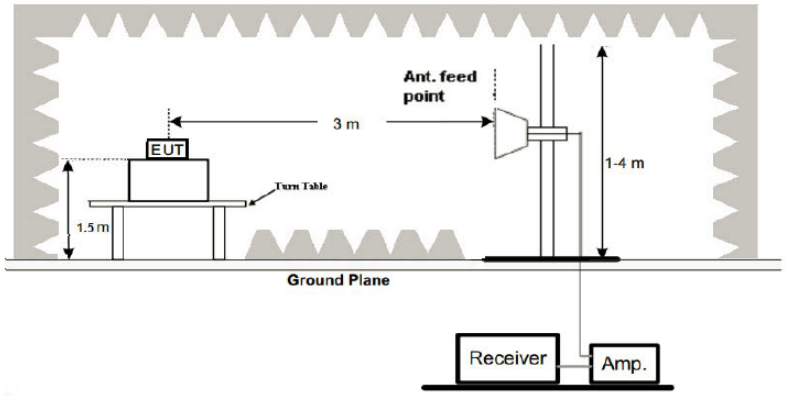
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be

	stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.
Test Result:	PASS

4.6.2. Test Instruments

Radiated Emission Test Site (966)					
Name of Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Date**	**Calibration Due**
Receiver	R&S	ESRP3	HKE-005	Jun. 18, 2020	Jun. 17, 2021
Spectrum analyzer	Agilent	N9020A	HKE-048	Jun. 18, 2020	Jun. 17, 2021
Preamplifier	EMCI	EMC051845SE	HKE-015	Jun. 18, 2020	Jun. 17, 2021
Preamplifier	Agilent	83051A	HKE-016	Jun. 18, 2020	Jun. 17, 2021
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Jun. 18, 2020	Jun. 17, 2021
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Jun. 18, 2020	Jun. 17, 2021
Horn antenna	Schwarzbeck	9120D	HKE-013	Jun. 18, 2020	Jun. 17, 2021
Antenna Mast	Keleto	CC-A-4M	N/A	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Jun. 18, 2020	Jun. 17, 2021
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A	N/A
Hf antenna	Schwarzbeck	LB-180400-KF	HKE-031	Jun. 18, 2020	Jun. 17, 2021
RF cable	Tonscend	1-18G	HKE-099	Jun. 18, 2020	Jun. 17, 2021
RF cable	Times	1-40G	HKE-034	Jun. 18, 2020	Jun. 17, 2021
Horn Antenna	Schewarzbeck	BBHA 9170	HKE-017	Jun. 18, 2020	Jun. 17, 2021
Spectrum analyzer	R&S	FSP40	HKE-025	Jun. 18, 2020	Jun. 17, 2021

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

4.6.3. Test Data

ANT 1

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5650	52.31	-2.06	50.25	68.2	-17.95	peak
5700	95.32	-1.96	93.36	105.2	-11.84	peak
5720	94.38	-2.87	91.51	110.8	-19.29	peak
5725	111.32	-2.14	109.18	122.2	-13.02	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5650	52.34	-2.06	50.28	68.2	-17.92	peak
5700	92.01	-1.96	90.05	105.2	-15.15	peak
5720	94.36	-2.87	91.49	110.8	-19.31	peak
5725	112.45	-2.14	110.31	122.2	-11.89	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	104.35	-1.97	102.38	122.2	-19.82	peak
5855	98.45	-2.13	96.32	110.8	-14.48	peak
5875	88.69	-2.65	86.04	105.2	-19.16	peak
5925	56.31	-2.28	54.03	68.2	-14.17	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.98	-1.97	104.01	122.2	-18.19	peak
5855	98.14	-2.13	96.01	110.8	-14.79	peak
5875	89.01	-2.65	86.36	105.2	-18.84	peak
5925	56.47	-2.28	54.19	68.2	-14.01	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	54.15	-2.06	52.09	68.2	-16.11	peak
5700	98.35	-1.96	96.39	105.2	-8.81	peak
5720	96.21	-2.87	93.34	110.8	-17.46	peak
5725	112.45	-2.14	110.31	122.2	-11.89	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	52.34	-2.06	50.28	68.2	-17.92	peak
5700	95.34	-1.96	93.38	105.2	-11.82	peak
5720	94.15	-2.87	91.28	110.8	-19.52	peak
5725	112.37	-2.14	110.23	122.2	-11.97	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G
Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5850	106.32	-1.97	104.35	122.2	-17.85	peak
5855	97.46	-2.13	95.33	110.8	-15.47	peak
5875	89.34	-2.65	86.69	105.2	-18.51	peak
5925	57.04	-2.28	54.76	68.2	-13.44	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5850	104.58	-1.97	102.61	122.2	-19.59	peak
5855	97.49	-2.13	95.36	110.8	-15.44	peak
5875	88.32	-2.65	85.67	105.2	-19.53	peak
5925	57.16	-2.28	54.88	68.2	-13.32	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.99	-2.06	49.93	68.2	-18.27	peak
5700	98.47	-1.96	96.51	105.2	-8.69	peak
5720	94.62	-2.87	91.75	110.8	-19.05	peak
5725	111.85	-2.14	109.71	122.2	-12.49	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	52.87	-2.06	50.81	68.2	-17.39	peak
5700	96.34	-1.96	94.38	105.2	-10.82	peak
5720	95.11	-2.87	92.24	110.8	-18.56	peak
5725	111.47	-2.14	109.33	122.2	-12.87	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G
Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5850	106.32	-1.97	104.35	122.2	-17.85	peak
5855	98.32	-2.13	96.19	110.8	-14.61	peak
5875	88.72	-2.65	86.07	105.2	-19.13	peak
5925	54.19	-2.28	51.91	68.2	-16.29	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5850	104.25	-1.97	102.28	122.2	-19.92	peak
5855	98.34	-2.13	96.21	110.8	-14.59	peak
5875	88.16	-2.65	85.51	105.2	-19.69	peak
5925	54.71	-2.28	52.43	68.2	-15.77	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	52.52	-2.06	50.46	68.2	-17.74	peak
5700	97.64	-1.96	95.68	105.2	-9.52	peak
5720	95.25	-2.87	92.38	110.8	-18.42	peak
5725	110.45	-2.14	108.31	122.2	-13.89	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.69	-2.06	49.63	68.2	-18.57	peak
5700	91.47	-1.96	89.51	105.2	-15.69	peak
5720	95.78	-2.87	92.91	110.8	-17.89	peak
5725	110.11	-2.14	107.97	122.2	-14.23	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	104.32	-1.97	102.35	122.2	-19.85	peak
5855	95.25	-2.13	93.12	110.8	-17.68	peak
5875	89.43	-2.65	86.78	105.2	-18.42	peak
5925	54.67	-2.28	52.39	68.2	-15.81	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.48	-1.97	103.51	122.2	-18.69	peak
5855	97.99	-2.13	95.86	110.8	-14.94	peak
5875	88.74	-2.65	86.09	105.2	-19.11	peak
5925	56.31	-2.28	54.03	68.2	-14.17	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	53.14	-2.06	51.08	68.2	-17.12	peak
5700	99	-1.96	97.04	105.2	-8.16	peak
5720	94.02	-2.87	91.15	110.8	-19.65	peak
5725	110.32	-2.14	108.18	122.2	-14.02	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	52.14	-2.06	50.08	68.2	-18.12	peak
5700	93.32	-1.96	91.36	105.2	-13.84	peak
5720	94.78	-2.87	91.91	110.8	-18.89	peak
5725	112.32	-2.14	110.18	122.2	-12.02	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	104.97	-1.97	103	122.2	-19.2	peak
5855	98.64	-2.13	96.51	110.8	-14.29	peak
5875	88.63	-2.65	85.98	105.2	-19.22	peak
5925	56.25	-2.28	53.97	68.2	-14.23	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	106.58	-1.97	104.61	122.2	-17.59	peak
5855	98.64	-2.13	96.51	110.8	-14.29	peak
5875	89.49	-2.65	86.84	105.2	-18.36	peak
5925	60.25	-2.28	57.97	68.2	-10.23	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	53.35	-2.06	51.29	68.2	-16.91	peak
5700	96.89	-1.96	94.93	105.2	-10.27	peak
5720	94.02	-2.87	91.15	110.8	-19.65	peak
5725	111.11	-2.14	108.97	122.2	-13.23	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	50.36	-2.06	48.3	68.2	-19.9	peak
5700	91.24	-1.96	89.28	105.2	-15.92	peak
5720	94.35	-2.87	91.48	110.8	-19.32	peak
5725	111.78	-2.14	109.64	122.2	-12.56	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	106.36	-1.97	104.39	122.2	-17.81	peak
5855	99.25	-2.13	97.12	110.8	-13.68	peak
5875	89.34	-2.65	86.69	105.2	-18.51	peak
5925	57.49	-2.28	55.21	68.2	-12.99	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	106.78	-1.97	104.81	122.2	-17.39	peak
5855	97.89	-2.13	95.76	110.8	-15.04	peak
5875	89.25	-2.65	86.6	105.2	-18.6	peak
5925	56.33	-2.28	54.05	68.2	-14.15	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

ANT 2

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5650	52.14	-2.06	50.08	68.2	-18.12	peak
5700	92.63	-1.96	90.67	105.2	-14.53	peak
5720	94.62	-2.87	91.75	110.8	-19.05	peak
5725	110.49	-2.14	108.35	122.2	-13.85	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5650	51.35	-2.06	49.29	68.2	-18.91	peak
5700	90.33	-1.96	88.37	105.2	-16.83	peak
5720	96.48	-2.87	93.61	110.8	-17.19	peak
5725	109.28	-2.14	107.14	122.2	-15.06	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.11	-1.97	103.14	122.2	-19.06	peak
5855	97.68	-2.13	95.55	110.8	-15.25	peak
5875	88.47	-2.65	85.82	105.2	-19.38	peak
5925	56.32	-2.28	54.04	68.2	-14.16	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	107.62	-1.97	105.65	122.2	-16.55	peak
5855	99.01	-2.13	96.88	110.8	-13.92	peak
5875	88.72	-2.65	86.07	105.2	-19.13	peak
5925	56.33	-2.28	54.05	68.2	-14.15	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.24	-2.06	49.18	68.2	-19.02	peak
5700	92.55	-1.96	90.59	105.2	-14.61	peak
5720	94.22	-2.87	91.35	110.8	-19.45	peak
5725	110.64	-2.14	108.5	122.2	-13.7	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	53.46	-2.06	51.4	68.2	-16.8	peak
5700	94.01	-1.96	92.05	105.2	-13.15	peak
5720	95.16	-2.87	92.29	110.8	-18.51	peak
5725	109.87	-2.14	107.73	122.2	-14.47	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G
Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5850	107.26	-1.97	105.29	122.2	-16.91	peak
5855	98.15	-2.13	96.02	110.8	-14.78	peak
5875	89.66	-2.65	87.01	105.2	-18.19	peak
5925	57.48	-2.28	55.2	68.2	-13	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5850	105.39	-1.97	103.42	122.2	-18.78	peak
5855	98.62	-2.13	96.49	110.8	-14.31	peak
5875	88.61	-2.65	85.96	105.2	-19.24	peak
5925	58.44	-2.28	56.16	68.2	-12.04	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	50.99	-2.06	48.93	68.2	-19.27	peak
5700	92.14	-1.96	90.18	105.2	-15.02	peak
5720	94.13	-2.87	91.26	110.8	-19.54	peak
5725	108.32	-2.14	106.18	122.2	-16.02	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	87.64	-2.06	85.58	68.2	17.38	peak
5700	96.35	-1.96	94.39	105.2	-10.81	peak
5720	95.34	-2.87	92.47	110.8	-18.33	peak
5725	111.32	-2.14	109.18	122.2	-13.02	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	106.32	-1.97	104.35	122.2	-17.85	peak
5855	98.47	-2.13	96.34	110.8	-14.46	peak
5875	89.12	-2.65	86.47	105.2	-18.73	peak
5925	54.66	-2.28	52.38	68.2	-15.82	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.01	-1.97	103.04	122.2	-19.16	peak
5855	98.47	-2.13	96.34	110.8	-14.46	peak
5875	88.32	-2.65	85.67	105.2	-19.53	peak
5925	52.72	-2.28	50.44	68.2	-17.76	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.24	-2.06	49.18	68.2	-19.02	peak
5700	92.35	-1.96	90.39	105.2	-14.81	peak
5720	94.15	-2.87	91.28	110.8	-19.52	peak
5725	110.32	-2.14	108.18	122.2	-14.02	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.24	-2.06	49.18	68.2	-19.02	peak
5700	93.25	-1.96	91.29	105.2	-13.91	peak
5720	95.14	-2.87	92.27	110.8	-18.53	peak
5725	110.37	-2.14	108.23	122.2	-13.97	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.42	-1.97	103.45	122.2	-18.75	peak
5855	98.67	-2.13	96.54	110.8	-14.26	peak
5875	90.15	-2.65	87.5	105.2	-17.7	peak
5925	58.14	-2.28	55.86	68.2	-12.34	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	104.32	-1.97	102.35	122.2	-19.85	peak
5855	98.98	-2.13	96.85	110.8	-13.95	peak
5875	90.32	-2.65	87.67	105.2	-17.53	peak
5925	57.48	-2.28	55.2	68.2	-13	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	52.14	-2.06	50.08	68.2	-18.12	peak
5700	97.66	-1.96	95.7	105.2	-9.5	peak
5720	96.25	-2.87	93.38	110.8	-17.42	peak
5725	111.32	-2.14	109.18	122.2	-13.02	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	52.34	-2.06	50.28	68.2	-17.92	peak
5700	94.62	-1.96	92.66	105.2	-12.54	peak
5720	95.32	-2.87	92.45	110.8	-18.35	peak
5725	110.47	-2.14	108.33	122.2	-13.87	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.24	-1.97	103.27	122.2	-18.93	peak
5855	98.39	-2.13	96.26	110.8	-14.54	peak
5875	88.32	-2.65	85.67	105.2	-19.53	peak
5925	57.25	-2.28	54.97	68.2	-13.23	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	106.21	-1.97	104.24	122.2	-17.96	peak
5855	98.19	-2.13	96.06	110.8	-14.74	peak
5875	88.14	-2.65	85.49	105.2	-19.71	peak
5925	56.72	-2.28	54.44	68.2	-13.76	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	50.32	-2.06	48.26	68.2	-19.94	peak
5700	96.35	-1.96	94.39	105.2	-10.81	peak
5720	94.32	-2.87	91.45	110.8	-19.35	peak
5725	110.28	-2.14	108.14	122.2	-14.06	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.24	-2.06	49.18	68.2	-19.02	peak
5700	95.37	-1.96	93.41	105.2	-11.79	peak
5720	94.72	-2.87	91.85	110.8	-18.95	peak
5725	110.87	-2.14	108.73	122.2	-13.47	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	104.72	-1.97	102.75	122.2	-19.45	peak
5855	98.65	-2.13	96.52	110.8	-14.28	peak
5875	90.32	-2.65	87.67	105.2	-17.53	peak
5925	56.32	-2.28	54.04	68.2	-14.16	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	106.74	-1.97	104.77	122.2	-17.43	peak
5855	98.69	-2.13	96.56	110.8	-14.24	peak
5875	89.35	-2.65	86.7	105.2	-18.5	peak
5925	56.32	-2.28	54.04	68.2	-14.16	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

MIMO

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.02	-2.06	48.96	68.2	-19.24	peak
5700	95.24	-1.96	93.28	105.2	-11.92	peak
5720	95.37	-2.87	92.5	110.8	-18.3	peak
5725	110.32	-2.14	108.18	122.2	-14.02	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	50.78	-2.06	48.72	68.2	-19.48	peak
5700	94.32	-1.96	92.36	105.2	-12.84	peak
5720	97.15	-2.87	94.28	110.8	-16.52	peak
5725	112.02	-2.14	109.88	122.2	-12.32	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.28	-1.97	103.31	122.2	-18.89	peak
5855	98.69	-2.13	96.56	110.8	-14.24	peak
5875	88.14	-2.65	85.49	105.2	-19.71	peak
5925	57.14	-2.28	54.86	68.2	-13.34	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.48	-1.97	103.51	122.2	-18.69	peak
5855	98.89	-2.13	96.76	110.8	-14.04	peak
5875	88.72	-2.65	86.07	105.2	-19.13	peak
5925	57.14	-2.28	54.86	68.2	-13.34	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	50.69	-2.06	48.63	68.2	-19.57	peak
5700	94.27	-1.96	92.31	105.2	-12.89	peak
5720	94.22	-2.87	91.35	110.8	-19.45	peak
5725	113.22	-2.14	111.08	122.2	-11.12	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	52.08	-2.06	50.02	68.2	-18.18	peak
5700	94.68	-1.96	92.72	105.2	-12.48	peak
5720	94.72	-2.87	91.85	110.8	-18.95	peak
5725	112.35	-2.14	110.21	122.2	-11.99	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G
Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5850	104.28	-1.97	102.31	122.2	-19.89	peak
5855	95.64	-2.13	93.51	110.8	-17.29	peak
5875	89.67	-2.65	87.02	105.2	-18.18	peak
5925	54.66	-2.28	52.38	68.2	-15.82	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
5850	104.98	-1.97	103.01	122.2	-19.19	peak
5855	96.77	-2.13	94.64	110.8	-16.16	peak
5875	88.64	-2.65	85.99	105.2	-19.21	peak
5925	57.16	-2.28	54.88	68.2	-13.32	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	52.64	-2.06	50.58	68.2	-17.62	peak
5700	93.25	-1.96	91.29	105.2	-13.91	peak
5720	96.42	-2.87	93.55	110.8	-17.25	peak
5725	110.25	-2.14	108.11	122.2	-14.09	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.2	-2.06	49.14	68.2	-19.06	peak
5700	96.74	-1.96	94.78	105.2	-10.42	peak
5720	95.32	-2.87	92.45	110.8	-18.35	peak
5725	111.34	-2.14	109.2	122.2	-13	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	106.34	-1.97	104.37	122.2	-17.83	peak
5855	98.14	-2.13	96.01	110.8	-14.79	peak
5875	88.45	-2.65	85.8	105.2	-19.4	peak
5925	54.88	-2.28	52.6	68.2	-15.6	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.62	-1.97	103.65	122.2	-18.55	peak
5855	95.32	-2.13	93.19	110.8	-17.61	peak
5875	88.64	-2.65	85.99	105.2	-19.21	peak
5925	54.72	-2.28	52.44	68.2	-15.76	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	52.34	-2.06	50.28	68.2	-17.92	peak
5700	97.15	-1.96	95.19	105.2	-10.01	peak
5720	96.27	-2.87	93.4	110.8	-17.4	peak
5725	110.32	-2.14	108.18	122.2	-14.02	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.34	-2.06	49.28	68.2	-18.92	peak
5700	93.45	-1.96	91.49	105.2	-13.71	peak
5720	95.68	-2.87	92.81	110.8	-17.99	peak
5725	110.34	-2.14	108.2	122.2	-14	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	104.68	-1.97	102.71	122.2	-19.49	peak
5855	95.74	-2.13	93.61	110.8	-17.19	peak
5875	89.32	-2.65	86.67	105.2	-18.53	peak
5925	54.11	-2.28	51.83	68.2	-16.37	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	104.39	-1.97	102.42	122.2	-19.78	peak
5855	96.35	-2.13	94.22	110.8	-16.58	peak
5875	89.28	-2.65	86.63	105.2	-18.57	peak
5925	56.37	-2.28	54.09	68.2	-14.11	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.47	-2.06	49.41	68.2	-18.79	peak
5700	98.89	-1.96	96.93	105.2	-8.27	peak
5720	94.12	-2.87	91.25	110.8	-19.55	peak
5725	110.85	-2.14	108.71	122.2	-13.49	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	52.72	-2.06	50.66	68.2	-17.54	peak
5700	94.37	-1.96	92.41	105.2	-12.79	peak
5720	94.02	-2.87	91.15	110.8	-19.65	peak
5725	112.35	-2.14	110.21	122.2	-11.99	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	106.35	-1.97	104.38	122.2	-17.82	peak
5855	98.75	-2.13	96.62	110.8	-14.18	peak
5875	88.69	-2.65	86.04	105.2	-19.16	peak
5925	54.02	-2.28	51.74	68.2	-16.46	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.69	-1.97	103.72	122.2	-18.48	peak
5855	98.67	-2.13	96.54	110.8	-14.26	peak
5875	89.72	-2.65	87.07	105.2	-18.13	peak
5925	60.33	-2.28	58.05	68.2	-10.15	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.32	-2.06	49.26	68.2	-18.94	peak
5700	97.99	-1.96	96.03	105.2	-9.17	peak
5720	96.48	-2.87	93.61	110.8	-17.19	peak
5725	110.32	-2.14	108.18	122.2	-14.02	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	51.99	-2.06	49.93	68.2	-18.27	peak
5700	93.32	-1.96	91.36	105.2	-13.84	peak
5720	94.02	-2.87	91.15	110.8	-19.65	peak
5725	111.03	-2.14	108.89	122.2	-13.31	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.45	-1.97	103.48	122.2	-18.72	peak
5855	97.99	-2.13	95.86	110.8	-14.94	peak
5875	89.72	-2.65	87.07	105.2	-18.13	peak
5925	56.32	-2.28	54.04	68.2	-14.16	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	105.36	-1.97	103.39	122.2	-18.81	peak
5855	97.69	-2.13	95.56	110.8	-15.24	peak
5875	89.72	-2.65	87.07	105.2	-18.13	peak
5925	56.38	-2.28	54.1	68.2	-14.1	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

4.7. Spurious Emission

4.7.1.1. Test Specification

<table>
<tr><td>Test Requirement:</td><td>FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205</td></tr>
<tr><td>Test Method:</td><td>KDB 789033 D02 v02r01</td></tr>
<tr><td>Frequency Range:</td><td>9kHz to 40GHz</td></tr>
<tr><td>Measurement Distance:</td><td>3 m</td></tr>
<tr><td>Antenna Polarization:</td><td>Horizontal & Vertical</td></tr>
<tr><td>Operation mode:</td><td>Transmitting mode with modulation</td></tr>
<tr><td>Receiver Setup:</td><td>
<table>
<tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr>
<tr><td>9kHz- 150kHz</td><td>Quasi-peak</td><td>200Hz</td><td>1kHz</td><td>Quasi-peak Value</td></tr>
<tr><td>150kHz-30MHz</td><td>Quasi-peak</td><td>9kHz</td><td>30kHz</td><td>Quasi-peak Value</td></tr>
<tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>120KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr>
<tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr>
<tr><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr>
</table>
</td></tr>
<tr><td>Limit:</td><td>(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.
(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.
(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.
(4) For transmitters operating in the 5.725-5.85 GHz band:
(i) All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
The limit of frequency below 1GHz and which fall in restricted b ands should complies 15.209.</td></tr>
<tr><td>Test setup:</td><td>For radiated emissions below 30MHz
 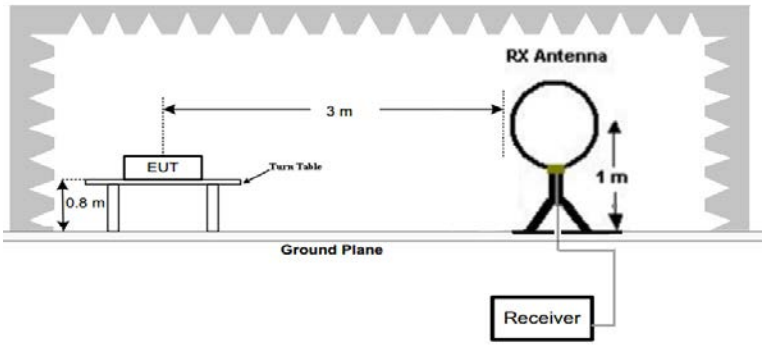

30MHz to 1GHz</td></tr>
</table>

	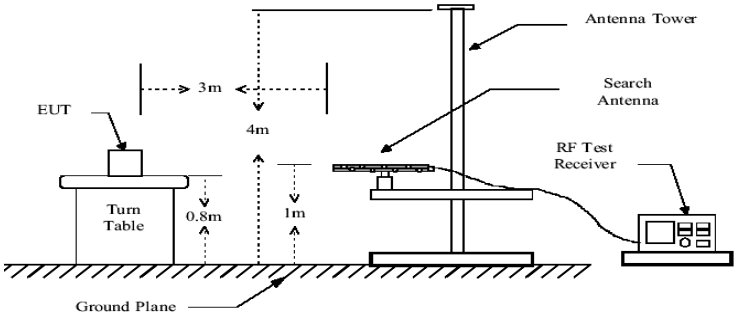 Above 1GHz 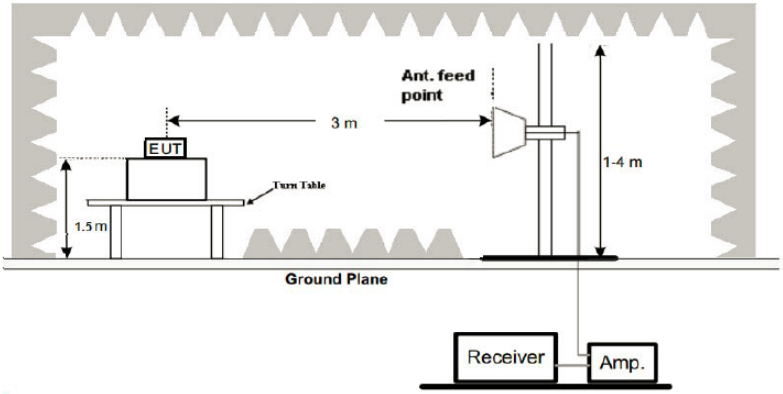
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the groundat a 3 meter camber. The table was rotated 360 degrees todetermine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, whichwas mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and thenthe antenna was tuned to heights from 1 meter to 4 meters and the rotatablewas turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and SpecifiedBandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limitspecified, then testing could be stopped and the peak values of the EUT wouldbe reported. Otherwise the emissions that did not have 10dB margin would bere-tested one by one using peak, quasi-peak or average method as specified andthen reported in a data sheet.
Test results:	PASS

4.7.2. Test Data

test mode: TX 802.11a 5745MHz

All the test modes completed for test. The worst case of Radiated Emission; the test data of this mode was reported.

Below 1GHz

Horizontal

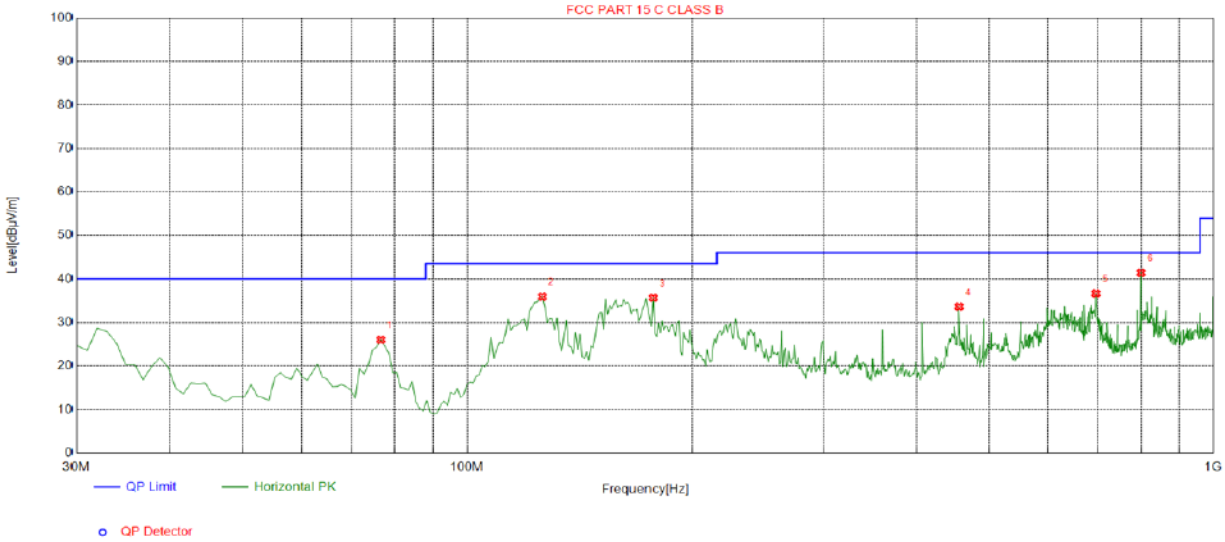

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	76.6066	-18.86	44.92	26.06	40.00	13.94	100	322	Horizontal
2	126.1261	-18.00	53.97	35.97	43.50	7.53	100	348	Horizontal
3	177.5876	-16.96	52.67	35.71	43.50	7.79	100	316	Horizontal
4	456.2563	-8.79	42.48	33.69	46.00	12.31	100	348	Horizontal
5	696.0861	-5.12	41.83	36.71	46.00	9.29	100	100	Horizontal
6	799.9800	-3.12	44.54	41.42	46.00	4.58	100	322	Horizontal

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

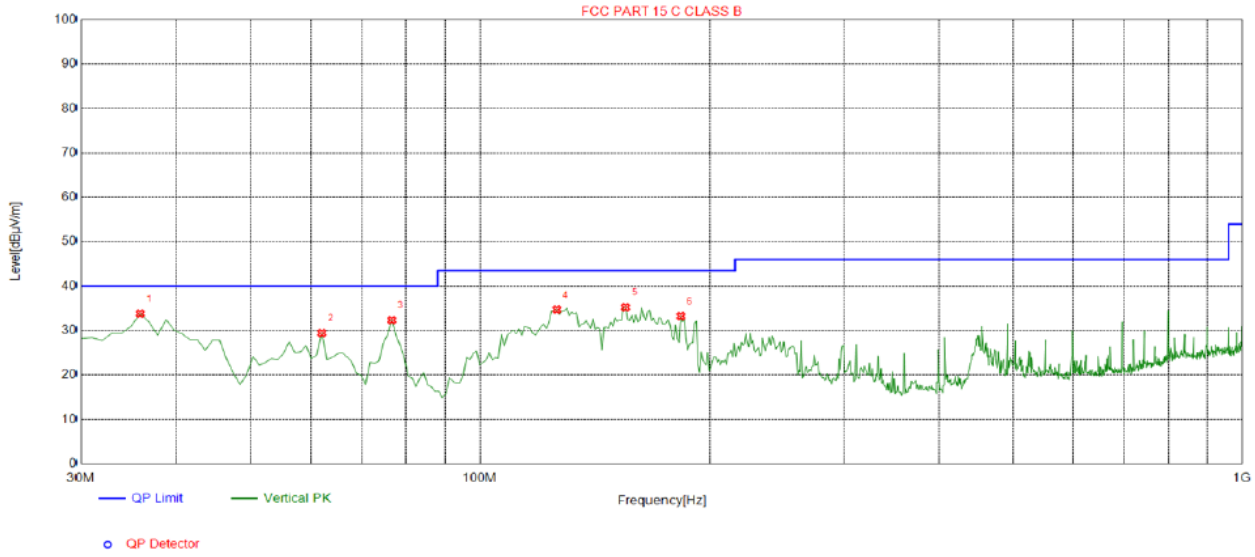

Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	35.8258	-15.88	49.70	33.82	40.00	6.18	100	295	Vertical
2	62.0420	-15.67	45.10	29.43	40.00	10.57	100	343	Vertical
3	76.6066	-18.86	51.20	32.34	40.00	7.66	100	292	Vertical
4	126.1261	-18.00	52.72	34.72	43.50	8.78	100	54	Vertical
5	155.2553	-18.56	53.80	35.24	43.50	8.26	100	12	Vertical
6	183.4134	-16.57	49.81	33.24	43.50	10.26	100	173	Vertical

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level

Harmonics and Spurious Emissions

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: *1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor*

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

Above 1GHz

LOW CH 149 (802.11 a Mode with 5.8G)/5745
All modes of operation were investigated and the worst-case of Ant 1 are reported.

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	54.72	-4.59	50.13	68.2	-18.07	peak
11096	50.34	4.21	54.55	74	-19.45	peak
11096	38.99	4.21	43.2	54	-10.8	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
3368	59.38	-4.59	54.79	68.2	-13.41	peak
11096	55.72	4.21	59.93	74	-14.07	peak
11096	37.19	4.21	41.4	54	-12.6	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

MID CH157 (802.11 a Mode with 5.8G)/5785

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	58.47	-4.59	53.88	68.2	-14.32	peak
10523	52.91	4.21	57.12	68.2	-11.08	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	57.16	-4.59	52.57	68.2	-15.63	peak
10523	53.95	4.21	58.16	68.2	-10.04	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

HIGH CH 165 (802.11a Mode with 5.8G)/5825

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	59.72	-4.59	55.13	74	-18.87	peak
2705	48.32	-4.59	43.73	54	-10.27	AVG
11717	54.11	4.84	58.95	74	-15.05	peak
11717	37.82	4.84	42.66	54	-11.34	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	59.34	-4.59	54.75	74	-19.25	peak
2705	45.32	-4.59	40.73	54	-13.27	AVG
11717	51.25	4.84	56.09	74	-17.91	peak
11717	39.77	4.84	44.61	54	-9.39	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark：
(1) Measuring frequencies from 1 GHz to the 40 GHz。
(2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
(4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

5.8G 802.11n20 Mode
All modes of operation were investigated and the worst-case of MIMO are reported.
LOW CH 149

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	65.32	-4.59	60.73	68.2	-7.47	peak
11096	57.49	4.21	61.7	74	-12.3	peak
11096	46.32	4.21	50.53	54	-3.47	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	63.25	-4.59	58.66	68.2	-9.54	peak
11096	56.74	4.21	60.95	74	-13.05	peak
11096	38.29	4.21	42.5	54	-11.5	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

MID CH157

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	64.32	-4.59	59.73	68.2	-8.47	peak
10523	54.71	4.21	58.92	68.2	-9.28	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	59.38	-4.59	54.79	68.2	-13.41	peak
10523	55.41	4.21	59.62	68.2	-8.58	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

HIGH CH165

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	60.32	-4.59	55.73	74	-18.27	peak
2705	49.72	-4.59	45.13	54	-8.87	AVG
11717	56.14	4.84	60.98	74	-13.02	peak
11717	38.99	4.84	43.83	54	-10.17	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	60.32	-4.59	55.73	74	-18.27	peak
2705	49.28	-4.59	44.69	54	-9.31	AVG
11717	53.37	4.84	58.21	74	-15.79	peak
11717	40.19	4.84	45.03	54	-8.97	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark：
(1) Measuring frequencies from 1 GHz to the 40 GHz。
(2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
(4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

5.8G 802.11n40 Mode
All modes of operation were investigated and the worst-case of MIMO are reported.
LOW CH 151

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	64.28	-4.59	59.69	68.2	-8.51	peak
11096	51.79	4.21	56	74	-18	peak
11096	39.72	4.21	43.93	54	-10.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	63.27	-4.59	58.68	68.2	-9.52	peak
11096	57.14	4.21	61.35	74	-12.65	peak
11096	38.94	4.21	43.15	54	-10.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

MID CH159

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	64.38	-4.59	59.79	68.2	-8.41	peak
10523	54.77	4.21	58.98	68.2	-9.22	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	58.67	-4.59	54.08	68.2	-14.12	peak
10523	54.19	4.21	58.4	68.2	-9.8	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark：
(1) Measuring frequencies from 1 GHz to the 40 GHz。
(2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
(4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

5.8G 802.11ac20 Mode
All modes of operation were investigated and the worst-case of MIMO are reported.
LOW CH 149

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	62.58	-4.59	57.99	68.2	-10.21	peak
11096	52.11	4.21	56.32	74	-17.68	peak
11096	38.97	4.21	43.18	54	-10.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	64.21	-4.59	59.62	68.2	-8.58	peak
11096	52.31	4.21	56.52	74	-17.48	peak
11096	38.6	4.21	42.81	54	-11.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

MID CH157

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	63.44	-4.59	58.85	68.2	-9.35	peak
10523	54.02	4.21	58.23	68.2	-9.97	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	59.58	-4.59	54.99	68.2	-13.21	peak
10523	54.22	4.21	58.43	68.2	-9.77	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

HIGH CH165

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	60.25	-4.59	55.66	74	-18.34	peak
2705	50.48	-4.59	45.89	54	-8.11	AVG
11717	56.72	4.84	61.56	74	-12.44	peak
11717	39.32	4.84	44.16	54	-9.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2705	59.38	-4.59	54.79	74	-19.21	peak
2705	47.25	-4.59	42.66	54	-11.34	AVG
11717	53.64	4.84	58.48	74	-15.52	peak
11717	38.97	4.84	43.81	54	-10.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark：
(1) Measuring frequencies from 1 GHz to the 40 GHz。
(2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
(4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

5.8G 802.11ac40 Mode
All modes of operation were investigated and the worst-case of MIMO are reported.
LOW CH 151

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	62.58	-4.59	57.99	68.2	-10.21	peak
11096	59.34	4.21	63.55	74	-10.45	peak
11096	38.49	4.21	42.7	54	-11.3	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	64.37	-4.59	59.78	68.2	-8.42	peak
11096	57.82	4.21	62.03	74	-11.97	peak
11096	39.14	4.21	43.35	54	-10.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

MID CH159

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	62.38	-4.59	57.79	68.2	-10.41	peak
10523	54.18	4.21	58.39	68.2	-9.81	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3172	59.67	-4.59	55.08	68.2	-13.12	peak
10523	55.32	4.21	59.53	68.2	-8.67	peak
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark：
(1) Measuring frequencies from 1 GHz to the 40 GHz。
(2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
(4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

5.8G 802.11ac80 Mode
All modes of operation were investigated and the worst-case of MIMO are reported.
CH 155

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	66.82	-4.59	62.23	68.2	-5.97	peak
11096	56.72	4.21	60.93	74	-13.07	peak
11096	38.97	4.21	43.18	54	-10.82	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
3368	63.37	-4.59	58.78	68.2	-9.42	peak
11096	56.78	4.21	60.99	74	-13.01	peak
11096	39.14	4.21	43.35	54	-10.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Remark：
(1) Measuring frequencies from 1 GHz to the 40 GHz。
(2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
(4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

4.8. Frequency Stability Measurement

4.8.1. Test Specification

Test Requirement:	FCC Part15 Section 15.407(g)
Test Method:	ANSI C63.10: 2013
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Setup:	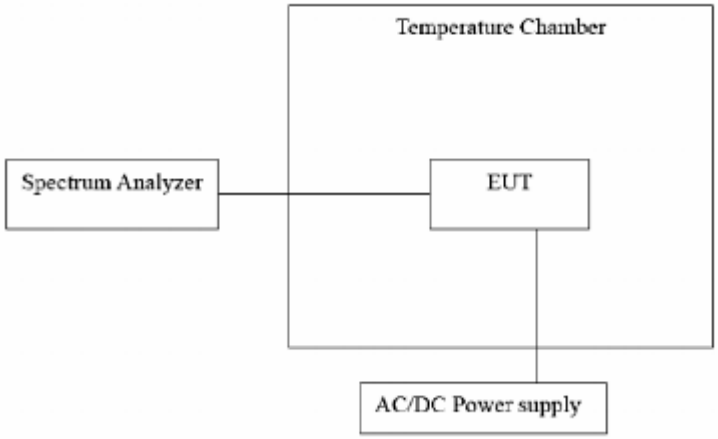
Test Procedure:	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Test Result:	PASS
Remark:	N/A

Test Result as follows:

Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	108.0V	5744.952	-48	5824.953	-47
	120.0V	5745.020	20	5825.021	21
	132.0 V	5745.017	17	5824.965	-35

Mode	Temperature (℃)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	-30	5745.022	22	5825.002	2
	-20	5745.049	49	5824.957	-43
	-10	5745.008	8	5824.952	-48
	0	5744.989	-11	5824.967	-33
	10	5745.014	14	5825.009	9
	20	5744.979	-21	5824.980	-20
	30	5744.982	-18	5825.022	22
	40	5745.006	6	5824.963	-37
	50	5744.970	-30	5824.998	-2

4.9. ANTENNA REQUIREMENT

Standard Applicable
For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.
The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction
The antenna used in this product is a External Antenna, with non-standard SMA connector, need professional installation, not easy to remove. It conforms to the standard requirements. and the best case gain of the antenna is Antenna port 1:0dBi and Antenna port 2:0dBi.

ANTENNA

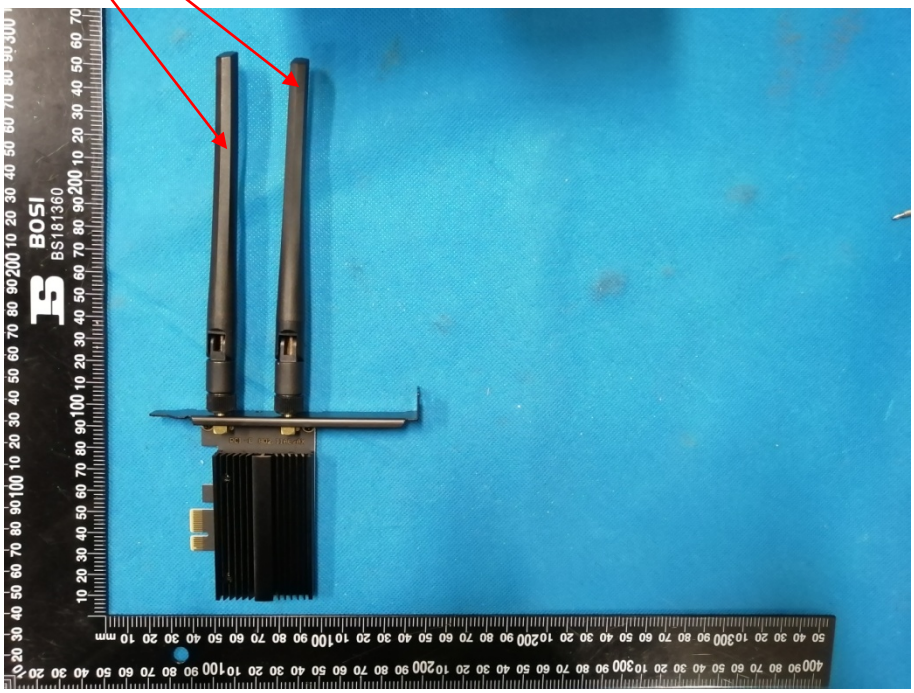

4.10. Photographs of Test Setup

Radiated Emission

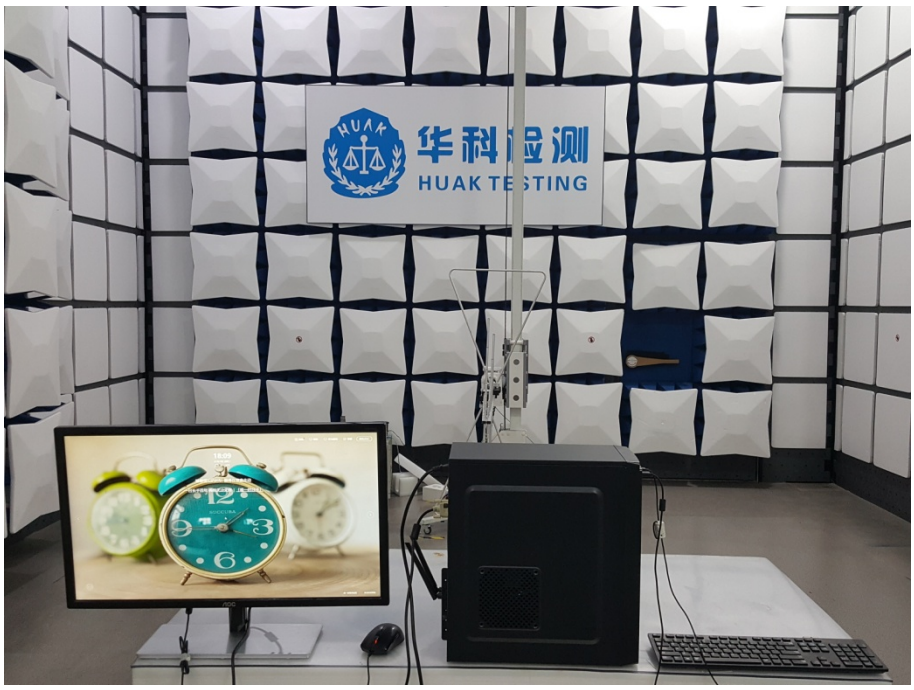

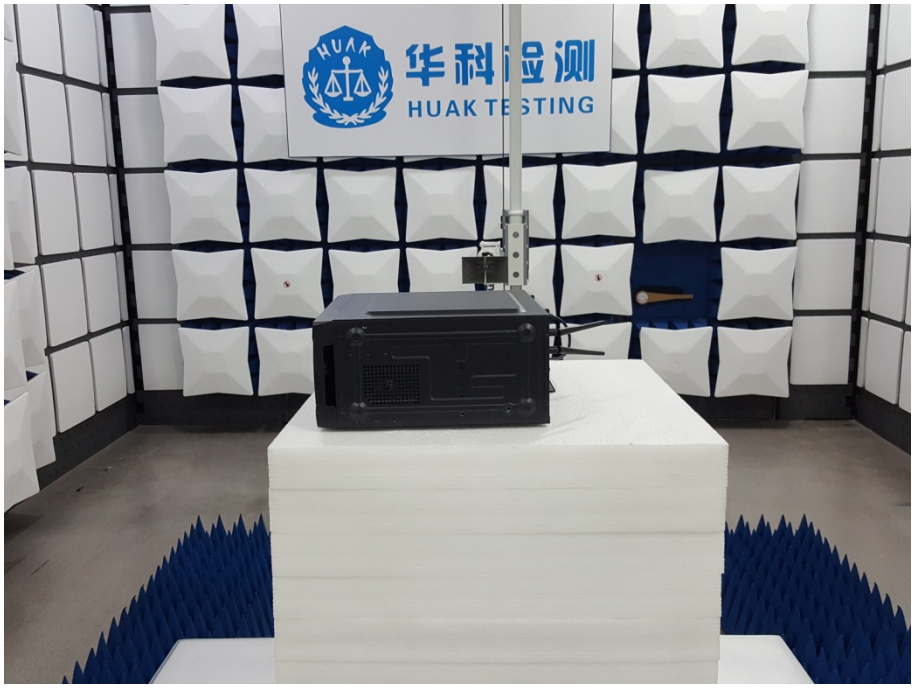

Conducted Emission

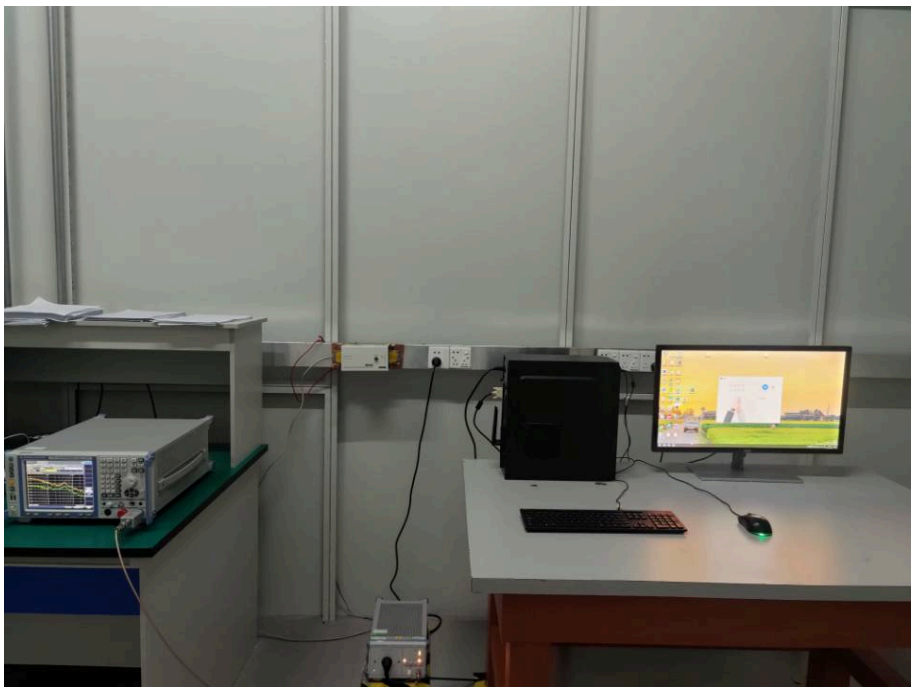

4.11. PHOTOS OF THE EUT

Reference to the reporter : ANNEX A of external photos and ANNEX B of internal photos