





(802.11ac40) PSD plot on channel 151

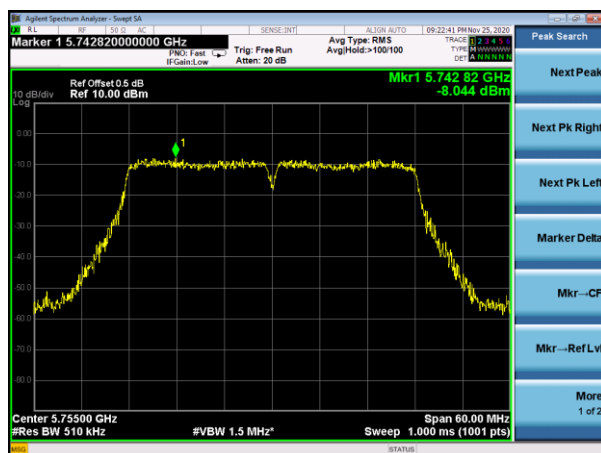

(802.11ac80) PSD plot on channel 155

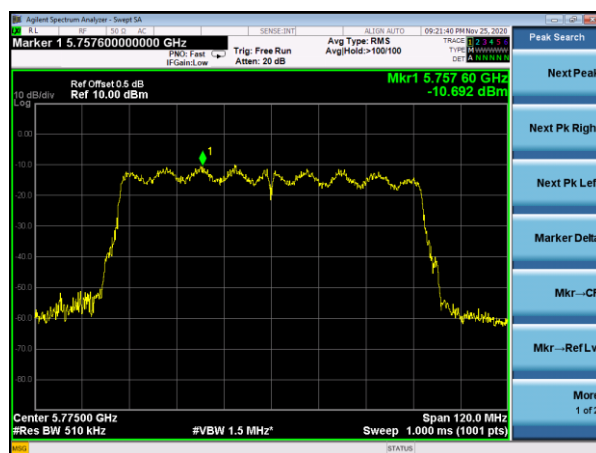


(802.11ac40) PSD plot on channel 159

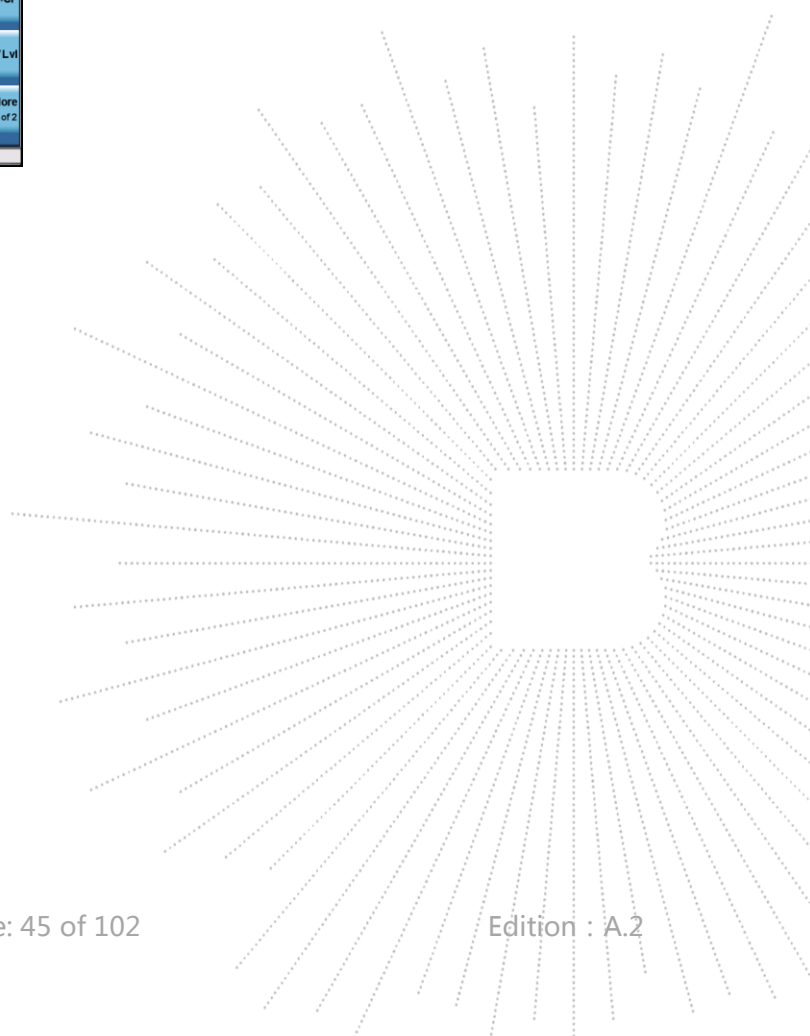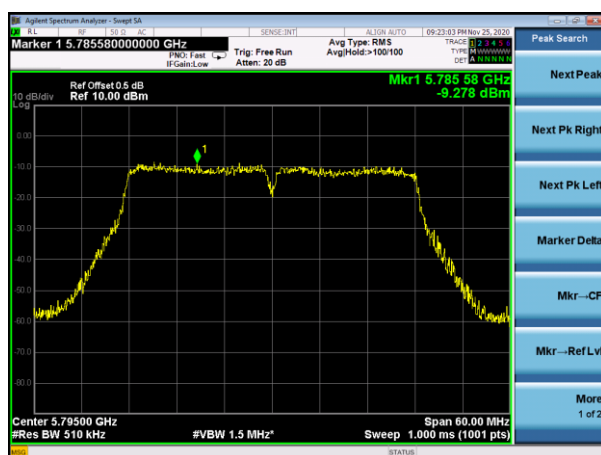

9. 26DB & 6DB & 99% EMISSION BANDWIDTH

9.1 Block Diagram Of Test Setup

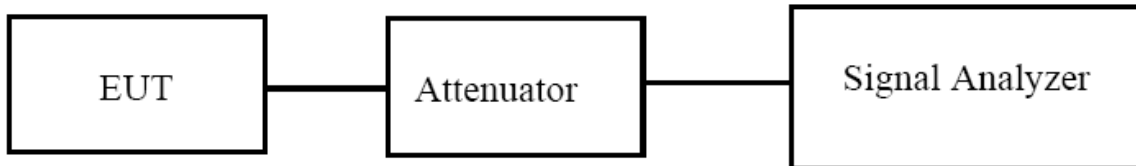

9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

9.3 Test procedure

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

9.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


9.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency U-NII-1 (5180-5240MHz)		


Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	26dB bandwidth (MHz)	Result
			Antenna A	Antenna A	
802.11a	CH36	5180	16.611	20.41	Pass
	CH40	5200	16.593	20.14	Pass
	CH48	5240	16.628	20.58	Pass
802.11 n20	CH36	5180	17.607	20.89	Pass
	CH40	5200	17.618	20.69	Pass
	CH48	5240	17.597	20.63	Pass
802.11 n40	CH 38	5190	36.832	43.68	Pass
	CH 46	5230	36.736	43.12	Pass
802.11 AC20	CH36	5180	17.600	20.81	Pass
	CH40	5200	17.640	20.75	Pass
	CH48	5240	17.616	20.96	Pass
802.11 AC40	CH 38	5190	36.649	43.76	Pass
	CH 46	5230	36.720	43.66	Pass
802.11 AC80	CH 42	5210	75.259	81.94	Pass

Test plot


(802.11a) 26dB&99%Bandwidth plot on channel 36

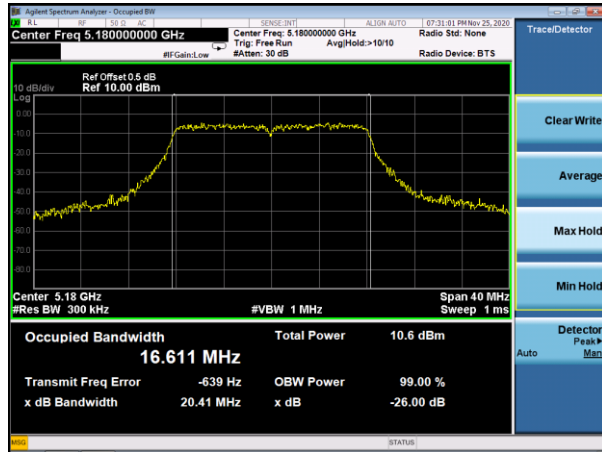


(802.11 n20) 26dB&99%Bandwidth plot on channel 36

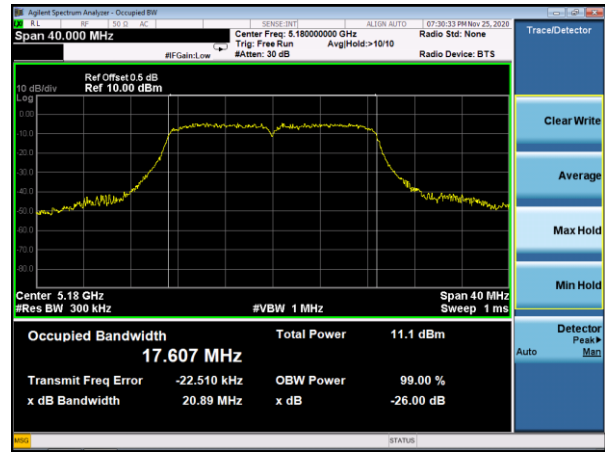


(802.11a) 26dB&99%Bandwidth plot on channel 40

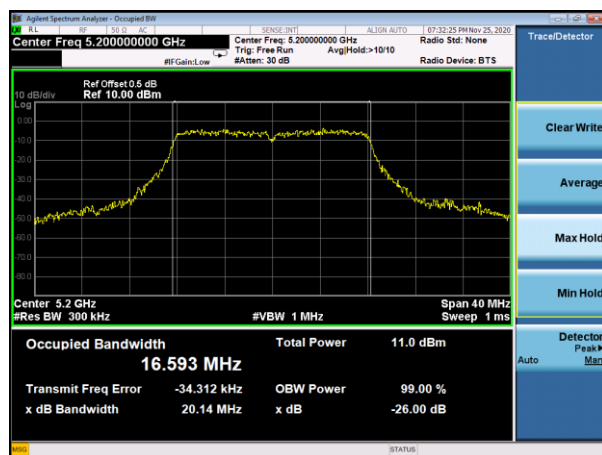


(802.11 n20) 26dB&99%Bandwidth plot on channel 40

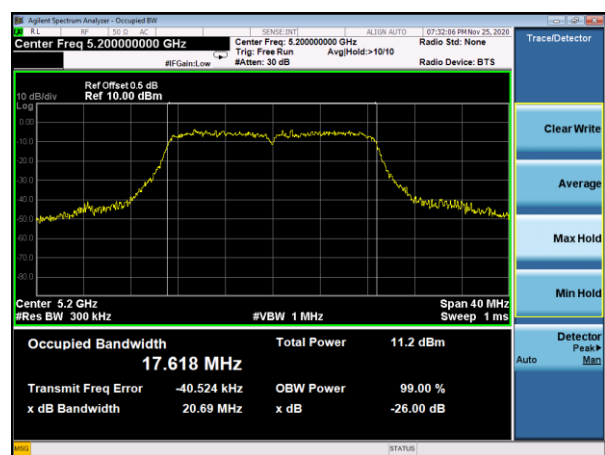

(802.11a) 26dB&99%Bandwidth plot on channel 48

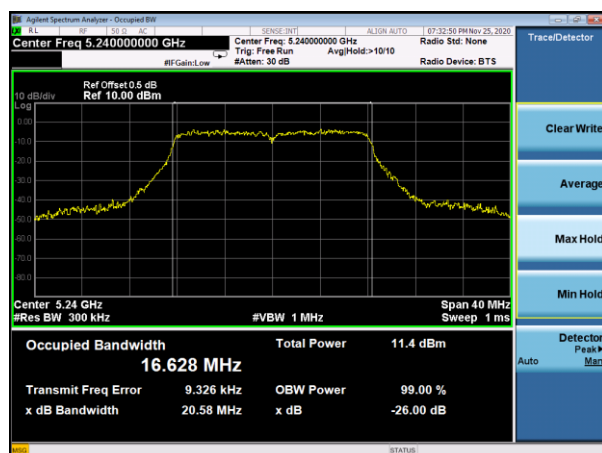


(802.11 n20) 26dB&99%Bandwidth plot on channel 48

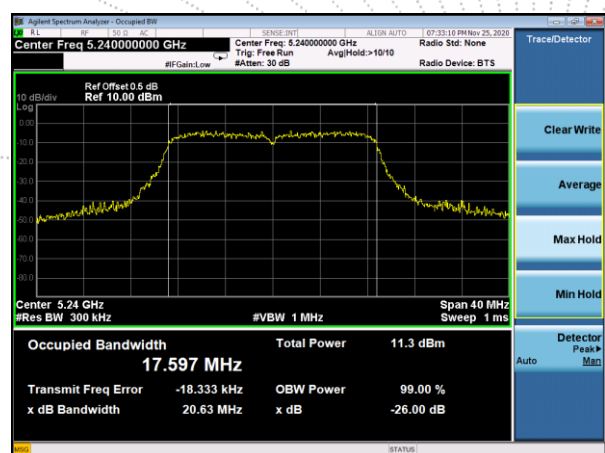


Test plot


(802.11 n40) 26dB&99%Bandwidth plot on channel 38

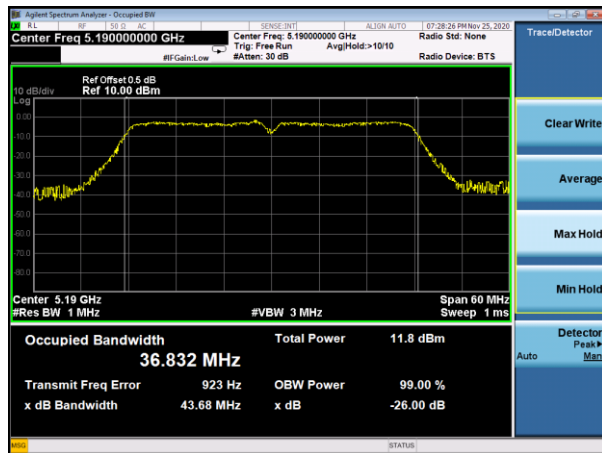


(802.11 AC20) -26dB&99%Bandwidth plot on channel 36

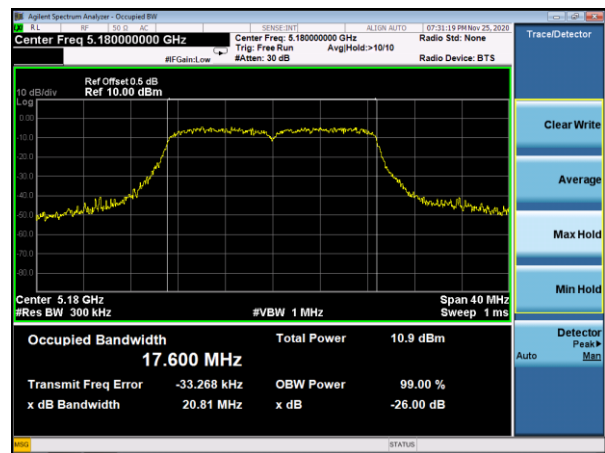


(802.11 n40) 26dB&99%Bandwidth plot on channel 46

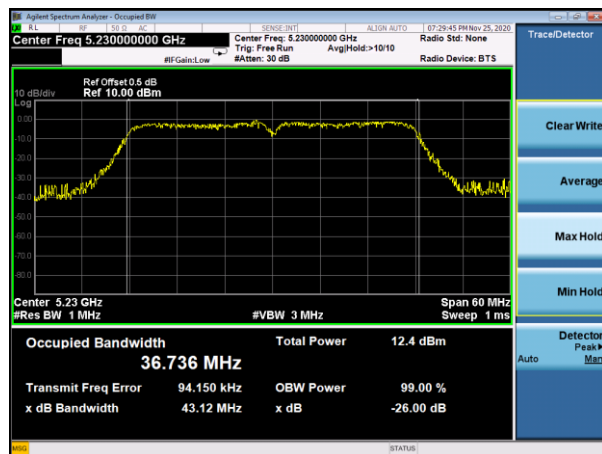

(802.11 AC20) -26dB&99%Bandwidth plot on channel 40

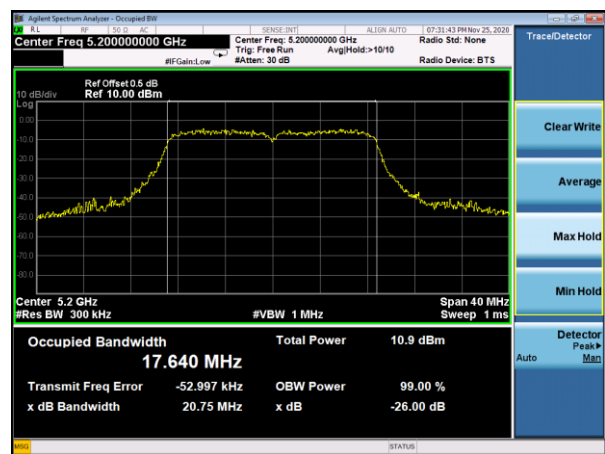


(802.11 AC20) -26dB&99%Bandwidth plot on channel 48

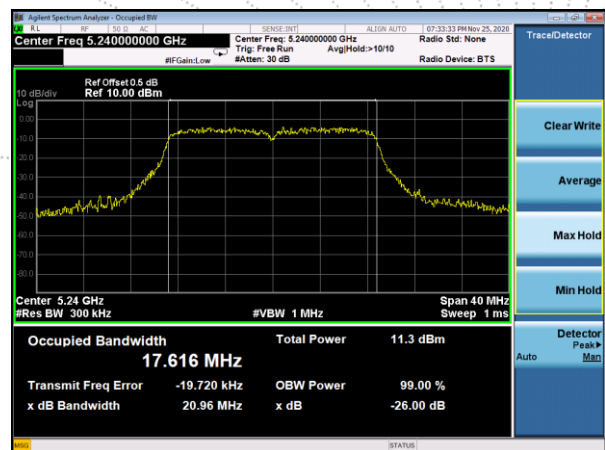


Test plot



(802.11 AC40) -26dB&99%Bandwidth plot on
channel 38

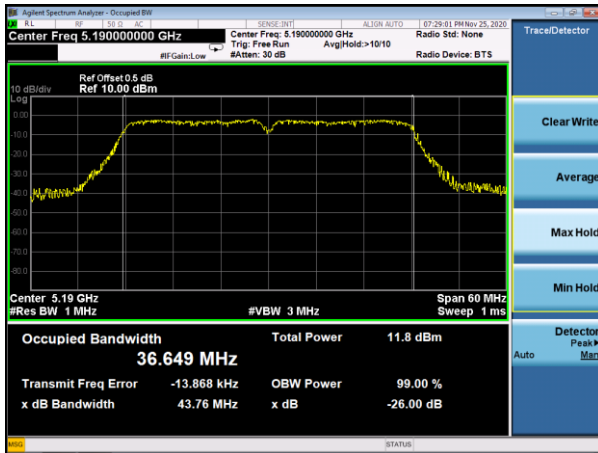

(802.11 AC80) -26dB&99%Bandwidth plot on
channel 42

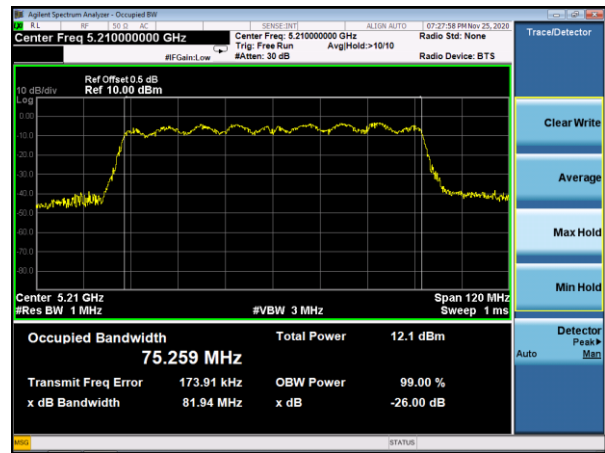


(802.11 AC40) -26dB&99%Bandwidth plot on
channel 46

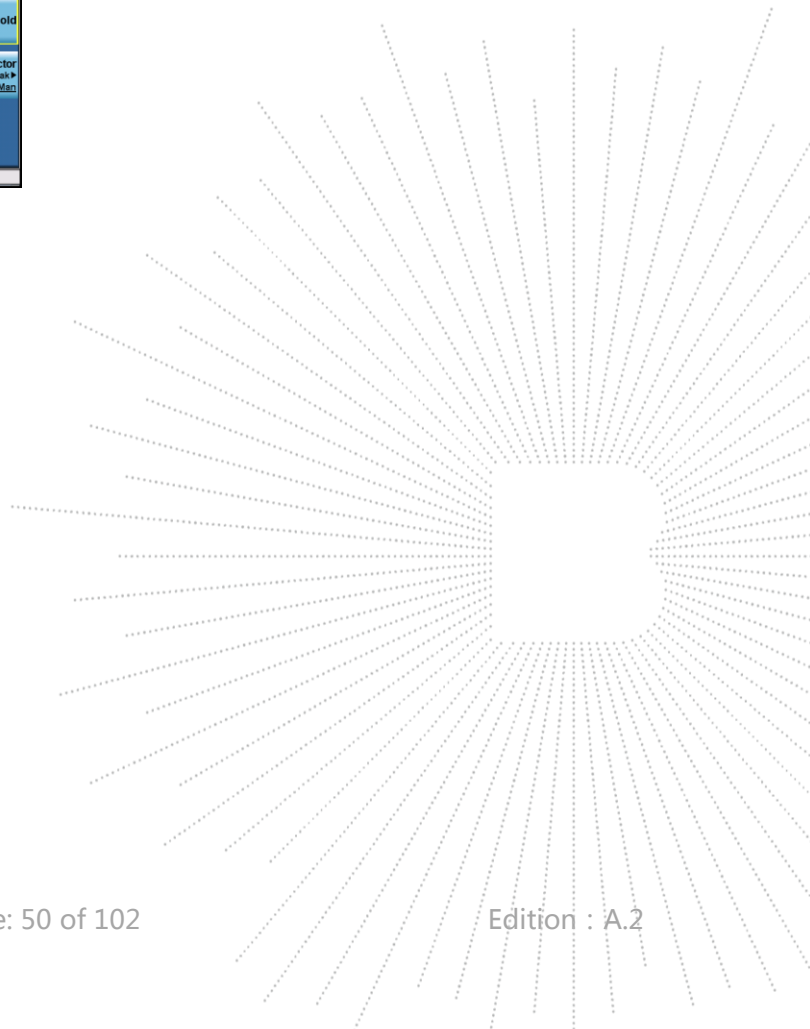
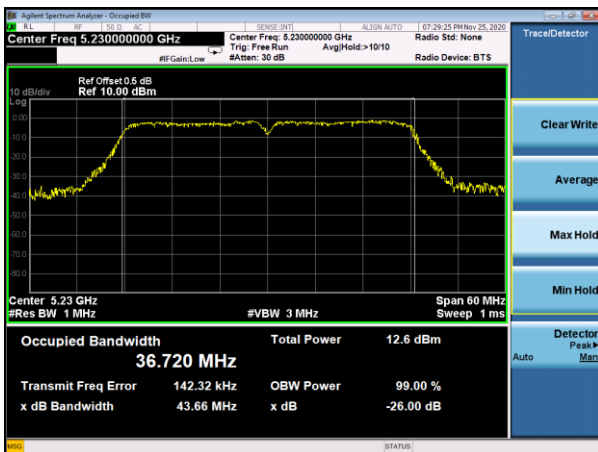


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency U-NII-3(5745-5825MHz)		


Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	6dB bandwidth (MHz)	Result
802.11a	CH149	5745	16.646	16.35	Pass
	CH157	5785	16.668	16.30	Pass
	CH165	5825	16.665	16.35	Pass
802.11 n20	CH149	5745	17.641	17.54	Pass
	CH157	5785	17.652	16.81	Pass
	CH165	5825	17.647	16.87	Pass
802.11 n40	CH151	5755	36.991	35.75	Pass
	CH159	5795	36.928	35.53	Pass
802.11 AC20	CH149	5745	17.648	16.91	Pass
	CH157	5785	17.628	16.70	Pass
	CH165	5825	17.673	16.30	Pass
802.11 AC40	CH151	5755	36.842	35.68	Pass
	CH159	5795	36.830	35.54	Pass
802.11 AC80	CH155	5775	75.335	75.18	Pass

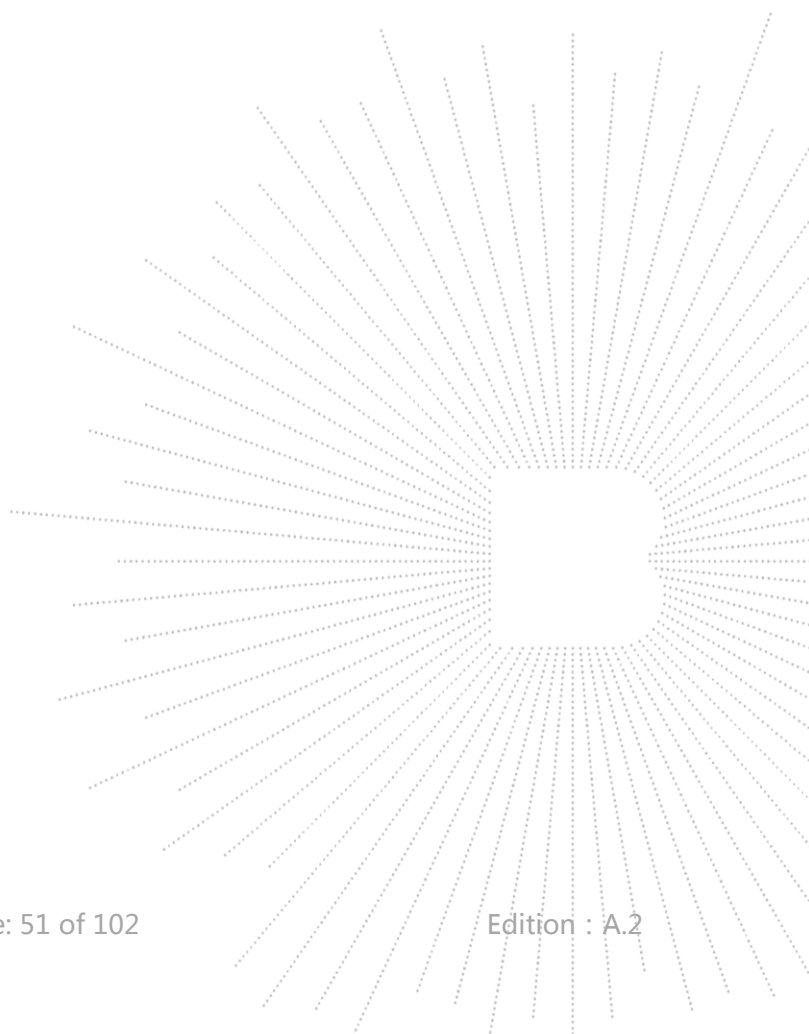


5725-5850MHz

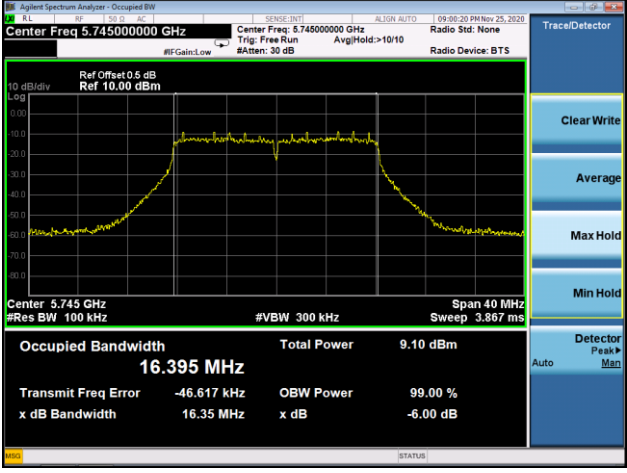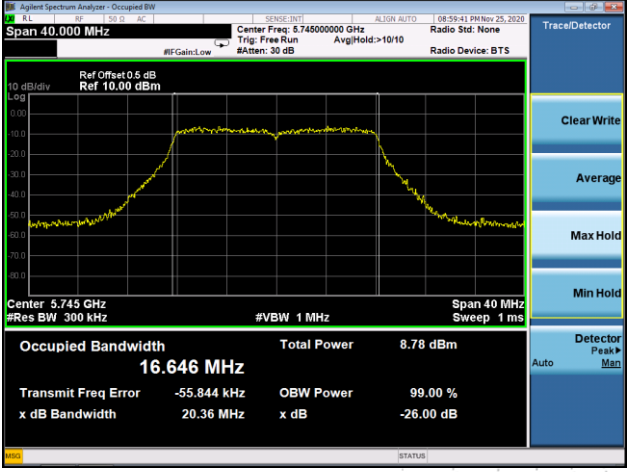Mode:	802.11a
5745MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.745000000 GHz Ref Offset: 0.5 dB Ref: 10.00 dBm Occupied Bandwidth: 16.395 MHz Total Power: 9.10 dBm Transmit Freq Error: -46.617 kHz OBW Power: 99.00 % x dB Bandwidth: 16.35 MHz x dB: -6.00 dB
5745MHz 99% bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.745000000 GHz Ref Offset: 0.5 dB Ref: 10.00 dBm Occupied Bandwidth: 16.646 MHz Total Power: 8.78 dBm Transmit Freq Error: -55.844 kHz OBW Power: 99.00 % x dB Bandwidth: 20.36 MHz x dB: -26.00 dB


5785MHz
6dB bandwidth

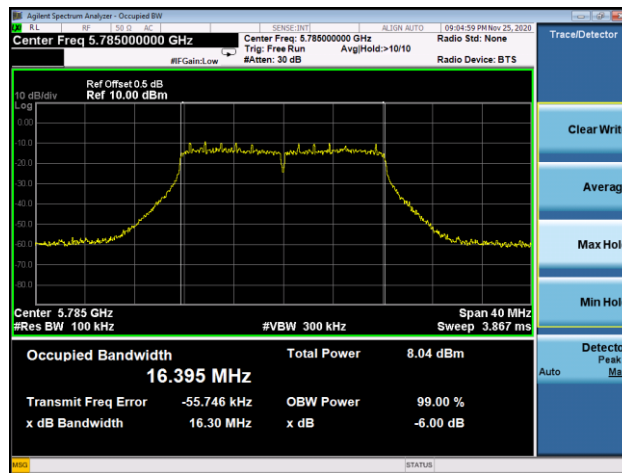





5785MHz
99% bandwidth

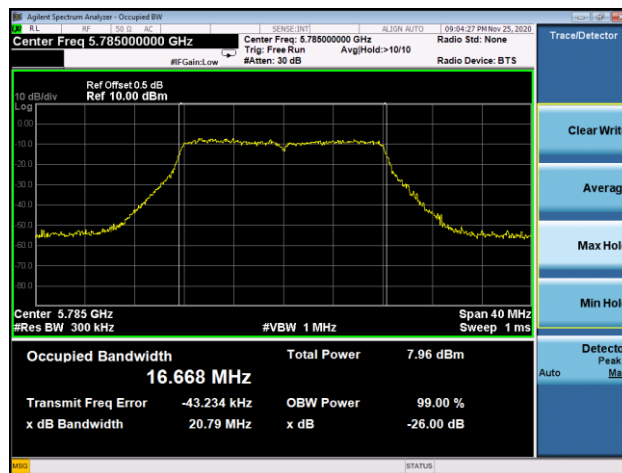


5825MHz
6dB bandwidth

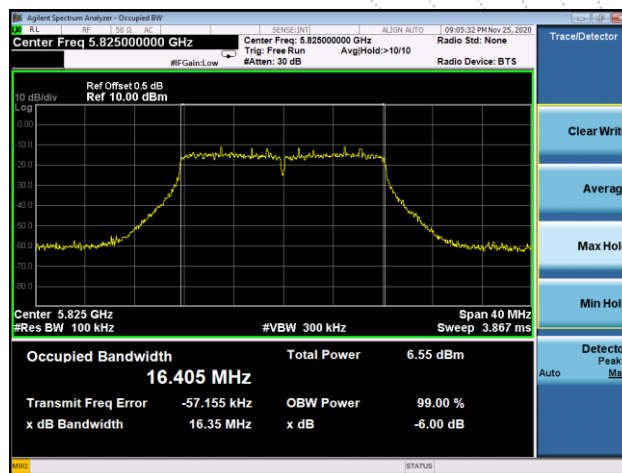

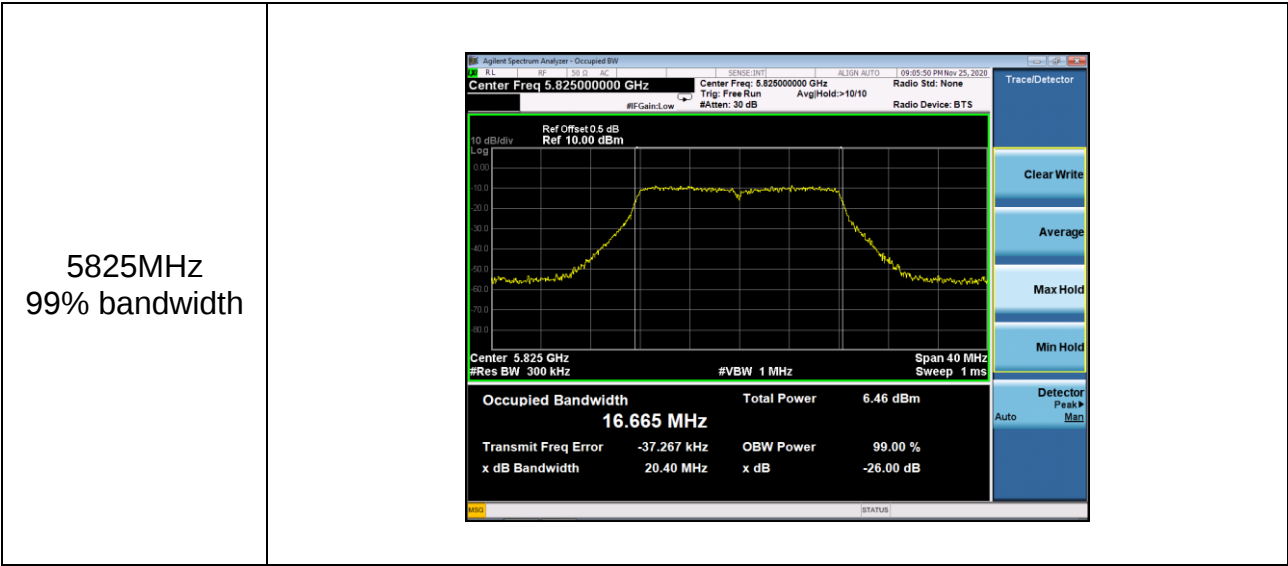


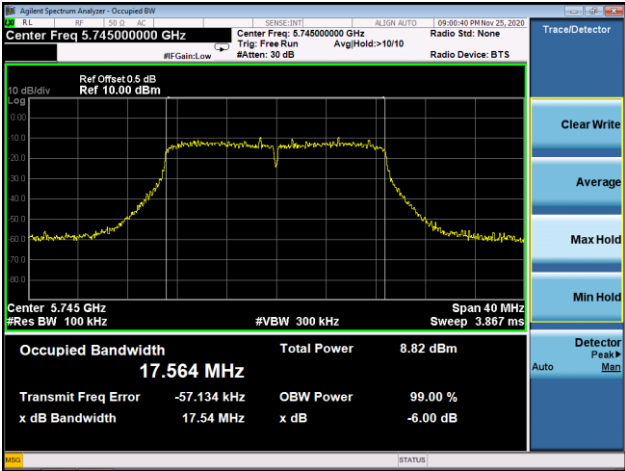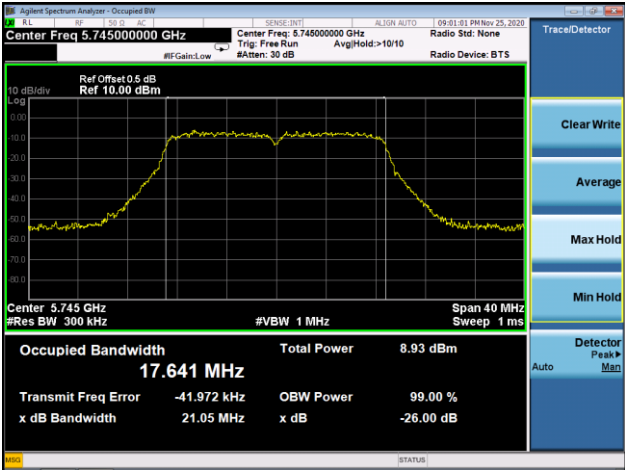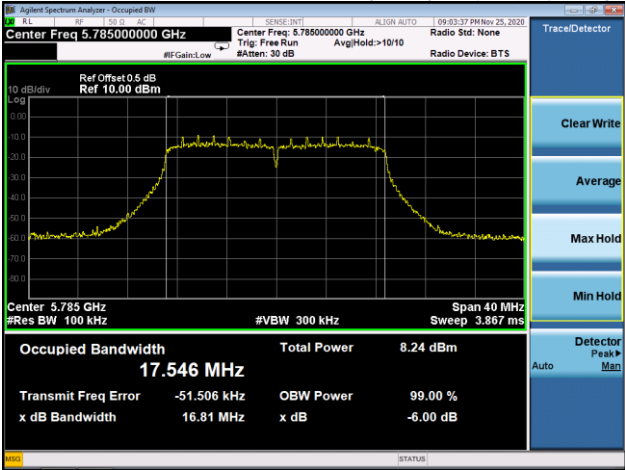Mode:	802.11n-HT20
5745MHz 6dB bandwidth	
5745MHz 99% bandwidth	
5785MHz 6dB bandwidth	


5785MHz
99% bandwidth



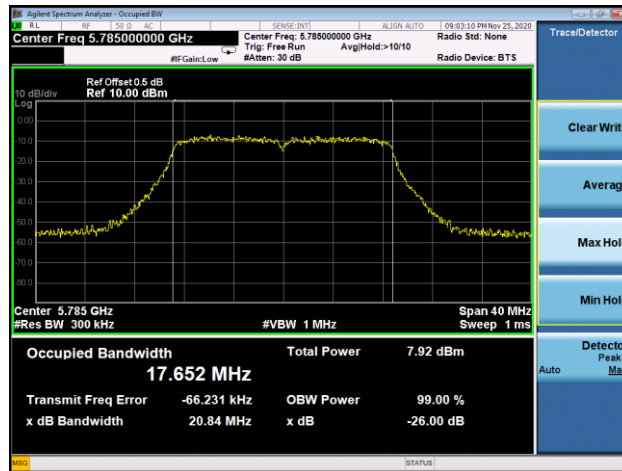


5825MHz
6dB bandwidth

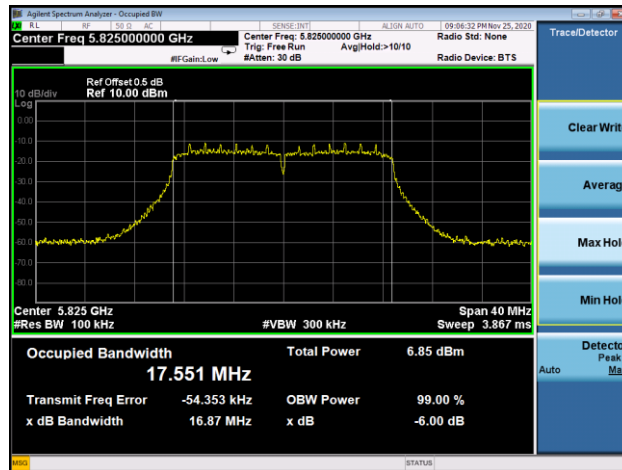





5825MHz
99% bandwidth



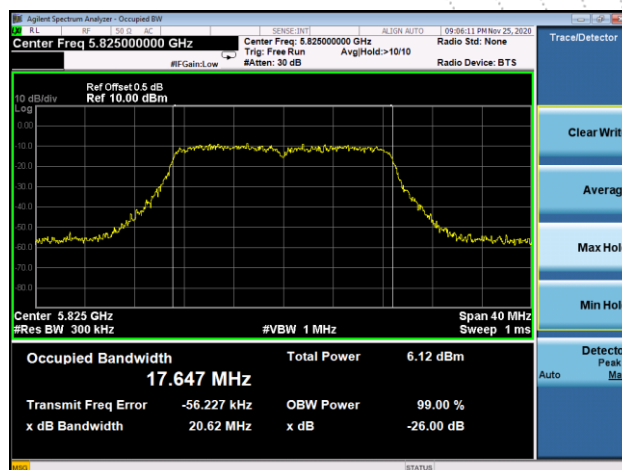


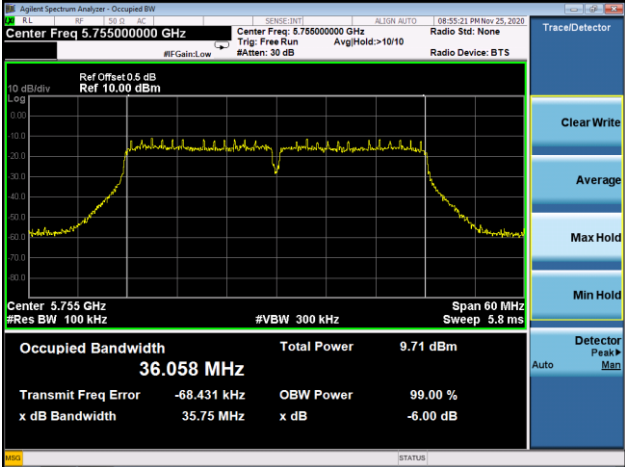
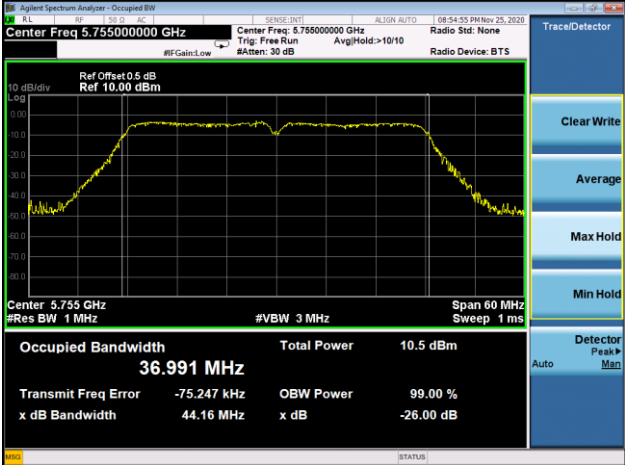
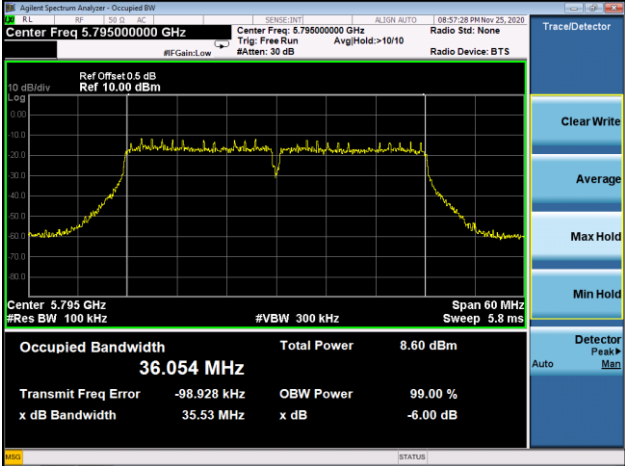
Mode:	802.11n-HT40
5755 MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.755000000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Center 5.755 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.058 MHz Total Power 9.71 dBm Transmit Freq Error -68.431 kHz OBW Power 99.00 % x dB Bandwidth 35.75 MHz x dB -6.00 dB
5755 MHz 99% bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.755000000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Center 5.755 GHz #Res BW 1 MHz #VBW 3 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 36.991 MHz Total Power 10.5 dBm Transmit Freq Error -75.247 kHz OBW Power 99.00 % x dB Bandwidth 44.16 MHz x dB -26.00 dB
5795 MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.795000000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Center 5.795 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.054 MHz Total Power 8.60 dBm Transmit Freq Error -98.928 kHz OBW Power 99.00 % x dB Bandwidth 35.53 MHz x dB -6.00 dB


5795 MHz
99% bandwidth

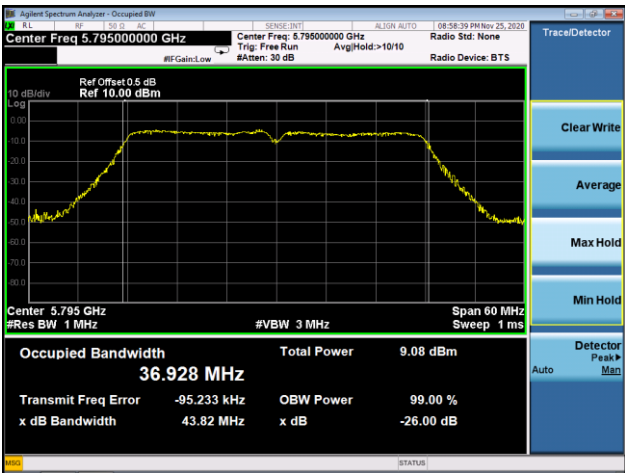

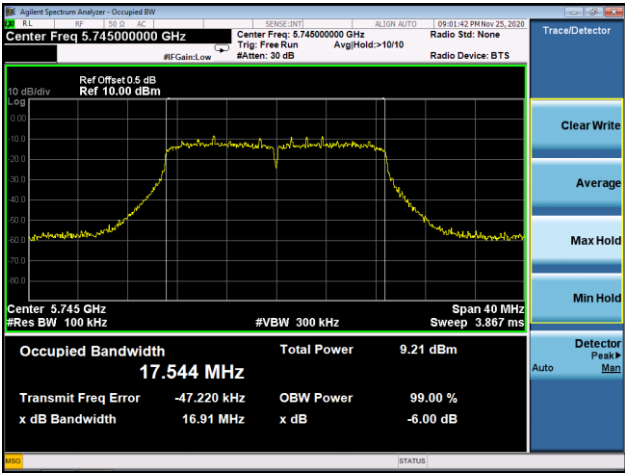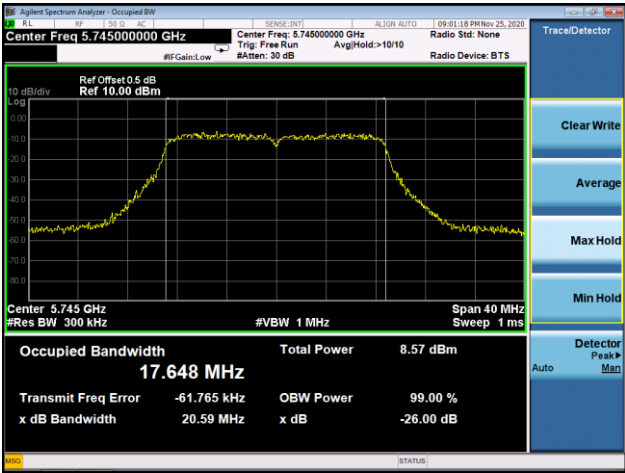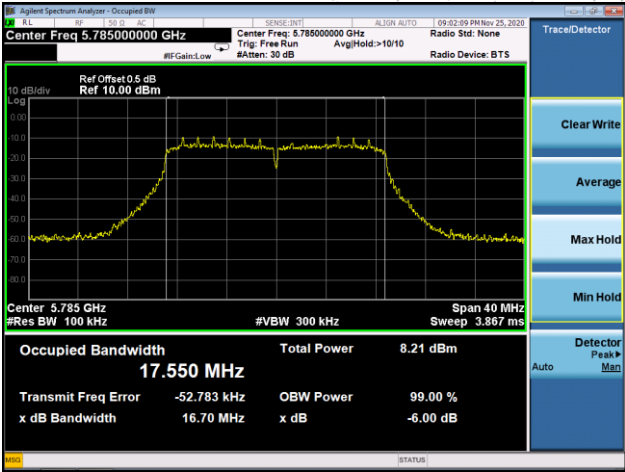Mode:	802.11ac-HT20
5745MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.74500000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.544 MHz Total Power 9.21 dBm Transmit Freq Error -47.220 kHz x dB Bandwidth 16.91 MHz OBW Power 99.00 % x dB -6.00 dB
5745MHz 99% bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.74500000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Center 5.745 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.648 MHz Total Power 8.57 dBm Transmit Freq Error -61.765 kHz x dB Bandwidth 20.59 MHz OBW Power 99.00 % x dB -26.00 dB
5785MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.785000000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.550 MHz Total Power 8.21 dBm Transmit Freq Error -52.783 kHz x dB Bandwidth 16.70 MHz OBW Power 99.00 % x dB -6.00 dB

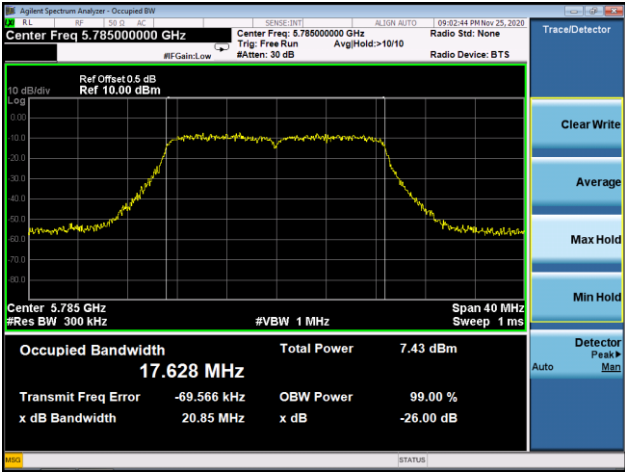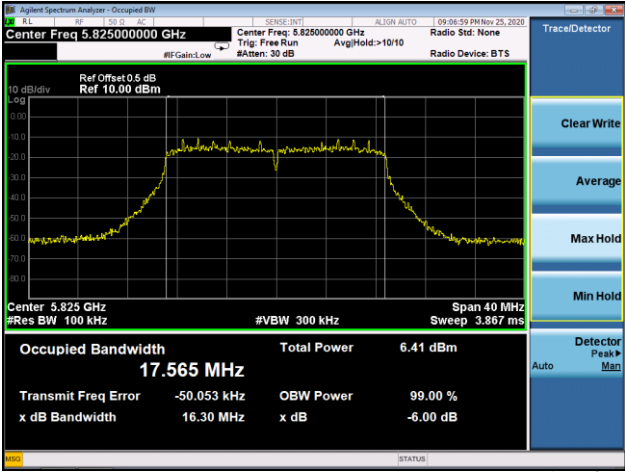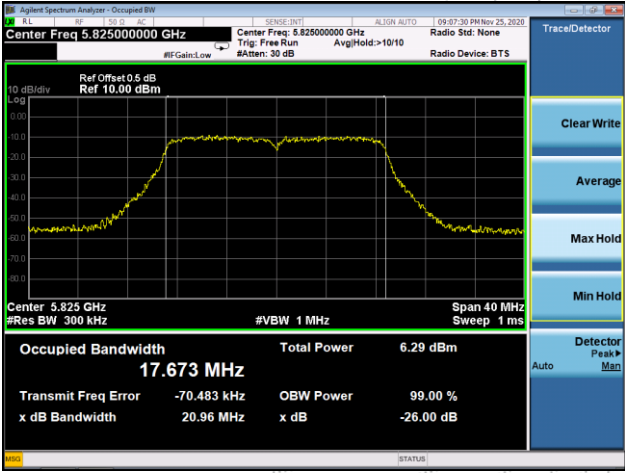5785MHz 99% bandwidth	 Center Freq 5.78500000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Center 5.785 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.628 MHz Total Power 7.43 dBm Transmit Freq Error -69.566 kHz OBW Power 99.00 % x dB Bandwidth 20.85 MHz x dB -26.00 dB
5825MHz 6dB bandwidth	 Center Freq 5.82500000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.565 MHz Total Power 6.41 dBm Transmit Freq Error -50.053 kHz OBW Power 99.00 % x dB Bandwidth 16.30 MHz x dB -6.00 dB
5825MHz 99% bandwidth	 Center Freq 5.82500000 GHz Ref Offset 0.5 dB Ref 10.00 dBm Center 5.825 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.673 MHz Total Power 6.29 dBm Transmit Freq Error -70.483 kHz OBW Power 99.00 % x dB Bandwidth 20.96 MHz x dB -26.00 dB

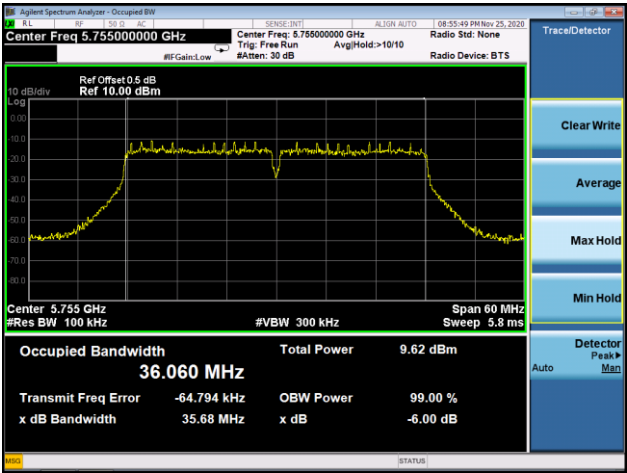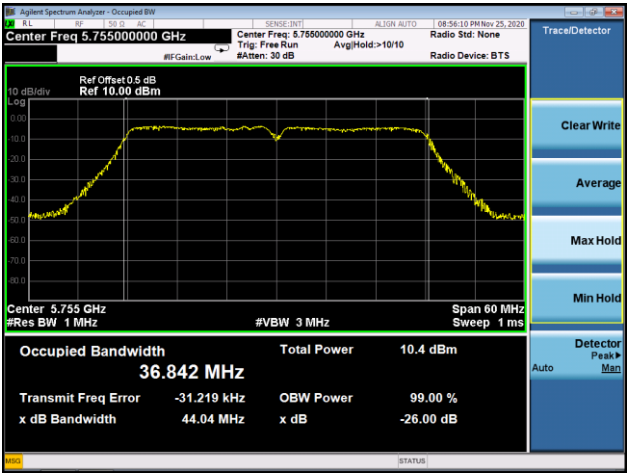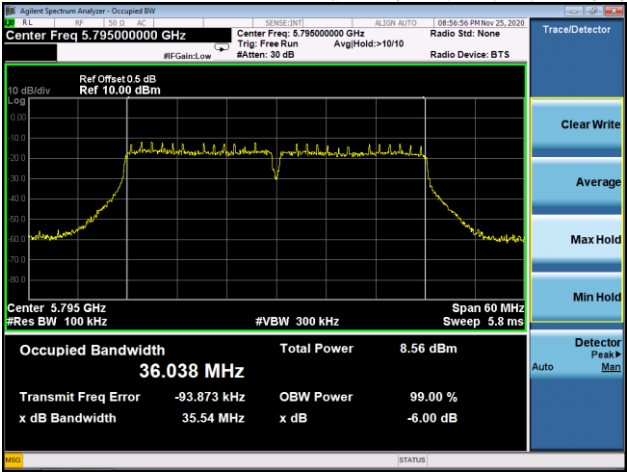Mode:	802.11ac-HT40
5755 MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.755000000 GHz Ref Offset: 0.5 dB Ref: 10.00 dBm Center Freq: 5.755000000 GHz Trig: Free Run #Gain: Low #Atten: 30 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS 10 dB/div Log Center 5.755 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth: 36.060 MHz Total Power: 9.62 dBm Transmit Freq Error: -64.794 kHz OBW Power: 99.00 % x dB Bandwidth: 35.68 MHz x dB: -6.00 dB Trace/Detector Clear Write Average Max Hold Min Hold Detector Peak Auto Man
5755 MHz 99% bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.755000000 GHz Ref Offset: 0.5 dB Ref: 10.00 dBm Center Freq: 5.755000000 GHz Trig: Free Run #Gain: Low #Atten: 30 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS 10 dB/div Log Center 5.755 GHz #Res BW 1 MHz #VBW 3 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth: 36.842 MHz Total Power: 10.4 dBm Transmit Freq Error: -31.219 kHz OBW Power: 99.00 % x dB Bandwidth: 44.04 MHz x dB: -26.00 dB Trace/Detector Clear Write Average Max Hold Min Hold Detector Peak Auto Man
5795 MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.795000000 GHz Ref Offset: 0.5 dB Ref: 10.00 dBm Center Freq: 5.795000000 GHz Trig: Free Run #Gain: Low #Atten: 30 dB Avg/Hold: >10/10 Radio Std: None Radio Device: BTS 10 dB/div Log Center 5.795 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth: 36.038 MHz Total Power: 8.56 dBm Transmit Freq Error: -93.873 kHz OBW Power: 99.00 % x dB Bandwidth: 35.54 MHz x dB: -6.00 dB Trace/Detector Clear Write Average Max Hold Min Hold Detector Peak Auto Man

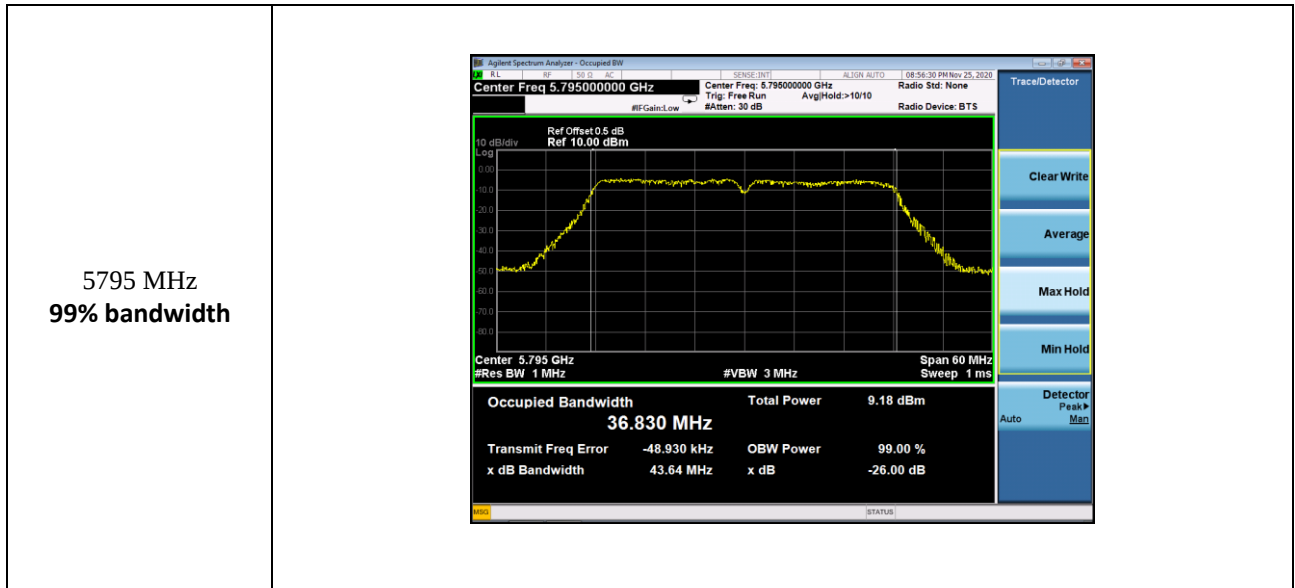

10. MAXIMUM CONDUCTED OUTPUT POWER

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	1W
5725~5850	1W

10.3 Test procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be

averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


10.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX (5.1G) Mode Frequency U-NII-1 (5180-5240MHz)		

Test Channel	Frequency	Maximum output power. Antenna port (AV)	LIMIT	Result
	(MHz)	(dBm)	dBm	
TX 802.11a Mode				
CH36	5180	7.833	23.98	Pass
CH40	5200	8.500	23.98	Pass
CH48	5240	8.322	23.98	Pass
TX 802.11 n20M Mode				
CH36	5180	7.955	23.98	Pass
CH40	5200	7.817	23.98	Pass
CH48	5240	7.918	23.98	Pass
TX 802.11 n40M Mode				
CH38	5190	4.340	23.98	Pass
CH46	5230	5.042	23.98	Pass
TX 802.11 AC20M Mode				
CH36	5180	6.644	23.98	Pass
CH40	5200	7.820	23.98	Pass
CH48	5240	8.120	23.98	Pass
TX 802.11 AC40M Mode				
CH38	5190	3.862	23.98	Pass
CH46	5230	4.834	23.98	Pass
TX 802.11 AC80M Mode				
CH42	5210	2.708	23.98	Pass

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX (5.8G) Mode Frequency U-NII-3 (5745-5825MHz)		

Test Channel	Frequency	Maximum output power. Antenna port (AV)	LIMIT	Result
	(MHz)	(dBm)	dBm	
TX 802.11a Mode				
CH 149	5745	7.474	30	Pass
CH 157	5785	6.393	30	Pass
CH 165	5825	5.012	30	Pass
TX 802.11 n20M Mode				
CH 149	5745	5.561	30	Pass
CH 157	5785	4.895	30	Pass
CH 165	5825	3.492	30	Pass
TX 802.11 n40M Mode				
CH 151	5755	3.584	30	Pass
CH 159	5795	2.214	30	Pass
TX 802.11 AC20M Mode				
CH 149	5745	5.787	30	Pass
CH 157	5785	4.630	30	Pass
CH 165	5825	3.256	30	Pass
TX 802.11 AC40M Mode				
CH 151	5755	3.013	30	Pass
CH 159	5795	2.062	30	Pass
TX 802.11 AC80M Mode				
CH 155	5775	1.345	30	Pass

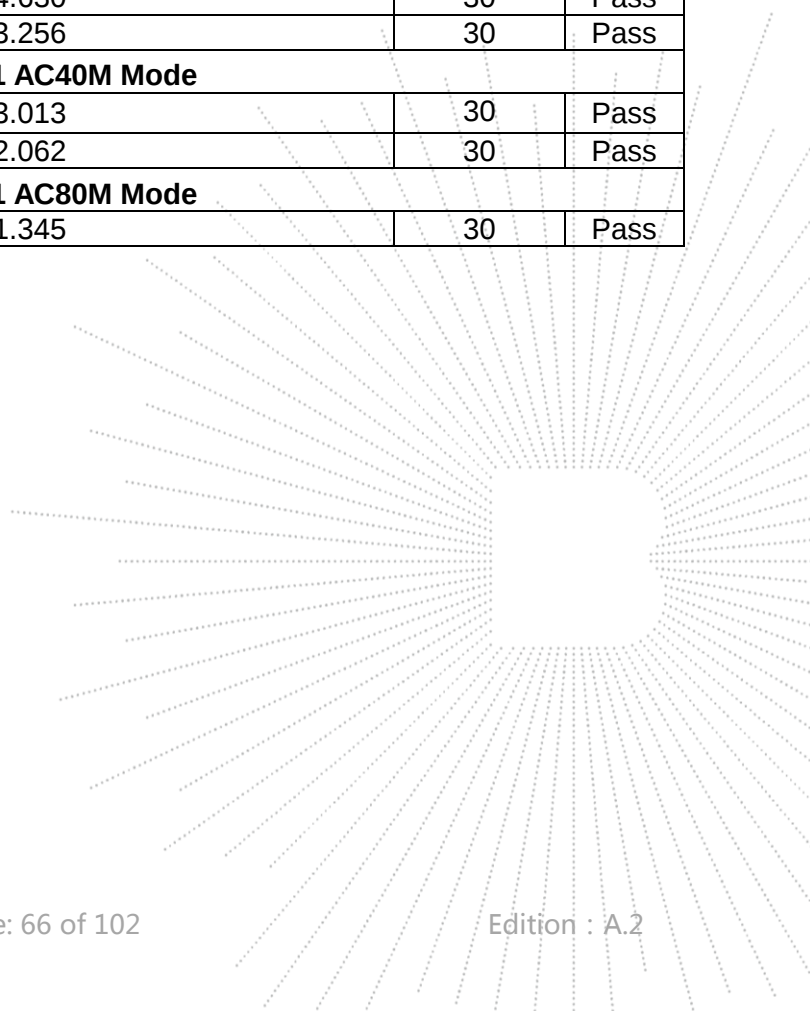

11. OUT OF BAND EMISSIONS

11.1 Block Diagram Of Test Setup



11.2 Limit

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

11.3 Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data


11.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V


5.1G

5.180~5.240 GHz


(802.11a) Band Edge, Left Side

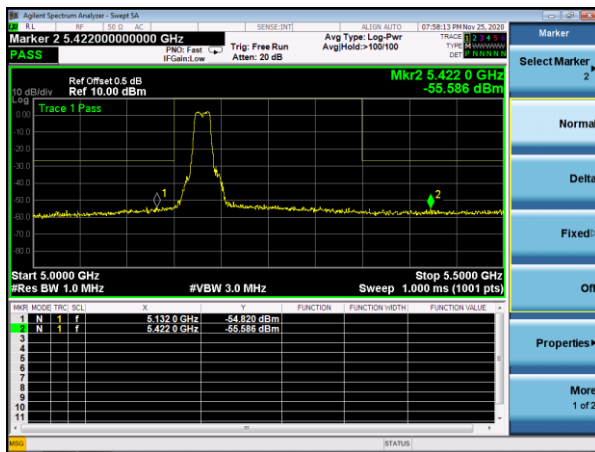


(802.11n20) Band Edge, Left Side

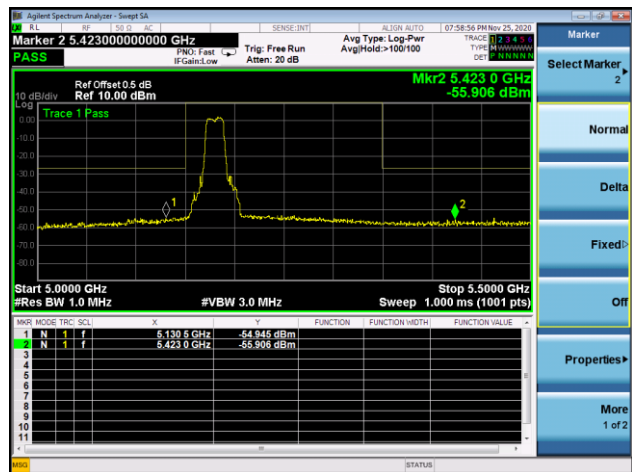

(802.11a) Band Edge, Right Side

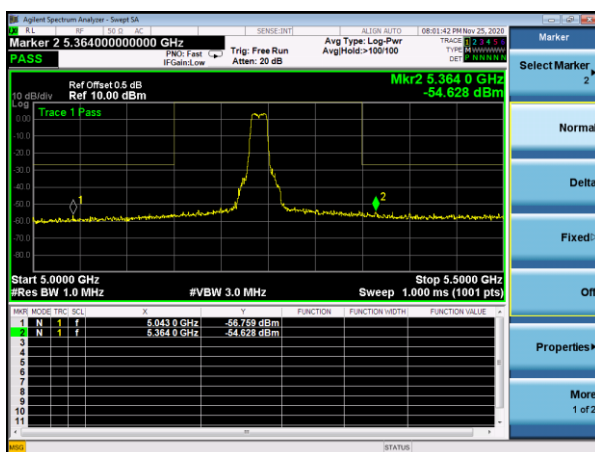


(802.11n20) Band Edge, Right Side

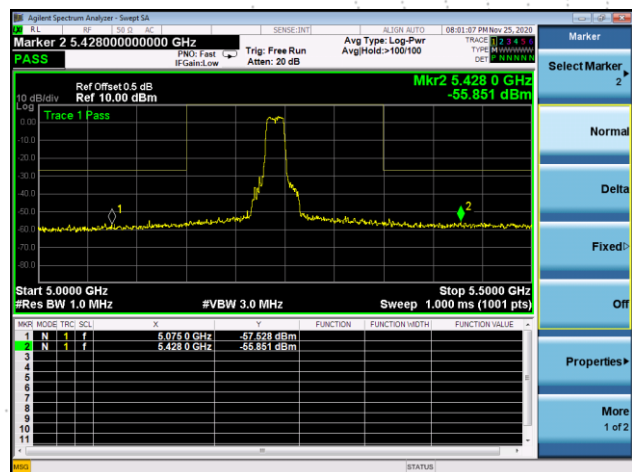


5.180~5.240 GHz


(802.11n40) Band Edge, Left Side

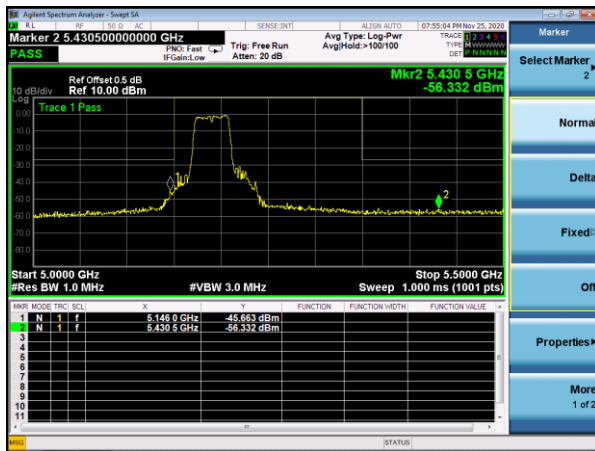

(802.11ac20) Band Edge, Left Side

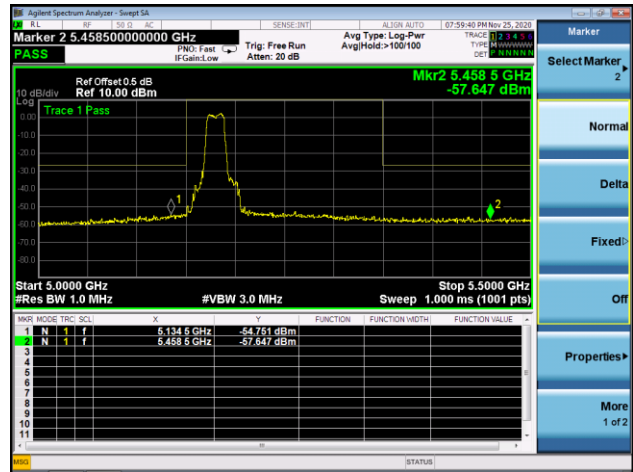

(802.11n40) Band Edge, Right Side

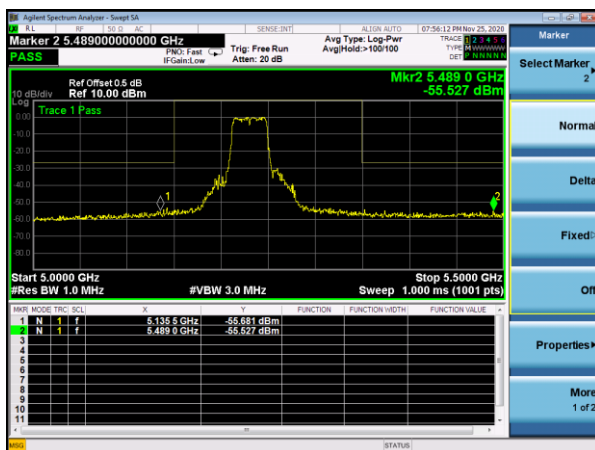

(802.11ac20) Band Edge, Right Side

