ZiiLock

Caution

Please read the following instructions to make sure to use ZiiLock safely and correctly.

1. Do not disassemble, adjust or repair this product arbitrarily.

2. Do not hit the product with hard objects (hammers etc.).

3. Do not insert foreign objects into the keyhole.

4. Do not use corrosive or volatile liquids during cleaning, e.g. alcohol, chemical thinners etc.

5. Make sure the key is under proper storage to unlock the product in emergency such as running out of battery or abnormal circuit.

6. Please pay attention to the battery level, and recharge the lock in time to ensure normal use.

Product Diagram

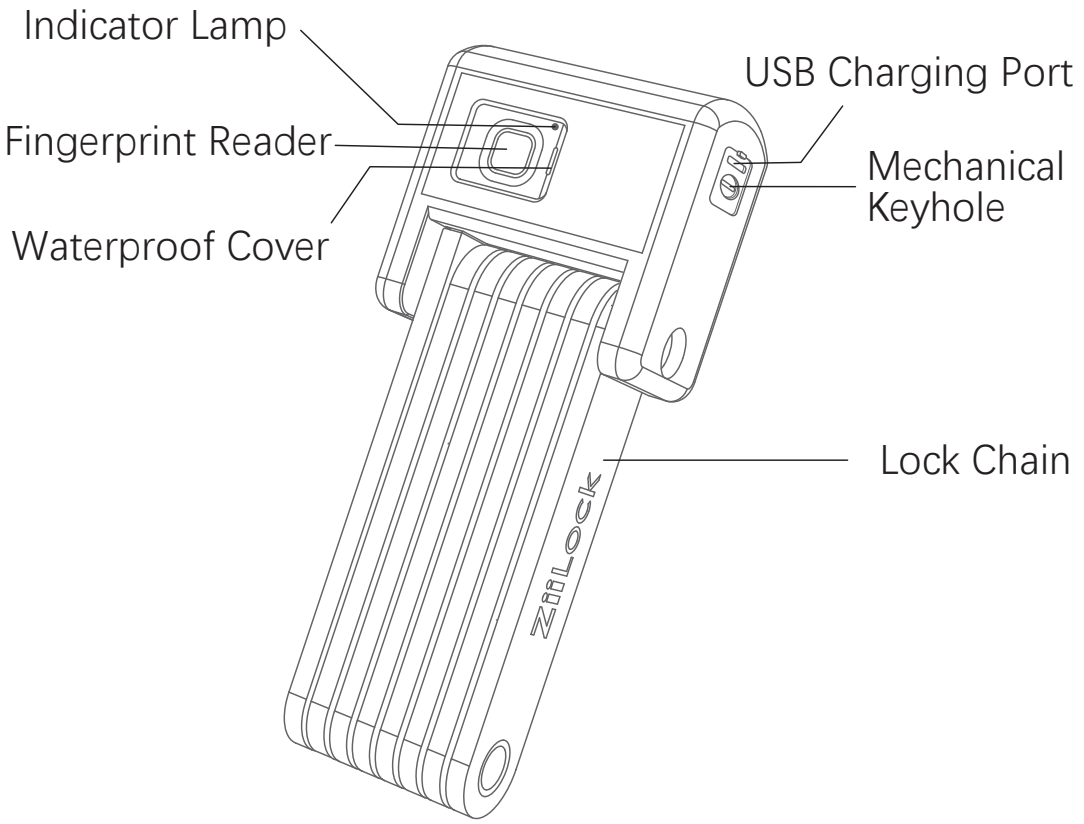

Product List:

ZiiLock x 1
ZiiLock Bracket x 1
Key x 2
Charging Cable x 1
Product Manual x 1
Straps X 4
Waterproof Cap x 1

Specification

Size	195×75×45 mm
Net weight	1.60kg
Battery capacity	3.7V/640mAh
Connection mode	Low power consumption Bluetooth
Encryptio	ASE 128 encryption
Charging Port	USB Type-C
Unlocking Methods	Fingerprint / APP / Mechanical key
Extended Length	101cm

App Instruction

Download App

Scan the QR code to download the App

Note: Support iOS 10 /Android 6.0 or above.

Log in/Sign Up

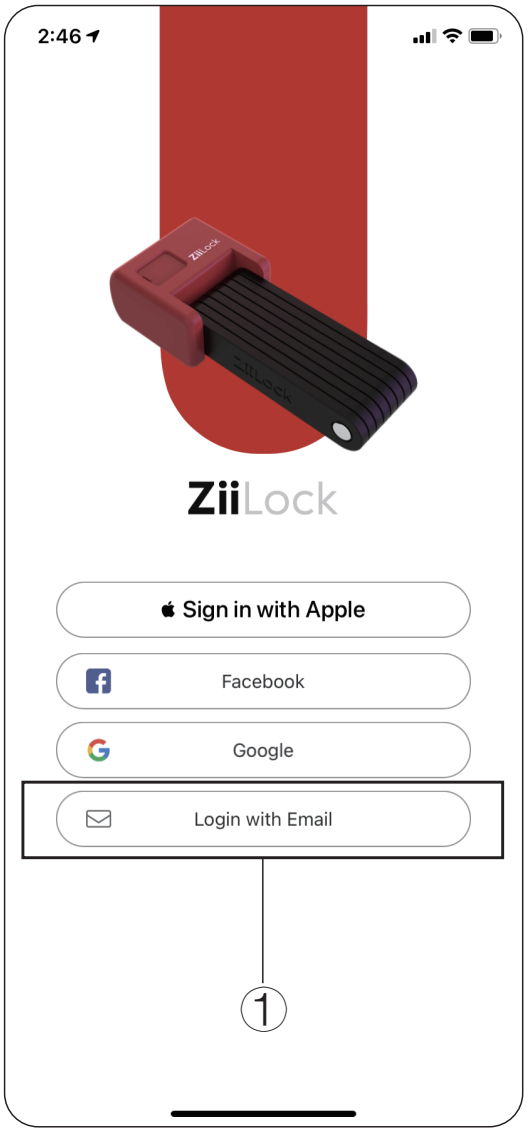

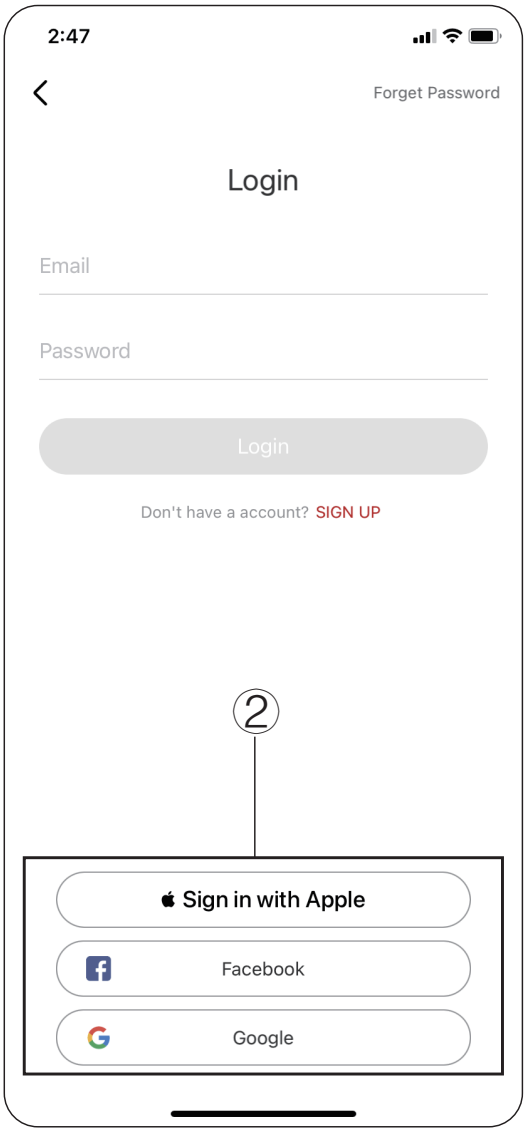

① Enter email account. Then enter/set the login password.

② Use Facebook/Google/Apple account to sign up or log in.

Bluetooth Settings

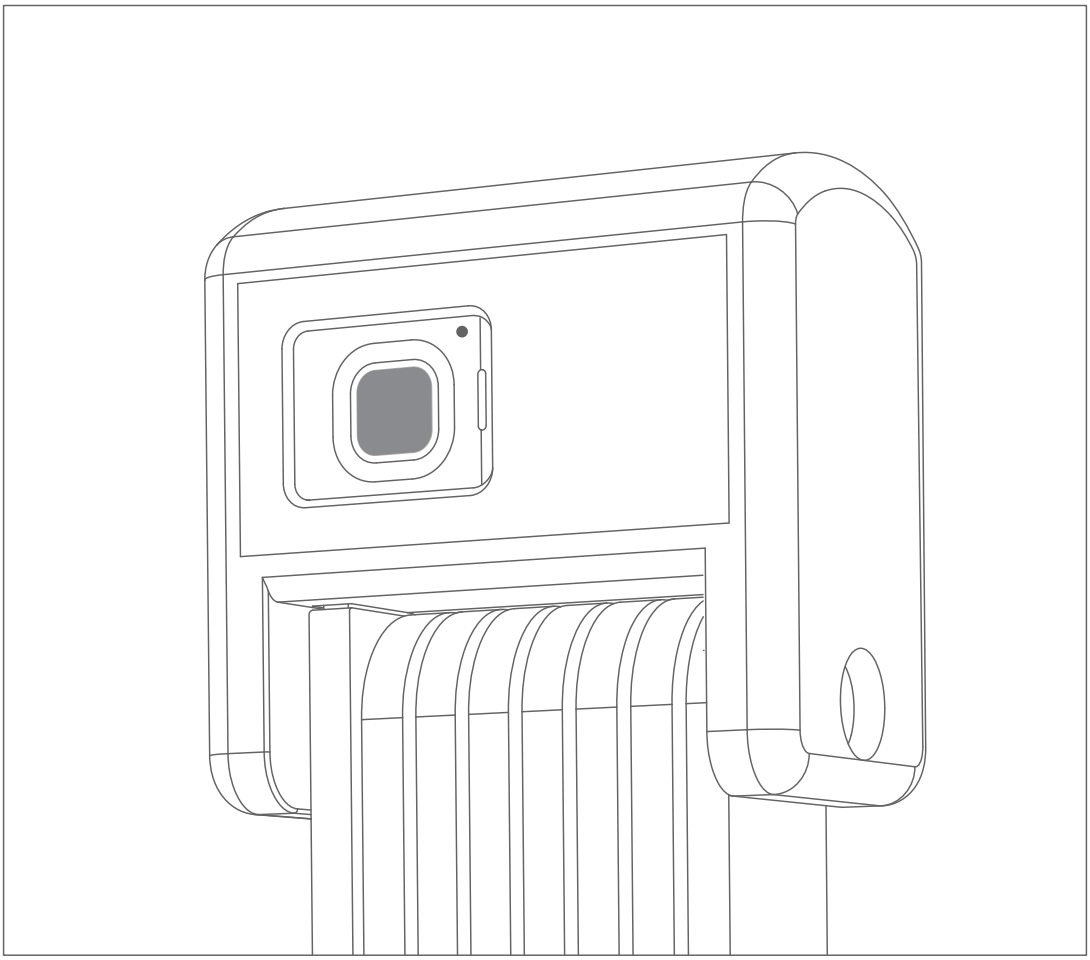

Long press the fingerprint board for about 5 seconds to turn on/off the Bluetooth of ZiiLock. When the lock beeps with a red light, the Bluetooth of the lock is turned off.

When the lock beeps with a green light, the Bluetooth of the lock is turned on.

Bind a new ZiiLock:

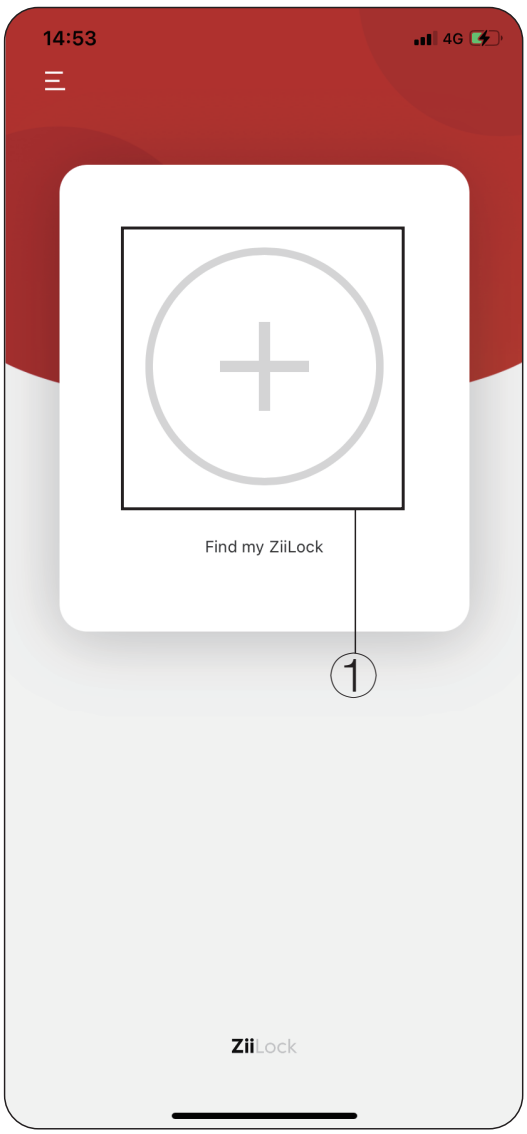

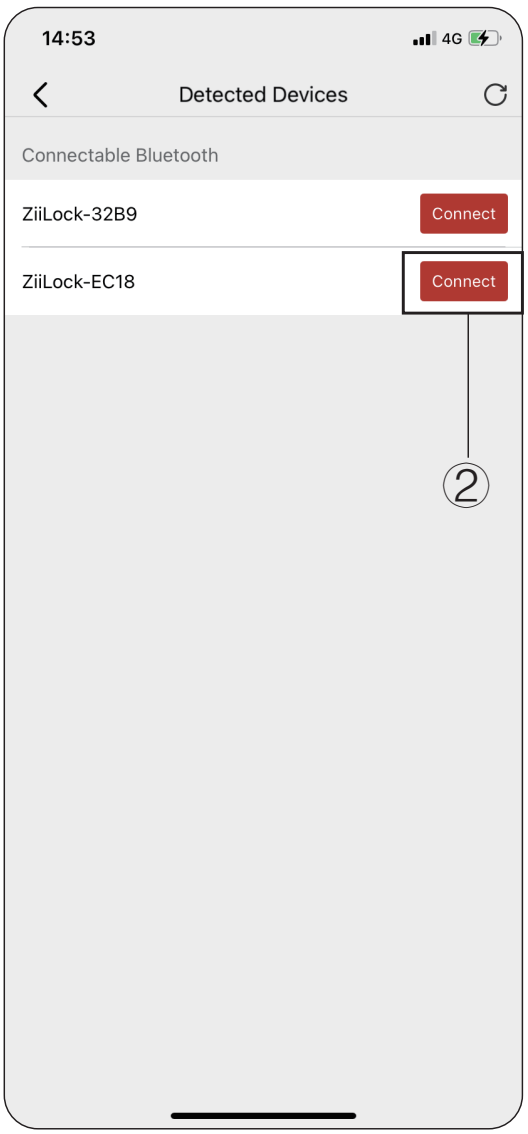

① Click "⊕" to initiate Bluetooth search.

② Click "connect" and enter the authorization code "12345678"

③ Binding completed.

Note: Ensure the lock is nearby and the Bluetooth is enabled for binding.

Set your ZiiLock

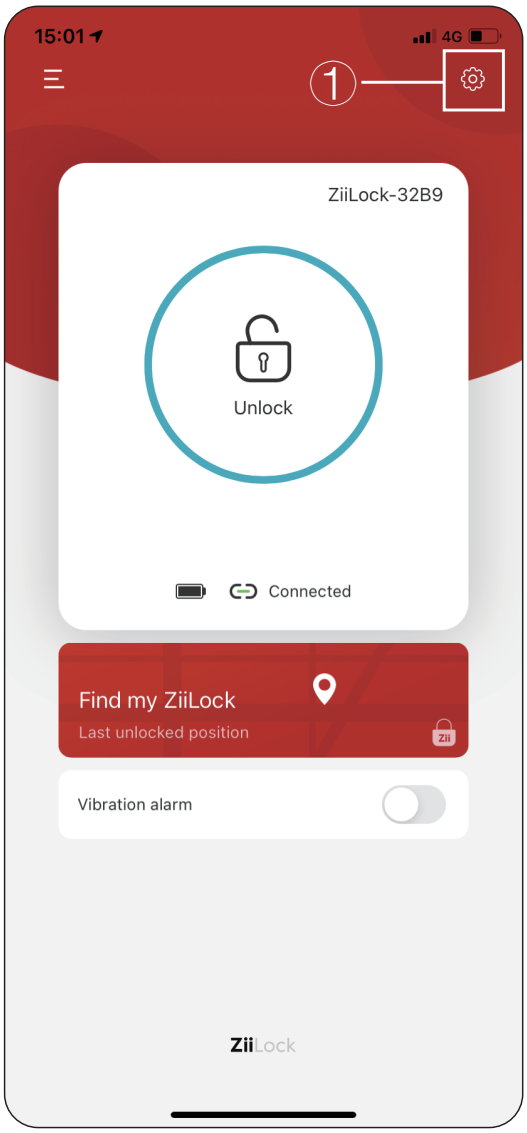

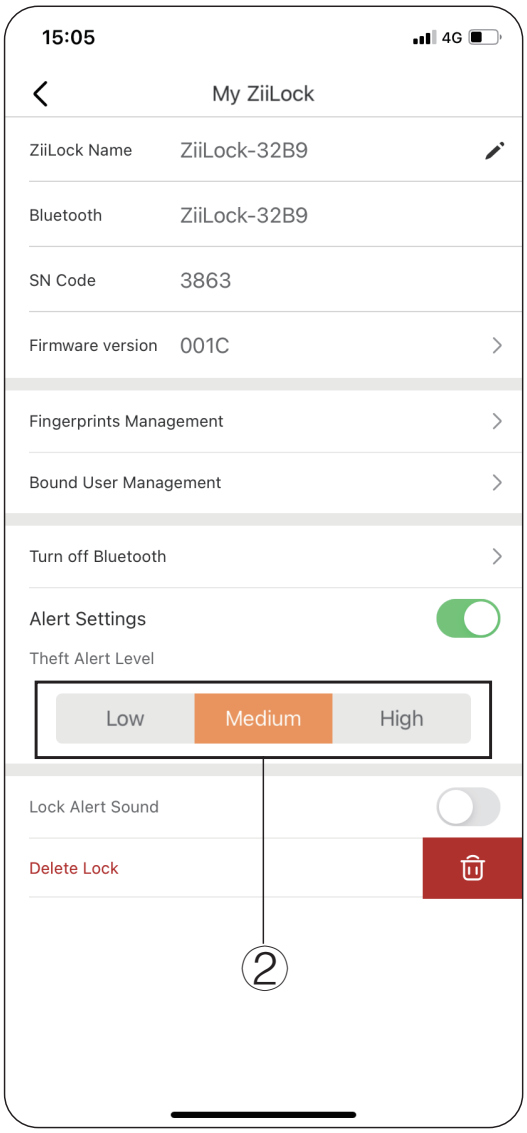

① Select the lock to enter the lock setting page.

② Rename the lock and set the alert settings of the lock.

Note: Ensure the lock is nearby and is connected with the App for setting.

Add Fingerprint

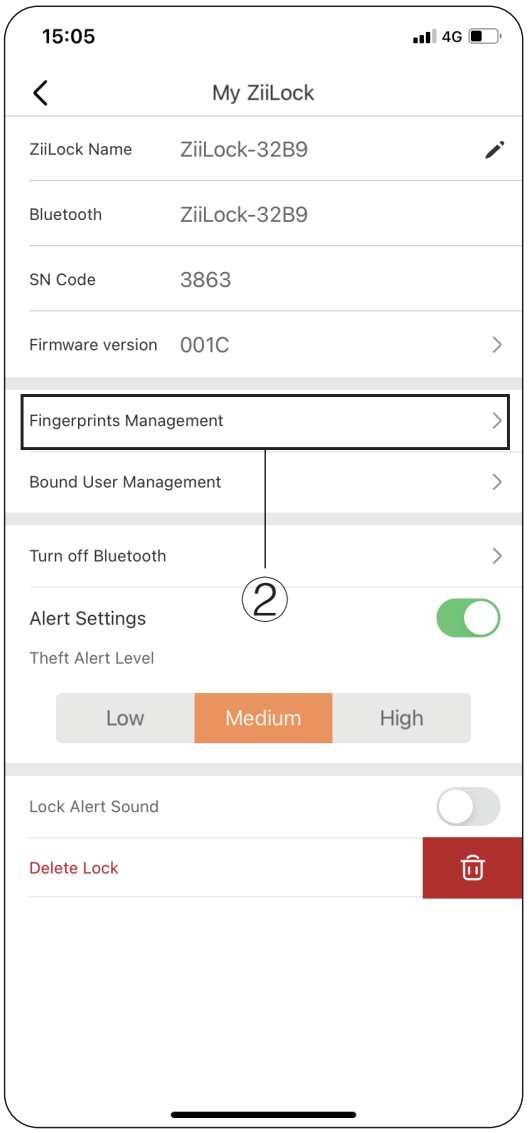

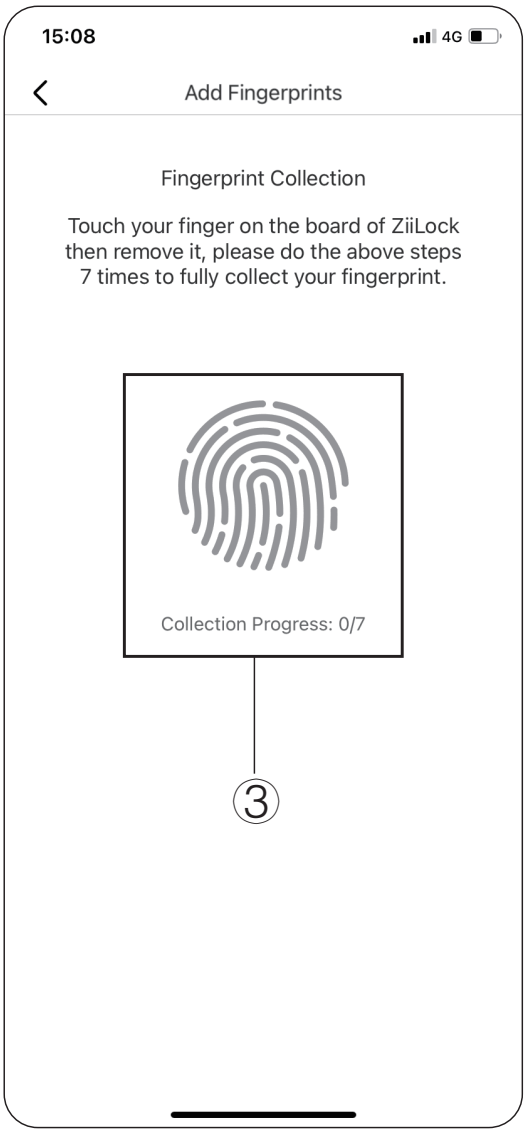

① Enter the setting page.

② Click “Fingerprints Management”.

③ Click “Add a Fingerprint” for the fingerprint collection, please try to input your fingerprint for 7 times to fully collect the fingerprint.

Note: Ensure the lock is nearby and is connected with the App for setting.

Share Authorization Code

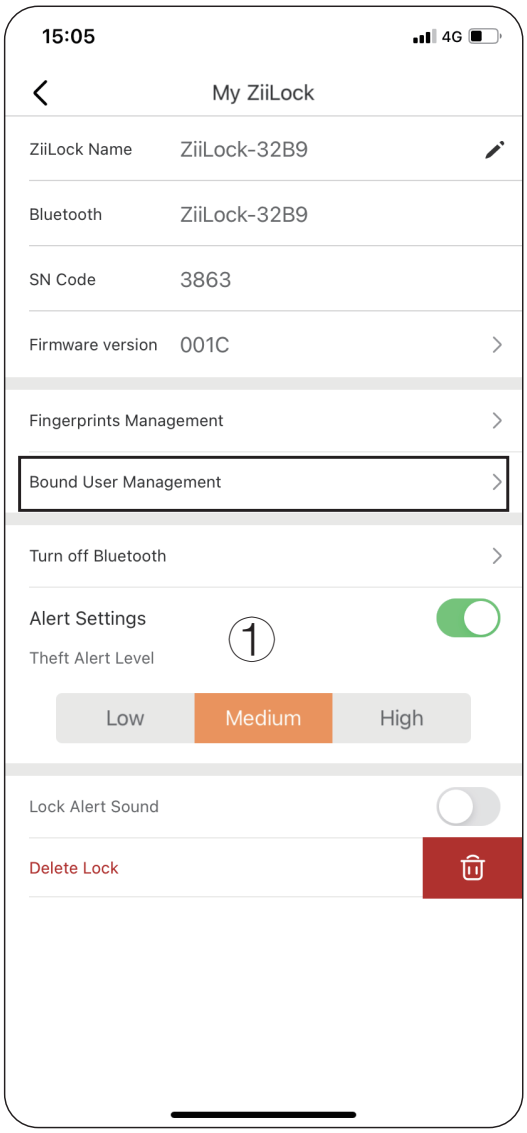

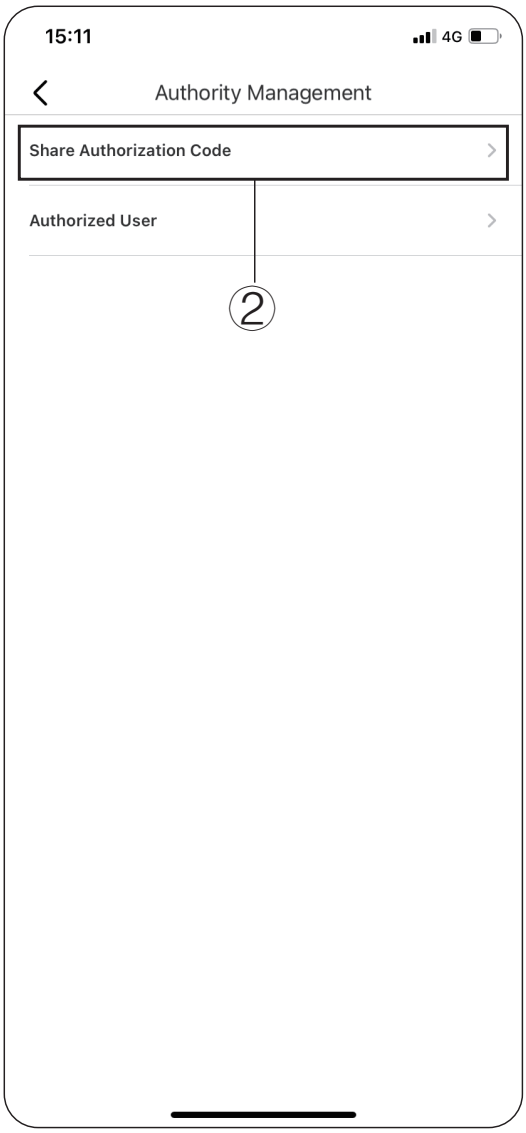

① Enter the setting page. Click “Bound User Management”.

② Click “Share Authorization Code” to generate the authorization code.

Share Authorization Code

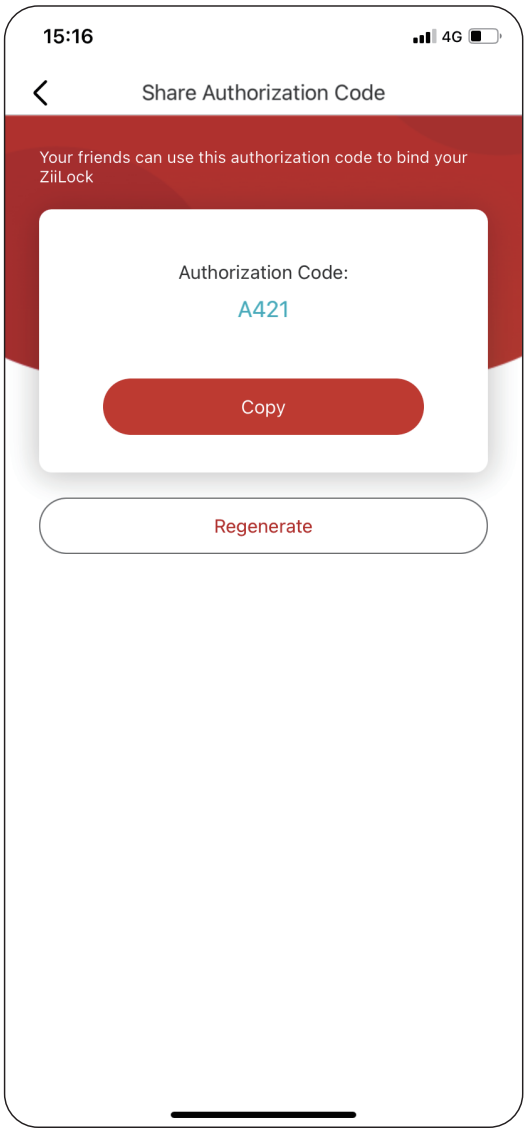

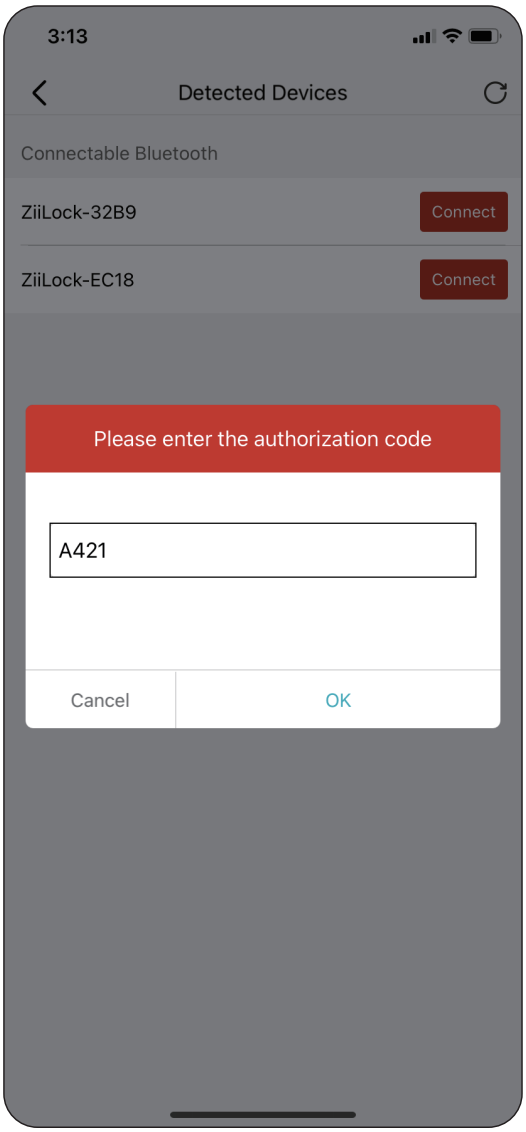

③ Your friends can bind the shared lock with the authorization code via ZiiLock App and use the lock.

Authorization Management

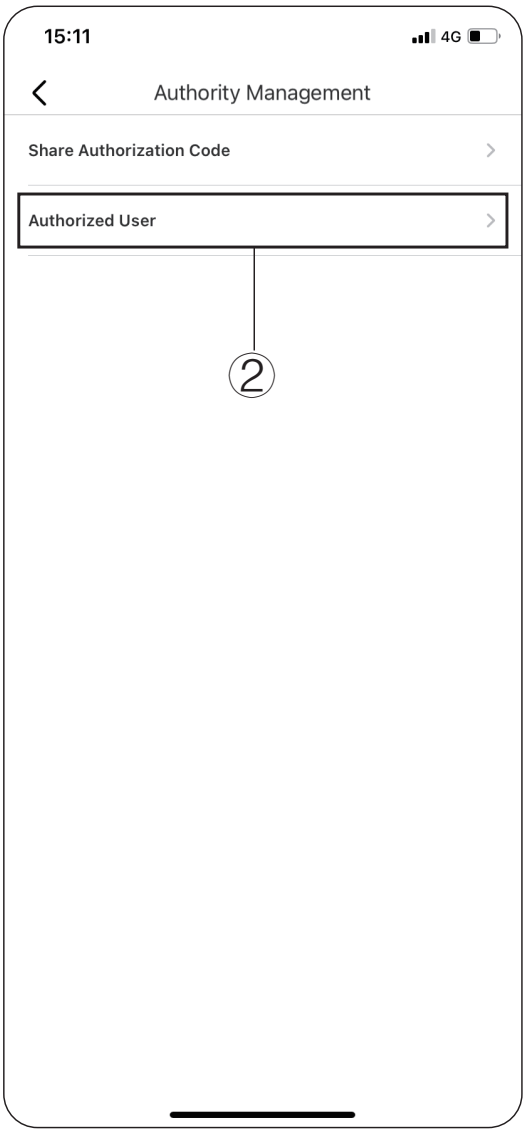

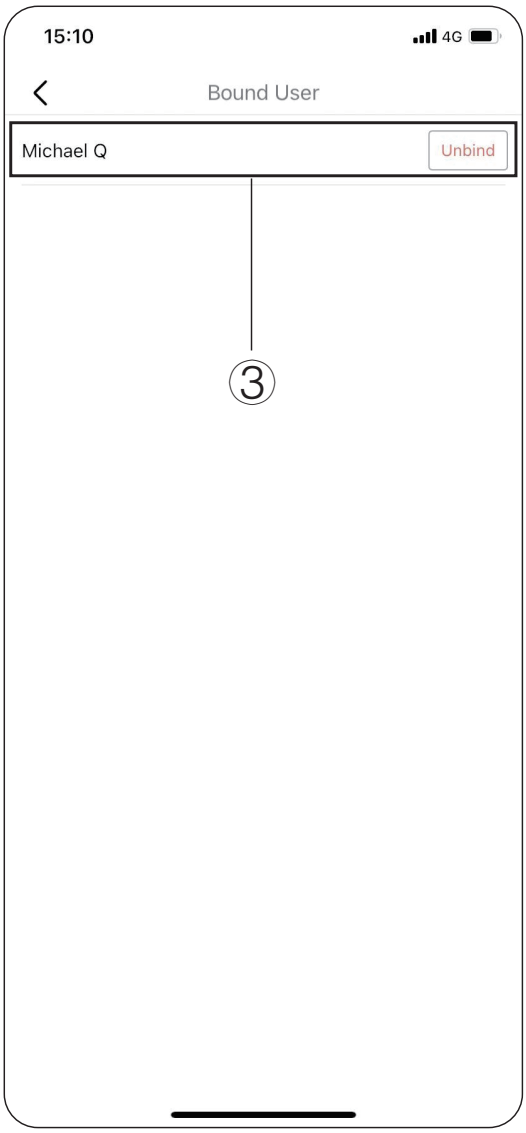

① Enter authorization management page.

② View the authorized users.

③ Unbind your users' authorization.

Emergency Unlock

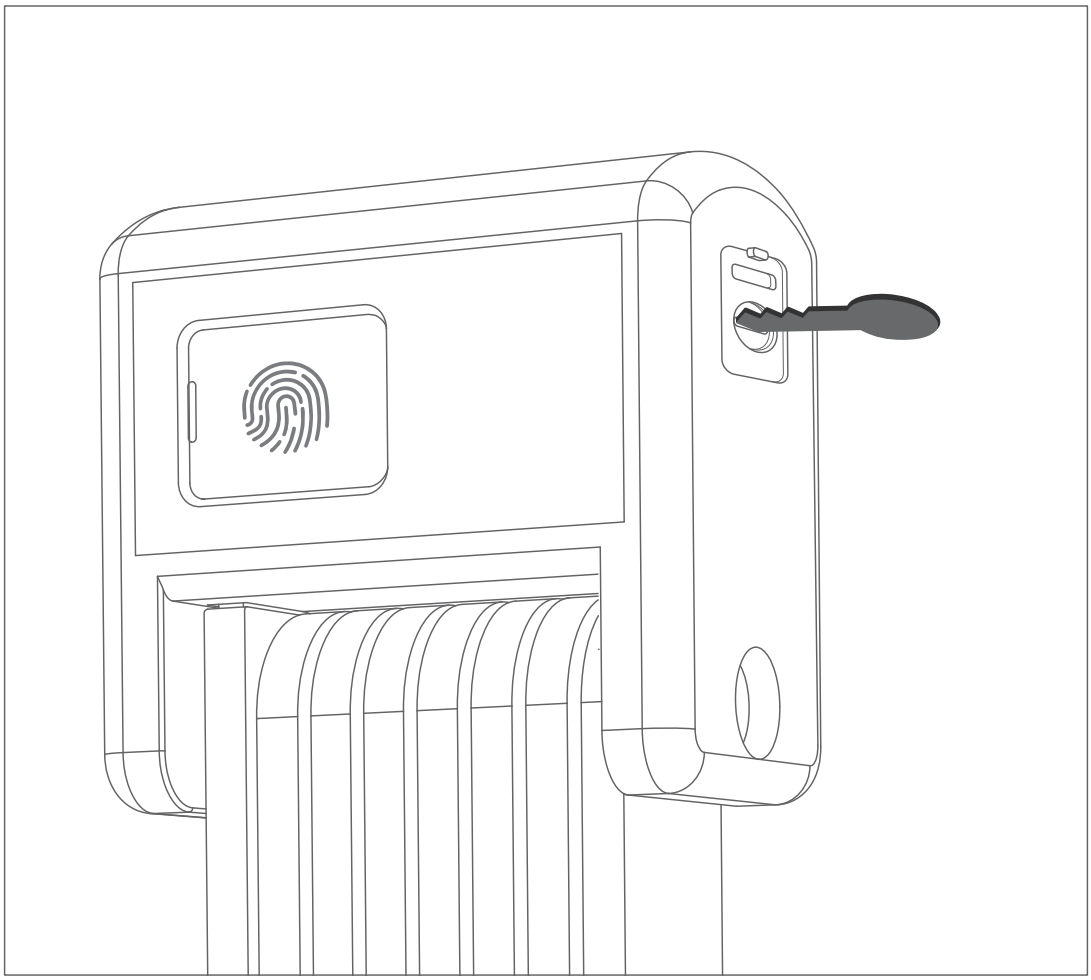

ZiiLock is equipped with two mechanical keys to unlock even if you forget to charge it.

Quality Assurance

6 months warranty: lock only
(not including accessories)

ZiiLock is warrantied to be free from manufacturer defects in materials and/or workmanship for 6 months from the date of original purchase. This warranty does not cover normal wear&tear and any unauthorized modifications done to ZiiLock and /or its components.
Please send failure videos or photos to our official email (support@ziilock.com) to contact us when there is a product failure. We will spare no efforts to provide you good services.

ZiiLock

ZiiLock Product Manual

Please read this manual before using ZiiLock
and keep this manual for future reference

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.