



FCC RADIO TEST REPORT

FCC ID : 2A4DH-7924
Equipment : Digital Media Receiver
Model Name : C79G24
Applicant : Amazon.com Services LLC
410 Terry Avenue N, Seattle, WA 98109-5210 United States
Standard : FCC Part 15 Subpart C §15.247

The product was received on Mar. 07, 2024 and testing was performed from Aug. 13, 2025 to Nov. 13, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in Test Configuration and System	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 Test Result.....	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	16
3.6 AC Conducted Emission Measurement.....	20
3.7 Antenna Requirements.....	22
4 List of Measuring Equipment	23
5 Measurement Uncertainty	25
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	



History of this test report

Report No.	Version	Description	Issue Date
FR4O1402-01D	01	Initial issue of report	Sep. 17, 2025
FR4O1402-01D	02	Revise section 2.2, section 2.3, section 2.4, section 4, AC conducted emission test Result, and radiated spurious emission test photo This report is an updated version, replacing the report issued on Sep. 17, 2025.	Nov. 14, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The purpose of different model name is for marketing segmentation.

Reviewed by: Alan Liu

Report Producer: Dara Chiu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	C79G24
FCC ID	2A4DH-7924
EUT supports Radios application	Zigbee WLAN 802.11b/g/n HT20 WLAN 802.11a/n HT20/HT40 WLAN 802.11ac VHT20/VHT40/VHT80 WLAN 802.11ax HE20/HE40/HE80 Bluetooth BR/EDR/LE

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency Range	2405 MHz ~ 2480 MHz
Antenna Type / Gain	Ceramic Block Patch Antenna type with gain 4 dBi
Maximum Output Power to Antenna	7.33 dBm / 0.0054 W
99% Occupied Bandwidth	2.133 MHz
Type of Modulation	Zigbee : OQPSK

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY (TAF Code: 1190)
Remark	The AC Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH13-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2020

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	ZigBee / OQPSK
	<Ant. 2>
	Mode 1: ZigBee Tx CH11_2405 MHz
	Mode 2: ZigBee Tx CH18_2440 MHz
	Mode 3: ZigBee Tx CH25_2475 MHz
	Mode 4: ZigBee Tx CH26_2480 MHz
AC Conducted Emission	Mode 1 :Wifi 2.4G Link + Bluetooth Link + USB Cable (Charging from Adapter)
	Mode 2 :Zigbee Tx + USB Cable (Charging from NB)
Remark: 1. The worst case of Conducted Emission is mode 1; only the test data of it was reported. 2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. 3. For Radiated Test Cases, the tests were performed with USB Cable 1 4. The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

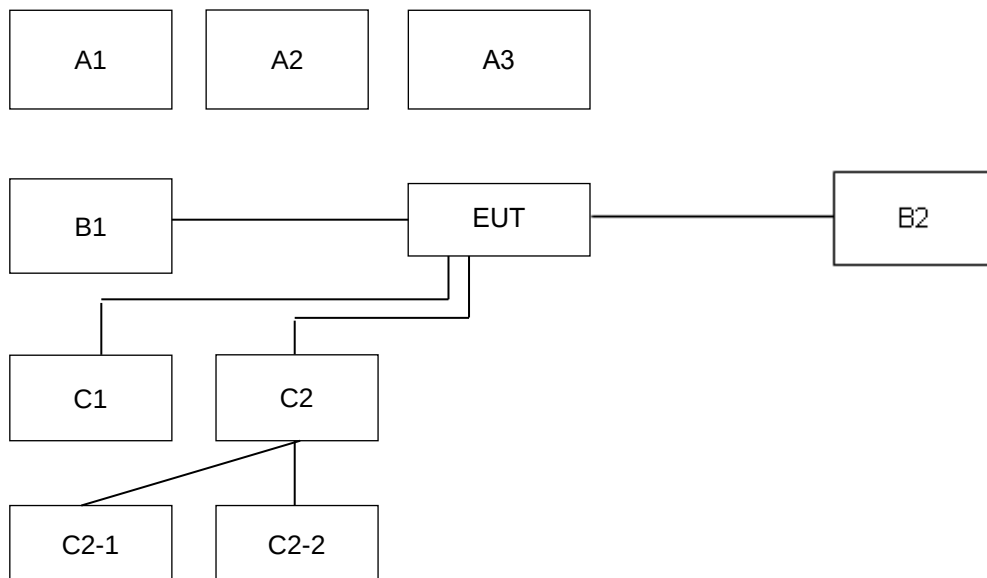

Conduction Test Setup									
No.	Wireless Station	Connection Type	Test Mode						
			1	2	-	-	-	-	-
A1	BT accessory	Bluetooth	X	-	-	-	-	-	-
A2	AP router	WiFi	X	-	-	-	-	-	-
A3	Notebook	WiFi	X	-	-	-	-	-	-
No.	Power Source	Connection Type	1	2	-	-	-	-	-
B1	AC : 120V/60Hz	USB Cable	X	-	-	-	-	-	-
B2	Power From System	USB Cable	-	X	-	-	-	-	-
No.	Setup Peripherals	Connection Type	1	2	-	-	-	-	-
C1	Accessory	HDMI Cable	X	X	-	-	-	-	-
C2	Notebook	USB Cable	-	X	-	-	-	-	-
C2-1	AP router	RJ45 Cable	-	X	-	-	-	-	-
C2-2	iPod	USB Cable	-	X	-	-	-	-	-
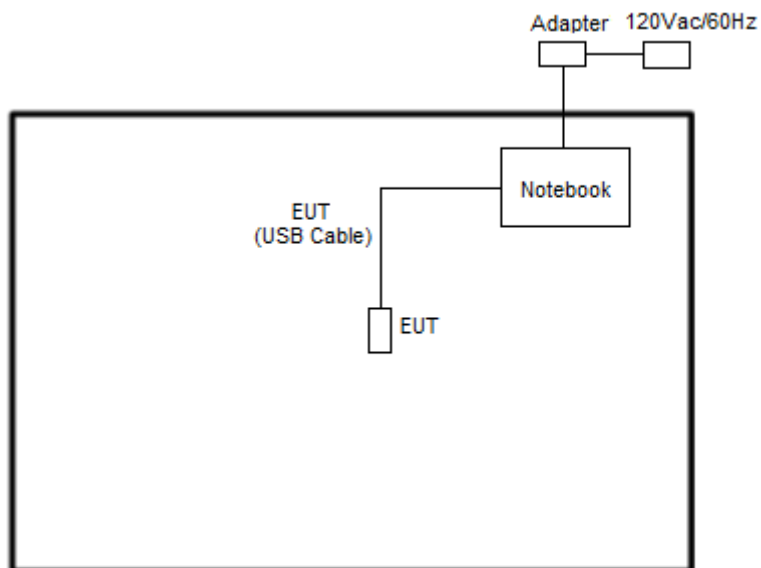
<Zigbee Tx Mode>

2.4 Support Unit used in Test Configuration and System

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,1.8m
2.	iPod	Apple	A1285	DoC	Shielded, 1.0m	N/A
3.	Notebook	Lenovo	TP00116A	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Accessory	Sharp	LC-50UA6800T	FCC DoC	N/A	Unshielded,1.8m
5.	Notebook	Acer	N18Q13	PD9AX201NG	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2.5 EUT Operation Test Setup

The RF test items, utility "ComplianceTool.1.0.1.54" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth VBW $\geq 3 * RBW$. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

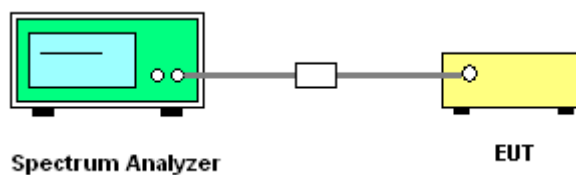

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

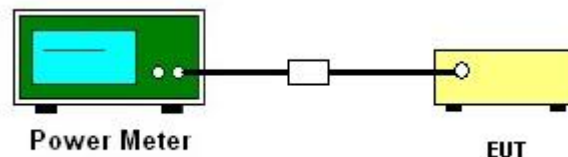

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = No faster than coupled (auto) time, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level..
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

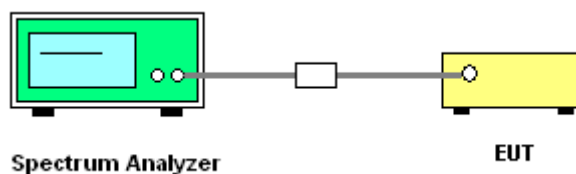

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

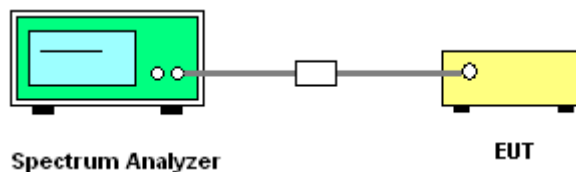

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW = RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f > 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

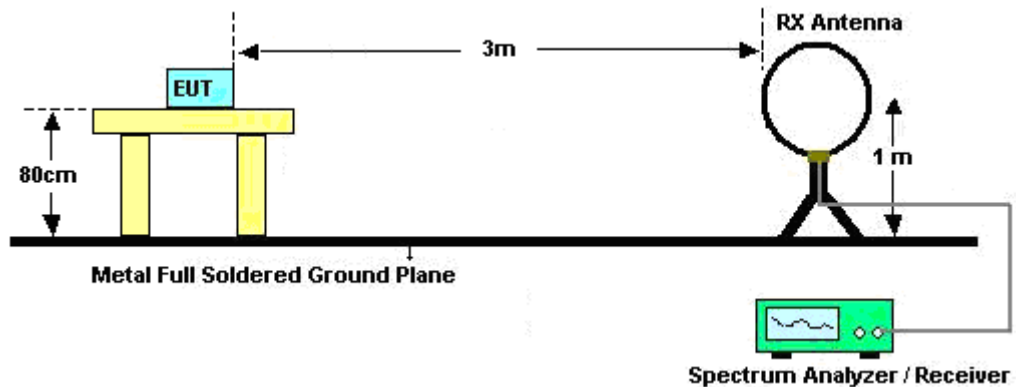


For radiated test from 30MHz to 1GHz

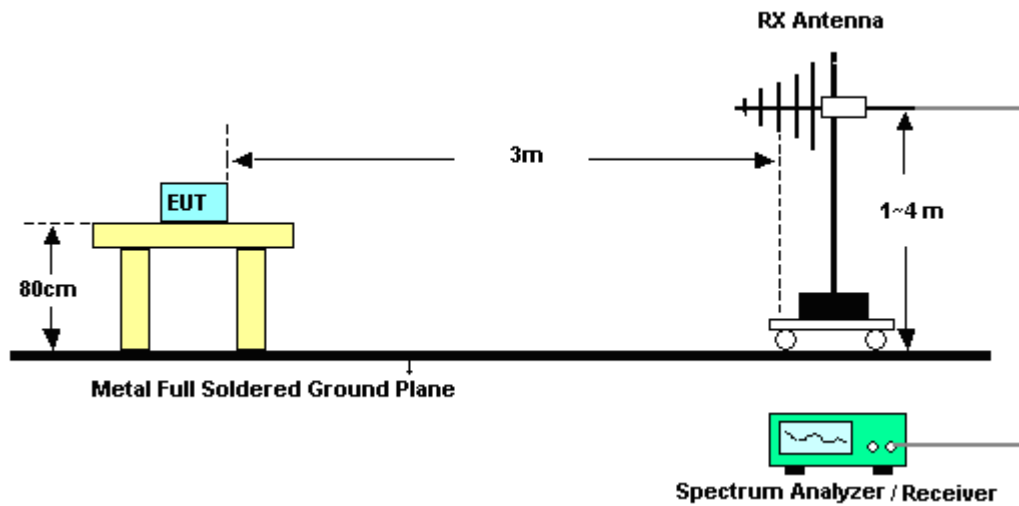

For radiated test from 1GHz to 18GHz

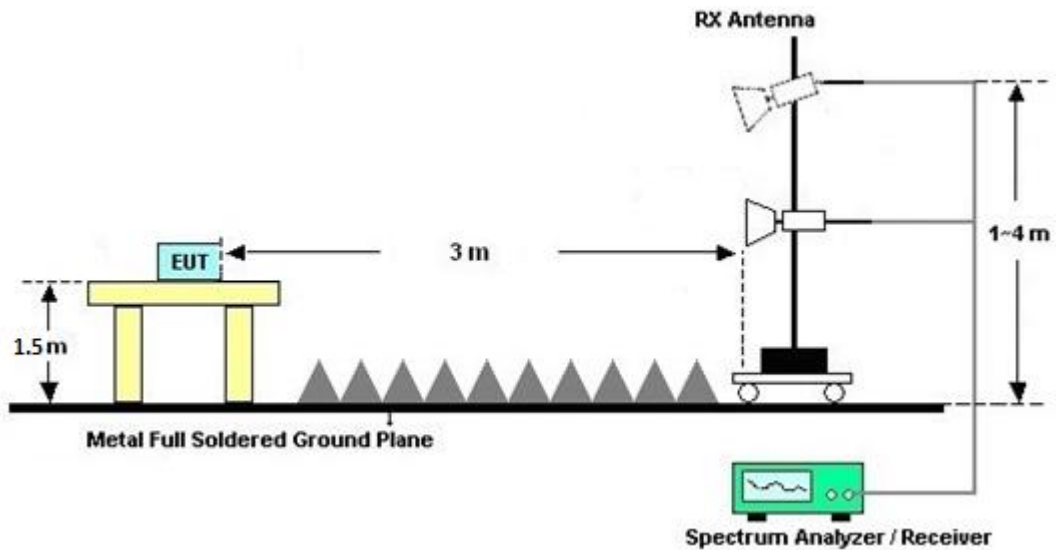

For radiated test above 18GHz

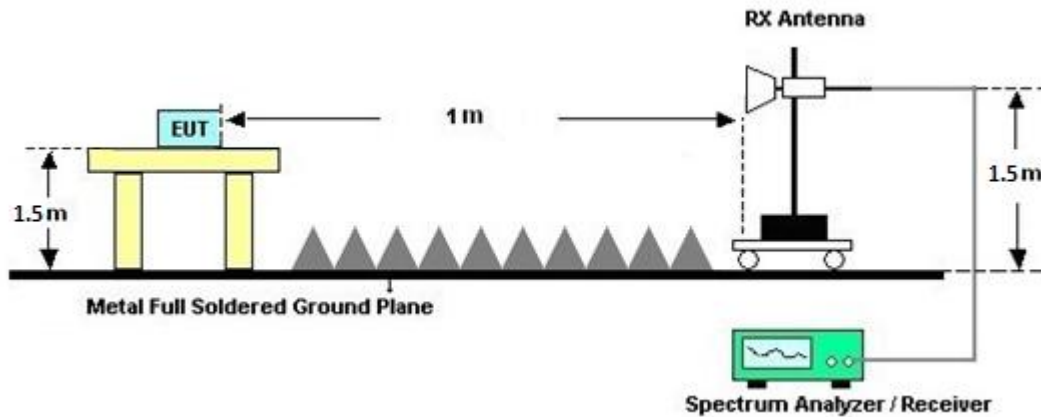

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

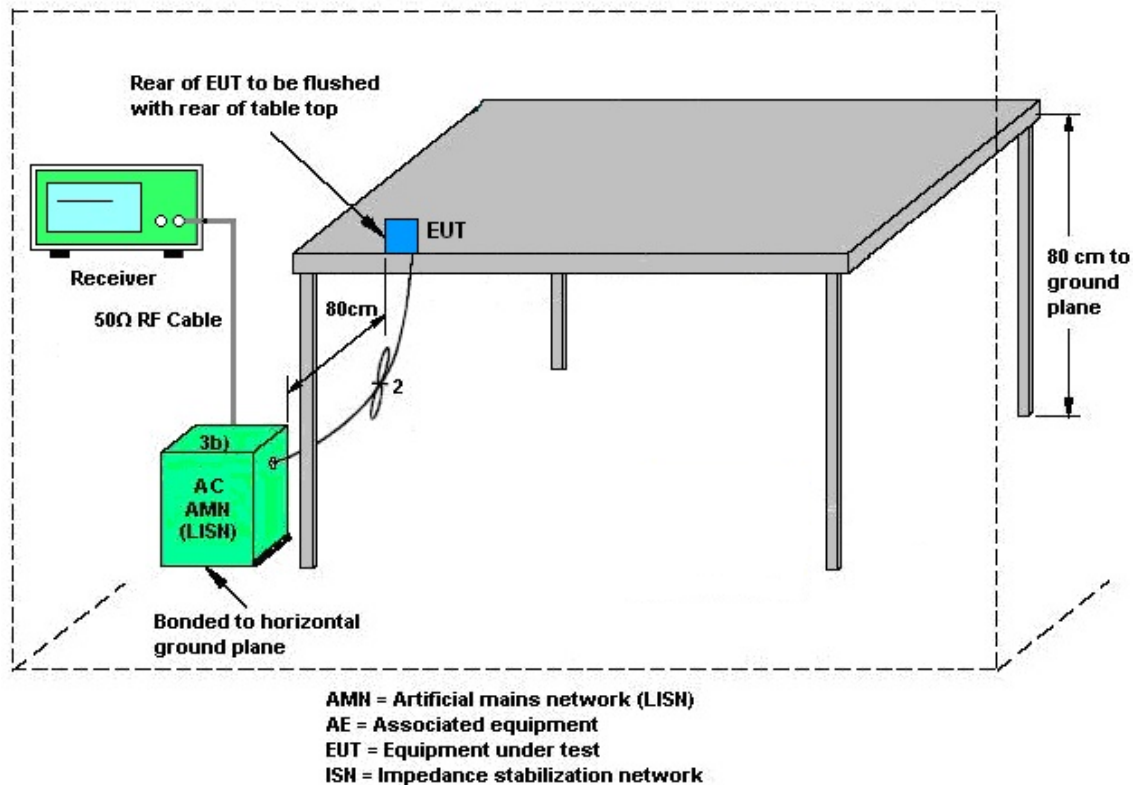

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Aug. 13, 2025~ Aug. 19, 2025	Aug. 28, 2025	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 05, 2025	Aug. 13, 2025~ Aug. 19, 2025	Mar. 04, 2026	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	00994	18GHz~40GHz	Jan. 09, 2025	Aug. 13, 2025~ Aug. 19, 2025	Jan. 08, 2026	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May.26, 2024	Aug. 13, 2025~ Aug. 19, 2025	May.25, 2026	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	18GHz~40GHz	Dec. 31, 2024	Aug. 13, 2025~ Aug. 19, 2025	Dec. 30, 2025	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 12, 2024	Aug. 13, 2025~ Aug. 19, 2025	Dec. 11, 2025	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	40103 & 07	30MHz~1GHz	Apr. 13, 2025	Aug. 13, 2025~ Aug. 19, 2025	Apr. 12, 2026	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-02038	1GHz~18GHz	Aug. 07, 2025	Aug. 13, 2025~ Aug. 19, 2025	Aug. 06, 2026	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May. 14, 2025	Aug. 13, 2025~ Aug. 19, 2025	May. 13, 2026	Radiation (03CH13-HY)
Preamplifier	EM Electronics	EM01G18G	060803	1GHz~18GHz	Jan. 08, 2025	Aug. 13, 2025~ Aug. 19, 2025	Jan. 07, 2026	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Jan. 11, 2025	Aug. 13, 2025~ Aug. 19, 2025	Jan. 10, 2026	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 06, 2025	Aug. 13, 2025~ Aug. 19, 2025	Feb. 05, 2026	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102E	508408-2E	30MHz~40GHz	Jun. 16, 2025	Aug. 13, 2025~ Aug. 19, 2025	Jun. 15, 2026	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30MHz~18GHz	Feb. 06, 2025	Aug. 13, 2025~ Aug. 19, 2025	Feb. 05, 2026	Radiation (03CH13-HY)
Notch Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN12	1.53GHz Low Pass Filter	Sep. 11, 2024	Aug. 13, 2025~ Aug. 19, 2025	Sep. 10, 2025	Radiation (03CH13-HY)
Notch Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN2	3GHz High Pass Filter	Jul. 08, 2025	Aug. 13, 2025~ Aug. 19, 2025	Jul. 07, 2026	Radiation (03CH13-HY)
Notch Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN5	6.75GHz High Pass Filter	Mar. 07, 2025	Aug. 13, 2025~ Aug. 19, 2025	Mar. 06, 2026	Radiation (03CH13-HY)
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Aug. 13, 2025~ Aug. 22, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO 31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Aug. 13, 2025~ Aug. 22, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Sep. 04, 2024	Aug. 13, 2025~ Aug. 22, 2025	Sep. 03, 2025	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Aug. 13, 2025~ Aug. 22, 2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_ version_24051 3	N/A	Conducted Other Test Item	N/A	Aug. 13, 2025~ Aug. 22, 2025	N/A	Conducted (TH05-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Nov. 13, 2025	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	N/A	Dec. 10, 2024	Nov. 13, 2025	Dec. 09, 2025	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP210031	N/A	Jun. 26, 2025	Nov. 13, 2025	Jun. 25, 2026	Conduction (CO05-HY)
Two-Line V-Network	Rohde & Schwarz	ENV216	100080	N/A	Sep. 09, 2025	Nov. 13, 2025	Sep. 08, 2026	Conduction (CO05-HY)
Two-Line V-Network	Rohde & Schwarz	ENV216	100081	N/A	Jul. 25, 2025	Nov. 13, 2025	Jul. 24, 2026	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Nov. 13, 2025	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Jul. 29, 2025	Nov. 13, 2025	Jul. 28, 2026	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT24082501	N/A	Oct. 14, 2025	Nov. 13, 2025	Oct. 13, 2026	Conduction (CO05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Appendix A. Test Result of Conducted Test Items

TEST RESULTS DATA 6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250K	1	11	2405	2.133	1.322	0.50	Pass
Zigbee	250K	1	18	2440	2.133	1.332	0.50	Pass
Zigbee	250K	1	25	2475	2.132	1.330	0.50	Pass
Zigbee	250K	1	26	2480	2.133	1.332	0.50	Pass

TEST RESULTS DATA Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250K	1	11	2405	6.83	30.00	4.00	10.83	36.00	Pass
Zigbee	250K	1	18	2440	6.86	30.00	4.00	10.86	36.00	Pass
Zigbee	250K	1	25	2475	7.33	30.00	4.00	11.33	36.00	Pass
Zigbee	250K	1	26	2480	7.33	30.00	4.00	11.33	36.00	Pass

TEST RESULTS DATA Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250K	1	11	2405	3.05	-6.84	4.00	8.00	Pass
Zigbee	250K	1	18	2440	3.13	-6.75	4.00	8.00	Pass
Zigbee	250K	1	25	2475	3.53	-6.35	4.00	8.00	Pass
Zigbee	250K	1	26	2480	3.57	-6.33	4.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Number of TX = 1, Ant. 1 (Measured)


6dB Bandwidth

<1Mbps>


6 dB Bandwidth Plot on Channel 11

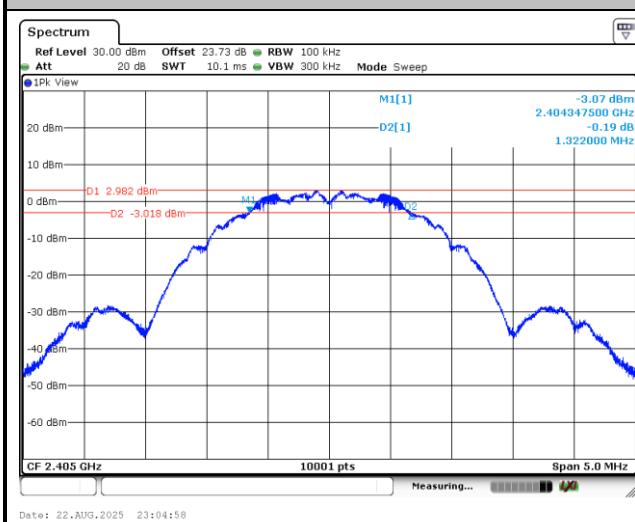


6 dB Bandwidth Plot on Channel 18

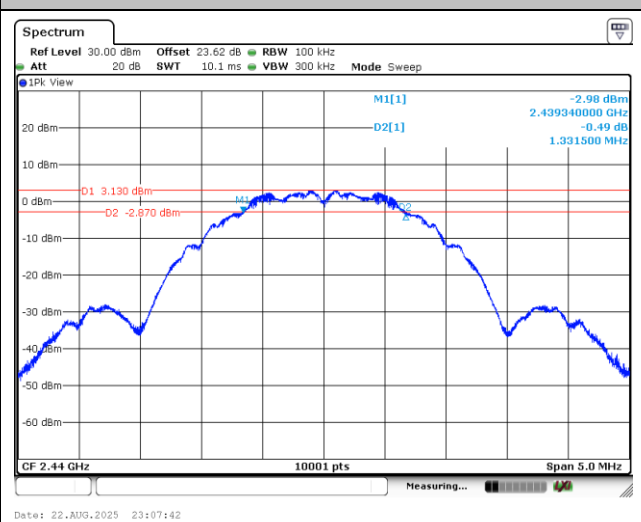

6 dB Bandwidth Plot on Channel 25




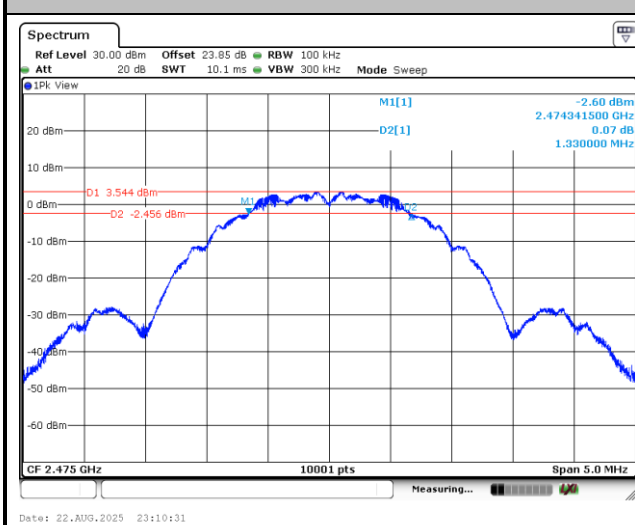


6 dB Bandwidth Plot on Channel 26

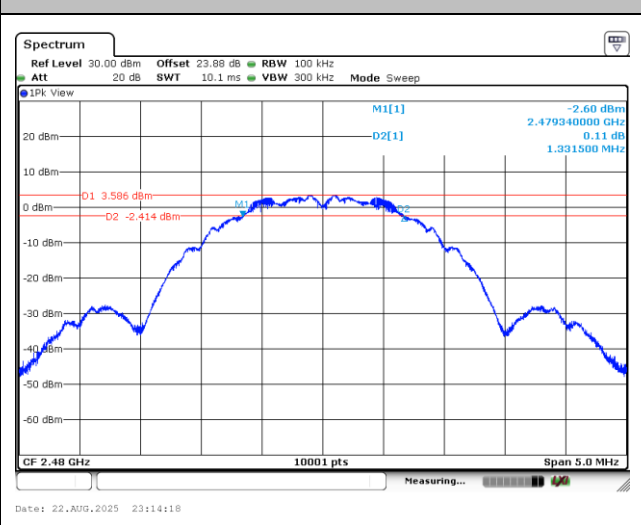





**99% Occupied Bandwidth**

<1Mbps>

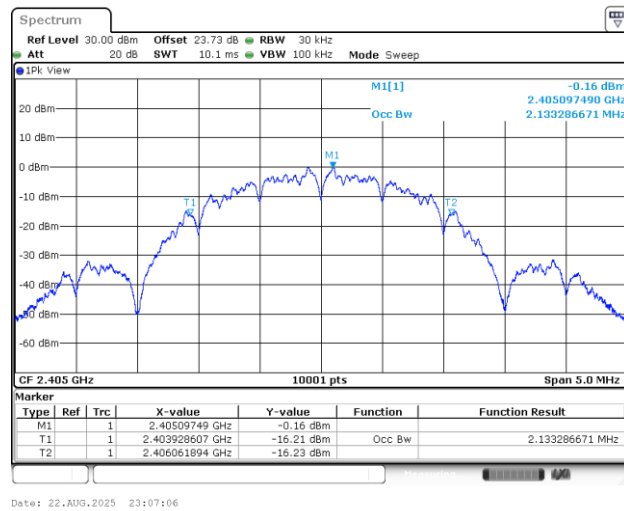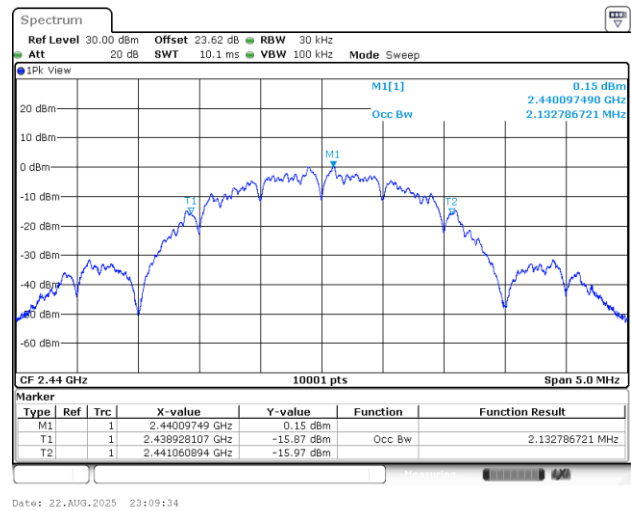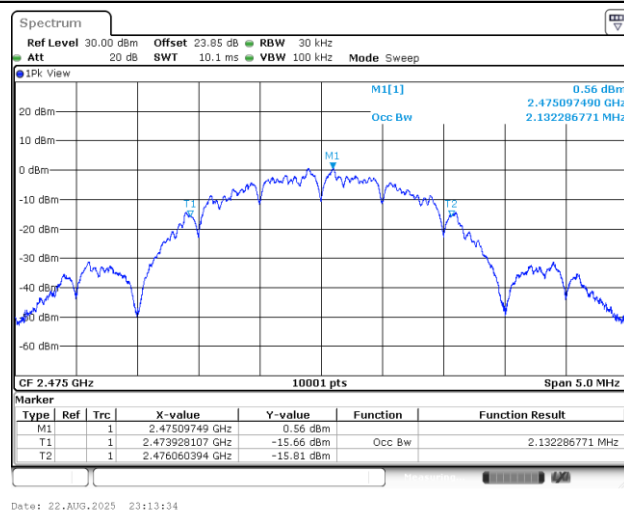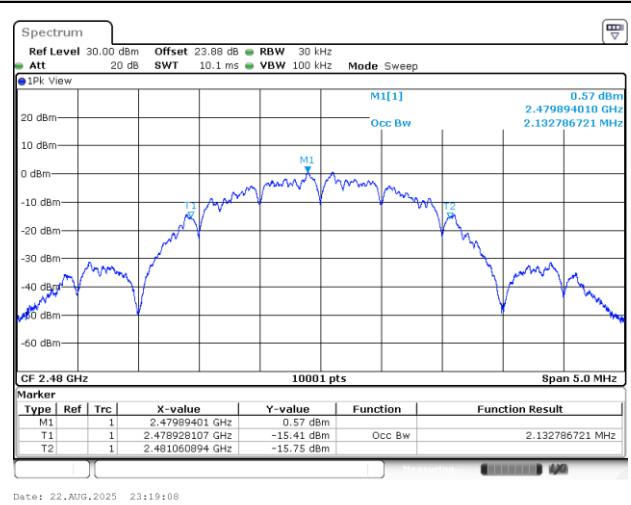99% Occupied Bandwidth Plot on Channel 11**99% Occupied Bandwidth Plot on Channel 18****99% Occupied Bandwidth Plot on Channel 25****99% Occupied Bandwidth Plot on Channel 26**





**Power Spectral Density (dBm/3kHz)**

<1Mbps>

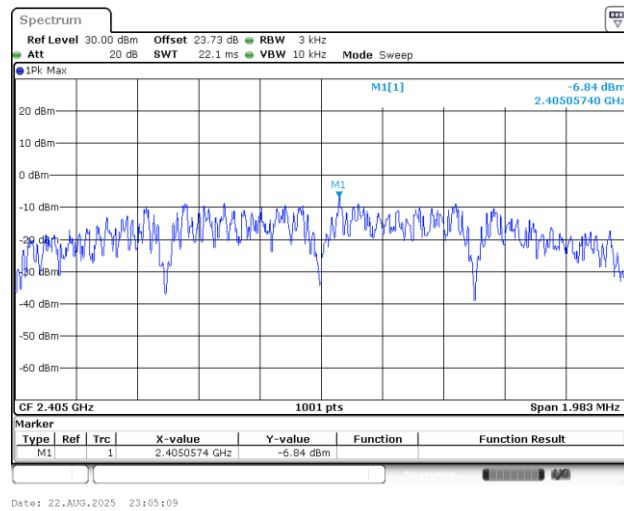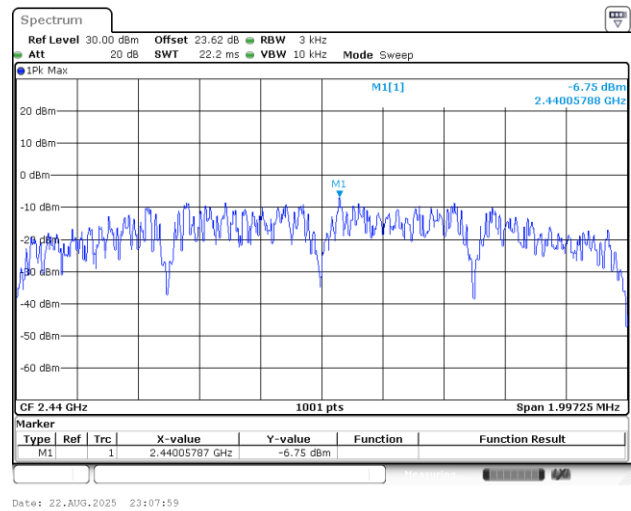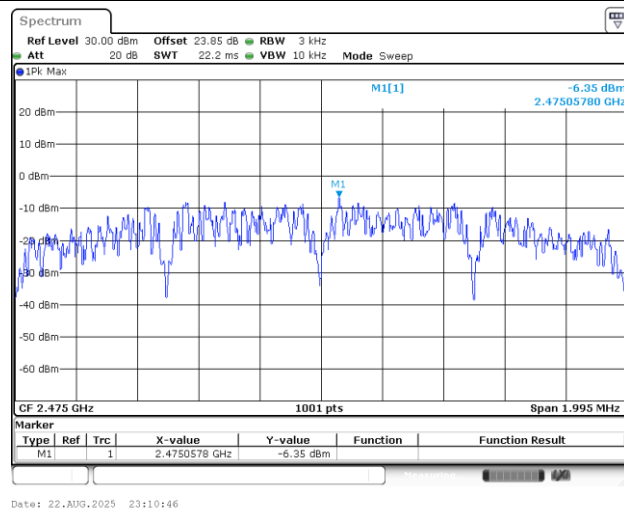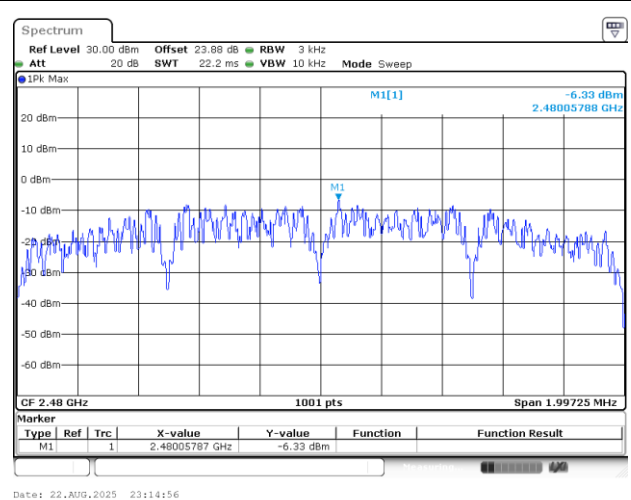Power Density (dBm/3kHz) Plot Channel 11**Power Density (dBm/3kHz) Plot Channel 18****Power Density (dBm/3kHz) Plot Channel 25****Power Density (dBm/3kHz) Plot Channel 26**

**Band Edge and Conducted Spurious Emission**


<1Mbps>

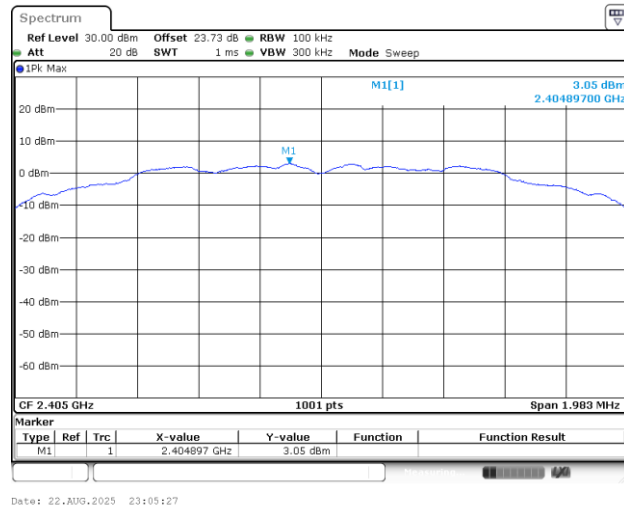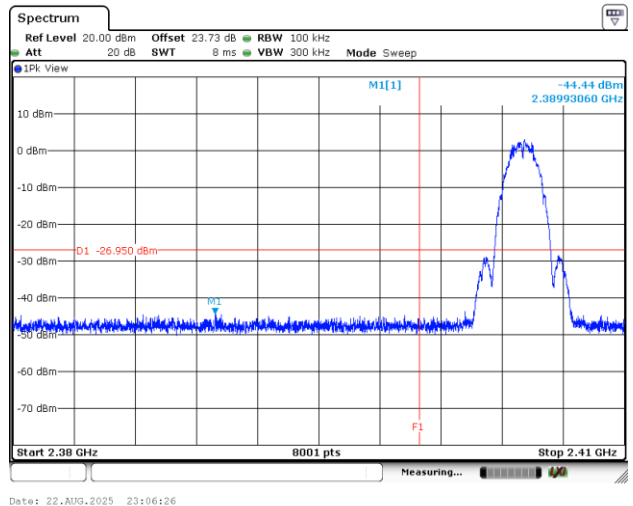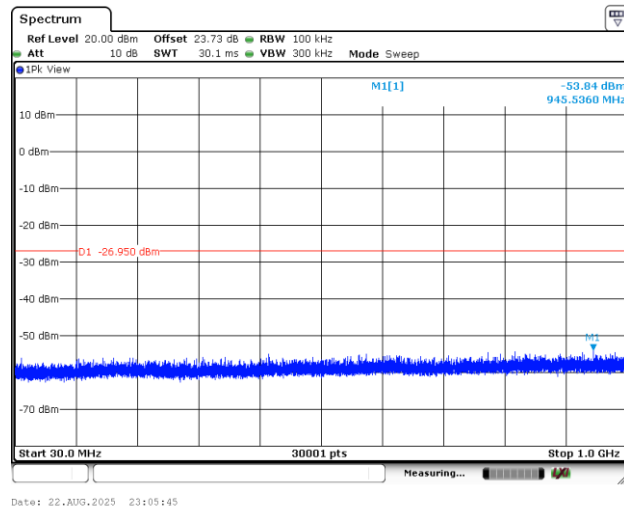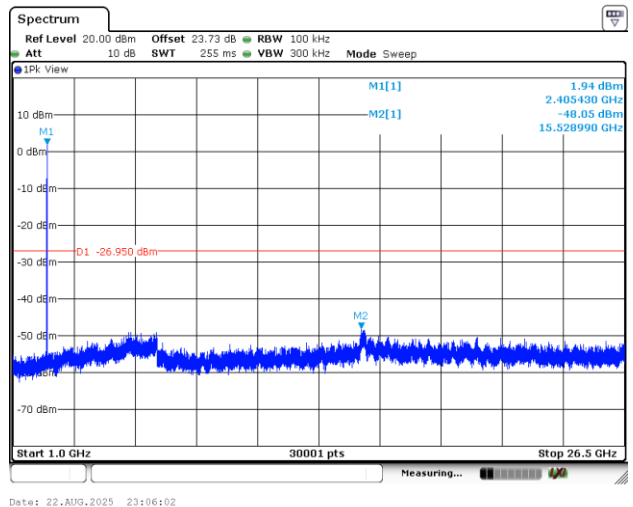Channel 11**100kHz PSD reference Level Plot****Plot on Channel 11****Spurious Emission 30MHz~1GHz Plot****Spurious Emission 1GHz~26.5GHz Plot**




Channel 18

100kHz PSD reference Level Plot

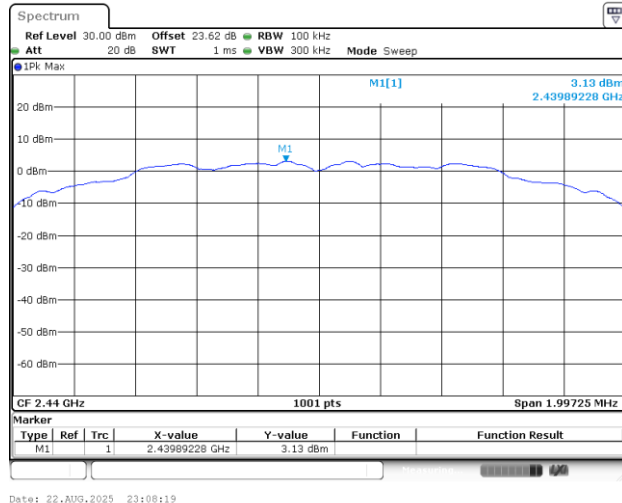


Plot on Channel 18

Spurious Emission 30MHz~1GHz Plot

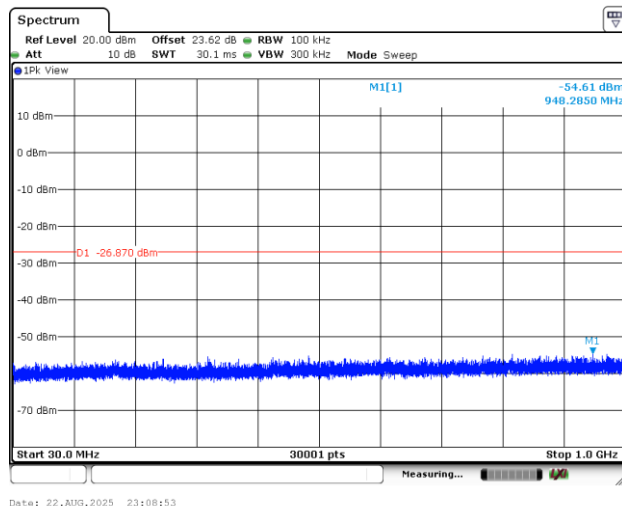


Spurious Emission 1GHz~26.5GHz Plot

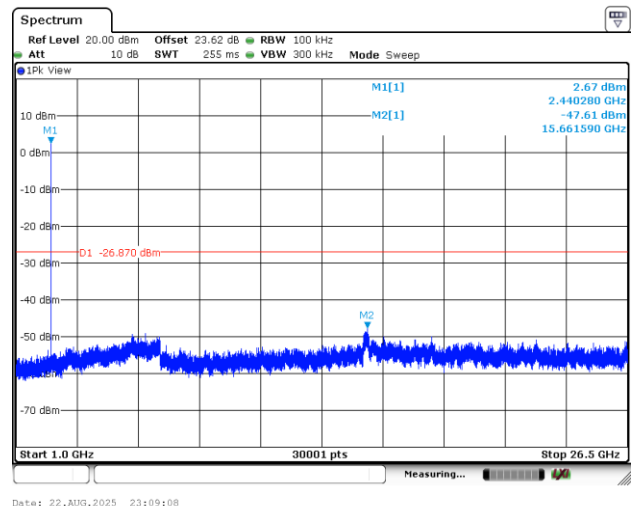




Channel 25


100kHz PSD reference Level Plot

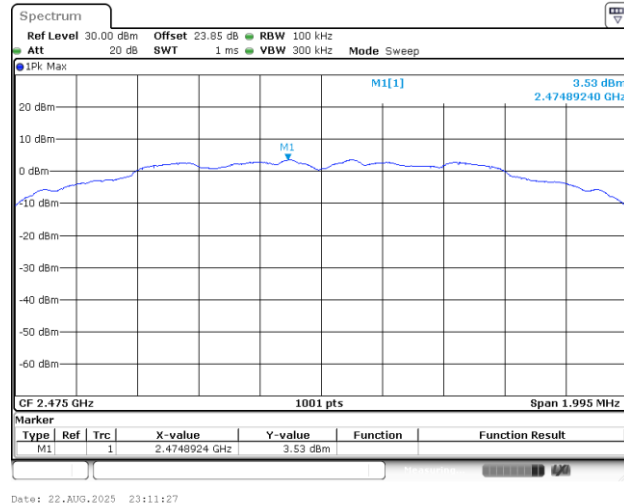


Plot on Channel 25

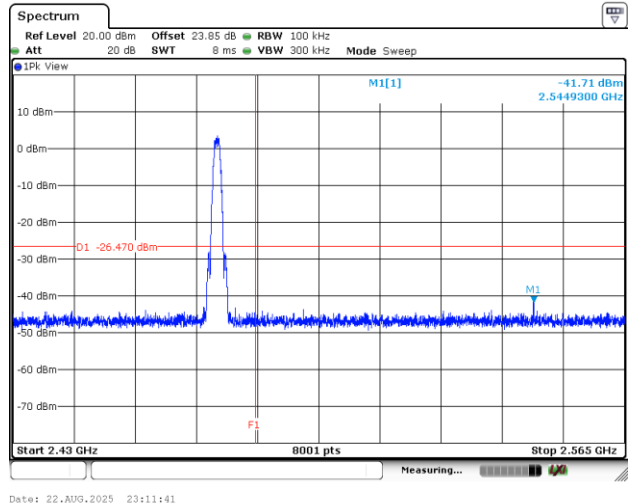

Spurious Emission 30MHz~1GHz Plot

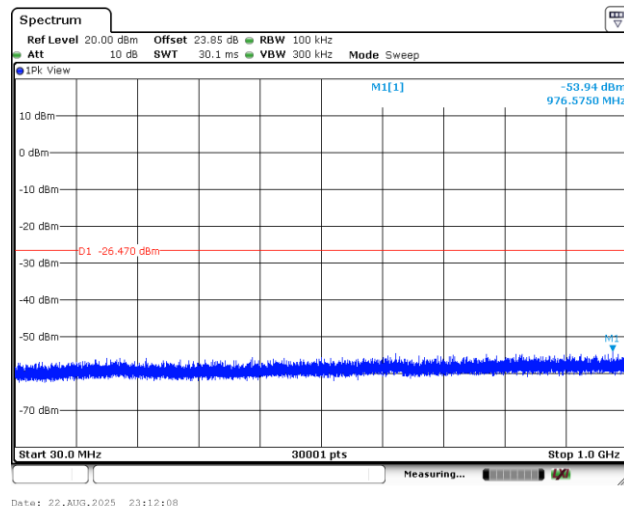


Spurious Emission 1GHz~26.5GHz Plot

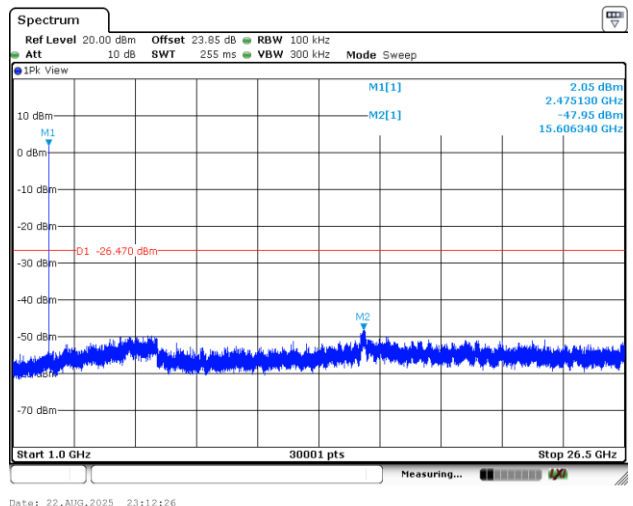




Channel 26


100kHz PSD reference Level Plot

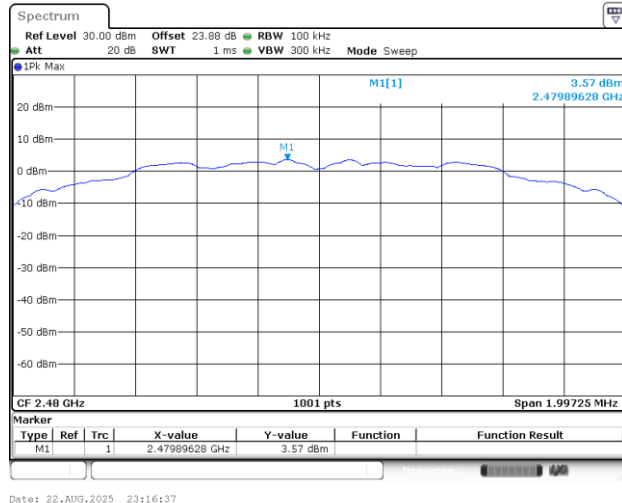


Plot on Channel 26

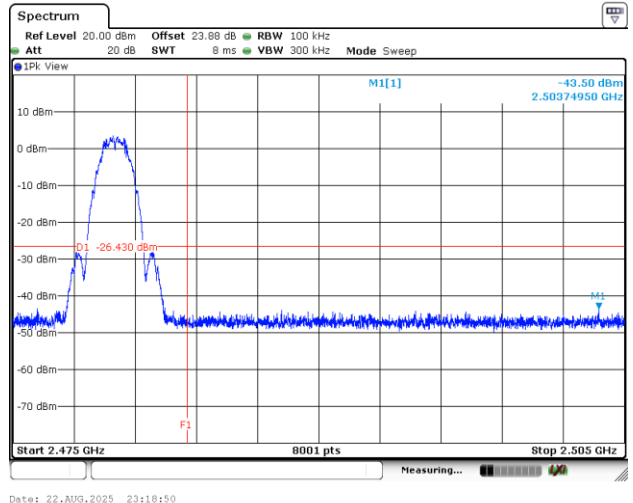

Spurious Emission 30MHz~1GHz Plot

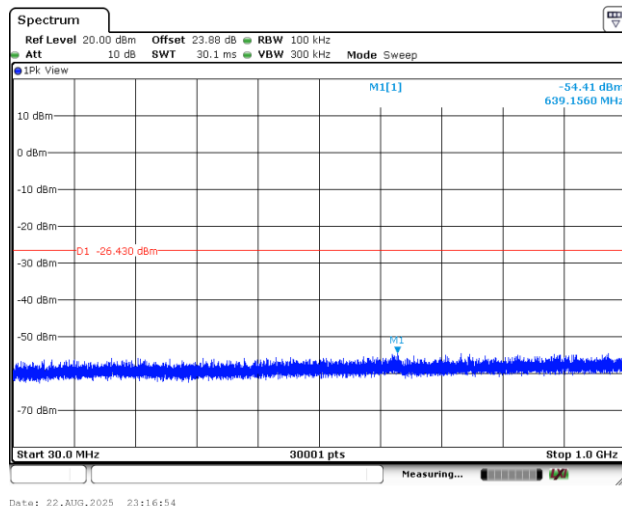

Spurious Emission 1GHz~26.5GHz Plot

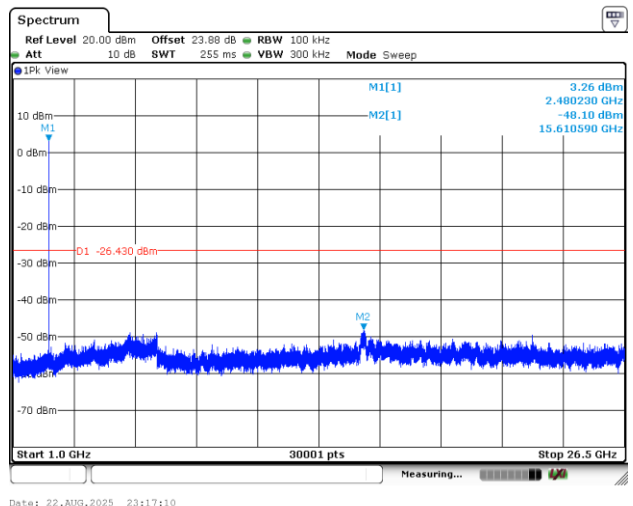




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 4O1402-02
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

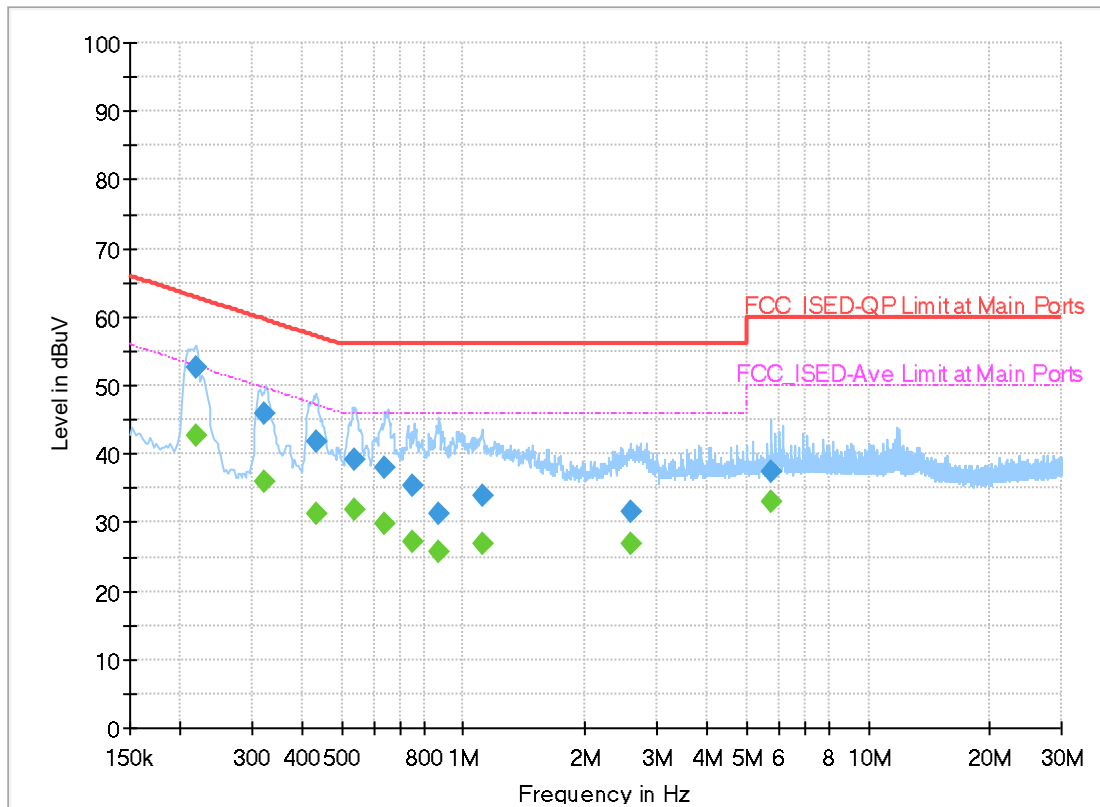


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.217500	---	42.64	52.91	10.27	L1	OFF	19.8
0.217500	52.53	---	62.91	10.38	L1	OFF	19.8
0.323250	---	36.05	49.62	13.57	L1	OFF	19.8
0.323250	45.84	---	59.62	13.78	L1	OFF	19.8
0.431250	---	31.15	47.23	16.08	L1	OFF	19.8
0.431250	41.76	---	57.23	15.47	L1	OFF	19.8
0.539250	---	31.82	46.00	14.18	L1	OFF	19.8
0.539250	39.32	---	56.00	16.68	L1	OFF	19.8
0.640500	---	29.89	46.00	16.11	L1	OFF	19.8
0.640500	38.01	---	56.00	17.99	L1	OFF	19.8
0.746250	---	27.08	46.00	18.92	L1	OFF	19.9
0.746250	35.46	---	56.00	20.54	L1	OFF	19.9
0.870000	---	25.69	46.00	20.31	L1	OFF	19.9
0.870000	31.29	---	56.00	24.71	L1	OFF	19.9
1.110750	---	26.85	46.00	19.15	L1	OFF	19.9
1.110750	33.93	---	56.00	22.07	L1	OFF	19.9
2.584500	---	26.82	46.00	19.18	L1	OFF	19.9
2.584500	31.62	---	56.00	24.38	L1	OFF	19.9
5.741250	---	32.98	50.00	17.02	L1	OFF	20.2
5.741250	37.55	---	60.00	22.45	L1	OFF	20.2

EUT Information

Report NO : 4O1402-02
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

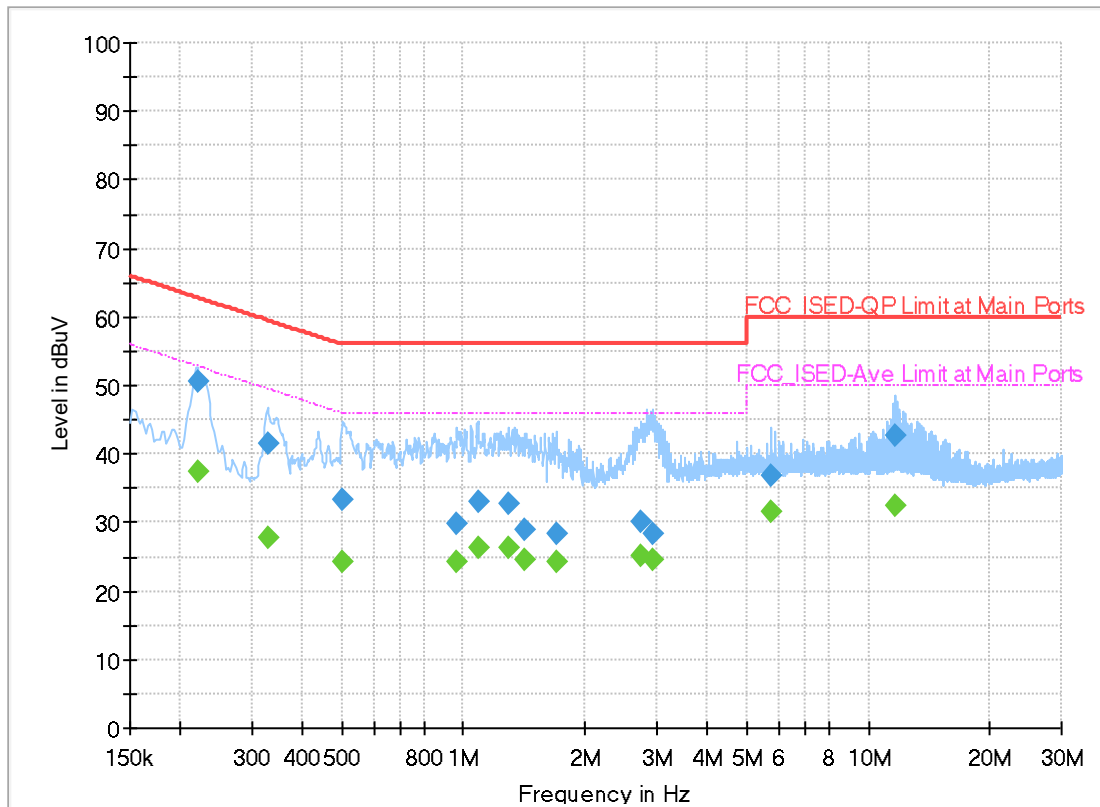

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.219750	---	37.50	52.83	15.33	N	OFF	19.8
0.219750	50.47	---	62.83	12.36	N	OFF	19.8
0.327750	---	27.73	49.51	21.78	N	OFF	19.8
0.327750	41.62	---	59.51	17.89	N	OFF	19.8
0.503250	---	24.26	46.00	21.74	N	OFF	19.8
0.503250	33.25	---	56.00	22.75	N	OFF	19.8
0.962250	---	24.37	46.00	21.63	N	OFF	19.9
0.962250	29.76	---	56.00	26.24	N	OFF	19.9
1.088250	---	26.31	46.00	19.69	N	OFF	19.9
1.088250	33.12	---	56.00	22.88	N	OFF	19.9
1.295250	---	26.29	46.00	19.71	N	OFF	19.9
1.295250	32.87	---	56.00	23.13	N	OFF	19.9
1.423500	---	24.53	46.00	21.47	N	OFF	19.9
1.423500	29.07	---	56.00	26.93	N	OFF	19.9
1.702500	---	24.37	46.00	21.63	N	OFF	19.9
1.702500	28.48	---	56.00	27.52	N	OFF	19.9
2.746500	---	25.03	46.00	20.97	N	OFF	20.0
2.746500	30.14	---	56.00	25.86	N	OFF	20.0
2.942250	---	24.69	46.00	21.31	N	OFF	20.0
2.942250	28.42	---	56.00	27.58	N	OFF	20.0
5.739000	---	31.44	50.00	18.56	N	OFF	20.2

5.739000	36.87	---	60.00	23.13	N	OFF	20.2
11.602500	---	32.55	50.00	17.45	N	OFF	20.5
11.602500	42.60	---	60.00	17.40	N	OFF	20.5



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Rain Lee, Jacky Hong and White Hou	Temperature :	20~26°C
		Relative Humidity :	40~65%

Note symbol

-L	Low channel location
-R	High channel location



C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 14	2400-2483.5	2	Zigbee	11	2405	250k	-	-
Mode 15	2400-2483.5	2	Zigbee	18	2440	250k	-	-
Mode 16	2400-2483.5	2	Zigbee	25	2475	250k	-	-
Mode 17	2400-2483.5	2	Zigbee	26	2480	250k	-	-
Mode 18	2400-2483.5	2	Zigbee	26	2480	250k	-	LF
Mode 19	2400-2483.5	2	Zigbee	26	2480	250k	-	SHF

**C1. Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
14	Zigbee	11	2371.33	40.97	54.00	-13.03	H	Avg.	Pass	-	Band Edge
	Zigbee	11	4810.00	40.75	74.00	-33.25	V	Peak	Pass	-	Harmonic
15	Zigbee	18	-	-	-	-	-	-	-	-	Band Edge
	Zigbee	18	7320.00	43.90	74.00	-30.10	V	Peak	Pass	-	Harmonic
16	Zigbee	25	2491.31	41.63	54.00	-12.37	H	Avg.	Pass	-	Band Edge
	Zigbee	25	7425.00	43.77	74.00	-30.23	H	Peak	Pass	-	Harmonic
17	Zigbee	26	2483.52	43.82	54.00	-10.18	H	Avg.	Pass	-	Band Edge
	Zigbee	26	7440.00	44.37	74.00	-29.63	V	Peak	Pass	-	Harmonic
18	LF	26	332.64	39.68	46.00	-6.32	V	Peak	Pass	-	LF
19	SHF	26	24552.13	39.31	74.00	-34.69	H	Peak	Pass	-	SHF



		14																																																																																							
Mode		Band Edge																																																																																							
		2400-2483.5_Zigbee_CH11_2405MHz																																																																																							
ANT		2																																																																																							
Pol.		Horizontal						Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2025-08-15 23102332.82355.62378.42401.22424 Frequency (MHz) Site : 03CH13-HY Condition: PEAK_BE_74 3m 91200_02038 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2322.31</td><td>52.14</td><td>74.00</td><td>-21.86</td><td>45.43</td><td>27.30</td><td>6.45</td><td>36.97</td><td>9.93</td><td>154</td><td>322</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2322.31	52.14	74.00	-21.86	45.43	27.30	6.45	36.97	9.93	154	322	Peak	Level (dBuV/m) Date: 2025-08-15 10001400.1800.2200.2600.3000 Frequency (MHz) Site : 03CH13-HY Condition: PEAK_74 3m 91200_02038 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2405.00</td><td>105.62</td><td>-----</td><td>-----</td><td>98.67</td><td>27.40</td><td>6.59</td><td>36.97</td><td>9.93</td><td>154</td><td>322</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2405.00	105.62	-----	-----	98.67	27.40	6.59	36.97	9.93	154	322	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2322.31	52.14	74.00	-21.86	45.43	27.30	6.45	36.97	9.93	154	322	Peak																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2405.00	105.62	-----	-----	98.67	27.40	6.59	36.97	9.93	154	322	Peak																																																																													
Avg	Level (dBuV/m) Date: 2025-08-15 23102332.82355.62378.42401.22424 Frequency (MHz) Site : 03CH13-HY Condition: AVG_BE_54 3m 91200_02038 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2371.33</td><td>40.97</td><td>54.00</td><td>-13.03</td><td>34.18</td><td>27.30</td><td>6.53</td><td>36.97</td><td>9.93</td><td>154</td><td>322</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2371.33	40.97	54.00	-13.03	34.18	27.30	6.53	36.97	9.93	154	322	Average	Level (dBuV/m) Date: 2025-08-15 10001400.1800.2200.2600.3000 Frequency (MHz) Site : 03CH13-HY Condition: AVG_54 3m 91200_02038 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2405.00</td><td>104.08</td><td>-----</td><td>-----</td><td>97.13</td><td>27.40</td><td>6.59</td><td>36.97</td><td>9.93</td><td>154</td><td>322</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2405.00	104.08	-----	-----	97.13	27.40	6.59	36.97	9.93	154	322	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2371.33	40.97	54.00	-13.03	34.18	27.30	6.53	36.97	9.93	154	322	Average																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2405.00	104.08	-----	-----	97.13	27.40	6.59	36.97	9.93	154	322	Average																																																																													







Mode	14																																																																																													
	Band Edge																																																																																													
	2400-2483.5_Zigbee_CH11_2405MHz																																																																																													
ANT	2																																																																																													
Pol.	Vertical												Fundamental																																																																																	
Peak	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: PEAK_BE_74 3m 91200_02038 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2324.02</td><td>51.42</td><td>74.00</td><td>-22.58</td><td>44.70</td><td>27.30</td><td>6.46</td><td>36.97</td><td>9.93</td><td>354</td><td>111</td><td>Peak</td></tr></table>															Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2324.02	51.42	74.00	-22.58	44.70	27.30	6.46	36.97	9.93	354	111	Peak	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: PEAK_74 3m 91200_02038 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2405.00</td><td>100.54</td><td>-----</td><td>-----</td><td>93.59</td><td>27.40</td><td>6.59</td><td>36.97</td><td>9.93</td><td>354</td><td>111</td><td>Peak</td></tr></table>			Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2405.00	100.54	-----	-----	93.59	27.40	6.59	36.97	9.93	354	111	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	2324.02	51.42	74.00	-22.58	44.70	27.30	6.46	36.97	9.93	354	111	Peak																																																																																		
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	2405.00	100.54	-----	-----	93.59	27.40	6.59	36.97	9.93	354	111	Peak																																																																																		
Avg	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: AVG_BE_54 3m 91200_02038 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2383.76</td><td>40.95</td><td>54.00</td><td>-13.05</td><td>34.10</td><td>27.34</td><td>6.55</td><td>36.97</td><td>9.93</td><td>354</td><td>111</td><td>Average</td></tr></table>															Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2383.76	40.95	54.00	-13.05	34.10	27.34	6.55	36.97	9.93	354	111	Average	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: AVG_54 3m 91200_02038 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2405.00</td><td>98.93</td><td>-----</td><td>-----</td><td>91.98</td><td>27.40</td><td>6.59</td><td>36.97</td><td>9.93</td><td>354</td><td>111</td><td>Average</td></tr></table>			Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2405.00	98.93	-----	-----	91.98	27.40	6.59	36.97	9.93	354	111	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																	
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																		
1	2383.76	40.95	54.00	-13.05	34.10	27.34	6.55	36.97	9.93	354	111	Average																																																																																		
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	2405.00	98.93	-----	-----	91.98	27.40	6.59	36.97	9.93	354	111	Average																																																																																		



Mode	14																																																																																																
	Harmonic																																																																																																
	2400-2483.5_Zigbee_CH11_2405MHz																																																																																																
ANT	2																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak Avg	Level (dBuV/m) Date: 2025-08-18 PEAK_74 AVG_54 Frequency (MHz) Site : 03CH13-HY Condition: PEAK_74 3m 91280_02038 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4810.00</td><td>40.46</td><td>74.00</td><td>-33.54</td><td>56.12</td><td>32.36</td><td>9.65</td><td>58.37</td><td>0.70</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4810.00	40.46	74.00	-33.54	56.12	32.36	9.65	58.37	0.70	--	Peak	Level (dBuV/m) Date: 2025-08-18 PEAK_74 AVG_54 Frequency (MHz) Site : 03CH13-HY Condition: PEAK_74 3m 91280_02038 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4810.00</td><td>40.75</td><td>74.00</td><td>-33.25</td><td>56.41</td><td>32.36</td><td>9.65</td><td>58.37</td><td>0.70</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4810.00	40.75	74.00	-33.25	56.41	32.36	9.65	58.37	0.70	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4810.00	40.46	74.00	-33.54	56.12	32.36	9.65	58.37	0.70	--	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4810.00	40.75	74.00	-33.25	56.41	32.36	9.65	58.37	0.70	--	Peak																																																																																						

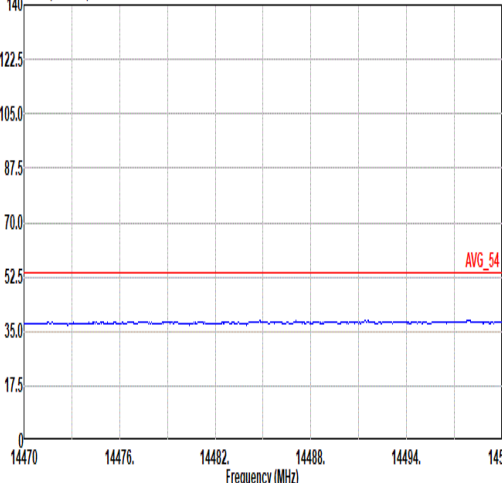
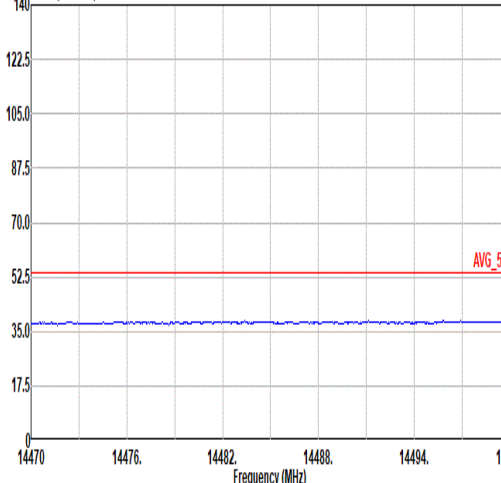
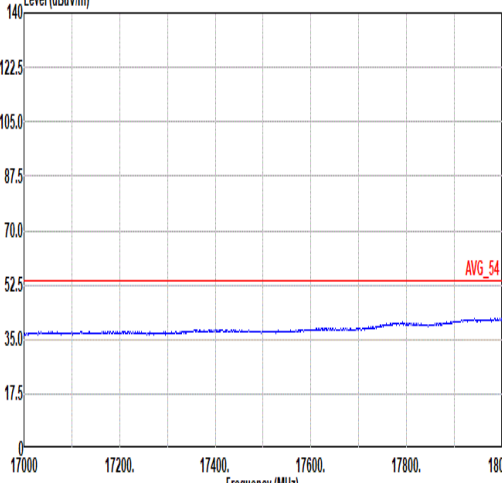
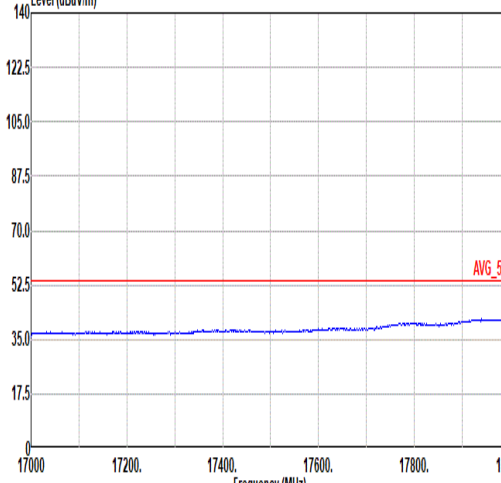


Mode	14	
	Harmonic	
	2400-2483.5_Zigbee_CH11_2405MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-08-18  Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 HORIZONTAL	Level (dBuV/m) Date: 2025-08-18  Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 VERTICAL
	Level (dBuV/m) Date: 2025-08-18  Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 HORIZONTAL	Level (dBuV/m) Date: 2025-08-18  Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 VERTICAL



Mode	15																																																																																																					
	Harmonic																																																																																																					
	2400-2483.5_Zigbee_CH18_2440MHz																																																																																																					
ANT	2																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: PEAK_74 3m 91280_02038 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>41.04</td><td>74.00</td><td>-32.96</td><td>56.19</td><td>32.60</td><td>9.75</td><td>58.21</td><td>0.71 -- -- Peak</td></tr><tr><td>2</td><td>7320.00</td><td>43.90</td><td>74.00</td><td>-30.10</td><td>52.11</td><td>36.66</td><td>12.16</td><td>57.69</td><td>0.66 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4880.00	41.04	74.00	-32.96	56.19	32.60	9.75	58.21	0.71 -- -- Peak	2	7320.00	43.90	74.00	-30.10	52.11	36.66	12.16	57.69	0.66 -- -- Peak	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: PEAK_74 3m 91280_02038 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>40.67</td><td>74.00</td><td>-33.33</td><td>55.82</td><td>32.60</td><td>9.75</td><td>58.21</td><td>0.71 -- -- Peak</td></tr><tr><td>2</td><td>7320.00</td><td>43.90</td><td>74.00</td><td>-30.10</td><td>52.11</td><td>36.66</td><td>12.16</td><td>57.69</td><td>0.66 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4880.00	40.67	74.00	-33.33	55.82	32.60	9.75	58.21	0.71 -- -- Peak	2	7320.00	43.90	74.00	-30.10	52.11	36.66	12.16	57.69	0.66 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	4880.00	41.04	74.00	-32.96	56.19	32.60	9.75	58.21	0.71 -- -- Peak																																																																																													
2	7320.00	43.90	74.00	-30.10	52.11	36.66	12.16	57.69	0.66 -- -- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	4880.00	40.67	74.00	-33.33	55.82	32.60	9.75	58.21	0.71 -- -- Peak																																																																																													
2	7320.00	43.90	74.00	-30.10	52.11	36.66	12.16	57.69	0.66 -- -- Peak																																																																																													

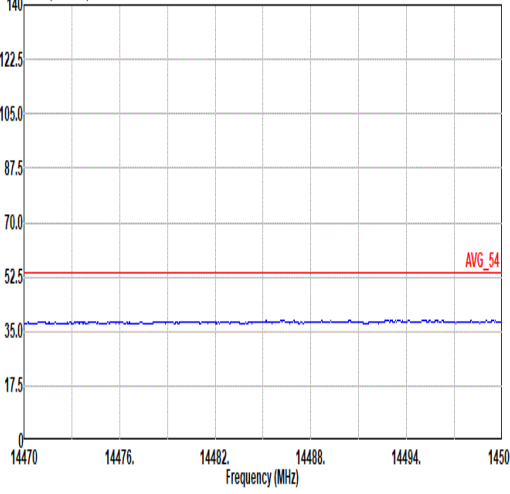
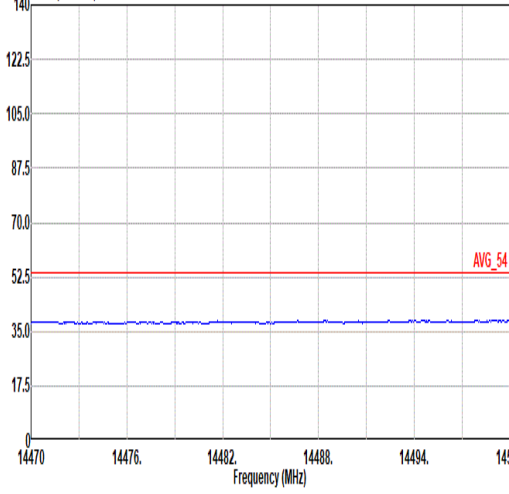
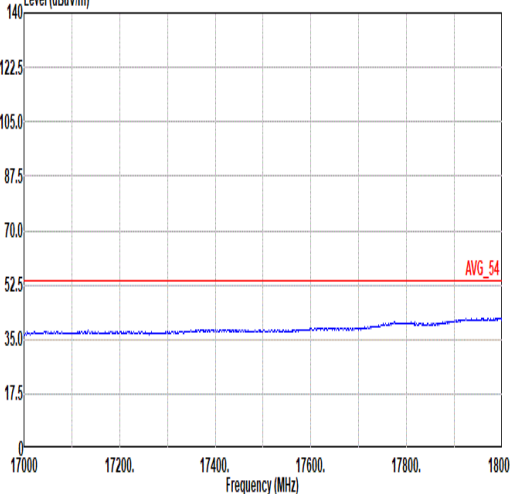
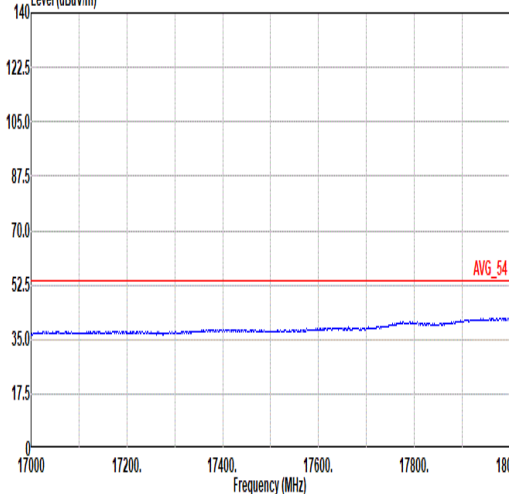


Mode	15	
	Harmonic	
	2400-2483.5_Zigbee_CH18_2440MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-08-15  Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 HORIZONTAL	Level (dBuV/m) Date: 2025-08-15  Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 VERTICAL
	Level (dBuV/m) Date: 2025-08-15  Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 HORIZONTAL	Level (dBuV/m) Date: 2025-08-15  Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 VERTICAL



Mode	16																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Zigbee_CH25_2475MHz																																																																																			
ANT	2																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: PEAK_BE_74 3m 91200_02038 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.54</td><td>53.24</td><td>74.00</td><td>-20.76</td><td>45.75</td><td>27.84</td><td>6.69</td><td>36.97</td><td>9.93</td><td>118</td><td>324</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.54	53.24	74.00	-20.76	45.75	27.84	6.69	36.97	9.93	118	324	Peak	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: PEAK_74 3m 91200_02038 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2475.00</td><td>106.98</td><td>-----</td><td>-----</td><td>99.58</td><td>27.76</td><td>6.68</td><td>36.97</td><td>9.93</td><td>118</td><td>324</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2475.00	106.98	-----	-----	99.58	27.76	6.68	36.97	9.93	118	324	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2483.54	53.24	74.00	-20.76	45.75	27.84	6.69	36.97	9.93	118	324	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2475.00	106.98	-----	-----	99.58	27.76	6.68	36.97	9.93	118	324	Peak																																																																									
Avg	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: AVG_BE_54 3m 91200_02038 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2491.31</td><td>41.63</td><td>54.00</td><td>-12.37</td><td>34.07</td><td>27.90</td><td>6.70</td><td>36.97</td><td>9.93</td><td>118</td><td>324</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2491.31	41.63	54.00	-12.37	34.07	27.90	6.70	36.97	9.93	118	324	Average	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: AVG_54 3m 91200_02038 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2475.00</td><td>105.32</td><td>-----</td><td>-----</td><td>97.92</td><td>27.76</td><td>6.68</td><td>36.97</td><td>9.93</td><td>118</td><td>324</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2475.00	105.32	-----	-----	97.92	27.76	6.68	36.97	9.93	118	324	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2491.31	41.63	54.00	-12.37	34.07	27.90	6.70	36.97	9.93	118	324	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2475.00	105.32	-----	-----	97.92	27.76	6.68	36.97	9.93	118	324	Average																																																																									

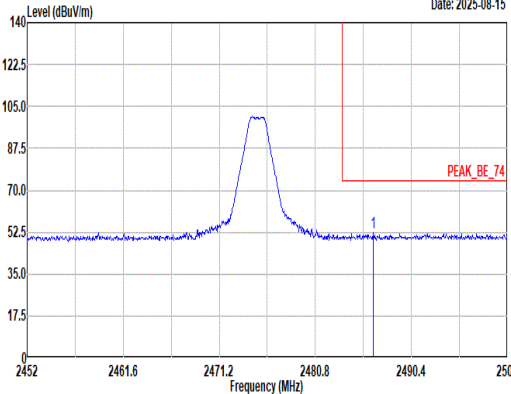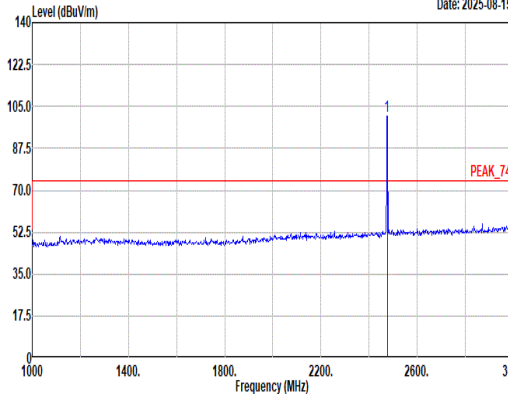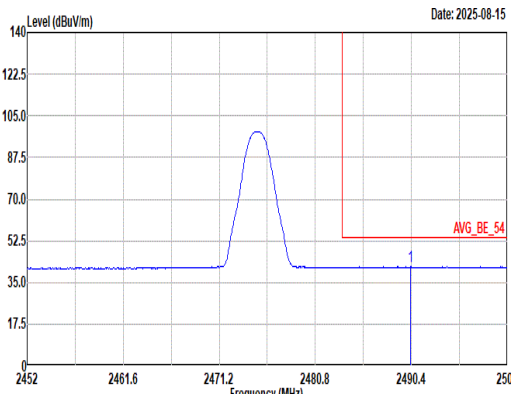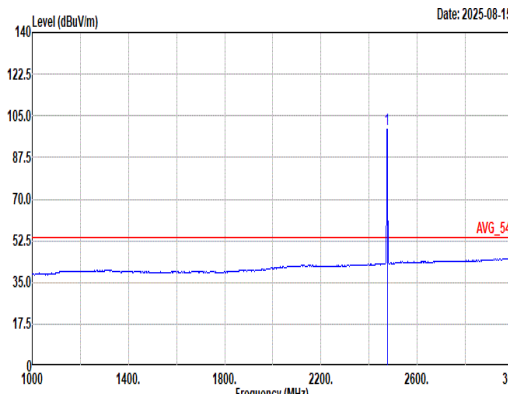

Mode	16																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Zigbee_CH25_2475MHz																																																																																									
ANT	2																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-08-15  PEAK_BE_74 Site : 03CH13-HY Condition: PEAK_BE_74 3m 91200_02038 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2486.56</td><td>52.04</td><td>74.00</td><td>-21.96</td><td>44.51</td><td>27.87</td><td>6.70</td><td>36.97</td><td>9.93</td><td>300 111 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2486.56	52.04	74.00	-21.96	44.51	27.87	6.70	36.97	9.93	300 111 Peak	Level (dBuV/m) Date: 2025-08-15  PEAK_74 Site : 03CH13-HY Condition: PEAK_74 3m 91200_02038 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2475.00</td><td>101.03</td><td>-----</td><td>-----</td><td>93.63</td><td>27.76</td><td>6.68</td><td>36.97</td><td>9.93</td><td>300 111 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2475.00	101.03	-----	-----	93.63	27.76	6.68	36.97	9.93	300 111 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2486.56	52.04	74.00	-21.96	44.51	27.87	6.70	36.97	9.93	300 111 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2475.00	101.03	-----	-----	93.63	27.76	6.68	36.97	9.93	300 111 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2025-08-15  AVG_BE_54 Site : 03CH13-HY Condition: AVG_BE_54 3m 91200_02038 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2490.30</td><td>41.58</td><td>54.00</td><td>-12.42</td><td>34.02</td><td>27.90</td><td>6.70</td><td>36.97</td><td>9.93</td><td>300 111 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2490.30	41.58	54.00	-12.42	34.02	27.90	6.70	36.97	9.93	300 111 Average	Level (dBuV/m) Date: 2025-08-15  AVG_54 Site : 03CH13-HY Condition: AVG_54 3m 91200_02038 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2475.00</td><td>99.44</td><td>-----</td><td>-----</td><td>92.04</td><td>27.76</td><td>6.68</td><td>36.97</td><td>9.93</td><td>300 111 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2475.00	99.44	-----	-----	92.04	27.76	6.68	36.97	9.93	300 111 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2490.30	41.58	54.00	-12.42	34.02	27.90	6.70	36.97	9.93	300 111 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2475.00	99.44	-----	-----	92.04	27.76	6.68	36.97	9.93	300 111 Average																																																																																	



Mode	16																																																																																																																								
	Harmonic																																																																																																																								
	2400-2483.5_Zigbee_CH25_2475MHz																																																																																																																								
ANT	2																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2025-08-18 PEAK_74 AVG_54 1 2 Frequency (MHz) Site : 03CH13-HY Condition: PEAK_74 3m 91280_02038 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4950.00</td><td>41.21</td><td>74.00</td><td>-32.79</td><td>55.69</td><td>33.00</td><td>9.85</td><td>58.05</td><td>0.72</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7425.00</td><td>43.77</td><td>74.00</td><td>-30.23</td><td>52.41</td><td>36.30</td><td>12.24</td><td>57.85</td><td>0.67</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4950.00	41.21	74.00	-32.79	55.69	33.00	9.85	58.05	0.72	--	Peak	2	7425.00	43.77	74.00	-30.23	52.41	36.30	12.24	57.85	0.67	--	Peak	Level (dBuV/m) Date: 2025-08-18 PEAK_74 AVG_54 1 2 Frequency (MHz) Site : 03CH13-HY Condition: PEAK_74 3m 91280_02038 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4950.00</td><td>40.62</td><td>74.00</td><td>-33.38</td><td>55.10</td><td>33.00</td><td>9.85</td><td>58.05</td><td>0.72</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7425.00</td><td>43.72</td><td>74.00</td><td>-30.28</td><td>52.36</td><td>36.30</td><td>12.24</td><td>57.85</td><td>0.67</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4950.00	40.62	74.00	-33.38	55.10	33.00	9.85	58.05	0.72	--	Peak	2	7425.00	43.72	74.00	-30.28	52.36	36.30	12.24	57.85	0.67	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4950.00	41.21	74.00	-32.79	55.69	33.00	9.85	58.05	0.72	--	Peak																																																																																																														
2	7425.00	43.77	74.00	-30.23	52.41	36.30	12.24	57.85	0.67	--	Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4950.00	40.62	74.00	-33.38	55.10	33.00	9.85	58.05	0.72	--	Peak																																																																																																														
2	7425.00	43.72	74.00	-30.28	52.36	36.30	12.24	57.85	0.67	--	Peak																																																																																																														



Mode	16	
	Harmonic	
	2400-2483.5_Zigbee_CH25_2475MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-08-18 Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 HORIZONTAL	Level (dBuV/m) Date: 2025-08-18 Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 VERTICAL
	Level (dBuV/m) Date: 2025-08-18 Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 HORIZONTAL	Level (dBuV/m) Date: 2025-08-18 Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 VERTICAL





Mode	17																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																			
ANT	2																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: PEAK_BE_74 3m 91200_02038 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.52</td><td>61.89</td><td>74.00</td><td>-12.11</td><td>54.40</td><td>27.84</td><td>6.69</td><td>36.97</td><td>9.93</td><td>100</td><td>326</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.52	61.89	74.00	-12.11	54.40	27.84	6.69	36.97	9.93	100	326	Peak	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: PEAK_74 3m 91200_02038 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>106.15</td><td>-----</td><td>-----</td><td>98.70</td><td>27.80</td><td>6.69</td><td>36.97</td><td>9.93</td><td>100</td><td>326</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	106.15	-----	-----	98.70	27.80	6.69	36.97	9.93	100	326	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2483.52	61.89	74.00	-12.11	54.40	27.84	6.69	36.97	9.93	100	326	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	106.15	-----	-----	98.70	27.80	6.69	36.97	9.93	100	326	Peak																																																																									
Avg	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: AVG_BE_54 3m 91200_02038 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.52</td><td>43.82</td><td>54.00</td><td>-10.18</td><td>36.33</td><td>27.84</td><td>6.69</td><td>36.97</td><td>9.93</td><td>100</td><td>326</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.52	43.82	54.00	-10.18	36.33	27.84	6.69	36.97	9.93	100	326	Average	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: AVG_54 3m 91200_02038 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>104.34</td><td>-----</td><td>-----</td><td>96.89</td><td>27.80</td><td>6.69</td><td>36.97</td><td>9.93</td><td>100</td><td>326</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	104.34	-----	-----	96.89	27.80	6.69	36.97	9.93	100	326	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2483.52	43.82	54.00	-10.18	36.33	27.84	6.69	36.97	9.93	100	326	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	104.34	-----	-----	96.89	27.80	6.69	36.97	9.93	100	326	Average																																																																									



Mode	17																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																			
ANT	2																																																																																			
Pol.	Vertical						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: PEAK_BE_74 3m 91200_02038 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.54</td><td>56.91</td><td>74.00</td><td>-17.09</td><td>49.42</td><td>27.84</td><td>6.69</td><td>36.97</td><td>9.93</td><td>300</td><td>109</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.54	56.91	74.00	-17.09	49.42	27.84	6.69	36.97	9.93	300	109	Peak	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: PEAK_74 3m 91200_02038 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>99.63</td><td>-----</td><td>-----</td><td>92.18</td><td>27.80</td><td>6.69</td><td>36.97</td><td>9.93</td><td>300</td><td>109</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	99.63	-----	-----	92.18	27.80	6.69	36.97	9.93	300	109	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2483.54	56.91	74.00	-17.09	49.42	27.84	6.69	36.97	9.93	300	109	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	99.63	-----	-----	92.18	27.80	6.69	36.97	9.93	300	109	Peak																																																																									
Avg	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: AVG_BE_54 3m 91200_02038 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.82</td><td>41.78</td><td>54.00</td><td>-12.22</td><td>34.29</td><td>27.84</td><td>6.69</td><td>36.97</td><td>9.93</td><td>300</td><td>109</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.82	41.78	54.00	-12.22	34.29	27.84	6.69	36.97	9.93	300	109	Average	Level (dBuV/m) Date: 2025-08-15 Site : 03CH13-HY Condition: AVG_54 3m 91200_02038 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2480.00</td><td>97.94</td><td>-----</td><td>-----</td><td>90.49</td><td>27.80</td><td>6.69</td><td>36.97</td><td>9.93</td><td>300</td><td>109</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2480.00	97.94	-----	-----	90.49	27.80	6.69	36.97	9.93	300	109	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																									
1 2483.82	41.78	54.00	-12.22	34.29	27.84	6.69	36.97	9.93	300	109	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2480.00	97.94	-----	-----	90.49	27.80	6.69	36.97	9.93	300	109	Average																																																																									

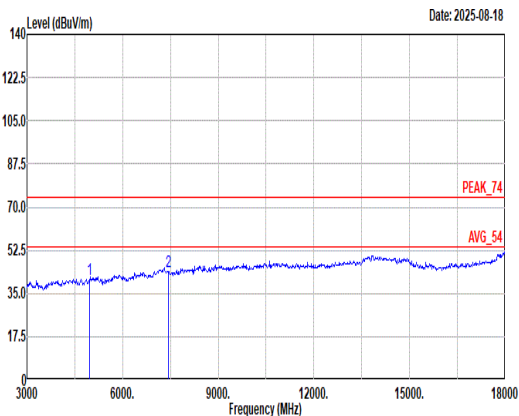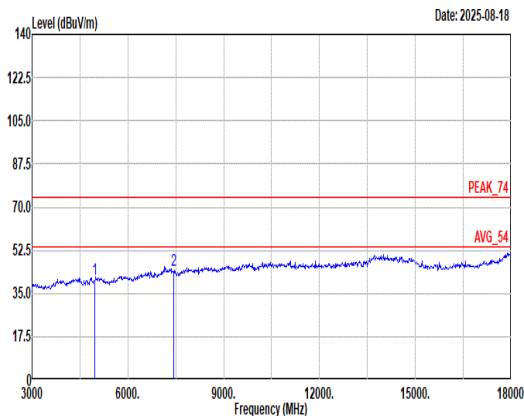

Mode	17																																																																																																																					
	Harmonic																																																																																																																					
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																																					
ANT	2																																																																																																																					
Pol.	Horizontal						Vertical																																																																																																															
Peak Avg																																																																																																																						
	Site : 03CH13-HY Condition: PEAK_74 3m 91280_02038 HORIZONTAL						Site : 03CH13-HY Condition: PEAK_74 3m 91280_02038 VERTICAL																																																																																																															
	<table><tr><th colspan="2"></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.93</td><td>74.00</td><td>-33.07</td><td>55.35</td><td>33.02</td><td>9.86</td><td>58.02</td><td>0.72</td><td>-- Peak</td></tr><tr><td>2</td><td>7440.00</td><td>44.11</td><td>74.00</td><td>-29.89</td><td>52.76</td><td>36.30</td><td>12.25</td><td>57.87</td><td>0.67</td><td>-- Peak</td></tr></table>								Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	40.93	74.00	-33.07	55.35	33.02	9.86	58.02	0.72	-- Peak	2	7440.00	44.11	74.00	-29.89	52.76	36.30	12.25	57.87	0.67	-- Peak	<table><tr><th colspan="2"></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.52</td><td>74.00</td><td>-33.48</td><td>54.94</td><td>33.02</td><td>9.86</td><td>58.02</td><td>0.72</td><td>-- Peak</td></tr><tr><td>2</td><td>7440.00</td><td>44.37</td><td>74.00</td><td>-29.63</td><td>53.02</td><td>36.30</td><td>12.25</td><td>57.87</td><td>0.67</td><td>-- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	40.52	74.00	-33.48	54.94	33.02	9.86	58.02	0.72	-- Peak	2	7440.00	44.37	74.00	-29.63	53.02	36.30	12.25	57.87	0.67
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	4960.00	40.93	74.00	-33.07	55.35	33.02	9.86	58.02	0.72	-- Peak																																																																																																												
2	7440.00	44.11	74.00	-29.89	52.76	36.30	12.25	57.87	0.67	-- Peak																																																																																																												
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	4960.00	40.52	74.00	-33.48	54.94	33.02	9.86	58.02	0.72	-- Peak																																																																																																												
2	7440.00	44.37	74.00	-29.63	53.02	36.30	12.25	57.87	0.67	-- Peak																																																																																																												



Mode	17	
	Harmonic	
	2400-2483.5_Zigbee_CH26_2480MHz	
ANT	2	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2025-08-18 Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 HORIZONTAL	Level (dBuV/m) Date: 2025-08-18 Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 VERTICAL
	Level (dBuV/m) Date: 2025-08-18 Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 HORIZONTAL	Level (dBuV/m) Date: 2025-08-18 Site : 03CH13-HY Condition: AVG_54 3m 91280_02038 VERTICAL



Mode	18																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																																																																																																					
ANT	2																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QPI Peak	Level (dBuV/m) Date: 2025-08-18 Site : 03CH13-HY Condition: QP 3m B1LOG_40103 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>72.68</td><td>32.44</td><td>40.00</td><td>-7.56</td><td>50.35</td><td>12.79</td><td>1.14</td><td>31.91</td><td>0.07 -- -- Peak</td></tr><tr><td>2</td><td>120.21</td><td>30.85</td><td>43.50</td><td>-12.65</td><td>43.74</td><td>17.49</td><td>1.45</td><td>31.91</td><td>0.08 -- -- Peak</td></tr><tr><td>3</td><td>264.74</td><td>36.37</td><td>46.00</td><td>-9.63</td><td>45.74</td><td>20.11</td><td>2.15</td><td>31.75</td><td>0.12 -- -- Peak</td></tr><tr><td>4</td><td>332.64</td><td>35.25</td><td>46.00</td><td>-10.75</td><td>44.59</td><td>19.93</td><td>2.43</td><td>31.82</td><td>0.12 -- -- Peak</td></tr><tr><td>5</td><td>552.83</td><td>38.13</td><td>46.00</td><td>-7.87</td><td>40.77</td><td>25.83</td><td>3.11</td><td>31.71</td><td>0.13 -- -- Peak</td></tr><tr><td>6</td><td>951.50</td><td>34.41</td><td>46.00</td><td>-11.59</td><td>30.04</td><td>30.77</td><td>4.06</td><td>30.66</td><td>0.20 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	72.68	32.44	40.00	-7.56	50.35	12.79	1.14	31.91	0.07 -- -- Peak	2	120.21	30.85	43.50	-12.65	43.74	17.49	1.45	31.91	0.08 -- -- Peak	3	264.74	36.37	46.00	-9.63	45.74	20.11	2.15	31.75	0.12 -- -- Peak	4	332.64	35.25	46.00	-10.75	44.59	19.93	2.43	31.82	0.12 -- -- Peak	5	552.83	38.13	46.00	-7.87	40.77	25.83	3.11	31.71	0.13 -- -- Peak	6	951.50	34.41	46.00	-11.59	30.04	30.77	4.06	30.66	0.20 -- -- Peak	Level (dBuV/m) Date: 2025-08-18 Site : 03CH13-HY Condition: QP 3m B1LOG_40103 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>30.97</td><td>31.90</td><td>40.00</td><td>-8.02</td><td>30.97</td><td>24.18</td><td>0.78</td><td>32.00</td><td>0.05 -- -- Peak</td></tr><tr><td>2</td><td>120.21</td><td>28.10</td><td>43.50</td><td>-15.40</td><td>40.99</td><td>17.49</td><td>1.45</td><td>31.91</td><td>0.08 -- -- Peak</td></tr><tr><td>3</td><td>264.74</td><td>32.39</td><td>46.00</td><td>-13.61</td><td>41.76</td><td>20.11</td><td>2.15</td><td>31.75</td><td>0.12 -- -- Peak</td></tr><tr><td>4</td><td>332.64</td><td>39.68</td><td>46.00</td><td>-6.32</td><td>49.02</td><td>19.93</td><td>2.43</td><td>31.82</td><td>0.12 -- -- Peak</td></tr><tr><td>5</td><td>552.83</td><td>33.36</td><td>46.00</td><td>-12.64</td><td>36.00</td><td>25.83</td><td>3.11</td><td>31.71</td><td>0.13 -- -- Peak</td></tr><tr><td>6</td><td>958.29</td><td>34.94</td><td>46.00</td><td>-11.06</td><td>30.42</td><td>30.82</td><td>4.08</td><td>30.59</td><td>0.21 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	30.97	31.90	40.00	-8.02	30.97	24.18	0.78	32.00	0.05 -- -- Peak	2	120.21	28.10	43.50	-15.40	40.99	17.49	1.45	31.91	0.08 -- -- Peak	3	264.74	32.39	46.00	-13.61	41.76	20.11	2.15	31.75	0.12 -- -- Peak	4	332.64	39.68	46.00	-6.32	49.02	19.93	2.43	31.82	0.12 -- -- Peak	5	552.83	33.36	46.00	-12.64	36.00	25.83	3.11	31.71	0.13 -- -- Peak	6	958.29	34.94	46.00	-11.06	30.42	30.82	4.08	30.59	0.21 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	72.68	32.44	40.00	-7.56	50.35	12.79	1.14	31.91	0.07 -- -- Peak																																																																																																																																																																													
2	120.21	30.85	43.50	-12.65	43.74	17.49	1.45	31.91	0.08 -- -- Peak																																																																																																																																																																													
3	264.74	36.37	46.00	-9.63	45.74	20.11	2.15	31.75	0.12 -- -- Peak																																																																																																																																																																													
4	332.64	35.25	46.00	-10.75	44.59	19.93	2.43	31.82	0.12 -- -- Peak																																																																																																																																																																													
5	552.83	38.13	46.00	-7.87	40.77	25.83	3.11	31.71	0.13 -- -- Peak																																																																																																																																																																													
6	951.50	34.41	46.00	-11.59	30.04	30.77	4.06	30.66	0.20 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	30.97	31.90	40.00	-8.02	30.97	24.18	0.78	32.00	0.05 -- -- Peak																																																																																																																																																																													
2	120.21	28.10	43.50	-15.40	40.99	17.49	1.45	31.91	0.08 -- -- Peak																																																																																																																																																																													
3	264.74	32.39	46.00	-13.61	41.76	20.11	2.15	31.75	0.12 -- -- Peak																																																																																																																																																																													
4	332.64	39.68	46.00	-6.32	49.02	19.93	2.43	31.82	0.12 -- -- Peak																																																																																																																																																																													
5	552.83	33.36	46.00	-12.64	36.00	25.83	3.11	31.71	0.13 -- -- Peak																																																																																																																																																																													
6	958.29	34.94	46.00	-11.06	30.42	30.82	4.08	30.59	0.21 -- -- Peak																																																																																																																																																																													




Mode	19																																																																																																
	SHF																																																																																																
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																
ANT	2																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak	Level (dBuV/m) Date: 2025-08-18 Site : 03CH13-HY Condition: PEAK_74 1m SHF_00994 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>24552.13</td><td>39.31</td><td>74.00</td><td>-34.69</td><td>56.23</td><td>39.69</td><td>6.23</td><td>53.30</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	24552.13	39.31	74.00	-34.69	56.23	39.69	6.23	53.30	-9.54	--	PEAK	Level (dBuV/m) Date: 2025-08-18 Site : 03CH13-HY Condition: PEAK_74 1m SHF_00994 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>23832.04</td><td>38.99</td><td>74.00</td><td>-35.01</td><td>57.35</td><td>39.10</td><td>6.08</td><td>54.00</td><td>-9.54</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	23832.04	38.99	74.00	-35.01	57.35	39.10	6.08	54.00	-9.54	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	24552.13	39.31	74.00	-34.69	56.23	39.69	6.23	53.30	-9.54	--	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	23832.04	38.99	74.00	-35.01	57.35	39.10	6.08	54.00	-9.54	--	PEAK																																																																																						

Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
2	ZigBee	57.92	1060	0.94	1kHz

<Ant. 2>

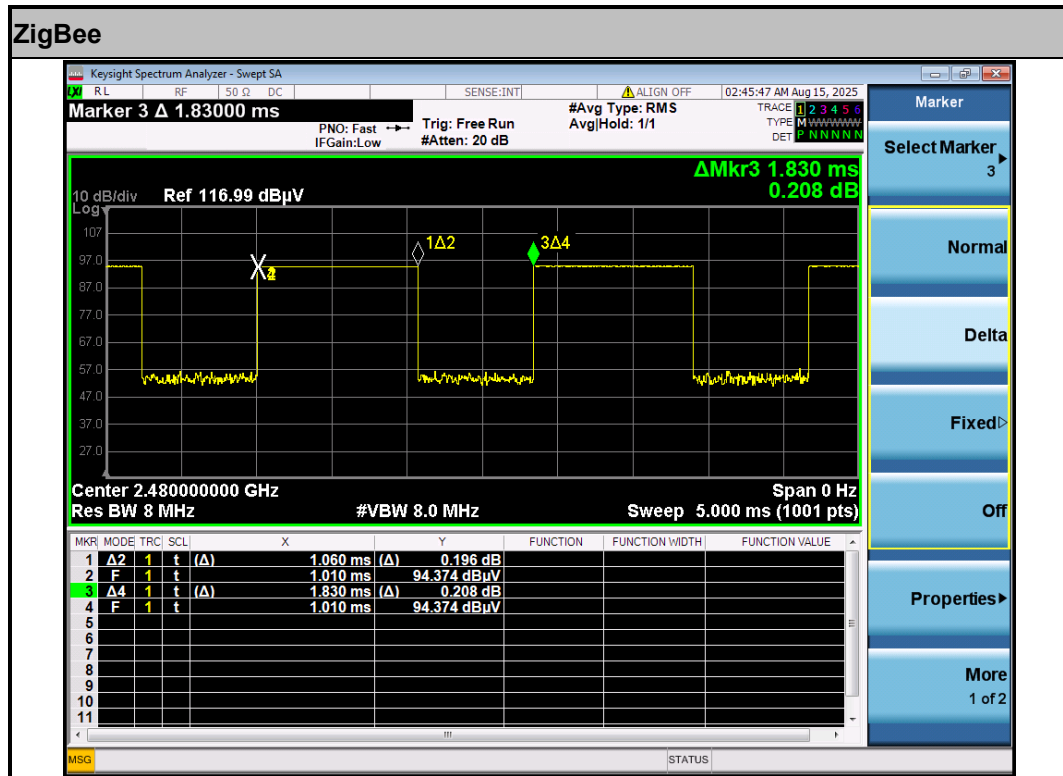

————THE END————