





Plot on Channel 6695MHz 26RU0

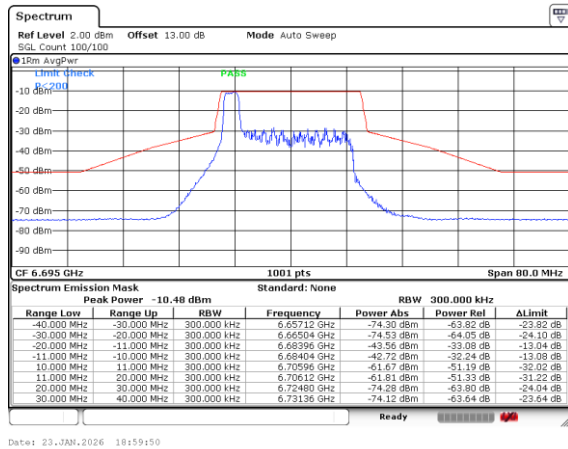


Date: 23.JAN.2026 18:59:50

Plot on Channel 6695MHz 52RU37

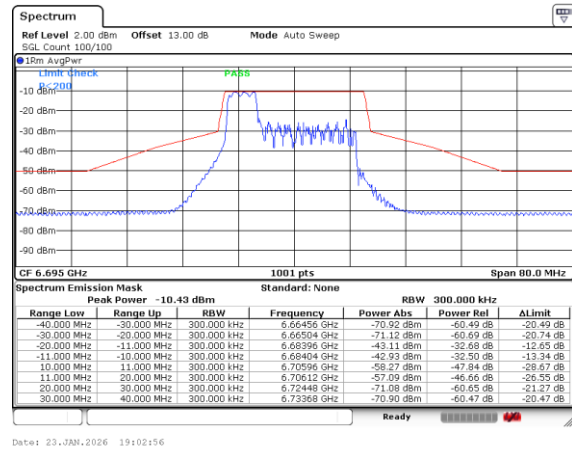

Date: 23.JAN.2026 19:02:56


Plot on Channel 6695MHz 106RU53

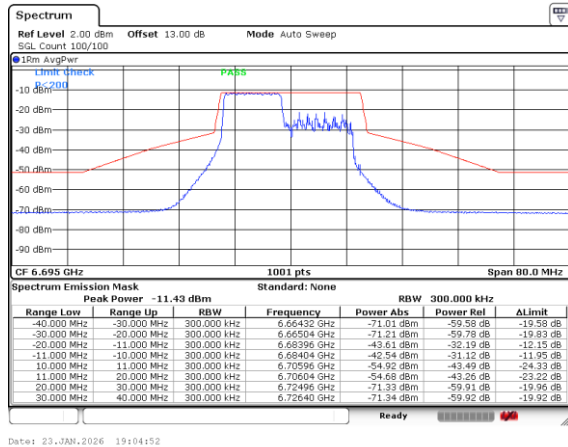


Date: 23.JAN.2026 19:04:52




Plot on Channel 6855MHz 26RU8

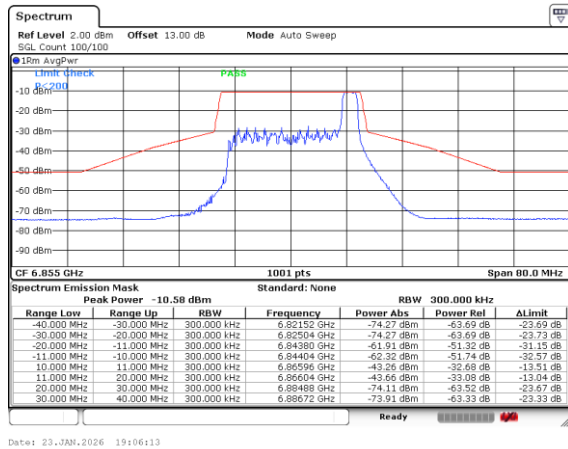

Plot on Channel 6855MHz 52RU40

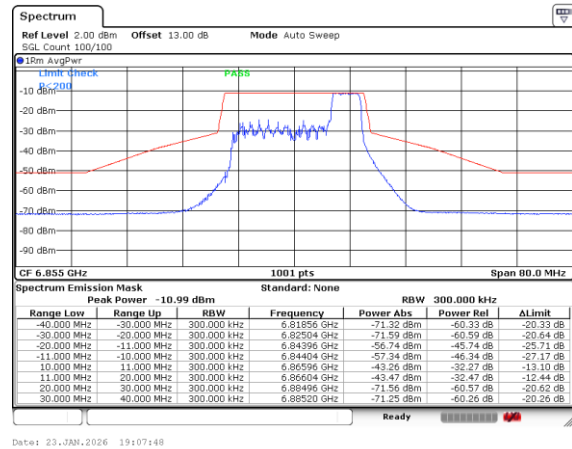


Plot on Channel 6855MHz 106RU54

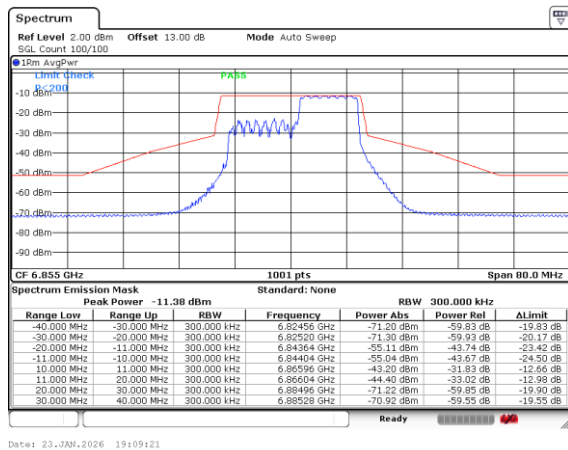





Plot on Channel 6875MHz 26RU8

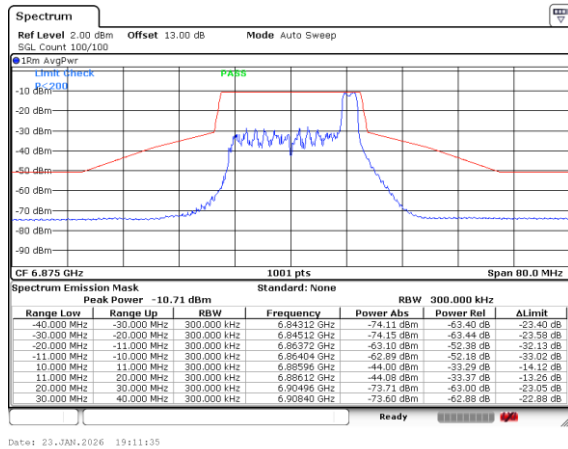

Plot on Channel 6875MHz 52RU40

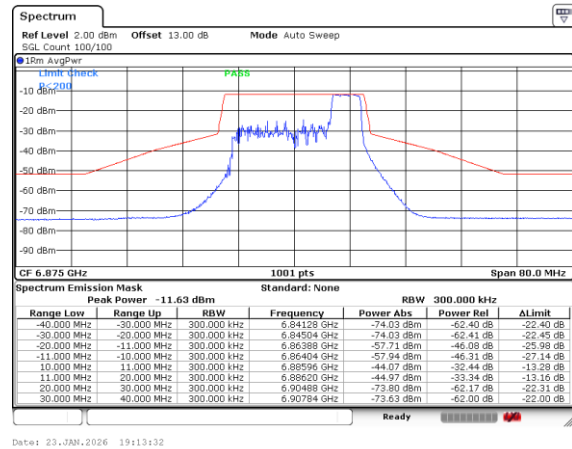


Plot on Channel 6875MHz 106RU54

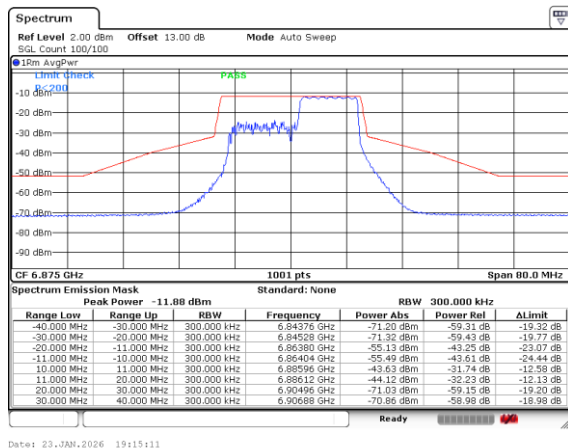




Plot on Channel 6895MHz 26RU0

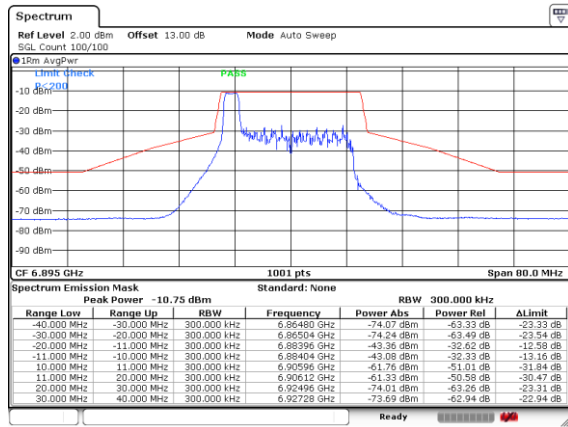


Date: 23.JAN.2026 19:17:10

Plot on Channel 6895MHz 52RU37

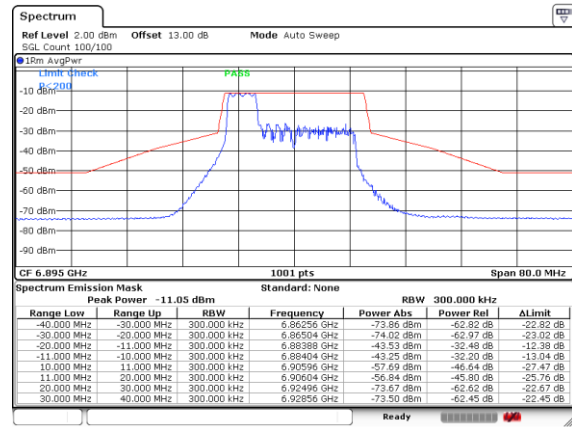

Date: 23.JAN.2026 19:18:27


Plot on Channel 6895MHz 106RU53

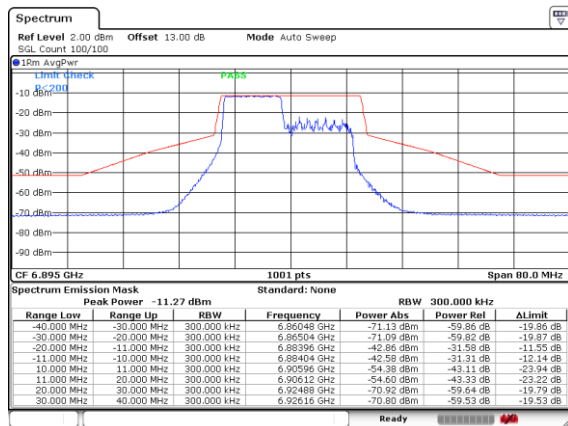

Date: 23.JAN.2026 19:21:10




Plot on Channel 6995MHz 26RU0

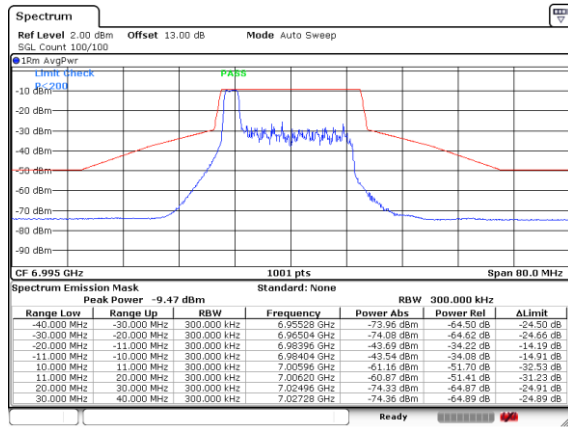


Date: 23.JAN.2026 19:35:18

Plot on Channel 6995MHz 52RU37

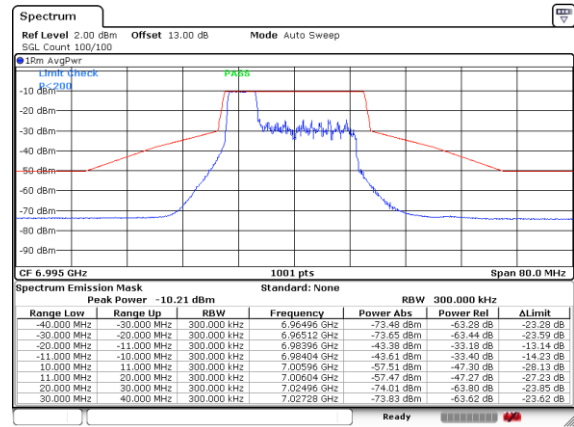

Date: 23.JAN.2026 19:36:17


Plot on Channel 6995MHz 106RU53

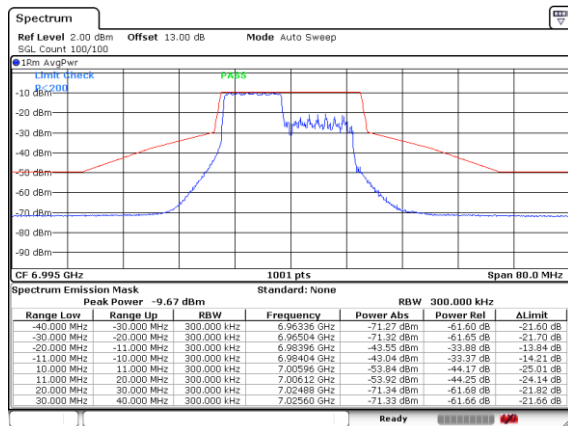


Date: 23.JAN.2026 19:38:15




Plot on Channel 7095MHz 26RU8

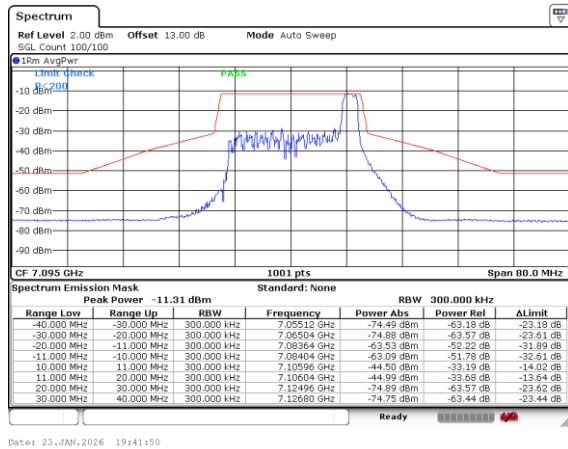

Plot on Channel 7095MHz 52RU40

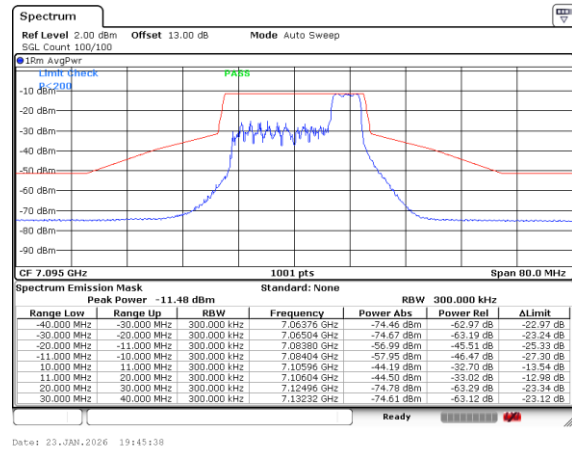


Plot on Channel 7095MHz 106RU54

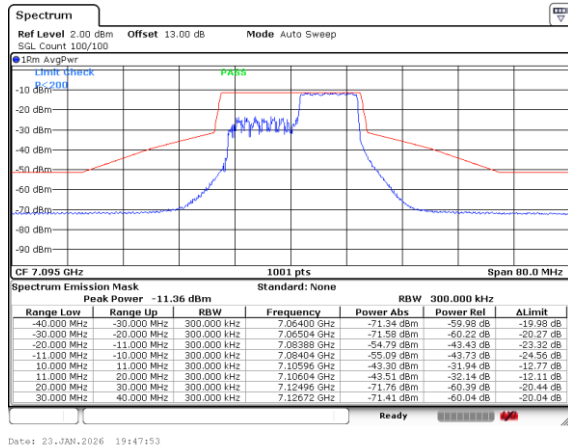




Plot on Channel 7115MHz 26RU8

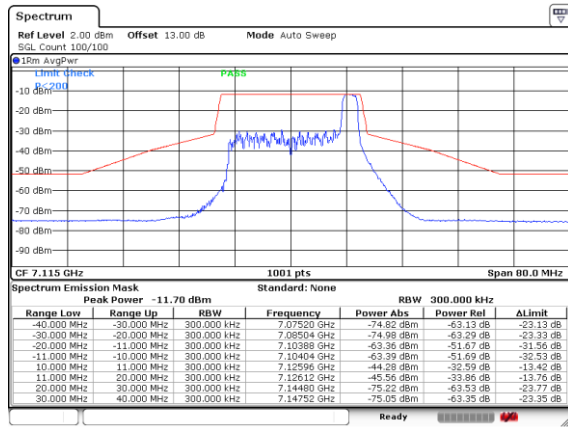


Date: 23.JAN.2026 19:50:01

Plot on Channel 7115MHz 52RU40

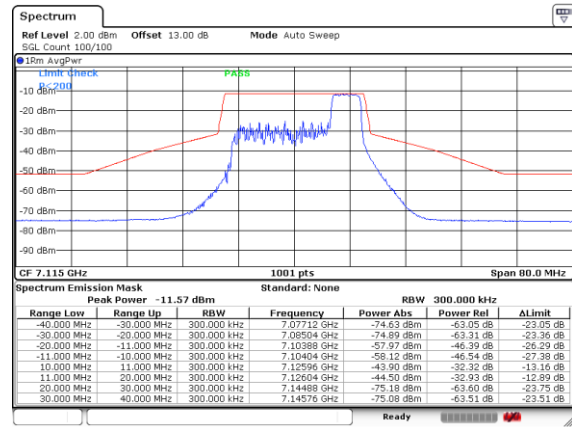

Date: 23.JAN.2026 19:52:14

Plot on Channel 7115MHz 106RU54

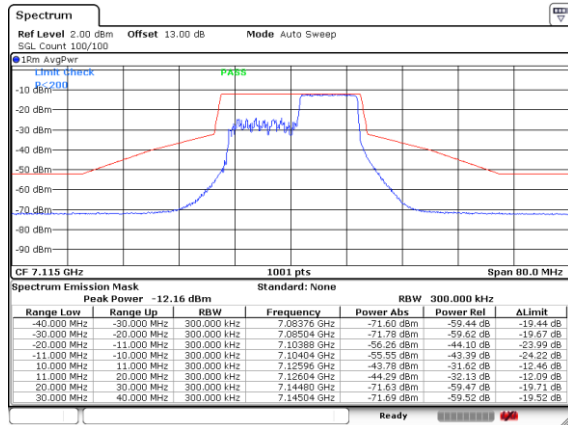


Date: 23.JAN.2026 19:54:50




EUT Mode : 802.11ax HE40

Plot on Channel 5965MHz 242RU61

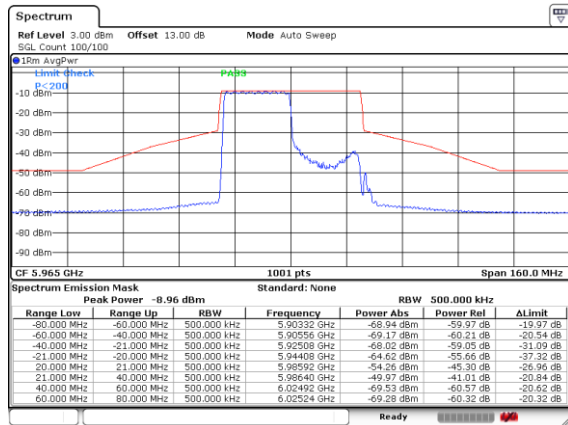


Date: 23.JAN.2026 20:37:03

Plot on Channel 6205MHz 242RU61

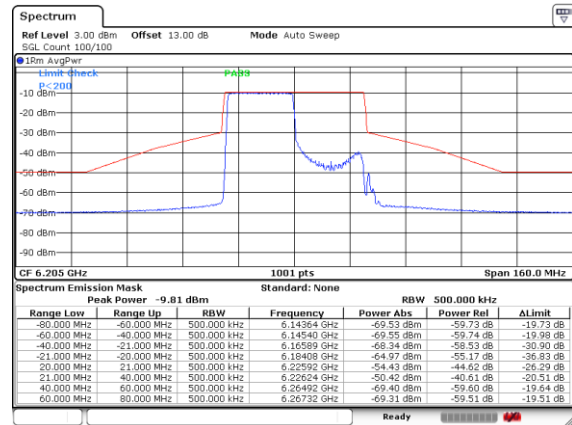


Date: 23.JAN.2026 20:39:33

Plot on Channel 6405MHz 242RU62

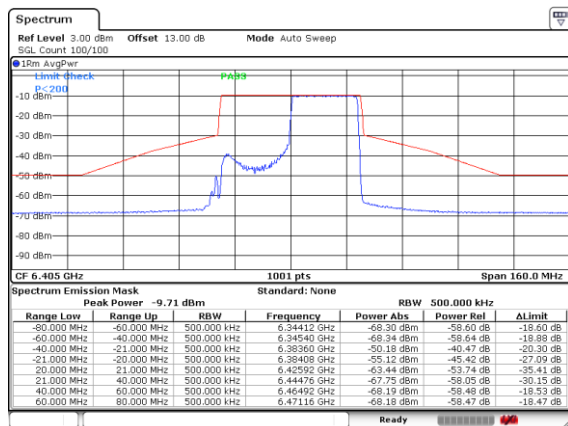

Date: 23.JAN.2026 20:43:05


Plot on Channel 6445MHz 242RU61

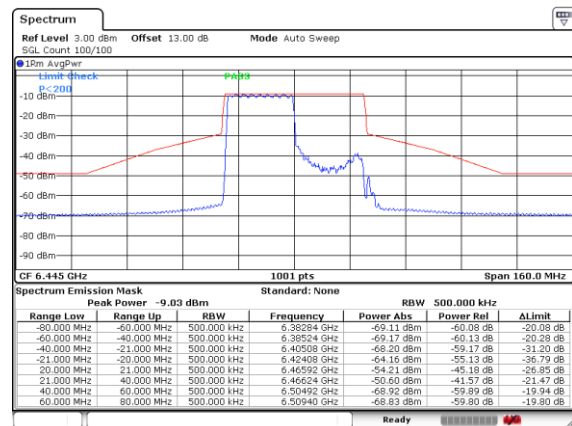


Date: 23.JAN.2026 20:44:46




Plot on Channel 6485MHz 242RU62

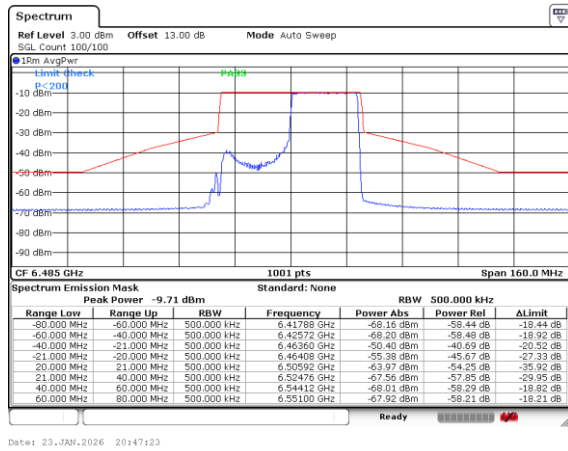


Plot on Channel 6525MHz 242RU62

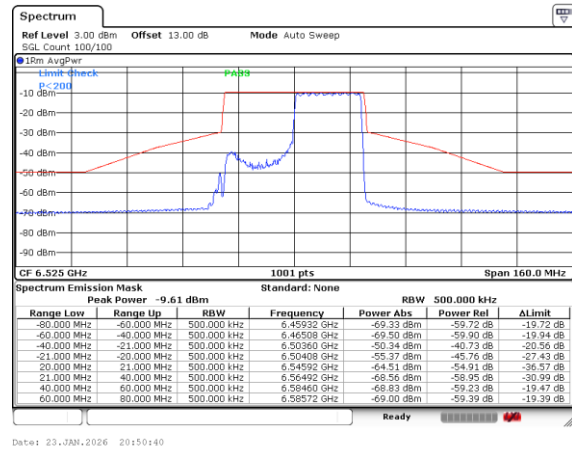


Plot on Channel 6565MHz 242RU61

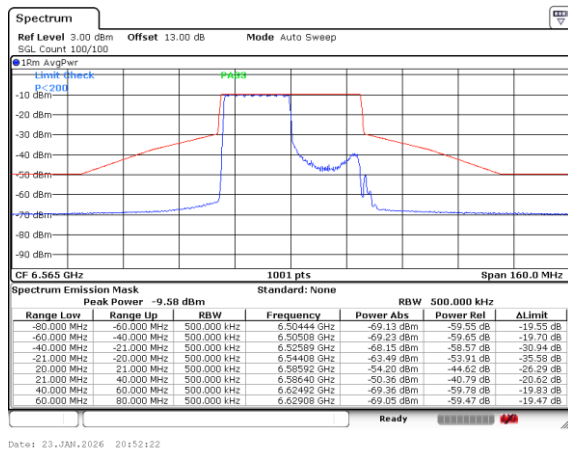


Plot on Channel 6685MHz 242RU61

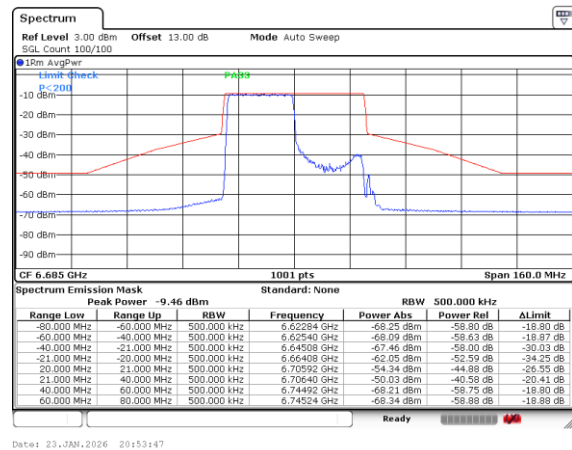

Plot on Channel 6845MHz 242RU62

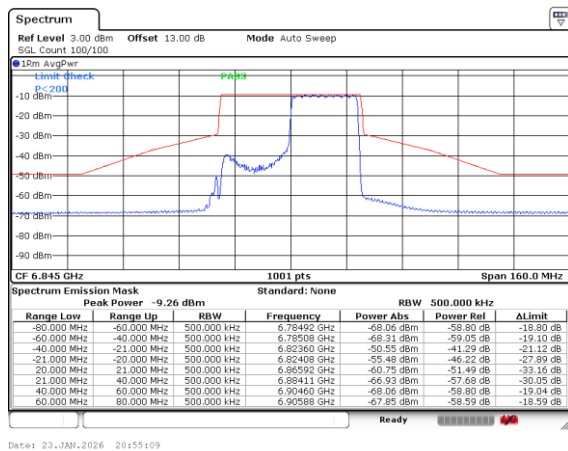


Plot on Channel 6885MHz 242RU62

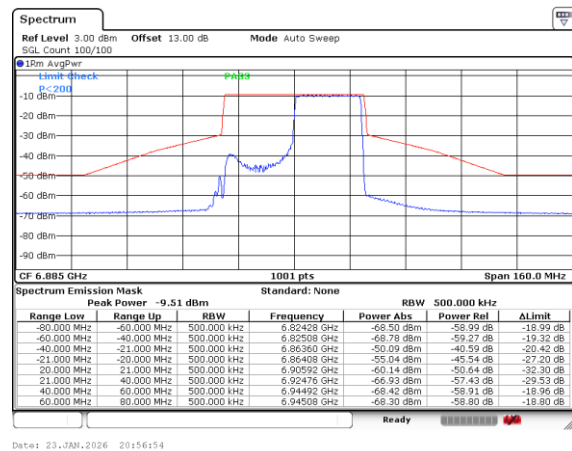




Plot on Channel 6925MHz 242RU61

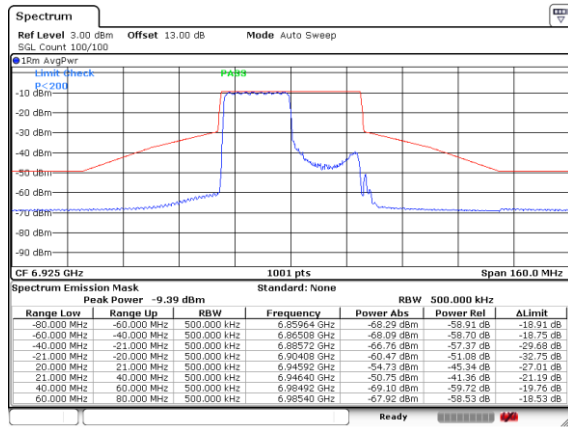


Date: 23.JAN.2026 20:59:32

Plot on Channel 7005MHz 242RU61

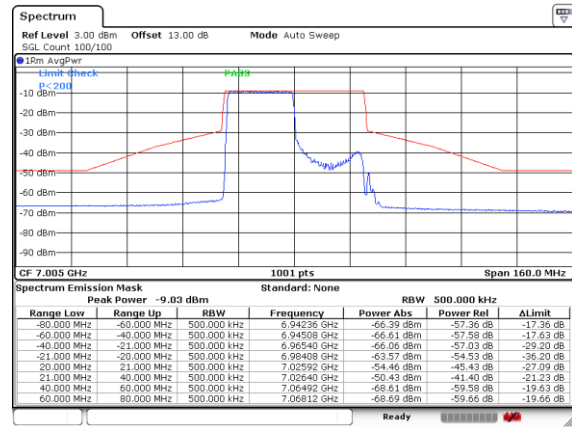

Date: 23.JAN.2026 21:02:27

Plot on Channel 7085MHz 242RU62

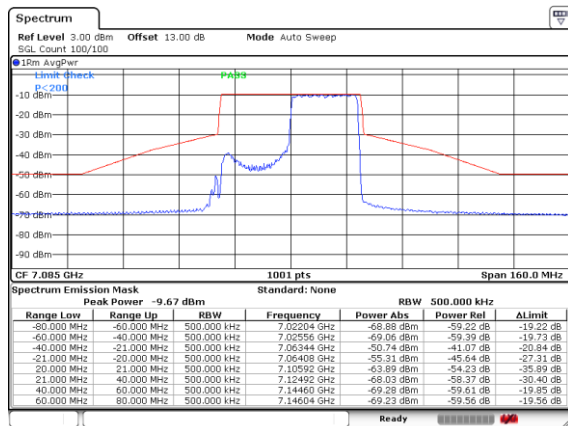


Date: 23.JAN.2026 21:05:53




EUT Mode : 802.11ax HE80

Plot on Channel 5985MHz 484RU65

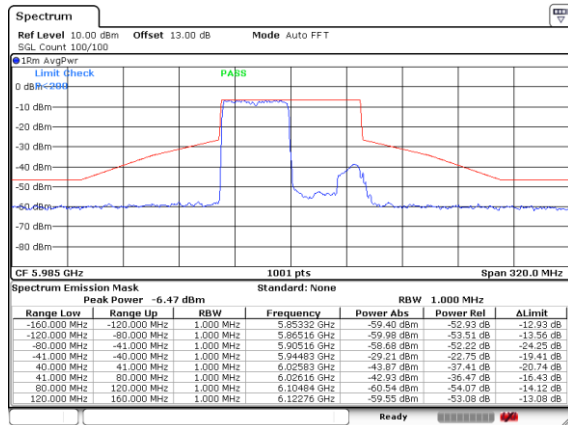


Date: 23.JAN.2026 21:13:43

Plot on Channel 6225MHz 484RU65

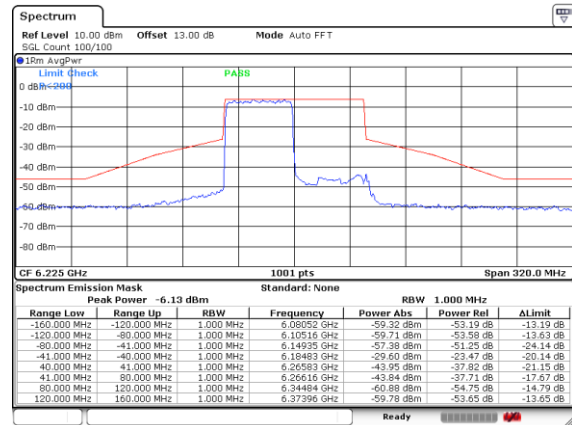


Date: 23.JAN.2026 21:15:17

Plot on Channel 6385MHz 484RU66

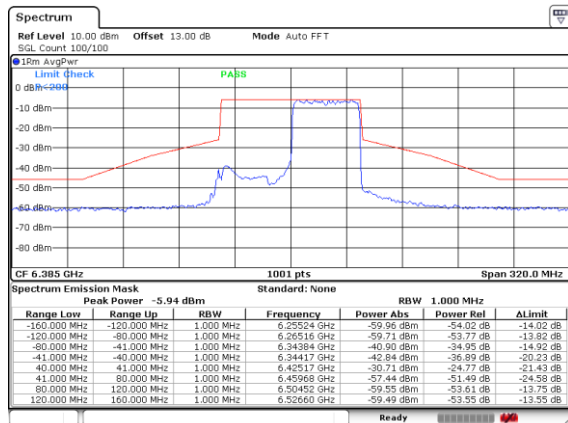

Date: 23.JAN.2026 21:17:47


Plot on Channel 6465MHz 484RU65

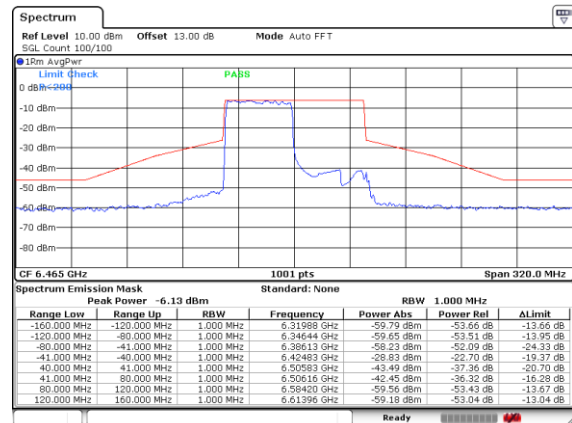


Date: 23.JAN.2026 21:19:51




Plot on Channel 6545MHz 484RU66

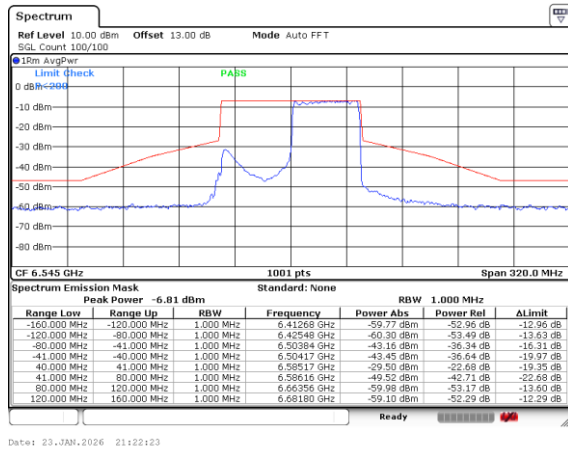


Plot on Channel 6625MHz 484RU65

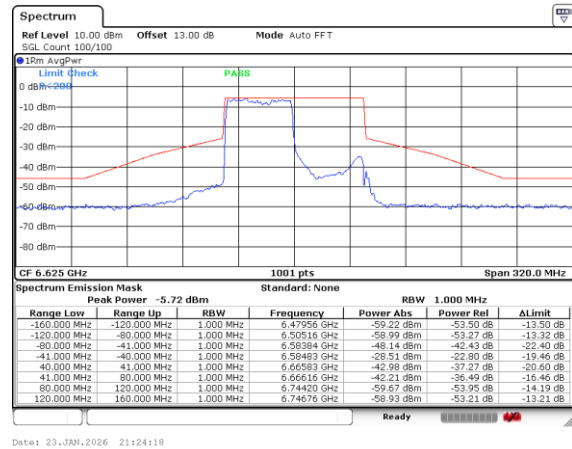


Plot on Channel 6705MHz 484RU65

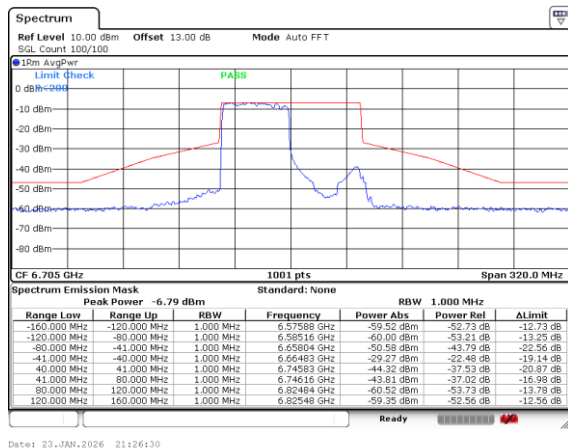


Plot on Channel 6785MHz 484RU66

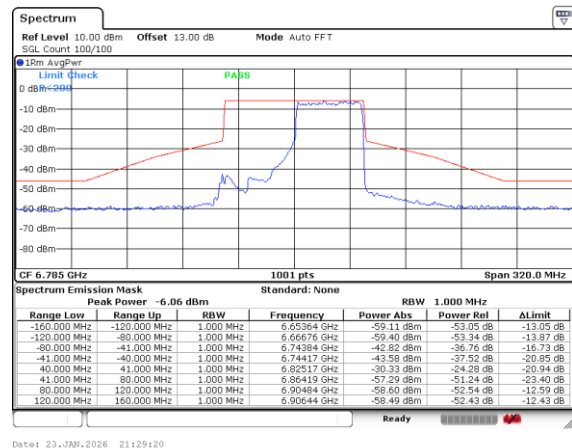

Plot on Channel 6865MHz 484RU66

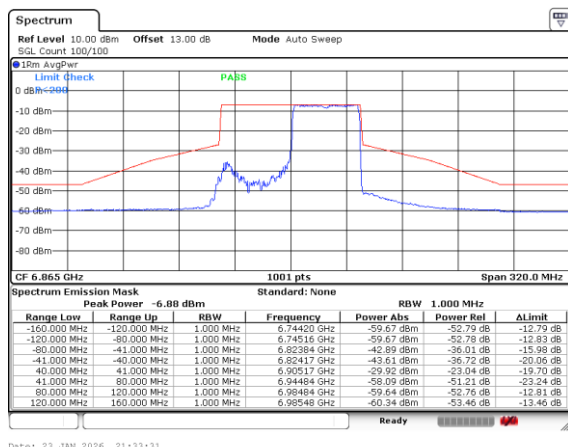


Plot on Channel 6945MHz 484RU65

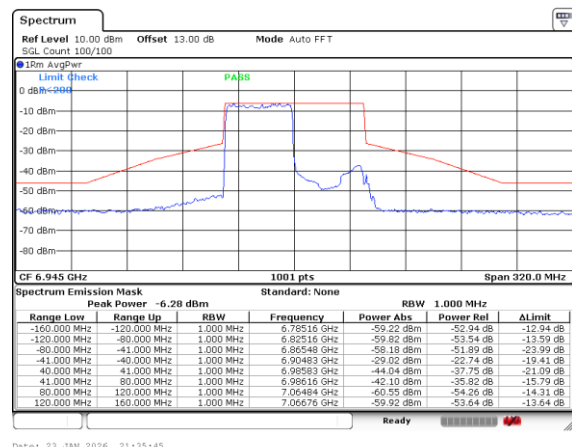




Plot on Channel 7025MHz 484RU66

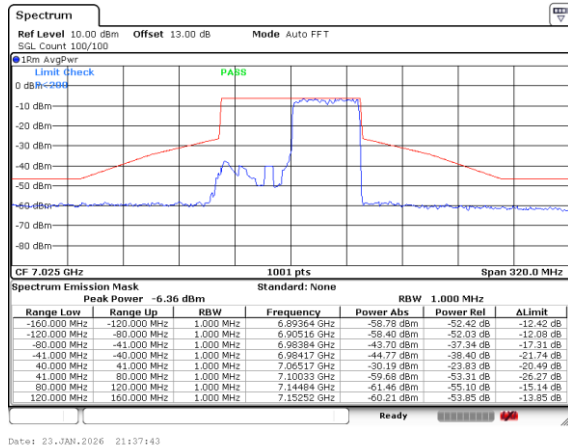




EUT Mode : 802.11ax HE160


Plot on Channel 6025MHz 996RU67

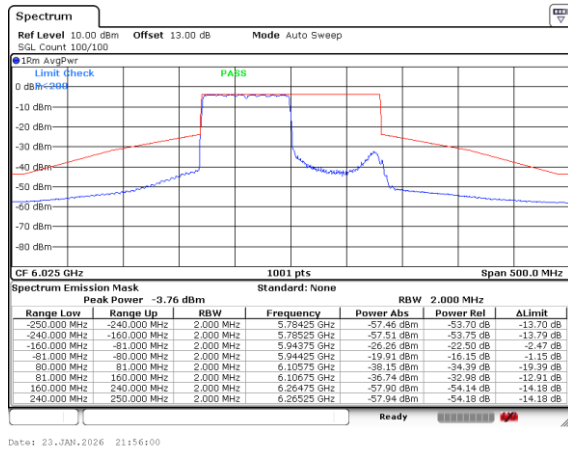


Plot on Channel 6185MHz 996RU67

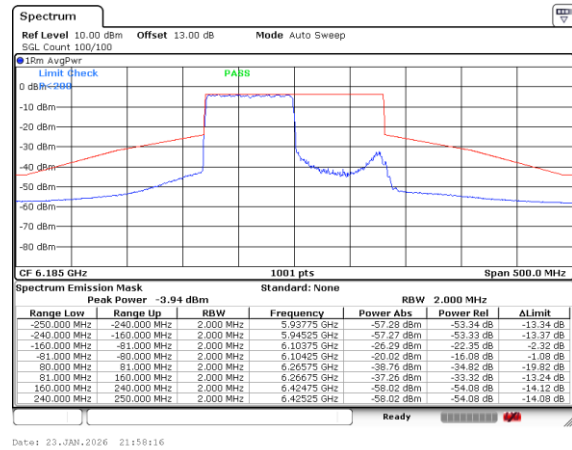

Plot on Channel 6345MHz 996RU67

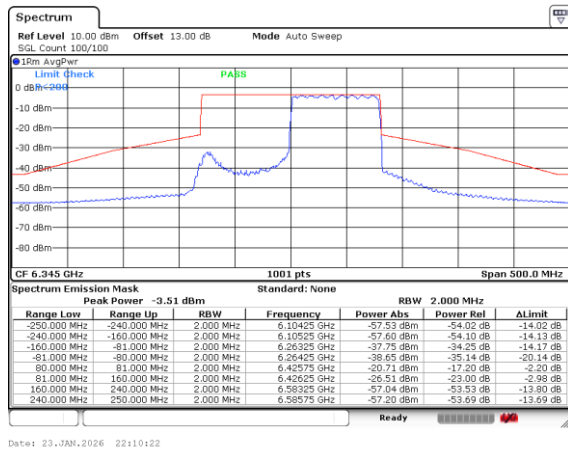


Plot on Channel 6505MHz 996RU67

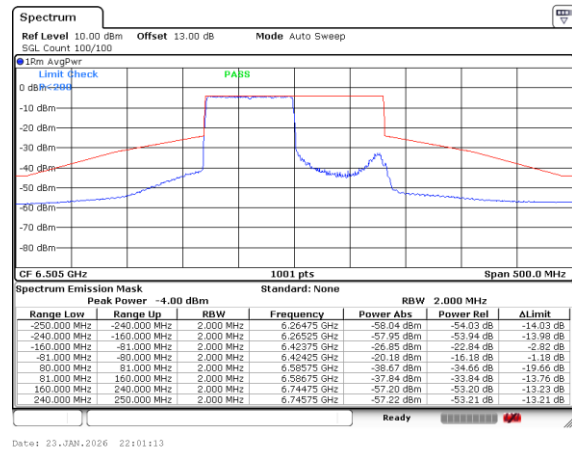





Plot on Channel 6665MHz 996RU67

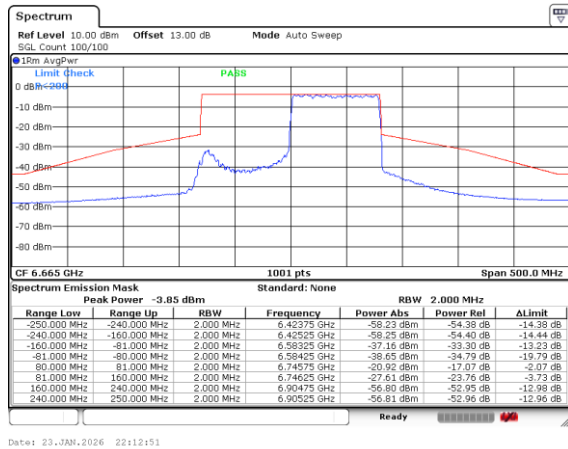

Plot on Channel 6825MHz 996RU67

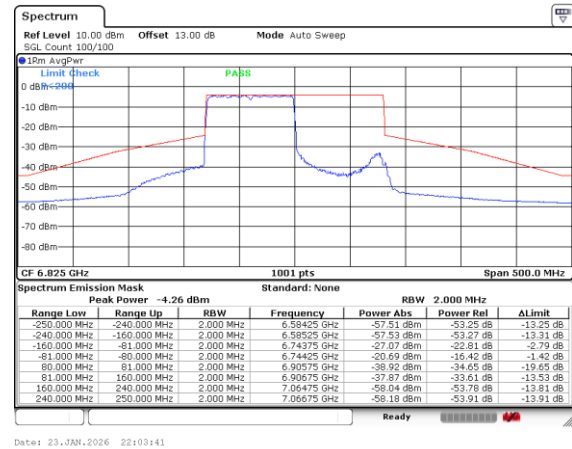

Plot on Channel 6985MHz 996RU67

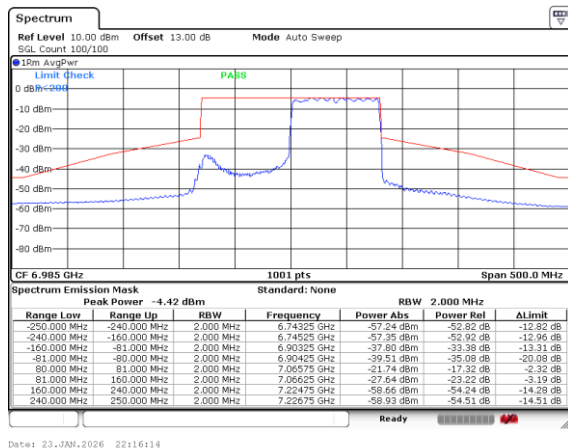

3.5 Contention Based Protocol

3.5.1 Limit of Contention Based Protocol

<CFR 15.407>

(d)(6) All U-NII transmitters, except for standard power access points and fixed client devices, operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

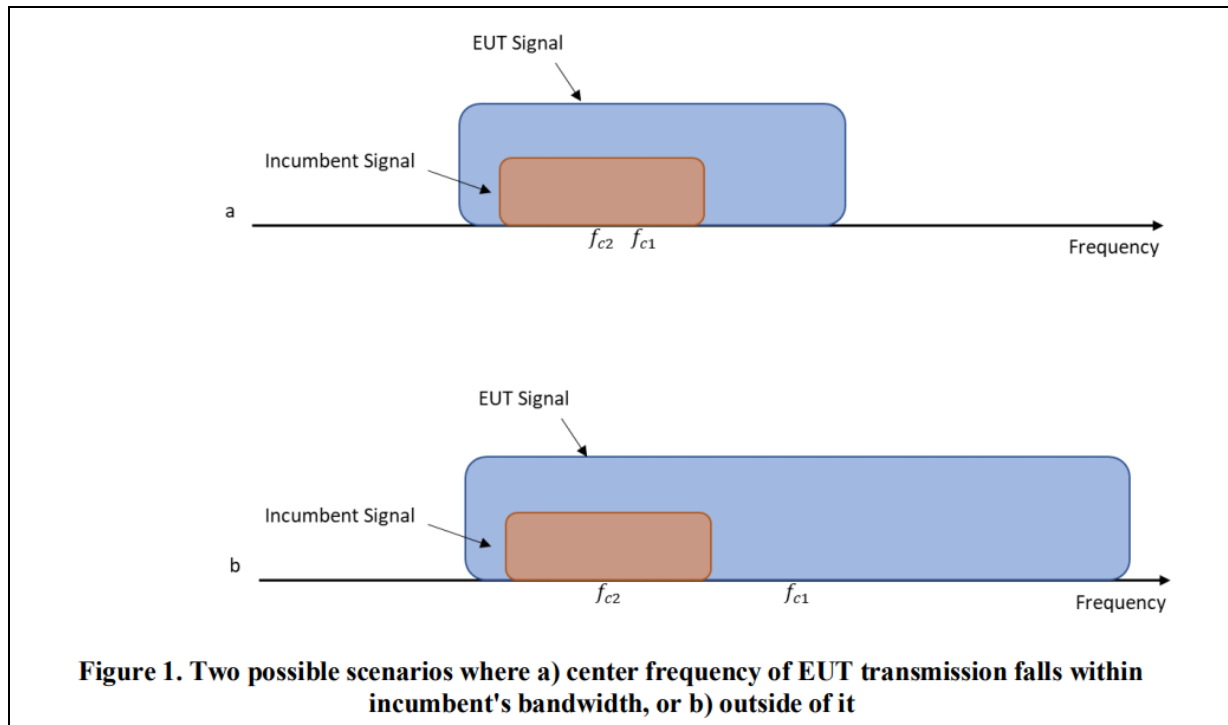

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.


3.5.3 Test Procedures

1. To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{c2}) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed
2. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
3. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
4. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
5. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 2, choose a different center

frequency for the AWGN signal and repeat the process.

6. EUT was driven in MIMO mode, the interferer signal was injected to both chains to monitor the performance, while the interferer level is determined according to the lowest antenna gain among both antennas.

3.5.4 Test Setup

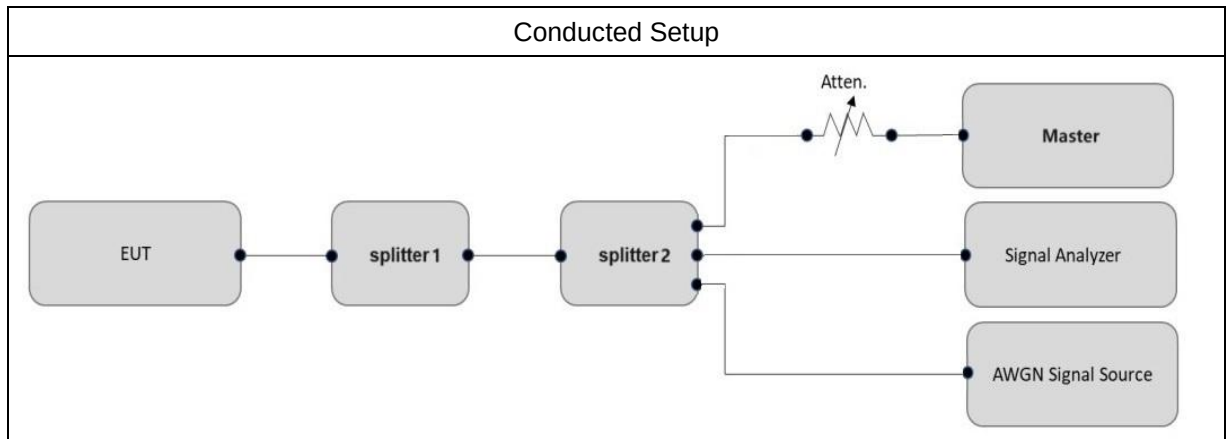

3.5.5 Support Unit used in test configuration and system

Instrument	Brand Name	Model No.	Characteristics
Signal Generator	Keysight	5182B/5182BX07	9KHz~7.2GHz
Spectrum Analyzer	R&S	FSV40	10kHz~40GHz
Terminal (NB Server)	DELL	P78G	LAN
Combiner (splitter1)	Tojoin	N/A	2G~8GHz
Combiner (splitter2)	MTJ Cooperation	MTJ7144-M	0.5GHz~18GHz
Attenuator	Keysight	8494B	0-110dBm
WLAN AP	ASUS	GT-AXE11000	Dual Band AP



3.5.6 Test Summary of Contention Based Protocol Test

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 5	6135	20	6135	-70.91	100	-62	-73.91	11.91
					Result: Stop Transmission			
				-71.91	<90	-62	-74.91	12.91
					Result: Minimal Operation			
				-72.91	=0	-62	-75.91	13.91
					Result: Normal Operation			
	6185	160	6110	-67.01	100	-62	-70.01	8.01
					Result: Stop Transmission			
				-68.01	<90	-62	-71.01	9.01
					Result: Minimal Operation			
				-69.01	=0	-62	-72.01	10.01
					Result: Normal Operation			
			6185	-64.37	100	-62	-67.37	5.37
					Result: Stop Transmission			
				-65.37	<90	-62	-68.37	6.37
					Result: Minimal Operation			
				-66.37	=0	-62	-69.37	7.37
					Result: Normal Operation			
			6260	-70.92	100	-62	-73.92	11.92
					Result: Stop Transmission			
				-71.92	<90	-62	-74.92	12.92
					Result: Minimal Operation			
				-72.92	=0	-62	-75.92	13.92
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna, gain = 3.0dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 6	6455	20	6455	-69.81	100	-62	-72.81	10.81
					Result: Stop Transmission			
				-70.81	<90	-62	-73.81	11.81
					Result: Minimal Operation			
				-71.81	=0	-62	-74.81	12.81
					Result: Normal Operation			
	6505	160	6430	-66.47	100	-62	-69.47	7.47
					Result: Stop Transmission			
				-67.47	<90	-62	-70.47	8.47
					Result: Minimal Operation			
				-68.47	=0	-62	-71.47	9.47
					Result: Normal Operation			
			6505	-62.88 (worst)	100	-62	-65.88	3.88
					Result: Stop Transmission			
				-63.88	<90	-62	-66.88	4.88
					Result: Minimal Operation			
				-64.88	=0	-62	-67.88	5.88
					Result: Normal Operation			
			6580	-68.35	100	-62	-71.35	9.35
					Result: Stop Transmission			
				-69.35	<90	-62	-72.35	10.35
					Result: Minimal Operation			
				-70.35	=0	-62	-73.35	11.35
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna, gain = 3.0dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 7	6695	20	6695	-68.72	100	-62	-71.72	9.72
					Result: Stop Transmission			
				-69.72	<90	-62	-72.72	10.72
					Result: Minimal Operation			
				-70.72	=0	-62	-73.72	11.72
					Result: Normal Operation			
	6665	160	6590	-67.83	100	-62	-70.83	8.83
					Result: Stop Transmission			
				-68.83	<90	-62	-71.83	9.83
					Result: Minimal Operation			
				-69.83	=0	-62	-72.83	10.83
					Result: Normal Operation			
			6665	-63.40	100	-62	-66.40	4.40
					Result: Stop Transmission			
				-64.40	<90	-62	-67.40	5.40
					Result: Minimal Operation			
				-65.40	=0	-62	-68.40	6.40
					Result: Normal Operation			
			6740	-67.57	100	-62	-70.57	8.57
					Result: Stop Transmission			
				-68.57	<90	-62	-71.57	9.57
					Result: Minimal Operation			
				-69.57	=0	-62	-72.57	10.57
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna, gain = 3.0dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power




Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 8	7015	20	7015	-70.56	100	-62	-73.56	11.56
					Result: Stop Transmission			
				-71.56	<90	-62	-74.56	12.56
					Result: Minimal Operation			
				-72.56	=0	-62	-75.56	13.56
					Result: Normal Operation			
	6985	160	6910	-68.01	100	-62	-71.01	9.01
					Result: Stop Transmission			
				-69.01	<90	-62	-72.01	10.01
					Result: Minimal Operation			
				-70.01	=0	-62	-73.01	11.01
					Result: Normal Operation			
			6985	-63.61	100	-62	-66.61	4.61
					Result: Stop Transmission			
				-64.61	<90	-62	-67.61	5.61
					Result: Minimal Operation			
				-65.61	=0	-62	-68.61	6.61
					Result: Normal Operation			
			7060	-69.94	100	-62	-72.94	10.94
					Result: Stop Transmission			
				-70.94	<90	-62	-73.94	11.94
					Result: Minimal Operation			
				-71.94	=0	-62	-74.94	12.94
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna, gain = 3.0dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power

3.5.7 Worst Case Plots of Contention Based Protocol

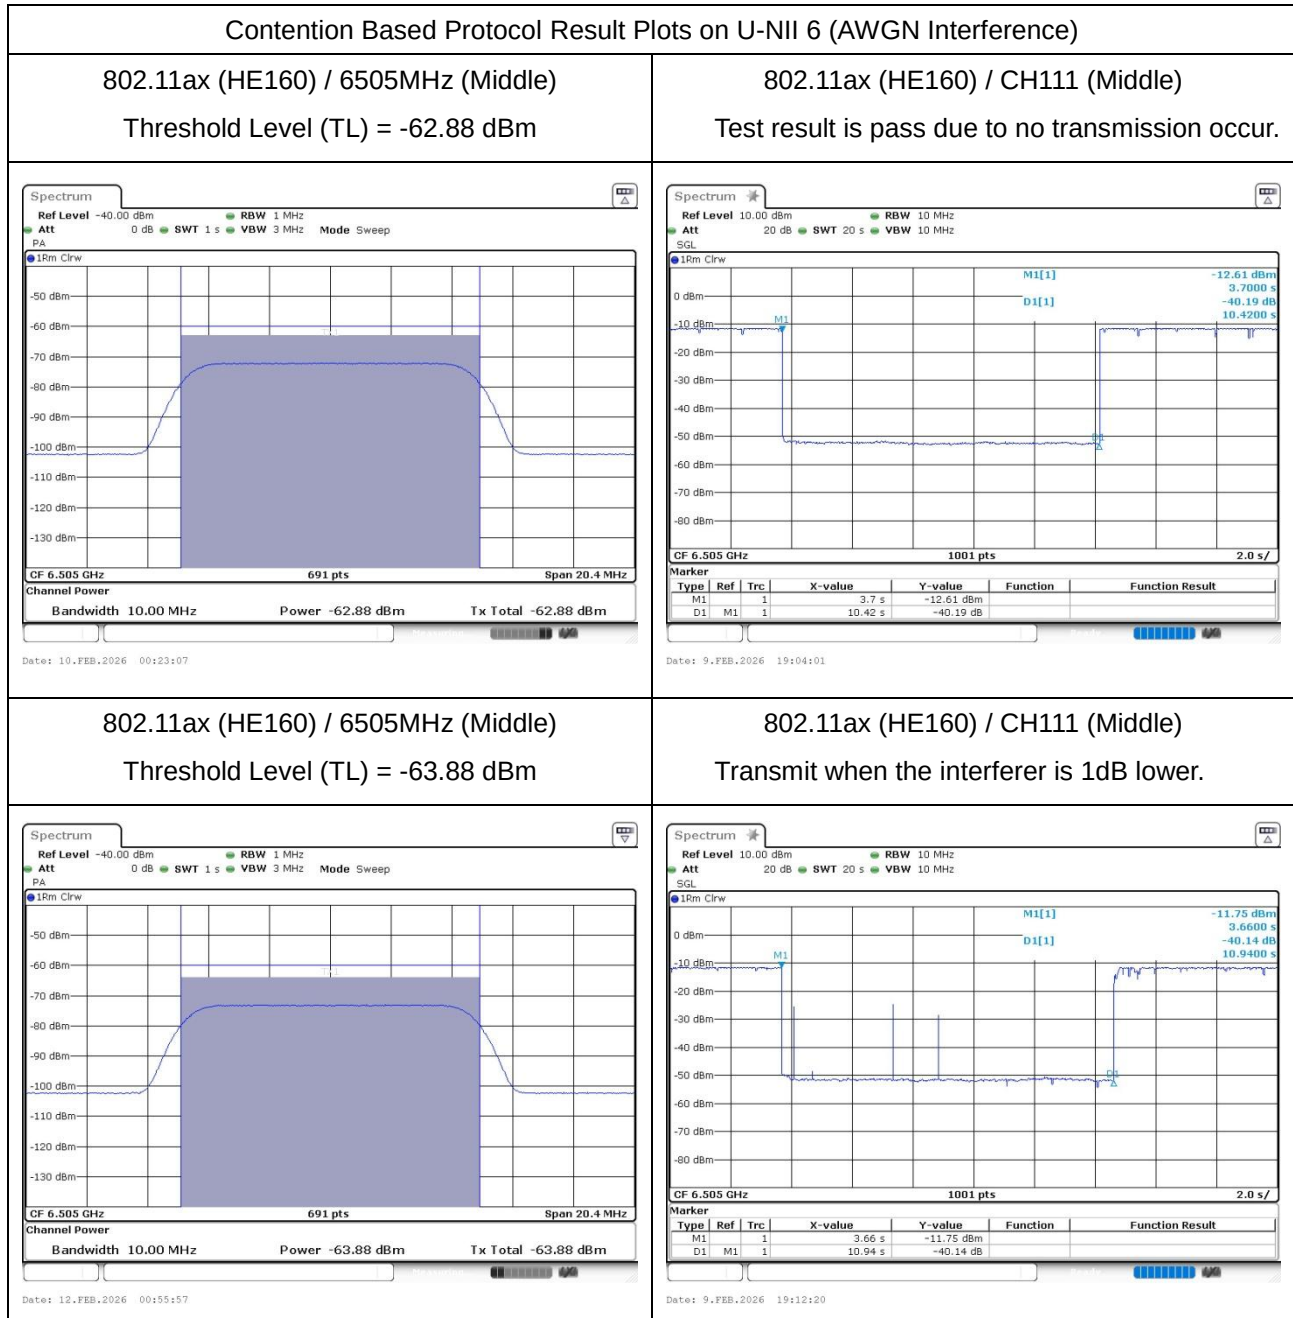


Remark: M1: Injection of AWGN signal, D1: Removal of AWGN signal



3.5.8 Worst Case of Contention Based Protocol Transmission Bandwidth

Verify transmission absence when Incumbent signal at different frequency (frequency domain plots).

1. When Incumbent Signal inject at lowest frequency, the whole 80MHz bandwidth stop transmission;
2. When Incumbent Signal inject at middle frequency, the transmission bandwidth reduced to 20MHz;
3. When Incumbent Signal inject at highest frequency, the transmission bandwidth reduced to 80MHz;
4. This device does not support channel puncturing mode for incumbent avoidance but bandwidth reduction mechanism is supported.

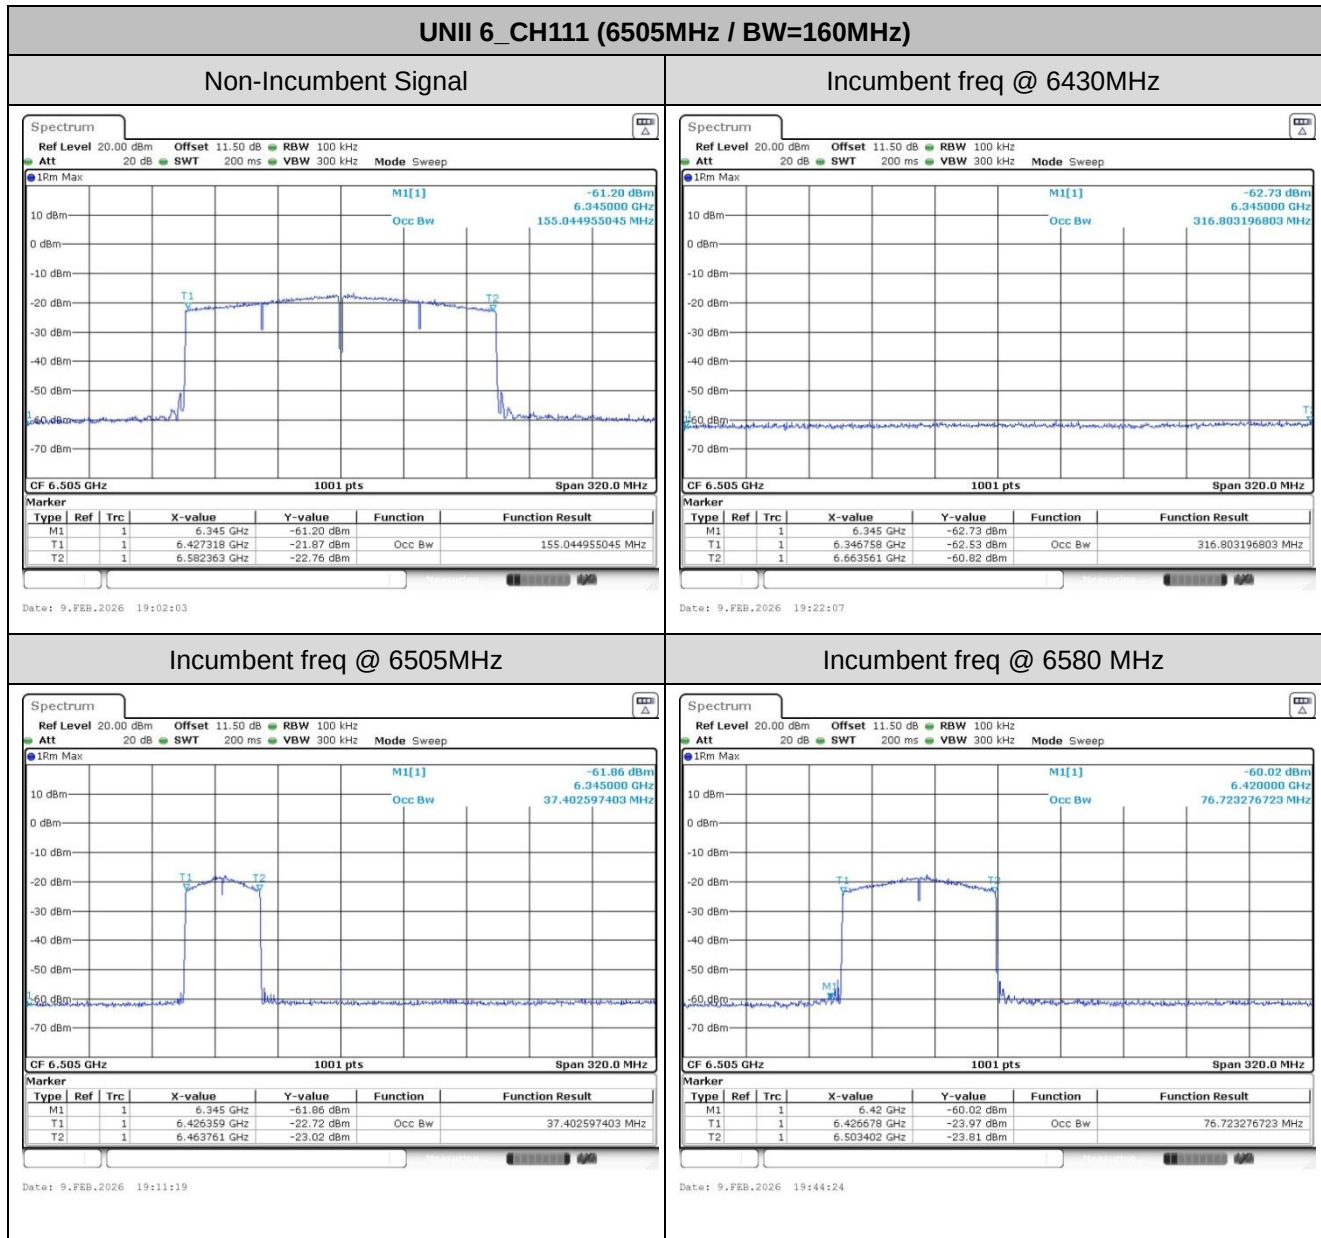

3.6 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.6.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.2
- 7 (Peak)	88.2

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.6.2 Measuring Instruments


See list of measuring equipment of this test report.

3.6.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.6.4 Test Setup


For radiated emissions below 30MHz

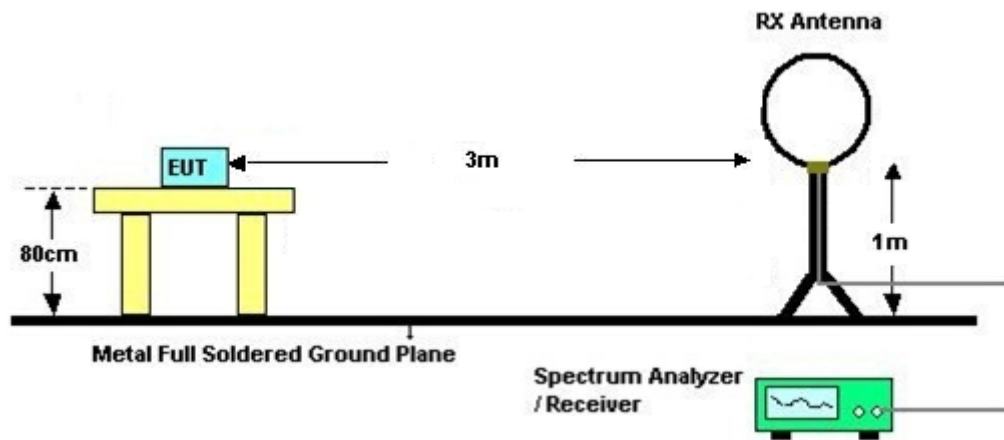

For radiated emissions from 30MHz to 1GHz

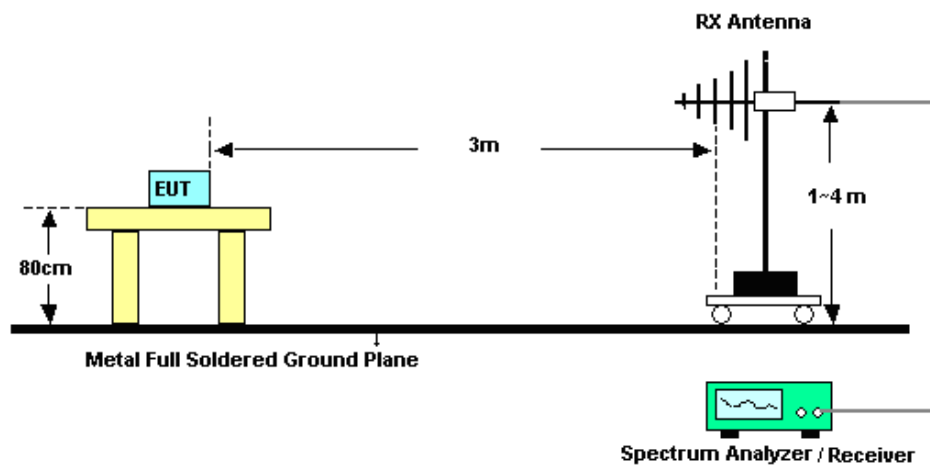

For radiated emissions above 1GHz

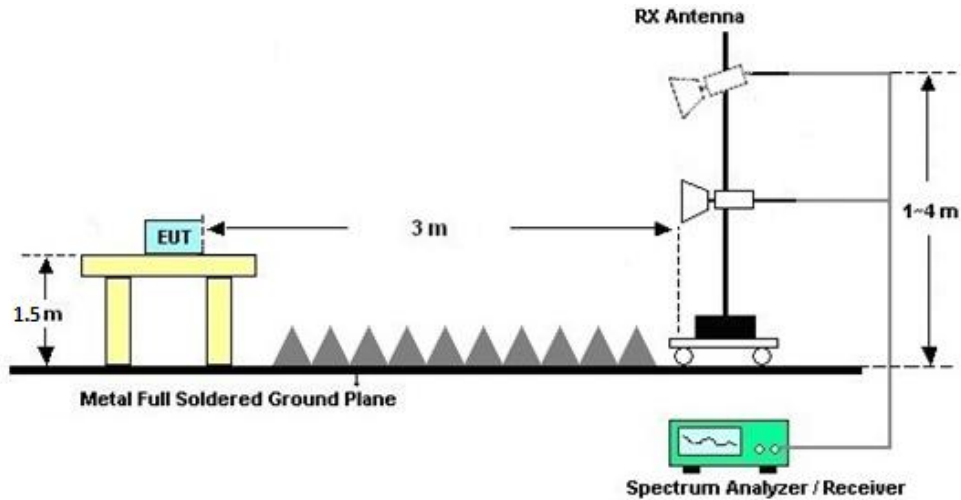

3.6.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.6.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.6.7 Duty Cycle

Please refer to Appendix D.

3.6.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

The emission level above 18GHz is checked that the emission level is noise floor only, so it is not reflected in the report.

3.7 AC Conducted Emission Measurement

3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.7.4 Test Setup

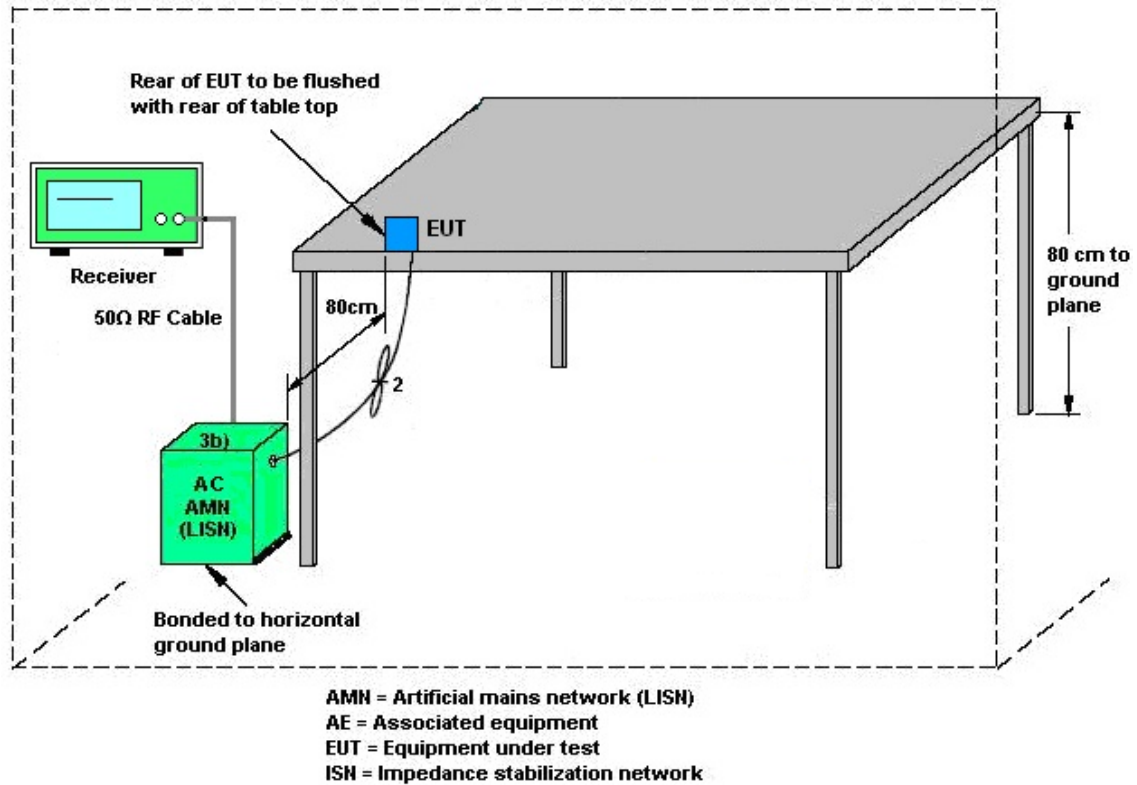

3.7.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.8 Antenna Requirements

3.8.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

3.8.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 ~List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Jan. 22, 2026~ Jan. 23, 2026	Apr. 01, 2026	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 24, 2025	Jan. 22, 2026~ Jan. 23, 2026	Dec. 23, 2026	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct.13, 2025	Jan. 22, 2026~ Jan. 23, 2026	Oct. 12, 2026	Conducted (TH01-SZ)
Attenuator	MICROWAV	EMVE2214-10	2	30MHz~26.5GHz	Feb. 22, 2025	Jan. 22, 2026~ Jan. 23, 2026	Feb. 22, 2026	Conducted (TH01-SZ)
Attenuator	MICROWAV	EMVE2214-10	2	30MHz~26.5GHz	Feb. 22, 2025	Jan. 22, 2026~ Jan. 23, 2026	Feb. 22, 2026	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 15, 2025	Mar. 14, 2026	Oct. 14, 2026	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Mar. 14, 2026	Jul. 02, 2026	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 25, 2025	Mar. 14, 2026	Dec. 24, 2026	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	Apr. 21, 2025	Mar. 14, 2026	Apr. 20, 2026	Radiation (03CH04-SZ)
Double Ridge Guide Antenna	ETS-Lindgren	Burgeon-3117	00240057	1GHz~18GHz	Jun. 26, 2025	Mar. 14, 2026	Jun. 25, 2026	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 04, 2025	Mar. 14, 2026	Jul. 03, 2026	Radiation (03CH04-SZ)
LF Amplifier	EM Electronics	EM330	060773	20MHz~3GHz	Apr. 02, 2025	Mar. 14, 2026	Apr. 01, 2026	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 13, 2025	Mar. 14, 2026	Oct. 12, 2026	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 02, 2025	Mar. 14, 2026	Jul. 01, 2026	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Jul. 03, 2025	Mar. 14, 2026	Jul. 02, 2026	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 14, 2025	Mar. 14, 2026	Oct. 13, 2026	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Mar. 14, 2026	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Mar. 14, 2026	NCR	Radiation (03CH04-SZ)
Attenuator	SolvangTech	STI02-3125-06	2	30MHz~26.5GHz	Jan. 27, 2026	Mar. 14, 2026	Jan. 26, 2027	Radiation (03CH04-SZ)
Attenuator	SolvangTech	STI02-3125-06	2	30MHz~26.5GHz	Jan. 26, 2026	Mar. 14, 2026	Jan. 25, 2027	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 02, 2025	Feb. 13, 2026	Jul. 01, 2026	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2025	Feb. 13, 2026	Jul. 02, 2026	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.24, 2025	Feb. 13, 2026	Dec. 23, 2026	Conduction (CO02-SZ)
Signal Analyzer	R&S	FSV40	101829	10Hz~40GHz	Oct. 13, 2025	Feb. 09, 2026~ Feb. 12, 2026	Oct. 12, 2026	CBP (DFS01-SZ)
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200424	9kHz~6GHz	Apr. 02, 2025	Feb. 09, 2026~ Feb. 12, 2026	Apr. 01, 2026	CBP (DFS01-SZ)
Attenuator	Keysight	8494B	N/A	0-110dBm	NCR	Jun. 18, 2025	NCR	CBP (DFS01-SZ)
Combiner	TOJOIN	PS-2AM-0460	SZE14011007	0.4~6GHz	Sep. 04, 2025	Feb. 09, 2026~ Feb. 12, 2026	Sep. 03, 2026	CBP (DFS01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz
Conducted Generated signal Levels	±0.62 dB
Conducted Time	0.38%

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Liu Qiu Qiu	Temperature:	21~25	°C
Test Date:	2026/1/22~2026/1/23	Relative Humidity:	51~54	%

TEST RESULTS DATA
EIRP Power Table

Band V single antenna												Power Setting
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	
						Ant 1	Ant 1	Ant 1	Ant 1			Ant 1
11a	6Mbps	1	1	5955	Full	0.69	6.23	3.00	9.23	24.00	Pass	6
11a	6Mbps	1	49	6195	Full	0.69	6.42	3.00	9.42	24.00	Pass	6
11a	6Mbps	1	93	6415	Full	0.69	6.51	3.00	9.51	24.00	Pass	6.5
HE20	MCS0	1	1	5955	Full	0.97	7.12	3.00	10.12	24.00	Pass	6.5
HE20	MCS0	1	1	5955	26/0	1.35	-1.86	3.00	1.14	24.00	Pass	-2
HE20	MCS0	1	1	5955	52/37	1.58	0.83	3.00	3.83	24.00	Pass	0.5
HE20	MCS0	1	1	5955	106/53	1.69	3.72	3.00	6.72	24.00	Pass	3.5
HE20	MCS0	1	49	6195	Full	0.97	6.73	3.00	9.73	24.00	Pass	6
HE20	MCS0	1	49	6195	26/0	1.35	-1.95	3.00	1.05	24.00	Pass	-2
HE20	MCS0	1	49	6195	52/37	1.58	0.58	3.00	3.58	24.00	Pass	0.5
HE20	MCS0	1	49	6195	106/53	1.69	3.74	3.00	6.74	24.00	Pass	3.5
HE20	MCS0	1	93	6415	Full	0.97	7.01	3.00	10.01	24.00	Pass	7
HE20	MCS0	1	93	6415	26/8	1.35	-1.46	3.00	1.54	24.00	Pass	-1.5
HE20	MCS0	1	93	6415	52/40	1.58	1.50	3.00	4.50	24.00	Pass	1.5
HE20	MCS0	1	93	6415	106/54	1.69	4.50	3.00	7.50	24.00	Pass	4.5
HE40	MCS0	1	3	5965	Full	1.57	9.95	3.00	12.95	24.00	Pass	9
HE40	MCS0	1	3	5965	242/61	1.97	7.35	3.00	10.35	24.00	Pass	7
HE40	MCS0	1	51	6205	Full	1.57	9.75	3.00	12.75	24.00	Pass	9
HE40	MCS0	1	51	6205	242/61	1.97	6.92	3.00	9.92	24.00	Pass	6.5
HE40	MCS0	1	91	6405	Full	1.57	10.28	3.00	13.28	24.00	Pass	10
HE40	MCS0	1	91	6405	242/62	1.97	7.52	3.00	10.52	24.00	Pass	7.5
HE80	MCS0	1	7	5985	Full	2.60	12.58	3.00	15.58	24.00	Pass	11.5
HE80	MCS0	1	7	5985	484/65	2.12	10.14	3.00	13.14	24.00	Pass	9.5
HE80	MCS0	1	55	6225	Full	2.60	12.37	3.00	15.37	24.00	Pass	11.5
HE80	MCS0	1	55	6225	484/65	2.12	9.97	3.00	12.97	24.00	Pass	9.5
HE80	MCS0	1	87	6385	Full	2.60	12.85	3.00	15.85	24.00	Pass	12
HE80	MCS0	1	87	6385	484/66	2.12	10.46	3.00	13.46	24.00	Pass	10
HE160	MCS0	1	15	6025	Full	3.76	15.60	3.00	18.60	24.00	Pass	14
HE160	MCS0	1	15	6025	996/67	2.29	13.52	3.00	16.52	24.00	Pass	12.5
HE160	MCS0	1	47	6185	Full	3.76	15.57	3.00	18.57	24.00	Pass	14
HE160	MCS0	1	47	6185	996/67	2.29	13.24	3.00	16.24	24.00	Pass	12
HE160	MCS0	1	79	6345	Full	3.76	15.32	3.00	18.32	24.00	Pass	14
HE160	MCS0	1	79	6345	996/S67	2.29	13.53	3.00	16.53	24.00	Pass	10

TEST RESULTS DATA
26dB and 99% OBW

Band V single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Limit (MHz)	Pass /Fail
						Ant 1	Ant 1		
11a	6Mbps	1	1	5955	Full	16.87	28.14	320	Pass
11a	6Mbps	1	49	6195	Full	16.53	20.64	320	Pass
11a	6Mbps	1	93	6415	Full	16.54	21.42	320	Pass
HE20	MCS0	1	1	5955	Full	18.90	22.14	320	Pass
HE20	MCS0	1	49	6195	Full	18.88	21.72	320	Pass
HE20	MCS0	1	93	6415	Full	18.89	21.78	320	Pass
HE40	MCS0	1	3	5965	Full	37.57	39.84	320	Pass
HE40	MCS0	1	51	6205	Full	37.54	39.96	320	Pass
HE40	MCS0	1	91	6405	Full	37.51	39.84	320	Pass
HE80	MCS0	1	7	5985	Full	76.64	80.64	320	Pass
HE80	MCS0	1	55	6225	Full	76.76	81.12	320	Pass
HE80	MCS0	1	87	6385	Full	76.71	80.88	320	Pass
HE160	MCS0	1	15	6025	Full	155.67	162.72	320	Pass
HE160	MCS0	1	47	6185	Full	155.50	163.20	320	Pass
HE160	MCS0	1	79	6345	Full	155.34	162.72	320	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

Band V single antenna											
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	1	5955	Full	0.69	-4.27	3.00	-1.27	-1.00	Pass
11a	6Mbps	1	49	6195	Full	0.69	-4.14	3.00	-1.14	-1.00	Pass
11a	6Mbps	1	93	6415	Full	0.69	-4.23	3.00	-1.23	-1.00	Pass
HE20	MCS0	1	1	5955	Full	0.97	-4.13	3.00	-1.13	-1.00	Pass
HE20	MCS0	1	1	5955	26/0	1.35	-4.49	3.00	-1.49	-1.00	Pass
HE20	MCS0	1	1	5955	52/37	1.58	-4.45	3.00	-1.45	-1.00	Pass
HE20	MCS0	1	1	5955	106/53	1.69	-4.50	3.00	-1.50	-1.00	Pass
HE20	MCS0	1	49	6195	Full	0.97	-4.41	3.00	-1.41	-1.00	Pass
HE20	MCS0	1	49	6195	26/0	1.35	-4.65	3.00	-1.65	-1.00	Pass
HE20	MCS0	1	49	6195	52/37	1.58	-4.70	3.00	-1.70	-1.00	Pass
HE20	MCS0	1	49	6195	106/53	1.69	-4.63	3.00	-1.63	-1.00	Pass
HE20	MCS0	1	93	6415	Full	0.97	-4.29	3.00	-1.29	-1.00	Pass
HE20	MCS0	1	93	6415	26/8	1.35	-4.68	3.00	-1.68	-1.00	Pass
HE20	MCS0	1	93	6415	52/40	1.58	-4.44	3.00	-1.44	-1.00	Pass
HE20	MCS0	1	93	6415	106/54	1.69	-4.35	3.00	-1.35	-1.00	Pass
HE40	MCS0	1	3	5965	Full	1.57	-4.25	3.00	-1.25	-1.00	Pass
HE40	MCS0	1	3	5965	242/61	1.97	-4.46	3.00	-1.46	-1.00	Pass
HE40	MCS0	1	51	6205	Full	1.57	-4.44	3.00	-1.44	-1.00	Pass
HE40	MCS0	1	51	6205	242/61	1.97	-4.83	3.00	-1.83	-1.00	Pass
HE40	MCS0	1	91	6405	Full	1.57	-4.15	3.00	-1.15	-1.00	Pass
HE40	MCS0	1	91	6405	242/62	1.97	-4.59	3.00	-1.59	-1.00	Pass
HE80	MCS0	1	7	5985	Full	2.60	-4.24	3.00	-1.24	-1.00	Pass
HE80	MCS0	1	7	5985	484/65	2.12	-4.50	3.00	-1.50	-1.00	Pass
HE80	MCS0	1	55	6225	Full	2.60	-4.56	3.00	-1.56	-1.00	Pass
HE80	MCS0	1	55	6225	484/65	2.12	-4.63	3.00	-1.63	-1.00	Pass
HE80	MCS0	1	87	6385	Full	2.60	-4.16	3.00	-1.16	-1.00	Pass
HE80	MCS0	1	87	6385	484/66	2.12	-4.52	3.00	-1.52	-1.00	Pass
HE160	MCS0	1	15	6025	Full	3.76	-4.10	3.00	-1.10	-1.00	Pass
HE160	MCS0	1	15	6025	996/67	2.29	-4.12	3.00	-1.12	-1.00	Pass
HE160	MCS0	1	47	6185	Full	3.76	-4.05	3.00	-1.05	-1.00	Pass
HE160	MCS0	1	47	6185	996/67	2.29	-4.43	3.00	-1.43	-1.00	Pass
HE160	MCS0	1	79	6345	Full	3.76	-4.10	3.00	-1.10	-1.00	Pass
HE160	MCS0	1	79	6345	996/S67	2.29	-4.31	3.00	-1.31	-1.00	Pass

TEST RESULTS DATA
EIRP Power Table

Band VI single antenna												Power Setting
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	
						Ant 1	Ant 1	Ant 1	Ant 1			Ant 1
11a	6Mbps	1	97	6435	Full	0.69	6.64	3.00	9.64	24.00	Pass	6
11a	6Mbps	1	105	6475	Full	0.69	6.53	3.00	9.53	24.00	Pass	6.5
11a	6Mbps	1	113	6515	Full	0.69	6.64	3.00	9.64	24.00	Pass	6
HE20	MCS0	1	97	6435	Full	0.97	7.29	3.00	10.29	24.00	Pass	6.5
HE20	MCS0	1	97	6435	26/0	1.35	-1.36	3.00	1.64	24.00	Pass	-1.5
HE20	MCS0	1	97	6435	52/37	1.58	1.30	3.00	4.30	24.00	Pass	1
HE20	MCS0	1	97	6435	106/53	1.69	4.32	3.00	7.32	24.00	Pass	4
HE20	MCS0	1	105	6475	Full	0.97	7.18	3.00	10.18	24.00	Pass	7
HE20	MCS0	1	105	6475	26/0	1.35	-0.94	3.00	2.06	24.00	Pass	-1
HE20	MCS0	1	105	6475	52/37	1.58	2.01	3.00	5.01	24.00	Pass	2
HE20	MCS0	1	105	6475	106/53	1.69	4.54	3.00	7.54	24.00	Pass	4.5
HE20	MCS0	1	113	6515	Full	0.97	7.19	3.00	10.19	24.00	Pass	6.5
HE20	MCS0	1	113	6515	26/8	1.35	-1.25	3.00	1.75	24.00	Pass	-1.5
HE20	MCS0	1	113	6515	52/40	1.58	1.39	3.00	4.39	24.00	Pass	1
HE20	MCS0	1	113	6515	106/54	1.69	4.41	3.00	7.41	24.00	Pass	4
HE40	MCS0	1	99	6445	Full	1.57	10.33	3.00	13.33	24.00	Pass	9.5
HE40	MCS0	1	99	6445	242/61	1.97	7.48	3.00	10.48	24.00	Pass	7
HE40	MCS0	1	107	6485	Full	1.57	9.78	3.00	12.78	24.00	Pass	9.5
HE40	MCS0	1	107	6485	242/62	1.97	7.51	3.00	10.51	24.00	Pass	7.5
HE80	MCS0	1	103	6465	Full	2.60	12.97	3.00	15.97	24.00	Pass	12
HE80	MCS0	1	103	6465	484/65	2.12	10.51	3.00	13.51	24.00	Pass	10

Band VI straddle channel single antenna												Power Setting
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	
						Ant 1	Ant 1	Ant 1	Ant 1			Ant 1
HE40	MCS0	1	115	6525	Full	1.57	9.65	3.00	12.65	24.00	Pass	9
HE40	MCS0	1	115	6525	242/62	1.97	6.97	3.00	9.97	24.00	Pass	6.5
HE80	MCS0	1	119	6545	Full	2.60	12.91	3.00	15.91	24.00	Pass	12
HE80	MCS0	1	119	6545	484/66	2.12	10.03	3.00	13.03	24.00	Pass	9.5
HE160	MCS0	1	111	6505	Full	3.76	15.28	3.00	18.28	24.00	Pass	14
HE160	MCS0	1	111	6505	996/67	2.29	13.45	3.00	16.45	24.00	Pass	12.5

TEST RESULTS DATA
26dB and 99% OBW

Band VI single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Limit (MHz)	Pass /Fail
						Ant 1	Ant 1		
11a	6Mbps	1	97	6435	Full	16.54	21.42	320	Pass
11a	6Mbps	1	105	6475	Full	16.53	20.76	320	Pass
11a	6Mbps	1	113	6515	Full	16.54	21.06	320	Pass
HE20	MCS0	1	97	6435	Full	18.90	21.78	320	Pass
HE20	MCS0	1	105	6475	Full	18.89	21.90	320	Pass
HE20	MCS0	1	113	6515	Full	18.88	21.90	320	Pass
HE40	MCS0	1	99	6445	Full	37.50	39.96	320	Pass
HE40	MCS0	1	107	6485	Full	37.52	39.84	320	Pass
HE80	MCS0	1	103	6465	Full	76.80	81.12	320	Pass

Band VI straddle channel single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Limit (MHz)	Pass /Fail
						Ant 1	Ant 1		
HE40	MCS0	1	115	6525	Full	37.58	39.96	320	Pass
HE80	MCS0	1	119	6545	Full	76.78	80.64	320	Pass
HE160	MCS0	1	111	6505	Full	155.50	162.72	320	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

Band VI single antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	97	6435	Full	0.69	-4.05	3.00	-1.05	-1.00	Pass
11a	6Mbps	1	105	6475	Full	0.69	-4.44	3.00	-1.44	-1.00	Pass
11a	6Mbps	1	113	6515	Full	0.69	-4.19	3.00	-1.19	-1.00	Pass
HE20	MCS0	1	97	6435	Full	0.97	-4.08	3.00	-1.08	-1.00	Pass
HE20	MCS0	1	97	6435	26/0	1.35	-4.17	3.00	-1.17	-1.00	Pass
HE20	MCS0	1	97	6435	52/37	1.58	-4.42	3.00	-1.42	-1.00	Pass
HE20	MCS0	1	97	6435	106/53	1.69	-4.33	3.00	-1.33	-1.00	Pass
HE20	MCS0	1	105	6475	Full	0.97	-4.10	3.00	-1.10	-1.00	Pass
HE20	MCS0	1	105	6475	26/0	1.35	-4.36	3.00	-1.36	-1.00	Pass
HE20	MCS0	1	105	6475	52/37	1.58	-4.22	3.00	-1.22	-1.00	Pass
HE20	MCS0	1	105	6475	106/53	1.69	-4.53	3.00	-1.53	-1.00	Pass
HE20	MCS0	1	113	6515	Full	0.97	-4.23	3.00	-1.23	-1.00	Pass
HE20	MCS0	1	113	6515	26/8	1.35	-4.33	3.00	-1.33	-1.00	Pass
HE20	MCS0	1	113	6515	52/40	1.58	-4.43	3.00	-1.43	-1.00	Pass
HE20	MCS0	1	113	6515	106/54	1.69	-4.34	3.00	-1.34	-1.00	Pass
HE40	MCS0	1	99	6445	Full	1.57	-4.13	3.00	-1.13	-1.00	Pass
HE40	MCS0	1	99	6445	242/61	1.97	-4.34	3.00	-1.34	-1.00	Pass
HE40	MCS0	1	107	6485	Full	1.57	-4.40	3.00	-1.40	-1.00	Pass
HE40	MCS0	1	107	6485	242/62	1.97	-4.69	3.00	-1.69	-1.00	Pass
HE80	MCS0	1	103	6465	Full	2.60	-4.12	3.00	-1.12	-1.00	Pass
HE80	MCS0	1	103	6465	484/65	2.12	-4.30	3.00	-1.30	-1.00	Pass

FCC Band VI straddle channel single antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1		
HE40	MCS0	1	115	6525	Full	1.57	-4.99	3.00	-1.99	-1.00	Pass
HE40	MCS0	1	115	6525	242/62	1.97	-5.08	3.00	-2.08	-1.00	Pass
HE80	MCS0	1	119	6545	Full	2.60	-4.35	3.00	-1.35	-1.00	Pass
HE80	MCS0	1	119	6545	484/66	2.12	-4.74	3.00	-1.74	-1.00	Pass
HE160	MCS0	1	111	6505	Full	3.76	-4.30	3.00	-1.30	-1.00	Pass
HE160	MCS0	1	111	6505	996/67	2.29	-4.54	3.00	-1.54	-1.00	Pass

TEST RESULTS DATA
EIRP Power Table

Band VII single antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	117	6535	Full	0.69	6.04	3.00	9.04	24.00	Pass
11a	6Mbps	1	149	6695	Full	0.69	6.65	3.00	9.65	24.00	Pass
11a	6Mbps	1	181	6855	Full	0.69	6.95	3.00	9.95	24.00	Pass
HE20	MCS0	1	117	6535	Full	0.97	7.27	3.00	10.27	24.00	Pass
HE20	MCS0	1	117	6535	26/0	1.35	-1.26	3.00	1.74	24.00	Pass
HE20	MCS0	1	117	6535	52/37	1.58	1.34	3.00	4.34	24.00	Pass
HE20	MCS0	1	117	6535	106/53	1.69	4.33	3.00	7.33	24.00	Pass
HE20	MCS0	1	149	6695	Full	0.97	7.32	3.00	10.32	24.00	Pass
HE20	MCS0	1	149	6695	26/0	1.35	-0.95	3.00	2.05	24.00	Pass
HE20	MCS0	1	149	6695	52/37	1.58	1.51	3.00	4.51	24.00	Pass
HE20	MCS0	1	149	6695	106/53	1.69	4.03	3.00	7.03	24.00	Pass
HE20	MCS0	1	181	6855	Full	0.97	7.52	3.00	10.52	24.00	Pass
HE20	MCS0	1	181	6855	26/8	1.35	-0.98	3.00	2.02	24.00	Pass
HE20	MCS0	1	181	6855	52/40	1.58	1.63	3.00	4.63	24.00	Pass
HE20	MCS0	1	181	6855	106/54	1.69	4.16	3.00	7.16	24.00	Pass
HE40	MCS0	1	123	6565	Full	1.57	10.11	3.00	13.11	24.00	Pass
HE40	MCS0	1	123	6565	242/61	1.97	7.27	3.00	10.27	24.00	Pass
HE40	MCS0	1	147	6685	Full	1.57	10.37	3.00	13.37	24.00	Pass
HE40	MCS0	1	147	6685	242/61	1.97	7.59	3.00	10.59	24.00	Pass
HE40	MCS0	1	179	6845	Full	1.57	9.95	3.00	12.95	24.00	Pass
HE40	MCS0	1	179	6845	242/62	1.97	7.55	3.00	10.55	24.00	Pass
HE80	MCS0	1	135	6625	Full	2.60	13.25	3.00	16.25	24.00	Pass
HE80	MCS0	1	135	6625	484/65	2.12	10.42	3.00	13.42	24.00	Pass
HE80	MCS0	1	151	6705	Full	2.60	12.98	3.00	15.98	24.00	Pass
HE80	MCS0	1	151	6705	484/65	2.12	10.14	3.00	13.14	24.00	Pass
HE80	MCS0	1	167	6785	Full	2.60	12.96	3.00	15.96	24.00	Pass
HE80	MCS0	1	167	6785	484/66	2.12	10.59	3.00	13.59	24.00	Pass
HE160	MCS0	1	143	6665	Full	3.76	15.44	3.00	18.44	24.00	Pass
HE160	MCS0	1	143	6665	996/S67	2.29	13.64	3.00	16.64	24.00	Pass

Band VII straddle channel single antenna												Power Setting
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	
						Ant 1	Ant 1	Ant 1	Ant 1			
11a	6Mbps	1	185	6875	Full	0.69	6.54	3.00	9.54	24.00	Pass	6
HE20	MCS0	1	185	6875	Full	0.97	7.21	3.00	10.21	24.00	Pass	6.5
HE20	MCS0	1	185	6875	26/8	1.35	-1.61	3.00	1.39	24.00	Pass	-2
HE20	MCS0	1	185	6875	52/40	1.58	0.99	3.00	3.99	24.00	Pass	0.5
HE20	MCS0	1	185	6875	106/54	1.69	3.85	3.00	6.85	24.00	Pass	3.5
HE40	MCS0	1	187	6885	Full	1.57	10.23	3.00	13.23	24.00	Pass	9.5
HE40	MCS0	1	187	6885	242/62	1.97	7.75	3.00	10.75	24.00	Pass	7.5
HE80	MCS0	1	183	6865	Full	2.60	12.60	3.00	15.60	24.00	Pass	12
HE80	MCS0	1	183	6865	484/66	2.12	10.31	3.00	13.31	24.00	Pass	10
HE160	MCS0	1	175	6825	Full	3.76	15.06	3.00	18.06	24.00	Pass	14
HE160	MCS0	1	175	6825	996/67	2.29	13.34	3.00	16.34	24.00	Pass	12.5

TEST RESULTS DATA
26dB and 99% OBW

Band VII single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Limit (MHz)	Pass /Fail
						Ant 1	Ant 1		
11a	6Mbps	1	117	6535	Full	16.54	20.76	320	Pass
11a	6Mbps	1	149	6695	Full	16.56	21.12	320	Pass
11a	6Mbps	1	181	6855	Full	16.54	20.40	320	Pass
HE20	MCS0	1	117	6535	Full	18.89	21.48	320	Pass
HE20	MCS0	1	149	6695	Full	18.90	21.72	320	Pass
HE20	MCS0	1	181	6855	Full	18.88	22.20	320	Pass
HE40	MCS0	1	123	6565	Full	37.57	39.84	320	Pass
HE40	MCS0	1	147	6685	Full	37.53	39.96	320	Pass
HE40	MCS0	1	179	6845	Full	37.53	39.84	320	Pass
HE80	MCS0	1	135	6625	Full	76.79	80.88	320	Pass
HE80	MCS0	1	151	6705	Full	76.82	80.64	320	Pass
HE80	MCS0	1	167	6785	Full	76.67	80.64	320	Pass
HE160	MCS0	1	143	6665	Full	155.48	162.72	320	Pass

Band VII straddle channel single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Limit (MHz)	Pass /Fail
						Ant 1	Ant 1		
11a	6Mbps	1	185	6875	Full	16.52	20.88	320	Pass
HE20	MCS0	1	185	6875	Full	18.89	22.14	320	Pass
HE40	MCS0	1	187	6885	Full	37.55	39.96	320	Pass
HE80	MCS0	1	183	6865	Full	76.78	80.88	320	Pass
HE160	MCS0	1	175	6825	Full	155.36	163.20	320	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

Band VII single antenna											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	117	6535	Full	0.69	-4.79	3.00	-1.79	-1.00	Pass
11a	6Mbps	1	149	6695	Full	0.69	-4.28	3.00	-1.28	-1.00	Pass
11a	6Mbps	1	181	6855	Full	0.69	-4.13	3.00	-1.13	-1.00	Pass
HE20	MCS0	1	117	6535	Full	0.97	-4.37	3.00	-1.37	-1.00	Pass
HE20	MCS0	1	117	6535	26/0	1.35	-4.51	3.00	-1.51	-1.00	Pass
HE20	MCS0	1	117	6535	52/37	1.58	-4.46	3.00	-1.46	-1.00	Pass
HE20	MCS0	1	117	6535	106/53	1.69	-4.49	3.00	-1.49	-1.00	Pass
HE20	MCS0	1	149	6695	Full	0.97	-4.37	3.00	-1.37	-1.00	Pass
HE20	MCS0	1	149	6695	26/0	1.35	-4.41	3.00	-1.41	-1.00	Pass
HE20	MCS0	1	149	6695	52/37	1.58	-4.40	3.00	-1.40	-1.00	Pass
HE20	MCS0	1	149	6695	106/53	1.69	-4.56	3.00	-1.56	-1.00	Pass
HE20	MCS0	1	181	6855	Full	0.97	-4.22	3.00	-1.22	-1.00	Pass
HE20	MCS0	1	181	6855	26/8	1.35	-4.28	3.00	-1.28	-1.00	Pass
HE20	MCS0	1	181	6855	52/40	1.58	-4.28	3.00	-1.28	-1.00	Pass
HE20	MCS0	1	181	6855	106/54	1.69	-4.51	3.00	-1.51	-1.00	Pass
HE40	MCS0	1	123	6565	Full	1.57	-4.29	3.00	-1.29	-1.00	Pass
HE40	MCS0	1	123	6565	242/61	1.97	-4.72	3.00	-1.72	-1.00	Pass
HE40	MCS0	1	147	6685	Full	1.57	-4.15	3.00	-1.15	-1.00	Pass
HE40	MCS0	1	147	6685	242/61	1.97	-4.69	3.00	-1.69	-1.00	Pass
HE40	MCS0	1	179	6845	Full	1.57	-4.42	3.00	-1.42	-1.00	Pass
HE40	MCS0	1	179	6845	242/62	1.97	-4.72	3.00	-1.72	-1.00	Pass
HE80	MCS0	1	135	6625	Full	2.60	-4.06	3.00	-1.06	-1.00	Pass
HE80	MCS0	1	135	6625	484/65	2.12	-4.12	3.00	-1.12	-1.00	Pass
HE80	MCS0	1	151	6705	Full	2.60	-4.37	3.00	-1.37	-1.00	Pass
HE80	MCS0	1	151	6705	484/65	2.12	-4.75	3.00	-1.75	-1.00	Pass
HE80	MCS0	1	167	6785	Full	2.60	-4.13	3.00	-1.13	-1.00	Pass
HE80	MCS0	1	167	6785	484/66	2.12	-4.42	3.00	-1.42	-1.00	Pass
HE160	MCS0	1	143	6665	Full	3.76	-4.07	3.00	-1.07	-1.00	Pass
HE160	MCS0	1	143	6665	996/S67	2.29	-4.52	3.00	-1.52	-1.00	Pass

FCC Band VII straddle channel single antenna											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	185	6875	Full	0.69	-4.43	3.00	-1.43	-1.00	Pass
HE20	MCS0	1	185	6875	Full	0.97	-4.38	3.00	-1.38	-1.00	Pass
HE20	MCS0	1	185	6875	26/8	1.35	-4.65	3.00	-1.65	-1.00	Pass
HE20	MCS0	1	185	6875	52/40	1.58	-4.84	3.00	-1.84	-1.00	Pass
HE20	MCS0	1	185	6875	106/54	1.69	-4.74	3.00	-1.74	-1.00	Pass
HE40	MCS0	1	187	6885	Full	1.57	-4.11	3.00	-1.11	-1.00	Pass
HE40	MCS0	1	187	6885	242/62	1.97	-4.25	3.00	-1.25	-1.00	Pass
HE80	MCS0	1	183	6865	Full	2.60	-4.81	3.00	-1.81	-1.00	Pass
HE80	MCS0	1	183	6865	484/66	2.12	-4.95	3.00	-1.95	-1.00	Pass
HE160	MCS0	1	175	6825	Full	3.76	-4.46	3.00	-1.46	-1.00	Pass
HE160	MCS0	1	175	6825	996/67	2.29	-4.80	3.00	-1.80	-1.00	Pass

TEST RESULTS DATA
EIRP Power Table

VIII single antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power with duty factor (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	189	6895	Full	0.69	6.65	3.00	9.65	24.00	Pass
11a	6Mbps	1	209	6995	Full	0.69	6.75	3.00	9.75	24.00	Pass
11a	6Mbps	1	229	7095	Full	0.69	6.03	3.00	9.03	24.00	Pass
11a	6Mbps	1	233	7115	Full	0.69	6.57	3.00	9.57	24.00	Pass
HE20	MCS0	1	189	6895	Full	0.97	7.27	3.00	10.27	24.00	Pass
HE20	MCS0	1	189	6895	26/0	1.35	-1.08	3.00	1.92	24.00	Pass
HE20	MCS0	1	189	6895	52/37	1.58	1.62	3.00	4.62	24.00	Pass
HE20	MCS0	1	189	6895	106/53	1.69	4.49	3.00	7.49	24.00	Pass
HE20	MCS0	1	209	6995	Full	0.97	7.45	3.00	10.45	24.00	Pass
HE20	MCS0	1	209	6995	26/0	1.35	-1.45	3.00	1.55	24.00	Pass
HE20	MCS0	1	209	6995	52/37	1.58	1.09	3.00	4.09	24.00	Pass
HE20	MCS0	1	209	6995	106/53	1.69	4.10	3.00	7.10	24.00	Pass
HE20	MCS0	1	229	7095	Full	0.97	6.63	3.00	9.63	24.00	Pass
HE20	MCS0	1	229	7095	26/8	1.35	-2.43	3.00	0.57	24.00	Pass
HE20	MCS0	1	229	7095	52/40	1.58	0.59	3.00	3.59	24.00	Pass
HE20	MCS0	1	229	7095	106/54	1.69	3.68	3.00	6.68	24.00	Pass
HE20	MCS0	1	233	7115	Full	0.97	6.71	3.00	9.71	24.00	Pass
HE20	MCS0	1	233	7115	26/8	1.35	-2.42	3.00	0.58	24.00	Pass
HE20	MCS0	1	233	7115	52/40	1.58	0.57	3.00	3.57	24.00	Pass
HE20	MCS0	1	233	7115	106/54	1.69	3.09	3.00	6.09	24.00	Pass
HE40	MCS0	1	195	6925	Full	1.57	10.23	3.00	13.23	24.00	Pass
HE40	MCS0	1	195	6925	242/61	1.97	7.54	3.00	10.54	24.00	Pass
HE40	MCS0	1	211	7005	Full	1.57	9.36	3.00	12.36	24.00	Pass
HE40	MCS0	1	211	7005	242/61	1.97	6.58	3.00	9.58	24.00	Pass
HE40	MCS0	1	227	7085	Full	1.57	9.66	3.00	12.66	24.00	Pass
HE40	MCS0	1	227	7085	242/62	1.97	6.67	3.00	9.67	24.00	Pass
HE80	MCS0	1	199	6945	Full	2.60	12.78	3.00	15.78	24.00	Pass
HE80	MCS0	1	199	6945	484/65	2.12	10.07	3.00	13.07	24.00	Pass
HE80	MCS0	1	215	7025	Full	2.60	12.44	3.00	15.44	24.00	Pass
HE80	MCS0	1	215	7025	484/66	2.12	10.12	3.00	13.12	24.00	Pass
HE160	MCS0	1	207	6985	Full	3.76	14.81	3.00	17.81	24.00	Pass
HE160	MCS0	1	207	6985	996/S67	2.29	12.25	3.00	15.25	24.00	Pass

Power Setting

Ant 1

6

6.5

6

6.5

6.5

-1.5

1

4

7

-1.5

1

4

6.5

-2.5

0.5

3.5

6.5

-2.5

0.5

3

10

7.5

9

6.5

9.5

6.5

12.5

10

12

10

14

9.5

TEST RESULTS DATA
26dB EBW and 99% OBW


Band VIII single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	Limit (MHz)	Pass /Fail
						Ant 1	Ant 1		
11a	6Mbps	1	189	6895	Full	16.54	20.94	320	Pass
11a	6Mbps	1	209	6995	Full	16.58	20.82	320	Pass
11a	6Mbps	1	229	7095	Full	16.96	28.32	320	Pass
11a	6Mbps	1	233	7115	Full	16.70	24.24	320	Pass
HE20	MCS0	1	189	6895	Full	18.88	21.90	320	Pass
HE20	MCS0	1	209	6995	Full	18.92	21.72	320	Pass
HE20	MCS0	1	229	7095	Full	18.91	22.02	320	Pass
HE20	MCS0	1	233	7115	Full	18.89	23.34	320	Pass
HE40	MCS0	1	195	6925	Full	37.52	39.84	320	Pass
HE40	MCS0	1	211	7005	Full	37.45	39.72	320	Pass
HE40	MCS0	1	227	7085	Full	37.62	39.84	320	Pass
HE80	MCS0	1	199	6945	Full	76.68	80.64	320	Pass
HE80	MCS0	1	215	7025	Full	76.55	80.64	320	Pass
HE160	MCS0	1	207	6985	Full	155.50	163.20	320	Pass

TEST RESULTS DATA
EIRP Power Spectral Density

Band VIII single antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)	Conducted Power Density with Duty Factor (dBm/MHz)	DG (dBi)	EIRP Power Density (dBm/MHz)	EIRP Power Density Limit (dBm)	Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	189	6895	Full	0.69	-4.18	3.00	-1.18	-1.00	Pass
11a	6Mbps	1	209	6995	Full	0.69	-4.36	3.00	-1.36	-1.00	Pass
11a	6Mbps	1	229	7095	Full	0.69	-6.00	3.00	-3.00	-1.00	Pass
11a	6Mbps	1	233	7115	Full	0.69	-5.17	3.00	-2.17	-1.00	Pass
HE20	MCS0	1	189	6895	Full	0.97	-4.19	3.00	-1.19	-1.00	Pass
HE20	MCS0	1	189	6895	26/0	1.35	-4.35	3.00	-1.35	-1.00	Pass
HE20	MCS0	1	189	6895	52/37	1.58	-4.32	3.00	-1.32	-1.00	Pass
HE20	MCS0	1	189	6895	106/53	1.69	-4.30	3.00	-1.30	-1.00	Pass
HE20	MCS0	1	209	6995	Full	0.97	-4.55	3.00	-1.55	-1.00	Pass
HE20	MCS0	1	209	6995	26/0	1.35	-4.92	3.00	-1.92	-1.00	Pass
HE20	MCS0	1	209	6995	52/37	1.58	-4.87	3.00	-1.87	-1.00	Pass
HE20	MCS0	1	209	6995	106/53	1.69	-4.64	3.00	-1.64	-1.00	Pass
HE20	MCS0	1	229	7095	Full	0.97	-5.50	3.00	-2.50	-1.00	Pass
HE20	MCS0	1	229	7095	26/8	1.35	-5.93	3.00	-2.93	-1.00	Pass
HE20	MCS0	1	229	7095	52/40	1.58	-5.57	3.00	-2.57	-1.00	Pass
HE20	MCS0	1	229	7095	106/54	1.69	-5.53	3.00	-2.53	-1.00	Pass
HE20	MCS0	1	233	7115	Full	0.97	-5.41	3.00	-2.41	-1.00	Pass
HE20	MCS0	1	233	7115	26/8	1.35	-5.53	3.00	-2.53	-1.00	Pass
HE20	MCS0	1	233	7115	52/40	1.58	-5.57	3.00	-2.57	-1.00	Pass
HE20	MCS0	1	233	7115	106/54	1.69	-5.70	3.00	-2.70	-1.00	Pass
HE40	MCS0	1	195	6925	Full	1.57	-4.07	3.00	-1.07	-1.00	Pass
HE40	MCS0	1	195	6925	242/61	1.97	-4.56	3.00	-1.56	-1.00	Pass
HE40	MCS0	1	211	7005	Full	1.57	-4.21	3.00	-1.21	-1.00	Pass
HE40	MCS0	1	211	7005	242/61	1.97	-4.72	3.00	-1.72	-1.00	Pass
HE40	MCS0	1	227	7085	Full	1.57	-5.32	3.00	-2.32	-1.00	Pass
HE40	MCS0	1	227	7085	242/62	1.97	-5.70	3.00	-2.70	-1.00	Pass
HE80	MCS0	1	199	6945	Full	2.60	-4.52	3.00	-1.52	-1.00	Pass
HE80	MCS0	1	199	6945	484/65	2.12	-4.85	3.00	-1.85	-1.00	Pass
HE80	MCS0	1	215	7025	Full	2.60	-4.24	3.00	-1.24	-1.00	Pass
HE80	MCS0	1	215	7025	484/66	2.12	-4.42	3.00	-1.42	-1.00	Pass
HE160	MCS0	1	207	6985	Full	3.76	-5.01	3.00	-2.01	-1.00	Pass
HE160	MCS0	1	207	6985	996/S67	2.29	-5.17	3.00	-2.17	-1.00	Pass




Appendix B. AC Conducted Emission Test Results

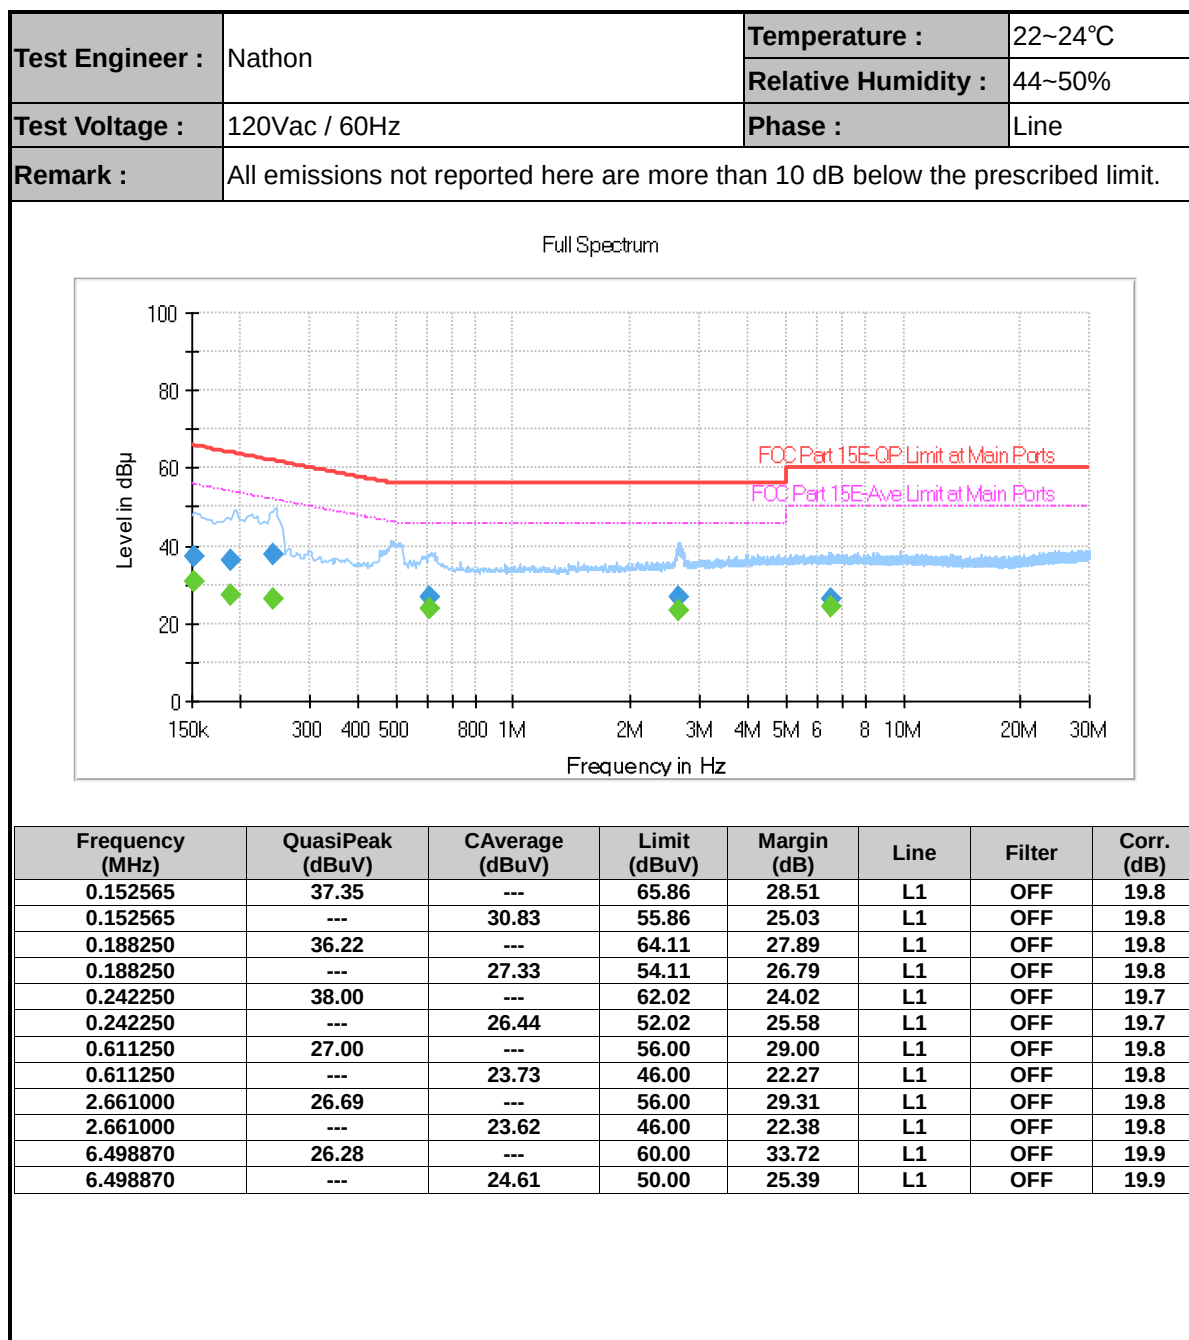



Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

Full Spectrum

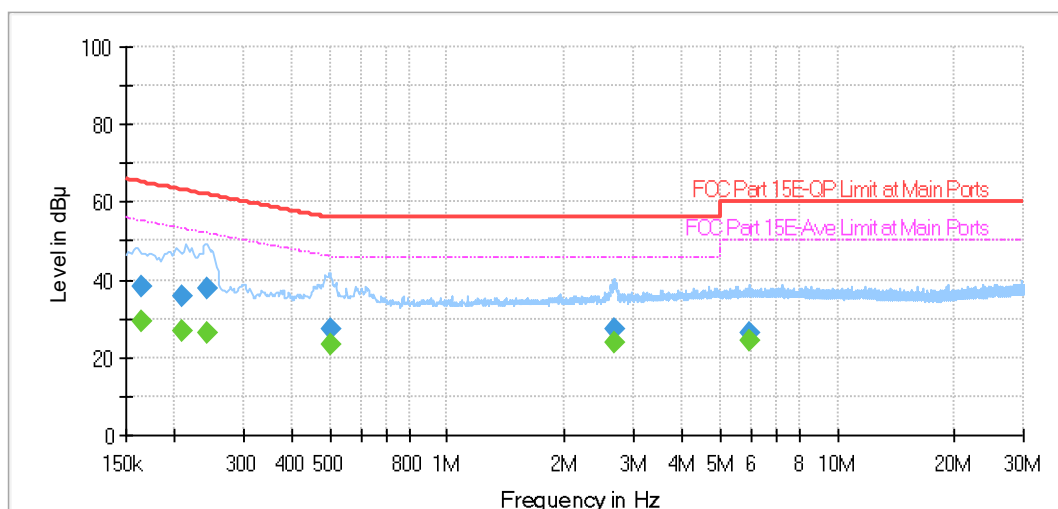

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.163500	38.39	---	65.28	26.89	N	OFF	19.7
0.163500	---	29.11	55.28	26.17	N	OFF	19.7
0.208500	35.93	---	63.27	27.34	N	OFF	19.7
0.208500	---	26.97	53.27	26.29	N	OFF	19.7
0.241980	37.60	---	62.03	24.43	N	OFF	19.7
0.241980	---	26.51	52.03	25.52	N	OFF	19.7
0.503250	27.23	---	56.00	28.77	N	OFF	19.7
0.503250	---	23.53	46.00	22.47	N	OFF	19.7
2.665590	27.59	---	56.00	28.41	N	OFF	19.8
2.665590	---	23.93	46.00	22.07	N	OFF	19.8
5.919000	26.27	---	60.00	33.73	N	OFF	19.9
5.919000	---	24.57	50.00	25.43	N	OFF	19.9



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jia Kuang	Relative Humidity :	50%
		Temperature :	20~22 °C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-5	5.925-6.425	1	802.11a	1	5955	6Mbps	-	-
Mode 2	U-NII-5	5.925-6.425	1	802.11a	49	6195	6Mbps	-	-
Mode 3	U-NII-5	5.925-6.425	1	802.11a	93	6415	6Mbps	-	-
Mode 4	U-NII-5	5.925-6.425	1	802.11ax HE20	1	5955	MCS0	Full RU	-
Mode 5	U-NII-5	5.925-6.425	1	802.11ax HE20	1	5955	MCS0	Partial_RU_26/0	-
Mode 6	U-NII-5	5.925-6.425	1	802.11ax HE20	1	5955	MCS0	Partial_RU_52/37	-
Mode 7	U-NII-5	5.925-6.425	1	802.11ax HE20	1	5955	MCS0	Partial_RU_106/53	-
Mode 8	U-NII-5	5.925-6.425	1	802.11ax HE20	49	6195	MCS0	Full RU	-
Mode 9	U-NII-5	5.925-6.425	1	802.11ax HE20	93	6415	MCS0	Full RU	-
Mode 10	U-NII-5	5.925-6.425	1	802.11ax HE40	3	5965	MCS0	Full RU	-
Mode 11	U-NII-5	5.925-6.425	1	802.11ax HE40	3	5965	MCS0	Partial_RU_242/61	-
Mode 12	U-NII-5	5.925-6.425	1	802.11ax HE40	51	6205	MCS0	Full RU	-
Mode 13	U-NII-5	5.925-6.425	1	802.11ax HE40	91	6405	MCS0	Full RU	-
Mode 14	U-NII-5	5.925-6.425	1	802.11ax HE80	7	5985	MCS0	Full RU	-
Mode 15	U-NII-5	5.925-6.425	1	802.11ax HE80	7	5985	MCS0	Partial_RU_484/65	-
Mode 16	U-NII-5	5.925-6.425	1	802.11ax HE80	55	6225	MCS0	Full RU	-
Mode 17	U-NII-5	5.925-6.425	1	802.11ax HE80	87	6385	MCS0	Full RU	-
Mode 18	U-NII-5	5.925-6.425	1	802.11ax HE160	15	6025	MCS0	Full RU	-
Mode 19	U-NII-5	5.925-6.425	1	802.11ax HE160	15	6025	MCS0	Partial_RU_996/67	-
Mode 20	U-NII-5	5.925-6.425	1	802.11ax HE160	47	6185	MCS0	Full RU	-
Mode 21	U-NII-5	5.925-6.425	1	802.11ax HE160	79	6345	MCS0	Full RU	-
Mode 22	U-NII-6	6.425-6.525	1	802.11a	97	6435	6Mbps	-	-
Mode 23	U-NII-6	6.425-6.525	1	802.11a	105	6475	6Mbps	-	-
Mode 24	U-NII-6	6.425-6.525	1	802.11a	113	6515	6Mbps	-	-
Mode 25	U-NII-6	6.425-6.525	1	802.11ax HE20	97	6435	MCS0	Full RU	-
Mode 26	U-NII-6	6.425-6.525	1	802.11ax HE20	105	6475	MCS0	Full RU	-
Mode 27	U-NII-6	6.425-6.525	1	802.11ax HE20	113	6515	MCS0	Full RU	-
Mode 28	U-NII-6	6.425-6.525	1	802.11ax HE40	99	6445	MCS0	Full RU	-
Mode 29	U-NII-6	6.425-6.525	1	802.11ax HE40	107	6485	MCS0	Full RU	-
Mode 30	U-NII-6	6.425-6.525	1	802.11ax HE40	115	6525	MCS0	Full RU	-
Mode 31	U-NII-6	6.425-6.525	1	802.11ax HE80	103	6465	MCS0	Full RU	-
Mode 32	U-NII-6	6.425-6.525	1	802.11ax HE80	119	6545	MCS0	Full RU	-
Mode 33	U-NII-6	6.425-6.525	1	802.11ax HE160	111	6505	MCS0	Full RU	-
Mode 34	U-NII-7	6.525-6.875	1	802.11a	117	6535	6Mbps	-	-
Mode 35	U-NII-7	6.525-6.875	1	802.11a	149	6695	6Mbps	-	-
Mode 36	U-NII-7	6.525-6.875	1	802.11a	181	6855	6Mbps	-	-
Mode 37	U-NII-7	6.525-6.875	1	802.11a	185	6875	6Mbps	-	-
Mode 38	U-NII-7	6.525-6.875	1	802.11ax HE20	117	6535	MCS0	Full RU	-



Mode 39	U-NII-7	6.525-6.875	1	802.11ax HE20	149	6695	MCS0	Full RU	-
Mode 40	U-NII-7	6.525-6.875	1	802.11ax HE20	181	6855	MCS0	Full RU	-
Mode 41	U-NII-7	6.525-6.875	1	802.11ax HE20	185	6875	MCS0	Full RU	-
Mode 42	U-NII-7	6.525-6.875	1	802.11ax HE40	123	6565	MCS0	Full RU	-
Mode 43	U-NII-7	6.525-6.875	1	802.11ax HE40	147	6685	MCS0	Full RU	-
Mode 44	U-NII-7	6.525-6.875	1	802.11ax HE40	179	6845	MCS0	Full RU	-
Mode 45	U-NII-7	6.525-6.875	1	802.11ax HE40	187	6885	MCS0	Full RU	-
Mode 46	U-NII-7	6.525-6.875	1	802.11ax HE80	135	6625	MCS0	Full RU	-
Mode 47	U-NII-7	6.525-6.875	1	802.11ax HE80	151	6705	MCS0	Full RU	-
Mode 48	U-NII-7	6.525-6.875	1	802.11ax HE80	167	6785	MCS0	Full RU	-
Mode 49	U-NII-7	6.525-6.875	1	802.11ax HE80	183	6865	MCS0	Full RU	-
Mode 50	U-NII-7	6.525-6.875	1	802.11ax HE160	143	6665	MCS0	Full RU	-
Mode 51	U-NII-7	6.525-6.875	1	802.11ax HE160	175	6825	MCS0	Full RU	-
Mode 52	U-NII-8	6.875-7.125	1	802.11a	189	6895	6Mbps	-	-
Mode 53	U-NII-8	6.875-7.125	1	802.11a	209	6995	6Mbps	-	-
Mode 54	U-NII-8	6.875-7.125	1	802.11a	229	7095	6Mbps	-	-
Mode 55	U-NII-8	6.875-7.125	1	802.11a	233	7115	6Mbps	-	-
Mode 56	U-NII-8	6.875-7.125	1	802.11ax HE20	189	6895	MCS0	Full RU	-
Mode 57	U-NII-8	6.875-7.125	1	802.11ax HE20	209	6995	MCS0	Full RU	-
Mode 58	U-NII-8	6.875-7.125	1	802.11ax HE20	229	7095	MCS0	Full RU	-
Mode 59	U-NII-8	6.875-7.125	1	802.11ax HE20	229	7095	MCS0	Partial_RU_26/8	-
Mode 60	U-NII-8	6.875-7.125	1	802.11ax HE20	229	7095	MCS0	Partial_RU_52/40	-
Mode 61	U-NII-8	6.875-7.125	1	802.11ax HE20	229	7095	MCS0	Partial_RU_106/54	-
Mode 62	U-NII-8	6.875-7.125	1	802.11ax HE20	233	7115	MCS0	Full RU	-
Mode 63	U-NII-8	6.875-7.125	1	802.11ax HE20	233	7115	MCS0	Partial_RU_26/8	-
Mode 64	U-NII-8	6.875-7.125	1	802.11ax HE20	233	7115	MCS0	Partial_RU_52/40	-
Mode 65	U-NII-8	6.875-7.125	1	802.11ax HE20	233	7115	MCS0	Partial_RU_106/54	-
Mode 66	U-NII-8	6.875-7.125	1	802.11ax HE40	195	6925	MCS0	Full RU	-
Mode 67	U-NII-8	6.875-7.125	1	802.11ax HE40	211	7005	MCS0	Full RU	-
Mode 68	U-NII-8	6.875-7.125	1	802.11ax HE40	227	7085	MCS0	Full RU	-
Mode 69	U-NII-8	6.875-7.125	1	802.11ax HE40	227	7085	MCS0	Partial_RU_242/62	-
Mode 70	U-NII-8	6.875-7.125	1	802.11ax HE80	199	6945	MCS0	Full RU	-
Mode 71	U-NII-8	6.875-7.125	1	802.11ax HE80	215	7025	MCS0	Full RU	-
Mode 72	U-NII-8	6.875-7.125	1	802.11ax HE80	215	7025	MCS0	Partial_RU_484/66	-
Mode 73	U-NII-8	6.875-7.125	1	802.11ax HE160	207	6985	MCS0	Full RU	-
Mode 74	U-NII-8	6.875-7.125	1	802.11ax HE160	207	6985	MCS0	Partial_RU_996/S67	-
Mode 75	U-NII-8	6.875-7.125	1	802.11ax HE80 LF	199	6945	MCS0	Full RU	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	PEAK Avg.	Result	Remark
1	802.11a	1	5914.05	43.15	68.20	-25.05	H	AVERAGE	Pass	Band Edge
1	802.11a	1	11910.00	41.92	54.00	-12.08	V	Average	Pass	Harmonic
2	802.11a	49	-	-	-	-	-	-	-	Band Edge
2	802.11a	49	12390.00	42.50	54.00	-11.50	H	Average	Pass	Harmonic
3	802.11a	93	-	-	-	-	-	-	-	Band Edge
3	802.11a	93	12830.00	50.94	88.20	-37.26	H	Peak	Pass	Harmonic
4	802.11ax HE20	1	5873.10	43.19	68.20	-25.01	H	AVERAGE	Pass	Band Edge
4	802.11ax HE20	1	11910.00	42.40	54.00	-11.60	V	Average	Pass	Harmonic
5	802.11ax HE20	1	5921.33	42.96	68.20	-25.24	V	AVERAGE	Pass	Band Edge
5	802.11ax HE20	1	-	-	-	-	-	-	-	Harmonic
6	802.11ax HE20	1	5874.79	43.01	68.20	-25.19	H	AVERAGE	Pass	Band Edge
6	802.11ax HE20	1	-	-	-	-	-	-	-	Harmonic
7	802.11ax HE20	1	5875.18	43.09	68.20	-25.11	H	AVERAGE	Pass	Band Edge
7	802.11ax HE20	1	-	-	-	-	-	-	-	Harmonic
8	802.11ax HE20	49	-	-	-	-	-	-	-	Band Edge
8	802.11ax HE20	49	12390.00	42.90	54.00	-11.10	V	Average	Pass	Harmonic
9	802.11ax HE20	93	-	-	-	-	-	-	-	Band Edge
9	802.11ax HE20	93	12830.00	52.07	88.20	-36.13	H	Peak	Pass	Harmonic
10	802.11ax HE40	3	5918.28	44.26	68.20	-23.94	H	AVERAGE	Pass	Band Edge
10	802.11ax HE40	3	11930.00	41.74	54.00	-12.26	H	Average	Pass	Harmonic
11	802.11ax HE40	3	5921.64	43.92	68.20	-24.28	H	AVERAGE	Pass	Band Edge
11	802.11ax HE40	3	-	-	-	-	-	-	-	Harmonic
12	802.11ax HE40	51	-	-	-	-	-	-	-	Band Edge
12	802.11ax HE40	51	12410.00	43.34	54.00	-10.66	H	Average	Pass	Harmonic
13	802.11ax HE40	91	-	-	-	-	-	-	-	Band Edge
13	802.11ax HE40	91	12810.00	52.35	88.20	-35.85	H	Peak	Pass	Harmonic
14	802.11ax HE80	7	5924.84	47.19	68.20	-21.01	H	AVERAGE	Pass	Band Edge
14	802.11ax HE80	7	11970.00	42.08	54.00	-11.92	H	Average	Pass	Harmonic
15	802.11ax HE80	7	5922.76	45.26	68.20	-22.94	H	AVERAGE	Pass	Band Edge
15	802.11ax HE80	7	-	-	-	-	-	-	-	Harmonic
16	802.11ax HE80	55	-	-	-	-	-	-	-	Band Edge
16	802.11ax HE80	55	12450.00	43.06	54.00	-10.94	H	Average	Pass	Harmonic
17	802.11ax HE80	87	-	-	-	-	-	-	-	Band Edge
17	802.11ax HE80	87	12770.00	53.54	88.20	-34.66	H	Peak	Pass	Harmonic
18	802.11ax HE160	15	5902.28	52.24	68.20	-15.96	H	AVERAGE	Pass	Band Edge
18	802.11ax HE160	15	12050.00	42.04	54.00	-11.96	H	Average	Pass	Harmonic
19	802.11ax HE160	15	5921.88	48.60	68.20	-19.60	H	AVERAGE	Pass	Band Edge
19	802.11ax HE160	15	-	-	-	-	-	-	-	Harmonic
20	802.11ax HE160	47	-	-	-	-	-	-	-	Band Edge
20	802.11ax HE160	47	12370.00	42.90	54.00	-11.10	H	Average	Pass	Harmonic
21	802.11ax HE160	79	-	-	-	-	-	-	-	Band Edge
21	802.11ax HE160	79	12690.00	43.47	54.00	-10.53	H	Average	Pass	Harmonic
22	802.11a	97	-	-	-	-	-	-	-	Band Edge
22	802.11a	97	12870.00	48.67	88.20	-39.53	H	Peak	Pass	Harmonic



23	802.11a	105	-	-	-	-	-	-	-	Band Edge
23	802.11a	105	12950.00	49.05	88.20	-39.15	V	Peak	Pass	Harmonic
24	802.11a	113	-	-	-	-	-	-	-	Band Edge
24	802.11a	113	13030.00	50.08	88.20	-38.12	H	Peak	Pass	Harmonic
25	802.11ax HE20	97	-	-	-	-	-	-	-	Band Edge
25	802.11ax HE20	97	12870.00	49.93	88.20	-38.27	H	Peak	Pass	Harmonic
26	802.11ax HE20	105	-	-	-	-	-	-	-	Band Edge
26	802.11ax HE20	105	12950.00	50.37	88.20	-37.83	H	Peak	Pass	Harmonic
27	802.11ax HE20	113	-	-	-	-	-	-	-	Band Edge
27	802.11ax HE20	113	13030.00	49.30	88.20	-38.90	H	Peak	Pass	Harmonic
28	802.11ax HE40	99	-	-	-	-	-	-	-	Band Edge
28	802.11ax HE40	99	12890.00	49.60	88.20	-38.60	V	Peak	Pass	Harmonic
29	802.11ax HE40	107	-	-	-	-	-	-	-	Band Edge
29	802.11ax HE40	107	12970.00	49.21	88.20	-38.99	V	Peak	Pass	Harmonic
30	802.11ax HE40	115	-	-	-	-	-	-	-	Band Edge
30	802.11ax HE40	115	13050.00	50.30	88.20	-37.90	V	Peak	Pass	Harmonic
31	802.11ax HE80	103	-	-	-	-	-	-	-	Band Edge
31	802.11ax HE80	103	12930.00	49.61	88.20	-38.59	H	Peak	Pass	Harmonic
32	802.11ax HE80	119	-	-	-	-	-	-	-	Band Edge
32	802.11ax HE80	119	13090.00	50.16	88.20	-38.04	H	Peak	Pass	Harmonic
33	802.11ax HE160	111	-	-	-	-	-	-	-	Band Edge
33	802.11ax HE160	111	13010.00	49.83	88.20	-38.37	V	Peak	Pass	Harmonic
34	802.11a	117	-	-	-	-	-	-	-	Band Edge
34	802.11a	117	13070.00	48.63	88.20	-39.57	H	Peak	Pass	Harmonic
35	802.11a	149	-	-	-	-	-	-	-	Band Edge
35	802.11a	149	13390.00	42.53	54.00	-11.47	H	Average	Pass	Harmonic
36	802.11a	181	-	-	-	-	-	-	-	Band Edge
36	802.11a	181	13710.00	49.55	88.20	-38.65	H	Peak	Pass	Harmonic
37	802.11a	185	-	-	-	-	-	-	-	Band Edge
37	802.11a	185	13750.00	48.53	88.20	-39.67	V	Peak	Pass	Harmonic
38	802.11ax HE20	117	-	-	-	-	-	-	-	Band Edge
38	802.11ax HE20	117	13070.00	51.33	88.20	-36.87	V	Peak	Pass	Harmonic
39	802.11ax HE20	149	-	-	-	-	-	-	-	Band Edge
39	802.11ax HE20	149	13390.00	43.95	54.00	-10.05	H	Average	Pass	Harmonic
40	802.11ax HE20	181	-	-	-	-	-	-	-	Band Edge
40	802.11ax HE20	181	13710.00	48.81	88.20	-39.39	H	Peak	Pass	Harmonic
41	802.11ax HE20	185	-	-	-	-	-	-	-	Band Edge
41	802.11ax HE20	185	13750.00	48.77	88.20	-39.43	V	Peak	Pass	Harmonic
42	802.11ax HE40	123	-	-	-	-	-	-	-	Band Edge
42	802.11ax HE40	123	13130.00	49.04	88.20	-39.16	H	Peak	Pass	Harmonic
43	802.11ax HE40	147	-	-	-	-	-	-	-	Band Edge
43	802.11ax HE40	147	13370.00	44.24	54.00	-9.76	V	Average	Pass	Harmonic
44	802.11ax HE40	179	-	-	-	-	-	-	-	Band Edge
44	802.11ax HE40	179	13690.00	48.55	88.20	-39.65	H	Peak	Pass	Harmonic
45	802.11ax HE40	187	-	-	-	-	-	-	-	Band Edge
45	802.11ax HE40	187	13770.00	48.76	88.20	-39.44	V	Peak	Pass	Harmonic
46	802.11ax HE80	135	-	-	-	-	-	-	-	Band Edge







46	802.11ax HE80	135	13250.00	43.40	54.00	-10.60	V	Average	Pass	Harmonic
47	802.11ax HE80	151	-	-	-	-	-	-	-	Band Edge
47	802.11ax HE80	151	13410.00	51.59	88.20	-36.61	H	Peak	Pass	Harmonic
48	802.11ax HE80	167	-	-	-	-	-	-	-	Band Edge
48	802.11ax HE80	167	13570.00	48.42	88.20	-39.78	H	Peak	Pass	Harmonic
49	802.11ax HE80	183	-	-	-	-	-	-	-	Band Edge
49	802.11ax HE80	183	13730.00	50.22	88.20	-37.98	V	Peak	Pass	Harmonic
50	802.11ax HE160	143	-	-	-	-	-	-	-	Band Edge
50	802.11ax HE160	143	13330.00	43.72	54.00	-10.28	H	Average	Pass	Harmonic
51	802.11ax HE160	175	-	-	-	-	-	-	-	Band Edge
51	802.11ax HE160	175	13650.00	49.90	88.20	-38.30	V	Peak	Pass	Harmonic
52	802.11a	189	-	-	-	-	-	-	-	Band Edge
52	802.11a	189	13790.00	49.86	88.20	-38.34	H	Peak	Pass	Harmonic
53	802.11a	209	-	-	-	-	-	-	-	Band Edge
53	802.11a	209	13990.00	48.28	88.20	-39.92	V	Peak	Pass	Harmonic
54	802.11a	229	7291.61	42.81	54.00	-11.19	V	AVERAGE	Pass	Band Edge
54	802.11a	229	14190.00	49.15	88.20	-39.05	V	Peak	Pass	Harmonic
55	802.11a	233	7281.62	42.76	54.00	-11.24	V	AVERAGE	Pass	Band Edge
55	802.11a	233	14230.00	48.66	88.20	-39.54	H	Peak	Pass	Harmonic
56	802.11ax HE20	189	-	-	-	-	-	-	-	Band Edge
56	802.11ax HE20	189	13790.00	49.08	88.20	-39.12	H	Peak	Pass	Harmonic
57	802.11ax HE20	209	-	-	-	-	-	-	-	Band Edge
57	802.11ax HE20	209	13990.00	47.47	88.20	-40.73	H	Peak	Pass	Harmonic
58	802.11ax HE20	229	7286.51	42.85	54.00	-11.15	H	AVERAGE	Pass	Band Edge
58	802.11ax HE20	229	14190.00	49.29	88.20	-38.91	H	Peak	Pass	Harmonic
59	802.11ax HE20	229	7304.10	42.59	54.00	-11.41	H	AVERAGE	Pass	Band Edge
59	802.11ax HE20	229	-	-	-	-	-	-	-	Harmonic
60	802.11ax HE20	229	7266.11	42.76	54.00	-11.24	V	AVERAGE	Pass	Band Edge
60	802.11ax HE20	229	-	-	-	-	-	-	-	Harmonic
61	802.11ax HE20	229	7292.37	42.66	54.00	-11.34	V	AVERAGE	Pass	Band Edge
61	802.11ax HE20	229	-	-	-	-	-	-	-	Harmonic
62	802.11ax HE20	233	7349.30	42.80	54.00	-11.20	V	AVERAGE	Pass	Band Edge
62	802.11ax HE20	233	14230.00	49.03	88.20	-39.17	V	Peak	Pass	Harmonic
63	802.11ax HE20	233	7347.89	42.65	54.00	-11.35	H	AVERAGE	Pass	Band Edge
63	802.11ax HE20	233	-	-	-	-	-	-	-	Harmonic
64	802.11ax HE20	233	7286.08	42.83	54.00	-11.17	V	AVERAGE	Pass	Band Edge
64	802.11ax HE20	233	-	-	-	-	-	-	-	Harmonic
65	802.11ax HE20	233	7297.36	42.77	54.00	-11.23	H	-	Pass	Band Edge
65	802.11ax HE20	233	-	-	-	-	-	-	-	Harmonic
66	802.11ax HE40	195	-	-	-	-	-	-	-	Band Edge
66	802.11ax HE40	195	13850.00	48.84	88.20	-39.36	H	Peak	Pass	Harmonic
67	802.11ax HE40	211	-	-	-	-	-	-	-	Band Edge
67	802.11ax HE40	211	14010.00	47.64	88.20	-40.56	H	Peak	Pass	Harmonic
68	802.11ax HE40	227	7295.94	43.91	54.00	-10.09	V	AVERAGE	Pass	Band Edge
68	802.11ax HE40	227	14176.80	47.64	88.20	-40.56	V	Peak	Pass	Harmonic
69	802.11ax HE40	227	7286.93	43.52	54.00	-10.48	V	AVERAGE	Pass	Band Edge
69	802.11ax HE40	227	-	-	-	-	-	-	-	Harmonic







70	802.11ax HE80	199	7251.88	45.81	54.00	-8.19	V	AVERAGE	Pass	Band Edge
70	802.11ax HE80	199	13890.00	48.31	88.20	-39.89	H	Peak	Pass	Harmonic
71	802.11ax HE80	215	7309.38	45.29	54.00	-8.71	V	AVERAGE	Pass	Band Edge
71	802.11ax HE80	215	14050.00	47.28	88.20	-40.92	H	Peak	Pass	Harmonic
72	802.11ax HE80	215	7323.68	45.25	54.00	-8.75	H	AVERAGE	Pass	Band Edge
72	802.11ax HE80	215	-	-	-	-	-	-	-	Harmonic
73	802.11ax HE160	207	7332.50	45.61	54.00	-8.39	V	AVERAGE	Pass	Band Edge
73	802.11ax HE160	207	13970.00	48.01	88.20	-40.19	H	Peak	Pass	Harmonic
74	802.11ax HE160	207	7280.00	45.27	54.00	-8.73	V	AVERAGE	Pass	Band Edge
74	802.11ax HE160	207	-	-	-	-	-	-	-	Harmonic
75	802.11ax HE80 LF	199	956.35	31.88	46.00	-14.12	H	Peak	Pass	LF

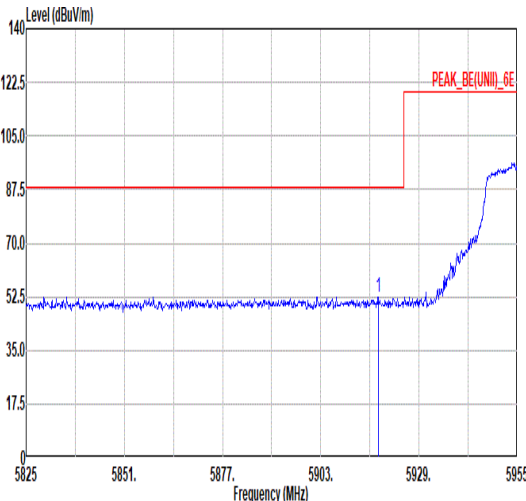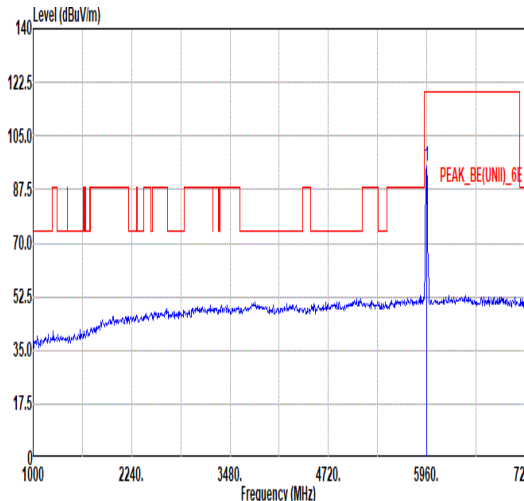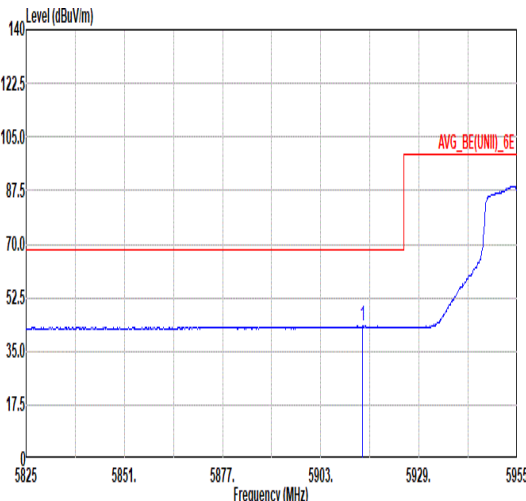
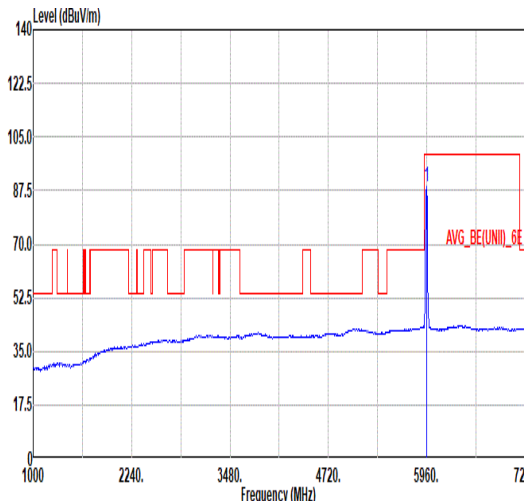


Mode	1																																																																																			
	Band Edge																																																																																			
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5918.21</td><td>52.52</td><td>88.20</td><td>-35.68</td><td>38.43</td><td>36.02</td><td>10.52</td><td>32.45</td><td>100</td><td>176</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5918.21	52.52	88.20	-35.68	38.43	36.02	10.52	32.45	100	176	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5955.00</td><td>95.31</td><td>-----</td><td>-----</td><td>81.19</td><td>36.06</td><td>10.56</td><td>32.50</td><td>100</td><td>176</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	95.31	-----	-----	81.19	36.06	10.56	32.50	100	176	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5918.21	52.52	88.20	-35.68	38.43	36.02	10.52	32.45	100	176	PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5955.00	95.31	-----	-----	81.19	36.06	10.56	32.50	100	176	PEAK																																																																									
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5914.05</td><td>43.15</td><td>68.20</td><td>-25.05</td><td>29.05</td><td>36.02</td><td>10.52</td><td>32.44</td><td>100</td><td>176</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5914.05	43.15	68.20	-25.05	29.05	36.02	10.52	32.44	100	176	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5955.00</td><td>88.95</td><td>-----</td><td>-----</td><td>74.84</td><td>36.06</td><td>10.55</td><td>32.50</td><td>100</td><td>176</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	88.95	-----	-----	74.84	36.06	10.55	32.50	100	176	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5914.05	43.15	68.20	-25.05	29.05	36.02	10.52	32.44	100	176	AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5955.00	88.95	-----	-----	74.84	36.06	10.55	32.50	100	176	AVERAGE																																																																									

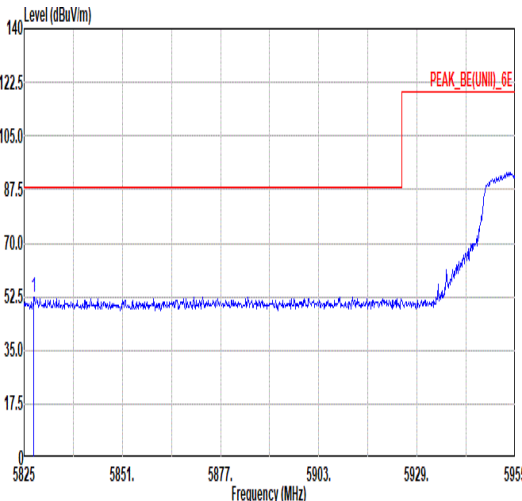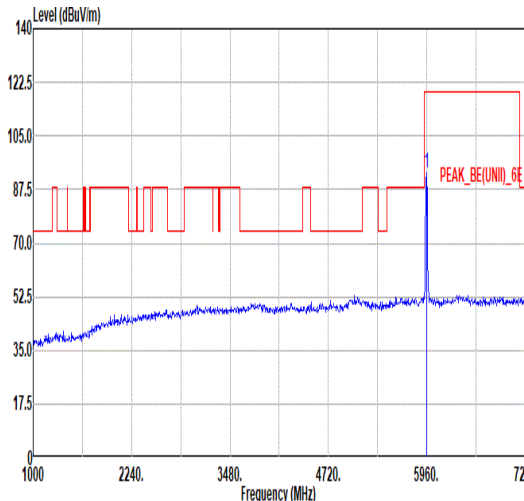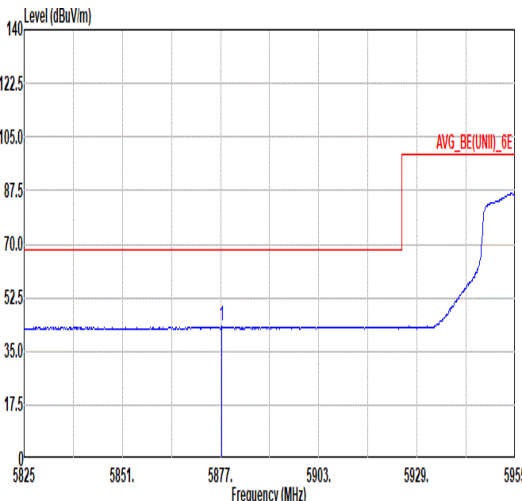
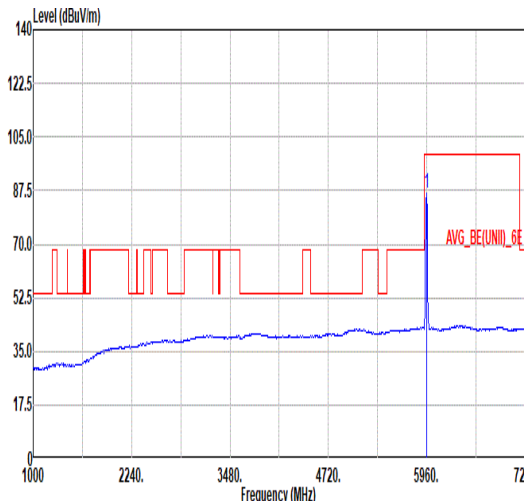


Mode	1																																																																																													
	Band Edge																																																																																													
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																																													
ANT	1																																																																																													
Pol.	Vertical						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5827.60</td><td>52.44</td><td>88.20</td><td>-35.76</td><td>38.58</td><td>35.80</td><td>10.44</td><td>32.38</td><td>100</td><td>65</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5827.60	52.44	88.20	-35.76	38.58	35.80	10.44	32.38	100	65	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>92.77</td><td>-----</td><td>-----</td><td>78.66</td><td>36.06</td><td>10.55</td><td>32.50</td><td>100</td><td>65</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	92.77	-----	-----	78.66	36.06	10.55	32.50	100	65
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5827.60	52.44	88.20	-35.76	38.58	35.80	10.44	32.38	100	65	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5955.00	92.77	-----	-----	78.66	36.06	10.55	32.50	100	65	PEAK																																																																																			
Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5877.26</td><td>43.10</td><td>68.20</td><td>-25.10</td><td>29.09</td><td>35.94</td><td>10.48</td><td>32.41</td><td>100</td><td>65</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5877.26	43.10	68.20	-25.10	29.09	35.94	10.48	32.41	100	65	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>86.44</td><td>-----</td><td>-----</td><td>72.33</td><td>36.06</td><td>10.55</td><td>32.50</td><td>100</td><td>65</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	86.44	-----	-----	72.33	36.06	10.55	32.50	100	65
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5877.26	43.10	68.20	-25.10	29.09	35.94	10.48	32.41	100	65	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5955.00	86.44	-----	-----	72.33	36.06	10.55	32.50	100	65	AVERAGE																																																																																			

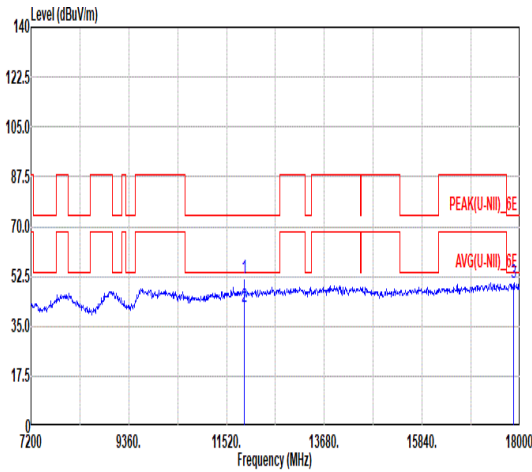
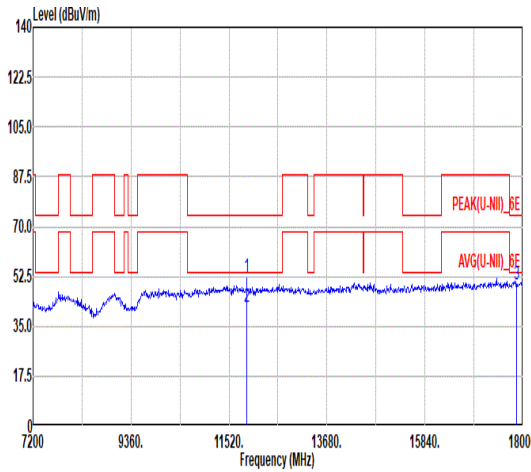


Mode	1																																																																													
	Harmonic																																																																													
	U-NII-5_5.925-6.425_802.11a_CH1_5955MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal																																																																													
Peak Avg																																																																														
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11910.00</td><td>52.01</td><td>74.00</td><td>-21.99</td><td>57.19</td><td>38.73</td><td>14.22</td><td>58.13</td><td>125</td><td>124</td><td>Peak</td></tr><tr><td>2</td><td>11910.00</td><td>41.57</td><td>54.00</td><td>-12.43</td><td>46.75</td><td>38.73</td><td>14.22</td><td>58.13</td><td>125</td><td>124</td><td>Average</td></tr><tr><td>3</td><td>17865.00</td><td>50.25</td><td>74.00</td><td>-23.75</td><td>49.24</td><td>41.50</td><td>17.10</td><td>57.59</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11910.00	52.01	74.00	-21.99	57.19	38.73	14.22	58.13	125	124	Peak	2	11910.00	41.57	54.00	-12.43	46.75	38.73	14.22	58.13	125	124	Average	3	17865.00	50.25	74.00	-23.75	49.24	41.50	17.10	57.59	--	--
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	11910.00	52.01	74.00	-21.99	57.19	38.73	14.22	58.13	125	124	Peak																																																																			
2	11910.00	41.57	54.00	-12.43	46.75	38.73	14.22	58.13	125	124	Average																																																																			
3	17865.00	50.25	74.00	-23.75	49.24	41.50	17.10	57.59	--	--	Peak																																																																			
Peak Avg																																																																														
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11910.00</td><td>52.04</td><td>74.00</td><td>-21.96</td><td>57.22</td><td>38.73</td><td>14.22</td><td>58.13</td><td>125</td><td>332</td><td>Peak</td></tr><tr><td>2</td><td>11910.00</td><td>41.92</td><td>54.00</td><td>-12.08</td><td>47.10</td><td>38.73</td><td>14.22</td><td>58.13</td><td>125</td><td>332</td><td>Average</td></tr><tr><td>3</td><td>17865.00</td><td>49.84</td><td>74.00</td><td>-24.16</td><td>48.83</td><td>41.50</td><td>17.10</td><td>57.59</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11910.00	52.04	74.00	-21.96	57.22	38.73	14.22	58.13	125	332	Peak	2	11910.00	41.92	54.00	-12.08	47.10	38.73	14.22	58.13	125	332	Average	3	17865.00	49.84	74.00	-24.16	48.83	41.50	17.10	57.59	--	--
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	11910.00	52.04	74.00	-21.96	57.22	38.73	14.22	58.13	125	332	Peak																																																																			
2	11910.00	41.92	54.00	-12.08	47.10	38.73	14.22	58.13	125	332	Average																																																																			
3	17865.00	49.84	74.00	-24.16	48.83	41.50	17.10	57.59	--	--	Peak																																																																			



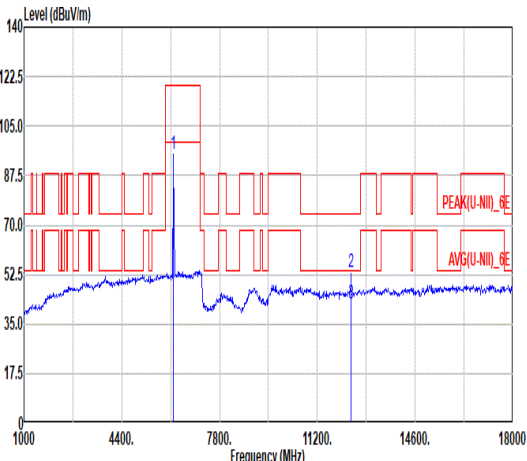
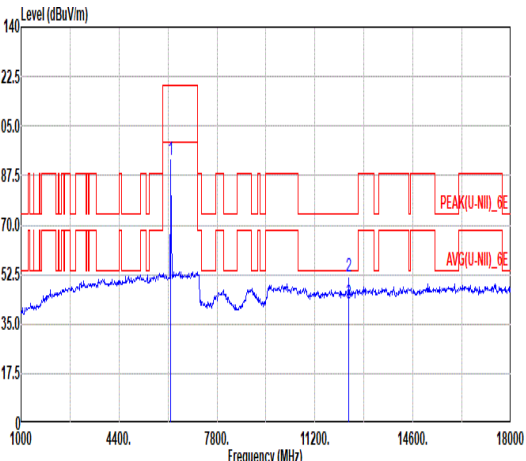


Mode	2																																																																																																																																												
	Harmonic																																																																																																																																												
	U-NII-5_5.925-6.425_802.11a_CH49_6195MHz																																																																																																																																												
ANT	1																																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																																						
Peak Avg																																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6195.00</td><td>95.28</td><td>-----</td><td>-----</td><td>80.98</td><td>36.29</td><td>10.73</td><td>32.72</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12380.00</td><td>53.29</td><td>74.00</td><td>-20.71</td><td>32.93</td><td>38.88</td><td>14.36</td><td>32.88</td><td>132</td><td>124</td><td>Peak</td></tr><tr><td>3</td><td>12380.00</td><td>42.50</td><td>54.00</td><td>-11.50</td><td>22.14</td><td>38.88</td><td>14.36</td><td>32.88</td><td>132</td><td>124</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6195.00	95.28	-----	-----	80.98	36.29	10.73	32.72	--	--	Peak	2	12380.00	53.29	74.00	-20.71	32.93	38.88	14.36	32.88	132	124	Peak	3	12380.00	42.50	54.00	-11.50	22.14	38.88	14.36	32.88	132	124	Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6195.00</td><td>92.90</td><td>-----</td><td>-----</td><td>78.60</td><td>36.29</td><td>10.73</td><td>32.72</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12380.00</td><td>51.99</td><td>74.00</td><td>-22.01</td><td>31.63</td><td>38.88</td><td>14.36</td><td>32.88</td><td>132</td><td>41</td><td>Peak</td></tr><tr><td>3</td><td>12380.00</td><td>42.19</td><td>54.00</td><td>-11.81</td><td>21.83</td><td>38.88</td><td>14.36</td><td>32.88</td><td>132</td><td>41</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6195.00	92.90	-----	-----	78.60	36.29	10.73	32.72	--	--	Peak	2	12380.00	51.99	74.00	-22.01	31.63	38.88	14.36	32.88	132	41	Peak	3	12380.00	42.19	54.00	-11.81	21.83	38.88	14.36	32.88	132	41	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																					
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	6195.00	95.28	-----	-----	80.98	36.29	10.73	32.72	--	--	Peak																																																																																																																																		
2	12380.00	53.29	74.00	-20.71	32.93	38.88	14.36	32.88	132	124	Peak																																																																																																																																		
3	12380.00	42.50	54.00	-11.50	22.14	38.88	14.36	32.88	132	124	Average																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																			
1	6195.00	92.90	-----	-----	78.60	36.29	10.73	32.72	--	--	Peak																																																																																																																																		
2	12380.00	51.99	74.00	-22.01	31.63	38.88	14.36	32.88	132	41	Peak																																																																																																																																		
3	12380.00	42.19	54.00	-11.81	21.83	38.88	14.36	32.88	132	41	Average																																																																																																																																		



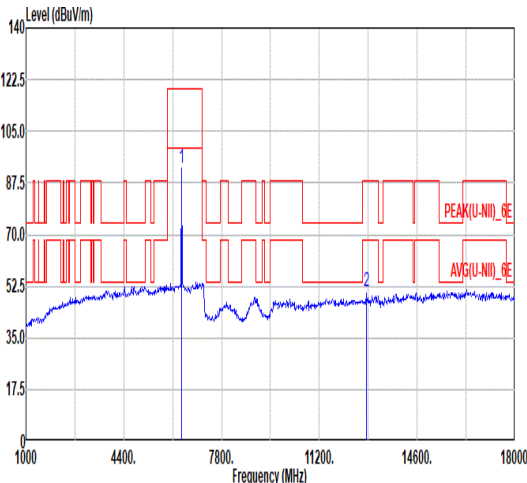
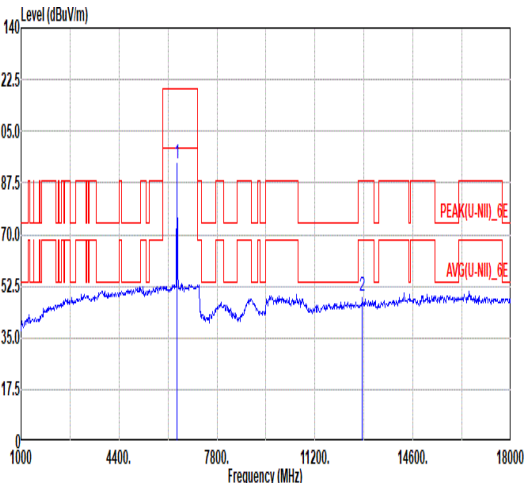


Mode	3																																																																																																	
	Harmonic																																																																																																	
	U-NII-5_5.925-6.425_802.11a_CH93_6415MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	 Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a red line for the peak level and a blue line for the average level. A significant peak is visible at 6415 MHz, reaching approximately 122.5 dBuV/m. The x-axis ranges from 1000 to 18000 MHz, and the y-axis ranges from 0 to 140 dBuV/m.	 Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a red line for the peak level and a blue line for the average level. A significant peak is visible at 6415 MHz, reaching approximately 122.5 dBuV/m. The x-axis ranges from 1000 to 18000 MHz, and the y-axis ranges from 0 to 140 dBuV/m.																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6415.00</td><td>92.65</td><td>-----</td><td>78.13</td><td>36.50</td><td>10.85</td><td>32.83</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12830.00</td><td>50.94</td><td>88.20</td><td>-37.26</td><td>29.85</td><td>39.17</td><td>14.72</td><td>32.80</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	6415.00	92.65	-----	78.13	36.50	10.85	32.83	--	--	Peak	2	12830.00	50.94	88.20	-37.26	29.85	39.17	14.72	32.80	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>6415.00</td><td>93.86</td><td>-----</td><td>79.34</td><td>36.50</td><td>10.85</td><td>32.83</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12830.00</td><td>49.06</td><td>88.20</td><td>-39.14</td><td>27.97</td><td>39.17</td><td>14.72</td><td>32.80</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	6415.00	93.86	-----	79.34	36.50	10.85	32.83	--	--	Peak	2	12830.00	49.06	88.20	-39.14	27.97	39.17	14.72	32.80	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1	6415.00	92.65	-----	78.13	36.50	10.85	32.83	--	--	Peak																																																																																								
2	12830.00	50.94	88.20	-37.26	29.85	39.17	14.72	32.80	--	--	Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																										
1	6415.00	93.86	-----	79.34	36.50	10.85	32.83	--	--	Peak																																																																																								
2	12830.00	49.06	88.20	-39.14	27.97	39.17	14.72	32.80	--	--	Peak																																																																																							

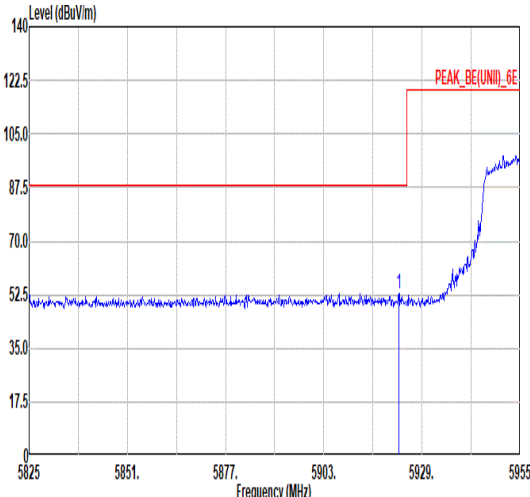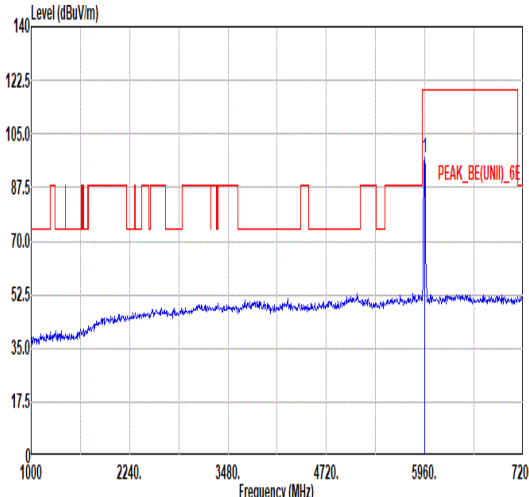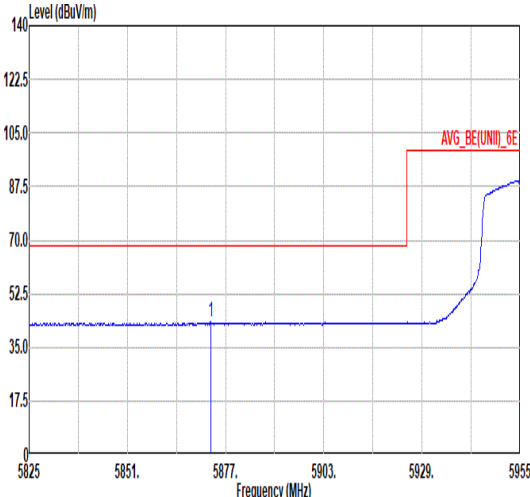
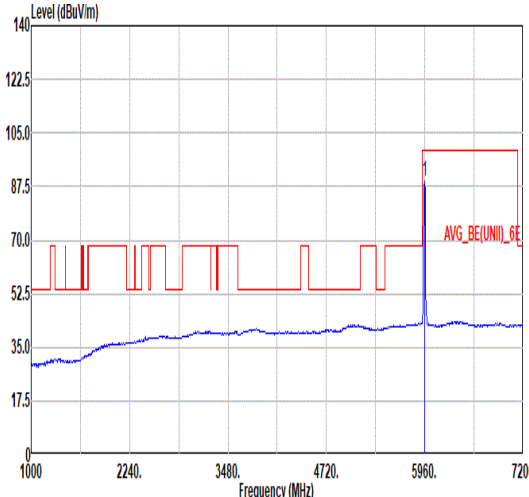


Mode	4																																																																																													
	Band Edge																																																																																													
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Full RU_5955MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal						Fundamental																																																																																							
Peak																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5922.89</td><td>52.86</td><td>88.20</td><td>-35.34</td><td>38.77</td><td>36.03</td><td>10.52</td><td>32.46</td><td>111</td><td>169</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5922.89	52.86	88.20	-35.34	38.77	36.03	10.52	32.46	111	169	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5955.00</td><td>97.38</td><td>-----</td><td>-----</td><td>83.27</td><td>36.06</td><td>10.55</td><td>32.50</td><td>111</td><td>169</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	97.38	-----	-----	83.27	36.06	10.55	32.50	111	169
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5922.89	52.86	88.20	-35.34	38.77	36.03	10.52	32.46	111	169	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5955.00	97.38	-----	-----	83.27	36.06	10.55	32.50	111	169	PEAK																																																																																			
Avg																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5873.10</td><td>43.19</td><td>68.20</td><td>-25.01</td><td>29.19</td><td>35.93</td><td>10.48</td><td>32.41</td><td>111</td><td>169</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5873.10	43.19	68.20	-25.01	29.19	35.93	10.48	32.41	111	169	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5955.00</td><td>89.29</td><td>-----</td><td>-----</td><td>75.18</td><td>36.06</td><td>10.55</td><td>32.50</td><td>111</td><td>169</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	89.29	-----	-----	75.18	36.06	10.55	32.50	111	169
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5873.10	43.19	68.20	-25.01	29.19	35.93	10.48	32.41	111	169	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5955.00	89.29	-----	-----	75.18	36.06	10.55	32.50	111	169	AVERAGE																																																																																			

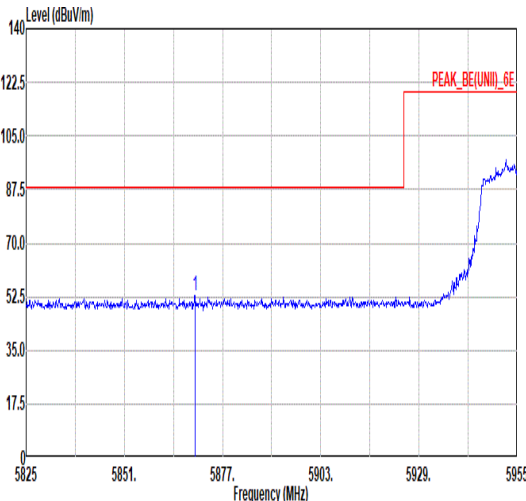
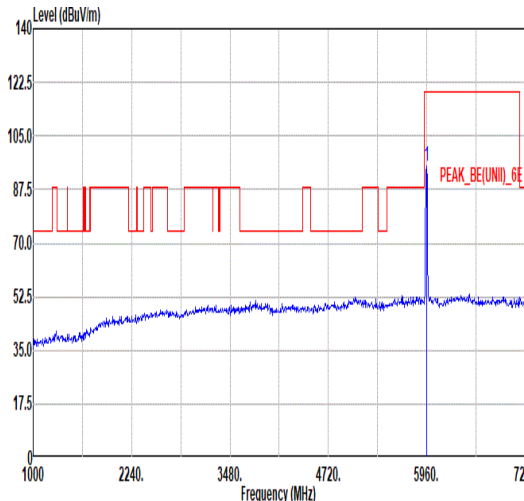
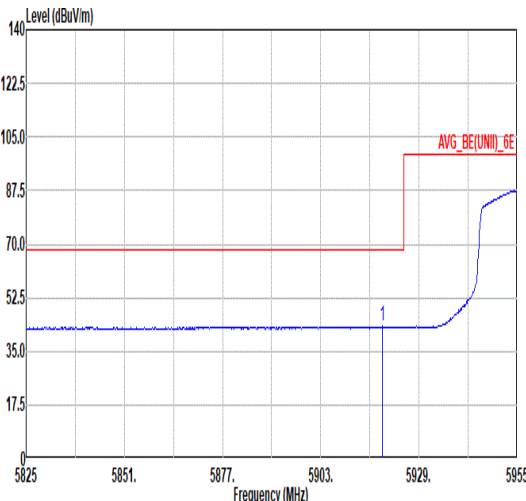
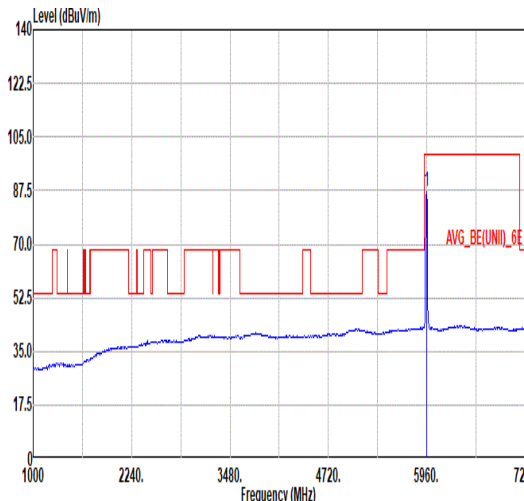


Mode	4																																																		
	Band Edge																																																		
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Full RU_5955MHz																																																		
ANT	1																																																		
Pol.	Vertical																																																		
Peak																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5869.72</td><td>52.95</td><td>88.20</td><td>-35.25</td><td>38.96</td><td>35.92</td><td>10.48</td><td>32.41</td><td>100</td><td>61</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5869.72	52.95	88.20	-35.25	38.96	35.92	10.48	32.41	100	61	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5869.72	52.95	88.20	-35.25	38.96	35.92	10.48	32.41	100	61	PEAK																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>95.15</td><td>-----</td><td>-----</td><td>81.04</td><td>36.06</td><td>10.55</td><td>32.50</td><td>100</td><td>61</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	95.15	-----	-----	81.04	36.06	10.55	32.50	100	61	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5955.00	95.15	-----	-----	81.04	36.06	10.55	32.50	100	61	PEAK																																								
Avg																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5919.38</td><td>43.06</td><td>68.20</td><td>-25.14</td><td>28.97</td><td>36.02</td><td>10.52</td><td>32.45</td><td>100</td><td>61</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5919.38	43.06	68.20	-25.14	28.97	36.02	10.52	32.45	100	61	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5919.38	43.06	68.20	-25.14	28.97	36.02	10.52	32.45	100	61	AVERAGE																																								
AVERAGE																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>87.29</td><td>-----</td><td>-----</td><td>73.18</td><td>36.06</td><td>10.55</td><td>32.50</td><td>100</td><td>61</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	87.29	-----	-----	73.18	36.06	10.55	32.50	100	61	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5955.00	87.29	-----	-----	73.18	36.06	10.55	32.50	100	61	AVERAGE																																								

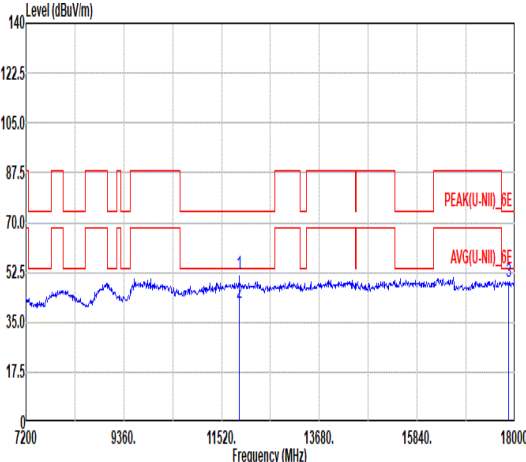
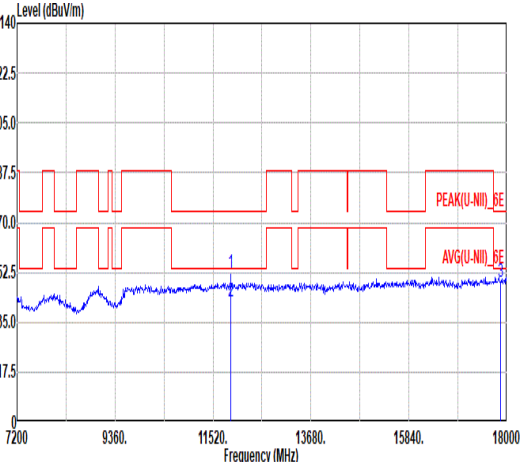


Mode	4																																																																																																																					
	Harmonic																																																																																																																					
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Full RU_5955MHz																																																																																																																					
ANT	1																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																				
Peak Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 11910.00</td><td>51.67</td><td>74.00</td><td>-22.33</td><td>56.85</td><td>38.73</td><td>14.22</td><td>58.13</td><td>254</td><td>312 Peak</td></tr><tr><td>2 11910.00</td><td>41.67</td><td>54.00</td><td>-12.33</td><td>46.85</td><td>38.73</td><td>14.22</td><td>58.13</td><td>254</td><td>312 Average</td></tr><tr><td>3 17865.00</td><td>49.02</td><td>74.00</td><td>-24.98</td><td>48.01</td><td>41.50</td><td>17.10</td><td>57.59</td><td>--</td><td>-- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11910.00	51.67	74.00	-22.33	56.85	38.73	14.22	58.13	254	312 Peak	2 11910.00	41.67	54.00	-12.33	46.85	38.73	14.22	58.13	254	312 Average	3 17865.00	49.02	74.00	-24.98	48.01	41.50	17.10	57.59	--	-- Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 11910.00</td><td>52.43</td><td>74.00</td><td>-21.57</td><td>57.61</td><td>38.73</td><td>14.22</td><td>58.13</td><td>132</td><td>242 Peak</td></tr><tr><td>2 11910.00</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>47.58</td><td>38.73</td><td>14.22</td><td>58.13</td><td>132</td><td>242 Average</td></tr><tr><td>3 17865.00</td><td>49.28</td><td>74.00</td><td>-24.72</td><td>48.27</td><td>41.50</td><td>17.10</td><td>57.59</td><td>--</td><td>-- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11910.00	52.43	74.00	-21.57	57.61	38.73	14.22	58.13	132	242 Peak	2 11910.00	42.40	54.00	-11.60	47.58	38.73	14.22	58.13	132	242 Average	3 17865.00	49.28	74.00	-24.72	48.27	41.50	17.10	57.59	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1 11910.00	51.67	74.00	-22.33	56.85	38.73	14.22	58.13	254	312 Peak																																																																																																													
2 11910.00	41.67	54.00	-12.33	46.85	38.73	14.22	58.13	254	312 Average																																																																																																													
3 17865.00	49.02	74.00	-24.98	48.01	41.50	17.10	57.59	--	-- Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1 11910.00	52.43	74.00	-21.57	57.61	38.73	14.22	58.13	132	242 Peak																																																																																																													
2 11910.00	42.40	54.00	-11.60	47.58	38.73	14.22	58.13	132	242 Average																																																																																																													
3 17865.00	49.28	74.00	-24.72	48.27	41.50	17.10	57.59	--	-- Peak																																																																																																													

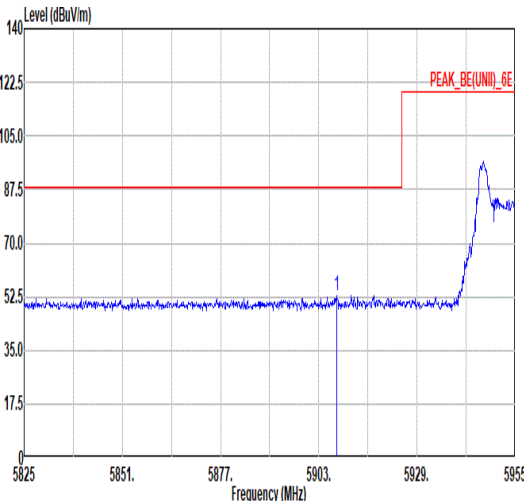
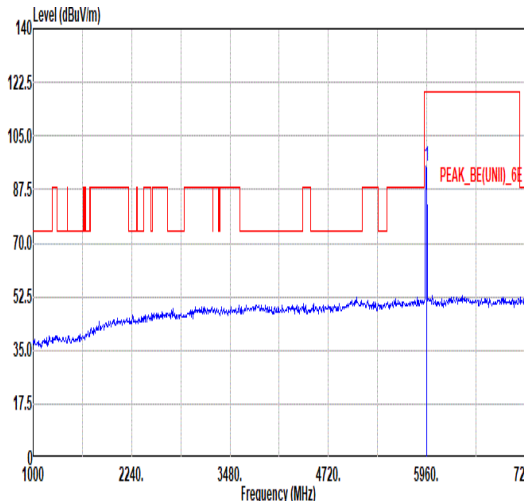
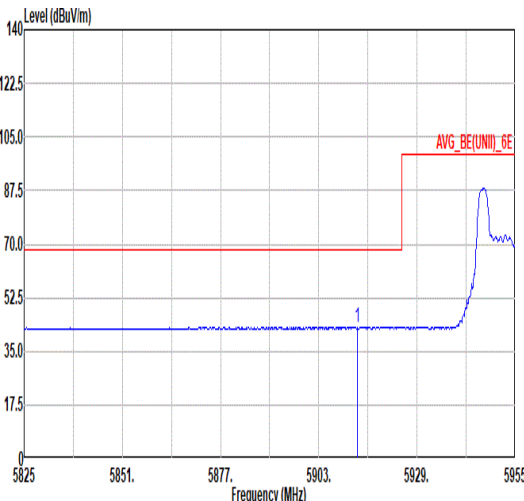
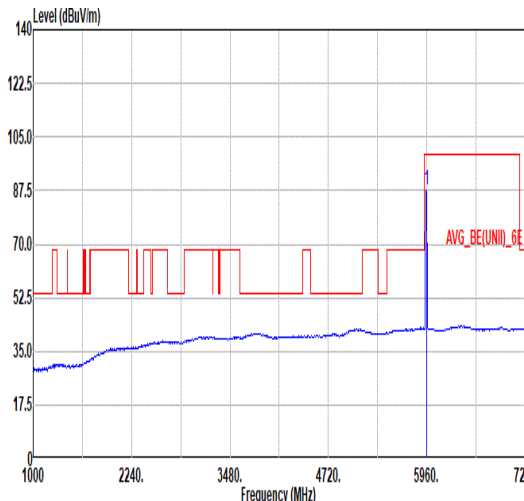


Mode	5																																																		
	Band Edge																																																		
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial_RU_26/0_5955MHz																																																		
ANT	1																																																		
Pol.	Horizontal																																																		
Peak																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5907.68</td><td>53.02</td><td>88.20</td><td>-35.18</td><td>38.94</td><td>36.01</td><td>10.51</td><td>32.44</td><td>103</td><td>169</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5907.68	53.02	88.20	-35.18	38.94	36.01	10.51	32.44	103	169	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5907.68	53.02	88.20	-35.18	38.94	36.01	10.51	32.44	103	169	PEAK																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>95.10</td><td>-----</td><td>-----</td><td>80.99</td><td>36.05</td><td>10.55</td><td>32.49</td><td>103</td><td>169</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	95.10	-----	-----	80.99	36.05	10.55	32.49	103	169	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5955.00	95.10	-----	-----	80.99	36.05	10.55	32.49	103	169	PEAK																																								
Avg																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5913.27</td><td>42.94</td><td>68.20</td><td>-25.26</td><td>28.84</td><td>36.02</td><td>10.52</td><td>32.44</td><td>103</td><td>169</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5913.27	42.94	68.20	-25.26	28.84	36.02	10.52	32.44	103	169	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5913.27	42.94	68.20	-25.26	28.84	36.02	10.52	32.44	103	169	AVERAGE																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>87.70</td><td>-----</td><td>-----</td><td>73.59</td><td>36.05</td><td>10.55</td><td>32.49</td><td>103</td><td>169</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	87.70	-----	-----	73.59	36.05	10.55	32.49	103	169	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5955.00	87.70	-----	-----	73.59	36.05	10.55	32.49	103	169	AVERAGE																																								



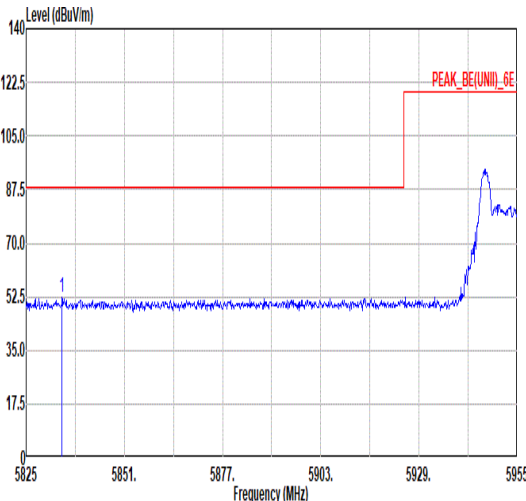
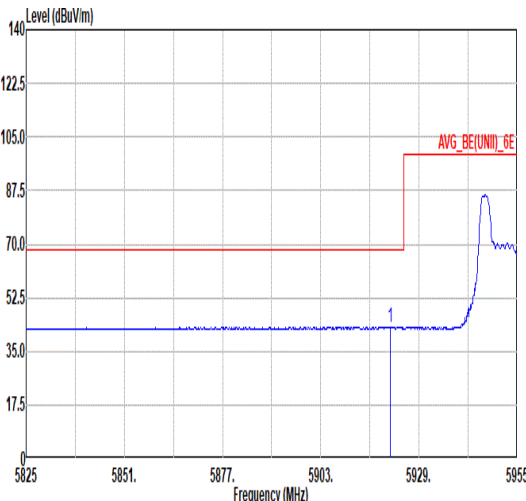


Mode	5																																																		
	Band Edge																																																		
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial_RU_26/0_5955MHz																																																		
ANT	1																																																		
Pol.	Vertical																																																		
Peak																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5834.49</td><td>52.11</td><td>88.20</td><td>-36.09</td><td>38.23</td><td>35.82</td><td>10.45</td><td>32.39</td><td>114</td><td>63</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5834.49	52.11	88.20	-36.09	38.23	35.82	10.45	32.39	114	63	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5834.49	52.11	88.20	-36.09	38.23	35.82	10.45	32.39	114	63	PEAK																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5834.49</td><td>52.11</td><td>88.20</td><td>-36.09</td><td>38.23</td><td>35.82</td><td>10.45</td><td>32.39</td><td>114</td><td>63</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5834.49	52.11	88.20	-36.09	38.23	35.82	10.45	32.39	114	63	PEAK	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5834.49	52.11	88.20	-36.09	38.23	35.82	10.45	32.39	114	63	PEAK																																								
Avg																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5921.33</td><td>42.96</td><td>68.20</td><td>-25.24</td><td>28.87</td><td>36.02</td><td>10.52</td><td>32.45</td><td>114</td><td>63</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5921.33	42.96	68.20	-25.24	28.87	36.02	10.52	32.45	114	63	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5921.33	42.96	68.20	-25.24	28.87	36.02	10.52	32.45	114	63	AVERAGE																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5921.33</td><td>42.96</td><td>68.20</td><td>-25.24</td><td>28.87</td><td>36.02</td><td>10.52</td><td>32.45</td><td>114</td><td>63</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5921.33	42.96	68.20	-25.24	28.87	36.02	10.52	32.45	114	63	AVERAGE	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5921.33	42.96	68.20	-25.24	28.87	36.02	10.52	32.45	114	63	AVERAGE																																								

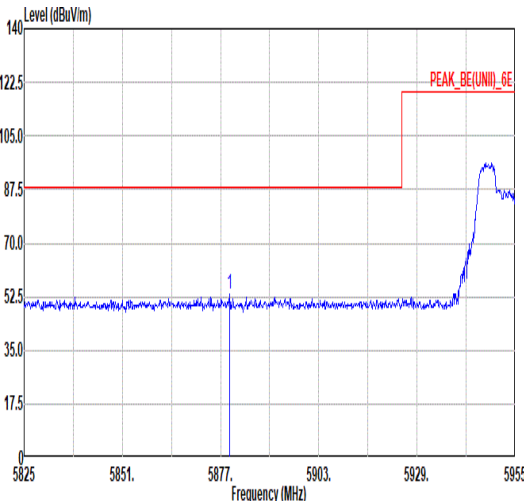
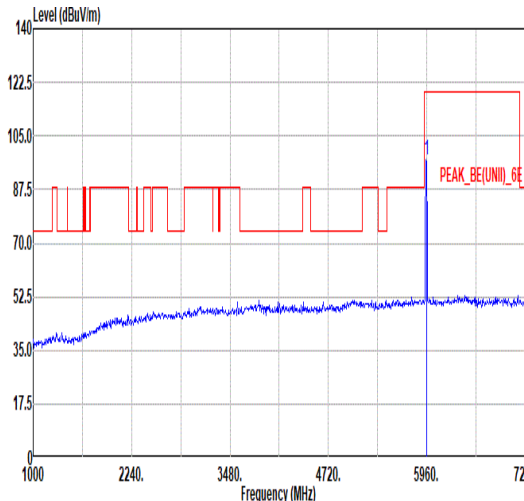
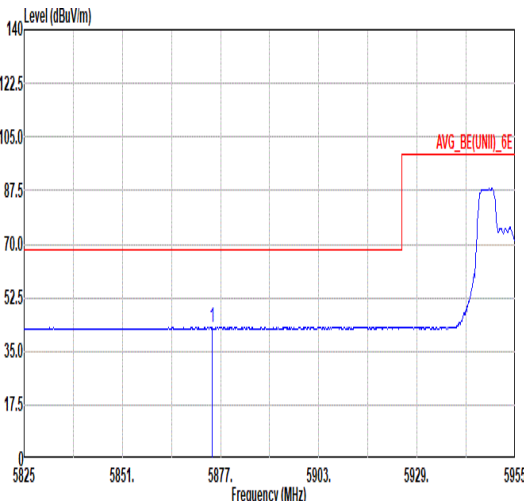
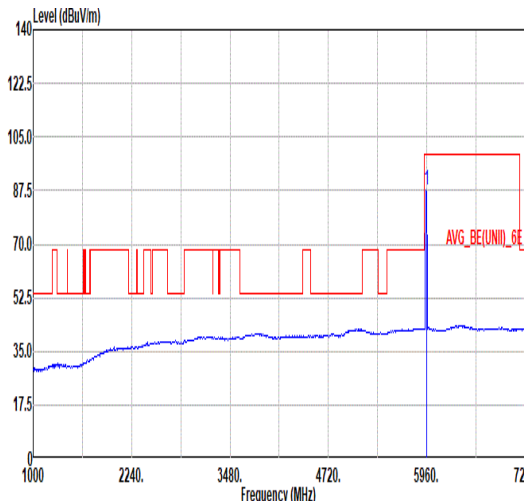


Mode	6																																																				
	Band Edge																																																				
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial_RU_52/37_5955MHz																																																				
ANT	1																																																				
Pol.	Horizontal																																																				
Peak																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5879.34</td><td>53.51</td><td>88.20</td><td>-34.69</td><td>39.48</td><td>35.95</td><td>10.49</td><td>32.41</td><td>102</td><td>171</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5879.34	53.51	88.20	-34.69	39.48	35.95	10.49	32.41	102	171	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5879.34	53.51	88.20	-34.69	39.48	35.95	10.49	32.41	102	171	PEAK																																										
Fundamental																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5955.00</td><td>97.05</td><td>-----</td><td>-----</td><td>82.94</td><td>36.05</td><td>10.55</td><td>32.49</td><td>102</td><td>171</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5955.00	97.05	-----	-----	82.94	36.05	10.55	32.49	102	171	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5955.00	97.05	-----	-----	82.94	36.05	10.55	32.49	102	171	PEAK																																										
Avg																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5874.79</td><td>43.01</td><td>68.20</td><td>-25.19</td><td>29.00</td><td>35.94</td><td>10.48</td><td>32.41</td><td>102</td><td>171</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5874.79	43.01	68.20	-25.19	29.00	35.94	10.48	32.41	102	171	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5874.79	43.01	68.20	-25.19	29.00	35.94	10.48	32.41	102	171	AVERAGE																																										
Fundamental																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5955.00</td><td>87.75</td><td>-----</td><td>-----</td><td>73.64</td><td>36.05</td><td>10.55</td><td>32.49</td><td>102</td><td>171</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5955.00	87.75	-----	-----	73.64	36.05	10.55	32.49	102	171	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5955.00	87.75	-----	-----	73.64	36.05	10.55	32.49	102	171	AVERAGE																																										

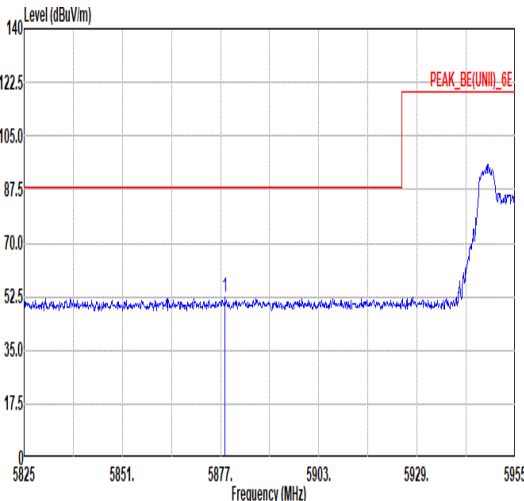
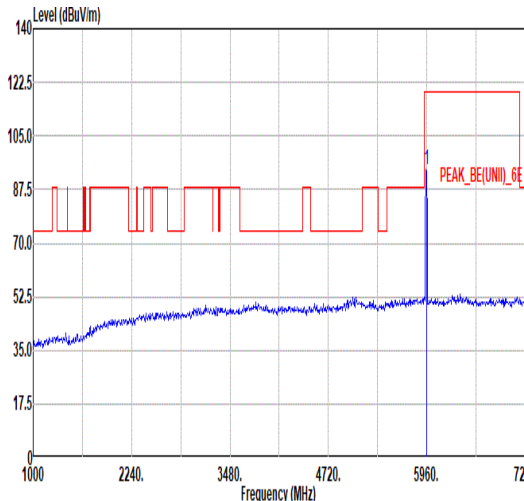
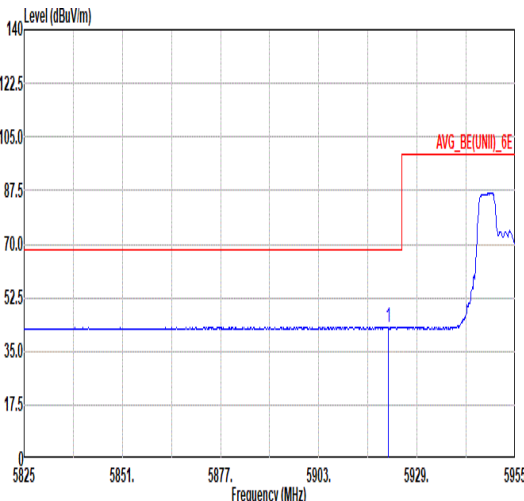
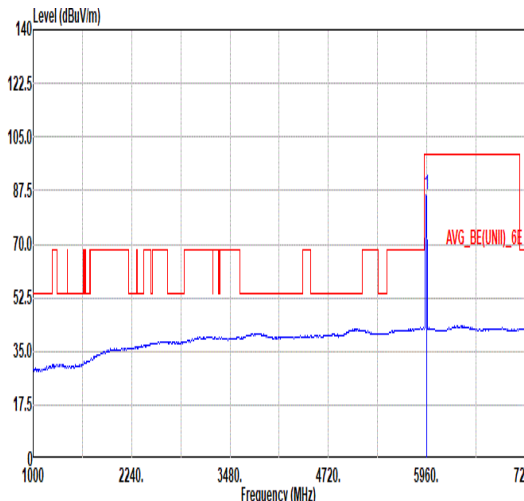


Mode	6																																																			
	Band Edge																																																			
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial_RU_52/37_5955MHz																																																			
ANT	1																																																			
Pol.	Vertical																																																			
Peak																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5878.17</td><td>52.55</td><td>88.20</td><td>-35.65</td><td>38.53</td><td>35.95</td><td>10.48</td><td>32.41</td><td>100</td><td>61</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5878.17	52.55	88.20	-35.65	38.53	35.95	10.48	32.41	100	61
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5878.17	52.55	88.20	-35.65	38.53	35.95	10.48	32.41	100	61	PEAK																																									
Fundamental																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>93.84</td><td>-----</td><td>-----</td><td>79.73</td><td>36.05</td><td>10.55</td><td>32.49</td><td>100</td><td>61</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	93.84	-----	-----	79.73	36.05	10.55	32.49	100	61
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5955.00	93.84	-----	-----	79.73	36.05	10.55	32.49	100	61	PEAK																																									
Avg																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5921.33</td><td>43.00</td><td>68.20</td><td>-25.20</td><td>28.91</td><td>36.02</td><td>10.52</td><td>32.45</td><td>100</td><td>61</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5921.33	43.00	68.20	-25.20	28.91	36.02	10.52	32.45	100	61
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5921.33	43.00	68.20	-25.20	28.91	36.02	10.52	32.45	100	61	AVERAGE																																									
Fundamental																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>86.34</td><td>-----</td><td>-----</td><td>72.23</td><td>36.05</td><td>10.55</td><td>32.49</td><td>100</td><td>61</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	86.34	-----	-----	72.23	36.05	10.55	32.49	100	61
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5955.00	86.34	-----	-----	72.23	36.05	10.55	32.49	100	61	AVERAGE																																									

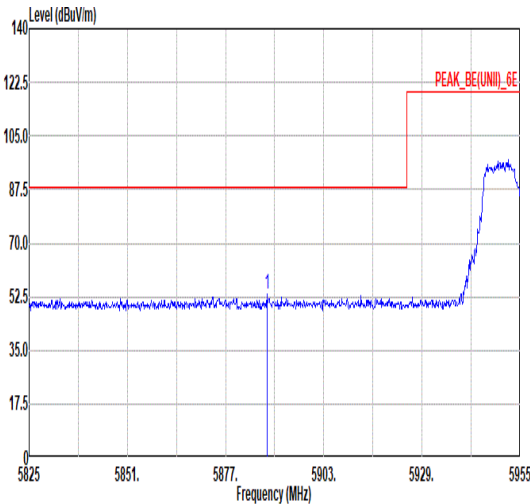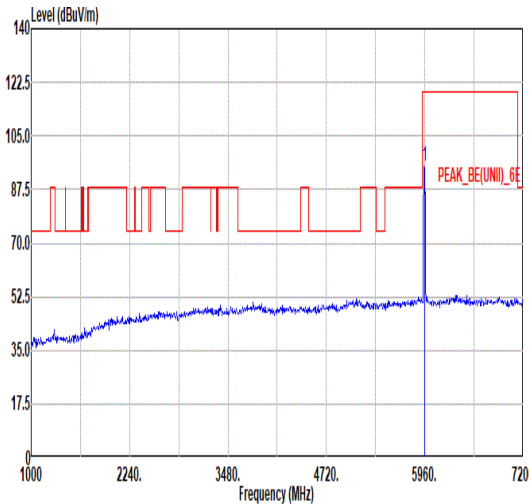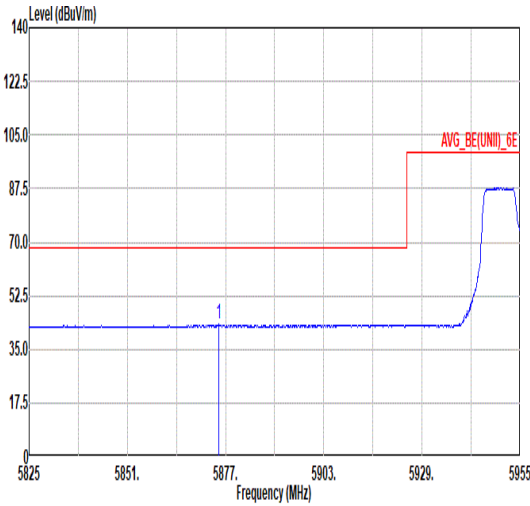
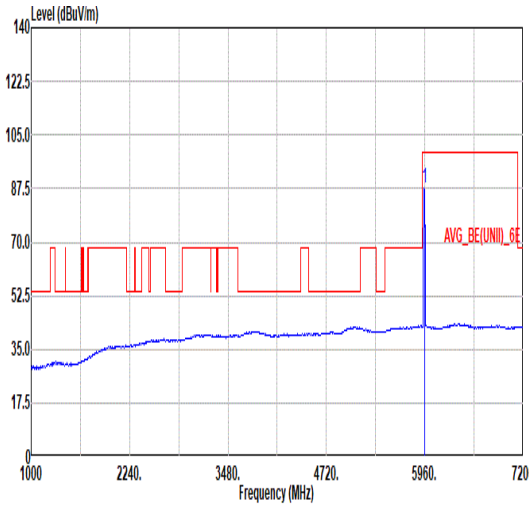


Mode	7																																																				
	Band Edge																																																				
	U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial_RU_106/53_5955MHz																																																				
ANT	1																																																				
Pol.	Horizontal																																																				
Peak																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5877.92</td><td>53.19</td><td>88.20</td><td>-35.01</td><td>39.14</td><td>35.98</td><td>10.49</td><td>32.42</td><td>102</td><td>169</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5877.92	53.19	88.20	-35.01	39.14	35.98	10.49	32.42	102	169	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5877.92	53.19	88.20	-35.01	39.14	35.98	10.49	32.42	102	169	PEAK																																										
Fundamental																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>95.00</td><td>-----</td><td>-----</td><td>80.89</td><td>36.05</td><td>10.55</td><td>32.49</td><td>102</td><td>169</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	95.00	-----	-----	80.89	36.05	10.55	32.49	102	169	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5955.00	95.00	-----	-----	80.89	36.05	10.55	32.49	102	169	PEAK																																										
Avg																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5875.18</td><td>43.09</td><td>68.20</td><td>-25.11</td><td>29.08</td><td>35.94</td><td>10.48</td><td>32.41</td><td>102</td><td>169</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5875.18	43.09	68.20	-25.11	29.08	35.94	10.48	32.41	102	169	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5875.18	43.09	68.20	-25.11	29.08	35.94	10.48	32.41	102	169	AVERAGE																																										
Ave																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>87.46</td><td>-----</td><td>-----</td><td>73.35</td><td>36.05</td><td>10.55</td><td>32.49</td><td>102</td><td>169</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	87.46	-----	-----	73.35	36.05	10.55	32.49	102	169	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	5955.00	87.46	-----	-----	73.35	36.05	10.55	32.49	102	169	AVERAGE																																										

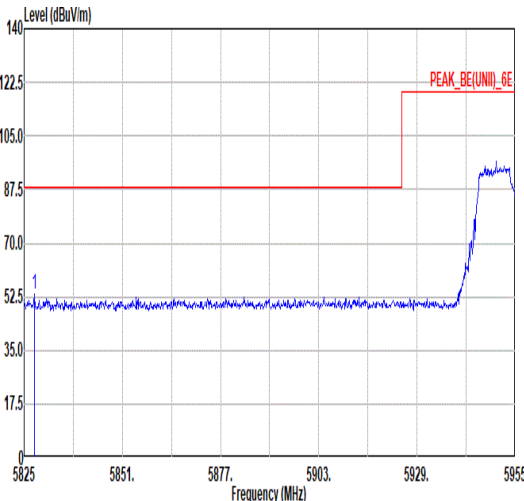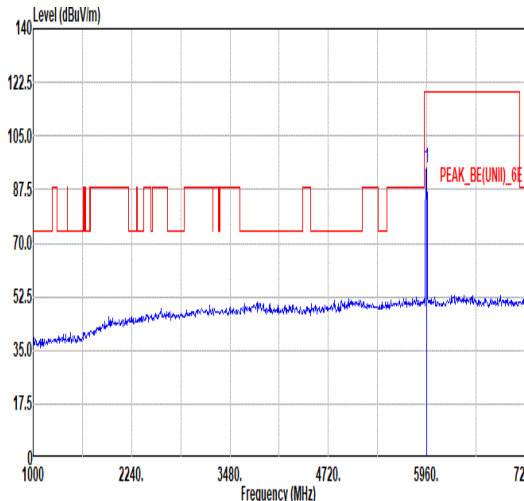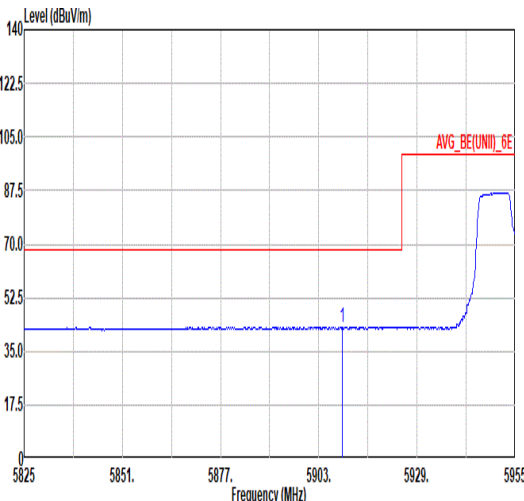
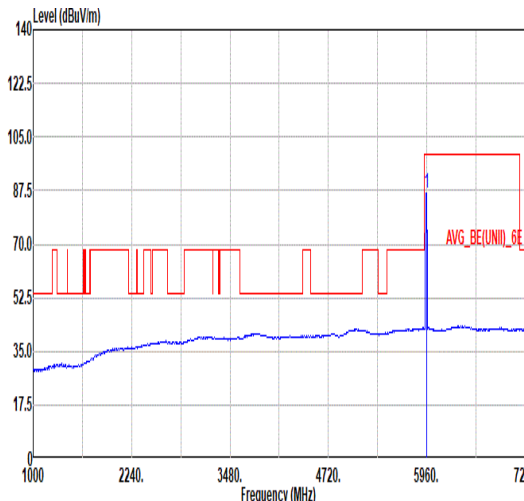


		7																																																																																											
Mode		Band Edge																																																																																											
		U-NII-5_5.925-6.425_802.11ax HE20_CH1_Partial_RU_106/53_5955MHz																																																																																											
ANT		1																																																																																											
Pol.		Vertical					Fundamental																																																																																						
Peak																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5827.73</td><td>53.45</td><td>88.20</td><td>-34.75</td><td>39.59</td><td>35.80</td><td>10.44</td><td>32.38</td><td>100</td><td>61</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5827.73	53.45	88.20	-34.75	39.59	35.80	10.44	32.38	100	61	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>94.49</td><td>-----</td><td>-----</td><td>80.38</td><td>36.06</td><td>10.55</td><td>32.50</td><td>100</td><td>61</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	94.49	-----	-----	80.38	36.06	10.55	32.50	100	61
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5827.73	53.45	88.20	-34.75	39.59	35.80	10.44	32.38	100	61	PEAK																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5955.00	94.49	-----	-----	80.38	36.06	10.55	32.50	100	61	PEAK																																																																																		
Avg																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5909.24</td><td>43.03</td><td>68.20</td><td>-25.17</td><td>28.95</td><td>36.01</td><td>10.51</td><td>32.44</td><td>100</td><td>61</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5909.24	43.03	68.20	-25.17	28.95	36.01	10.51	32.44	100	61	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5955.00</td><td>86.44</td><td>-----</td><td>-----</td><td>72.33</td><td>36.05</td><td>10.55</td><td>32.49</td><td>100</td><td>61</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5955.00	86.44	-----	-----	72.33	36.05	10.55	32.49	100	61
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5909.24	43.03	68.20	-25.17	28.95	36.01	10.51	32.44	100	61	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5955.00	86.44	-----	-----	72.33	36.05	10.55	32.49	100	61	AVERAGE																																																																																		

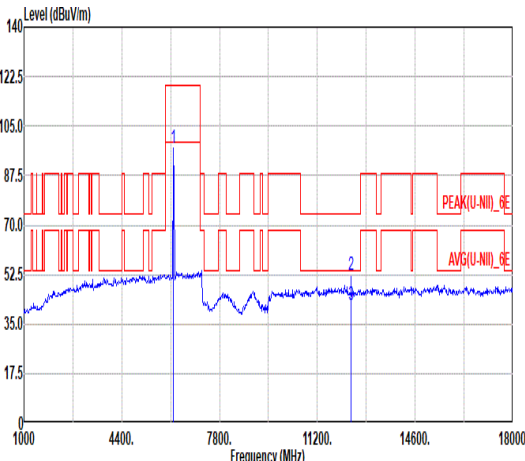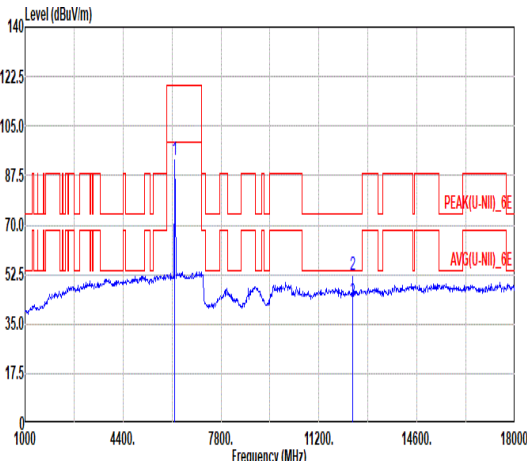

Mode	8																																																																																																																																			
	Harmonic																																																																																																																																			
	U-NII-5_5.925-6.425_802.11ax HE20_CH49_Full RU_6195MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																		
Peak Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6195.00</td><td>97.14</td><td>-----</td><td>-----</td><td>82.84</td><td>36.29</td><td>10.73</td><td>32.72</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12380.00</td><td>52.29</td><td>74.00</td><td>-21.71</td><td>31.93</td><td>38.88</td><td>14.36</td><td>32.88</td><td>235</td><td>224</td><td>Peak</td></tr><tr><td>3</td><td>12380.00</td><td>41.99</td><td>54.00</td><td>-12.01</td><td>21.63</td><td>38.88</td><td>14.36</td><td>32.88</td><td>235</td><td>224</td><td>Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6195.00	97.14	-----	-----	82.84	36.29	10.73	32.72	--	--	Peak	2	12380.00	52.29	74.00	-21.71	31.93	38.88	14.36	32.88	235	224	Peak	3	12380.00	41.99	54.00	-12.01	21.63	38.88	14.36	32.88	235	224	Average	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6195.00</td><td>92.83</td><td>-----</td><td>-----</td><td>78.53</td><td>36.29</td><td>10.73</td><td>32.72</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>12380.00</td><td>52.30</td><td>74.00</td><td>-21.70</td><td>31.94</td><td>38.88</td><td>14.36</td><td>32.88</td><td>132</td><td>124</td><td>Peak</td></tr><tr><td>3</td><td>12380.00</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>22.54</td><td>38.88</td><td>14.36</td><td>32.88</td><td>132</td><td>124</td><td>Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	6195.00	92.83	-----	-----	78.53	36.29	10.73	32.72	--	--	Peak	2	12380.00	52.30	74.00	-21.70	31.94	38.88	14.36	32.88	132	124	Peak	3	12380.00	42.90	54.00	-11.10	22.54	38.88	14.36	32.88	132	124	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	6195.00	97.14	-----	-----	82.84	36.29	10.73	32.72	--	--	Peak																																																																																																																									
2	12380.00	52.29	74.00	-21.71	31.93	38.88	14.36	32.88	235	224	Peak																																																																																																																									
3	12380.00	41.99	54.00	-12.01	21.63	38.88	14.36	32.88	235	224	Average																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	6195.00	92.83	-----	-----	78.53	36.29	10.73	32.72	--	--	Peak																																																																																																																									
2	12380.00	52.30	74.00	-21.70	31.94	38.88	14.36	32.88	132	124	Peak																																																																																																																									
3	12380.00	42.90	54.00	-11.10	22.54	38.88	14.36	32.88	132	124	Average																																																																																																																									

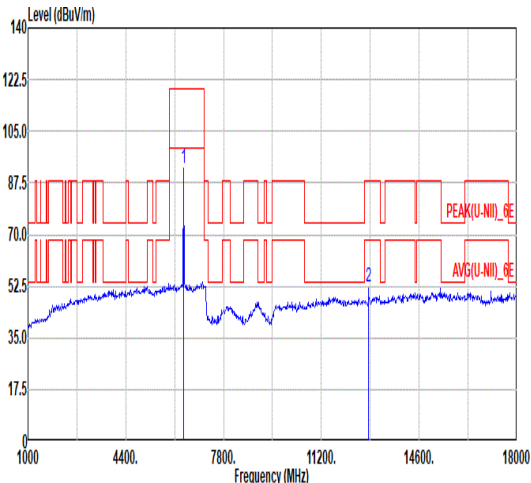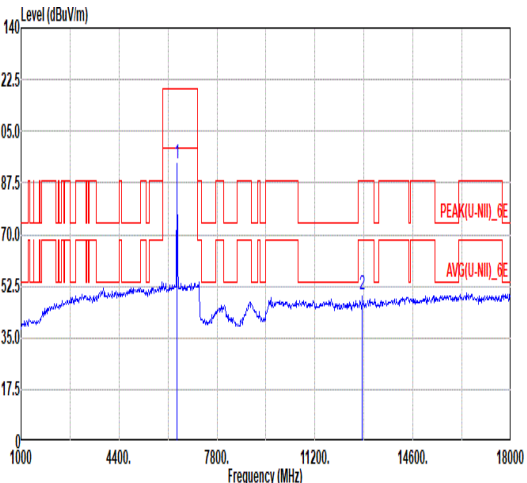

Mode	9																																																																																															
	Harmonic																																																																																															
	U-NII-5_5.925-6.425_802.11ax HE20_CH93_Full RU_6415MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6415.00</td><td>92.22</td><td>-----</td><td>77.70</td><td>36.50</td><td>10.85</td><td>32.83</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>12830.00</td><td>52.07</td><td>88.20</td><td>-36.13</td><td>30.98</td><td>39.17</td><td>14.72</td><td>32.80</td><td>--</td><td>-- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	6415.00	92.22	-----	77.70	36.50	10.85	32.83	--	-- Peak	2	12830.00	52.07	88.20	-36.13	30.98	39.17	14.72	32.80	--	-- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>6415.00</td><td>94.08</td><td>-----</td><td>79.56</td><td>36.50</td><td>10.85</td><td>32.83</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>12830.00</td><td>49.84</td><td>88.20</td><td>-38.36</td><td>28.75</td><td>39.17</td><td>14.72</td><td>32.80</td><td>--</td><td>-- Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	6415.00	94.08	-----	79.56	36.50	10.85	32.83	--	-- Peak	2	12830.00	49.84	88.20	-38.36	28.75	39.17	14.72	32.80	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	6415.00	92.22	-----	77.70	36.50	10.85	32.83	--	-- Peak																																																																																							
2	12830.00	52.07	88.20	-36.13	30.98	39.17	14.72	32.80	--	-- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	6415.00	94.08	-----	79.56	36.50	10.85	32.83	--	-- Peak																																																																																							
2	12830.00	49.84	88.20	-38.36	28.75	39.17	14.72	32.80	--	-- Peak																																																																																						