

Date: 2026-04-15

01_WLAN2.4GHz_802.11b 1Mbps_Bottom Face_5mm_Ch12

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2467.000MHz; Duty Cycle: 1:1.009

Medium: HSL_2450_260415 Medium parameters used: $f = 2467.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (140.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.575 W/kg; SAR (10g) = 0.281 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.545 W/kg; SAR (10g) = 0.276 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 76.3 %

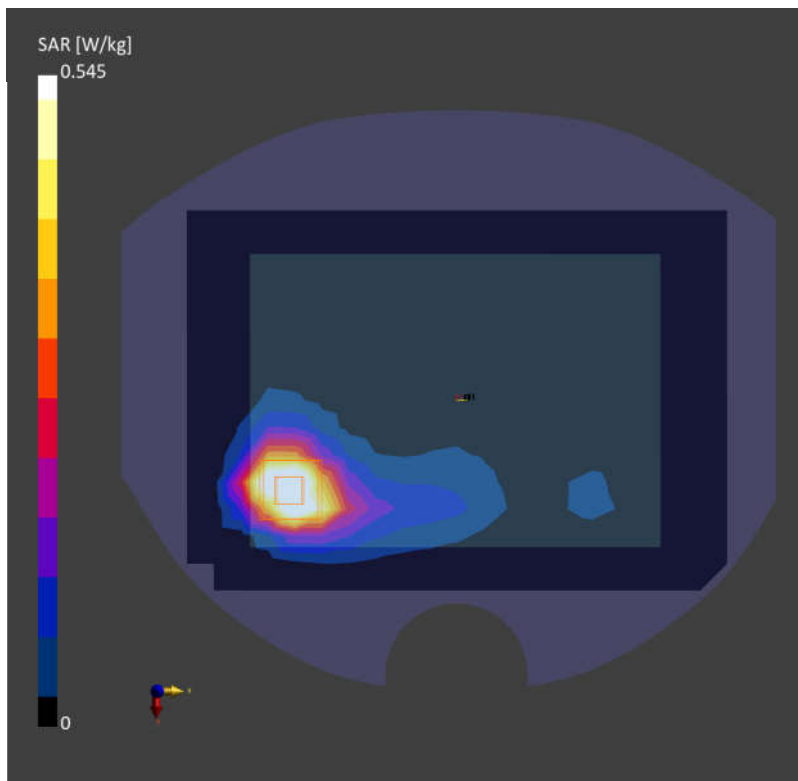

Date: 2026-04-16

02_WLAN5GHz_802.11a 6Mbps_Bottom Face_5mm_Ch60

Communication System: IEEE 802.11a/h WiFi 5 GHz

Frequency: 5300.000MHz; Duty Cycle: 1:1.034

Medium: HSL_5250_260416 Medium parameters used: $f = 5300.000$ MHz; $\sigma = 4.74$ S/m; $\epsilon_r = 36.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.9, 5.74, 5.85); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (140.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.901 W/kg; SAR (10g) = 0.307 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 0.941 W/kg; SAR (10g) = 0.317 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.8 %

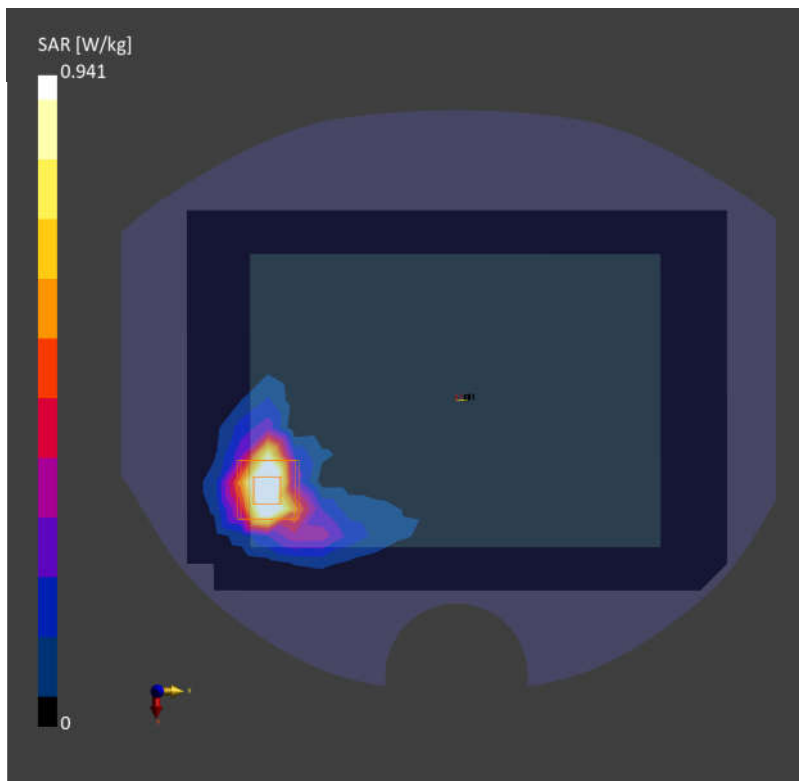

Date: 2026-04-20

03_WLAN5GHz_802.11n-HT40 MCS0_Bottom Face_5mm_Ch142

Communication System: IEEE 802.11n

Frequency: 5710.000 MHz; Duty Cycle: 1:1.067

Medium: HSL_5800_260420 Medium parameters used: $f = 5710.000$ MHz; $\sigma = 5.19$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.31, 5.17, 5.27); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (140.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.867 W/kg; SAR (10g) = 0.285 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.908 W/kg; SAR (10g) = 0.295 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.1 %

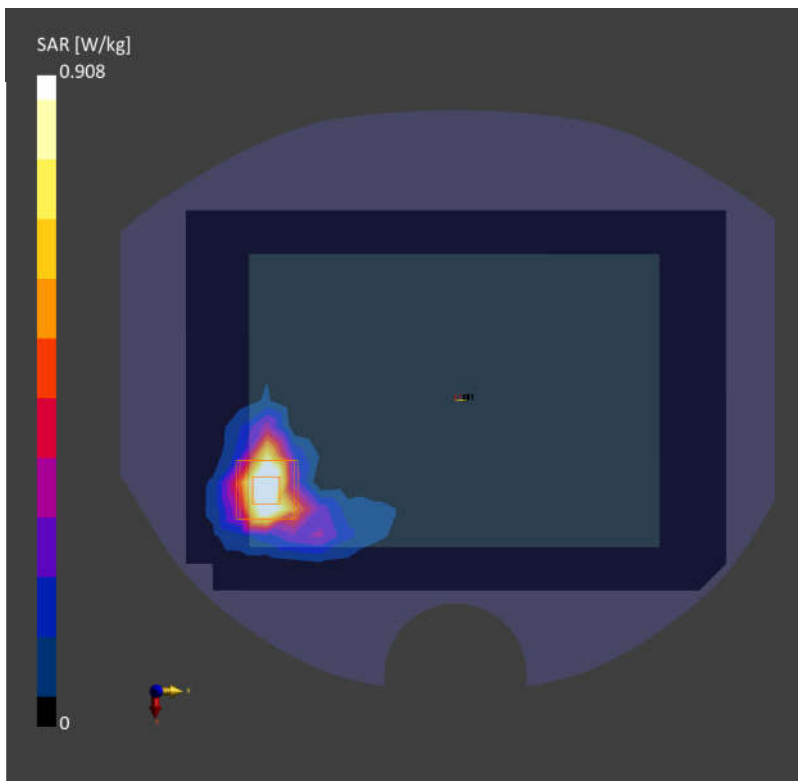

Date: 2026-04-20

04_WLAN5GHz_802.11n-HT40 MCS0_Bottom Face_5mm_Ch151

Communication System: IEEE 802.11n

Frequency: 5755.000 MHz; Duty Cycle: 1:1.067

Medium: HSL_5800_260420 Medium parameters used: $f = 5755.000$ MHz; $\sigma = 5.24$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.31, 5.17, 5.27); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (140.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.856 W/kg; SAR (10g) = 0.286 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.897 W/kg; SAR (10g) = 0.290 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 61.7 %

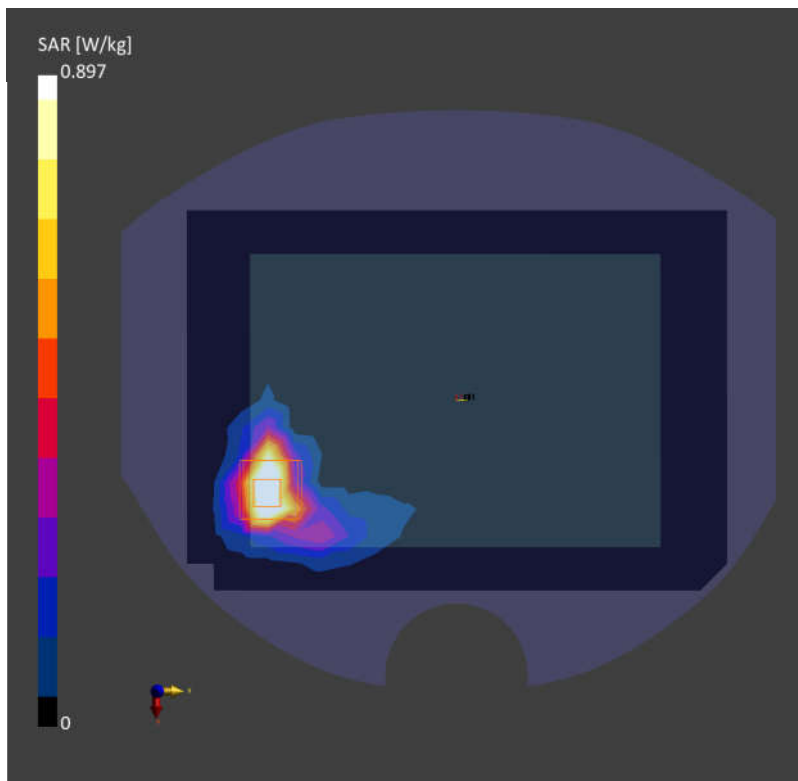

Date: 2026-04-15

05_Bluetooth_1Mbps_Bottom Face_5mm_Ch78

Communication System: IEEE 802.15.1 Bluetooth

Frequency: 2480.000 MHz; Duty Cycle: 1:1.301

Medium: HSL_2450_260415 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (140.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.067 W/kg; SAR (10g) = 0.033 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.065 W/kg; SAR (10g) = 0.033 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 83.3 %

