

Date: 2026-04-10

01_WLAN2.4GHz_802.11b 1Mbps_Front Face_0mm_Ch12

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2467.000MHz; Duty Cycle: 1:1.006

Medium: HSL_2450_260410 Medium parameters used: $f = 2467.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (140.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.275 W/kg; SAR (10g) = 0.142 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.314 W/kg; SAR (10g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

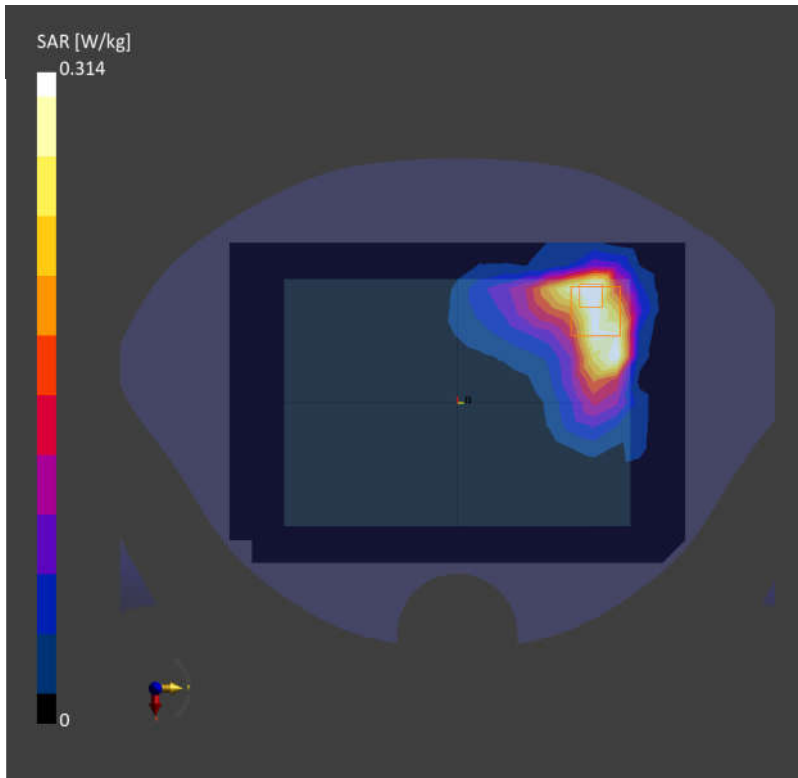

Date: 2026-04-13

02_WLAN5GHz_802.11n-HT40 MCS0_Front Face_0mm_Ch54

Communication System: IEEE 802.11n

Frequency: 5270.000 MHz; Duty Cycle: 1:1.071

Medium: HSL_5250_260413 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 36.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.79, 5.18, 4.9); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (140.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.466 W/kg; SAR (10g) = 0.170 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 0.530 W/kg; SAR (10g) = 0.181 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.5 %

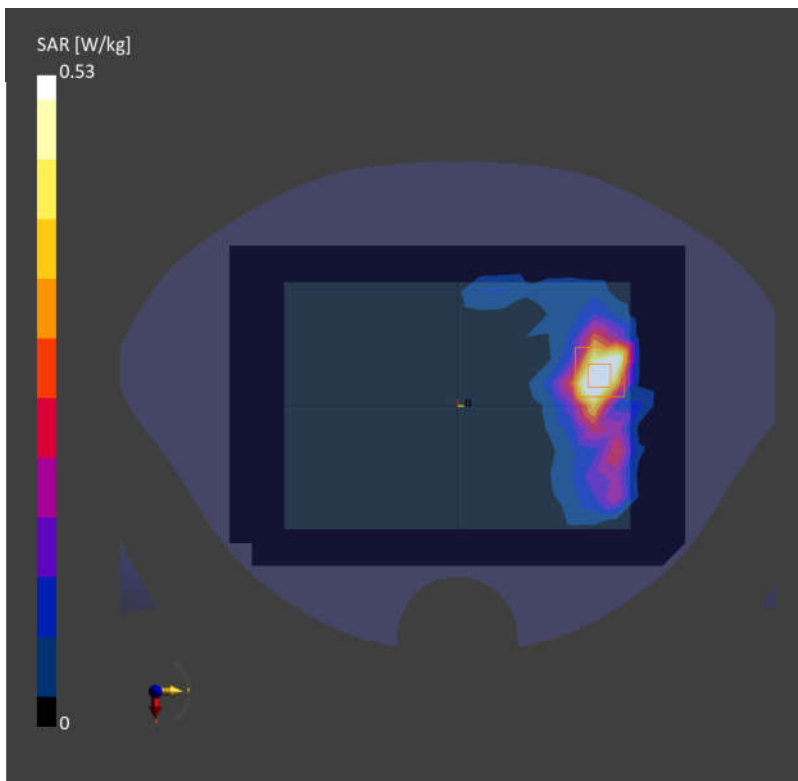

Date: 2026-04-14

03_WLAN5GHz_802.11n-HT40 MCS0_Front Face_0mm_Ch110

Communication System: IEEE 802.11n

Frequency: 5550.000 MHz; Duty Cycle: 1:1.071

Medium: HSL_5600_260414 Medium parameters used: $f = 5550.000$ MHz; $\sigma = 4.99$ S/m; $\epsilon_r = 36.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.39, 4.74, 4.48); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (140.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.632 W/kg; SAR (10g) = 0.221 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.18 dB

SAR (1g) = 0.631 W/kg; SAR (10g) = 0.219 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.5 %

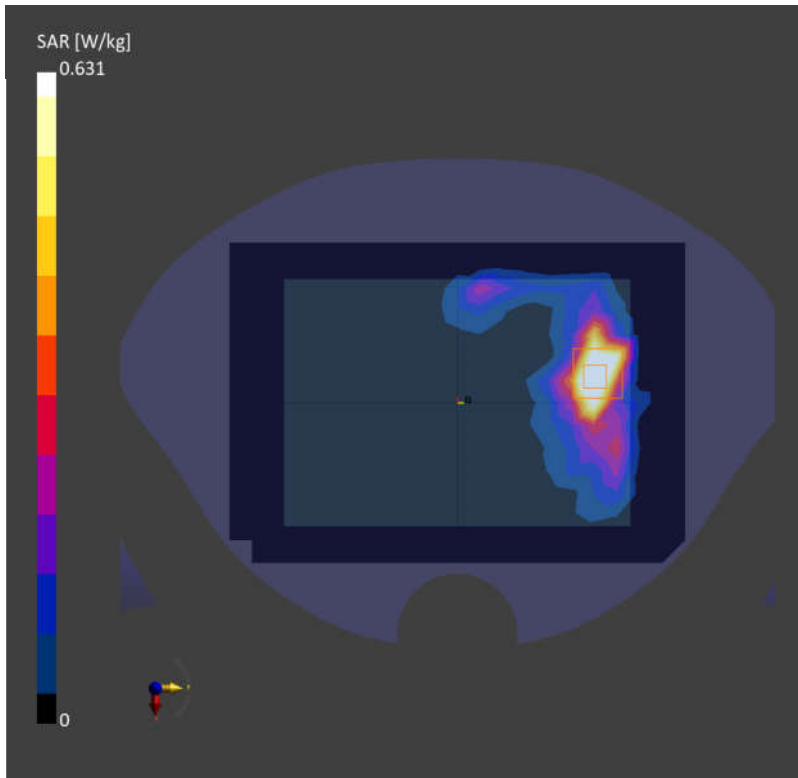

Date: 2026-04-15

04_WLAN5GHz_802.11a 6Mbps_Front Face_0mm_Ch149

Communication System: IEEE 802.11a/h WiFi 5 GHz

Frequency: 5745.000MHz; Duty Cycle: 1:1.031

Medium: HSL_5800_260415 Medium parameters used: $f = 5745.000$ MHz; $\sigma = 5.22$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.49, 4.85, 4.59); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (140.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.577 W/kg; SAR (10g) = 0.187 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.08 dB

SAR (1g) = 0.560 W/kg; SAR (10g) = 0.177 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.3 %

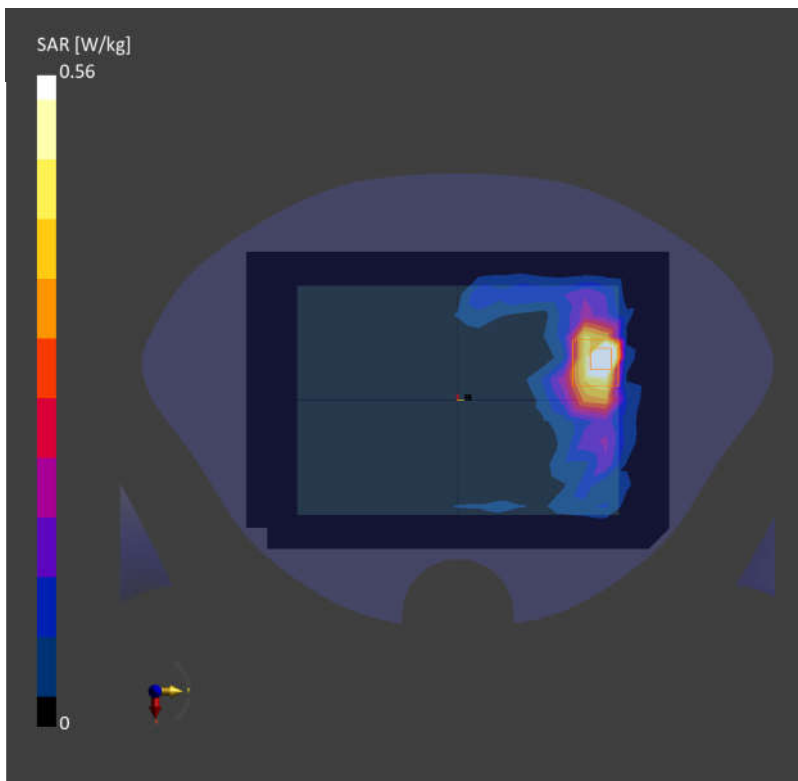

Date: 2026-04-10

05_Bluetooth_1Mbps_Front Face_0mm_Ch78

Communication System: IEEE 802.15.1 Bluetooth

Frequency: 2480.000 MHz; Duty Cycle: 1:1.305

Medium: HSL_2450_260410 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1279; Calibrated: 2025-12-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (140.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.020 W/kg; SAR (10g) = 0.010 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.020 W/kg; SAR (10g) = 0.009 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

