V202509.1

S100L / S100L PRO User Manual



• If the QR code cannot be scanned, please search for "Scent Master Pro" in Google play or APP store.

Download app

Please read the user manual carefully before using the product and keep it in a safe place.

⚠ Safety Precautions:

1. Do not use overloaded power supplies, sockets, or damaged power cords and plugs. If used, it may endanger your safety and may cause fire. If this happens, please promptly report to the sales or after-sales department and request replacement;
2. Please do not open the inside of the device to avoid the device damage. If the device works in error, please read the user manual carefully, follow the normal procedure or consult sales and after-sales;
3. When the device is working, do not disassemble the device or shake it vigorously, to avoid abnormal functioning abnormally;
4. Do not put the device or power adapter in water or watering, do not use a watering power adapter;
5. When the device is already filled with liquid (essential oil), do not invert, tilt or rotate the device to device liquid spillage and damage the device;
6. When encountering natural weather thunder, do not operate the device or touch the power cord to avoid the risk of electric shock.

Product Instruction:

The S100L features the industry-leading second-generation atomization technology, powered by a robust pump that ensures stable operation for over 10,000 hours. It introduces innovative human detection technology, creating an elegant fragrance atmosphere while maximizing energy efficiency and environmental friendliness.The seamless integration of the colorful night light and high-quality speakers blends fragrance, light, and music to deliver an immersive experience that relaxes both the body and mind. The all-aluminum flying saucer design is minimalist yet sophisticated, perfect for any space that needs a touch of fragrance, keeping a pleasant atmosphere constantly surrounding you.

Product Specification:

Model Number	S100L	S100L PRO
Oil Capacity	150mL	150mL
Coverage Area	350m²/1000m³	350m²/1000m³
Atomization Power	5W	5W
Speaker Power		24W
Oil Consumption	2.0g/h	2.0g/h
Machine Size	ϕ203×900mm	ϕ203×900mm
N.W	2.55kg	2.75kg
Voltage	DC12V1A	DC12V2A
Noise	< 35dB	< 35dB
Install Method	Desktop	Desktop
Human body sensing	Distance 3m / Angle 120°	Distance 3m / Angle 120°
Speaker		4+2

Oil consumption means: the device in the maximum setting, the test oil is Shangri-La, the test oil consistency is 9.5MPA.S, the room temperature is 30 °C, the air humidity is 45%. Above is for reference.

Install Instruction:



1. Connect the power socket on the base to start misting (as Figure 1);
2. Rotate counterclockwise to remove the atomizer head and essential oil bottle (as Figure 2);
3. Remove the essential oil bottle by rotating it counterclockwise, add liquid to the essential oil bottle, and tighten it clockwise (as Figure 3);
4. Put the tightened essential oil bottle and atomizer head into the machine, tighten them clockwise, and the installation is successful (as Figure 4).



Press and hold [✱] and [⏻] for 3 seconds to restore the Bluetooth initial password / wifi network configuration/ 4g network configuration

Install Instruction:



1. Connect the power socket on the base to start misting (as Figure 1);
2. Rotate counterclockwise to remove the atomizer head and essential oil bottle (as Figure 2);
3. Remove the essential oil bottle by rotating it counterclockwise, add liquid to the essential oil bottle, and tighten it clockwise (as Figure 3);
4. Put the tightened essential oil bottle and atomizer head into the machine, tighten them clockwise, and the installation is successful (as Figure 4).



Press and hold [✱] and [⏻] for 3 seconds to restore the Bluetooth initial password / wifi network configuration/ 4g network configuration

Device Maintains:

Maintain the device every 6 months,or replace the essential oil if the scent weaker.

1. Open the device cover, take off the oil bottle;
2. Each time replace the essential oil, should clean the oil pipe filter;
3. Pour an appropriate amount of alcohol into the essential oil bottle and clean it;
4. Check whether the nozzle of atomizing core is clean.If there is blackening and powder accumulation, it can be removed with toothpick or paper towel.

Fault Resolution:

Device Fault	Solution
Device not work	A. Check if use wrong power supply; B. Check if the power is on; C. Check the setting of device work time.
No atomization	A. Check if the pump work normal, if the nuzzle blocked; B. Check if the fog outlet seal ring broken or fall off; C. Check if the oil pipe blocked or fall off.
Weak atomization	A. Check if the seal ring of fog outlet pipe damage; B. Check if the nozzle blocked; C. Check if the connection of atomizer and nuzzle loose.
Oil leak	A. Check if the atomizer broken; B. Check if the gasket broken and need change; C. Check if the connection of oil bottle and atomizer close tighten;
Abnormal noise	A. Pump loose,fix the pump; B. Pump broken,change new pump; C. Check if the fan fixed well.

Packing Accessories:

Power Supply	User Manual

After Sale Service:

The warranty period of the equipment is 1 year from the date of sale. Easily damaged accessories such as housing, wire and outer pipe are not covered by the warranty, and man-made damage and accident damage are not covered by the warranty. If the warranty period is exceeded, we will charge maintenance fees.

Warranty Card:

Maintain Date	Maintain Item	Maintain Company	Maintain Staff

APP User Manual:

I. Download and register new account

1. Scan QR code on the cover or search for App called "Scent Master Pro" in App Store to download and install;
2. Open the homepage of "Scent Master Pro" App, then click【4G / WIFI】(as Figure 1);
3. For first-time use, click【Register】(as Figure 2);
4. Register a new account and log in according to the prompts on the registration interface (as Figure 3).



Figure 1



Figure 2



Figure 3

II. 4G Distribution Network

1. Open【4G / WIFI】interface,then click【Creat】(as Figure 4);
2. Switch to window【4G】, click【Scan Qrcode】(as Figure 5);
3. Scan QR code posted on the device, then add device (as Figure 6); Note: This two-dimensional code is the only way to bind the device, please properly save it, it is recommended to take photos and archive;
4. In the interface of【Create Success】, device can be renamed, click【Finish】to enter the operation of interfaces (as Figure 7).



Figure 4

Figure 5

Figure 6



Figure 7

III. WIFI Distribution Network

1. Open【4G / WIFI】interface, then click【Creat】(as Figure 8);
2. Follow the prompt for【Next step】(as Figure 9);
3. Follow the prompt for【Config Wi-Fi】(as Figure 10);
4. Select 2.4GHz WiFi, enter the password, and click【Next Step】(as Figure 11);
5. The network is being configured. If the device is scanned, it will automatically jump to the page where the device is added successfully; If the timeout, please re-operate according to the above steps (as Figure 12);
6. In the interface of【Create Success】, device can be renamed, click【Finish】to enter the operation of interface (as Figure 13).



Figure 8

Figure 9

Figure 10

Figure 11

Figure 12



Figure 13

IV. Bluetooth Mode Settings

1. Open the app homepage interface, click【BLUETOOTH】(as Figure 1);
2. Click the search device to pop up the password input dialog box and enter the initial password 9999 (as Figure 2).



Figure 1

Figure 2

S100L

S100L PRO

If you forget the modified password, press and hold [✱] and [⏻] or 3 seconds. When you hear three beeps ("beep beep beep") and the red and blue lights flash alternately, the password will be reset to the default: 9999.

V. Working Mode Setting

4G / WIFI working mode

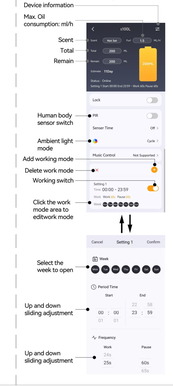

Bluetooth working mode

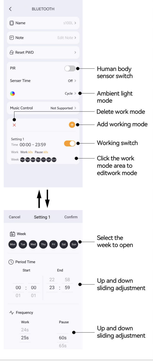

VI. Device Unbinding Ways

1. Open the interface of【4G / WIFI】, long press device name to pop up【Rrname】【Share device】【Unbind device】Click【Unbind device】to complete the device removal operation (as Figure 14 / 15);



Figure 14

Long press the pop-up window settings



Figure 15

2. device unbinding way2 :
(1) Open the interface of【4G / WIFI】, click the device that needs to be removed (as Figure 17);
(2) In the device operation interface. Click the icon" " (as Figure 16);
(3) On the device information page, click【Unbind Device】to complete the removal of the device (as Figure 17).

Figure 16



Figure 17

VII. Group Management

1. Enter【4G / WIFI】and select【Group】interface, click【Add group】to add a first-level group (as Figure 18);
2. Long press on the first-level group in the list to pop up options rename/ group share / delete group (as Figure 19);
3. Click the grouping list to enter the second-level grouping, showing the devices associated with the first-level grouping and the second-level grouping. (as Figure 20).



Figure 18

Figure 19

Figure 20

VIII. Sub-account Management

1. Enter【4G / WIFI】and select【My】interface, click【Sub-account management】(as Figure 21 / 22);
2. Click【Device】to enter the device managed under the employee 's name, and add / remove the device (as Figure 23).



Figure 21

Figure 22



Figure 23

Administrator : can see all devices from main account, but does not have the authority to delete devices.
Employee : can only【Add device】【Work mode setting】

IX. 4G Card Recharging(Compatible with 4G devices only)

1. Enter【4G / WIFI】to enter the device operation interface to recharge, click " " (as Figure 24);
2. Enter the device information interface, Click on【4G card recharge】(as Figure 25);
3. Enter the recharge interface for recharge (as Figure 26).

Figure 24



Figure 25

Figure 26

X. 4G Card Batch Recharge(Compatible with 4G devices only)

1. Enter【4G / WIFI】, select【Me】, click on【Warn Device】(as Figure 27);
2. Enter the interface of batch recharge to tick the device that needs to be recharged, click【Batch Recharge】(as Figure 28);
3. Enter the recharge interface for recharge (as Figure 29).



Figure 27



Figure 28

Figure 29

FCC Warnning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection againstharmful interference in a residential installation. This equipment generates, uses and can radiateradio frequency energy and, if not installed and used in accordance with the instructions, maycause harmful interference to radio communications. However, there is no guarantee thatinterference will not occur in a particular installation. If this equipment does cause harmfulinterference to radio or television reception, which can be determined by turning the equipmentoff and on, the user is encouraged to try to correct the interference by one or more of thefollowing measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1)This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.