


TF-G03说明书 成品尺寸：73X93mm 128克铜版纸 覆哑膜 双面印刷 钢琴折

虚线做
易撕线

正面

TRANSFORMERS

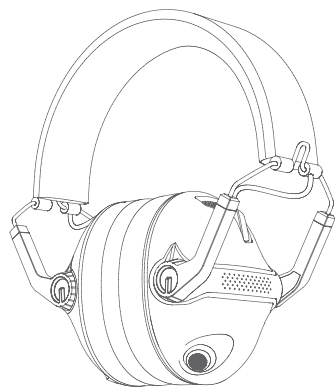

TF-G03蓝牙双模头戴耳机
使用说明书

包装清单

	耳机 x1		Type-C充电线 x1
	音频线 x1		说明书与保修卡 x1

产品规格


蓝牙版本：V5.4
传输距离：≥10m
喇叭类型：Φ40mm
阻抗：16Ω±15%
灵敏度：116dB±3dB
频率响应：20Hz-20KHz
电池容量：4.2V1200mAh
额定输入：5V=500mA
充电时间：≈3小时
播放音乐时间：≈100小时

温馨提示

- 除说明书有特殊标示的操作方式以外，请勿尝试拆卸或更换产品内的任何零件。
- 请勿将产品放入水或其他任何液体中，此产品非防水设计。
- 如果有任何液体不小心进入产品内时，请立即断开连接并移开此产品。
- 为避免触电，请在安装或卸载产品时，确保手上没有沾水。
- 请勿将此产品放置于热源附近或直接暴露在火源附近。
- 请勿将此产品放置在有强大电磁力的环境中，否则会导致产品故障。

产品示意图

- ① 开关键
- ② 麦克风键
- ③ EQ键
- ④ M键
- ⑤ 音量转轮
- ⑥ 麦克风
- ⑦ 指示灯
- ⑧ Type-C充电线接口 / 音频线接口



产品操作说明

1. 开 / 关机
开机：耳机关机状态下，长按3秒开关键，蓝灯长亮1秒，语音提示音“Power on”响起。
关机：耳机开机状态下，长按5秒开关键，红灯长亮1秒，语音提示音“Power off”响起。
低电量报警及自动关机功能：当电池电压低于3.3V时，耳机会发出语音提示音“Battery low”，此时应及时给耳机充电。当电池电压低于3.1V时，耳机会自动关机。
2. 配对
耳机开机后，开启设备蓝牙，搜索“TF-G03”并点击连接。配对成功后，语音提示音“Connected”响起。耳机无连接或断开连接超过5分钟，耳机会自动关机。
注意：首次使用耳机时，耳机开机后自动进入配对模式。本产品有蓝牙记忆功能，再次使用时，开起耳机和设备蓝牙，蓝牙会自动回连。
3. 通话
按下麦克风，麦克风弹出后即可拉出使用。不用时，将麦克风推入并再次按压收回。
开启麦克风：通话状态下，双击麦克风键，语音提示音“mic on”响起。
关闭麦克风：通话状态下，双击麦克风键，语音提示音“mic off”响起。
接听 / 挂断电话：单击麦克风键。
拒听电话：长按2秒麦克风键。
4. EQ
游戏 / 音乐模式（开机默认）：单击EQ键。

5. 音乐
播放 / 暂停音乐：单击M键，下一曲：双击M键，上一曲：三击M键。
6. 语音助手
唤醒 Siri：长按2秒M键。
7. 音量
调低音量：转轮向左减小音量，最小音量时有提示音。
调高音量：转轮向右增大音量，最大音量时有提示音。
8. 接口
耳机插入Type-C充电线或音频线时，耳机会自动关机。
9. 一拖二功能
首先，耳机开机与第一台设备连接。其次，关闭第一台设备蓝牙，耳机重新开机，并与第二台设备连接。最后，打开第一台设备蓝牙，耳机自动与第一台设备连接，耳机能在设备之间切换。

重置配对设备列表

耳机开机状态下，六击开关键，红蓝灯交替闪，语音提示音“Pairing”响起，重新进入搜索配对状态。

LED指示灯状态

模式	灯显	语音提示音
开机	蓝灯长亮1秒	“Power on”
关机	红灯长亮1秒	“Power off”
配对 / 清除配对	红蓝灯交替闪烁	“Pairing”
连接成功	灯光熄灭	“Connected”
断开连接	红蓝灯交替闪烁	“Disconnected”
接听电话	蓝灯长亮	—
充电状态	红灯长亮	—
充电完成	蓝灯长亮	—
低电量警告状态	红灯每5秒闪烁一次	“Battery low”

产品中有害物质的名称及含量

部件名称	有害物质					
	Pb	Hg	Cd	六价铬 Cr(VI)	多溴联苯 PBB	多溴二苯醚 PBDE
印刷电路板组件	○	○	○	○	○	○
外壳等小组构件	○	○	○	○	○	○

本表格依据SJ/T 11364的规定编制。

- ：表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求以下。
×：表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572规定的限量要求。
注：1. 表中标记“×”的部件，皆因全球技术及其零部件而无法实现有害物质的替代；
2. 印刷电路板组件：包括印刷电路板及其零部件、电子元器件等；
3. 根据产品型号不同，您所购买的产品可能不会含有以上所有部件。



在中华人民共和国境内销售的电子电气产品必须标识此标志，标志内的数字代表在正常的使用状态下的产品的环保使用期限。



保修声明

免责声明：
本使用手册没有任何形式的担保、立场表达或其他暗示。本使用手册所提到的产品、规格及信息仅供参考，内容亦会随时更新于网页，恕不另行通知。

保修声明

就本文件附随的产品做如下保证：如产品在您购买日起十二（12）个月（“保修期”）内，在正常使用情况下因质量问题能发生损坏，能修理的，免费修理；经厂家确认无法修理的，免费更换；修理或更换后的产品，在剩余保修期（最短不少于30天）内继续享有保修。购买日以销售发票日期为准。如无法确定购买日，则保修期自产品生产日期起按十三（13）个月计算。如申请保修，请先致电产品服务热线，并按我们指示的方式执行。申请保修时，您需提供准确、完整和清晰填写的有效销售发票。

以上保证不适用于下列情况：

1. 超过三包有效期的；
2. 涂改保修卡、产品编码与产品本体不符；
3. 因误用、滥用或不适当的运输、使用、维护或保管而导致的故障或损坏；
4. 因不可抗力（如地震、战争、火灾等）或意外导致的故障或损坏；
5. 虫鼠、将扣因受力过大而损坏；
6. 因承载过重造成的脱线或撕裂；
7. 因任何尖锐物体造成的损坏；
8. 有烧损或水浸迹象的产品；
9. 因篡改或修改导致的损坏；
10. 产品正常使用过程中发生的老化、褪色、磨痕、破裂和其他损耗；
11. 如产品原有标识标签被更改或损毁，本保证将失效。

产品及随附物料的齐备和外观完好不属于保证范围。您在接收产品时当场检验并对任何不符提出异议。

以上保证是我们就产品做出的全部保证，且仅在中国大陆地区境内适用。本文件的任何内容均不影响根据法律法规规定不能排除或限制的消费者权益。

服务监督热线：400-885-8808

保修卡

尊敬的用户，本保修卡是您将来申请保修的凭证，请您配合销售商填写并妥善保管备用！

用户信息	
用户姓名	电子部件
联系电话	邮政编码
通讯地址	
产品信息	
产品名称	产品型号
产品条码 / 编号 / 型号	

销售商信息	
名 称	
地 址	
联系电话	邮政编码
销售日期	发票号码
备 注	

合格证

产品型号：_____
生产日期：_____
检 验 员：_____

背面

Warranty card

Dear user, this warranty card is the proof of your future warranty application, please cooperate with the seller to fill it out and keep it for future use!

User information

User name	Email
Contact number	Postal code
Mailing address	

Product information

Product name	Product number
Product barcode / Serial number / Batch number	


Vendor information

Name	
Address	
Contact number	Postal code
Sales date	Invoice number
Remark	

Certificate Of Approval

Product number: _____
Production Time: _____
QC: _____

TRANSFORMERS

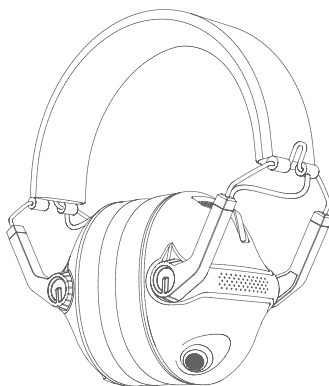

TF-G03 BT dual-mode headsets
Instruction manual

Packing list

	Headsets x1		Type-C charging cable x1
	Audio cable x1		Instructions and warranty card x1

Product specification


BT version: V5.4
Transmission distance: ≥10m
Speaker type: Φ40mm
Impedance: 16Ω±15%
Sensitivity: 116dB±3dB
Frequency response: 20Hz-20KHz
Battery capacity: 4.2V1200mAh
Rated input: 5V=500mA
Charging time: ≈3 hours
Play music time: ≈100 hours

Tips

1. Except for the operation methods specifically marked in the manual, do not try to disassemble or replace any parts in the product.
2. Do not put the product in the water or any others liquid, the product is not waterproof.
3. If any liquid accidentally enters the product, please disconnect and remove the product immediately.
4. To avoid electric shock, please make sure that there is no water on your hands when installing or uninstalling the product.
5. Do not put the product near a heat source or directly expose it to a fire source.
6. Do not put the product in an environment with strong electromagnetic force, otherwise it will cause product malfunction.

Product diagram

- ① Switch key
- ② Microphone key
- ③ EQ key
- ④ M key
- ⑤ Volume wheel
- ⑥ Microphone
- ⑦ Pilot lamp
- ⑧ Type-C charging cable interface / audio cable interface



Product operation instructions

1. Power on / off
Power on: When the headsets are power off, press and hold the switch key for 3 seconds, the blue light will be on for 1 second, and the voice prompt "Power on" will sound.
Power off: When the headsets are power on, press and hold the switch key for 5 seconds, the red light will be on for 1 second, and the voice prompt "Power off" will sound.
Low power alarm and automatic shutdown function: When the battery voltage is lower than 3.3V, the headsets will emit a voice prompt "Battery low", and the headsets should be charged in time. When the battery voltage is lower than 3.1V, the headsets will automatically power off.
2. Pairing
After the headsets are power on, turn on the device BT, search for "TF-G03" and click connect. After successful pairing, the voice prompt "Connected" will sound. If the headsets are not connected or disconnected for more than 5 minutes, the headsets will automatically power off.
Note: When the headsets are used for the first time, they will automatically enter the pairing mode after the headsets are power on. This product has a BT memory function. When used again, turn on the headset and device BT, and BT will automatically reconnect.
3. Phone call
Press the microphone, and after the microphone ejects, it can be pulled out for use. When not in use, push the microphone in and press it again to take it back.
Turn on the microphone: In the call state, double-click the microphone key, and the voice prompt "mic on" will sound.
Turn off the microphone: In the call state, double-click the microphone key, and the voice prompt "mic off" will sound.
Answer / end Call: Click the microphone key.
Reject Call: Press and hold the microphone key for 2 seconds.
4. EQ
Game / music mode (power-on default): Click the EQ key.

5. Music
Play / pause music: Click the M key.
Next song: Double-click the M key.
Previous song: Triple-click the M key.
6. Voice assistant
Wake up Siri: Press and hold the M key for 2 seconds.
7. Volume
Turn down the volume: Turn the wheel to the left to reduce the volume, and there is a prompt tone at the minimum volume.
Turn up the volume: Turn the wheel to the right to increase the volume, and there is a prompt tone at the maximum volume.
8. Interface
When the headsets are plugged into the Type-C charging cable or audio cable, the headsets will automatically power off.
9. One drag two function
First of all, the headsets are turned on and connected to the first device. Secondly, turn off the BT of the first device, restart the headsets, and connect to the second device. Finally, turn on the BT of the first device, and the headsets will automatically connect to the first device.
Headsets can switch between devices.

Reset paired device list

When the headsets are power on, six clicks the switch key, the red and blue lights flash alternately, the voice prompt "Pairing" will sound, and then re-enter the search pairing state.

LED indicator status

Mode	Lamp display	Voice prompt tone
Power on	The blue light is on for 1 second	"Power on"
Power off	The red light is on for 1 second	"Power off"
Pairing / Clear Pairing	The red and blue lights flash alternately	"Pairing"
Connected	The light goes out	"Connected"
Disconnected	The red and blue lights flash alternately	"Disconnected"
Answer	The blue light is steady on	—
Charging state	The red light is steady on	—
Charging completed	The blue light is steady on	—
Low power alarm state	The red light flashes every 5 seconds	"Battery low"

The name and content of harmful substances in the product

Part name	Harmful substances					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
Printed circuit board components	○	○	○	○	○	○
Small structural parts such as shell	○	○	○	○	○	○

This form is compiled in accordance with the provisions of SJ/T 11364.

○: Indicates that the content of the hazardous substance in all homogeneous materials of the part is below the limit requirements specified in GB/T 26572.

×: Indicates that the content of the hazardous substance in at least one homogeneous material of the part exceeds the limit requirements specified in GB/T 26572.

- Note: 1. The parts marked with "×" on the table are unable to achieve the replacement of harmful substances due to limitations in global technological development;
2. Printed circuit board components: including printed circuit boards and their parts, electronic components, etc;
3. Depending on the product model, the product you purchased may not contain all of the above components.



Electronic and electrical products sold in the People's Republic of China must mark this logo, the number in the logo represents the product under normal use environmental protection use period.



Warranty statement

Disclaimer:
This user manual does not have any form of guarantee, position expression or other implication. The products, specifications and information mentioned in this user manual are for reference only, and the content will also be updated on the web at any time without additional separate notice.

Warranty statement

The product attached to this document is guaranteed as follows: If the product is twelve (12) months from the date of purchase ("Warranty Period"), under normal conditions of use due to quality defects damaged, can be repaired, free repair; free replacement if the manufacturer confirms that it cannot be repaired; repaired or replaced product, continue to enjoy the warranty during the remaining warranty period (the shortest not less than 30 days). The date of purchase is subject to the date of the sales invoice. If the date of purchase cannot be determined, the warranty period shall be thirteen (13) months from the date of production. If you apply for a warranty, please call the product service hotline first and execute it in the manner instructed by us. When applying for warranty, you need to provide an accurate, complete and clearly filled out valid sales invoice.

The above guarantee does not apply to the following situations:

1. Exceeding the validity period of three guarantees;
2. Altering the warranty card, the product code does not match the product body;
3. Failure or damage caused by misuse, abuse or improper transportation, use, maintenance or storage;
4. Failure or damage caused by force majeure (such as earthquake, war, fire, etc.) or accidents;
5. Zipper and tower buckle are damaged due to excessive force;
6. Disconnection or tearing caused by excessive force;
7. Any damage caused by sharp objects;
8. Products with signs of burning or flooding;
9. Damage caused by unauthorized disassembly;
10. Aging, discoloration, abrasion, rupture and other losses that occur during the normal use of the product;
11. If the original identification label of the product is changed or damaged, this guarantee will become invalid.

The completeness and appearance of the product and accompanying materials are not within the scope of the guarantee. You should inspect the product on the spot when you receive it and raise objections to any discrepancies.

The above guarantees are all guarantees we make regarding the products, and are only applicable in Chinese Mainland. Nothing in this document affects consumer rights that cannot be excluded or restricted by law.

Service supervision hotline: 400-885-8808

TRANSFORMERS

虚线做
易撕线

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.