



Descartes Systems (USA) LLC

Pallet Tag

FCC 15.247:2022

Bluetooth Low Energy (DTS) Radio

Report: DESC0001.1 Rev. 1, Issue Date: May 9, 2022



This report must not be used to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.

EAR-Controlled Data - This document contains technical data whose export and reexport/retransfer is subject to control by the U.S. Department of Commerce under the Export Administration Act and the Export Administration Regulations. The Department of Commerce's prior written approval may be required for the export or re-export/retransfer of such technical data to any foreign person, foreign entity or foreign organization whether in the United States or abroad.

CERTIFICATE OF TEST

Last Date of Test: March 23, 2022
 Descartes Systems (USA) LLC
 EUT: Pallet Tag

Radio Equipment Testing

Standards

Specification	Method
FCC 15.247:2022	ANSI C63.10:2013, KDB 558074

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
11.6	Duty Cycle	Yes	Pass	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.9.1.1	Equivalent Isotropic Radiated Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	
11.12.1, 11.13.2, 6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:



Cole Ghizzone, Department Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

REVISION HISTORY

Revision Number	Description	Date (yyyy-mm-dd)	Page Number
01	Changed serial numbers for the band edge measurements in spurious radiated emissions from 1,2,3 to 4,5,6.	2022-05-06	54
	Client confirmed radio control firmware is "The firmware name is PLT003 certification firmware Version 1.0 " - updated both configurations -7 and -8 accordingly.	2022-05-06	12

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Each laboratory is accredited by A2LA to ISO / IEC 17025, and as a product certifier to ISO / IEC 17065 which allows Element to certify transmitters to FCC and IC specifications.

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

European Union

European Commission – Recognized as an EU Notified Body validated for the EMCD and RED Directives.

United Kingdom

BEIS – Recognized by the UK as an Approved Body under the UK Radio Equipment and UK EMC Regulations.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

[California](#)

[Minnesota](#)

[Oregon](#)


[Texas](#)

[Washington](#)

FACILITIES



California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-11 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
A2LA				
Lab Code: 3310.04	Lab Code: 3310.05	Lab Code: 3310.02	Lab Code: 3310.03	Lab Code: 3310.06
Innovation, Science and Economic Development Canada				
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1
BSMI				
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI				
A-0029	A-0109	A-0108	A-0201	A-0110
Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA				
US0158	US0175	US0017	US0191	US0157

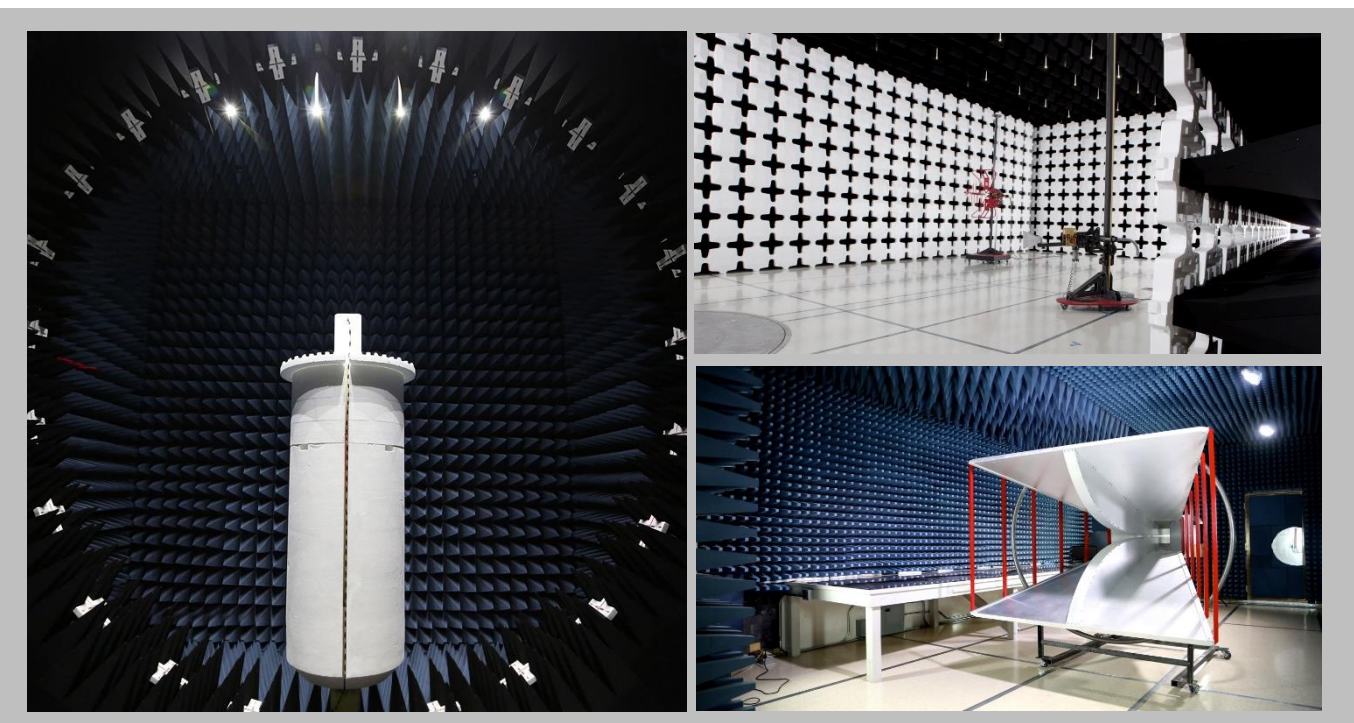

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found in the table below. A lab specific value may also be found in the applicable test description section. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	1.2 dB	-1.2 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	3.2 dB	-3.2 dB

TEST SETUP BLOCK DIAGRAMS

Measurement Bandwidths

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

Unless otherwise stated, measurements were made using the bandwidths and detectors specified. No video filter was used.


Antenna Port Conducted Measurements



Sample Calculation (logarithmic units)

Measured Value		Measured Level		Reference Level Offset
71.2	=	42.6	+	28.6

Near Field Test Fixture Measurements

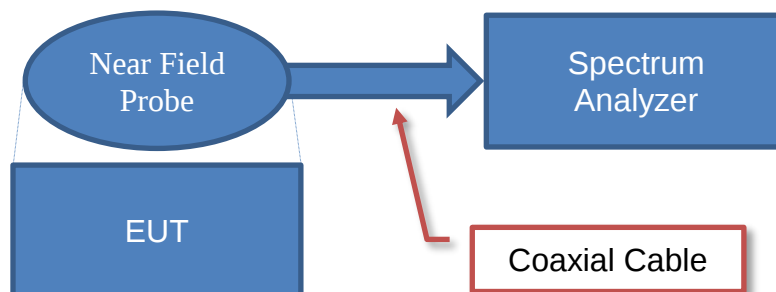


Sample Calculation (logarithmic units)

Measured Value		Measured Level		Reference Level Offset
71.2	=	42.6	+	28.6

TEST SETUP BLOCK DIAGRAMS

Emissions Measurements

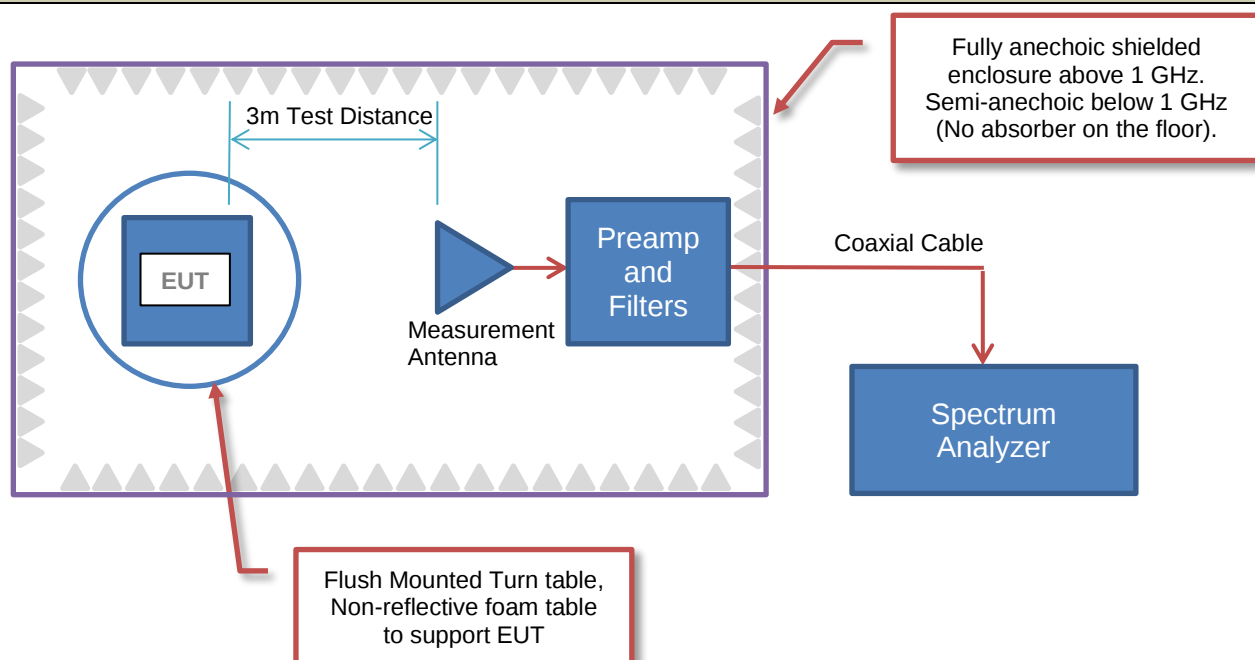

Sample Calculation (logarithmic units)

Radiated Emissions:

Measured Level (Amplitude)	Factor				Distance Adjustment Factor	External Attenuation	Field Strength
	Antenna Factor	Cable Factor	Amplifier Gain				
42.6	28.6	3.1	40.8	+	0.0	0.0	= 33.5


Conducted Emissions:

Measured Level (Amplitude)	Factor			External Attenuation	Adjusted Level
	Transducer Factor	Cable Factor			
26.7	0.3	0.1	+	20.0	= 47.1

TEST SETUP BLOCK DIAGRAMS

Bore Sighting (>1GHz)

The diameter of the illumination area is the dimension of the line tangent to the EUT formed by 3 dB beamwidth of the measurement antenna at the measurement distance. At a 3 meter test distance, the diameter of the illumination area was 3.8 meters at 1 GHz and greater than 2.1 meters up to 6 GHz. Above 1 GHz, when required by the measurement standard, the antenna is pointed for both azimuth and elevation to maintain the receive antenna within the cone of radiation from the EUT. The specified measurement detectors were used for comparison of the emissions to the peak and average specification limits.

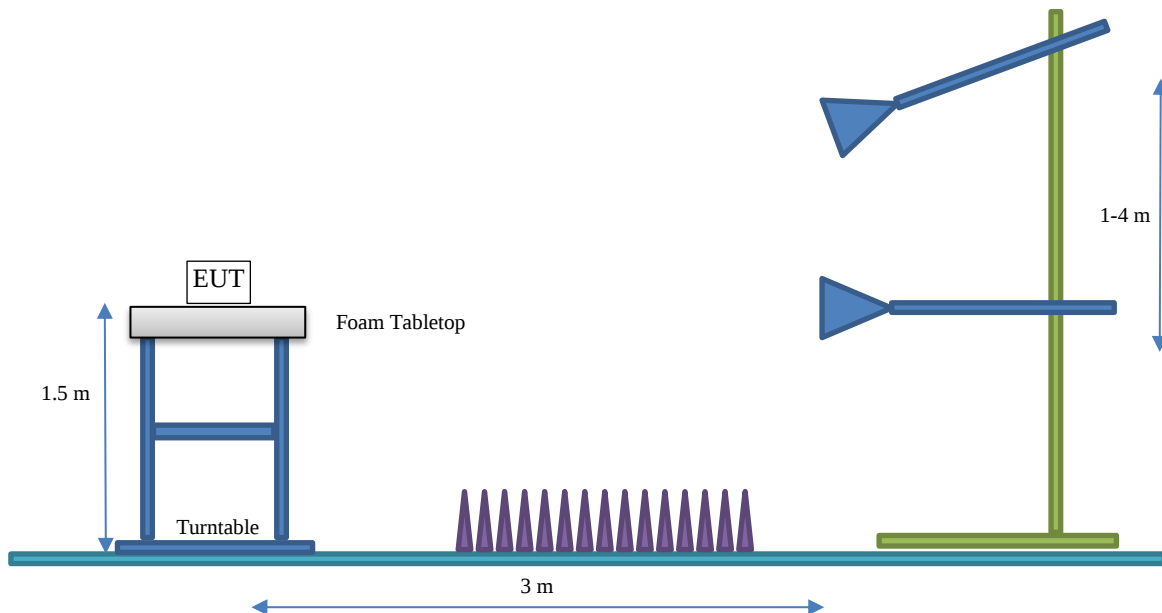

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Descartes Systems (USA) LLC
Address:	37 N Orange Ave #500
City, State, Zip:	Orlando, FL 32801
Test Requested By:	Maria Vivas
EUT:	Pallet Tag
First Date of Test:	March 10, 2022
Last Date of Test:	March 23, 2022
Receipt Date of Samples:	March 9, 2022
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

Bluetooth Low Energy (BLE) tag used to monitor movement of goods and equipment. Each tag is made up of an Nordic nRF52810-QCAA module encased in a housing. Also included is three lithium cell batteries. It is advertising each 10 seconds

Testing Objective:

To demonstrate compliance of the Bluetooth low energy (DTS) radio to FCC 15.247 requirements.

POWER SETTINGS AND ANTENNAS



The power settings, antenna gain value(s) and cable loss (if applicable) used for the testing contained in this report were provided by the customer and will affect the validity of the results. Element assumes no responsibility for the accuracy of this information.

ANTENNA GAIN (dBi)

Type	Provided by:	Frequency Range (MHz)	Gain (dBi)
Pillar	Manufacturer	2400-2500	-0.4

The EUT was tested using the power settings provided by the manufacturer:

SETTINGS FOR ALL TESTS IN THIS REPORT

Modulation Types / Data Rates	Type	Channel	Frequency (MHz)	Power Setting (dBm)
BLE / 1 Mbps	DTS	37	2402	4
		38	2426	
		39	2480	

CONFIGURATIONS



Configuration DESC0001- 7

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
BLE Beacon Tag 2402 MHz	COREInsight	PLT003	4
BLE Beacon Tag 2426 MHz	COREInsight	PLT003	5
BLE Beacon Tag 2480 MHz	COREInsight	PLT003	6

Software	
Description	Version
PLT0003 certification firmware	1.0

Configuration DESC0001- 8

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
BLE Direct Connect Beacon Tag 2402 MHz	COREInsight	PLT003	1
BLE Direct Connect Beacon Tag 2426 MHz	COREInsight	PLT003	2
BLE Direct Connect Beacon Tag 2480 MHz	COREInsight	PLT003	3

Software	
Description	Version
PLT0003 certification firmware	1.0

MODIFICATIONS

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2022-03-10	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2022-03-23	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2022-03-23	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2022-03-23	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2022-03-23	Equivalent Isotropic Radiated Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2022-03-23	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2022-03-23	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	2022-03-23	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

DUTY CYCLE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Block - DC	Fairview Microwave	SD3379	AMW	2022-03-14	2023-03-14
Attenuator	S.M. Electronics	SA26B-20	AUY	2022-03-15	2023-03-15
Generator - Signal	Keysight	N5182B	TFU	2020-11-20	2022-11-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFO	2021-07-06	2022-07-06
Cable	Micro-Coax	UFD150A-1-0720-200200	EVK	2022-03-14	2023-03-14

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.


ThiTx 2021.10.29.2 XMit 2022.02.07.0

DUTY CYCLE




TbTx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
2.119 ms	4.233 ms	1	50.1	N/A	N/A	

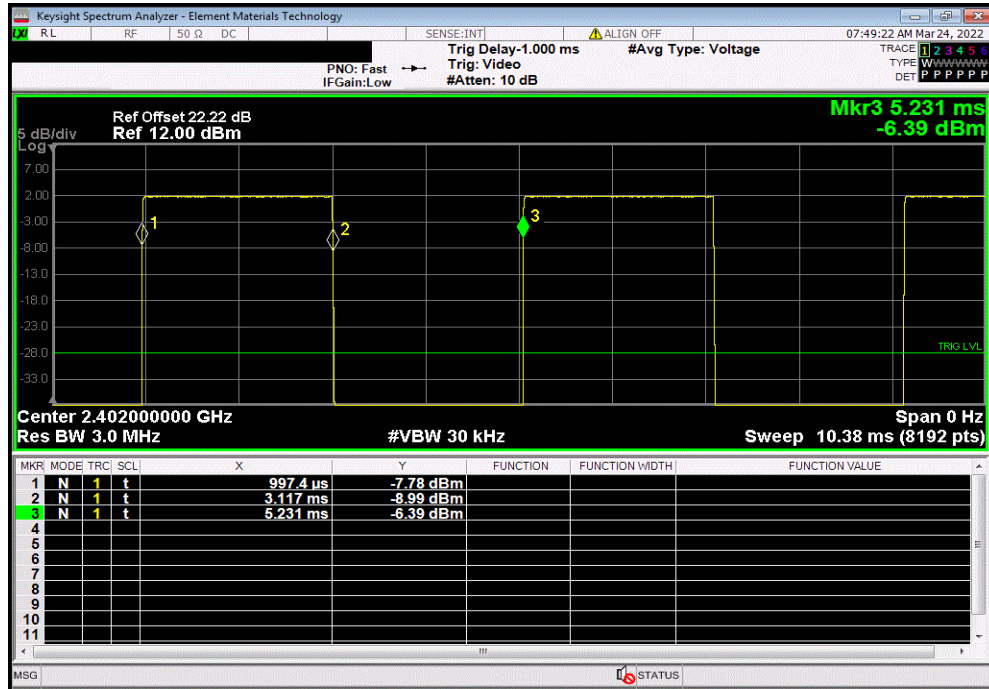

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

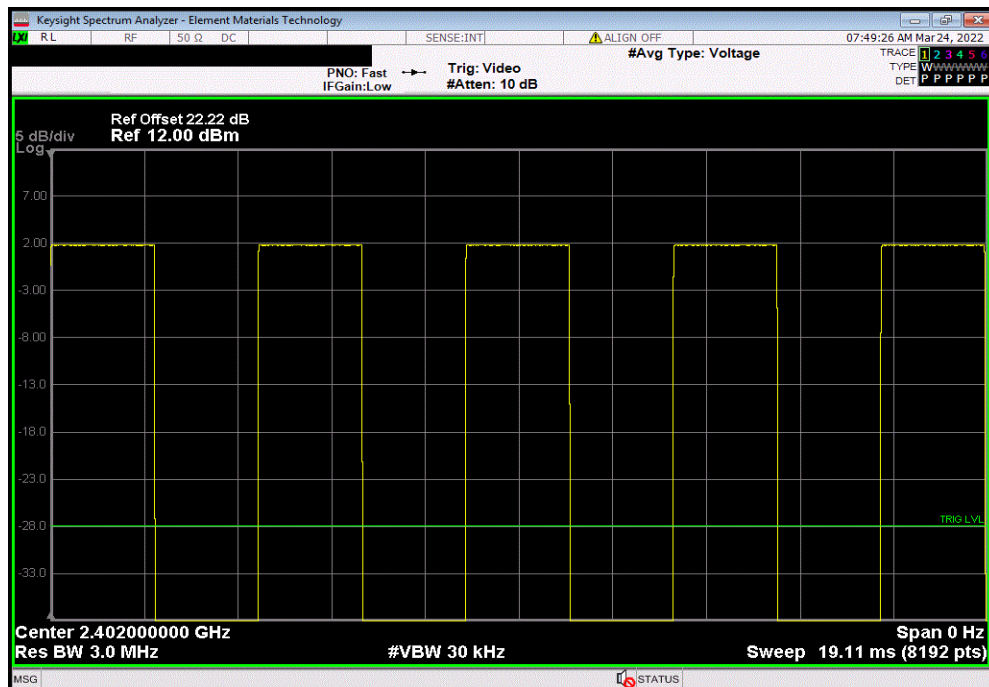


DUTY CYCLE




TbTx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps Mid Channel, 2426 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
2.123 ms	4.233 ms	1	50.2	N/A	N/A	

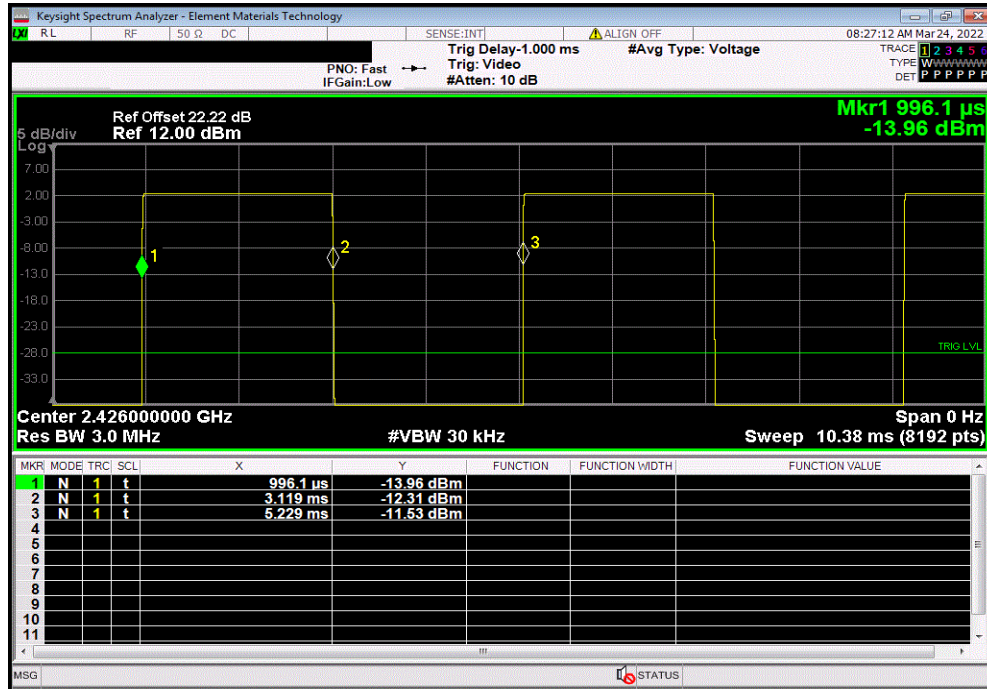

BLE/GFSK 1 Mbps Mid Channel, 2426 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

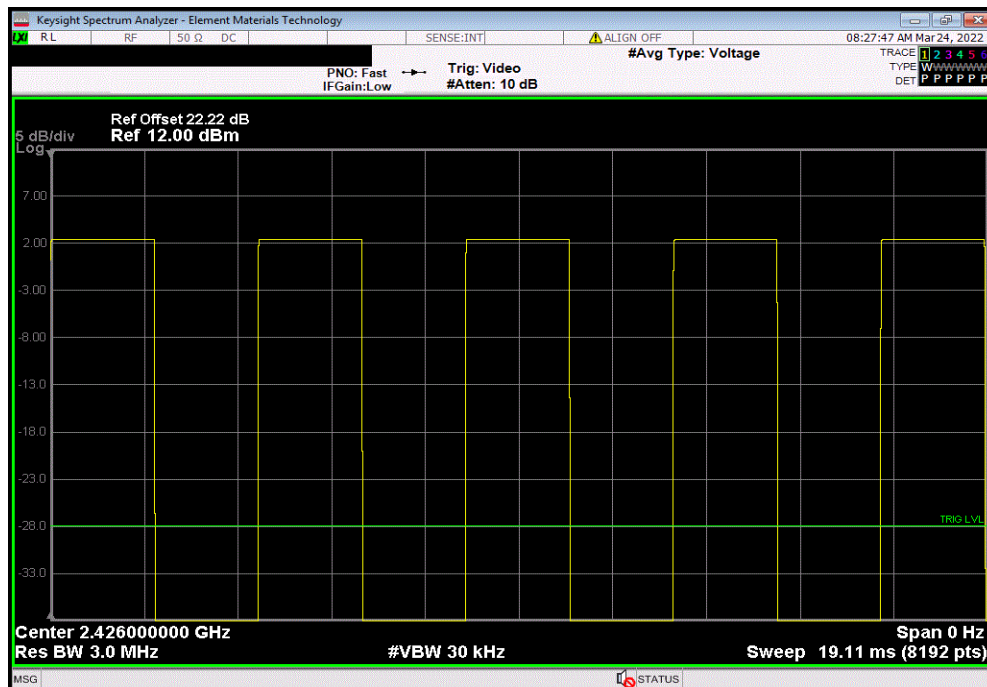


DUTY CYCLE




TbTx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
2.122 ms	4.234 ms	1	50.1	N/A	N/A	

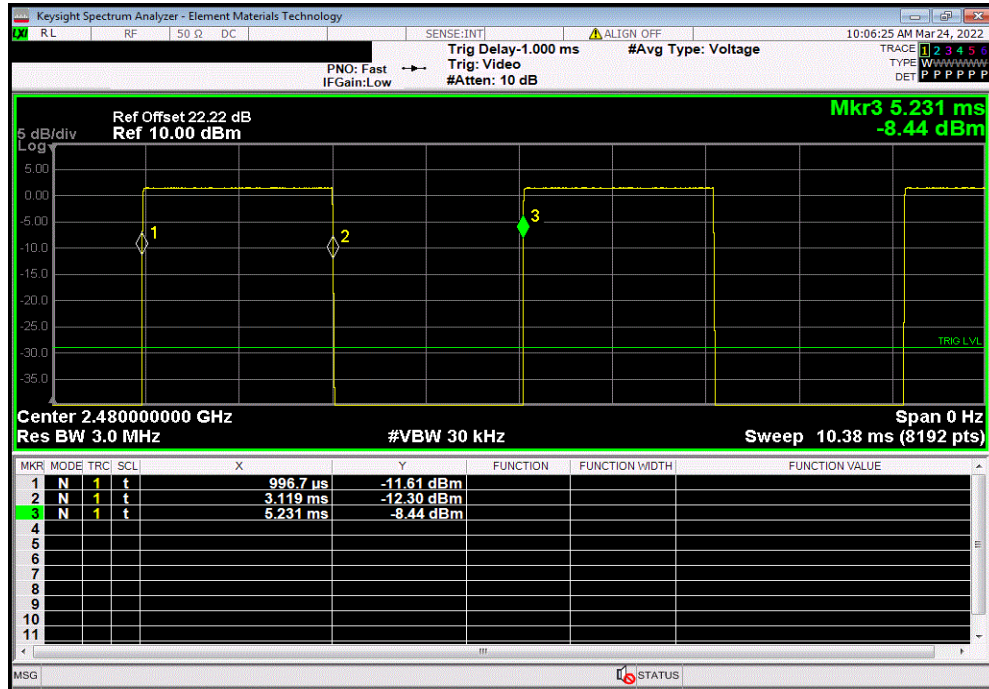

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

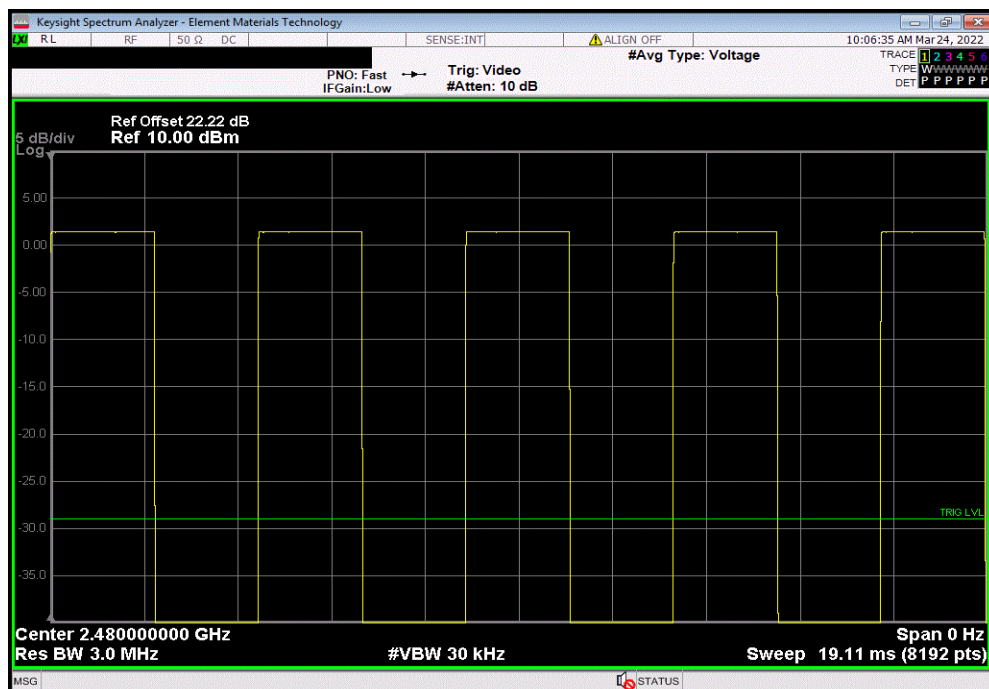

DTS BANDWIDTH



XMIT 2022.02.07.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Block - DC	Fairview Microwave	SD3379	AMW	2022-03-14	2023-03-14
Attenuator	S.M. Electronics	SA26B-20	AUY	2022-03-15	2023-03-15
Generator - Signal	Keysight	N5182B	TFU	2020-11-20	2022-11-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFO	2021-07-06	2022-07-06
Cable	Micro-Coax	UFD150A-1-0720-200200	EVK	2022-03-14	2023-03-14

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The EUT was set to the channels and modes listed in the datasheet.

The 6dB DTS bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

DTS BANDWIDTH



TbTb 2021.10.29.2 XMR 2022.02.07.0


EUT: Pallet Tag		Work Order: DESC0001	
Serial Number: 1, 2, 3		Date: 23-Mar-22	
Customer: Descartes Systems (USA) LLC		Temperature: 21.1 °C	
Attendees: None		Humidity: 49.2% RH	
Project: None		Barometric Pres.: 1026 mbar	
Tested by: Kam Robertson & Jeff Alcock		Power: Battery	
Job Site: EV06			
TEST SPECIFICATIONS			
FCC 15.247:2022		Test Method	
		ANSI C63.10:2013	
COMMENTS			
Reference level offset includes: DC block, 20dB attenuator, measurement cable, SMA to U.FL cable			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	8	Signature	
		Value	Limit (±)
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		703.221 kHz	500 kHz
BLE/GFSK 1 Mbps Mid Channel, 2426 MHz		661.376 kHz	500 kHz
BLE/GFSK 1 Mbps High Channel, 2480 MHz		696.574 kHz	500 kHz
			Result
			Pass
			Pass
			Pass

DTS BANDWIDTH




TbTx 2021.10.29.2 XbTx 2022.02.07.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
	Value	Limit	Result			
	703.221 kHz	500 kHz	Pass			

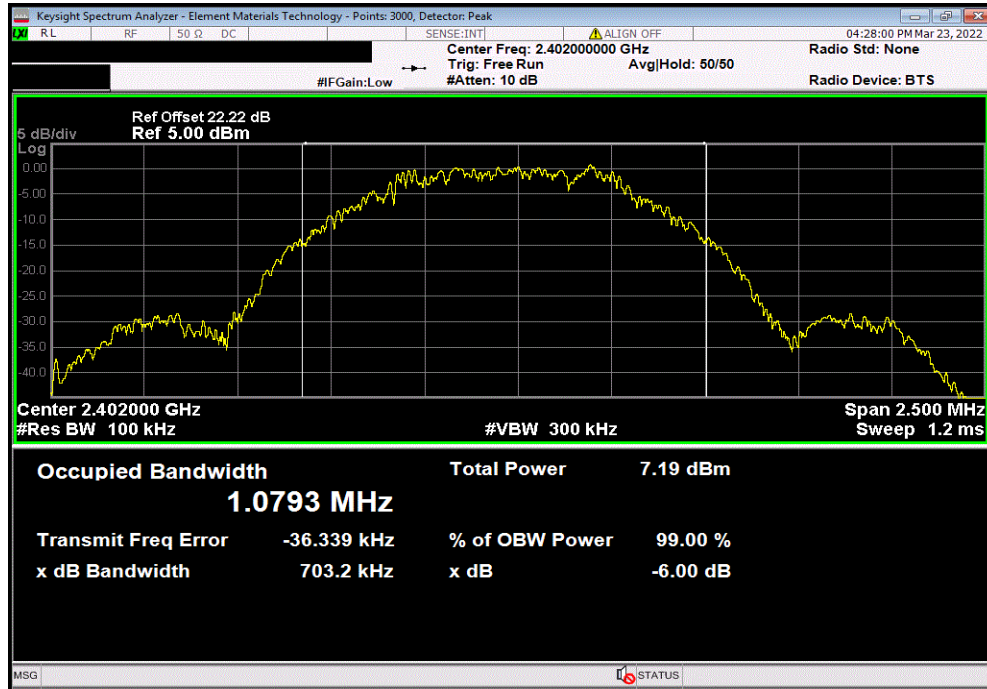

BLE/GFSK 1 Mbps Mid Channel, 2426 MHz						
	Value	Limit	Result			
	661.376 kHz	500 kHz	Pass			

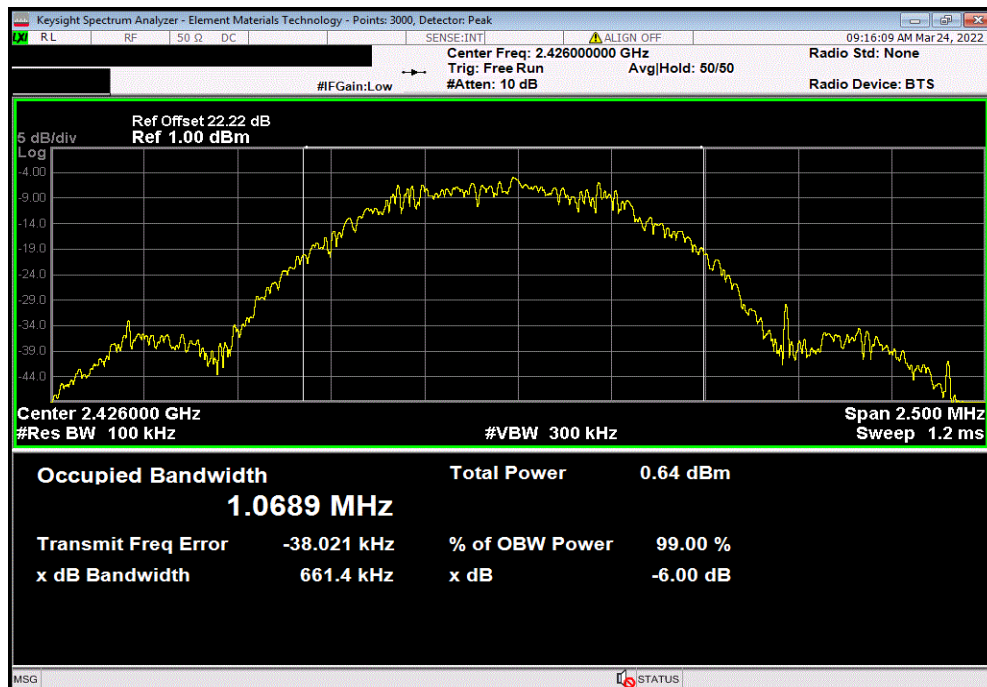


DTS BANDWIDTH



TbTx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
Value				Limit	Result	
				(≥)		
			696.574 kHz	500 kHz	Pass	

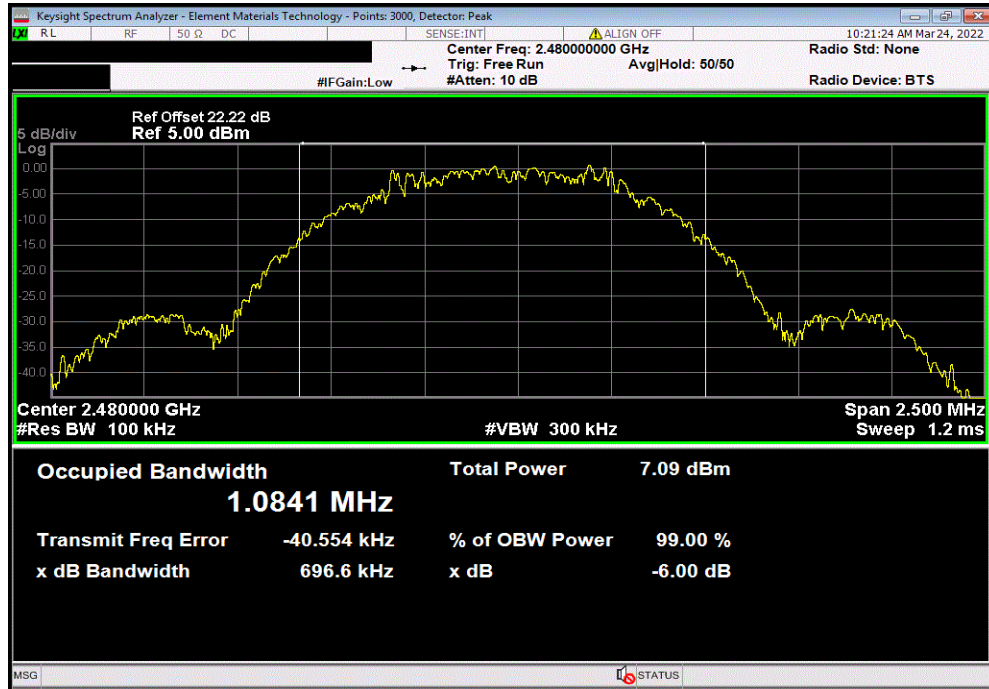

OCCUPIED BANDWIDTH



XMH 2022.02.07.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Block - DC	Fairview Microwave	SD3379	AMW	2022-03-14	2023-03-14
Attenuator	S.M. Electronics	SA26B-20	AUY	2022-03-15	2023-03-15
Generator - Signal	Keysight	N5182B	TFU	2020-11-20	2022-11-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFO	2021-07-06	2022-07-06
Cable	Micro-Coax	UFD150A-1-0720-200200	EVK	2022-03-14	2023-03-14

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The 99% occupied bandwidth was measured with the EUT configured for continuous modulated operation.

Per ANSI C63.10:2013, 6.9.3, the spectrum analyzer was configured as follows:

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) of the spectrum analyzer was set to the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) bandwidth was set to at least 3 times the resolution bandwidth. The analyzer sweep time was set to auto to prevent video filtering or averaging. A sample detector was used unless the device was not able to be operated in a continuous transmit mode, in which case a peak detector was used.

The spectrum analyzer occupied bandwidth measurement function was used to sum the power of the transmission in linear terms to obtain the 99% bandwidth.

OCCUPIED BANDWIDTH



TSTx 2021.10.29.2 XMR 2022.02.07.0


EUT: Pallet Tag		Work Order: DESC0001	
Serial Number: 1, 2, 3		Date: 23-Mar-22	
Customer: Descartes Systems (USA) LLC		Temperature: 21.1 °C	
Attendees: None		Humidity: 49.2% RH	
Project: None		Barometric Pres.: 1026 mbar	
Tested by: Kam Robertson & Jeff Alcock		Power: Battery	
		Job Site: EV06	
TEST SPECIFICATIONS			
FCC 15.247:2022		Test Method	
		ANSI C63.10:2013	
COMMENTS			
Reference level offset includes: DC block, 20dB attenuator, measurement cable, SMA to U.FL cable			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	8	Signature 	
		Value	Limit
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		1.078 MHz	N/A
BLE/GFSK 1 Mbps Mid Channel, 2426 MHz		1.052 MHz	N/A
BLE/GFSK 1 Mbps High Channel, 2480 MHz		1.069 MHz	N/A
		Result	
		N/A	
		N/A	
		N/A	

OCCUPIED BANDWIDTH




TbTx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
				Value	Limit	Result
				1.078 MHz	N/A	N/A

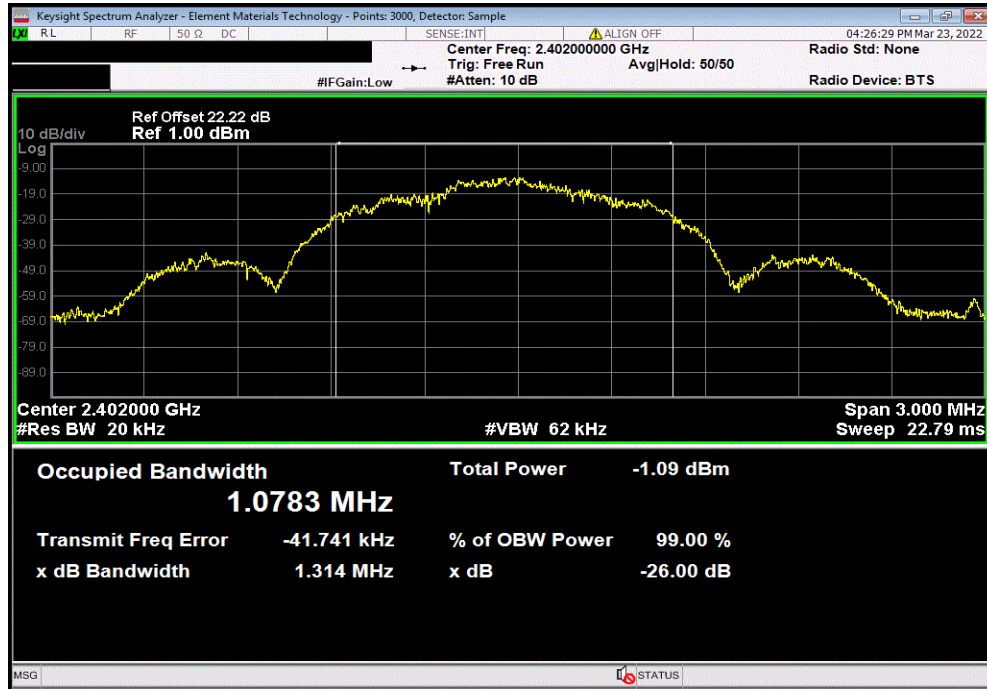

BLE/GFSK 1 Mbps Mid Channel, 2426 MHz						
				Value	Limit	Result
				1.052 MHz	N/A	N/A

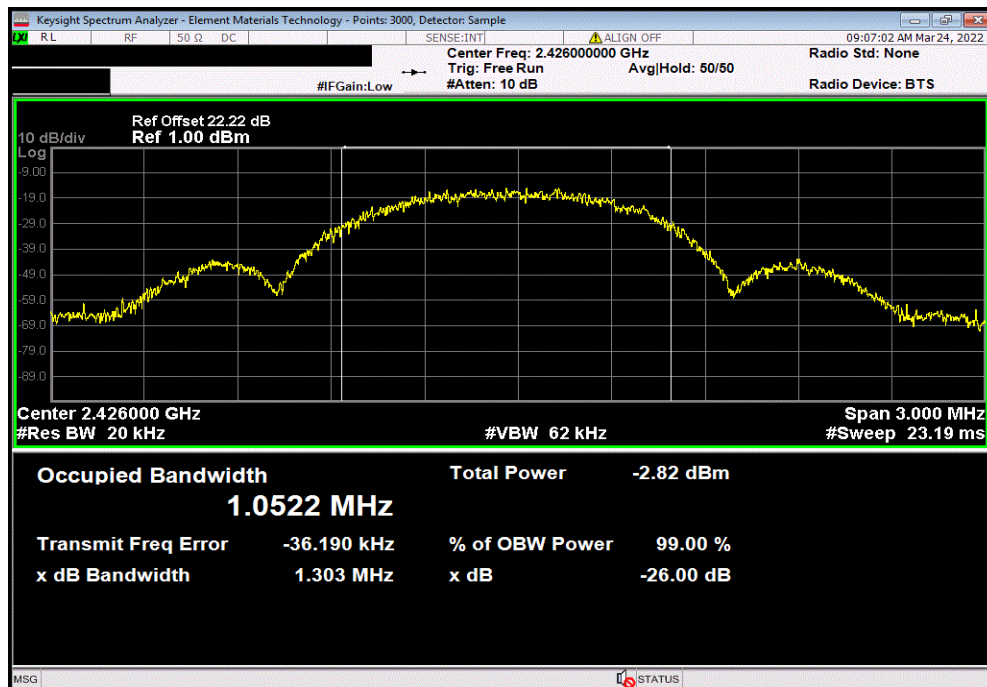


OCCUPIED BANDWIDTH



TbTx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
				Value	Limit	Result
				1.069 MHz	N/A	N/A

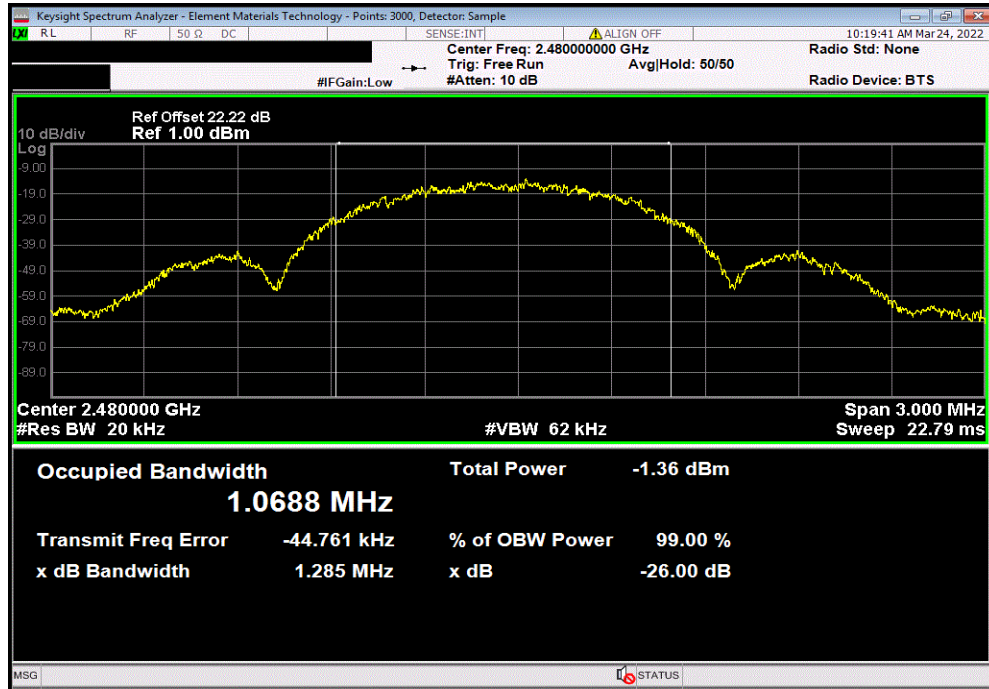

OUTPUT POWER



XMIT 2022.02.07.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Block - DC	Fairview Microwave	SD3379	AMW	2022-03-14	2023-03-14
Attenuator	S.M. Electronics	SA26B-20	AUY	2022-03-15	2023-03-15
Generator - Signal	Keysight	N5182B	TFU	2020-11-20	2022-11-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFO	2021-07-06	2022-07-06
Cable	Micro-Coax	UFD150A-1-0720-200200	EVK	2022-03-14	2023-03-14

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

OUTPUT POWER



TSTx 2021.10.29.2 XMR 2022.02.07.0


EUT: Pallet Tag		Work Order: DESC0001	
Serial Number: 1, 2, 3		Date: 23-Mar-22	
Customer: Descartes Systems (USA) LLC		Temperature: 21.1 °C	
Attendees: None		Humidity: 49.4% RH	
Project: None		Barometric Pres.: 1026 mbar	
Tested by: Kam Robertson & Jeff Alcock		Power: Battery	
Job Site: EV06			
TEST SPECIFICATIONS			
FCC 15.247:2022		Test Method	
		ANSI C63.10:2013	
COMMENTS			
Reference level offset includes: DC block, 20dB attenuator, measurement cable, SMA to U.FL cable			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	8	Signature 	
		Out Pwr (dBm)	Limit (dBm)
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		1.768	30
BLE/GFSK 1 Mbps Mid Channel, 2426 MHz		2.445	30
BLE/GFSK 1 Mbps High Channel, 2480 MHz		1.618	30
			Result
			Pass
			Pass
			Pass

OUTPUT POWER




TbTtx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				1.768	30	Pass

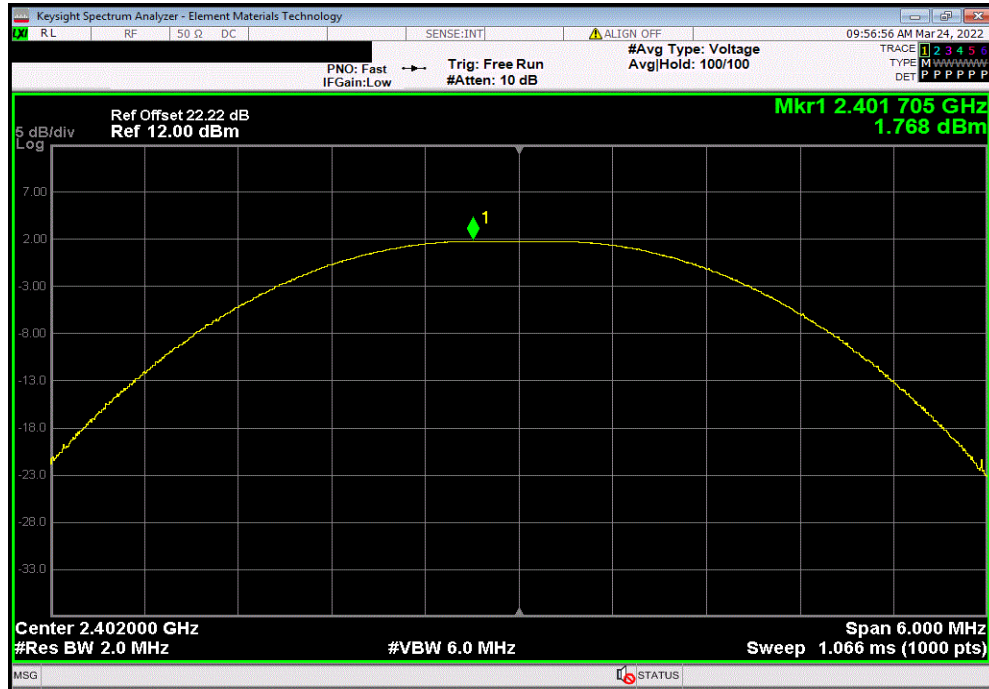

BLE/GFSK 1 Mbps Mid Channel, 2426 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				2.445	30	Pass

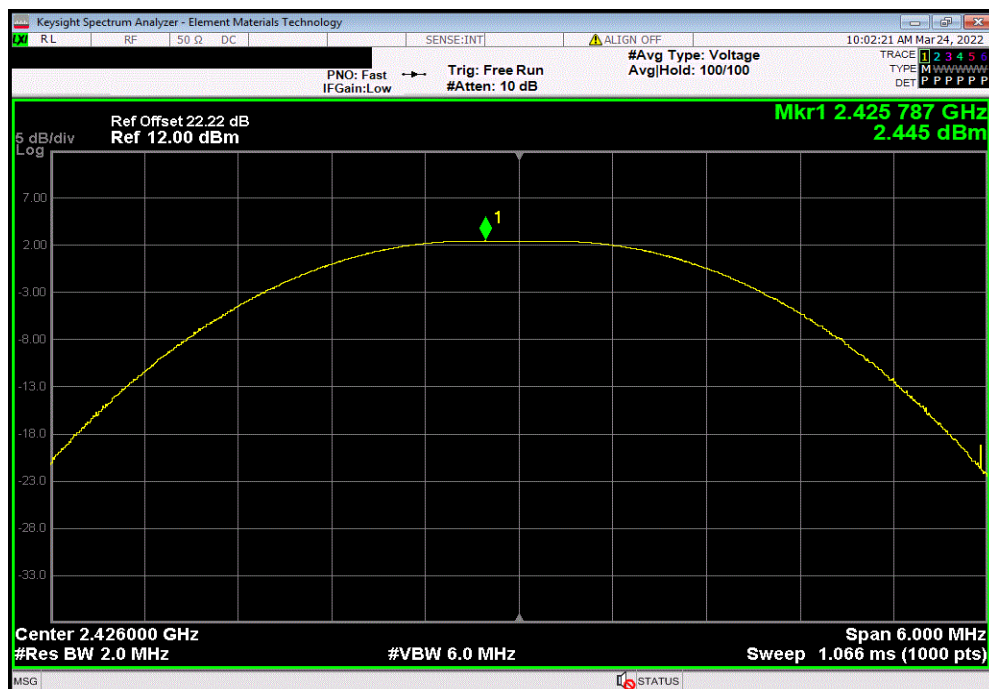


OUTPUT POWER



TbTx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				1.618	30	Pass

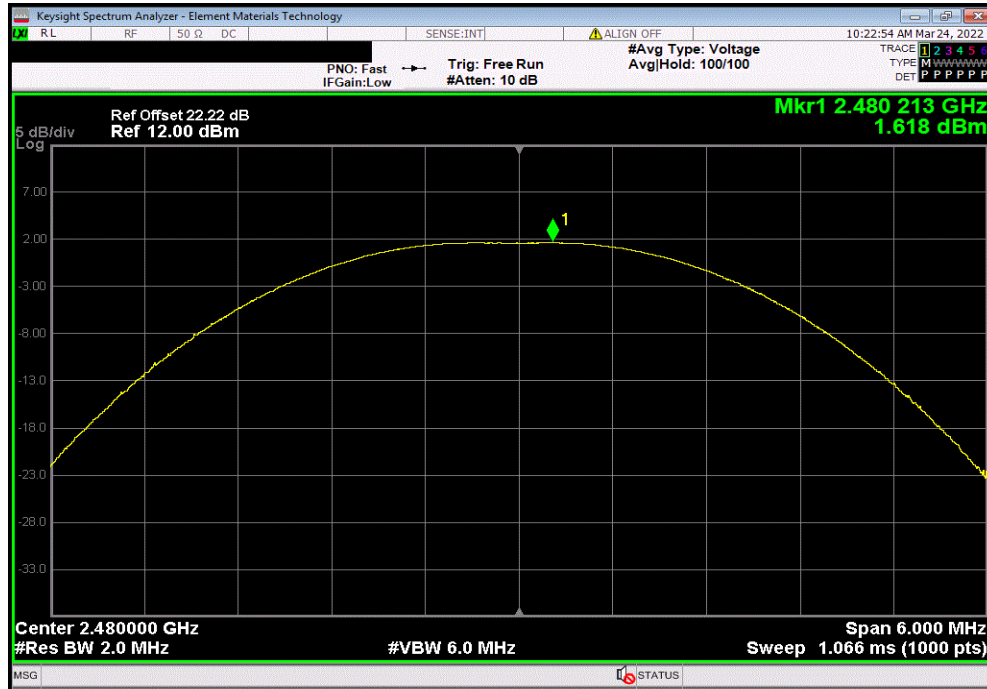

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



XMIT 2022.02.07.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	S.M. Electronics	SA26B-20	AUY	2022-03-15	2023-03-15
Generator - Signal	Keysight	N5182B	TFU	2020-11-20	2022-11-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFO	2021-07-06	2022-07-06
Cable	Micro-Coax	UFD150A-1-0720-200200	EVK	2022-03-14	2023-03-14
Block - DC	Fairview Microwave	SD3379	AMW	2022-03-14	2023-03-14

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

Equivalent Isotropic Radiated Power (EIRP) = Max Measured Power + Antenna gain (dBi)

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TSTx 2021.10.29.2 XMR 2022.02.07.0


EUT: Pallet Tag		Work Order: DESC0001	
Serial Number: 1, 2, 3		Date: 23-Mar-22	
Customer: Descartes Systems (USA) LLC		Temperature: 21.1 °C	
Attendees: None		Humidity: 49.2% RH	
Project: None		Barometric Pres.: 1026 mbar	
Tested by: Kam Robertson & Jeff Alcock		Power: Battery	
Job Site: EV06			
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2022		ANSI C63.10:2013	
COMMENTS			
Reference level offset includes: DC block, 20dB attenuator, measurement cable, SMA to U.FL cable			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	8	Signature	
		Out Pwr (dBm)	Antenna Gain (dBi)
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		1.768	-0.4
BLE/GFSK 1 Mbps Mid Channel, 2426 MHz		2.445	-0.4
BLE/GFSK 1 Mbps High Channel, 2480 MHz		1.618	-0.4
		EIRP (dBm)	EIRP Limit (dBm)
		1.368	36
		2.045	36
		1.218	36
			Result
			Pass
			Pass
			Pass

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbTx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	1.768	-0.4	1.368	36	Pass	

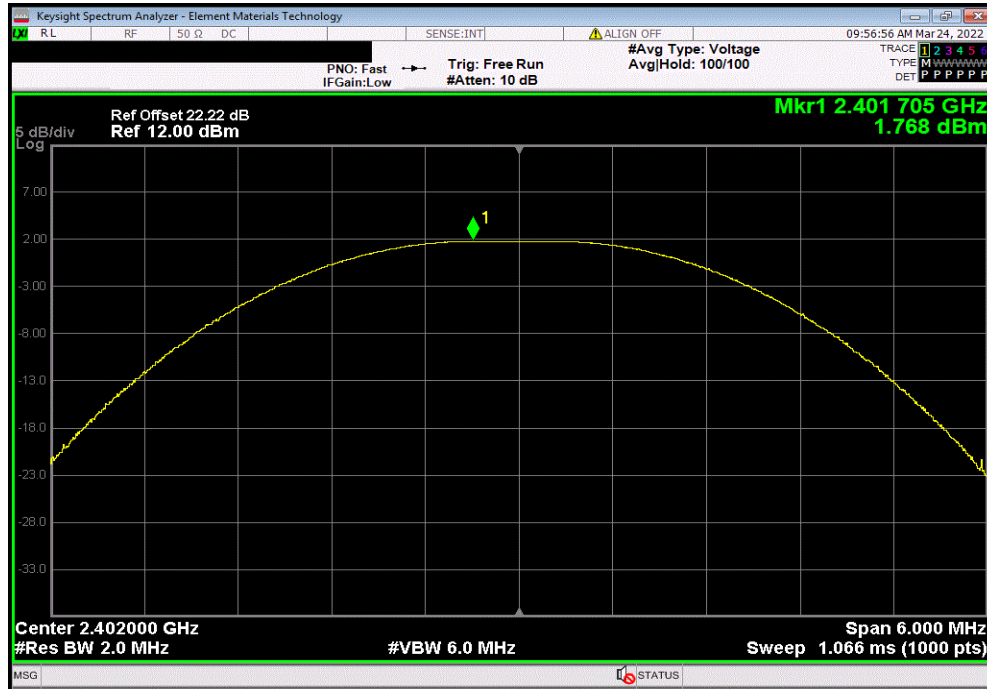

BLE/GFSK 1 Mbps Mid Channel, 2426 MHz						
	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
	2.445	-0.4	2.045	36	Pass	

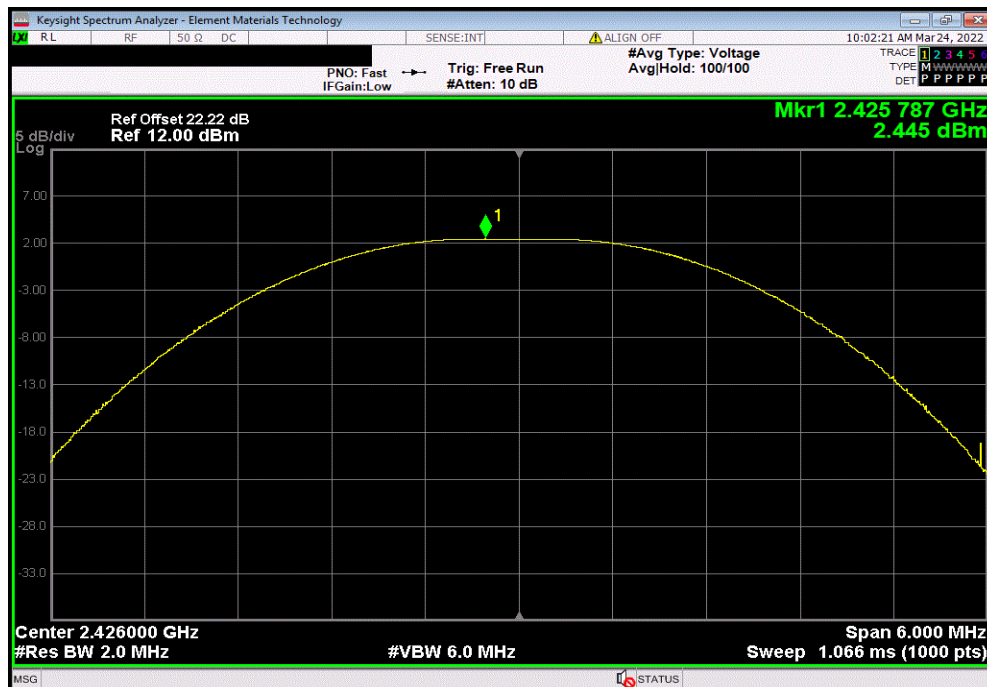


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TbTx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result		
1.618	-0.4	1.218	36	Pass		

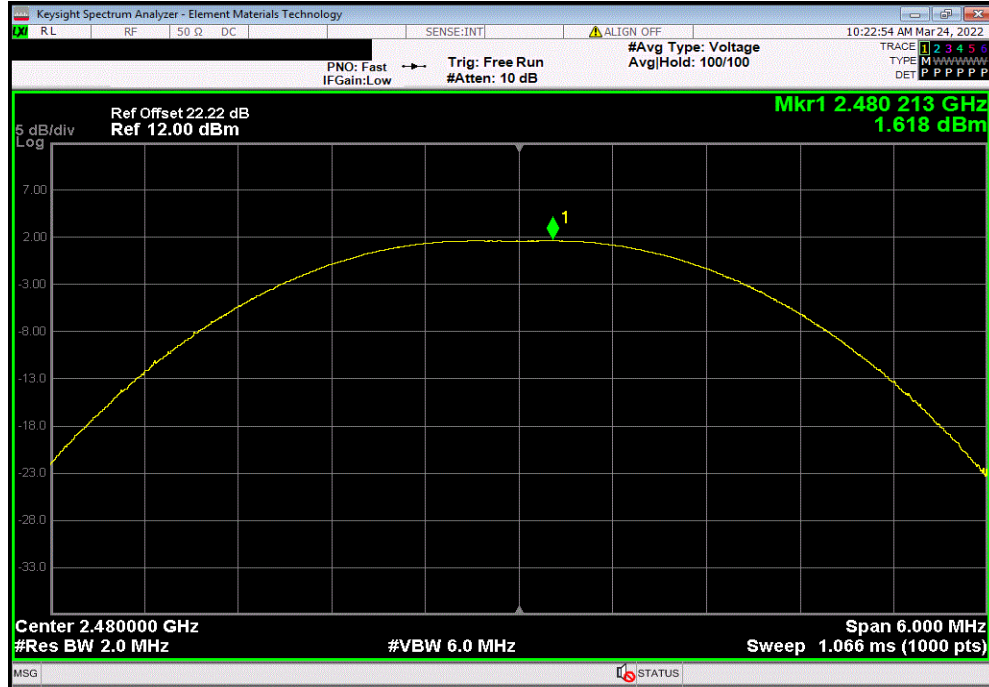

POWER SPECTRAL DENSITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Block - DC	Fairview Microwave	SD3379	AMW	2022-03-14	2023-03-14
Attenuator	S.M. Electronics	SA26B-20	AUY	2022-03-15	2023-03-15
Generator - Signal	Keysight	N5182B	TFU	2020-11-20	2022-11-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFO	2021-07-06	2022-07-06
Cable	Micro-Coax	UFD150A-1-0720-200200	EVK	2022-03-14	2023-03-14

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY



TSTx 2021.10.29.2 XMR 2022.02.07.0


EUT: Pallet Tag		Work Order: DESC0001	
Serial Number: 1, 2, 3		Date: 23-Mar-22	
Customer: Descartes Systems (USA) LLC		Temperature: 21.1 °C	
Attendees: None		Humidity: 49.3% RH	
Project: None		Barometric Pres.: 1026 mbar	
Tested by: Kam Robertson & Jeff Alcock		Power: Battery	
		Job Site: EV06	
TEST SPECIFICATIONS			
FCC 15.247:2022		Test Method	
		ANSI C63.10:2013	
COMMENTS			
Reference level offset includes: DC block, 20dB attenuator, measurement cable, SMA to U.FL cable			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	8	Signature 	
		Value dBm/3kHz	Limit < dBm/3kHz
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		-11.044	8
BLE/GFSK 1 Mbps Mid Channel, 2426 MHz		-10.541	8
BLE/GFSK 1 Mbps High Channel, 2480 MHz		-11.084	8
			Results
			Pass
			Pass
			Pass

POWER SPECTRAL DENSITY




TbTtx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
	Value	Limit	Results			
	dBm/3kHz	< dBm/3kHz				
	-11.044	8	Pass			

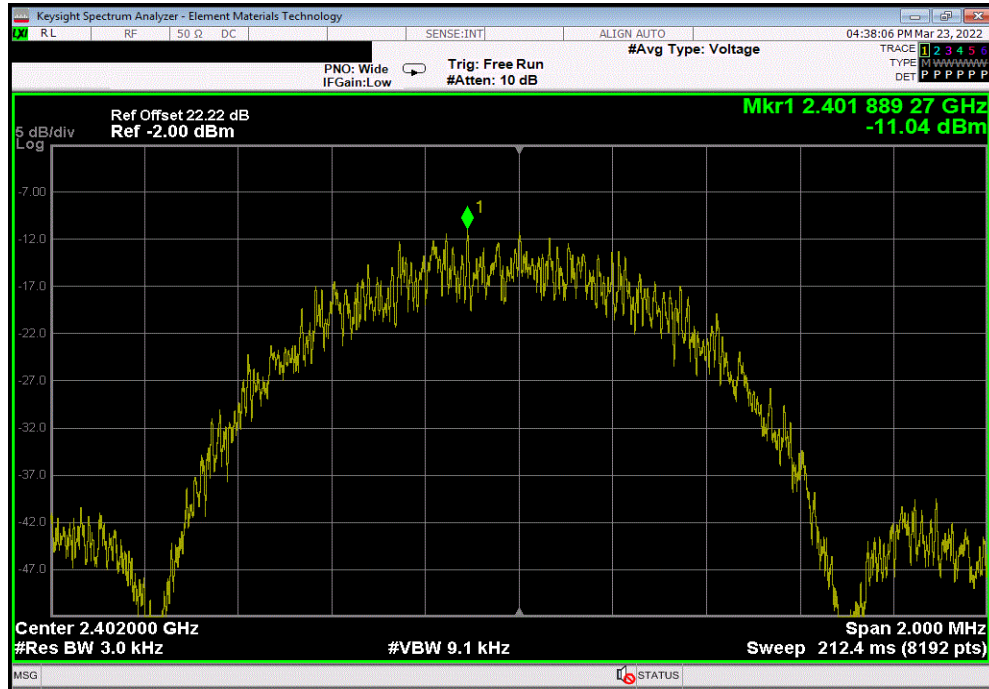

BLE/GFSK 1 Mbps Mid Channel, 2426 MHz						
	Value	Limit	Results			
	dBm/3kHz	< dBm/3kHz				
	-10.541	8	Pass			

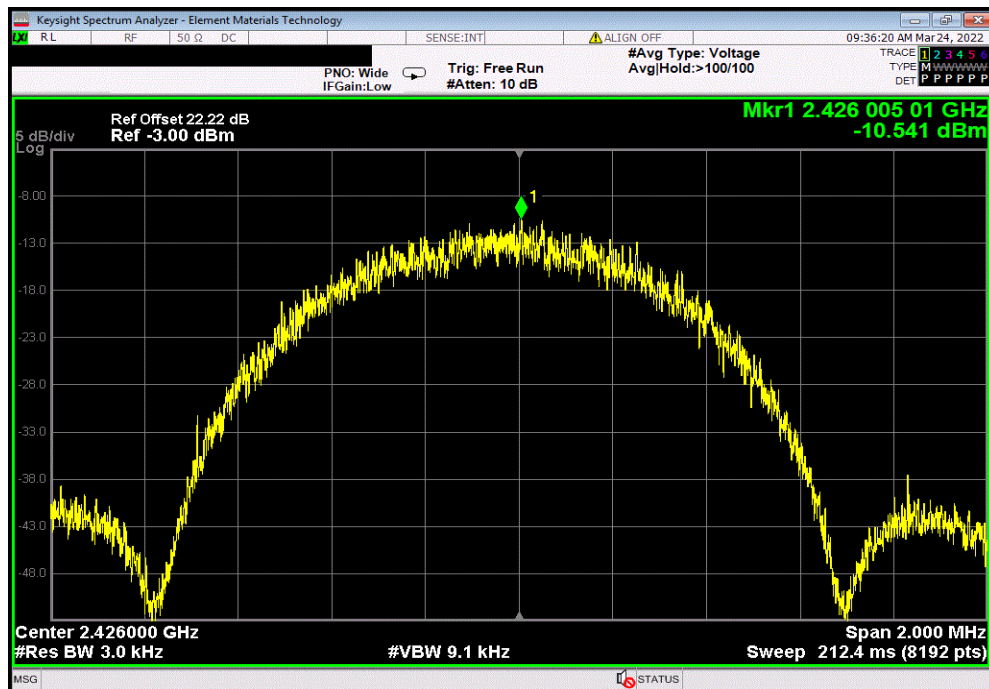


POWER SPECTRAL DENSITY



TbTx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
	Value	Limit				
	dBm/3kHz	< dBm/3kHz	Results			
	-11.084	8	Pass			

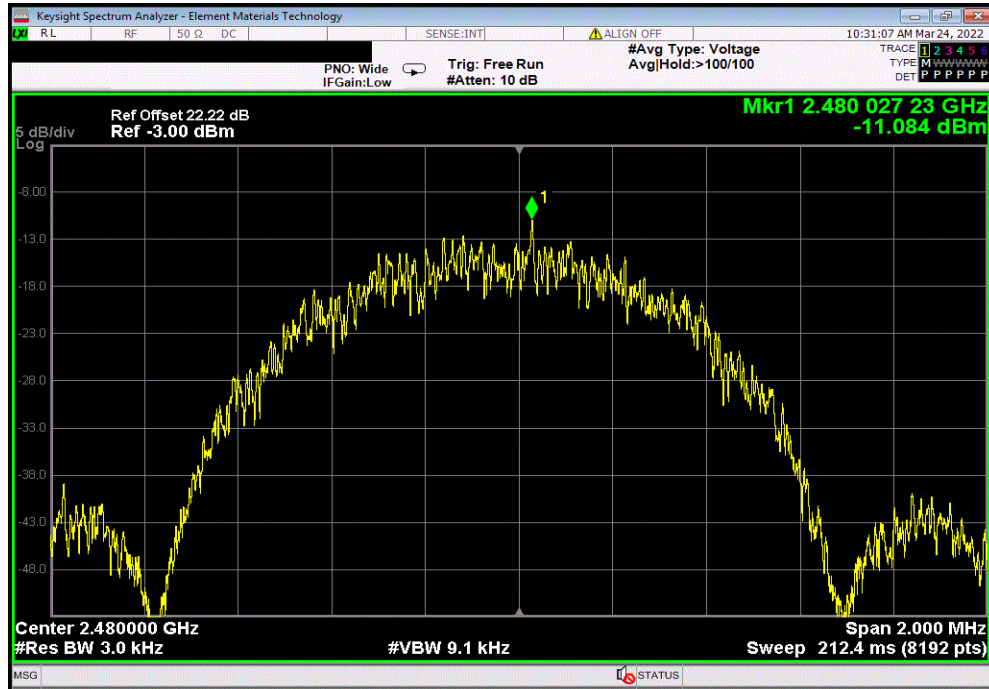

BAND EDGE COMPLIANCE



XMR 2022.02.07.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	Micro-Coax	UFD150A-1-0720-200200	EVK	2022-03-14	2023-03-14
Attenuator	S.M. Electronics	SA26B-20	AUY	2022-03-15	2023-03-15
Block - DC	Fairview Microwave	SD3379	AMW	2022-03-14	2023-03-14
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFO	2021-07-06	2022-07-06
Generator - Signal	Keysight	N5182B	TFU	2020-11-20	2022-11-20

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE



TSTx 2021.10.29.2 XMR 2022.02.07.0


EUT: Pallet Tag		Work Order: DESC0001	
Serial Number: 1, 3		Date: 23-Mar-22	
Customer: Descartes Systems (USA) LLC		Temperature: 21.1 °C	
Attendees: None		Humidity: 49.1% RH	
Project: None		Barometric Pres.: 1025 mbar	
Tested by: Jeff Alcock & Kam Robertson		Power: Battery	
Job Site: EV06			
TEST SPECIFICATIONS		Test Method	
FCC 15.247:2022		ANSI C63.10:2013	
COMMENTS			
Reference level offset includes: DC block, 20dB attenuator, measurement cable, SMA to U.FL cable			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	8	Signature 	
		Value (dBc)	Limit ≤ (dBc) Result
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		-47.26	-20 Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz		-54.79	-20 Pass

BAND EDGE COMPLIANCE



TbTtx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-47.26	-20	Pass

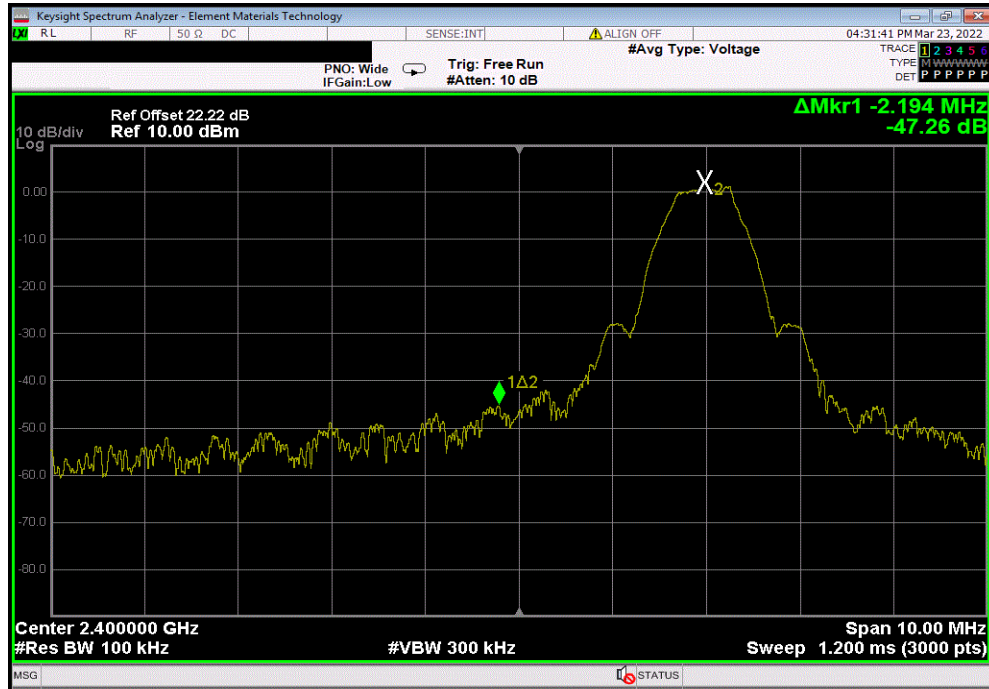

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-54.79	-20	Pass



SPURIOUS CONDUCTED EMISSIONS



XMH 2022.02.07.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Block - DC	Fairview Microwave	SD3379	AMW	2022-03-14	2023-03-14
Attenuator	S.M. Electronics	SA26B-20	AUY	2022-03-15	2023-03-15
Generator - Signal	Keysight	N5182B	TFU	2020-11-20	2022-11-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFO	2021-07-06	2022-07-06
Cable	Micro-Coax	UFD150A-1-0720-200200	EVK	2022-03-14	2023-03-14

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the fundamental was measured with a 100 kHz resolution bandwidth and the highest value was recorded. The rest of the spectrum was then measured with a 100 kHz resolution bandwidth and the highest value was found. The difference between the value found on the fundamental and the rest of the spectrum was compared against the limit to determine compliance.

SPURIOUS CONDUCTED EMISSIONS



TSTx 2021.10.29.2 XMR 2022.02.07.0


EUT: Pallet Tag		Work Order: DESC0001			
Serial Number: 1, 2, 3		Date: 23-Mar-22			
Customer: Descartes Systems (USA) LLC		Temperature: 21.1 °C			
Attendees: None		Humidity: 49.3% RH			
Project: None		Barometric Pres.: 1026 mbar			
Tested by: Kam Robertson & Jeff Alcock	Power: Battery	Job Site: EV06			
TEST SPECIFICATIONS					
FCC 15.247:2022		Test Method			
		ANSI C63.10:2013			
COMMENTS					
Reference level offset includes: DC block, 20dB attenuator, measurement cable, SMA to U.FL cable					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	8	Signature			
	Frequency Range	Measured Freq (MHz)	Max Value (dBc)		
			Limit ≤ (dBc)		
			Result		
BLE/GFSK 1 Mbps Low Channel, 2402 MHz	Fundamental	2401.96	N/A	N/A	
BLE/GFSK 1 Mbps Low Channel, 2402 MHz	30 MHz - 12.5 GHz	4804.25	-46.23	-20	Pass
BLE/GFSK 1 Mbps Low Channel, 2402 MHz	12.5 GHz - 25 GHz	24687.16	-51.91	-20	Pass
BLE/GFSK 1 Mbps Mid Channel, 2426 MHz	Fundamental	2425.97	N/A	N/A	N/A
BLE/GFSK 1 Mbps Mid Channel, 2426 MHz	30 MHz - 12.5 GHz	2281.63	-47.57	-20	Pass
BLE/GFSK 1 Mbps Mid Channel, 2426 MHz	12.5 GHz - 25 GHz	23864.61	-53.02	-20	Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz	Fundamental	2479.97	N/A	N/A	N/A
BLE/GFSK 1 Mbps High Channel, 2480 MHz	30 MHz - 12.5 GHz	2608.95	-47.24	-20	Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz	12.5 GHz - 25 GHz	24562.02	-51.76	-20	Pass

SPURIOUS CONDUCTED EMISSIONS




TbTx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result		
Fundamental	2401.96	N/A	N/A	N/A		

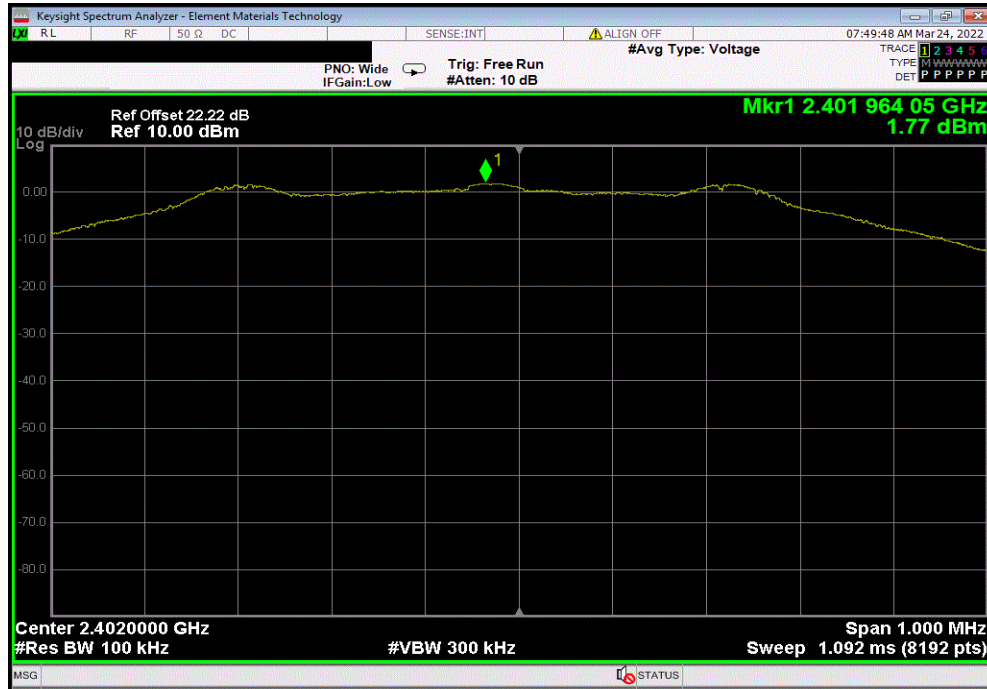

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result		
30 MHz - 12.5 GHz	4804.25	-46.23	-20	Pass		

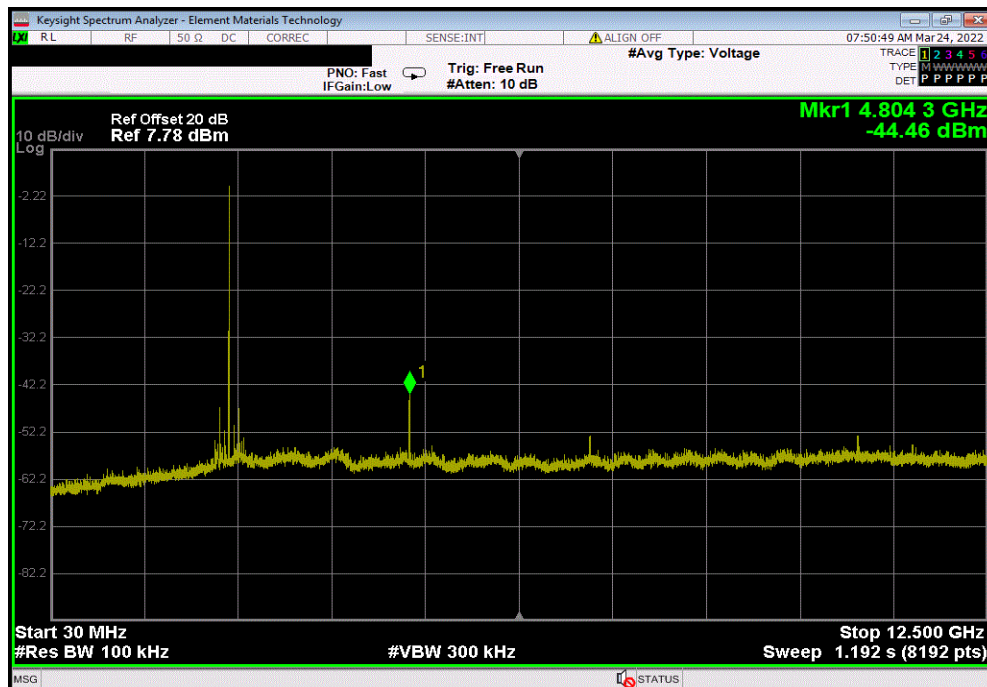


SPURIOUS CONDUCTED EMISSIONS




TbTtx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	24687.16	-51.91	-20	Pass	

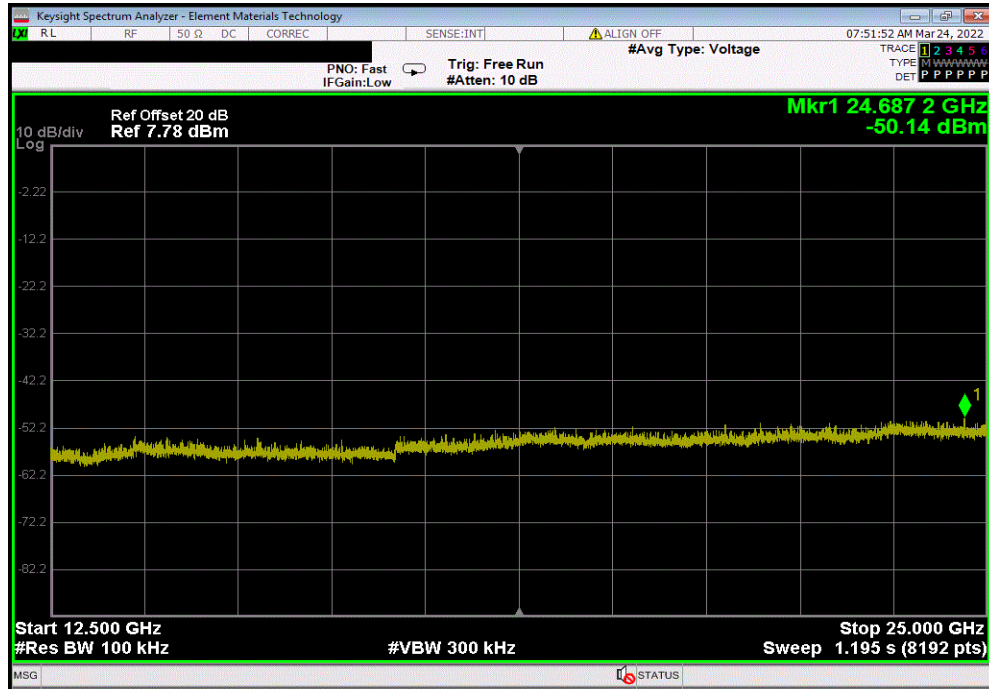

BLE/GFSK 1 Mbps Mid Channel, 2426 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2425.97	N/A	N/A	N/A	

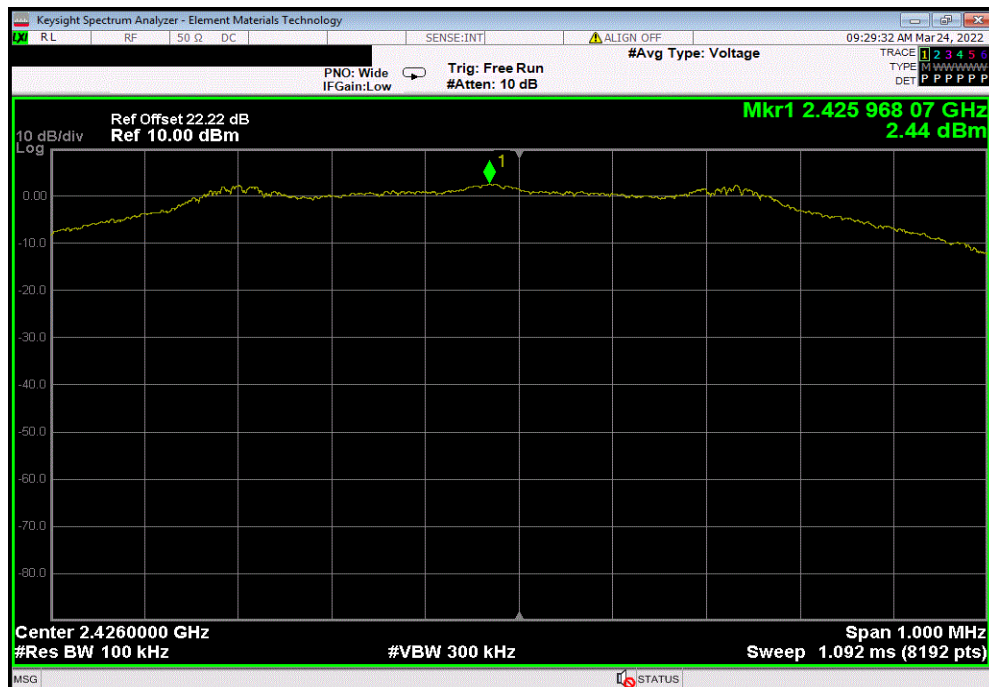


SPURIOUS CONDUCTED EMISSIONS




TbTtx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps Mid Channel, 2426 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	2281.63	-47.57	-20	Pass	

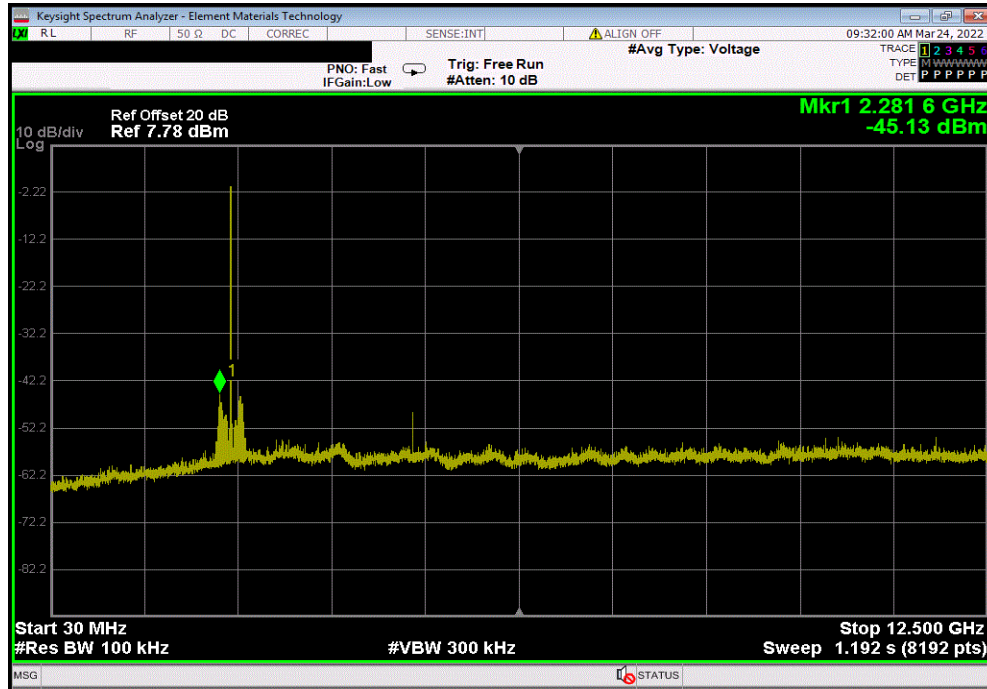

BLE/GFSK 1 Mbps Mid Channel, 2426 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	23864.61	-53.02	-20	Pass	

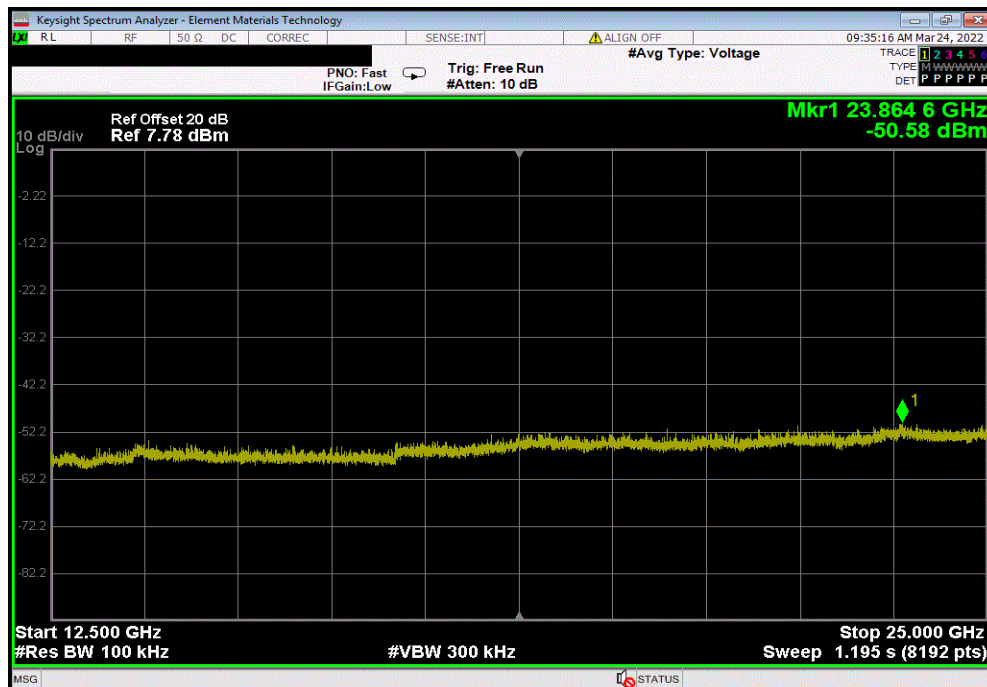


SPURIOUS CONDUCTED EMISSIONS




TbTtX 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2479.97	N/A	N/A	N/A	

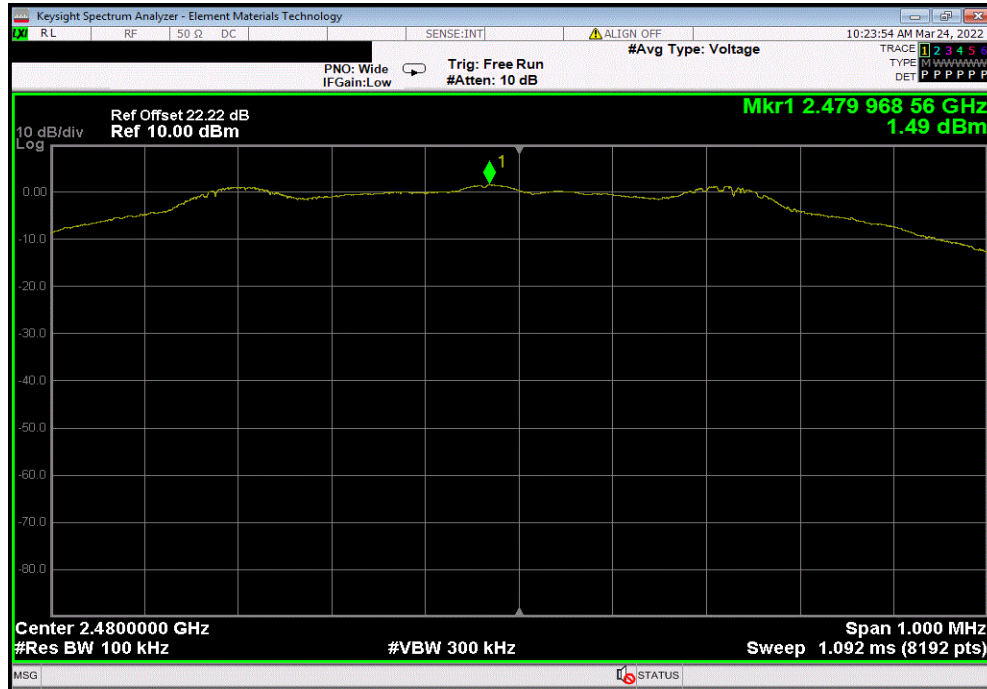

BLE/GFSK 1 Mbps High Channel, 2480 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	2608.95	-47.24	-20	Pass	

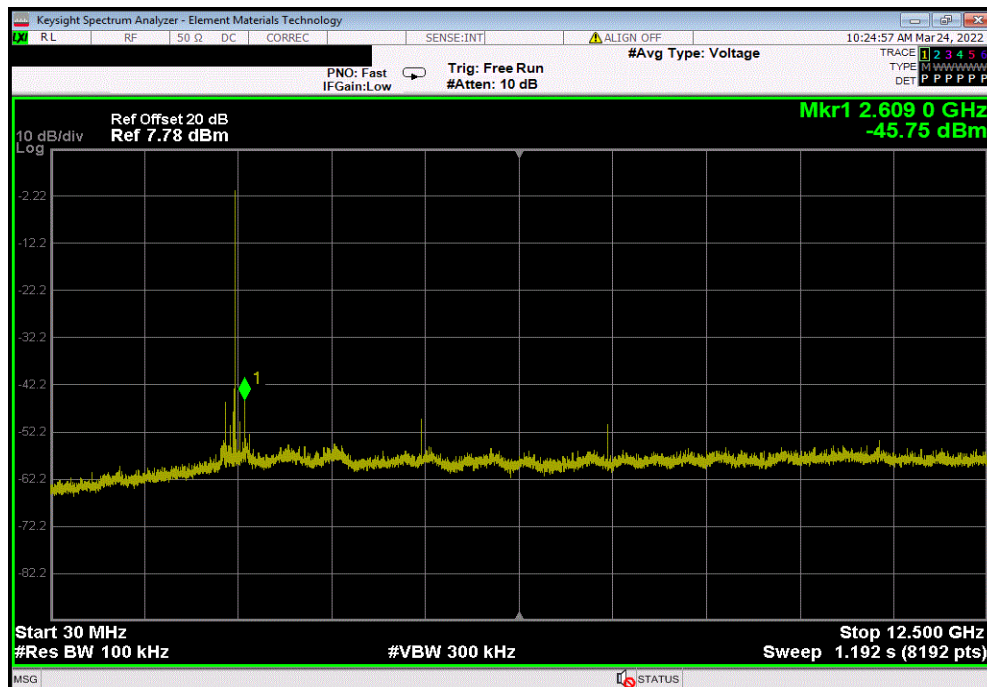


SPURIOUS CONDUCTED EMISSIONS



TbTx 2021.10.29.2 XMt 2022.02.07.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	24562.02	-51.76	-20	Pass	

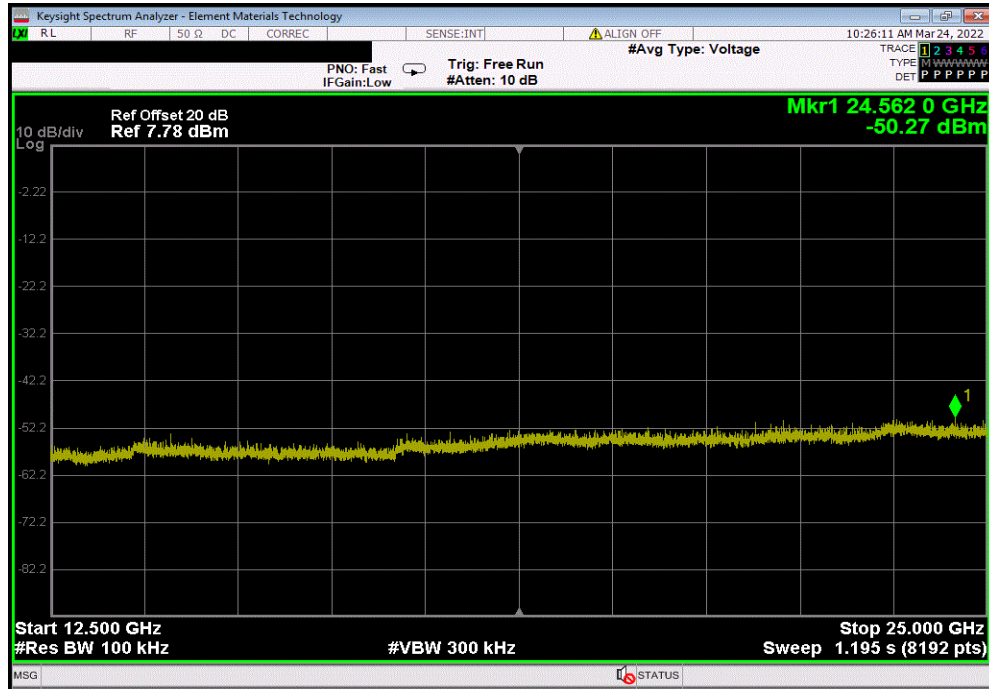

SPURIOUS RADIATED EMISSIONS

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector
PK = Peak Detector
AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of $10 \cdot \log(1/dc)$.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Spectrum Analyzer	Agilent	N9010A	AFI	2021-12-09	2022-12-09
Antenna - Biconilog	EMCO	3142B	AXJ	2021-03-03	2023-03-03
Antenna - Double Ridge	EMCO	3115	AHC	2020-07-01	2022-07-01
Antenna - Standard Gain	ETS Lindgren	3160-07	AHU	NCR	NCR
Antenna - Standard Gain	ETS Lindgren	3160-08	AHV	NCR	NCR
Antenna - Standard Gain	ETS Lindgren	3160-09	AIV	NCR	NCR
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AOL	2021-11-17	2022-11-17
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	PAG	2021-11-17	2022-11-17
Amplifier - Pre-Amplifier	L-3 Narda-MITEQ	AMF-6F-08001200-30-10P	PAO	2021-11-17	2022-11-17
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVD	2021-11-17	2022-11-17
Amplifier - Pre-Amplifier	Miteq	AMF-6F-18002650-25-10P	AVU	2021-07-16	2022-07-16
Cable	N/A	Bilog Cables	EVA	2021-11-17	2022-11-17
Cable	N/A	Double Ridge Horn Cables	EVB	2022-02-15	2023-02-15
Cable	None	Standard Gain Horn Cables	EVF	2021-11-17	2022-11-17
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	EVY	2021-07-16	2022-07-16
Attenuator	Coaxicom	3910-20	AXZ	2022-02-10	2023-02-10
Filter - Low Pass	Micro-Tronics	LPM50004	LFD	2022-02-10	2023-02-10
Filter - High Pass	Micro-Tronics	HPM50111	HFO	2021-11-17	2022-11-17

MEASUREMENT UNCERTAINTY

Description		
Expanded k=2	5.2 dB	-5.2 dB

SPURIOUS RADIATED EMISSIONS

FREQUENCY RANGE INVESTIGATED

30 MHz TO 26500 MHz

POWER INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

DESC0001-7

MODES INVESTIGATED

Continuous TX BLE, 1 Mbps, Low Ch = 2402 MHz, Mid Ch = 2426 MHz, High Ch = 2480 MHz

SPURIOUS RADIATED EMISSIONS

EUT:	Pallet Tag	Work Order:	DESC0001
Serial Number:	4,5,6	Date:	2022-03-10
Customer:	Descartes Systems (USA) LLC	Temperature:	20.2°C
Attendees:	None	Relative Humidity:	32.6%
Customer Project:	None	Bar. Pressure (PMSL):	1031 mb
Tested By:	Kam Robertson & Jeff Alcock	Job Site:	EV01
Power:	Battery	Configuration:	DESC0001-7

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2022	ANSI C63.10:2013

TEST PARAMETERS

Run #:	18	Test Distance (m):	3	Ant. Height(s) (m):	1 to 4(m)
--------	----	--------------------	---	---------------------	-----------

COMMENTS


Please see comments below for serial number, channel and device orientation. Test mode operates at 50.1% duty cycle, an upward DCCF correction applied based on $10 \cdot \log(1/0.501) = 3$ dB

EUT OPERATING MODES

Continuous TX BLE, 1 Mbps, Low Ch = 2402 MHz, Mid Ch = 2426 MHz, High Ch = 2480 MHz

DEVIATIONS FROM TEST STANDARD

None

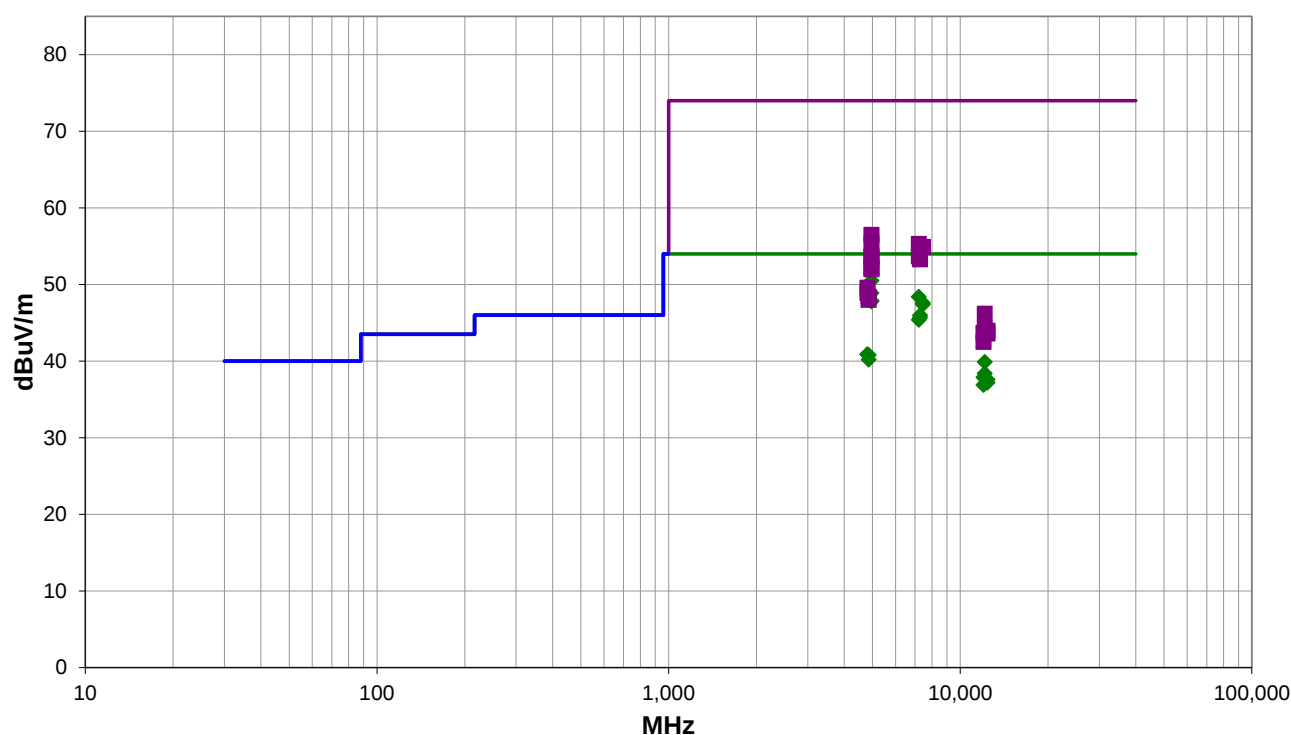

Run #: 18

■ PK ◆ AV ● QP

SPURIOUS RADIATED EMISSIONS

RESULTS - Run #18

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
4960.000	42.4	8.4	1.0	293.0	3.0	0.0	Horz	AV	0.0	53.8	54.0	-0.2	SN 6, High Ch, EUT Horz
4959.892	40.0	8.4	1.6	315.0	3.0	0.0	Horz	AV	0.0	51.4	54.0	-2.6	SN 6, High Ch, EUT On Side
4960.042	39.1	8.4	1.3	237.0	3.0	0.0	Vert	AV	0.0	50.5	54.0	-3.5	SN 6, High Ch, EUT Horz
4960.025	37.5	8.4	1.0	203.0	3.0	0.0	Vert	AV	0.0	48.9	54.0	-5.1	SN 6, High Ch, EUT On Side
7205.217	31.2	14.2	2.0	34.0	3.0	0.0	Horz	AV	0.0	48.4	54.0	-5.6	SN 4, Low Ch, EUT Horz
4960.108	36.5	8.4	2.1	312.0	3.0	0.0	Horz	AV	0.0	47.9	54.0	-6.1	SN 6, High Ch, EUT Vert
4960.092	36.4	8.4	1.5	248.0	3.0	0.0	Vert	AV	0.0	47.8	54.0	-6.2	SN 6, High Ch, EUT Vert
7440.508	29.5	15.1	1.5	312.0	3.0	0.0	Horz	AV	0.0	47.6	54.0	-6.4	SN 6, High Ch, EUT Horz
7440.658	29.3	15.1	4.0	225.0	3.0	0.0	Vert	AV	0.0	47.4	54.0	-6.6	SN 6, High Ch, EUT Horz
7278.450	28.6	14.4	1.5	246.0	3.0	0.0	Vert	AV	0.0	46.0	54.0	-8.0	SN 5, Mid Ch, EUT Horz
7277.567	28.3	14.4	2.4	256.0	3.0	0.0	Horz	AV	0.0	45.7	54.0	-8.3	SN 5, Mid Ch, EUT Horz
7207.008	28.2	14.2	3.0	181.0	3.0	0.0	Vert	AV	0.0	45.4	54.0	-8.6	SN 4, Low Ch, EUT Horz
4804.642	29.8	8.1	1.5	275.0	3.0	0.0	Horz	AV	0.0	40.9	54.0	-13.1	SN 4, Low Ch, EUT Horz
4805.225	29.8	8.1	1.2	300.0	3.0	0.0	Vert	AV	0.0	40.9	54.0	-13.1	SN 4, Low Ch, EUT Horz
4851.617	29.6	8.2	1.5	310.0	3.0	0.0	Horz	AV	0.0	40.8	54.0	-13.2	SN 5, Mid Ch, EUT Horz
4851.150	29.0	8.2	1.5	82.0	3.0	0.0	Vert	AV	0.0	40.2	54.0	-13.8	SN 5, Mid Ch, EUT Horz
12131.020	36.4	0.5	1.5	89.0	3.0	0.0	Vert	AV	0.0	39.9	54.0	-14.1	SN 5, Mid Ch, EUT Horz
12128.610	34.9	0.5	1.5	316.0	3.0	0.0	Horz	AV	0.0	38.4	54.0	-15.6	SN 5, Mid Ch, EUT Horz
12008.690	35.1	-0.2	1.5	87.0	3.0	0.0	Vert	AV	0.0	37.9	54.0	-16.1	SN 4, Low Ch, EUT Horz
12398.530	34.1	0.5	1.0	311.0	3.0	0.0	Horz	AV	0.0	37.6	54.0	-16.4	SN 6, High Ch, EUT Horz
12398.540	33.7	0.5	1.9	88.0	3.0	0.0	Vert	AV	0.0	37.2	54.0	-16.8	SN 6, High Ch, EUT Horz
12008.600	34.1	-0.2	1.1	330.0	3.0	0.0	Horz	AV	0.0	36.9	54.0	-17.1	SN 4, Low Ch, EUT Horz
4959.700	48.1	8.4	1.0	293.0	0.0	0.0	Horz	PK	0.0	56.5	74.0	-17.5	SN 6, High Ch, EUT Horz
4960.067	47.0	8.4	1.6	315.0	0.0	0.0	Horz	PK	0.0	55.4	74.0	-18.6	SN 6, High Ch, EUT On Side
7205.783	41.1	14.2	2.0	34.0	0.0	0.0	Horz	PK	0.0	55.3	74.0	-18.7	SN 4, Low Ch, EUT Horz
7440.908	39.8	15.1	1.5	312.0	0.0	0.0	Horz	PK	0.0	54.9	74.0	-19.1	SN 6, High Ch, EUT Horz
7440.617	39.8	15.1	4.0	225.0	0.0	0.0	Vert	PK	0.0	54.9	74.0	-19.1	SN 6, High Ch, EUT Horz
4960.075	45.3	8.4	1.3	237.0	0.0	0.0	Vert	PK	0.0	53.7	74.0	-20.3	SN 6, High Ch, EUT Horz
7207.608	39.5	14.2	3.0	181.0	0.0	0.0	Vert	PK	0.0	53.7	74.0	-20.3	SN 4, Low Ch, EUT Horz
4960.450	45.1	8.4	1.0	203.0	0.0	0.0	Vert	PK	0.0	53.5	74.0	-20.5	SN 6, High Ch, EUT On Side
7279.750	39.0	14.4	1.5	246.0	0.0	0.0	Vert	PK	0.0	53.4	74.0	-20.6	SN 5, Mid Ch, EUT Horz
7276.533	38.9	14.4	2.4	256.0	0.0	0.0	Horz	PK	0.0	53.3	74.0	-20.7	SN 5, Mid Ch, EUT Horz
4959.550	43.7	8.4	1.5	248.0	0.0	0.0	Vert	PK	0.0	52.1	74.0	-21.9	SN 6, High Ch, EUT Vert
4959.925	43.6	8.4	2.1	312.0	0.0	0.0	Horz	PK	0.0	52.0	74.0	-22.0	SN 6, High Ch, EUT Vert
4803.692	41.4	8.2	1.2	300.0	0.0	0.0	Vert	PK	0.0	49.6	74.0	-24.4	SN 4, Low Ch, EUT Horz
4805.825	40.8	8.1	1.5	275.0	0.0	0.0	Horz	PK	0.0	48.9	74.0	-25.1	SN 4, Low Ch, EUT Horz
4851.175	40.2	8.2	1.5	82.0	0.0	0.0	Vert	PK	0.0	48.4	74.0	-25.6	SN 5, Mid Ch, EUT Horz
4851.083	39.8	8.2	1.5	310.0	0.0	0.0	Horz	PK	0.0	48.0	74.0	-26.0	SN 5, Mid Ch, EUT Horz
12130.480	45.7	0.5	1.5	89.0	0.0	0.0	Vert	PK	0.0	46.2	74.0	-27.8	SN 5, Mid Ch, EUT Horz
12128.360	43.8	0.5	1.5	316.0	0.0	0.0	Horz	PK	0.0	44.3	74.0	-29.7	SN 5, Mid Ch, EUT Horz

SPURIOUS RADIATED EMISSIONS

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
12398.740	43.5	0.5	1.9	88.0	0.0	0.0	Vert	PK	0.0	44.0	74.0	-30.0	SN 6, High Ch, EUT Horz
12008.620	43.9	-0.2	1.5	87.0	0.0	0.0	Vert	PK	0.0	43.7	74.0	-30.3	SN 4, Low Ch, EUT Horz
12398.620	43.1	0.5	1.0	311.0	0.0	0.0	Horz	PK	0.0	43.6	74.0	-30.4	SN 6, High Ch, EUT Horz
12009.690	42.7	-0.2	1.1	330.0	0.0	0.0	Horz	PK	0.0	42.5	74.0	-31.5	SN 4, Low Ch, EUT Horz

CONCLUSION

Pass



Tested By

SPURIOUS RADIATED EMISSIONS

EUT:	Pallet Tag	Work Order:	DESC0001
Serial Number:	4, 5, 6	Date:	2022-03-10
Customer:	Descartes Systems (USA) LLC	Temperature:	20.2°C
Attendees:	None	Relative Humidity:	32.6%
Customer Project:	None	Bar. Pressure (PMSL):	1031 mb
Tested By:	Kam Robertson & Jeff Alcock	Job Site:	EV01
Power:	Battery	Configuration:	DESC0001-7

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2022	ANSI C63.10:2013

TEST PARAMETERS

Run #:	20	Test Distance (m):	3	Ant. Height(s) (m):	1 to 4(m)
--------	----	--------------------	---	---------------------	-----------

COMMENTS


Please see comments below for serial number, channel and device orientation. Test mode operates at 50.1% duty cycle, an upward DCCF correction applied based on $10 \cdot \log(1/0.501) = 3$ dB

EUT OPERATING MODES

Continuous TX BLE, 1 Mbps, Low Ch = 2402 MHz, Mid Ch = 2426 MHz, High Ch = 2480 MHz

DEVIATIONS FROM TEST STANDARD

None

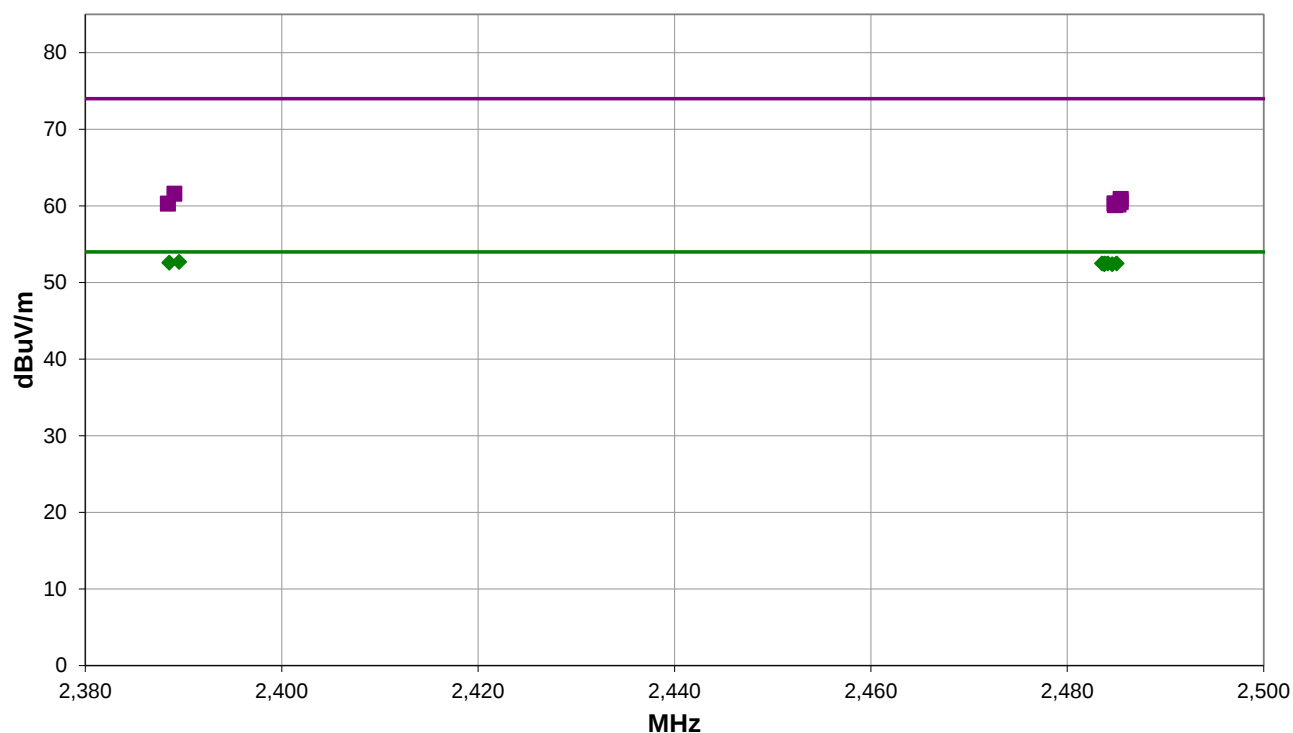

Run #: 20

■ PK ◆ AV ● QP

SPURIOUS RADIATED EMISSIONS

RESULTS - Run #20

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2389.550	31.3	-1.6	1.5	80.0	3.0	20.0	Vert	AV	0.0	52.7	54.0	-1.3	SN 4, Low Ch, EUT Horz
2388.543	31.2	-1.6	1.5	175.0	3.0	20.0	Horz	AV	0.0	52.6	54.0	-1.4	SN 4, Low Ch, EUT Horz
2485.023	31.0	-1.5	1.5	257.0	3.0	20.0	Horz	AV	0.0	52.5	54.0	-1.5	SN 6, High Ch, EUT Horz
2483.543	31.1	-1.6	1.5	159.0	3.0	20.0	Vert	AV	0.0	52.5	54.0	-1.5	SN 6, High Ch, EUT Horz
2483.803	31.1	-1.6	3.0	82.0	3.0	20.0	Horz	AV	0.0	52.5	54.0	-1.5	SN 6, High Ch, EUT On Side
2484.123	31.1	-1.6	1.5	70.0	3.0	20.0	Vert	AV	0.0	52.5	54.0	-1.5	SN 6, High Ch, EUT On Side
2484.577	31.0	-1.6	1.5	212.0	3.0	20.0	Vert	AV	0.0	52.4	54.0	-1.6	SN 6, High Ch, EUT Vert
2483.777	31.0	-1.6	1.5	11.0	3.0	20.0	Horz	AV	0.0	52.4	54.0	-1.6	SN 6, High Ch, EUT Vert
2389.063	43.2	-1.6	1.5	80.0	0.0	20.0	Vert	PK	0.0	61.6	74.0	-12.4	SN 4, Low Ch, EUT Horz
2485.447	42.4	-1.5	1.5	11.0	0.0	20.0	Horz	PK	0.0	60.9	74.0	-13.1	SN 6, High Ch, EUT Vert
2485.447	42.0	-1.5	3.0	82.0	0.0	20.0	Horz	PK	0.0	60.5	74.0	-13.5	SN 6, High Ch, EUT On Side
2484.847	41.9	-1.6	1.5	70.0	0.0	20.0	Vert	PK	0.0	60.3	74.0	-13.7	SN 6, High Ch, EUT Vert
2484.807	41.9	-1.6	1.5	212.0	0.0	20.0	Vert	PK	0.0	60.3	74.0	-13.7	SN 6, High Ch, EUT Horz
2388.400	41.9	-1.6	1.5	175.0	0.0	20.0	Horz	PK	0.0	60.3	74.0	-13.7	SN 4, Low Ch, EUT Horz
2485.213	41.7	-1.5	1.5	257.0	0.0	20.0	Horz	PK	0.0	60.2	74.0	-13.8	SN 6, High Ch, EUT Horz
2484.860	41.7	-1.6	1.5	159.0	0.0	20.0	Vert	PK	0.0	60.1	74.0	-13.9	SN 6, High Ch, EUT On Side

CONCLUSION

Pass



Tested By

End of Test Report