





SC55G/SC55GMD系列
快速入门指南



本手册仅供参考，具体功能及产品图片可能与实物有细微差别，请以实物为准


使用产品前请先阅读本使用指南

产品外观

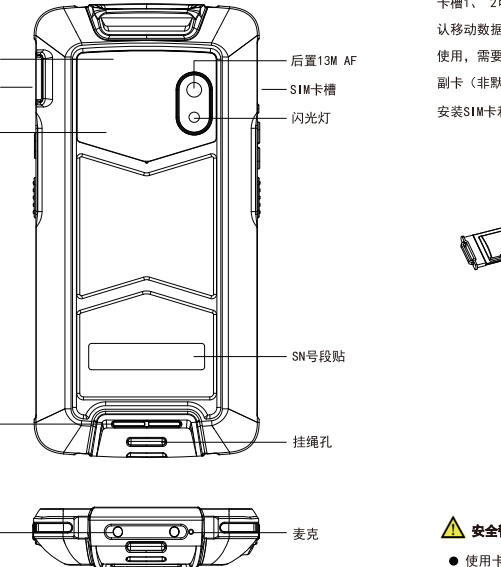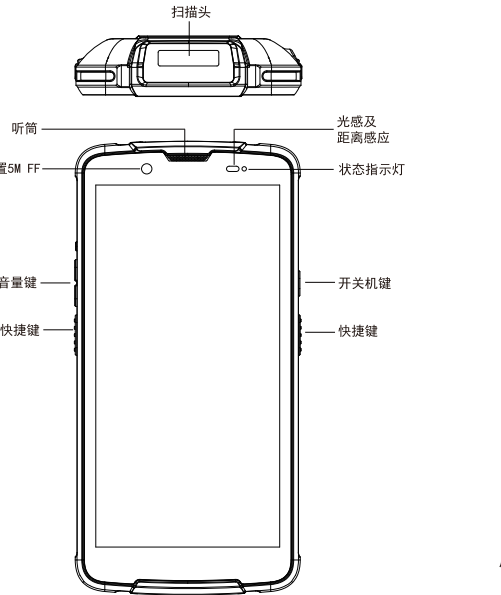

安装SIM卡和SD卡

插卡时请注意卡片缺口方向，插入非标准卡片可能会导致设备SIM卡座的损坏。
卡槽1、2可以任意切换为默认移动数据卡；如果两张都是电信卡，副卡（非默认移动数据卡）必须开通电信VoLTE业务，才能同时使用电信双卡；4G网络使用，需要根据运营商网络和相关业务部署情况确定是否支持；电信双卡时，副卡（非默认移动数据卡）不支持电信2G。
安装SIM卡和SD卡时需要打开塞子，使用卡针取出卡托。

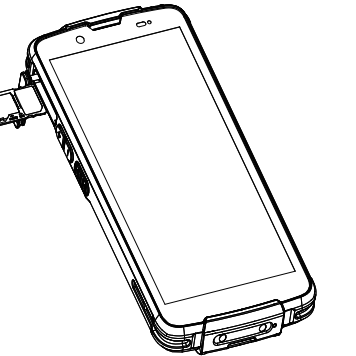

安全警告

- 使用卡针时，请注意安全，防止戳伤手指或损坏设备；
- 请保管好取卡针，将其放置在儿童接触不到的地方，防止儿童无意吞食或戳伤。

重新启动设备

按住开机键2秒，点击重新启动。

强制重新启动设备

按住开机键8秒，可强制重新启动设备。

为电池充电

首次使用本产品之前，建议为电池充电。
△注意：充电器应保持紧贴电源插座并易于拔插。

使用扫描功能

进入“设置>扫描”设置菜单，启动扫描，进行扫描功能设置。



小心激光

扫描引擎带有二类激光，在使用过程中请避免直接照射人眼，避免持续凝视激光，以免对人眼造成不可逆伤害。

注意事项

设备应当在-20℃~55℃的环境中使用，储藏温度应介于-30℃~70℃之间。温度过高或过低将会影响设备的性能，甚至造成设备和电池的损坏。
请在5℃~35℃的环境中为设备充电，以免造成电池性能下降、待机时间减少。自行刷新非官方的ROM系统或者破解修改设备的系统文件，将会导致系统出现安全风险，思必拓将不会对此类风险承担责任。



电磁辐射

本产品电磁辐射比吸收率最大值（SAR）≤2.0 W/kg。
有植入心脏起搏器、助听器、人工耳蜗等的使用者在使用本产品时请遵医嘱。



安全警告

以下行为可能会引起电池安全隐患，导致设备在正常使用过程中，出现安全问题：

- 自行拆解电池
- 强力挤压或刺破设备
- 通过非官方渠道维修设备
- 使用非标配的充电器和数据线充电
- 将设备放入微波炉、火源，或放在其他热源附近

产品参数

基本参数	
尺寸	155.15 (H) *74.5 (W) *16.8 (T) mm
重量	217.8g
系统	Android 11
处理器	8核 2.0GHz
RAM	3G/4G
ROM	32GB/64GB
摄像头	500万前置摄像头, 1300万后置摄像头, 高亮度LED闪光灯
显示屏	5.5寸, 720*1440, 5点电容触摸屏
GPS	GPS/GLONASS/BEIDOU
NFC	支持协议：ISO14443A/B, ISO15693, 读取距离：0~5cm
电池	内置锂离子聚合物电池3.8V 5000mAh

无线通信

蓝牙	BT5.0 BLE
Wi-Fi	IEEE 802.11 a/b/g/n/ac 2.4G 5G双频, 支持快速漫游
网络通信	FDD-LTE B1/B2/B3/B5/B7/B8
	TDD-LTE B34/B38/B39/B40/B41
	WCDMA B1/B2/B5/B8
	GSM B2/B3/B5/B8
	CDMA/EVDO BC0/BC1

接口

SIM卡槽	2个Nano SIM卡槽
SD卡槽	1个Micro SD卡槽
USB	USB TYPE-C接口, 支持OTG, 充电 5V 2A
其他	底部充电触点

特殊功能	
条码	扫描引擎：NLS-CM60/NLS-CM30 条码类型：EAN13, EAN8, UPCA, UPCE, Code 128, Code 39, Codabar, UCC/EAN128, RSS, ITF, ITF14, ITF6, ISSN, ISBN, Standard 25, Matrix 25, Industrial 25, Plessey, MSI Plessey, Code 11, Code 93, PDF417, QR Code, DataMatrix, AZTEC, 汉信码, Maxicode, Micro QR, Micro PDF417, Composite
防爆(选配)	防爆标志：Ex ib IIC T4 Gb/Ex ib IIIC T130°C Db
可靠性	
工作温度	-20℃~40℃
存储温度	-30℃~70℃
湿度	5%~95%
静电防护	空气放电±15kv, 接触放电±8kv
防护	6面均可承受1.8m跌落到水泥地面, IP67防尘防水
配件	
充电器	1
USB数据线	1
挂绳	1
快捷指南	1
卡针	1



环保说明

有毒有害物质或元素名称及含量表

部件名称	有毒有害物质或元素					
	镉 (Cd)	汞 (Hg)	镍 (Ni)	六价铬 (Cr6+)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
主机	主板	X	0	0	0	0
	显示屏	0	0	0	0	0
	塑料	0	0	0	0	0
	金属	X	0	0	0	0
电池	X	0	0	0	0	0
附件	X	0	0	0	0	0

0：表示该有毒有害物质在该部件所有均质材料中的含量均在GB/T 26572—2011规定的限量要求以下。
X：表示该有毒有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572—2011规定的限量要求。
注：本产品标有“X”的原因是：现阶段没有可供选择的替代技术或部件。请妥善处理此类部件或物质，以免对环境 and 人体健康造成影响。

本产品的“环保使用期限”为10年。某些内部或外部组件的环保使用期限可能与产品的环保使用期限不同。组件上的使用期限标识优先于产品上任何与之相冲突的或不同的环保使用期限标识。本产品所标环保使用期限是指本信息指南规定的使用条件下使用产品不发生有毒有害物质泄露的安全年限。

访问更多信息

查看Android版本和软件版本，请点击：设置>关于手机。
△注意
访问互联网、收发信息、上传和下载、进行自动同步、使用某些应用程序或使用定位服务可能会产生其他费用。为避免产生额外费用，请联系服务提供商并选择合适的资费套餐。

保修凭证

客户名称：_____

联系电话：_____

用户姓名：_____

通讯地址：_____

邮件地址：_____

产品信息：_____

设备序列号
「_____」

注意：保修卡是获取保修服务的重要凭证，请保存好此卡，一旦丢失或者不能提供设备序列号，将无法提供质保；

- 下列情况不属于保修范围：
1. 已经超出保修期限；
 2. 任何未经思必拓授权许可的改装、拆卸、维修；
 3. 意外因素或人为行为导致产品损坏。如：如进液、摔损、输入不合适电压、过度挤压、主板变形及其他；
 4. 未按使用说明书要求安装、使用、维护、保管导致的产品故障或损坏；
 5. 产品铭牌、SN条码、防拆标签被撕掉或被损坏，模糊不清无法识别；
 6. 保修凭证与产品型号不符或保修凭证被涂改；
 7. 由于不可抗力因素（如火灾、地震、水灾等）而造成的故障或损坏；

开发支持：_____ 售后电话：_____
全球技术支持：GlobalFAE@speedatagroup.com + 400 1088 019
中国区技术支持：FAE@speedatagroup.com



SC55G/SC55GMD Series



Quick start guide



This manual is for reference only.
There might be subtle differences between actual product and picture.
Please refer to actual product.

Please read this manual before using product.

Product

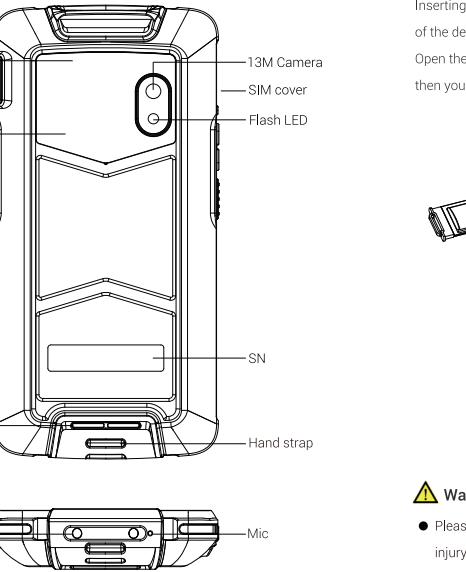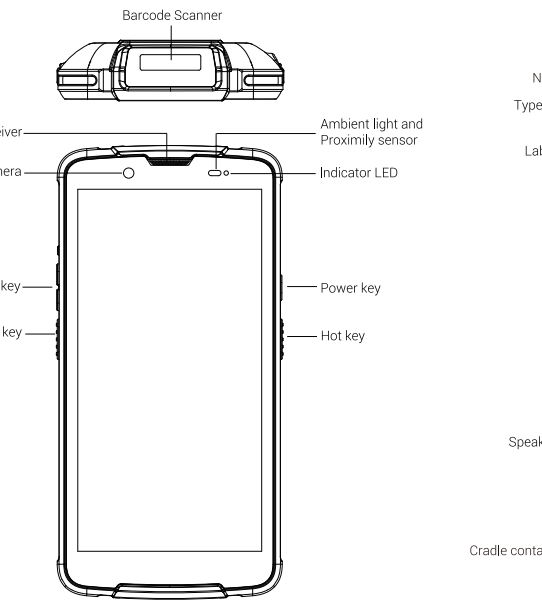

Installation of SIM card and SD Card


Please pay attention to the direction of slot when inserting the card.

Inserting a non-standard card may cause damage to the SIM card holder

of the device.

Open the SIM/ SD plug first and take out the card tray with the PIN,

then you can insert the SIM and SD card.

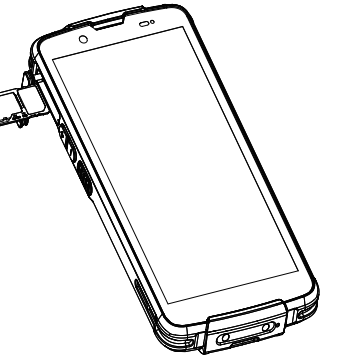

Warning!

- Please pay attention to safety when using a PIN to prevent finger injury or damage to equipment.
- Please take good care of the PIN and keep it out of the reach of children, so as to prevent children from swallowing or poking it unintentionally.

Restart Device

Holding power button 2 seconds, choose restart.

Force Device Restart

Holding power button over 8 seconds.

charge

Charging device before first use is recommended.

△Note: The charger plugs should be fully plugged into socket and keep

in easy-to-unplug location.

Barcode scanner

Go into "Settings>Scan", enable barcode scanner and configure other

settings of barcode scanner.



Laser Radiation!

Barcode scanner is Class2 laser device, do not directly expose human eyes to laser.

safety Information!

Device is designed for working in -20 C~55 C environment,proper storage

temperature is -30 C~70 C , lower or higher temperature would compromise,

device performance, even cause potential damage to device or battery.

Charge device in -5 C~35 C environment, in case of battery endurance

weakness.No support or responsibility will be undertaken if end user update

device with third party ROM or crack device system.



Electromagnetic Radiation

The maximum absorption rate of electromagnetic radiation is (SAR) ≤ 2.0 W/kg.

In special cases such as pacemakers, hearing aids, cochlear implants, users

should follow the doctor's instructions.



Warning

- Disassembly battery.
- Demolition device.
- Repair device in unofficial service.
- Using uncertified USB cable.
- Put device into or near microwave oven, fire, or other heat source.

Product Specification

General specification	
Dimensions	155.15(H)*74.5(W)*16.8(T)mm
Weight	217.8g
OS	Android 11
CPU	Octa-core 2.0GHz
RAM	3GB or 4GB
ROM	32GB or 64GB
Camera	13MP rear camera with high brightness LED flash 5MP front Camera
Display	5.5 inch 720*1440 IPS High bright screen 5 points capacitive touch
GPS	GPS/GLONASS/BEIDOU
NFC	ISO14443A/B,ISO15693,Working Range: 0~5cm
Battery	Built-in 5000mAh lithium-ion polymer battery
Wireless specification	
Bluetooth	BT5.0 BLE
Wi-Fi	IEEE 802.11 a/b/g/n/ac 2.4G 5G(Fast roaming)
WWAN	FDD-LTE B1/B2/B3/B5/B7/B8
	TDD-LTE B34/B38/B39/B40/B41
	WCDMA B1/B2/B5/B8
	GSM B2/B3/B5/B8
	CDMA/EVDO BC0/BC1
Interface	
SIM card slot	2 Nano SIM card slots
SD card slot	1 Micro SD card slot
USB	USB TYPE-C,OTG, fast charging 5V 2A
Others	Cradle contact

Special Feature	
Barcode	Scan engine:NLS-CM60 or NLS-CM30 Symbology: EAN13, EAN8, UPCA, UPCE, Code 128, Code 39, Codabar, UCC/EAN128, RSS, ITF, ITF14, ITF6, ISSN, ISBN, Standard 25, Matrix 25, Code 11, Industrial 25, Plessey, MSI Plessey, Code 93, PDF417, QR Code, DataMatrix, AZTEC, Maxicode, Hanxin Code, Micro QR, Micro PDF417, Composite
Performance	
Working temperature	-20°C~40°C
Storage temperature	-30°C~70°C
Humidity	5%~95%
ESD protection	Air discharge ±15kv, contact discharge ±8kv
Protection	1.8m free drop to concrete Seal to IP67
Accessory	
AC adaptor	1
USB cable	1
Lanyard	1
Quick start guide	1
PIN	1



Environmental Protection

List of toxic and hazardous substances or elements

Parts	Toxic and hazardous substances or elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	hexavalent chromium (Cr6+)	poly-brominated biphenyls (PBB)	poly-brominated biphenyl ethers (PBDE)
Device	PCBA	X	0	0	0	0
	LCD	0	0	0	0	0
	Plastic	0	0	0	0	0
	Metal	X	0	0	0	0
Accessory	Battery	X	0	0	0	0
	Accessary	X	0	0	0	0

0 indicates that the toxic and hazardous substances in all homogenized

materials of the component are below the limit required by GB/T 26572-2011.

X indicates that the toxic and hazardous substance in at least one homogeneous

material of the component exceeds the limit set by GB/T 26572-2011.

Note: this product is labeled "X" because there are no alternative technologies

or components available at this stage. Please handle such parts or materials

properly to avoid environmental and human health effects.

This product's "environmental protection life" is 10 years. The environmental

protection of some internal or external components may differ from the

environmental life of the product. The service life mark on the component has

precedence over any conflicting or different environmental life identification

on the product. The term of environmental protection of this product refers

to the safe life of using the product without toxic and harmful substances

leakage under the conditions stipulated in this information guide.

For more information

About the device Android and software versions, check in: settings > about

the phone.

△Note: Access to the Internet, send and receive information, upload and

download, automatic synchronization, so that some applications or use of

location services may incur other costs. To avoid additional charges, please

contact the service provider and select the appropriate tariff package scheme.

FCC Radiation Exposure Statement:

This device meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health. The SAR limit of USA (FCC) is 1.6 W/kg averaged. Device types: Wireless data terminal (FCC ID: 2BAQ0SC55G) has also been tested against this SAR limit. SAR information can be viewed on - line at <http://www.fcc.gov/etw/fccid/>. Please use the device FCC ID number for search. This device was tested simulation typical 10mm to body. To maintain compliance with FCC RF exposure requirements, the use of accessories should maintain a separation distance between the user's bodies mentioned above, the use of accessories should not contain metallic components in its assembly, the use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference

received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device,

pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against

harmful interference in a residential installation. This equipment generates, uses and can radiate radio

frequency energy and, if not installed and used in accordance with the instructions, may cause harmful

interference to radio communications. However, there is no guarantee that interference will not occur in a

particular installation. If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the

interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Warranty Card

Company: _____

Tel: _____

Name: _____

Add: _____

E-mail: _____

Product Info: _____

SN and IMEI number: _____
