

FCC Appendix RF Test Data for 2.4GWIFI

FCC ID : 2BAQY-PADONE

Company : HIFIMAN KUNSHAN TECHNOLOGY GROUP CO., LTD.

EUT : Tablet PC

Model Number : Pad One

Report No. : CTA25090802103

Reviewed By : Eric Wang

Appendix A: DTS Bandwidth

Test Result


TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.080	2406.960	2417.040	0.5	PASS
		2437	10.040	2432.000	2442.040	0.5	PASS
		2462	10.080	2456.960	2467.040	0.5	PASS
11G	Ant1	2412	15.120	2404.440	2419.560	0.5	PASS
		2437	15.040	2429.520	2444.560	0.5	PASS
		2462	15.120	2454.440	2469.560	0.5	PASS
11N20SISO	Ant1	2412	15.040	2404.520	2419.560	0.5	PASS
		2437	15.080	2429.480	2444.560	0.5	PASS
		2462	15.120	2454.440	2469.560	0.5	PASS
11N40SISO	Ant1	2422	35.120	2404.480	2439.600	0.5	PASS
		2437	35.040	2419.480	2454.520	0.5	PASS
		2452	35.040	2434.480	2469.520	0.5	PASS

Test Graphs


11B_Ant1_2412



11B_Ant1_2437

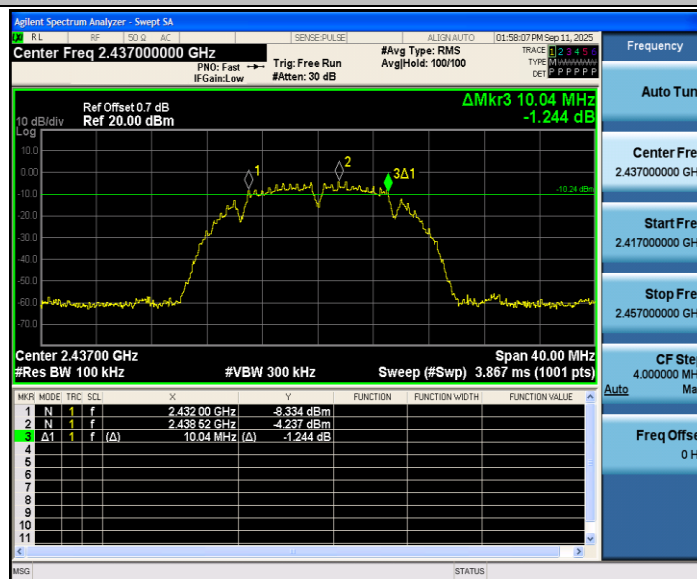

11B_Ant1_2462

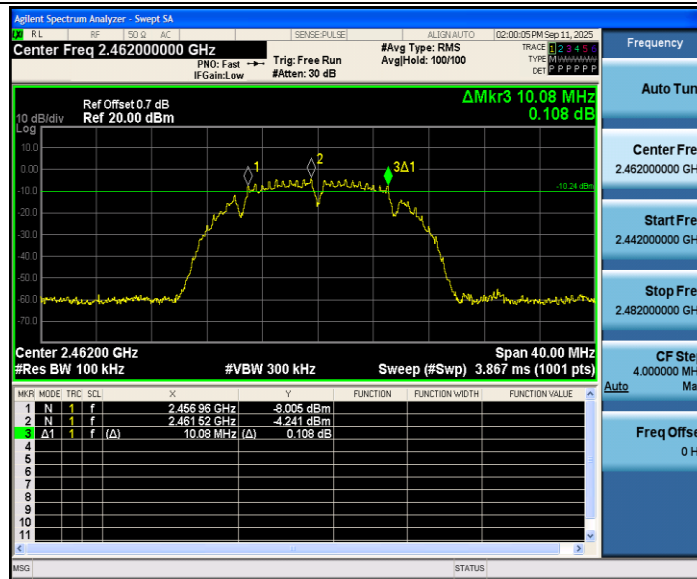

11G_Ant1_2412



11G_Ant1_2437



11G_Ant1_2462



11N20SISO_Ant1_2412




11N20SISO_Ant1_2437




11N20SISO_Ant1_2462




11N40SISO_Ant1_2422

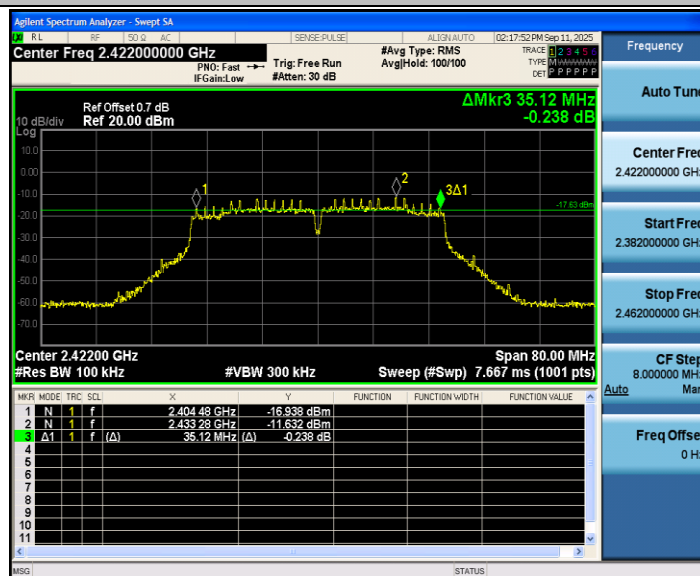

11N40SISO_Ant1_2437

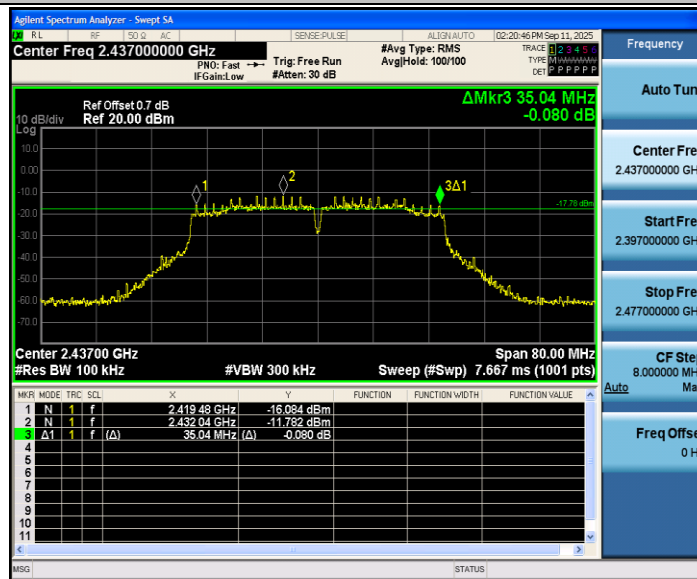

11N40SISO_Ant1_2452

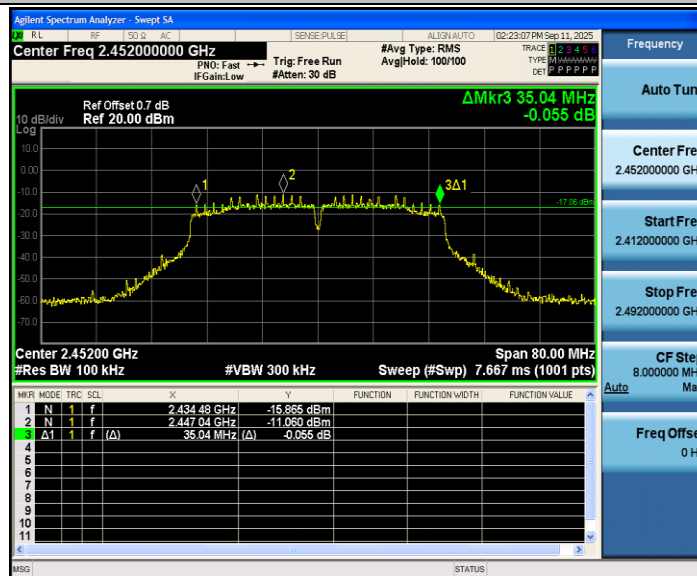


Appendix B: Occupied Channel Bandwidth

Test Result


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.430	2405.2744	2418.7044	---	---
		2437	13.419	2430.3871	2443.8061	---	---
		2462	13.400	2455.3137	2468.7137	---	---
11G	Ant1	2412	16.744	2403.6528	2420.3968	---	---
		2437	16.766	2428.7278	2445.4938	---	---
		2462	16.738	2453.6445	2470.3825	---	---
11N20SISO	Ant1	2412	17.853	2403.0805	2420.9335	---	---
		2437	17.764	2428.2032	2445.9672	---	---
		2462	17.815	2453.0987	2470.9137	---	---
11N40SISO	Ant1	2422	36.162	2404.0792	2440.2412	---	---
		2437	36.052	2419.0500	2455.1020	---	---
		2452	35.982	2434.0780	2470.0600	---	---

Test Graphs


11B_Ant1_2412

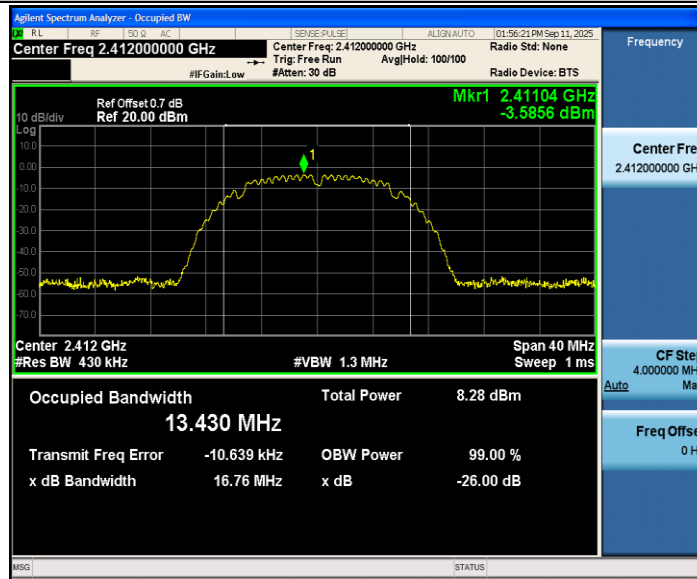


11B_Ant1_2437

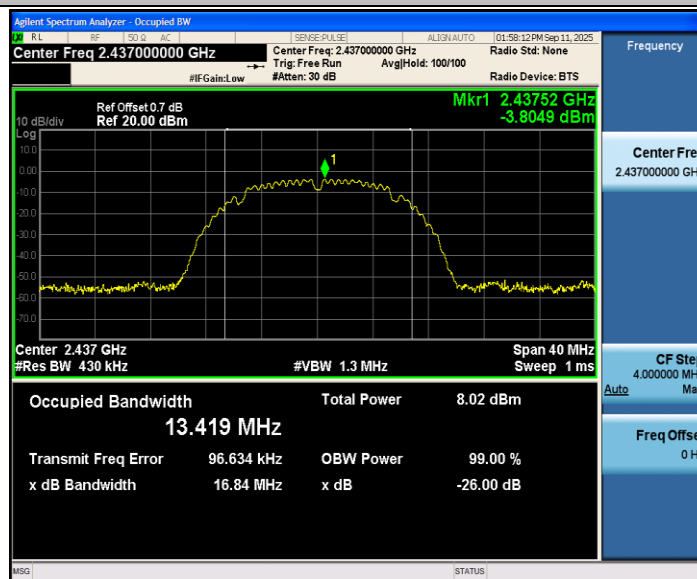


11B_Ant1_2462

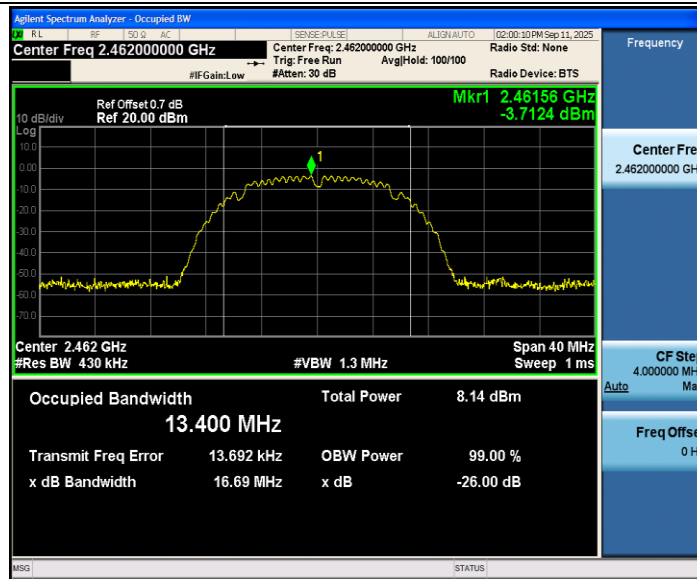

11G_Ant1_2412

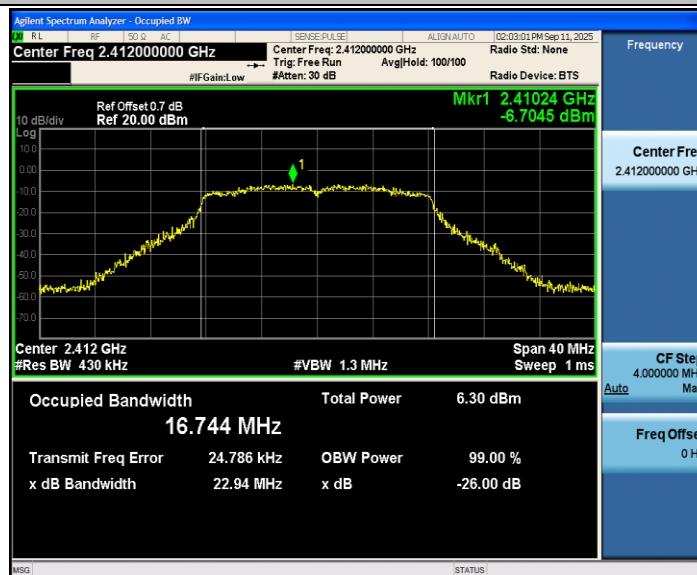


11G_Ant1_2437

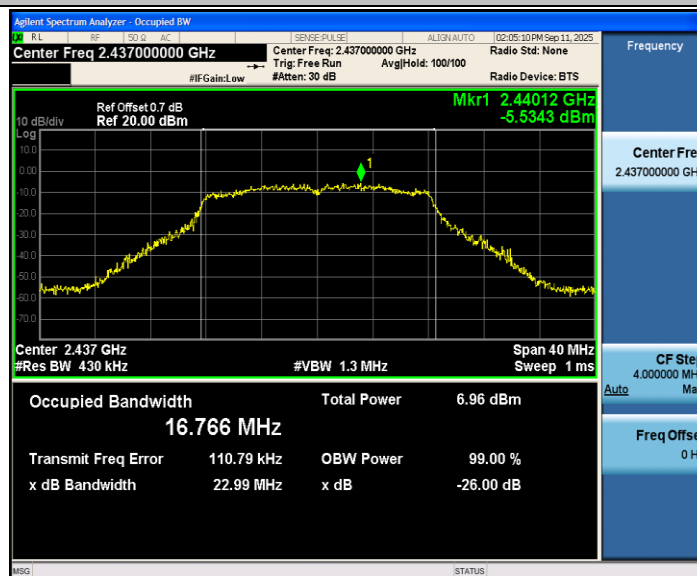


11G_Ant1_2462




11N20SISO_Ant1_2412

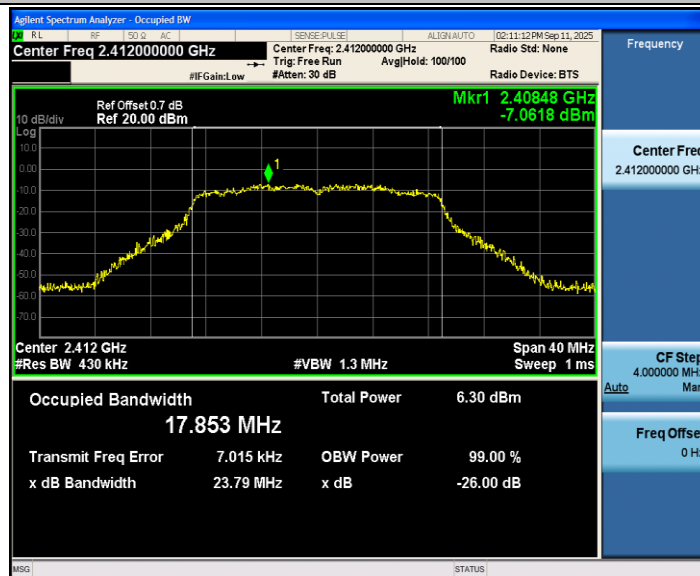


11N20SISO_Ant1_2437

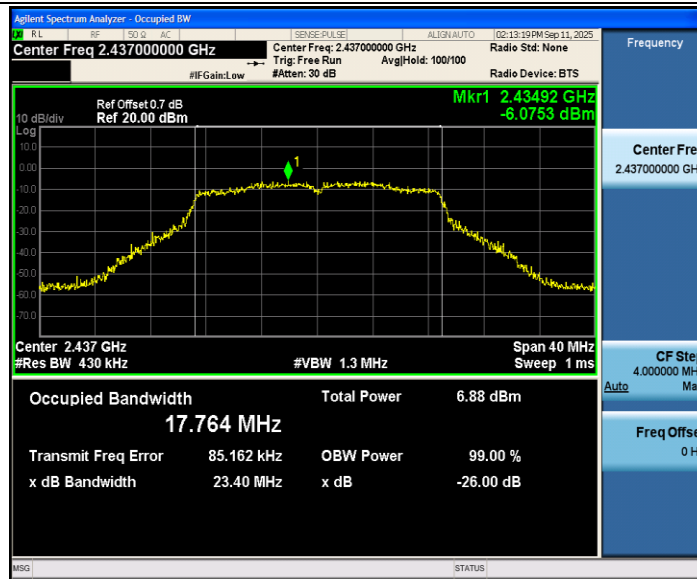

11N20SISO_Ant1_2462

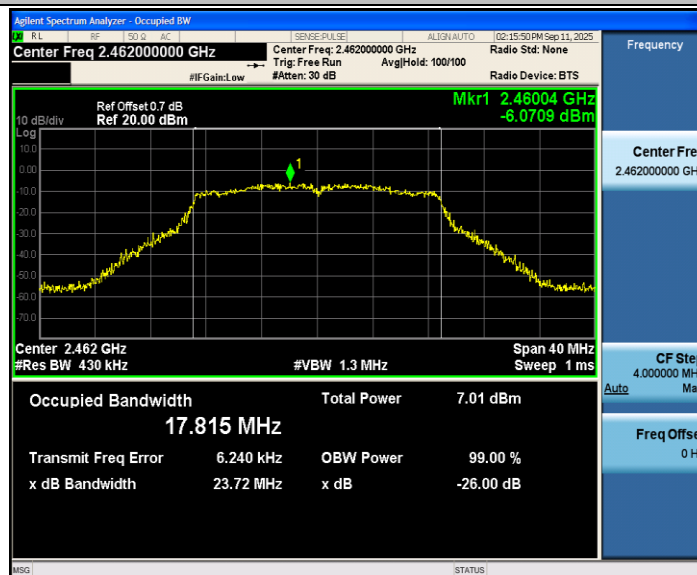

11N40SISO_Ant1_2422

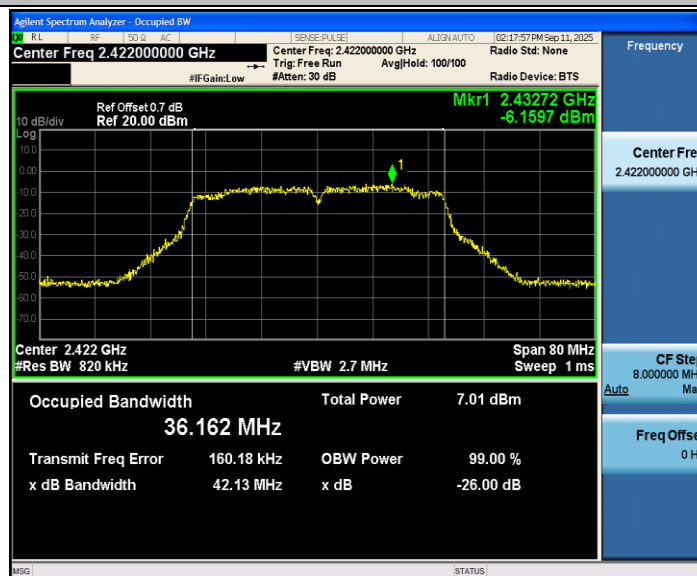

Appendix C: Maximum conducted output power

Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Peak power [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	5.01	≤30.00	PASS
		2437	5.84	≤30.00	PASS
		2462	5.97	≤30.00	PASS
11G	Ant1	2412	5.79	≤30.00	PASS
		2437	5.41	≤30.00	PASS
		2462	5.59	≤30.00	PASS
11N20SISO	Ant1	2412	5.61	≤30.00	PASS
		2437	5.21	≤30.00	PASS
		2462	5.36	≤30.00	PASS
11N40SISO	Ant1	2422	5.35	≤30.00	PASS
		2437	5.38	≤30.00	PASS
		2452	5.90	≤30.00	PASS

Appendix D: Maximum power spectral density

Test Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-18.26	≤8.00	PASS
		2437	-17.76	≤8.00	PASS
		2462	-17.41	≤8.00	PASS
11G	Ant1	2412	-24.04	≤8.00	PASS
		2437	-22.97	≤8.00	PASS
		2462	-23.07	≤8.00	PASS
11N20SISO	Ant1	2412	-23.71	≤8.00	PASS
		2437	-22.32	≤8.00	PASS
		2462	-22.02	≤8.00	PASS
11N40SISO	Ant1	2422	-26.05	≤8.00	PASS
		2437	-26.34	≤8.00	PASS
		2452	-25.38	≤8.00	PASS

Test Graphs

11B_Ant1_2412




11B_Ant1_2437




11B_Ant1_2462



11G_Ant1_2412

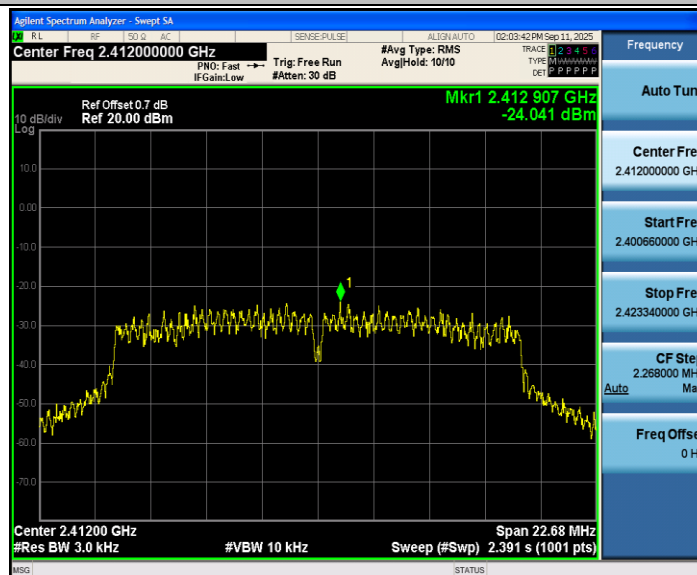


11G_Ant1_2437

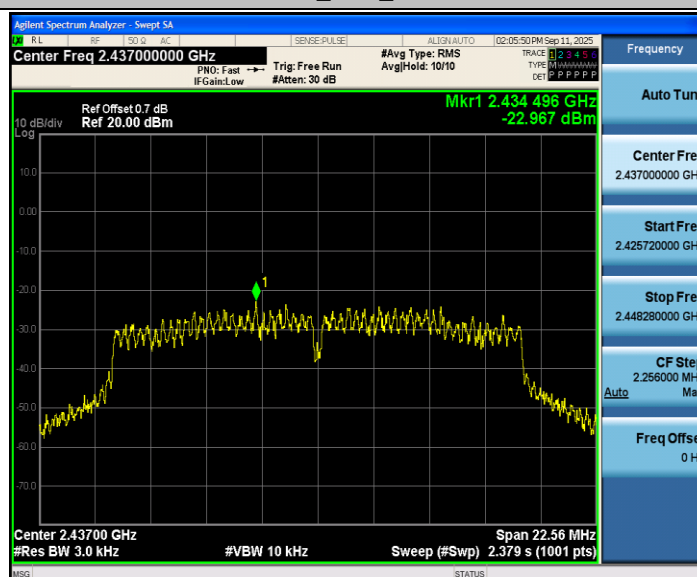

11G_Ant1_2462




11N20SISO_Ant1_2412

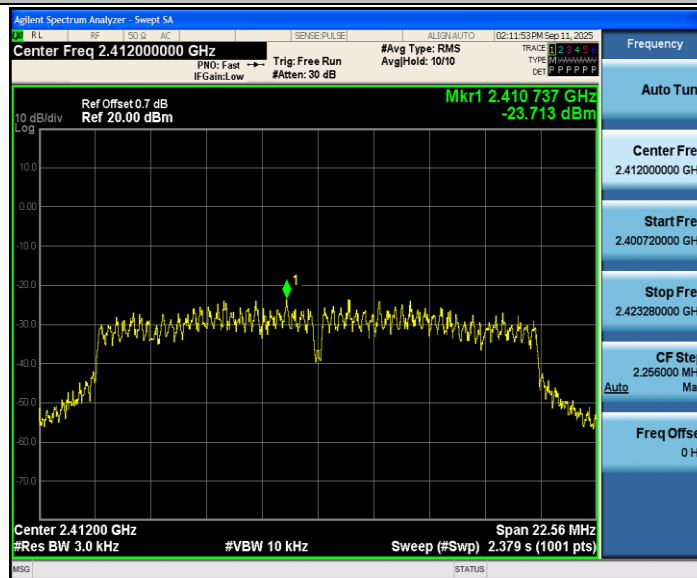


11N20SISO_Ant1_2437




11N20SISO_Ant1_2462

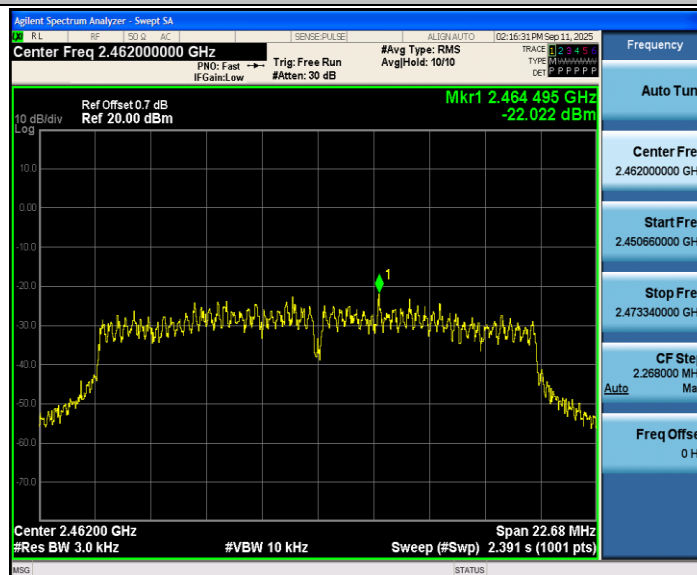


11N40SISO_Ant1_2422

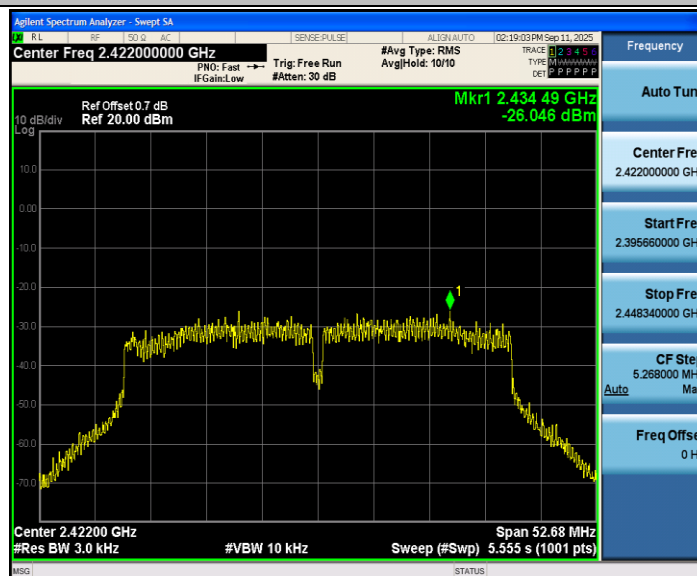

11N40SISO_Ant1_2437

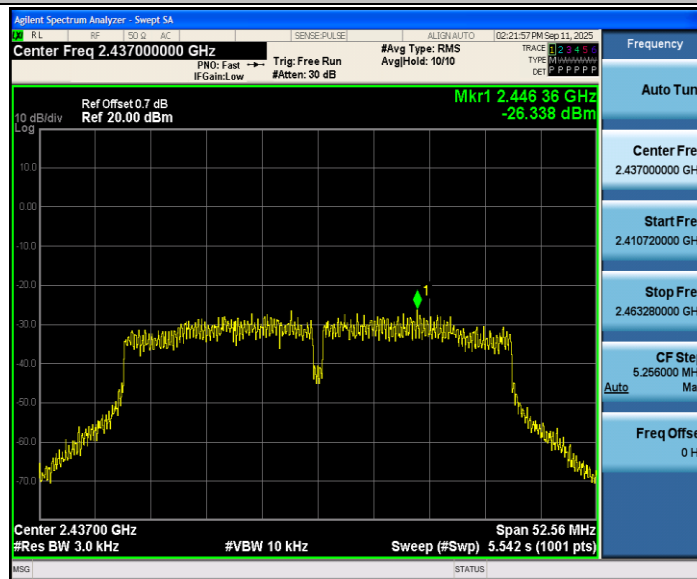

11N40SISO_Ant1_2452

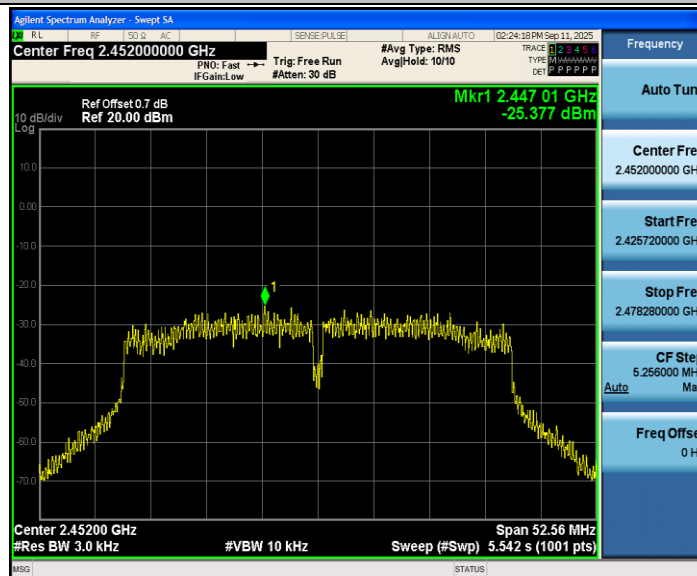


Appendix E: Band edge measurements

Test Result


TestMode	Antenna	Channel Name	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	-4.57	-56.51	≤-24.57	PASS
		High	2462	-4.26	-57.36	≤-24.26	PASS
11G	Ant1	Low	2412	-8.58	-41.19	≤-28.58	PASS
		High	2462	-7.87	-57.01	≤-27.87	PASS
11N20SISO	Ant1	Low	2412	-8.51	-40	≤-28.51	PASS
		High	2462	-7.76	-57.58	≤-27.76	PASS
11N40SISO	Ant1	Low	2422	-11.39	-39.41	≤-31.39	PASS
		High	2452	-11.14	-57.09	≤-31.14	PASS

Test Graphs


11B_Ant1_Low_2412

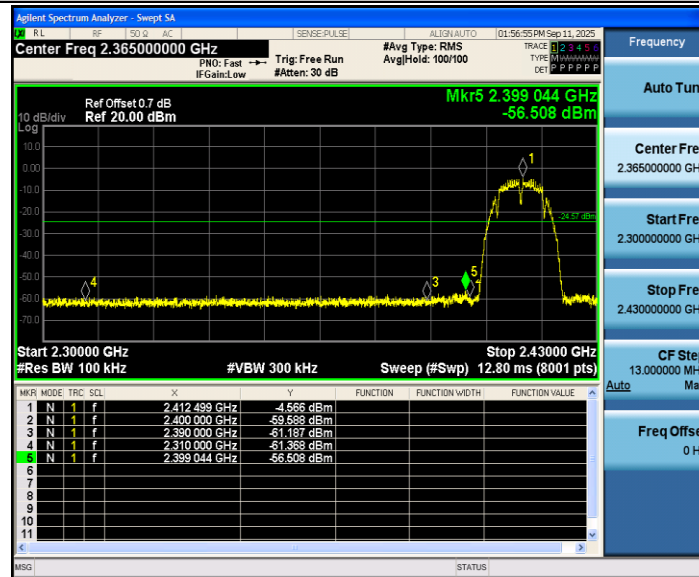


11B_Ant1_High_2462

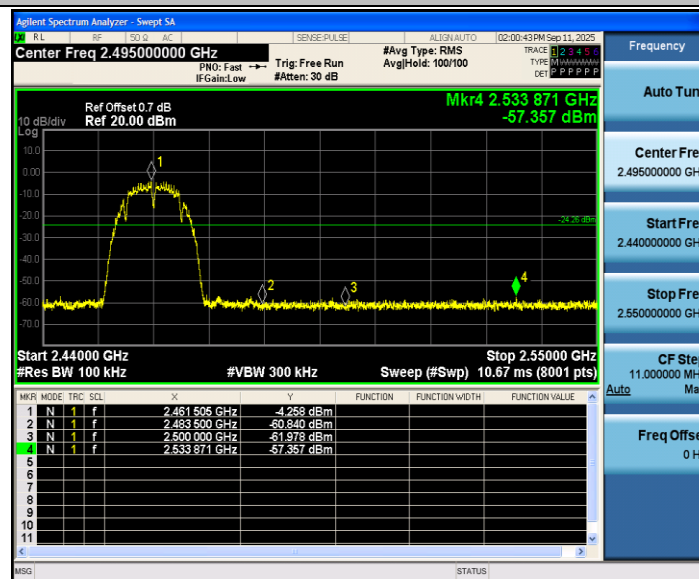


11G_Ant1_Low_2412

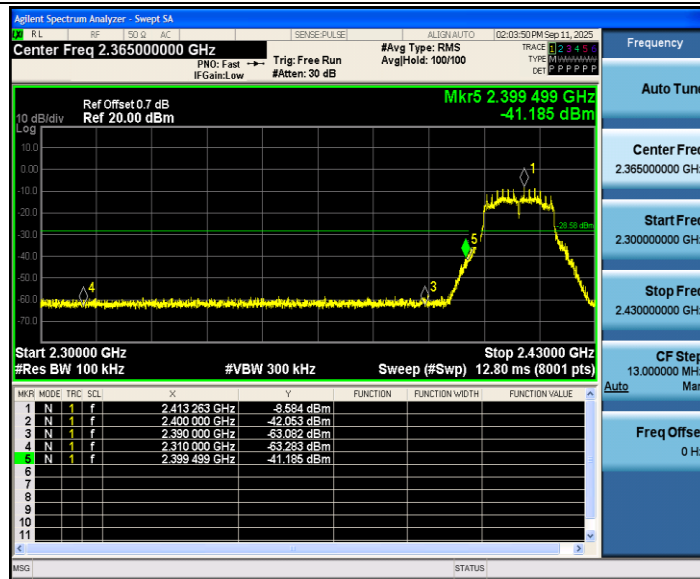


11G_Ant1_High_2462

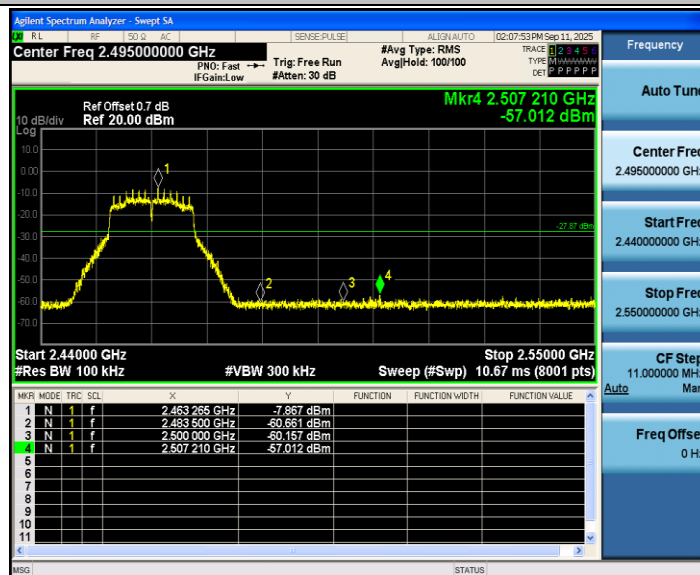


11N20SISO_Ant1_Low_2412

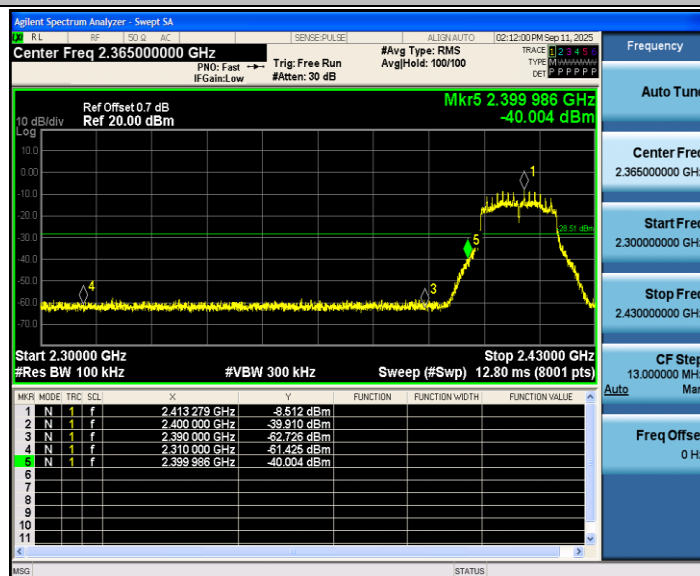


11N20SISO_Ant1_High_2462

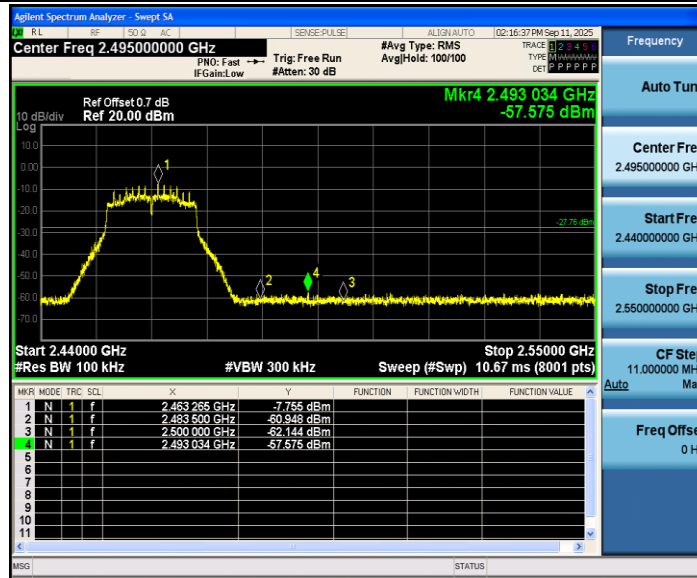

11N40SISO_Ant1_Low_2422

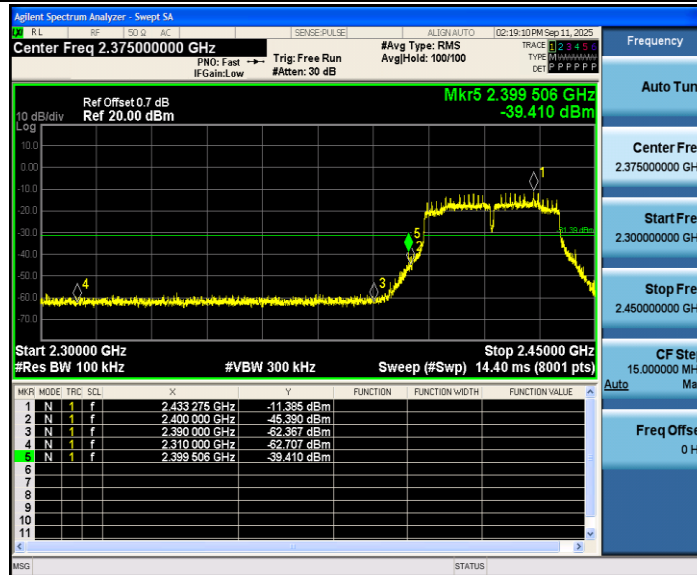

11N40SISO_Ant1_High_2452

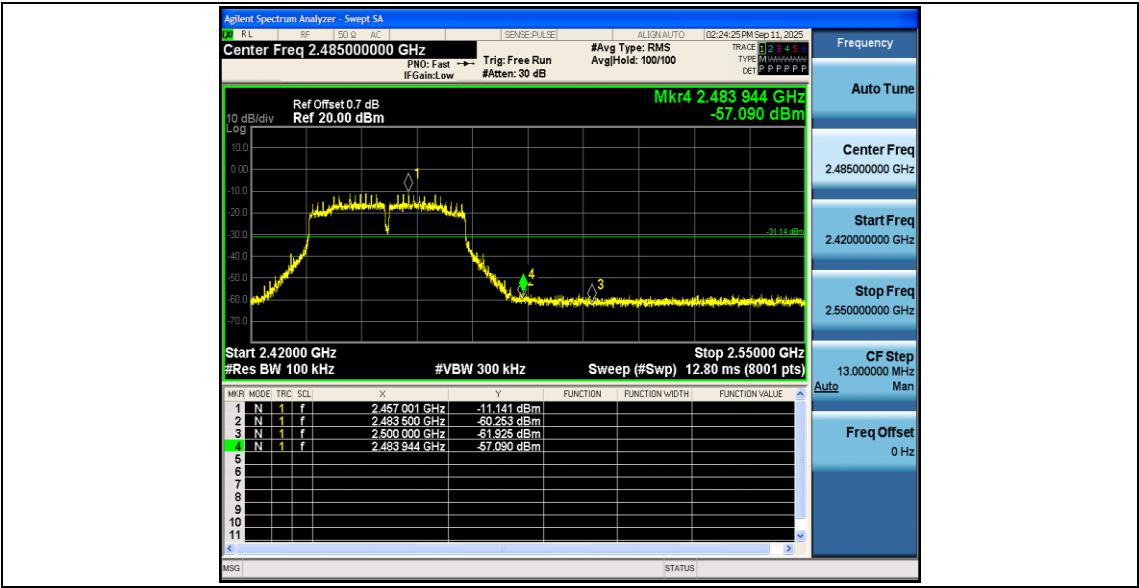

Appendix F: Conducted Spurious Emission

Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	-4.42	-4.42	---	PASS
			30~1000	-4.42	-67.26	≤-24.42	PASS
			1000~26500	-4.42	-54.81	≤-24.42	PASS
		2437	Reference	-5.03	-5.03	---	PASS
			30~1000	-5.03	-68.34	≤-25.03	PASS
			1000~26500	-5.03	-53.99	≤-25.03	PASS
		2462	Reference	-4.78	-4.78	---	PASS
			30~1000	-4.78	-67.25	≤-24.78	PASS
			1000~26500	-4.78	-54.97	≤-24.78	PASS
11G	Ant1	2412	Reference	-9.17	-9.17	---	PASS
			30~1000	-9.17	-67.53	≤-29.17	PASS
			1000~26500	-9.17	-54.64	≤-29.17	PASS
		2437	Reference	-7.89	-7.89	---	PASS
			30~1000	-7.89	-68	≤-27.89	PASS
			1000~26500	-7.89	-54.88	≤-27.89	PASS
		2462	Reference	-8.89	-8.89	---	PASS
			30~1000	-8.89	-68.27	≤-28.89	PASS
			1000~26500	-8.89	-54.68	≤-28.89	PASS
11N20SISO	Ant1	2412	Reference	-9.10	-9.10	---	PASS
			30~1000	-9.10	-67.54	≤-29.1	PASS
			1000~26500	-9.10	-55	≤-29.1	PASS
		2437	Reference	-8.26	-8.26	---	PASS
			30~1000	-8.26	-67.08	≤-28.26	PASS
			1000~26500	-8.26	-54.62	≤-28.26	PASS
		2462	Reference	-8.32	-8.32	---	PASS
			30~1000	-8.32	-67.86	≤-28.32	PASS
			1000~26500	-8.32	-54.12	≤-28.32	PASS
11N40SISO	Ant1	2422	Reference	-12.20	-12.20	---	PASS
			30~1000	-12.20	-67.63	≤-32.2	PASS
			1000~26500	-12.20	-55.07	≤-32.2	PASS
		2437	Reference	-11.83	-11.83	---	PASS
			30~1000	-11.83	-67.87	≤-31.83	PASS
			1000~26500	-11.83	-54.52	≤-31.83	PASS
		2452	Reference	-11.82	-11.82	---	PASS
			30~1000	-11.82	-67.53	≤-31.82	PASS
			1000~26500	-11.82	-53.92	≤-31.82	PASS

Test Graphs


11B_Ant1_2412_0~Reference



11B_Ant1_2412_30~1000

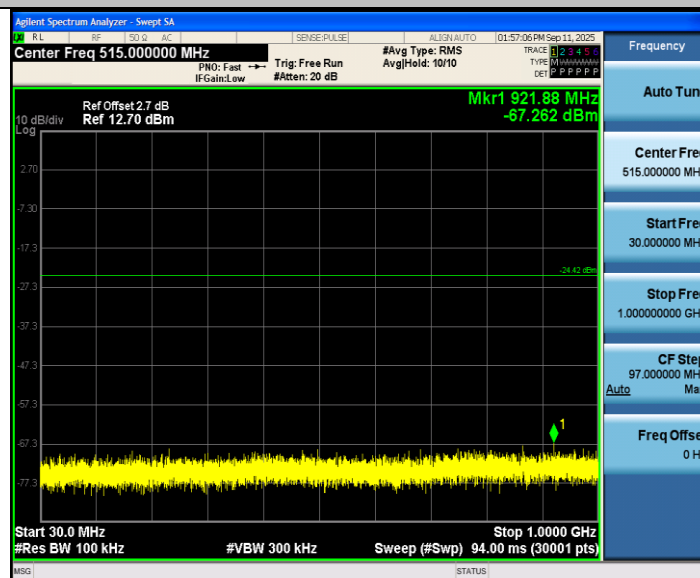


11B_Ant1_2412_1000~26500

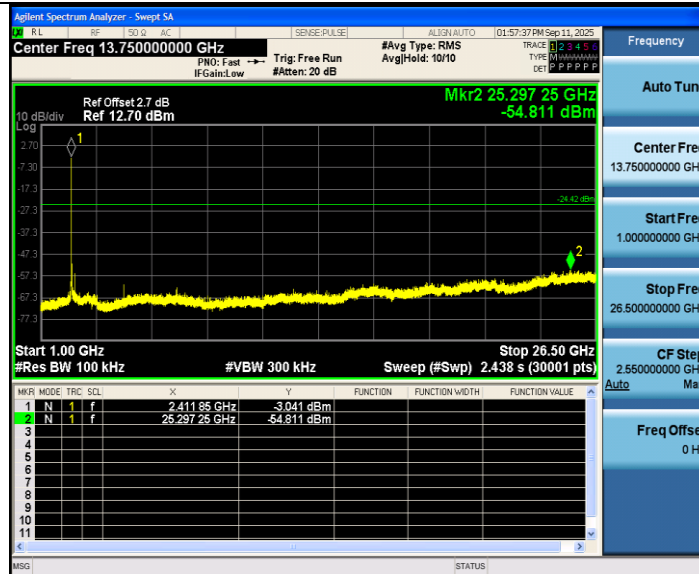


11B_Ant1_2437_0~Reference



11B_Ant1_2437_30~1000

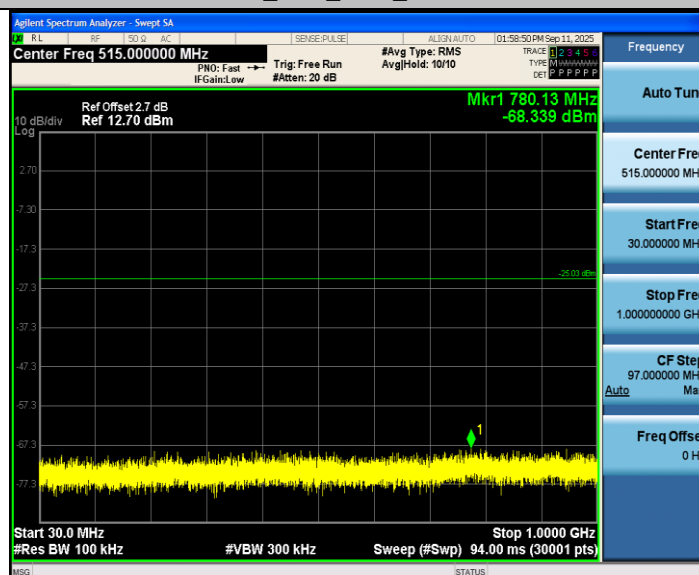


11B_Ant1_2437_1000~26500

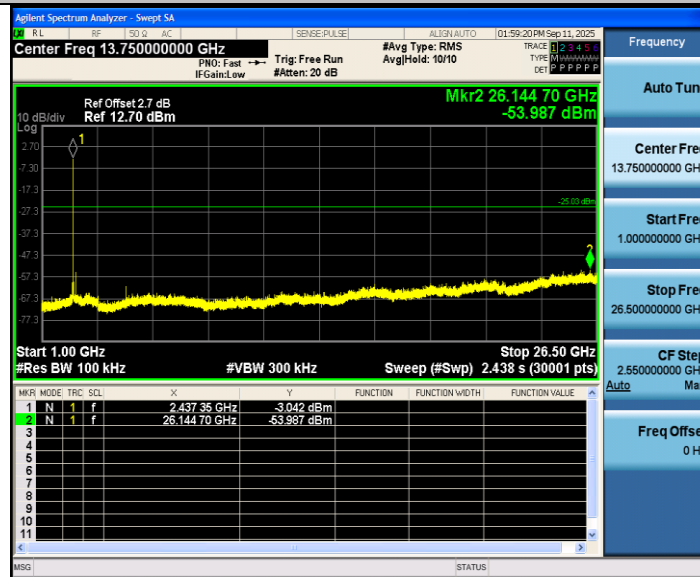


11B_Ant1_2462_0~Reference




11B_Ant1_2462_30~1000

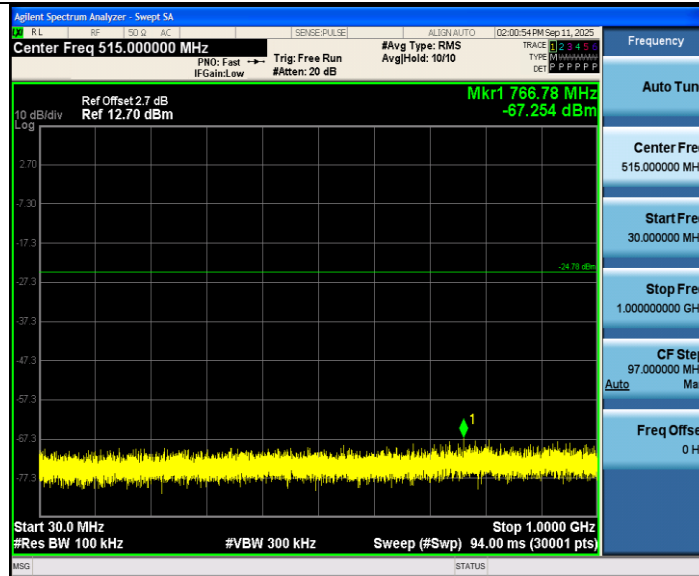


11B_Ant1_2462_1000~26500

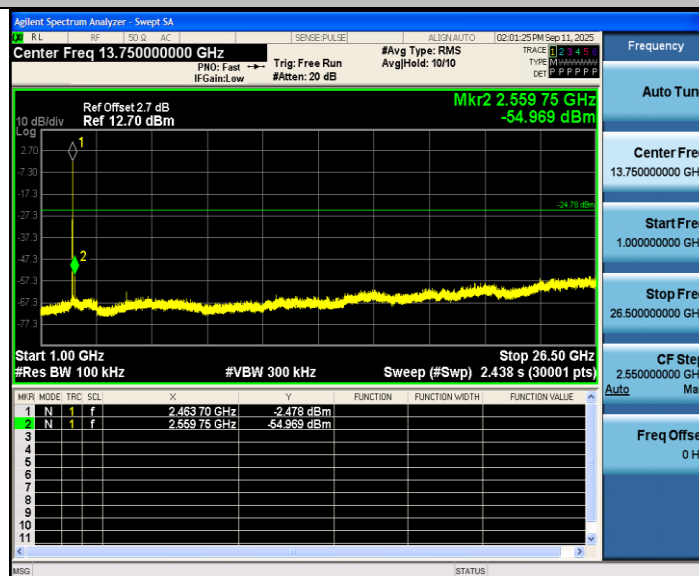


11G_Ant1_2412_0~Reference

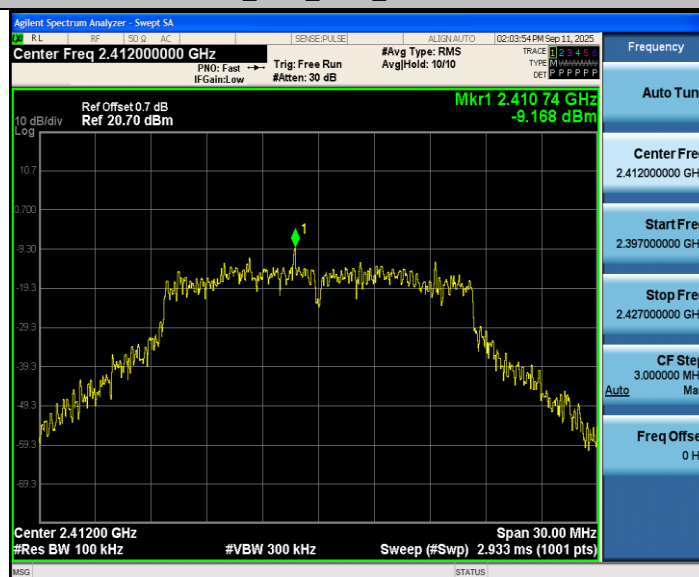

11G_Ant1_2412_30~1000

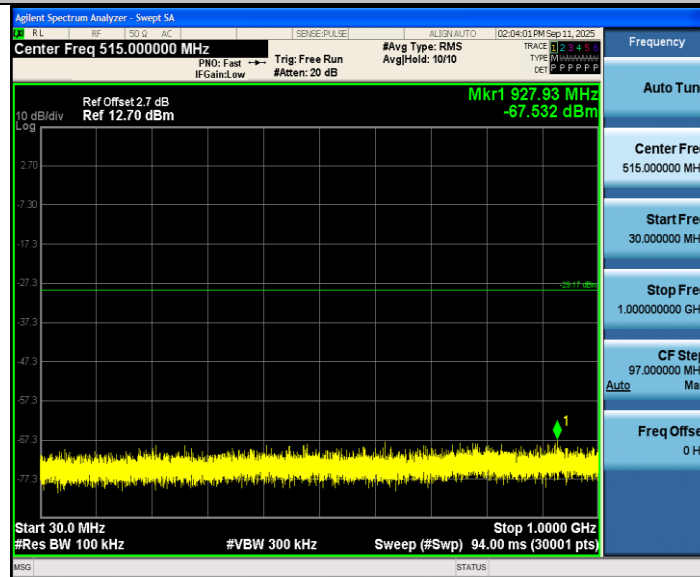


11G_Ant1_2412_1000~26500

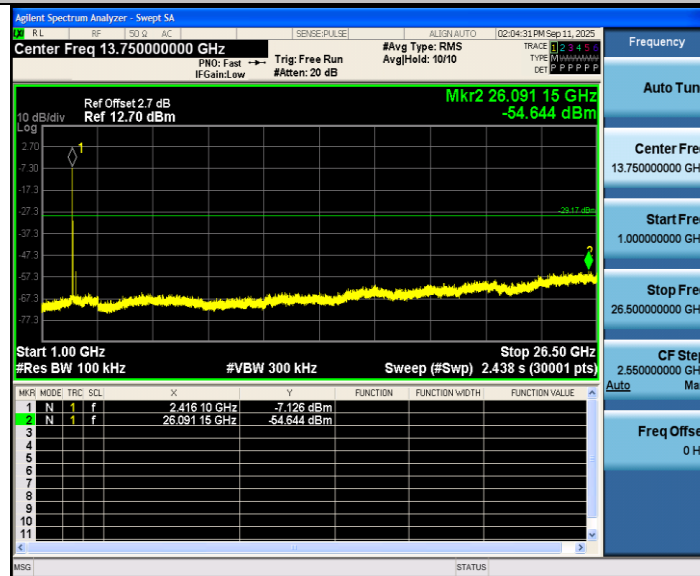


11G_Ant1_2437_0~Reference



11G_Ant1_2437_30~1000

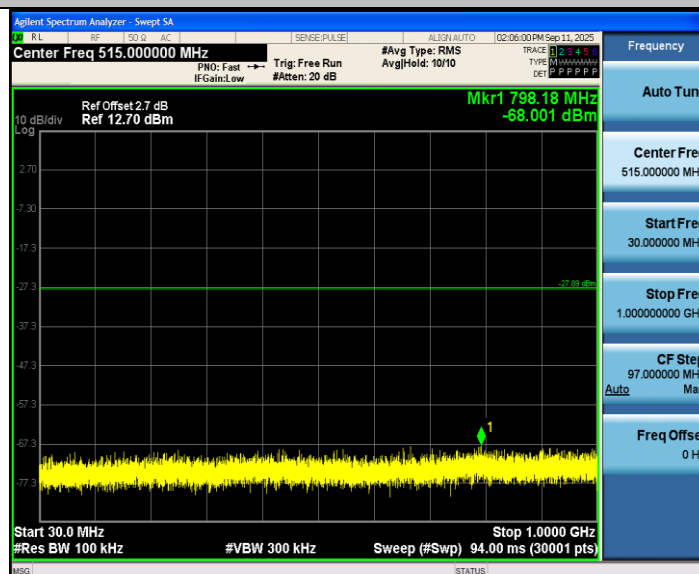


11G_Ant1_2437_1000~26500

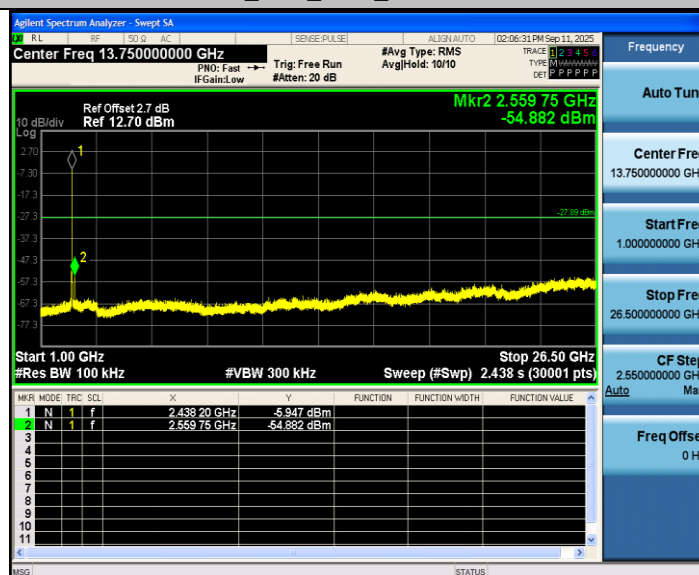


11G_Ant1_2462_0~Reference




11G_Ant1_2462_30~1000

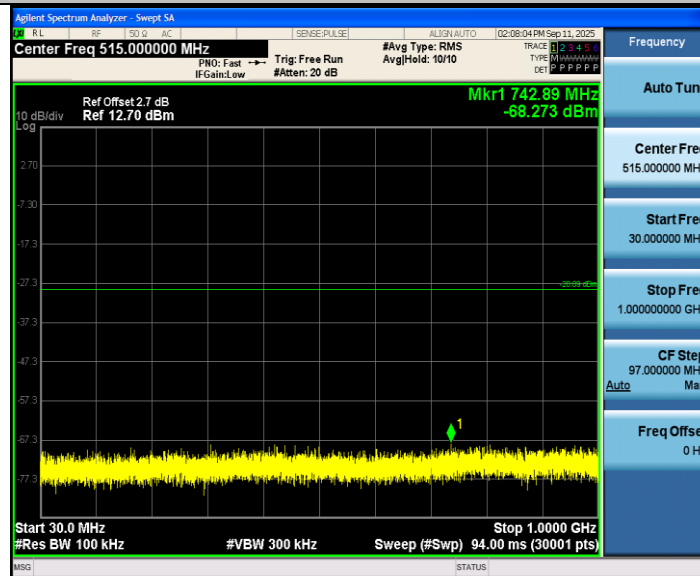

11G_Ant1_2462_1000~26500

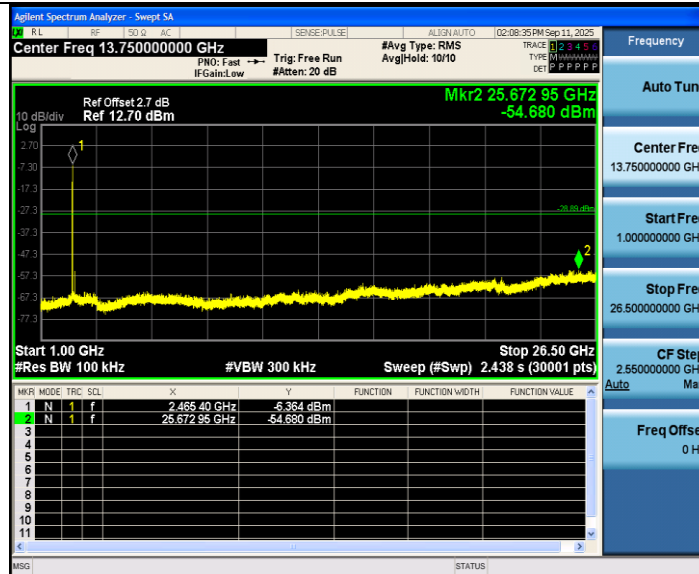

11N20SISO_Ant1_2412_0~Reference

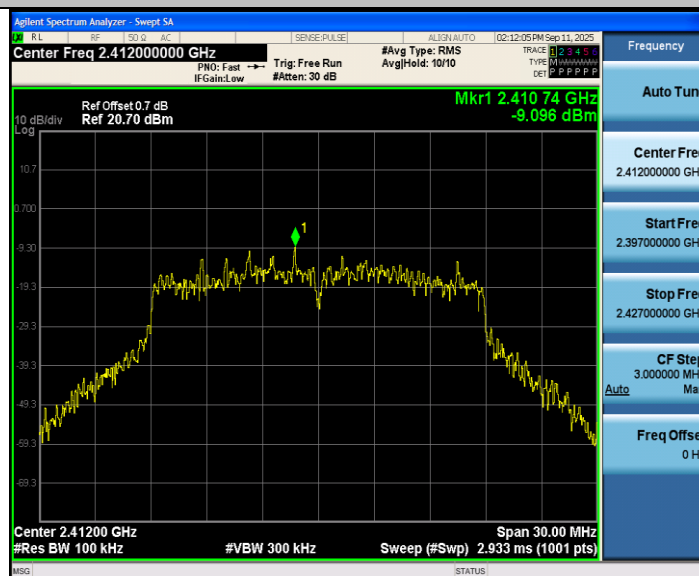

11N20SISO_Ant1_2412_30~1000

