

Appendix C

RF Test Data for 2.4GWIFI(Conducted Measurement)

Product Name: Android TV Box


Test Model: Q11

Environmental Conditions


Temperature:	23.1°C
Relative Humidity:	52.9%
ATM Pressure:	100.0 kPa
Test Engineer:	Suichao Lai
Supervised by:	Fengliu Tang

C.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	8.585	0.5	Pass
NVNT	b	2437	Ant1	8.549	0.5	Pass
NVNT	b	2462	Ant1	8.133	0.5	Pass
NVNT	g	2412	Ant1	16.23	0.5	Pass
NVNT	g	2437	Ant1	16.22	0.5	Pass
NVNT	g	2462	Ant1	16.15	0.5	Pass
NVNT	n20	2412	Ant1	17.3	0.5	Pass
NVNT	n20	2437	Ant1	16.99	0.5	Pass
NVNT	n20	2462	Ant1	16.94	0.5	Pass
NVNT	n40	2422	Ant1	28.49	0.5	Pass
NVNT	n40	2437	Ant1	33.66	0.5	Pass
NVNT	n40	2452	Ant1	35.12	0.5	Pass

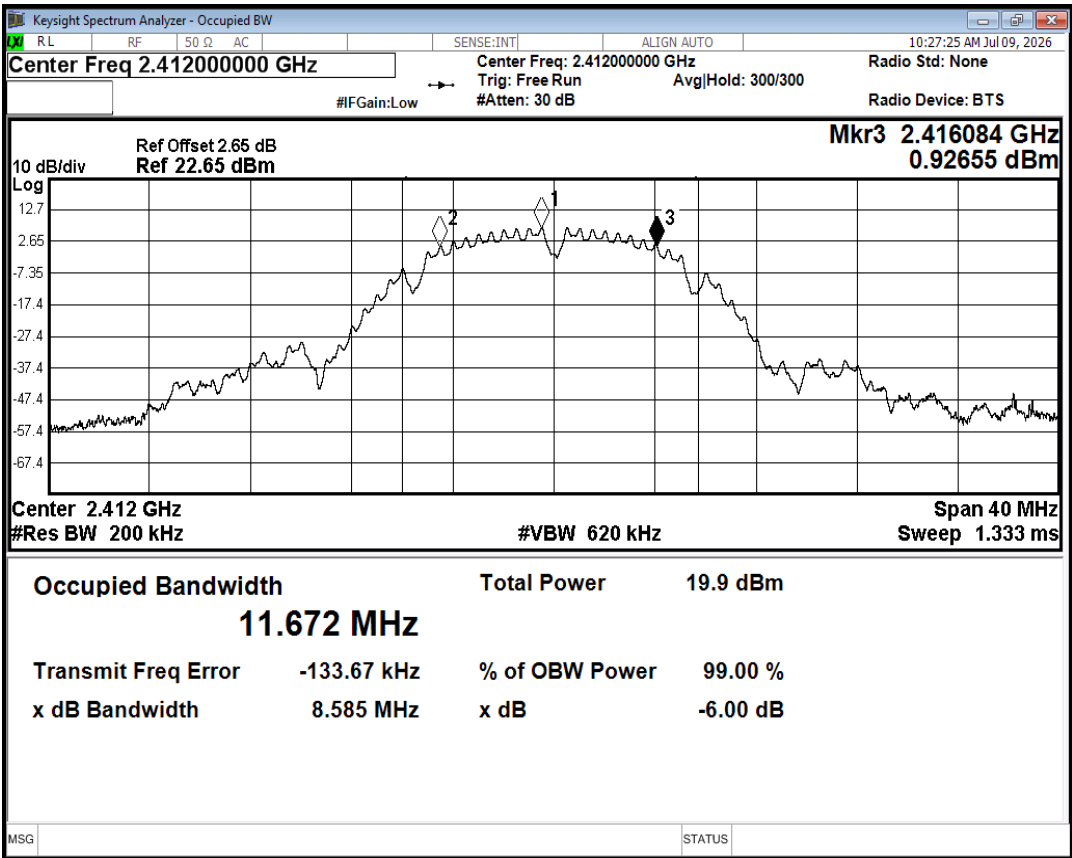


-6dB Bandwidth NVNT b 2412MHz Ant1

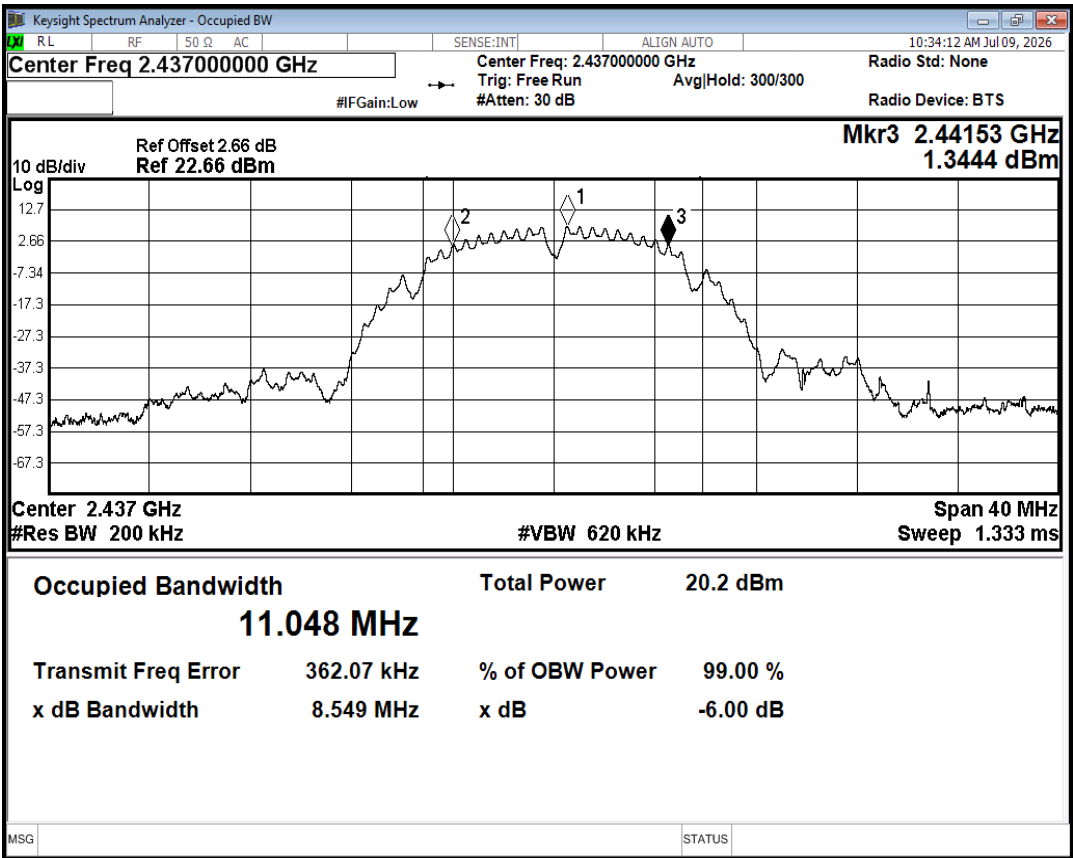


-6dB Bandwidth NVNT b 2437MHz Ant1

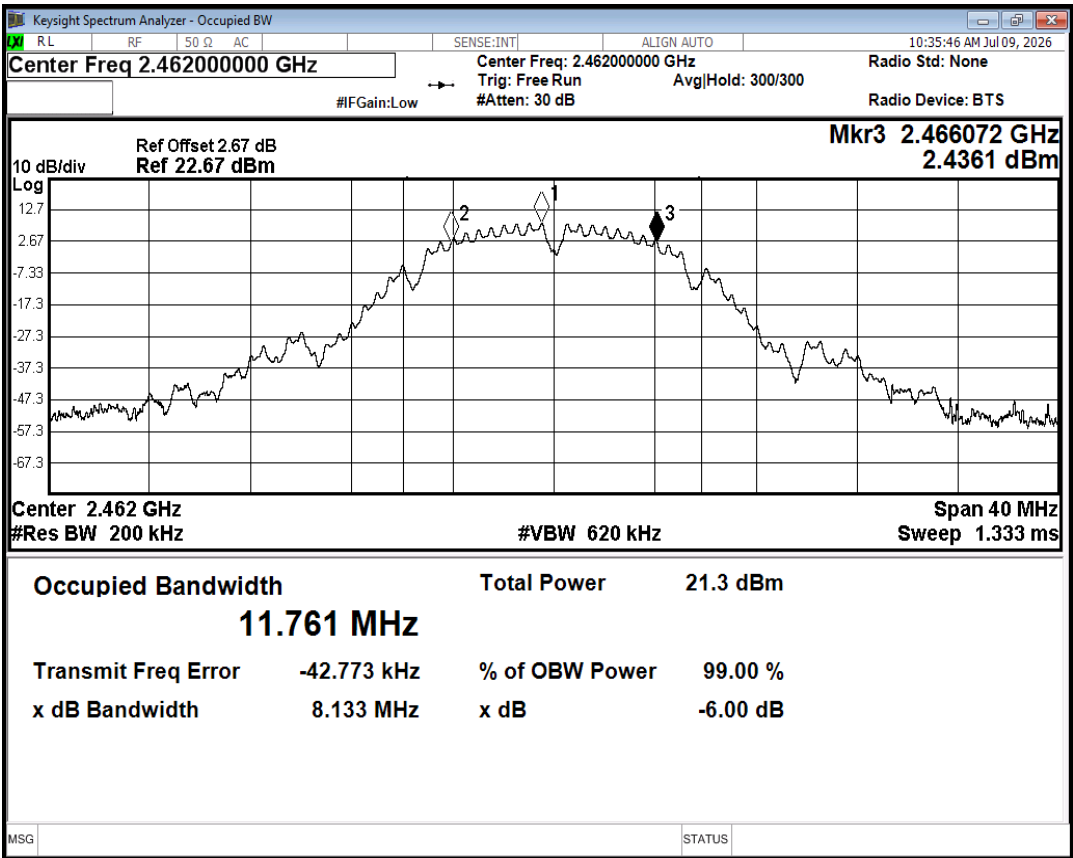


-6dB Bandwidth NVNT b 2462MHz Ant1

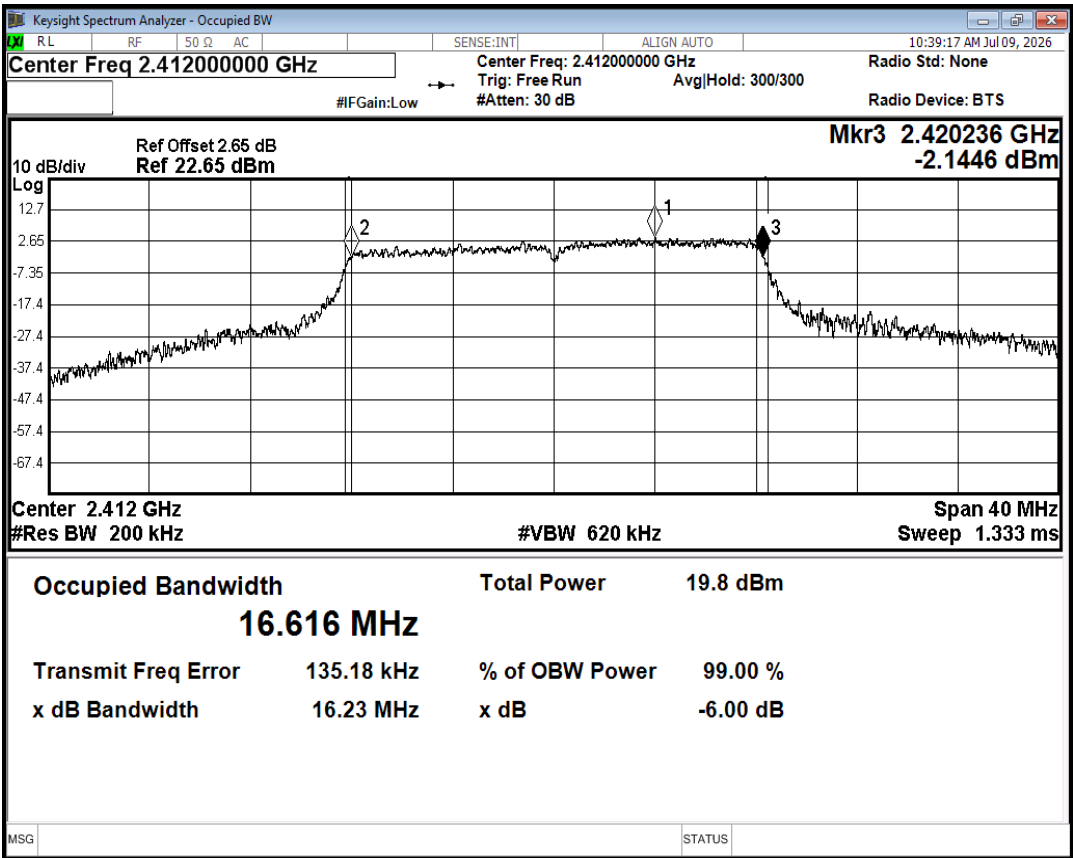


-6dB Bandwidth NVNT g 2412MHz Ant1

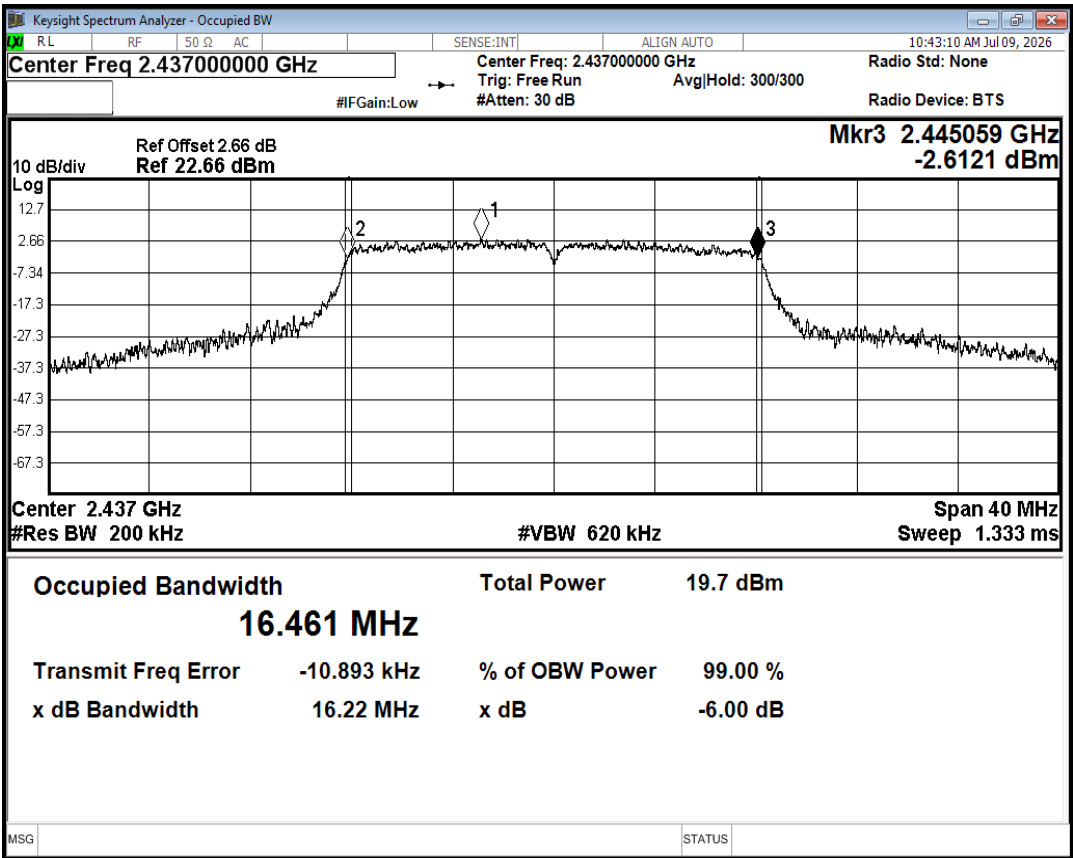


-6dB Bandwidth NVNT g 2437MHz Ant1

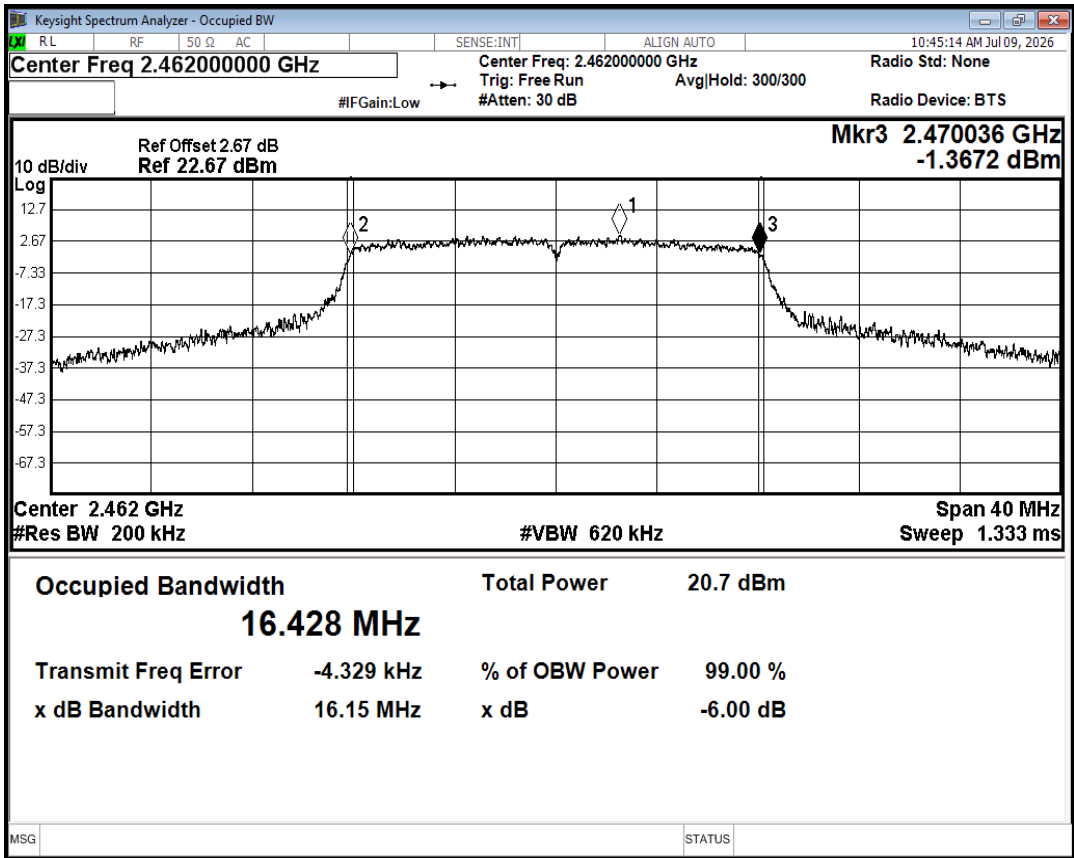


-6dB Bandwidth NVNT g 2462MHz Ant1

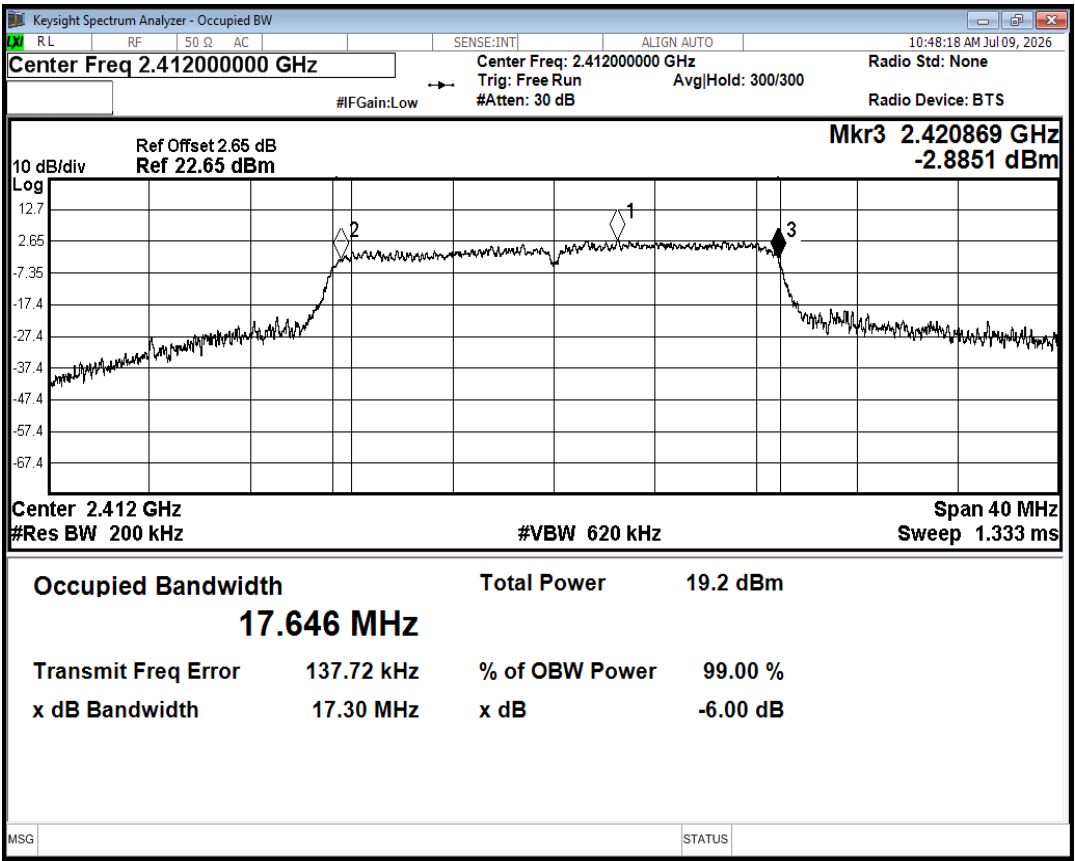


-6dB Bandwidth NVNT n20 2412MHz Ant1

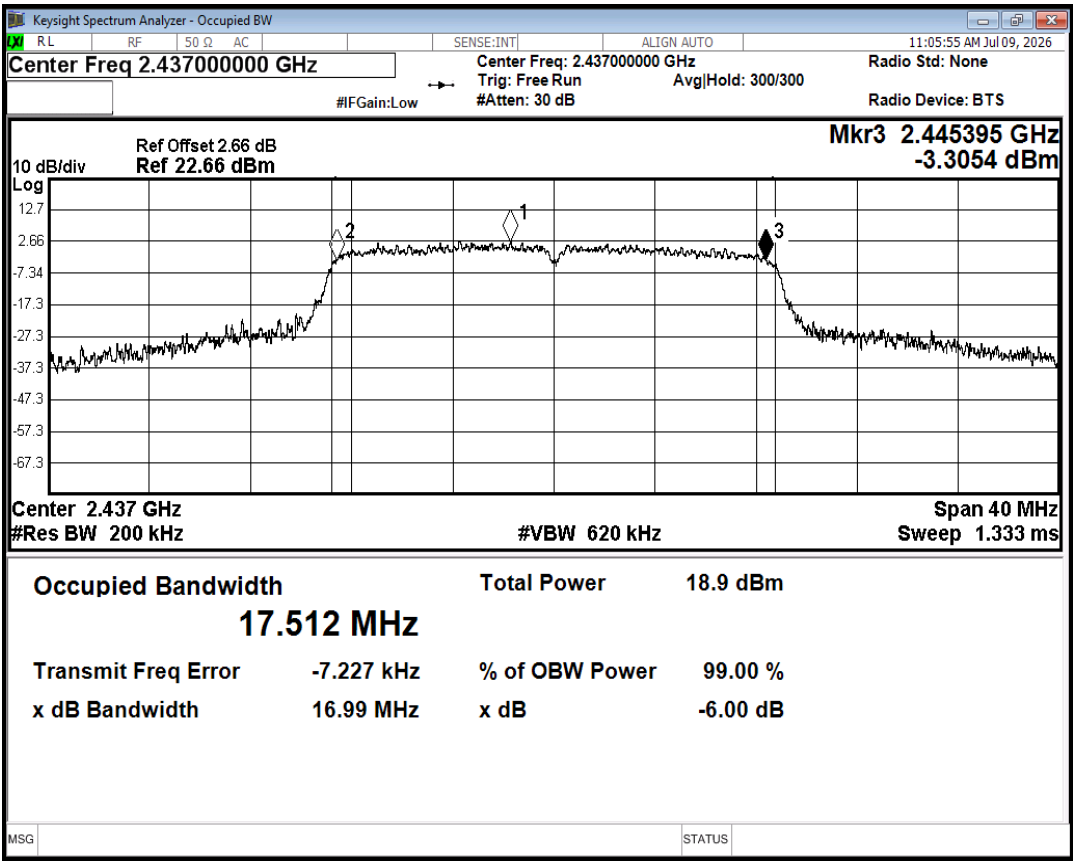


-6dB Bandwidth NVNT n20 2437MHz Ant1

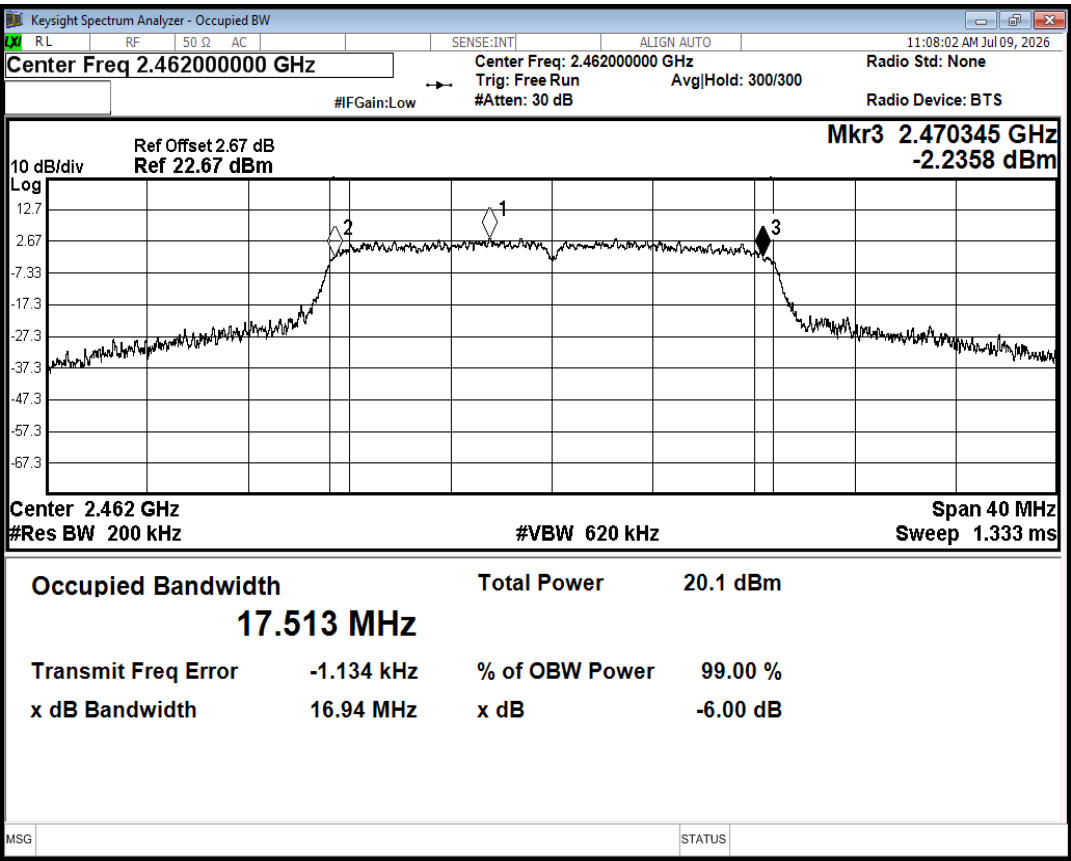


-6dB Bandwidth NVNT n20 2462MHz Ant1

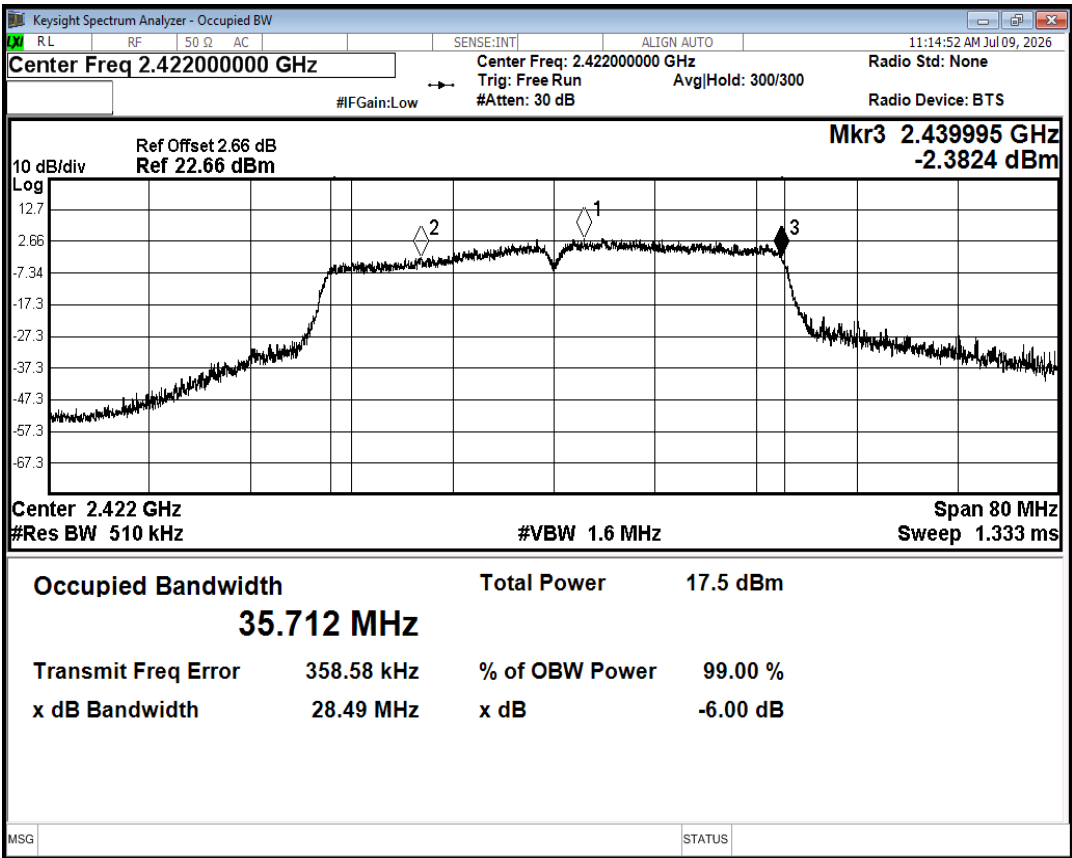

-6dB Bandwidth NVNT n40 2422MHz Ant1

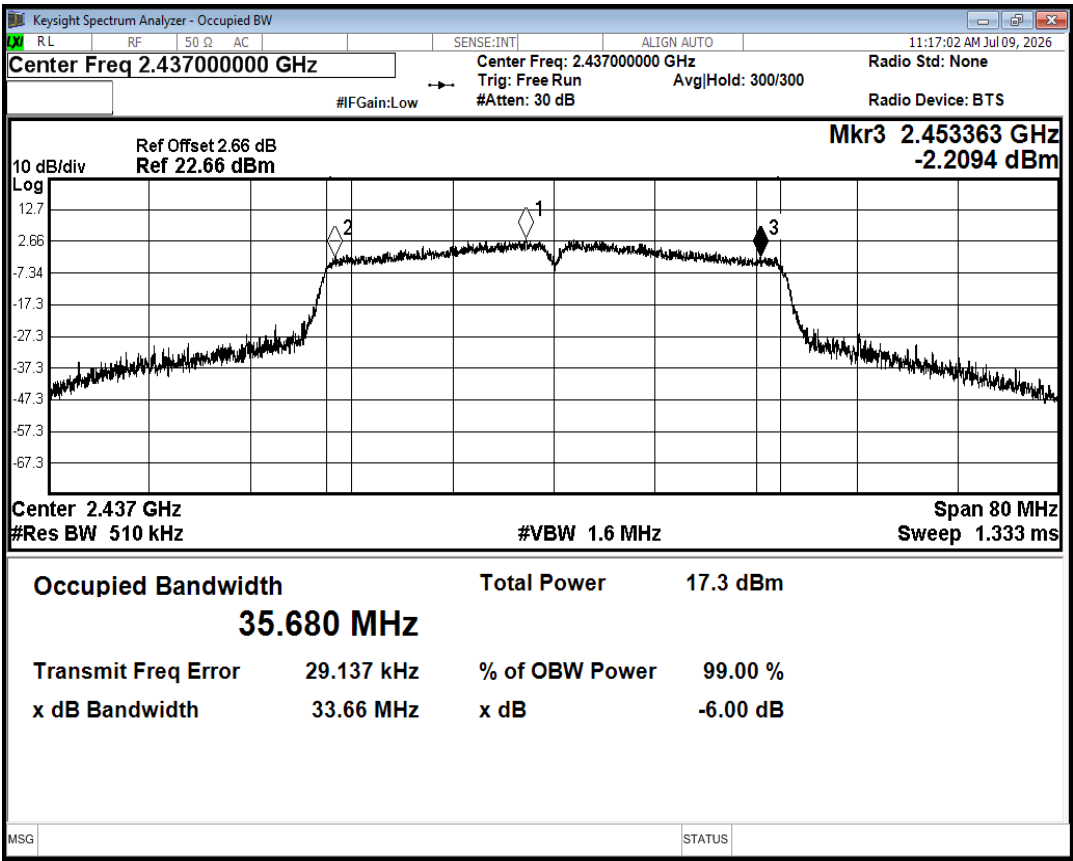


-6dB Bandwidth NVNT n40 2437MHz Ant1

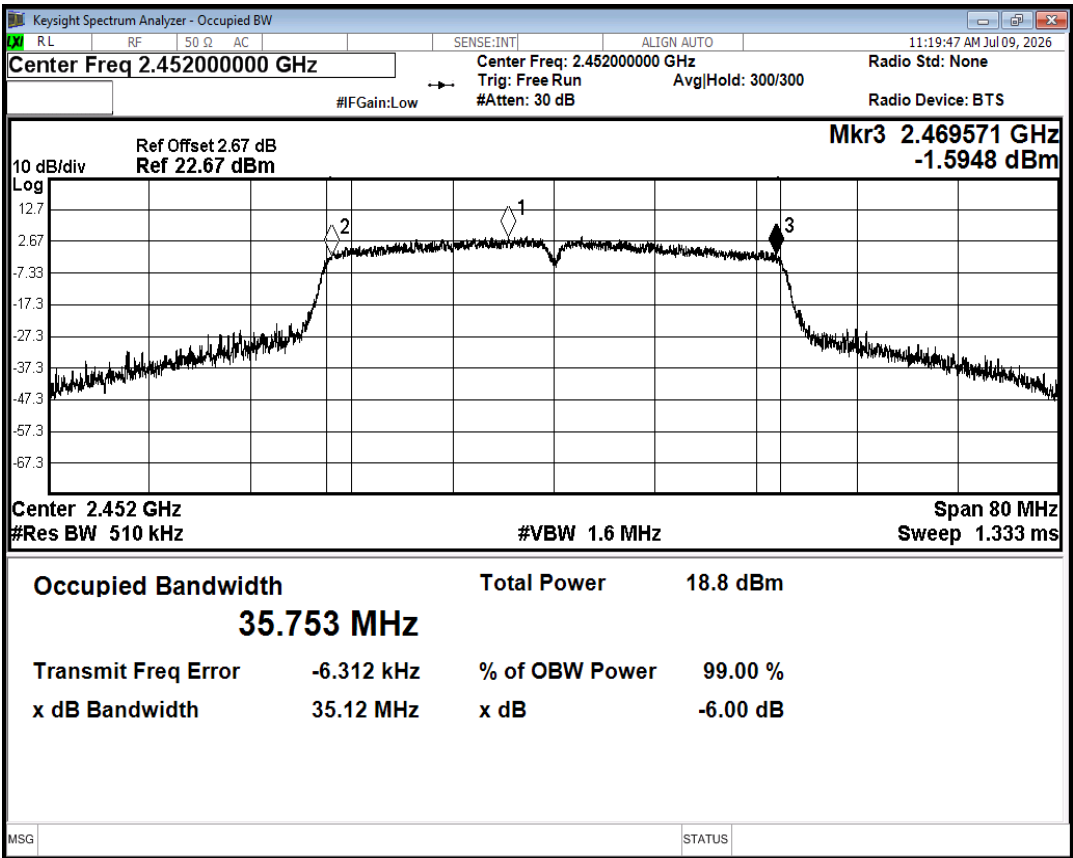


-6dB Bandwidth NVNT n40 2452MHz Ant1


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant2	8.589	0.5	Pass
NVNT	b	2437	Ant2	8.131	0.5	Pass
NVNT	b	2462	Ant2	8.136	0.5	Pass
NVNT	g	2412	Ant2	16.23	0.5	Pass
NVNT	g	2437	Ant2	16.17	0.5	Pass
NVNT	g	2462	Ant2	16.14	0.5	Pass
NVNT	n20	2412	Ant2	17.11	0.5	Pass
NVNT	n20	2437	Ant2	16.85	0.5	Pass
NVNT	n20	2462	Ant2	17.38	0.5	Pass
NVNT	n40	2422	Ant2	28.61	0.5	Pass
NVNT	n40	2437	Ant2	33.3	0.5	Pass
NVNT	n40	2452	Ant2	35.17	0.5	Pass

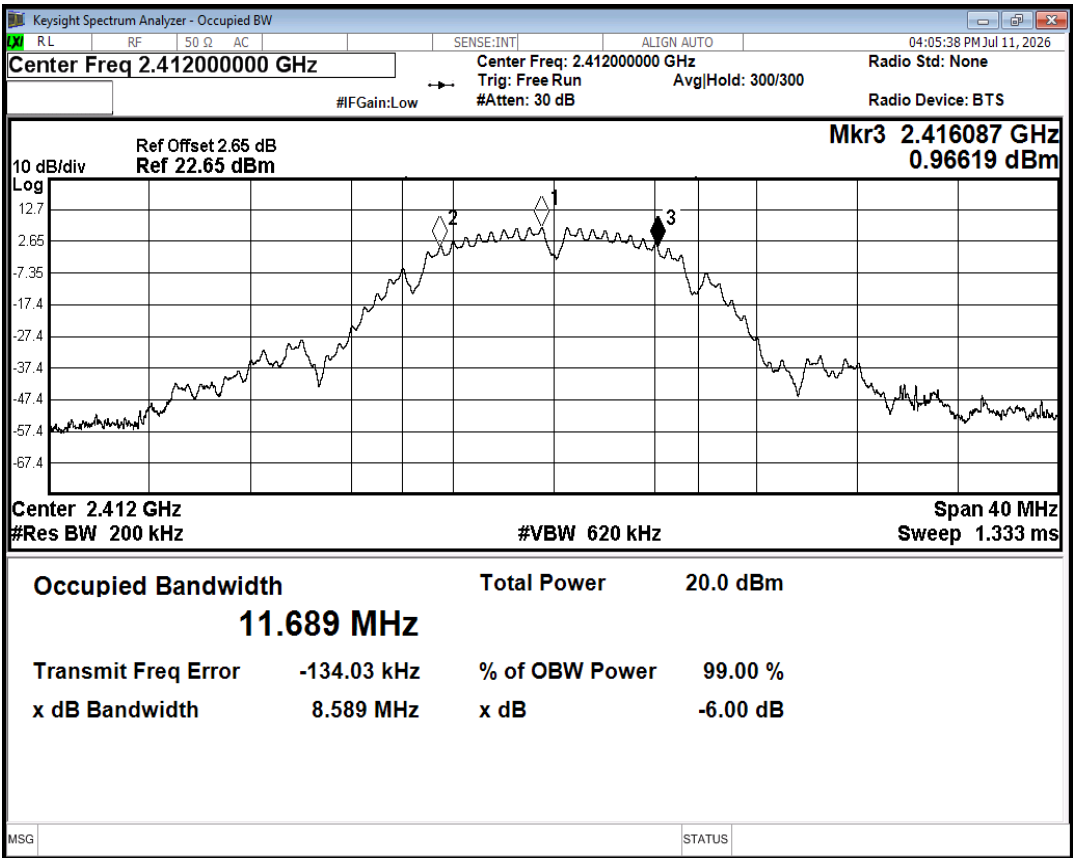


-6dB Bandwidth NVNT b 2412MHz Ant2

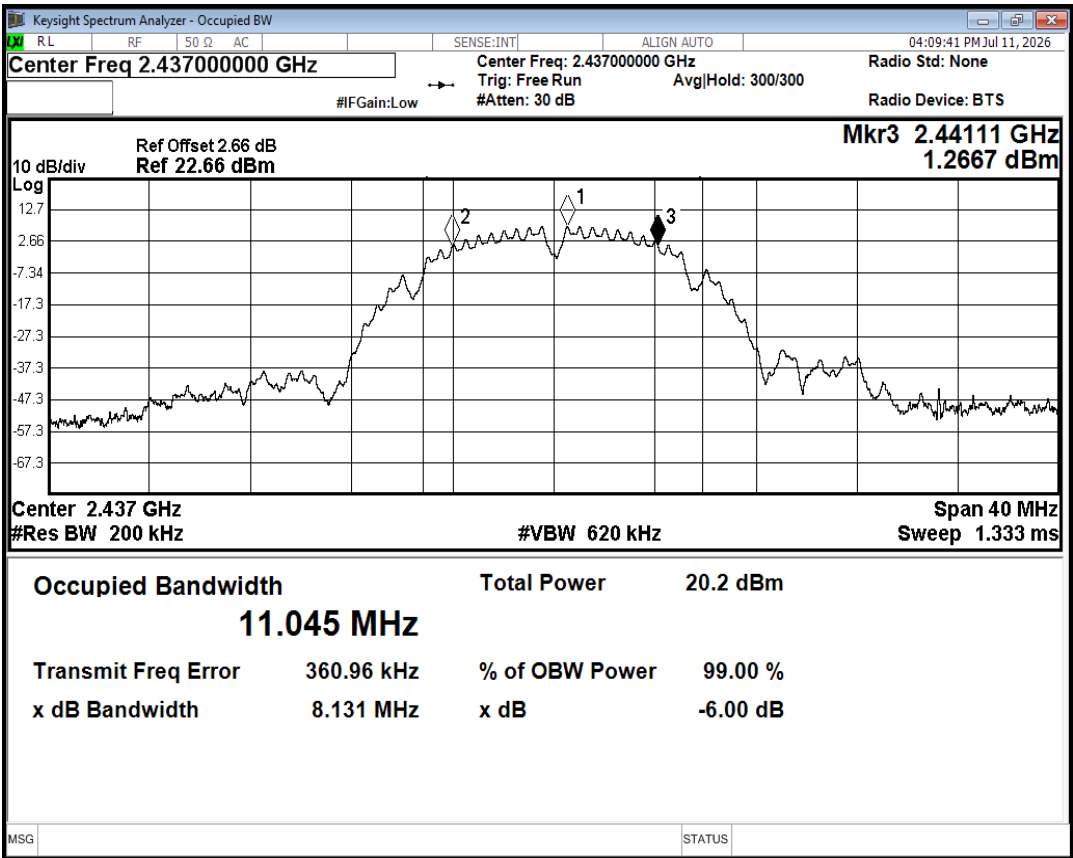


-6dB Bandwidth NVNT b 2437MHz Ant2

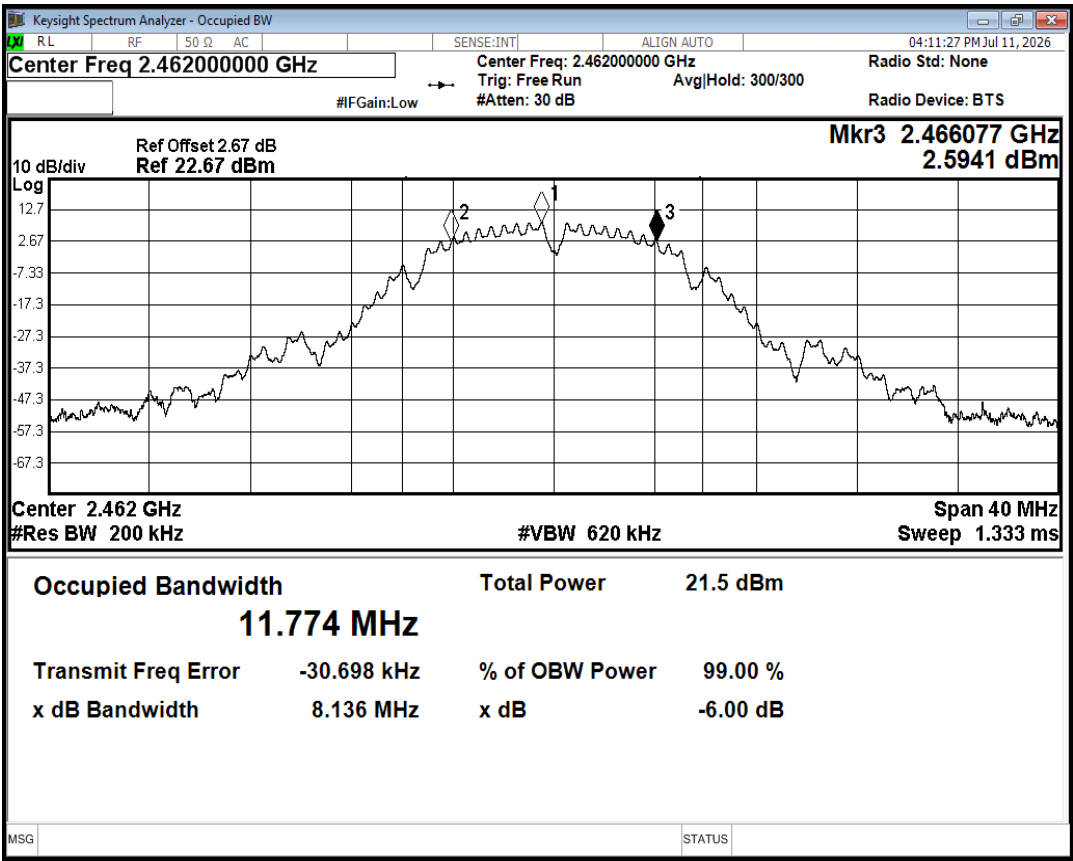


-6dB Bandwidth NVNT b 2462MHz Ant2

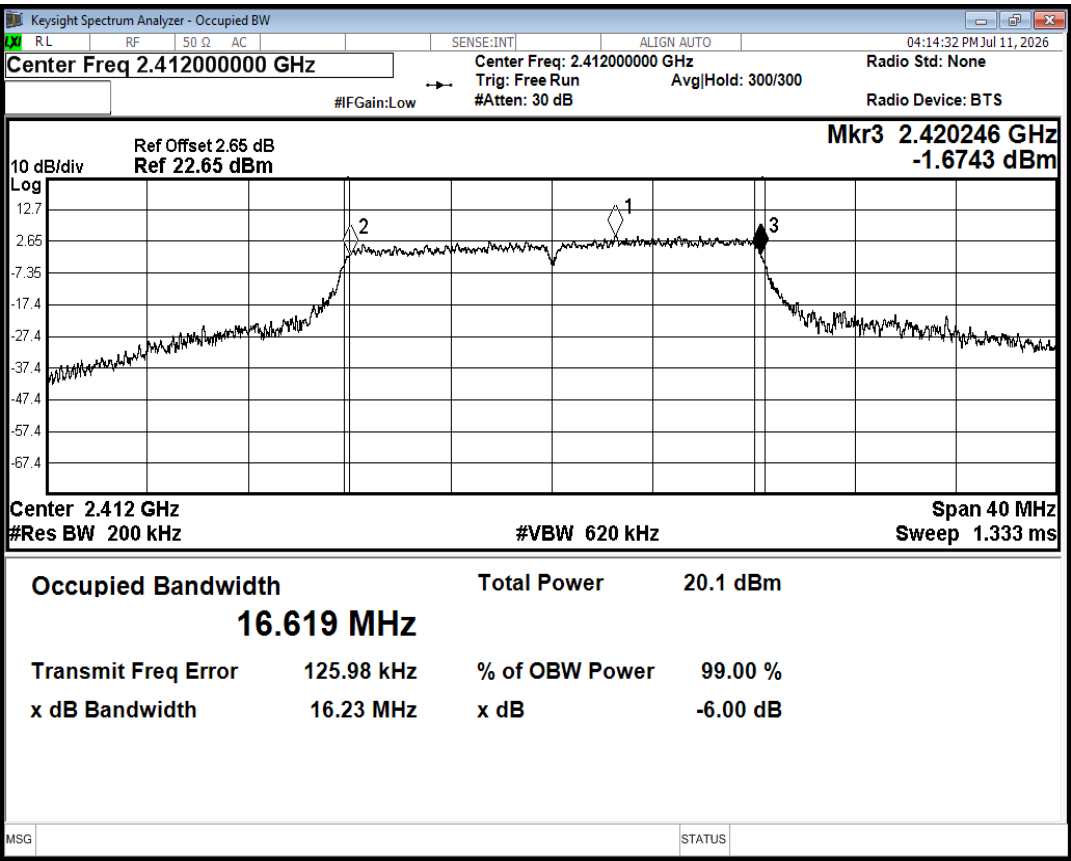


-6dB Bandwidth NVNT g 2412MHz Ant2

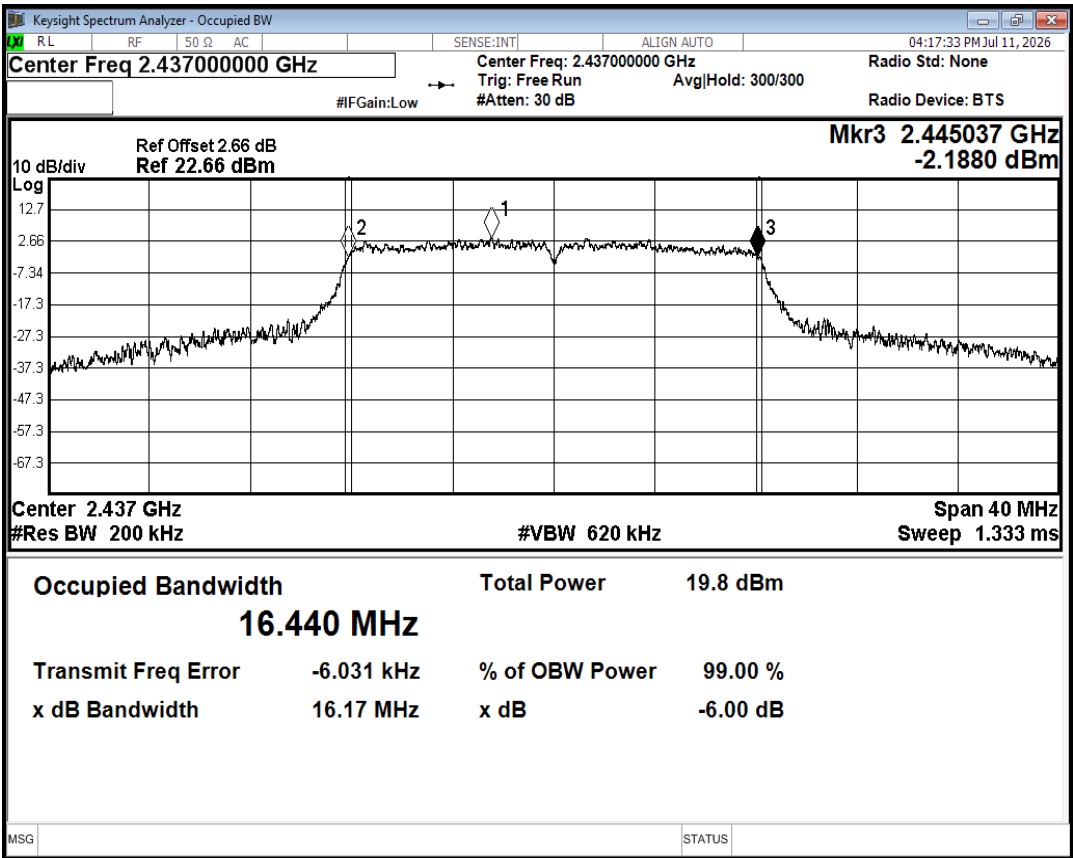


-6dB Bandwidth NVNT g 2437MHz Ant2

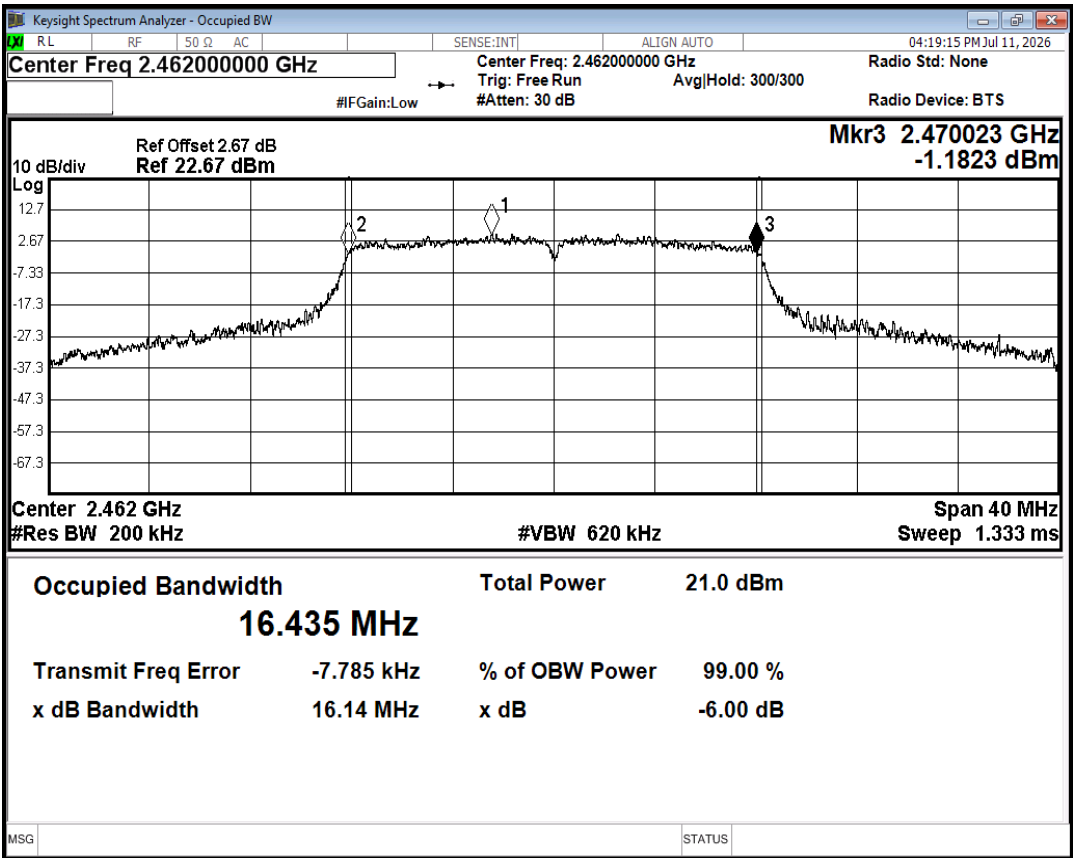


-6dB Bandwidth NVNT g 2462MHz Ant2

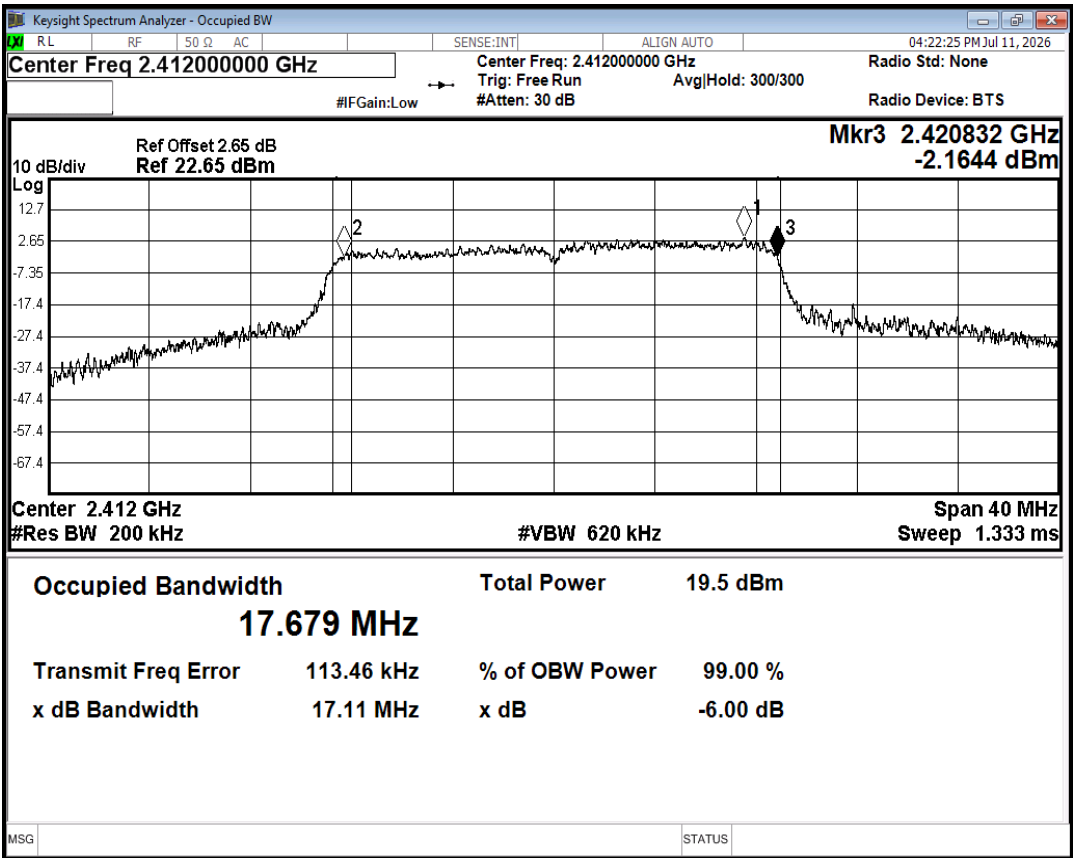


-6dB Bandwidth NVNT n20 2412MHz Ant2

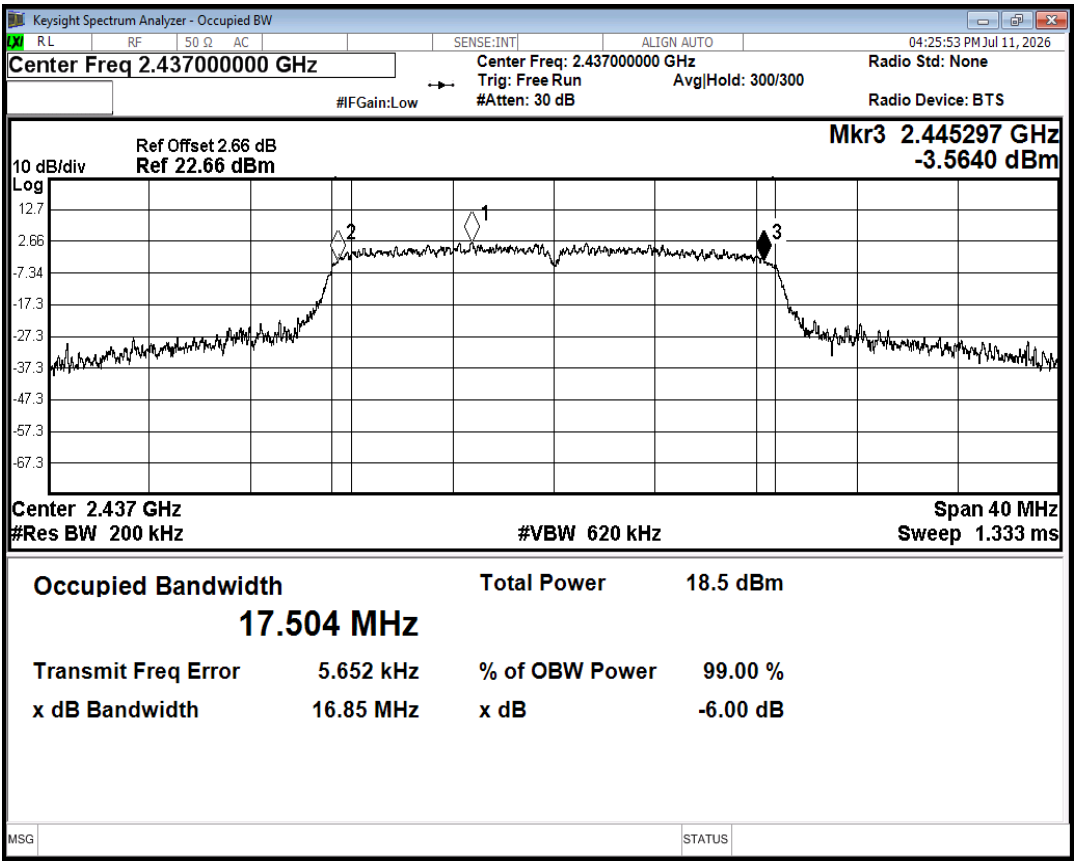


-6dB Bandwidth NVNT n20 2437MHz Ant2

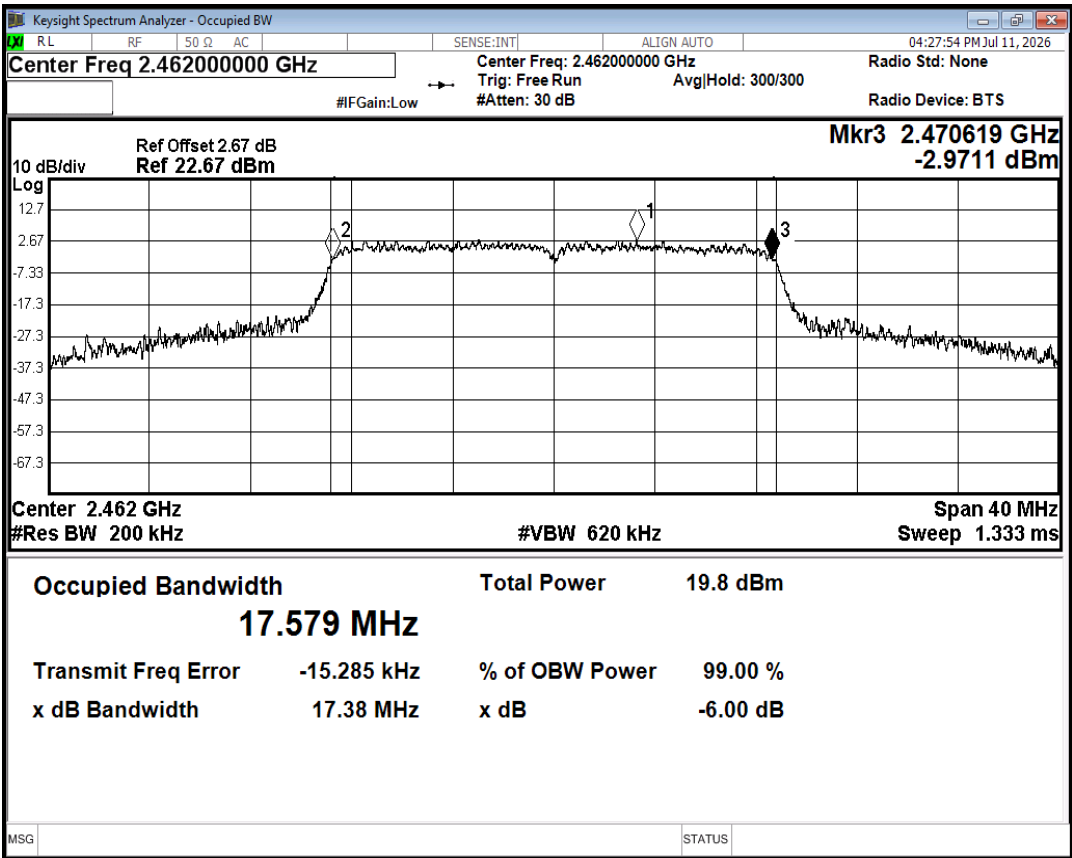


-6dB Bandwidth NVNT n20 2462MHz Ant2

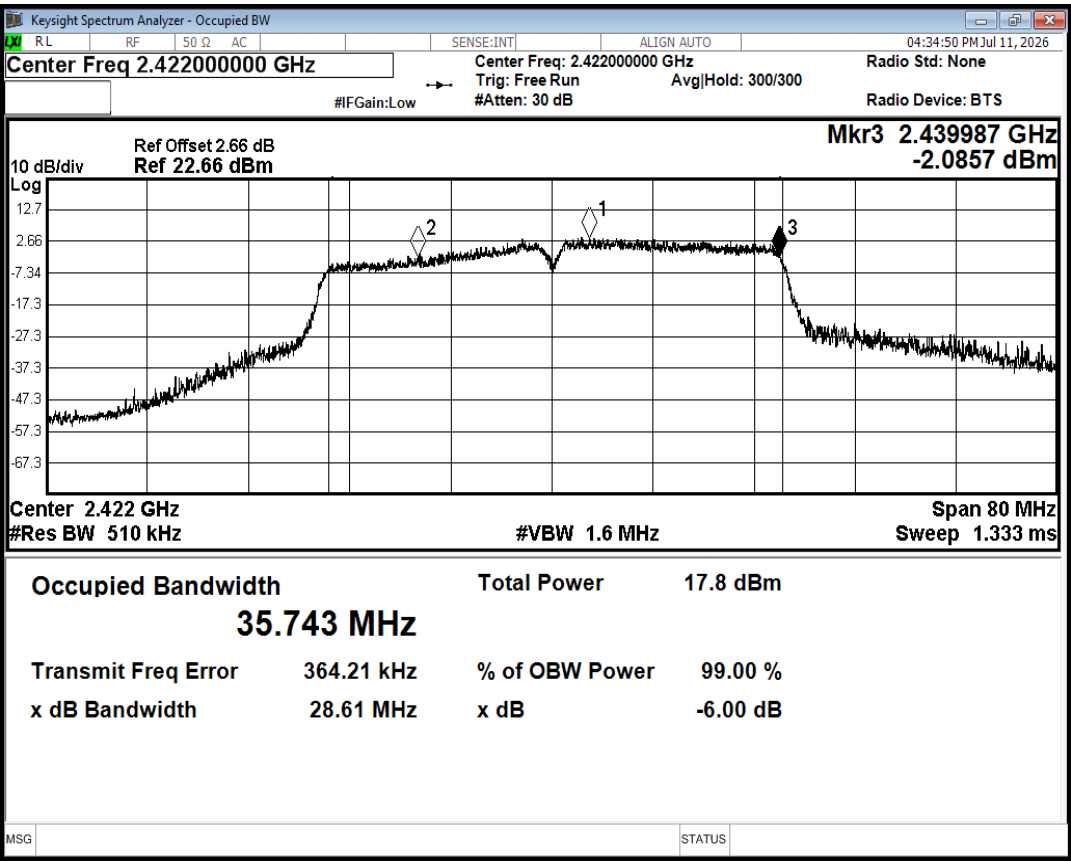

-6dB Bandwidth NVNT n40 2422MHz Ant2

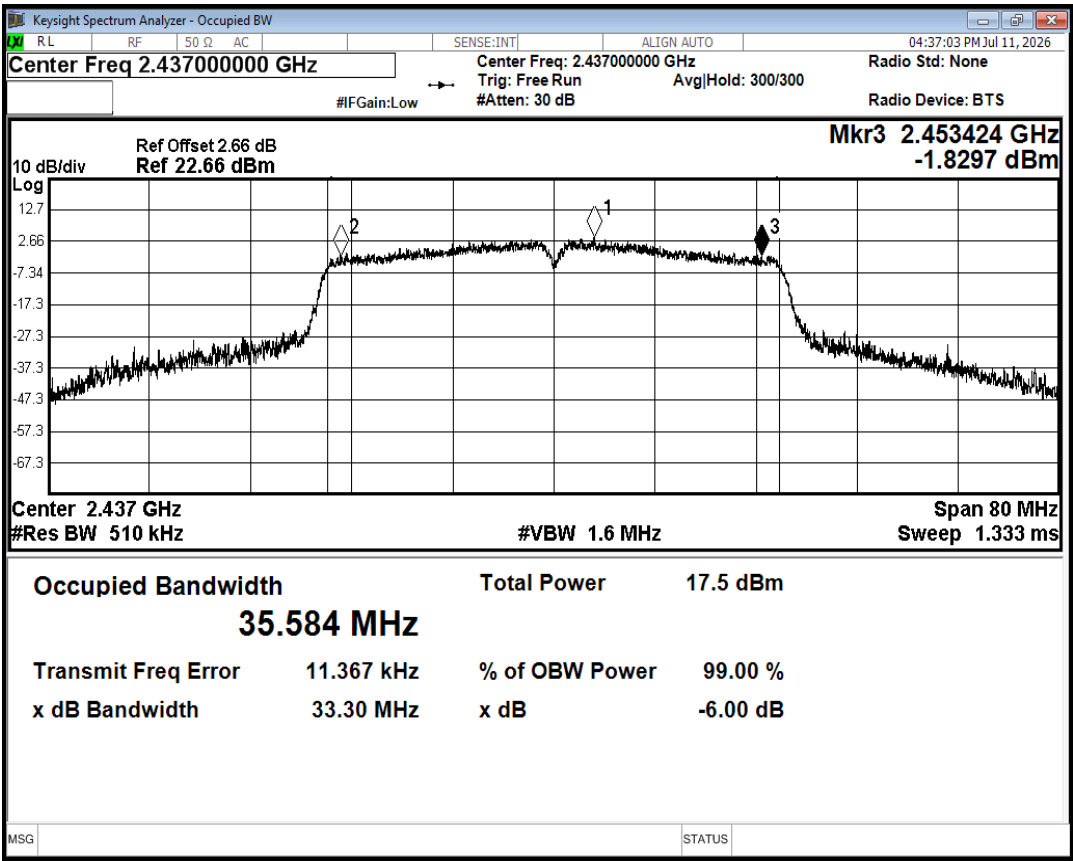

-6dB Bandwidth NVNT n40 2437MHz Ant2

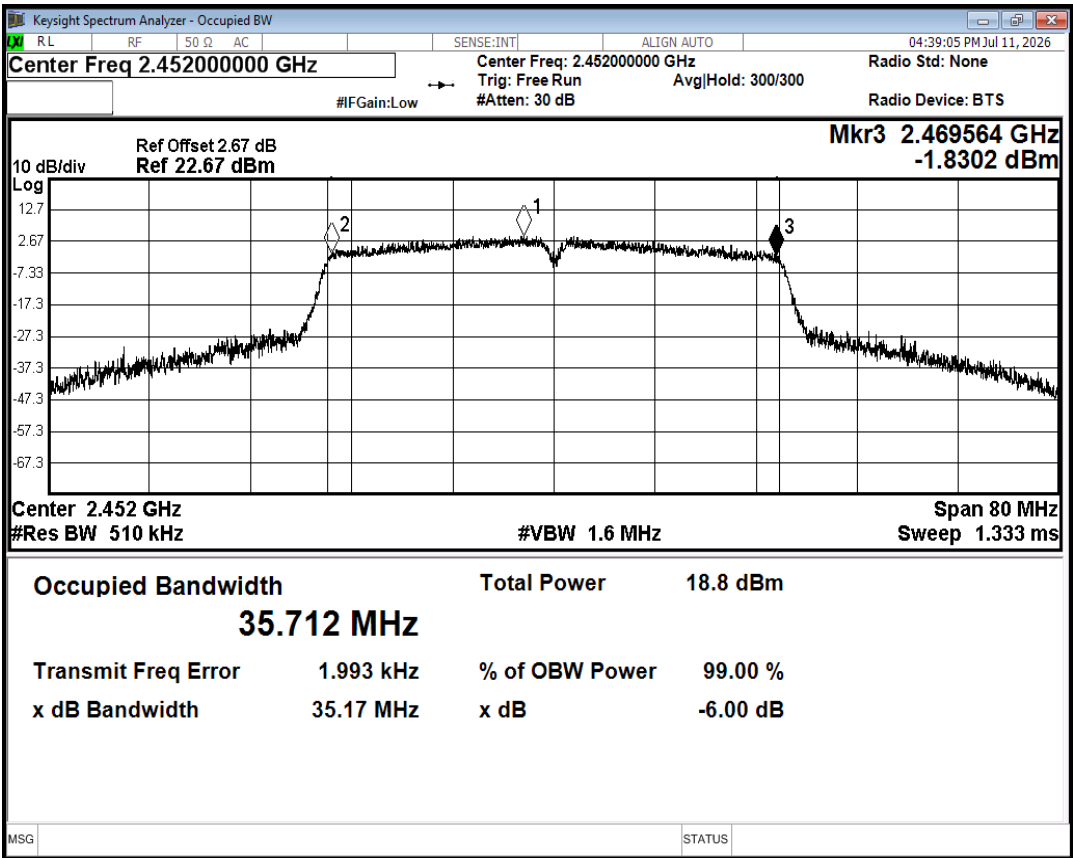

-6dB Bandwidth NVNT n40 2452MHz Ant2

C.2 Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted(dBm)	Verdict
NVNT	b	2412	Ant1	14.82	0.02	14.84	30	Pass
NVNT	b	2437	Ant1	15.06	0.01	15.07	30	Pass
NVNT	b	2462	Ant1	16.25	0.02	16.27	30	Pass
NVNT	g	2412	Ant1	13.51	0.1	13.61	30	Pass
NVNT	g	2437	Ant1	13.4	0.1	13.5	30	Pass
NVNT	g	2462	Ant1	14.47	0.1	14.57	30	Pass
NVNT	n20	2412	Ant1	12.85	0.12	12.97	30	Pass
NVNT	n20	2437	Ant1	12.66	0.12	12.78	30	Pass
NVNT	n20	2462	Ant1	13.8	0.12	13.92	30	Pass
NVNT	n40	2422	Ant1	10.62	0.21	10.83	30	Pass
NVNT	n40	2437	Ant1	10.38	0.24	10.62	30	Pass
NVNT	n40	2452	Ant1	11.83	0.24	12.07	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted(dBm)	Verdict
NVNT	b	2412	Ant2	14.92	0	14.92	30	Pass
NVNT	b	2437	Ant2	15.1	0.01	15.11	30	Pass
NVNT	b	2462	Ant2	16.33	0.01	16.34	30	Pass
NVNT	g	2412	Ant2	13.77	0.1	13.87	30	Pass
NVNT	g	2437	Ant2	13.45	0.1	13.55	30	Pass
NVNT	g	2462	Ant2	14.74	0.08	14.82	30	Pass
NVNT	n20	2412	Ant2	13.18	0.12	13.3	30	Pass
NVNT	n20	2437	Ant2	12.2	0.12	12.32	30	Pass
NVNT	n20	2462	Ant2	13.54	0.12	13.66	30	Pass
NVNT	n40	2422	Ant2	10.88	0.24	11.12	30	Pass
NVNT	n40	2437	Ant2	10.56	0.24	10.8	30	Pass
NVNT	n40	2452	Ant2	12	0.24	12.24	30	Pass

MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	2412	12.97	13.3	16.15	30	Pass
NVNT	n20	2437	12.78	12.32	15.57	30	Pass
NVNT	n20	2462	13.92	13.66	16.80	30	Pass
NVNT	n40	2422	10.83	11.12	13.99	30	Pass
NVNT	n40	2437	10.62	10.8	13.72	30	Pass
NVNT	n40	2452	12.07	12.24	15.17	30	Pass

C.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/30kHz)	Duty Factor (dB)	Total PSD (dBm/30kHz)	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-6.5	0.02	-6.48	-16.48	8	Pass
NVNT	b	2437	Ant1	-6.12	0.01	-6.11	-16.11	8	Pass
NVNT	b	2462	Ant1	-4.92	0.02	-4.9	-14.90	8	Pass
NVNT	g	2412	Ant1	-10.13	0.1	-10.03	-20.03	8	Pass
NVNT	g	2437	Ant1	-10.53	0.1	-10.43	-20.43	8	Pass
NVNT	g	2462	Ant1	-9.39	0.1	-9.29	-19.29	8	Pass
NVNT	n20	2412	Ant1	-11.62	0.12	-11.5	-21.50	8	Pass
NVNT	n20	2437	Ant1	-12.05	0.12	-11.93	-21.93	8	Pass
NVNT	n20	2462	Ant1	-11.14	0.12	-11.02	-21.02	8	Pass
NVNT	n40	2422	Ant1	-15.83	0.21	-15.62	-25.62	8	Pass
NVNT	n40	2437	Ant1	-15.73	0.24	-15.49	-25.49	8	Pass
NVNT	n40	2452	Ant1	-14.84	0.24	-14.6	-24.60	8	Pass


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/30kHz)	Duty Factor (dB)	Total PSD (dBm/30kHz)	Result (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant2	-6.45	0.01	-6.44	-16.44	8	Pass
NVNT	b	2437	Ant2	-6.19	0.01	-6.18	-16.18	8	Pass
NVNT	b	2462	Ant2	-4.72	0.01	-4.71	-14.71	8	Pass
NVNT	g	2412	Ant2	-9.68	0.1	-9.58	-19.58	8	Pass
NVNT	g	2437	Ant2	-10.65	0.1	-10.55	-20.55	8	Pass
NVNT	g	2462	Ant2	-9.19	0.08	-9.11	-19.11	8	Pass
NVNT	n20	2412	Ant2	-11.08	0.12	-10.96	-20.96	8	Pass
NVNT	n20	2437	Ant2	-12.41	0.12	-12.29	-22.29	8	Pass
NVNT	n20	2462	Ant2	-11.79	0.12	-11.67	-21.67	8	Pass
NVNT	n40	2422	Ant2	-15.6	0.24	-15.36	-25.36	8	Pass
NVNT	n40	2437	Ant2	-15.14	0.24	-14.9	-24.90	8	Pass
NVNT	n40	2452	Ant2	-14.76	0.24	-14.52	-24.52	8	Pass


MIMO

Condition	Mode	Frequency (MHz)	Total PSD (dBm/3kHz)			Limit (dBm/3kHz)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	2412	-21.50	-20.96	-18.21	8	Pass
NVNT	n20	2437	-21.93	-22.29	-19.10	8	Pass
NVNT	n20	2462	-21.02	-21.67	-18.32	8	Pass
NVNT	n40	2422	-25.62	-25.36	-22.48	8	Pass
NVNT	n40	2437	-25.49	-24.90	-22.17	8	Pass
NVNT	n40	2452	-24.60	-24.52	-21.55	8	Pass


Note :offset=System attenuation +cable loss

Result[dBm/3kHz]=Result[dBm/30kHz]+10*Log(3/30)

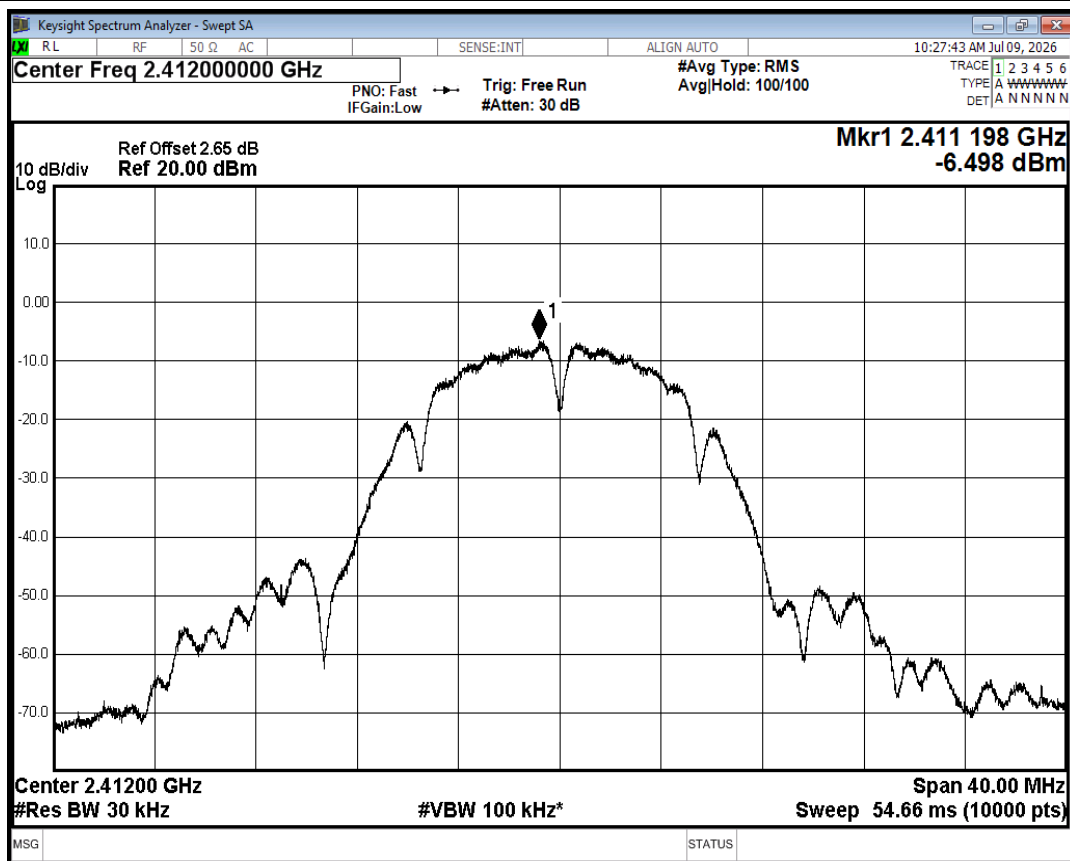


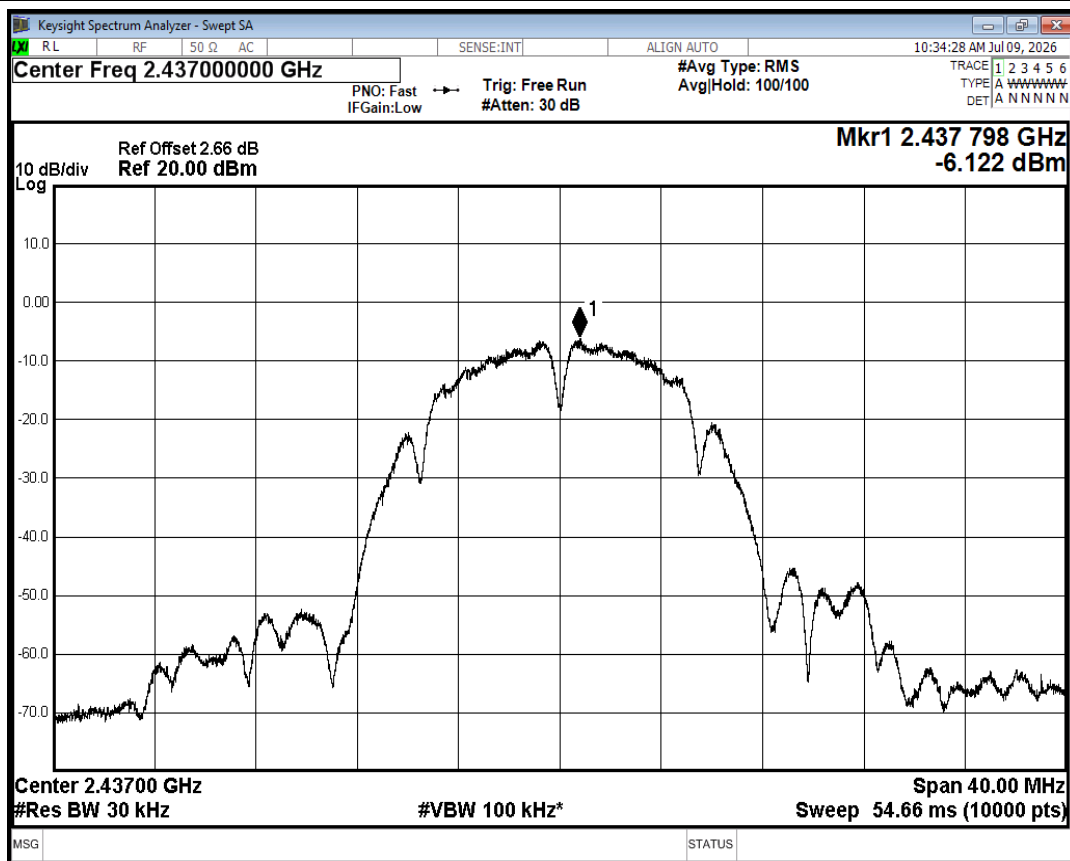


PSD NVNT b 2437MHz Ant1

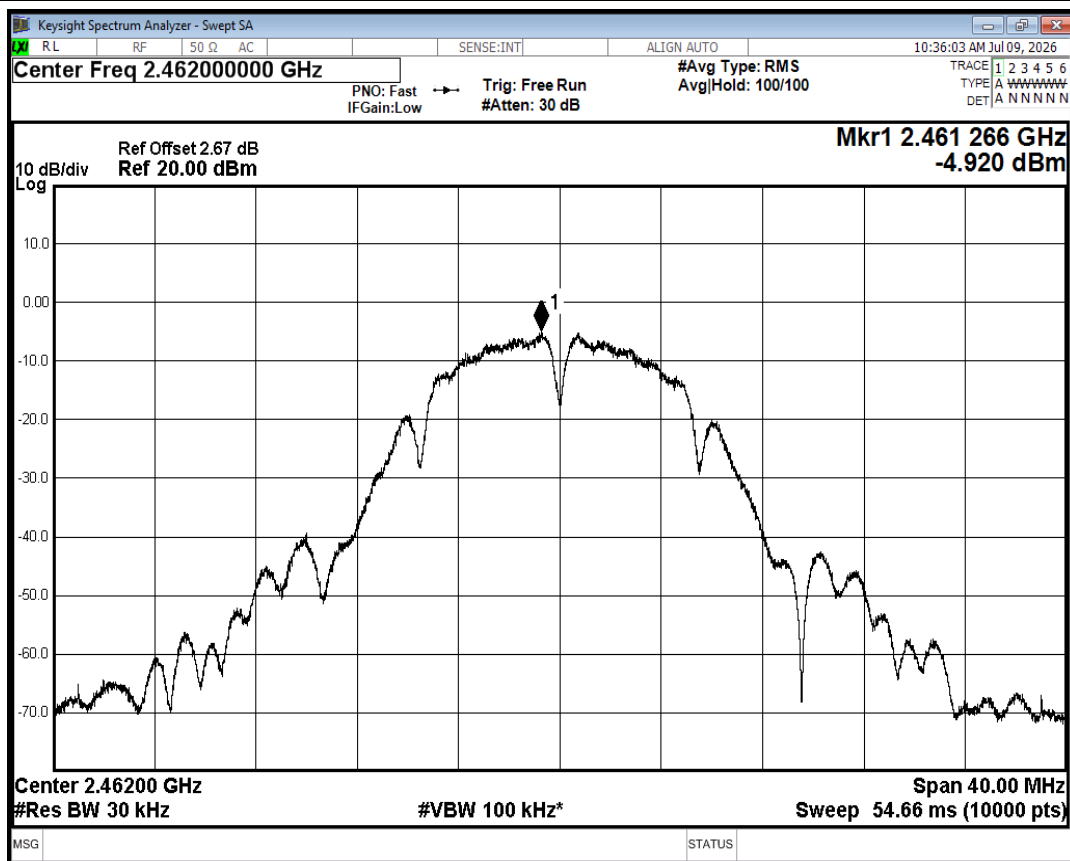


PSD NVNT b 2462MHz Ant1

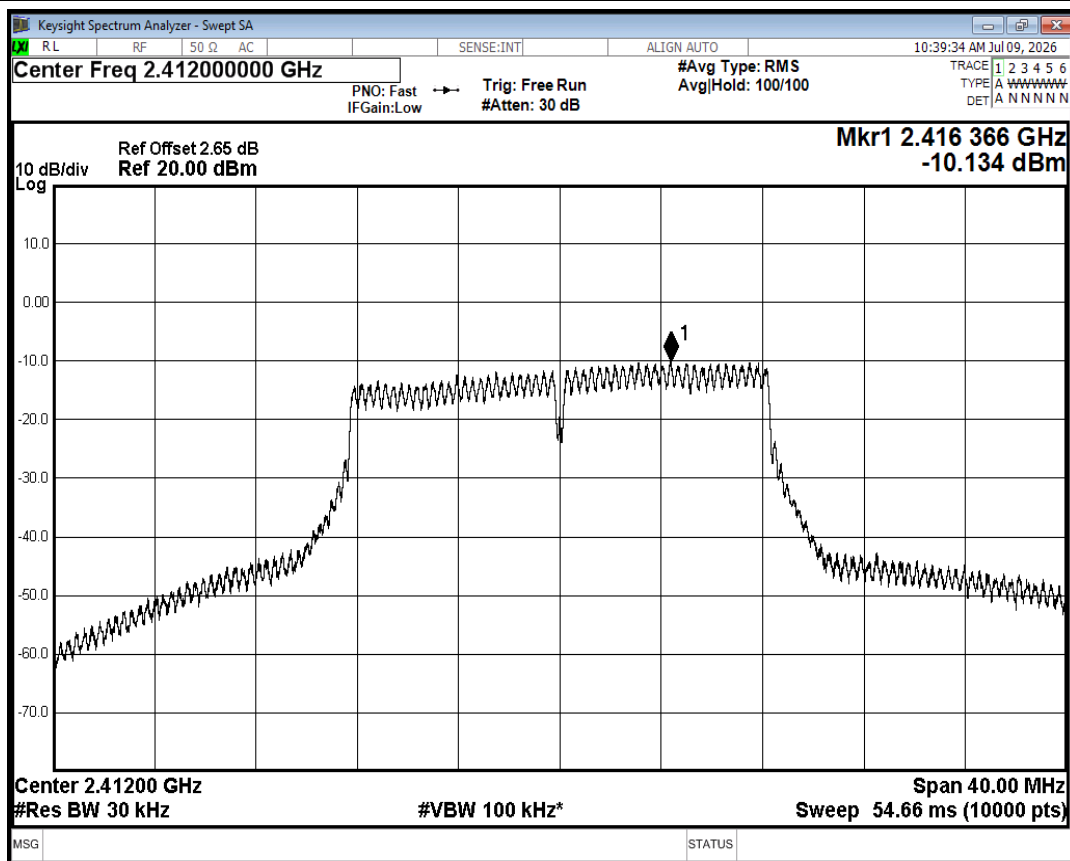


PSD NVNT g 2412MHz Ant1

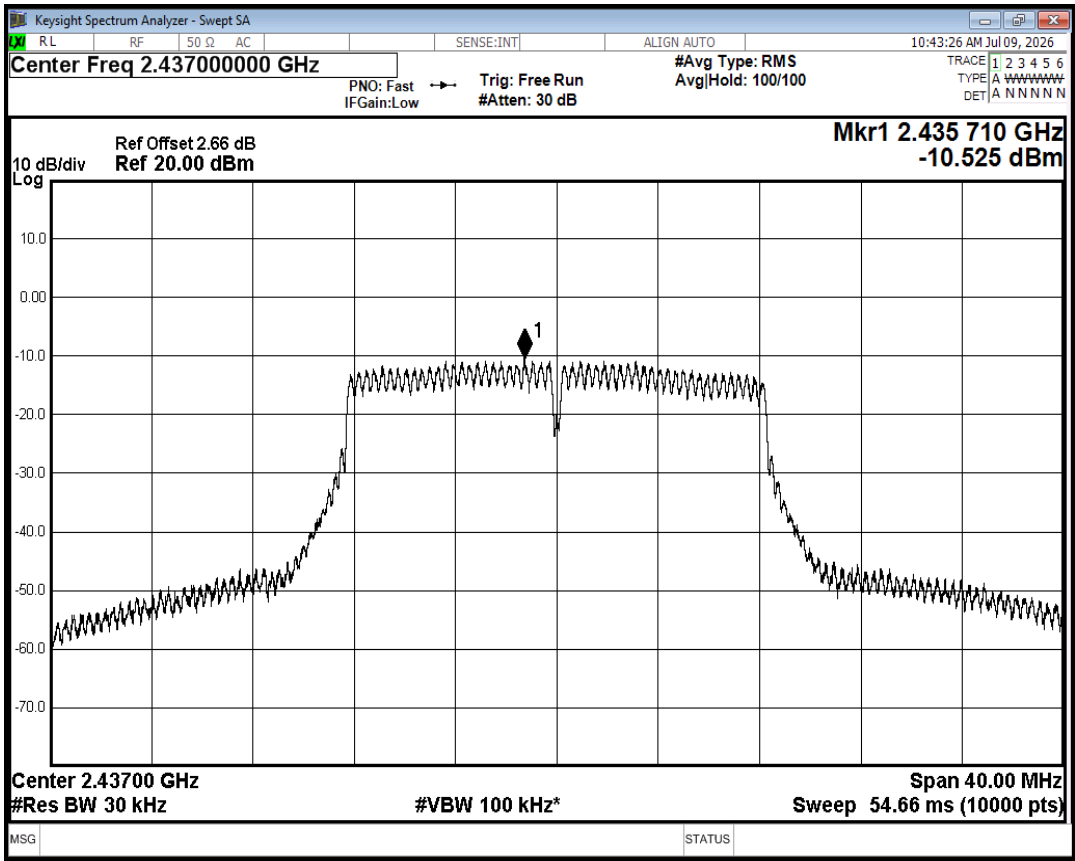


PSD NVNT g 2437MHz Ant1

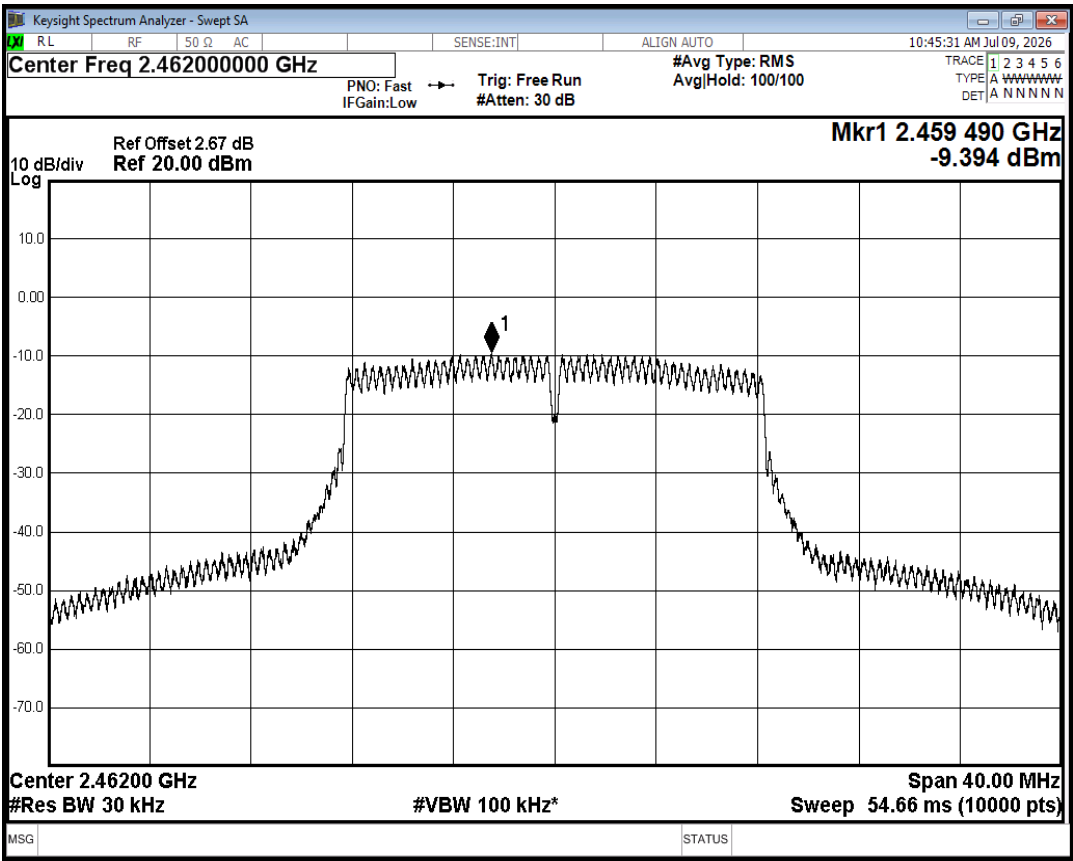


PSD NVNT g 2462MHz Ant1

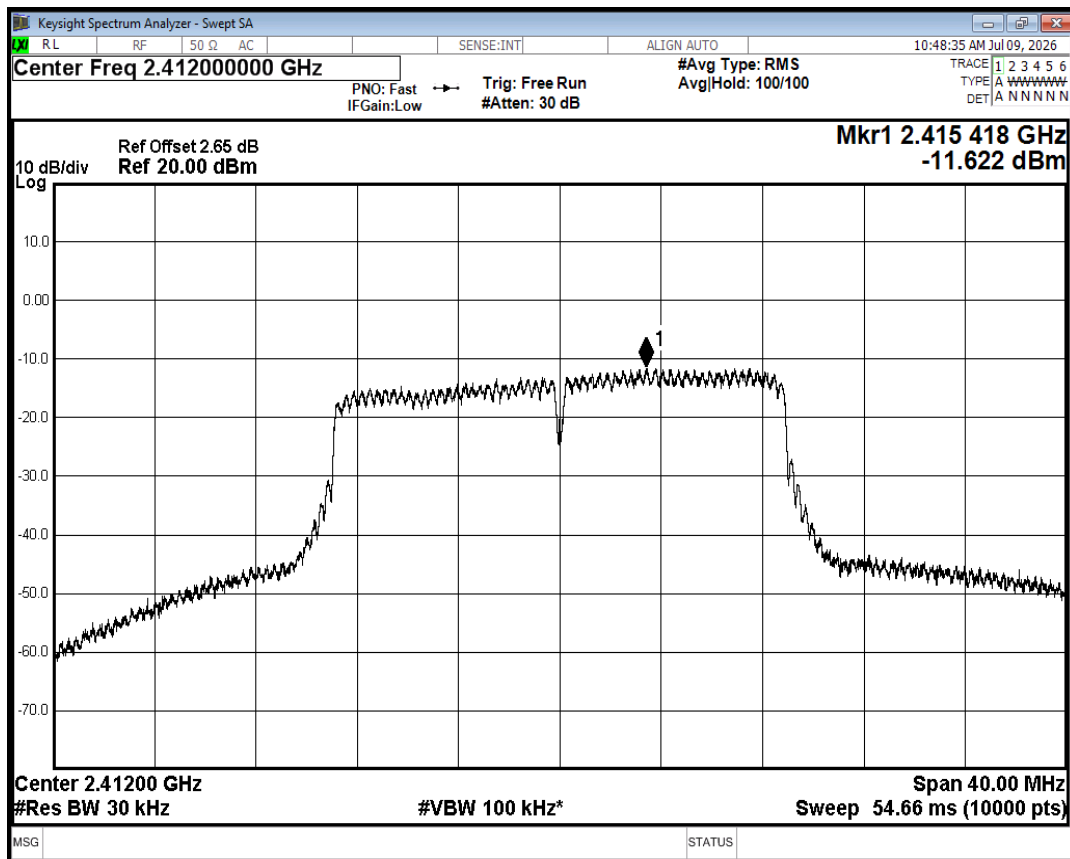


PSD NVNT n20 2412MHz Ant1

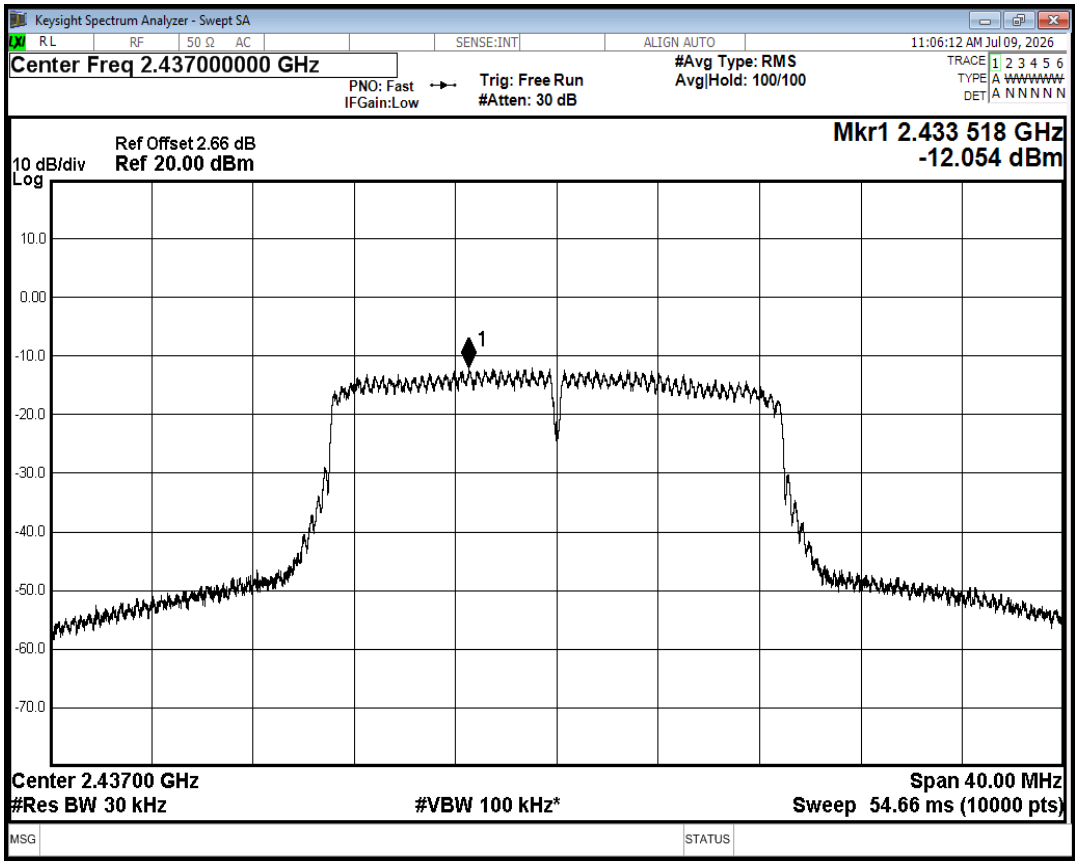



PSD NVNT n20 2437MHz Ant1

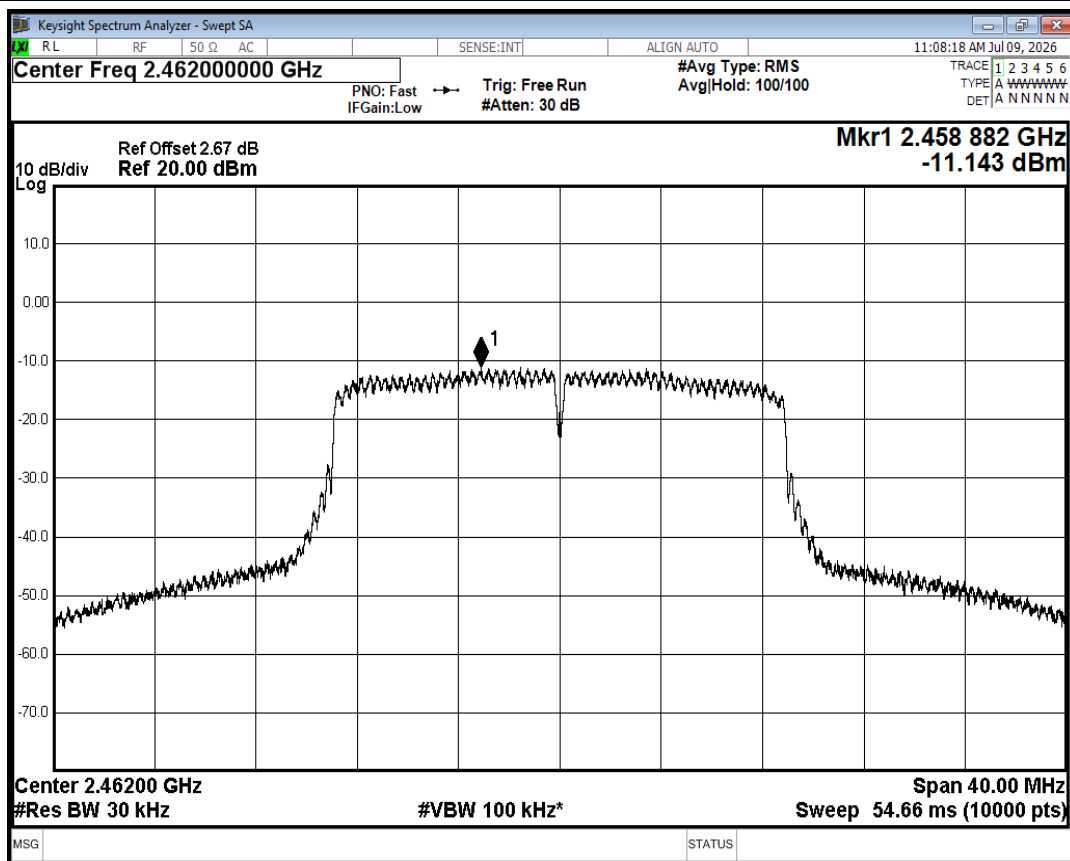


PSD NVNT n20 2462MHz Ant1

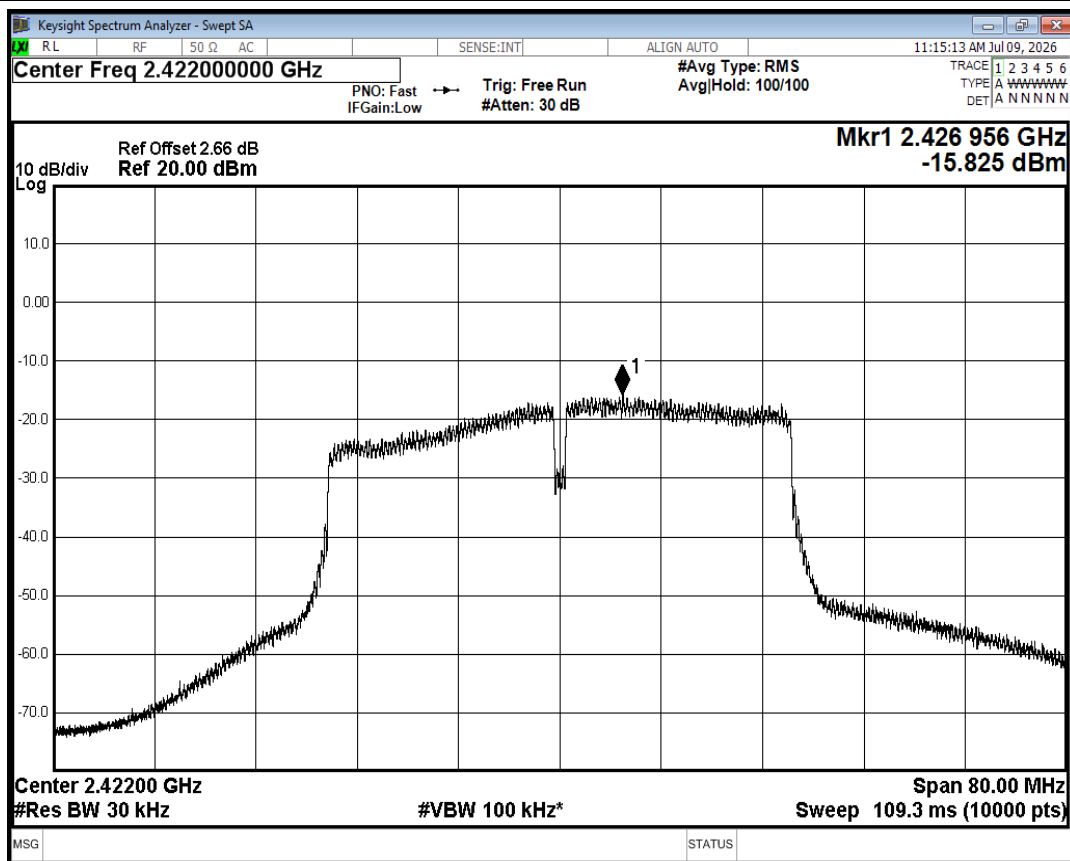


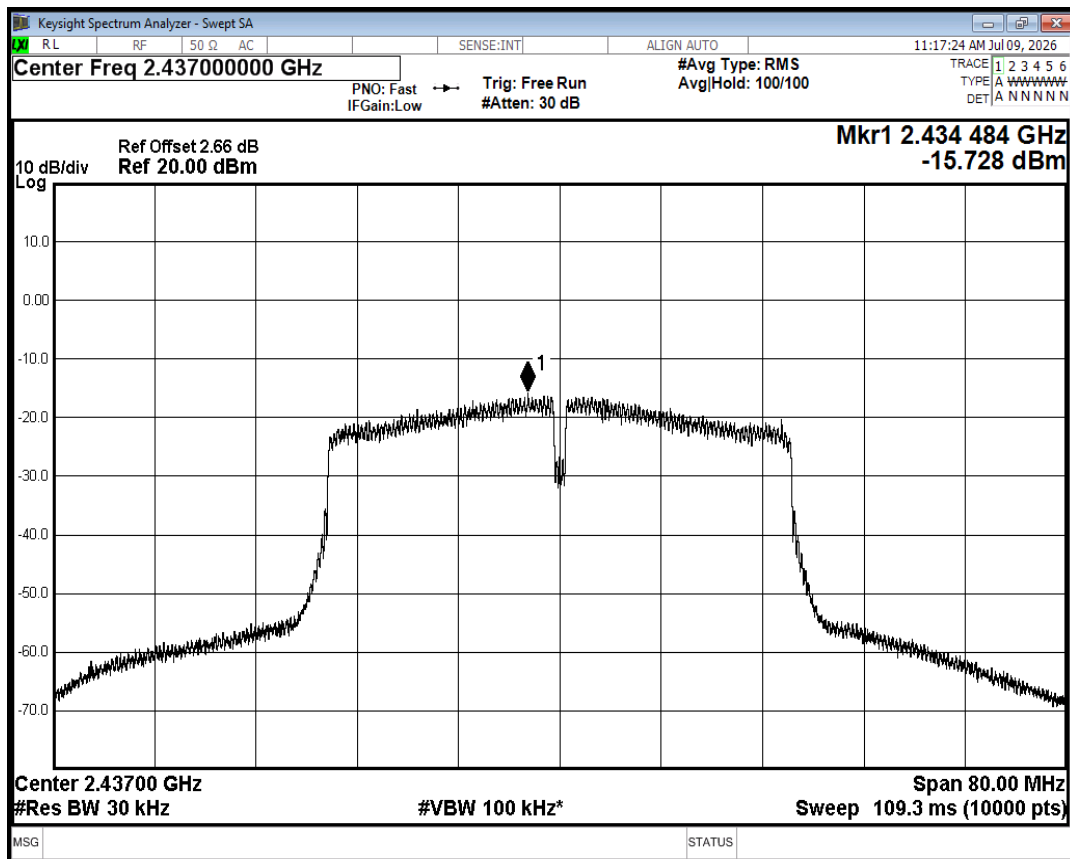

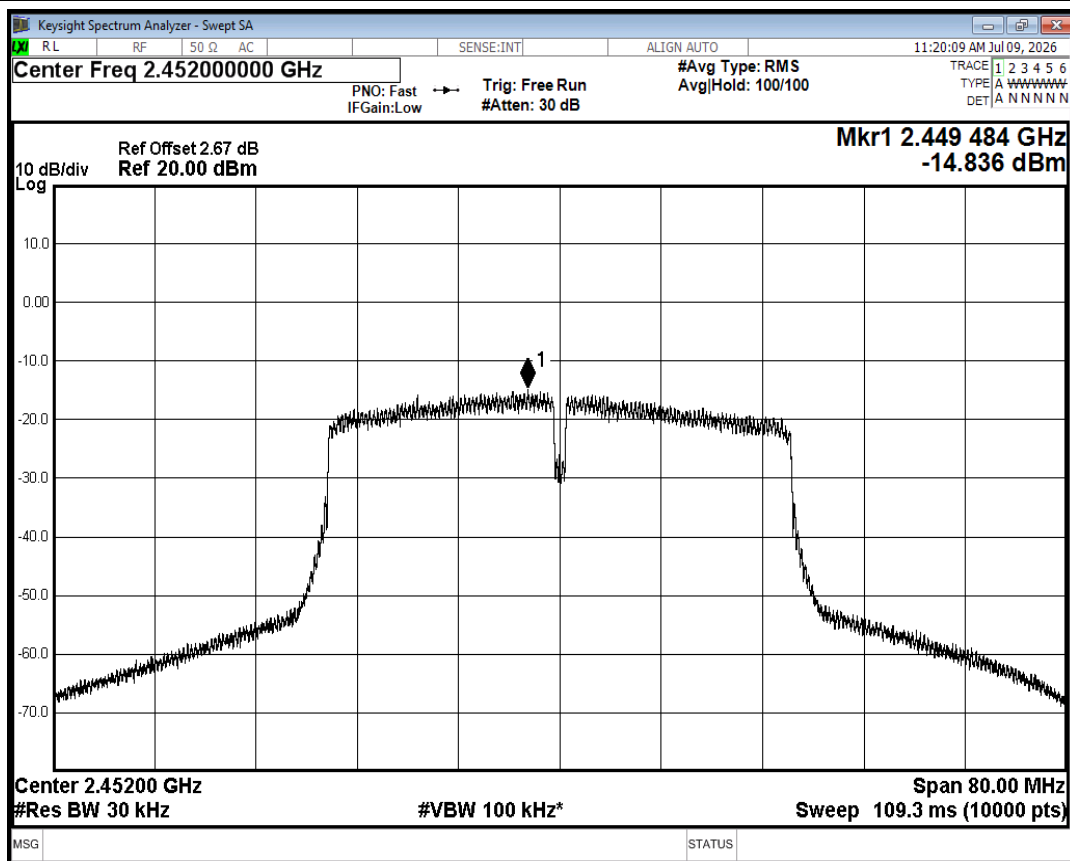


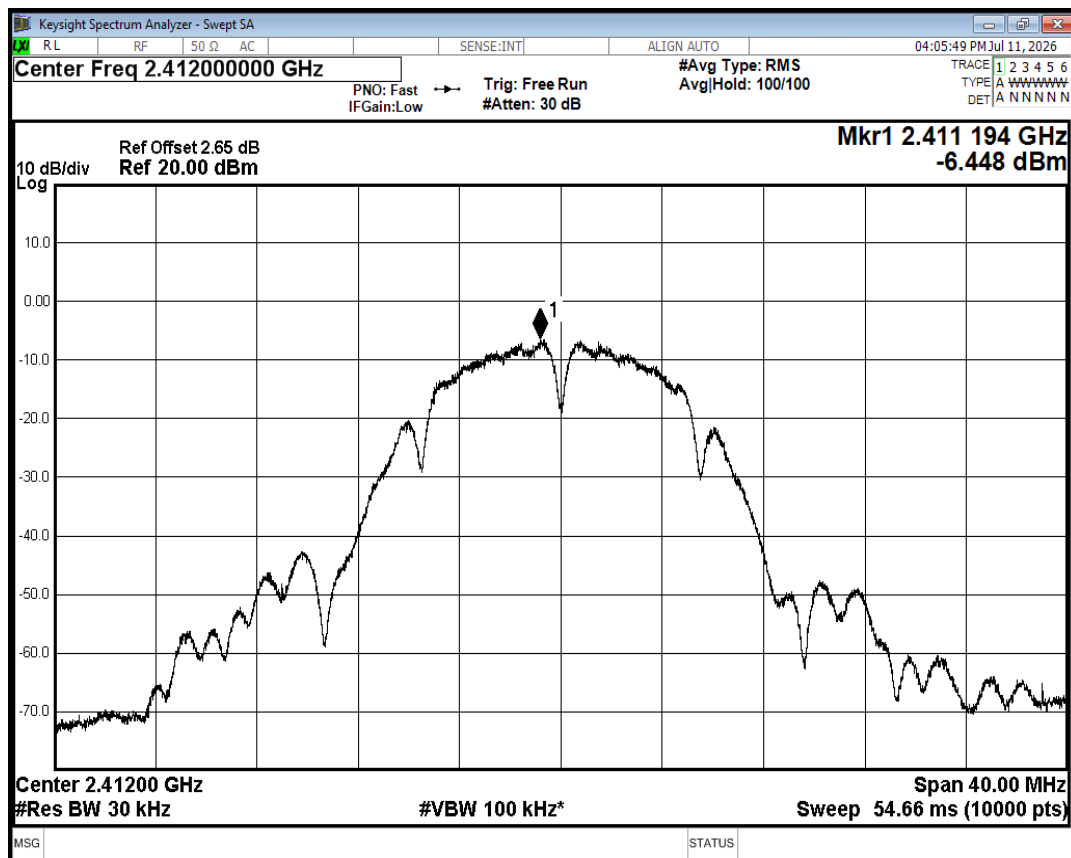


PSD NVNT b 2412MHz Ant2

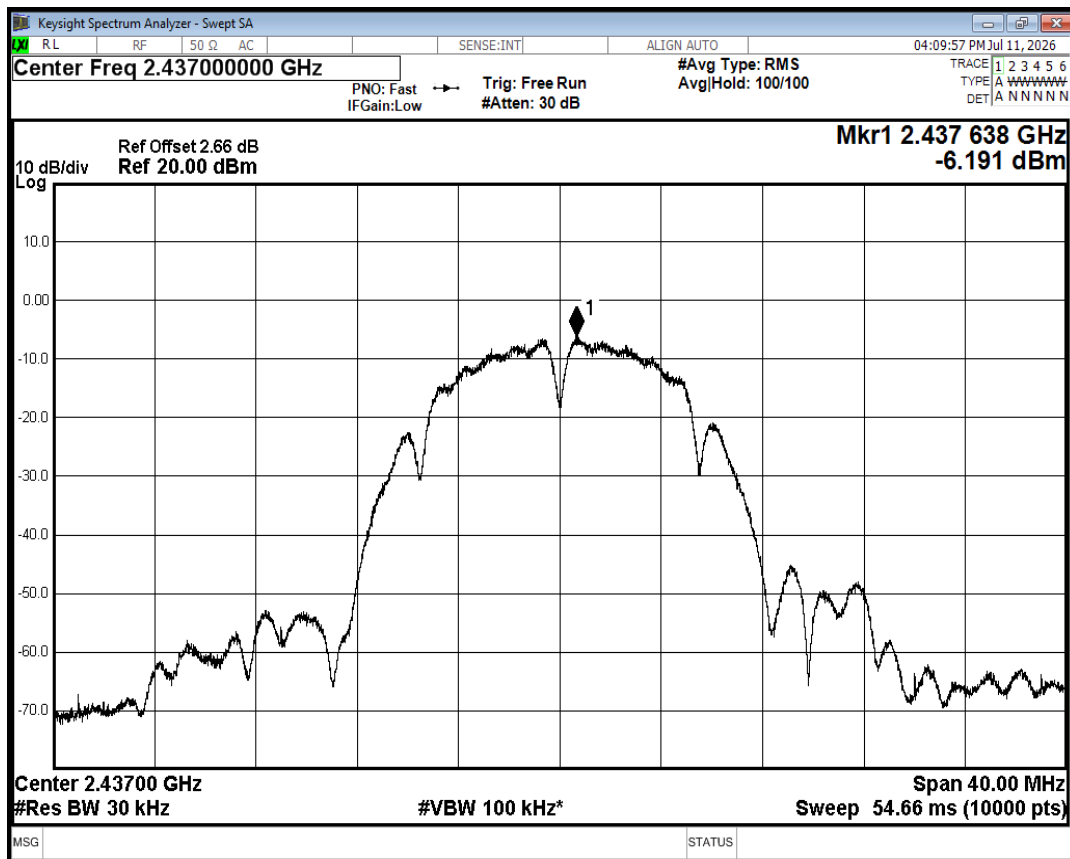


PSD NVNT b 2437MHz Ant2

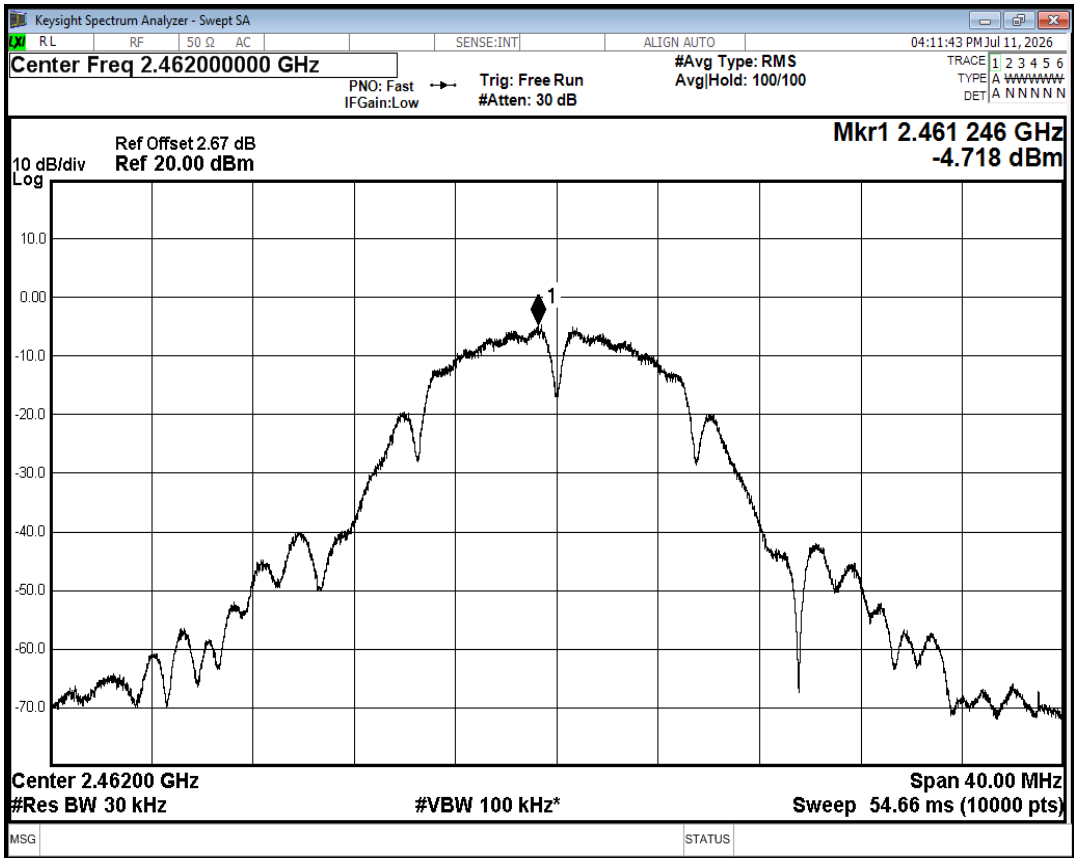


PSD NVNT b 2462MHz Ant2

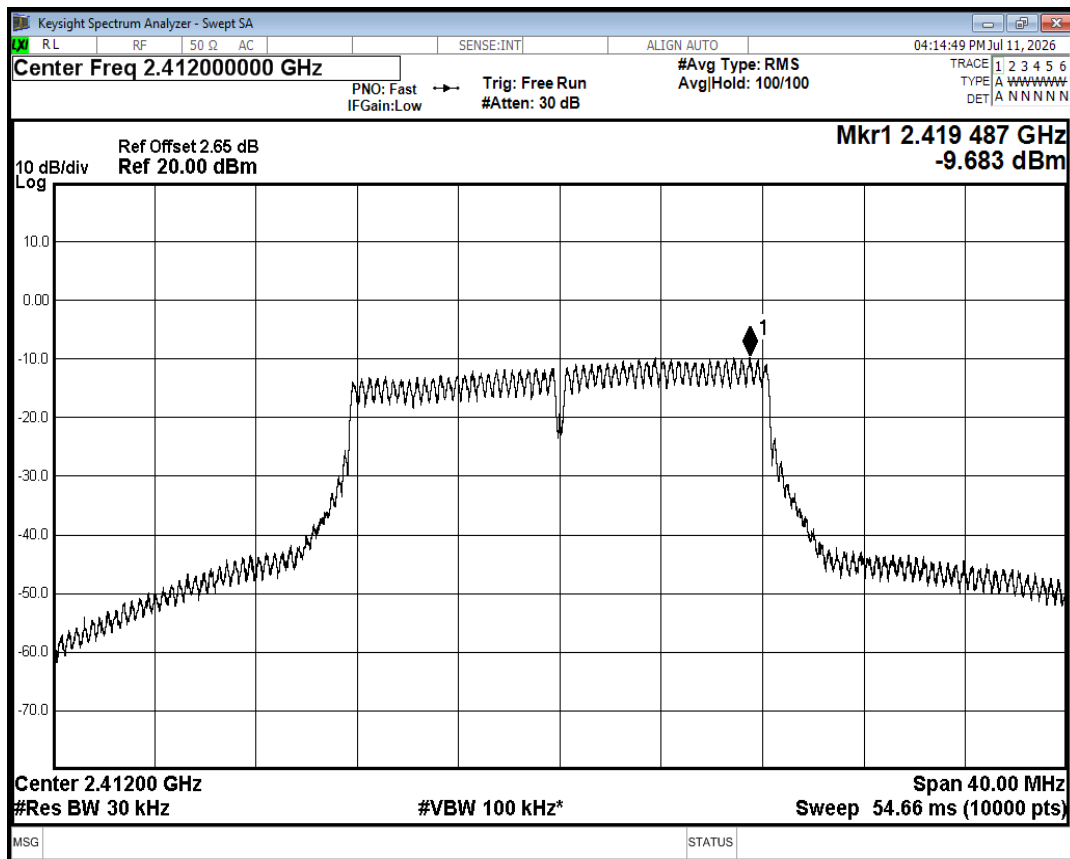


PSD NVNT g 2412MHz Ant2

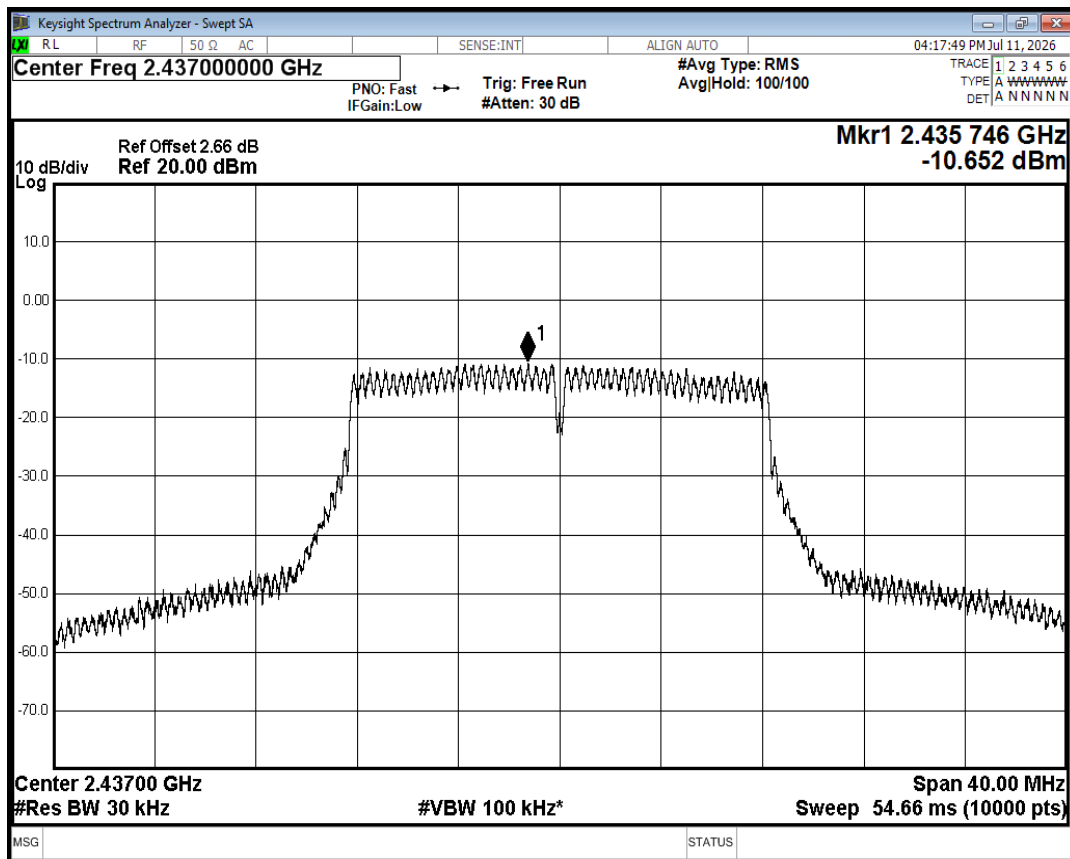


PSD NVNT g 2437MHz Ant2

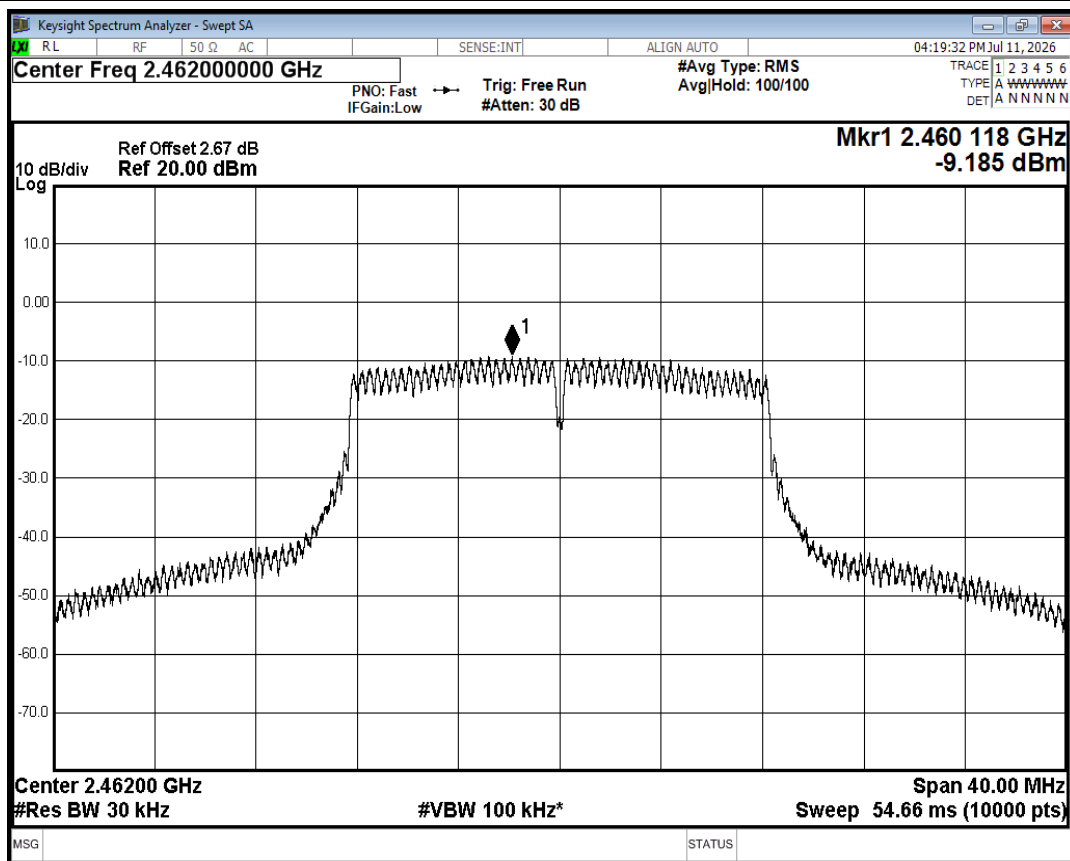


PSD NVNT g 2462MHz Ant2

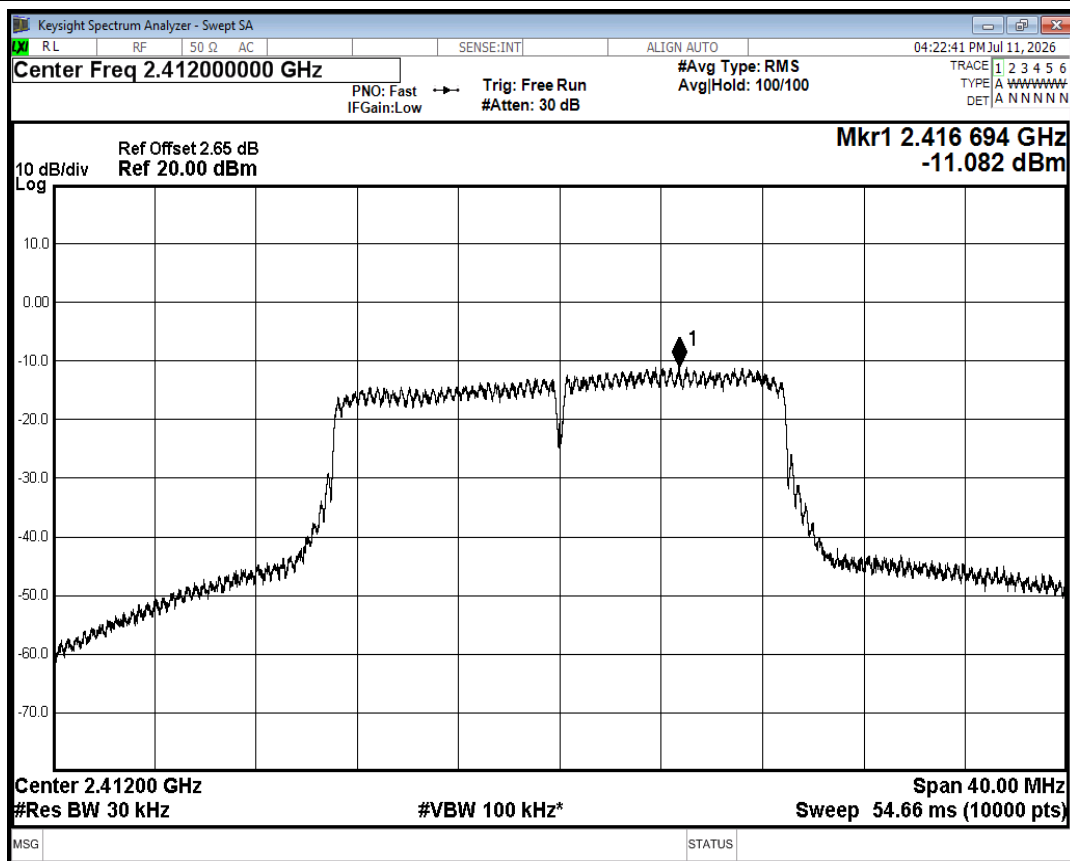


PSD NVNT n20 2412MHz Ant2

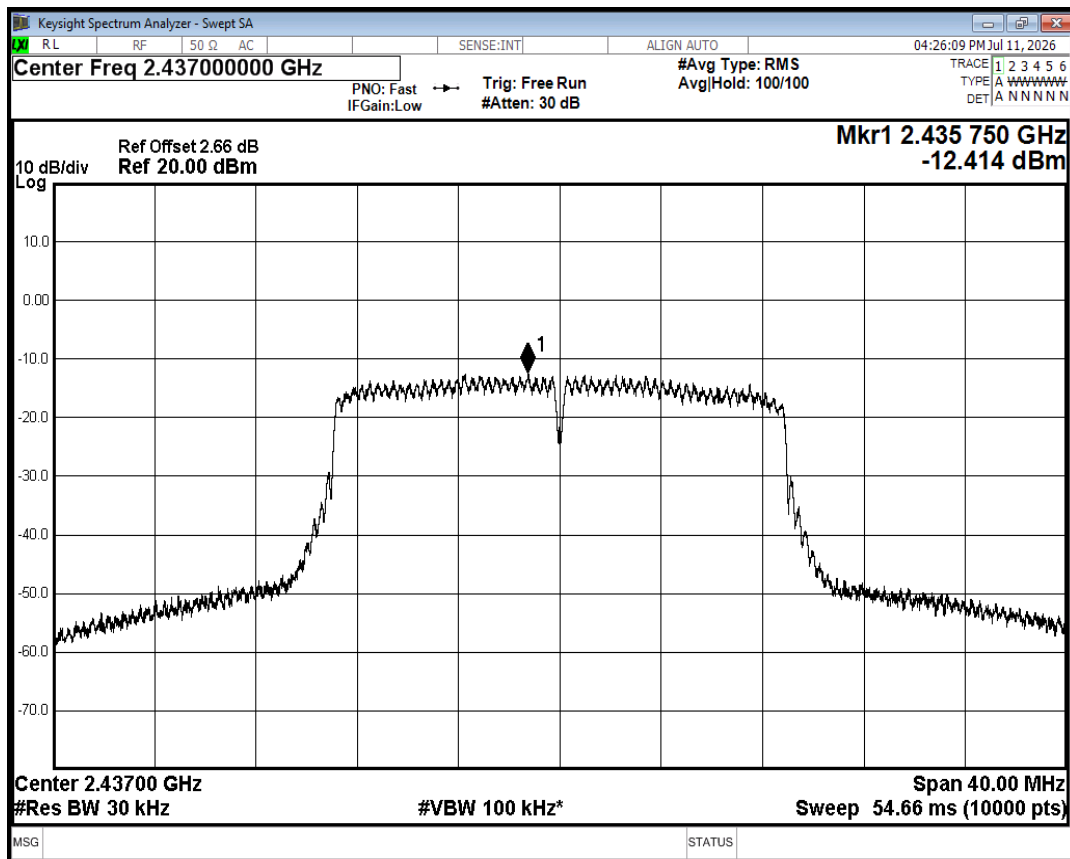


PSD NVNT n20 2437MHz Ant2

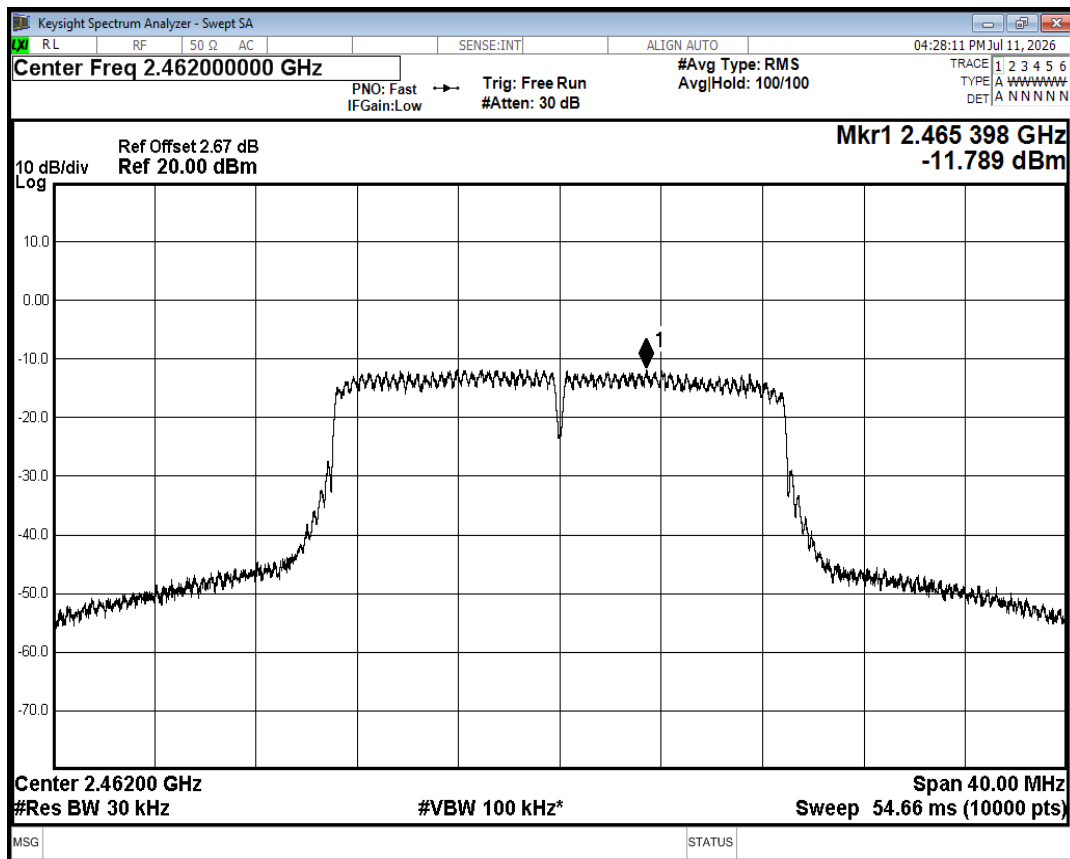


PSD NVNT n20 2462MHz Ant2

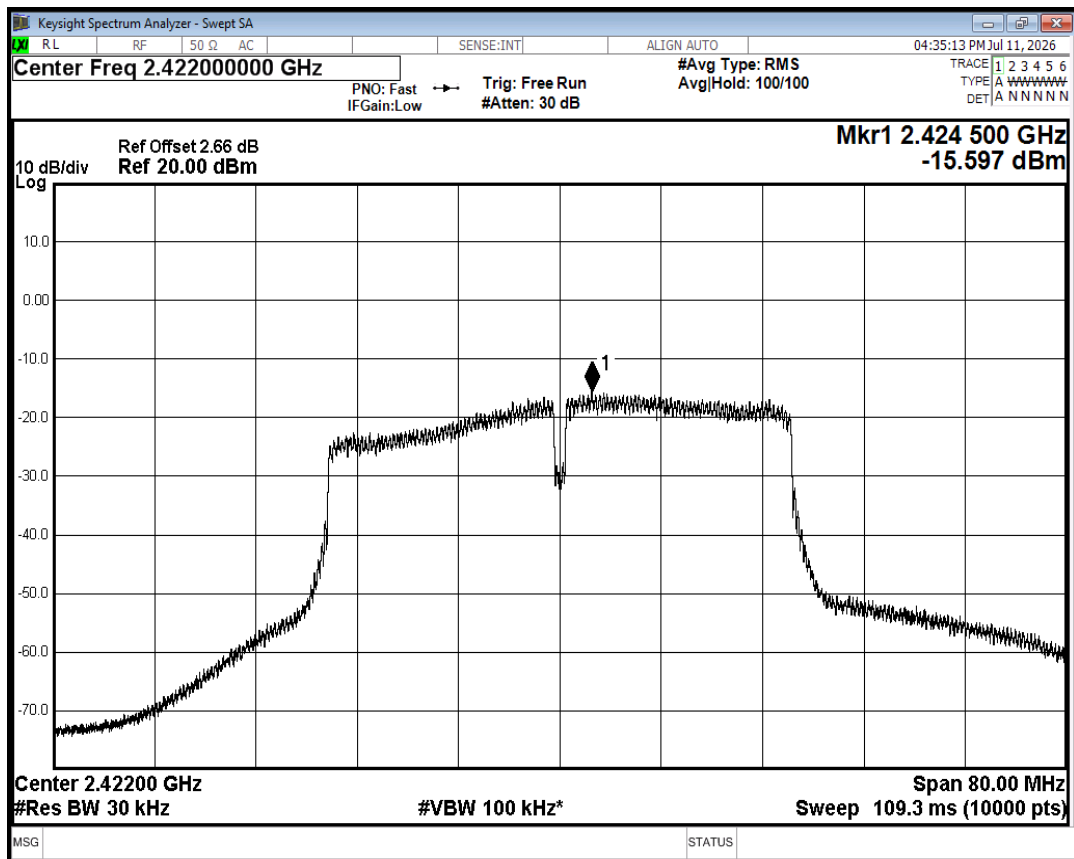

PSD NVNT n40 2422MHz Ant2

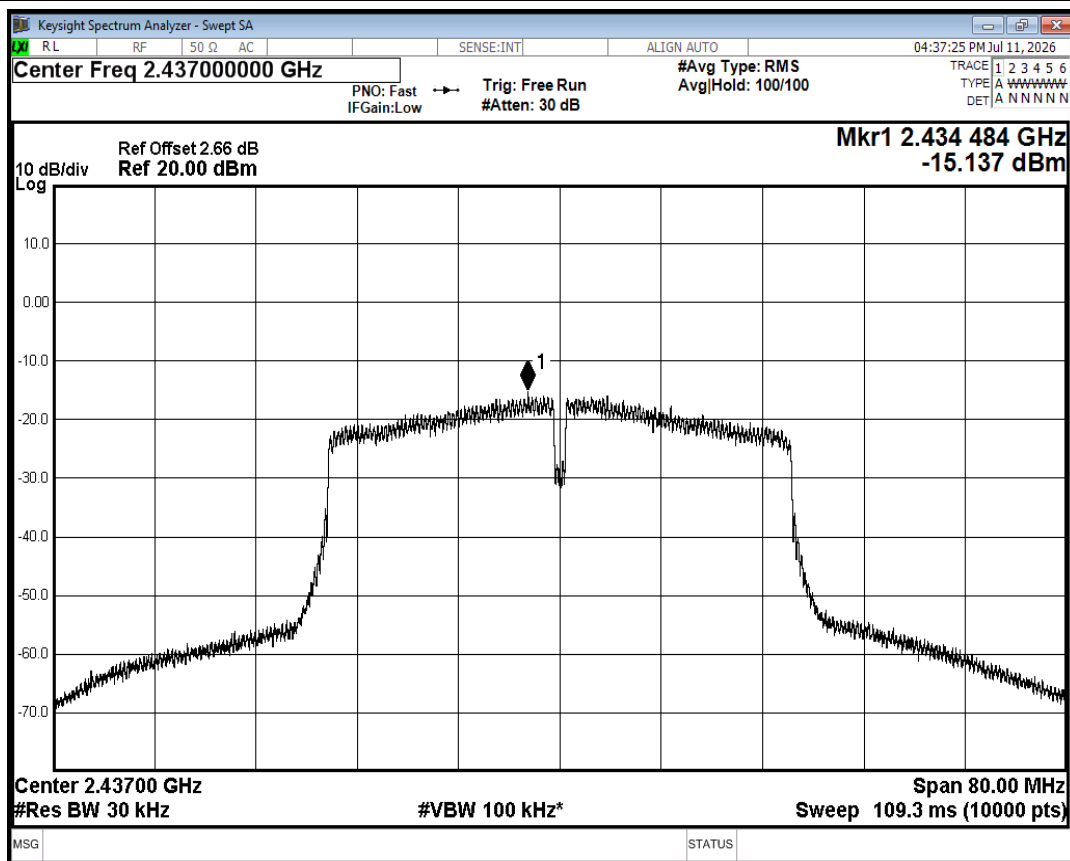


PSD NVNT n40 2437MHz Ant2

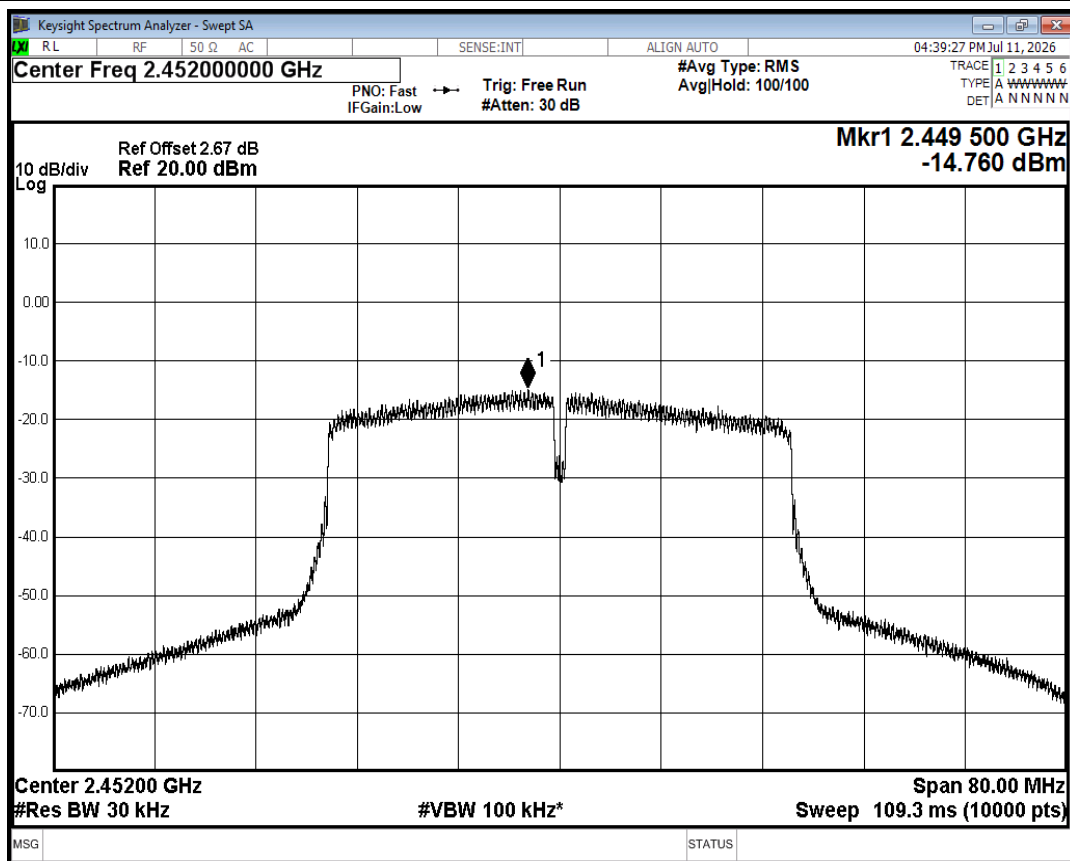


PSD NVNT n40 2452MHz Ant2

C.4 Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-42.83	-30	Pass
NVNT	b	2462	Ant1	-62.77	-30	Pass
NVNT	g	2412	Ant1	-30.43	-30	Pass
NVNT	g	2462	Ant1	-45.38	-30	Pass
NVNT	n20	2412	Ant1	-30.71	-30	Pass
NVNT	n20	2462	Ant1	-38.23	-30	Pass
NVNT	n40	2422	Ant1	-37.66	-30	Pass
NVNT	n40	2452	Ant1	-40.95	-30	Pass

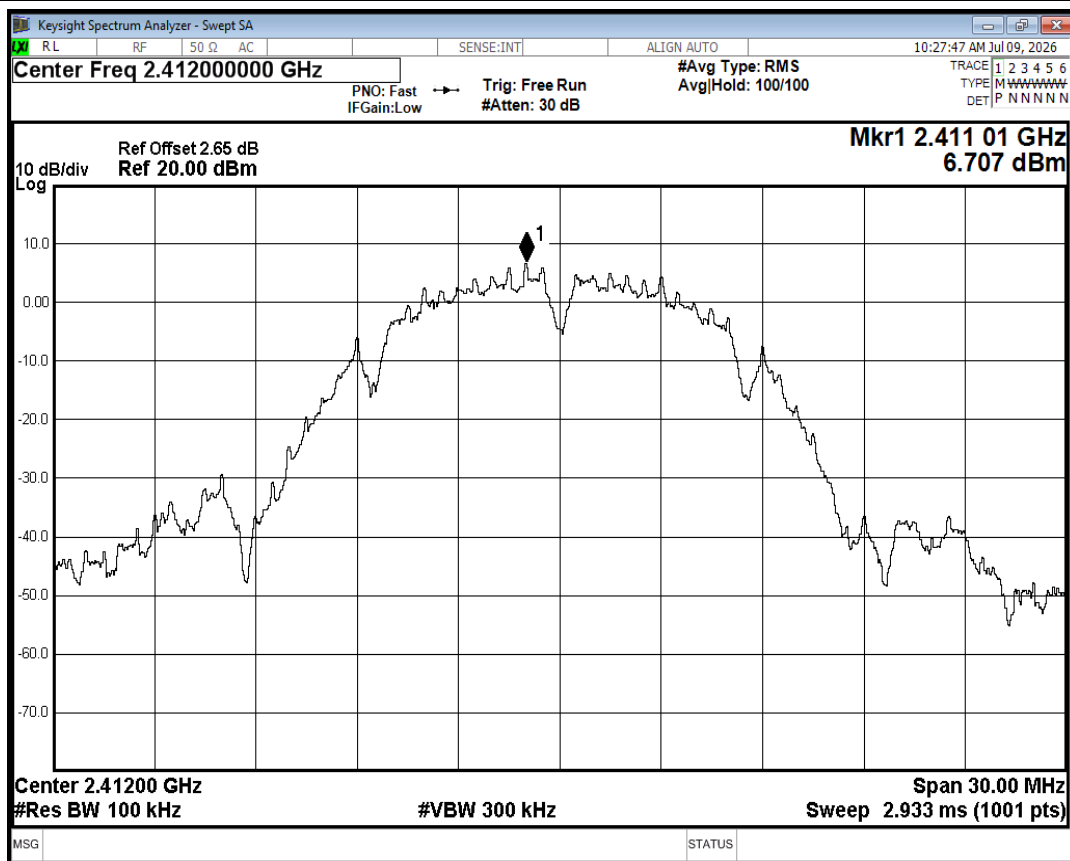


Band Edge NVNT b 2412MHz Ant1 Ref

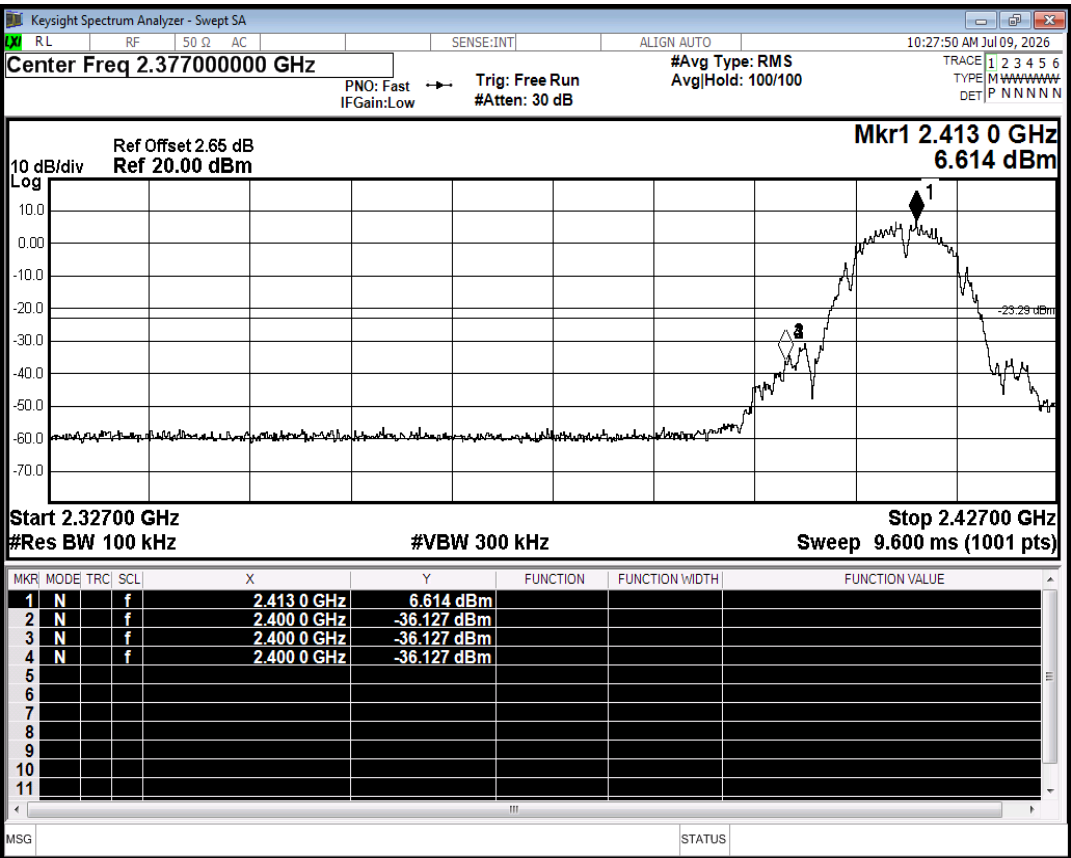


Band Edge NVNT b 2412MHz Ant1 Emission

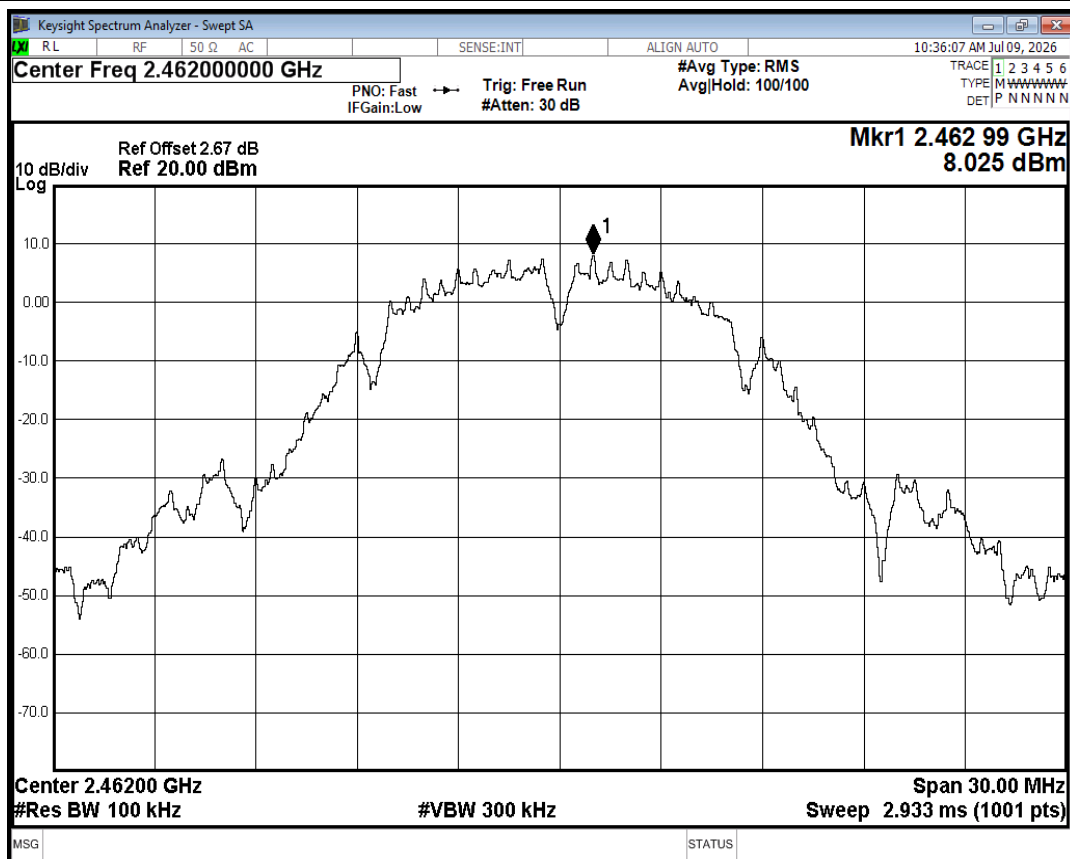


Band Edge NVNT b 2462MHz Ant1 Ref

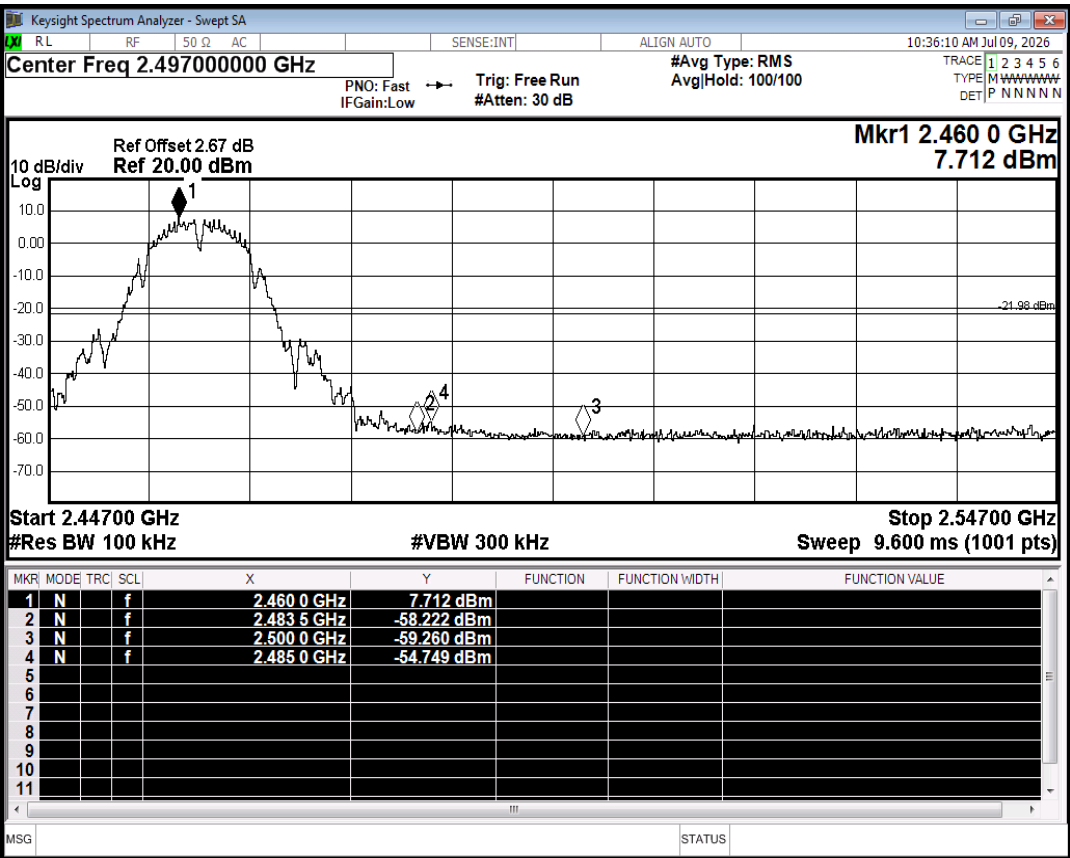


Band Edge NVNT b 2462MHz Ant1 Emission

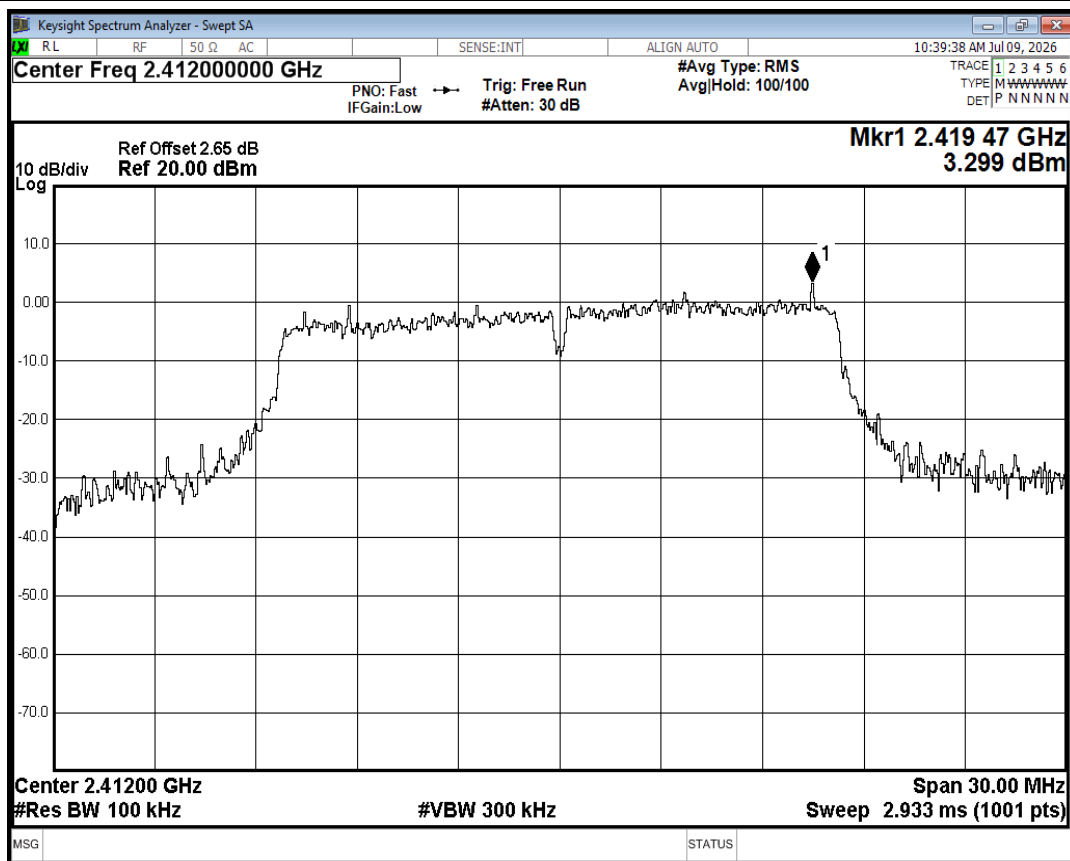


Band Edge NVNT g 2412MHz Ant1 Ref

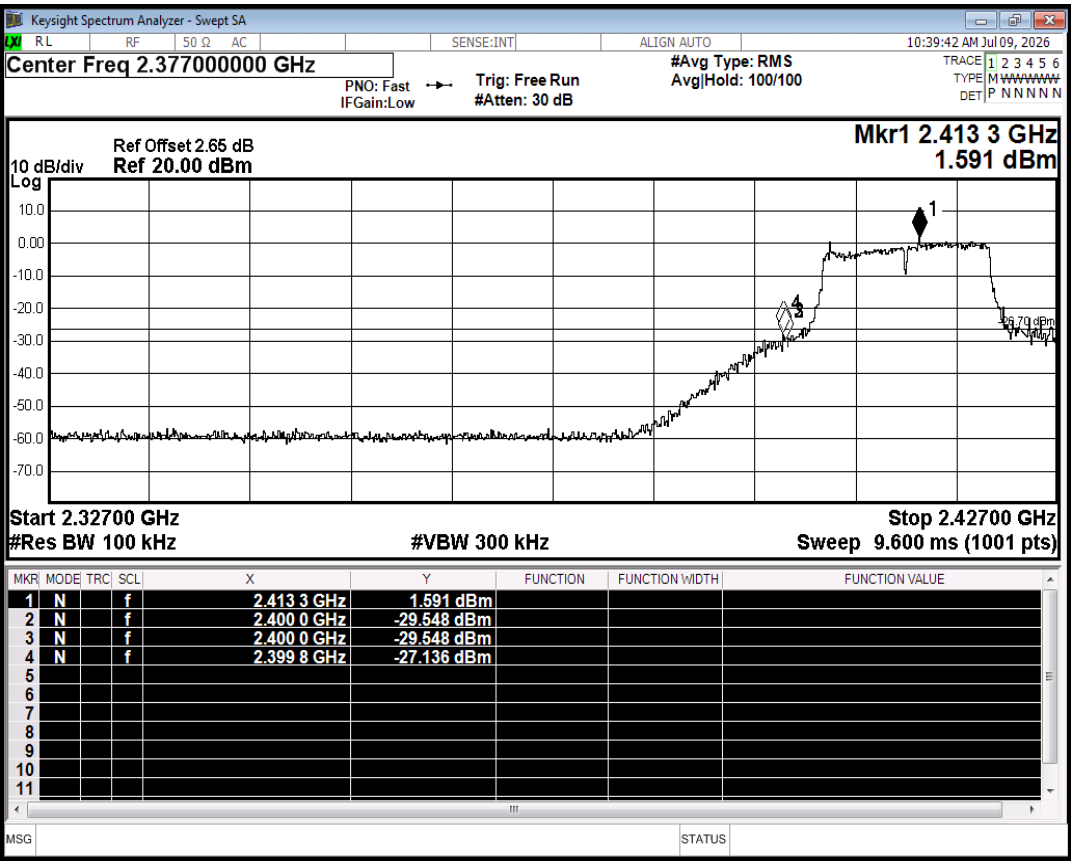


Band Edge NVNT g 2412MHz Ant1 Emission

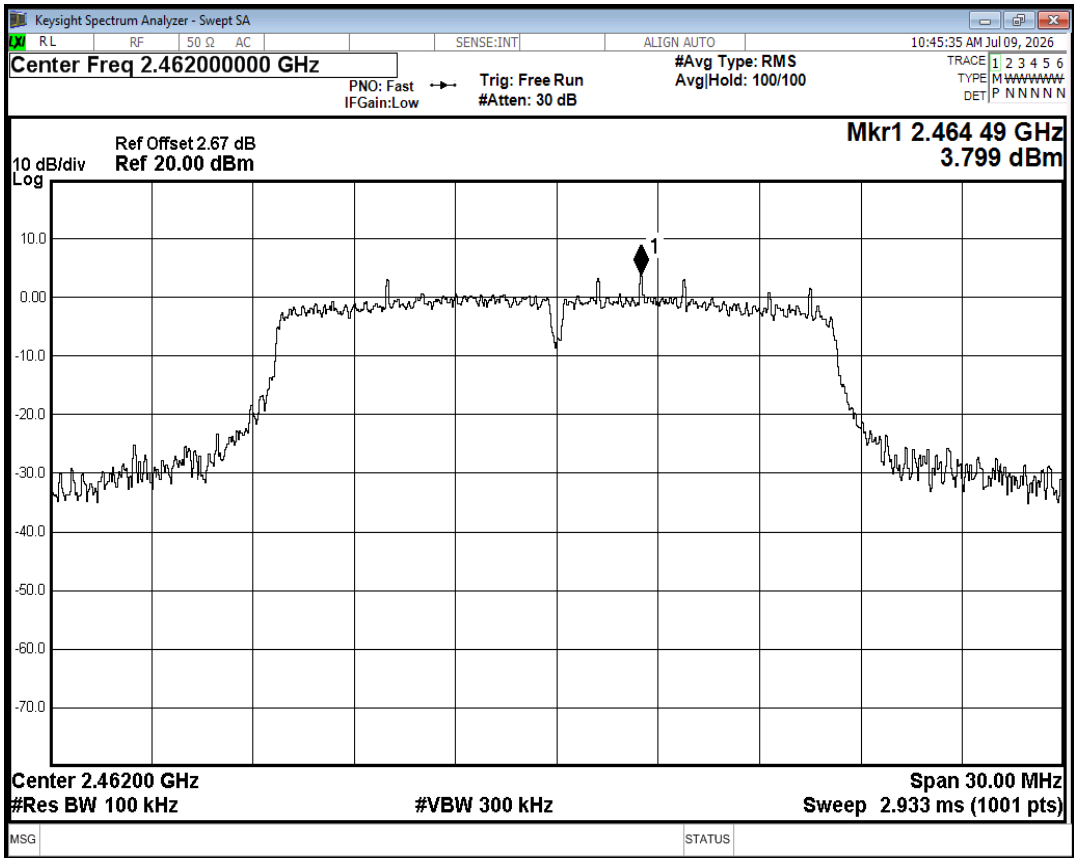


Band Edge NVNT g 2462MHz Ant1 Ref

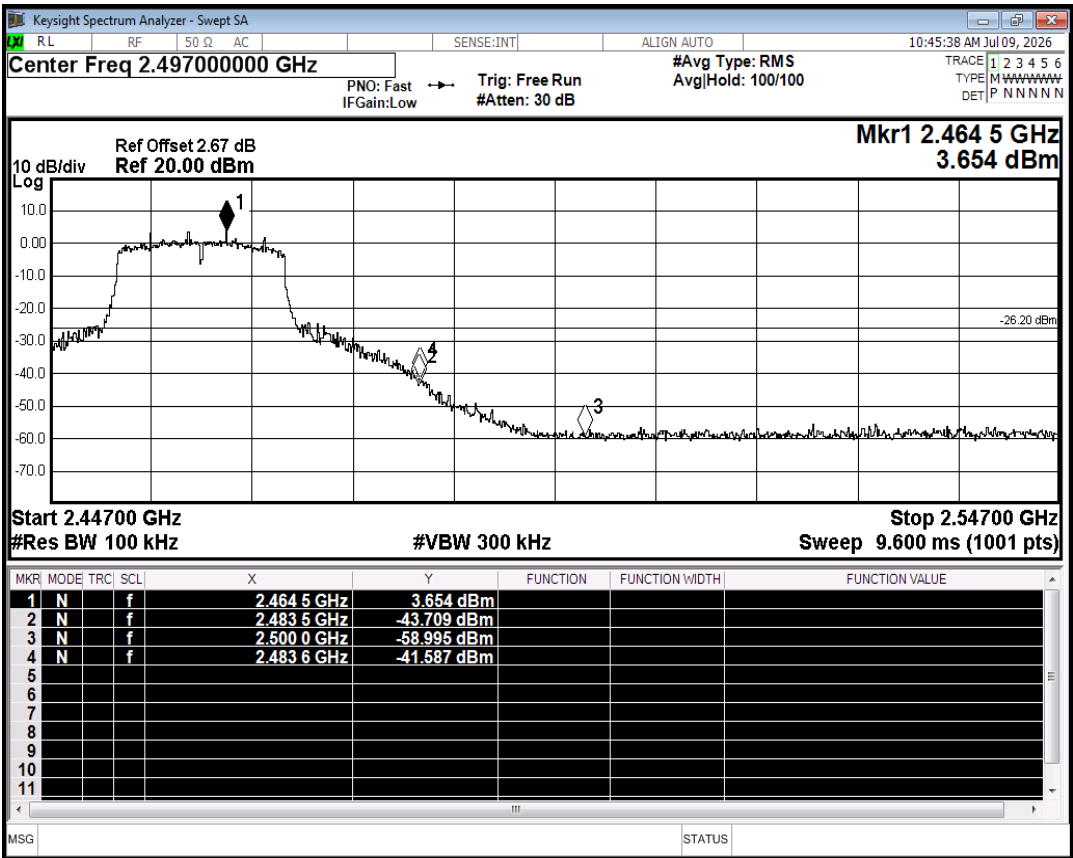


Band Edge NVNT g 2462MHz Ant1 Emission

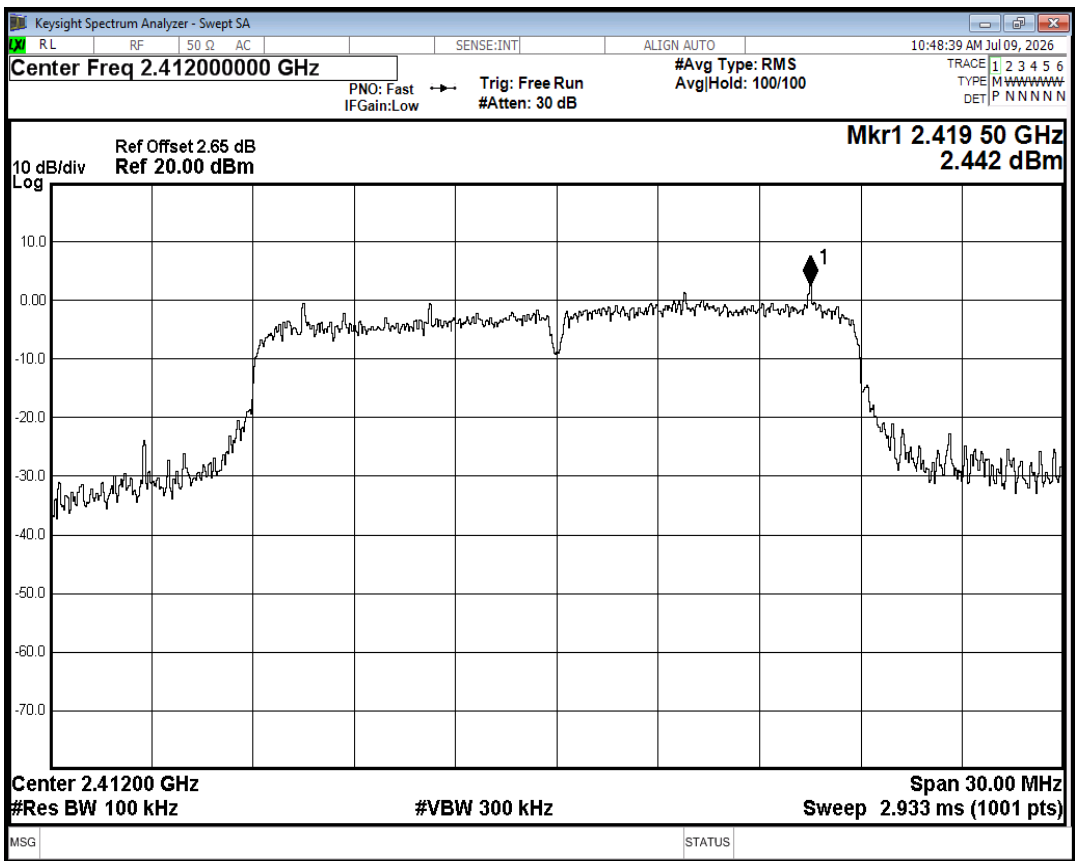


Band Edge NVNT n20 2412MHz Ant1 Ref

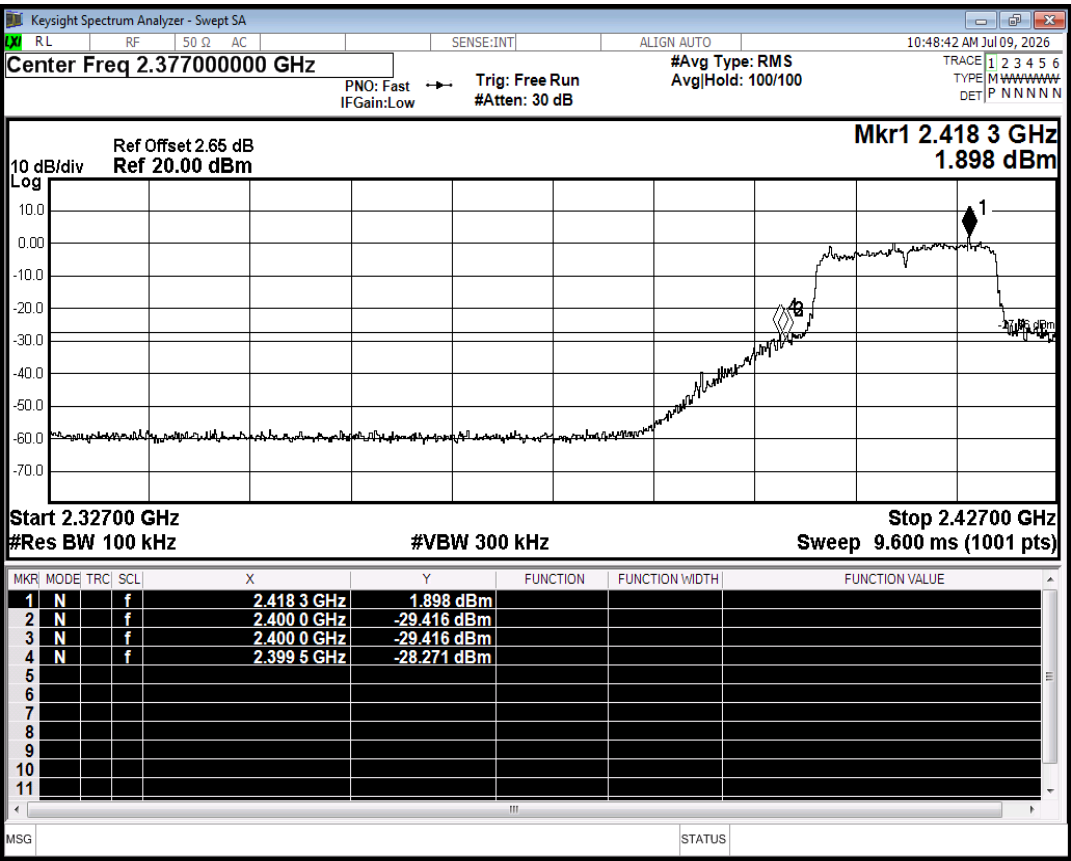


Band Edge NVNT n20 2412MHz Ant1 Emission

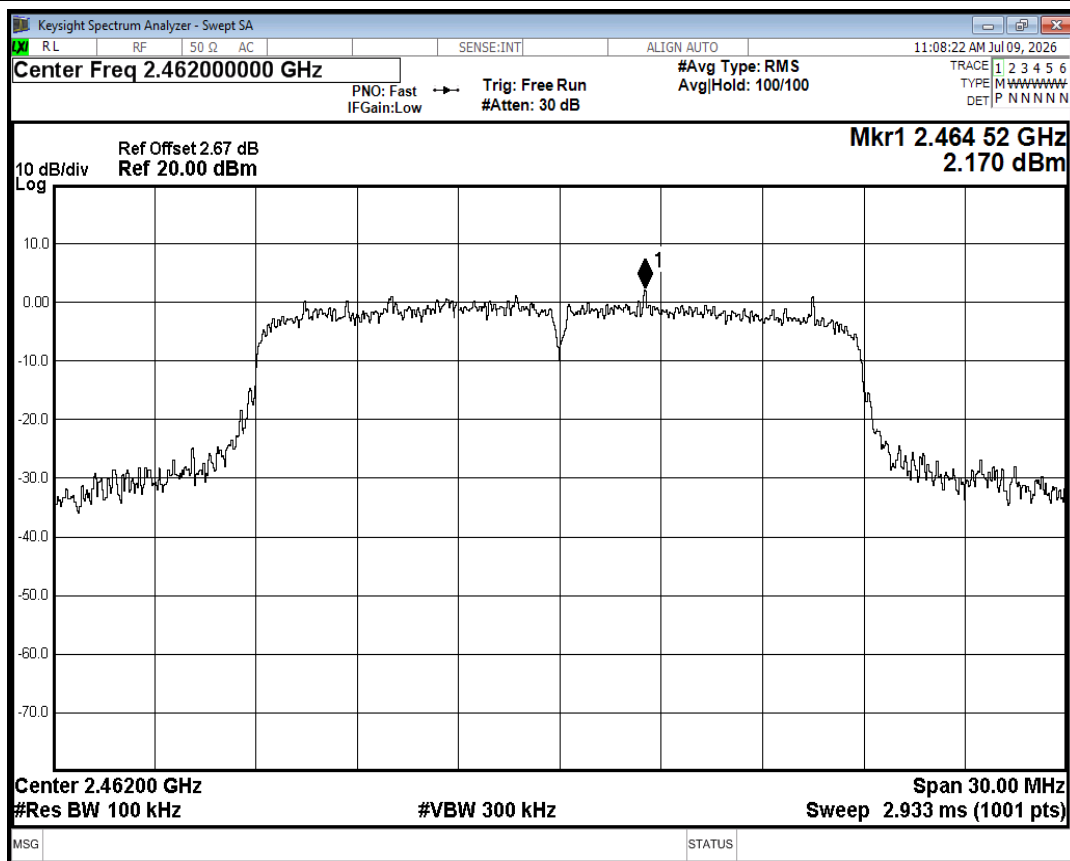


Band Edge NVNT n20 2462MHz Ant1 Ref

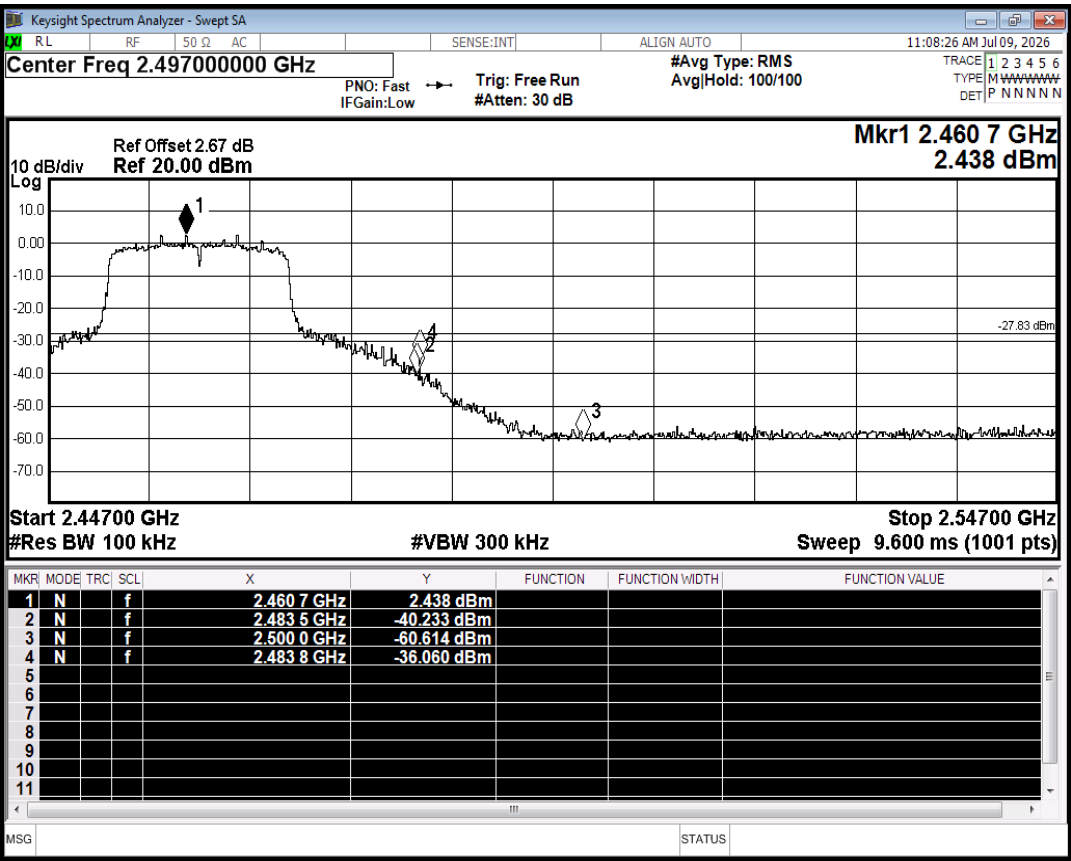


Band Edge NVNT n20 2462MHz Ant1 Emission

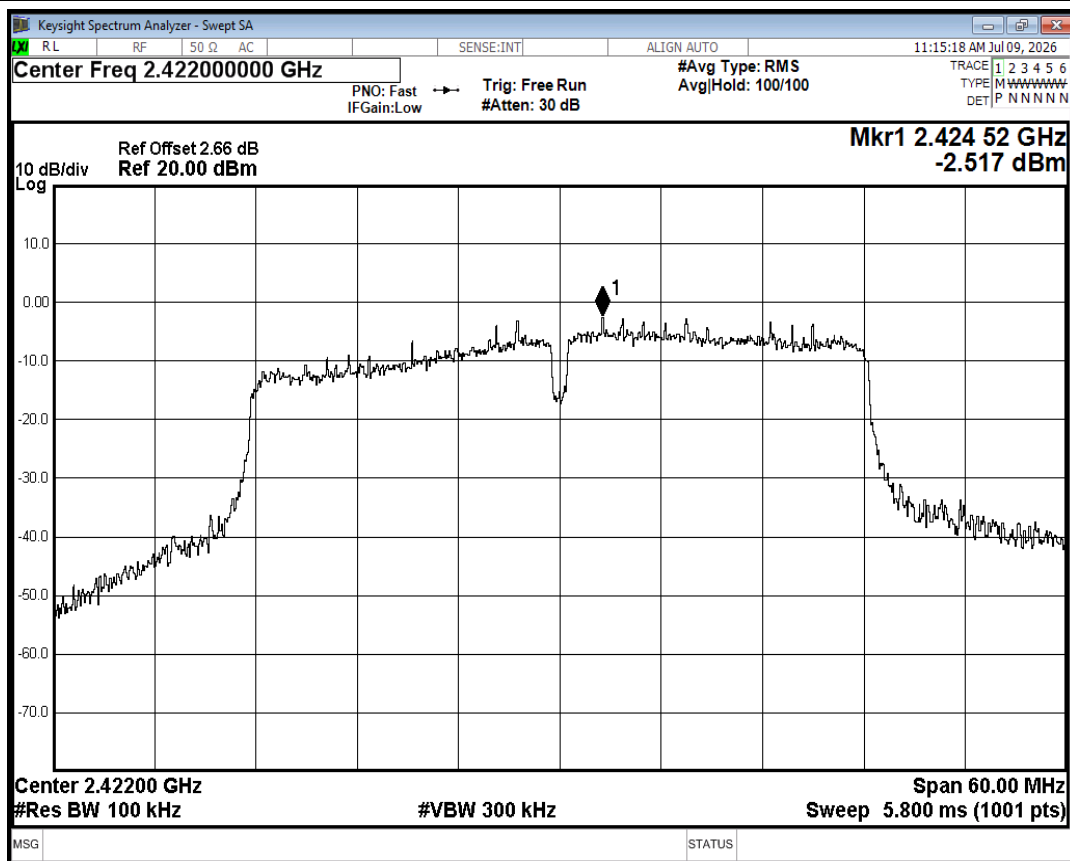


Band Edge NVNT n40 2422MHz Ant1 Ref

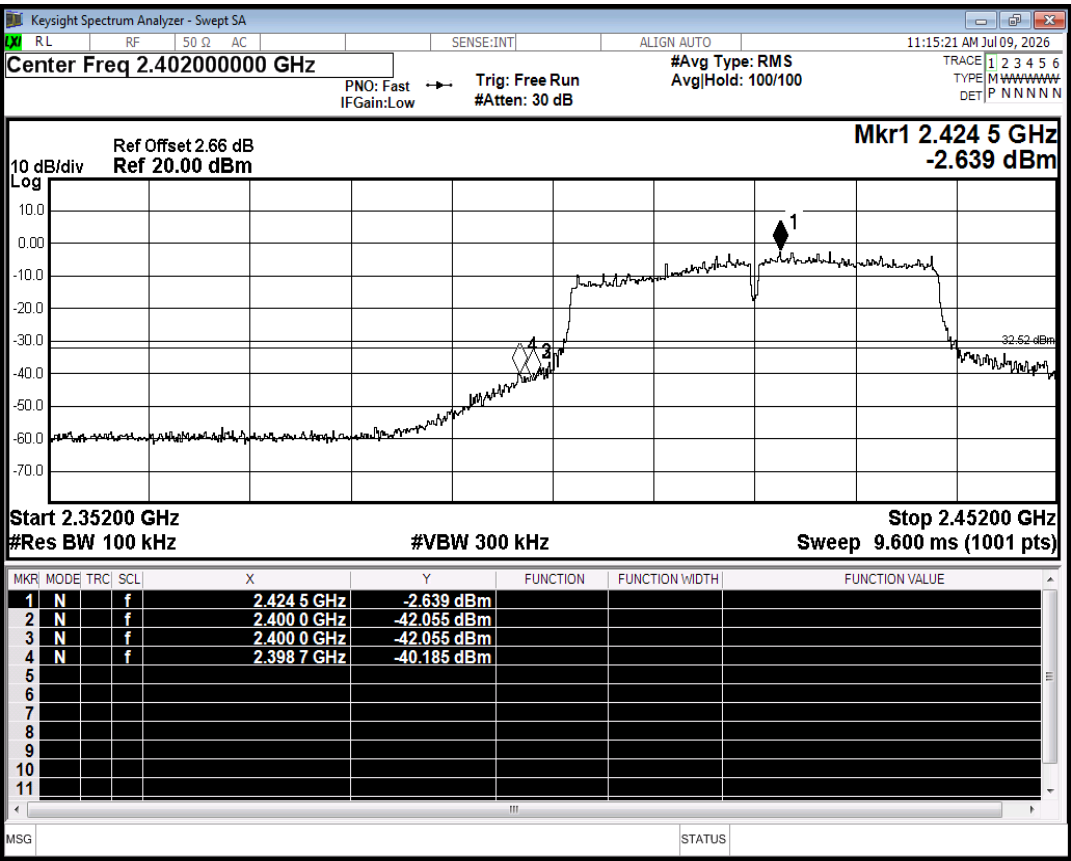

Band Edge NVNT n40 2422MHz Ant1 Emission

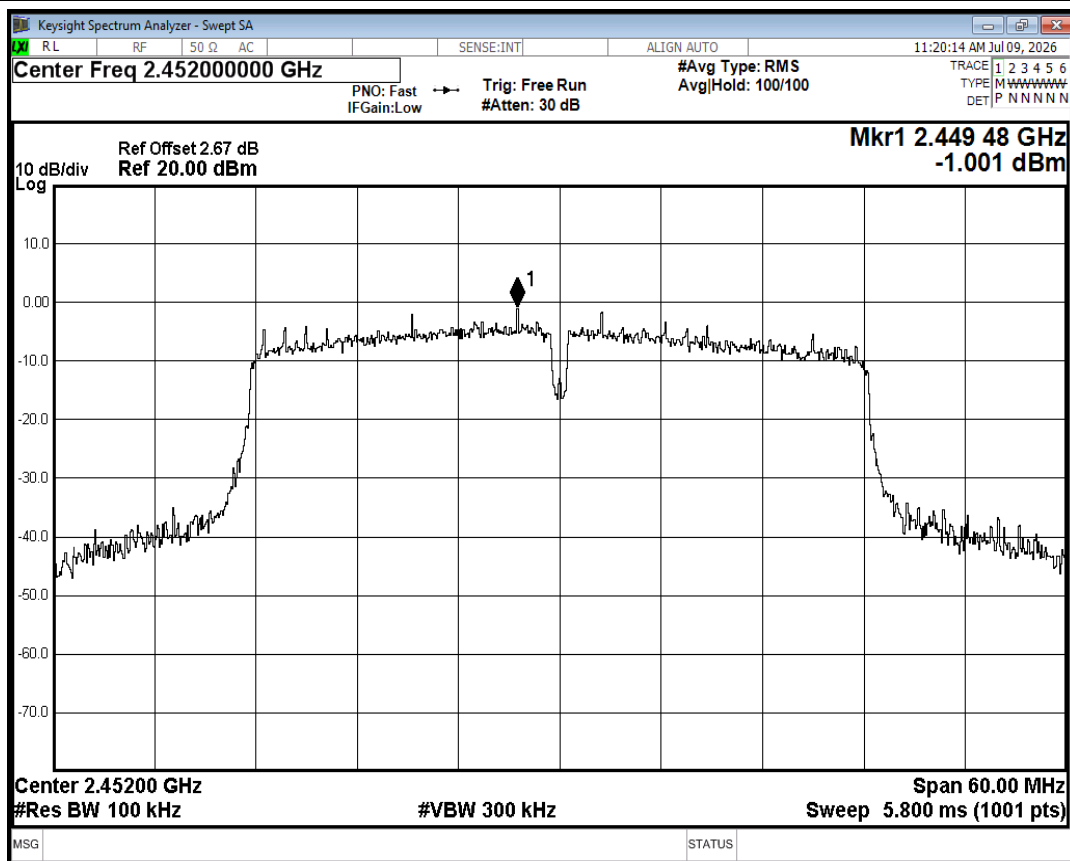


Band Edge NVNT n40 2452MHz Ant1 Ref

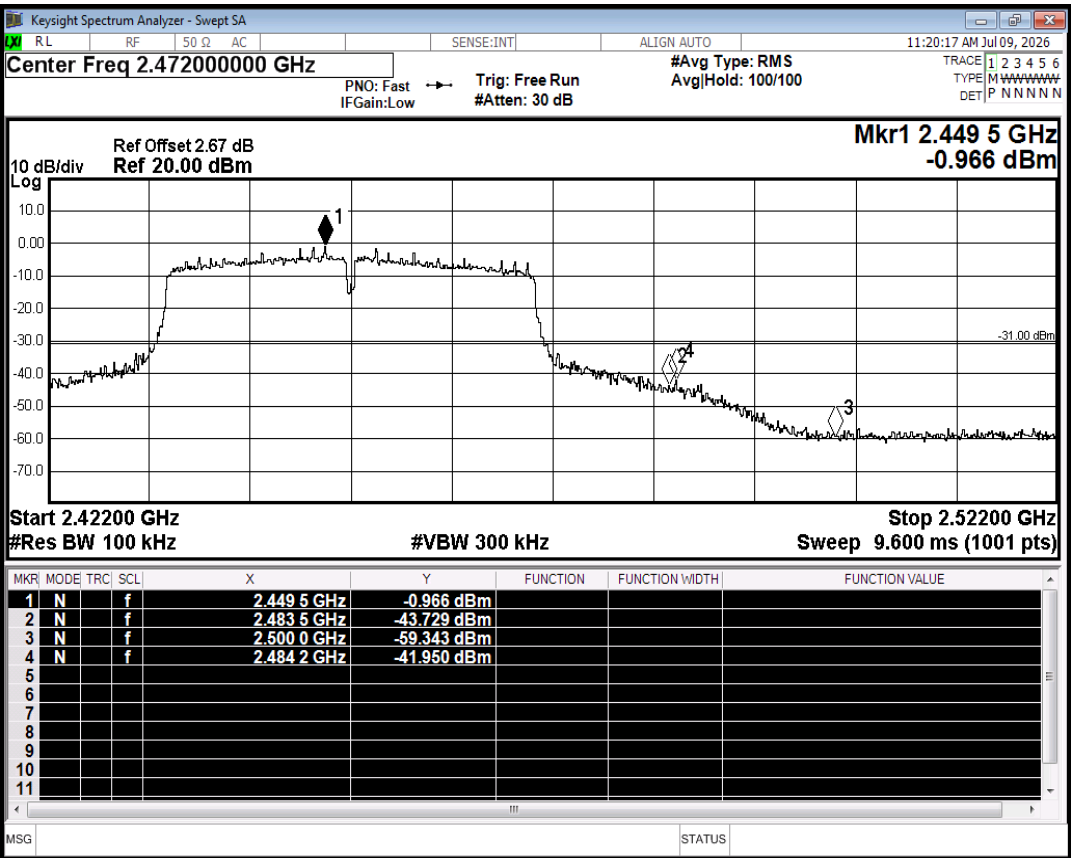


Band Edge NVNT n40 2452MHz Ant1 Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant2	-43.62	-30	Pass
NVNT	b	2462	Ant2	-63.83	-30	Pass
NVNT	g	2412	Ant2	-31.14	-30	Pass
NVNT	g	2462	Ant2	-42.04	-30	Pass
NVNT	n20	2412	Ant2	-31.28	-30	Pass
NVNT	n20	2462	Ant2	-40.68	-30	Pass
NVNT	n40	2422	Ant2	-37.54	-30	Pass
NVNT	n40	2452	Ant2	-41.7	-30	Pass

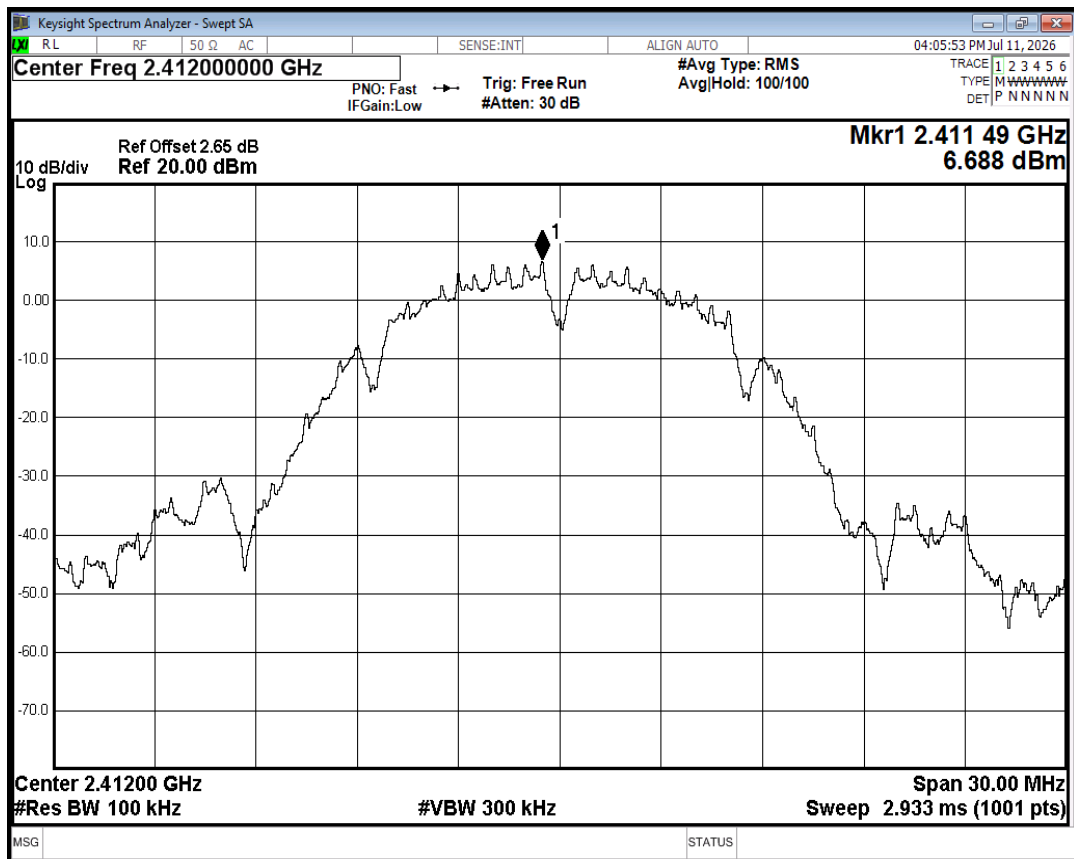


Band Edge NVNT b 2412MHz Ant2 Ref

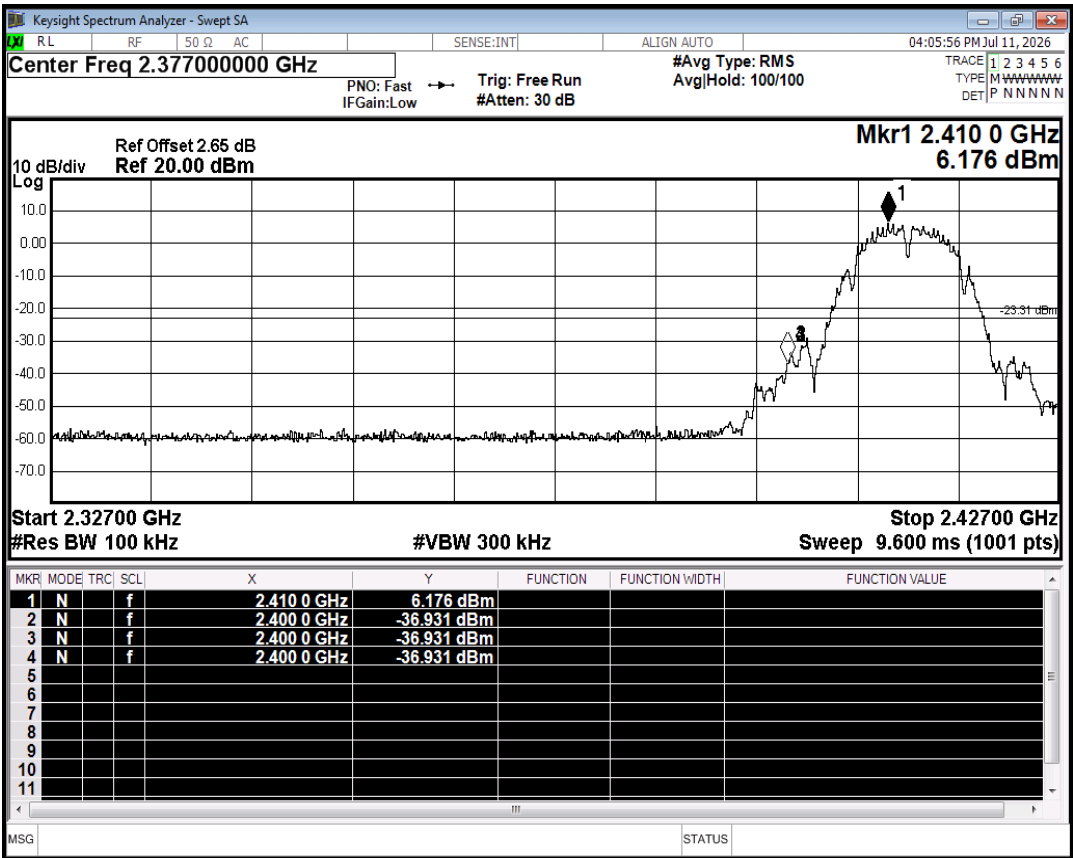


Band Edge NVNT b 2412MHz Ant2 Emission

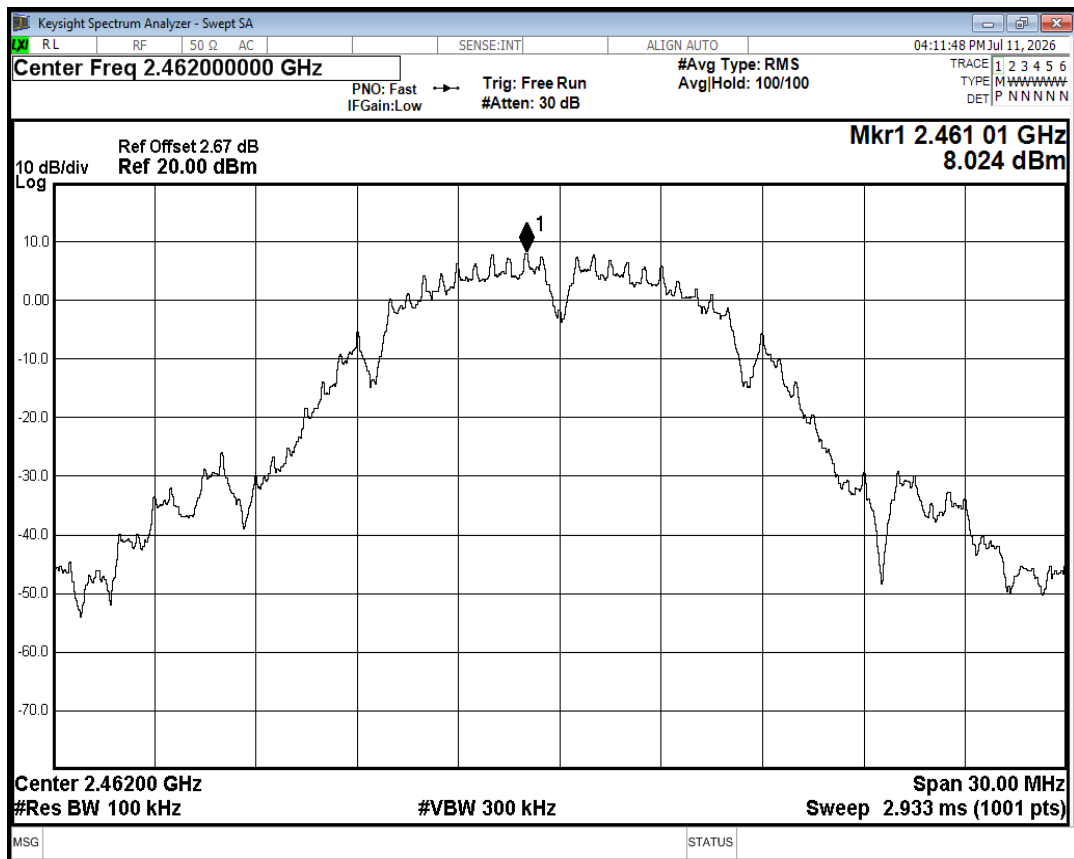


Band Edge NVNT b 2462MHz Ant2 Ref

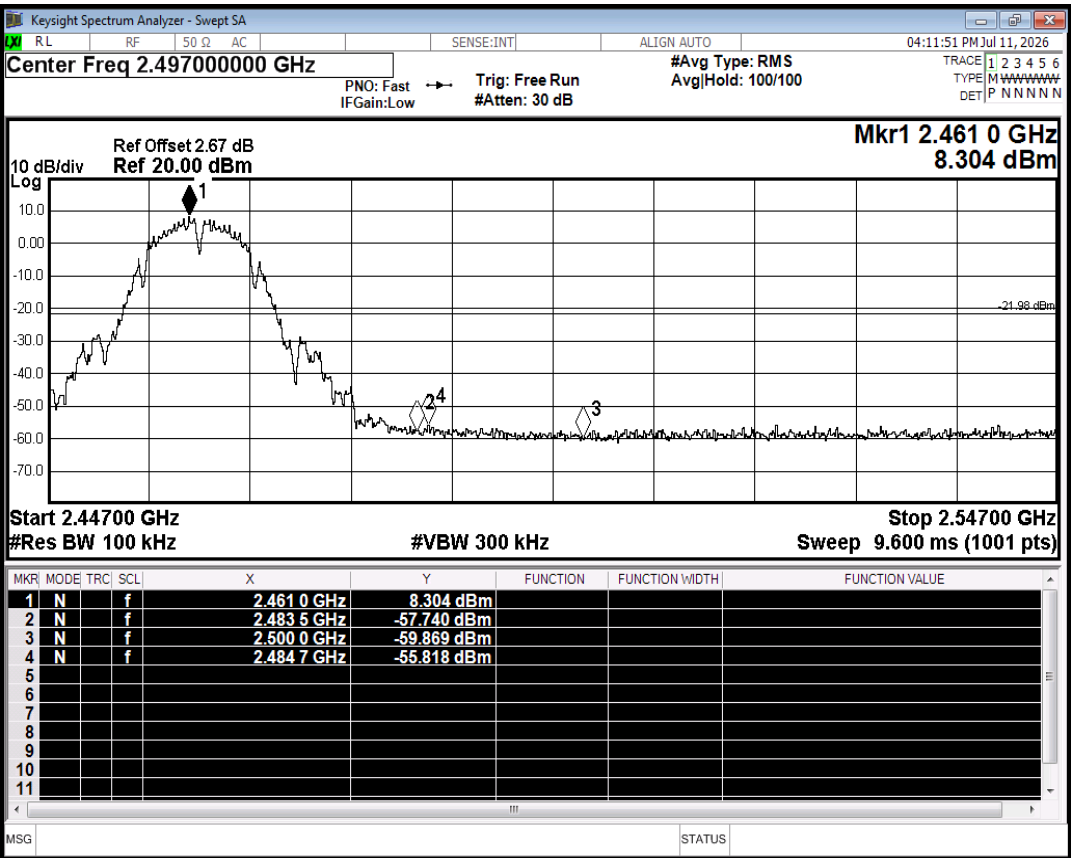


Band Edge NVNT b 2462MHz Ant2 Emission

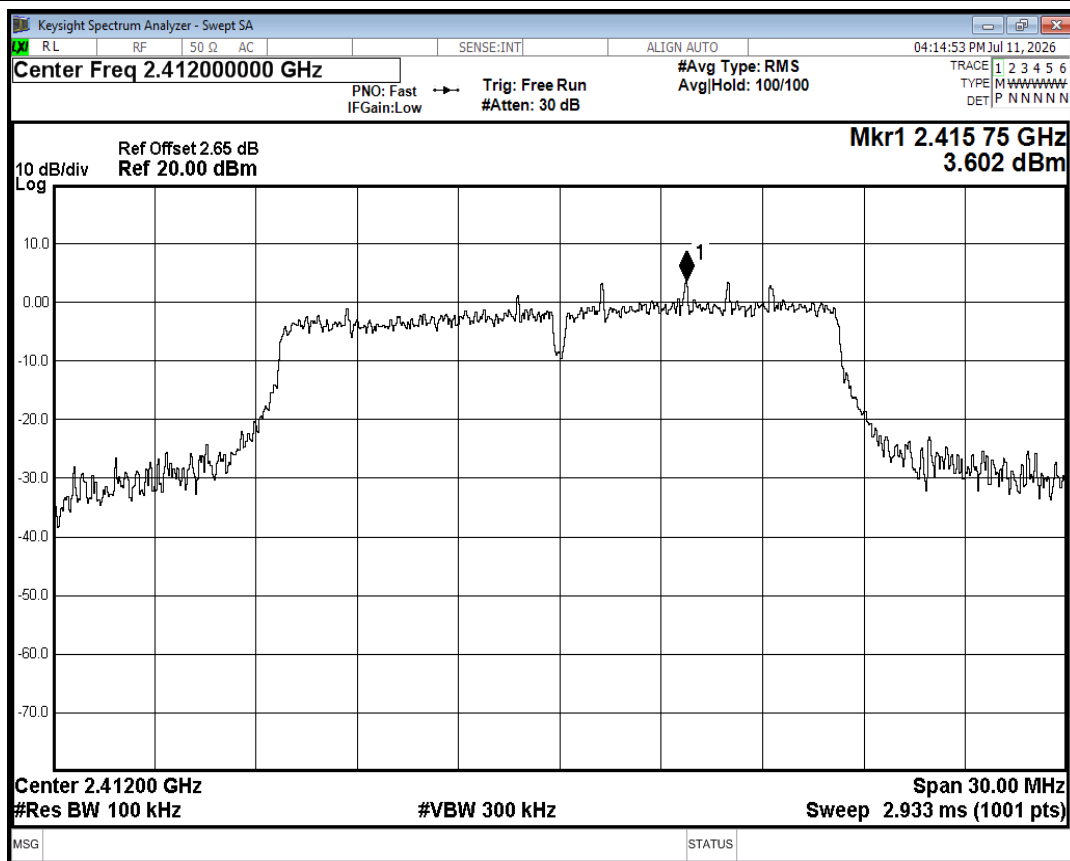


Band Edge NVNT g 2412MHz Ant2 Ref

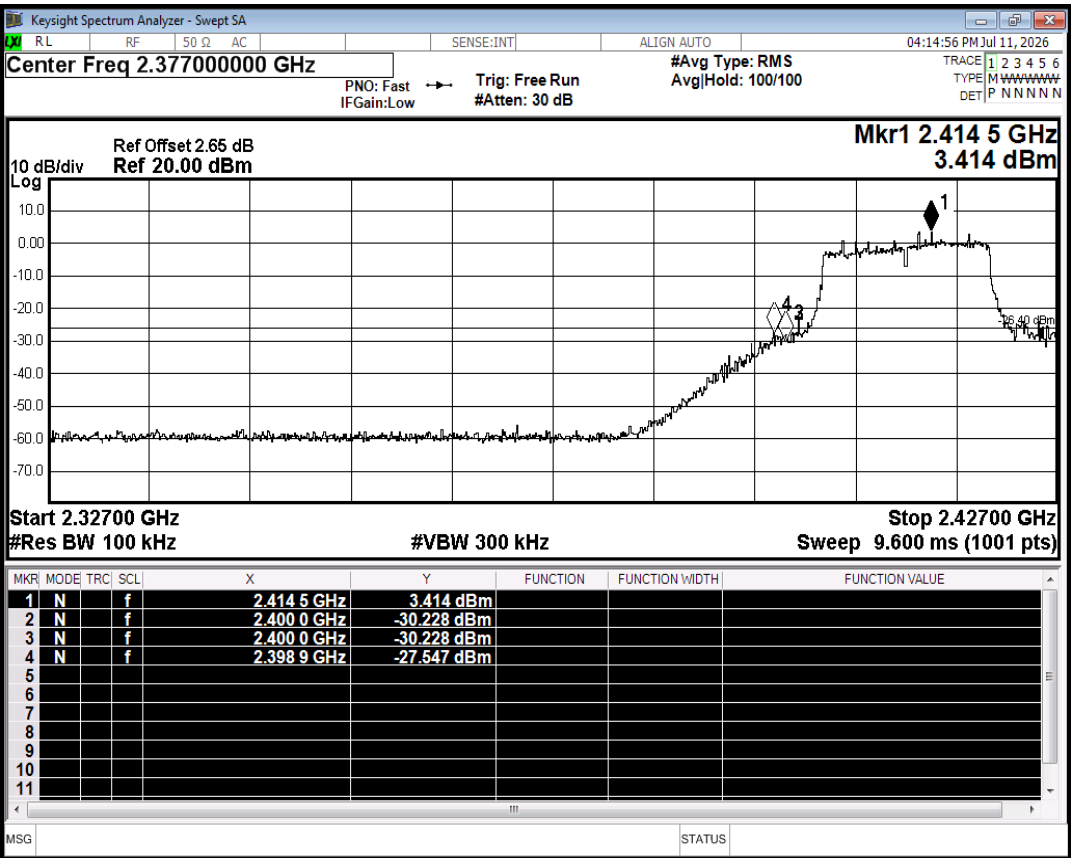


Band Edge NVNT g 2412MHz Ant2 Emission

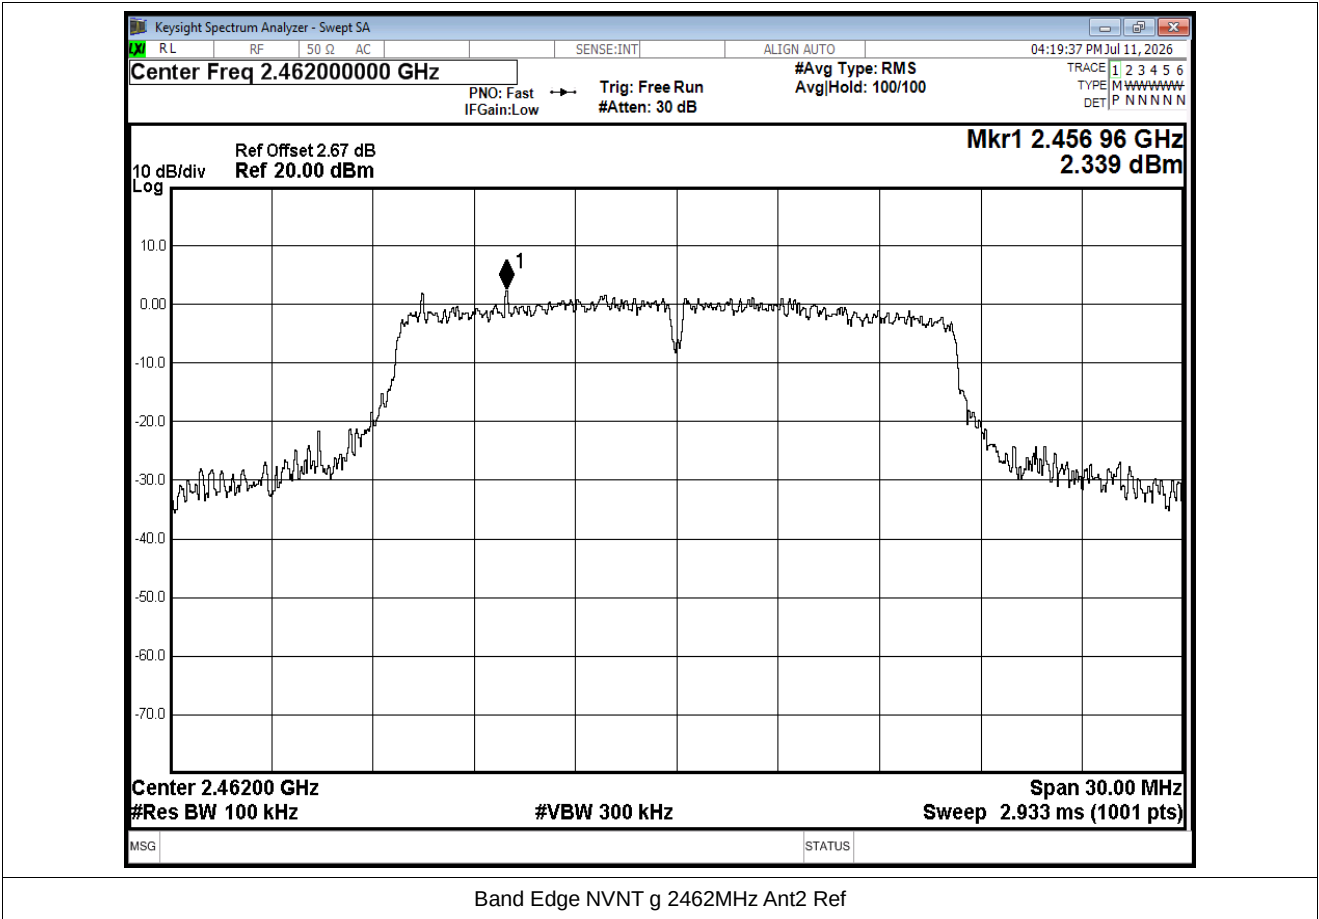


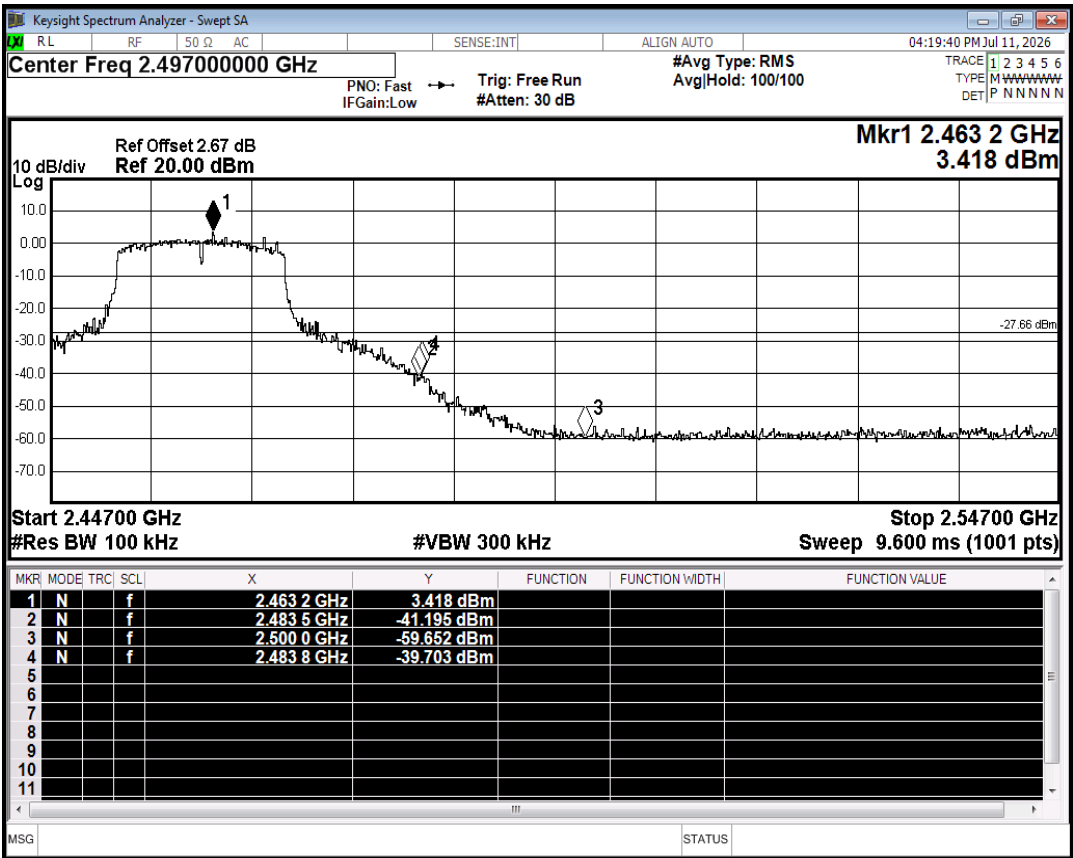


Band Edge NVNT g 2462MHz Ant2 Emission

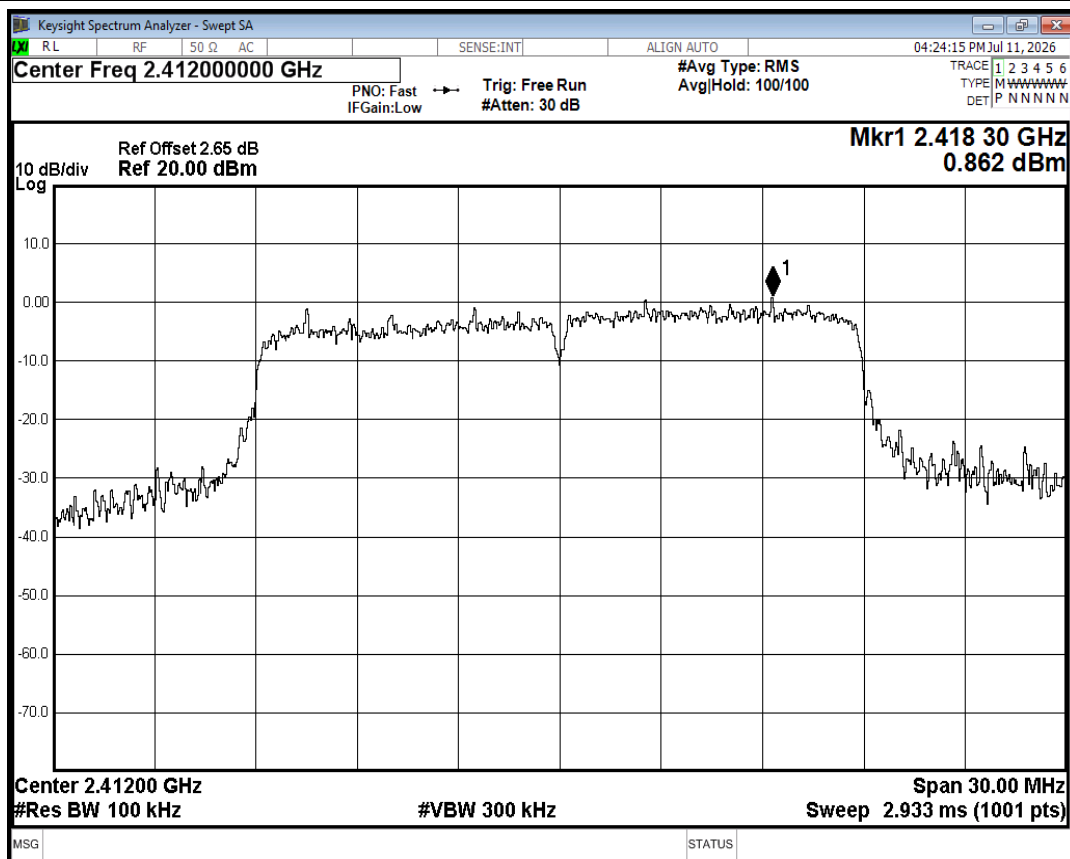


Band Edge NVNT n20 2412MHz Ant2 Ref

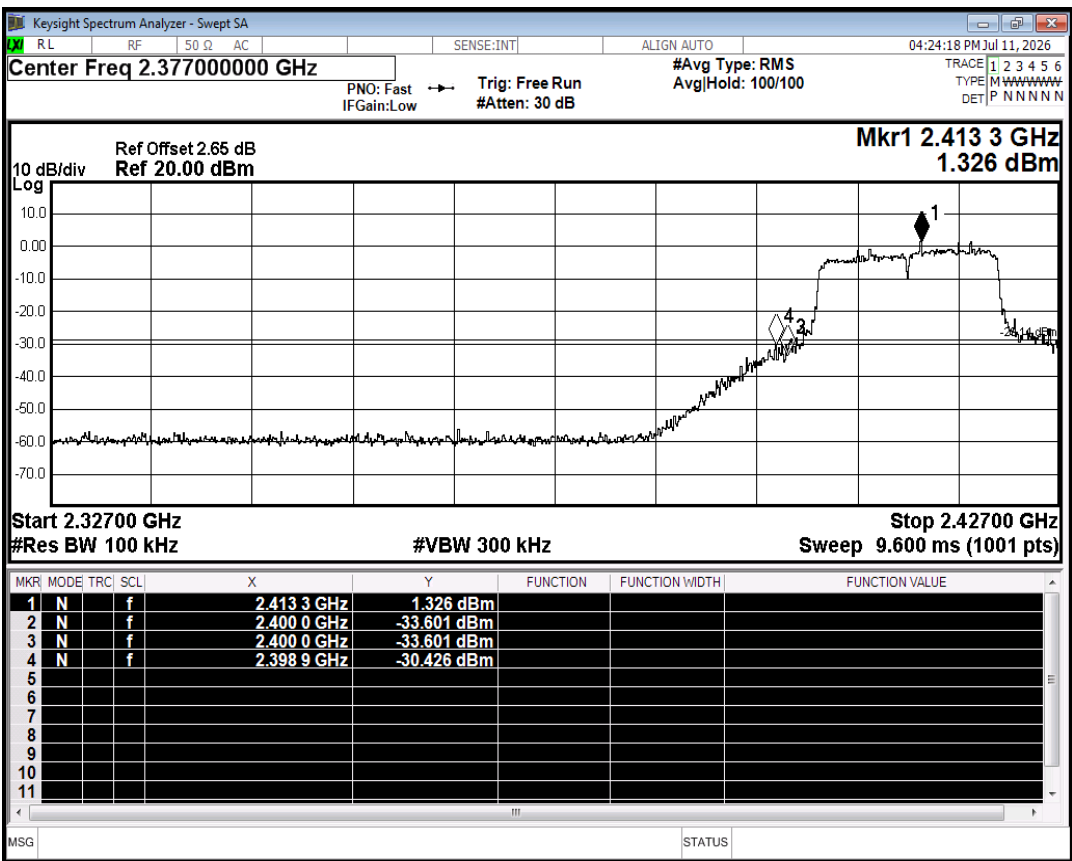


Band Edge NVNT n20 2412MHz Ant2 Emission

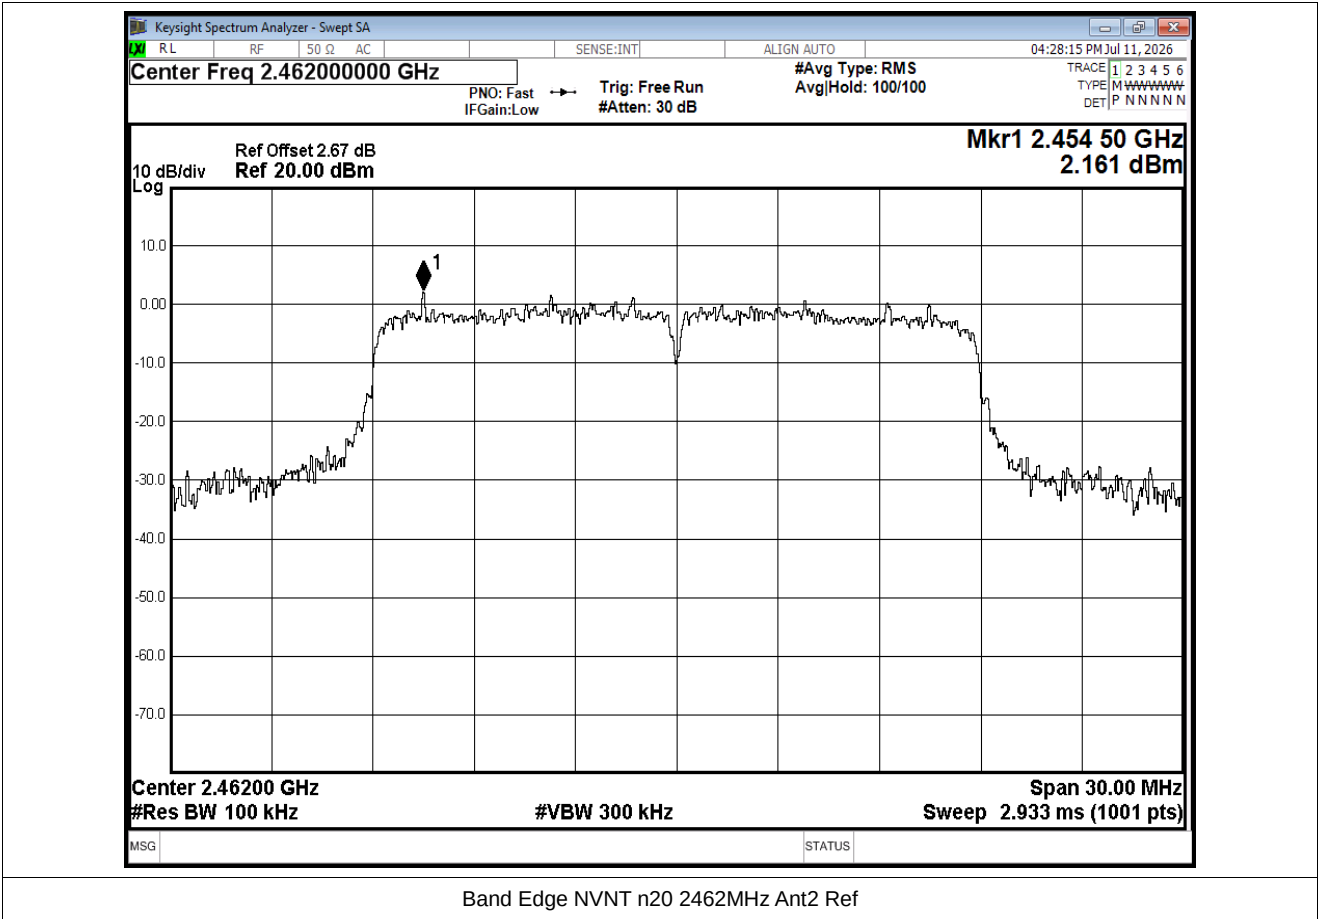


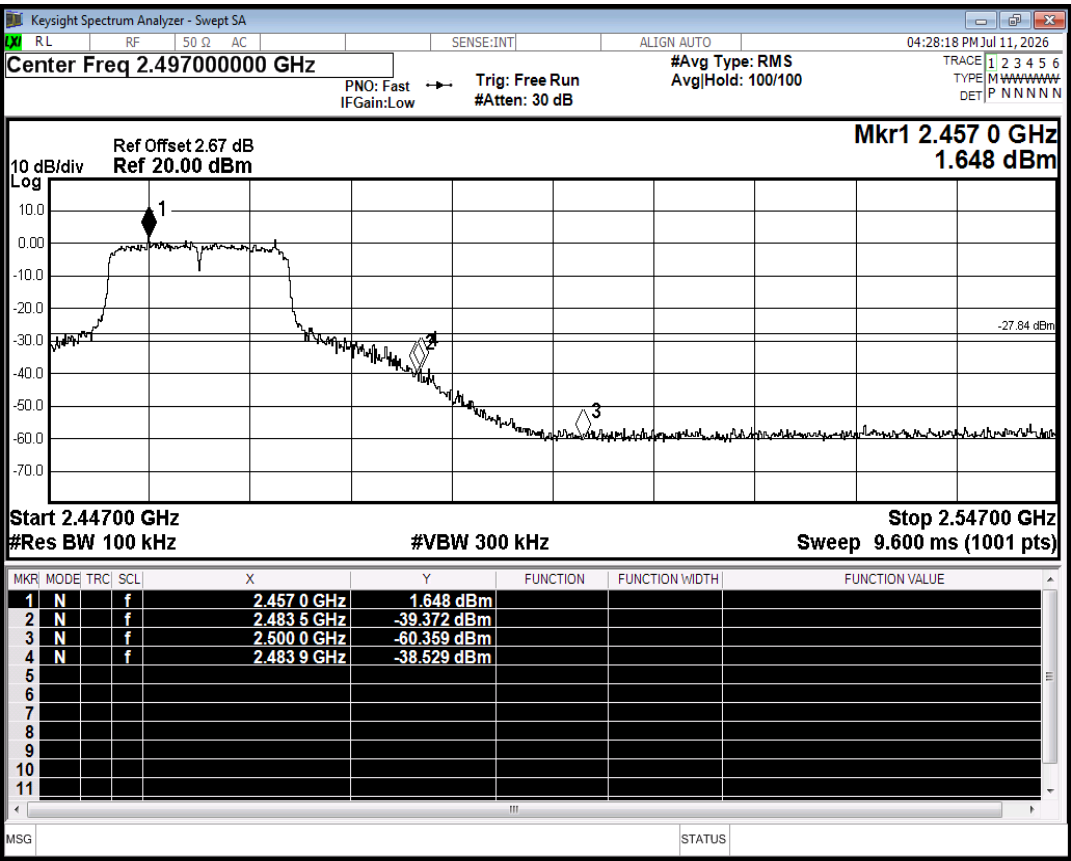


Band Edge NVNT n20 2462MHz Ant2 Emission

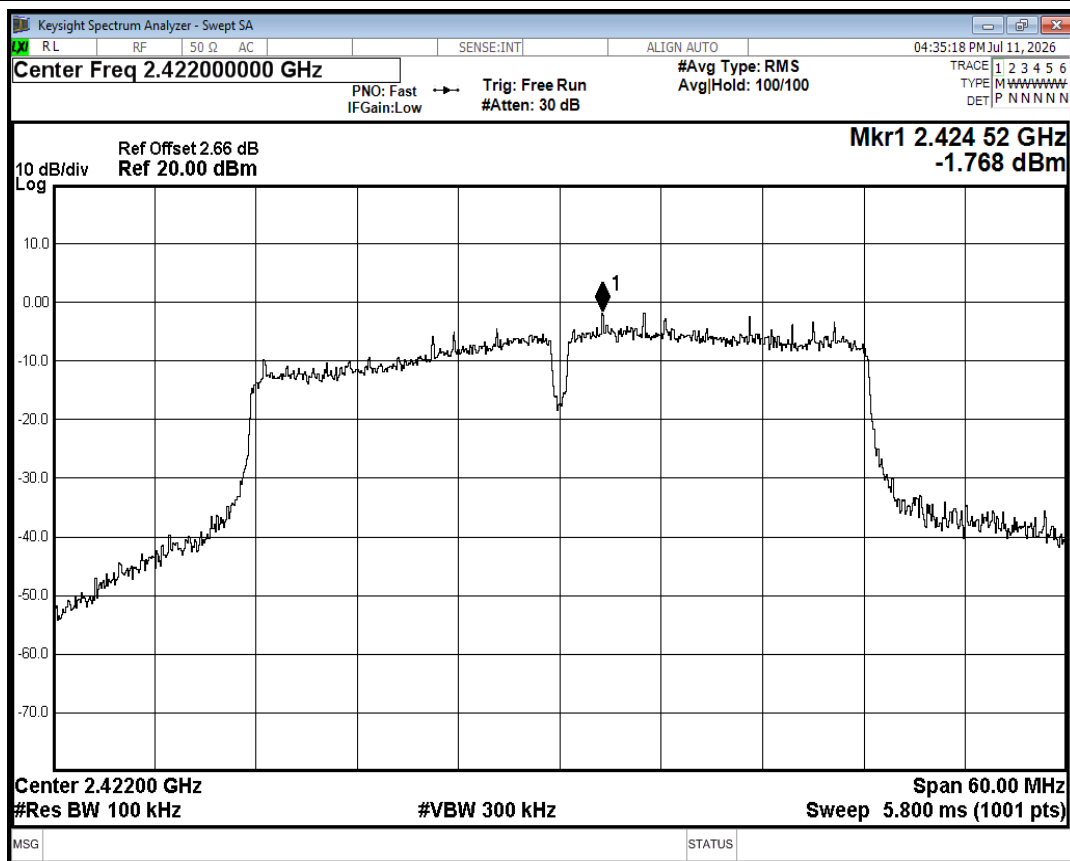


Band Edge NVNT n40 2422MHz Ant2 Ref

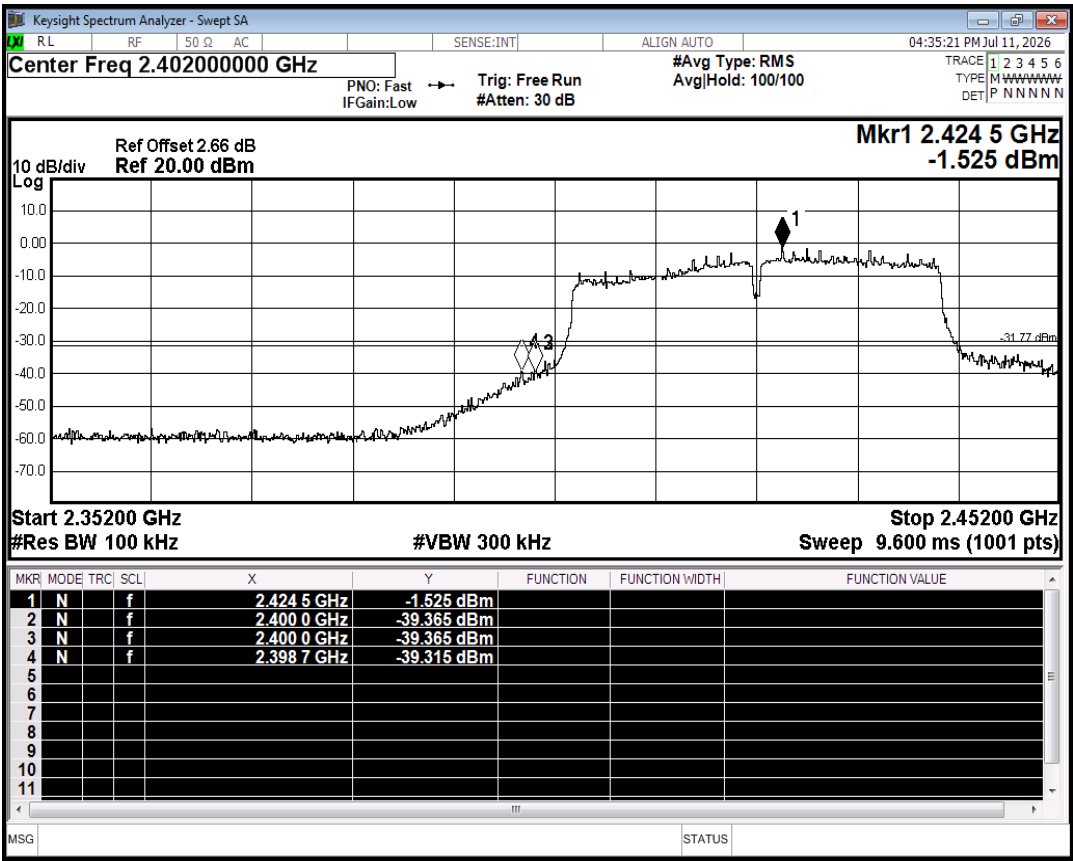

Band Edge NVNT n40 2422MHz Ant2 Emission

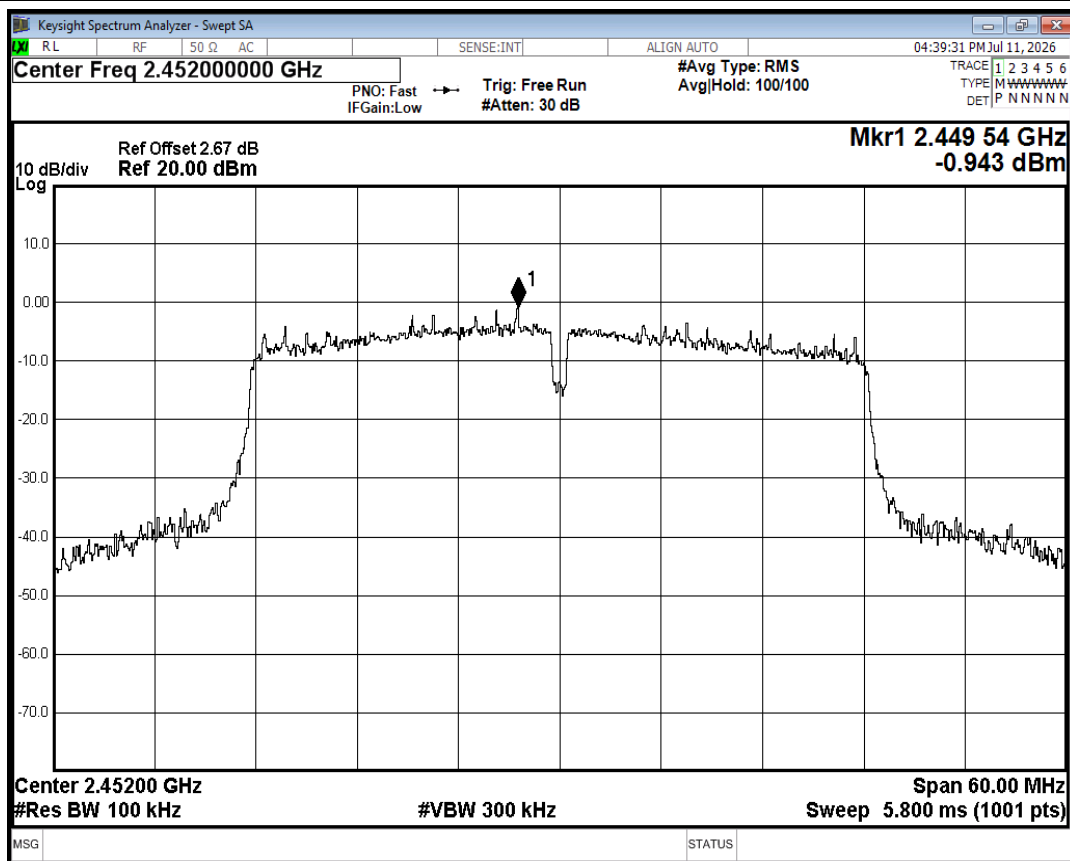


Band Edge NVNT n40 2452MHz Ant2 Ref

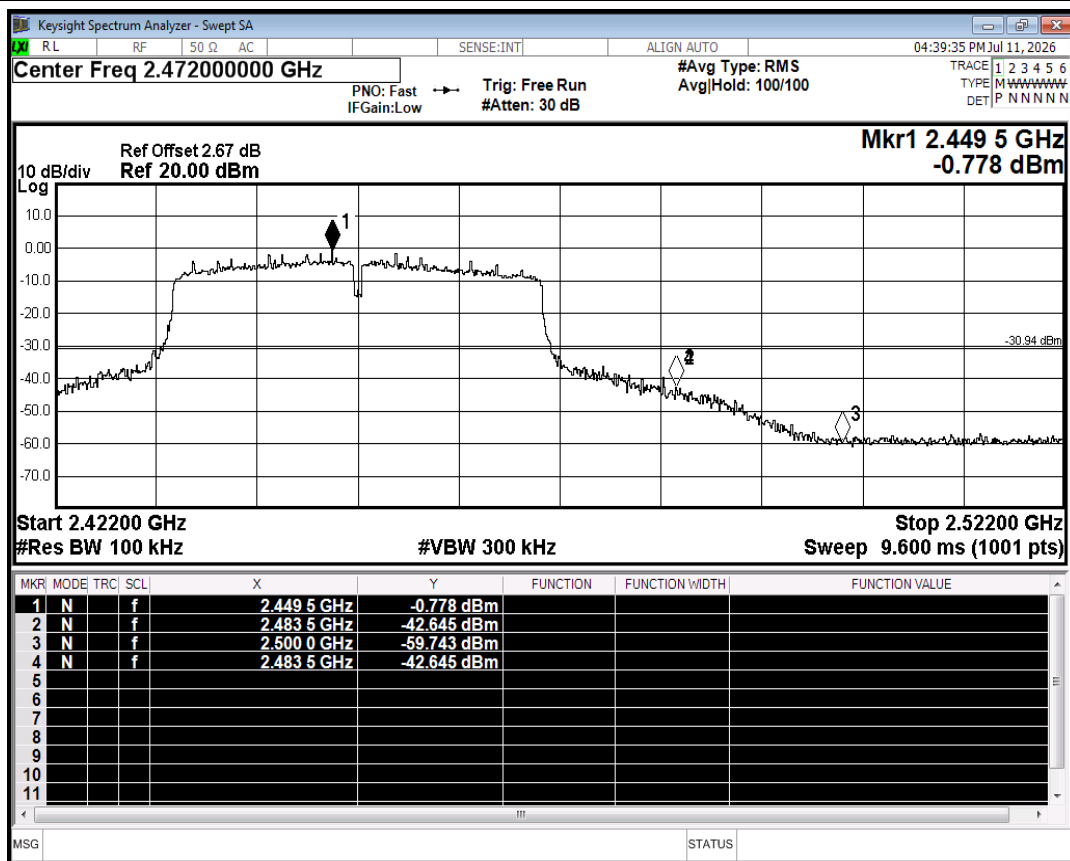


Band Edge NVNT n40 2452MHz Ant2 Emission

C.5 Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-45.27	-30	Pass
NVNT	b	2437	Ant1	-44.39	-30	Pass
NVNT	b	2462	Ant1	-45.04	-30	Pass
NVNT	g	2412	Ant1	-41.43	-30	Pass
NVNT	g	2437	Ant1	-40.21	-30	Pass
NVNT	g	2462	Ant1	-40.41	-30	Pass
NVNT	n20	2412	Ant1	-38.35	-30	Pass
NVNT	n20	2437	Ant1	-38.82	-30	Pass
NVNT	n20	2462	Ant1	-38.67	-30	Pass
NVNT	n40	2422	Ant1	-35.23	-30	Pass
NVNT	n40	2437	Ant1	-34.86	-30	Pass
NVNT	n40	2452	Ant1	-36.25	-30	Pass

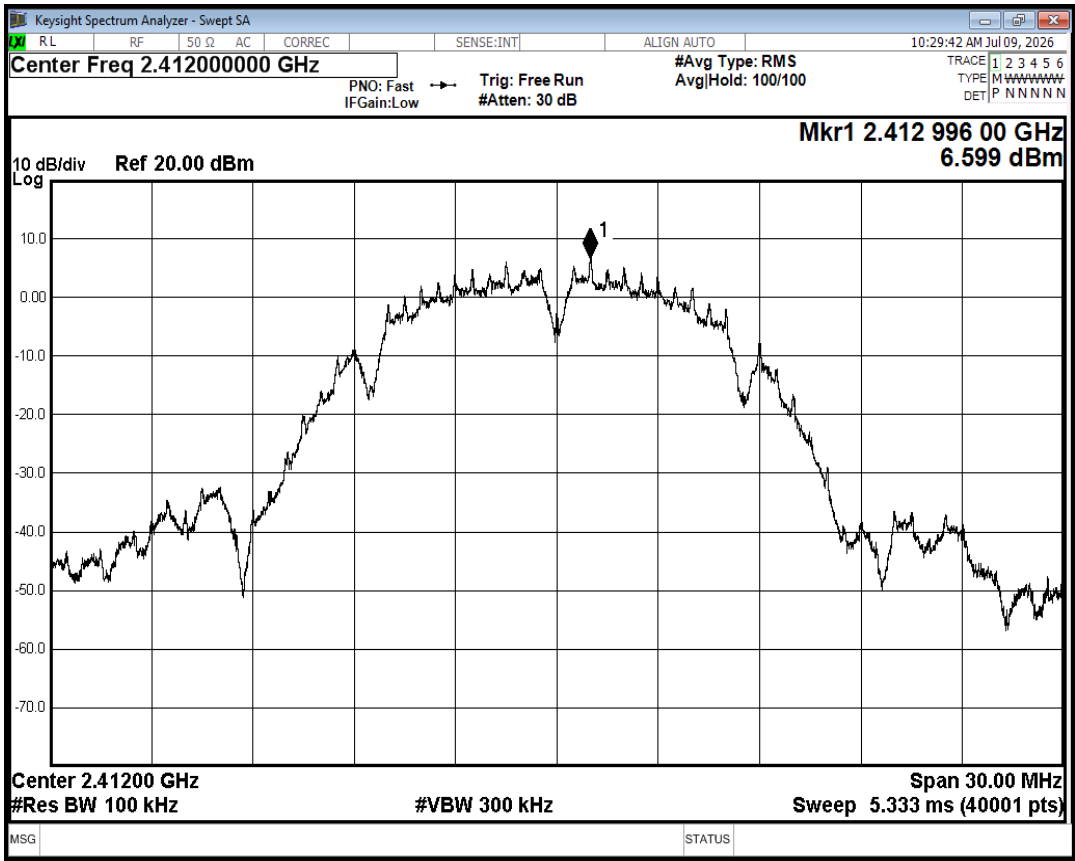


Tx. Spurious NVNT b 2412MHz Ant1 Ref

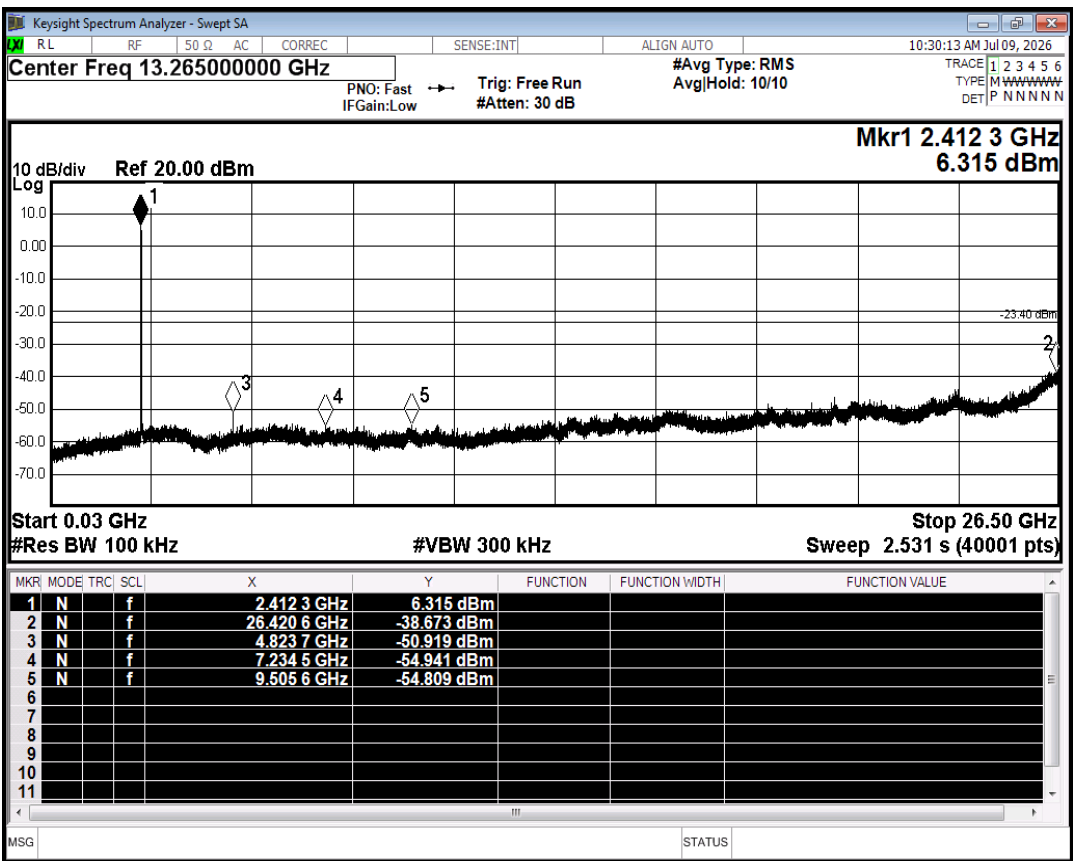


Tx. Spurious NVNT b 2412MHz Ant1 Emission

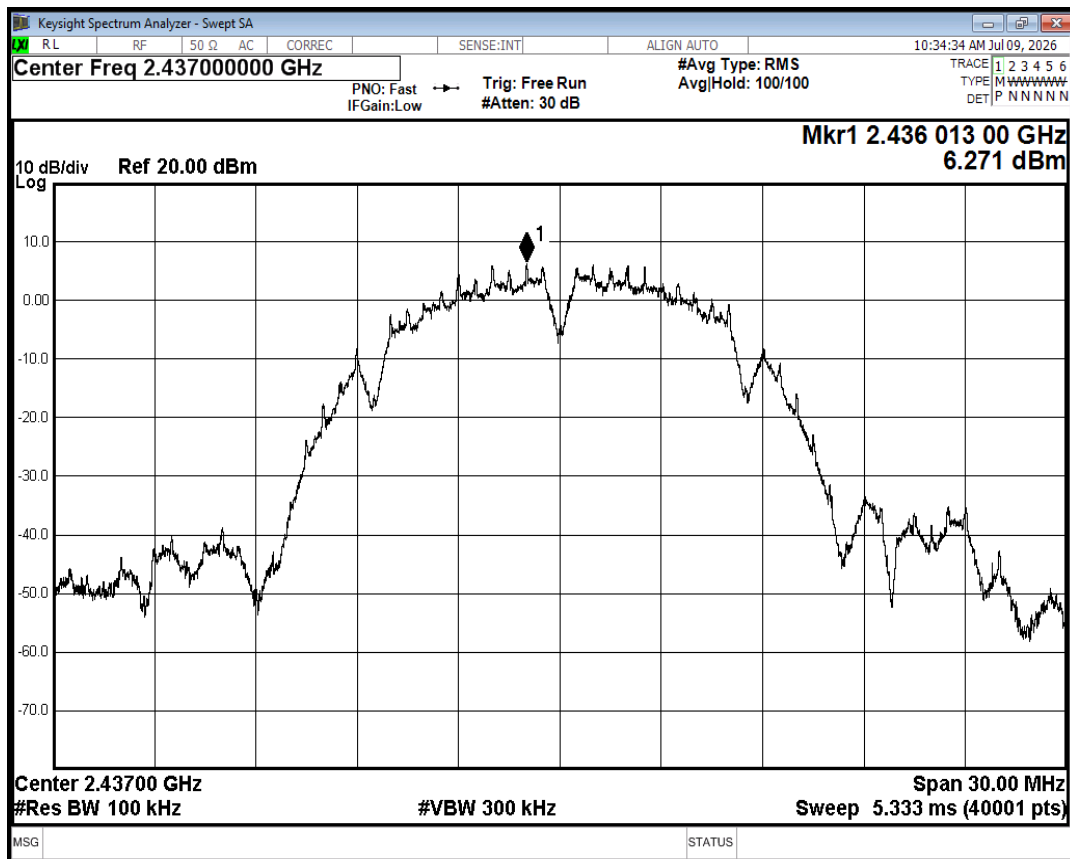


Tx. Spurious NVNT b 2437MHz Ant1 Ref

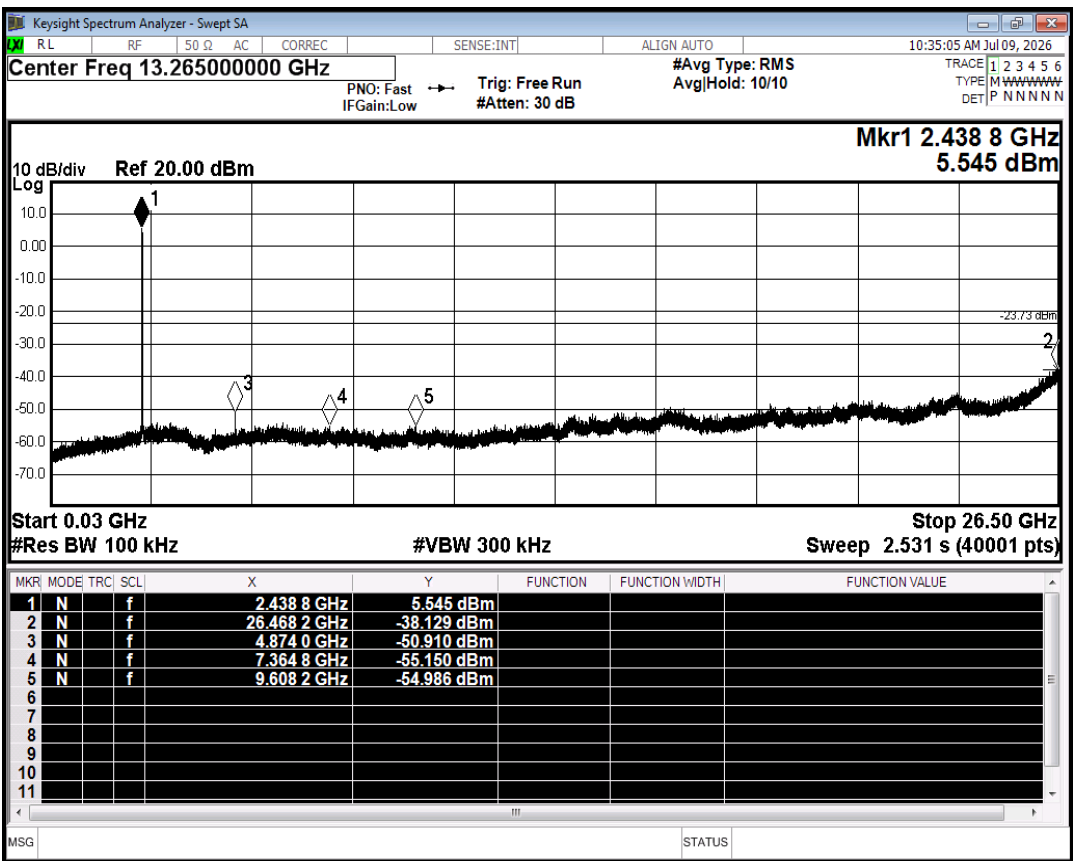


Tx. Spurious NVNT b 2437MHz Ant1 Emission

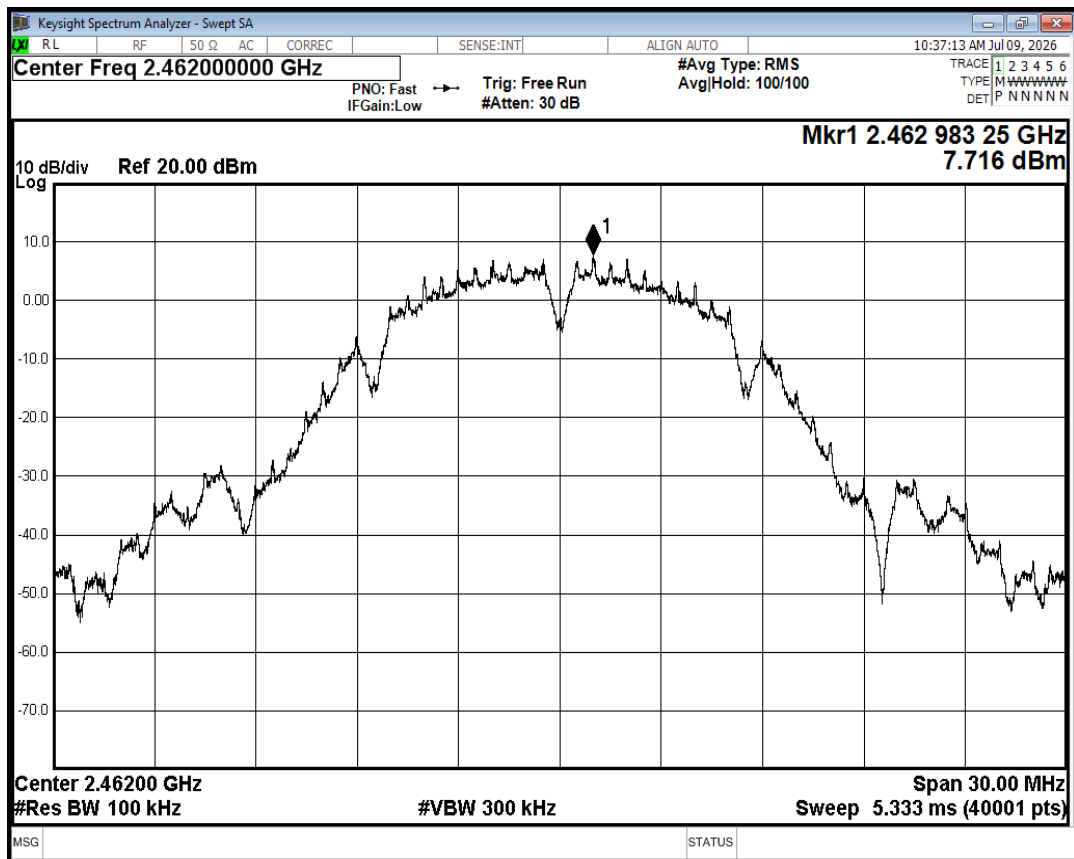


Tx. Spurious NVNT b 2462MHz Ant1 Ref

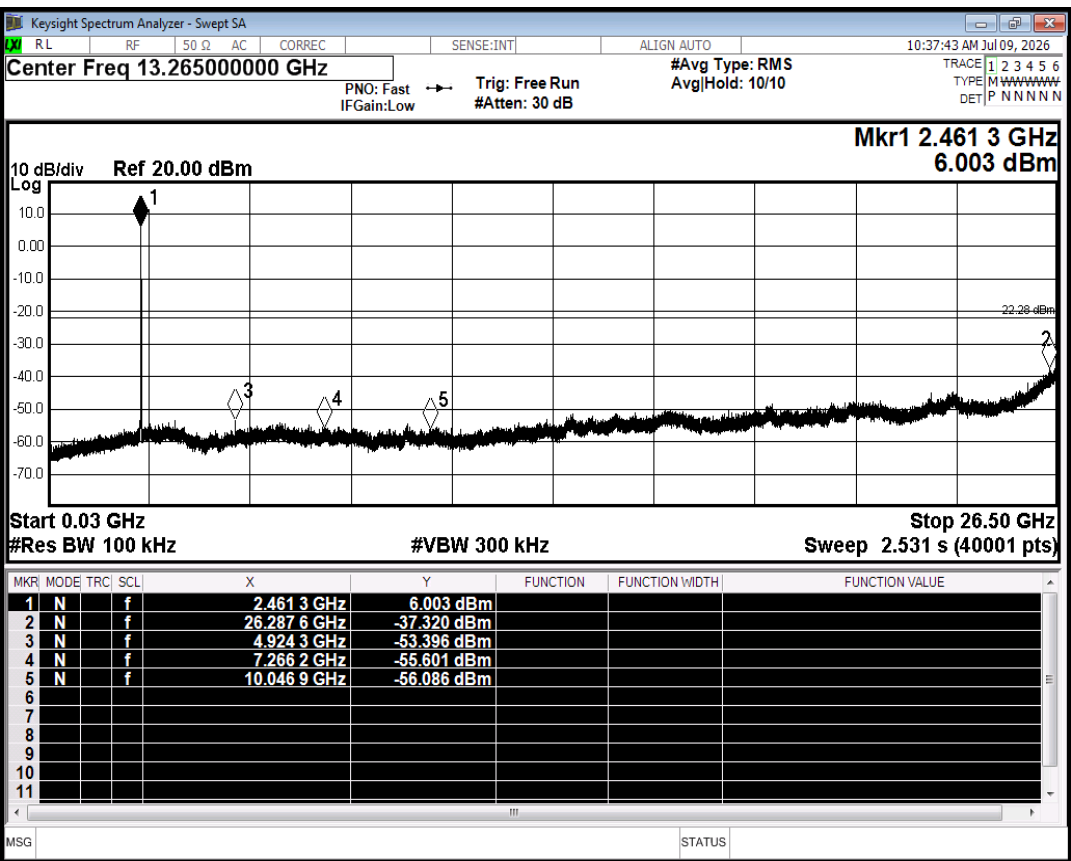


Tx. Spurious NVNT b 2462MHz Ant1 Emission

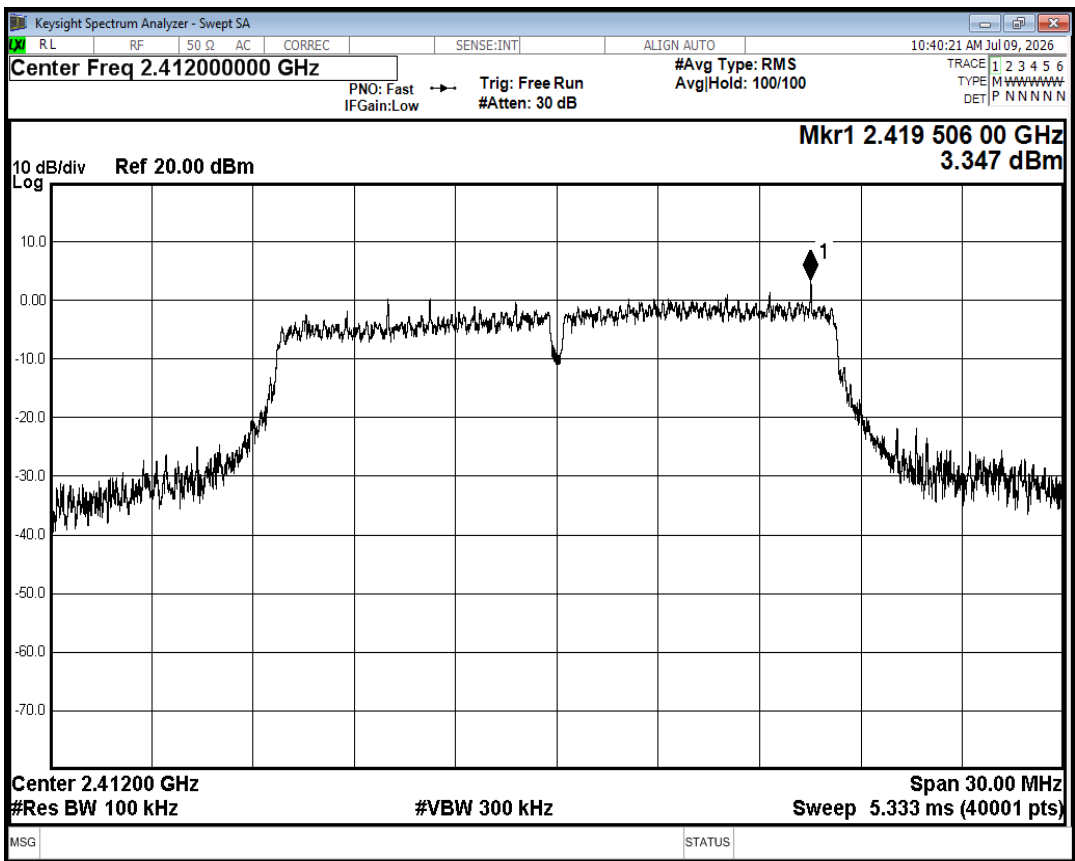


Tx. Spurious NVNT g 2412MHz Ant1 Ref

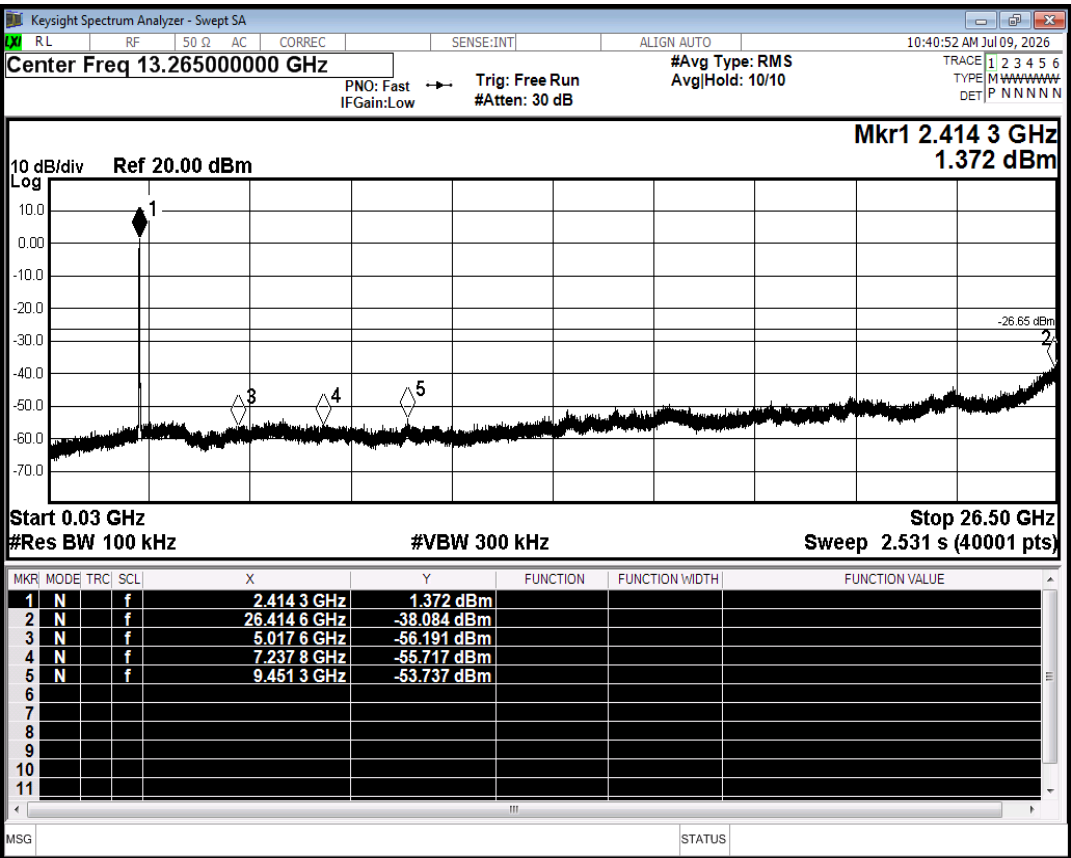


Tx. Spurious NVNT g 2412MHz Ant1 Emission

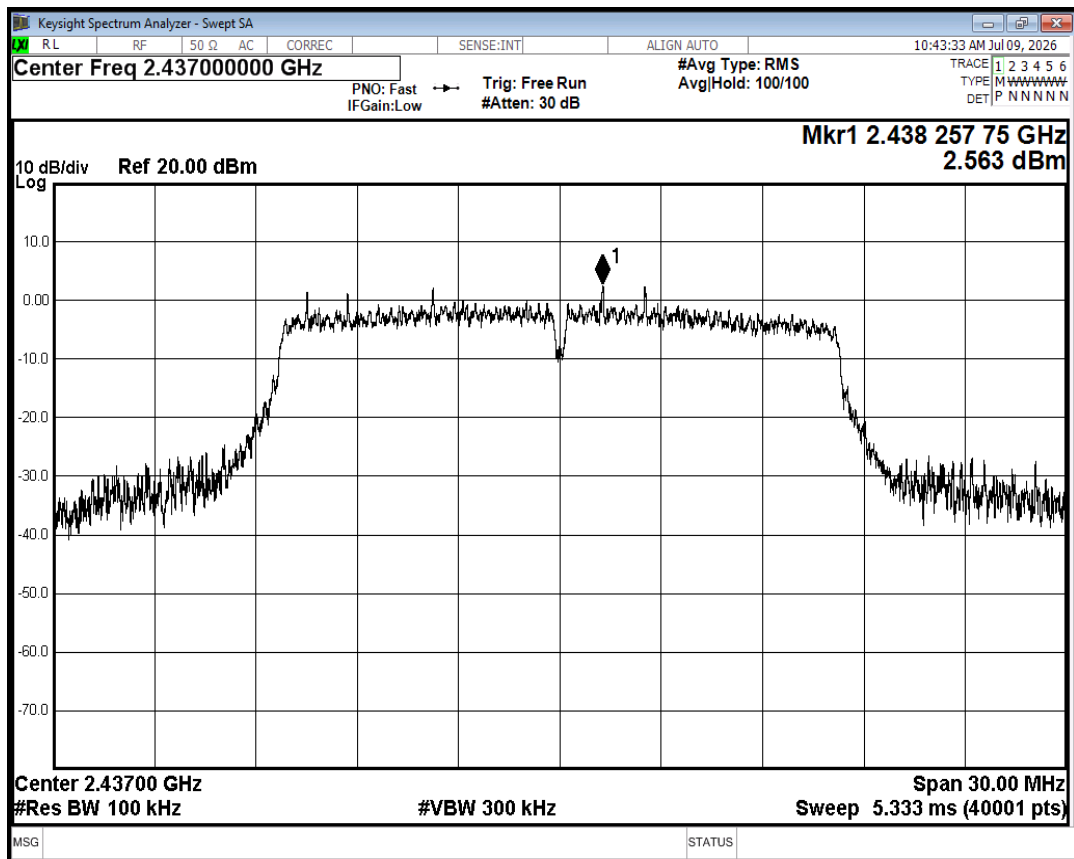


Tx. Spurious NVNT g 2437MHz Ant1 Ref

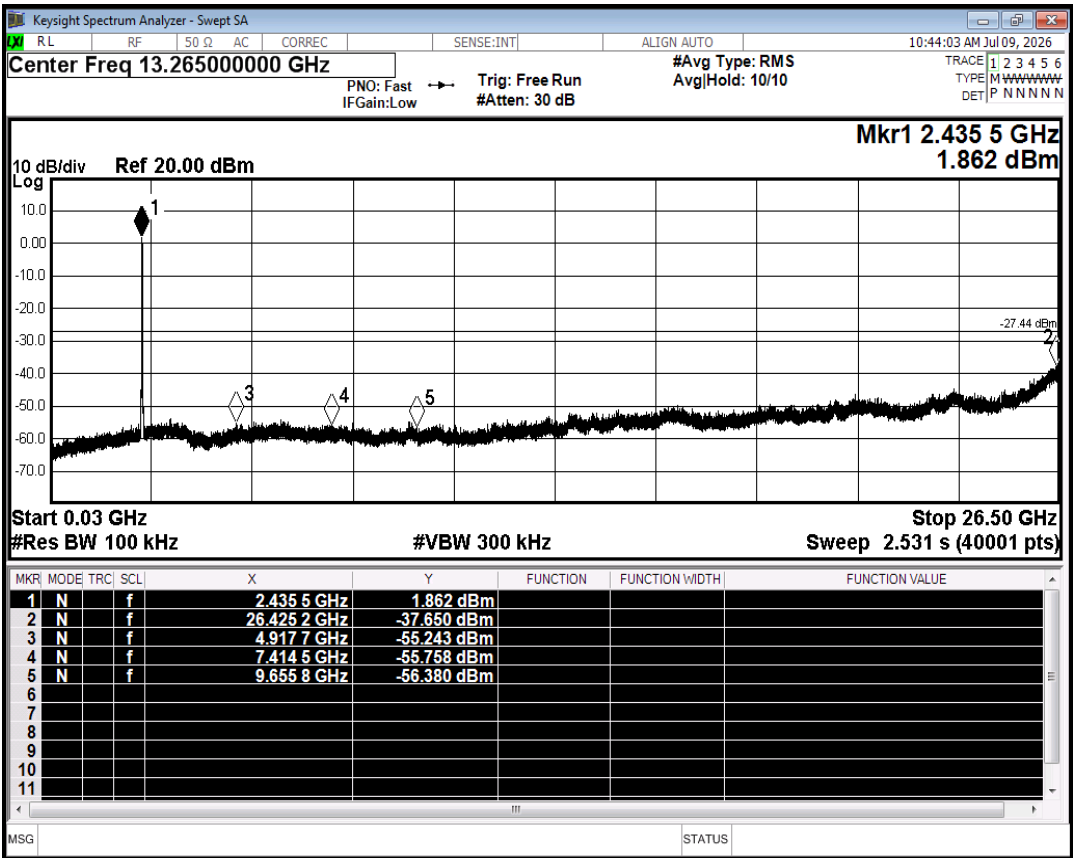


Tx. Spurious NVNT g 2437MHz Ant1 Emission

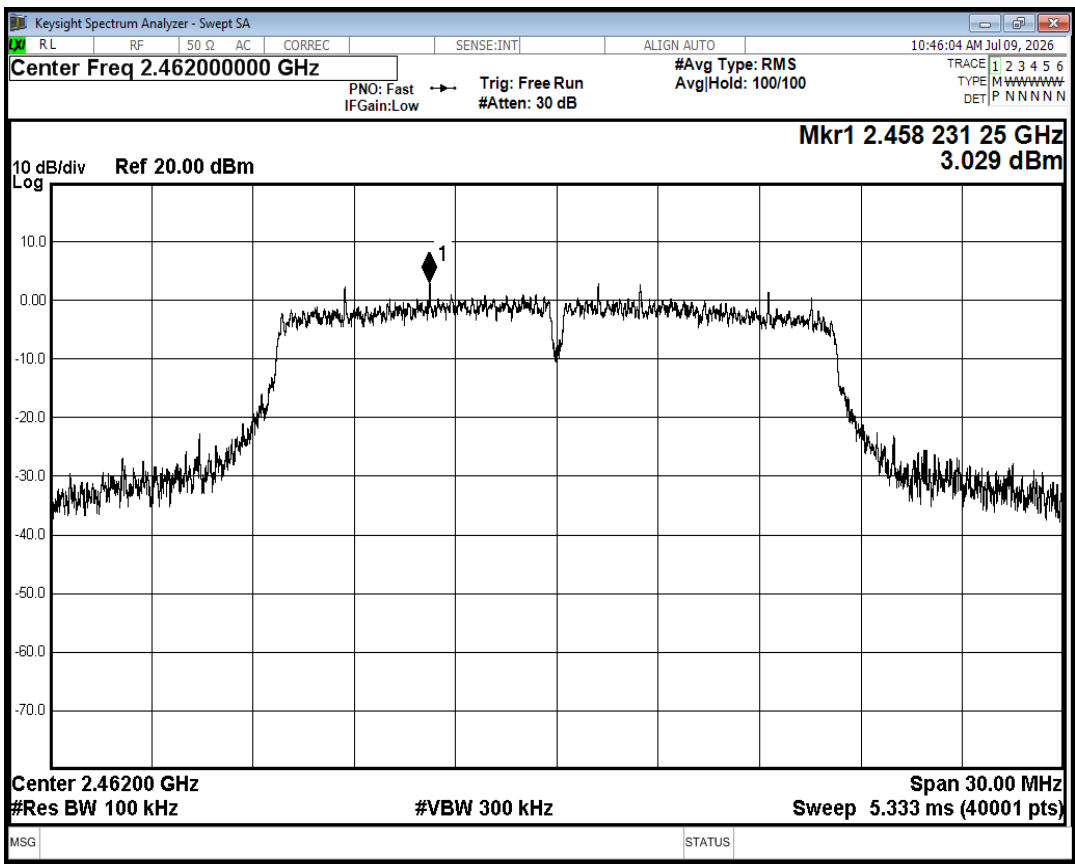


Tx. Spurious NVNT g 2462MHz Ant1 Ref

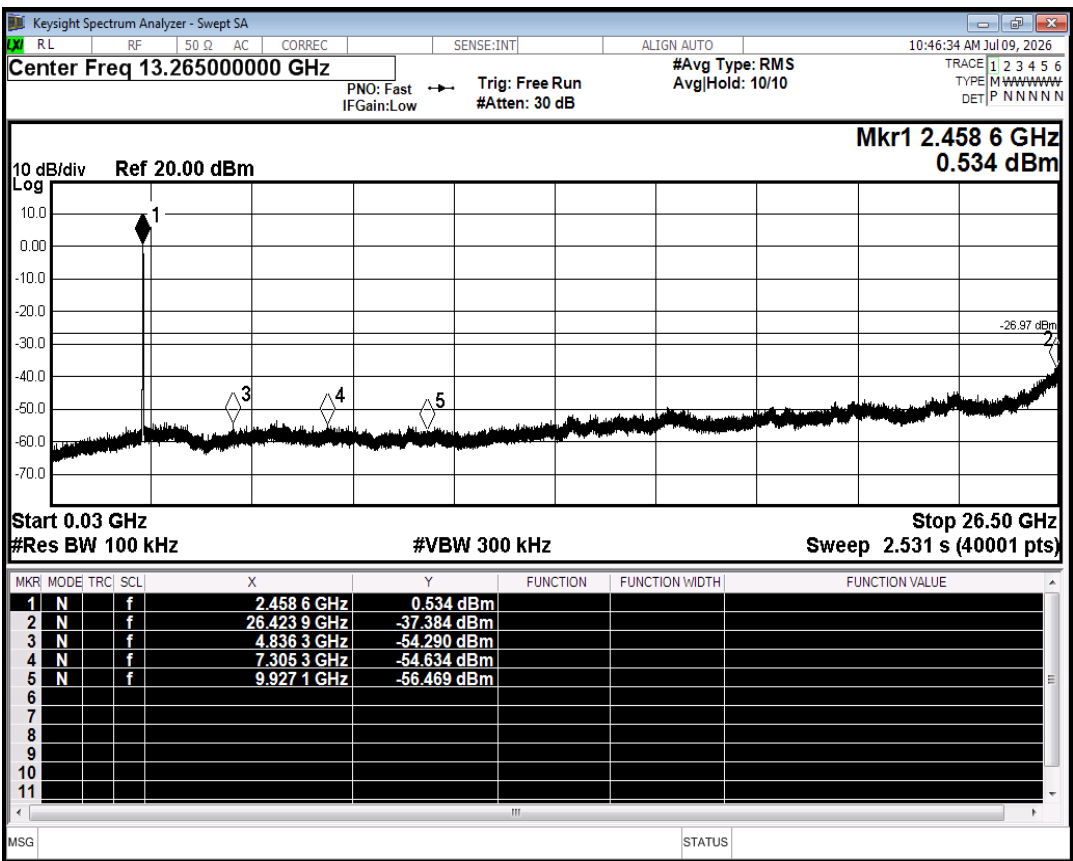


Tx. Spurious NVNT g 2462MHz Ant1 Emission

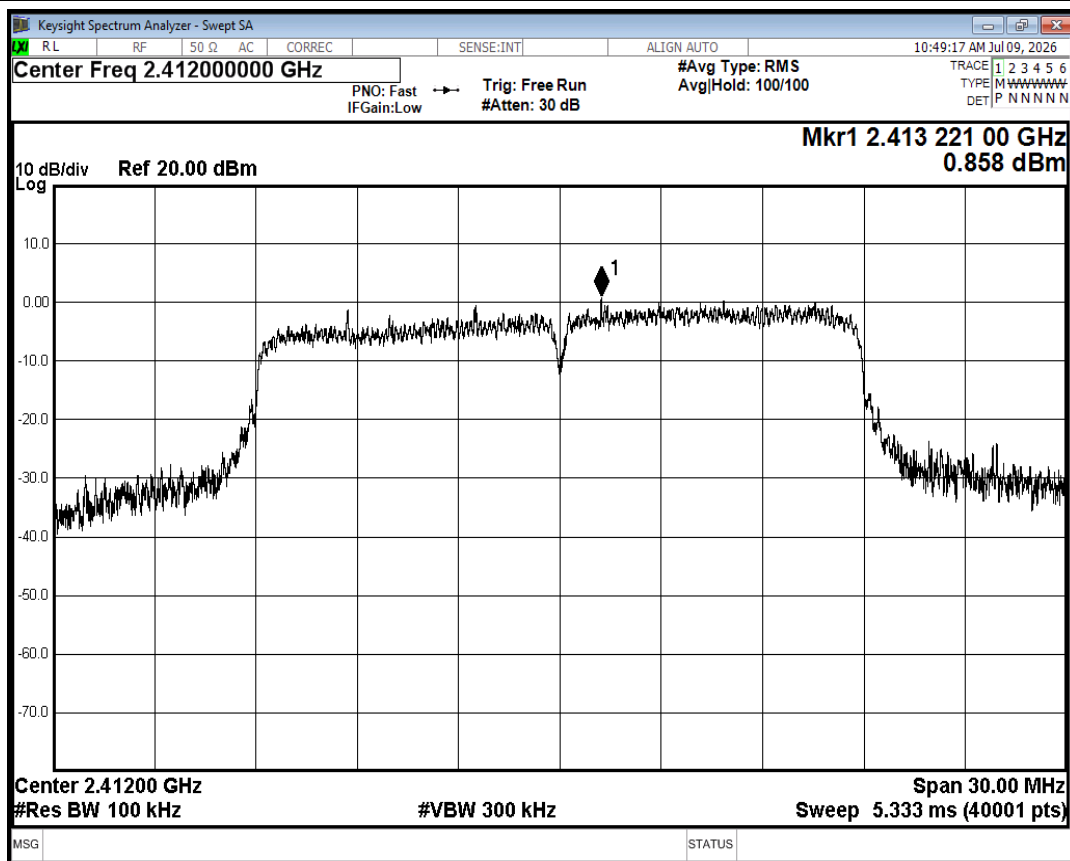


Tx. Spurious NVNT n20 2412MHz Ant1 Ref

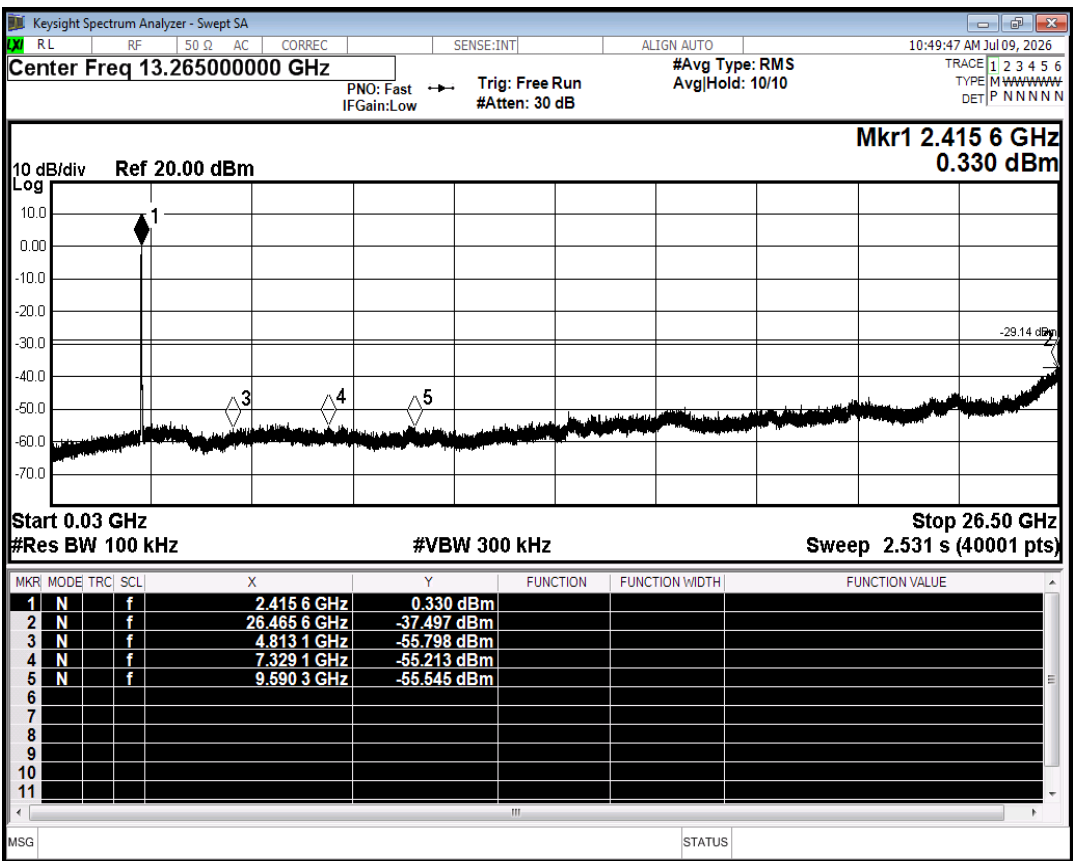


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

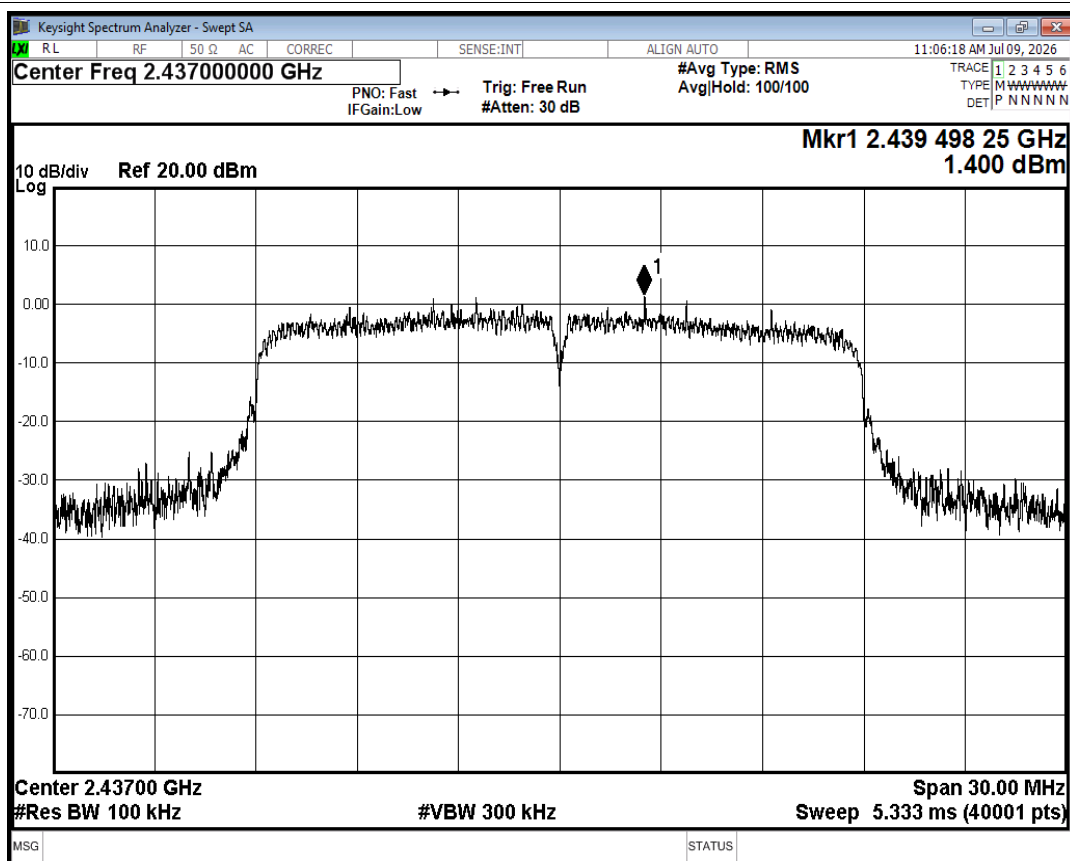


Tx. Spurious NVNT n20 2437MHz Ant1 Ref

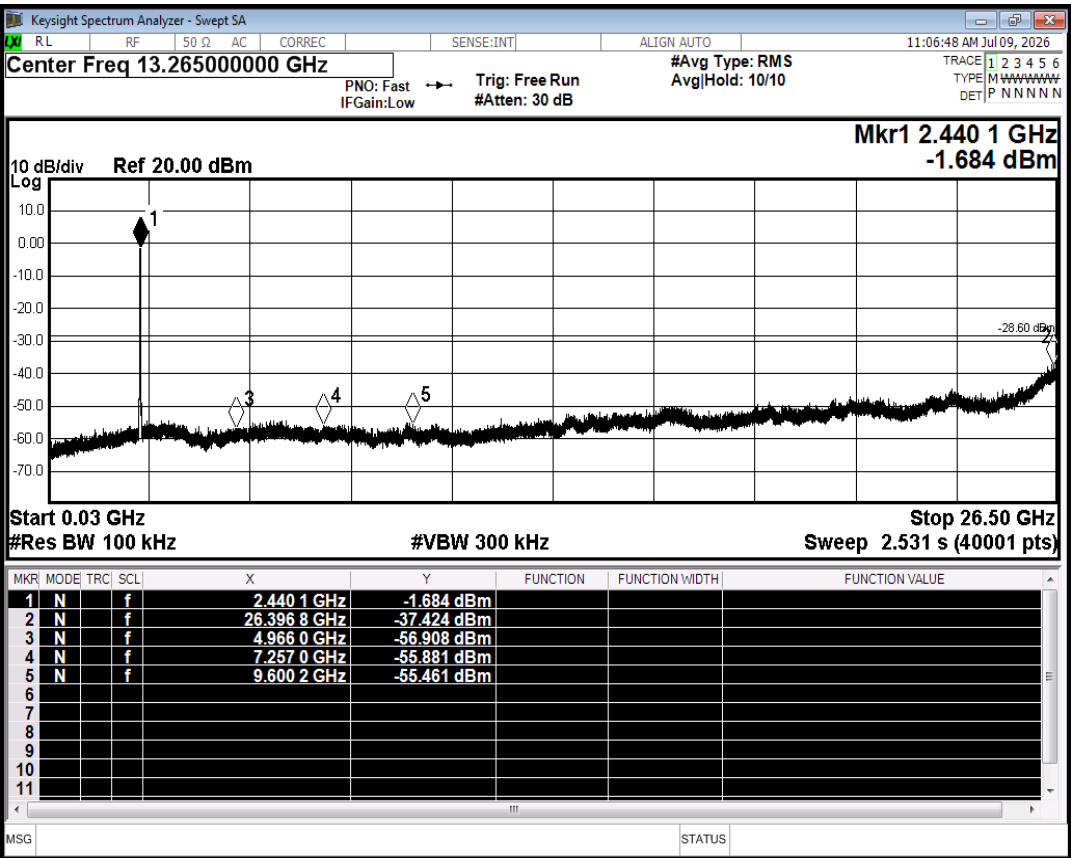


Tx. Spurious NVNT n20 2437MHz Ant1 Emission

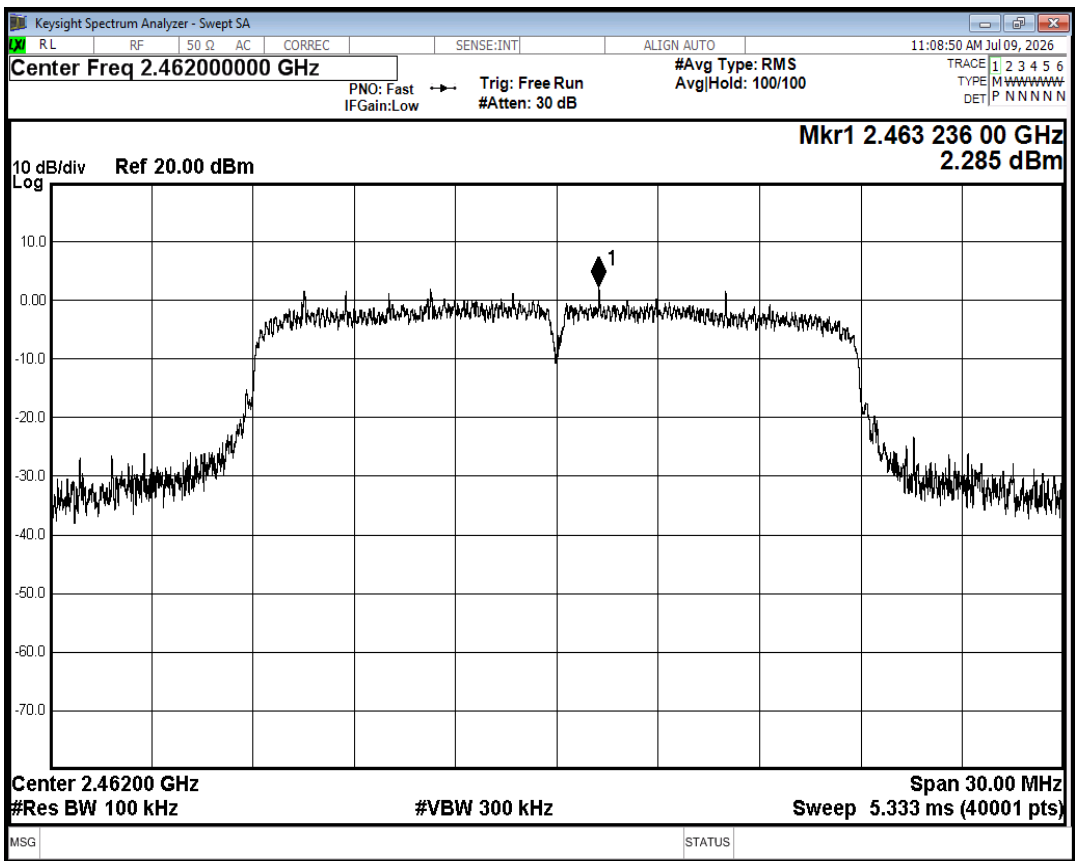


Tx. Spurious NVNT n20 2462MHz Ant1 Ref

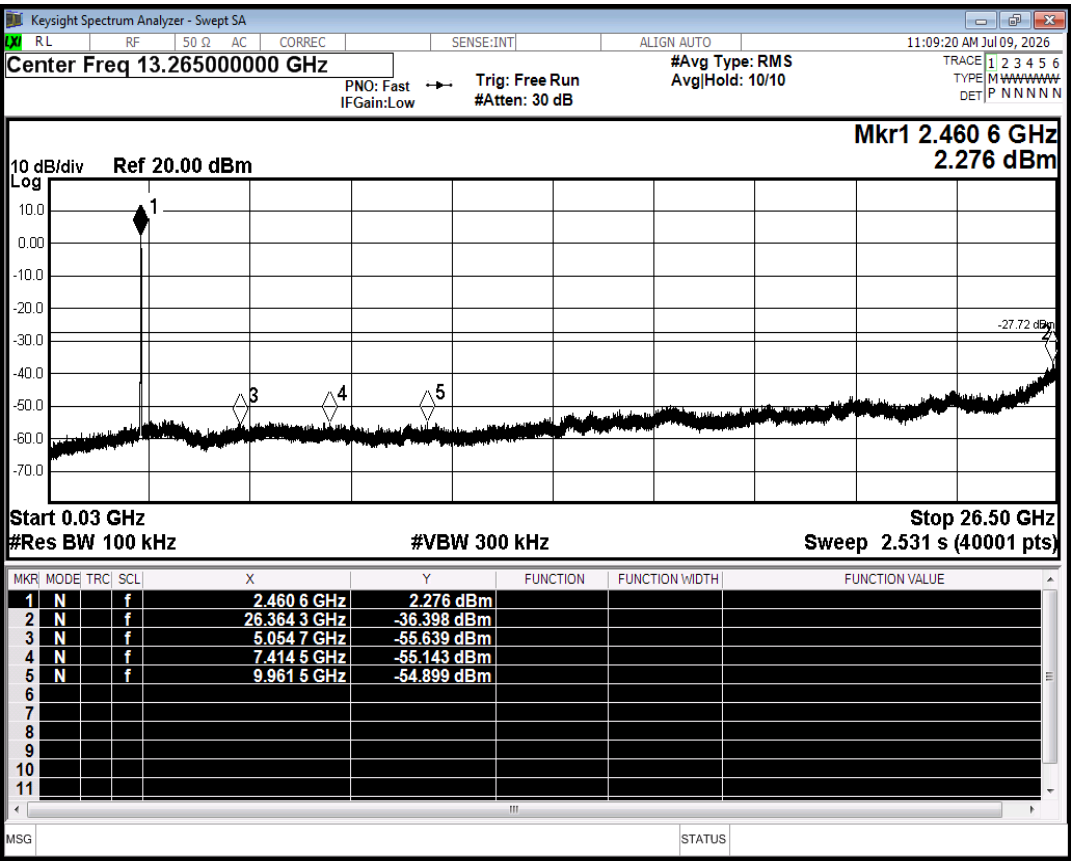


Tx. Spurious NVNT n20 2462MHz Ant1 Emission

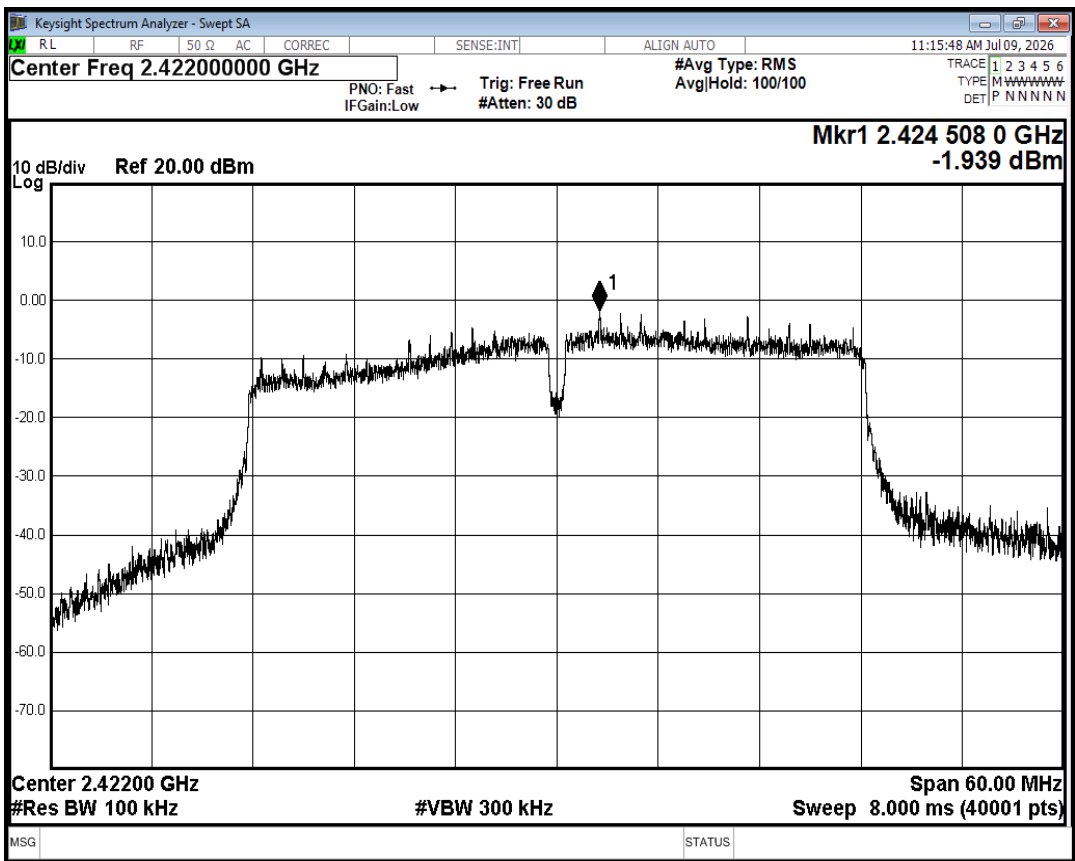


Tx. Spurious NVNT n40 2422MHz Ant1 Ref

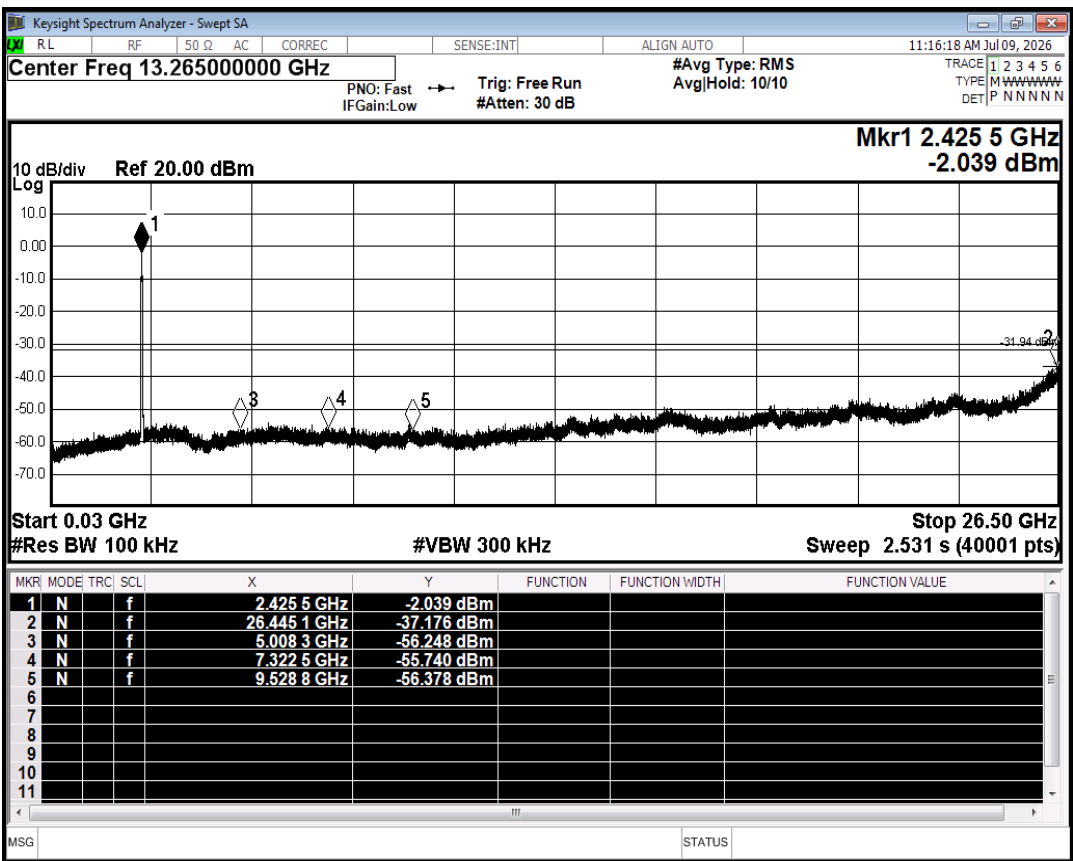


Tx. Spurious NVNT n40 2422MHz Ant1 Emission

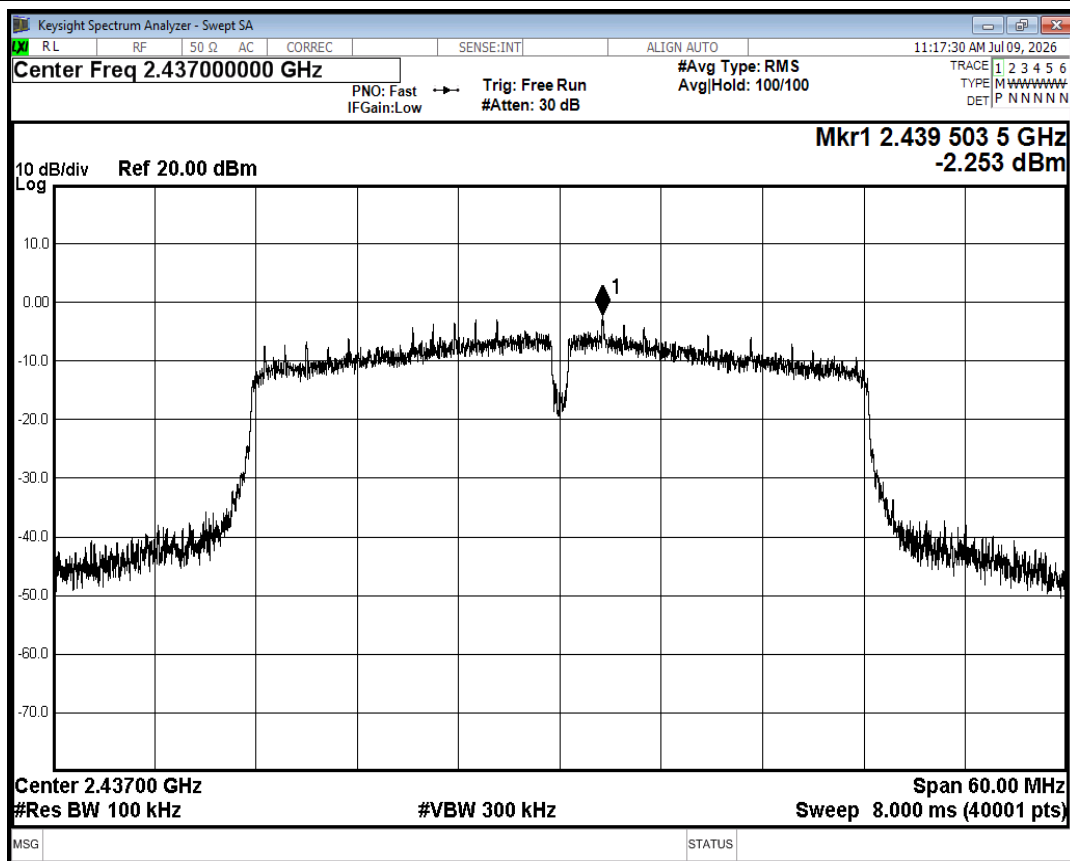


Tx. Spurious NVNT n40 2437MHz Ant1 Ref

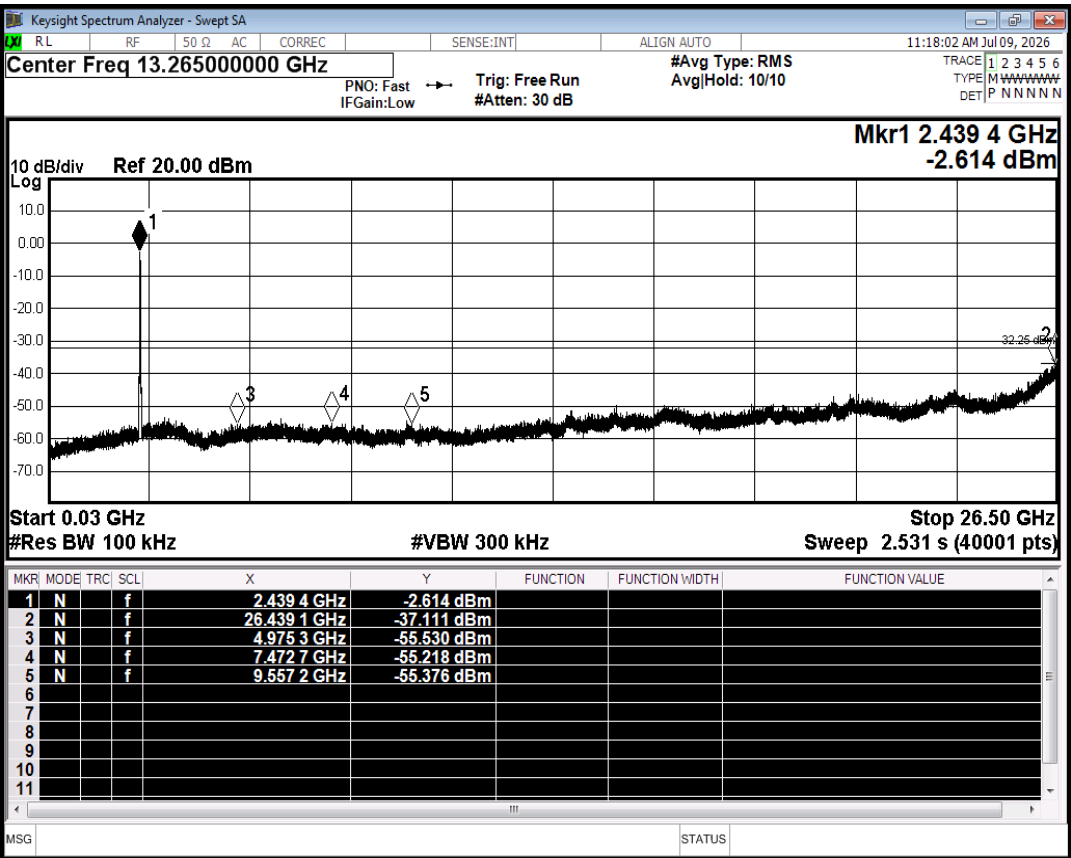

Tx. Spurious NVNT n40 2437MHz Ant1 Emission

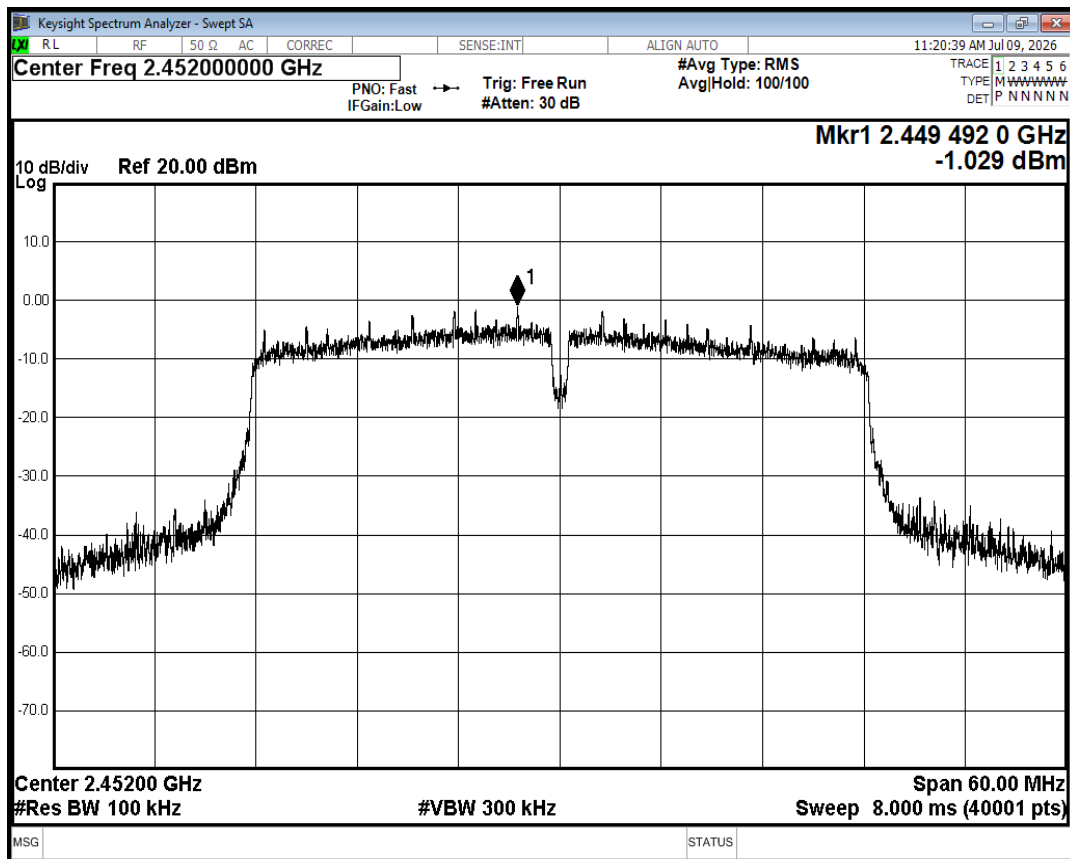


Tx. Spurious NVNT n40 2452MHz Ant1 Ref

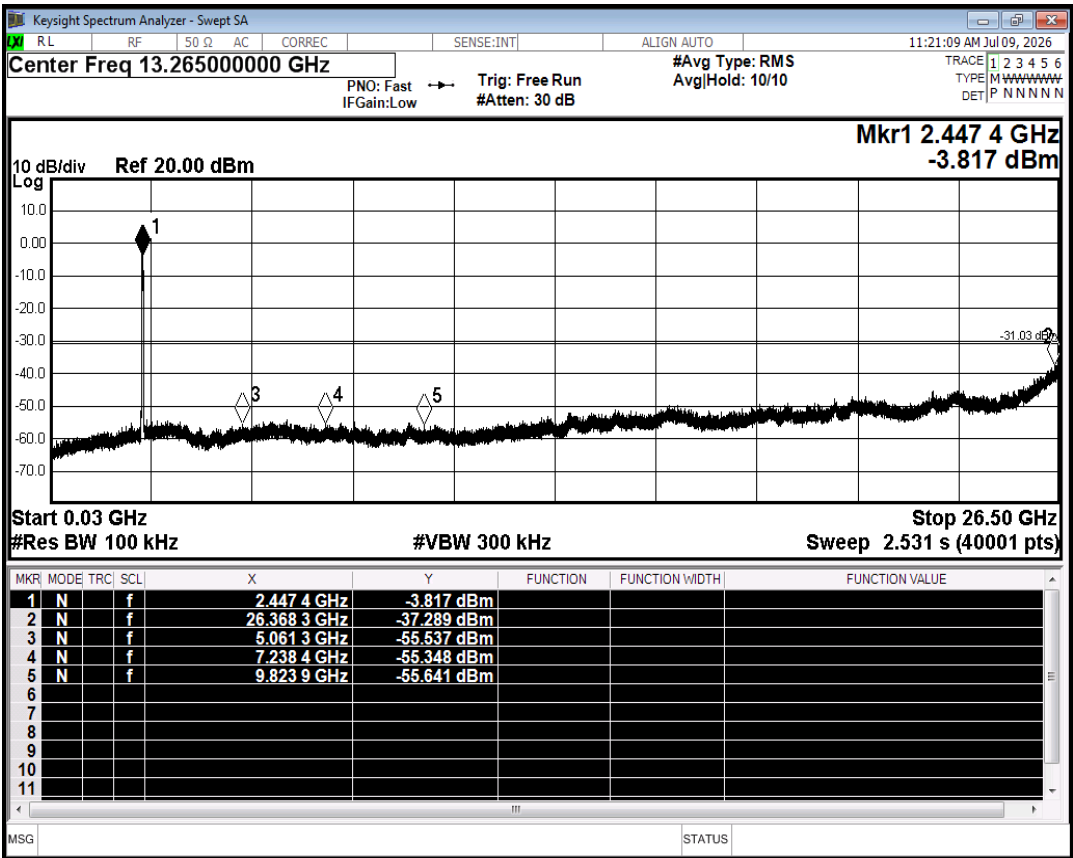


Tx. Spurious NVNT n40 2452MHz Ant1 Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant2	-45.49	-30	Pass
NVNT	b	2437	Ant2	-45.09	-30	Pass
NVNT	b	2462	Ant2	-45.79	-30	Pass
NVNT	g	2412	Ant2	-41.66	-30	Pass
NVNT	g	2437	Ant2	-40.1	-30	Pass
NVNT	g	2462	Ant2	-41.37	-30	Pass
NVNT	n20	2412	Ant2	-39.51	-30	Pass
NVNT	n20	2437	Ant2	-38.65	-30	Pass
NVNT	n20	2462	Ant2	-39.62	-30	Pass
NVNT	n40	2422	Ant2	-36.06	-30	Pass
NVNT	n40	2437	Ant2	-35.42	-30	Pass
NVNT	n40	2452	Ant2	-35.19	-30	Pass

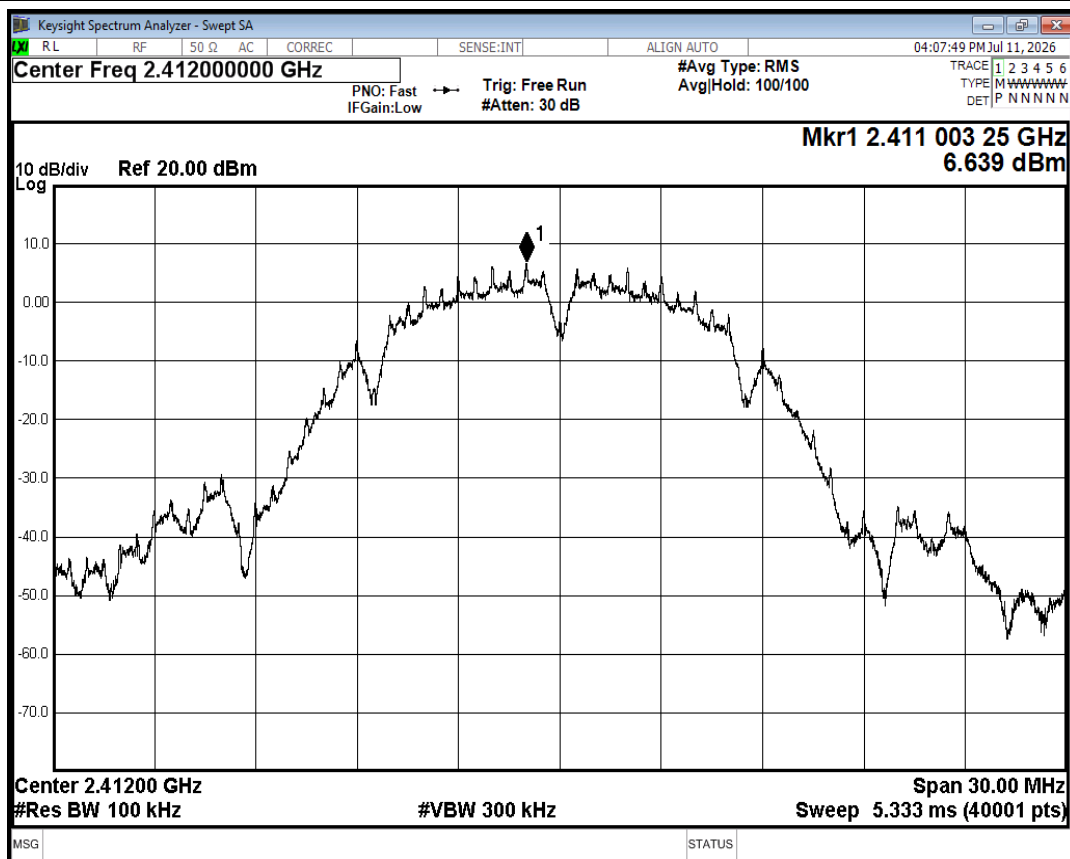


Tx. Spurious NVNT b 2412MHz Ant2 Ref

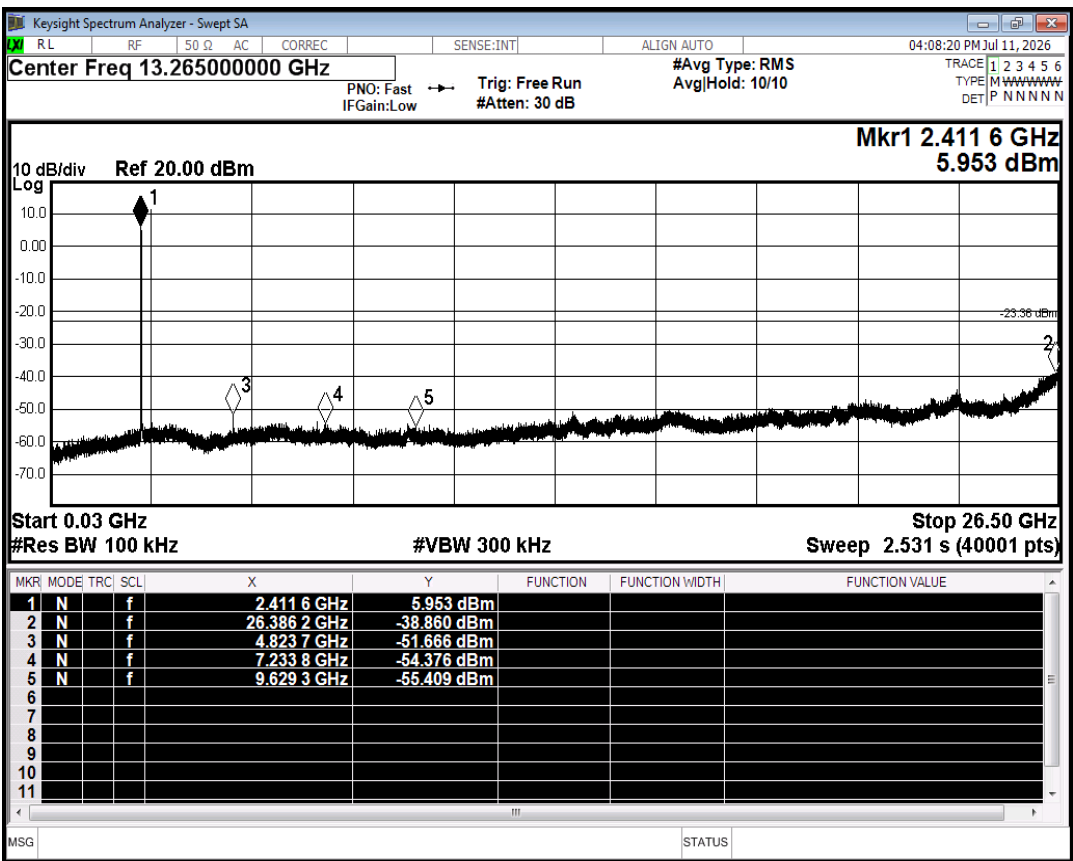


Tx. Spurious NVNT b 2412MHz Ant2 Emission

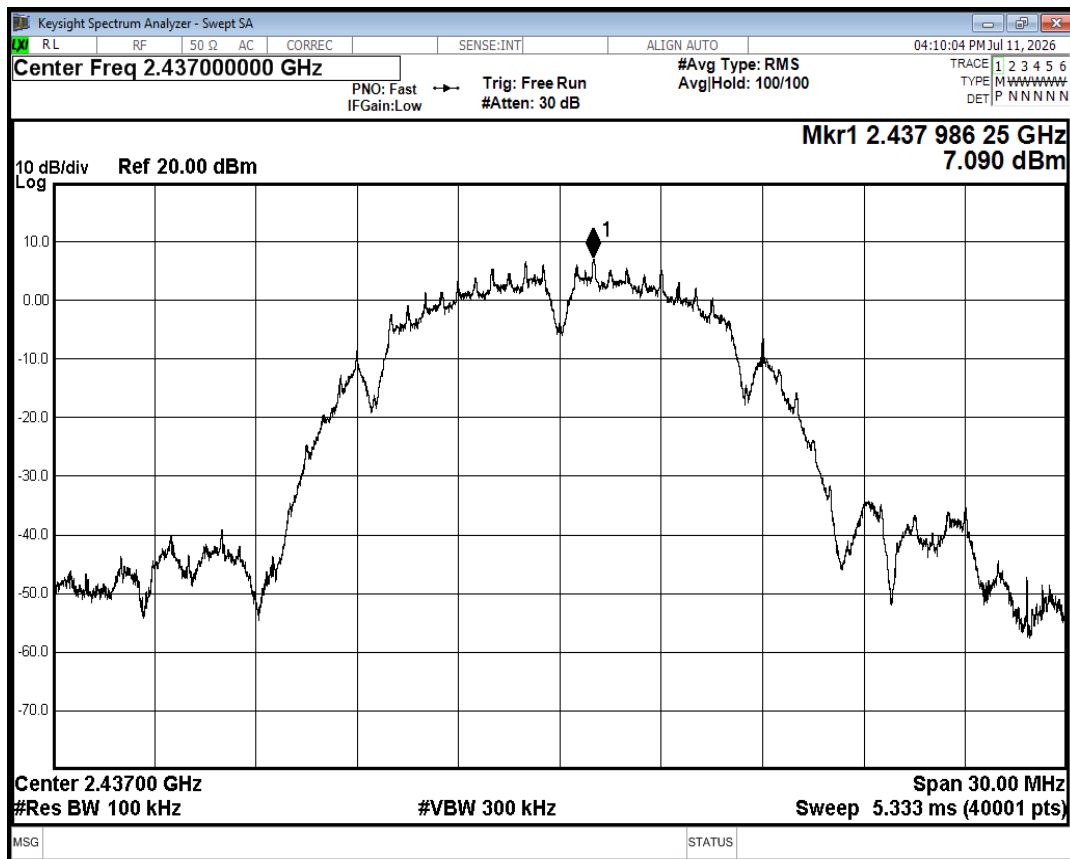


Tx. Spurious NVNT b 2437MHz Ant2 Ref

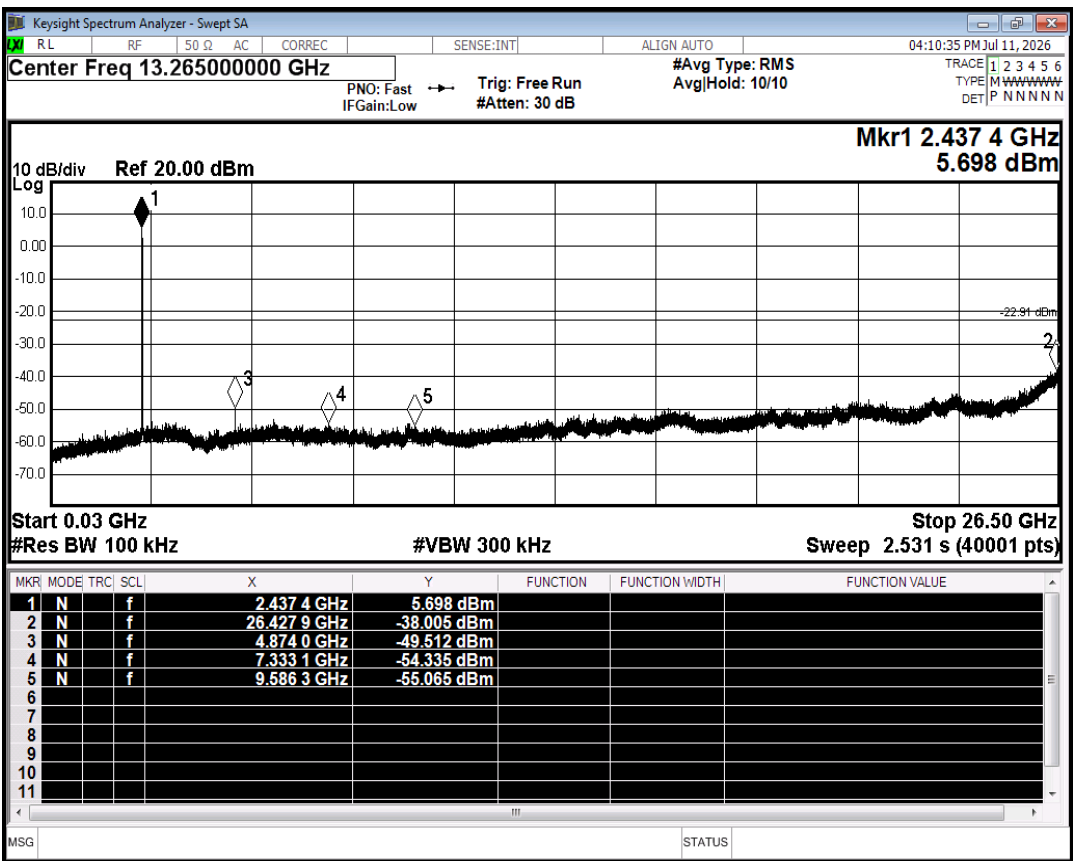


Tx. Spurious NVNT b 2437MHz Ant2 Emission

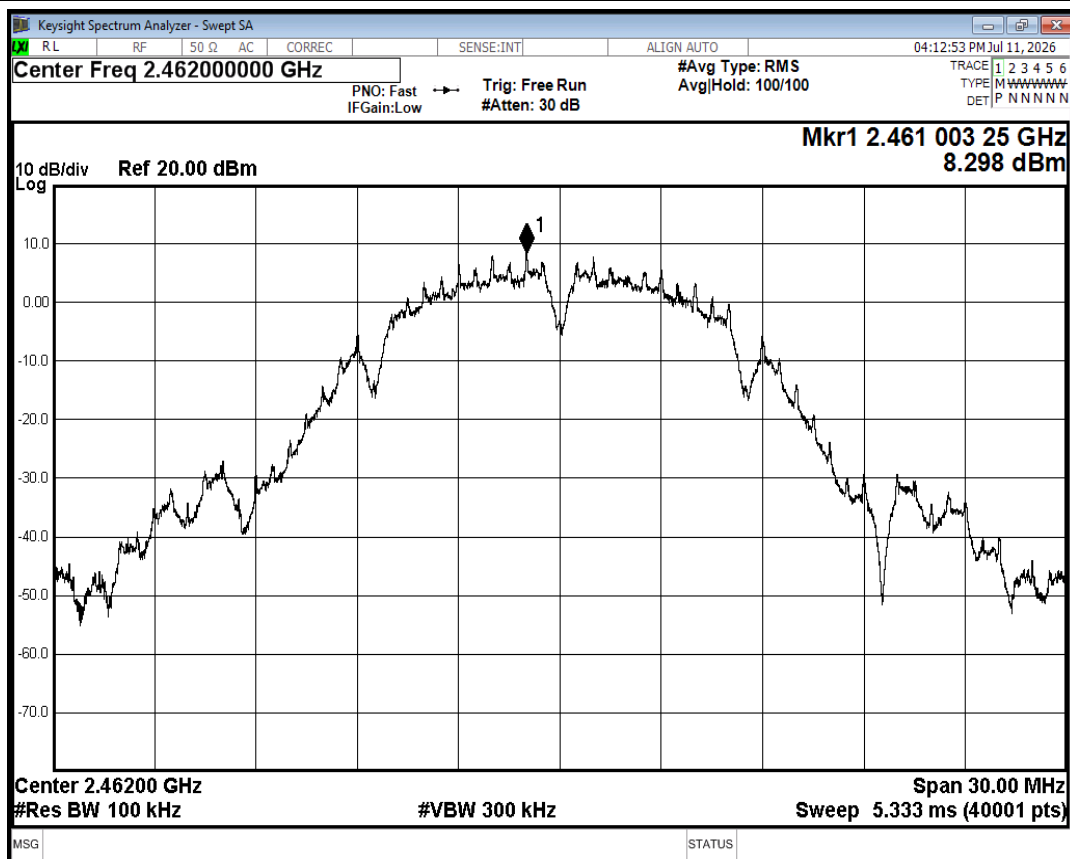


Tx. Spurious NVNT b 2462MHz Ant2 Ref

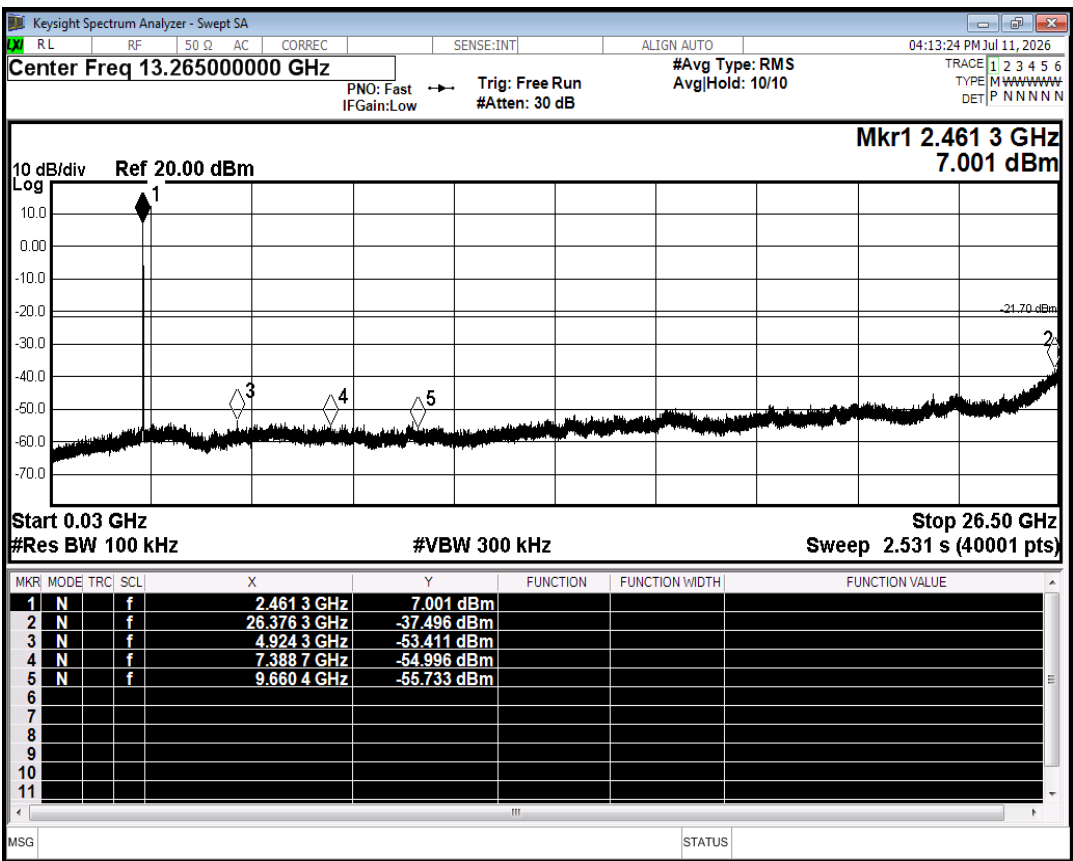


Tx. Spurious NVNT b 2462MHz Ant2 Emission

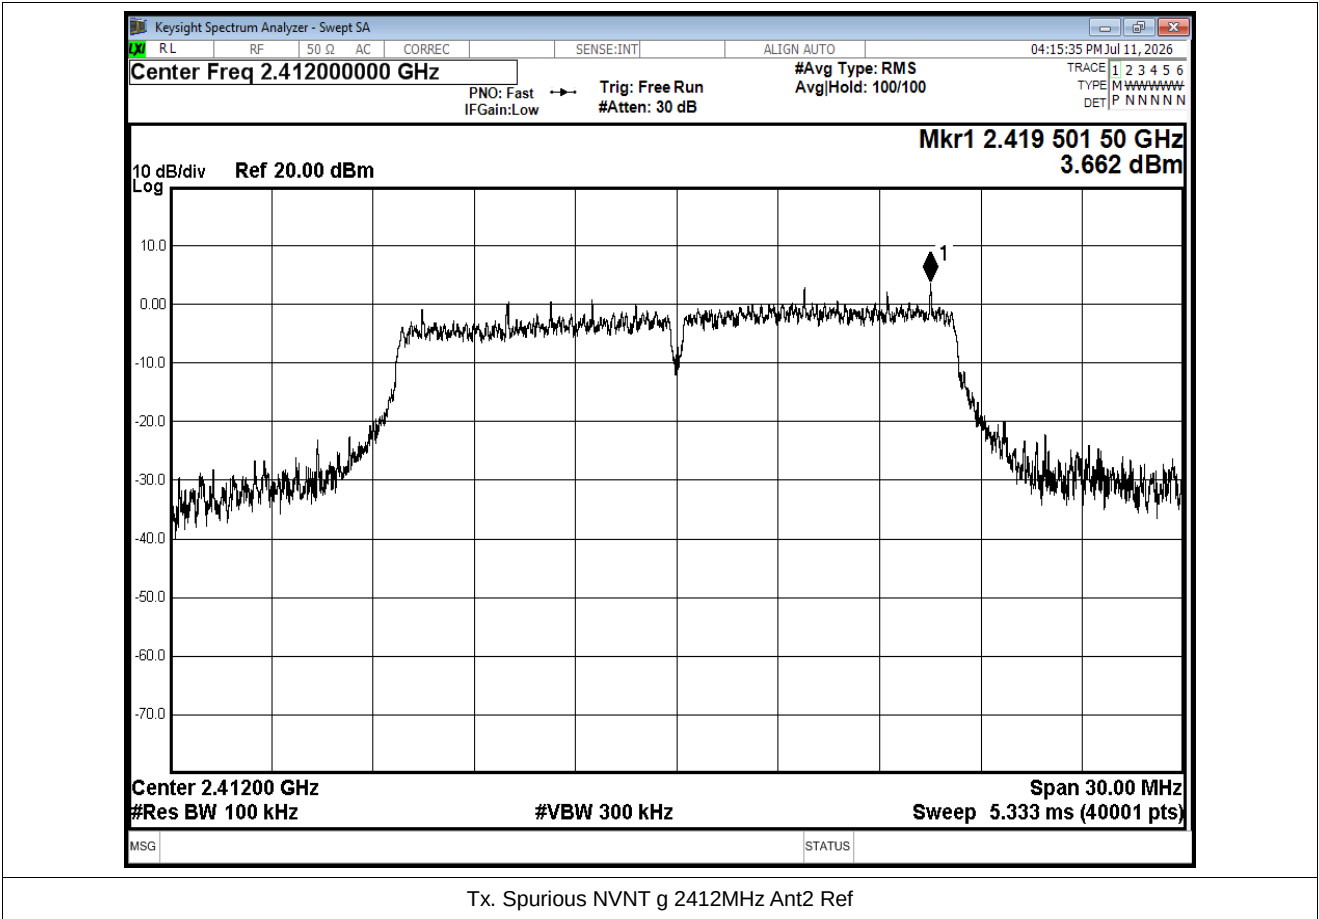


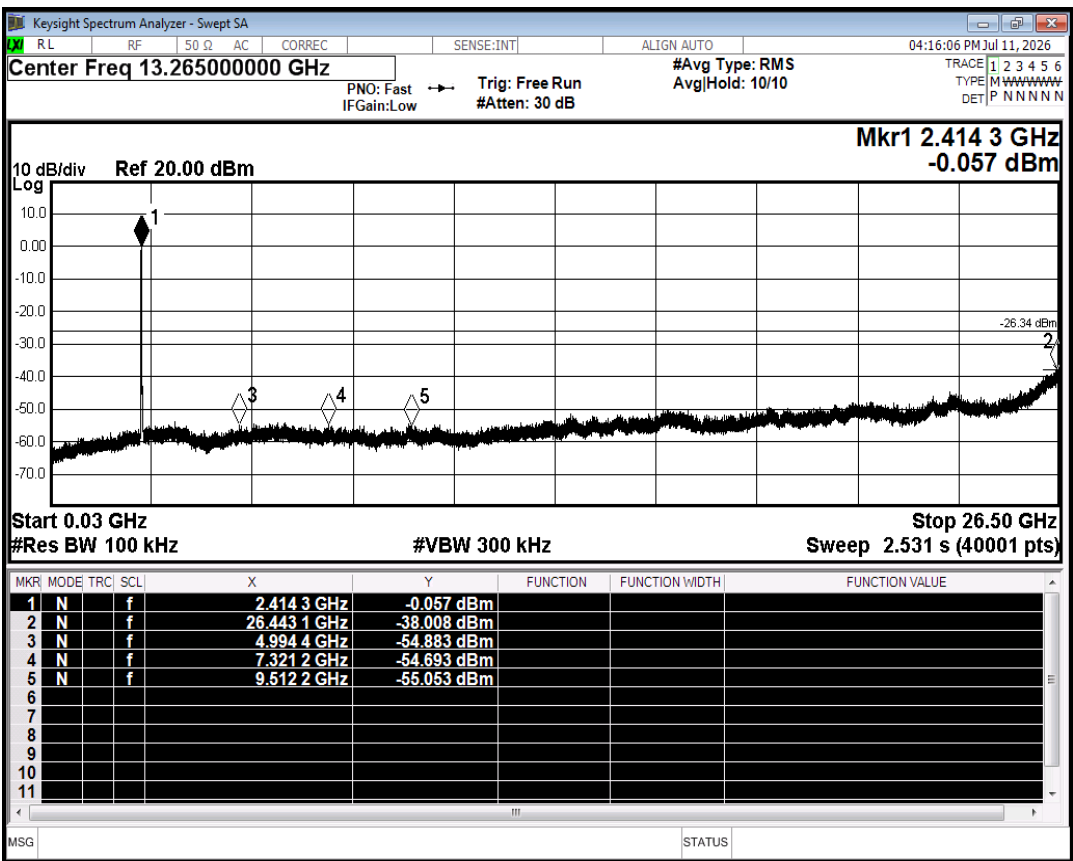


Tx. Spurious NVNT g 2412MHz Ant2 Emission

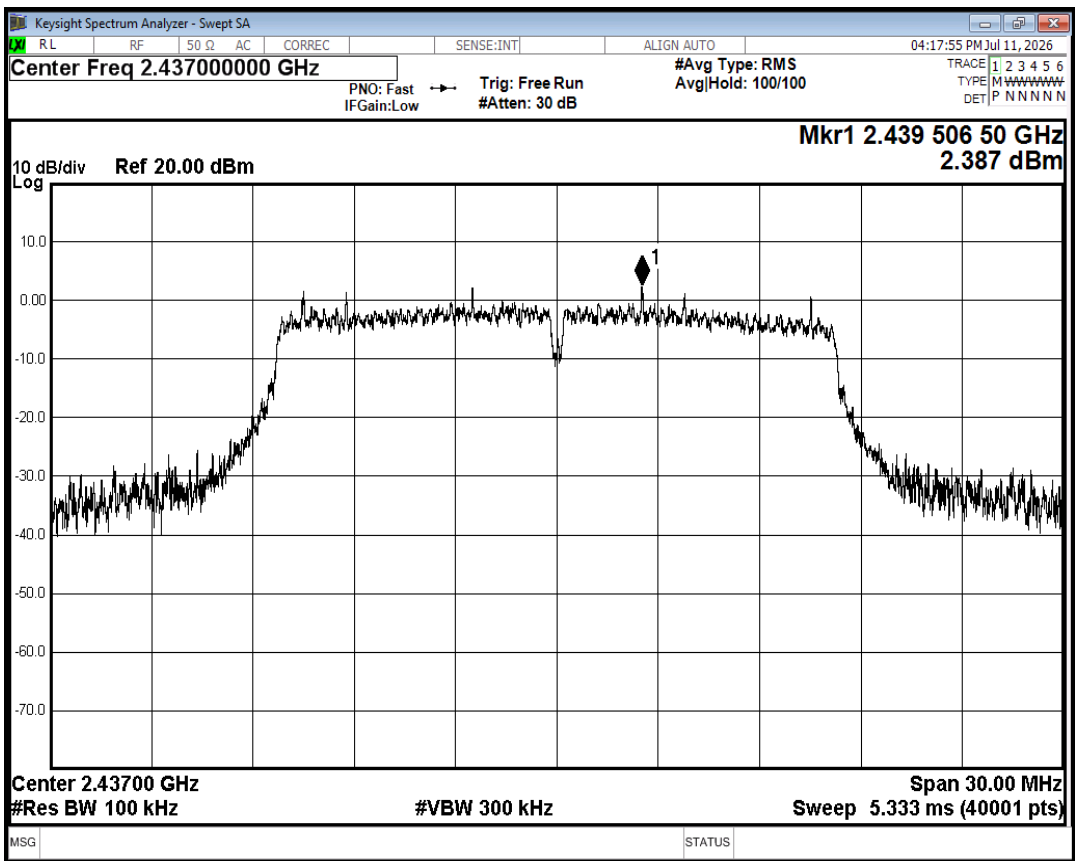


Tx. Spurious NVNT g 2437MHz Ant2 Ref

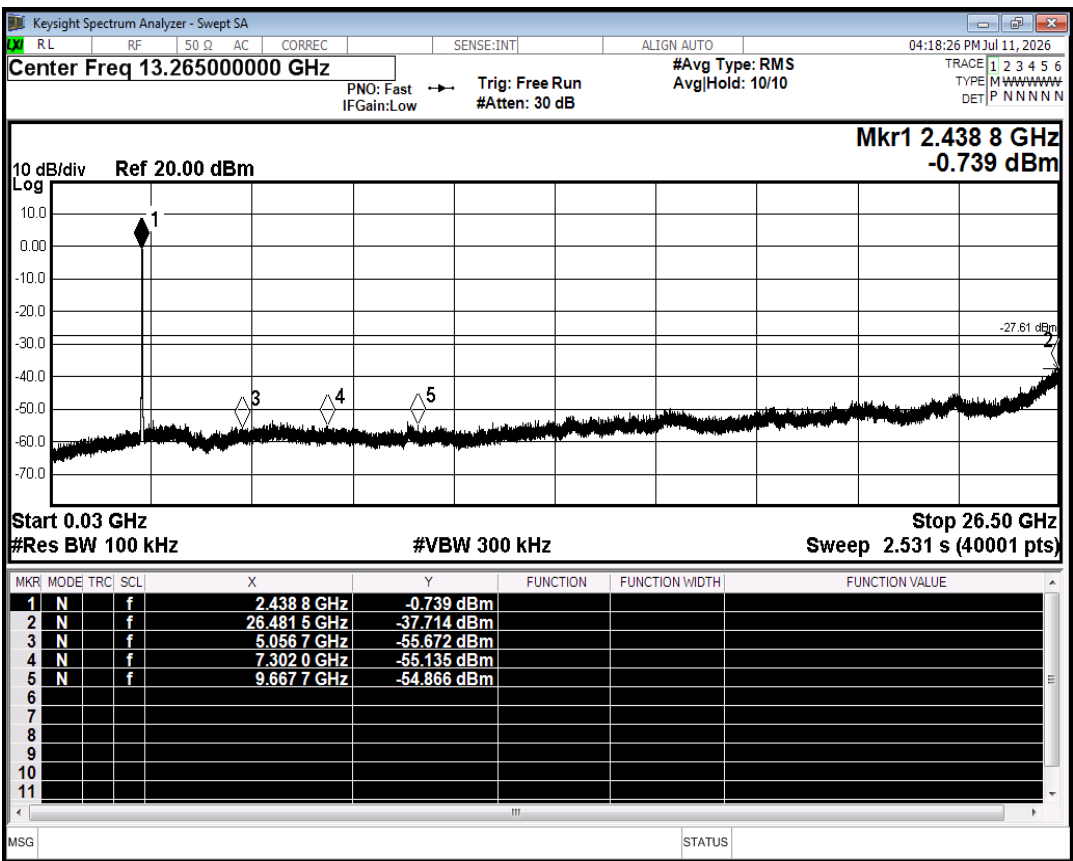


Tx. Spurious NVNT g 2437MHz Ant2 Emission

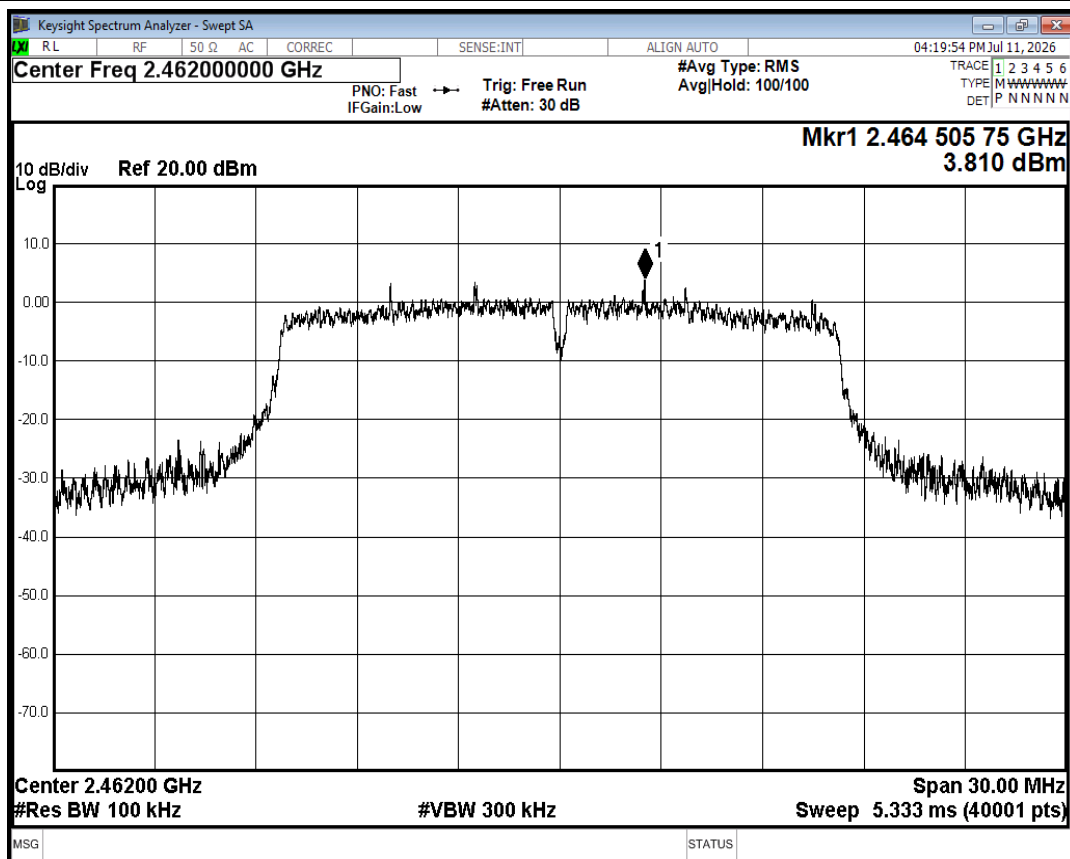


Tx. Spurious NVNT g 2462MHz Ant2 Ref

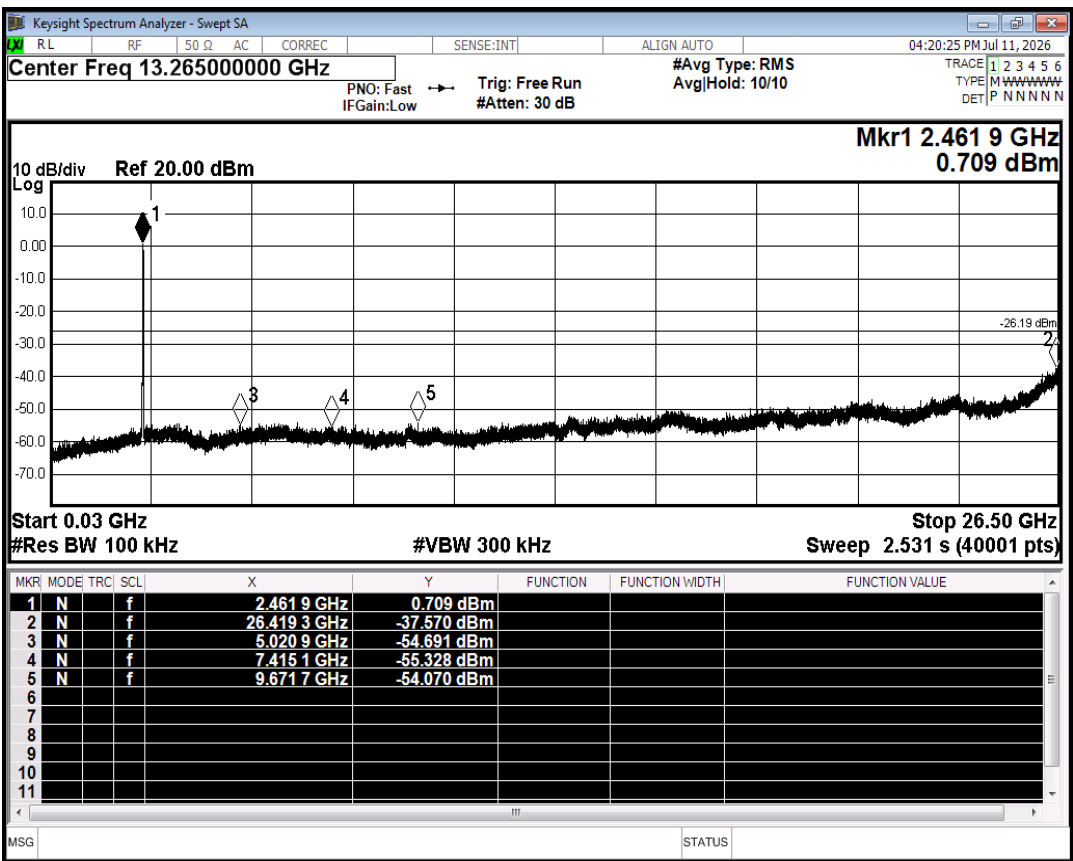


Tx. Spurious NVNT g 2462MHz Ant2 Emission

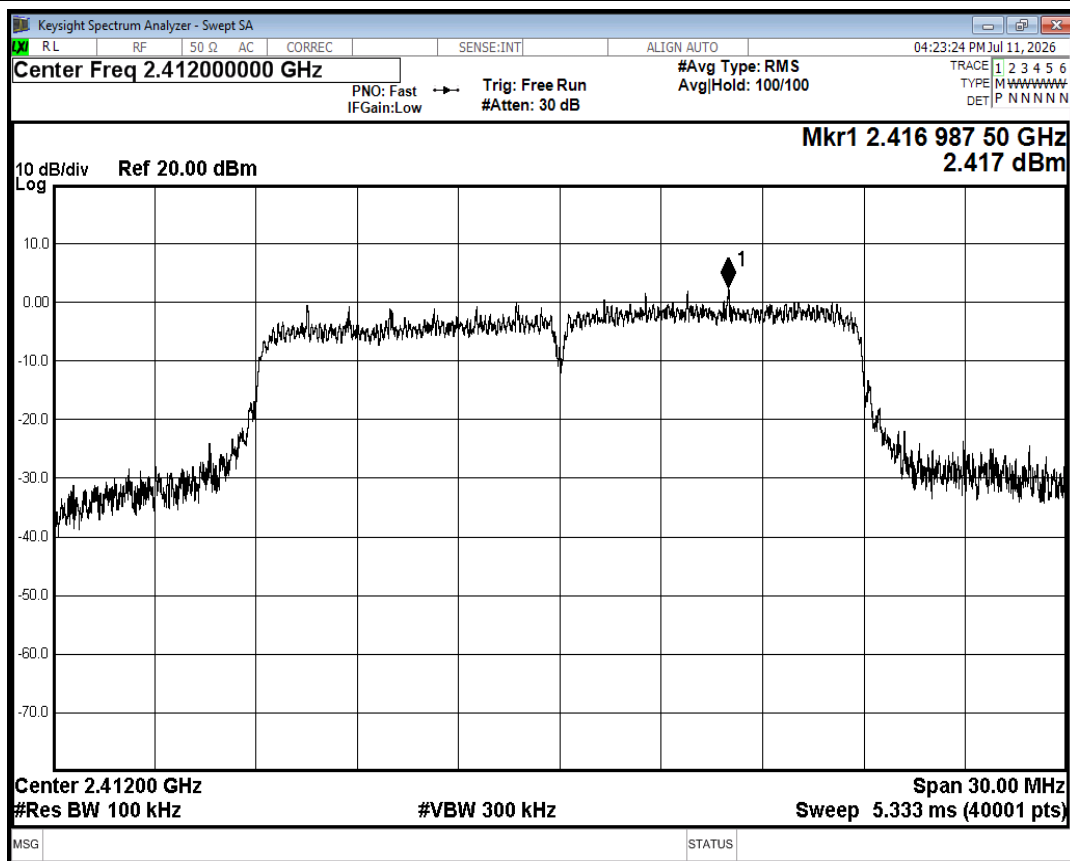


Tx. Spurious NVNT n20 2412MHz Ant2 Ref

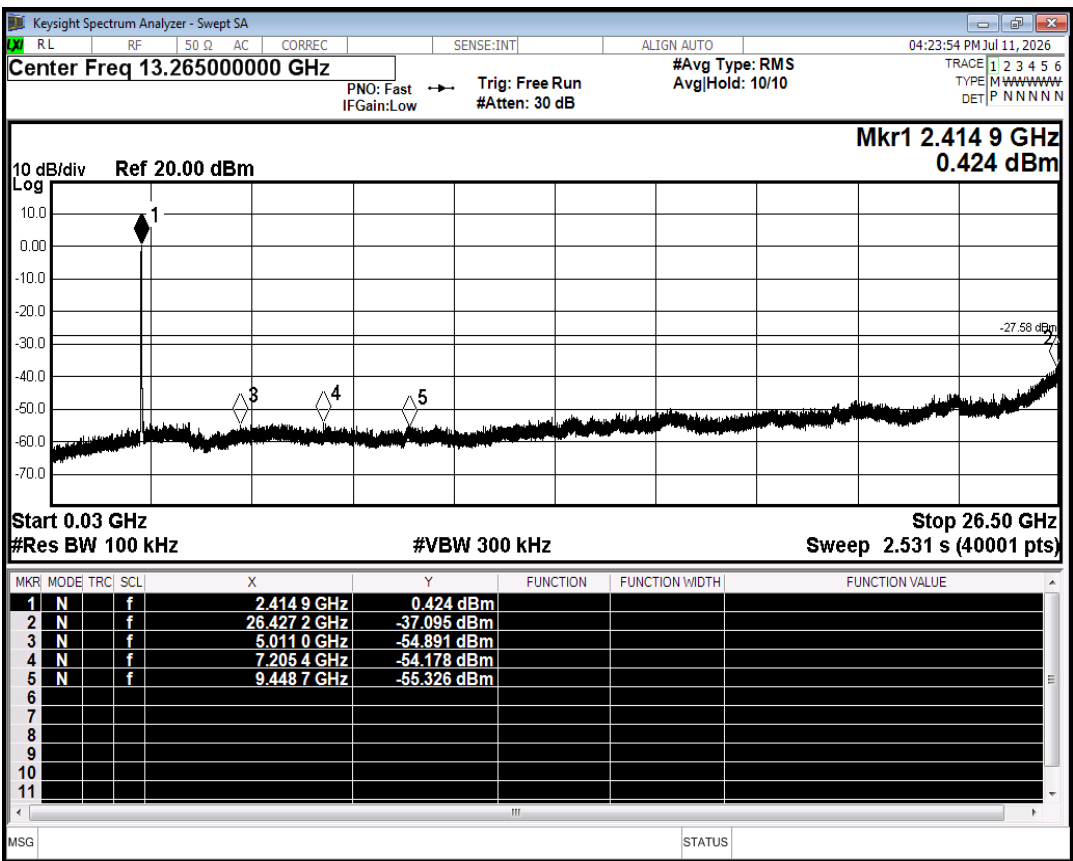


Tx. Spurious NVNT n20 2412MHz Ant2 Emission

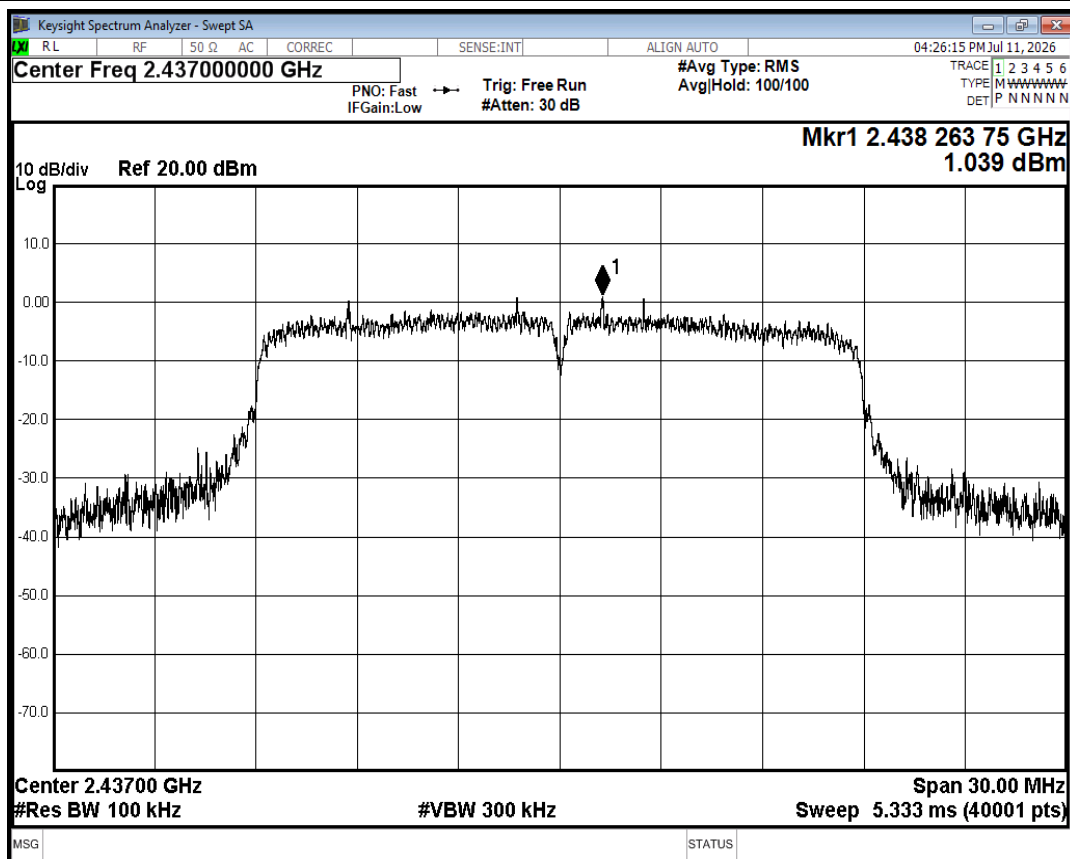


Tx. Spurious NVNT n20 2437MHz Ant2 Ref

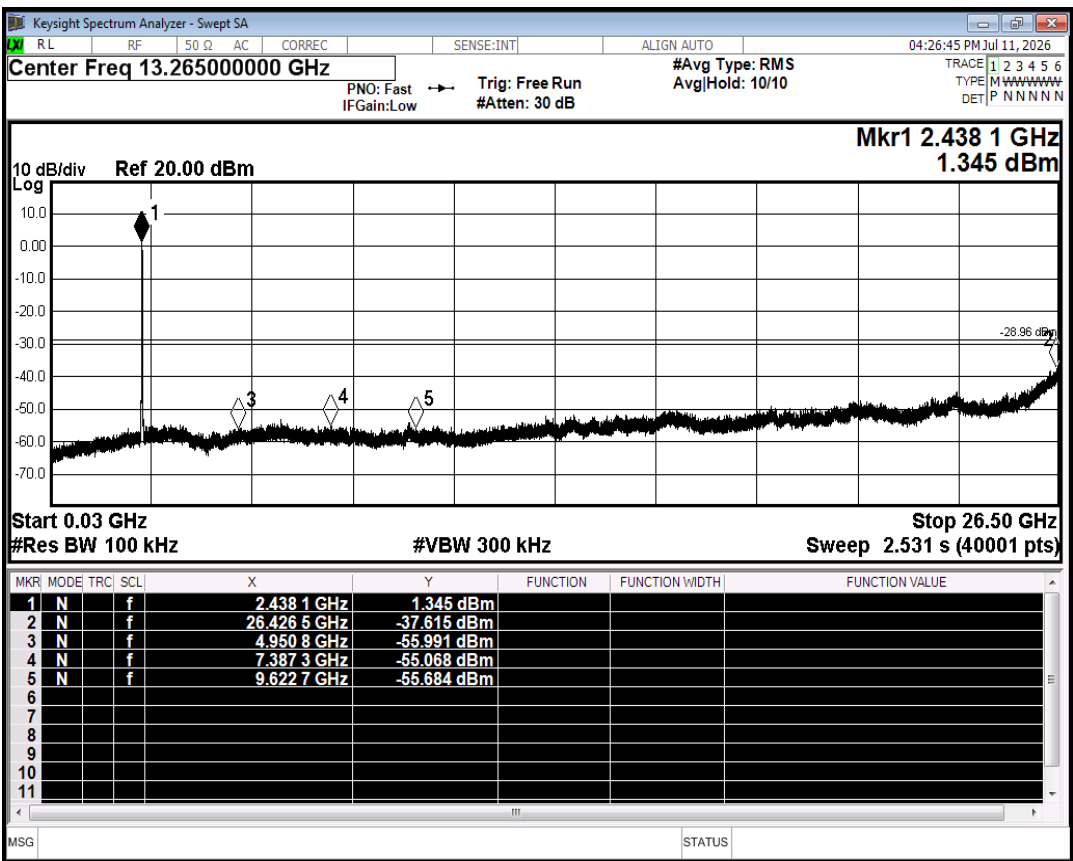


Tx. Spurious NVNT n20 2437MHz Ant2 Emission

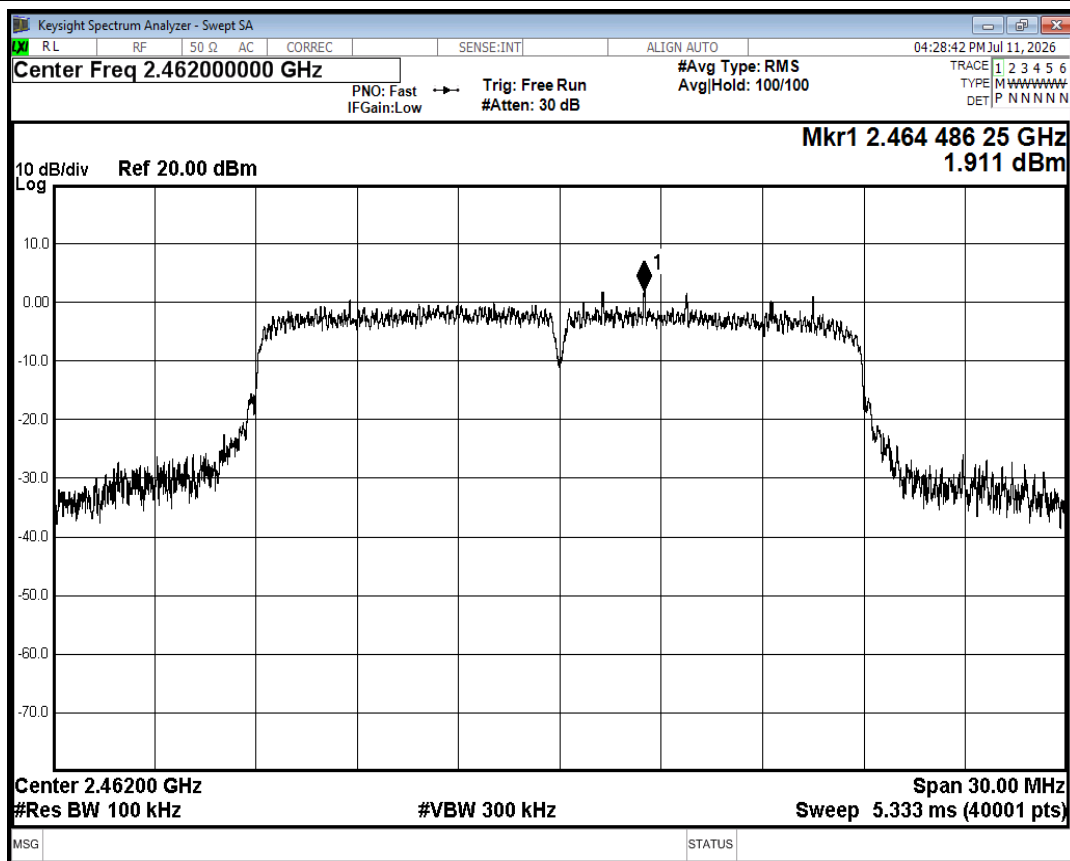


Tx. Spurious NVNT n20 2462MHz Ant2 Ref

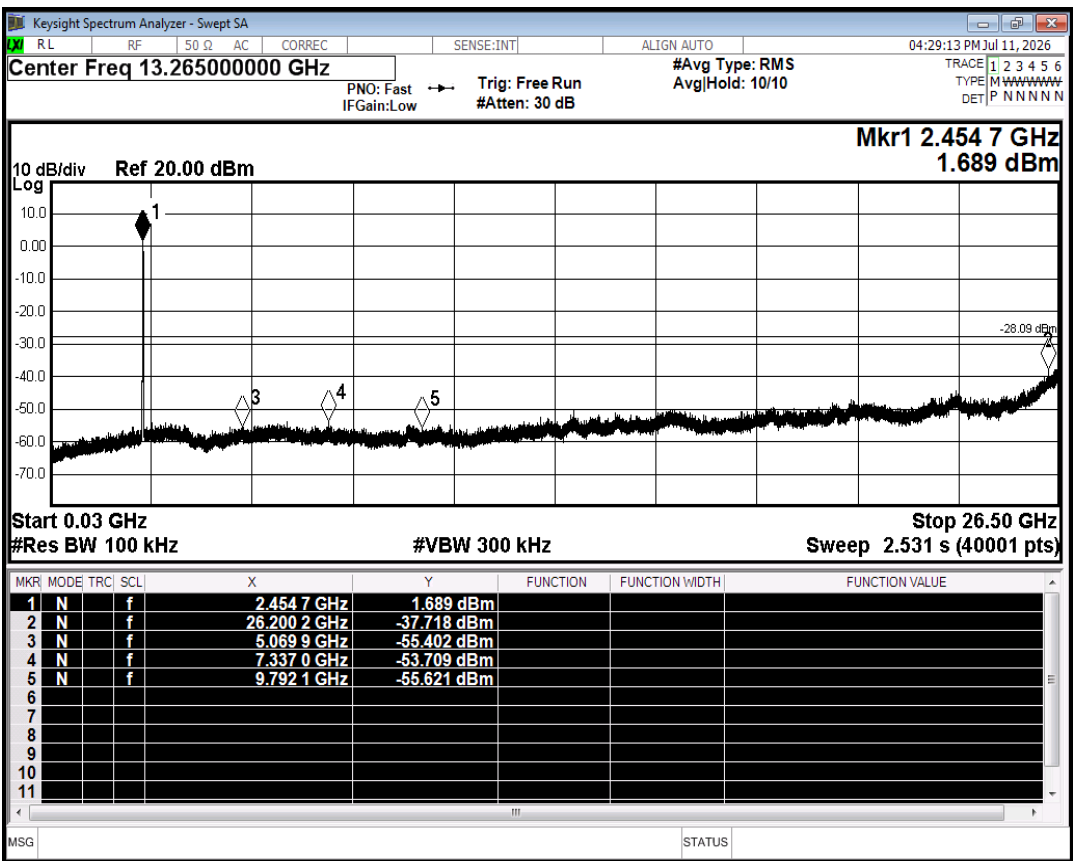


Tx. Spurious NVNT n20 2462MHz Ant2 Emission

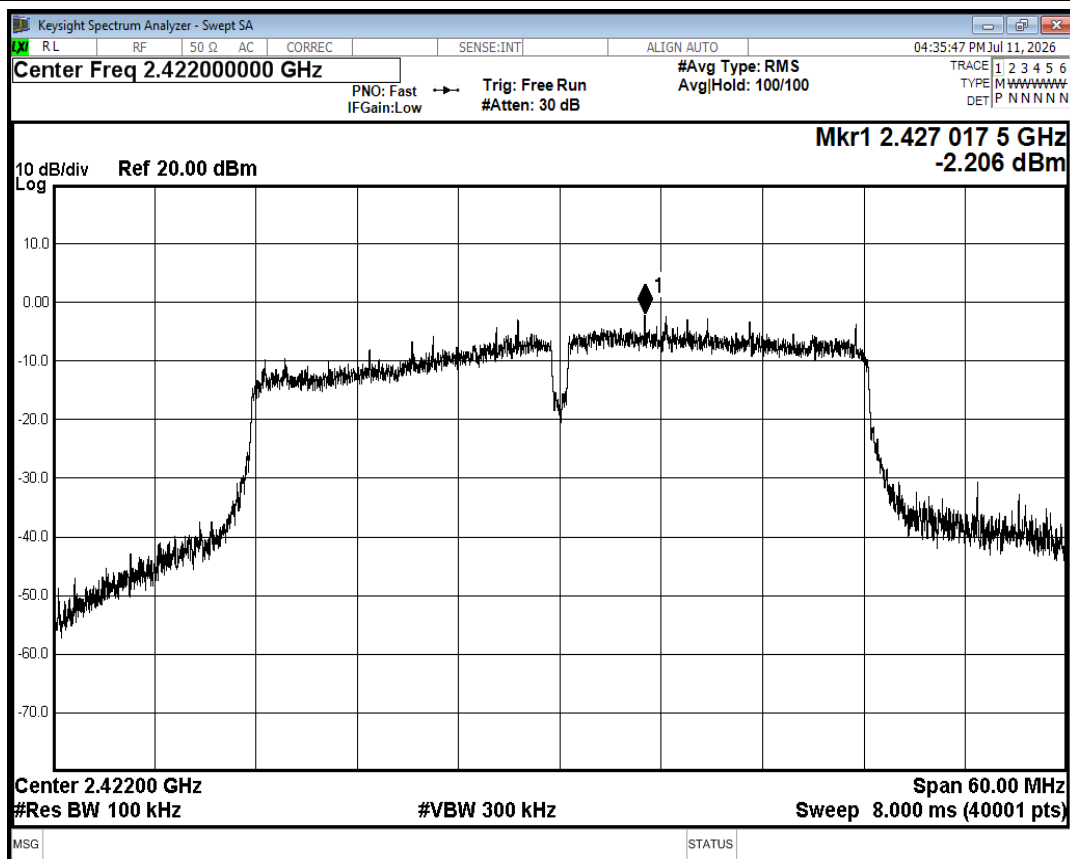


Tx. Spurious NVNT n40 2422MHz Ant2 Ref

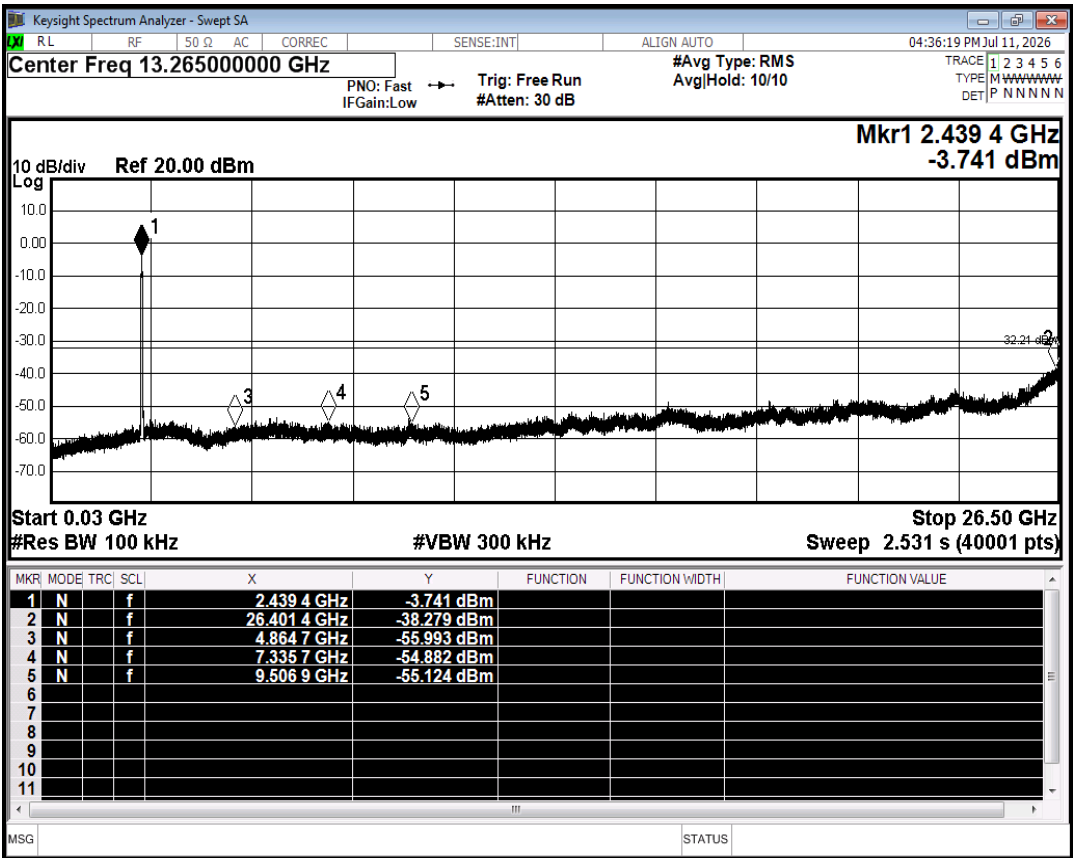


Tx. Spurious NVNT n40 2422MHz Ant2 Emission

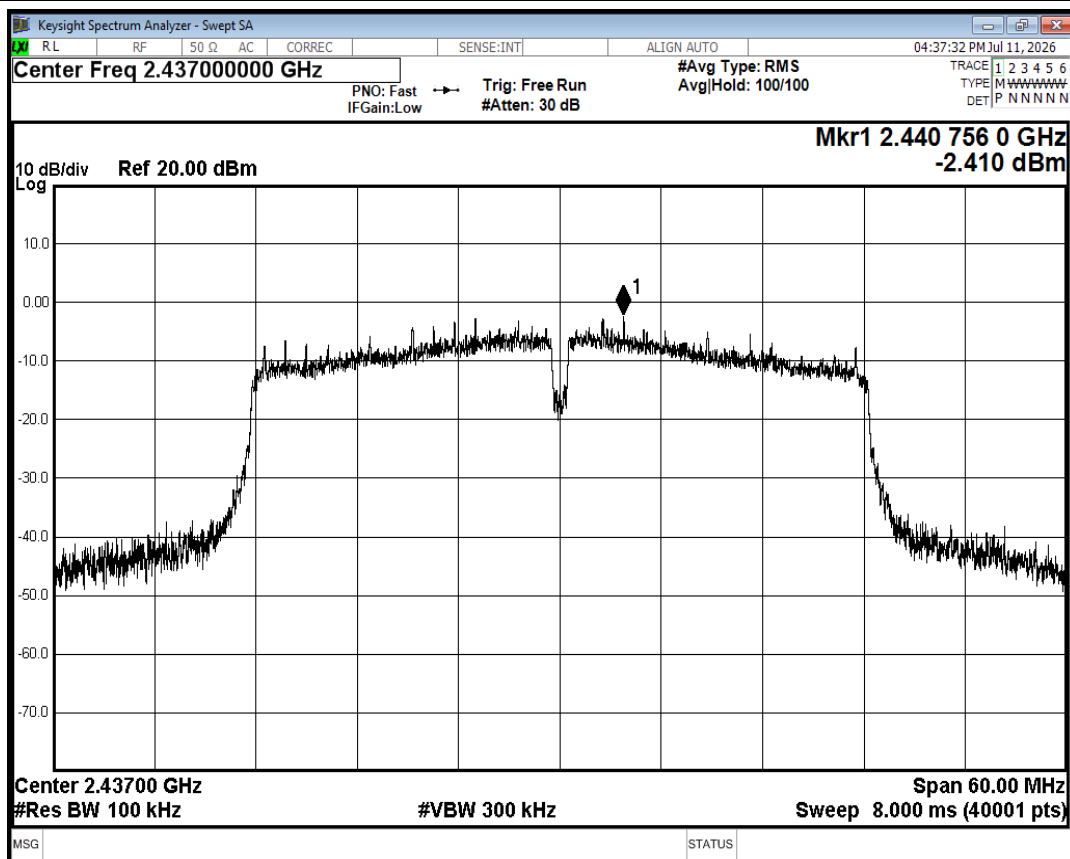


Tx. Spurious NVNT n40 2437MHz Ant2 Ref

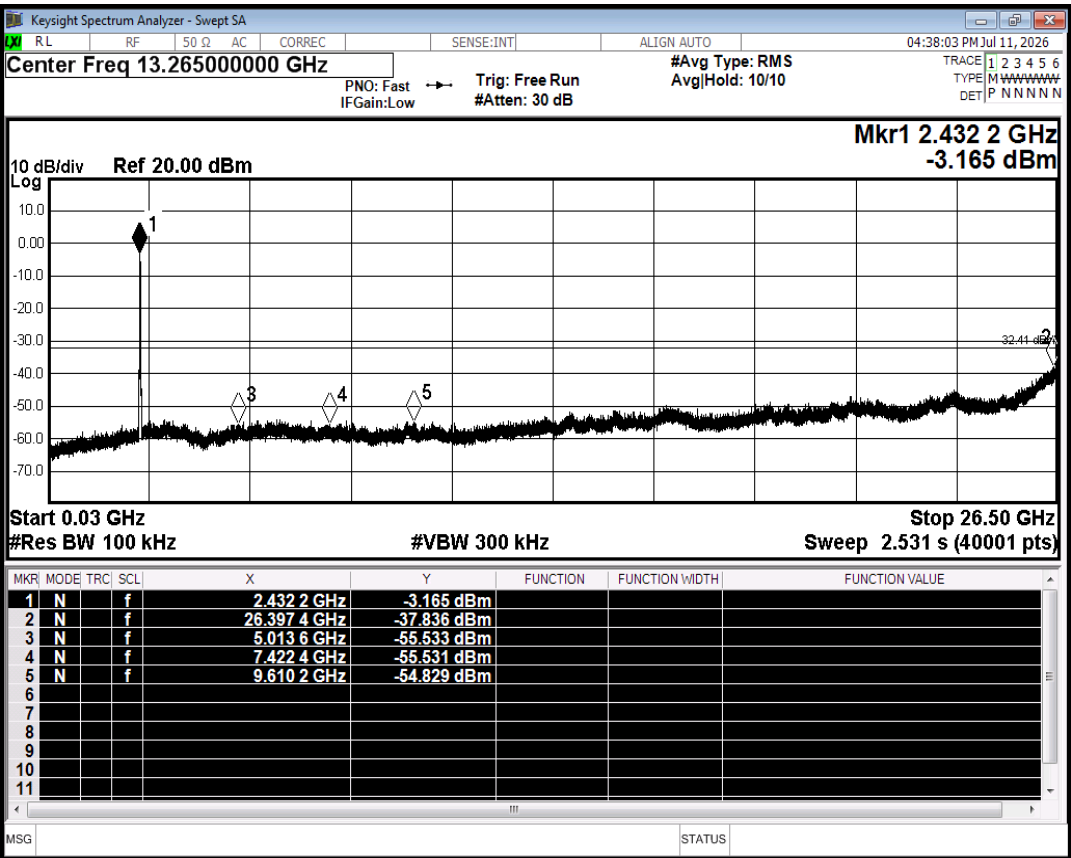

Tx. Spurious NVNT n40 2437MHz Ant2 Emission

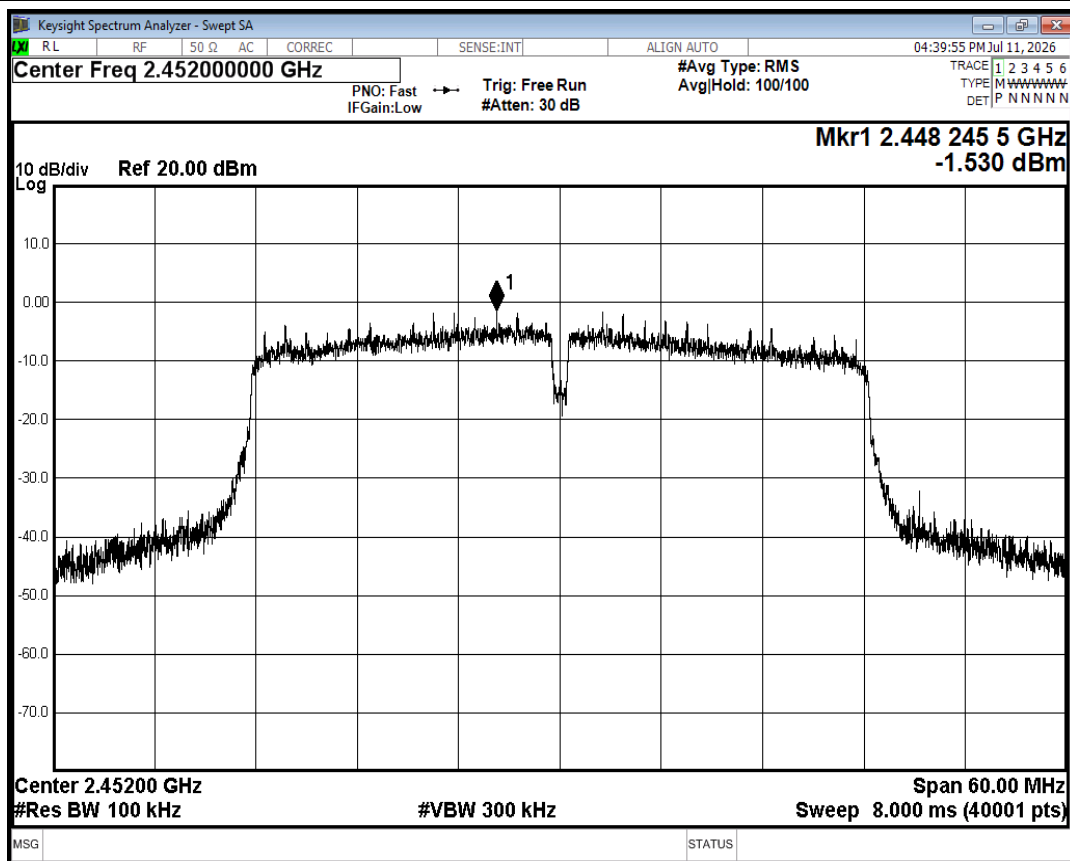


Tx. Spurious NVNT n40 2452MHz Ant2 Ref

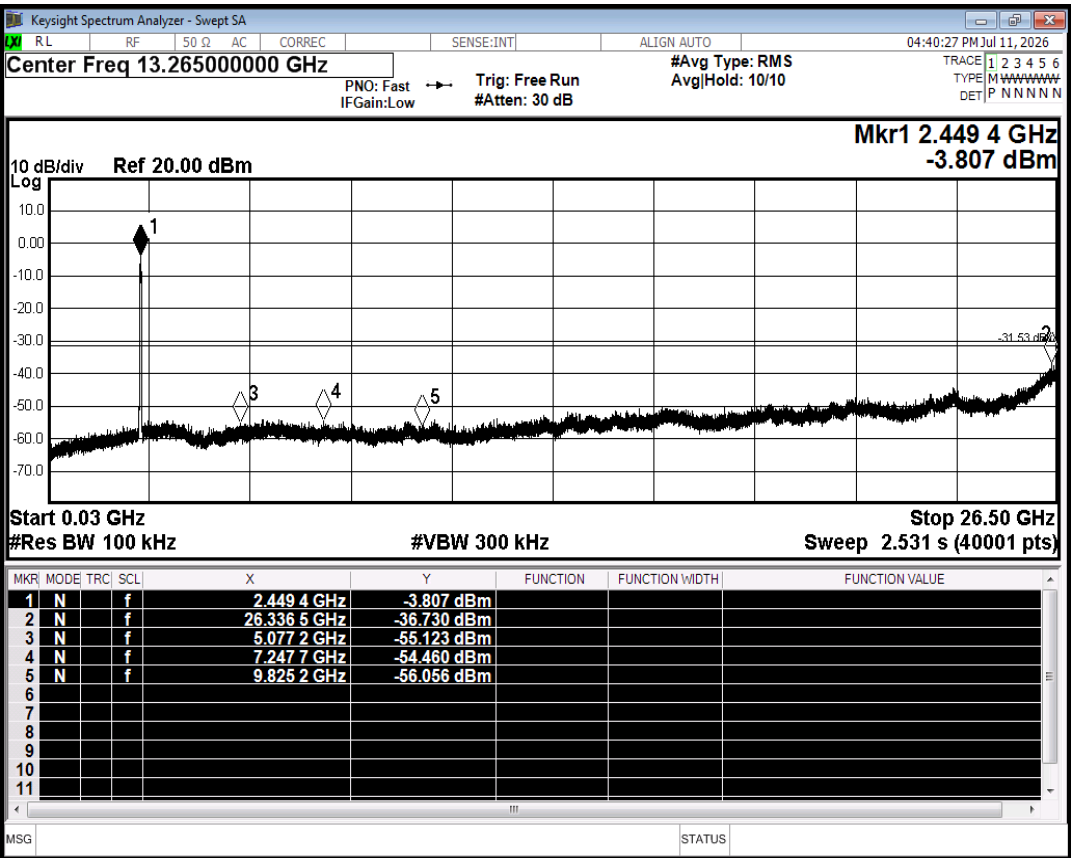


Tx. Spurious NVNT n40 2452MHz Ant2 Emission

C.6 Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	99.64	0.02	0.06
NVNT	b	2437	Ant1	99.67	0.01	0.06
NVNT	b	2462	Ant1	99.64	0.02	0.06
NVNT	g	2412	Ant1	97.68	0.1	0.37
NVNT	g	2437	Ant1	97.75	0.1	0.37
NVNT	g	2462	Ant1	97.75	0.1	0.37
NVNT	n20	2412	Ant1	97.25	0.12	0.44
NVNT	n20	2437	Ant1	97.33	0.12	0.44
NVNT	n20	2462	Ant1	97.33	0.12	0.44
NVNT	n40	2422	Ant1	95.35	0.21	0.9
NVNT	n40	2437	Ant1	94.71	0.24	0.9
NVNT	n40	2452	Ant1	94.7	0.24	0.9

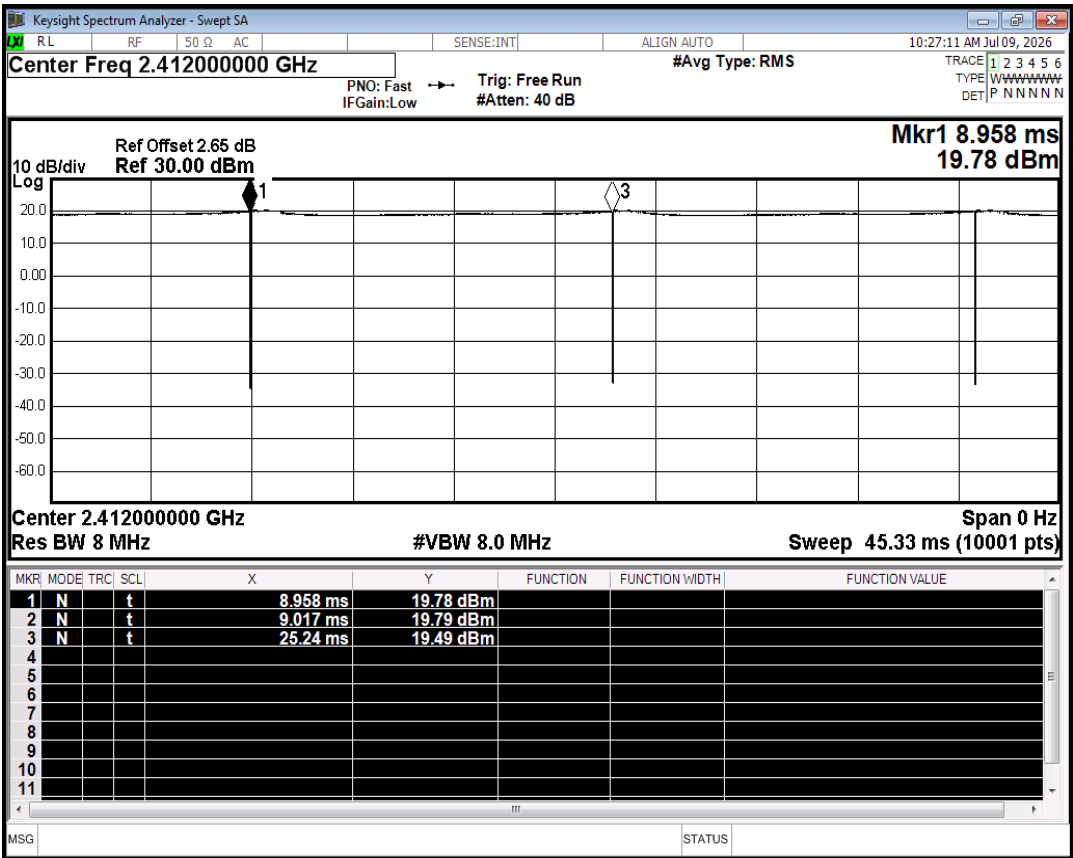


Duty Cycle NVNT b 2412MHz Ant1

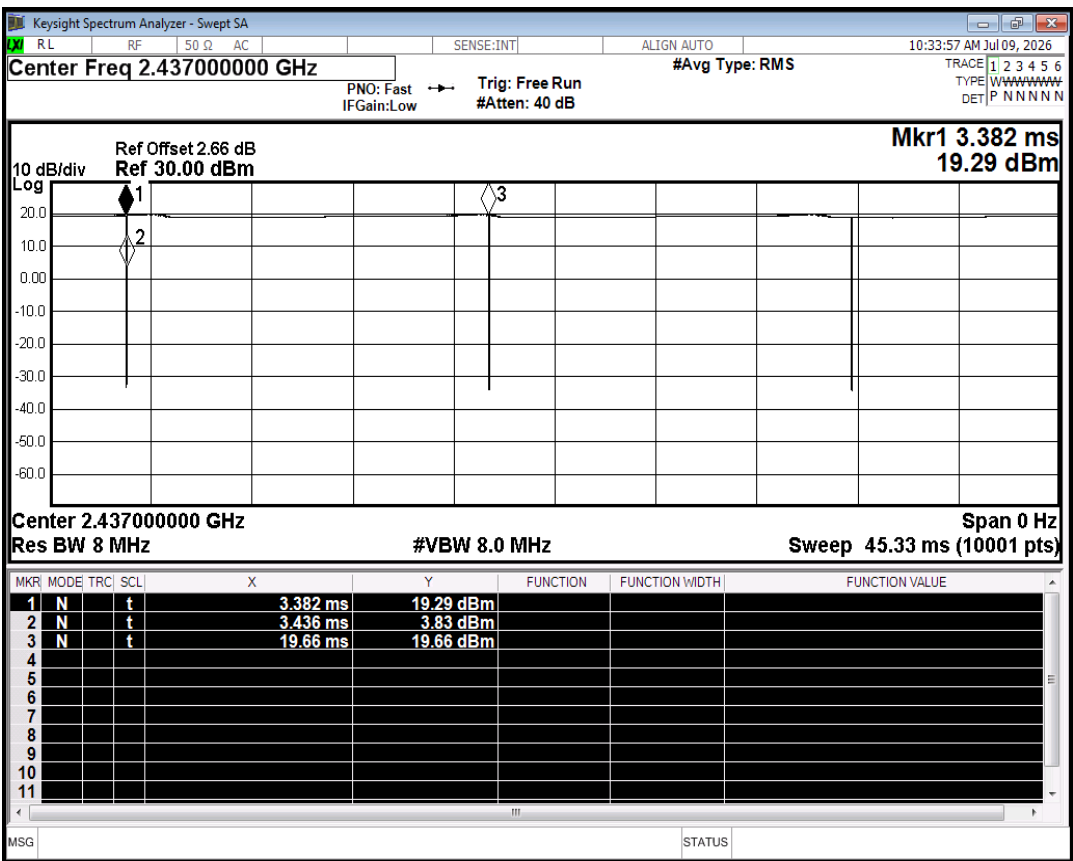


Duty Cycle NVNT b 2437MHz Ant1

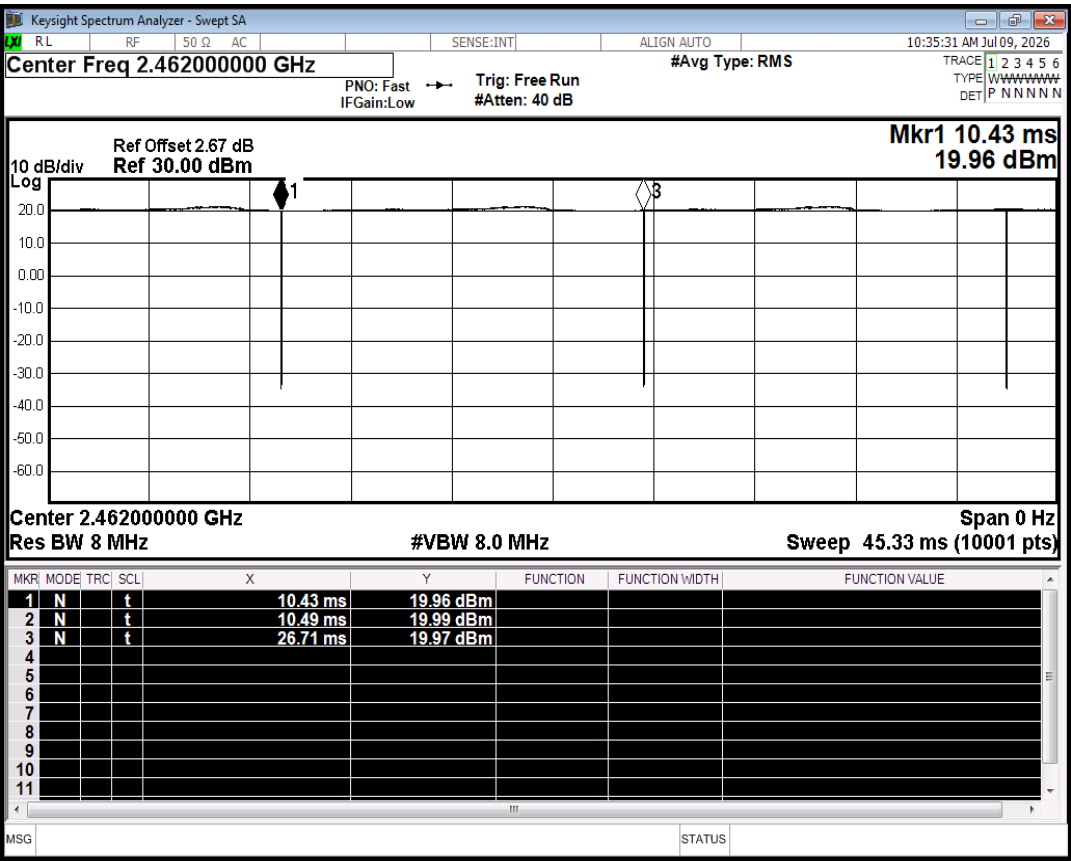

Duty Cycle NVNT b 2462MHz Ant1

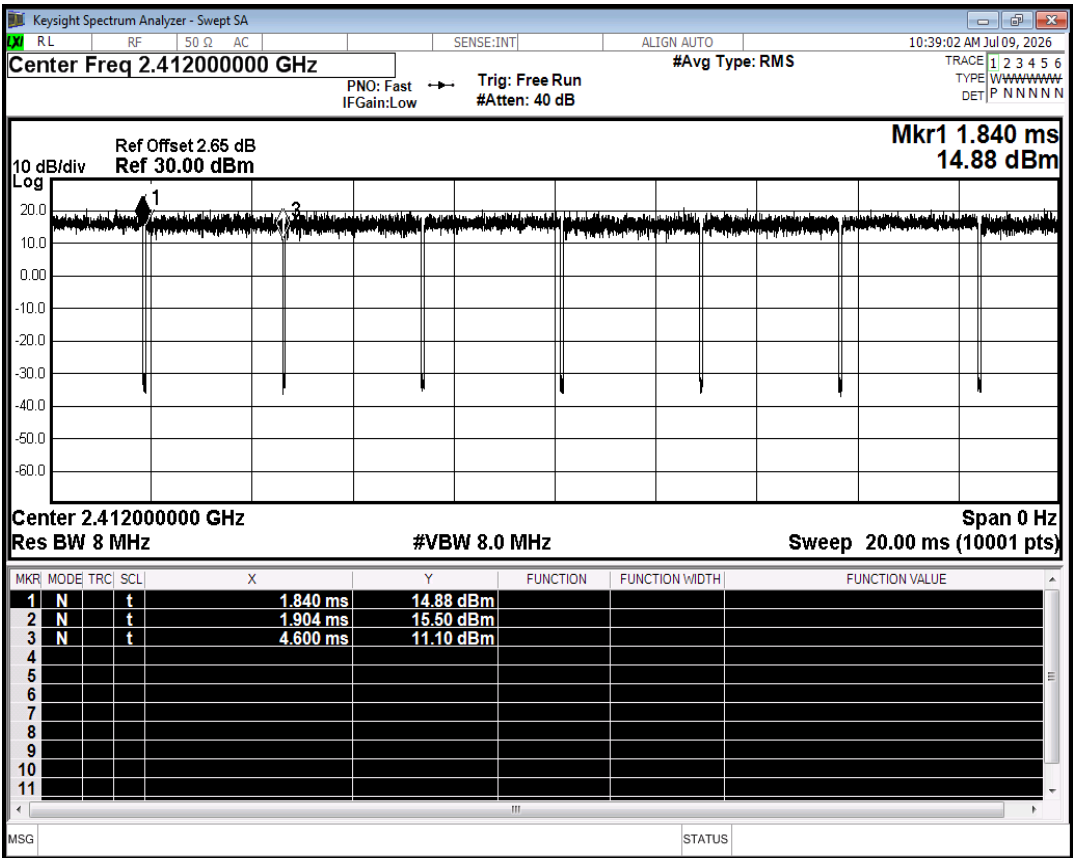

Duty Cycle NVNT g 2412MHz Ant1

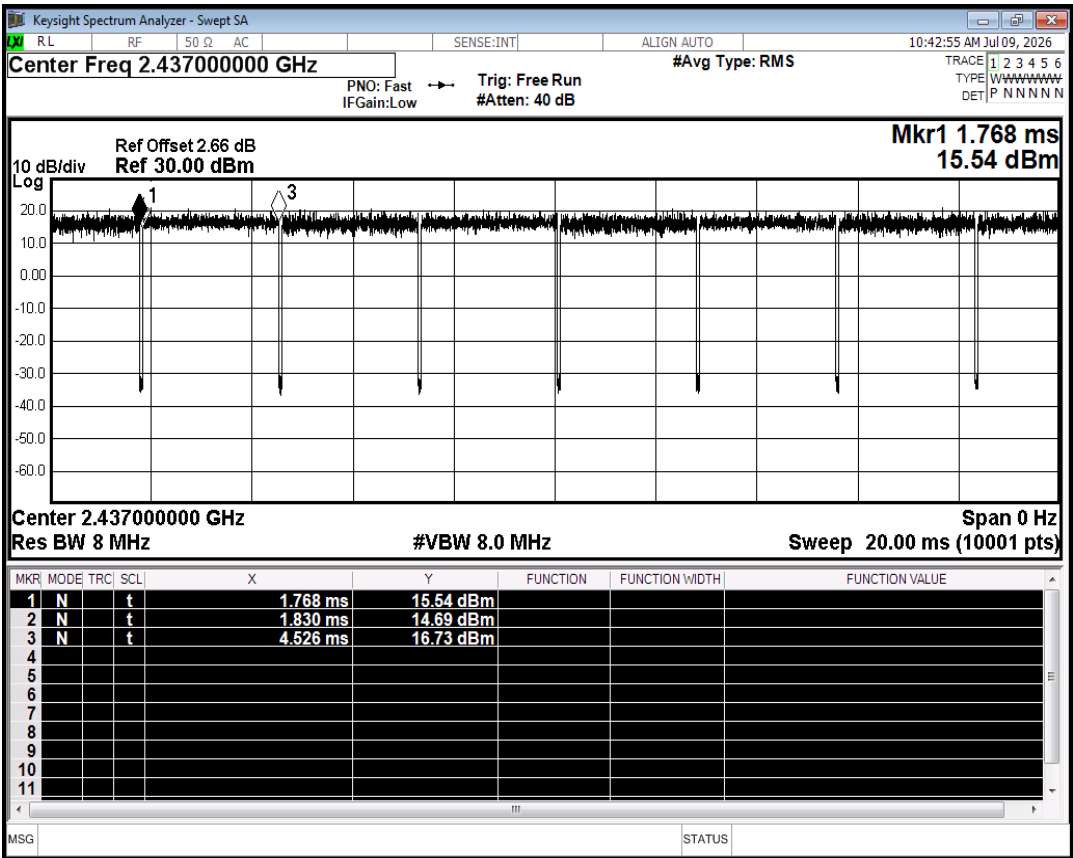

Duty Cycle NVNT g 2437MHz Ant1