



Appendix A

RF Test Data for BT (Conducted Measurement)

Product Name: Mibro Watch C3

Test Model: XPAW014

Environmental Conditions

Temperature:	23.8 ° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Nick Peng
Supervised by:	Ling Zhu



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



A.1 -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.95	N/A	Pass
NVNT	1-DH5	2441	Ant1	0.951	N/A	Pass
NVNT	1-DH5	2480	Ant1	1.031	N/A	Pass
NVNT	2-DH5	2402	Ant1	1.312	N/A	Pass
NVNT	2-DH5	2441	Ant1	1.28	N/A	Pass
NVNT	2-DH5	2480	Ant1	1.281	N/A	Pass
NVNT	3-DH5	2402	Ant1	1.295	N/A	Pass
NVNT	3-DH5	2441	Ant1	1.293	N/A	Pass
NVNT	3-DH5	2480	Ant1	1.305	N/A	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

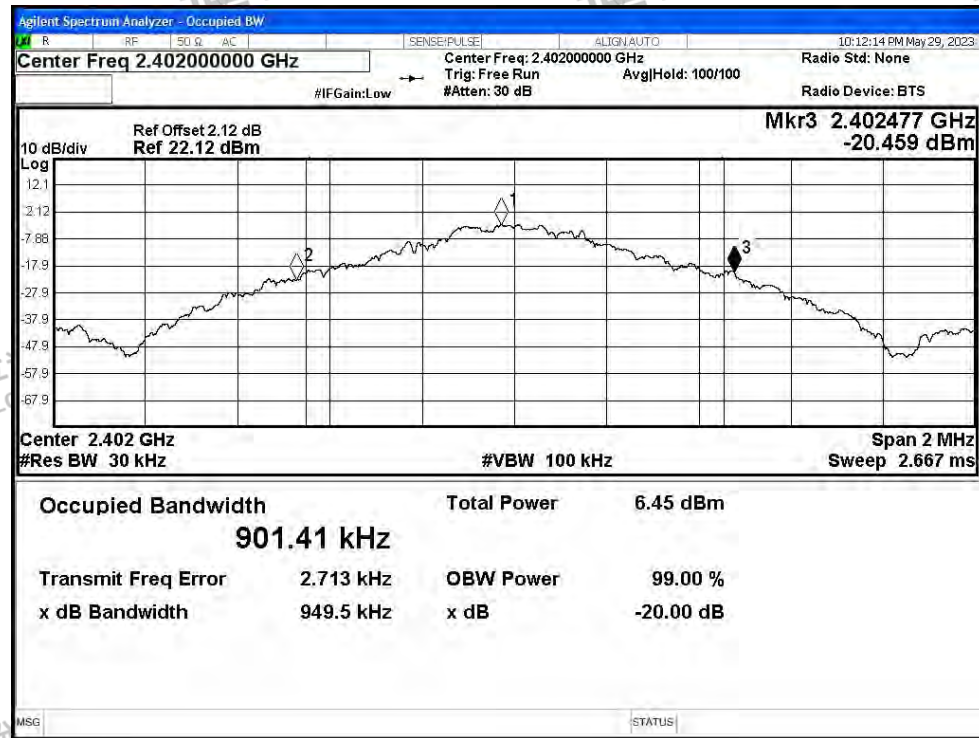


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1

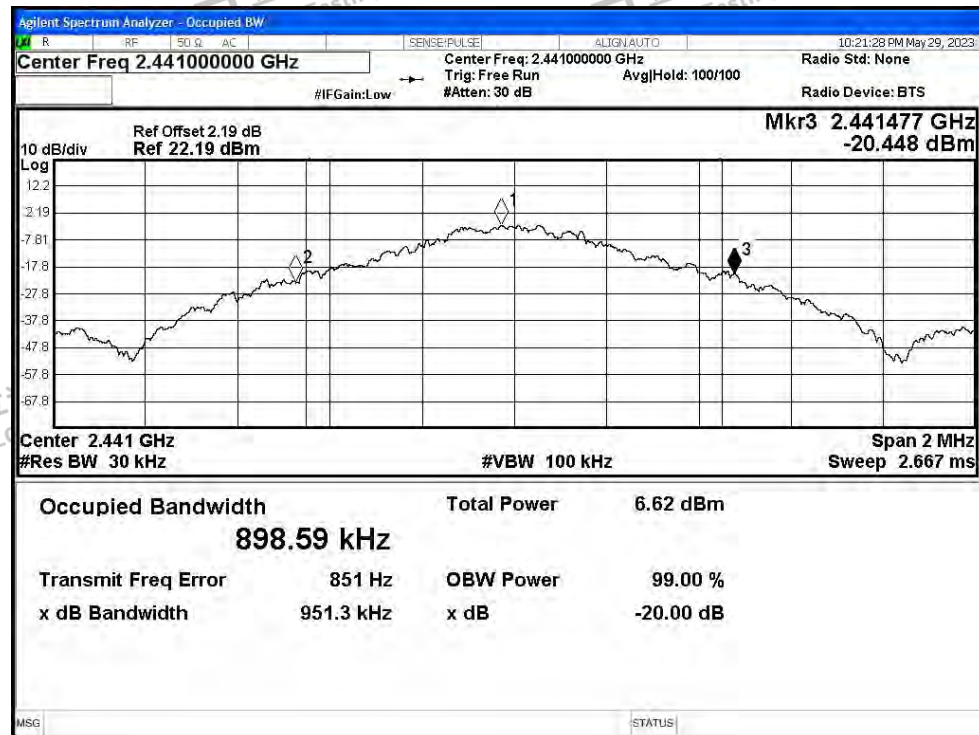




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

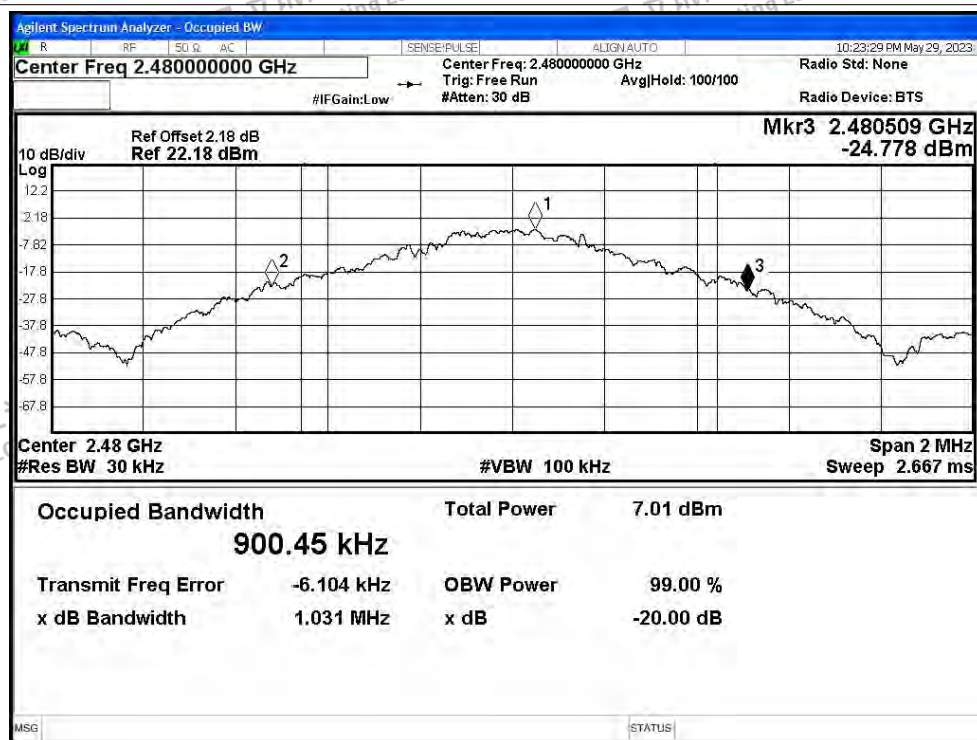

-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

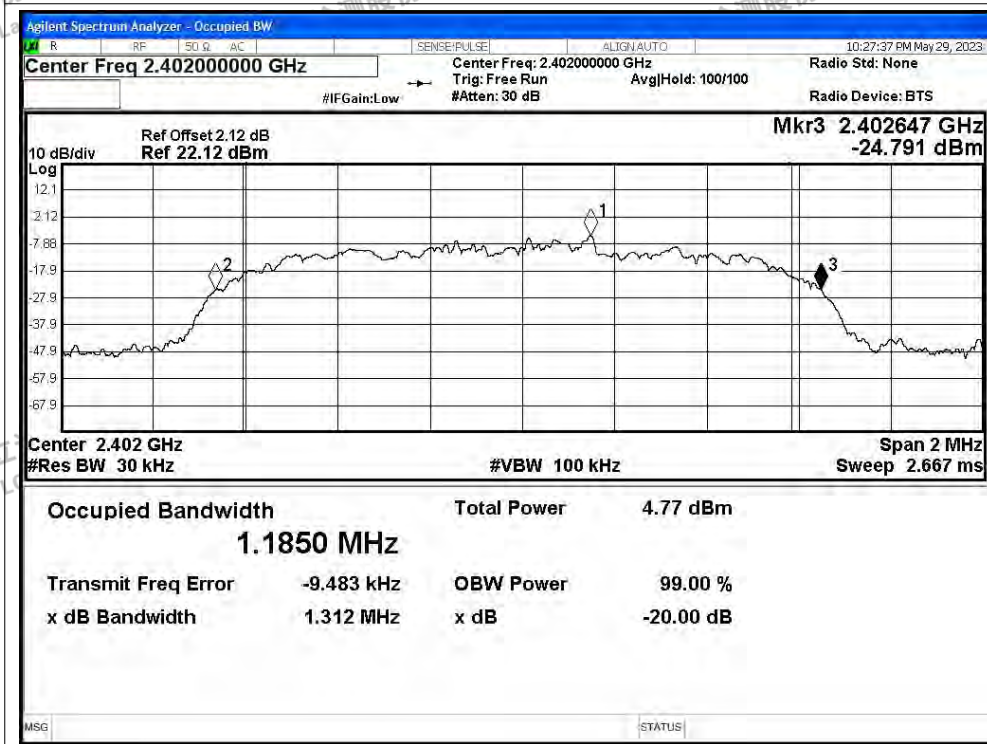

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

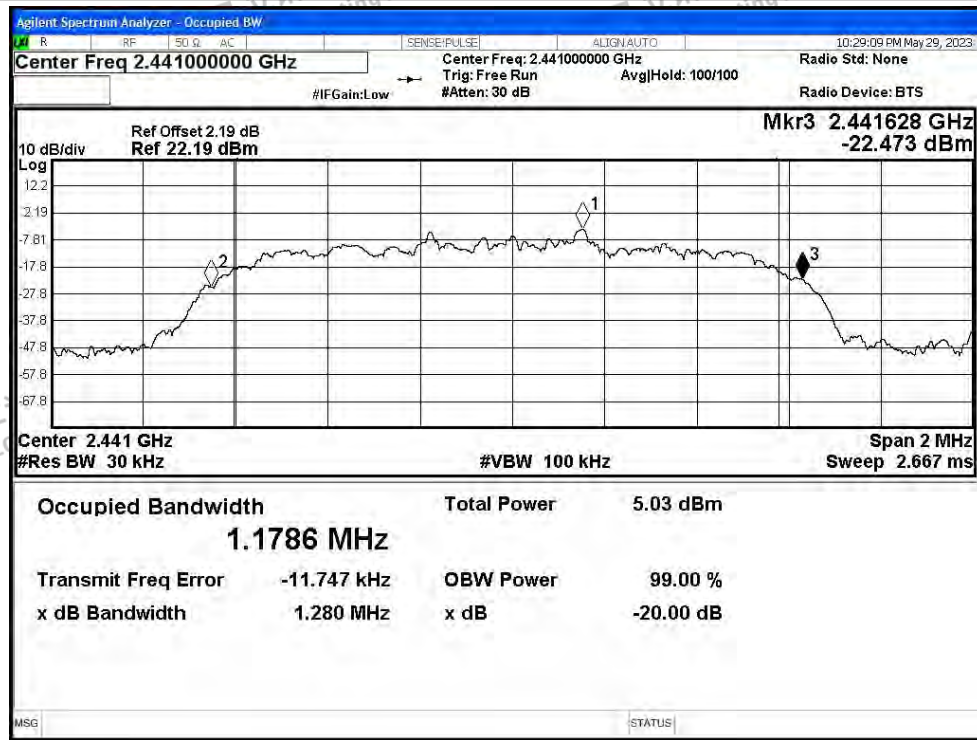

-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

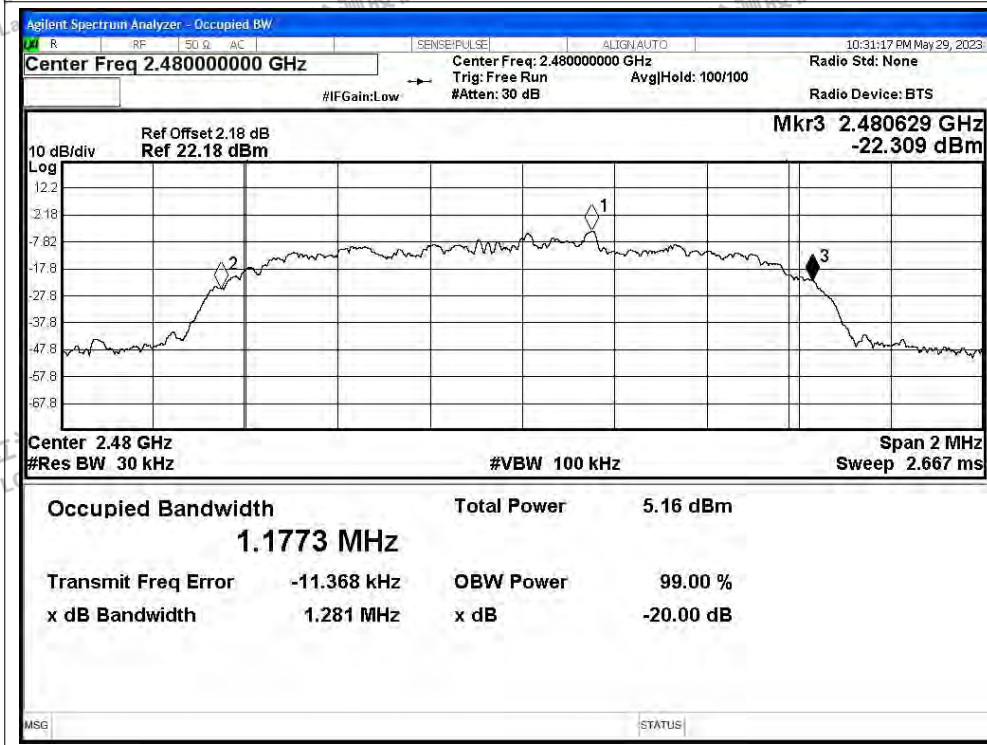





-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

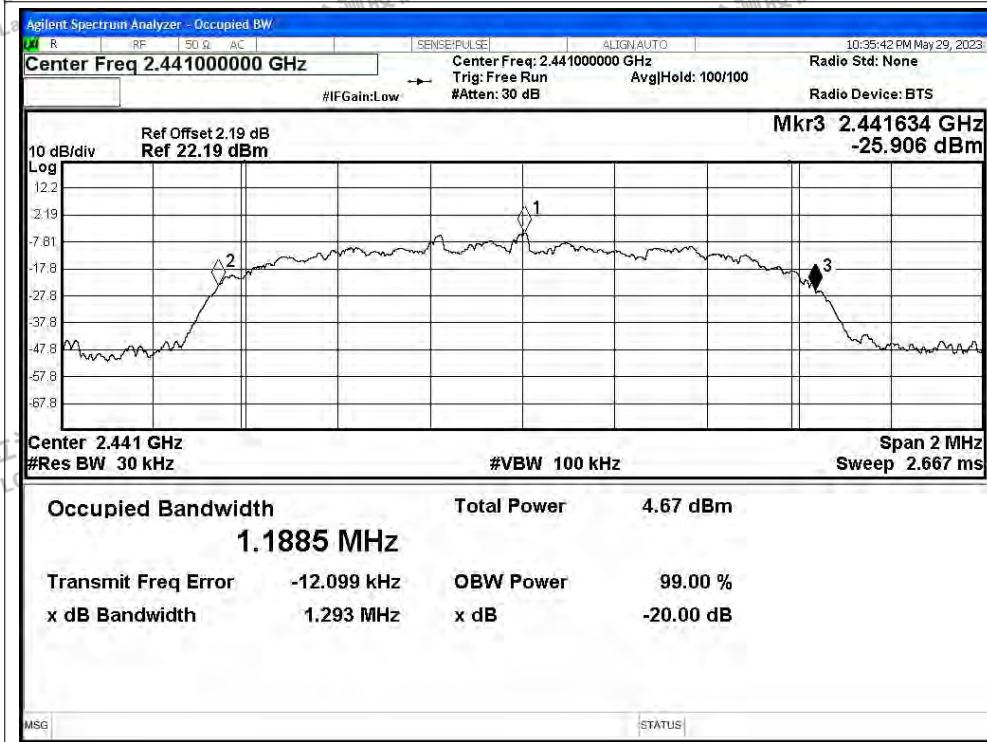

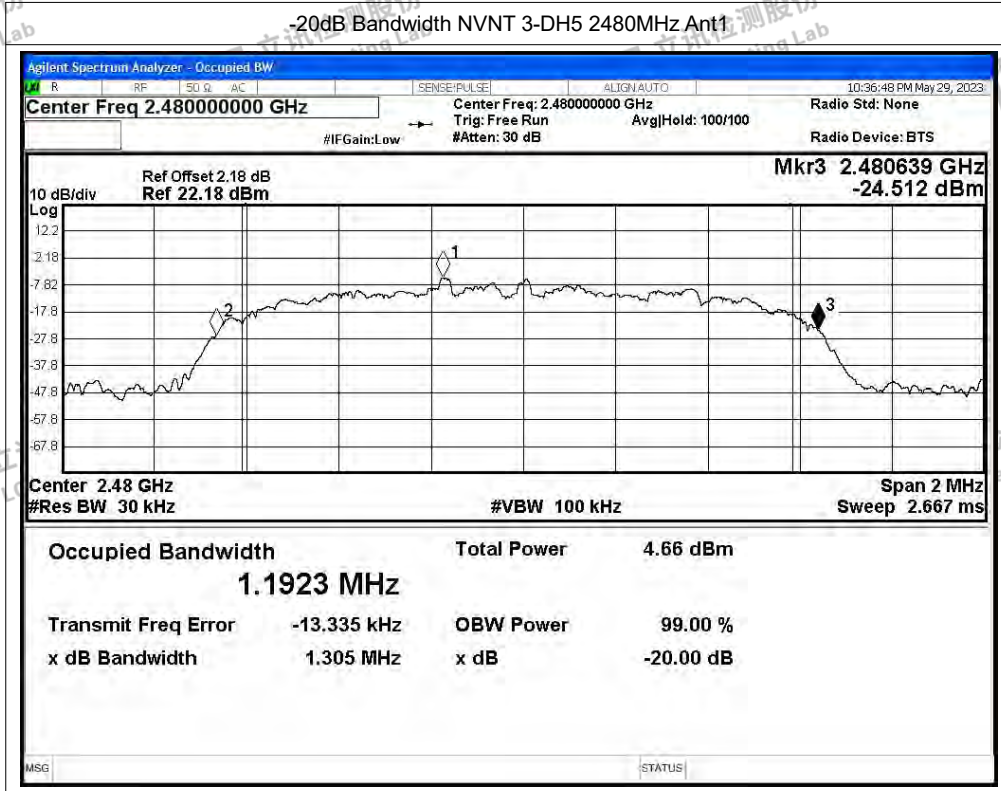



A.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	0.36	21	Pass
NVNT	1-DH5	2441	Ant1	0.52	21	Pass
NVNT	1-DH5	2480	Ant1	0.86	21	Pass
NVNT	2-DH5	2402	Ant1	0.28	21	Pass
NVNT	2-DH5	2441	Ant1	0.51	21	Pass
NVNT	2-DH5	2480	Ant1	0.45	21	Pass
NVNT	3-DH5	2402	Ant1	0.30	21	Pass
NVNT	3-DH5	2441	Ant1	0.52	21	Pass
NVNT	3-DH5	2480	Ant1	0.52	21	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Power NVNT 1-DH5 2402MHz Ant1

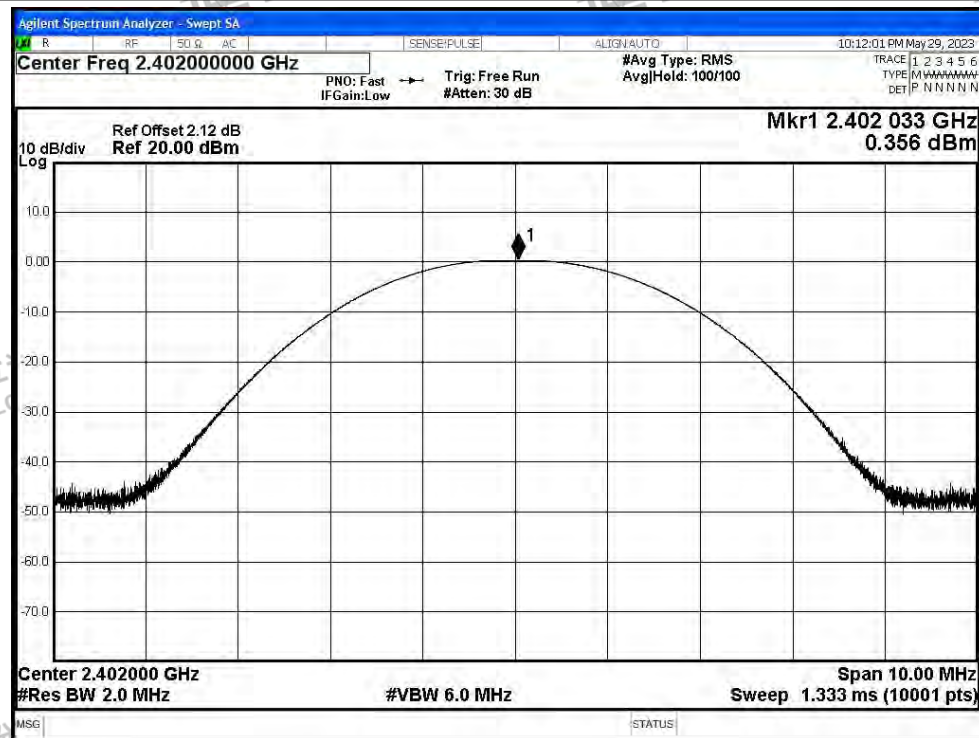


Power NVNT 1-DH5 2441MHz Ant1

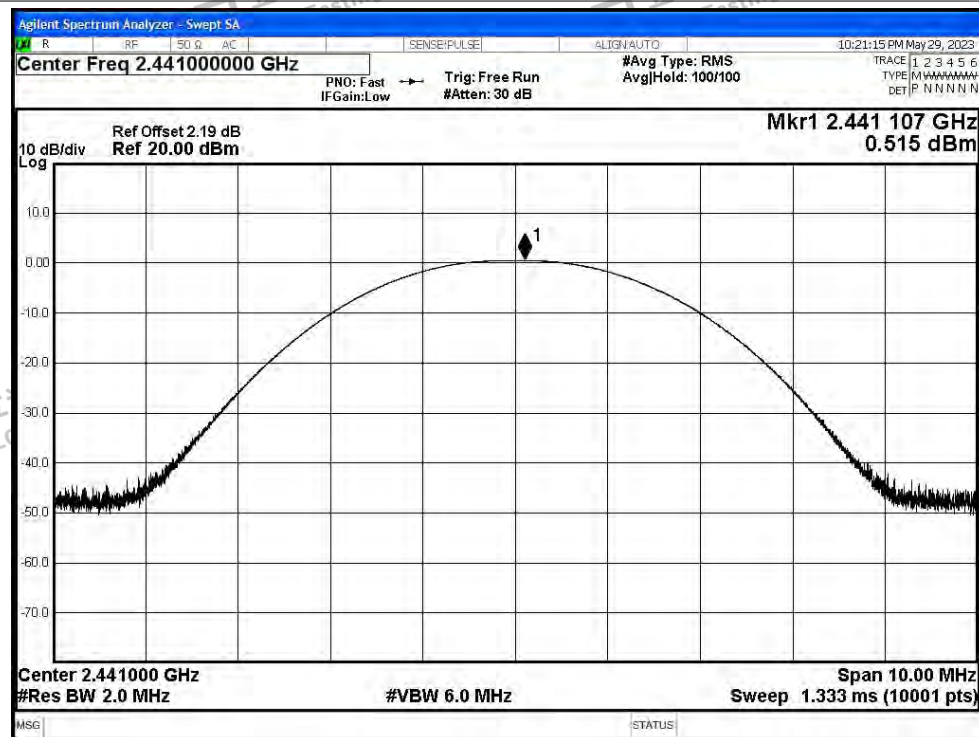




Power NVNT 1-DH5 2480MHz Ant1

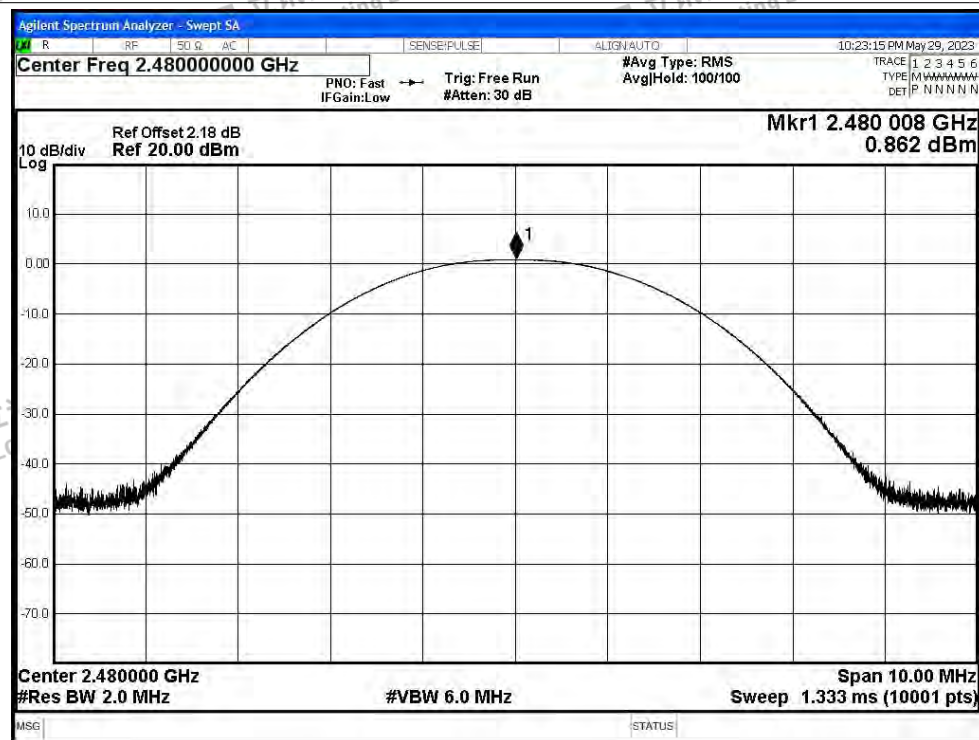


Power NVNT 2-DH5 2402MHz Ant1

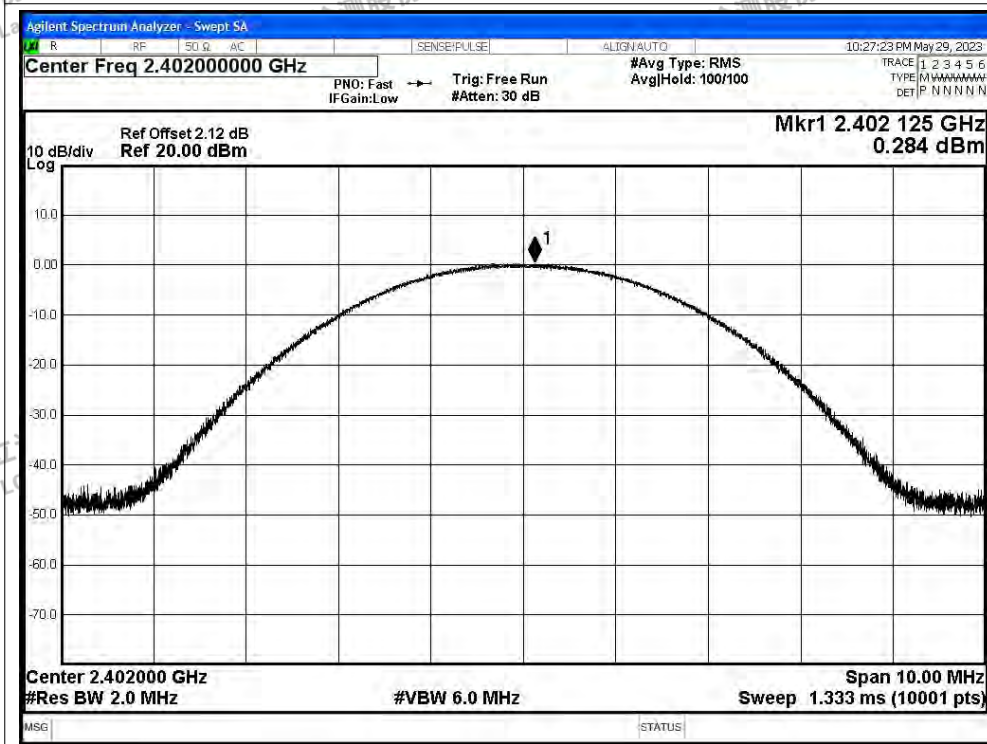




Power NVNT 2-DH5 2441MHz Ant1

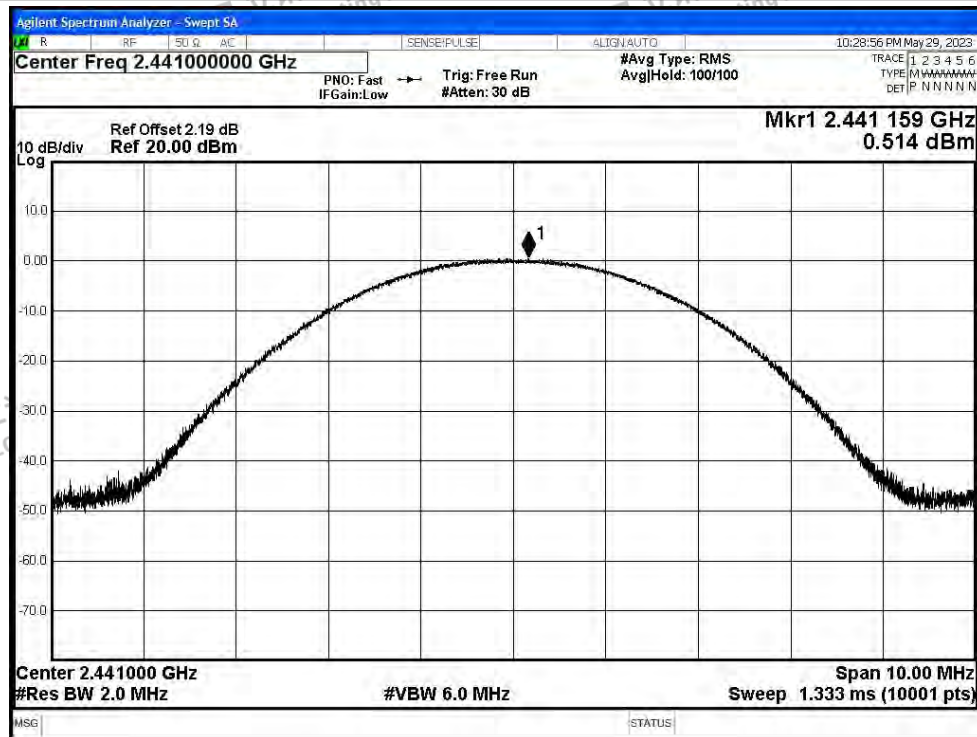


Power NVNT 2-DH5 2480MHz Ant1

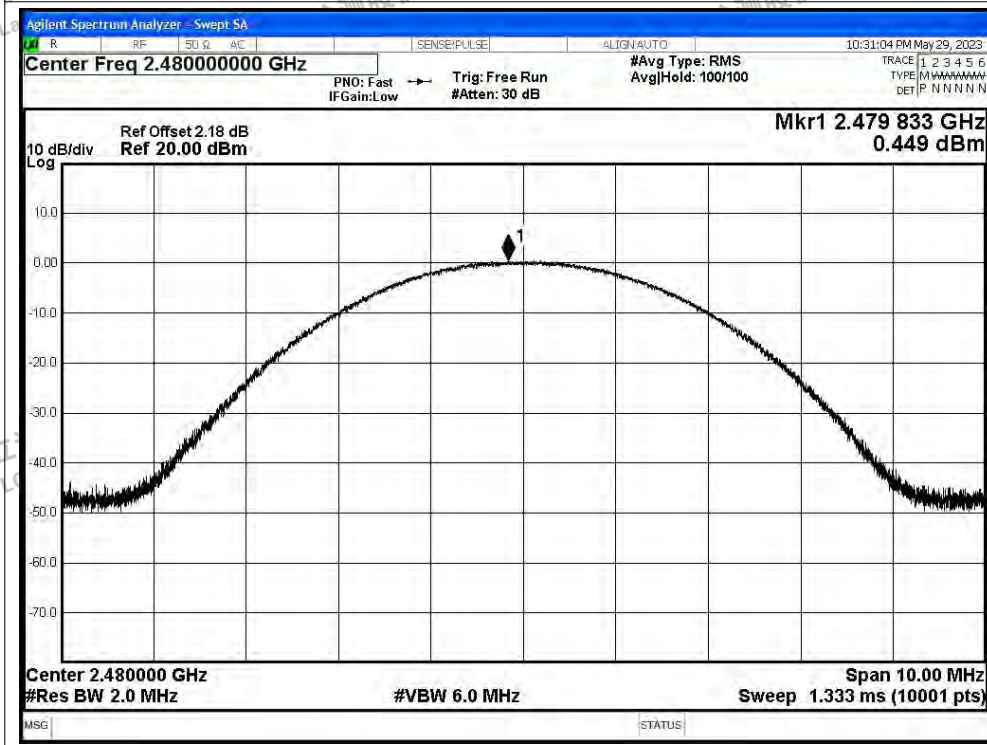





Power NVNT 3-DH5 2402MHz Ant1

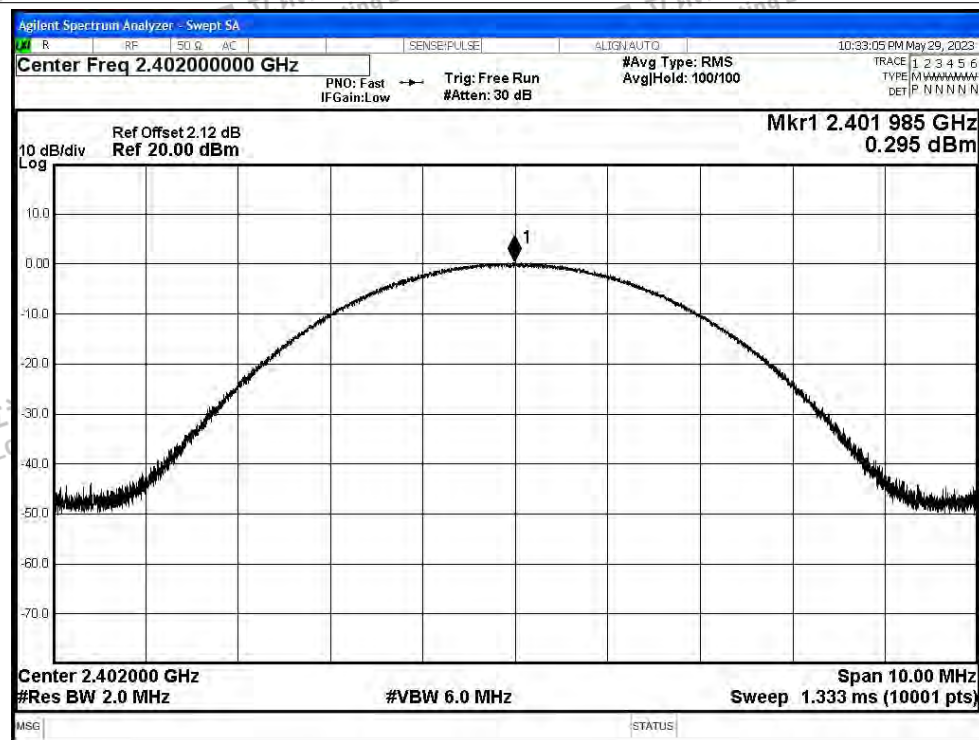

Power NVNT 3-DH5 2441MHz Ant1

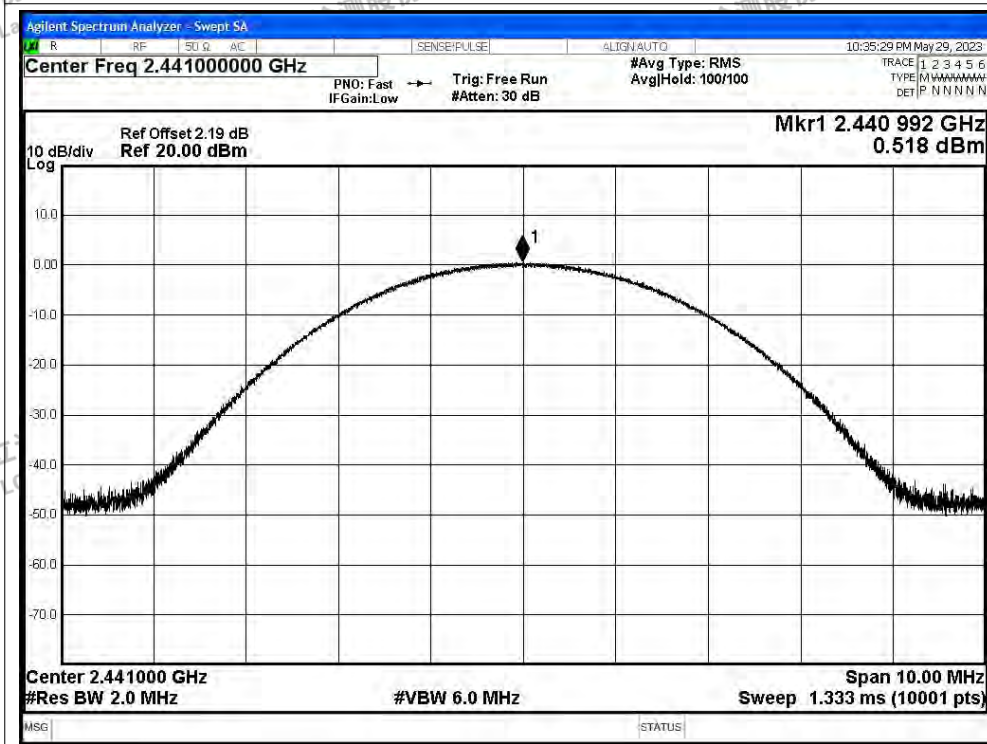

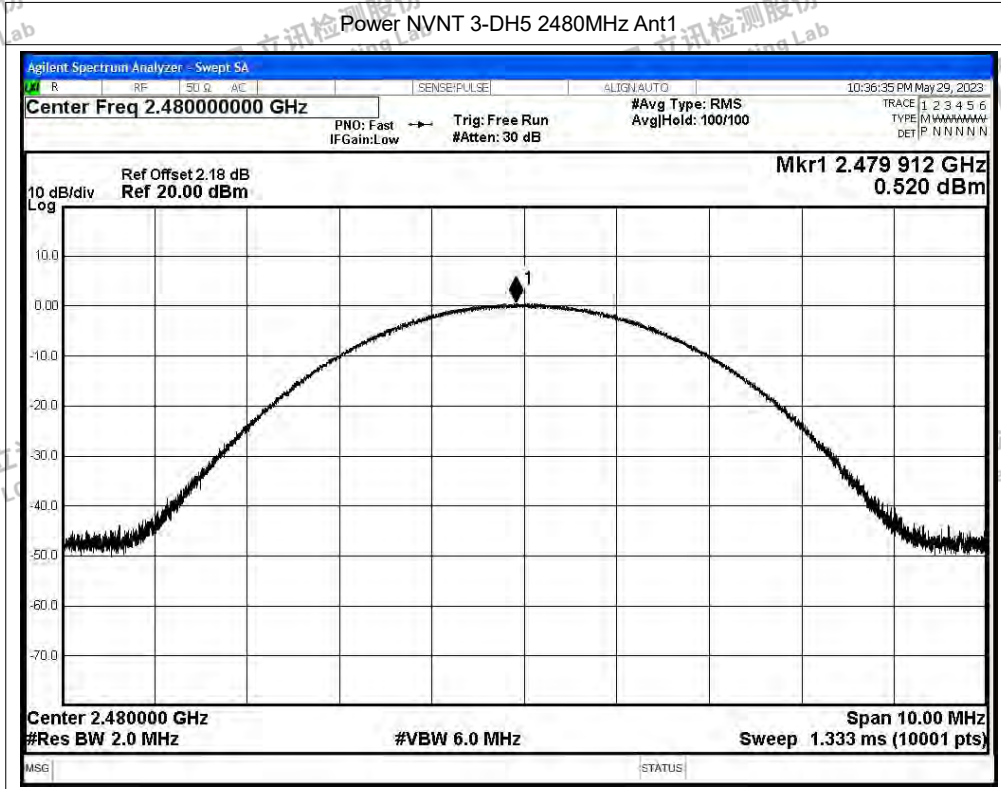

Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



A.3 Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.964	2403.002	1.038	0.687	Pass
NVNT	2-DH5	Ant1	2402.152	2403.164	1.012	0.875	Pass
NVNT	3-DH5	Ant1	2402.146	2403.158	1.012	0.870	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity





Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1

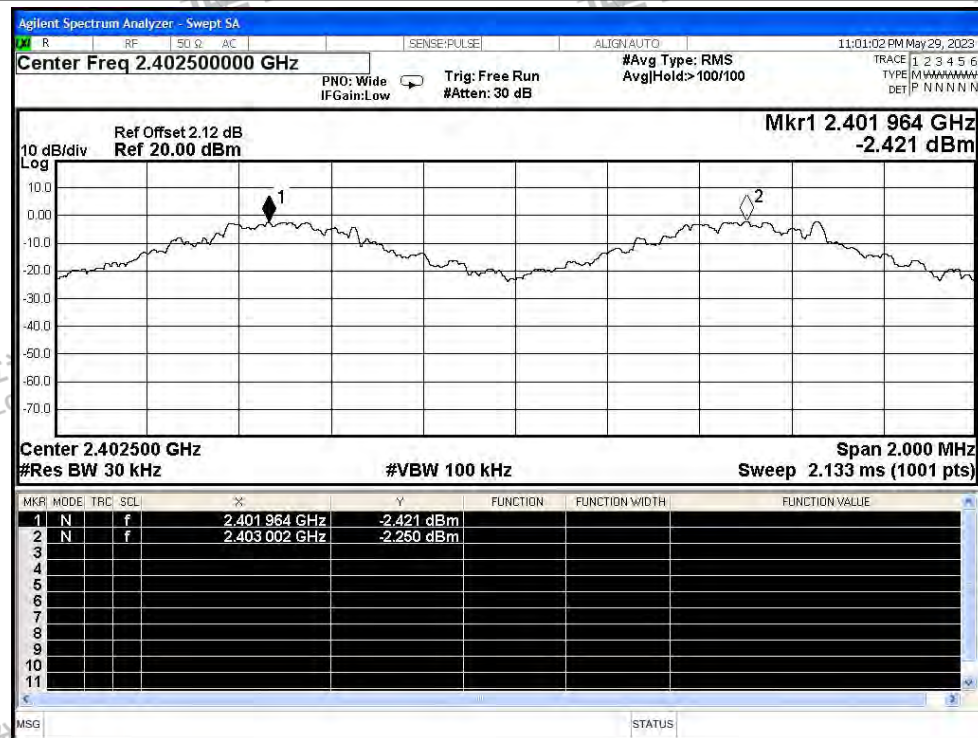

CFS NVNT 2-DH5 2402MHz Ant1

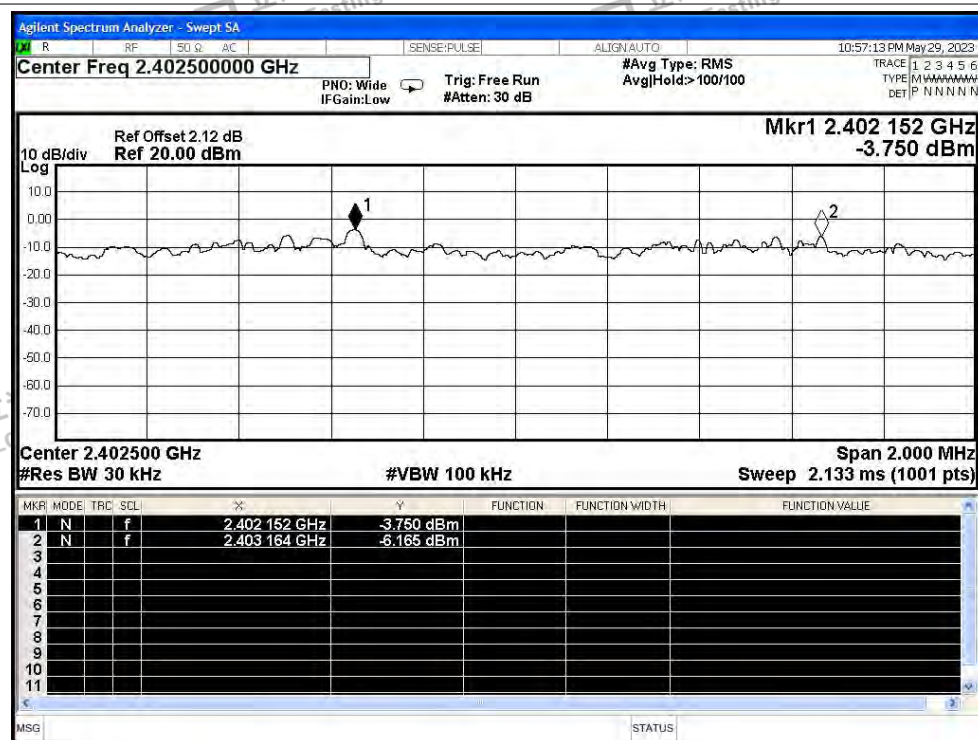

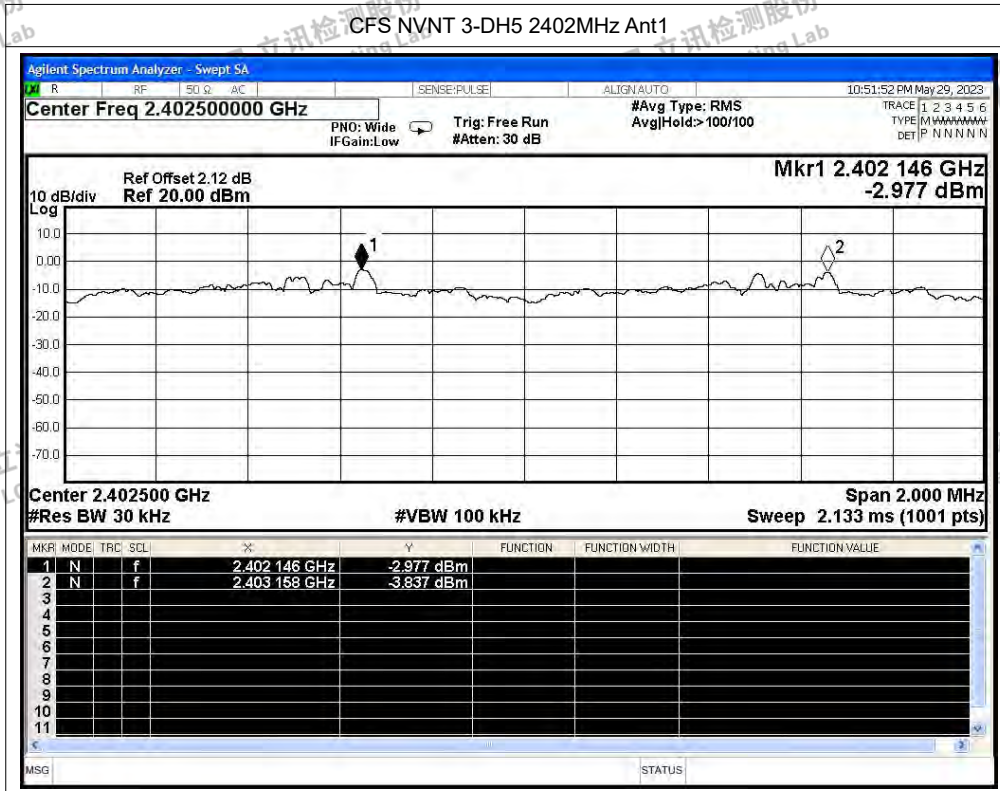

Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



A.4 Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.881	302.505	105	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.88	311.04	108	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.887	306.022	106	31600	400	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

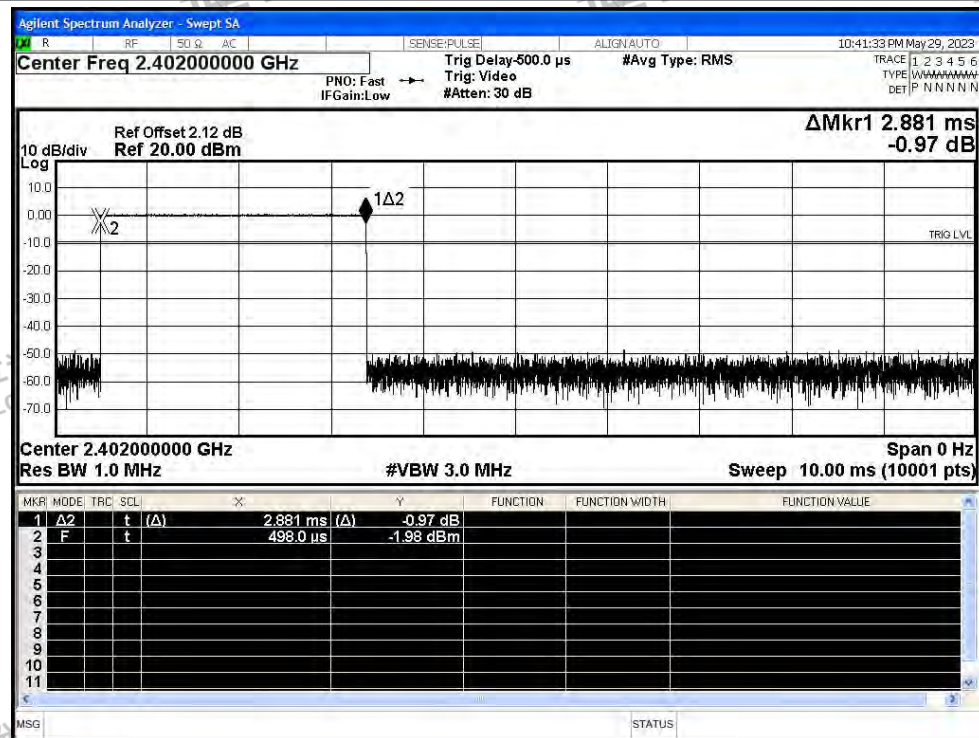


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

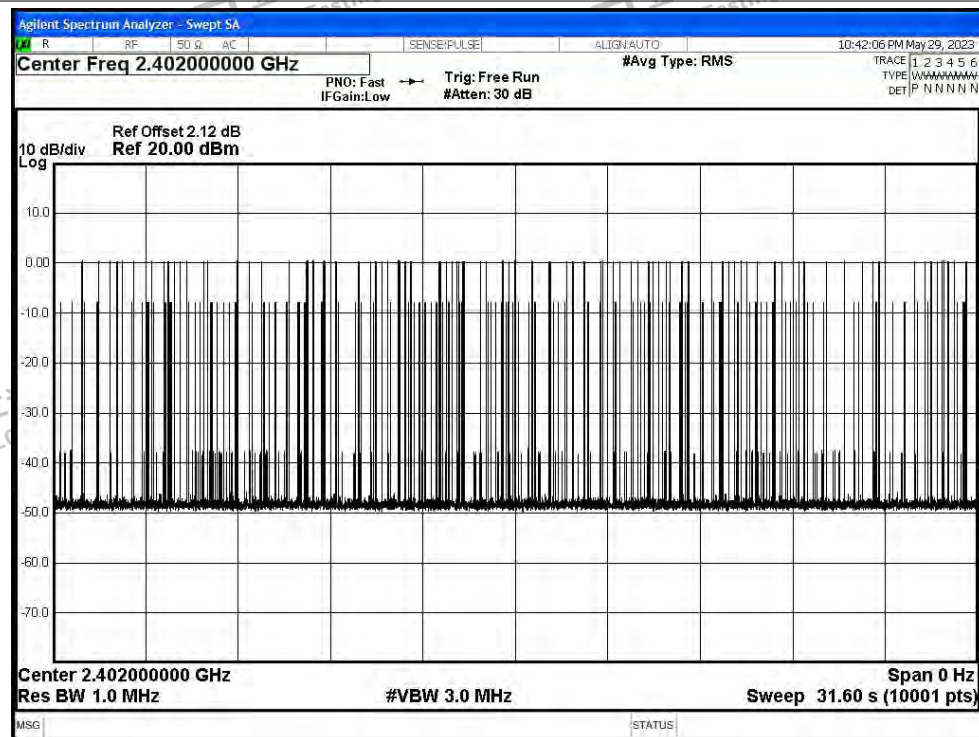


Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

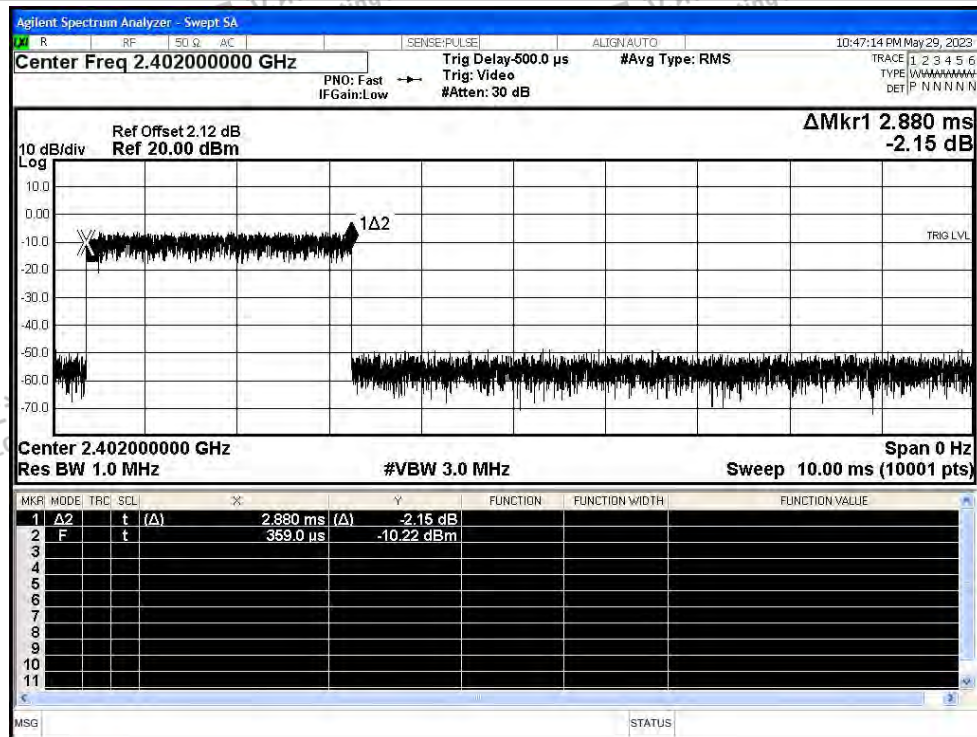


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated

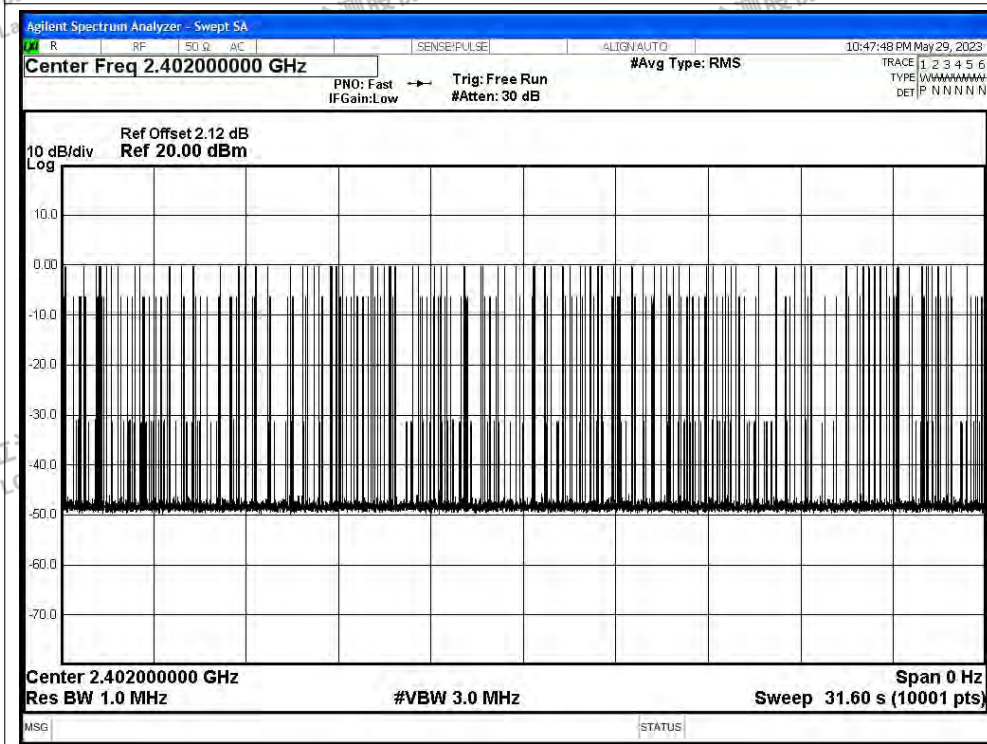




Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

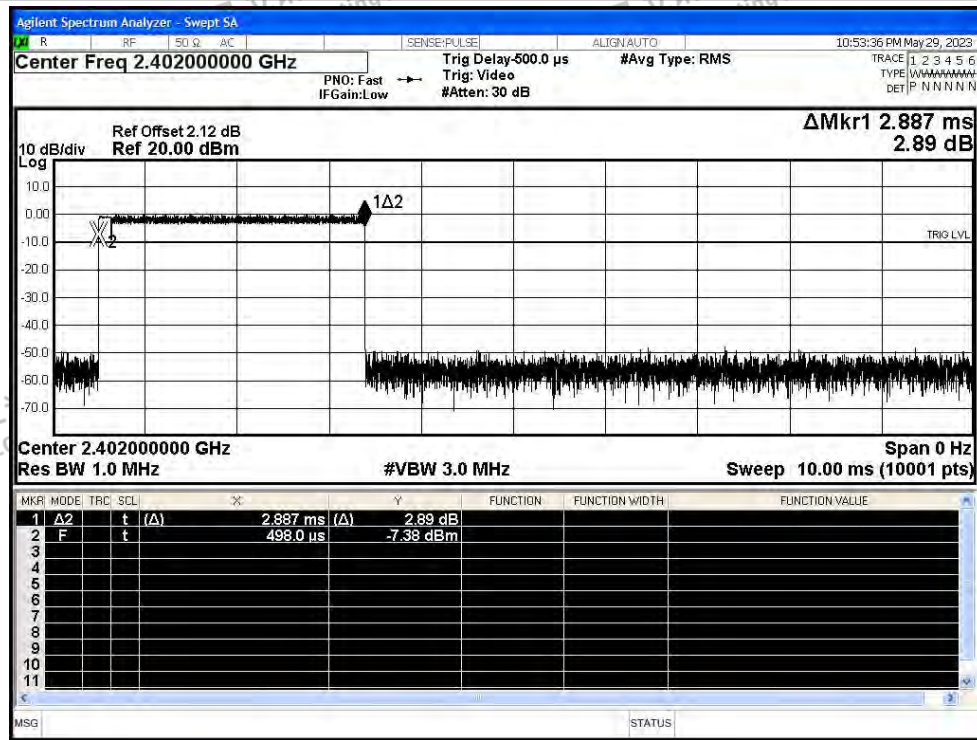

Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

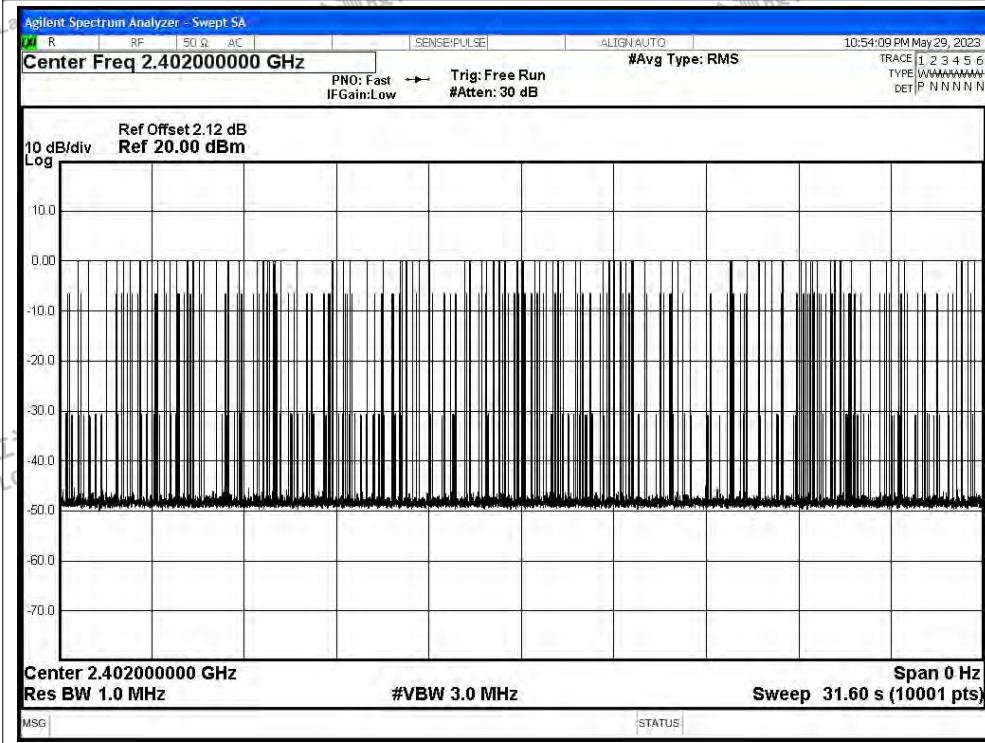



A.5 Number of Hopping Channel

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

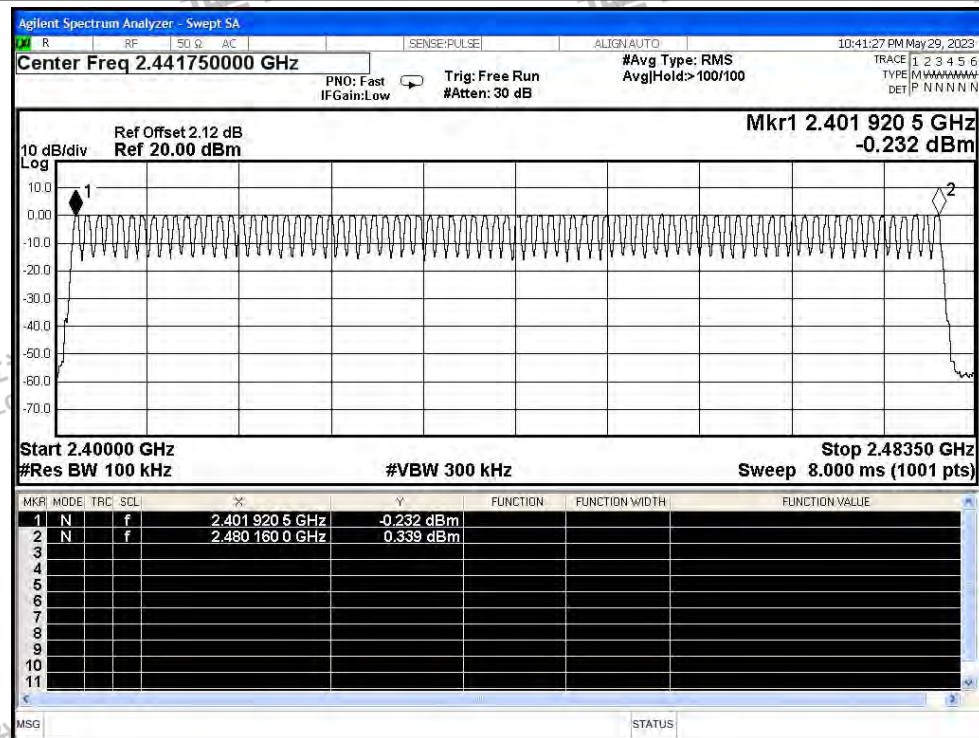

Hopping No. NVNT 2-DH5 2402MHz Ant1

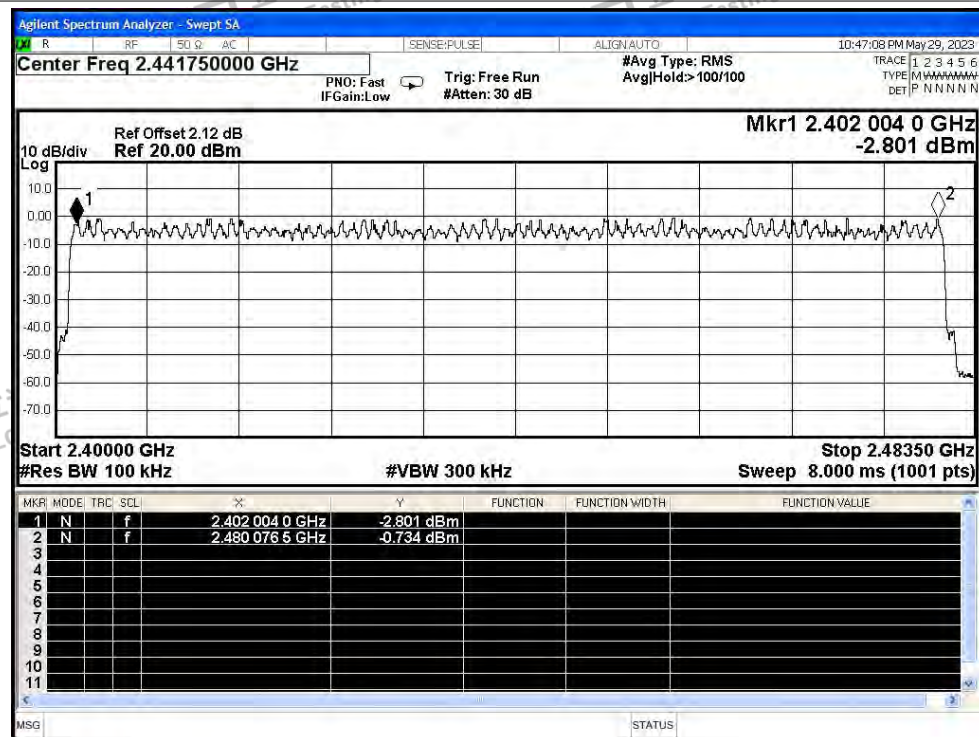

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Hopping No. NVNT 3-DH5 2402MHz Ant1

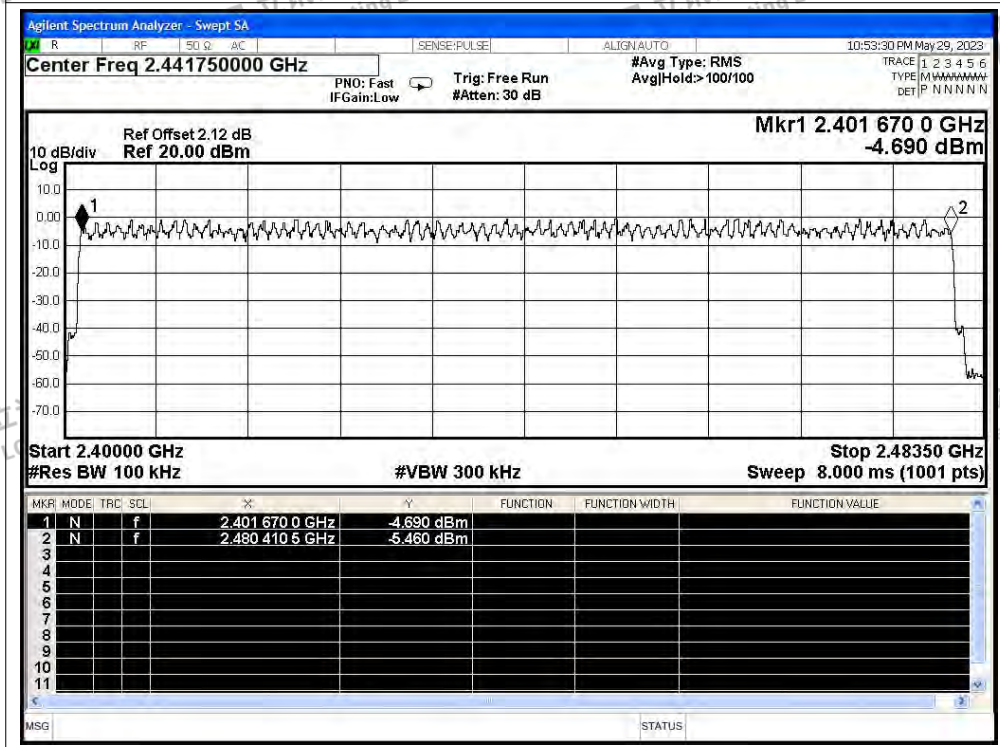

Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



A.6 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-56.75	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-57	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-52.85	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-54.35	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-52.86	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-56.24	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

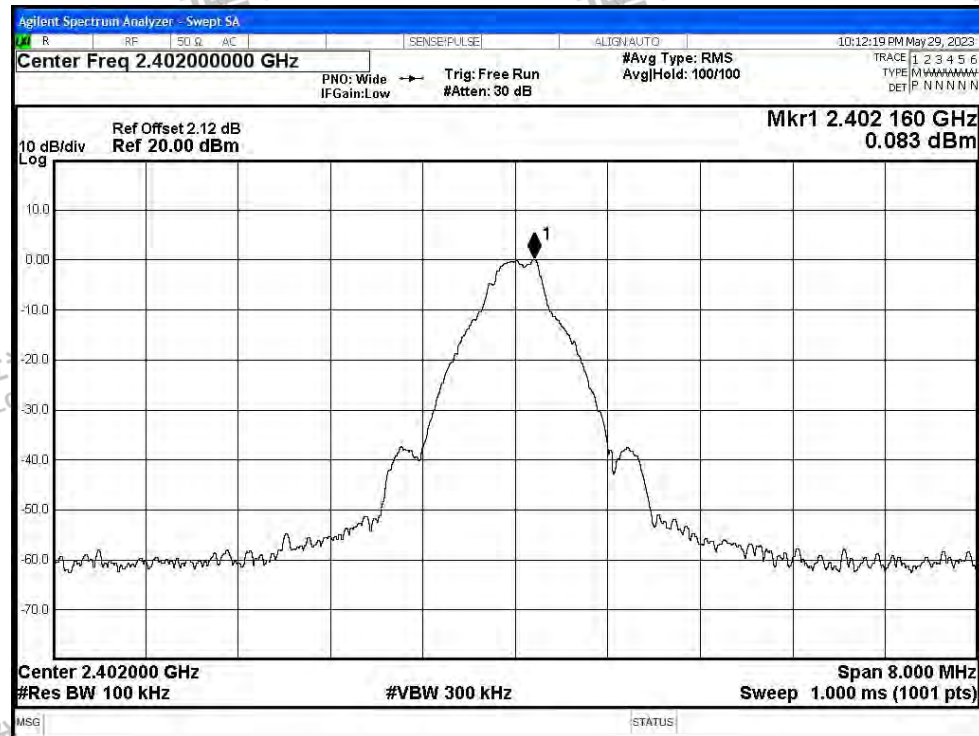

Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

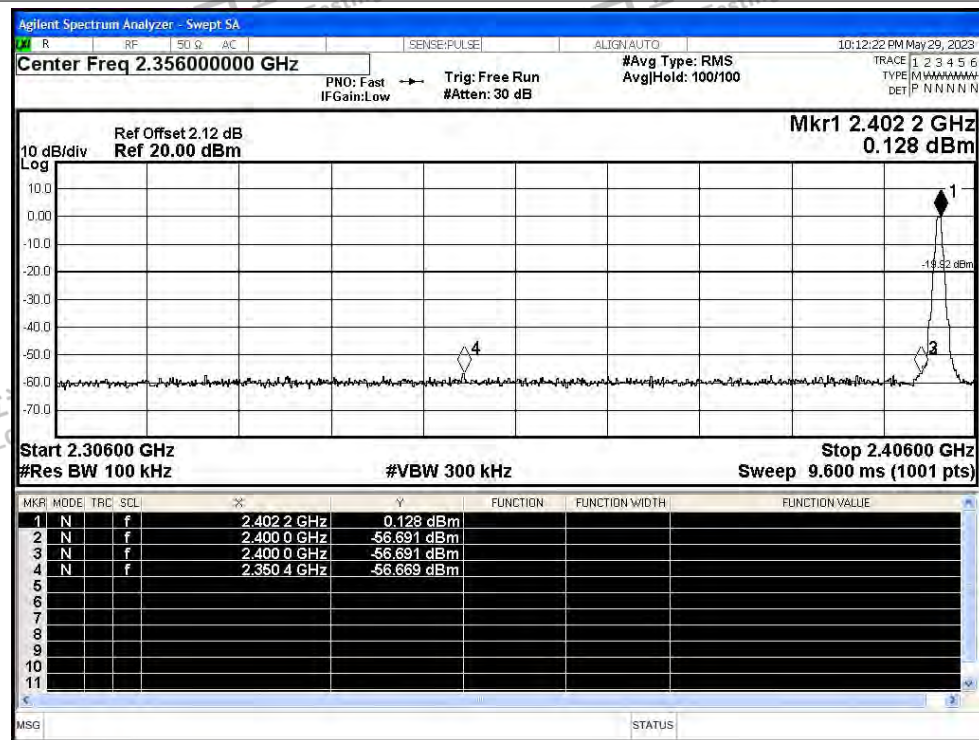

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

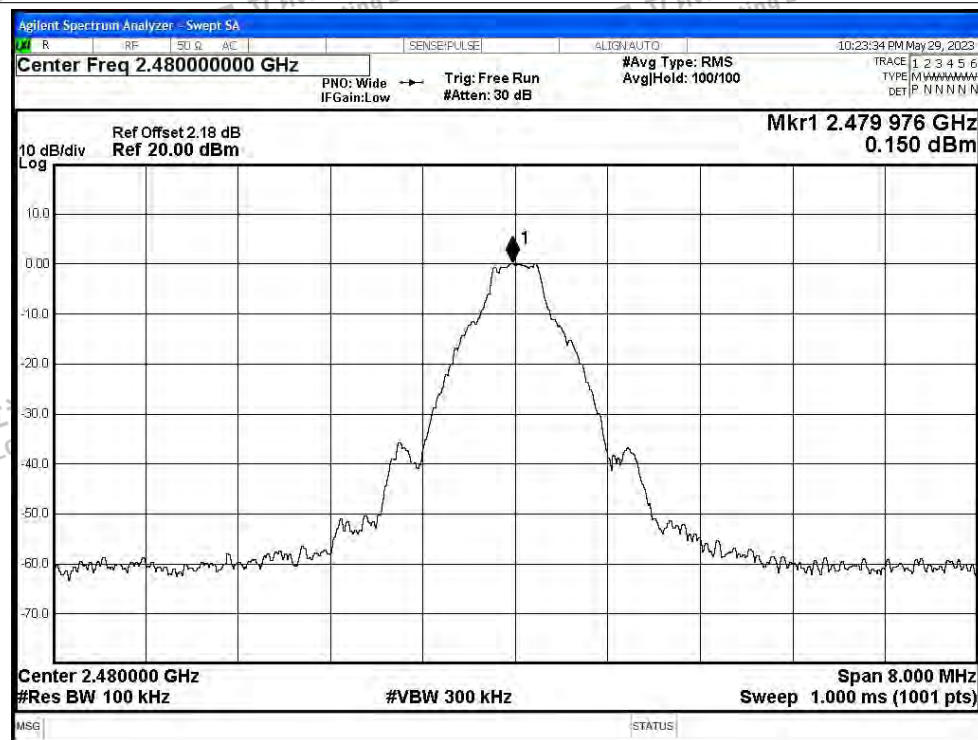


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

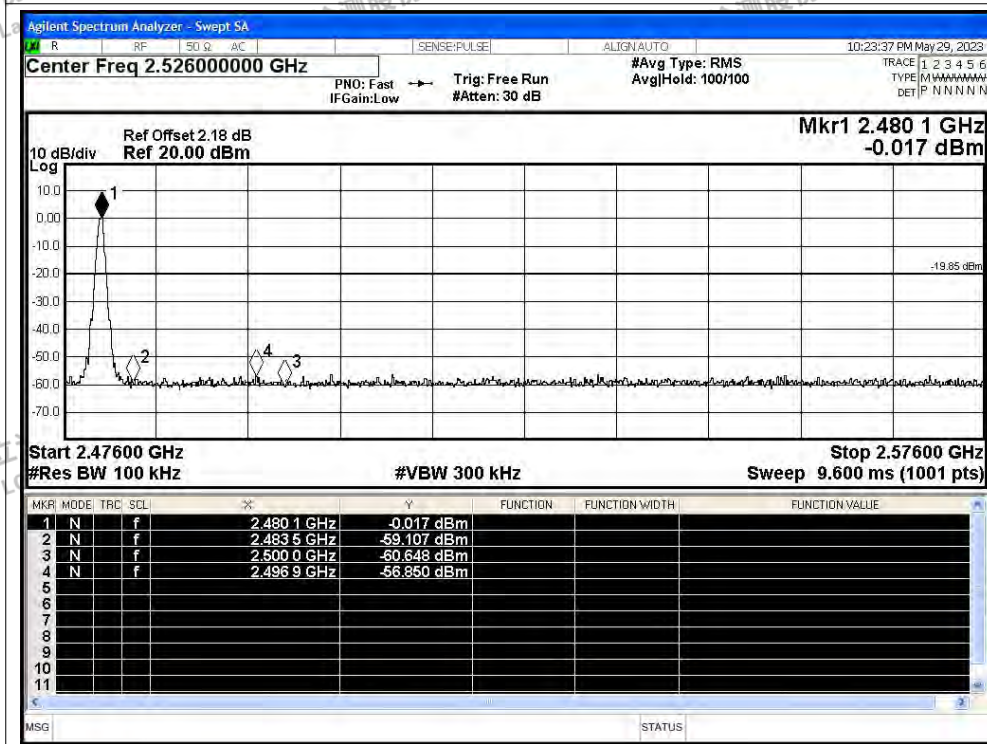




Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

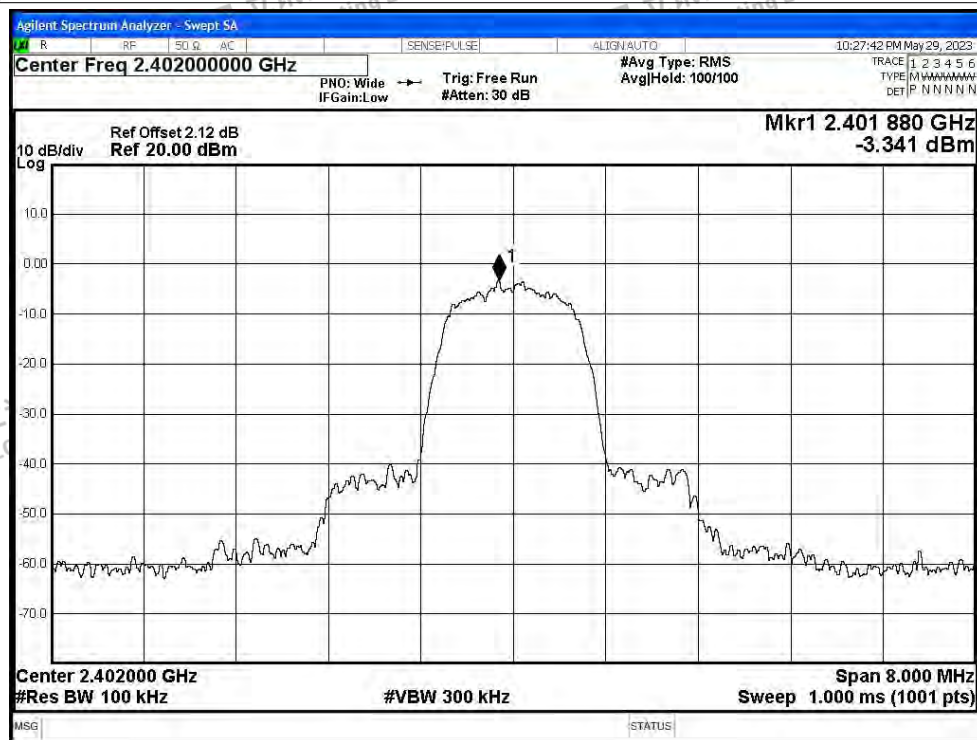


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

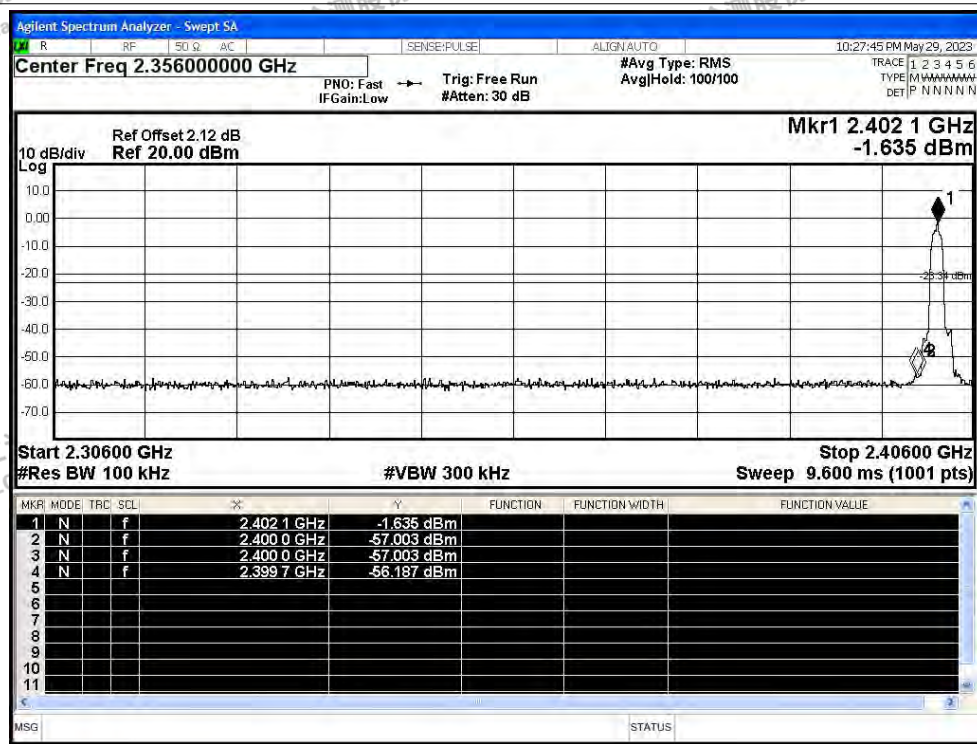




Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

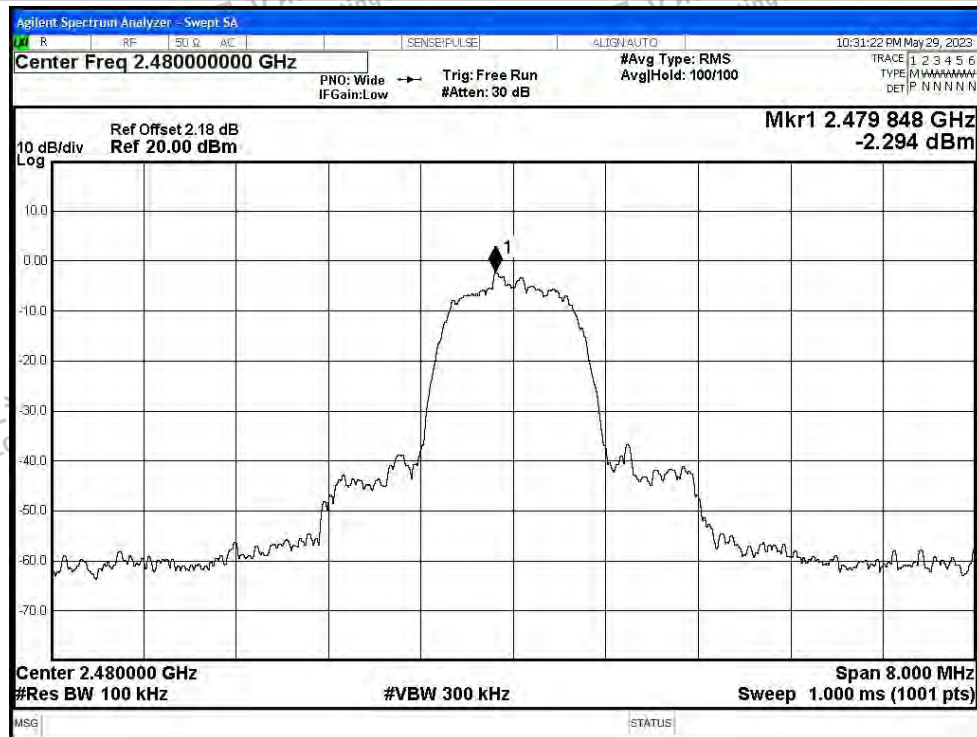


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

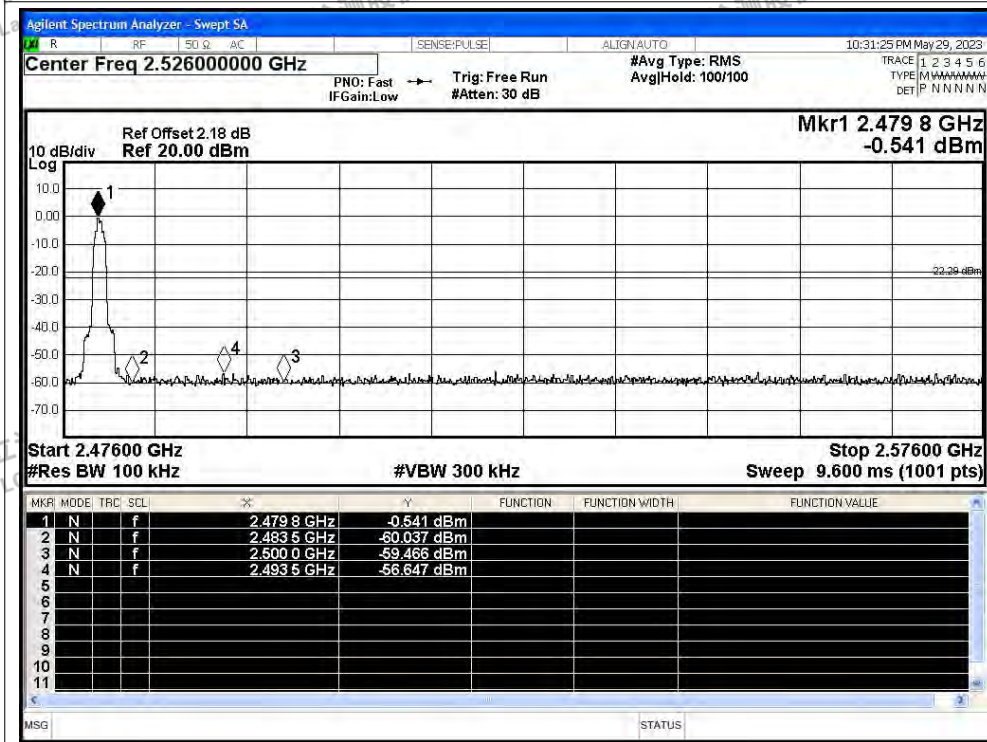




Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

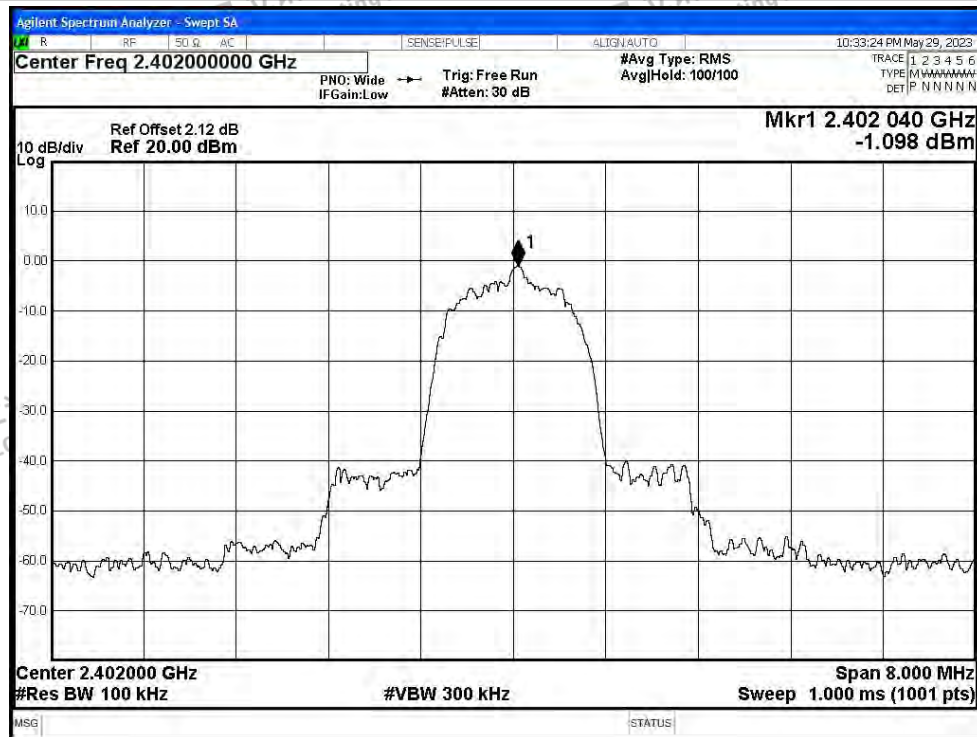


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

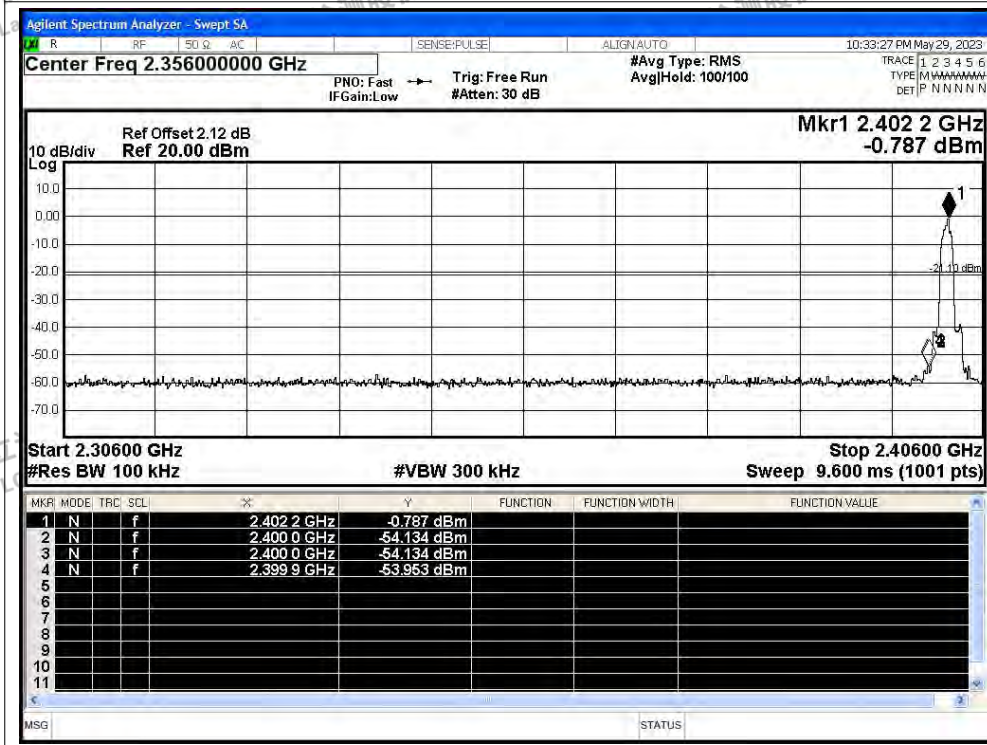




Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

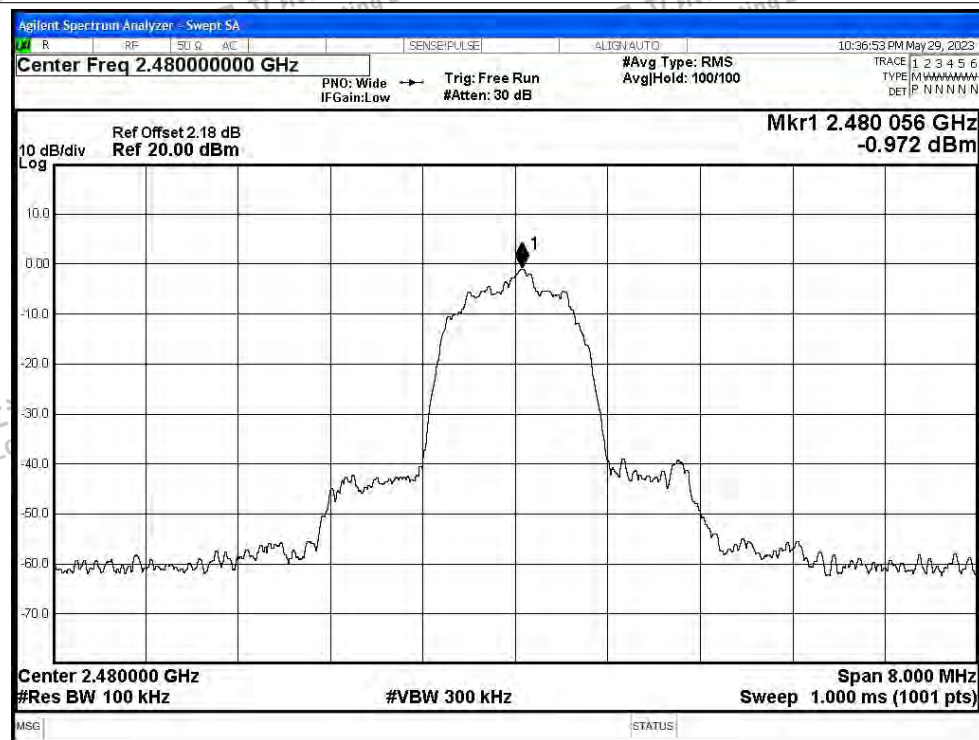

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

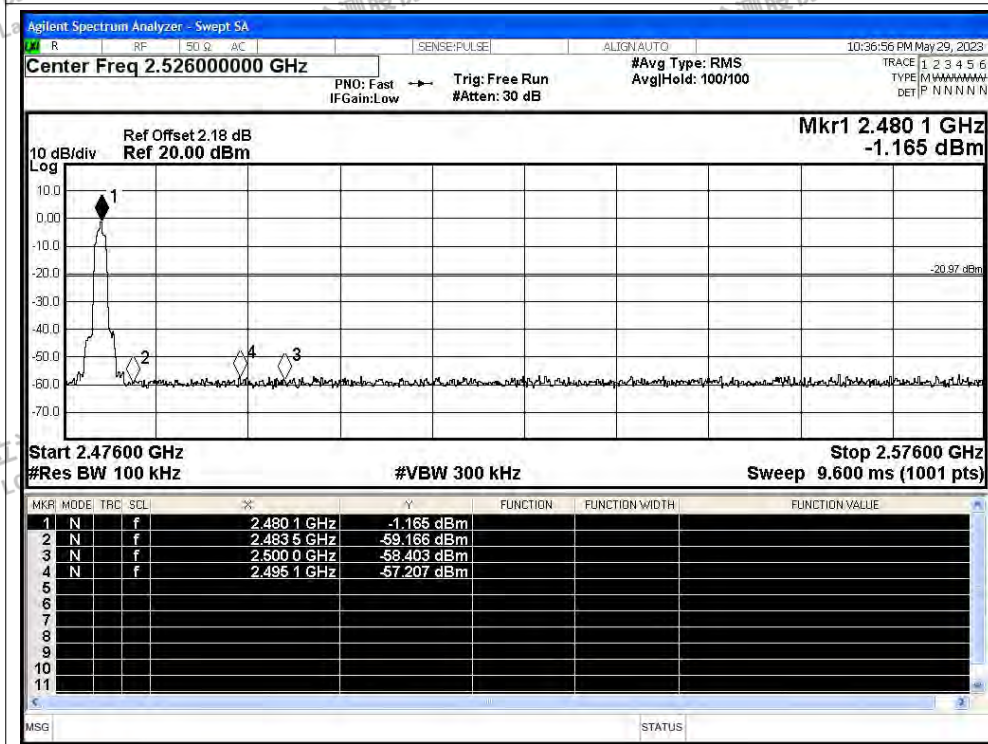



(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-55.89	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-56.3	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-54.62	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-54.61	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-53.67	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-54.56	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

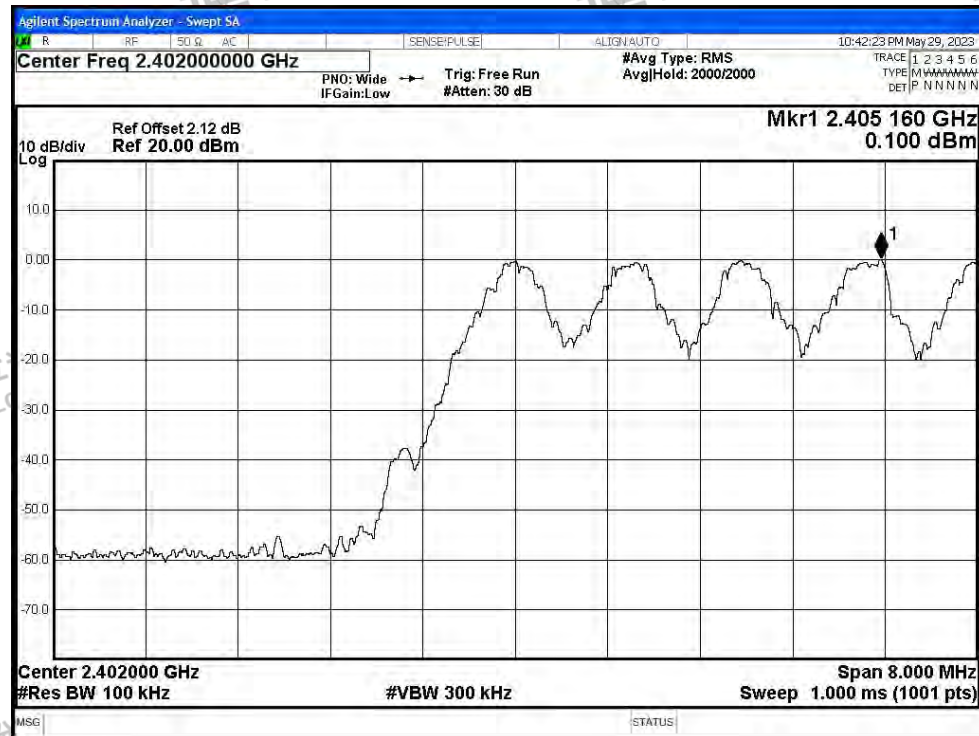

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

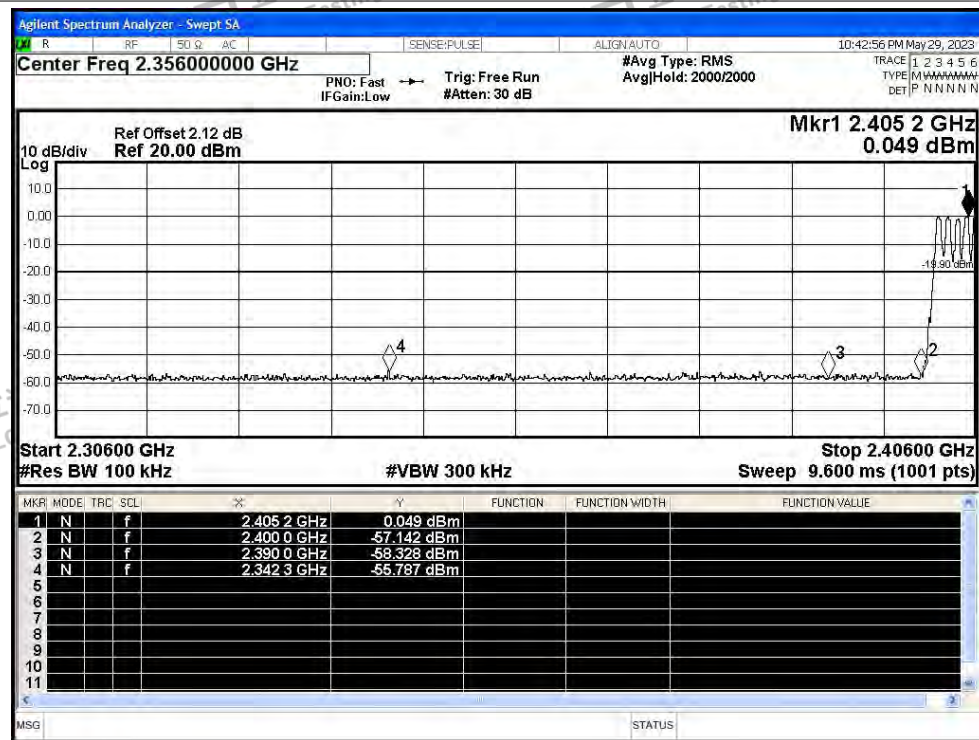

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

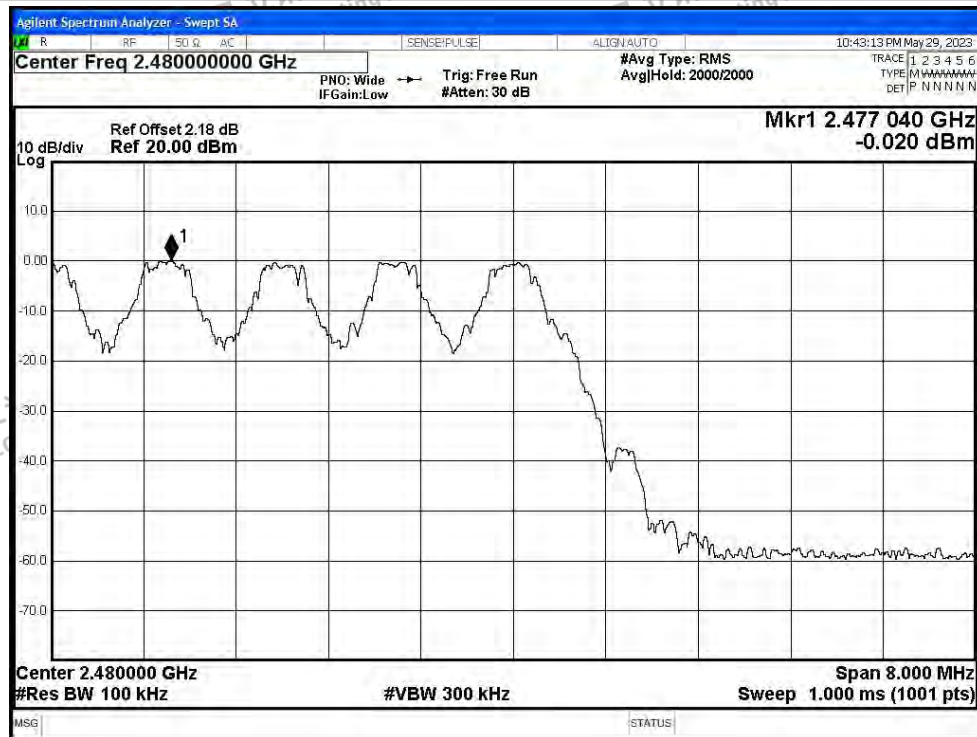

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

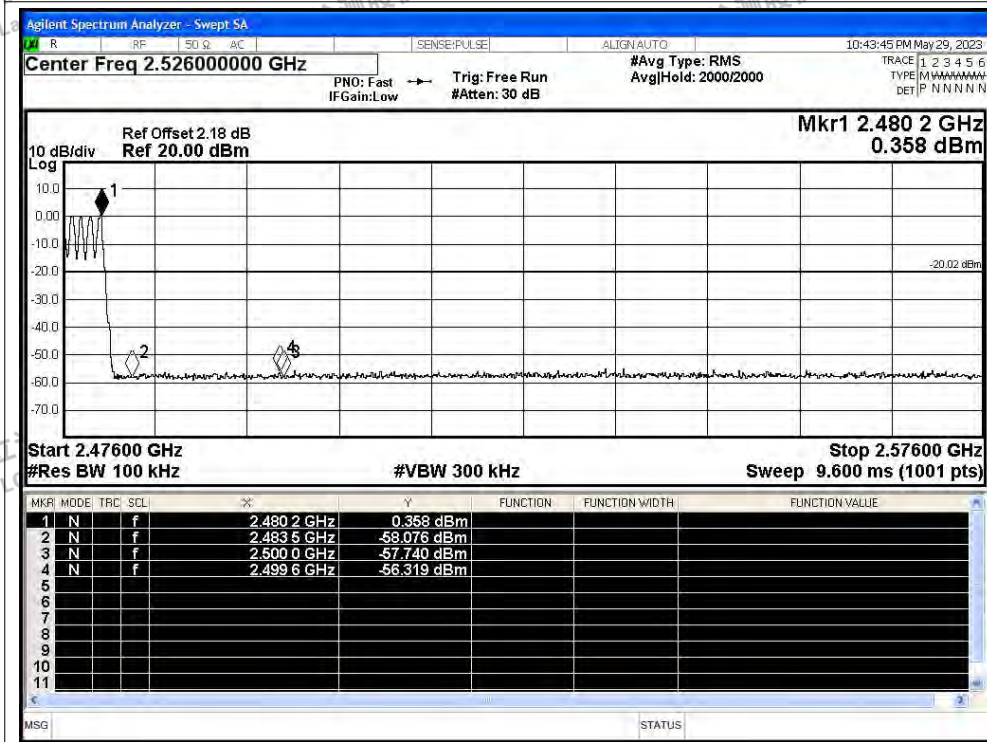




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

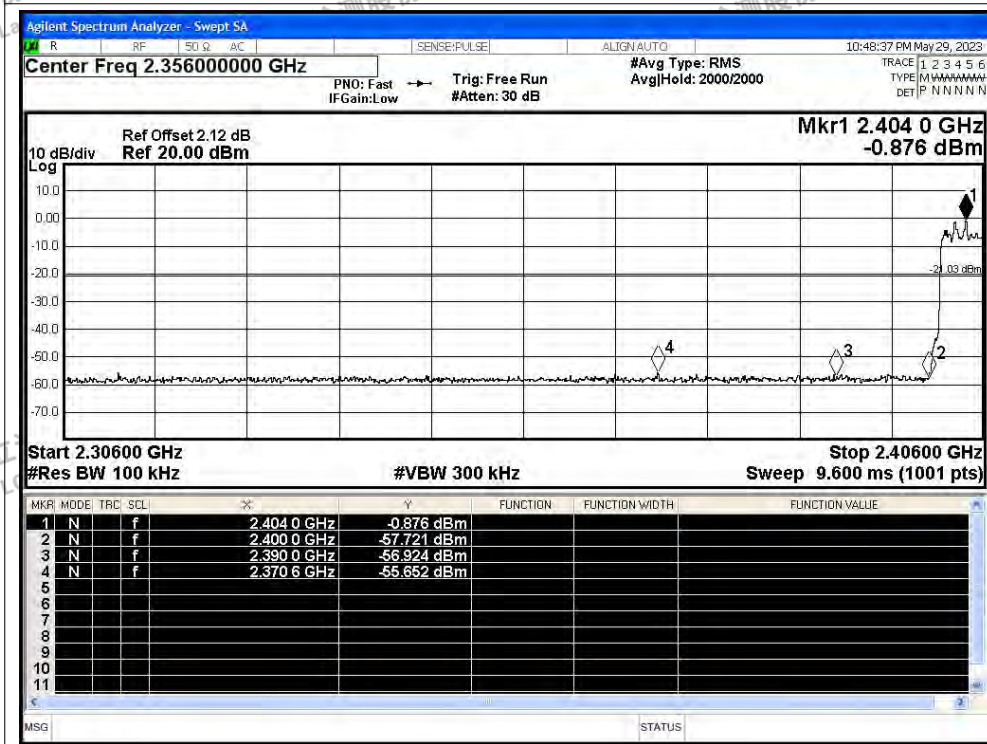




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

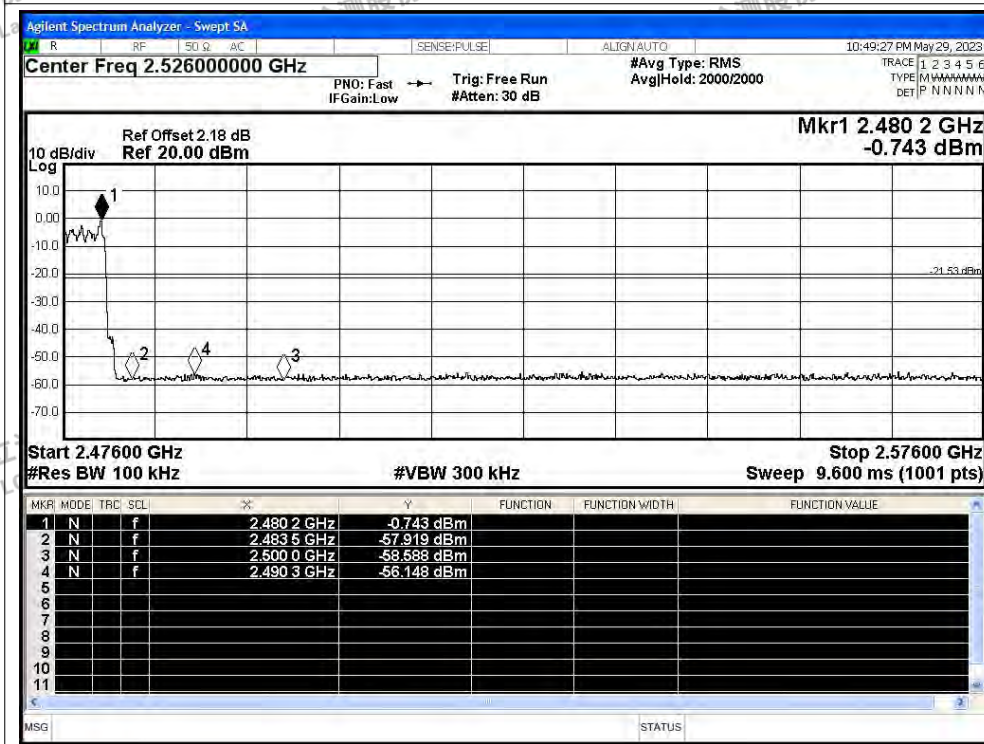

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

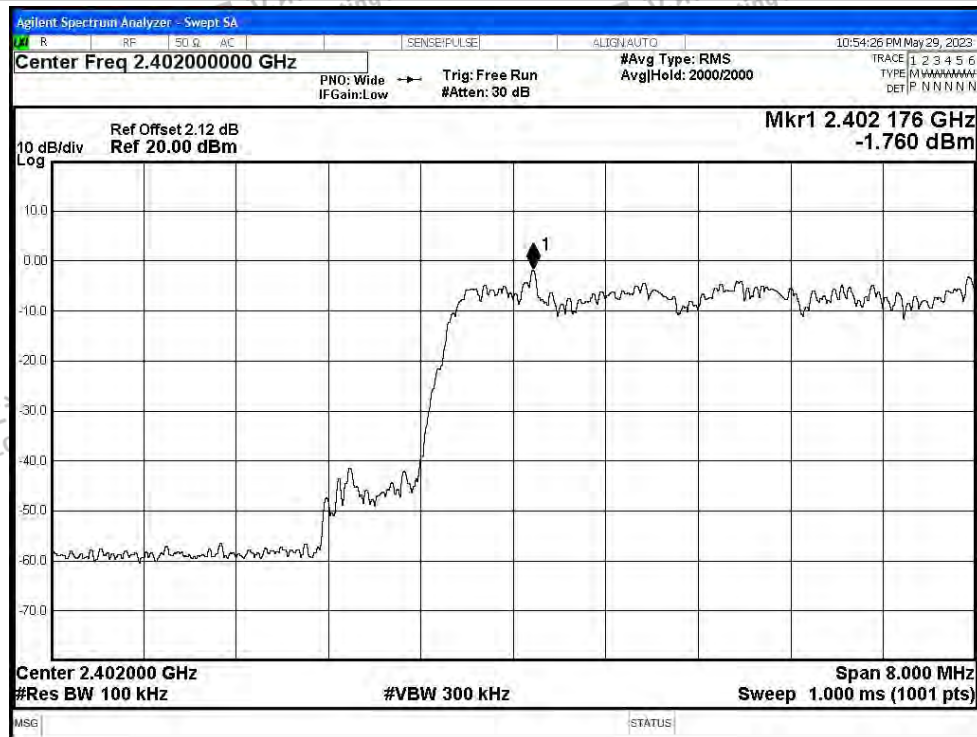

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

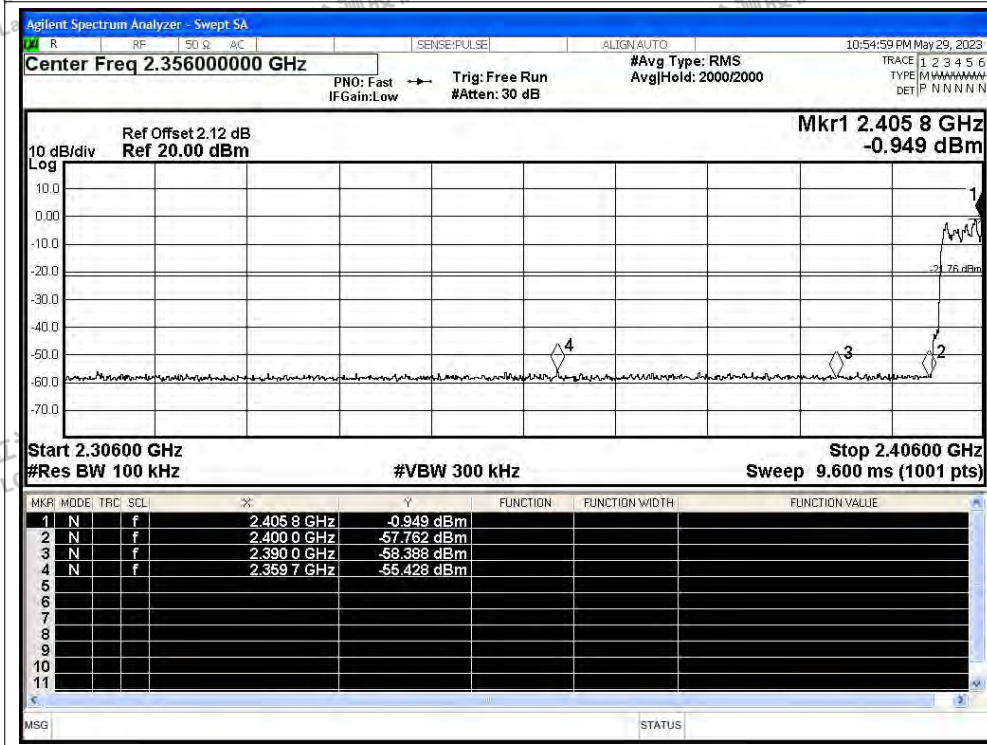

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

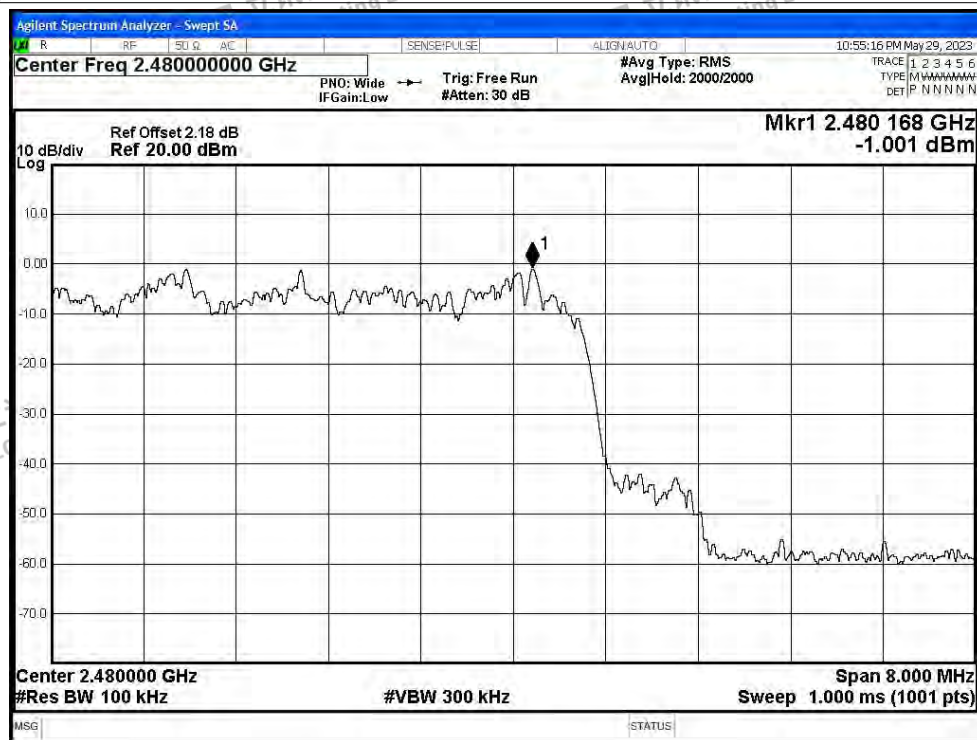

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

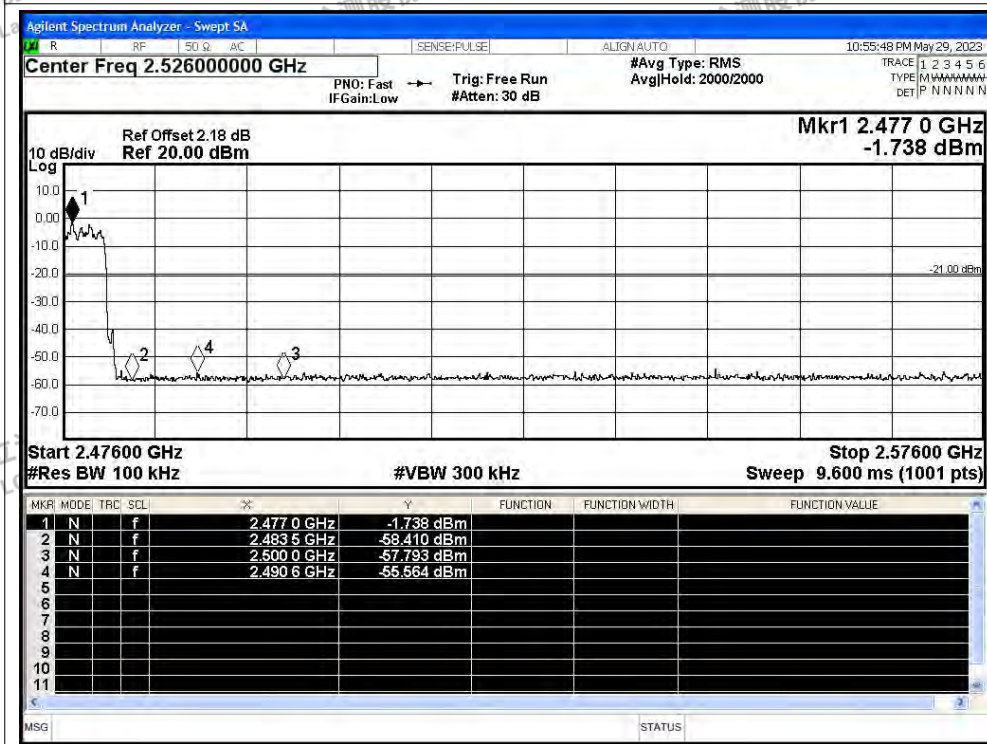



A.7 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-54.43	-20	Pass
NVNT	1-DH5	2441	Ant1	-55.61	-20	Pass
NVNT	1-DH5	2480	Ant1	-54.56	-20	Pass
NVNT	2-DH5	2402	Ant1	-54.86	-20	Pass
NVNT	2-DH5	2441	Ant1	-54.5	-20	Pass
NVNT	2-DH5	2480	Ant1	-53.89	-20	Pass
NVNT	3-DH5	2402	Ant1	-54.21	-20	Pass
NVNT	3-DH5	2441	Ant1	-54.72	-20	Pass
NVNT	3-DH5	2480	Ant1	-54.97	-20	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

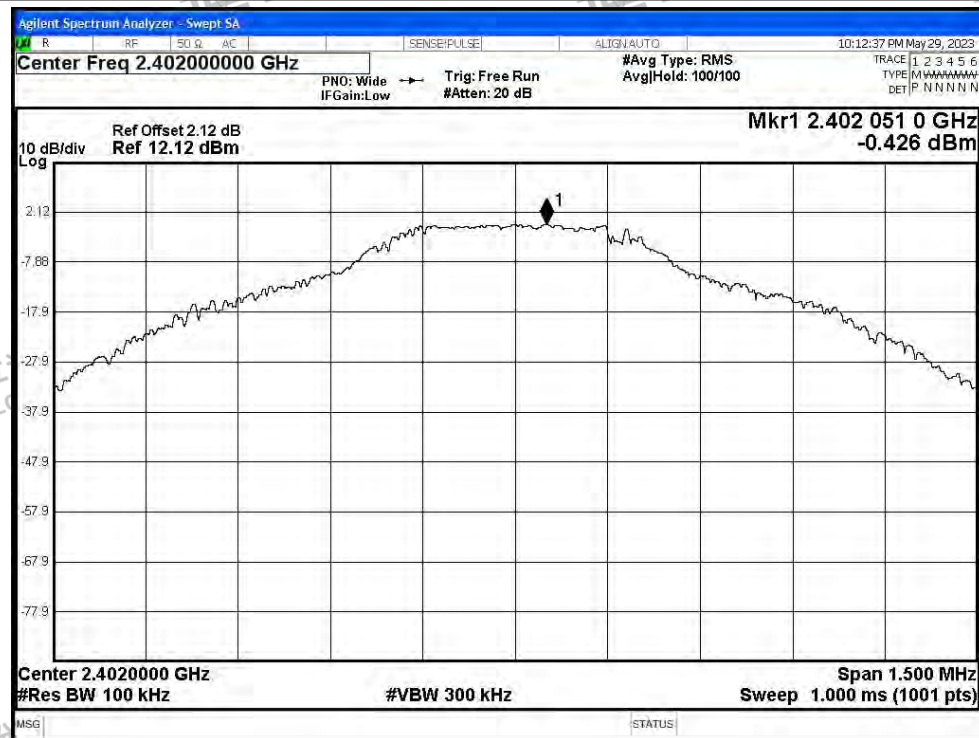

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

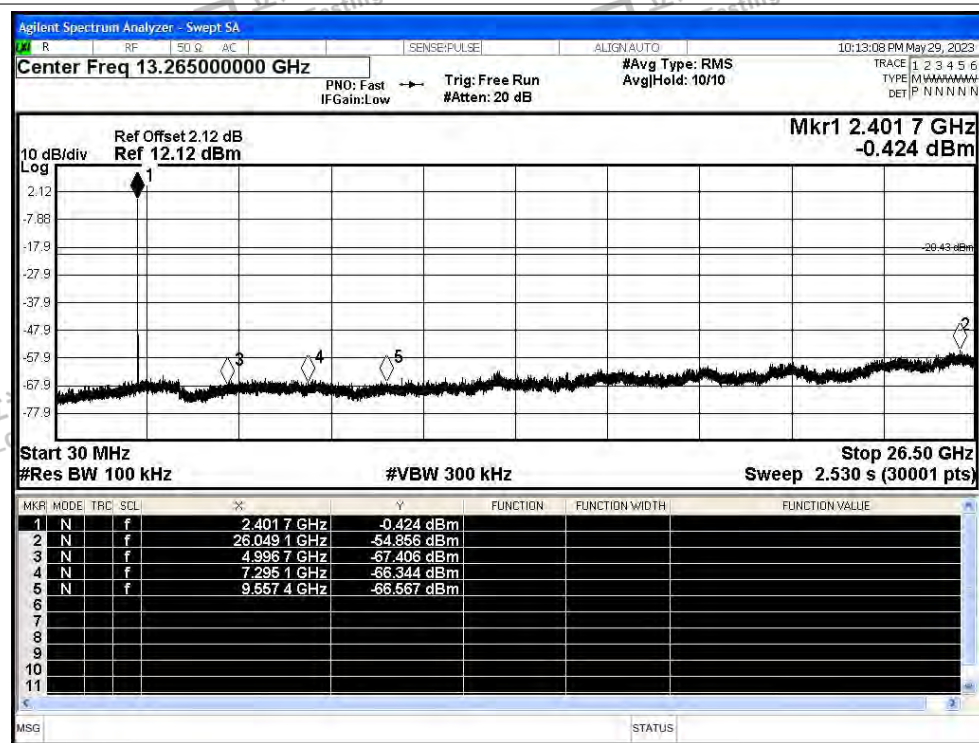

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

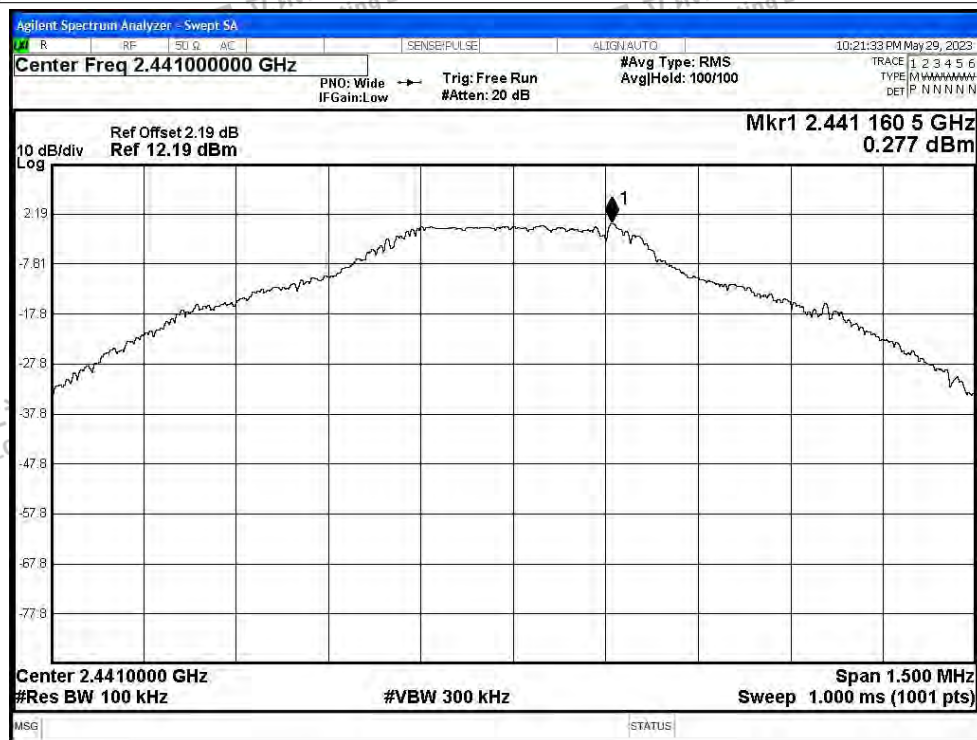


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

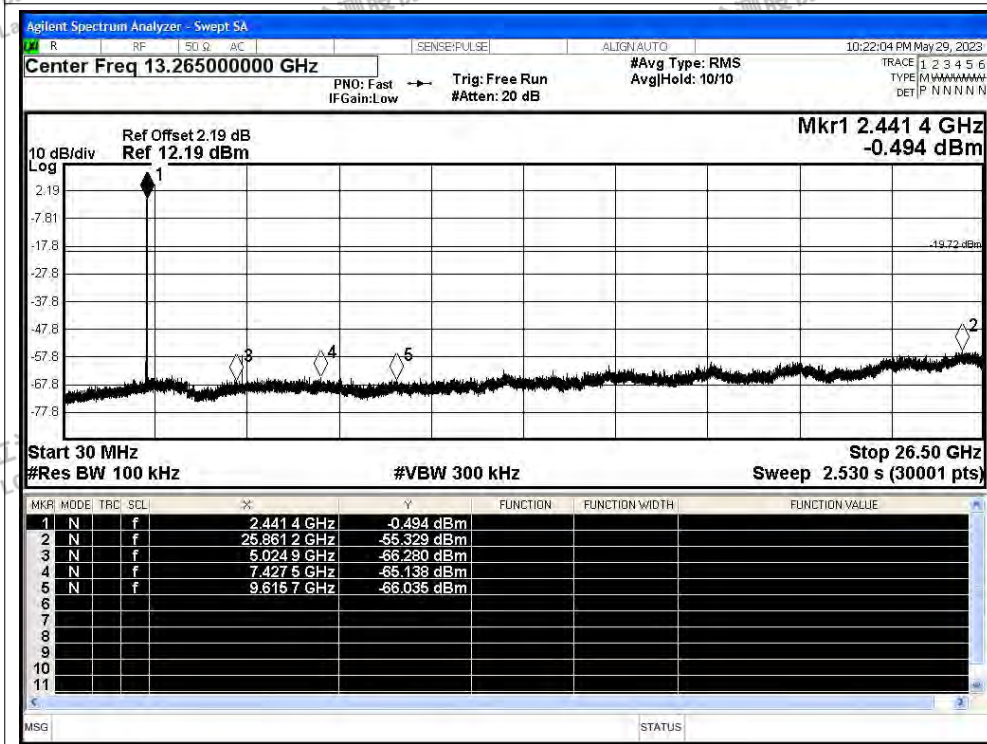




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

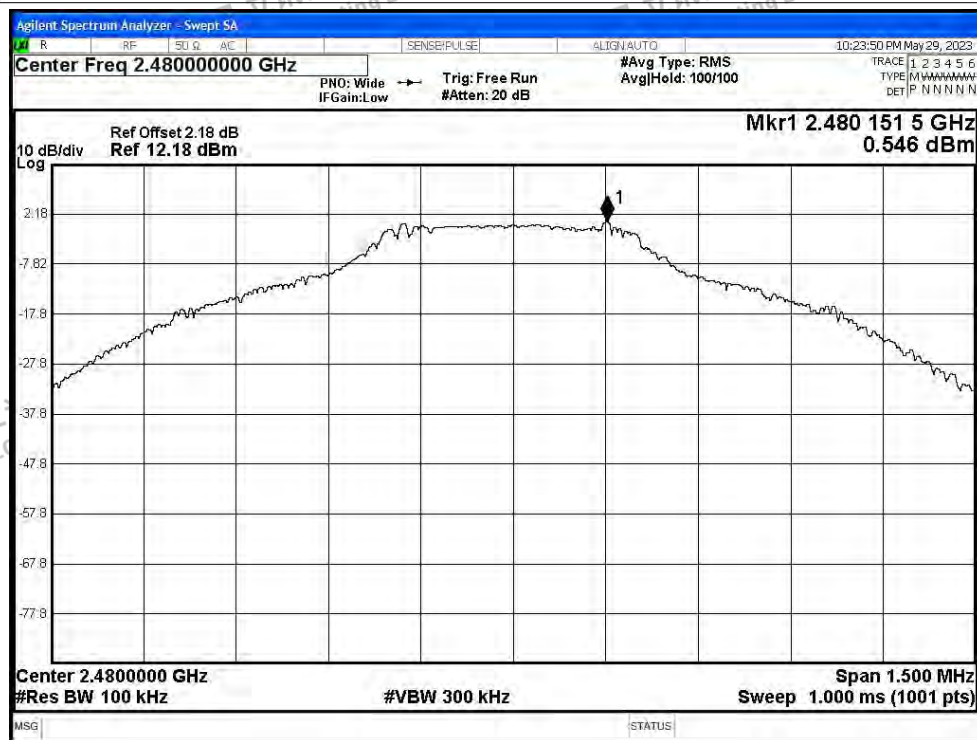


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

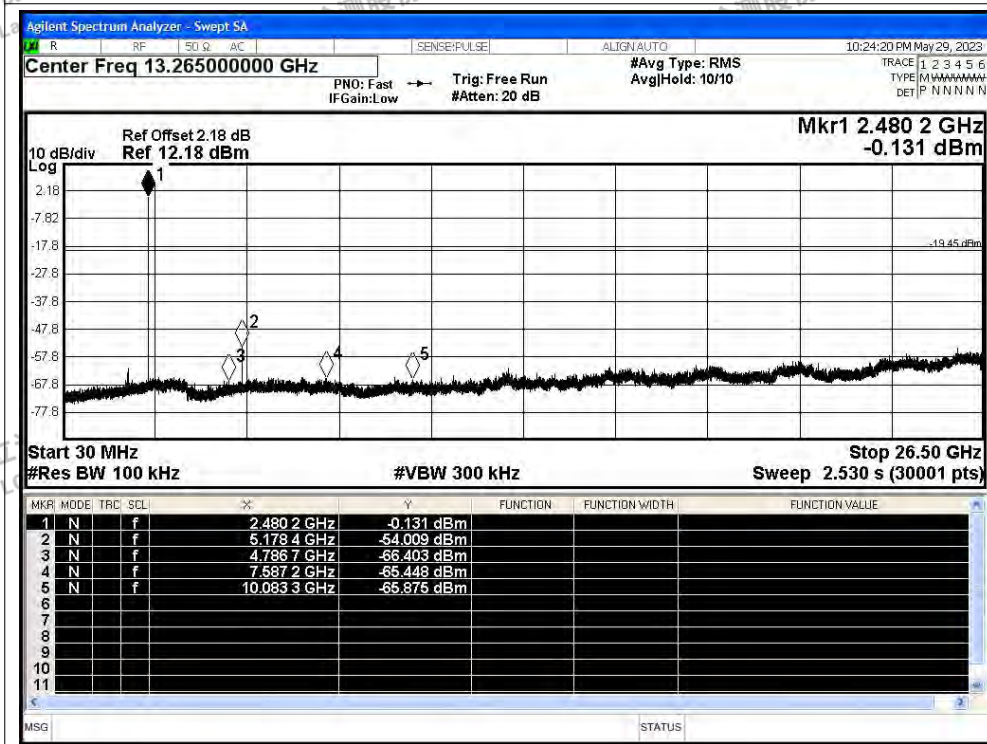




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

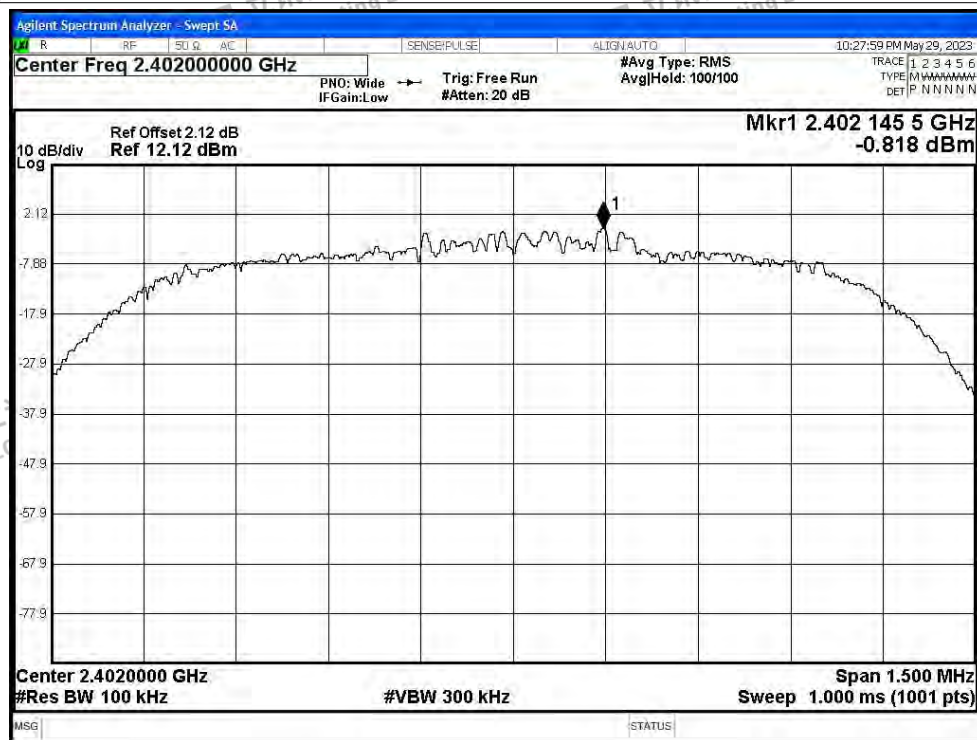


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

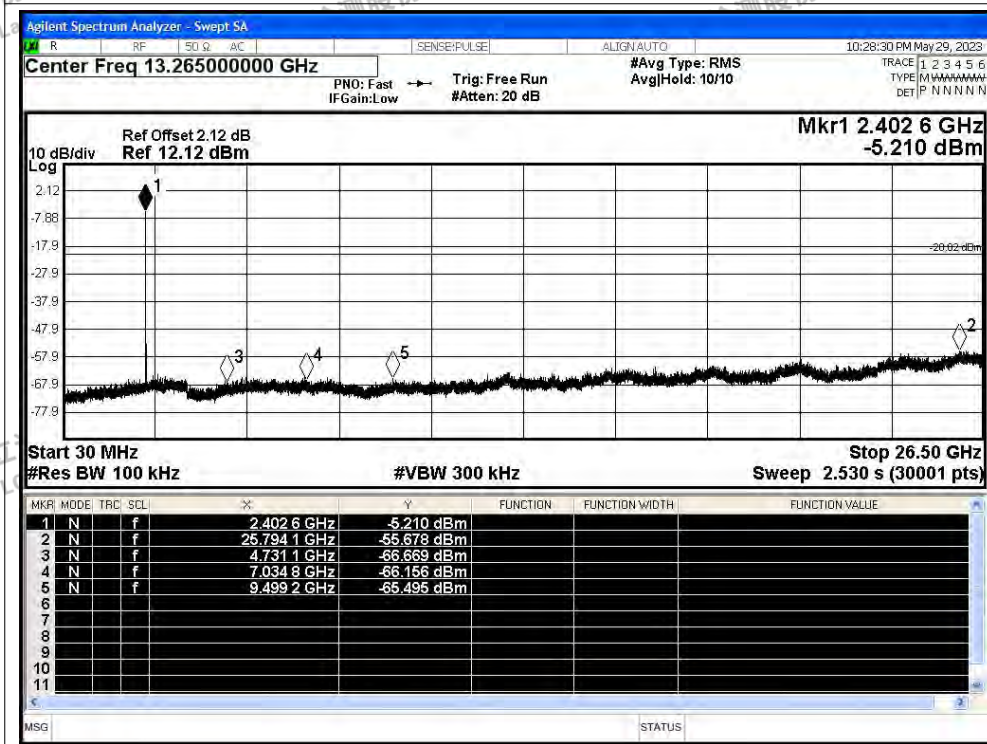




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

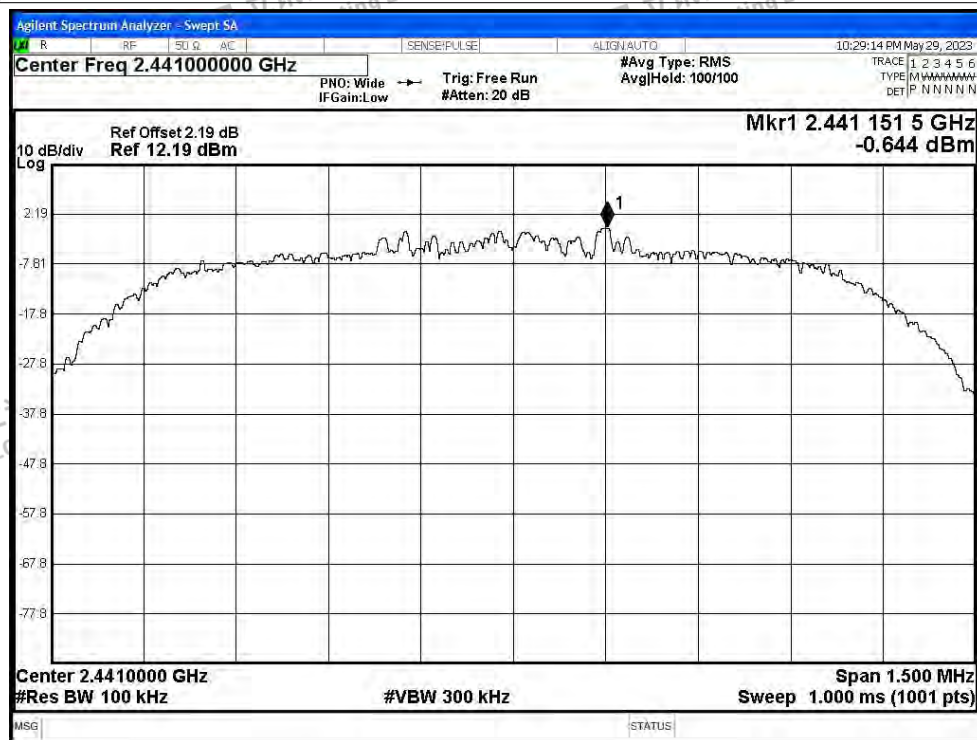


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

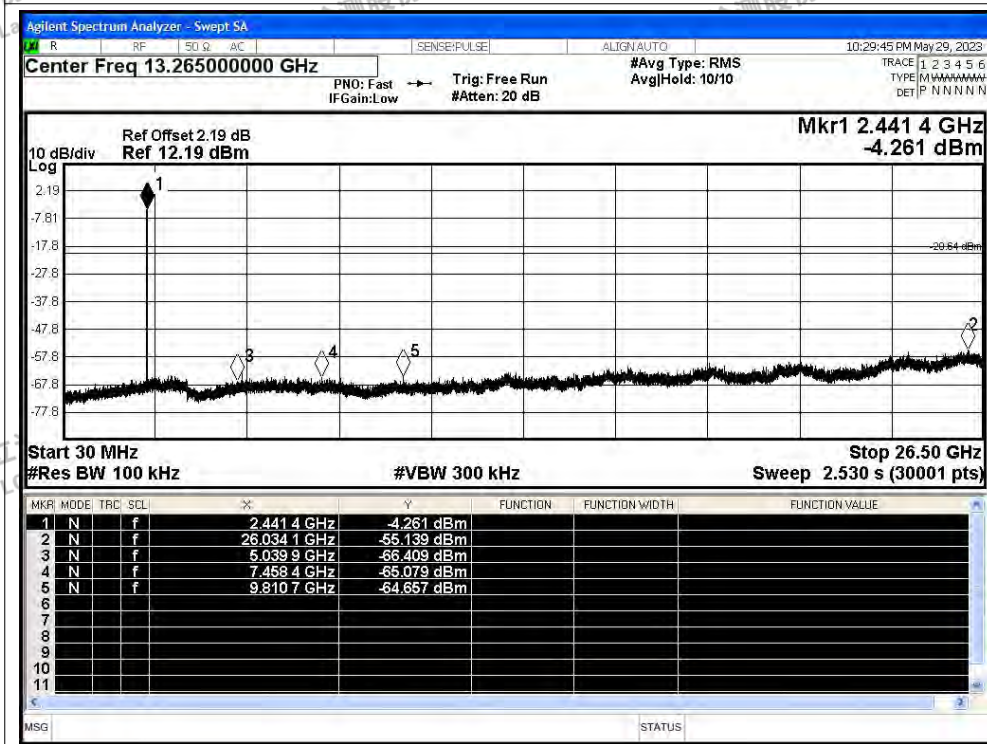




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

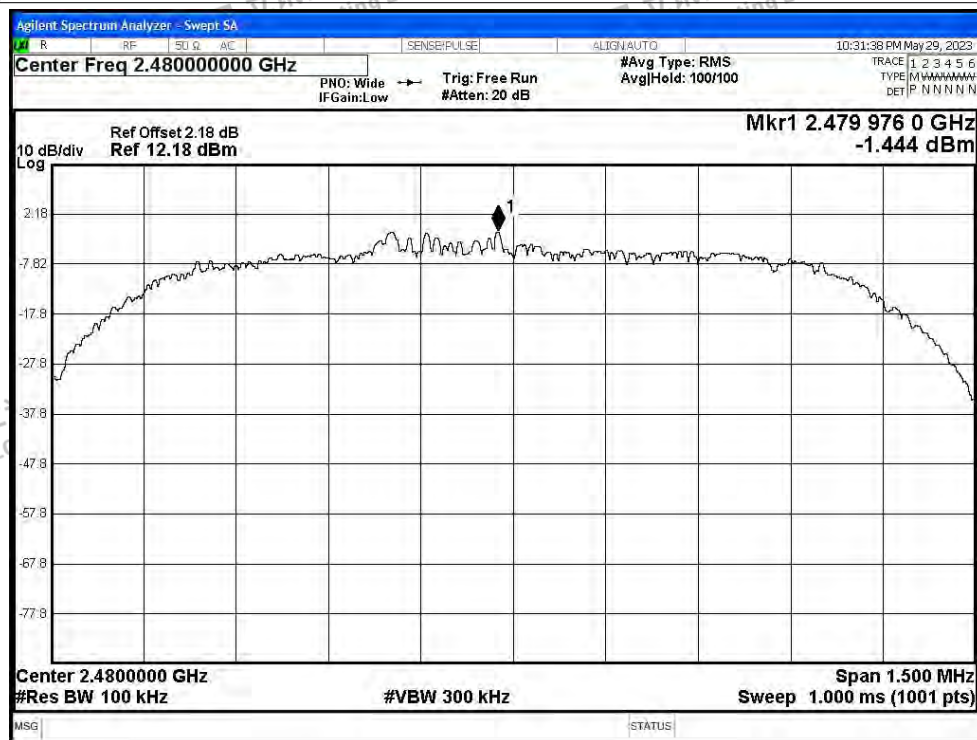


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

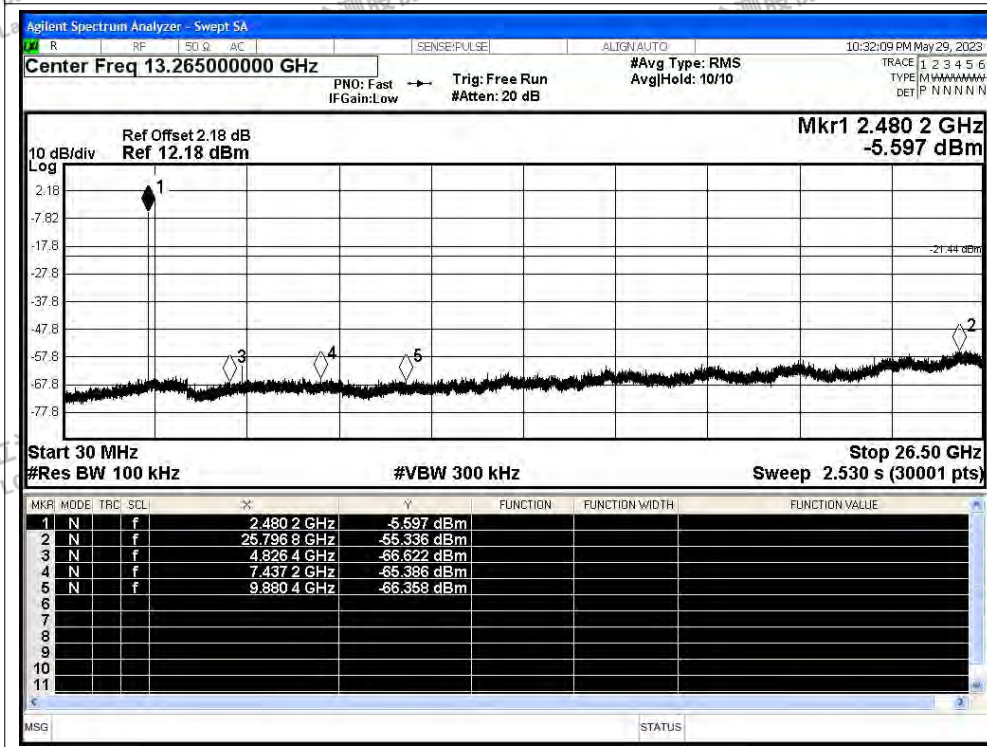




Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

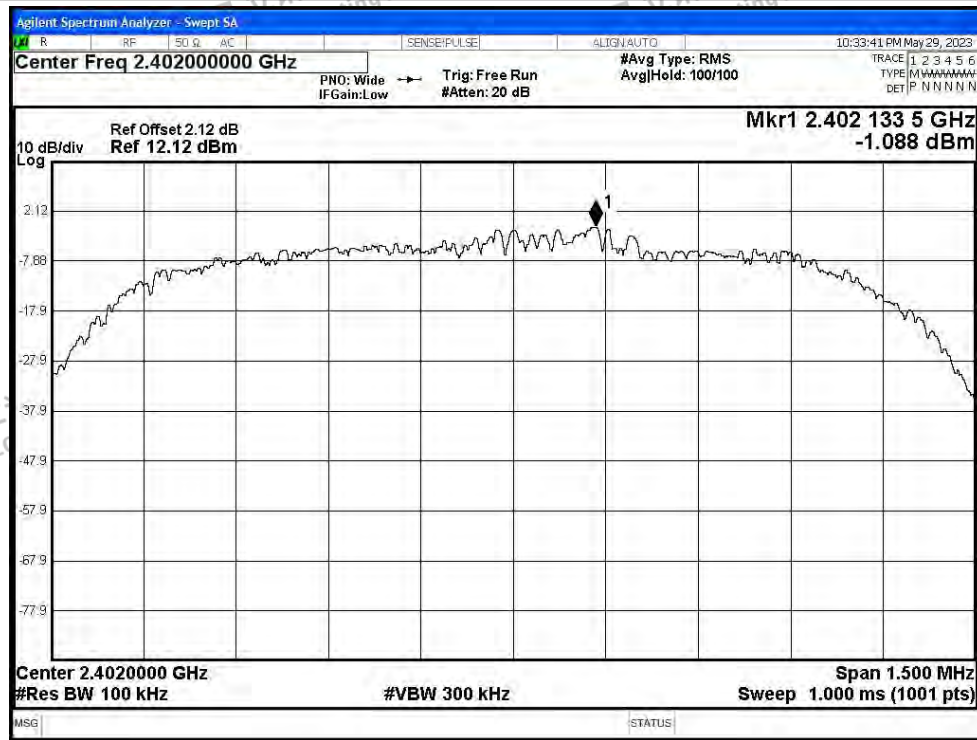


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

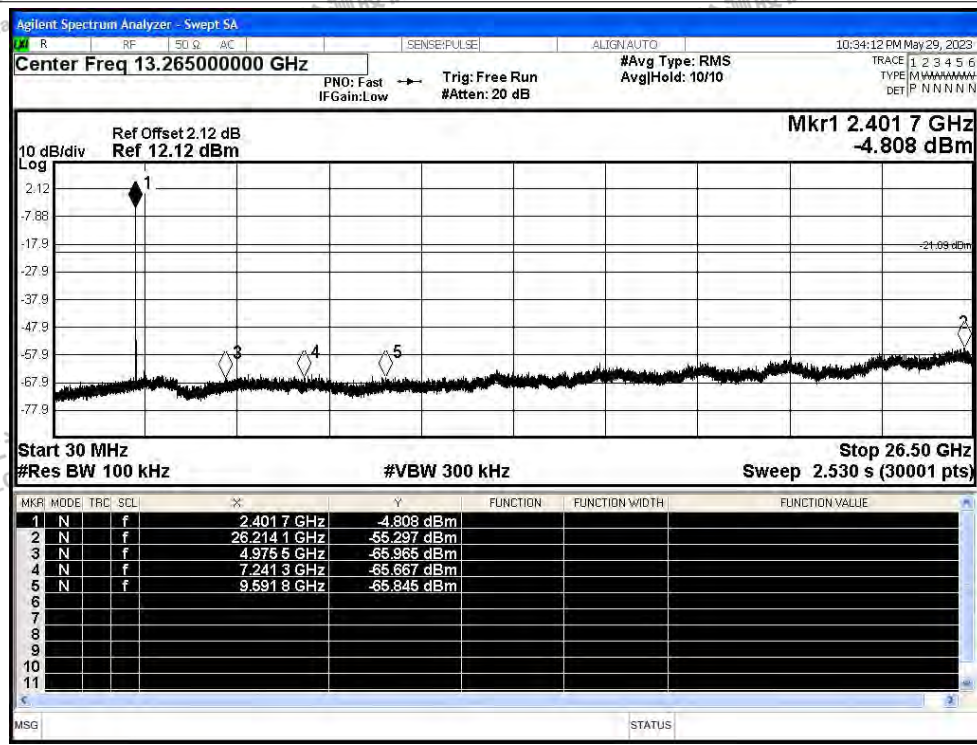




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

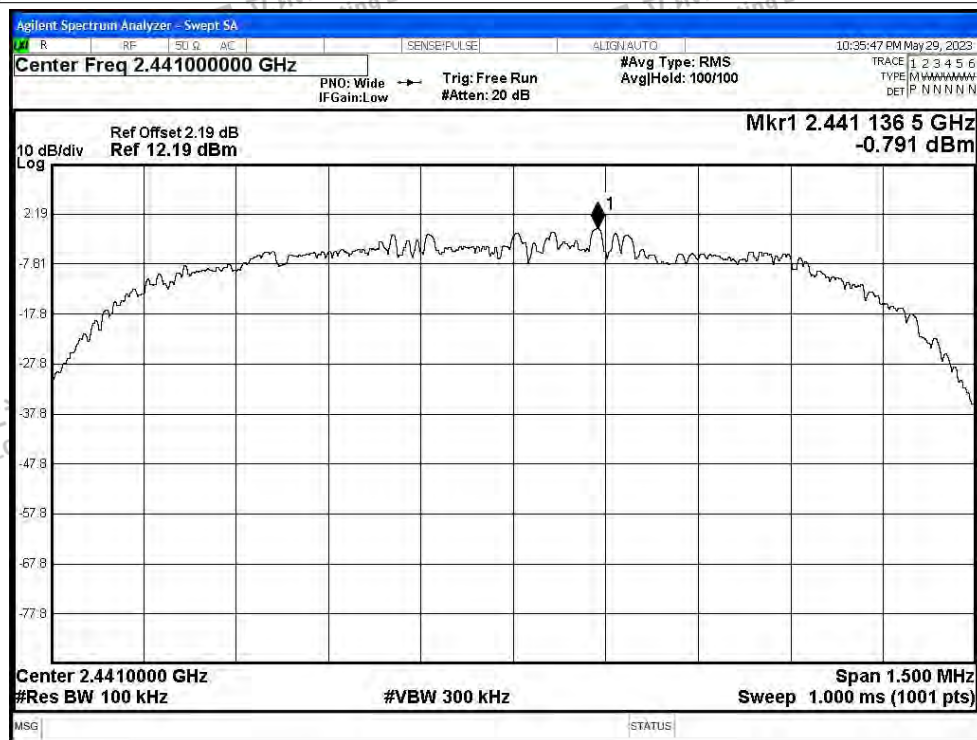


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

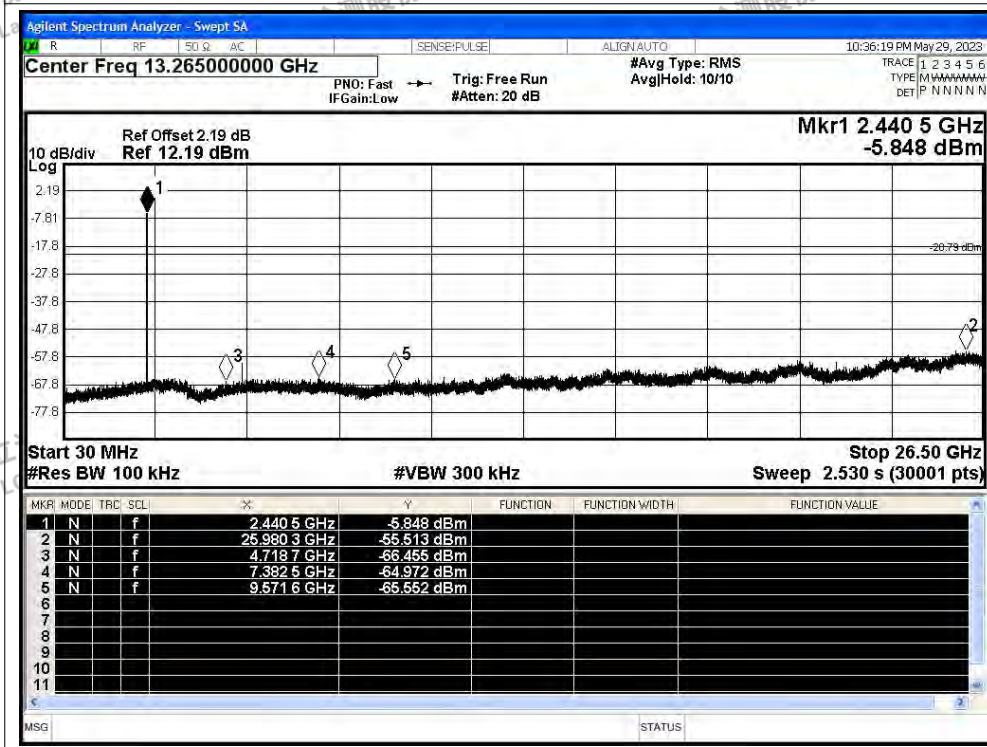




Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

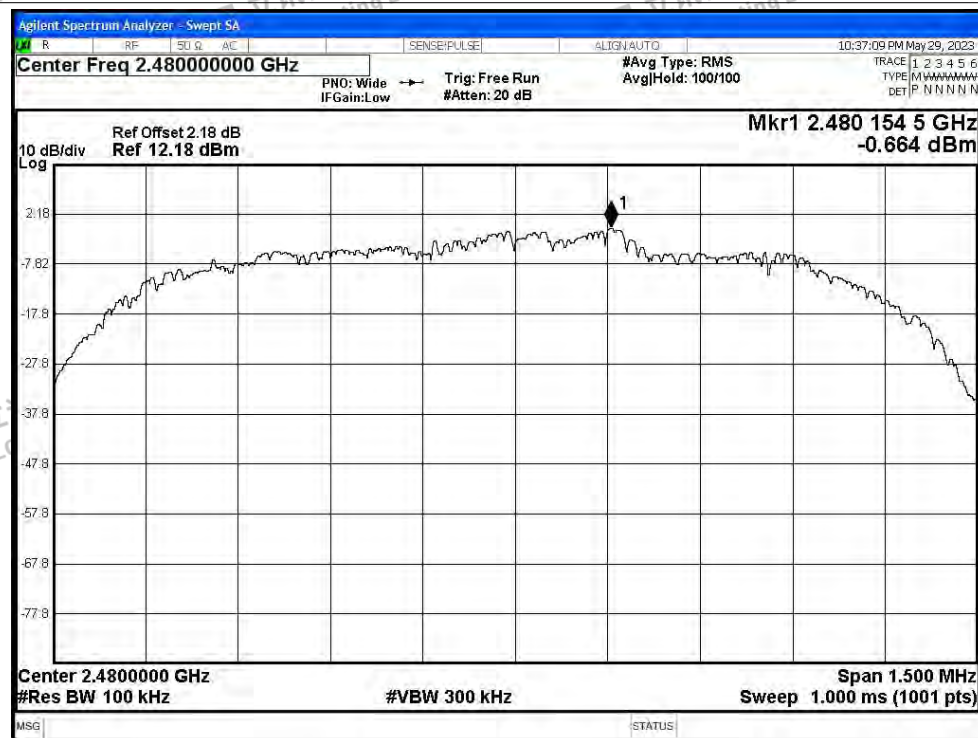

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

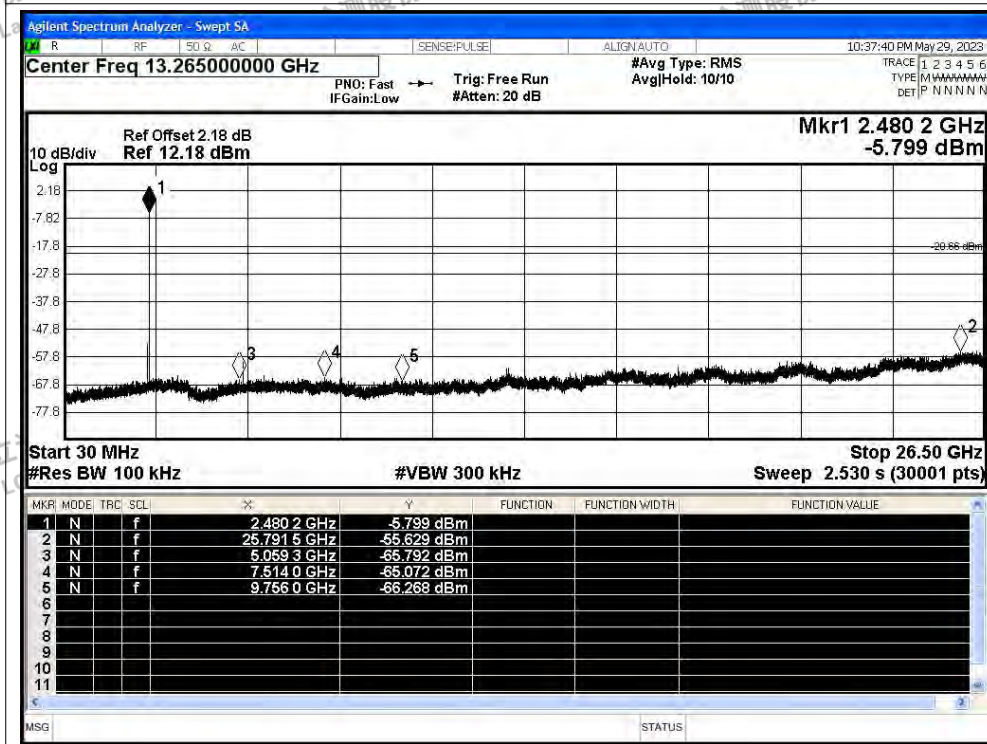



A.8 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-50.48	2	46.78	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2310	-57.98	2	39.28	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2316.912	-47.37	2	49.89	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2382.96	-57.44	2	39.82	Average	54	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-49.96	2	47.3	Peak	74	Pass
NVNT	1-DH5	2402	Ant1	No-Hopping	2390	-57.58	2	39.68	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-49.91	2	47.35	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.5	-55.71	2	41.55	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2498.896	-47.34	2	49.92	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2483.512	-55.71	2	41.55	Average	54	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-50.29	2	46.97	Peak	74	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	2500	-57.34	2	39.92	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-49.88	2	47.38	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2310	-57.87	2	39.39	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2377.104	-47.57	2	49.69	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2383.536	-57.43	2	39.83	Average	54	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-49.87	2	47.39	Peak	74	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	2390	-57.65	2	39.61	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-49.78	2	47.48	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.5	-55.51	2	41.75	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2489.944	-45.93	2	51.33	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2483.512	-55.51	2	41.75	Average	54	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-48.85	2	48.41	Peak	74	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	2500	-57.29	2	39.97	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-51.16	2	46.1	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2310	-58.06	2	39.2	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2315.76	-47.43	2	49.83	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2370.864	-57.44	2	39.82	Average	54	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-51.15	2	46.11	Peak	74	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	2390	-57.54	2	39.72	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-49.55	2	47.71	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.5	-55.65	2	41.61	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2495.464	-46.1	2	51.16	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2483.512	-55.65	2	41.61	Average	54	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-48.48	2	48.78	Peak	74	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	2500	-57.3	2	39.96	Average	54	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Peak

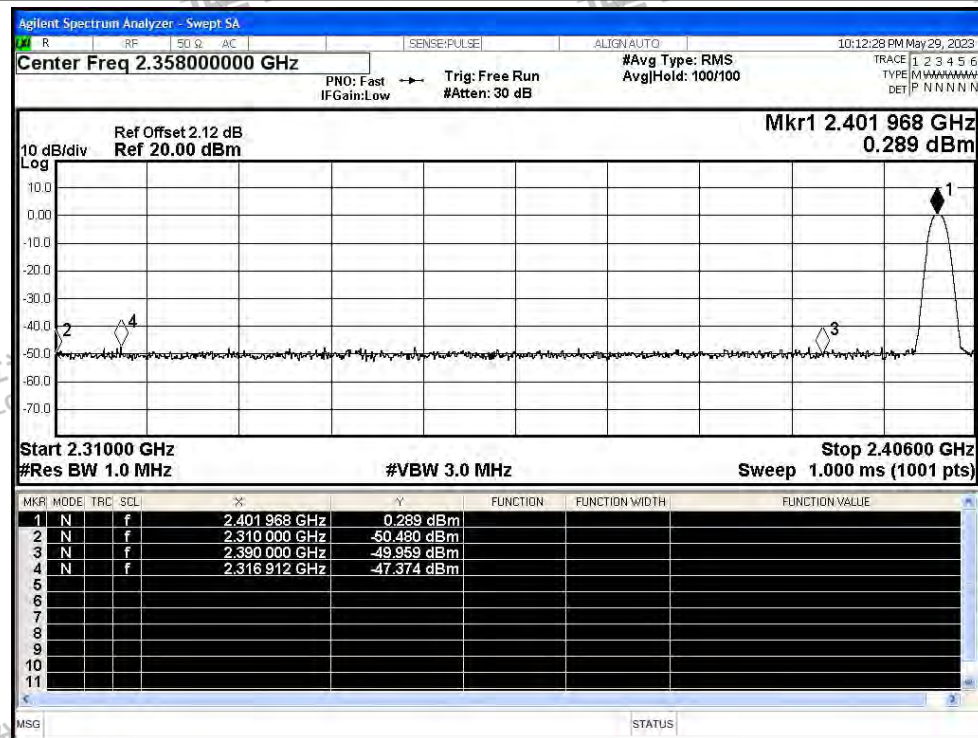


Restrict Band NVNT 1-DH5 2402MHz Ant1 No-Hopping Average

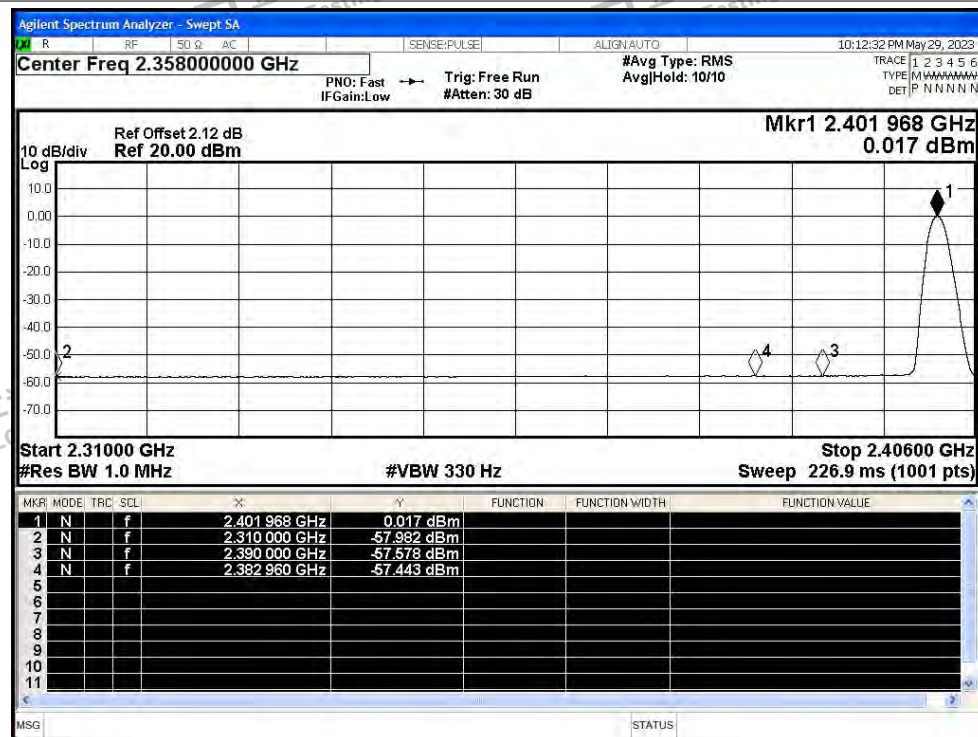




Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Peak

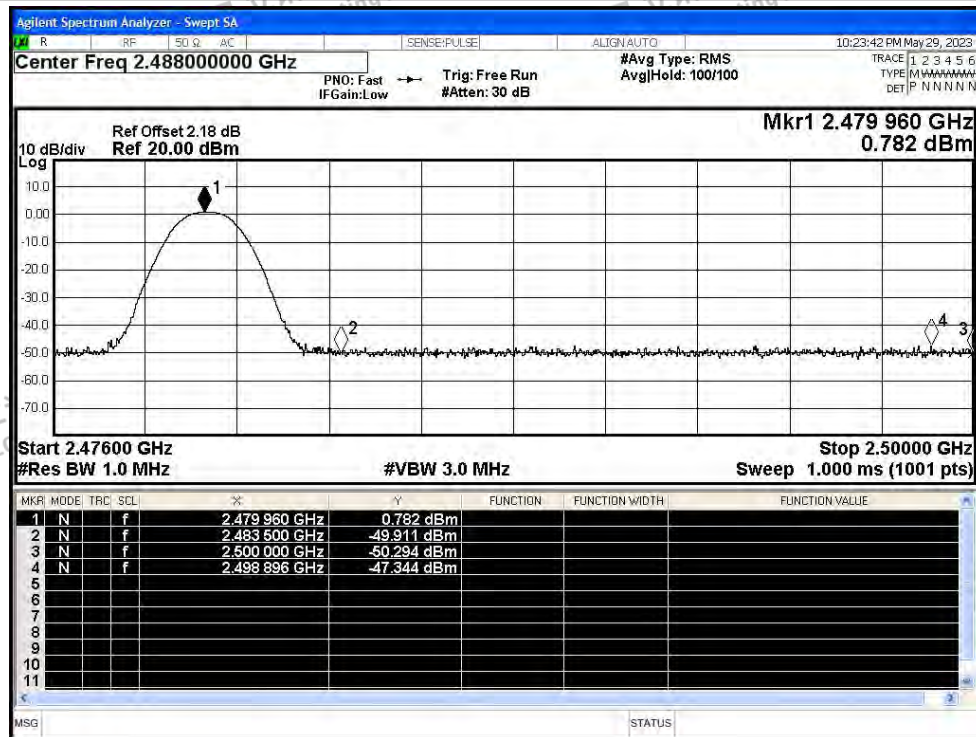

Restrict Band NVNT 1-DH5 2480MHz Ant1 No-Hopping Average

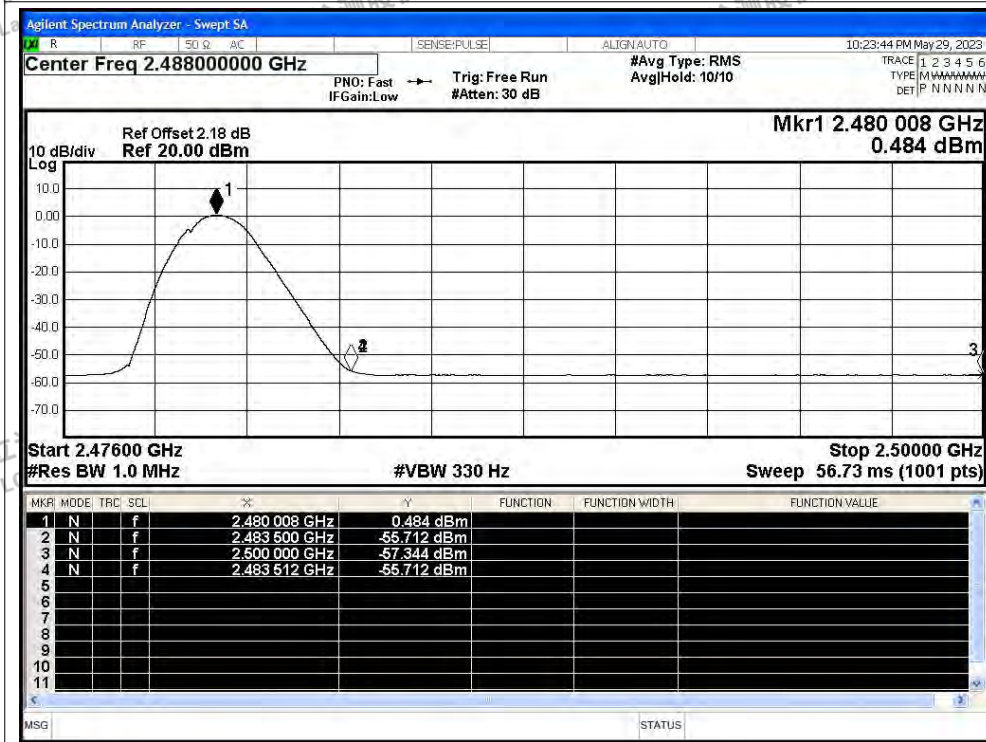

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Peak

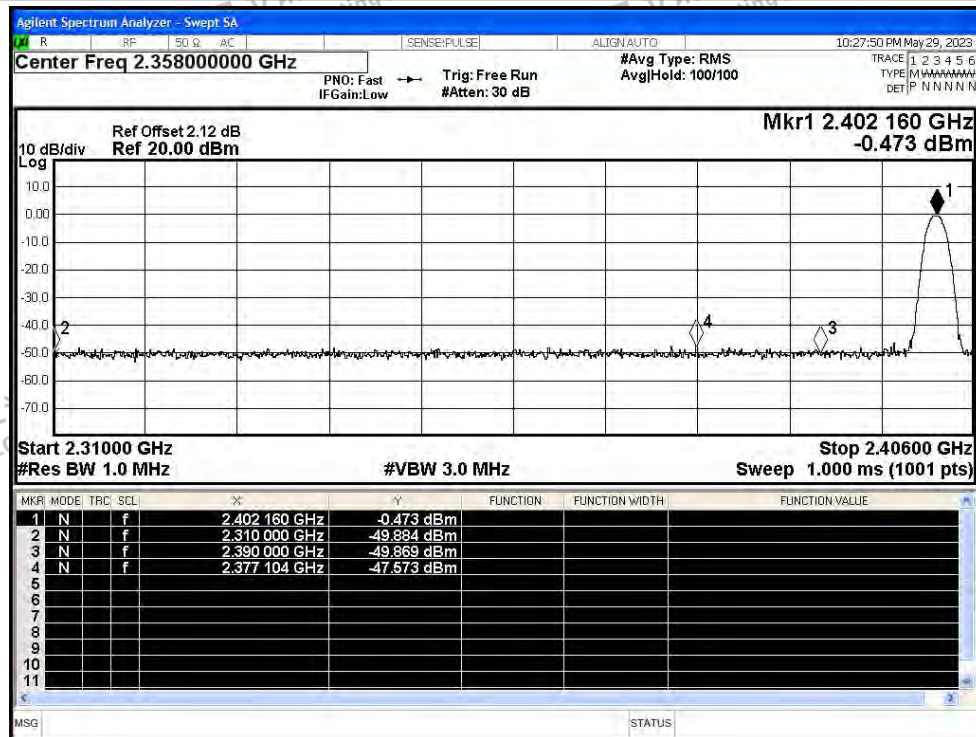


Restrict Band NVNT 2-DH5 2402MHz Ant1 No-Hopping Average

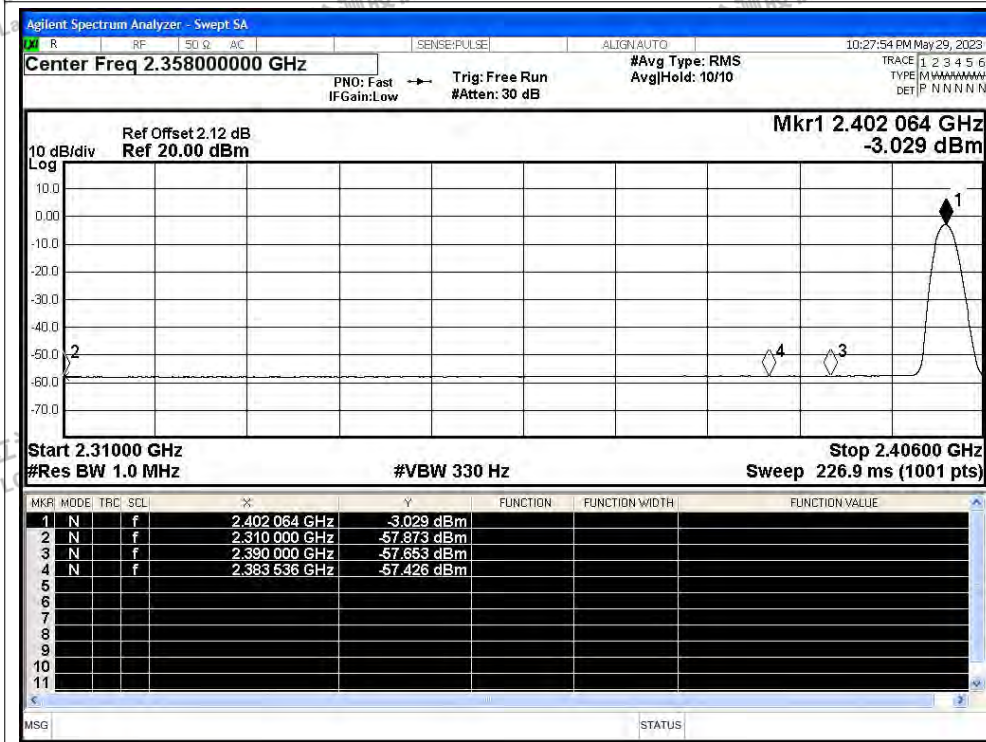




Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Peak

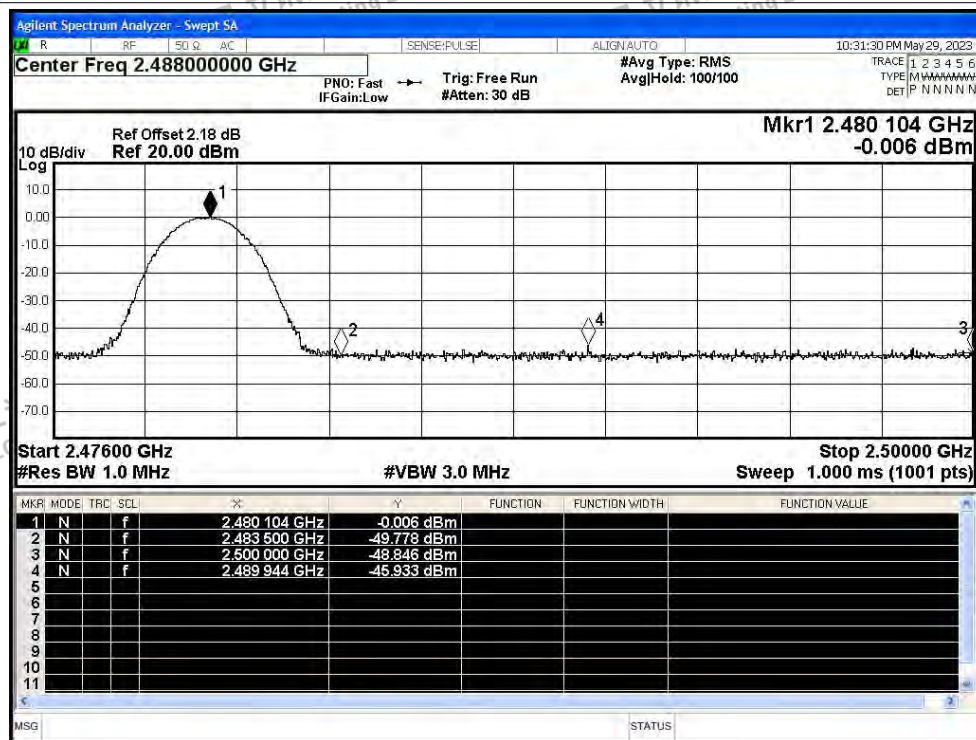


Restrict Band NVNT 2-DH5 2480MHz Ant1 No-Hopping Average

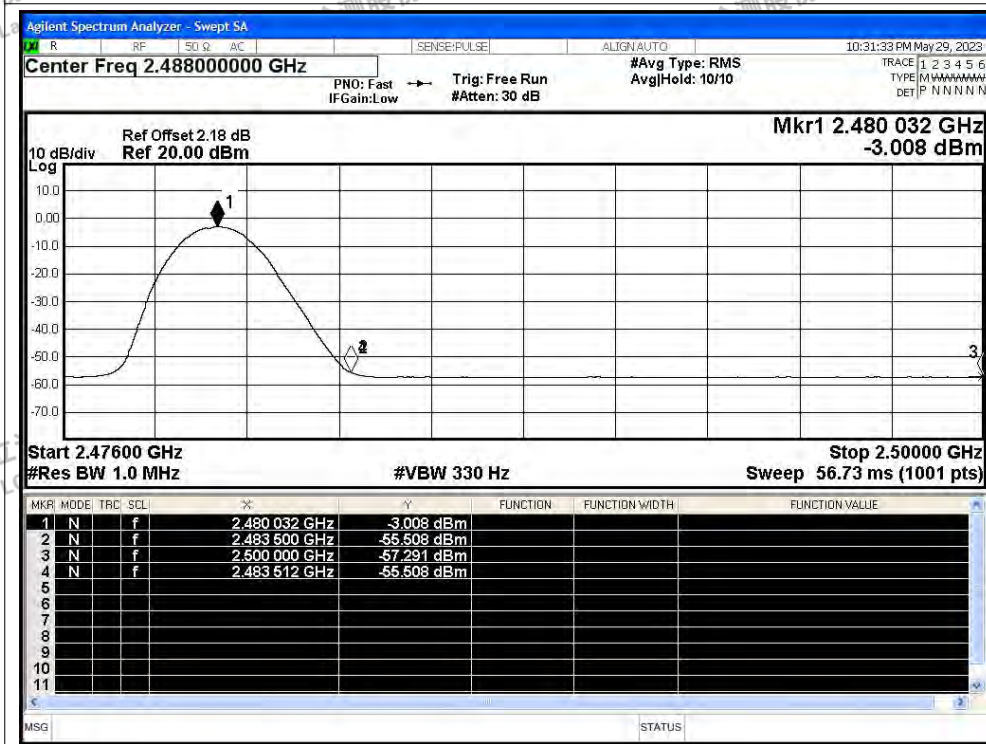




Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Peak

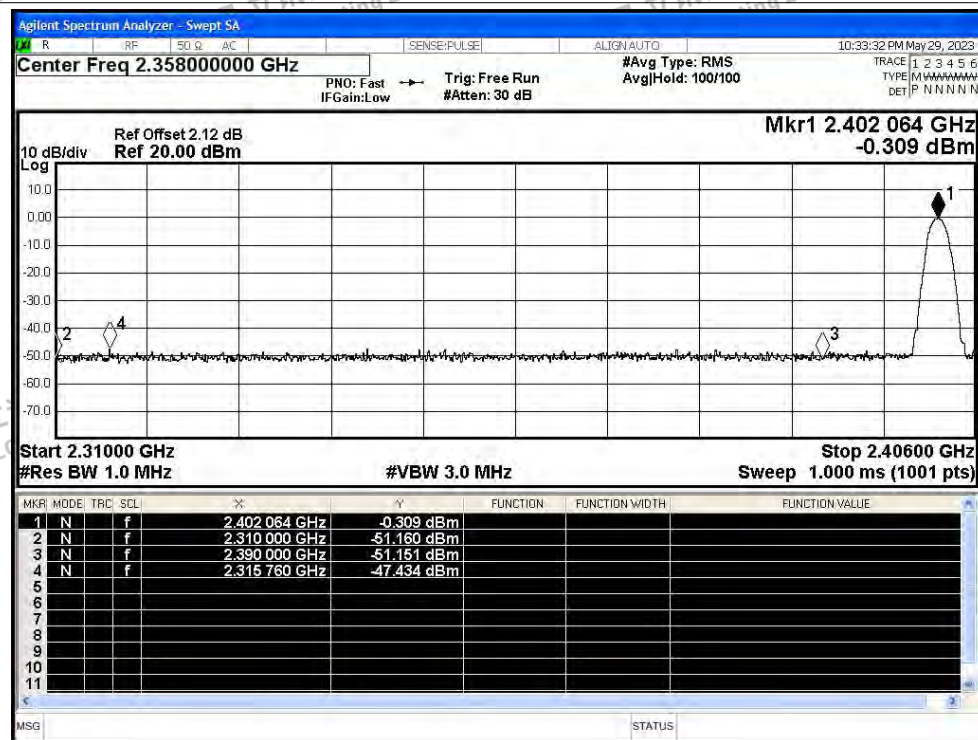


Restrict Band NVNT 3-DH5 2402MHz Ant1 No-Hopping Average

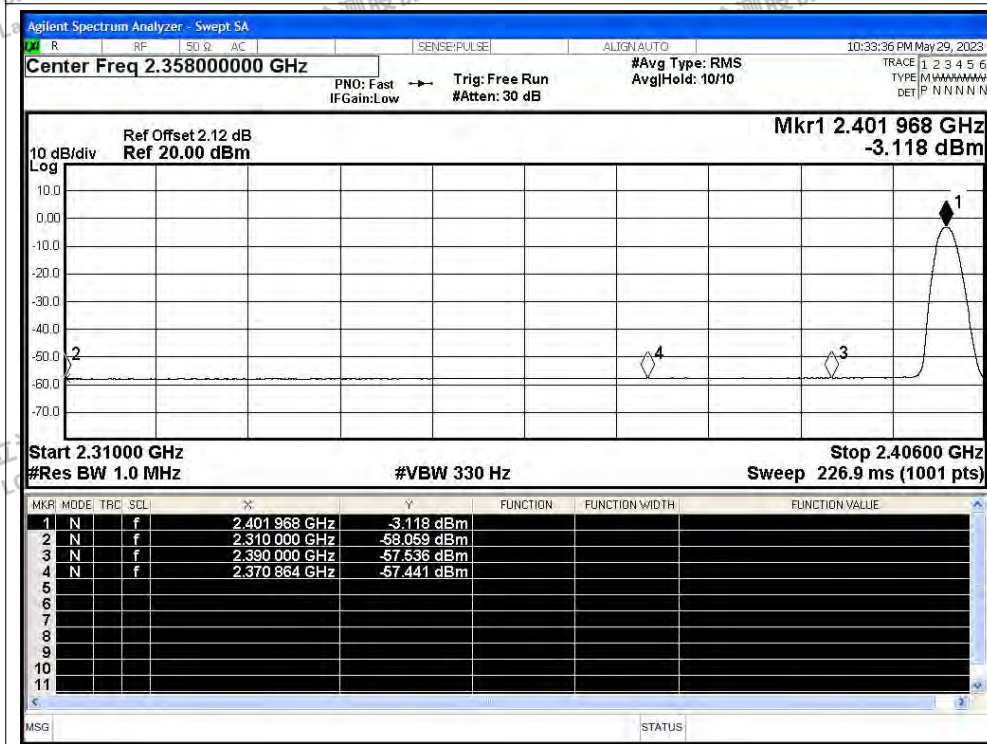



Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Peak

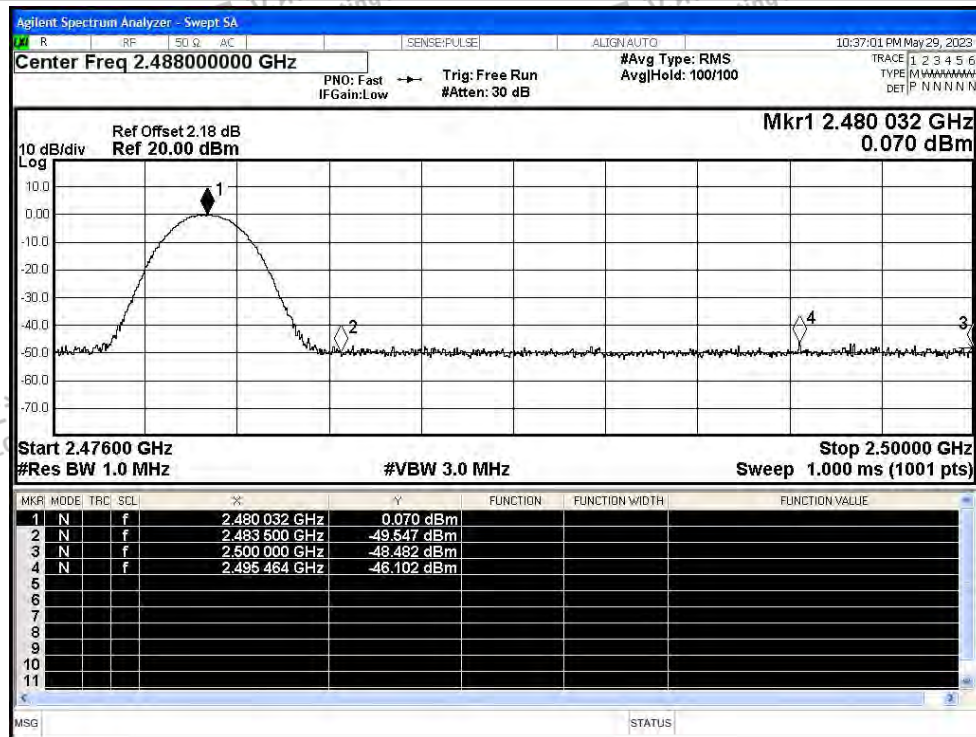

Restrict Band NVNT 3-DH5 2480MHz Ant1 No-Hopping Average

