



1_Reference_Level_Hopping_NVNT_ANT1_3-DH1_Hopping

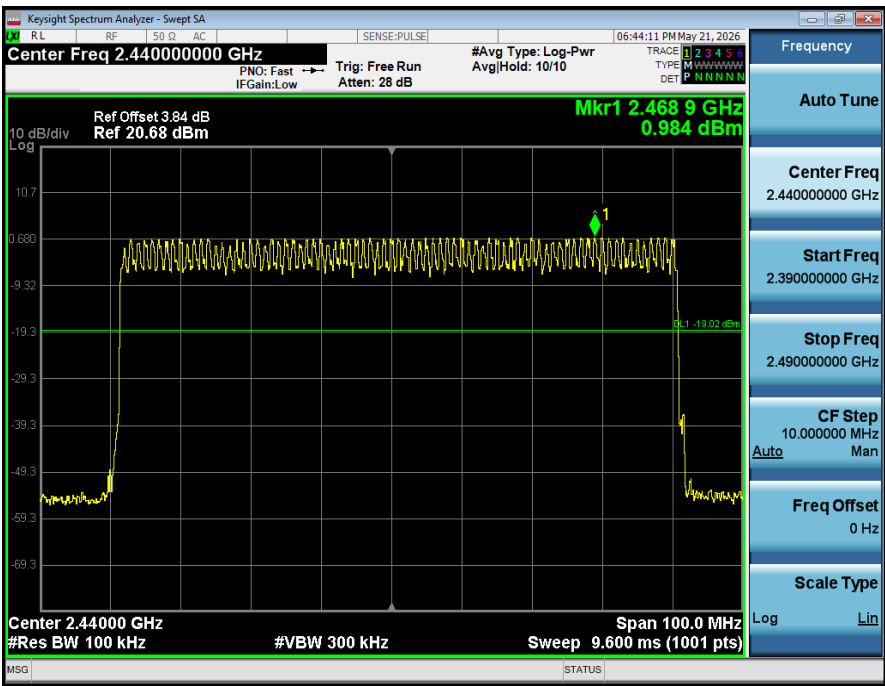


2_Band_Edge_(Hopping)_NVNT_ANT1_3-DH1_Hopping

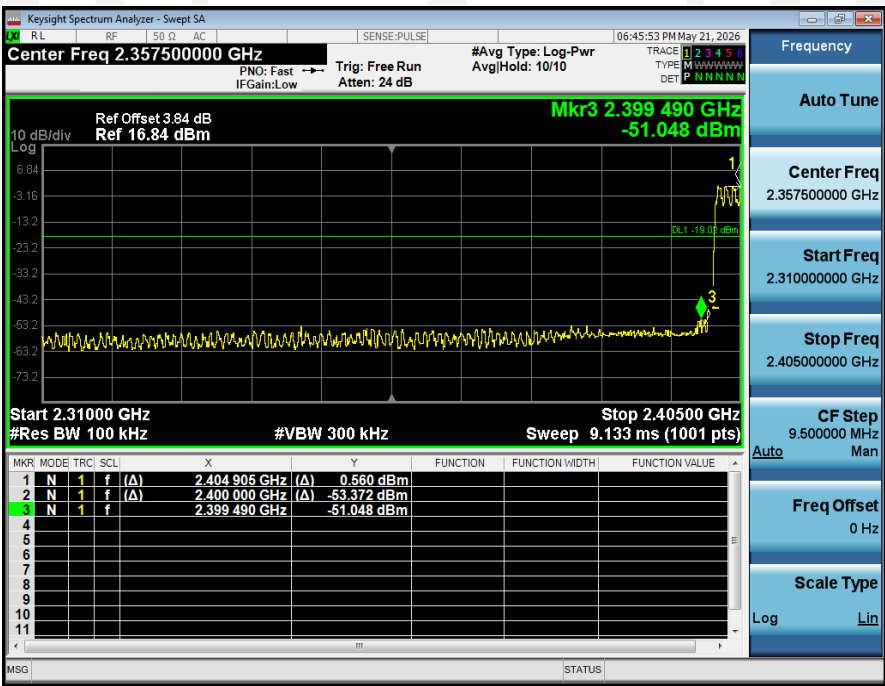


1_Reference_Level_NVNT_ANT1_3-DH1_2480_00




2_Bandedge_NVNT_ANT1_3-DH1_2480_00

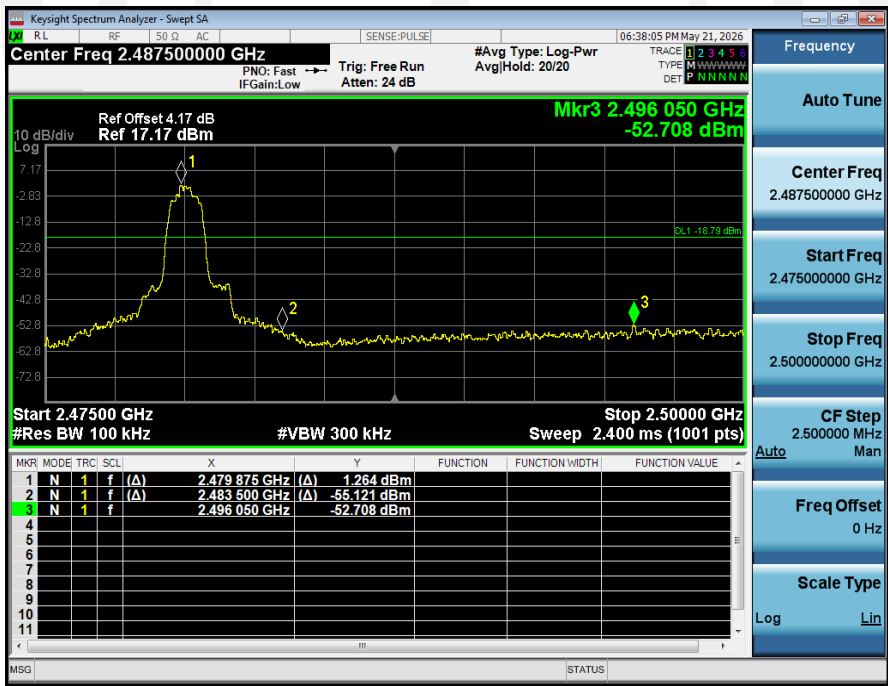

1_Reference_Level_Hopping_NVNT_ANT1_3-DH1_Hopping

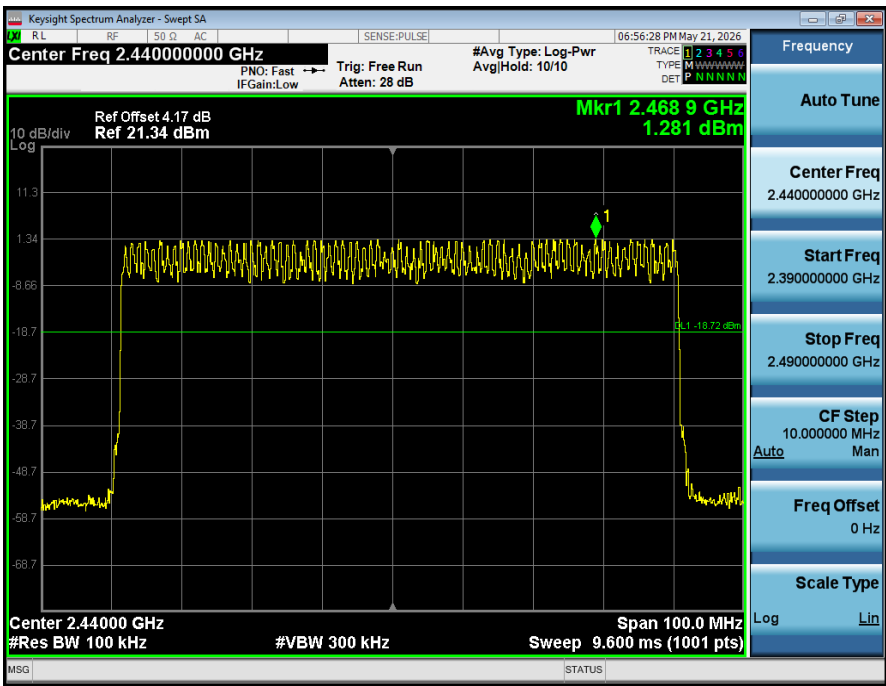

2_Band_Edge_(Hopping)_NVNT_ANT1_3-DH1_Hopping

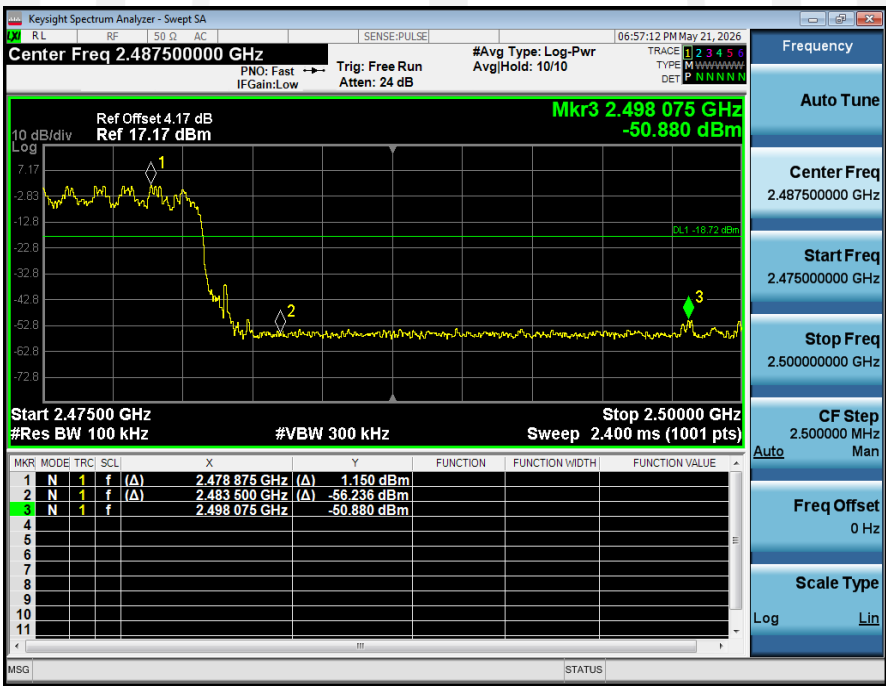


Conducted spurious emission: Pass


Condition	Antenna	Modulation	TX Mode	Ref_level(dBm)	Spurious MAX.Value(dBm)	Limit(dBm)	Result
NVNT	ANT1	1-DH1	2402.00	0.420	-44.849	-19.580	Pass
NVNT	ANT1	1-DH1	2441.00	1.068	-43.890	-18.932	Pass
NVNT	ANT1	1-DH1	2480.00	1.187	-43.450	-18.813	Pass
NVNT	ANT1	2-DH1	2402.00	0.489	-48.310	-19.511	Pass
NVNT	ANT1	2-DH1	2441.00	1.039	-46.323	-18.961	Pass
NVNT	ANT1	2-DH1	2480.00	1.173	-44.080	-18.827	Pass
NVNT	ANT1	3-DH1	2402.00	0.479	-47.797	-19.521	Pass
NVNT	ANT1	3-DH1	2441.00	1.090	-45.098	-18.910	Pass
NVNT	ANT1	3-DH1	2480.00	1.213	-43.372	-18.787	Pass




1_Reference_Level_NVNT_ANT1_1-DH1_2402_00

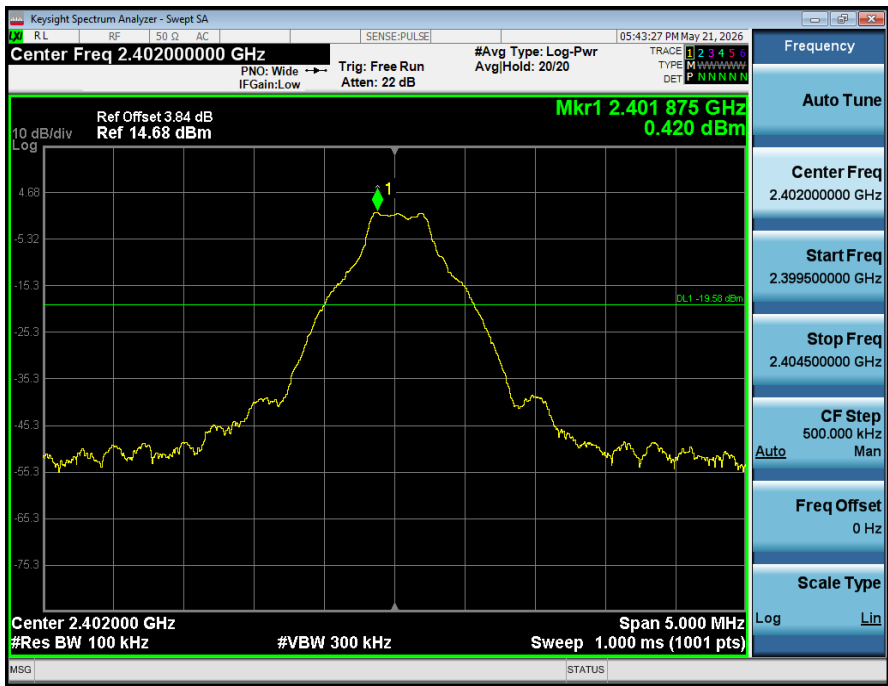


2_Spurious_Emissions_NVNT_ANT1_1-DH1_2402_00

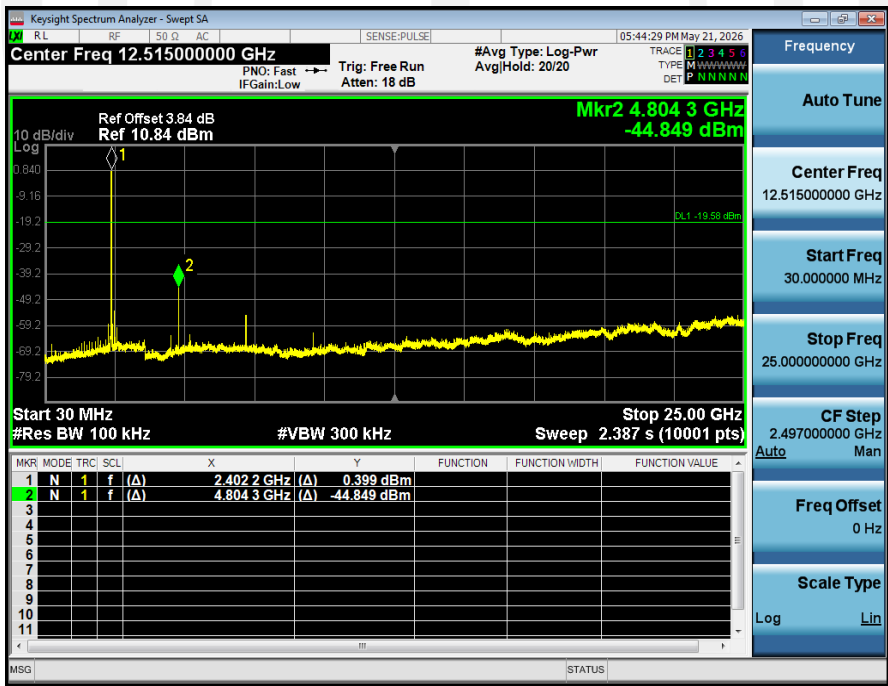


1_Reference_Level_NVNT_ANT1_1-DH1_2441_00

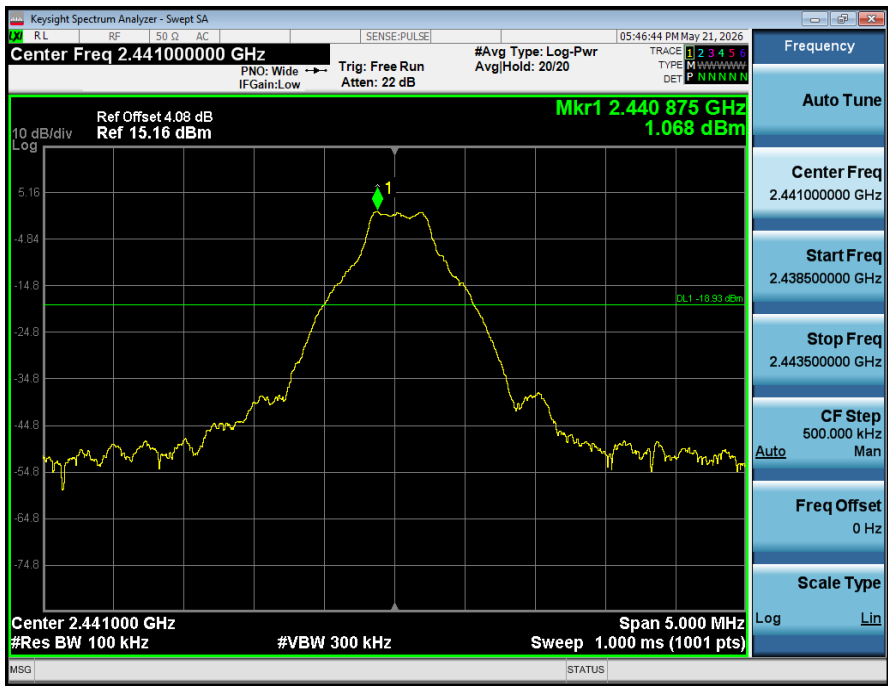


2_Spurious_Emissions_NVNT_ANT1_1-DH1_2441_00

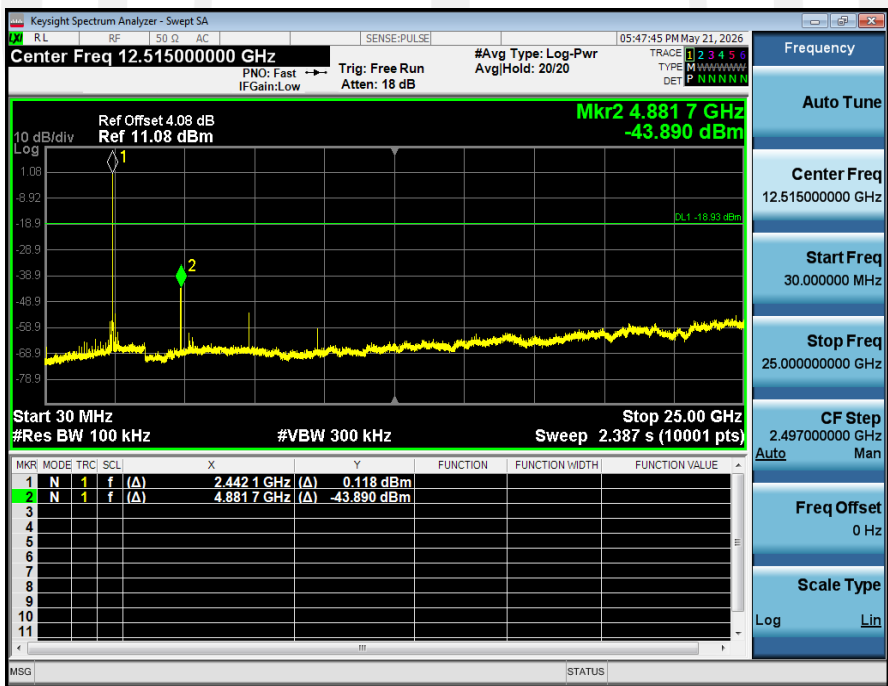

1_Reference_Level_NVNT_ANT1_1-DH1_2480_00

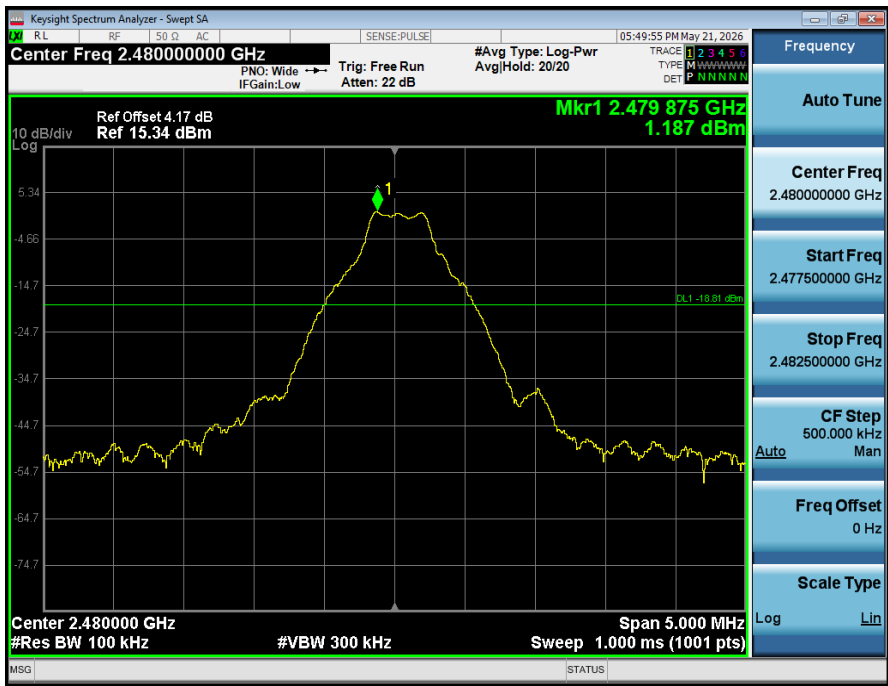


2_Spurious_Emissions_NVNT_ANT1_1-DH1_2480_00

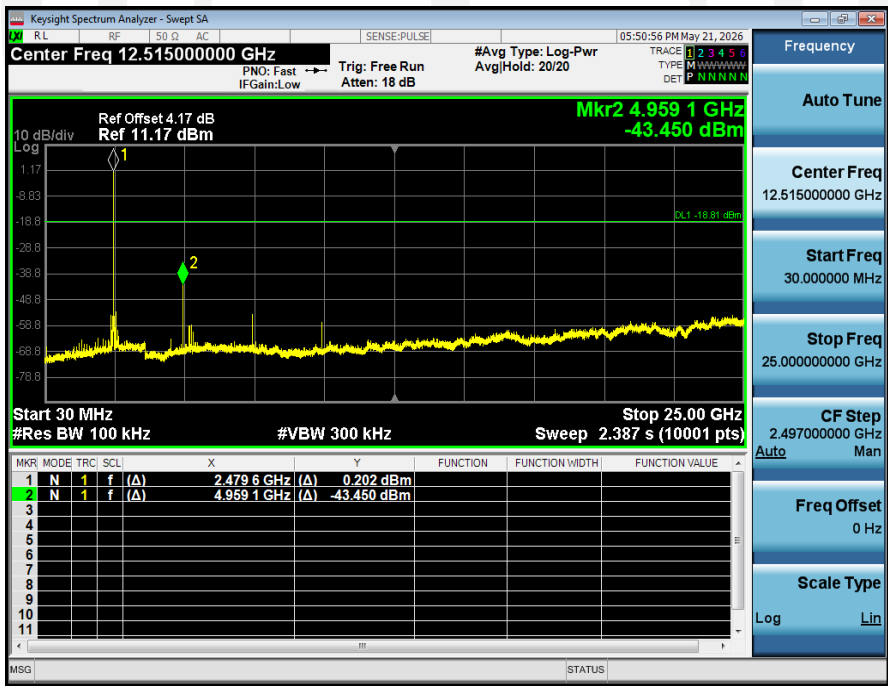

1_Reference_Level_NVNT_ANT1_2-DH1_2402_00




2_Spurious_Emissions_NVNT_ANT1_2-DH1_2402_00

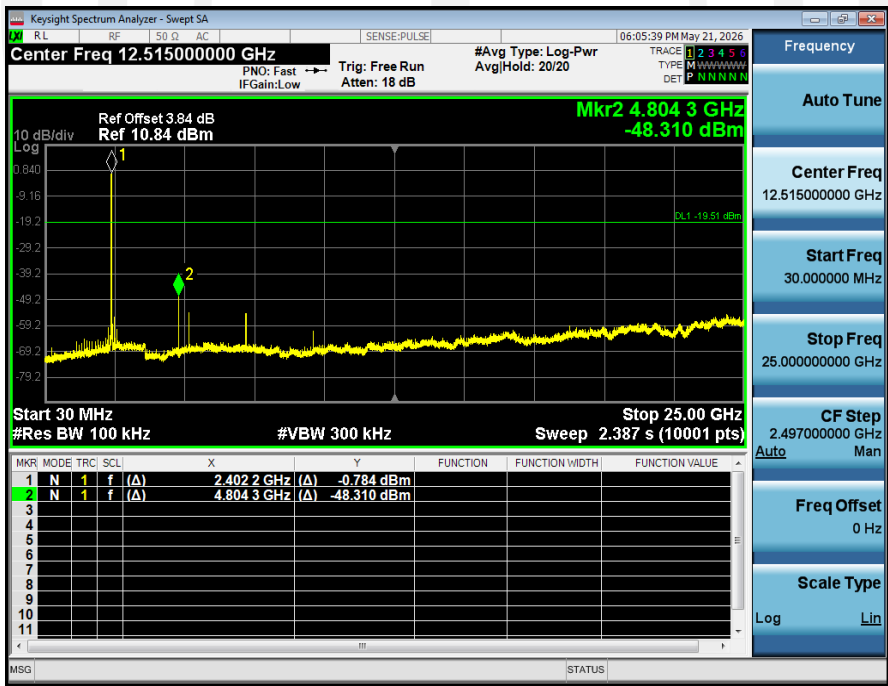

1_Reference_Level_NVNT_ANT1_2-DH1_2441_00




2_Spurious_Emissions_NVNT_ANT1_2-DH1_2441_00

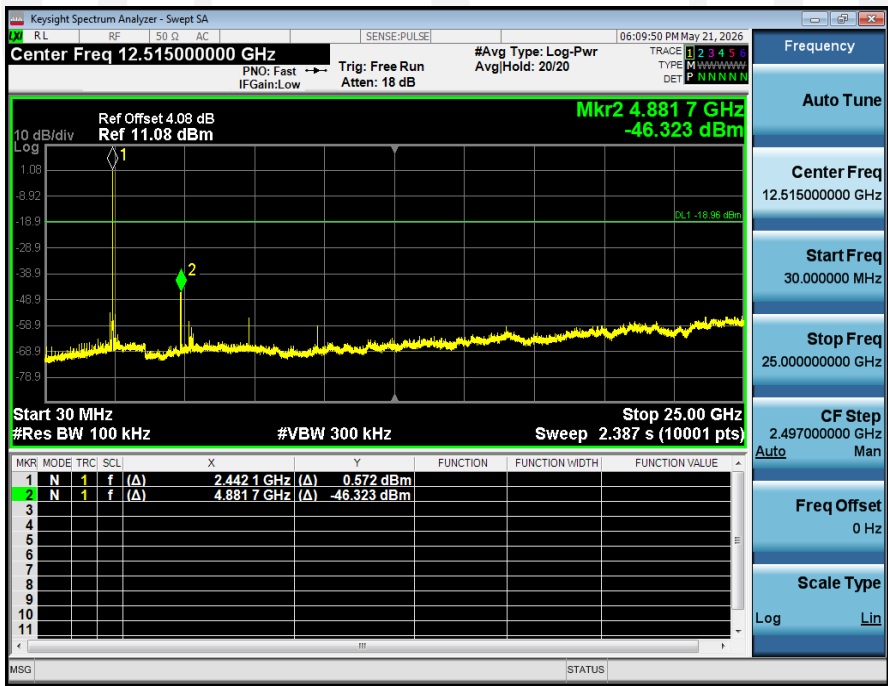

1_Reference_Level_NVNT_ANT1_2-DH1_2480_00




2_Spurious_Emissions_NVNT_ANT1_2-DH1_2480_00

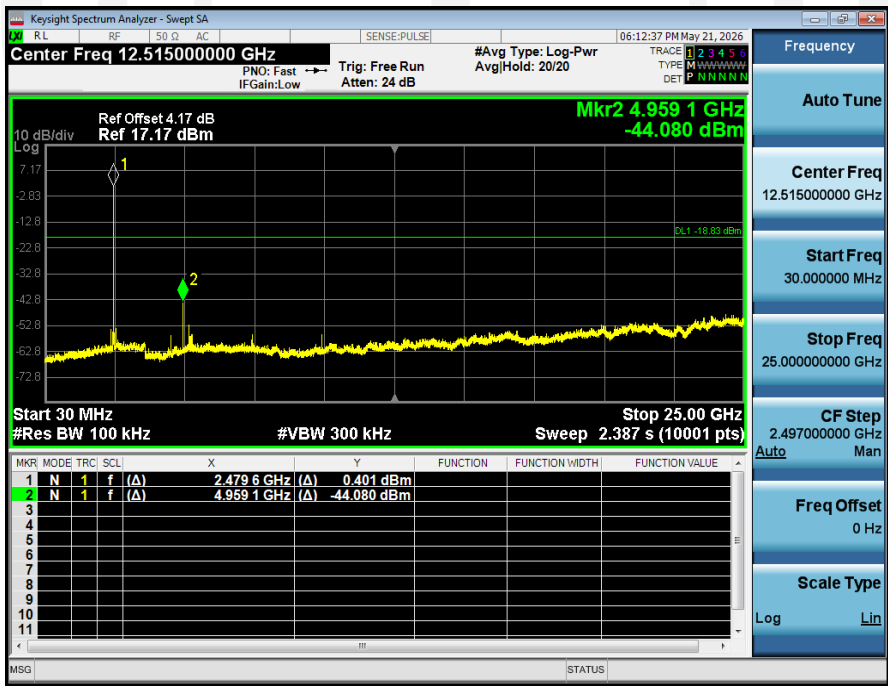

1_Reference_Level_NVNT_ANT1_3-DH1_2402_00




2_Spurious_Emissions_NVNT_ANT1_3-DH1_2402_00

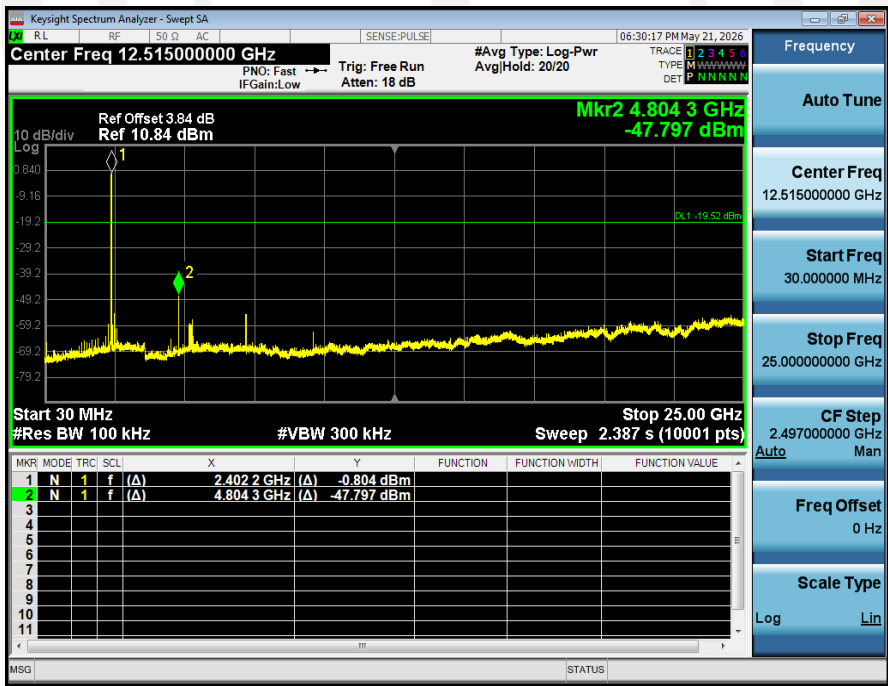

1_Reference_Level_NVNT_ANT1_3-DH1_2441_00




2_Spurious_Emissions_NVNT_ANT1_3-DH1_2441_00

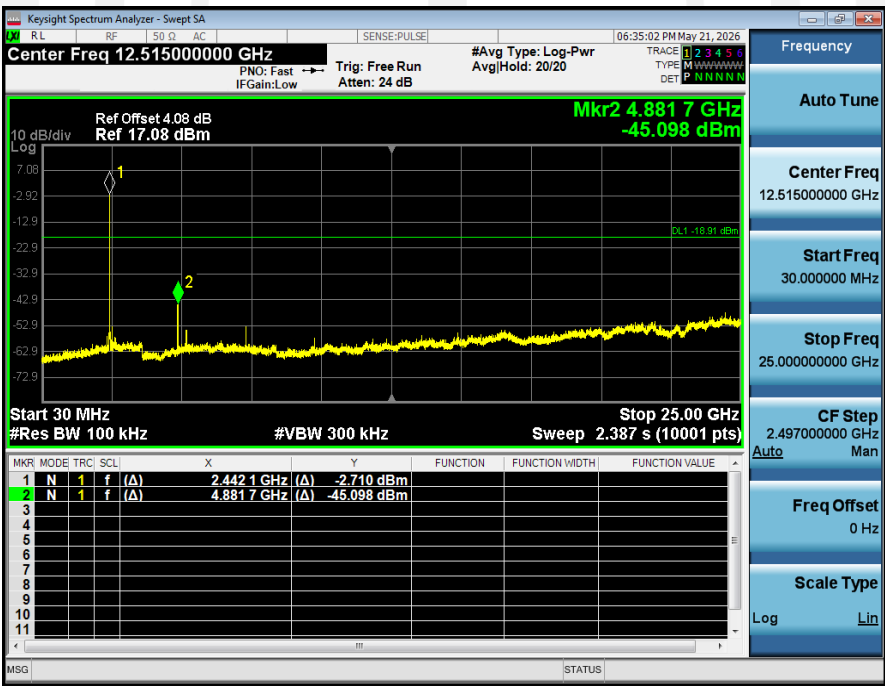

1_Reference_Level_NVNT_ANT1_3-DH1_2480_00



2_Spurious_Emissions_NVNT_ANT1_3-DH1_2480_00

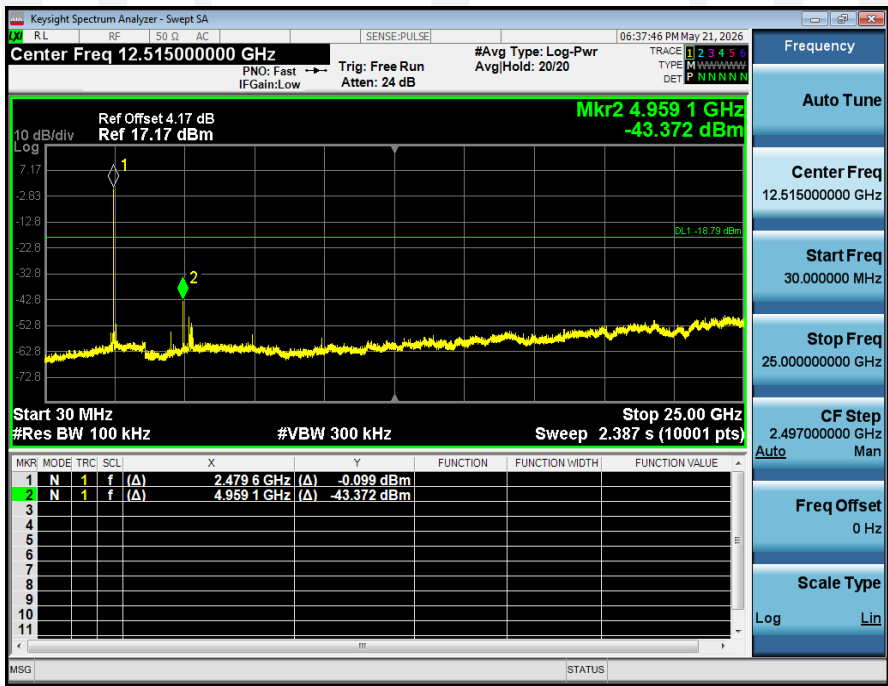

9. Spurious Emission

9.1. Test Limits

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

Note: The peak limit is 20 dB higher than the average limit


All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

9.2. Block Diagram of Test setup


a. In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

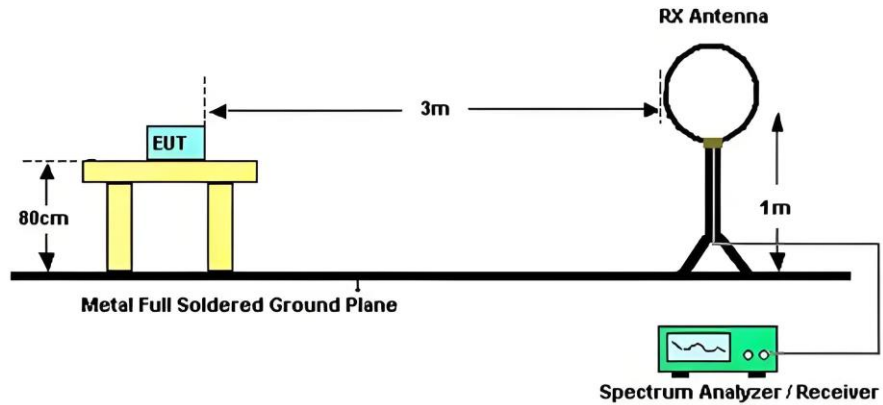

b. In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

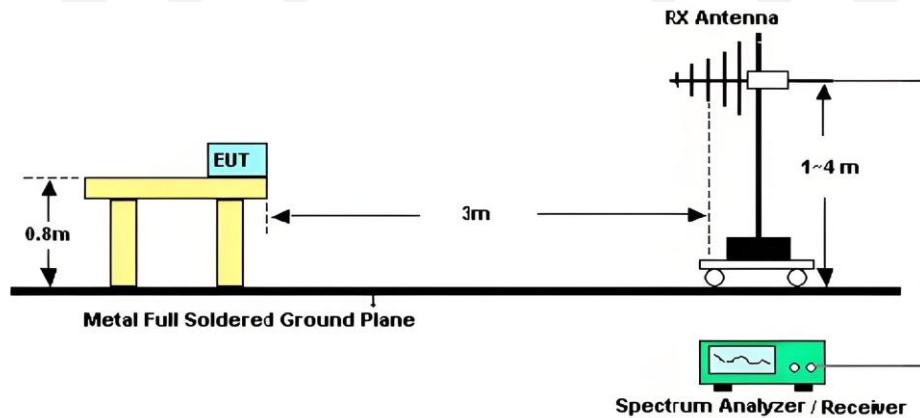

c. In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

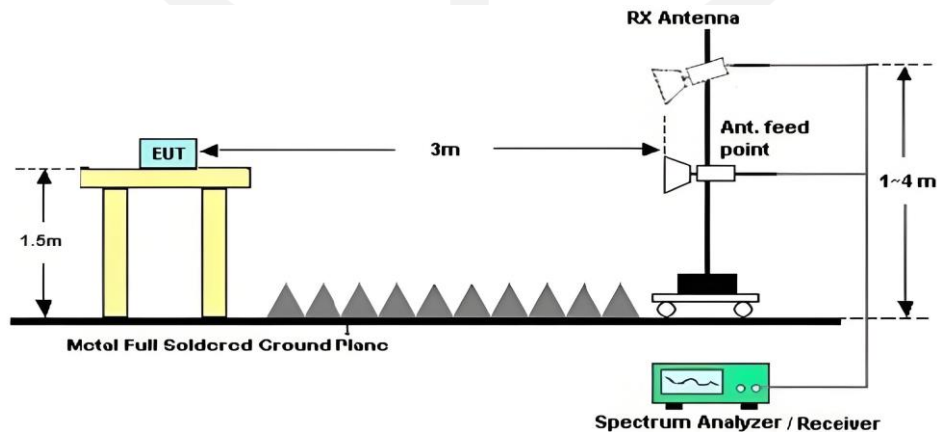

9.3. Test Procedure

- (1) The test equipment is placed on a non-metallic tabletop. For false radiation emission tests below 1G, the distance between the equipment and the ground surface is 80 cm; for false radiation emission tests above 1G, the distance is 1.5 meters. The equipment is situated within a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10-2020+Cor.1-2023 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

Test setup information:

9KHz~150KHz	RBW 200Hz	VBW 1KHz
150KHz~30MHz	RBW 9KHz	VBW 30KHz
30MHz~1GHz	RBW 120KHz	VBW 300KHz
Above1GHz	RBW 1MHz	VBW 3MHz

9.4. Test Results


We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency.

Detailed information please see the following page.

From 9KHz to 30MHz:	
Test Date : 2026.07.15	Temperature : 26°C
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : GFSK mode	
Test Voltage : AC 120V/60HZ	
Test Results : PASS	
Note:	The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


From 30MHz to 1000MHz:	
Test Date : 2026.07.15	Temperature : 26°C
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : GFSK mode	
Test Voltage : AC 120V/60HZ	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz was listed in this report.

Battery 1
Polarization: Vertical

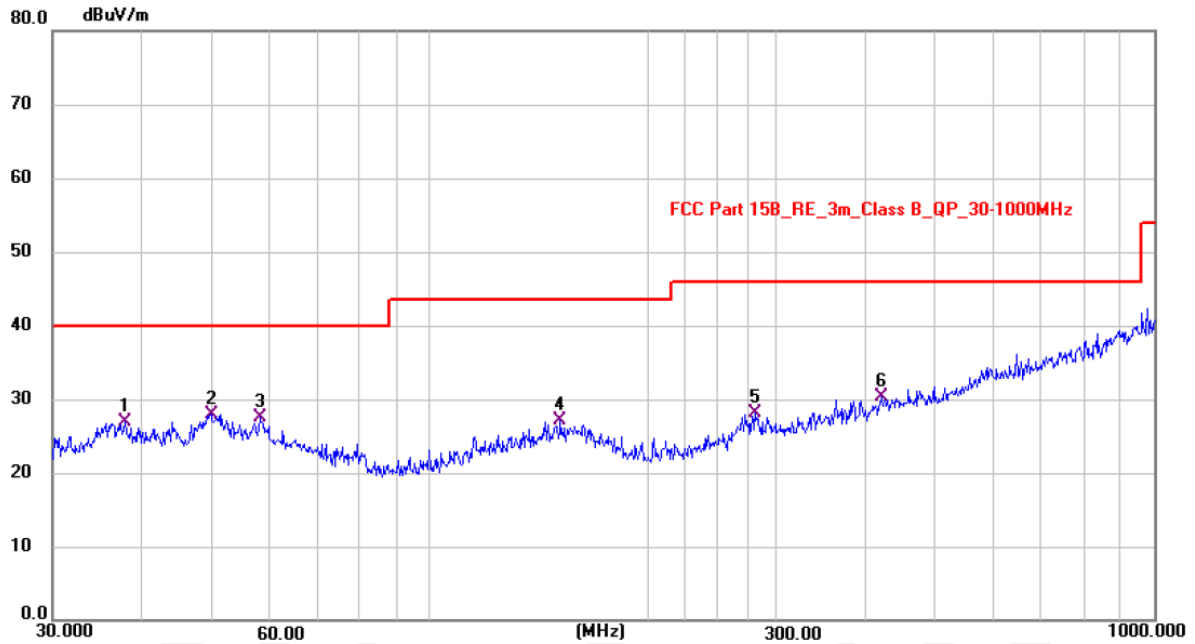

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.8785	12.93	13.97	26.90	40.00	-13.10	QP
2 *	49.8595	14.23	13.75	27.98	40.00	-12.02	QP
3	57.9993	14.06	13.35	27.41	40.00	-12.59	QP
4	151.3980	11.91	15.22	27.13	43.50	-16.37	QP
5	281.7475	13.52	14.56	28.08	46.00	-17.92	QP
6	421.1337	11.91	18.31	30.22	46.00	-15.78	QP


Note: Level = Reading + Factor Margin = Level - Limit

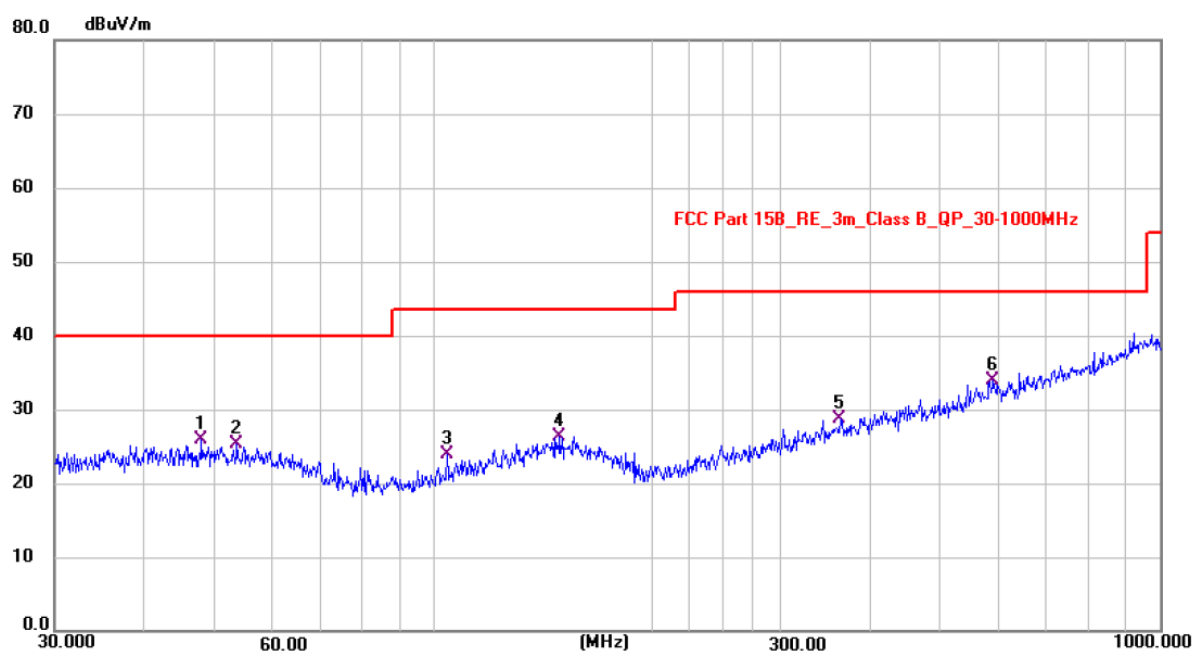Polarization: Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	47.9099	12.14	13.81	25.95	40.00	-14.05	QP
2	53.6226	11.77	13.56	25.33	40.00	-14.67	QP
3	104.3987	12.53	11.42	23.95	43.50	-19.55	QP
4	149.2239	11.11	15.17	26.28	43.50	-17.22	QP
5	364.0999	11.90	16.85	28.75	46.00	-17.25	QP
6 *	588.9051	12.07	21.84	33.91	46.00	-12.09	QP


Note: Level = Reading + Factor Margin = Level – Limit

Battery 2
Polarization: Vertical

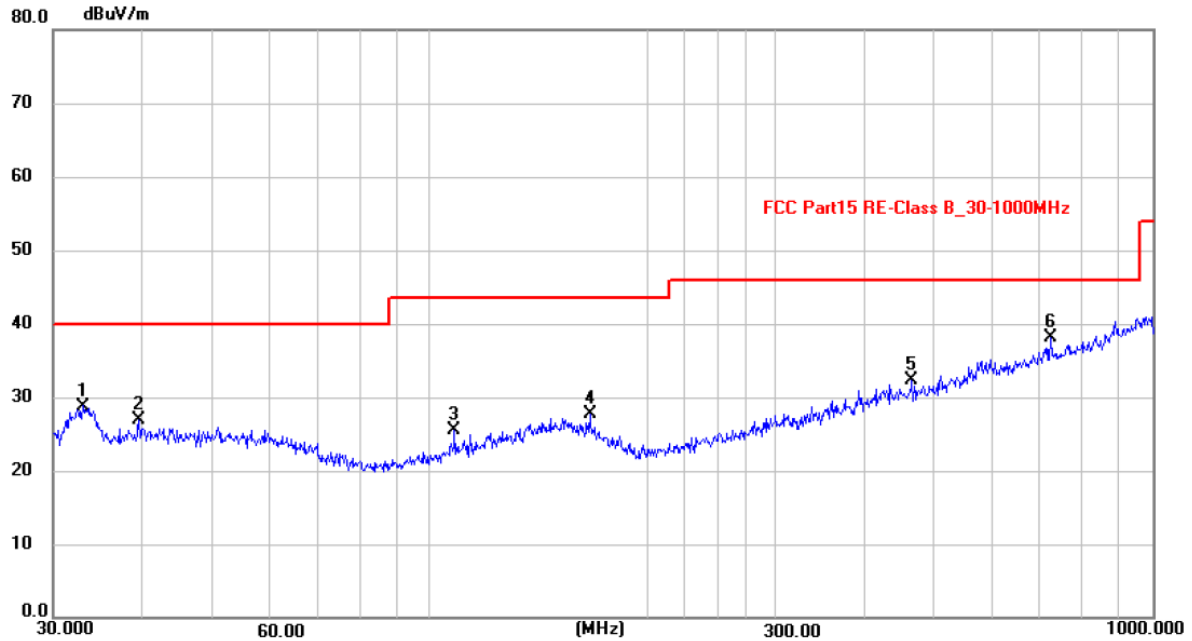

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	33.0370	15.30	13.50	28.80	40.00	-11.20	QP
2	39.4371	12.62	14.20	26.82	40.00	-13.18	QP
3	107.9823	13.64	11.80	25.44	43.50	-18.06	QP
4	166.2865	13.01	14.63	27.64	43.50	-15.86	QP
5	464.1730	13.08	19.30	32.38	46.00	-13.62	QP
6 *	722.3588	14.04	24.13	38.17	46.00	-7.83	QP

Note: Level = Reading + Factor Margin = Level - Limit

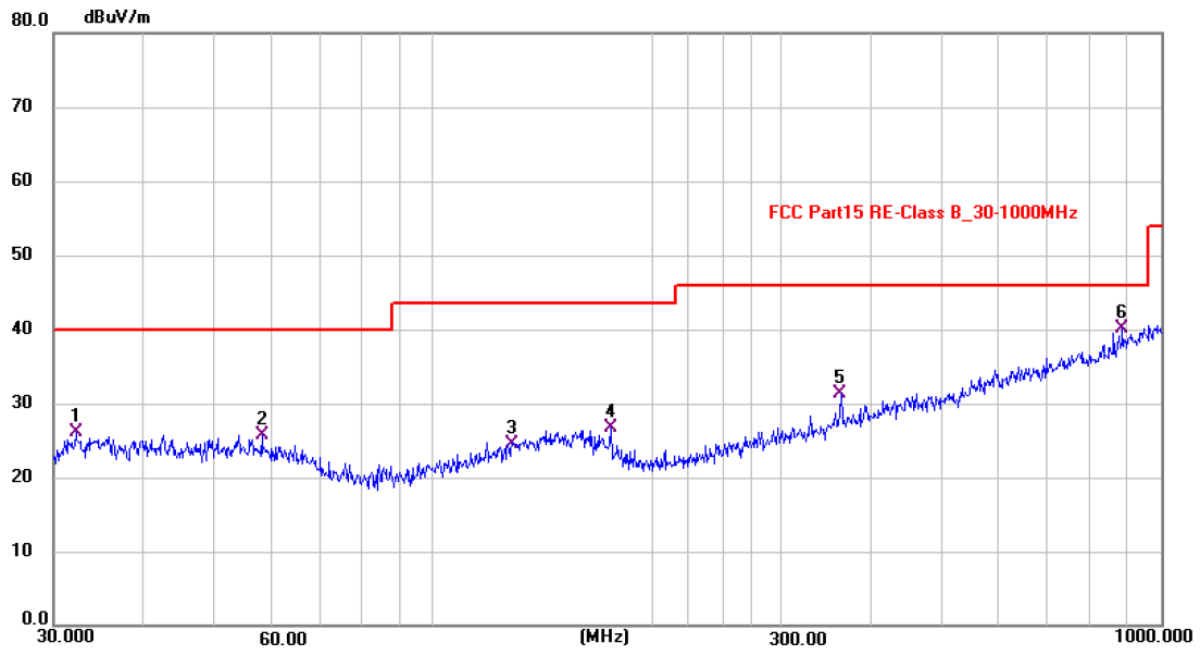Polarization: Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	32.1936	12.70	13.47	26.17	40.00	-13.83	QP
2	58.1265	12.35	13.34	25.69	40.00	-14.31	QP
3	128.3940	10.89	13.71	24.60	43.50	-18.90	QP
4	175.5746	13.13	13.51	26.64	43.50	-16.86	QP
5	364.0999	14.54	16.85	31.39	46.00	-14.61	QP
6 *	886.8321	13.90	26.18	40.08	46.00	-5.92	QP

Note: Level = Reading + Factor Margin = Level - Limit

From 1GHz to 25GHz:	
Test Date : 2026.07.15	Temperature : 26℃
Test Engineer : Felix Pang	Humidity : 54%
Test Mode : GFSK, $\pi/4$ DQPSK, 8DPSK mode	
Test Voltage : AC 120V/60HZ	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

Test Mode : GFSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	59.25	-13.25	46.00	74.00	-28.00	Peak
2	4804	V	49.77	-13.25	36.52	54.00	-17.48	Avg
3	7206	--	--	--	--	--	--	--
4	9608	--	--	--	--	--	--	--
5	4804	H	56.43	-13.25	43.18	74.00	-30.82	Peak
6	4804	H	46.75	-13.25	33.50	54.00	-20.50	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--
Test Mode : GFSK TX Mid								
1	4882	V	58.15	-12.98	45.17	74.00	-28.83	Peak
2	4882	V	47.68	-12.98	34.70	54.00	-19.30	Avg
3	7323	--	--	--	--	--	--	--
4	9764	--	--	--	--	--	--	--
5	4882	H	57.69	-12.98	44.71	74.00	-29.29	Peak
6	4882	H	48.15	-12.98	35.17	54.00	-18.83	Avg
7	7323	--	--	--	--	--	--	--
8	9764	--	--	--	--	--	--	--
Test Mode : GFSK TX High								
1	4960	V	59.59	-12.70	46.89	74.00	-27.11	Peak
2	4960	V	50.20	-12.70	37.50	54.00	-16.50	Avg
3	7440	--	--	--	--	--	--	--
4	9920	--	--	--	--	--	--	--
5	4960	H	55.56	-12.70	42.86	74.00	-31.14	Peak
6	4960	H	47.22	-12.70	34.52	54.00	-19.48	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.							

Test Mode : $\pi/4$ DQPSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	60.12	-13.25	46.87	74.00	-27.13	Peak
2	4804	V	47.45	-13.25	34.20	54.00	-19.80	Avg
3	7206	--	--	--	--	--	--	--
4	9608	--	--	--	--	--	--	--
5	4804	H	55.77	-13.25	42.52	74.00	-31.48	Peak
6	4804	H	45.45	-13.25	32.20	54.00	-21.80	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--
Test Mode : $\pi/4$ DQPSK TX Mid								
1	4882	V	58.77	-12.98	45.79	74.00	-28.21	Peak
2	4882	V	48.84	-12.98	35.86	54.00	-18.14	Avg
3	7323	--	--	--	--	--	--	--
4	9764	--	--	--	--	--	--	--
5	4882	H	54.52	-12.98	41.54	74.00	-32.46	Peak
6	4882	H	47.16	-12.98	34.18	54.00	-19.82	Avg
7	7323	--	--	--	--	--	--	--
8	9764	--	--	--	--	--	--	--
Test Mode : $\pi/4$ DQPSK TX High								
1	4960	V	59.21	-12.70	46.51	74.00	-27.49	Peak
2	4960	V	47.17	-12.70	34.47	54.00	-19.53	Avg
3	7440	--	--	--	--	--	--	--
4	9920	--	--	--	--	--	--	--
5	4960	H	56.22	-12.70	43.52	74.00	-30.48	Peak
6	4960	H	46.47	-12.70	33.77	54.00	-20.23	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.							

Test Mode : 8DPSK TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4804	V	59.66	-13.25	46.41	74.00	-27.59	Peak
2	4804	V	46.95	-13.25	33.70	54.00	-20.30	Avg
3	7206	--	--	--	--	--	--	--
4	9608	--	--	--	--	--	--	--
5	4804	H	56.56	-13.25	43.31	74.00	-30.69	Peak
6	4804	H	44.96	-13.25	31.71	54.00	-22.29	Avg
7	7206	--	--	--	--	--	--	--
8	9608	--	--	--	--	--	--	--
Test Mode : 8DPSK TX Mid								
1	4882	V	58.67	-12.98	45.69	74.00	-28.31	Peak
2	4882	V	49.00	-12.98	36.02	54.00	-17.98	Avg
3	7323	--	--	--	--	--	--	--
4	9764	--	--	--	--	--	--	--
5	4882	H	57.43	-12.98	44.45	74.00	-29.55	Peak
6	4882	H	47.44	-12.98	34.46	54.00	-19.54	Avg
7	7323	--	--	--	--	--	--	--
8	9764	--	--	--	--	--	--	--
Test Mode : 8D PSK TX High								
1	4960	V	59.11	-12.70	46.41	74.00	-27.59	Peak
2	4960	V	47.77	-12.70	35.07	54.00	-18.93	Avg
3	7440	--	--	--	--	--	--	--
4	9920	--	--	--	--	--	--	--
5	4960	H	54.41	-12.70	41.71	74.00	-32.29	Peak
6	4960	H	44.90	-12.70	32.20	54.00	-21.80	Avg
7	7440	--	--	--	--	--	--	--
8	9920	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

10. Band Edge Test


10.1. Test Limit

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241

10.2. Block Diagram of Test Setup

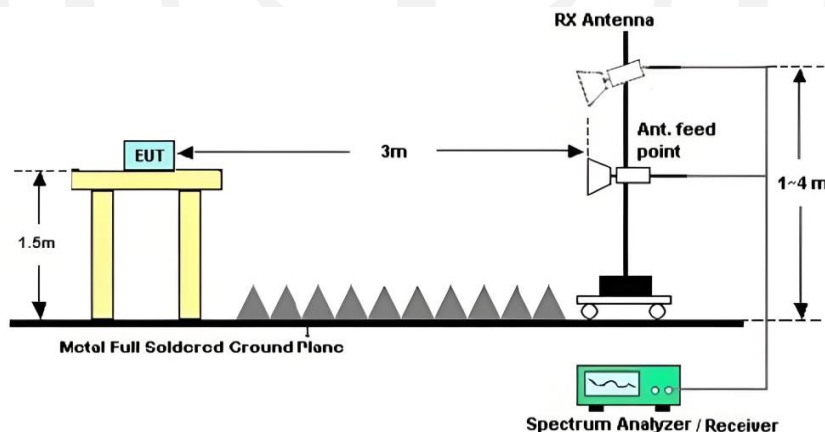

10.3. Test Procedure

ANSI C63.10-2020+Cor.1-2023 section 6.10.5.2

All restriction band and non- restriction band have been tested, only worse case is reported.

Details see the KDB558074 D01 Meas Guidance v05r02

1. Put the EUT on a 1.5m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission
2. Check the spurious emissions out of band.
3. RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 10Hz, RMS detector for AV value.

10.4. Test Results

Test Date	: 2026.07.15	Temperature	: 26°C
Test Engineer	: Felix Pang	Humidity	: 54%
Test Results	: PASS		

Frequency Range : 2310MHz~2410MHz								
Test Mode : GFSK TX 2402MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	61.94	-20.45	41.49	74.00	-32.51	Peak
2	2390	H	--	-20.45	--	54.00	--	Avg
3	2400	H	63.60	-20.41	43.19	74.00	-30.81	Peak
4	2400	H	--	-20.41	--	54.00	--	Avg
1	2390	V	61.75	-20.45	41.30	74.00	-32.70	Peak
2	2390	V	--	-20.45	--	54.00	--	Avg
3	2400	V	63.59	-20.41	43.18	74.00	-30.82	Peak
4	2400	V	--	-20.41	--	54.00	--	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : GFSK TX 2480MHz								
1	2483.5	H	61.87	-20.15	41.72	74.00	-32.28	Peak
2	2483.5	H	--	-20.15	--	54.00	--	Avg
1	2483.5	V	63.41	-20.15	43.26	74.00	-30.74	Peak
2	2483.5	V	--	-20.15	--	54.00	--	Avg
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.							

Frequency Range : 2310MHz~2410MHz								
Test Mode : $\pi/4$ DQPSK TX 2402MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	61.37	-20.45	40.92	74.00	-33.08	Peak
2	2390	H	--	-20.45	--	54.00	--	Avg
3	2400	H	62.72	-20.41	42.31	74.00	-31.69	Peak
4	2400	H	--	-20.41	--	54.00	--	Avg
1	2390	V	59.47	-20.45	39.02	74.00	-34.98	Peak
2	2390	V	--	-20.45	--	54.00	--	Avg
3	2400	V	63.52	-20.41	43.11	74.00	-30.89	Peak
4	2400	V	--	-20.41	--	54.00	--	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : $\pi/4$ DQPSK TX 2480MHz								
1	2483.5	H	60.63	-20.15	40.48	74.00	-33.52	Peak
2	2483.5	H	--	-20.15	--	54.00	--	Avg
1	2483.5	V	63.93	-20.15	43.78	74.00	-30.22	Peak
2	2483.5	V	--	-20.15	--	54.00	--	Avg
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.							

Frequency Range : 2310MHz~2410MHz								
Test Mode : 8DPSK TX 2402MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	60.83	-20.45	40.38	74.00	-33.62	Peak
2	2390	H	--	-20.45	--	54.00	--	Avg
3	2400	H	63.03	-20.41	42.62	74.00	-31.38	Peak
4	2400	H	--	-20.41	--	54.00	--	Avg
1	2390	V	61.32	-20.45	40.87	74.00	-33.13	Peak
2	2390	V	--	-20.45	--	54.00	--	Avg
3	2400	V	63.64	-20.41	43.23	74.00	-30.77	Peak
4	2400	V	--	-20.41	--	54.00	--	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : 8DPSK TX 2480MHz								
1	2483.5	H	59.75	-20.15	39.60	74.00	-34.40	Peak
2	2483.5	H	--	-20.15	--	54.00	--	Avg
1	2483.5	V	62.89	-20.15	42.74	74.00	-31.26	Peak
2	2483.5	V	--	-20.15	--	54.00	--	Avg
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.							

11. Power Line Conducted Emissions

11.1. Test Limits

Frequency (MHz)	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

11.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10-2020+Cor.1-2023 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.


11.3. Test Setup

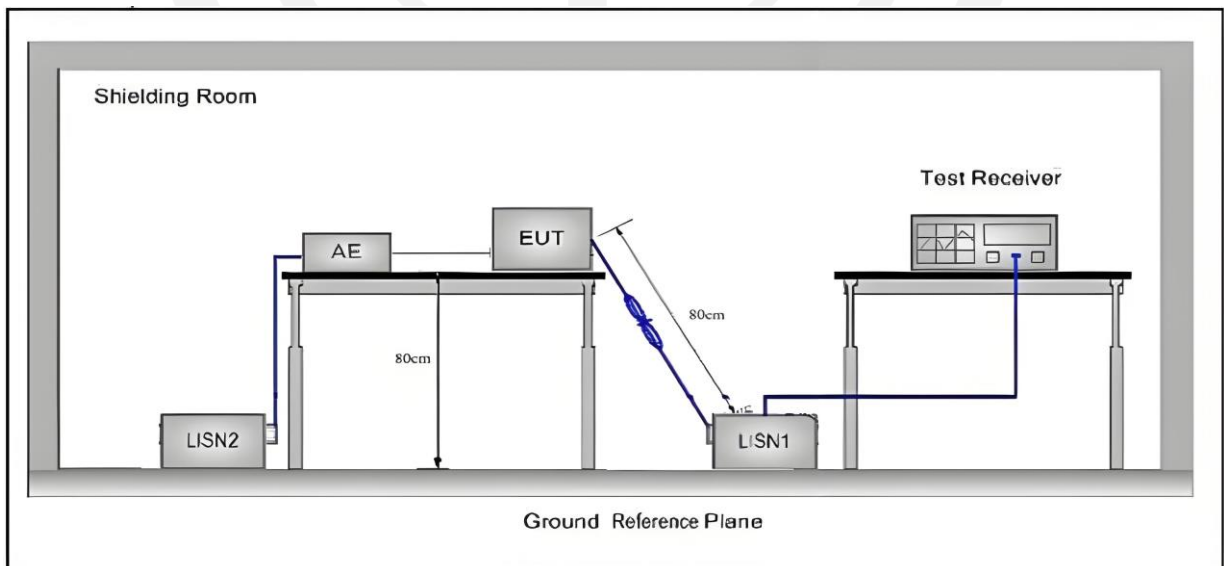

11.4. Test Results

Test Date	: 2026.07.15	Temperature	: 24℃
Test Engineer	: Felix Pang	Humidity	: 56%
Test Mode	: GFSK mode		
Test voltage	: AC 120V/60Hz		
Test Results	: PASS		
Note:	1. The test results are listed in next pages.		
	2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.		
	3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.		
	4. All modes have been tested, and only worst data of GFSK mode, Channel 2402MHz was listed in this report.		


Battery 1
Polarization: L

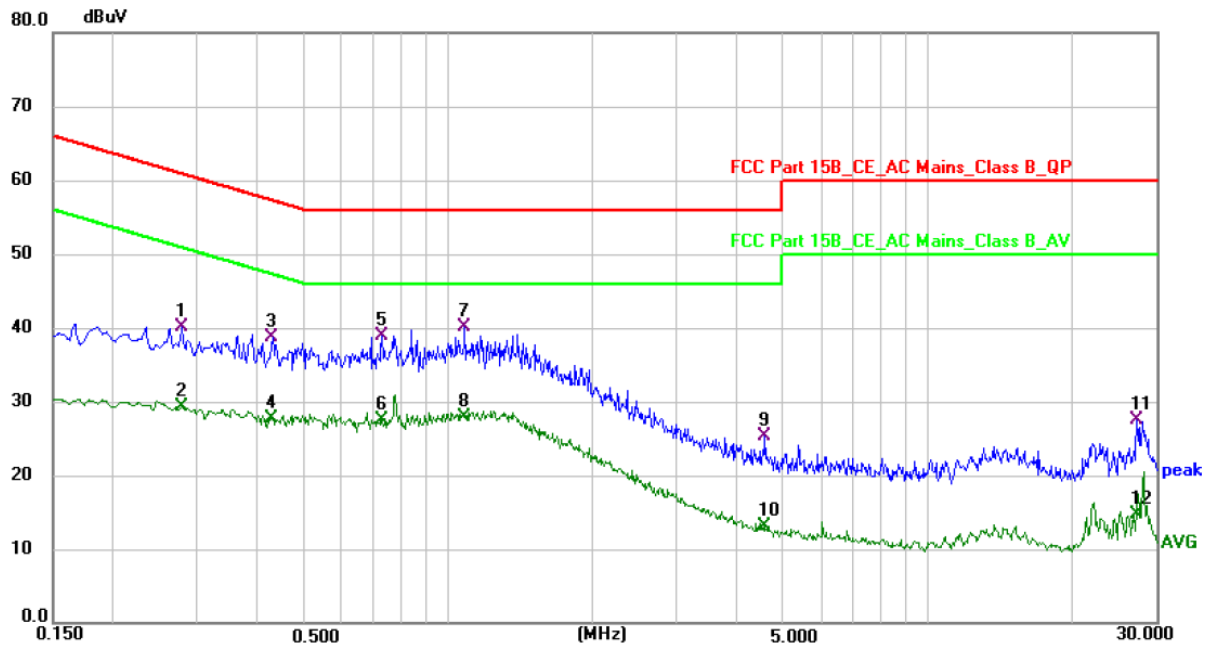

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2779	30.72	9.40	40.12	60.88	-20.76	QP
2	0.2779	19.82	9.40	29.22	50.88	-21.66	AVG
3	0.4300	29.14	9.49	38.63	57.25	-18.62	QP
4	0.4300	18.24	9.49	27.73	47.25	-19.52	AVG
5	0.7300	29.48	9.44	38.92	56.00	-17.08	QP
6	0.7300	17.97	9.44	27.41	46.00	-18.59	AVG
7 *	1.0859	30.31	9.81	40.12	56.00	-15.88	QP
8	1.0859	18.13	9.81	27.94	46.00	-18.06	AVG
9	4.5900	15.56	9.74	25.30	56.00	-30.70	QP
10	4.5900	3.31	9.74	13.05	46.00	-32.95	AVG
11	27.4020	17.94	9.55	27.49	60.00	-32.51	QP
12	27.4020	5.14	9.55	14.69	50.00	-35.31	AVG

Note: Level = Reading + Factor, Margin = Level - Limit

Polarization: N

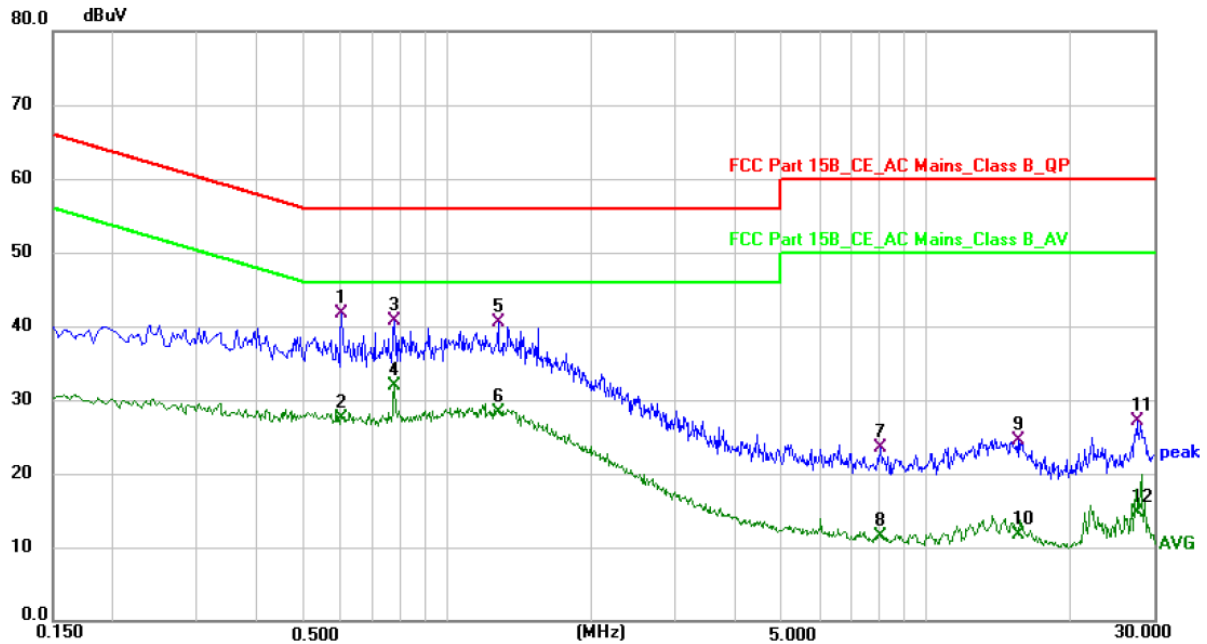


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.6020	32.08	9.55	41.63	56.00	-14.37	QP
2	0.6020	17.97	9.55	27.52	46.00	-18.48	AVG
3	0.7780	31.15	9.50	40.65	56.00	-15.35	QP
4 *	0.7780	22.37	9.50	31.87	46.00	-14.13	AVG
5	1.2780	30.73	9.83	40.56	56.00	-15.44	QP
6	1.2780	18.40	9.83	28.23	46.00	-17.77	AVG
7	8.0580	13.86	9.73	23.59	60.00	-36.41	QP
8	8.0580	1.82	9.73	11.55	50.00	-38.45	AVG
9	15.5700	14.63	9.78	24.41	60.00	-35.59	QP
10	15.5700	1.88	9.78	11.66	50.00	-38.34	AVG
11	27.6060	17.47	9.55	27.02	60.00	-32.98	QP
12	27.6060	5.22	9.55	14.77	50.00	-35.23	AVG

Note: Level = Reading + Factor, Margin = Level - Limit

Battery 2


Polarization: L

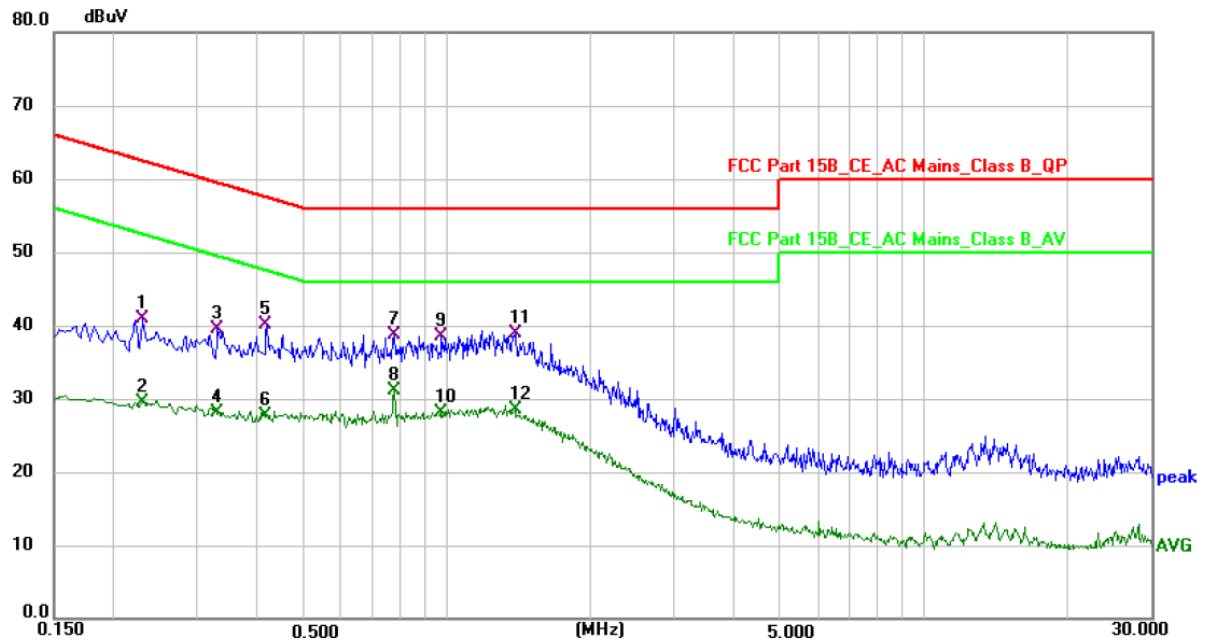

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2300	31.40	9.42	40.82	62.45	-21.63	QP
2	0.2300	20.10	9.42	29.52	52.45	-22.93	AVG
3	0.3300	30.10	9.42	39.52	59.45	-19.93	QP
4	0.3300	18.70	9.42	28.12	49.45	-21.33	AVG
5	0.4180	30.56	9.47	40.03	57.49	-17.46	QP
6	0.4180	18.17	9.47	27.64	47.49	-19.85	AVG
7	0.7780	29.20	9.53	38.73	56.00	-17.27	QP
8 *	0.7780	21.57	9.53	31.10	46.00	-14.90	AVG
9	0.9780	28.72	9.80	38.52	56.00	-17.48	QP
10	0.9780	18.40	9.80	28.20	46.00	-17.80	AVG
11	1.3940	29.12	9.87	38.99	56.00	-17.01	QP
12	1.3940	18.66	9.87	28.53	46.00	-17.47	AVG

Note: Level = Reading + Factor, Margin = Level - Limit

Polarization: N

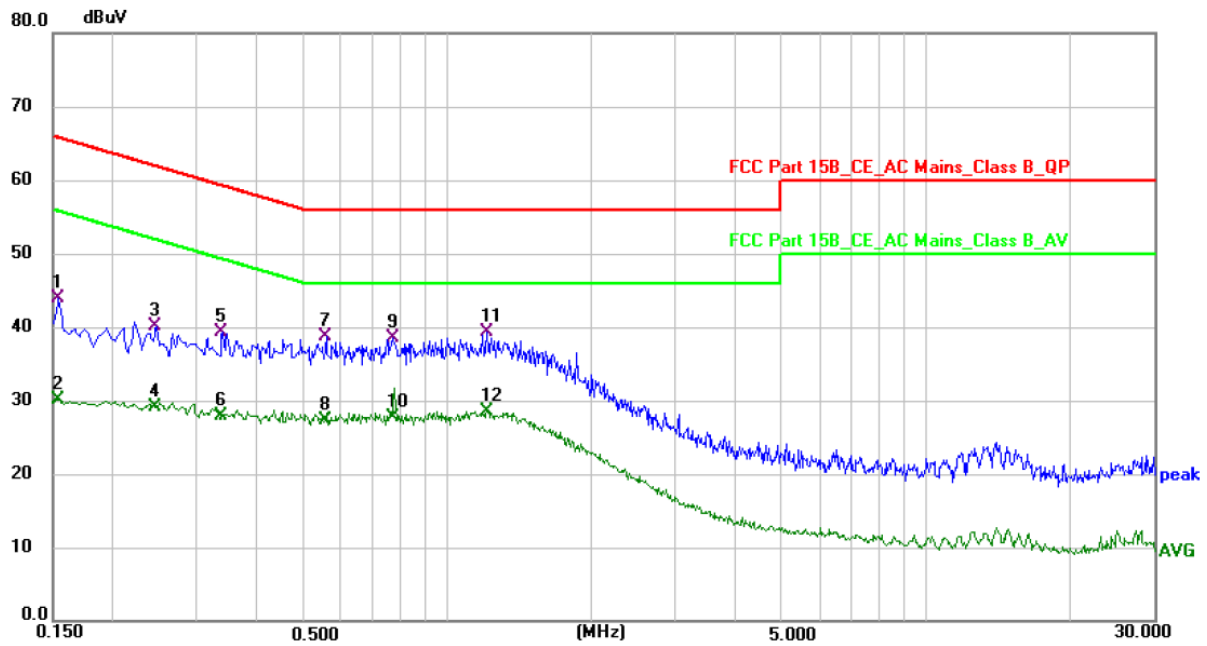

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	34.36	9.60	43.96	65.79	-21.83	QP
2	0.1539	20.49	9.60	30.09	55.79	-25.70	AVG
3	0.2460	30.60	9.42	40.02	61.89	-21.87	QP
4	0.2460	19.72	9.42	29.14	51.89	-22.75	AVG
5	0.3379	29.94	9.42	39.36	59.25	-19.89	QP
6	0.3379	18.52	9.42	27.94	49.25	-21.31	AVG
7	0.5580	28.86	9.78	38.64	56.00	-17.36	QP
8	0.5580	17.62	9.78	27.40	46.00	-18.60	AVG
9	0.7700	28.69	9.86	38.55	56.00	-17.45	QP
10	0.7700	17.94	9.86	27.80	46.00	-18.20	AVG
11 *	1.2100	29.63	9.59	39.22	56.00	-16.78	QP
12	1.2100	19.01	9.59	28.60	46.00	-17.40	AVG

Note: Level = Reading + Factor, Margin = Level - Limit

12. Antenna Requirements

12.1.Limit

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

12.2.Result

The EUT antenna is internal antenna. It complies with the standard requirement.



13. Photos of test setup

Reference to the **psi2604254-C01-R05 appendix I Test Setup Photo** for details.

14. Photos of EUT

Reference to the **psi2604254-C01-R05 appendix II external photos** and **appendix III internal photos** for details.

----- END OF REPORT-----

