

深圳市科鑫物联技术有限公司

Shenzhen KeXin Oit Technology Co ., Ltd

Address: 602, Floor 6, Building C3, 289 Louming Road, Loucun Community, Xinhua Street, Guangming District, Shenzhen

APPROVAL SHEET

For

Antenna componentst

频率范围 Frequency range	WIFI:(2.4/5.8GHz))
驻波比系数 VSWR	<3.0
输入阻抗 Input Impedance	50 (Ω)
极化方式 Polarization	垂直极化 Vertical Polarization
半功率波束 (3dB) HPW	180° H-plane 120° E-plane

Antenna Type: Dipole antenna

RF by		Checked by	
ME by		Date	
Customer Confirm			

Project:		Author:Wang	File Name:
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		

Revision History

Date	Revision	Description of Changes
2024-11-05	RA	Measured with SUS301 sample.

PROJECT	1
ANTENNA COMPONENTST	1
1 TECHNICAL SUMMARY	2
2 GENERAL DESCRIPTION	3
2.1 Components/Part revisions	3
3 MECHANICAL DESCRIPTION	3
4 ELECTRICAL PERFORMANCE	3
4.1 Set-up	3
4.1.1 VSWR	3
4.1.2 Gain & Radiation Patterns	3
4.1.3 Matching Circuit Description	3
4.2 Measurement Data	4
4.2.1 Active result (GSM)	4
6 Mechanical drawing	5
7 RELIABILITY TESTS	10
7.1 Test content	10
7.2 Test results	10
8 CONCLUSION	9

1 Technical Summary

This report summarizes the electrical results of the proposed antenna to support the小WIFI antenna program. We test the antenna with the latest version handset. And it

Project:	Author:Wang	File Name:
Date: 2024-11-05		
TEST:	Language:	Check: Zhong
A	English	

seems to be acceptable.

2 General Description

2.1 Components/Part revisions

VSWR: Voltage Standing Wave Rate.

3 Mechanical Description

4 Electrical Performance

4.1 Set-up

4.1.1 VSWR

VSWR measurements (S11) were performed using an Agilent 8753D Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

4.1.2 Gain & Radiation Patterns



The gain of the antenna was measured in the Lxc's anechoic chamber. Coaxial chokes on the feed cable were used to mitigate surface currents. The chamber provides less than -30 dB reflectivity from 800 MHz through 3 GHz and an 18" diameter spherical quiet zone. The measurement results are calibrated using both dipole and leaky wave horn standards.

4.1.3 Matching Circuit Description

Project:		Author:Wang	File Name:
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		

4.2 Measurement Data

4.2.1 Active result (2.4G/5.8WIFI)

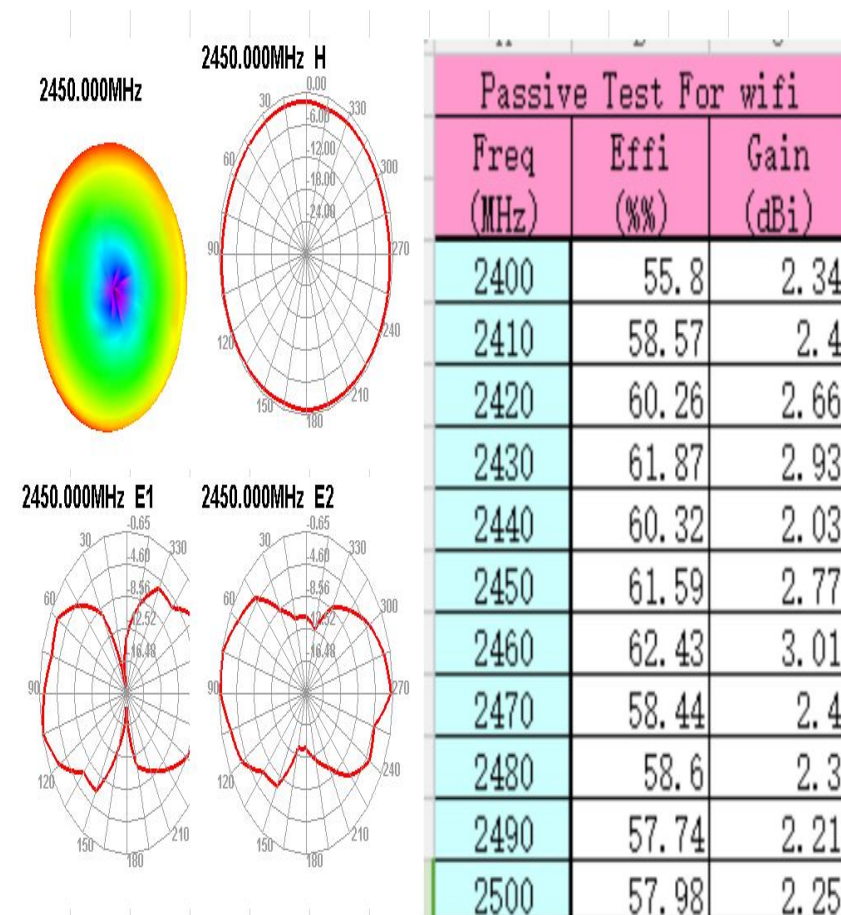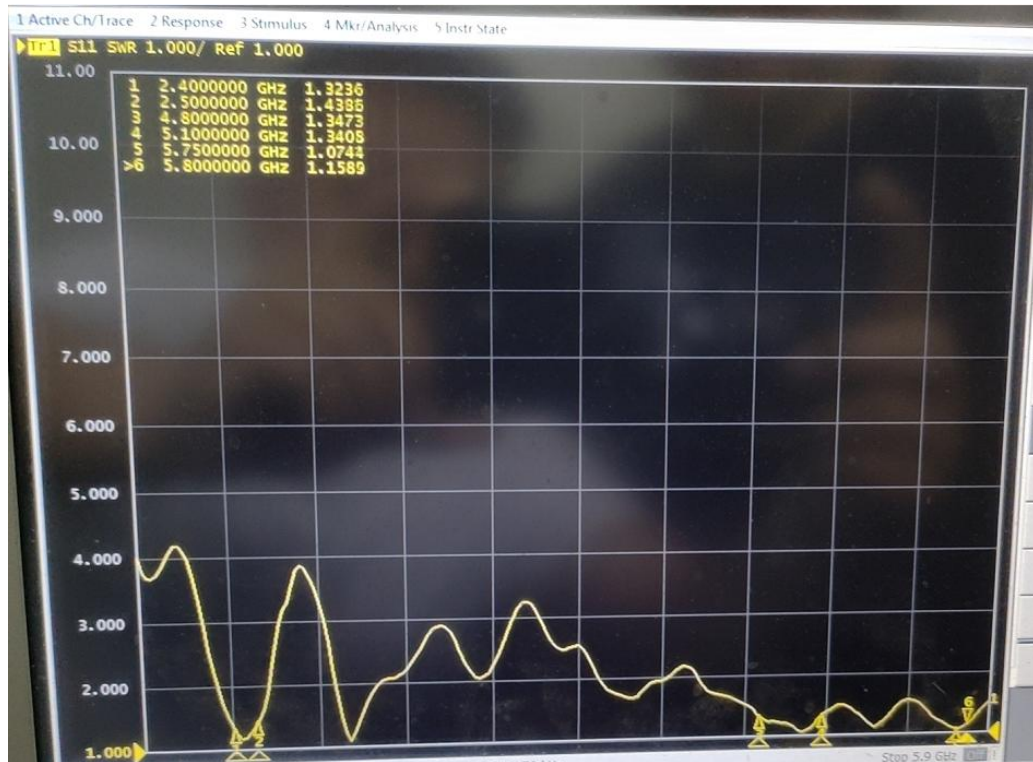

Project:		Author:Wang	File Name:
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		


Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
5150	50.84	-3.2	2.55
5160	50.91	-2.95	2.44
5170	53.82	-2.69	2.46
5180	52.88	-2.77	2.64
5190	50.48	-2.97	2.66
5200	49.24	-3.26	2.32
5210	49.42	-3.06	2.33
5220	51.52	-2.88	2.56
5230	55.3	-2.57	2.93
5240	57.23	-2.42	2.28
5250	50.33	-2.98	2.09
5260	50.22	-2.99	2.17
5270	48.98	-3.1	2.03
5280	51.73	-2.86	2.11
5290	53.3	-2.73	2.46
5300	51.79	-2.86	2.49
5310	51.68	-2.87	2.94
5320	52.18	-2.83	3.01
5330	51.18	-2.91	2.68
5340	52.01	-2.84	2.68
5350	54.68	-2.62	3.09
5360	52.86	-2.77	3.01
5370	53.3	-2.73	3.09
5380	53.78	-2.69	3.11
5390	50.33	-2.98	2.71
5400	60.27	-2.2	3.47
5410	57.92	-2.37	3.4
5420	56.91	-2.45	3.31
5430	56.42	-2.49	3.23
5440	55.8	-2.53	3.46
5450	59.59	-2.25	3.69
5460	56.29	-2.5	3.43
5470	57.54	-2.4	3.5
5480	56.43	-2.48	3.49
5490	57.37	-2.41	3.47
5500	58.29	-2.34	3.63

Project:		Author:Wang	File Name:
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		



5510	58.34	-2.34	3.42
5520	59.76	-2.24	3.51
5530	56.02	-2.52	3.7
5540	58.12	-2.36	3.37
5550	61.06	-2.14	3.13
5560	60.62	-2.17	3.87
5570	58.55	-2.32	3.98
5580	57.27	-2.42	3.82
5590	58.2	-2.35	3.56
5600	60.17	-2.21	3.55
5610	59.79	-2.23	3.79
5620	56.76	-2.46	3.68
5630	56.56	-2.47	3.7
5640	57.45	-2.41	3.6
5650	58.91	-2.3	3.62
5660	59.94	-2.22	3.88
5670	56.49	-2.48	3.92
5680	58.98	-2.29	3.72
5690	59.39	-2.26	3.15
5700	58.88	-2.3	3.96
5710	59.26	-2.27	3.85
5720	60.22	-2.2	3.91
5730	61.8	-2.09	3.46
5740	58.63	-2.32	3.45
5750	60.52	-2.18	3.48
5760	57.48	-2.4	3.64
5770	59.96	-2.22	3.69
5780	61.97	-2.08	3.71
5790	58.48	-2.33	3.24
5800	61.07	-2.14	3.27
5810	59.34	-2.27	3.2
5820	59.25	-2.27	3.53
5830	60.59	-2.18	3.98
5840	57.94	-2.37	3.53
5850	61.11	-2.14	3.79

Project:		Author:Wang	File Name:
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		

5150.00MHz - 5850.00MHz Gain

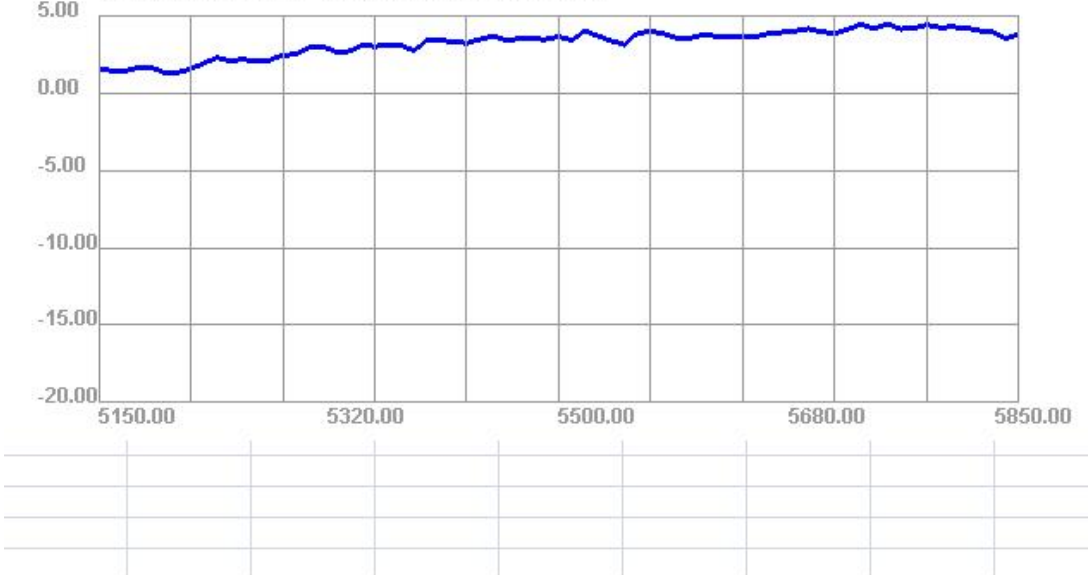


5150.00MHz - 5850.00MHz Efficiency

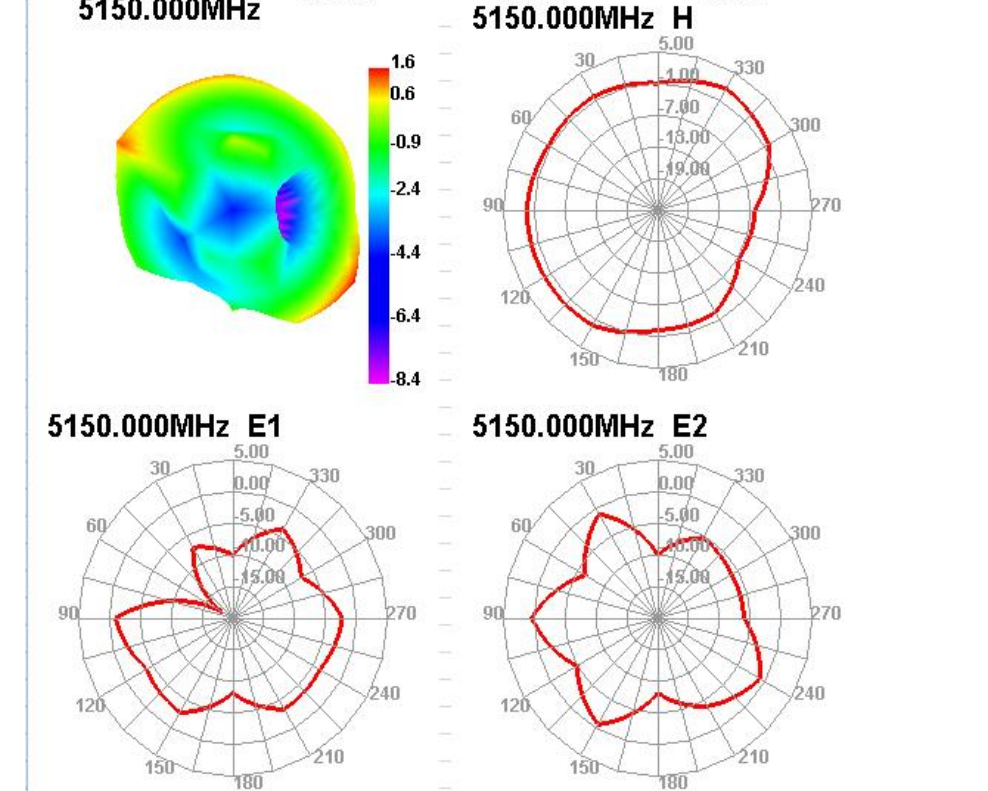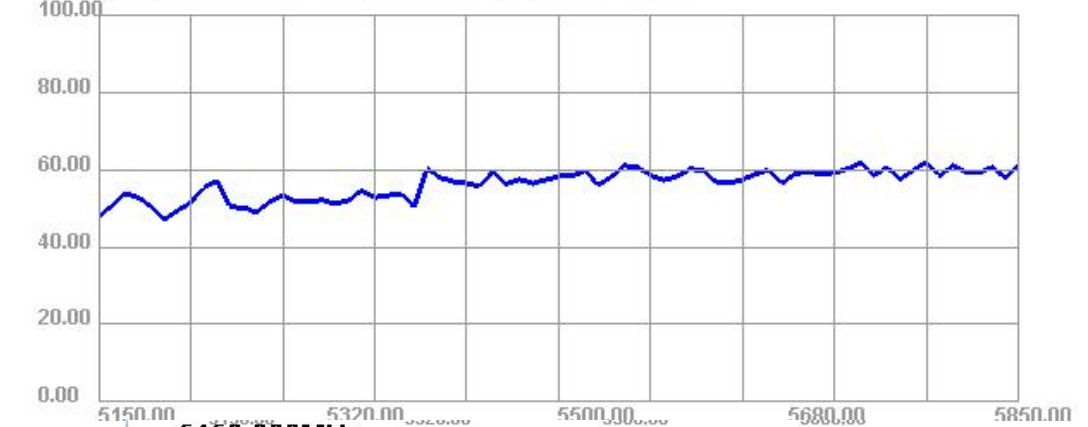


Project:		Author:Wang	File Name:
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		


5160.000MHz

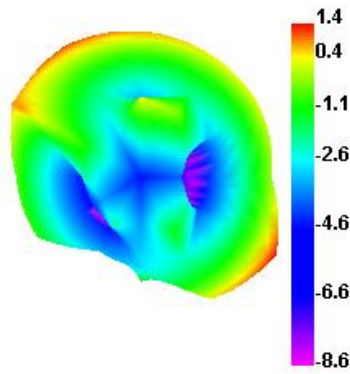


5160.000MHz H

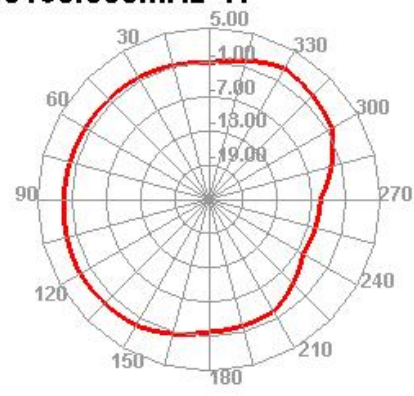

5160.000MHz E1

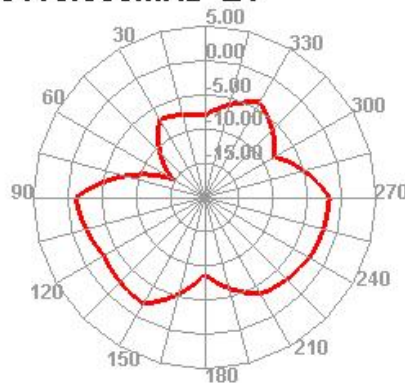

5160.000MHz E2

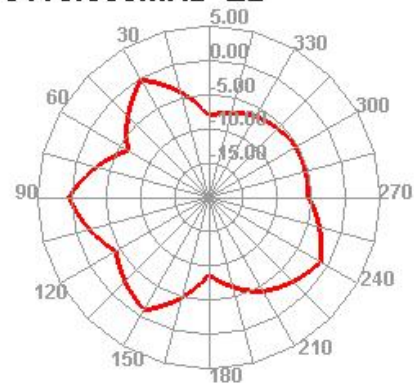

Project:		Author:Wang	File Name:
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		

Technical drawing of an SMA connector. The drawing shows a side view of the connector with a dimension of 50.0 ± 1.0. A label 'SMA' points to the connector. Below the drawing is a table with the following data:

ITEM	DESCRIPTION	QUANTITY	UNIT
1	SMA JACK-50 OHM PLUG 90 DEGREE ADAPTER	1	EA

Below the table is a section for material specifications and dimensions:

ITEM	DESCRIPTION	UNIT	QUANTITY
1	50 OHM PLUG 90 DEGREE ADAPTER	EA	1

Below the table is a section for material specifications and dimensions:

ITEM	DESCRIPTION	UNIT	QUANTITY
1	50 OHM PLUG 90 DEGREE ADAPTER	EA	1

Project:		Author:Wang	File Name:
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		

7 Reliability tests

7.1 Test content

No			
1			

7.2 Test results

NO				
1	50	24 Hour	OK	<0.4mm
2	50	48 Hour	OK	<0.4mm

8

Conclusion

From the above test results, we can know the electrical performance of the antenna is seems good.

Shenzhen KeXin Iot Technology Co ., Ltd ,look forward to your confirmation, thank you for your cooperation !

Project:		Author:Wang	File Name:
Date: 2024-11-05			
TEST:	Language:	Check: Zhong	
A	English		