**CTC Laboratories, Inc.**

2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-27521059 Fax: +86-755-27521011 http://www.sz-ctc.org.cn

# TEST REPORT

| | |
|---|---|
| **Report No. .....:** | **CTC20231526E02** |
| **FCC ID.....:** | **2BBQW-S1L** |
| **Applicant .....:** | **Shenzhen Jianghuan Technology CO.,LTD** |
| Address.....: | Building 12, No.121, Qiankeng Road, Fucheng Street, Longhua District, Shenzhen, Guangdong, China |
| Manufacturer.....: | Shenzhen Jianghuan Technology CO.,LTD |
| Address.....: | Building 12, No.121, Qiankeng Road, Fucheng Street, Longhua District, Shenzhen, Guangdong, China |
| **Product Name .....:** | **Wireless Speaker** |
| Trade Mark .....: | JUSTCENT |
| Model/Type reference.....: | S1L |
| Listed Model(s) .....: | S1, S1L PRO |
| **Standard .....:** | **FCC CFR Title 47 Part 15 Subpart C Section 15.247** |
| Date of receipt of test sample.....: | Jul. 11, 2023 |
| Date of testing.....: | Jul. 11, 2023 to Aug. 13, 2023 |
| Date of issue.....: | Aug. 14, 2023 |
| **Result.....:** | **PASS** |

| | | |
|---|---|---|
| Compiled by:<br>(Printed name+signature) | Jim Jiang | Jim Jiang |
| Supervised by:<br>(Printed name+signature) | Eric Zhang | Eric Zhang |
| Approved by:<br>(Printed name+signature) | Totti Zhao | |

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely corresponds to the test sample.

## Table of Contents Page


**1. TEST SUMMARY ..... 3**

1.1. TEST STANDARDS ..... 3
1.2. REPORT VERSION ..... 3
1.3. TEST DESCRIPTION ..... 3
1.4. TEST FACILITY ..... 4
1.5. MEASUREMENT UNCERTAINTY ..... 5
1.6. ENVIRONMENTAL CONDITIONS ..... 5

**2. GENERAL INFORMATION ..... 6**

2.1. CLIENT INFORMATION ..... 6
2.2. GENERAL DESCRIPTION OF EUT ..... 6
2.3. ACCESSORY EQUIPMENT INFORMATION ..... 7
2.4. OPERATION STATE ..... 8
2.5. MEASUREMENT INSTRUMENTS LIST ..... 9

**3. TEST ITEM AND RESULTS ..... 10**

3.1. CONDUCTED EMISSION ..... 10
3.2. RADIATED EMISSION ..... 13
3.3. BAND EDGE EMISSIONS (RADIATED) ..... 27
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED) ..... 40
3.5. 20DB BANDWIDTH ..... 56
3.6. CHANNEL SEPARATION ..... 63
3.7. NUMBER OF HOPPING CHANNEL ..... 65
3.8. DWELL TIME ..... 67
3.9. PEAK OUTPUT POWER ..... 71
3.10. DUTY CYCLE ..... 75
3.11. ANTENNA REQUIREMENT ..... 79

# 1. TEST SUMMARY

## 1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.
RSS-247 Issue 2: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.
RSS-Gen Issue 5: General Requirements for Compliance of Radio Apparatus.
ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

## 1.2. Report Version

| Revised No. | Date of issue | Description |
|---|---|---|
| 01 | Aug. 14, 2023 | Original |
| | | |
| | | |

## 1.3. Test Description

| FCC Part 15 Subpart C (15.247) / RSS-247 Issue 2 | | | | |
|---|---|---|---|---|
| Test Item | Standard Section | | Result | Test Engineer |
| | FCC | IC | | |
| Antenna Requirement | 15.203 | RSS-Gen 6.8 | Pass | Jim Jiang |
| Conducted Emission | 15.207 | RSS-Gen 8.8 | Pass | Jim Jiang |
| Restricted Bands | 15.205 | RSS-Gen 8.10 | Pass | Jim Jiang |
| Hopping Channel Separation | 15.247(a)(1) | RSS-247 5.1 (b) | Pass | Jim Jiang |
| Dwell Time | 15.247(a)(iii) | RSS-247 5.1 (d) | Pass | Jim Jiang |
| Peak Output Power | 15.247(b)(1) | RSS-247 5.4 (b) | Pass | Jim Jiang |
| Number of Hopping Frequency | 15.247(a)(iii) | RSS-247 5.1 (d) | Pass | Jim Jiang |
| Conducted Band Edge and Spurious Emissions | 15.247(d) | RSS-247 5.5 | Pass | Jim Jiang |
| Radiated Band Edge and Spurious Emissions | 15.205&15.209& 15.247(d) | RSS-247 5.5 | Pass | Jim Jiang |
| Radiated Spurious Emission | 15.247(d) &15.209 | RSS-247 5.5& RSS-Gen 8.9 | Pass | Jim Jiang |
| 20dB Bandwidth | 15.247(a) | RSS-247 5.1 (b) | Pass | Jim Jiang |

Note:
1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.

## 1.4. Test Facility

**Address of the report laboratory**

**CTC Laboratories, Inc.**

Add: 2/F., Building 1 and 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Longhua District, Shenzhen, Guangdong, China

**Laboratory accreditation**

The test facility is recognized, certified, or accredited by the following organizations:

**A2LA-Lab Cert. No.: 4340.01**

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

**Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)**

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

**FCC (Registration No.: 951311, Designation Number CN1208)**

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 “Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1” and TR-100028-02 “Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2” and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

| Test Items | Measurement Uncertainty | Notes |
|---|---|---|
| 20dB Emission Bandwidth | ±0.0196% | (1) |
| Carrier Frequency Separation | ±1.9% | (1) |
| Number of Hopping Channel | ±1.9% | (1) |
| Time of Occupancy | ±0.028% | (1) |
| Max Peak Conducted Output Power | ±0.743 dB | (1) |
| Band-edge Spurious Emission | ±1.328 dB | (1) |
| Conducted RF Spurious Emission | 9kHz-1GHz: ±0.746dB<br>1GHz-26GHz: ±1.328dB | (1) |
| Conducted Emissions 9kHz~30MHz | ±3.08 dB | (1) |
| Radiated Emissions 30~1000MHz | ±4.51 dB | (1) |
| Radiated Emissions 1~18GHz | ±5.84 dB | (1) |
| Radiated Emissions 18~40GHz | ±6.12 dB | (1) |

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|---|---|
| Temperature: | 15 °C to 35 °C |
| Relative Humidity: | 20 % to 75 % |
| Air Pressure: | 101 kPa |

# 2. GENERAL INFORMATION

## 2.1. Client Information

| | |
|---|---|
| Applicant: | Shenzhen Jianghuan Technology CO.,LTD |
| Address: | Building 12, No.121, Qiankeng Road, Fucheng Street, Longhua District, Shenzhen, Guangdong, China |
| Manufacturer: | Shenzhen Jianghuan Technology CO.,LTD |
| Address: | Building 12, No.121, Qiankeng Road, Fucheng Street, Longhua District, Shenzhen, Guangdong, China |

## 2.2. General Description of EUT

| | |
|---|---|
| Product Name: | Wireless Speaker |
| Trade Mark: | JUSTCENT |
| Model/Type reference: | S1L |
| Listed Model(s): | S1, S1L PRO |
| Model Difference: | All these models are identical in the same PCB, layout, electrical circuit and enclosure. The difference is the model name and appearance color. |
| Power Supply: | DC5V 1A |
| Hardware Version: | / |
| Software Version: | / |
| **Bluetooth 5.3 / BR+EDR** | |
| Modulation: | GFSK, π/4-DQPSK, 8-DPSK |
| Operation Frequency: | 2402MHz~2480MHz |
| Channel Number: | 79 |
| Channel Separation: | 1MHz |
| Antenna Type: | PCB Antenna |
| Antenna Gain: | -0.58dBi |

## 2.3. Accessory Equipment Information

| **Equipment Information** | | | |
|---|---|---|---|
| Name | Model | S/N | Manufacturer |
| Notebook | ThinkPad T460s | / | Lenovo |
| **Cable Information** | | | |
| Name | Shielded Type | Ferrite Core | Length |
| USB Cable | Unshielded | NO | 150cm |
| **Test Software Information** | | | |
| Name | Version | / | / |
| FCC Assist | 1.0.2.2 | / | / |

## 2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

| Channel | Frequency (MHz) |
|---|---|
| **00** | **2402** |
| 01 | 2403 |
| ⋮ | ⋮ |
| 38 | 2440 |
| **39** | **2441** |
| 40 | 2442 |
| ⋮ | ⋮ |
| 77 | 2479 |
| **78** | **2480** |

Note: The display in grey were the channel selected for testing.

Test Mode:

| |
|---|
| For RF test items: |
| The engineering test program was provided and enabled to make EUT continuous transmit. |
| For AC power line conducted emissions: |
| The EUT was set to connect with the Bluetooth instrument under large package sizes transmission. |
| For Radiated spurious emissions test item: |
| The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report. |

## 2.5. Measurement Instruments List

| Tonscend RF Test System | | | | | |
|---|---|---|---|---|---|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Calibrated Until |
| 1 | MXA Signal Analyzer | Keysight | N9020A | MY46471737 | Dec. 16, 2023 |
| 2 | Spectrum Analyzer | R&S | FSU26 | 100105 | Dec. 16, 2023 |
| 3 | Spectrum Analyzer | R&S | FSV40-N | 101331 | Mar. 14, 2024 |
| 4 | MXG Vector Signal Generator | Agilent | N5182A | MY47420864 | Dec. 16, 2023 |
| 5 | PSG Analog Signal Generator | Agilent | E8257D | MY46521908 | Dec. 16, 2023 |
| 6 | Power Sensor | Keysight | U2021XA | MY55130004 | Mar. 14, 2024 |
| 7 | Power Sensor | Keysight | U2021XA | MY55130006 | Mar. 14, 2024 |
| 8 | Wideband Radio Communication Tester | R&S | CMW500 | 102414 | Dec. 16, 2023 |
| 9 | High and low temperature box | ESPEC | MT3035 | / | Mar. 24, 2024 |
| 10 | JS1120 RF Test System | TONSCEND | v2.6 | / | / |

| Radiated Emission (3m chamber 2) | | | | | |
|---|---|---|---|---|---|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Calibrated Until |
| 1 | Trilog-Broadband Antenna | Schwarzbeck | VULB 9168 | 9168-1013 | Dec. 07, 2024 |
| 2 | Horn Antenna | Schwarzbeck | BBHA 9120D | 9120D-648 | Dec. 07, 2024 |
| 3 | Spectrum Analyzer | R&S | FSU26 | 100105 | Dec. 16, 2023 |
| 4 | Spectrum Analyzer | R&S | FSV40-N | 101331 | Mar. 14, 2024 |
| 5 | Pre-Amplifier | SONOMA | 310 | 186194 | Dec. 16, 2023 |
| 6 | Low Noise Pre-Amplifier | EMCI | EMC051835 | 980075 | Dec. 16, 2023 |
| 7 | Test Receiver | R&S | ESCI7 | 100967 | Dec. 16, 2023 |
| 8 | 3m chamber 2 | Frankonia | EE025 | / | Oct. 23, 2024 |

| Conducted Emission | | | | | |
|---|---|---|---|---|---|
| Item | Test Equipment | Manufacturer | Model No. | Serial No. | Calibrated Until |
| 1 | LISN | R&S | ENV216 | 101112 | Dec. 16, 2023 |
| 2 | LISN | R&S | ENV216 | 101113 | Dec. 16, 2023 |
| 3 | EMI Test Receiver | R&S | ESCS30 | 100353 | Dec. 16, 2023 |
| 4 | ISN CAT6 | Schwarzbeck | NTFM 8158 | CAT6-8158-0046 | Dec. 16, 2023 |
| 5 | ISN CAT5 | Schwarzbeck | NTFM 8158 | CAT5-8158-0046 | Dec. 16, 2023 |

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

# 3. TEST ITEM AND RESULTS

## 3.1. Conducted Emission

**Limit**

**FCC CFR Title 47 Part 15 Subpart C Section 15.207 / RSS-Gen 8.8**

| Frequency (MHz) | Conducted Limit (dBμV) | |
|---|---|---|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 to 56 * | 56 to 46 * |
| 0.5 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

**Test Configuration**

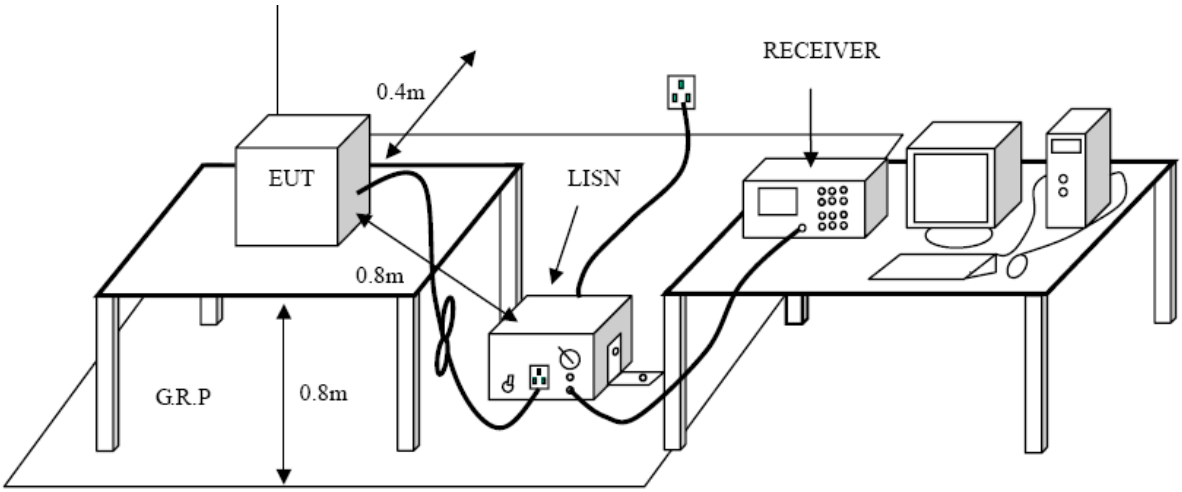


**Test Procedure**

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

**Test Mode**

Please refer to the clause 2.4.

**Test Result**

| | |
|---|---|
| **Test Voltage:** | AC 120V/60Hz |
| **Terminal:** | Line |
| **Remark:** | Only worse case is reported |

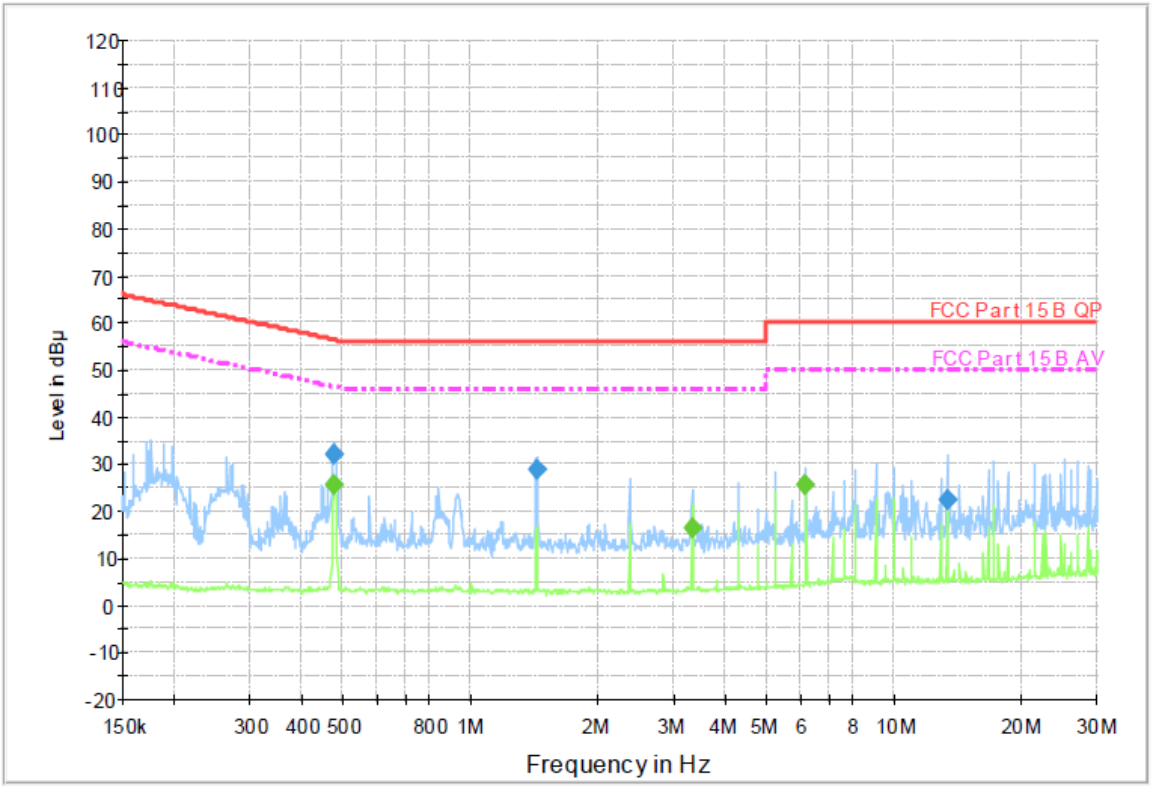


## Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dBµ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµ V) | Comment |
|---|---|---|---|---|---|---|---|---|---|
| 0.473590 | 32.2 | 1000.00 | 9.000 | On | L1 | 9.7 | 24.3 | 56.5 | |
| 1.425300 | 28.8 | 1000.00 | 9.000 | On | L1 | 9.7 | 27.2 | 56.0 | |
| 13.275500 | 22.6 | 1000.00 | 9.000 | On | L1 | 9.8 | 37.4 | 60.0 | |

## Final Measurement Detector 2

| Frequency (MHz) | Average (dBµ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµ V) | Comment |
|---|---|---|---|---|---|---|---|---|---|
| 0.473590 | 25.7 | 1000.00 | 9.000 | On | L1 | 9.7 | 20.8 | 46.5 | |
| 3.322410 | 16.5 | 1000.00 | 9.000 | On | L1 | 9.7 | 29.5 | 46.0 | |
| 6.168480 | 25.8 | 1000.00 | 9.000 | On | L1 | 9.7 | 24.2 | 50.0 | |

Emission Level = Read Level + Correct Factor

| | |
|---|---|
| **Test Voltage:** | AC 120V/60Hz |
| **Terminal:** | Neutral |
| **Remark:** | Only worse case is reported |

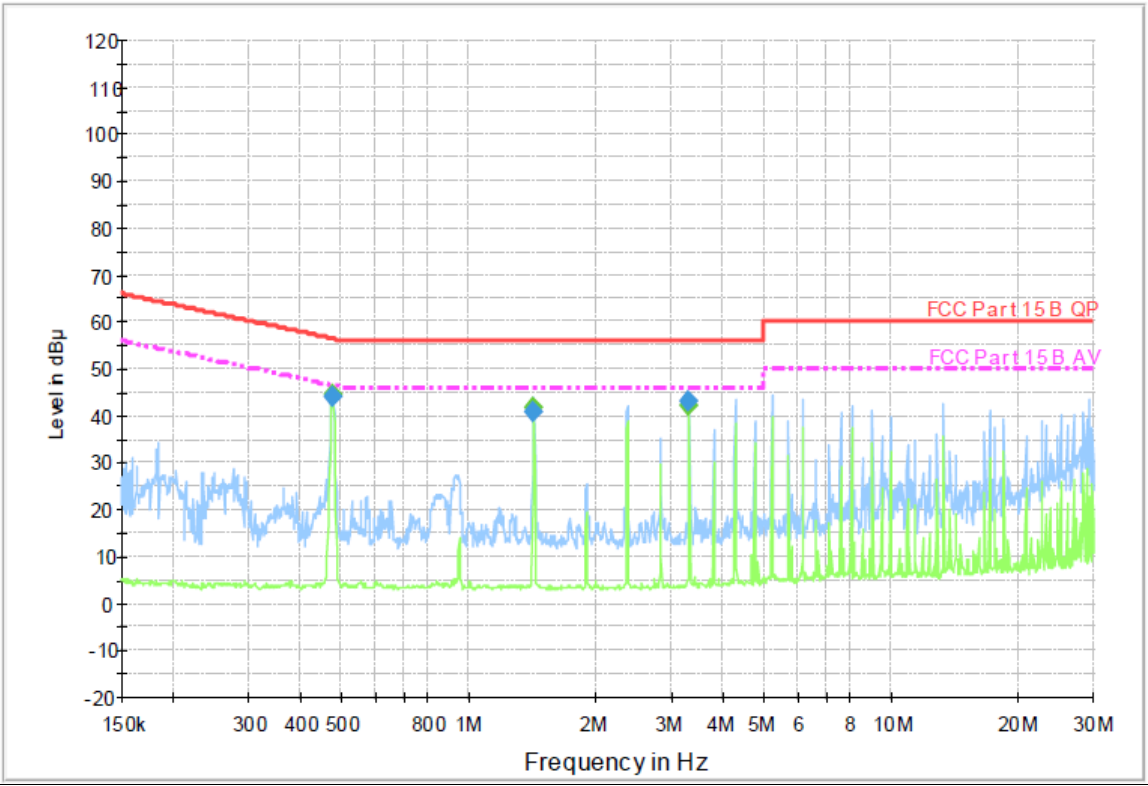


## Final Measurement Detector 1

| Frequency (MHz) | QuasiPeak (dBµ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµ V) | Comment |
|---|---|---|---|---|---|---|---|---|---|
| 0.471700 | 44.2 | 1000.00 | 9.000 | On | N | 10.0 | 12.3 | 56.5 | |
| 1.419620 | 40.8 | 1000.00 | 9.000 | On | N | 10.0 | 15.2 | 56.0 | |
| 3.309170 | 43.2 | 1000.00 | 9.000 | On | N | 10.0 | 12.8 | 56.0 | |

## Final Measurement Detector 2

| Frequency (MHz) | Average (dBµ V) | Meas. Time (ms) | Bandwidth (kHz) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµ V) | Comment |
|---|---|---|---|---|---|---|---|---|---|
| 0.471700 | 44.4 | 1000.00 | 9.000 | On | N | 10.0 | 2.1 | 46.5 | |
| 1.419620 | 41.8 | 1000.00 | 9.000 | On | N | 10.0 | 4.2 | 46.0 | |
| 3.309170 | 42.1 | 1000.00 | 9.000 | On | N | 10.0 | 3.9 | 46.0 | |

Emission Level = Read Level + Correct Factor

## 3.2. Radiated Emission

**Limit**

**FCC CFR Title 47 Part 15 Subpart C Section 15.209 / RSS-Gen 8.9**

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|---|---|---|
| 0.009~0.490 | 2400/F (kHz) | 300 |
| 0.490~1.705 | 24000/F (kHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| 960~1000 | 500 | 3 |

| Frequency Range (MHz) | dBμV/m (at 3 meters) | |
|---|---|---|
| | Peak | Average |
| Above 1000 | 74 | 54 |

Note:
(1) The tighter limit applies at the band edges.
(2) Emission Level (dBμV/m)=20log Emission Level (μV/m).

**Test Configuration**

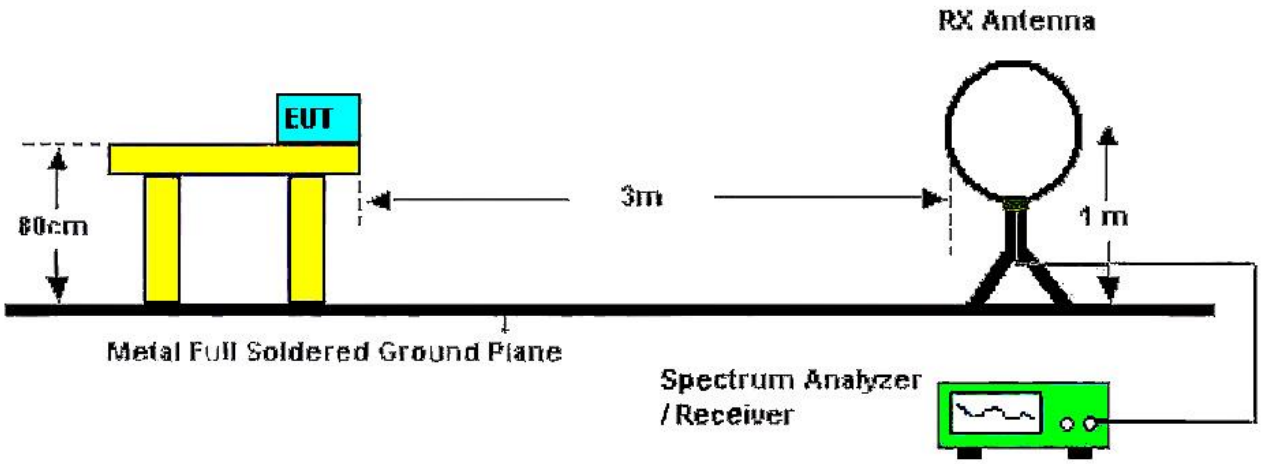


Below 30MHz Test Setup

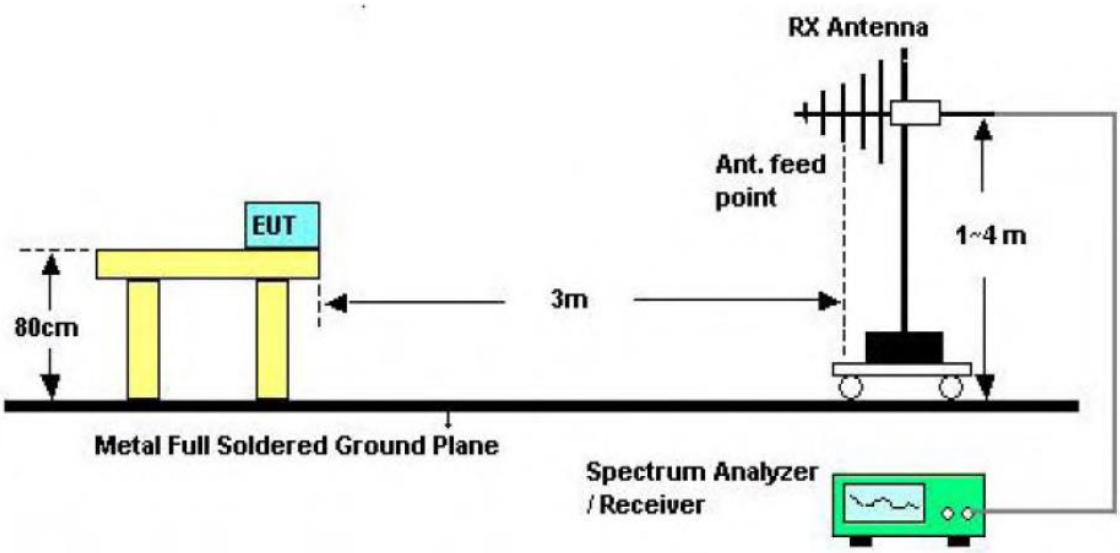


30-1000MHz Test Setup

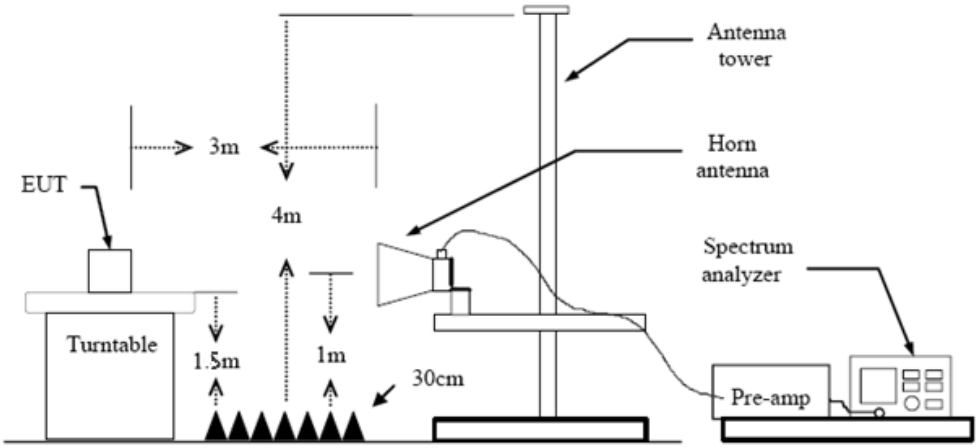


Above 1GHz Test Setup

**Test Procedure**

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings

(1) Span shall wide enough to fully capture the emission being measured;
(2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
(3) From 1 GHz to 10$^{th}$ harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.
Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.

## Test Mode

Please refer to the clause 2.4.

## Test Result

**9 kHz~30 MHz**

From 9 kHz to 30 MHz: The conclusion is PASS.

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**30MHz-1GHz**

| | |
|---|---|
| **Ant. Pol.** | Horizontal |
| **Test Mode:** | TX GFSK Mode 2402MHz |
| **Remark:** | Only worse case is reported. |

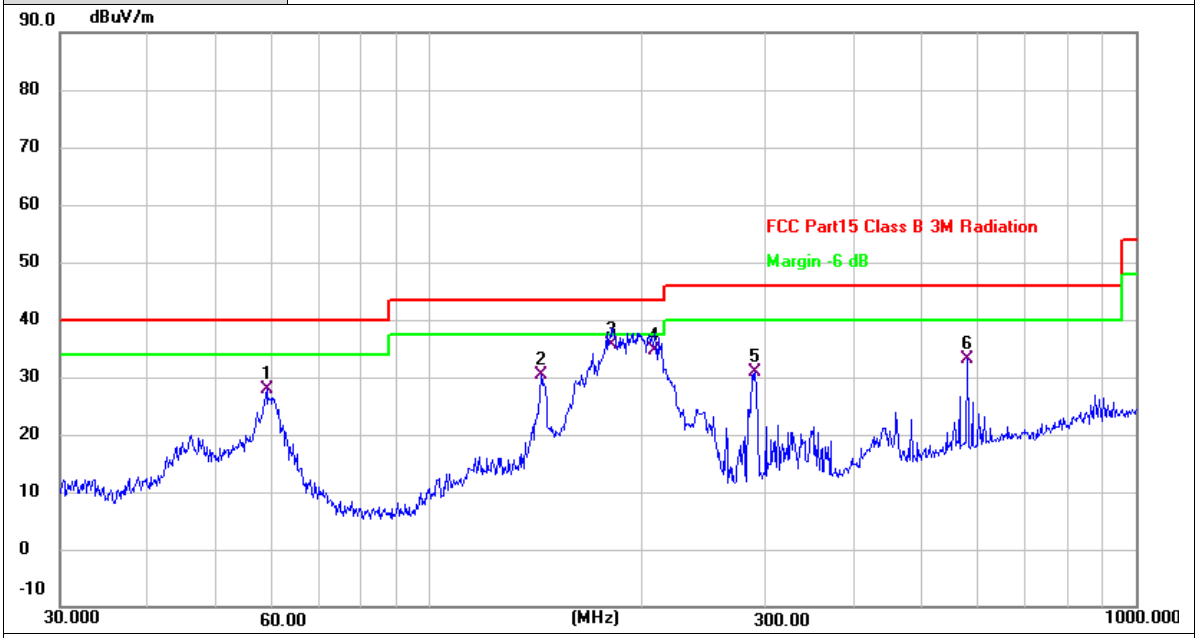


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 58.9836 | 46.28 | -18.51 | 27.77 | 40.00 | -12.23 | QP |
| 2 | 144.3346 | 47.30 | -16.96 | 30.34 | 43.50 | -13.16 | QP |
| 3 * | 181.6651 | 54.45 | -18.91 | 35.54 | 43.50 | -7.96 | QP |
| 4 | 209.0194 | 54.69 | -20.09 | 34.60 | 43.50 | -8.90 | QP |
| 5 | 289.4076 | 48.44 | -17.47 | 30.97 | 46.00 | -15.03 | QP |
| 6 | 577.0488 | 44.25 | -11.20 | 33.05 | 46.00 | -12.95 | QP |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Vertical |
| **Test Mode:** | TX GFSK Mode 2402MHz |
| **Remark:** | Only worse case is reported. |

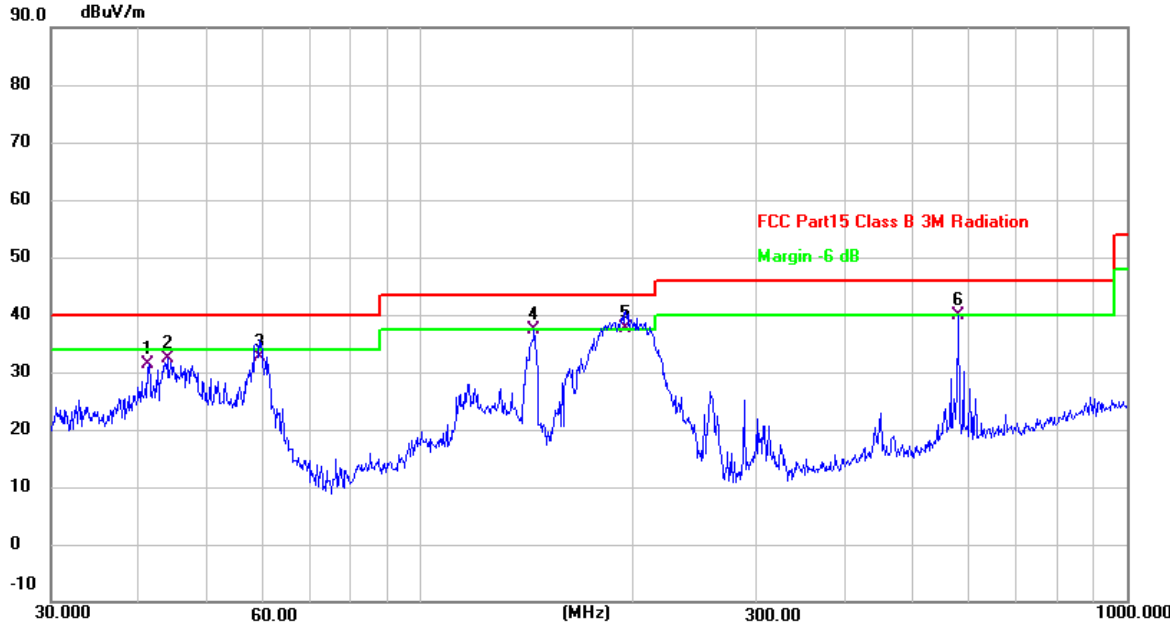


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 41.3052 | 48.87 | -17.45 | 31.42 | 40.00 | -8.58 | QP |
| 2 | 43.9348 | 49.92 | -17.66 | 32.26 | 40.00 | -7.74 | QP |
| 3 | 59.3155 | 51.24 | -18.54 | 32.70 | 40.00 | -7.30 | QP |
| 4 | 145.1468 | 54.33 | -16.85 | 37.48 | 43.50 | -6.02 | QP |
| 5 * | 195.4103 | 57.66 | -20.03 | 37.63 | 43.50 | -5.87 | QP |
| 6 | 577.0488 | 50.99 | -11.20 | 39.79 | 46.00 | -6.21 | QP |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

**Above 1GHz**

| **Ant. Pol.** | Horizontal |
|---|---|
| **Test Mode:** | TX GFSK Mode 2402MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 * | 4803.895 | 31.30 | 2.56 | 33.86 | 54.00 | -20.14 | AVG |
| 2 | 4803.965 | 41.74 | 2.56 | 44.30 | 74.00 | -29.70 | peak |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| **Ant. Pol.** | Vertical |
|---|---|
| **Test Mode:** | TX GFSK Mode 2402MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 * | 4803.981 | 29.07 | 2.56 | 31.63 | 54.00 | -22.37 | AVG |
| 2 | 4803.987 | 40.45 | 2.56 | 43.01 | 74.00 | -30.99 | peak |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Horizontal |
| **Test Mode:** | TX GFSK Mode 2441MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 4881.930 | 41.10 | 2.79 | 43.89 | 74.00 | -30.11 | peak |
| 2 * | 4881.944 | 30.95 | 2.79 | 33.74 | 54.00 | -20.26 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Vertical |
| **Test Mode:** | TX GFSK Mode 2441MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 * | 4881.873 | 29.31 | 2.79 | 32.10 | 54.00 | -21.90 | AVG |
| 2 | 4882.026 | 40.65 | 2.79 | 43.44 | 74.00 | -30.56 | peak |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Horizontal |
| **Test Mode:** | TX GFSK Mode 2480MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 4959.928 | 41.03 | 3.04 | 44.07 | 74.00 | -29.93 | peak |
| 2 * | 4960.010 | 30.32 | 3.04 | 33.36 | 54.00 | -20.64 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Vertical |
| **Test Mode:** | TX GFSK Mode 2480MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 4959.945 | 40.46 | 3.04 | 43.50 | 74.00 | -30.50 | peak |
| 2 * | 4960.016 | 28.88 | 3.04 | 31.92 | 54.00 | -22.08 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Horizontal |
| **Test Mode:** | TX π/4-DQPSK Mode 2402MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 * | 4803.899 | 31.50 | 2.56 | 34.06 | 54.00 | -19.94 | AVG |
| 2 | 4804.125 | 41.64 | 2.56 | 44.20 | 74.00 | -29.80 | peak |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Vertical |
| **Test Mode:** | TX π/4-DQPSK Mode 2402MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 * | 4803.880 | 29.31 | 2.56 | 31.87 | 54.00 | -22.13 | AVG |
| 2 | 4803.914 | 40.85 | 2.56 | 43.41 | 74.00 | -30.59 | peak |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Horizontal |
| **Test Mode:** | TX π/4-DQPSK Mode 2441MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 4882.012 | 41.05 | 2.79 | 43.84 | 74.00 | -30.16 | peak |
| 2 * | 4882.081 | 30.73 | 2.79 | 33.52 | 54.00 | -20.48 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Vertical |
| **Test Mode:** | TX π/4-DQPSK Mode 2441MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 * | 4882.023 | 28.94 | 2.79 | 31.73 | 54.00 | -22.27 | AVG |
| 2 | 4882.027 | 40.86 | 2.79 | 43.65 | 74.00 | -30.35 | peak |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Horizontal |
| **Test Mode:** | TX π/4-DQPSK Mode 2480MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 * | 4959.947 | 30.65 | 3.04 | 33.69 | 54.00 | -20.31 | AVG |
| 2 | 4960.011 | 40.84 | 3.04 | 43.88 | 74.00 | -30.12 | peak |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Vertical |
| **Test Mode:** | TX π/4-DQPSK Mode 2480MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 4959.929 | 39.94 | 3.04 | 42.98 | 74.00 | -31.02 | peak |
| 2 * | 4959.933 | 28.21 | 3.04 | 31.25 | 54.00 | -22.75 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Horizontal |
| **Test Mode:** | TX 8-DPSK Mode 2402MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 * | 4803.975 | 30.63 | 2.56 | 33.19 | 54.00 | -20.81 | AVG |
| 2 | 4803.980 | 41.18 | 2.56 | 43.74 | 74.00 | -30.26 | peak |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Vertical |
| **Test Mode:** | TX 8-DPSK Mode 2402MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 * | 4803.876 | 28.89 | 2.56 | 31.45 | 54.00 | -22.55 | AVG |
| 2 | 4803.894 | 40.85 | 2.56 | 43.41 | 74.00 | -30.59 | peak |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Horizontal |
| **Test Mode:** | TX 8-DPSK Mode 2441MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 4881.865 | 41.19 | 2.79 | 43.98 | 74.00 | -30.02 | peak |
| 2 * | 4882.021 | 30.54 | 2.79 | 33.33 | 54.00 | -20.67 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Vertical |
| **Test Mode:** | TX 8-DPSK Mode 2441MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 * | 4881.986 | 28.43 | 2.79 | 31.22 | 54.00 | -22.78 | AVG |
| 2 | 4882.014 | 40.55 | 2.79 | 43.34 | 74.00 | -30.66 | peak |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Horizontal |
| **Test Mode:** | TX 8-DPSK Mode 2480MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 4959.872 | 41.10 | 3.04 | 44.14 | 74.00 | -29.86 | peak |
| 2 * | 4960.023 | 30.97 | 3.04 | 34.01 | 54.00 | -19.99 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| | |
|---|---|
| **Ant. Pol.** | Vertical |
| **Test Mode:** | TX 8-DPSK Mode 2480MHz |
| **Remark:** | No report for the emission which more than 20 dB below the prescribed limit. |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 4959.958 | 40.52 | 3.04 | 43.56 | 74.00 | -30.44 | peak |
| 2 * | 4960.036 | 28.44 | 3.04 | 31.48 | 54.00 | -22.52 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

## 3.3. Band Edge Emissions (Radiated)

**Limit**

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5**

| Restricted Frequency Band (MHz) | (dBμV/m) (at 3m) | |
|---|---|---|
| | Peak | Average |
| 2310 ~ 2390 | 74 | 54 |
| 2483.5 ~ 2500 | 74 | 54 |

**Test Configuration**

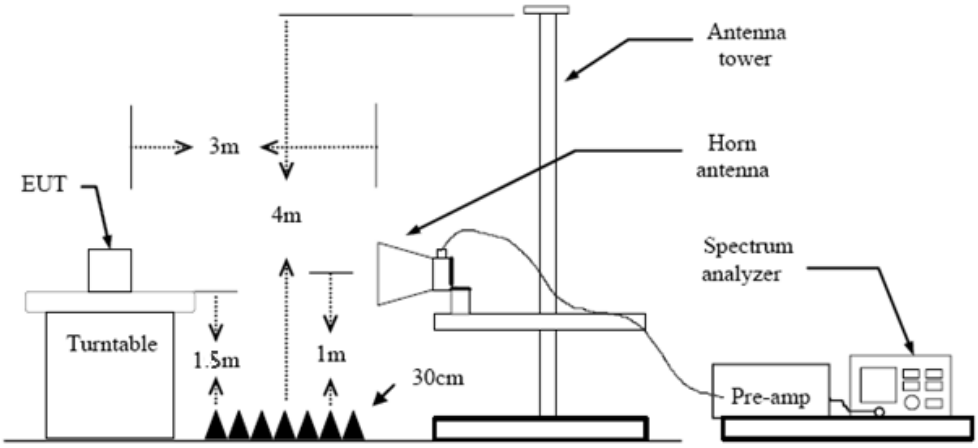


**Test Procedure**

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.

**Test Mode**

Please refer to the clause 2.4.

**Test Result**

| Ant. Pol. | Horizontal |
|---|---|
| Test Mode: | GFSK Mode 2402MHz |

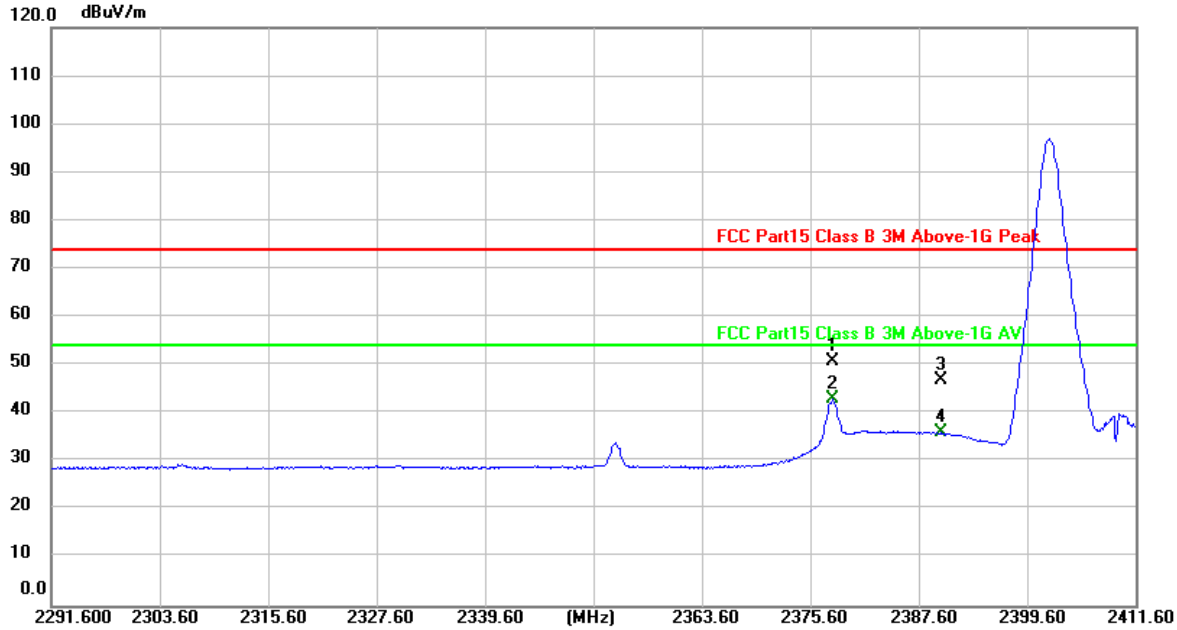


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 2378.096 | 58.62 | -7.77 | 50.85 | 74.00 | -23.15 | peak |
| 2 * | 2378.096 | 50.68 | -7.77 | 42.91 | 54.00 | -11.09 | AVG |
| 3 | 2390.000 | 54.77 | -7.72 | 47.05 | 74.00 | -26.95 | peak |
| 4 | 2390.000 | 43.76 | -7.72 | 36.04 | 54.00 | -17.96 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| Ant. Pol. | Vertical |
|---|---|
| Test Mode: | GFSK Mode 2402MHz |

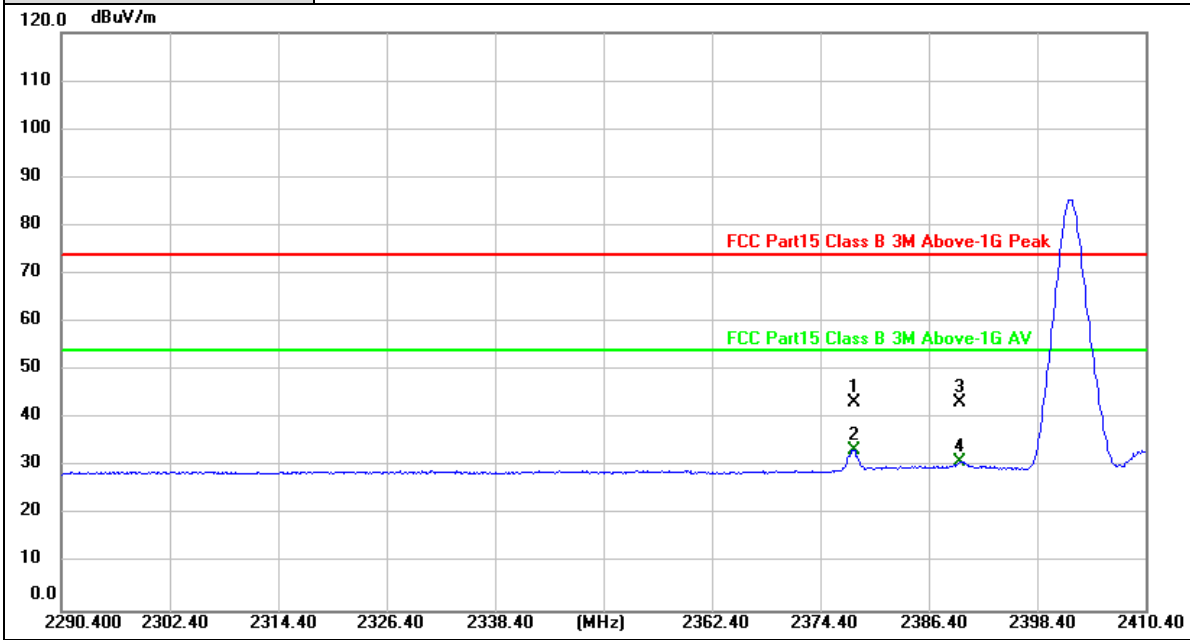


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 2378.144 | 51.02 | -7.77 | 43.25 | 74.00 | -30.75 | peak |
| 2 * | 2378.144 | 41.35 | -7.77 | 33.58 | 54.00 | -20.42 | AVG |
| 3 | 2390.000 | 51.06 | -7.72 | 43.34 | 74.00 | -30.66 | peak |
| 4 | 2390.000 | 38.82 | -7.72 | 31.10 | 54.00 | -22.90 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| Ant. Pol. | Horizontal |
|---|---|
| Test Mode: | GFSK Mode 2480MHz |

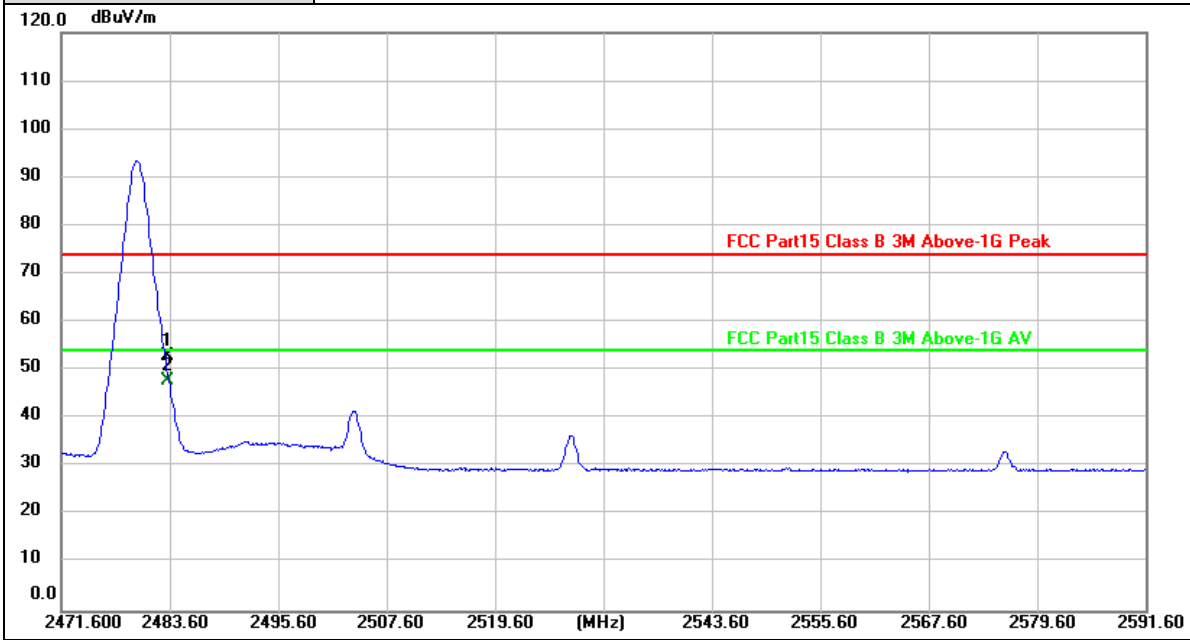


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 2483.500 | 60.41 | -7.32 | 53.09 | 74.00 | -20.91 | peak |
| 2 * | 2483.500 | 55.26 | -7.32 | 47.94 | 54.00 | -6.06 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| Ant. Pol. | Vertical |
|---|---|
| Test Mode: | GFSK Mode 2480MHz |

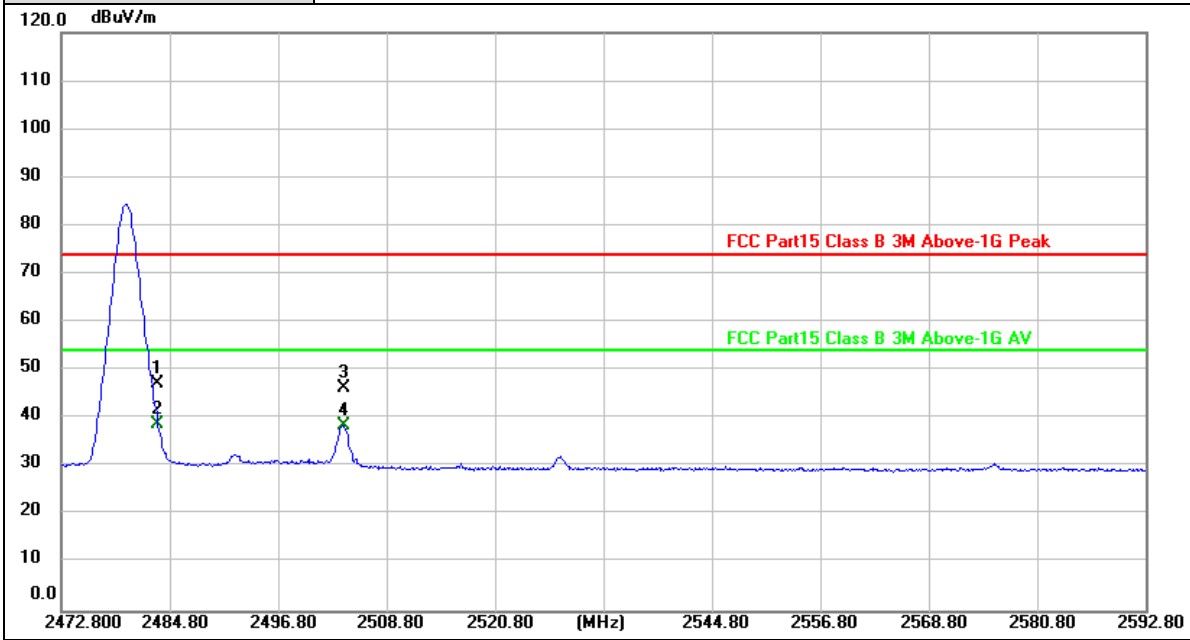


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 2483.500 | 54.43 | -7.32 | 47.11 | 74.00 | -26.89 | peak |
| 2 * | 2483.500 | 46.04 | -7.32 | 38.72 | 54.00 | -15.28 | AVG |
| 3 | 2504.000 | 53.75 | -7.25 | 46.50 | 74.00 | -27.50 | peak |
| 4 | 2504.000 | 45.84 | -7.25 | 38.59 | 54.00 | -15.41 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| Ant. Pol. | Horizontal |
|---|---|
| Test Mode: | π /4-DQPSK Mode 2402MHz |

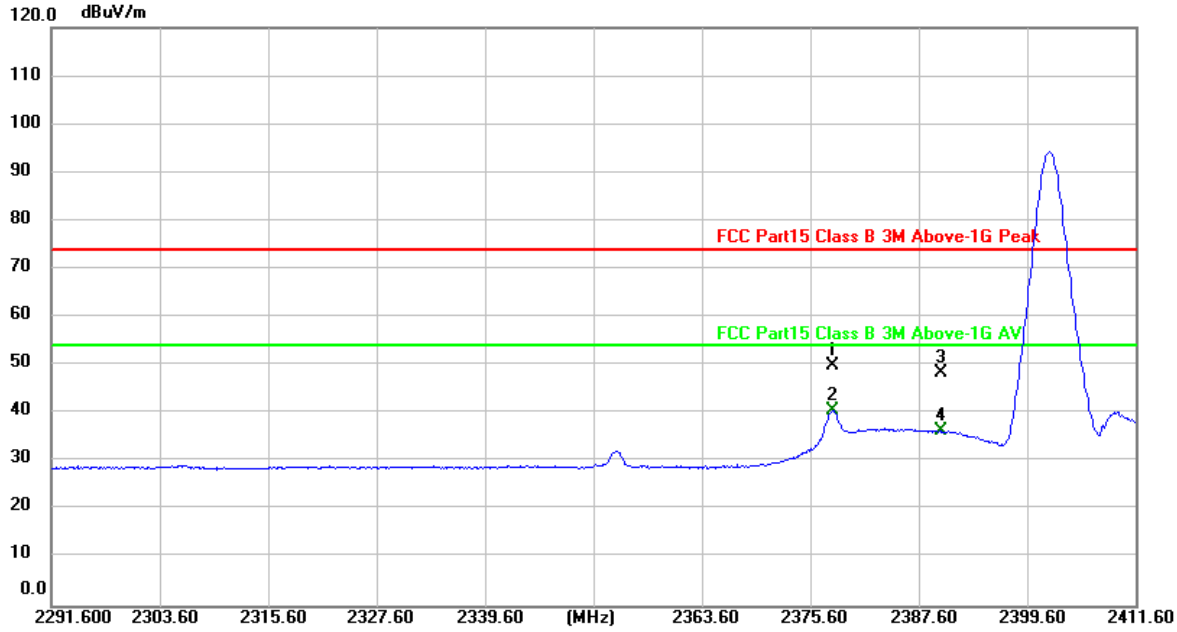


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 2378.000 | 57.65 | -7.77 | 49.88 | 74.00 | -24.12 | peak |
| 2 * | 2378.000 | 48.56 | -7.77 | 40.79 | 54.00 | -13.21 | AVG |
| 3 | 2390.000 | 56.29 | -7.72 | 48.57 | 74.00 | -25.43 | peak |
| 4 | 2390.000 | 44.06 | -7.72 | 36.34 | 54.00 | -17.66 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| Ant. Pol. | Vertical |
|---|---|
| Test Mode: | π /4-DQPSK Mode 2402MHz |

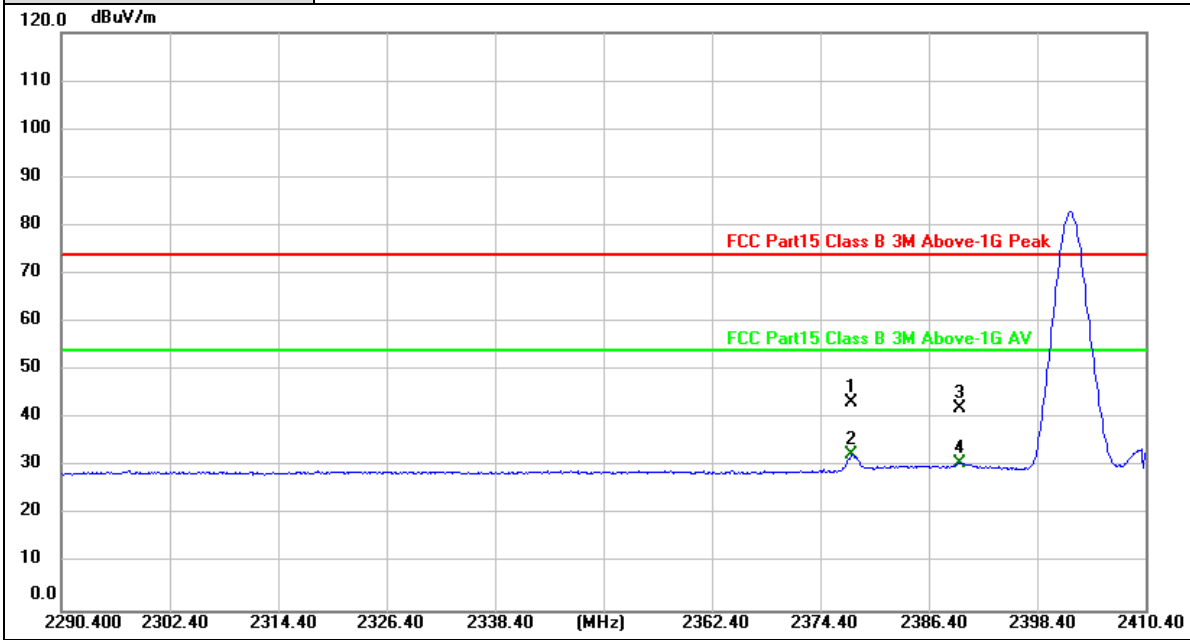


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 2377.952 | 51.14 | -7.77 | 43.37 | 74.00 | -30.63 | peak |
| 2 * | 2377.952 | 40.43 | -7.77 | 32.66 | 54.00 | -21.34 | AVG |
| 3 | 2390.000 | 49.78 | -7.72 | 42.06 | 74.00 | -31.94 | peak |
| 4 | 2390.000 | 38.45 | -7.72 | 30.73 | 54.00 | -23.27 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| Ant. Pol. | Horizontal |
|---|---|
| Test Mode: | π /4-DQPSK Mode 2480MHz |

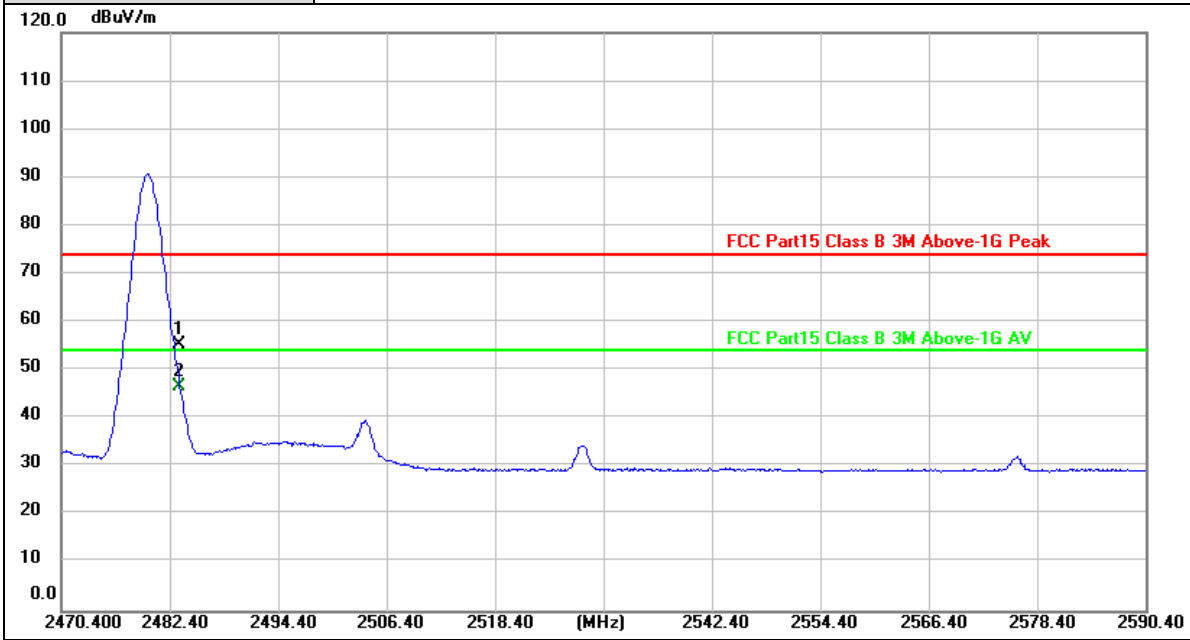


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 2483.500 | 62.81 | -7.32 | 55.49 | 74.00 | -18.51 | peak |
| 2 * | 2483.500 | 54.04 | -7.32 | 46.72 | 54.00 | -7.28 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| Ant. Pol. | Vertical |
|---|---|
| Test Mode: | π /4-DQPSK Mode 2480MHz |

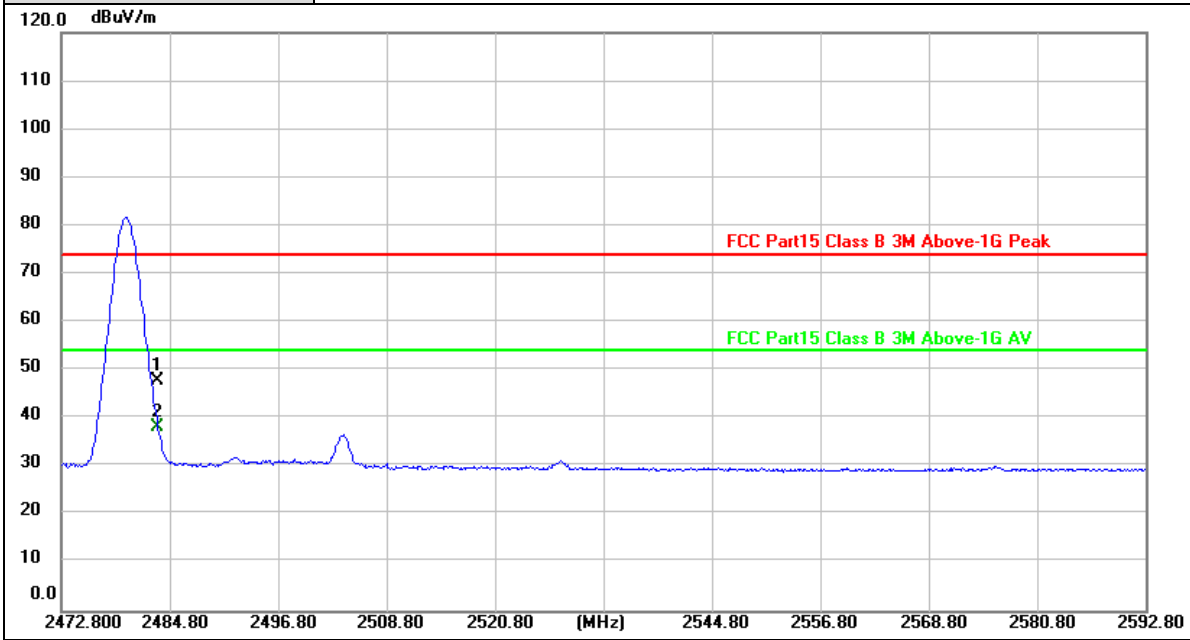


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 2483.500 | 55.06 | -7.32 | 47.74 | 74.00 | -26.26 | peak |
| 2 * | 2483.500 | 45.44 | -7.32 | 38.12 | 54.00 | -15.88 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| Ant. Pol. | Horizontal |
|---|---|
| Test Mode: | 8-DPSK Mode 2402MHz |

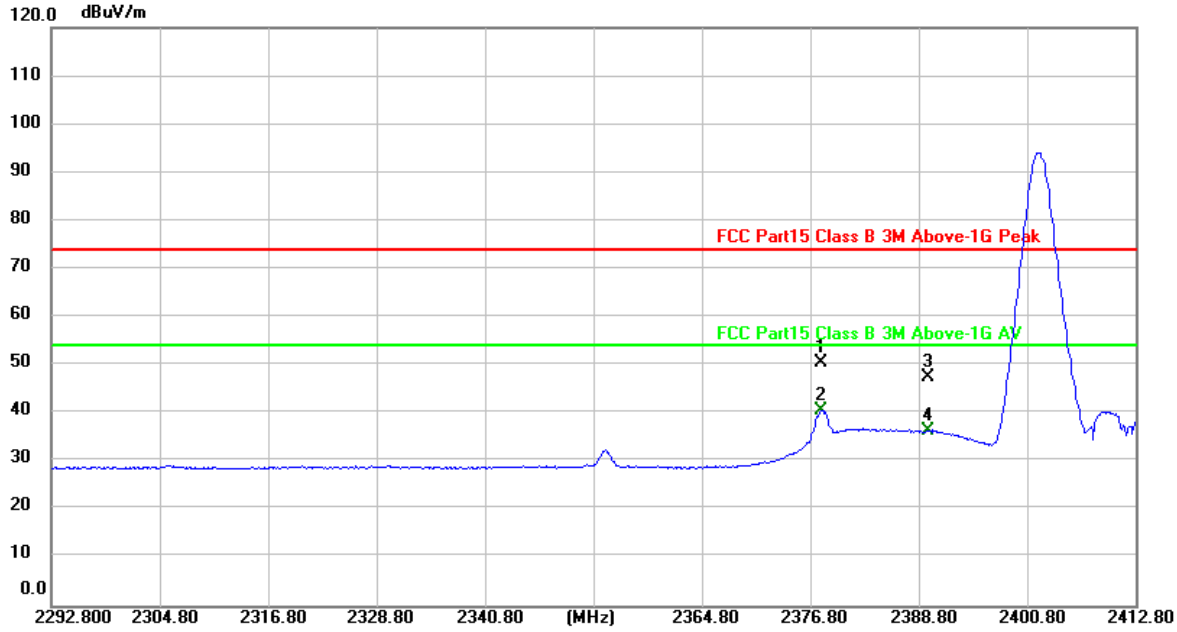


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 2378.048 | 58.36 | -7.77 | 50.59 | 74.00 | -23.41 | peak |
| 2 * | 2378.048 | 48.53 | -7.77 | 40.76 | 54.00 | -13.24 | AVG |
| 3 | 2390.000 | 55.32 | -7.72 | 47.60 | 74.00 | -26.40 | peak |
| 4 | 2390.000 | 44.18 | -7.72 | 36.46 | 54.00 | -17.54 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| Ant. Pol. | Vertical |
|---|---|
| Test Mode: | 8-DPSK Mode 2402MHz |

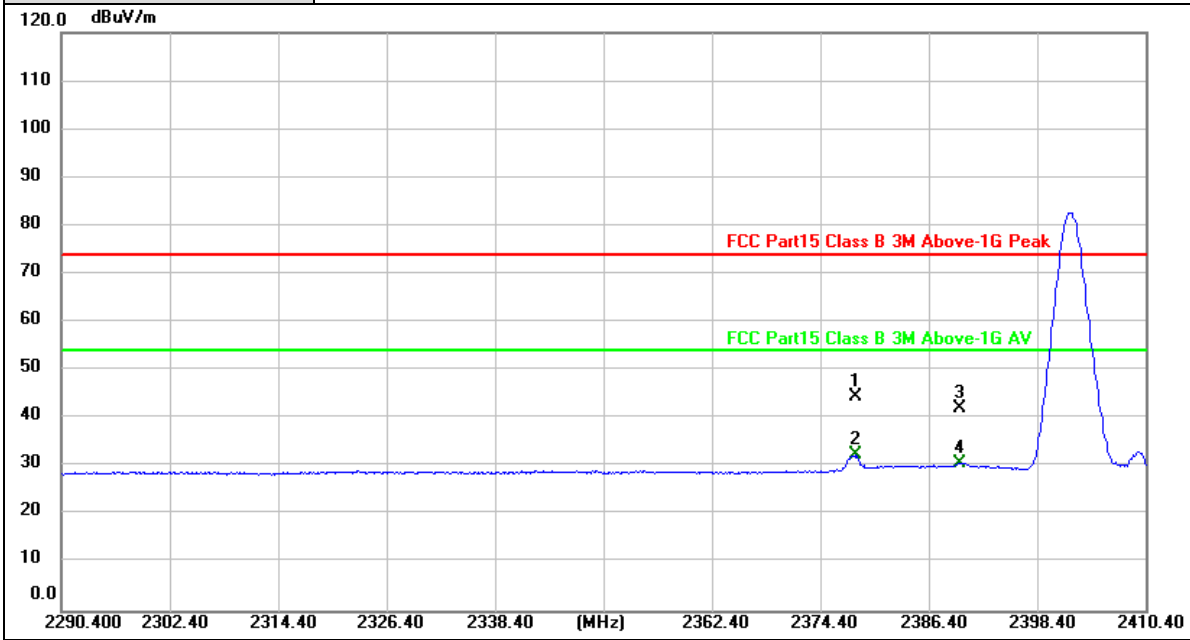


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 2378.240 | 52.19 | -7.77 | 44.42 | 74.00 | -29.58 | peak |
| 2 * | 2378.240 | 40.18 | -7.77 | 32.41 | 54.00 | -21.59 | AVG |
| 3 | 2390.000 | 49.98 | -7.72 | 42.26 | 74.00 | -31.74 | peak |
| 4 | 2390.000 | 38.54 | -7.72 | 30.82 | 54.00 | -23.18 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| Ant. Pol. | Horizontal |
|---|---|
| Test Mode: | 8-DPSK Mode 2480MHz |

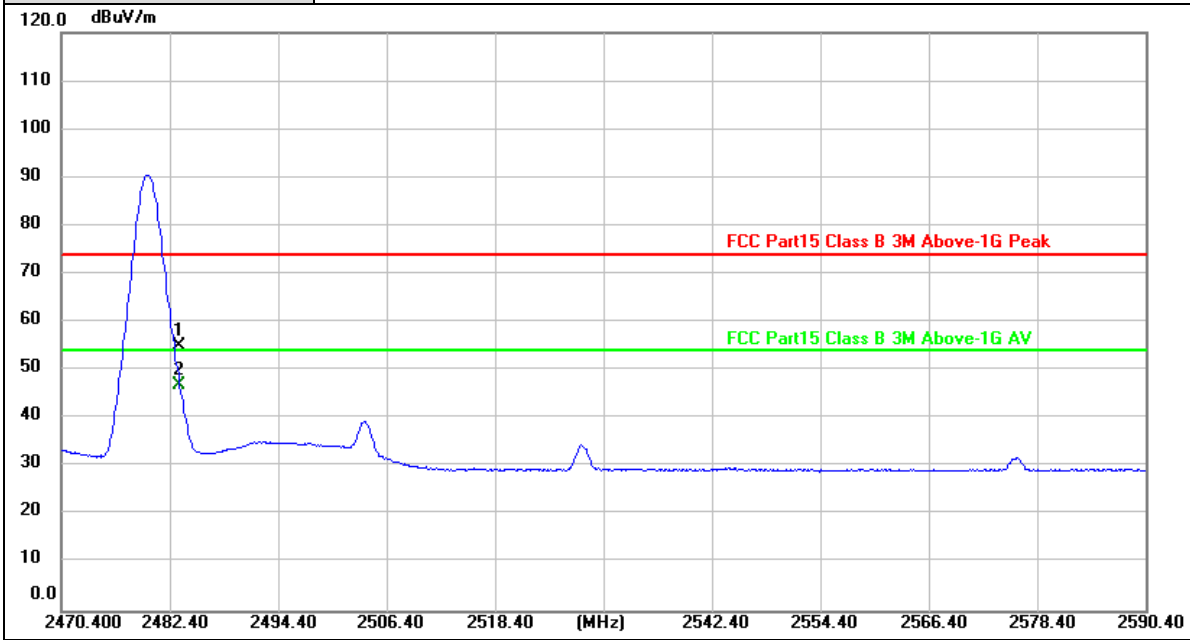


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 2483.500 | 62.29 | -7.32 | 54.97 | 74.00 | -19.03 | peak |
| 2 * | 2483.500 | 54.14 | -7.32 | 46.82 | 54.00 | -7.18 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

| Ant. Pol. | Vertical |
|---|---|
| Test Mode: | 8-DPSK Mode 2480MHz |

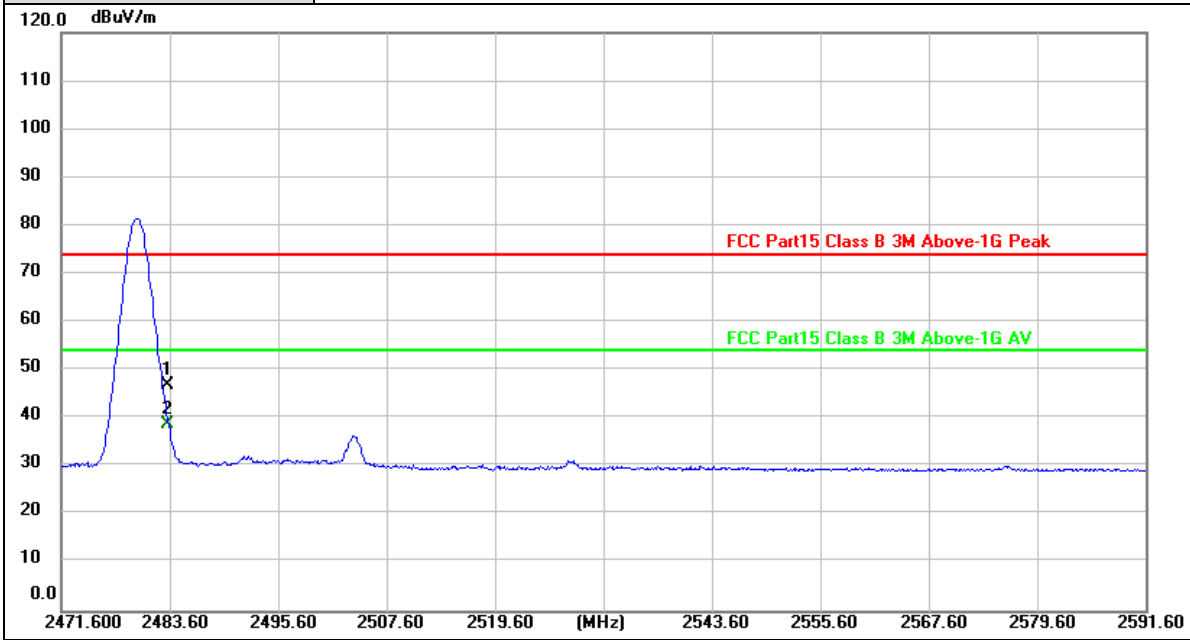


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|---|---|---|---|---|---|---|---|
| 1 | 2483.500 | 54.39 | -7.32 | 47.07 | 74.00 | -26.93 | peak |
| 2 * | 2483.500 | 46.03 | -7.32 | 38.71 | 54.00 | -15.29 | AVG |

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

## 3.4. Band Edge and Spurious Emissions (Conducted)

**Limit**

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d) / RSS-247 5.5**
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Test Configuration**

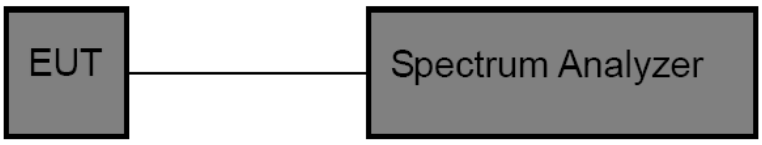


**Test Procedure**

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
   RBW = 100 kHz, VBW ≥ RBW, scan up through $10^{th}$ harmonic.
   Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

**Test Mode**

Please refer to the clause 2.4.

**Test Result**

Conducted Spurious Emission

| Test Mode | Freq(MHz) | Freq Range [MHz] | Ref Level [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|---|---|---|---|---|---|---|
| DH5 | 2402 | Reference | -1.66 | -1.66 | --- | PASS |
| | | 30~1000 | -1.66 | -61.75 | ≤-21.66 | PASS |
| | | 1000~26500 | -1.66 | -42.60 | ≤-21.66 | PASS |
| | 2441 | Reference | -1.80 | -1.80 | --- | PASS |
| | | 30~1000 | -1.80 | -61.03 | ≤-21.80 | PASS |
| | | 1000~26500 | -1.80 | -34.73 | ≤-21.80 | PASS |
| | 2480 | Reference | -2.21 | -2.21 | --- | PASS |
| | | 30~1000 | -2.21 | -59.34 | ≤-22.21 | PASS |
| | | 1000~26500 | -2.21 | -36.57 | ≤-22.21 | PASS |
| 2DH5 | 2402 | Reference | -1.67 | -1.67 | --- | PASS |
| | | 30~1000 | -1.67 | -62.09 | ≤-21.67 | PASS |
| | | 1000~26500 | -1.67 | -43.19 | ≤-21.67 | PASS |
| | 2441 | Reference | -1.71 | -1.71 | --- | PASS |
| | | 30~1000 | -1.71 | -60.69 | ≤-21.71 | PASS |
| | | 1000~26500 | -1.71 | -38.25 | ≤-21.71 | PASS |
| | 2480 | Reference | -2.13 | -2.13 | --- | PASS |
| | | 30~1000 | -2.13 | -58.06 | ≤-22.13 | PASS |
| | | 1000~26500 | -2.13 | -42.16 | ≤-22.13 | PASS |
| 3DH5 | 2402 | Reference | -1.59 | -1.59 | --- | PASS |
| | | 30~1000 | -1.59 | -59.22 | ≤-21.59 | PASS |
| | | 1000~26500 | -1.59 | -41.97 | ≤-21.59 | PASS |
| | 2441 | Reference | -1.76 | -1.76 | --- | PASS |
| | | 30~1000 | -1.76 | -60.86 | ≤-21.76 | PASS |
| | | 1000~26500 | -1.76 | -43.93 | ≤-21.76 | PASS |
| | 2480 | Reference | -2.22 | -2.22 | --- | PASS |
| | | 30~1000 | -2.22 | -60.71 | ≤-22.22 | PASS |
| | | 1000~26500 | -2.22 | -40.22 | ≤-22.22 | PASS |

Test Graphs:

DH5_Ant1_2402_0~Reference

DH5_Ant1_2402_30~1000

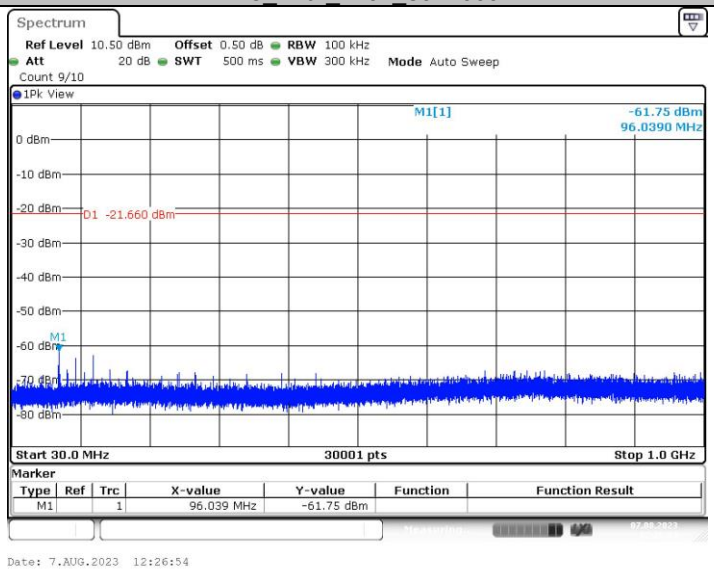


DH5_Ant1_2402_1000~26500

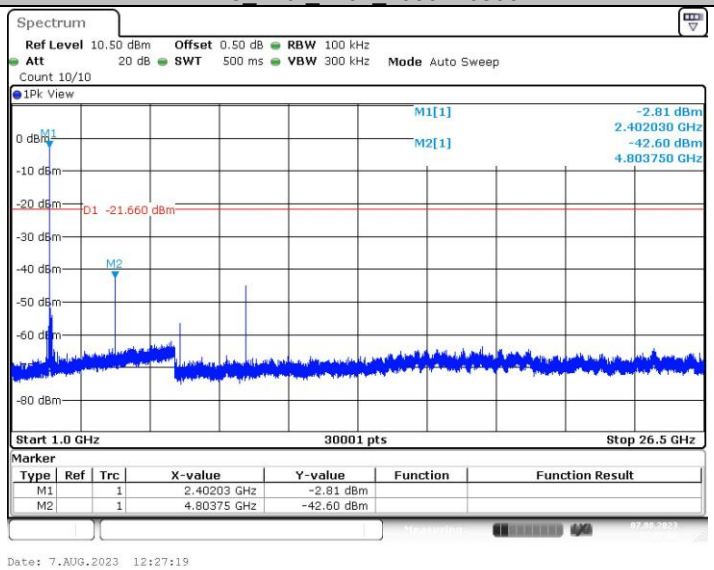


DH5_Ant1_2441_0~Reference

DH5_Ant1_2441_30~1000

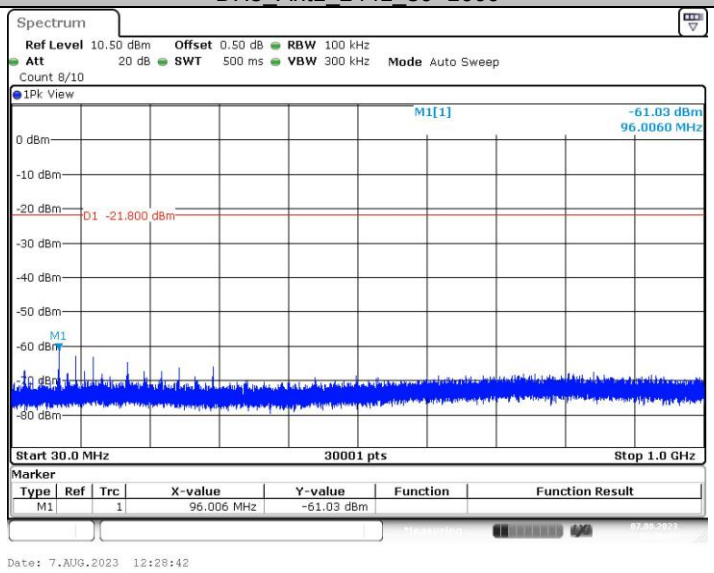


DH5_Ant1_2441_1000~26500

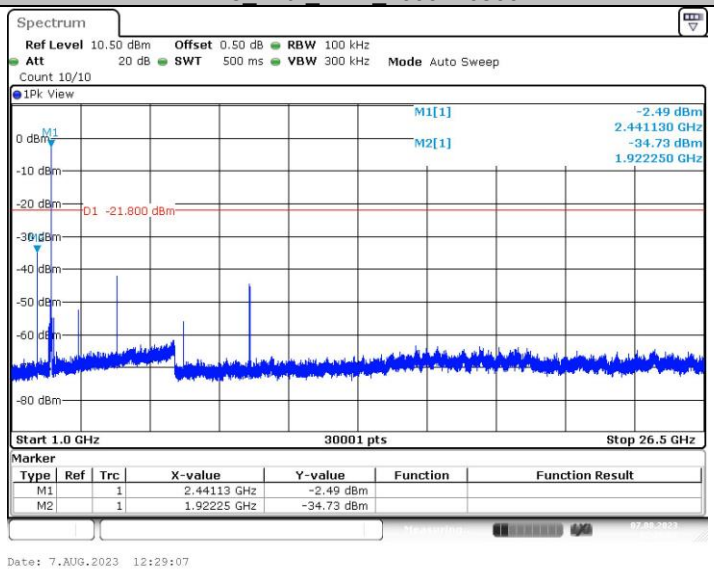


DH5_Ant1_2480_0~Reference

DH5_Ant1_2480_30~1000

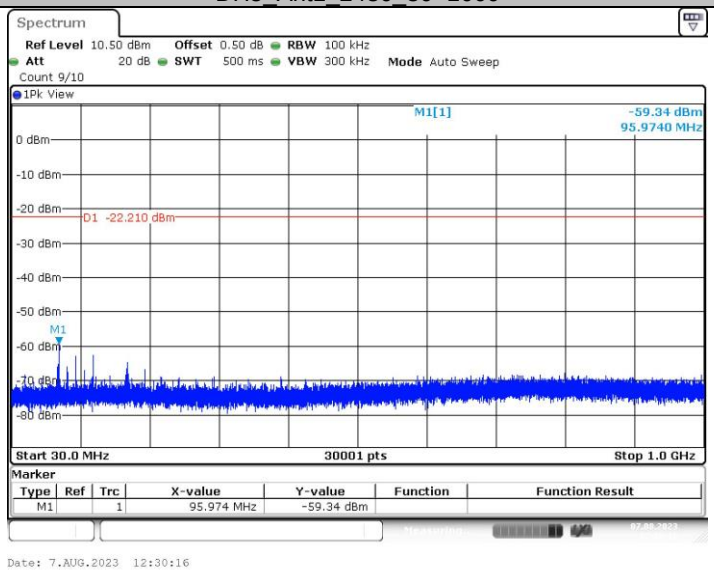


DH5_Ant1_2480_1000~26500

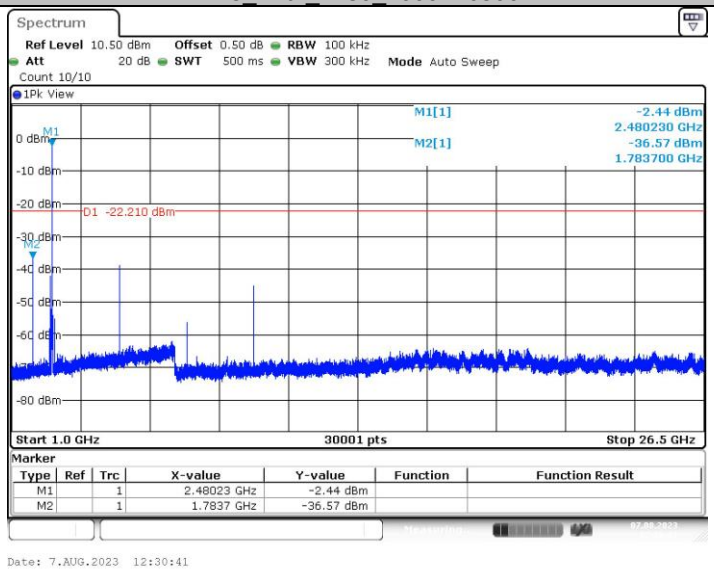


2DH5_Ant1_2402_0~Reference

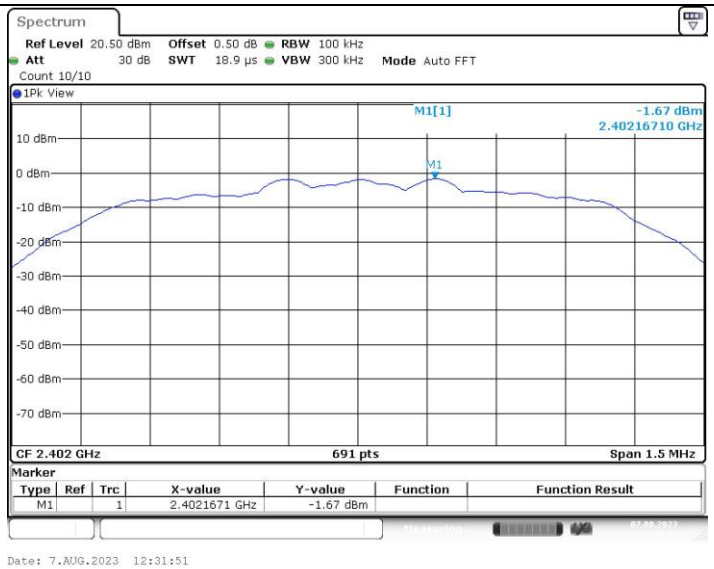


2DH5_Ant1_2402_30~1000

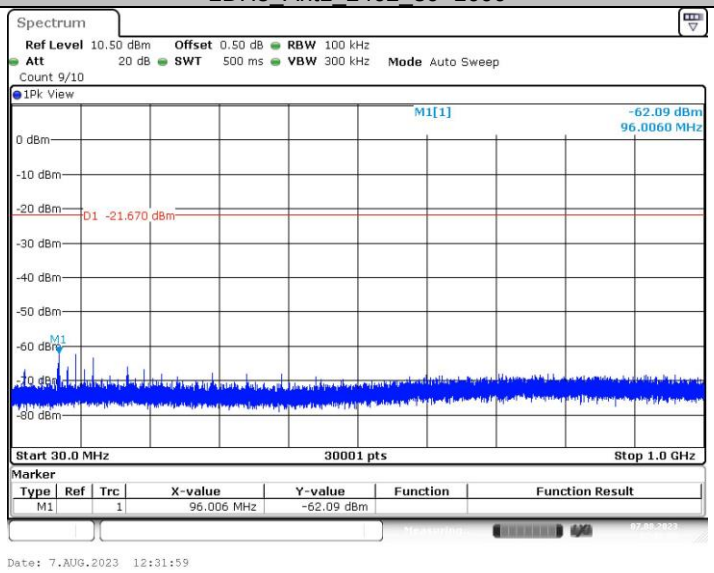


2DH5_Ant1_2402_1000~26500

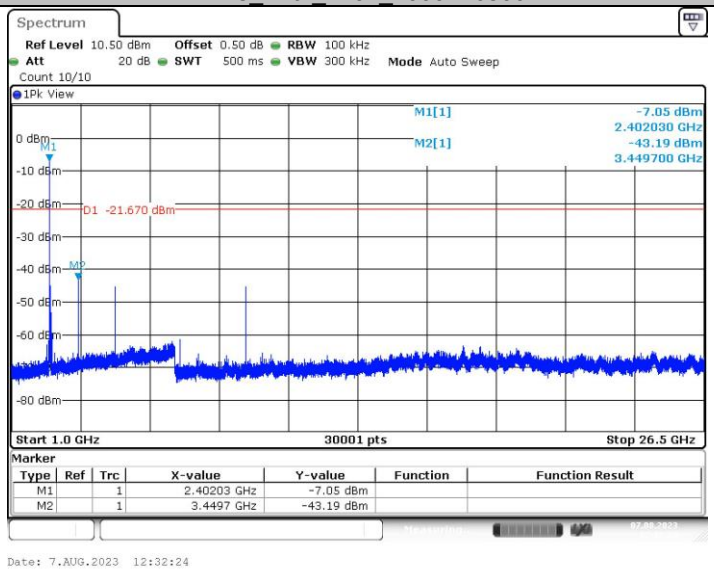


2DH5_Ant1_2441_0~Reference

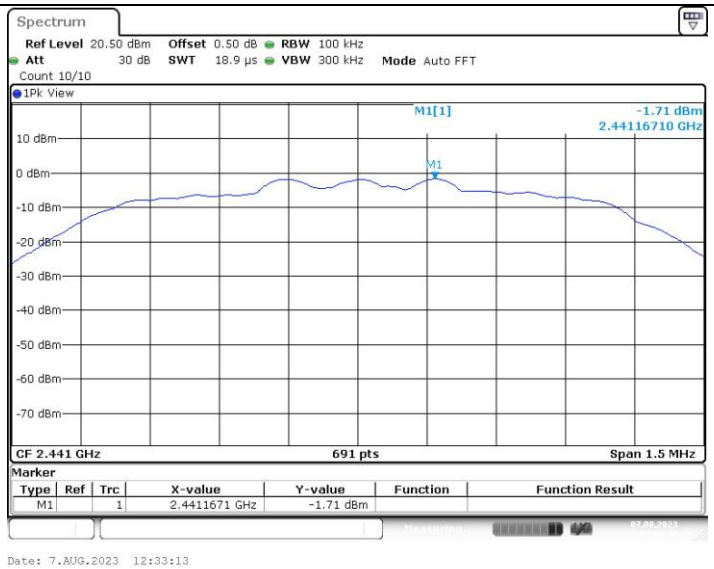


2DH5_Ant1_2441_30~1000

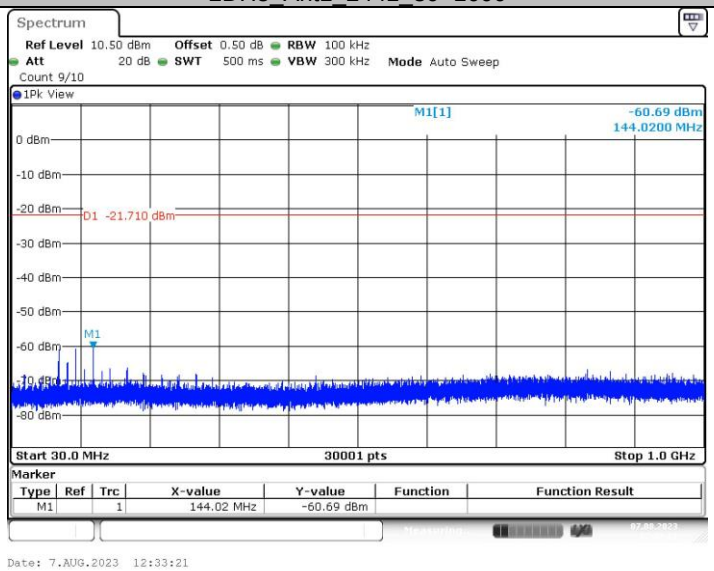


2DH5_Ant1_2441_1000~26500

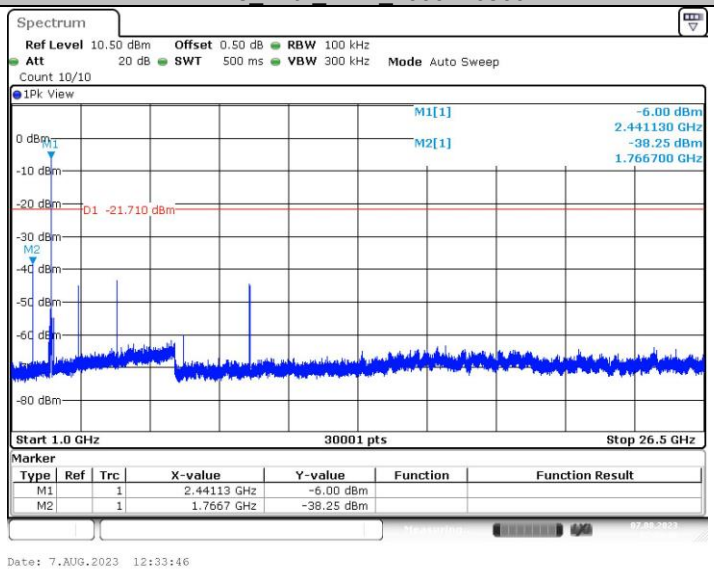


2DH5_Ant1_2480_0~Reference

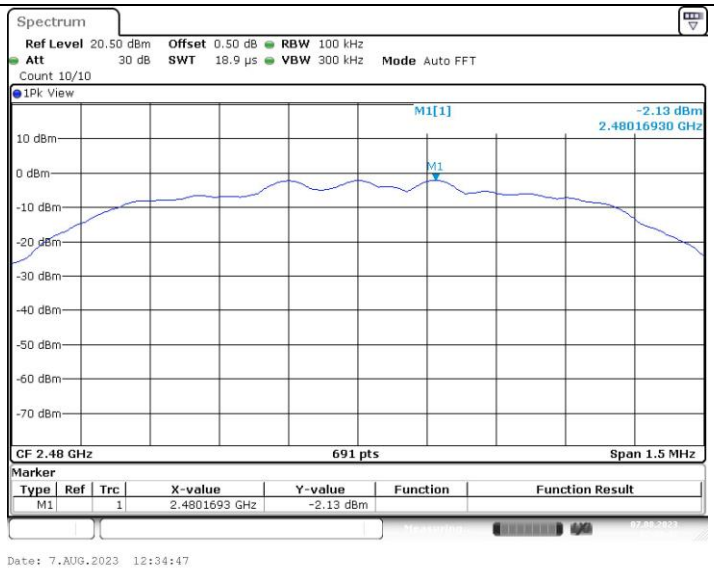


2DH5_Ant1_2480_30~1000

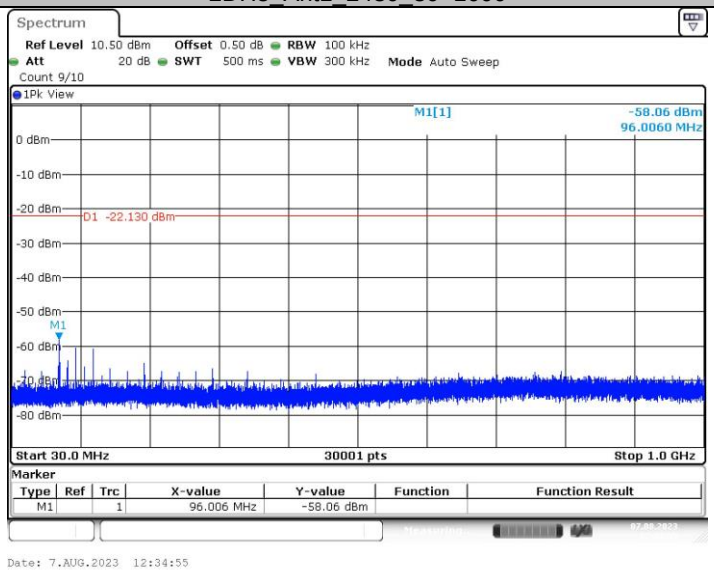


2DH5_Ant1_2480_1000~26500

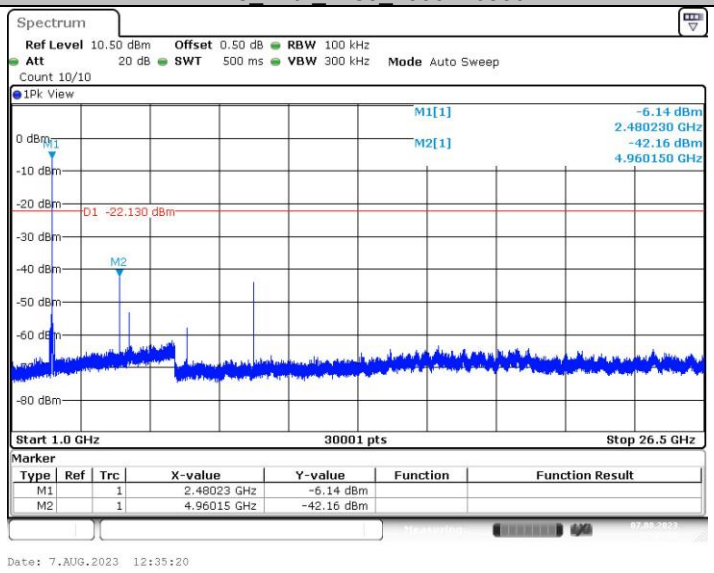


3DH5_Ant1_2402_0~Reference

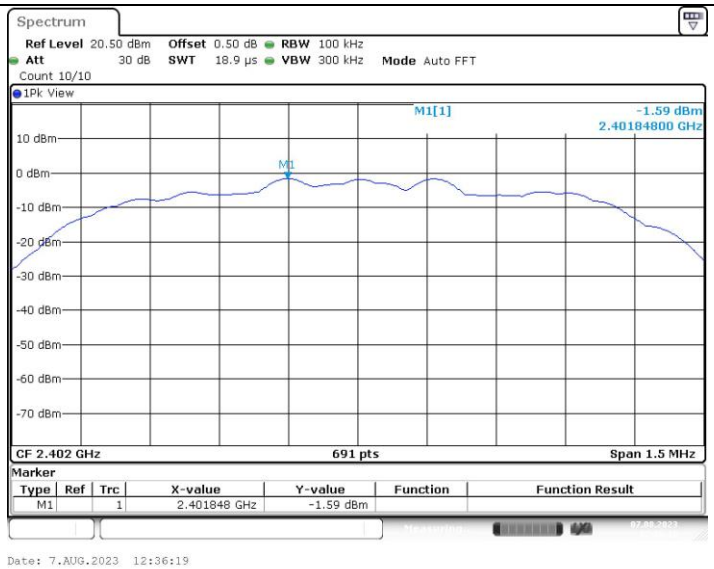


3DH5_Ant1_2402_30~1000

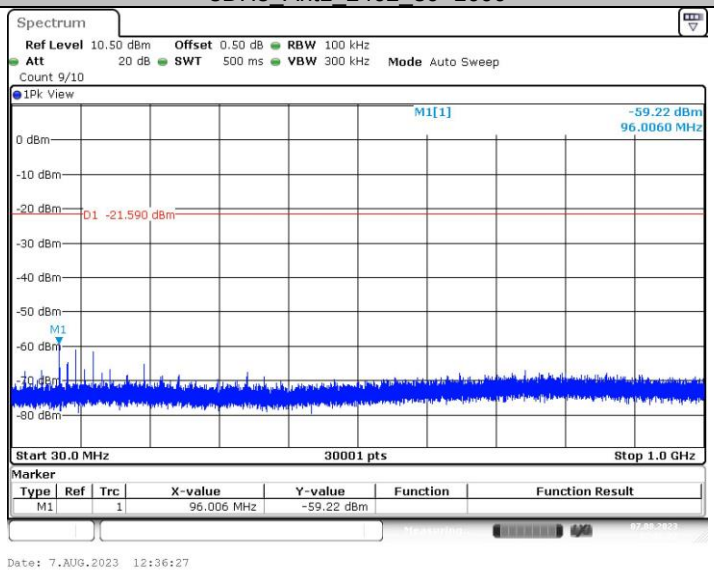


3DH5_Ant1_2402_1000~26500

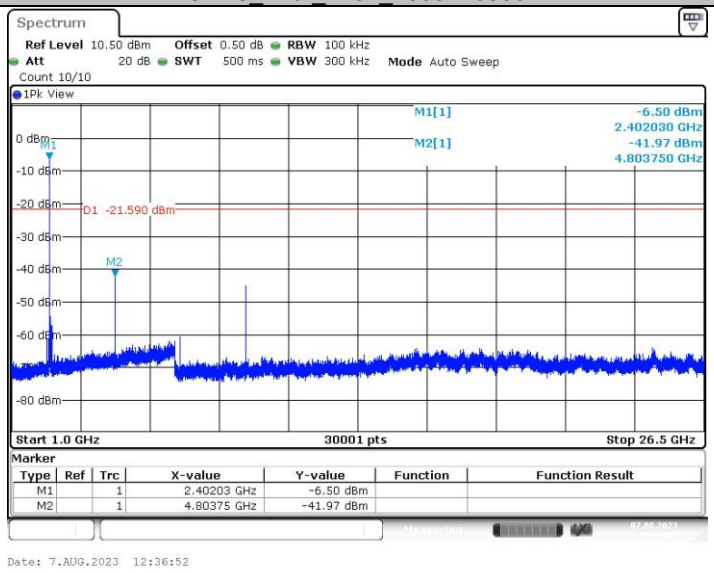


3DH5_Ant1_2441_0~Reference

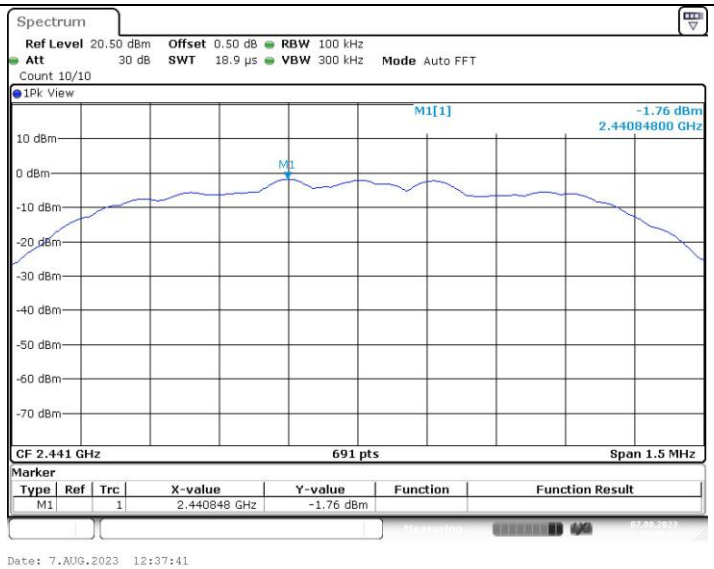


3DH5_Ant1_2441_30~1000

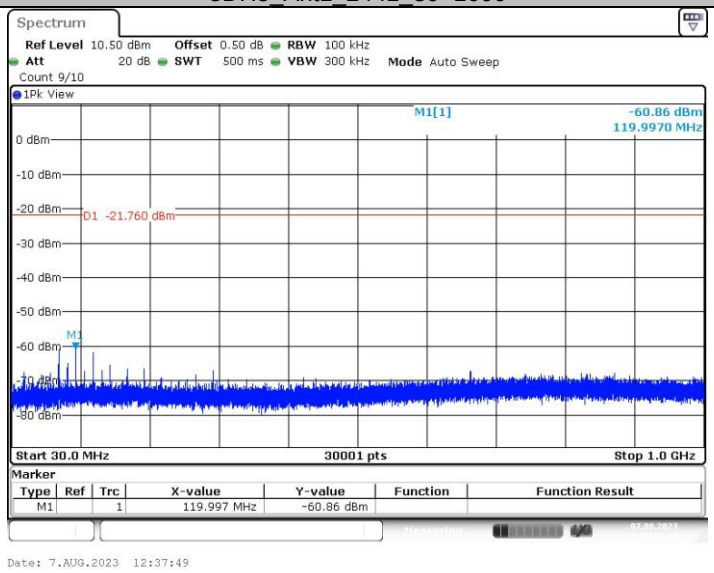


3DH5_Ant1_2441_1000~26500

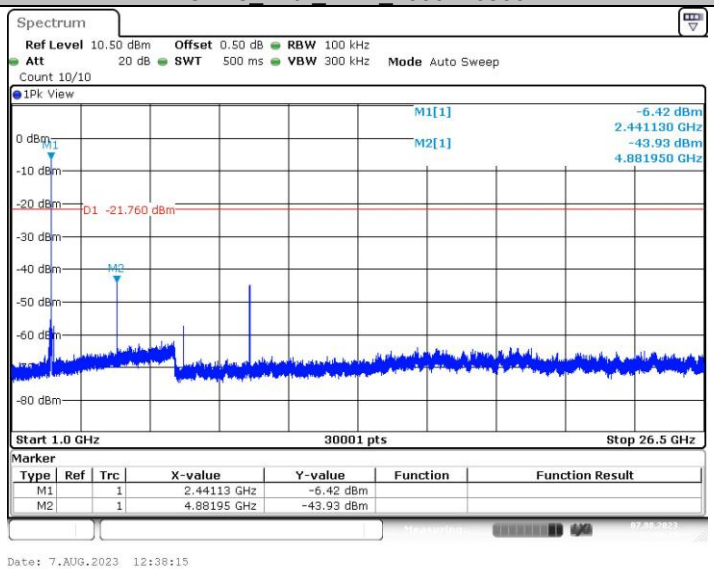


3DH5_Ant1_2480_0~Reference

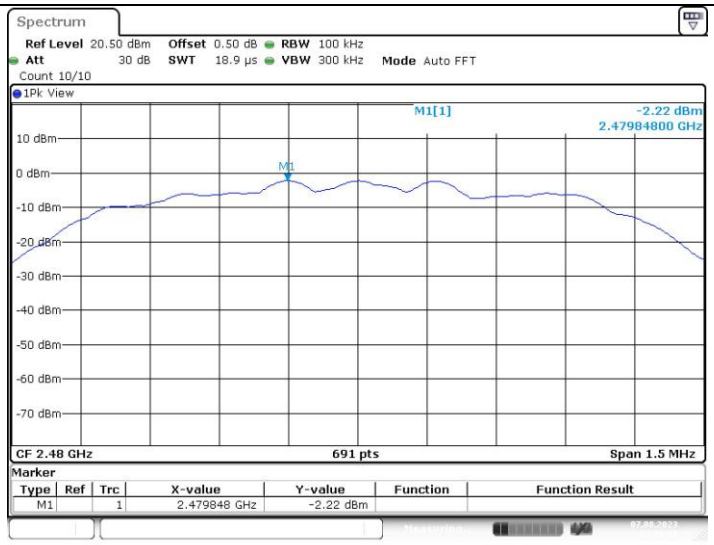


3DH5_Ant1_2480_30~1000

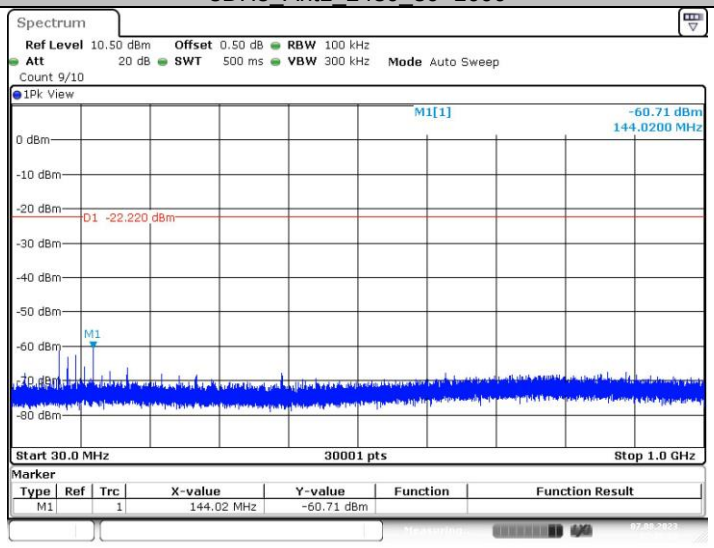


3DH5_Ant1_2480_1000~26500

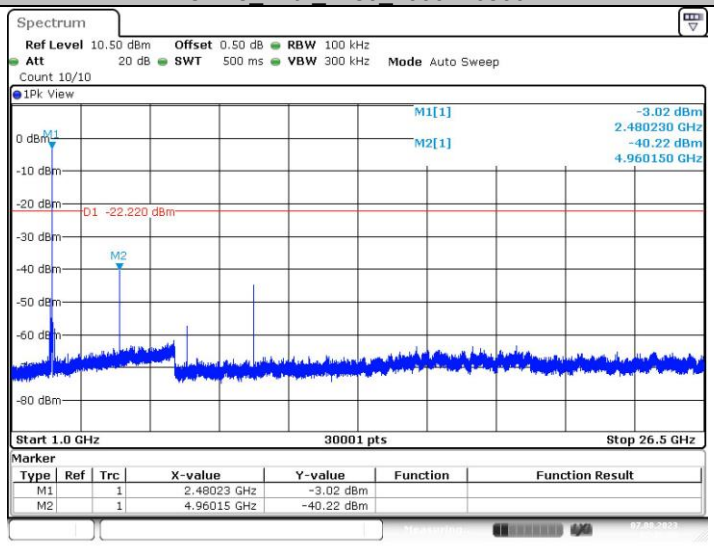

Conducted Band Edge

| Test Mode | Ch Name | Freq(MHz) | Ref Level [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|---|---|---|---|---|---|---|
| DH5 | Low | 2402 | -1.63 | -50.32 | ≤-21.63 | PASS |
| | High | 2480 | -2.10 | -50.91 | ≤-22.10 | PASS |
| | Low | Hop_2402 | -1.91 | -49.72 | ≤-21.91 | PASS |
| | High | Hop_2480 | -2.47 | -35.21 | ≤-22.47 | PASS |
| 2DH5 | Low | 2402 | -1.61 | -51.47 | ≤-21.61 | PASS |
| | High | 2480 | -3.01 | -52.89 | ≤-23.01 | PASS |
| | Low | Hop_2402 | -5.67 | -51.77 | ≤-25.67 | PASS |
| | High | Hop_2480 | -6.49 | -52.49 | ≤-26.49 | PASS |
| 3DH5 | Low | 2402 | -1.69 | -51.43 | ≤-21.69 | PASS |
| | High | 2480 | -2.39 | -51.27 | ≤-22.39 | PASS |
| | Low | Hop_2402 | -2.83 | -52.55 | ≤-22.83 | PASS |
| | High | Hop_2480 | -5.37 | -52.71 | ≤-25.37 | PASS |

Test Graphs:

DH5_Ant1_Low_2402

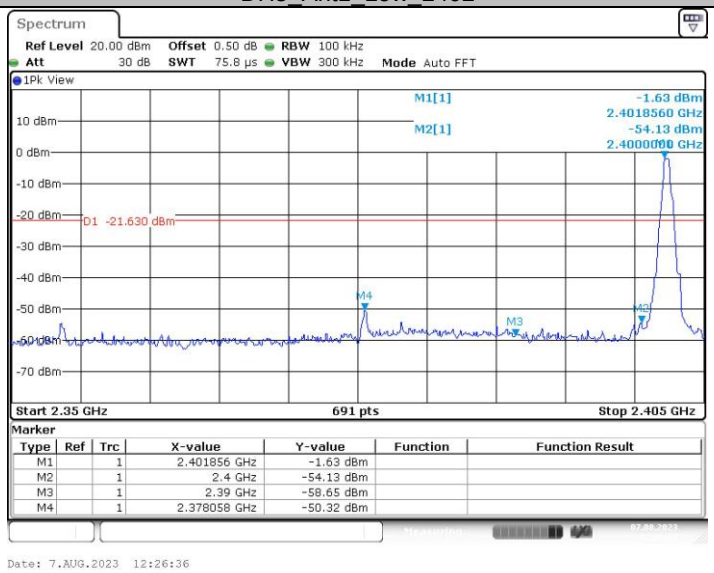


DH5_Ant1_High_2480

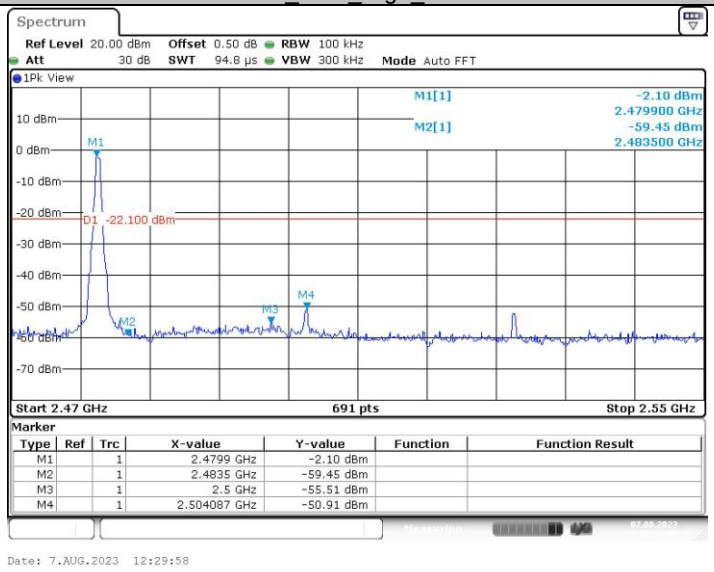


DH5_Ant1_Low_Hop_2402

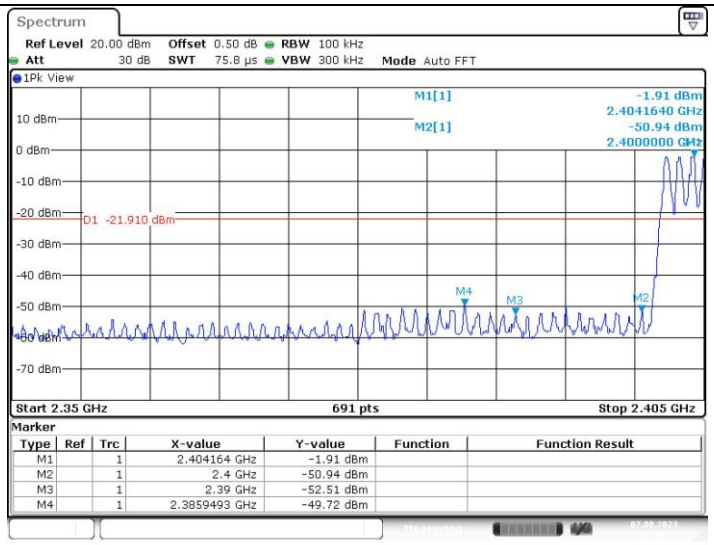


DH5_Ant1_High_Hop_2480

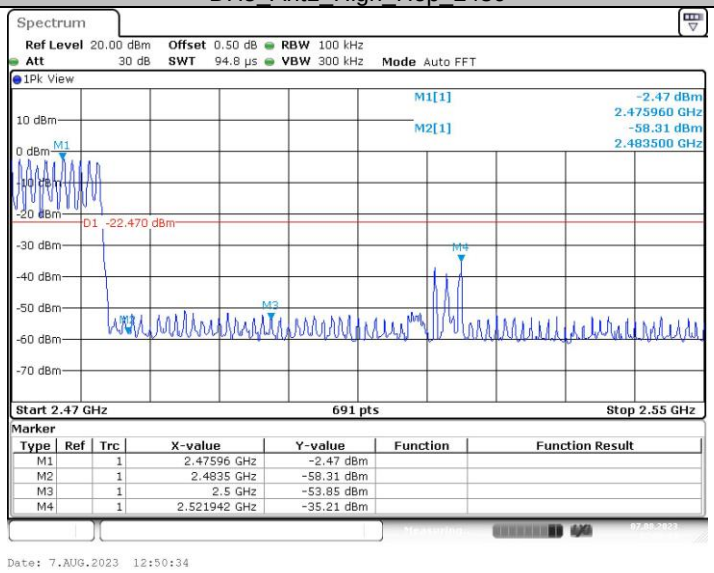


2DH5_Ant1_Low_2402

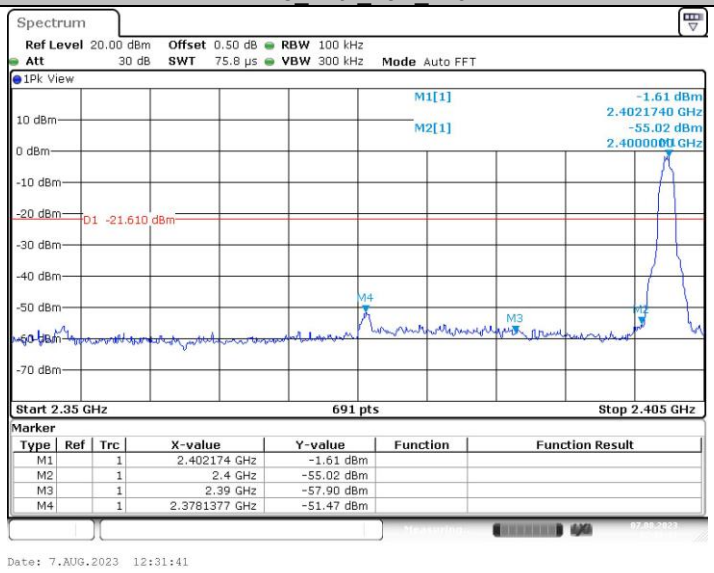


2DH5_Ant1_High_2480

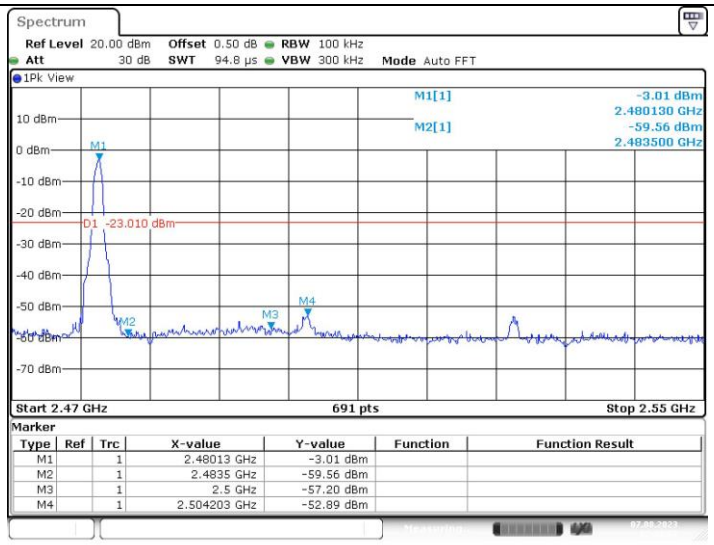


2DH5_Ant1_Low_Hop_2402

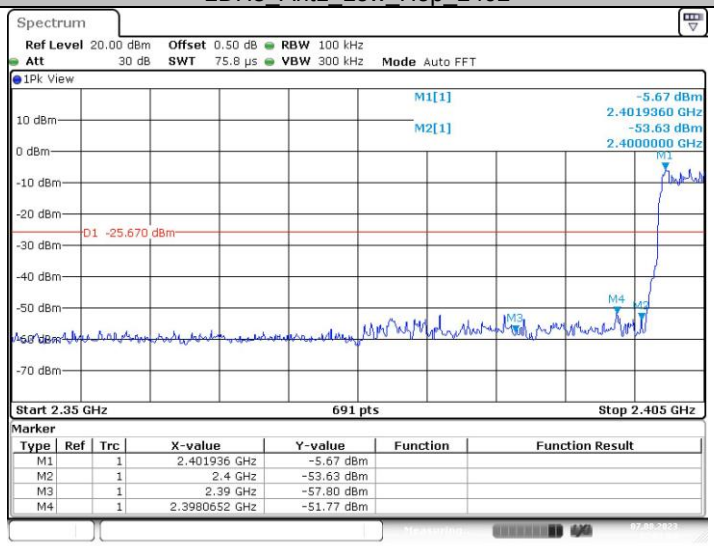


2DH5_Ant1_High_Hop_2480

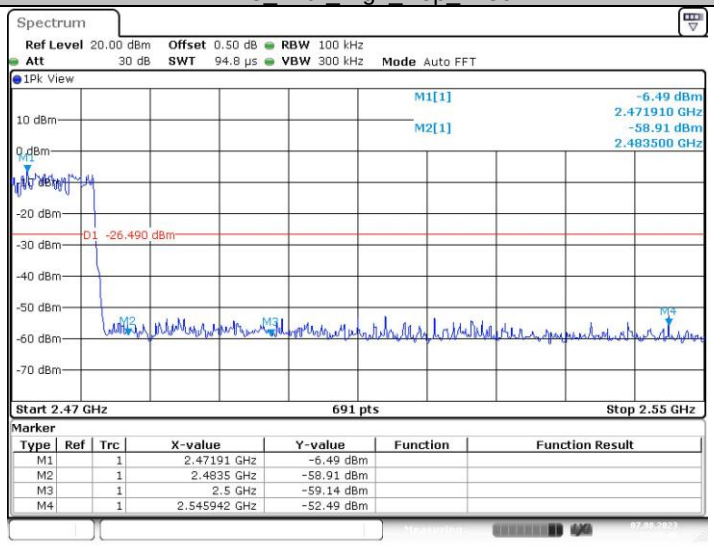


3DH5_Ant1_Low_2402

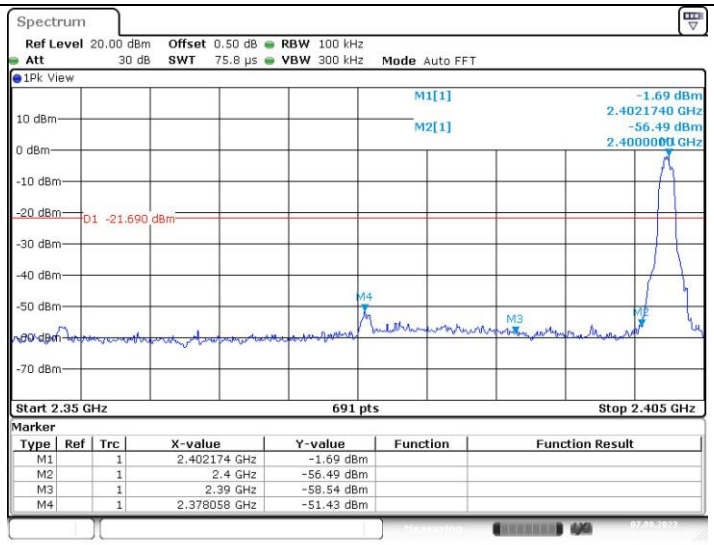


3DH5_Ant1_High_2480

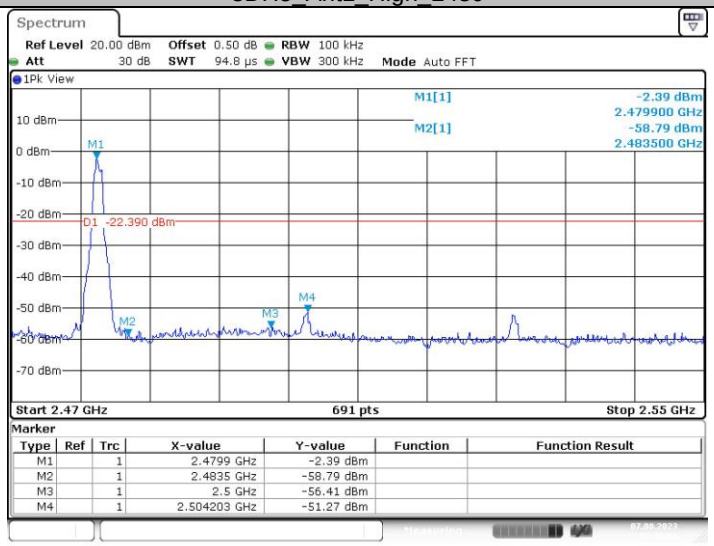


3DH5_Ant1_Low_Hop_2402

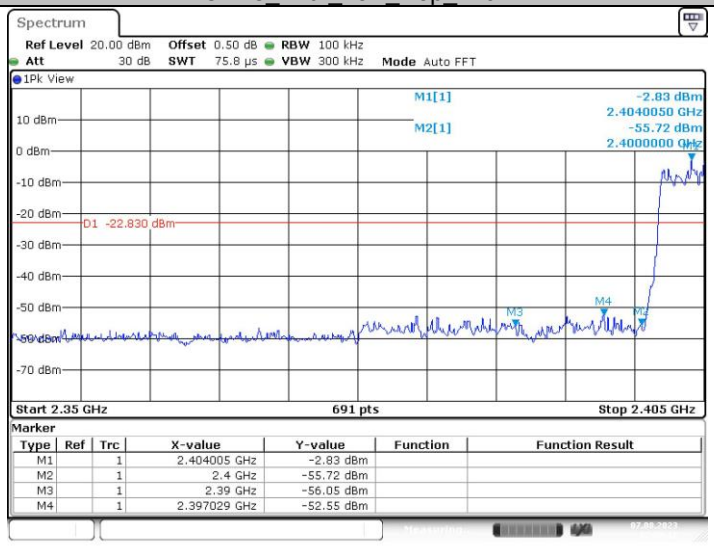


3DH5_Ant1_High_Hop_2480

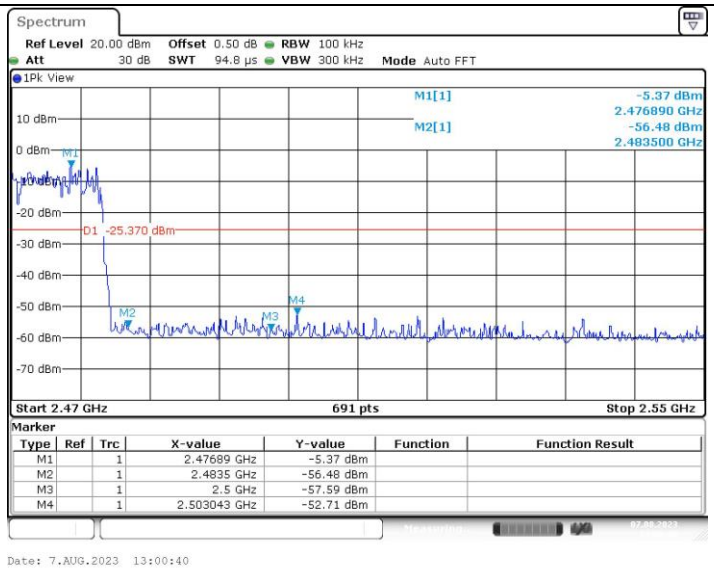
Spectrum
Ref Level 20.00 dBm Offset 0.50 dB RBW 100 kHz
Att 30 dB SWT 94.8 µs VBW 300 kHz Mode Auto FFT
1Pk View
M1[1] -5.37 dBm 2.476890 GHz
M2[1] -56.48 dBm 2.483500 GHz
10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm
D1 -25.370 dBm
M1
M2
M3
M4
Start 2.47 GHz 691 pts Stop 2.55 GHz
Marker
Type Ref Trc X-value Y-value Function Function Result
M1 1 2.47689 GHz -5.37 dBm
M2 1 2.4835 GHz -56.48 dBm
M3 1 2.5 GHz -57.59 dBm
M4 1 2.503043 GHz -52.71 dBm
Date: 7.AUG.2023 13:00:40