



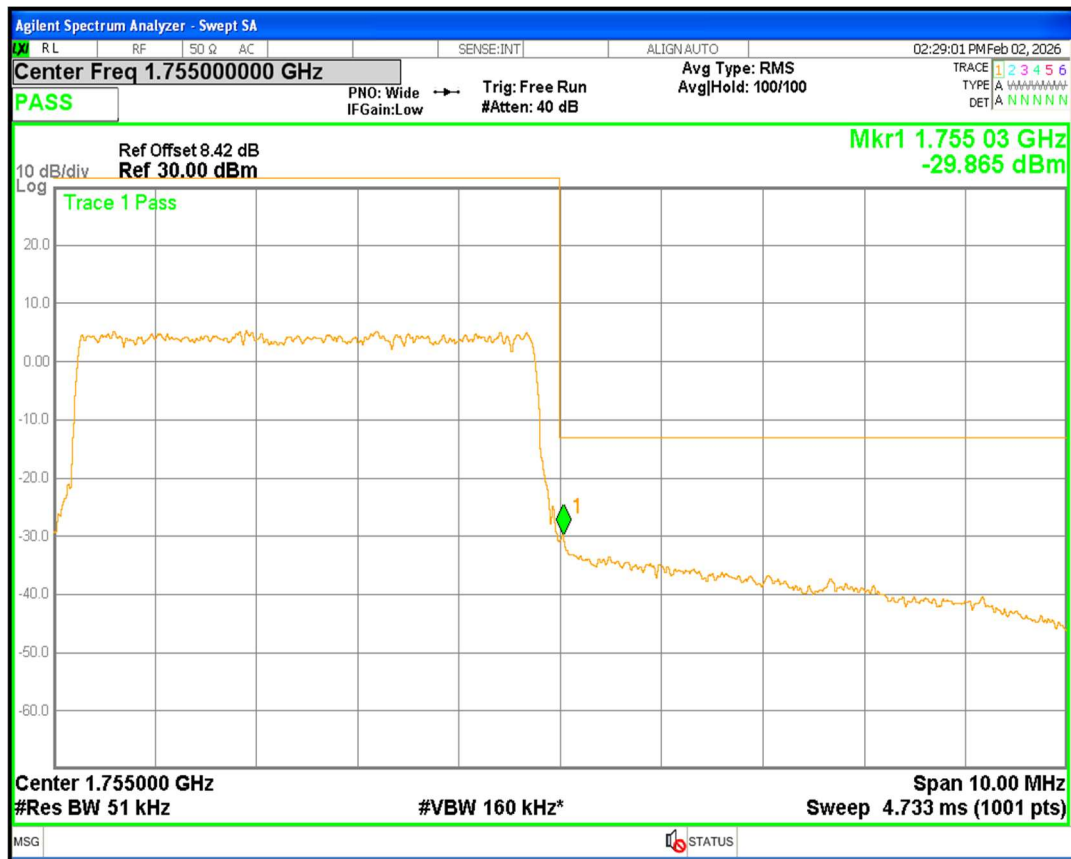


Band40(2305-2315) 16QAM BW=10MHz Channel=38750 RB Size=50 Position=#0

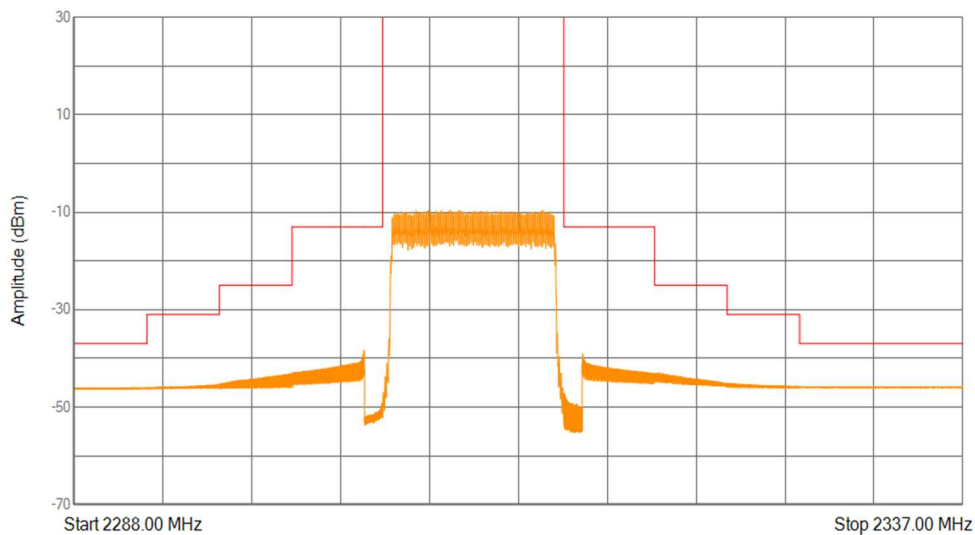


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2288	2292	1000	2291.256	-45.94	-37
2	2292	2296	1000	2295.916	-45.38	-31
3	2296	2300	1000	2299.896	-43.13	-25
4	2300	2304	1000	2303.976	-38.34	-13
5	2304	2305	100	2304.988	-49.15	-13
6	2315	2316	100	2315.024	-47.18	-13
7	2316	2320	1000	2316.024	-39.06	-13
8	2320	2324	1000	2320.236	-42.93	-25
9	2324	2328	1000	2324.072	-45.08	-31
10	2328	2337	1000	2332.203	-45.78	-37

Band40(2305-2315) 16QAM BW=5MHz Channel=38725 RB Size=25 Position=#0

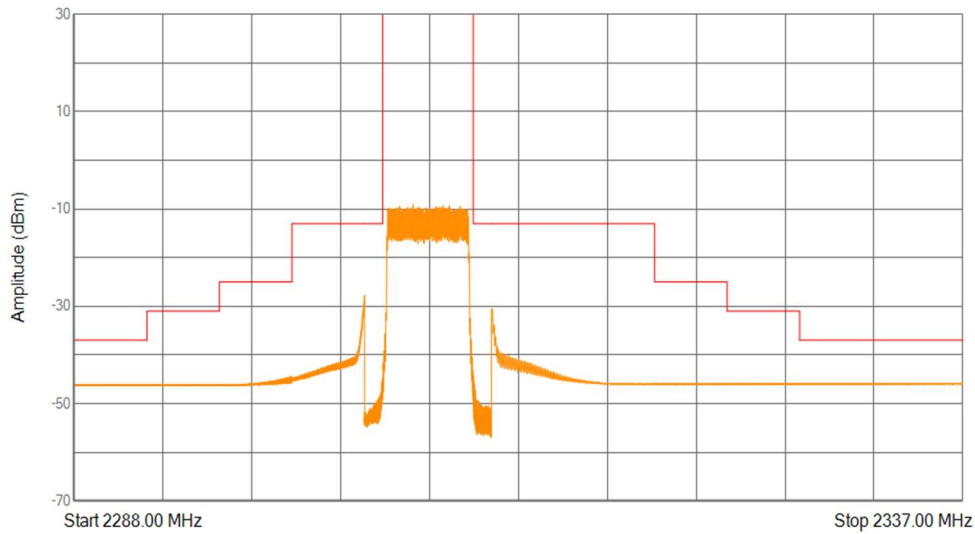


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2288	2292	1000	2288.988	-46.05	-37
2	2292	2296	1000	2293.792	-46.04	-31
3	2296	2300	1000	2299.944	-44.36	-25
4	2300	2304	1000	2304	-27.75	-13
5	2304	2305	51	2304.999	-44.8	-13
6	2310	2311	51	2310.001	-44.22	-13
7	2311	2320	1000	2311.027	-30.58	-13
8	2320	2324	1000	2322.412	-45.86	-25
9	2324	2328	1000	2328	-45.84	-31
10	2328	2337	1000	2332.509	-45.78	-37

Band40(2305-2315) 16QAM BW=5MHz Channel=38775 RB Size=25 Position=#0

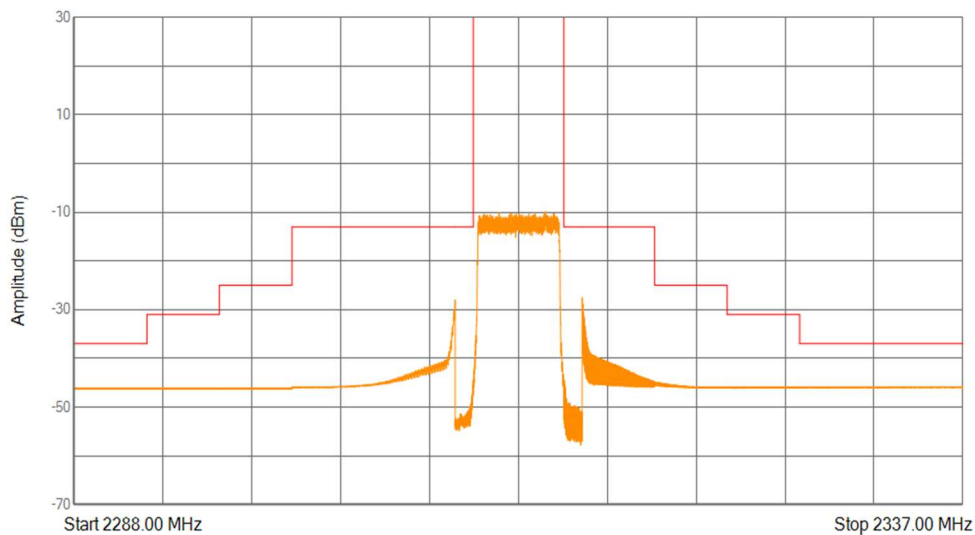


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2288	2292	1000	2291.9	-46.03	-37
2	2292	2296	1000	2292.684	-46.03	-31
3	2296	2300	1000	2297.12	-46.04	-25
4	2300	2309	1000	2309	-28.04	-13
5	2309	2310	51	2309.997	-44.57	-13
6	2315	2316	51	2315.007	-44.52	-13
7	2316	2320	1000	2316.004	-27.53	-13
8	2320	2324	1000	2320.18	-44.9	-25
9	2324	2328	1000	2325.564	-45.83	-31
10	2328	2337	1000	2336.991	-45.77	-37

Band40(2305-2315) QPSK BW=10MHz Channel=38750 RB Size=50 Position=#0

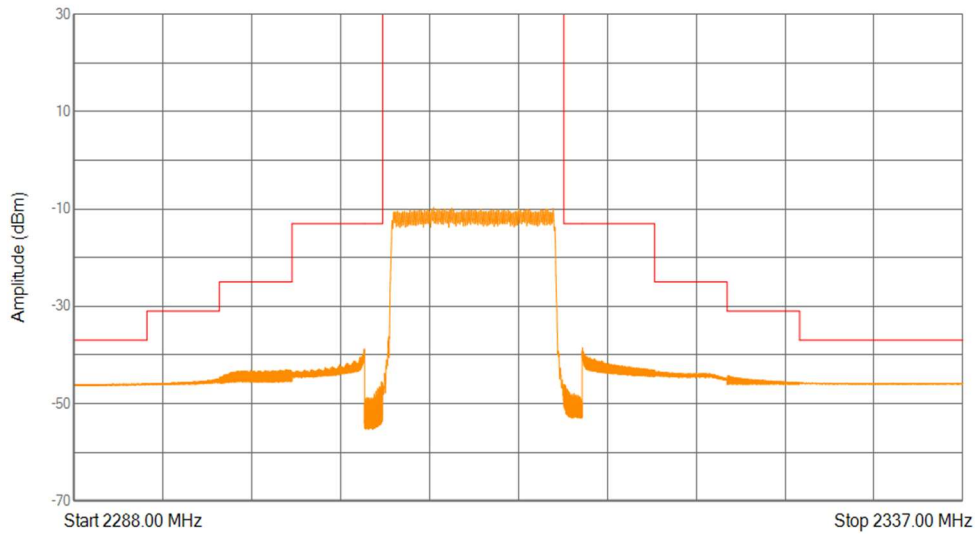


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2288	2292	1000	2291.796	-45.91	-37
2	2292	2296	1000	2295.952	-44.94	-31
3	2296	2300	1000	2299.652	-43.01	-25
4	2300	2304	1000	2303.988	-38.77	-13
5	2304	2305	100	2304.934	-45.49	-13
6	2315	2316	100	2315.007	-46.05	-13
7	2316	2320	1000	2316.02	-38.54	-13
8	2320	2324	1000	2320.228	-43.35	-25
9	2324	2328	1000	2324.068	-44.24	-31
10	2328	2337	1000	2328.099	-45.68	-37

Band40(2305-2315) QPSK BW=5MHz Channel=38725 RB Size=25 Position=#0

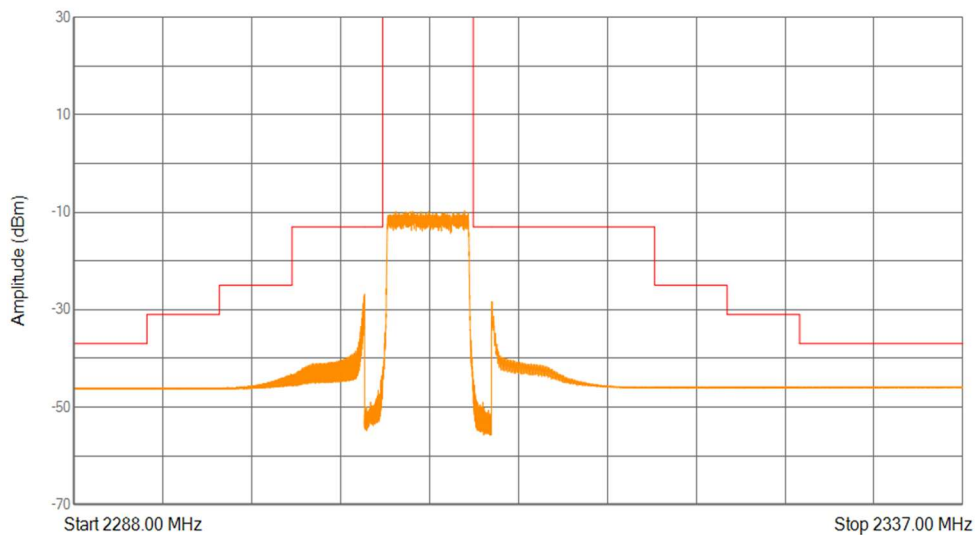


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2288	2292	1000	2288.56	-46.03	-37
2	2292	2296	1000	2294.376	-46.02	-31
3	2296	2300	1000	2299.936	-43.21	-25
4	2300	2304	1000	2304	-26.83	-13
5	2304	2305	51	2304.998	-42.87	-13
6	2310	2311	51	2310.009	-44.39	-13
7	2311	2320	1000	2311.027	-28.38	-13
8	2320	2324	1000	2320.06	-45.88	-25
9	2324	2328	1000	2327.756	-45.86	-31
10	2328	2337	1000	2334.138	-45.82	-37

Band40(2305-2315) QPSK BW=5MHz Channel=38775 RB Size=25 Position=#0

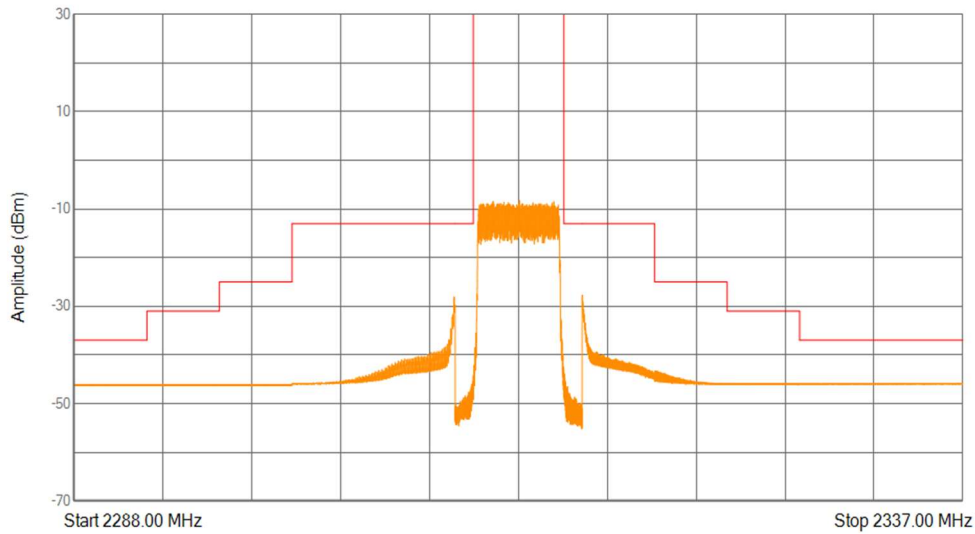


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2288	2292	1000	2288.872	-46.03	-37
2	2292	2296	1000	2292.756	-46.06	-31
3	2296	2300	1000	2298.352	-46.05	-25
4	2300	2309	1000	2308.946	-28.07	-13
5	2309	2310	51	2309.993	-44.32	-13
6	2315	2316	51	2315.008	-43.84	-13
7	2316	2320	1000	2316.008	-27.69	-13
8	2320	2324	1000	2320.02	-43.24	-25
9	2324	2328	1000	2327.756	-45.81	-31
10	2328	2337	1000	2336.757	-45.78	-37

Band40(2350-2360) 16QAM BW=10MHz Channel=39200 RB Size=50 Position=#0

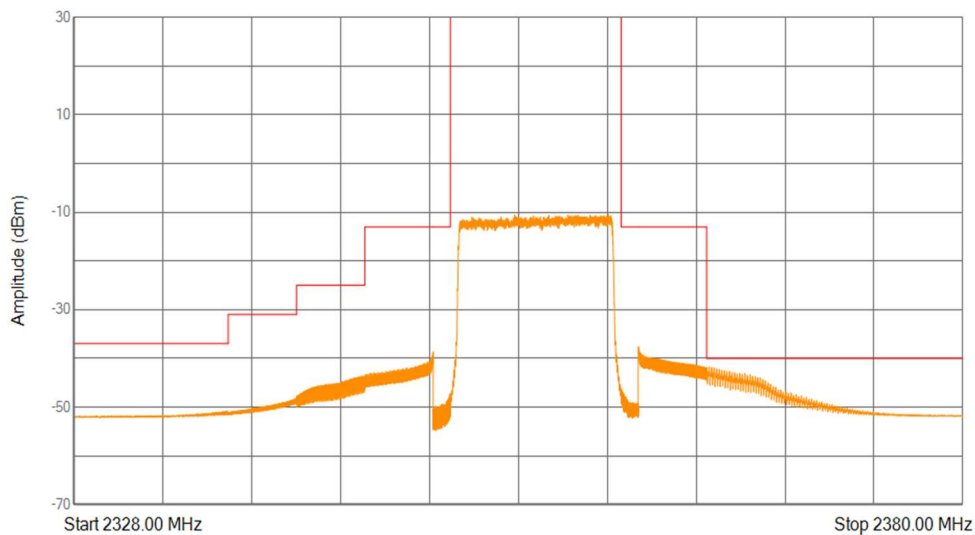


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2328	2337	1000	2336.937	-50.78	-37
2	2337	2341	1000	2340.948	-48.16	-31
3	2341	2345	1000	2344.816	-43.66	-25
4	2345	2349	1000	2349	-38.68	-13
5	2349	2350	100	2349.986	-47.27	-13
6	2360	2361	100	2360.005	-46.29	-13
7	2361	2365	1000	2361.008	-37.61	-13
8	2365	2380	1000	2365.135	-41.81	-40

Band40(2350-2360) 16QAM BW=5MHz Channel=39175 RB Size=25 Position=#0

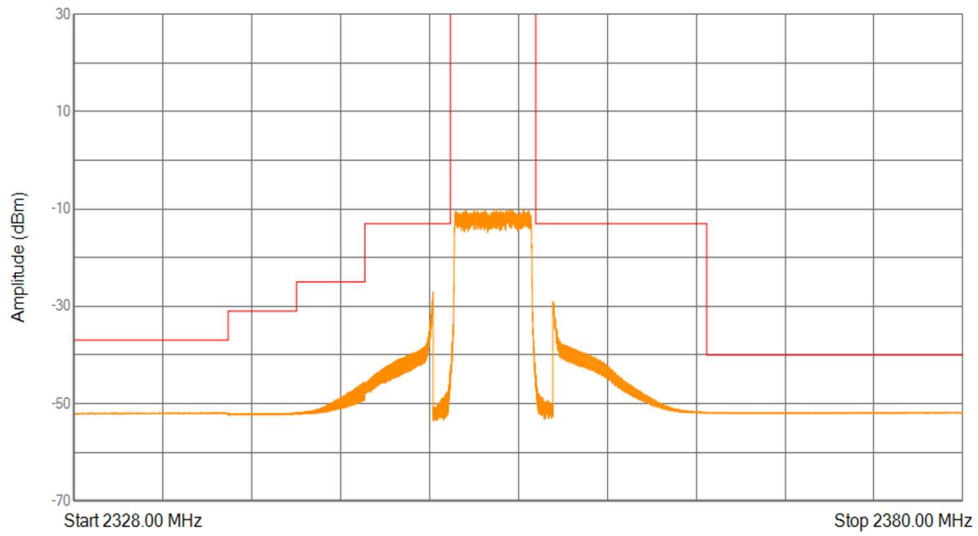


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2328	2337	1000	2331.699	-51.85	-37
2	2337	2341	1000	2340.976	-51.88	-31
3	2341	2345	1000	2344.924	-45.53	-25
4	2345	2349	1000	2348.992	-27.03	-13
5	2349	2350	51	2350	-42.96	-13
6	2355	2356	51	2355.006	-44.2	-13
7	2356	2365	1000	2356.009	-29.22	-13
8	2365	2380	1000	2379.145	-51.75	-40

Band40(2350-2360) 16QAM BW=5MHz Channel=39225 RB Size=25 Position=#0

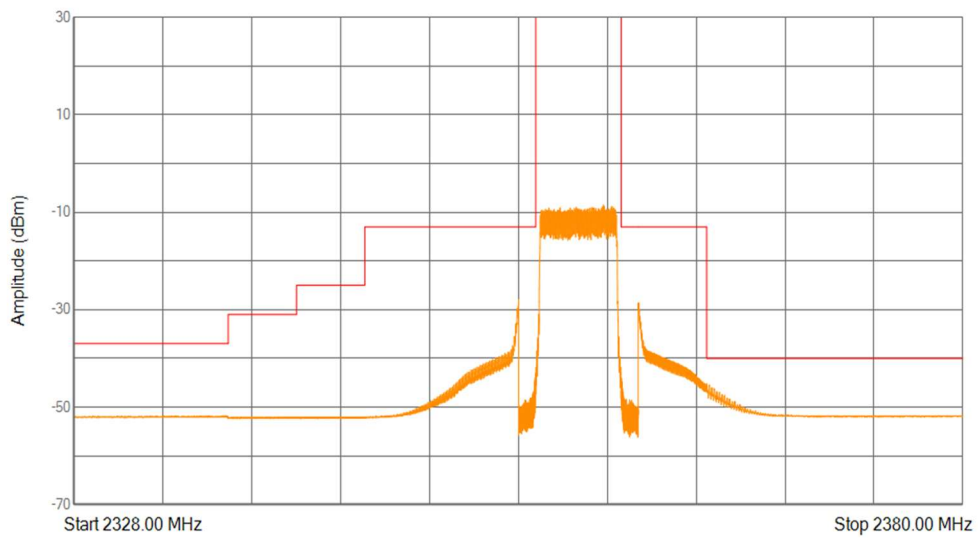


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2328	2337	1000	2335.308	-51.85	-37
2	2337	2341	1000	2339.24	-52.06	-31
3	2341	2345	1000	2344.768	-52	-25
4	2345	2354	1000	2354	-27.93	-13
5	2354	2355	51	2354.994	-43.15	-13
6	2360	2361	51	2360.007	-43.96	-13
7	2361	2365	1000	2361.012	-28.57	-13
8	2365	2380	1000	2365.015	-45.26	-40

Band40(2350-2360) QPSK BW=10MHz Channel=39200 RB Size=50 Position=#0

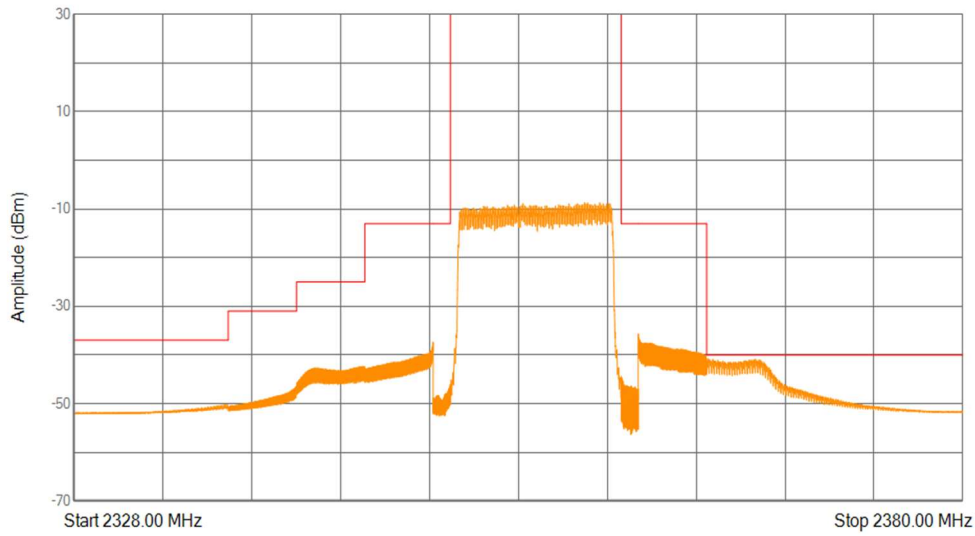


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2328	2337	1000	2336.874	-50.19	-37
2	2337	2341	1000	2340.992	-46.44	-31
3	2341	2345	1000	2344.968	-42.34	-25
4	2345	2349	1000	2349	-37.41	-13
5	2349	2350	100	2349.995	-46.06	-13
6	2360	2361	100	2360.006	-44.38	-13
7	2361	2365	1000	2361.004	-35.68	-13
8	2365	2380	1000	2365.06	-40.69	-40

Band40(2350-2360) QPSK BW=5MHz Channel=39175 RB Size=25 Position=#0

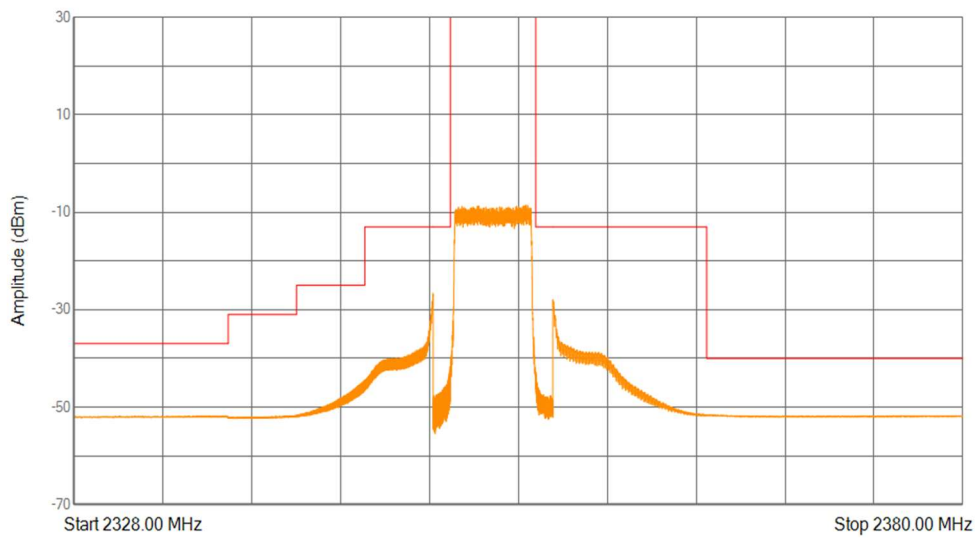


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2328	2337	1000	2335.875	-51.79	-37
2	2337	2341	1000	2340.924	-51.7	-31
3	2341	2345	1000	2344.984	-44.44	-25
4	2345	2349	1000	2348.984	-26.67	-13
5	2349	2350	51	2349.991	-41.65	-13
6	2355	2356	51	2355.003	-42.74	-13
7	2356	2365	1000	2356.036	-28.31	-13
8	2365	2380	1000	2365.09	-51.59	-40

Band40(2350-2360) QPSK BW=5MHz Channel=39225 RB Size=25 Position=#0

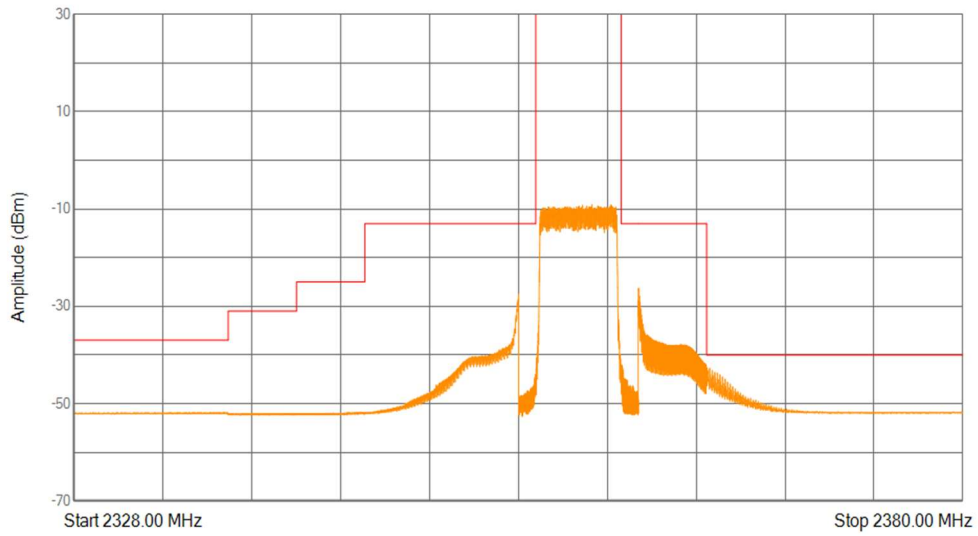


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2328	2337	1000	2336.757	-51.84	-37
2	2337	2341	1000	2338.7	-52.06	-31
3	2341	2345	1000	2344.76	-51.76	-25
4	2345	2354	1000	2353.991	-27.54	-13
5	2354	2355	51	2354.993	-44.02	-13
6	2360	2361	51	2360.017	-42.11	-13
7	2361	2365	1000	2361.024	-26.27	-13
8	2365	2380	1000	2365.03	-42.64	-40

Band41 16QAM BW=10MHz Channel=39700 RB Size=50 Position=#0

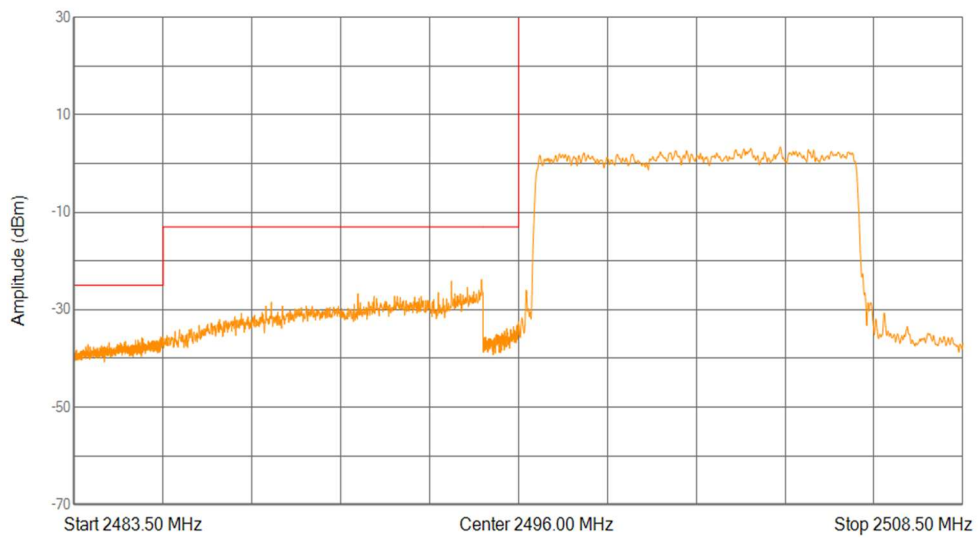


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2483.5	2486	1000	2485.93	-35.62	-25
2	2486	2495	1000	2494.955	-23.83	-13
3	2495	2496	100	2495.996	-32.48	-13


Band41 16QAM BW=10MHz Channel=41540 RB Size=50 Position=#0

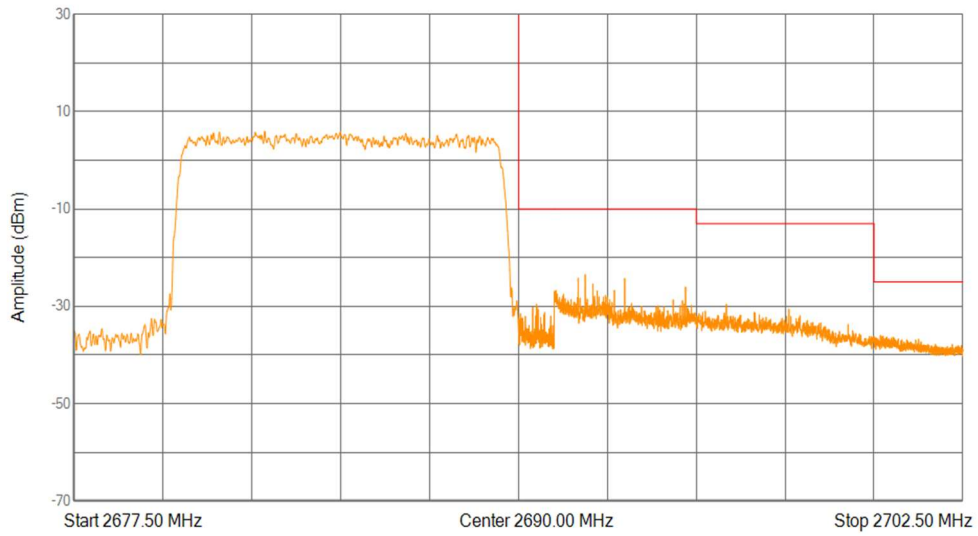

Band41 16QAM BW=15MHz Channel=39725 RB Size=75 Position=#0

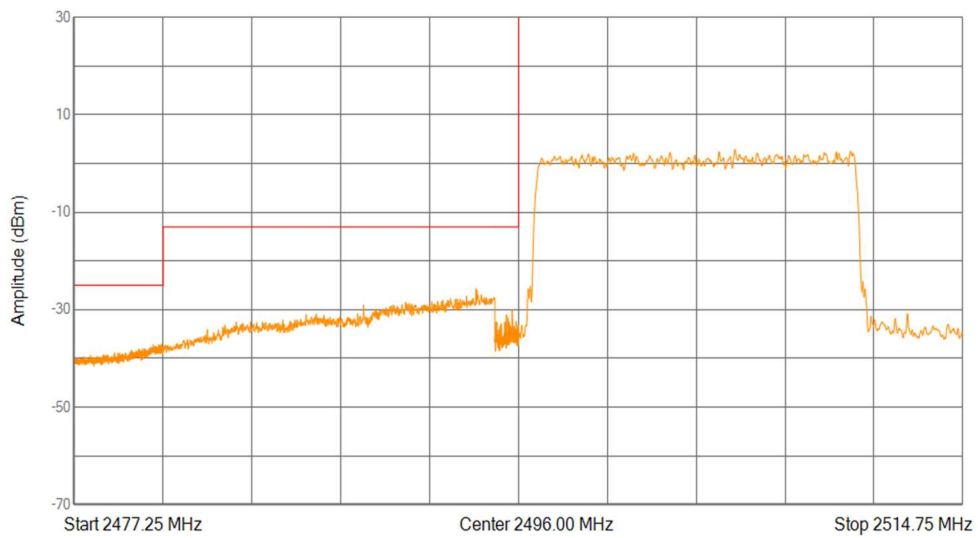


Band41 16QAM BW=15MHz Channel=41515 RB Size=75 Position=#0

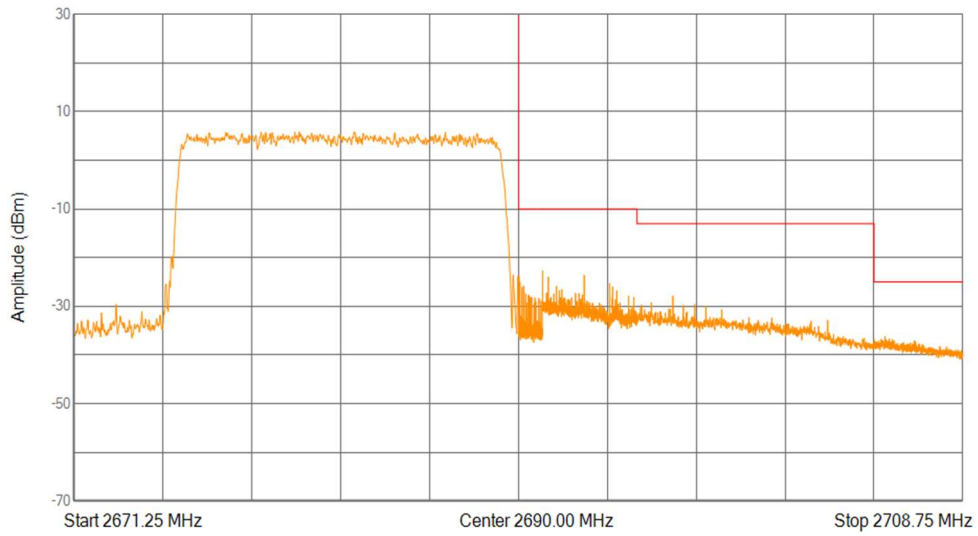


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2690	2691	300	2690.018	-23.89	-10
2	2691	2695	1000	2691.012	-22.75	-10
3	2695	2705	1000	2696.51	-27.9	-13
4	2705	2708.75	1000	2705.465	-36.24	-25

Band41 16QAM BW=20MHz Channel=39750 RB Size=100 Position=#0

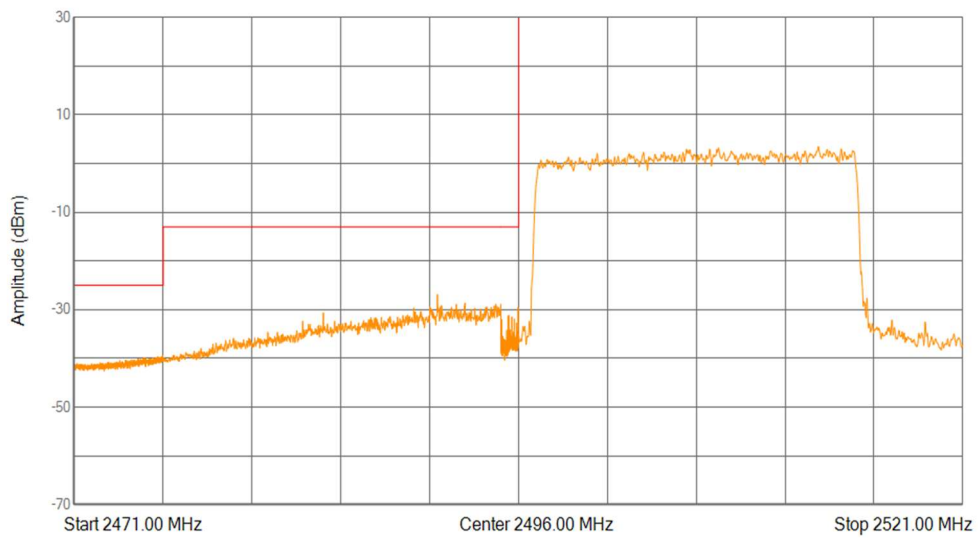


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2471	2476	1000	2475.96	-39.49	-25
2	2476	2495	1000	2491.428	-26.9	-13
3	2495	2496	200	2495.97	-29.55	-13

Band41 16QAM BW=20MHz Channel=41490 RB Size=100 Position=#0

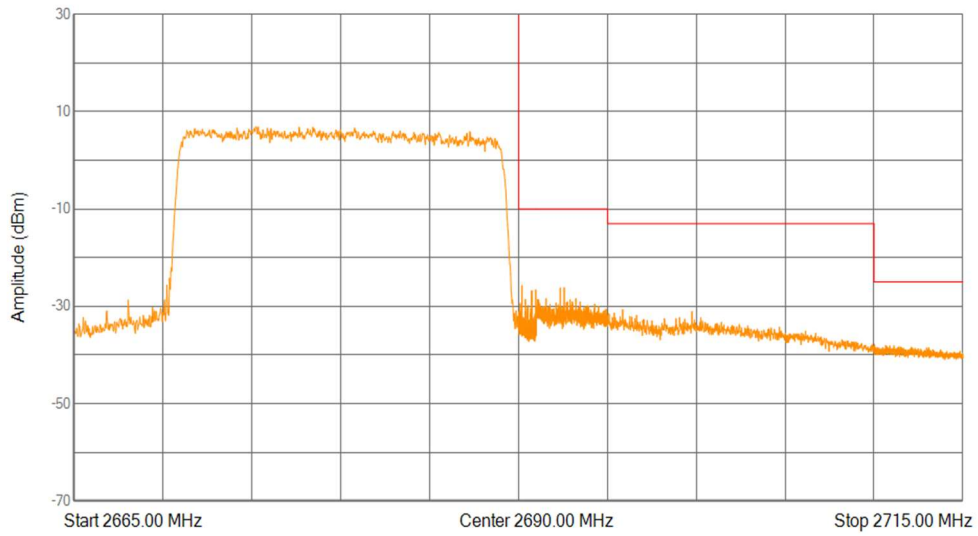


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2690	2691	430	2690.187	-25.76	-10
2	2691	2695	1000	2692.56	-26.17	-10
3	2695	2710	1000	2695.855	-30.67	-13
4	2710	2715	1000	2710.03	-37.83	-25

Band41 16QAM BW=5MHz Channel=39675 RB Size=25 Position=#0

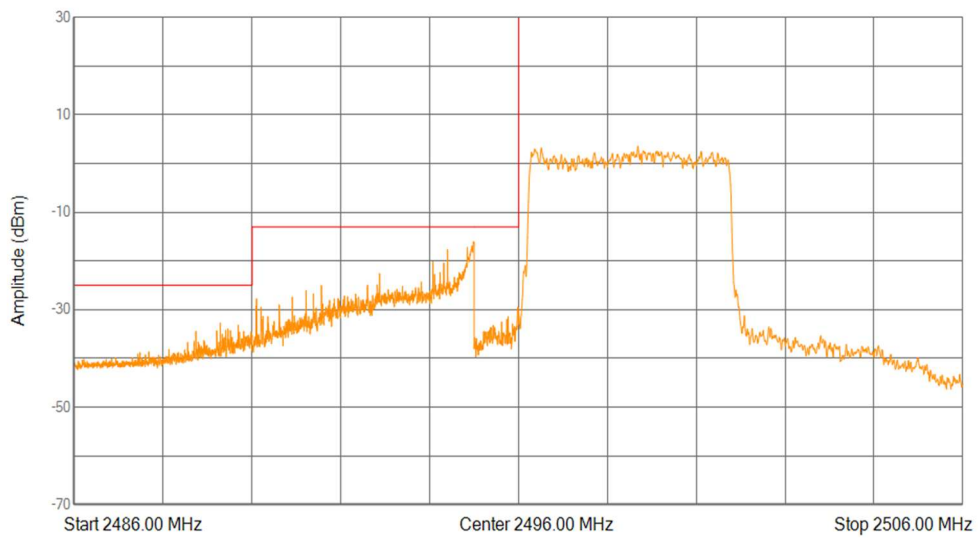


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2486	2490	1000	2489.284	-32.73	-25
2	2490	2495	1000	2494.98	-16.1	-13
3	2495	2496	51	2495.978	-29.55	-13

Band41 16QAM BW=5MHz Channel=41565 RB Size=25 Position=#0

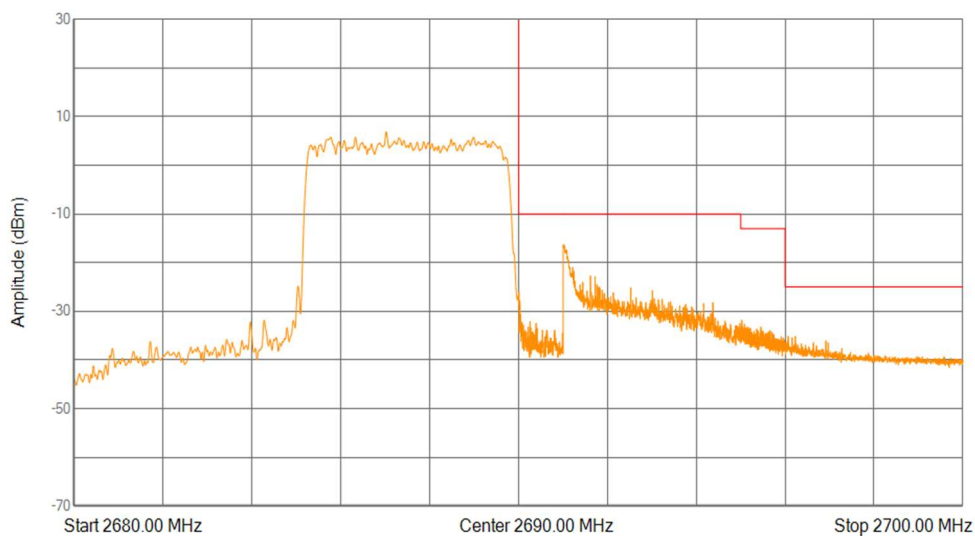


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2690	2691	100	2690.006	-26.09	-10
2	2691	2695	1000	2691.02	-16.32	-10
3	2695	2696	1000	2695.023	-31.87	-13
4	2696	2700	1000	2696.068	-35.13	-25

Band41 QPSK BW=10MHz Channel=39700 RB Size=50 Position=#0

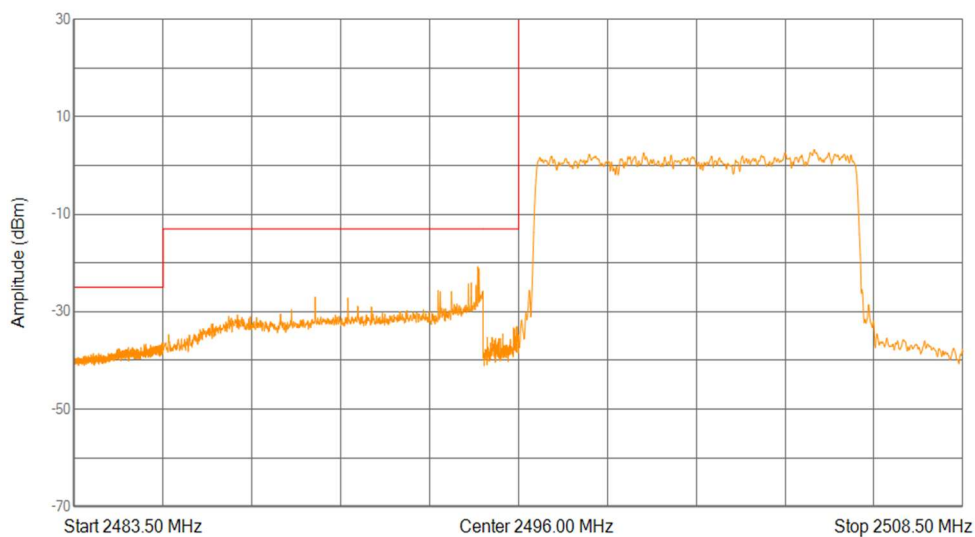


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2483.5	2486	1000	2485.9975	-36.37	-25
2	2486	2495	1000	2494.847	-20.76	-13
3	2495	2496	100	2495.955	-33.06	-13

Band41 QPSK BW=10MHz Channel=41540 RB Size=50 Position=#0

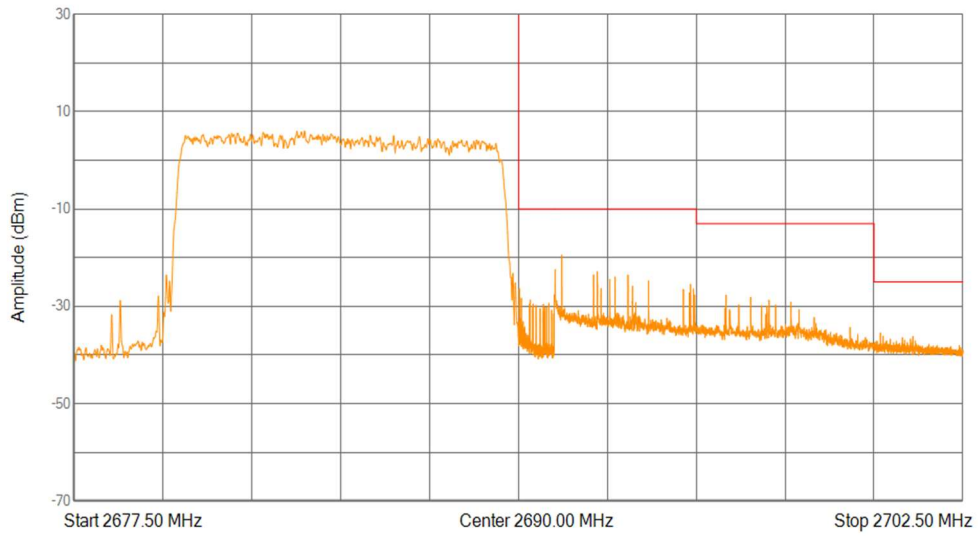


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2690	2691	200	2690.019	-26.37	-10
2	2691	2695	1000	2691.212	-19.48	-10
3	2695	2700	1000	2695.835	-27.69	-13
4	2700	2702.5	1000	2700.18	-35.46	-25

Band41 QPSK BW=15MHz Channel=39725 RB Size=75 Position=#0

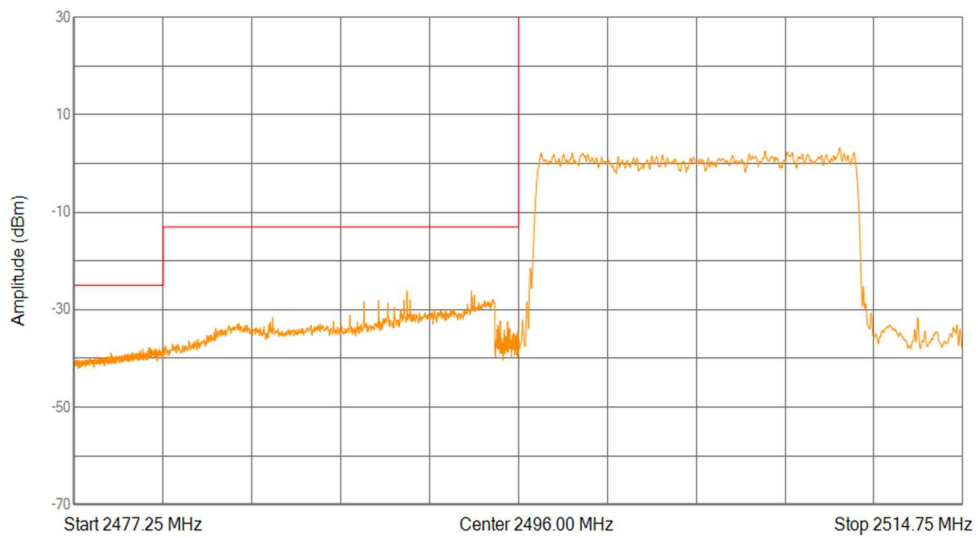


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2477.25	2481	1000	2480.3925	-37.78	-25
2	2481	2495	1000	2491.29	-26.16	-13
3	2495	2496	150	2495.227	-32.35	-13


Band41 QPSK BW=15MHz Channel=41515 RB Size=75 Position=#0

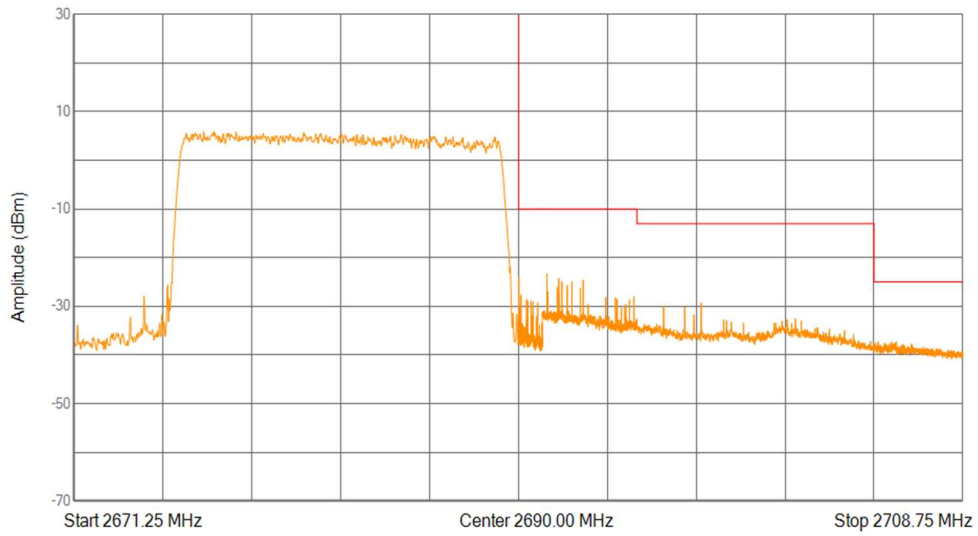

Band41 QPSK BW=20MHz Channel=39750 RB Size=100 Position=#0

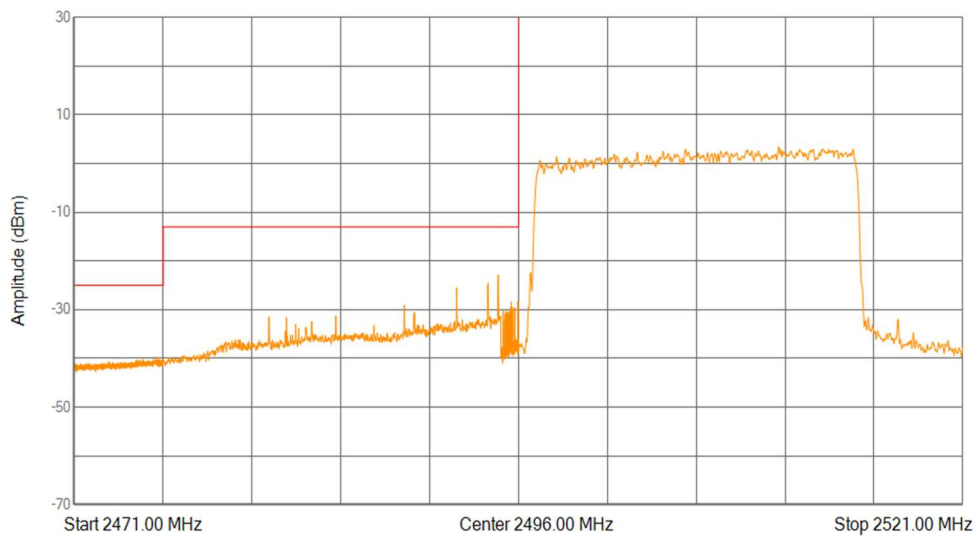


Band41 QPSK BW=20MHz Channel=41490 RB Size=100 Position=#0

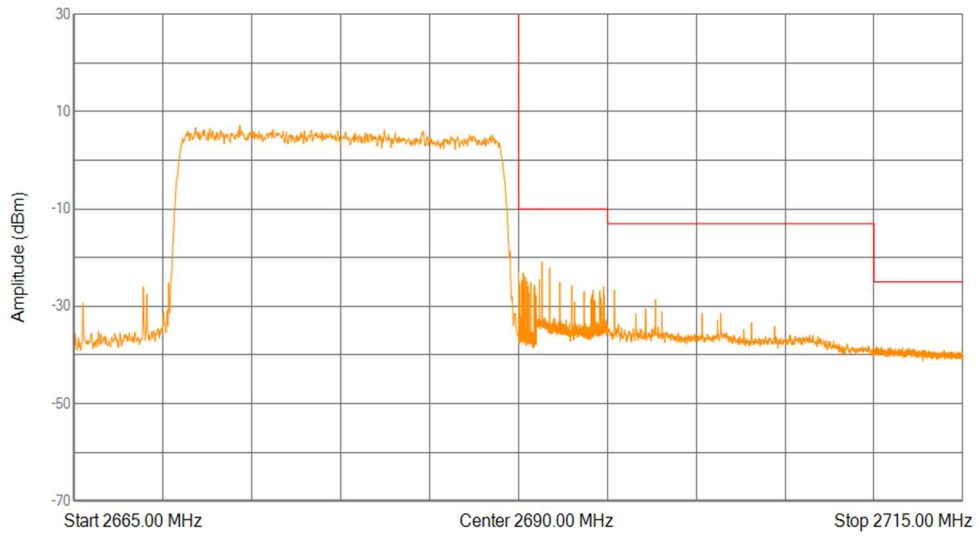


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2690	2691	430	2690.264	-23.15	-10
2	2691	2695	1000	2691.316	-20.91	-10
3	2695	2710	1000	2695.39	-26.7	-13
4	2710	2715	1000	2710.155	-38.36	-25

Band41 QPSK BW=5MHz Channel=39675 RB Size=25 Position=#0

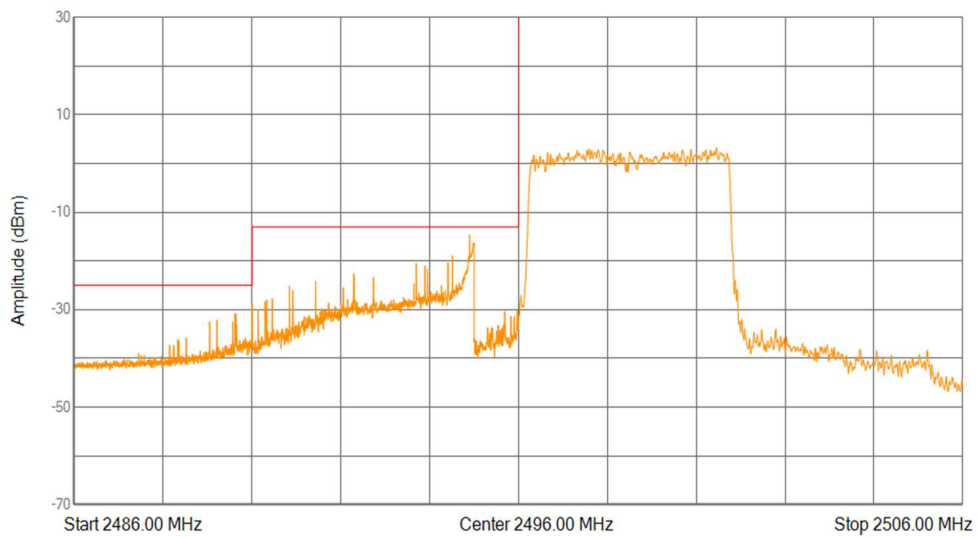


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2486	2490	1000	2489.632	-30.85	-25
2	2490	2495	1000	2494.895	-14.65	-13
3	2495	2496	51	2495.97	-30.31	-13

Band41 QPSK BW=5MHz Channel=41565 RB Size=25 Position=#0

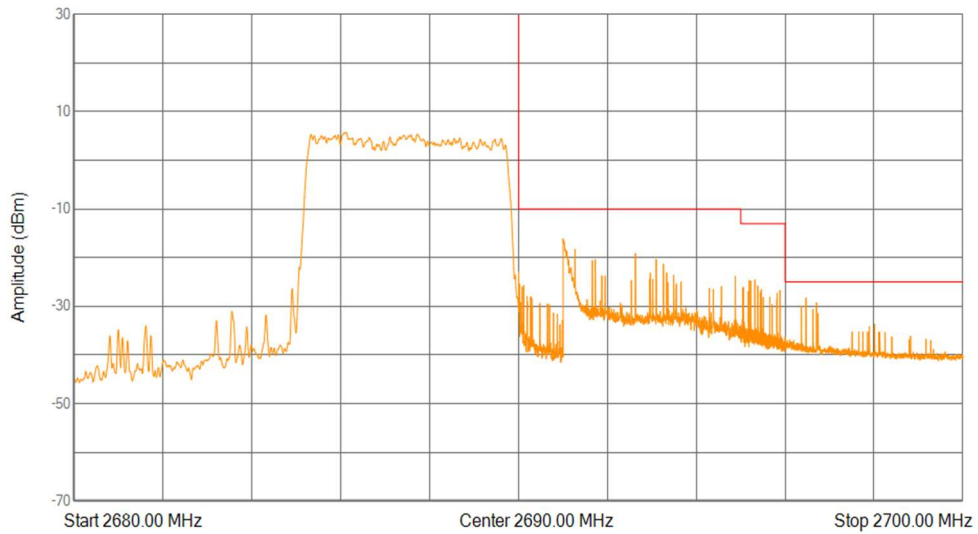


Range	Start (MHz)	Stop (MHz)	RBW (kHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)
1	2690	2691	100	2690.001	-23.31	-10
2	2691	2695	1000	2691.012	-16.58	-10
3	2695	2696	1000	2695.319	-24.57	-13
4	2696	2700	1000	2696.468	-28.29	-25


Band5 16QAM BW=1.4MHz Channel=20407 RB Size=6 Position=#0

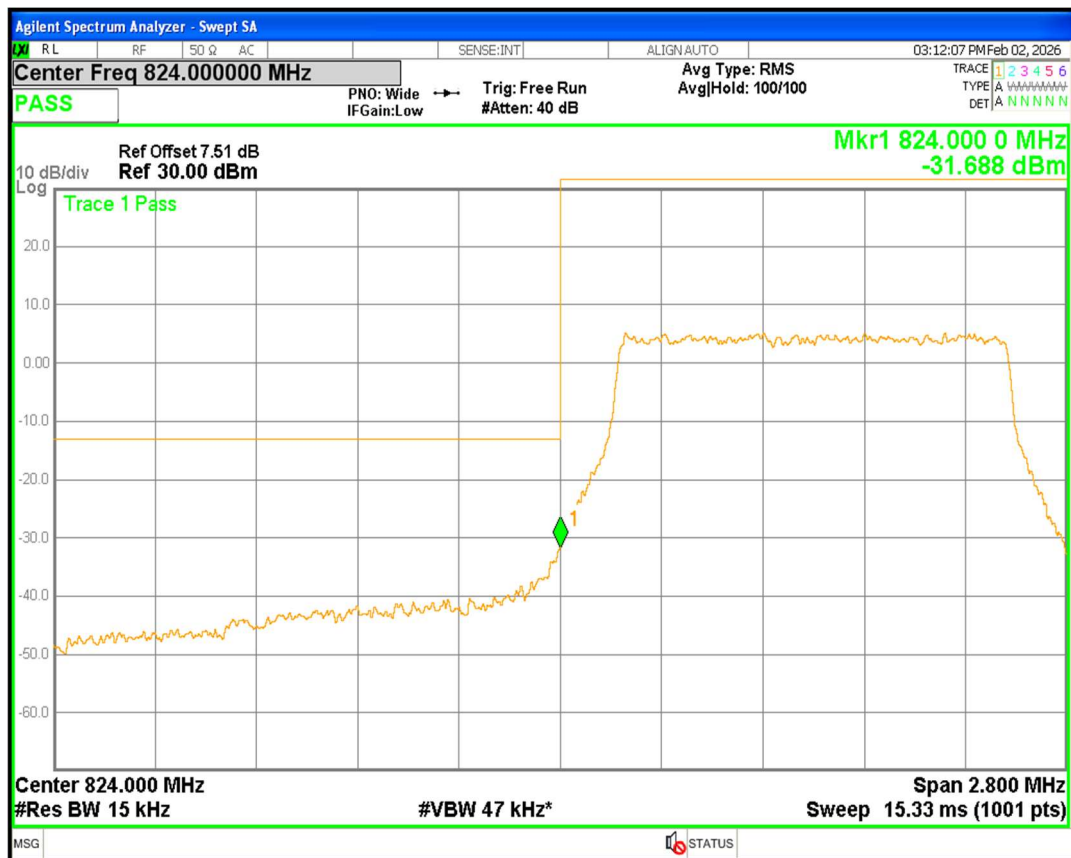


Band5 16QAM BW=1.4MHz Channel=20643 RB Size=6 Position=#0

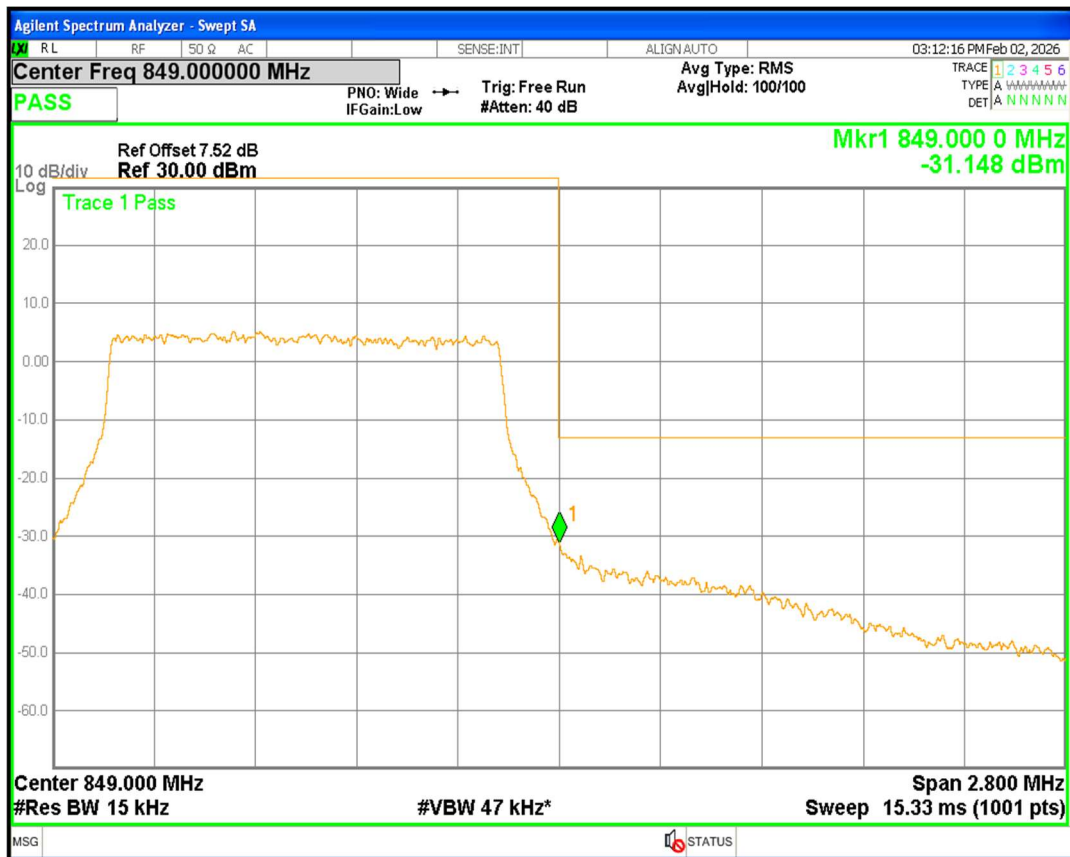


Band5 16QAM BW=10MHz Channel=20450 RB Size=50 Position=#0

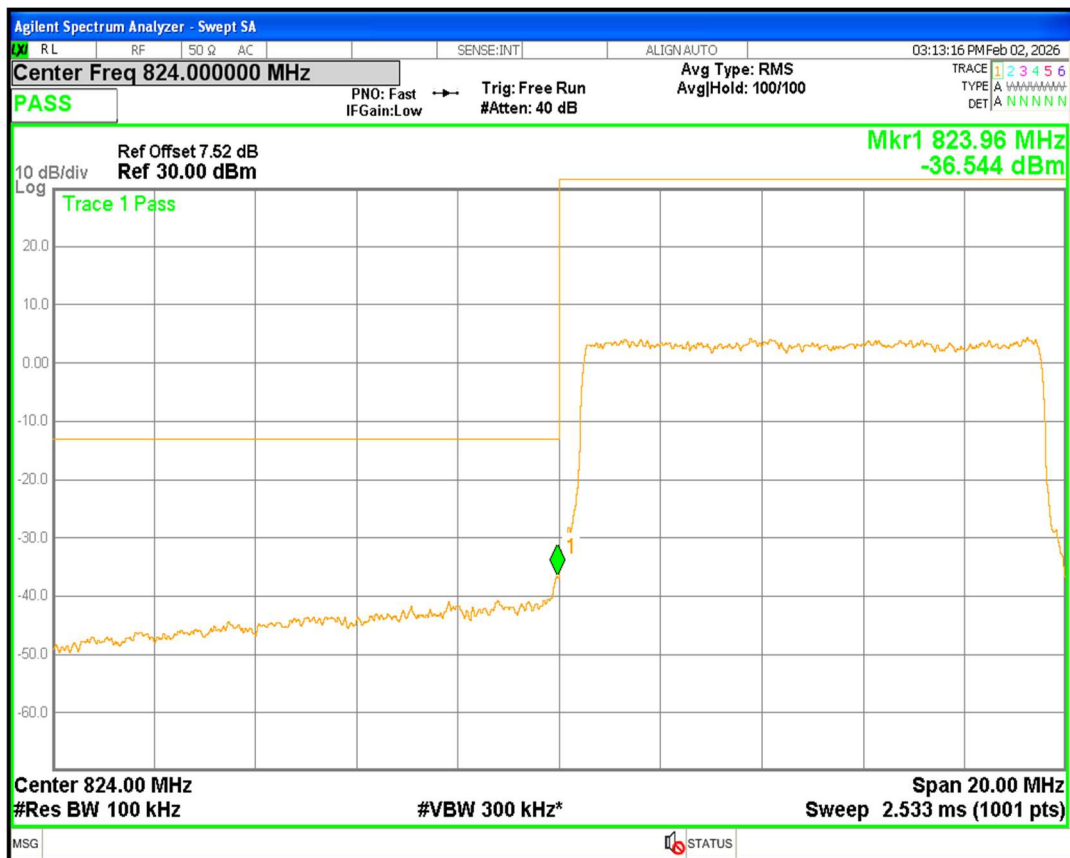


Band5 16QAM BW=10MHz Channel=20600 RB Size=50 Position=#0

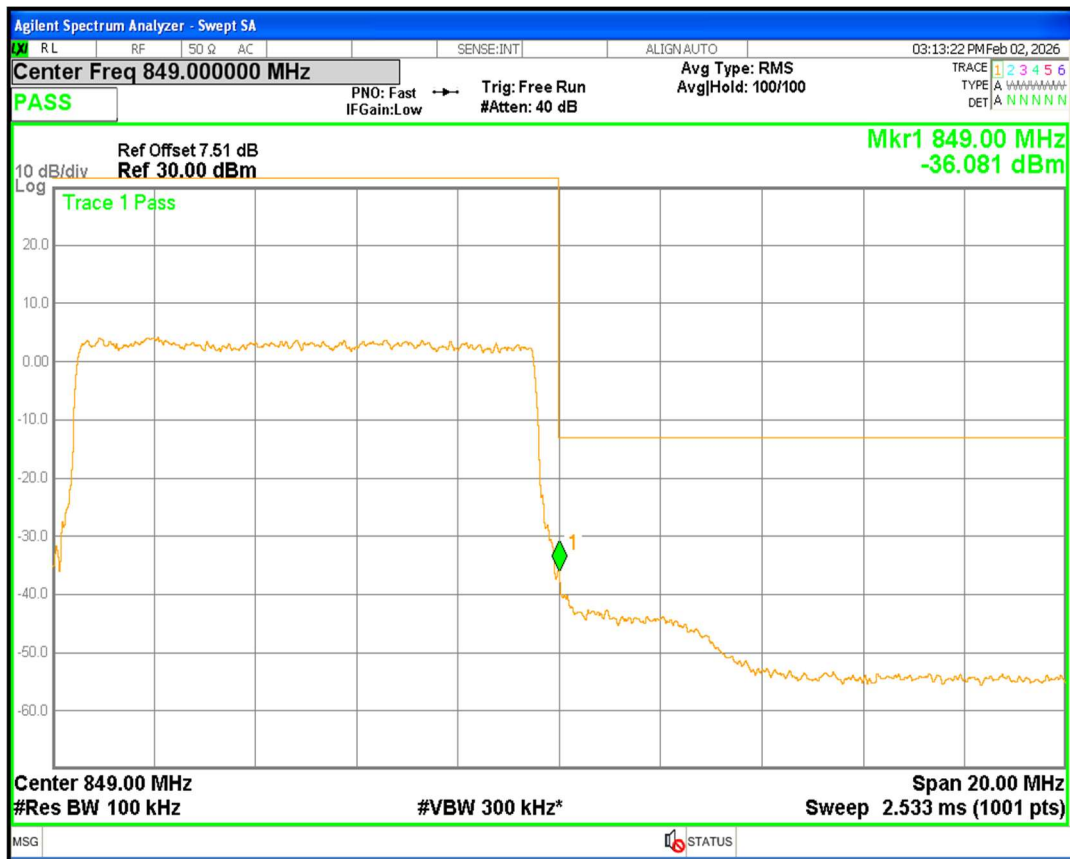


Band5 16QAM BW=3MHz Channel=20415 RB Size=15 Position=#0

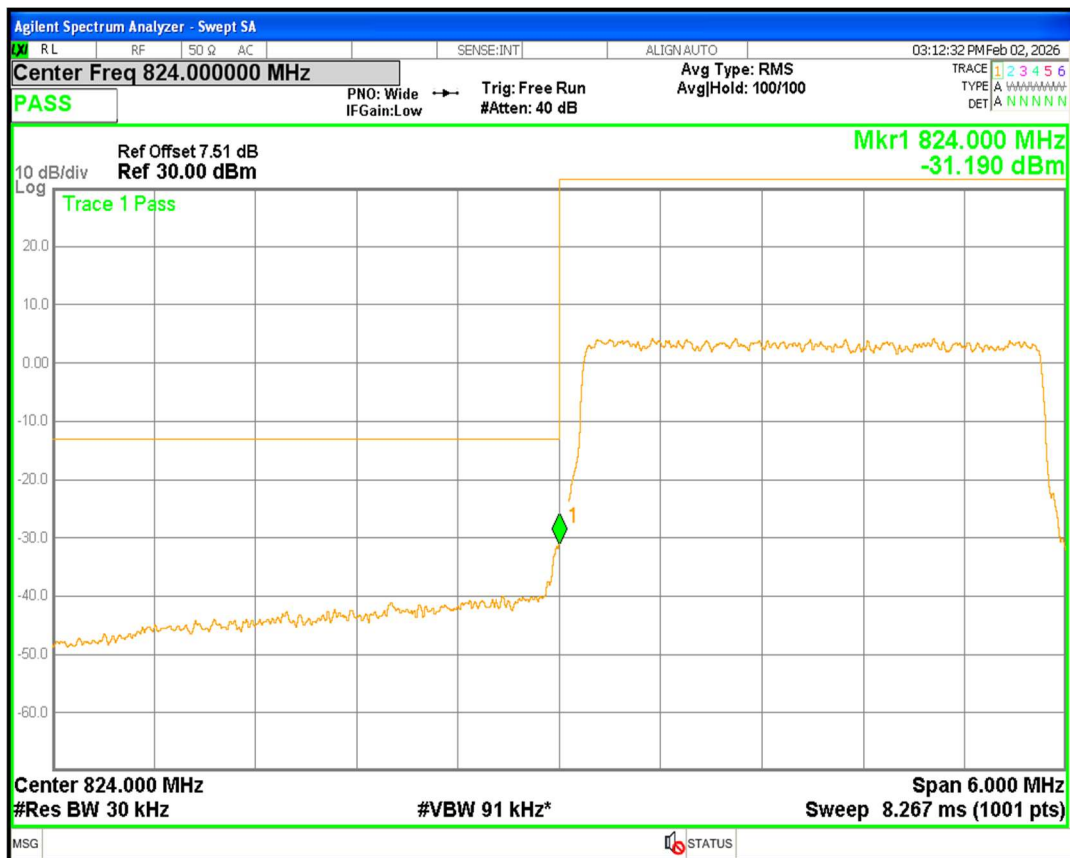


Band5 16QAM BW=3MHz Channel=20635 RB Size=15 Position=#0

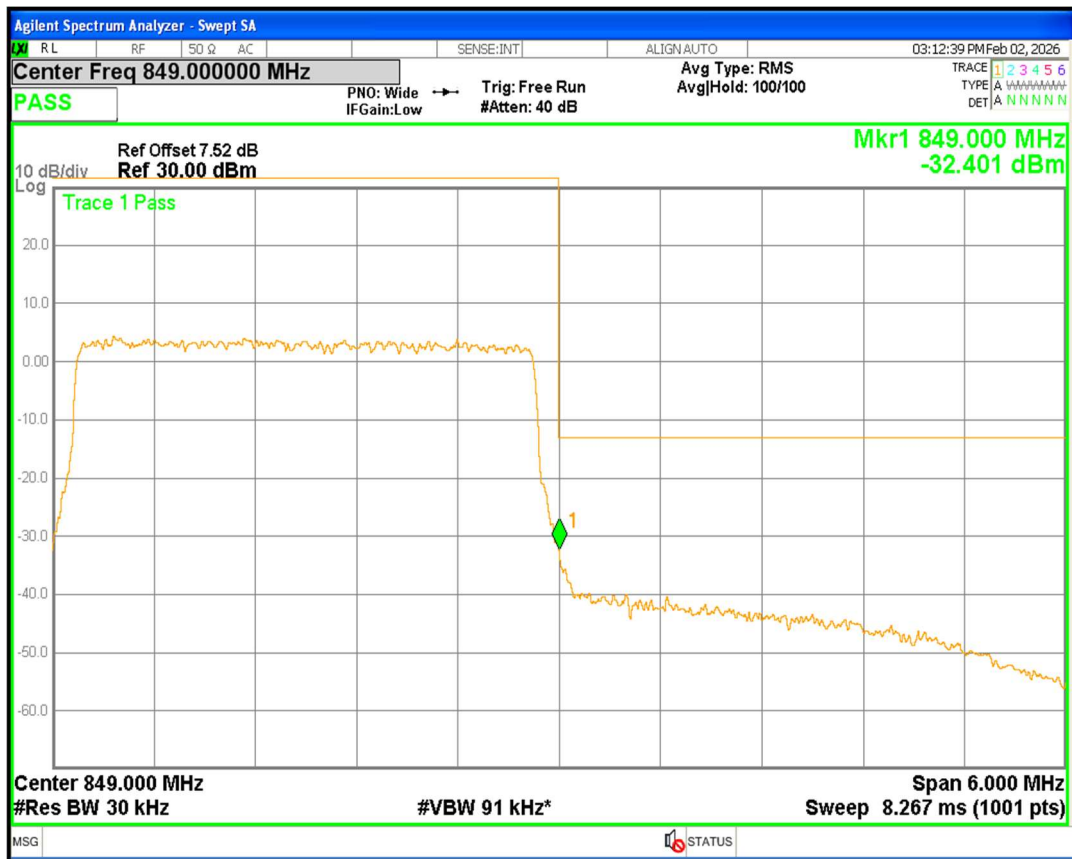


Band5 16QAM BW=5MHz Channel=20425 RB Size=25 Position=#0

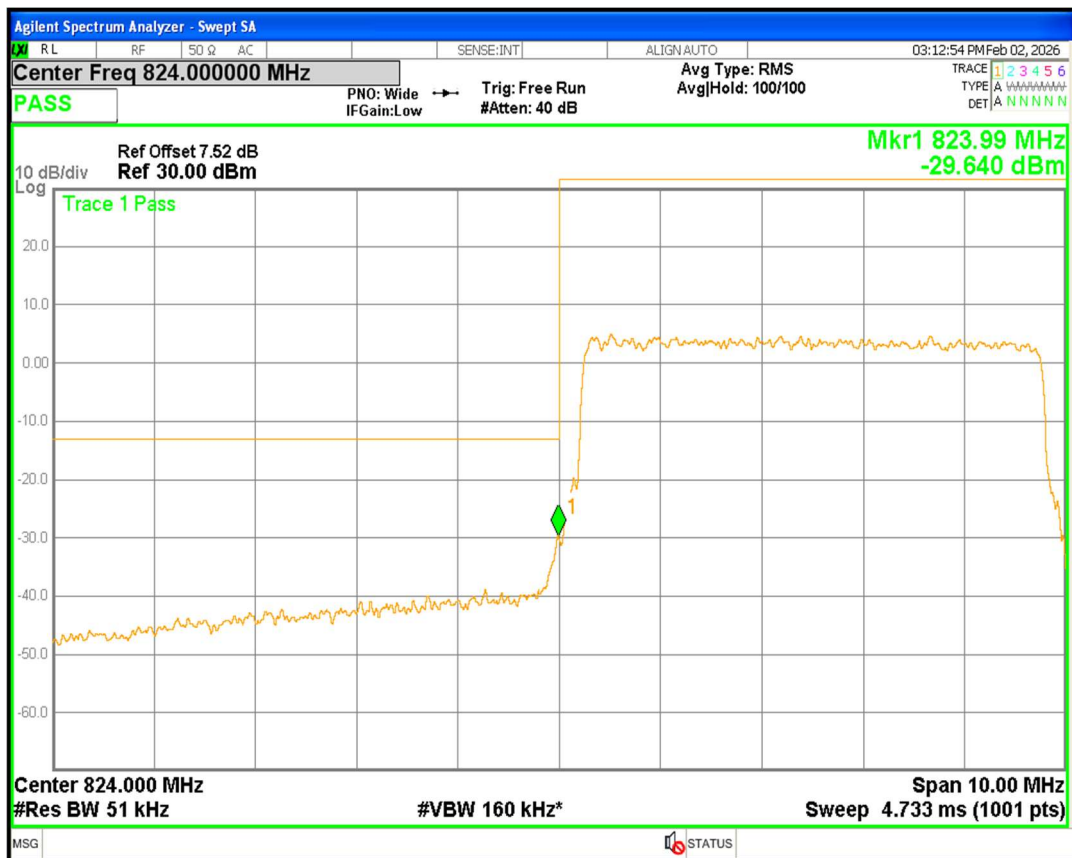

Band5 16QAM BW=5MHz Channel=20625 RB Size=25 Position=#0

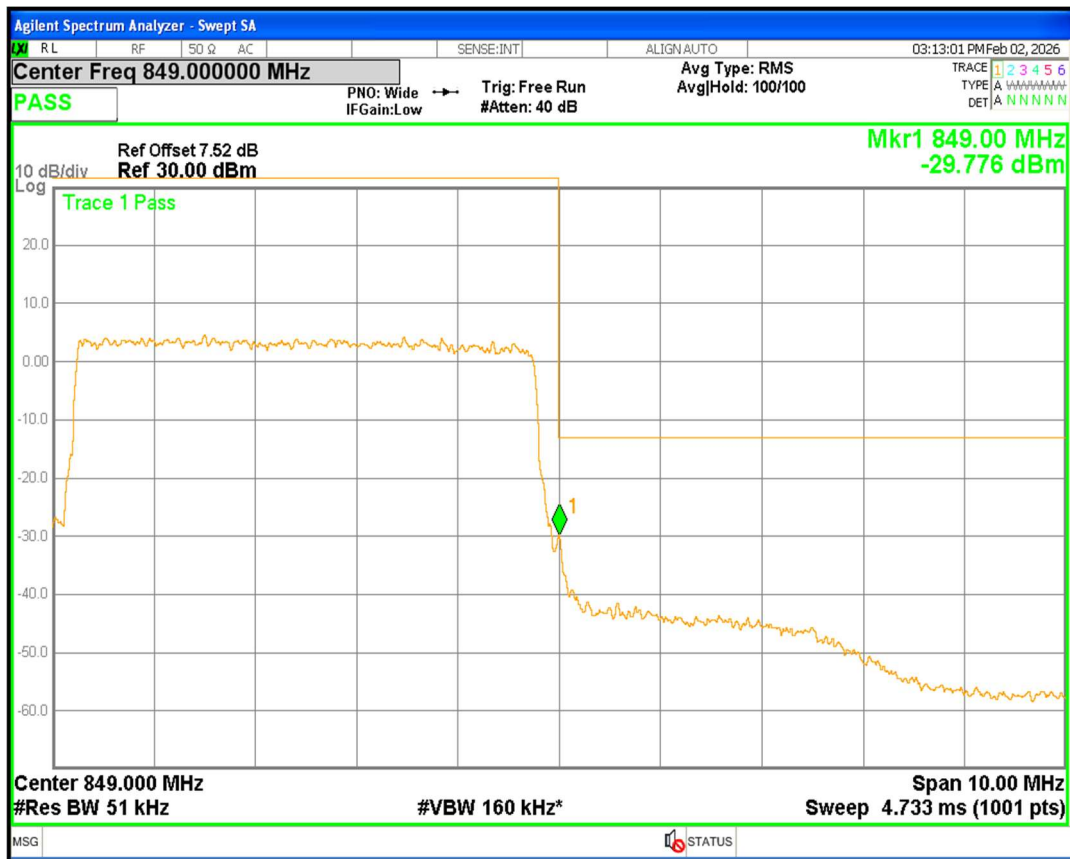

Band5 QPSK BW=1.4MHz Channel=20407 RB Size=6 Position=#0

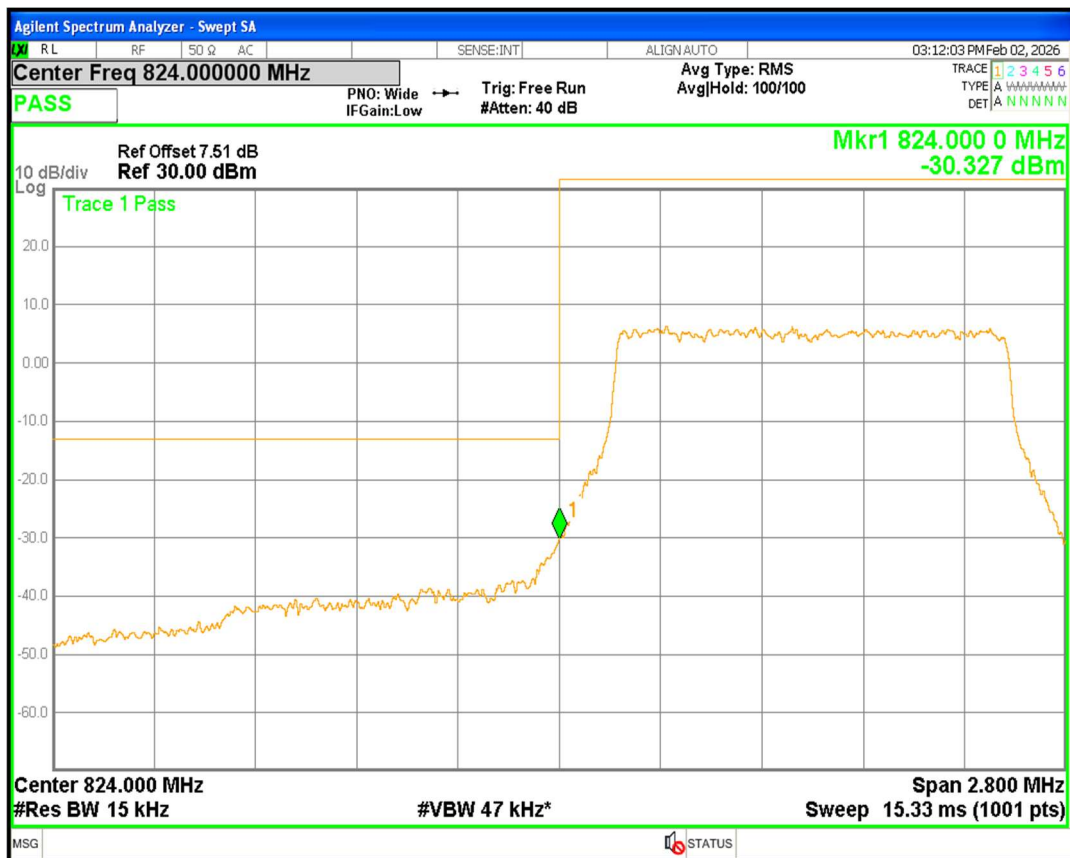

Band5 QPSK BW=1.4MHz Channel=20643 RB Size=6 Position=#0