

RF Test Data

FCC ID:2BC96NB-CMD02

Product: Birdfy Cam BD3A

Model Name: NB-CMD02, NB-CMD02-XXXXXX (XXXXXX can be A-Z, 0-9, a-z or blank, indicate different color)

Brand: Birdfy

Report No.: NCT260301097XE1-3

Prepared for

NETVUE INC.

1055 East Colorado Boulevard 5th Floor Pasadena, CA, 91106, United States

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.


A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

TEL: 400-8868-419


Duty Cycle	3
Maximum Conducted Output Power	13
-6dB Bandwidth	14
Occupied Channel Bandwidth	24
Maximum Power Spectral Density Level	34
Frequency Stability	44

Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5745	Ant1	12.28	9.11	0.71
NVNT	a	5785	Ant1	12.28	9.11	0.71
NVNT	a	5825	Ant1	12.28	9.11	0.71
NVNT	n20	5745	Ant1	33.66	4.73	0.2
NVNT	n20	5785	Ant1	33.77	4.71	0.2
NVNT	n20	5825	Ant1	33.66	4.73	0.2
NVNT	n40	5755	Ant1	32.78	4.84	0.2
NVNT	n40	5795	Ant1	32.78	4.84	0.2
NVNT	ac20	5745	Ant1	33.66	4.73	0.2
NVNT	ac20	5785	Ant1	33.44	4.76	0.2
NVNT	ac20	5825	Ant1	33.77	4.71	0.2
NVNT	ac40	5755	Ant1	32.89	4.83	0.2
NVNT	ac40	5795	Ant1	32.89	4.83	0.2
NVNT	ax20	5745	Ant1	27.96	5.54	0.26
NVNT	ax20	5785	Ant1	27.96	5.54	0.26
NVNT	ax20	5825	Ant1	28.06	5.52	0.26
NVNT	ax40	5755	Ant1	27.7	5.58	0.26
NVNT	ax40	5795	Ant1	28.06	5.52	0.26

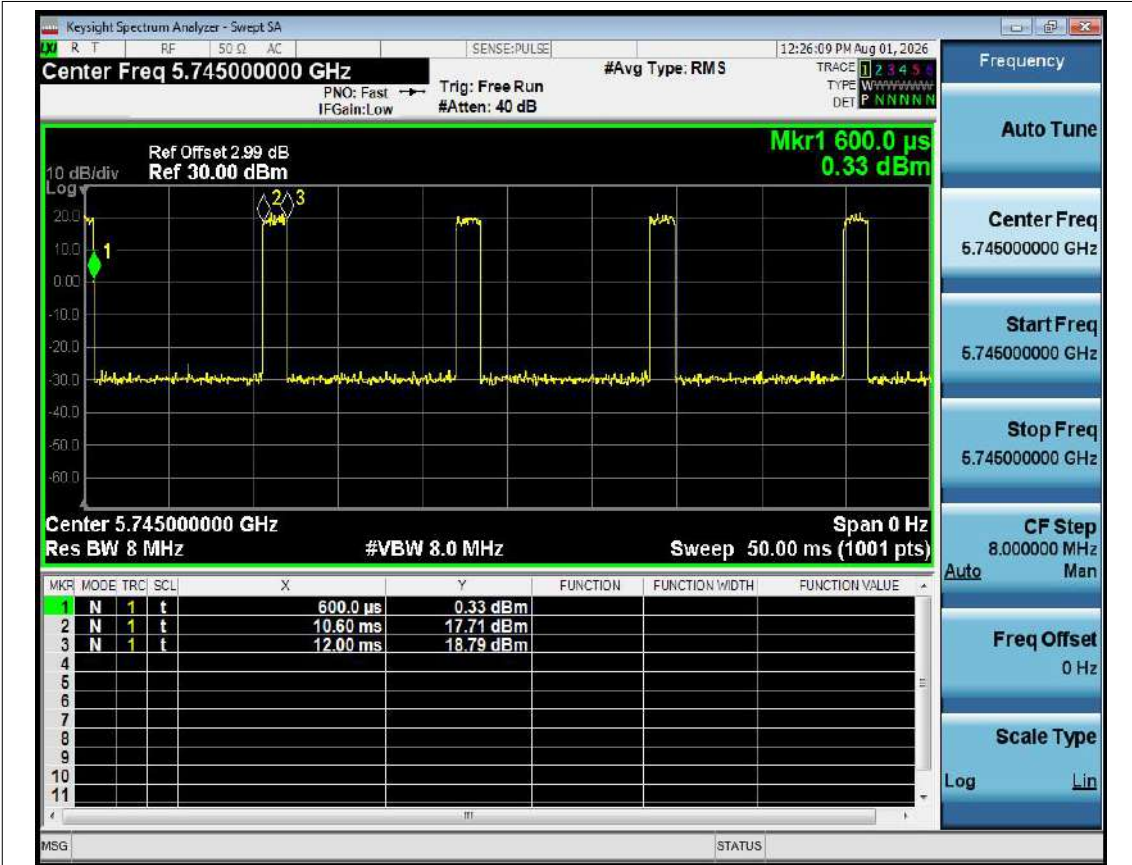


Duty Cycle NVNT a 5745MHz Ant1

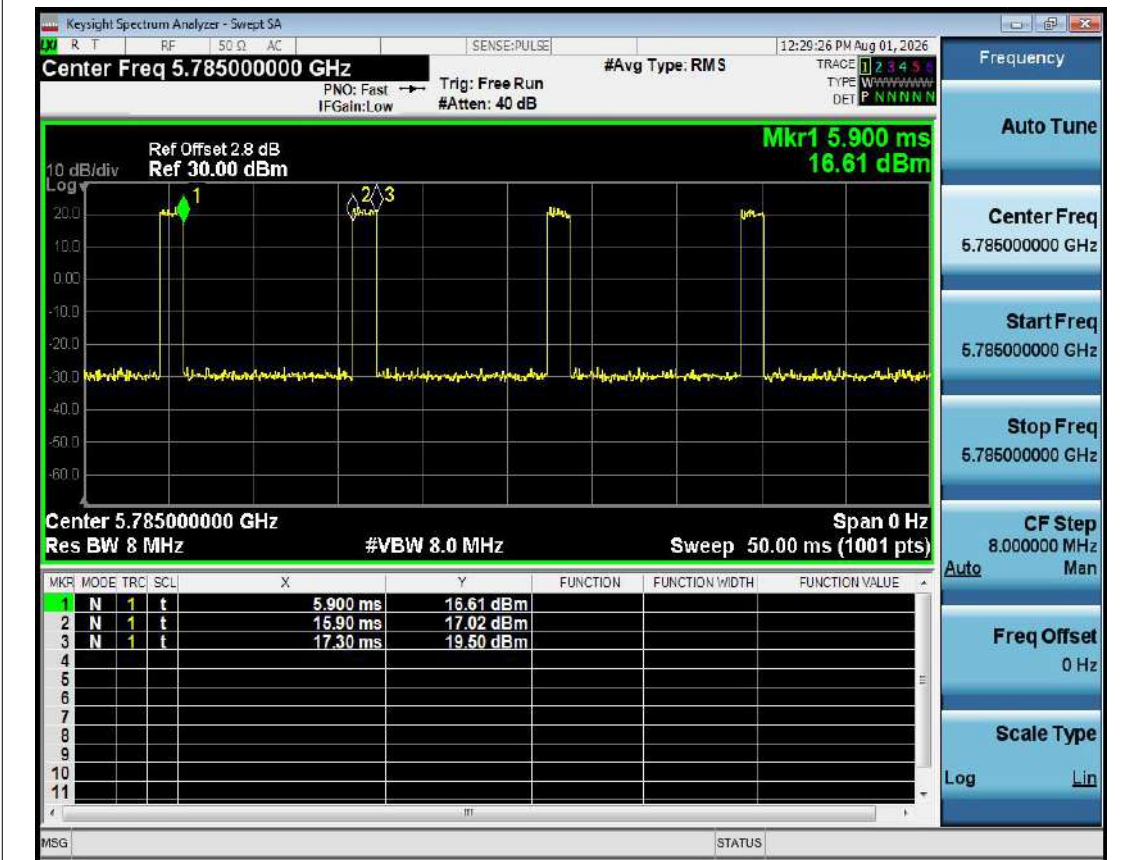


Duty Cycle NVNT a 5785MHz Ant1

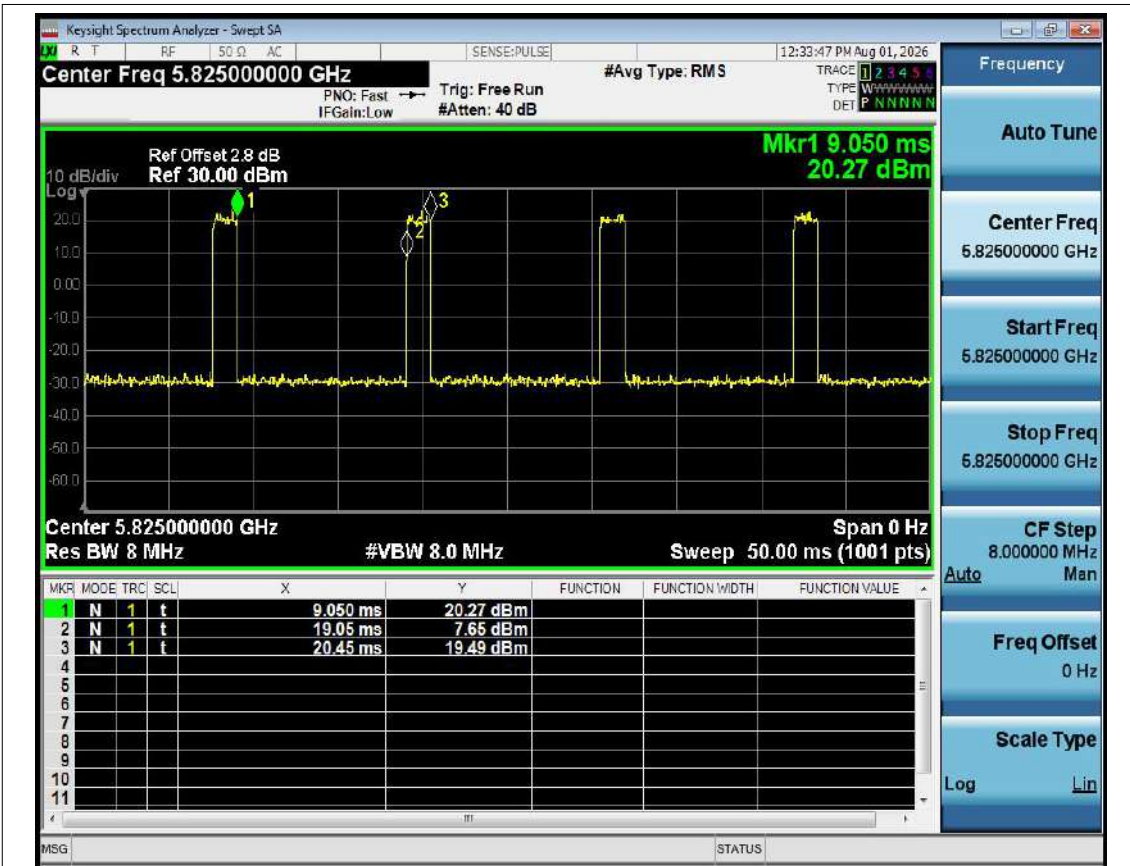

Duty Cycle NVNT a 5825MHz Ant1

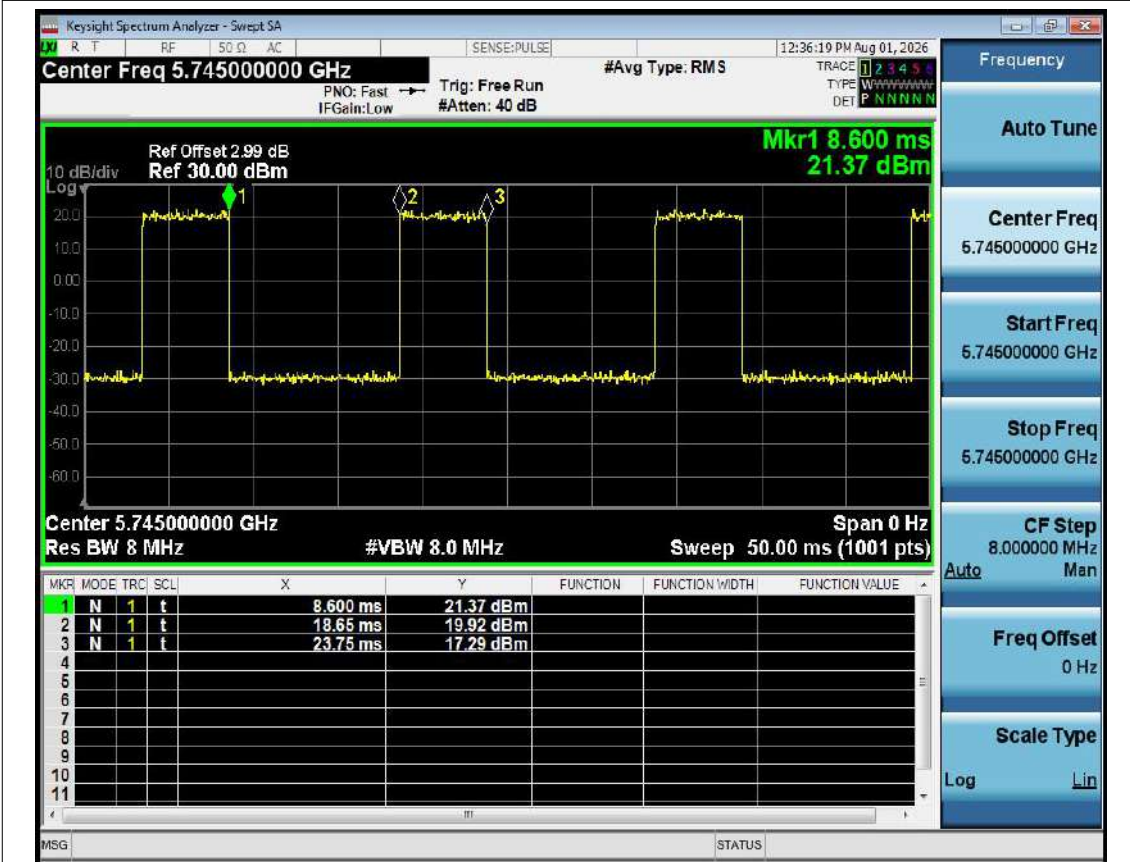


Duty Cycle NVNT n20 5745MHz Ant1

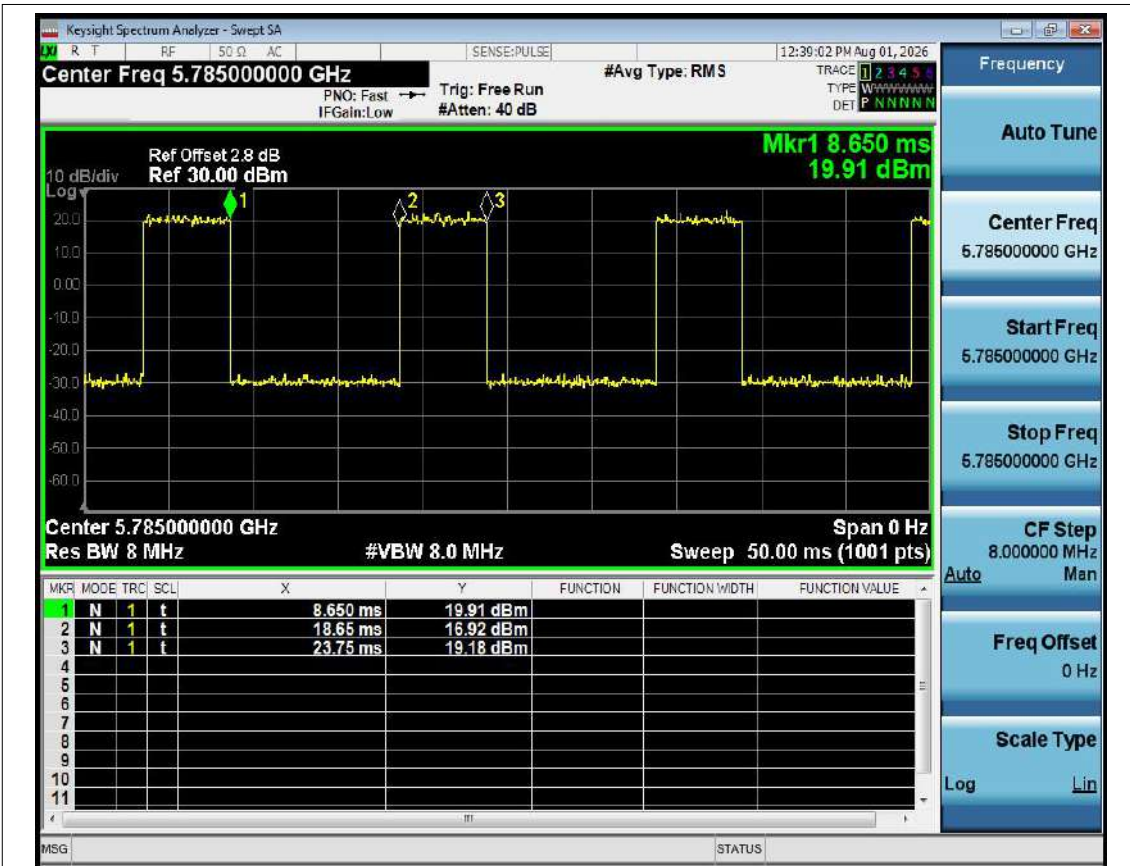


Duty Cycle NVNT n20 5785MHz Ant1



Duty Cycle NVNT n20 5825MHz Ant1

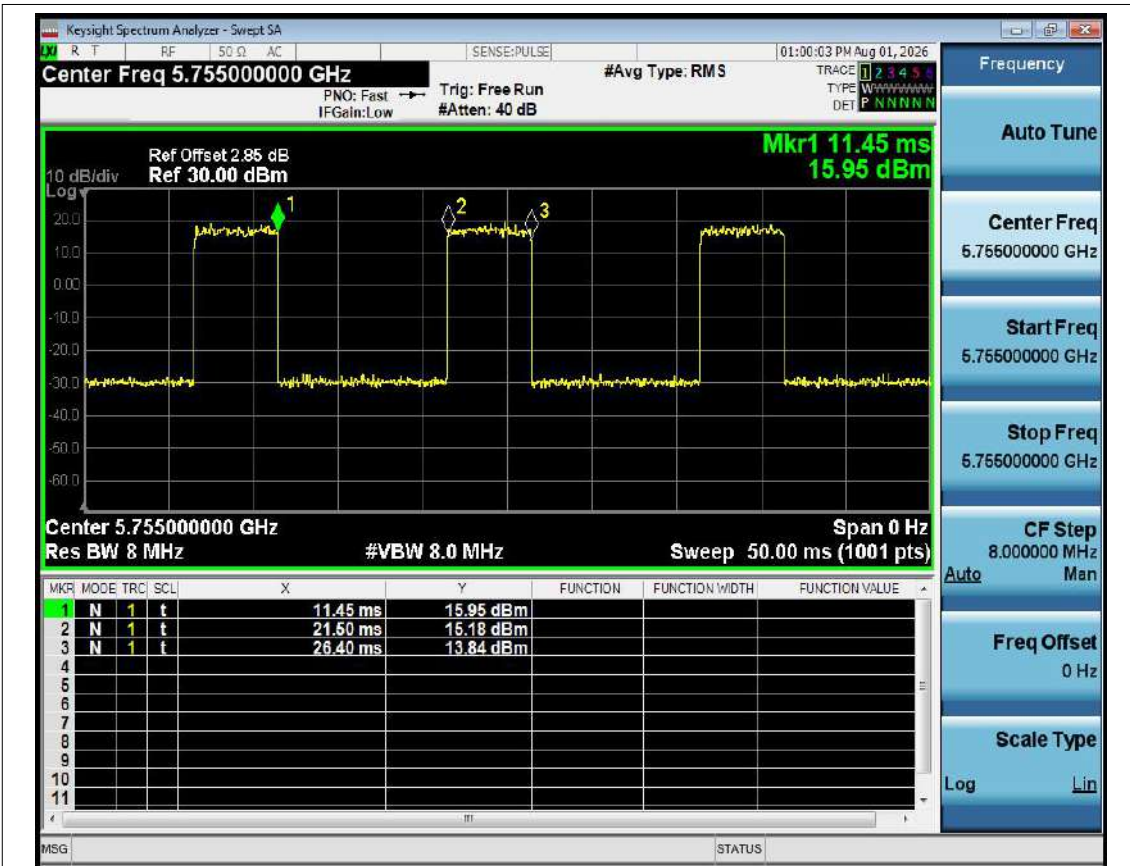


Duty Cycle NVNT n40 5755MHz Ant1

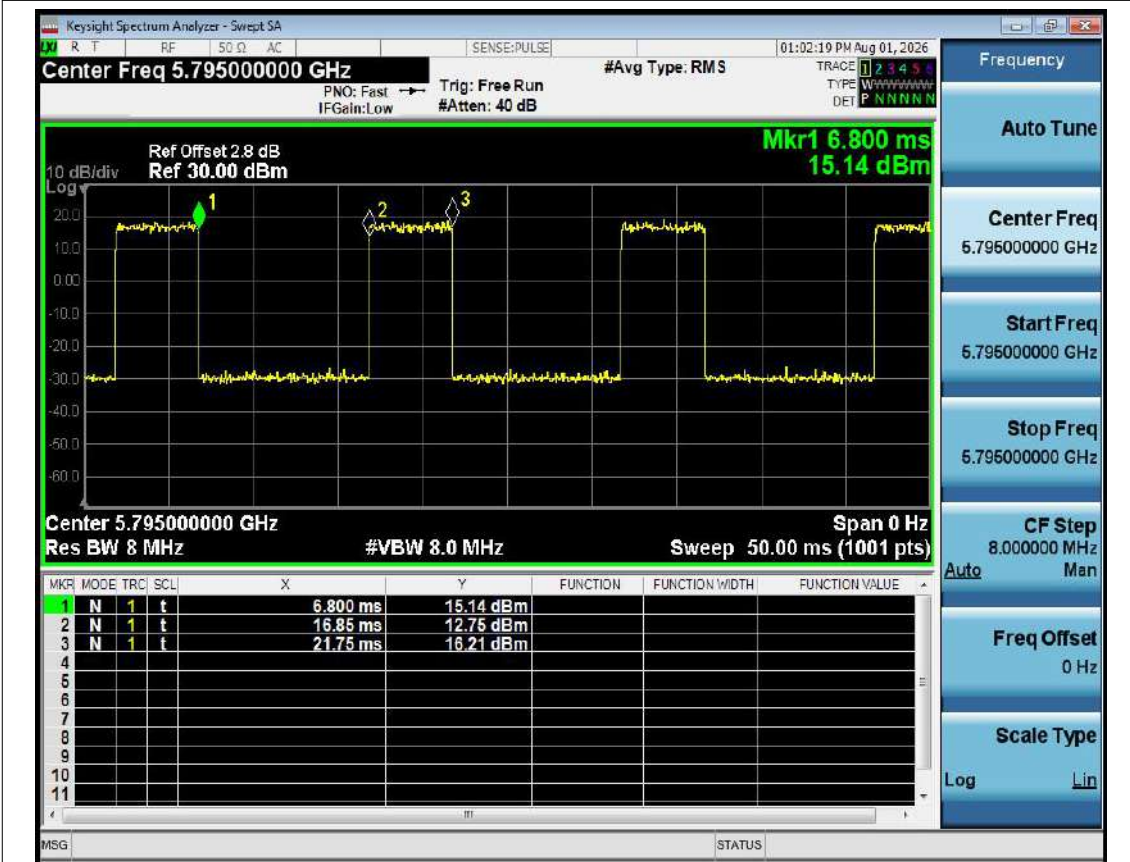


Duty Cycle NVNT n40 5795MHz Ant1




Duty Cycle NVNT ac20 5745MHz Ant1

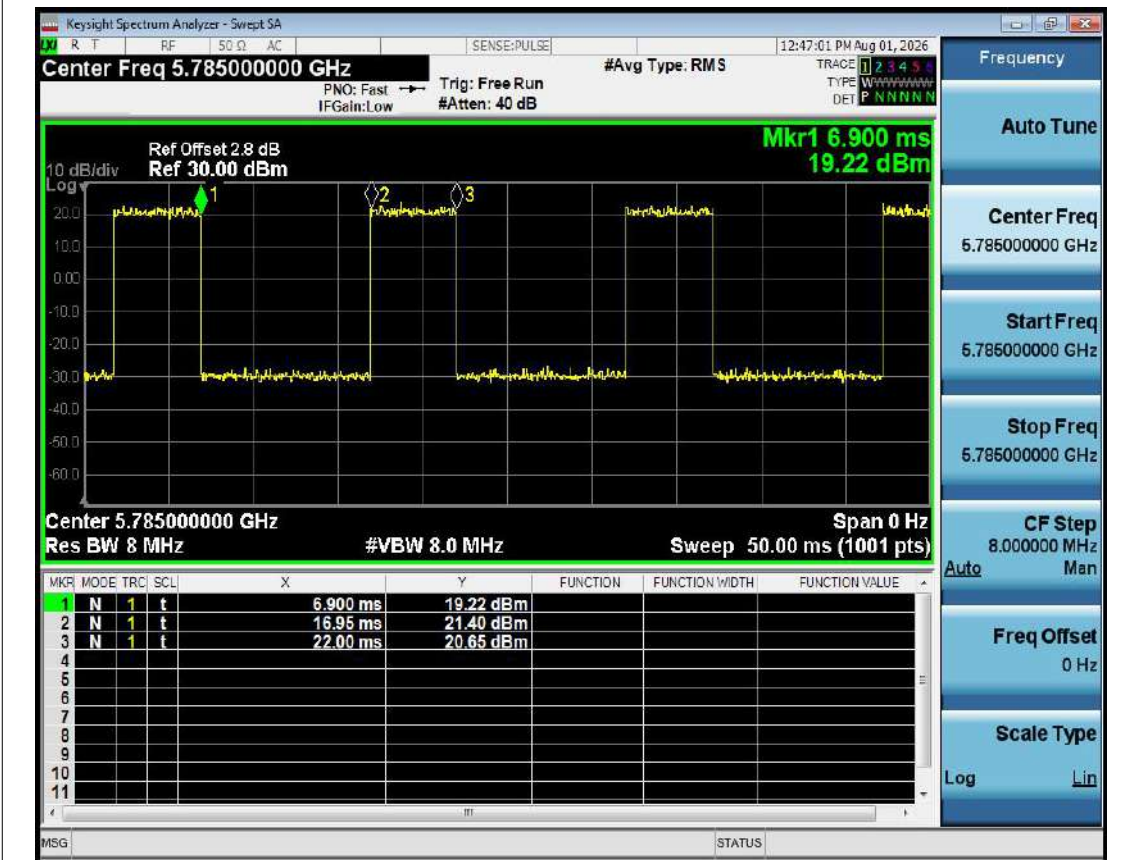


Duty Cycle NVNT ac20 5785MHz Ant1

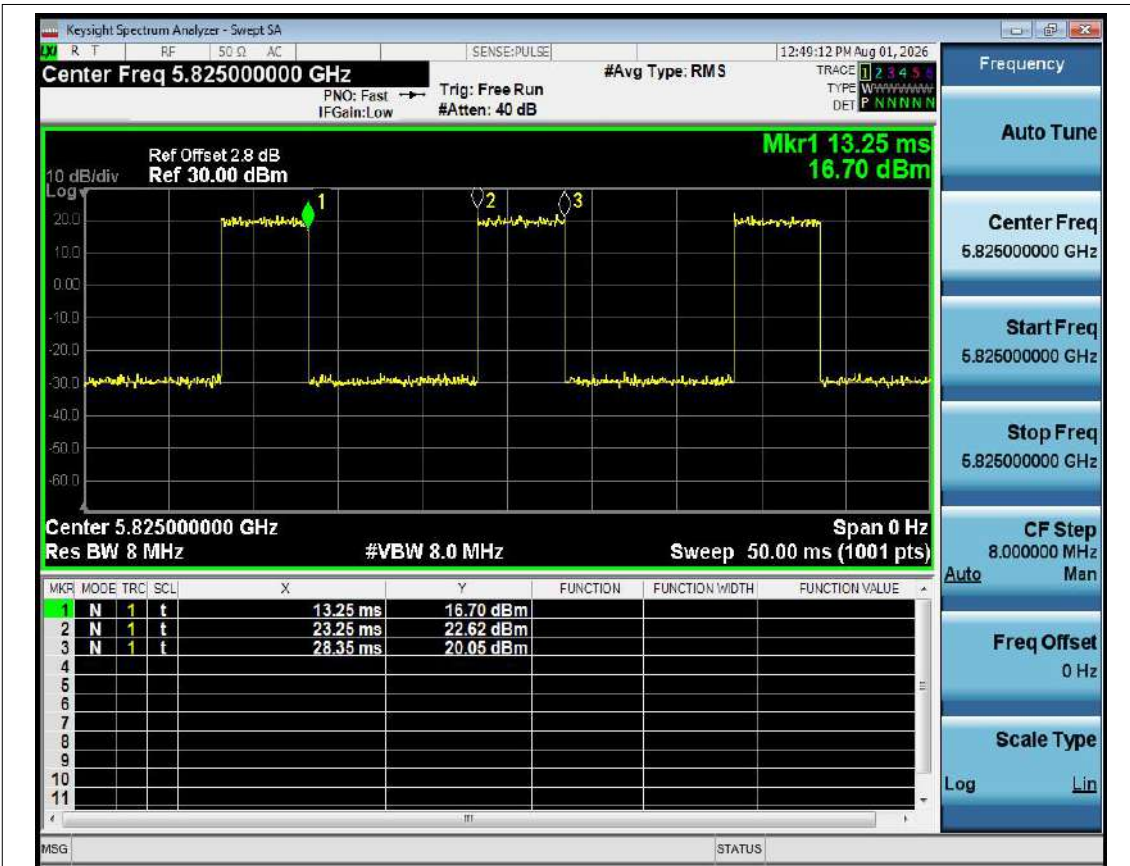


Duty Cycle NVNT ac20 5825MHz Ant1

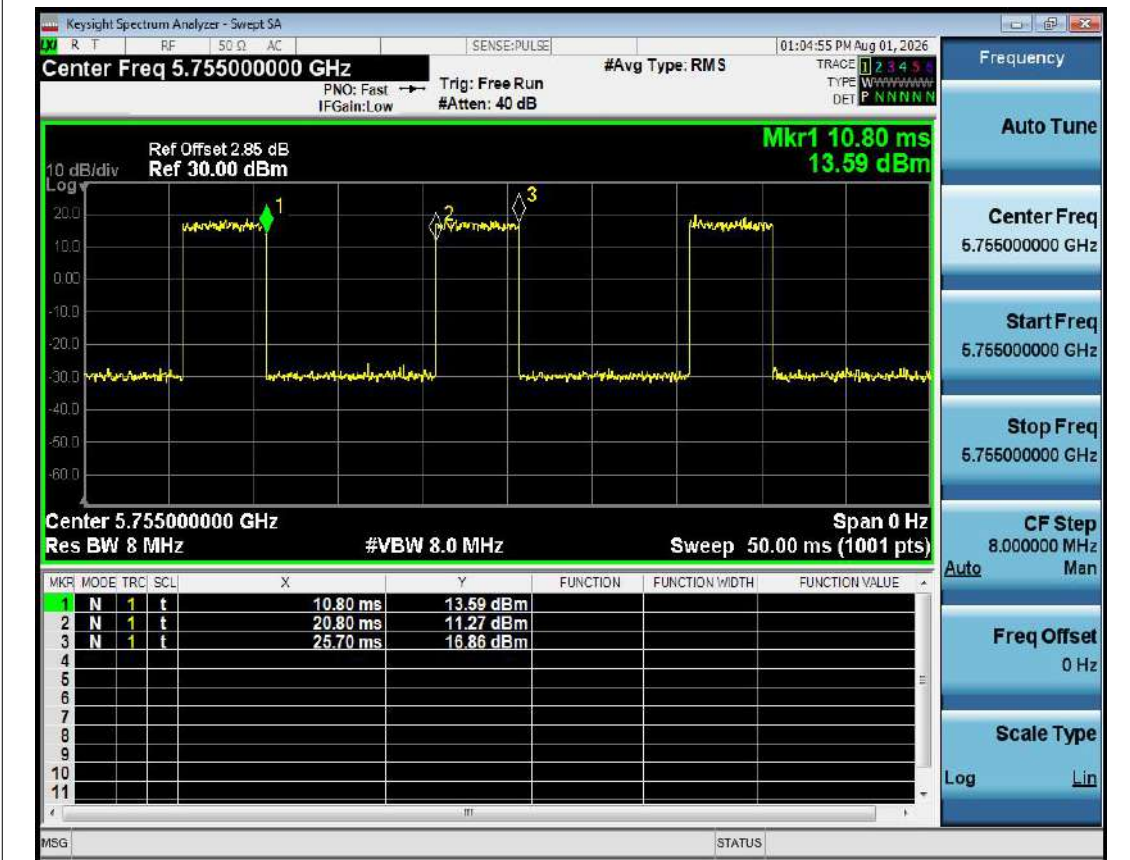


Duty Cycle NVNT ac40 5755MHz Ant1

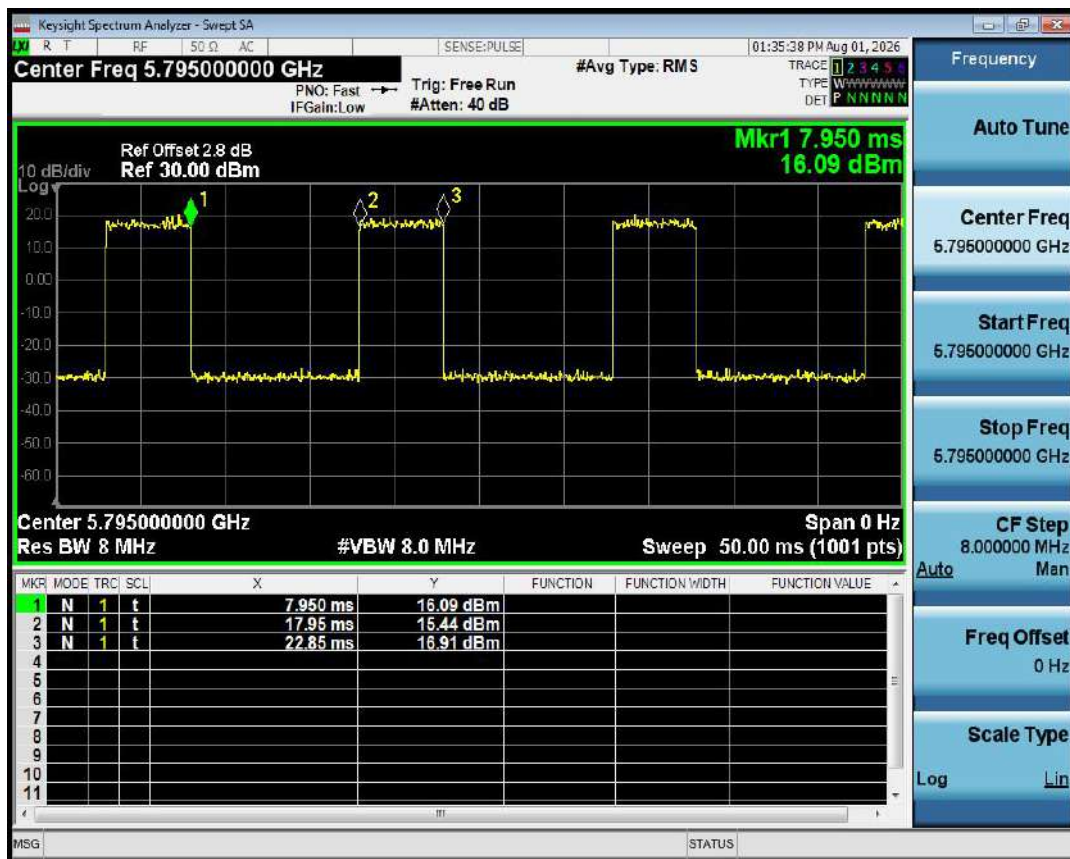


Duty Cycle NVNT ac40 5795MHz Ant1

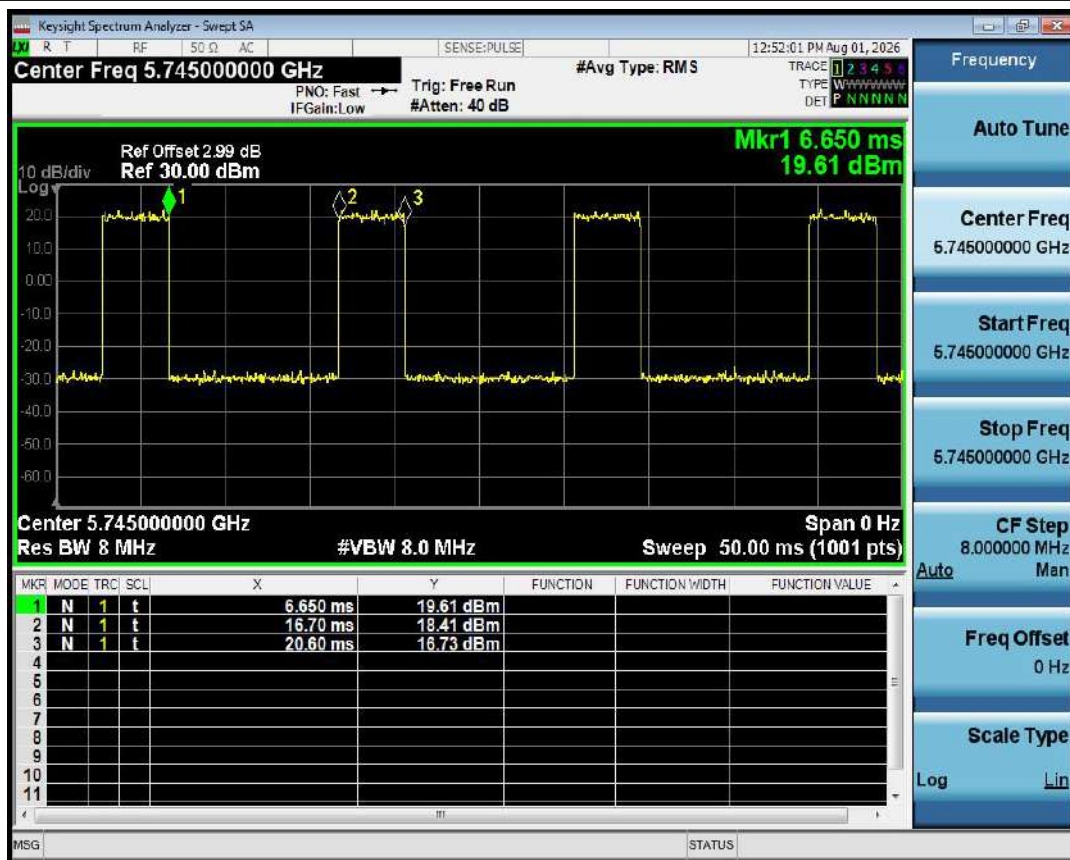


Duty Cycle NVNT ax20 5745MHz Ant1

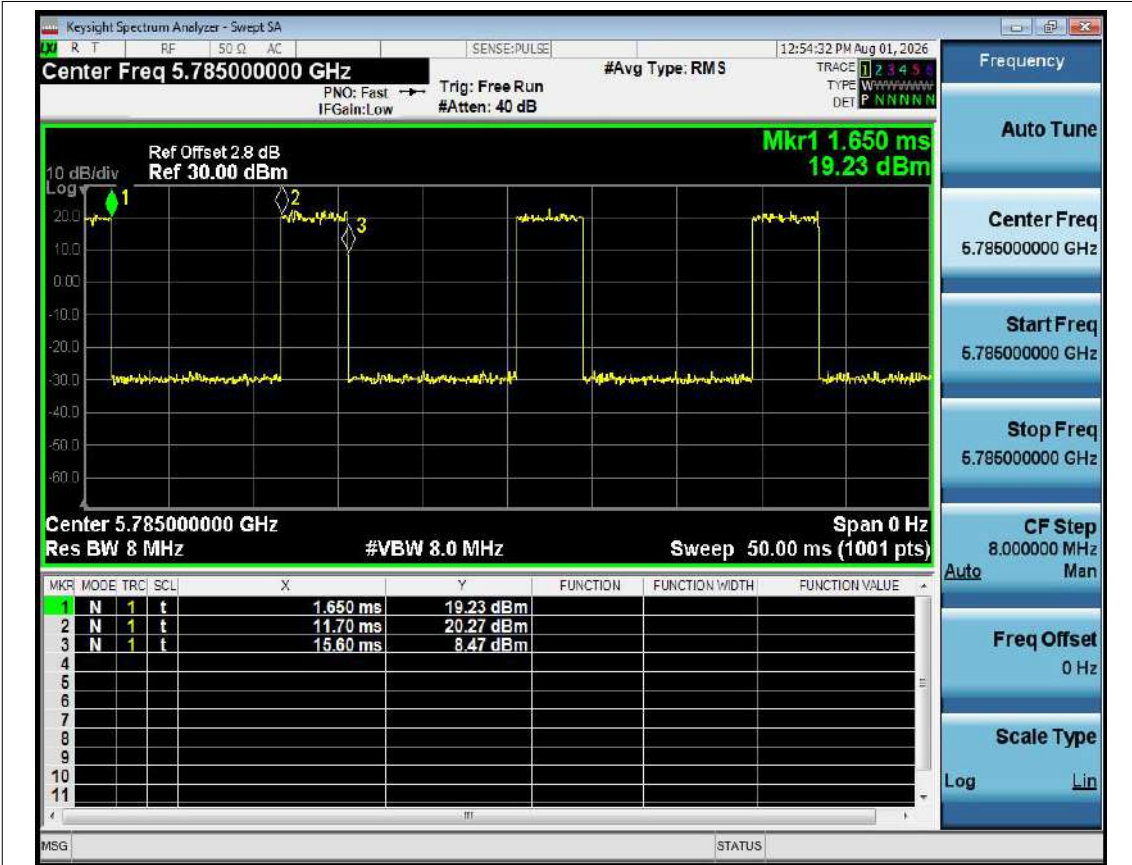


Duty Cycle NVNT ax20 5785MHz Ant1

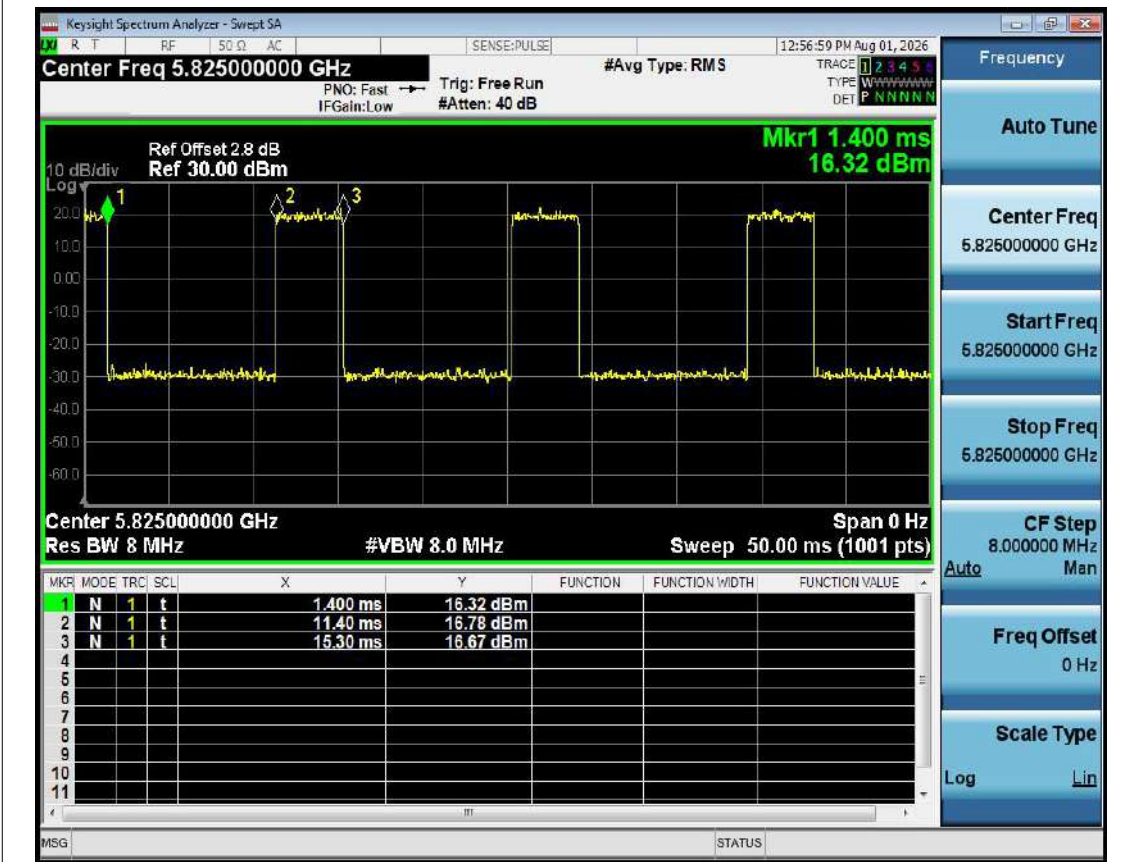

Duty Cycle NVNT ax20 5825MHz Ant1

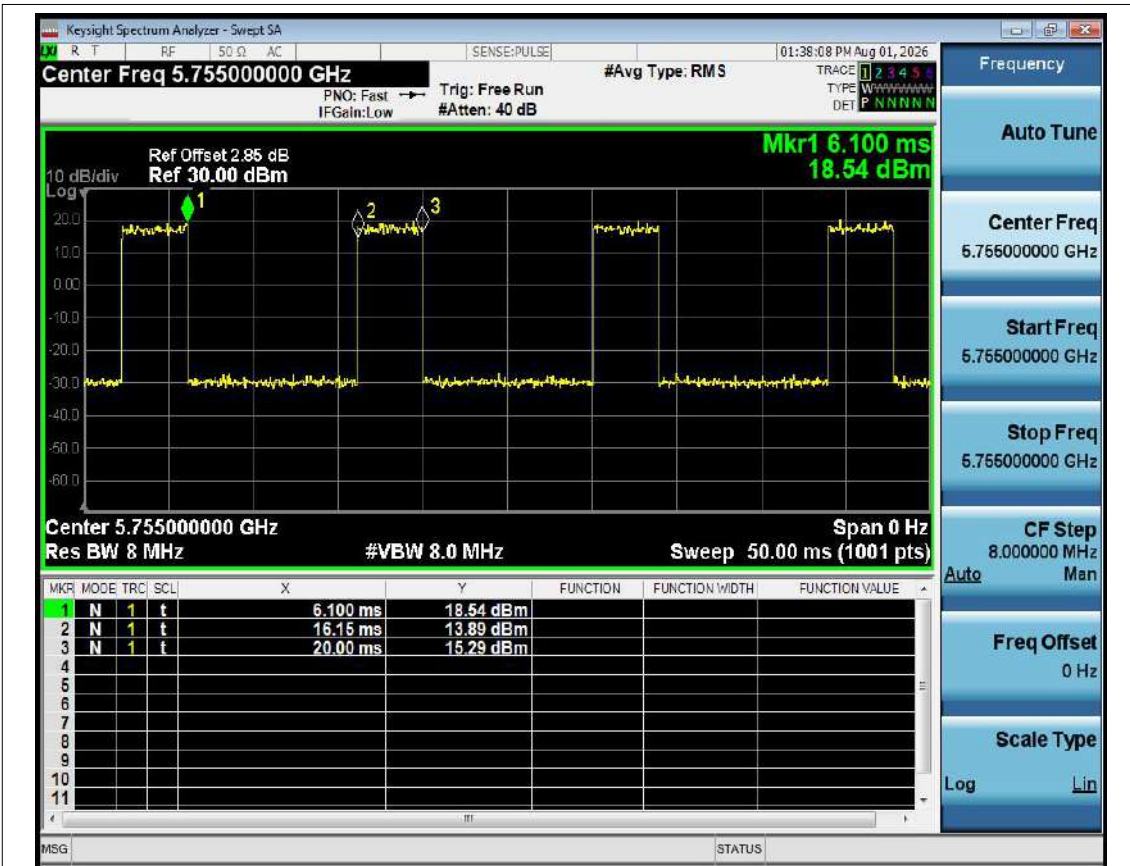

Duty Cycle NVNT ax40 5755MHz Ant1

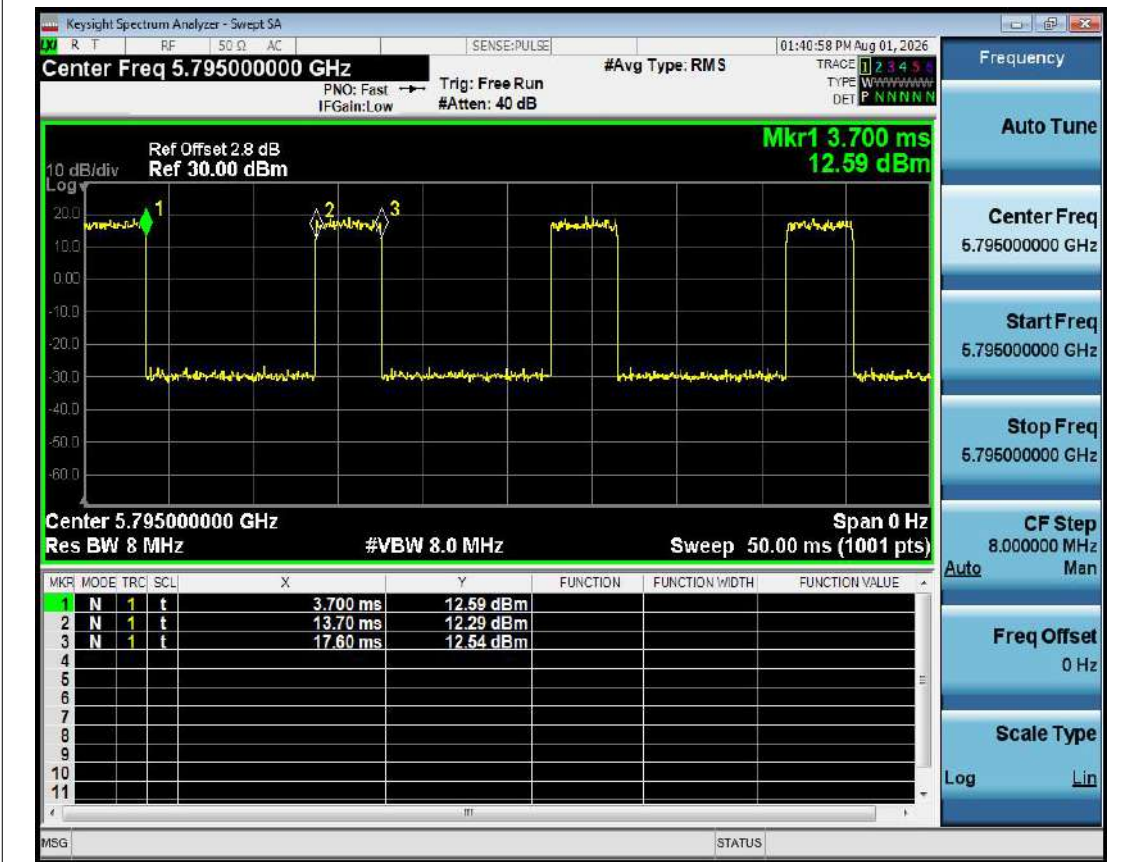

Duty Cycle NVNT ax40 5795MHz Ant1

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	measured value(dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted(dBm)	Verdict
NVNT	a	5745	4.88	9.11	13.99	0.02506	30	Pass
NVNT	a	5785	6.86	9.11	15.97	0.03954	30	Pass
NVNT	a	5825	5.29	9.11	14.4	0.02754	30	Pass
NVNT	n20	5745	10.15	4.73	14.88	0.03076	30	Pass
NVNT	n20	5785	10.52	4.71	15.23	0.03334	30	Pass
NVNT	n20	5825	11.5	4.73	16.23	0.04198	30	Pass
NVNT	n40	5755	10.11	4.84	14.95	0.03126	30	Pass
NVNT	n40	5795	10.8	4.84	15.64	0.03664	30	Pass
NVNT	ac20	5745	10.97	4.73	15.7	0.03715	30	Pass
NVNT	ac20	5785	11.02	4.76	15.78	0.03784	30	Pass
NVNT	ac20	5825	9.88	4.71	14.59	0.02877	30	Pass
NVNT	ac40	5755	10.25	4.83	15.08	0.03221	30	Pass
NVNT	ac40	5795	10.75	4.83	15.58	0.03614	30	Pass
NVNT	ax20	5745	9.66	5.54	15.2	0.03311	30	Pass
NVNT	ax20	5785	9.27	5.54	14.81	0.03027	30	Pass
NVNT	ax20	5825	8.9	5.52	14.42	0.02767	30	Pass
NVNT	ax40	5755	9.79	5.58	15.37	0.03443	30	Pass
NVNT	ax40	5795	9.79	5.52	15.31	0.03396	30	Pass

Conducted Power(dBm)=Correction Factor (dB)+measured value

Correction Factor (dB)=10log (1/D); D is duty cycle

-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.41	0.5	Pass
NVNT	a	5785	Ant1	16.34	0.5	Pass
NVNT	a	5825	Ant1	16.36	0.5	Pass
NVNT	n20	5745	Ant1	17.6	0.5	Pass
NVNT	n20	5785	Ant1	17.71	0.5	Pass
NVNT	n20	5825	Ant1	17.6	0.5	Pass
NVNT	n40	5755	Ant1	36.34	0.5	Pass
NVNT	n40	5795	Ant1	36.34	0.5	Pass
NVNT	ac20	5745	Ant1	17.51	0.5	Pass
NVNT	ac20	5785	Ant1	17.59	0.5	Pass
NVNT	ac20	5825	Ant1	17.55	0.5	Pass
NVNT	ac40	5755	Ant1	36.32	0.5	Pass
NVNT	ac40	5795	Ant1	36.31	0.5	Pass
NVNT	ax20	5745	Ant1	18.64	0.5	Pass
NVNT	ax20	5785	Ant1	19.01	0.5	Pass
NVNT	ax20	5825	Ant1	19.1	0.5	Pass
NVNT	ax40	5755	Ant1	37.92	0.5	Pass
NVNT	ax40	5795	Ant1	38.01	0.5	Pass



-6dB Bandwidth NVNT a 5745MHz Ant1



-6dB Bandwidth NVNT a 5785MHz Ant1



-6dB Bandwidth NVNT a 5825MHz Ant1



-6dB Bandwidth NVNT n20 5745MHz Ant1



-6dB Bandwidth NVNT n20 5785MHz Ant1



-6dB Bandwidth NVNT n20 5825MHz Ant1



-6dB Bandwidth NVNT n40 5755MHz Ant1



-6dB Bandwidth NVNT n40 5795MHz Ant1



-6dB Bandwidth NVNT ac20 5745MHz Ant1



-6dB Bandwidth NVNT ac20 5785MHz Ant1



-6dB Bandwidth NVNT ac20 5825MHz Ant1



-6dB Bandwidth NVNT ac40 5755MHz Ant1



-6dB Bandwidth NVNT ac40 5795MHz Ant1



-6dB Bandwidth NVNT ax20 5745MHz Ant1



-6dB Bandwidth NVNT ax20 5785MHz Ant1



-6dB Bandwidth NVNT ax20 5825MHz Ant1



-6dB Bandwidth NVNT ax40 5755MHz Ant1



-6dB Bandwidth NVNT ax40 5795MHz Ant1

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.61
NVNT	a	5785	Ant1	16.618
NVNT	a	5825	Ant1	16.63
NVNT	n20	5745	Ant1	17.92
NVNT	n20	5785	Ant1	17.873
NVNT	n20	5825	Ant1	17.733
NVNT	n40	5755	Ant1	36.508
NVNT	n40	5795	Ant1	36.505
NVNT	ac20	5745	Ant1	17.727
NVNT	ac20	5785	Ant1	17.714
NVNT	ac20	5825	Ant1	17.777
NVNT	ac40	5755	Ant1	36.393
NVNT	ac40	5795	Ant1	36.431
NVNT	ax20	5745	Ant1	18.941
NVNT	ax20	5785	Ant1	19.067
NVNT	ax20	5825	Ant1	19.102
NVNT	ax40	5755	Ant1	37.786
NVNT	ax40	5795	Ant1	37.991



OBW NVNT a 5745MHz Ant1



OBW NVNT a 5785MHz Ant1



OBW NVNT a 5825MHz Ant1



OBW NVNT n20 5745MHz Ant1



OBW NVNT n20 5785MHz Ant1



OBW NVNT n20 5825MHz Ant1



OBW NVNT n40 5755MHz Ant1



OBW NVNT n40 5795MHz Ant1



OBW NVNT ac20 5745MHz Ant1



OBW NVNT ac20 5785MHz Ant1



OBW NVNT ac20 5825MHz Ant1



OBW NVNT ac40 5755MHz Ant1



OBW NVNT ac40 5795MHz Ant1




OBW NVNT ax20 5745MHz Ant1



OBW NVNT ax20 5785MHz Ant1



OBW NVNT ax20 5825MHz Ant1

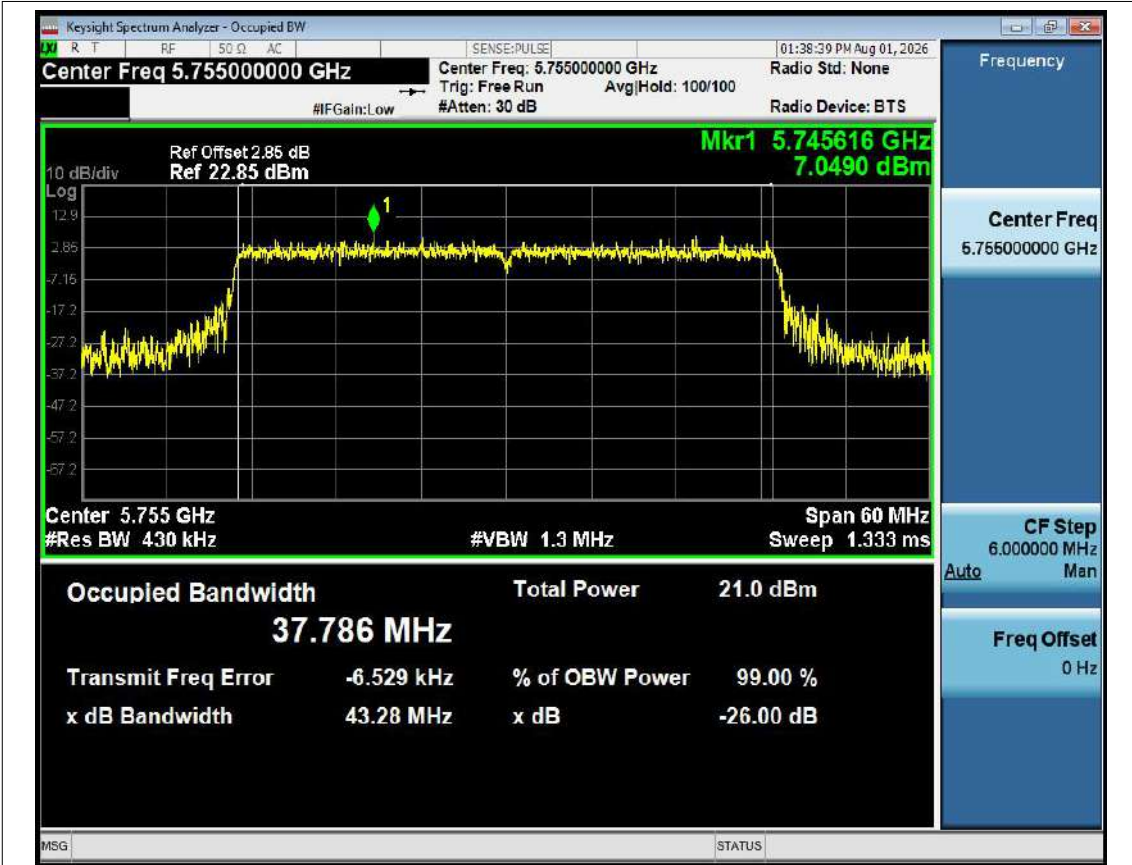

OBW NVNT ax40 5755MHz Ant1



OBW NVNT ax40 5795MHz Ant1

Maximum Power Spectral Density Level

Condi tion	Mod e	Frequen cy (MHz)	Anten na	Conducted PSD (dBm/510k Hz)	Duty Fact or (dB)	Total Conducted PSD (dBm/510k Hz)	Limit Conducted(dBm/500 kHz)	Verdi ct
NVNT	a	5745	Ant1	-7.94	9.11	1.17	30	Pass
NVNT	a	5785	Ant1	-6.91	9.11	2.2	30	Pass
NVNT	a	5825	Ant1	-6.93	9.11	2.18	30	Pass
NVNT	n20	5745	Ant1	-3.52	4.73	1.22	30	Pass
NVNT	n20	5785	Ant1	-3.92	4.71	0.79	30	Pass
NVNT	n20	5825	Ant1	-3.16	4.73	1.57	30	Pass
NVNT	n40	5755	Ant1	-6.6	4.84	-1.76	30	Pass
NVNT	n40	5795	Ant1	-6.82	4.84	-1.98	30	Pass
NVNT	ac20	5745	Ant1	-3.21	4.73	1.53	30	Pass
NVNT	ac20	5785	Ant1	-3.35	4.76	1.41	30	Pass
NVNT	ac20	5825	Ant1	-3.54	4.71	1.17	30	Pass
NVNT	ac40	5755	Ant1	-6.71	4.83	-1.88	30	Pass
NVNT	ac40	5795	Ant1	-6.24	4.83	-1.41	30	Pass
NVNT	ax20	5745	Ant1	-4.27	5.54	1.27	30	Pass
NVNT	ax20	5785	Ant1	-4.71	5.54	0.83	30	Pass
NVNT	ax20	5825	Ant1	-4.84	5.52	0.68	30	Pass
NVNT	ax40	5755	Ant1	-7.1	5.58	-1.52	30	Pass
NVNT	ax40	5795	Ant1	-7.38	5.52	-1.86	30	Pass



PSD NVNT a 5745MHz Ant1



PSD NVNT a 5785MHz Ant1



PSD NVNT a 5825MHz Ant1



PSD NVNT n20 5745MHz Ant1



PSD NVNT n20 5785MHz Ant1



PSD NVNT n20 5825MHz Ant1



PSD NVNT n40 5755MHz Ant1



PSD NVNT n40 5795MHz Ant1



PSD NVNT ac20 5745MHz Ant1



PSD NVNT ac20 5785MHz Ant1



PSD NVNT ac20 5825MHz Ant1



PSD NVNT ac40 5755MHz Ant1



PSD NVNT ac40 5795MHz Ant1



PSD NVNT ax20 5745MHz Ant1



PSD NVNT ax20 5785MHz Ant1



PSD NVNT ax20 5825MHz Ant1



PSD NVNT ax40 5755MHz Ant1



PSD NVNT ax40 5795MHz Ant1

Frequency Stability

Condition	Antenna	Modulation	Frequency (MHz)	Fc(MHz)	PPM	Limit(MHz)	Result
50degrees C&3.70V	ANT1	802.11a	5745.00	5744.9	-17.406	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11a	5745.00	5744.964	-6.266	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11a	5745.00	5744.956	-7.659	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11a	5745.00	5744.968	-5.570	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11a	5745.00	5744.962	-6.614	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11a	5745.00	5744.896	-18.103	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11a	5785.00	5784.902	-16.940	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11a	5785.00	5784.958	-7.260	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11a	5785.00	5784.954	-7.952	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11a	5785.00	5784.966	-5.877	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11a	5785.00	5784.93	-12.100	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11a	5785.00	5784.912	-15.212	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11a	5825.00	5824.91	-15.451	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11a	5825.00	5825.016	2.747	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11a	5825.00	5824.996	-0.687	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11a	5825.00	5825.01	1.717	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11a	5825.00	5824.986	-2.403	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11a	5825.00	5824.992	-1.373	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11n(HT20)	5745.00	5744.978	-3.829	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11n(HT20)	5745.00	5744.954	-8.007	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11n(HT20)	5745.00	5744.95	-8.703	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11n(HT20)	5745.00	5744.94	-10.444	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11n(HT20)	5745.00	5744.946	-9.399	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11n(HT20)	5745.00	5744.926	-12.881	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11n(HT20)	5785.00	5784.914	-14.866	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11n(HT20)	5785.00	5784.98	-3.457	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11n(HT20)	5785.00	5784.94	-10.372	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11n(HT20)	5785.00	5784.922	-13.483	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11n(HT20)	5785.00	5784.954	-7.952	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11n(HT20)	5785.00	5784.91	-15.557	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11n(HT20)	5825.00	5824.998	-0.343	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11n(HT20)	5825.00	5824.976	-4.120	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11n(HT20)	5825.00	5824.98	-3.433	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11n(HT20)	5825.00	5824.972	-4.807	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11n(HT20)	5825.00	5824.946	-9.270	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11n(HT20)	5825.00	5824.962	-6.524	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11ac(VHT20)	5745.00	5744.896	-18.103	5725~5850	Pass

20degrees C&3.70V	ANT1	802.11ac(VHT20)	5745.00	5744.968	-5.570	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11ac(VHT20)	5745.00	5744.946	-9.399	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11ac(VHT20)	5745.00	5744.92	-13.925	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11ac(VHT20)	5745.00	5744.94	-10.444	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11ac(VHT20)	5745.00	5744.91	-15.666	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11ac(VHT20)	5785.00	5784.975	-4.322	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11ac(VHT20)	5785.00	5784.902	-16.940	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11ac(VHT20)	5785.00	5784.892	-18.669	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11ac(VHT20)	5785.00	5784.938	-10.717	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11ac(VHT20)	5785.00	5784.947	-9.162	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11ac(VHT20)	5785.00	5784.929	-12.273	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11ac(VHT20)	5825.00	5824.968	-5.494	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11ac(VHT20)	5825.00	5824.95	-8.584	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11ac(VHT20)	5825.00	5824.91	-15.451	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11ac(VHT20)	5825.00	5824.93	-12.017	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11ac(VHT20)	5825.00	5824.906	-16.137	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11ac(VHT20)	5825.00	5824.908	-15.794	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11ax(HE20)	5745.00	5744.976	-4.178	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11ax(HE20)	5745.00	5744.978	-3.829	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11ax(HE20)	5745.00	5744.912	-15.318	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11ax(HE20)	5745.00	5744.982	-3.133	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11ax(HE20)	5745.00	5744.954	-8.007	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11ax(HE20)	5745.00	5744.982	-3.133	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11ax(HE20)	5785.00	5785.022	3.803	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11ax(HE20)	5785.00	5784.976	-4.149	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11ax(HE20)	5785.00	5784.94	-10.372	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11ax(HE20)	5785.00	5784.984	-2.766	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11ax(HE20)	5785.00	5784.948	-8.989	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11ax(HE20)	5785.00	5784.928	-12.446	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11ax(HE20)	5825.00	5825.016	2.747	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11ax(HE20)	5825.00	5824.994	-1.030	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11ax(HE20)	5825.00	5824.97	-5.150	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11ax(HE20)	5825.00	5824.948	-8.927	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11ax(HE20)	5825.00	5824.968	-5.494	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11ax(HE20)	5825.00	5824.936	-10.987	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11n(HT40)	5755.00	5754.952	-8.341	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11n(HT40)	5755.00	5754.932	-11.816	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11n(HT40)	5755.00	5754.912	-15.291	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11n(HT40)	5755.00	5754.964	-6.255	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11n(HT40)	5755.00	5754.904	-16.681	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11n(HT40)	5755.00	5754.918	-14.248	5725~5850	Pass

50degrees C&3.70V	ANT1	802.11n(HT40)	5795.00	5794.984	-2.761	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11n(HT40)	5795.00	5794.964	-6.212	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11n(HT40)	5795.00	5794.948	-8.973	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11n(HT40)	5795.00	5794.944	-9.664	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11n(HT40)	5795.00	5794.924	-13.115	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11n(HT40)	5795.00	5794.988	-2.071	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11ac(VHT40)	5755.00	5754.952	-8.341	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11ac(VHT40)	5755.00	5754.932	-11.816	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11ac(VHT40)	5755.00	5754.92	-13.901	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11ac(VHT40)	5755.00	5754.992	-1.390	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11ac(VHT40)	5755.00	5754.932	-11.816	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11ac(VHT40)	5755.00	5754.928	-12.511	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11ac(VHT40)	5795.00	5795.032	5.522	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11ac(VHT40)	5795.00	5794.996	-0.690	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11ac(VHT40)	5795.00	5794.924	-13.115	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11ac(VHT40)	5795.00	5794.904	-16.566	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11ac(VHT40)	5795.00	5794.944	-9.664	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11ac(VHT40)	5795.00	5794.94	-10.354	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11ax(HE40)	5755.00	5754.896	-18.071	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11ax(HE40)	5755.00	5754.94	-10.426	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11ax(HE40)	5755.00	5754.996	-0.695	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11ax(HE40)	5755.00	5754.98	-3.475	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11ax(HE40)	5755.00	5754.932	-11.816	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11ax(HE40)	5755.00	5754.944	-9.731	5725~5850	Pass
50degrees C&3.70V	ANT1	802.11ax(HE40)	5795.00	5795.056	9.664	5725~5850	Pass
20degrees C&3.70V	ANT1	802.11ax(HE40)	5795.00	5794.976	-4.142	5725~5850	Pass
-20degrees C&3.70V	ANT1	802.11ax(HE40)	5795.00	5794.928	-12.425	5725~5850	Pass
25degrees C&4.07V	ANT1	802.11ax(HE40)	5795.00	5794.92	-13.805	5725~5850	Pass
25degrees C&3.70V	ANT1	802.11ax(HE40)	5795.00	5794.974	-4.487	5725~5850	Pass
25degrees C&3.33V	ANT1	802.11ax(HE40)	5795.00	5794.948	-8.973	5725~5850	Pass