



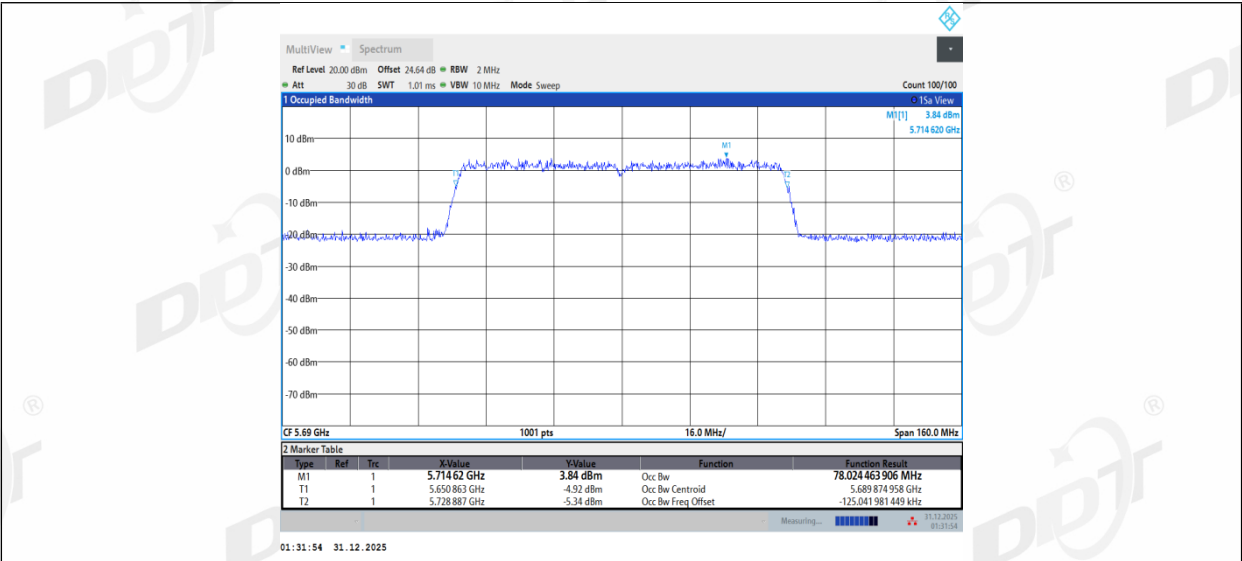


11AC80SISO_Ant1_5775

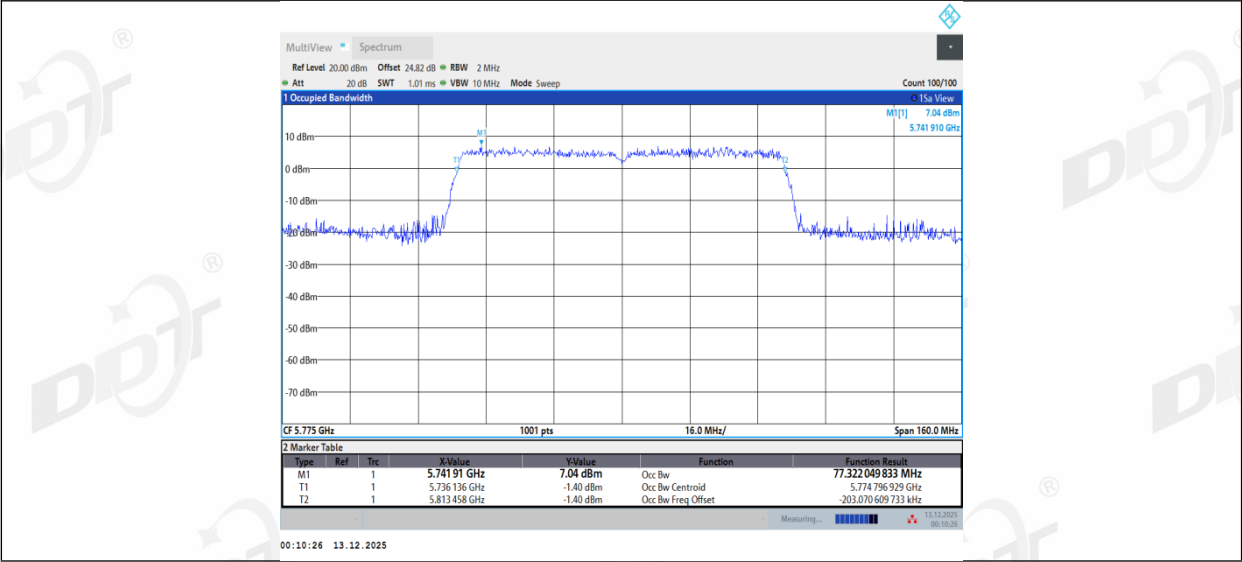

7. Duty Cycle

7.1. Block diagram of test setup

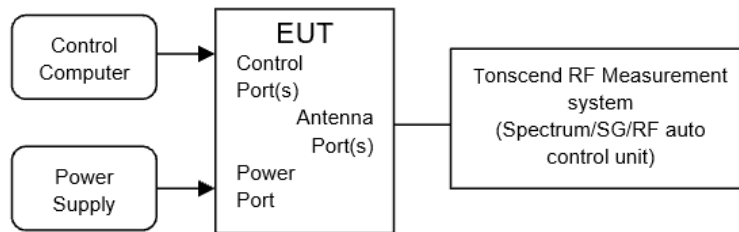

7.2. Limit

Just for Report.

7.3. Test procedure

- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.
set the Spectrum Analyzer as below:
Centre Frequency: The centre frequency of the middle hopping channel.
Resolution BW: 10 MHz.
Video BW: 10 MHz.
Span: Zero span.
Detector: Peak.
Trace Mode: Clear Write.
Sweep: Video Trigger
- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:
$$\text{Duty cycle} = \text{Pulse's on time} / \text{Burst cycle}$$


7.4. Test result


Test Engineer:	Tyang	Test Site:	RF Measurement System 4#
Ambient Condition:	25.6°C,49.8%RH	Test Date:	2025.12.6-2025.12.31
Test Power Supply:	AC 120V/60Hz	Sample Number:	S25081404-004

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5180	1.40	1.59	88.05
		5200	1.40	1.53	91.50
		5240	1.40	1.55	90.32
		5260	1.39	1.57	88.54
		5280	1.40	1.56	89.74
		5320	1.39	1.55	89.68
		5500	1.40	1.56	89.74
		5580	1.40	1.56	89.74
		5700	1.40	1.56	89.74
		5720	1.40	1.55	90.32
		5745	1.39	1.52	91.45
		5785	1.40	1.54	90.91
		5825	1.39	1.54	90.26
		5180	5.09	5.28	96.40
11N20SISO	Ant1	5200	5.09	5.27	96.58
		5240	5.10	5.28	96.59
		5260	5.09	5.30	96.04
		5280	5.10	5.27	96.77
		5320	5.09	5.27	96.58
		5500	5.10	5.30	96.23
		5580	5.10	5.28	96.59
		5700	5.09	5.29	96.22
		5720	5.10	5.27	96.77
		5745	5.09	5.30	96.04
		5785	5.10	5.30	96.23
		5825	5.10	5.30	96.23
		5190	2.47	2.68	92.16
11N40SISO	Ant1	5230	2.47	2.67	92.51
		5270	2.47	2.68	92.16
		5310	2.47	2.67	92.51
		5510	2.47	2.67	92.51
		5550	2.47	2.68	92.16
		5670	2.47	2.66	92.86
		5710	2.47	2.65	93.21
		5755	2.47	2.67	92.51
		5795	2.47	2.68	92.16
		5180	5.10	5.29	96.41
11AC20SISO	Ant1	5200	5.10	5.35	95.33
		5240	5.10	5.36	95.15
		5260	5.10	5.65	90.27
		5280	5.10	5.29	96.41
		5320	5.10	5.29	96.41
		5500	5.10	5.27	96.77
		5580	5.10	5.28	96.59
		5700	5.10	5.29	96.41
		5720	5.10	5.29	96.41
		5745	5.10	5.29	96.41
		5785	5.10	5.29	96.41
		5825	5.10	5.29	96.41
		5190	2.48	2.67	92.88
11AC40SISO	Ant1	5230	2.47	2.66	92.86
		5270	2.48	2.67	92.88
		5310	2.48	2.65	93.58
		5510	2.47	2.66	92.86
		5550	2.48	2.64	93.94
		5190	2.48	2.67	92.88


		5670	2.48	2.68	92.54
		5710	2.48	2.66	93.23
		5755	2.48	2.67	92.88
		5795	2.48	2.65	93.58
11AC80SISO	Ant1	5210	1.17	1.53	76.47
		5290	1.17	1.35	86.67
		5530	1.17	1.35	86.67
		5610	1.17	1.35	86.67
		5690	1.16	1.35	85.93
		5775	1.17	1.35	86.67

7.5. Test graphs

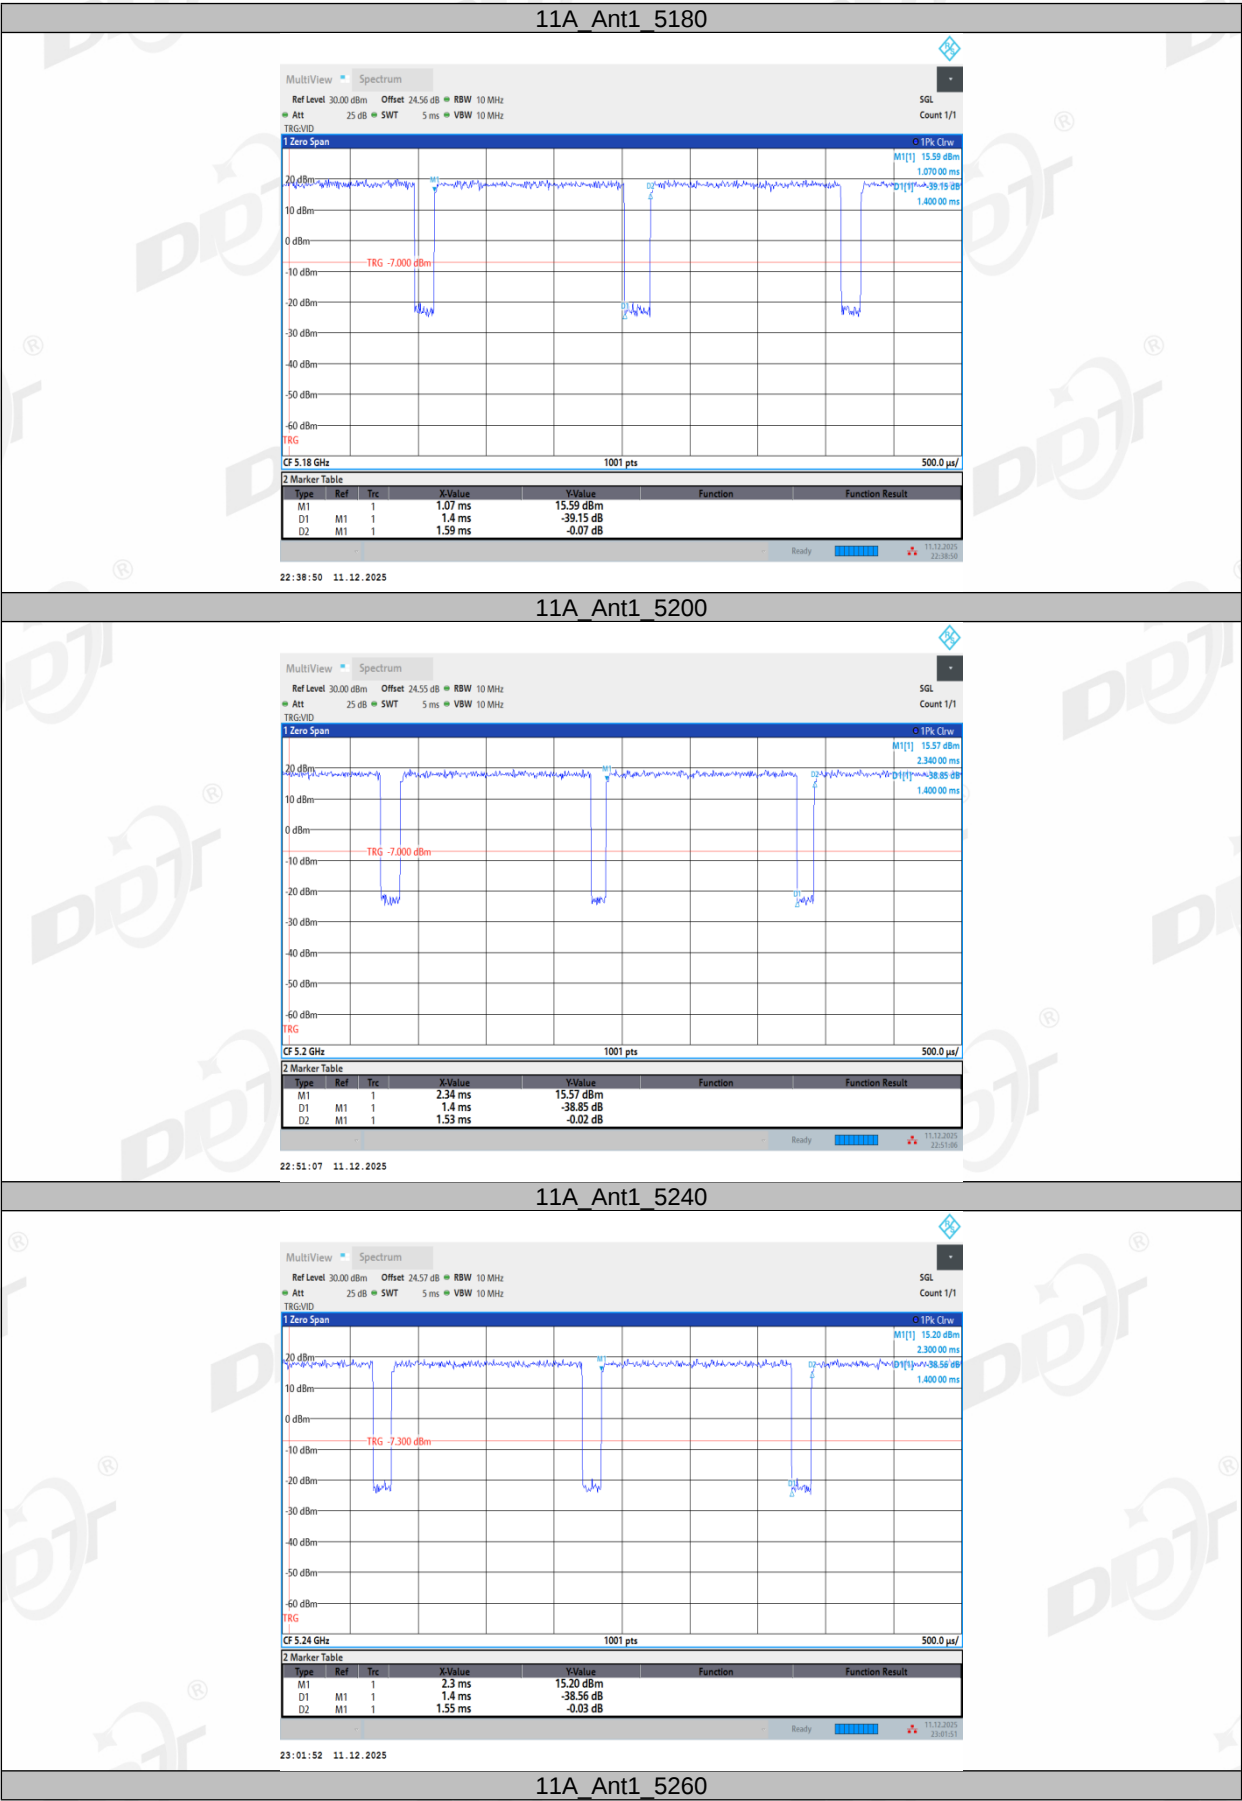


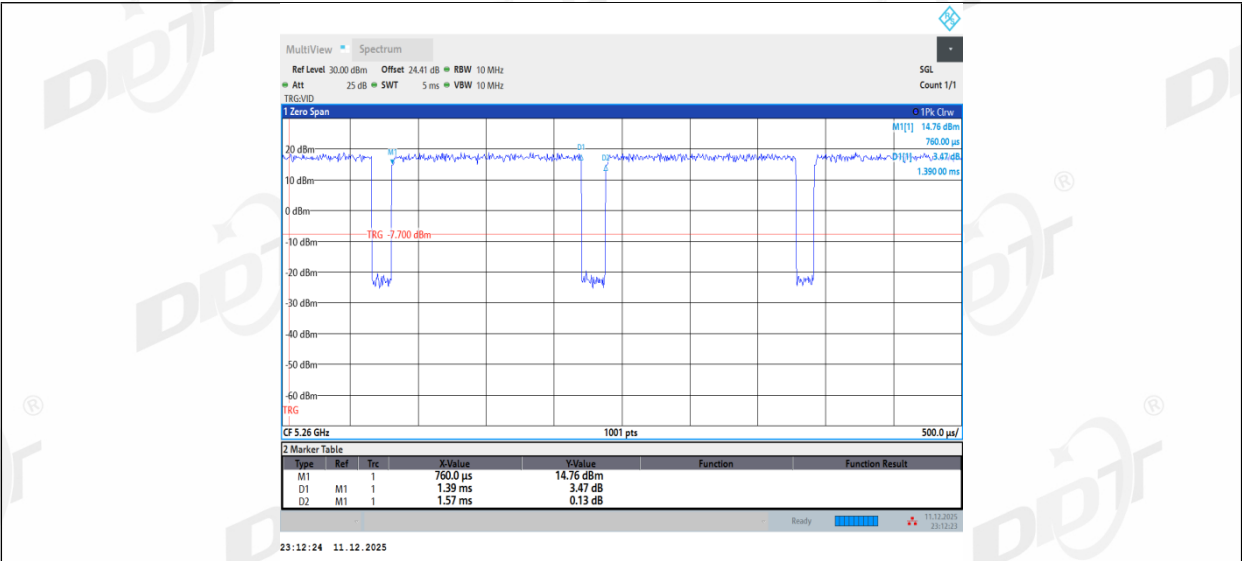


11A_Ant1_5280

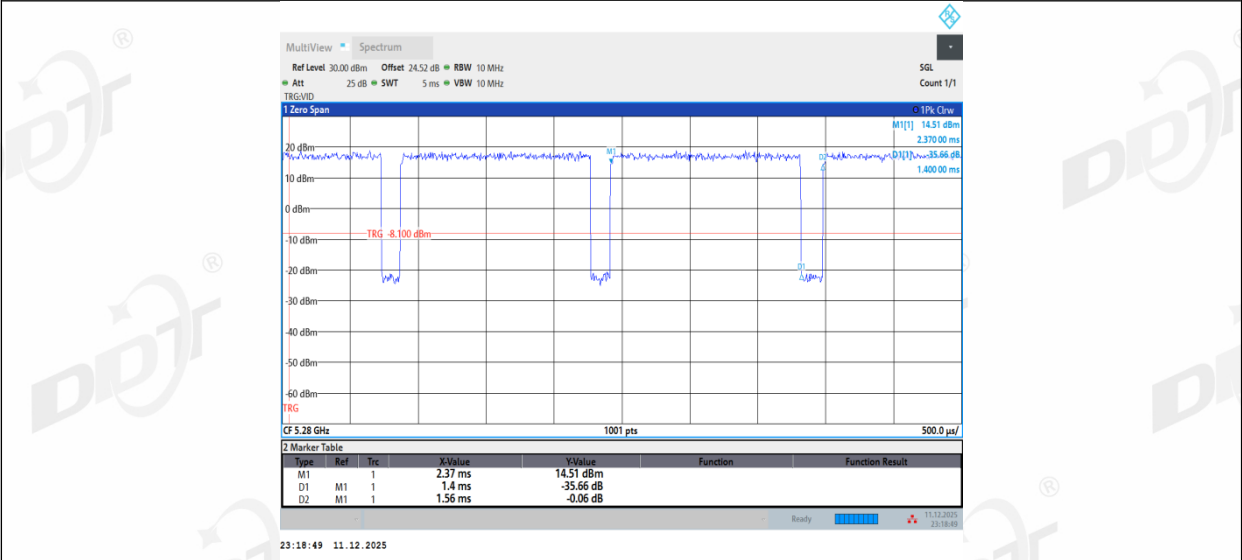


11A_Ant1_5320

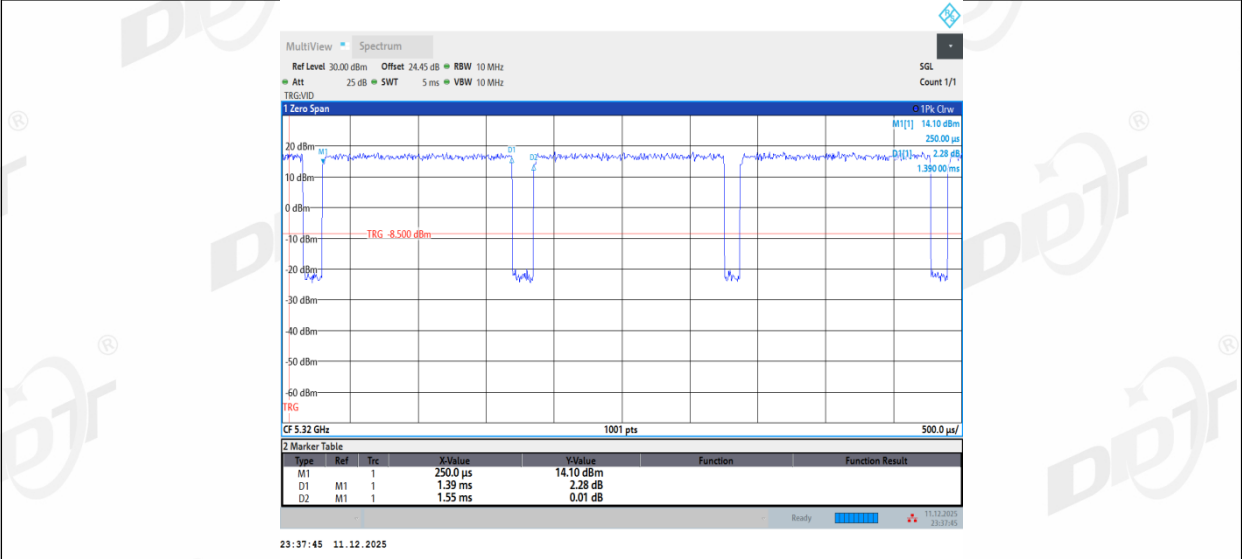


11A_Ant1_5500

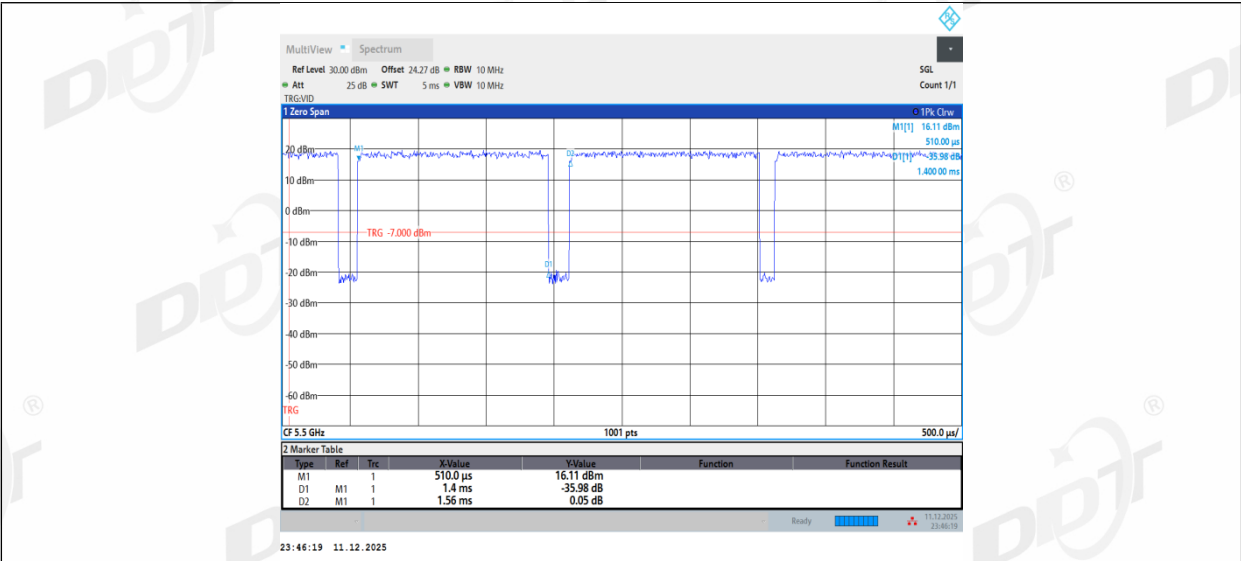


11A_Ant1_5580

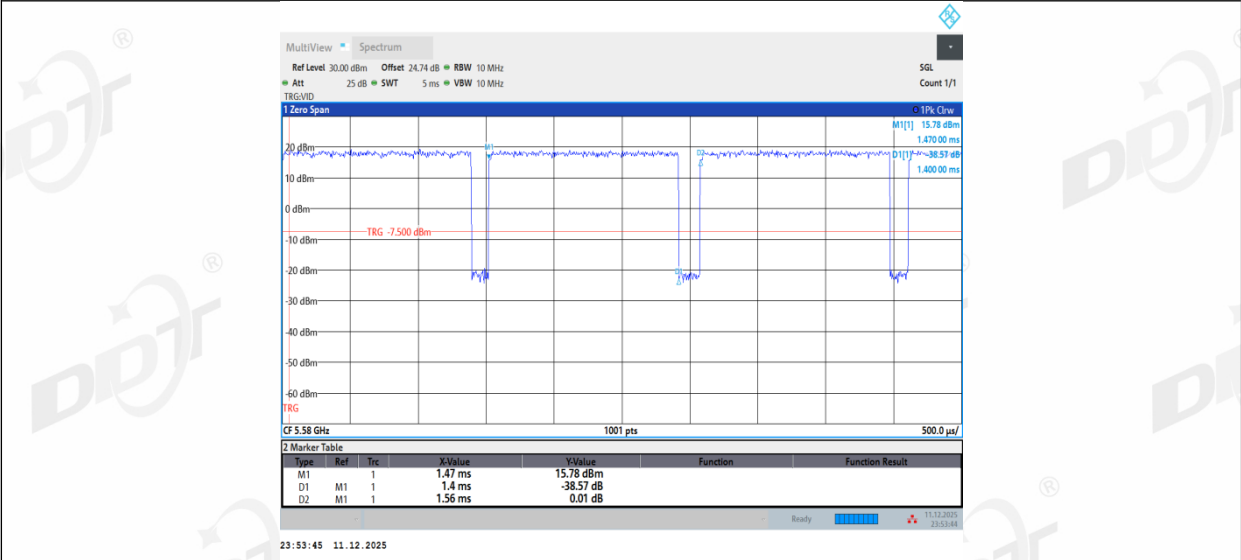


11A_Ant1_5700

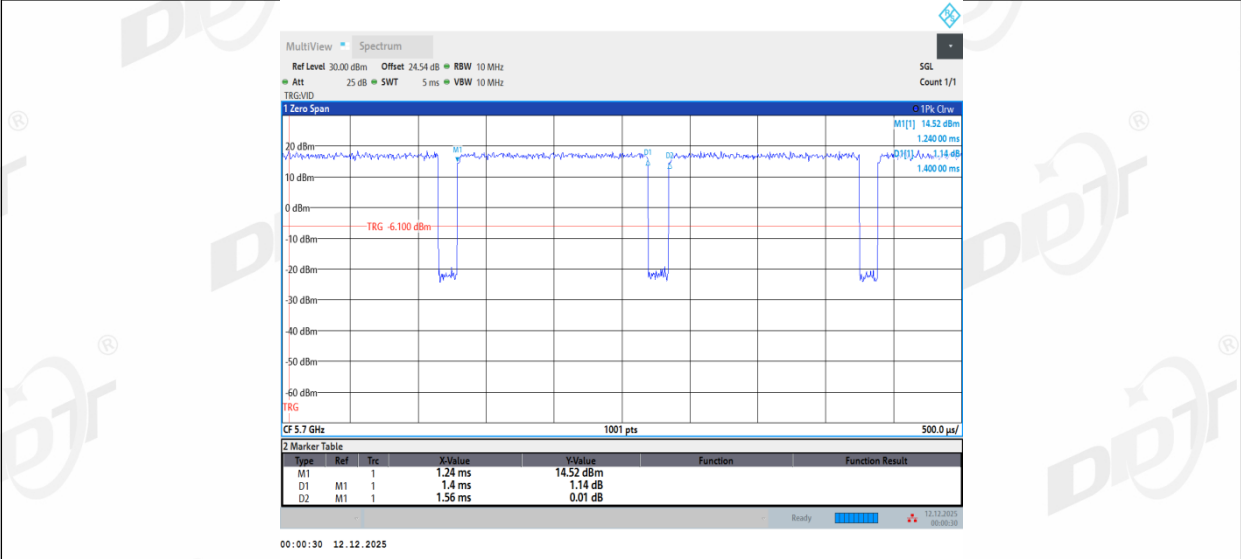


11A_Ant1_5720

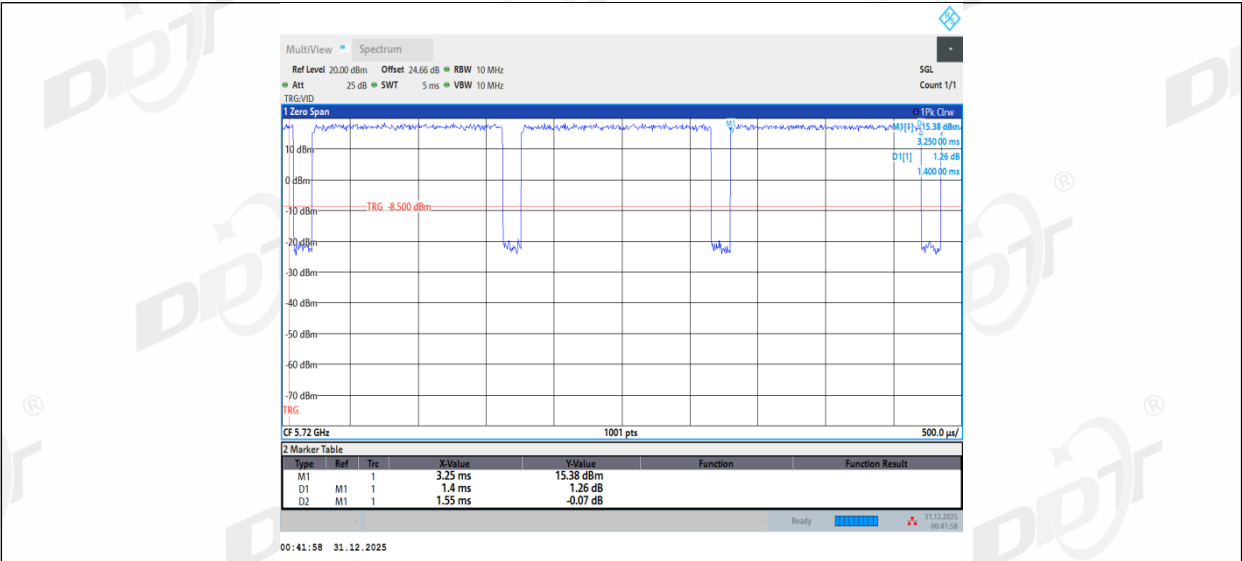


11A_Ant1_5745

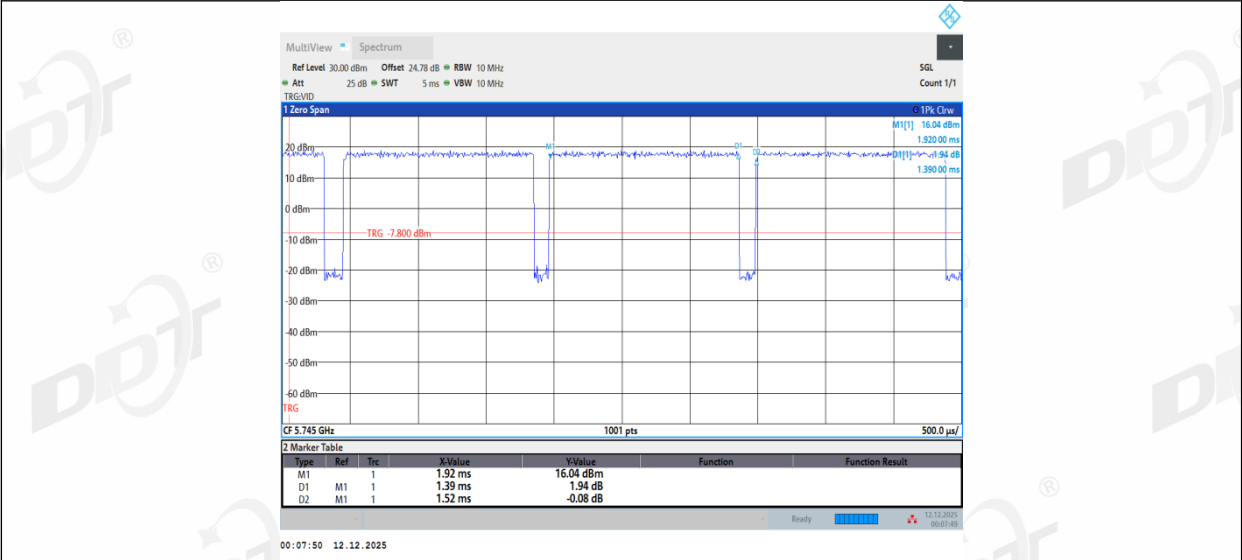


11A_Ant1_5785

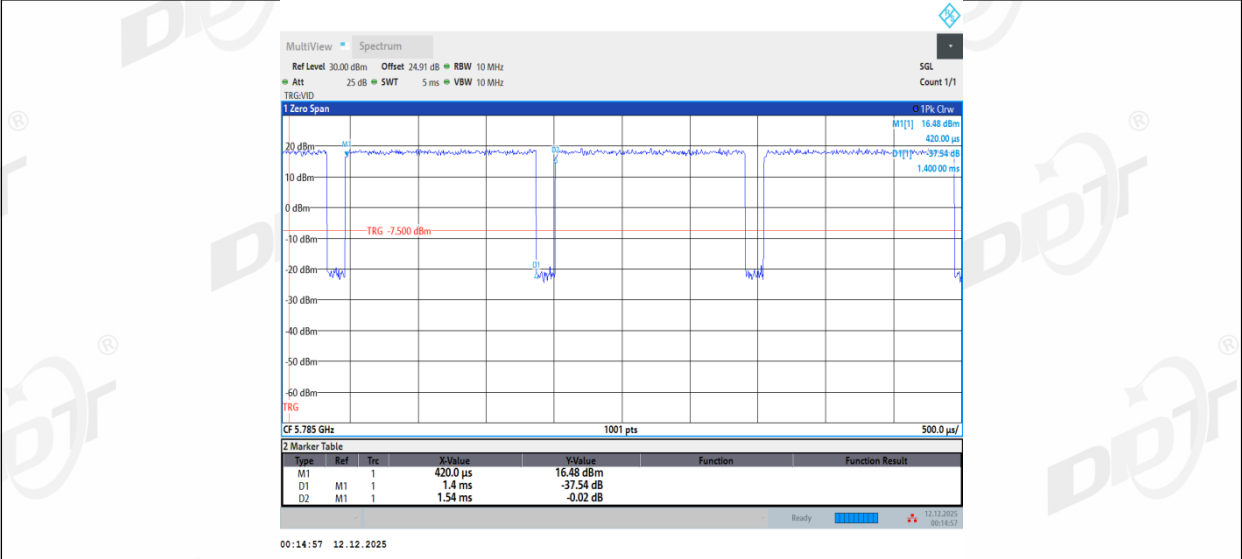


11A_Ant1_5825

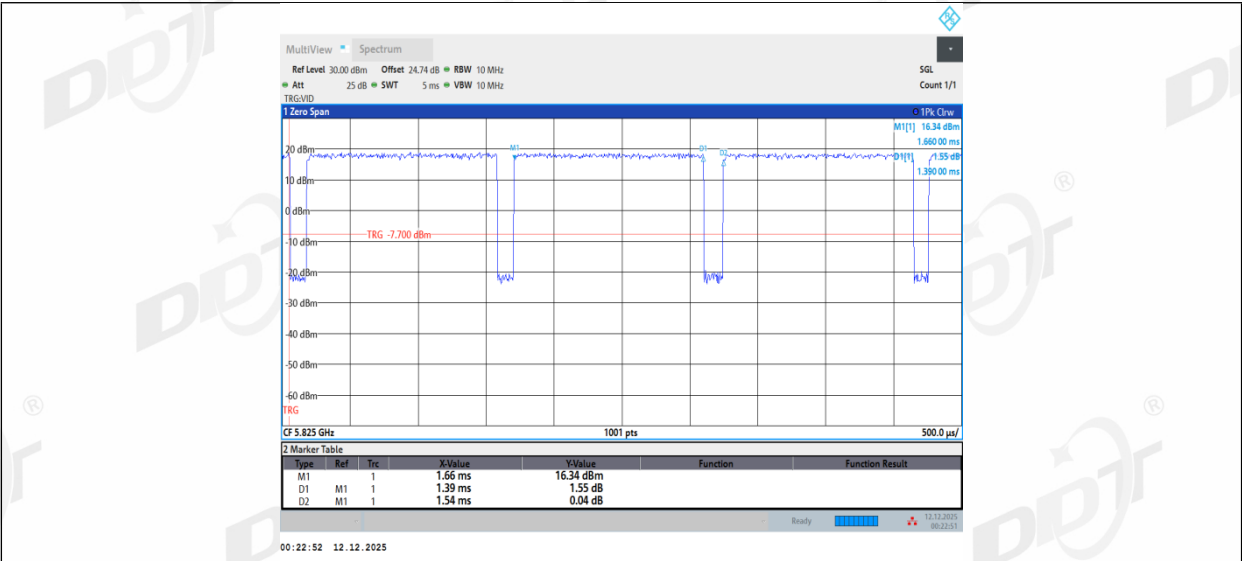


11N20SISO_Ant1_5180

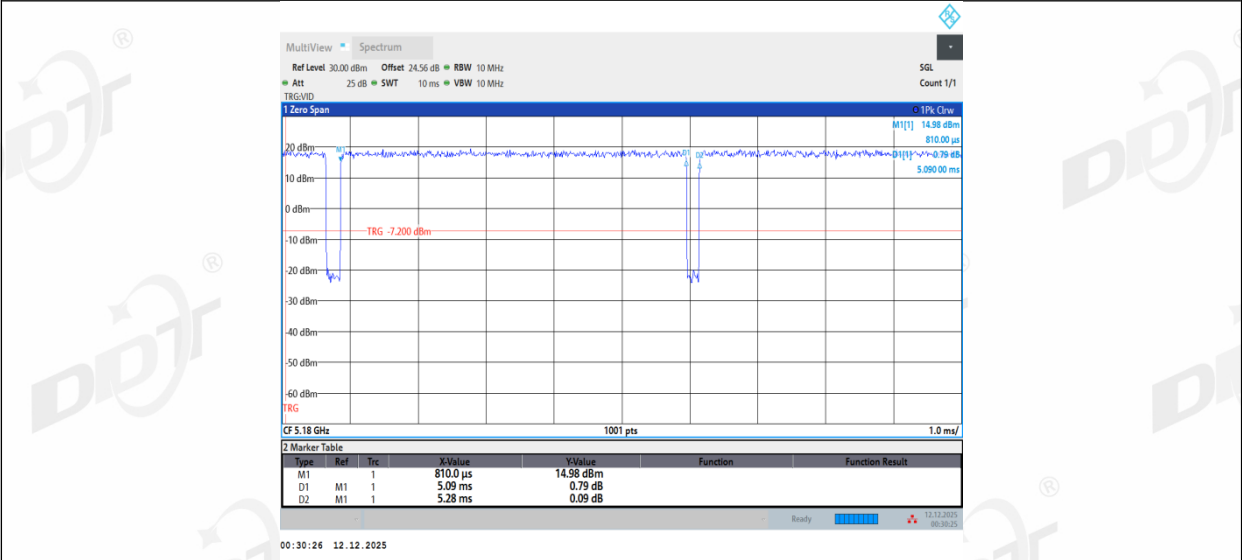


11N20SISO_Ant1_5200

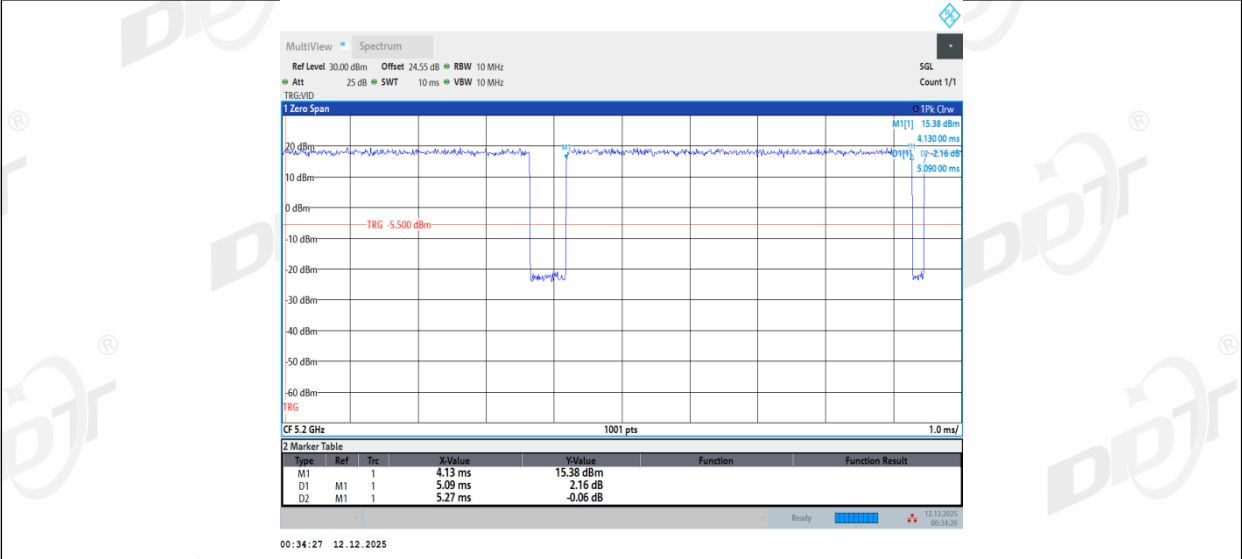


11N20SISO_Ant1_5240

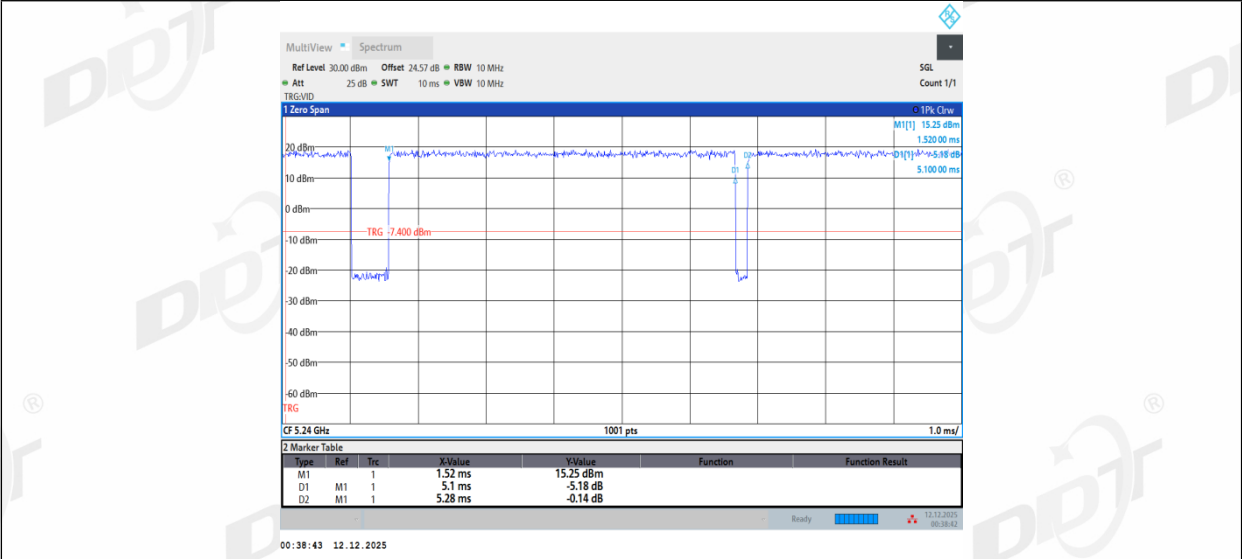


11N20SISO_Ant1_5260

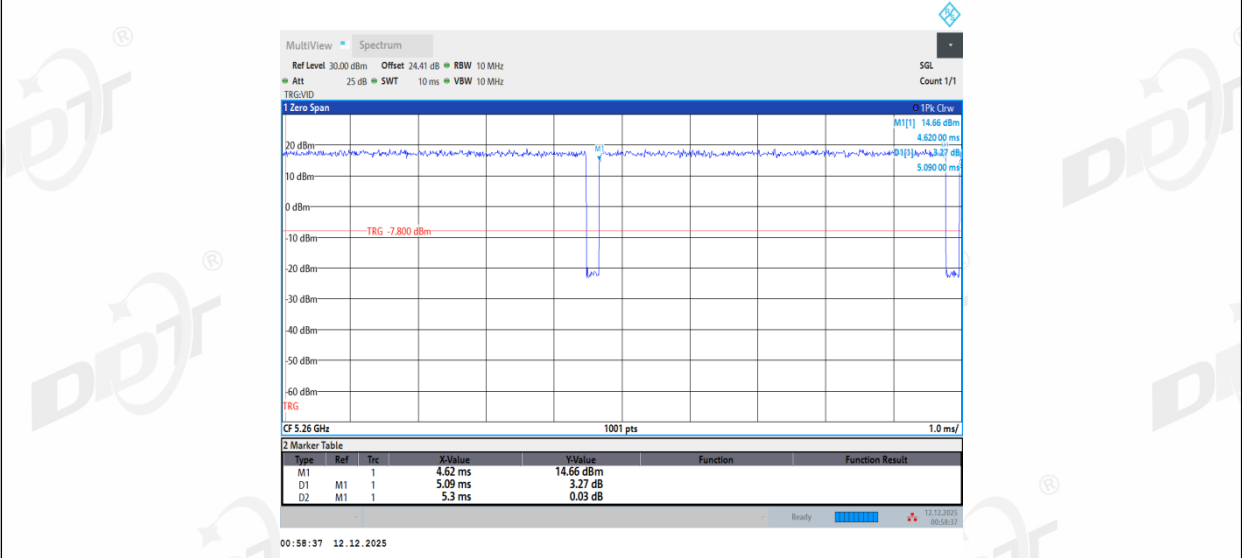


11N20SISO_Ant1_5280

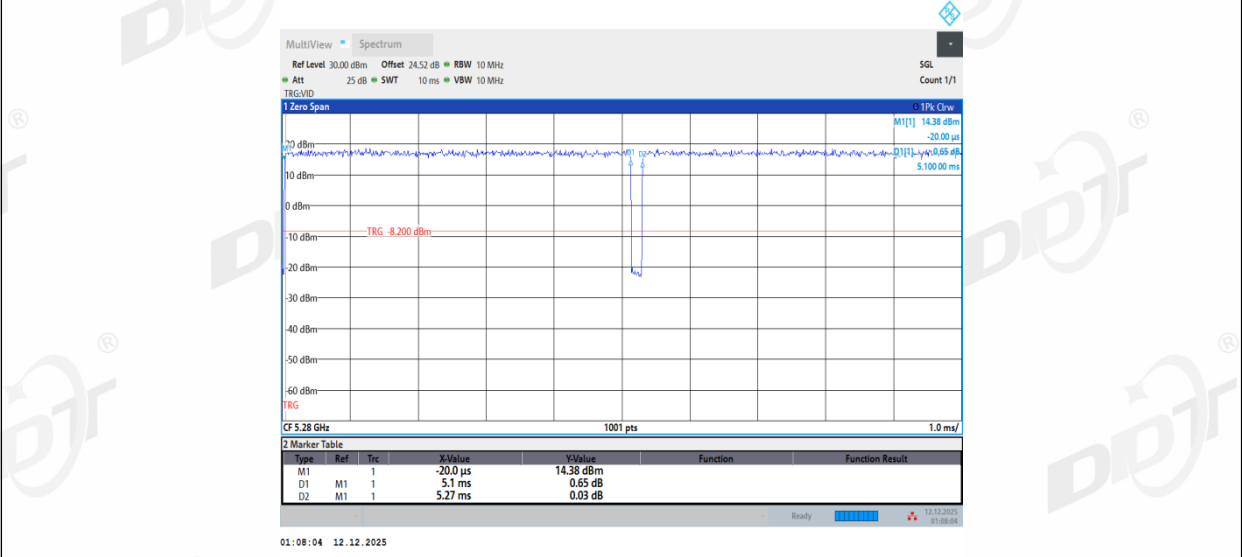


11N20SISO_Ant1_5320

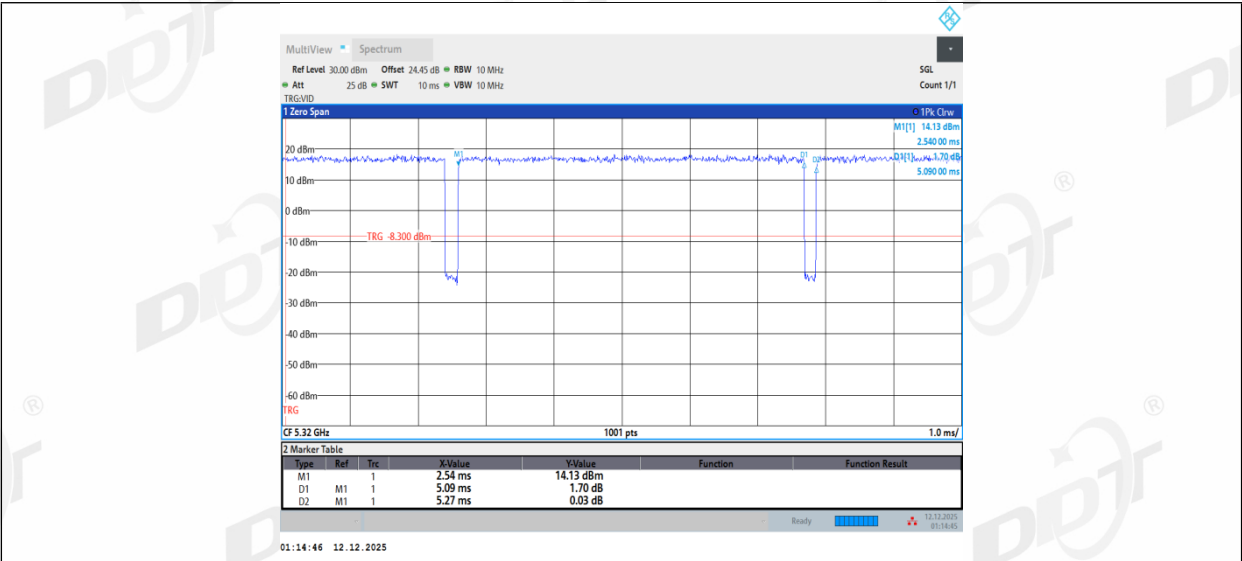


11N20SISO_Ant1_5500

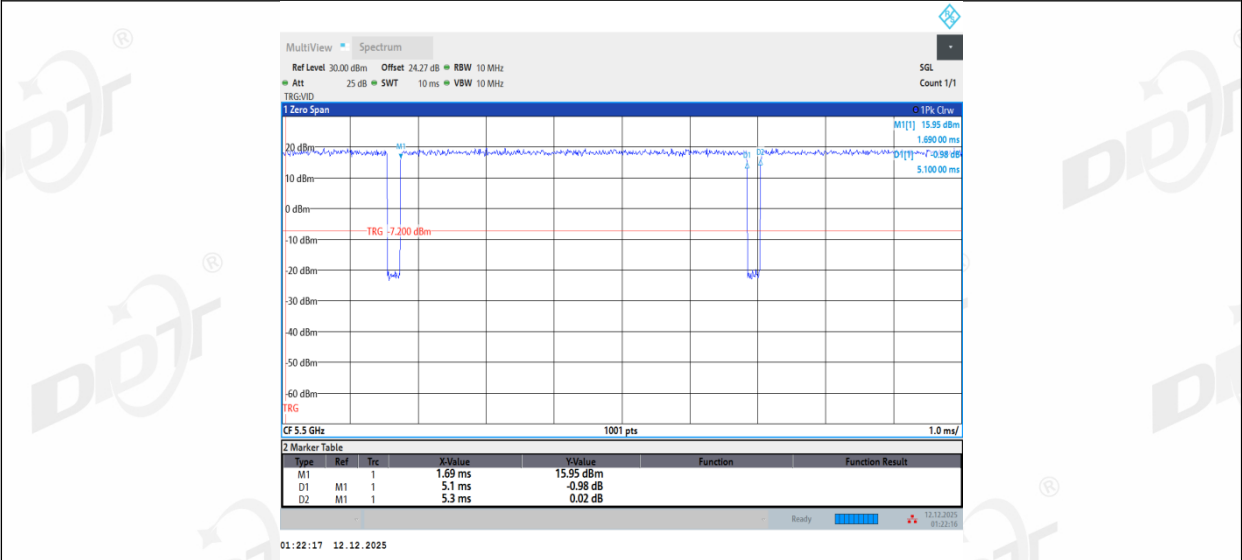


11N20SISO_Ant1_5580

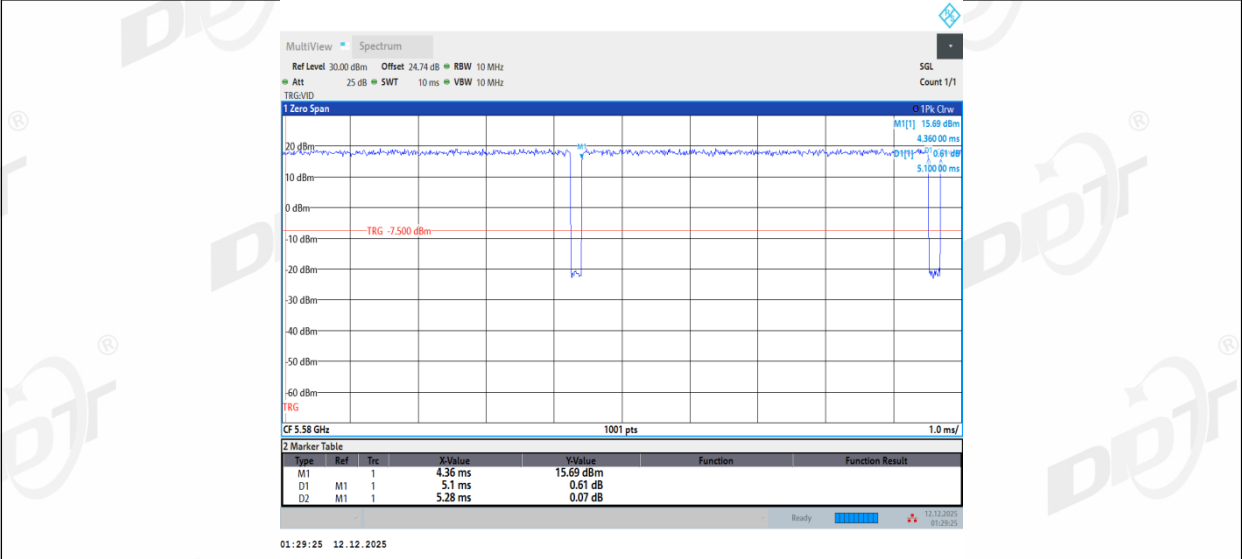


11N20SISO_Ant1_5700

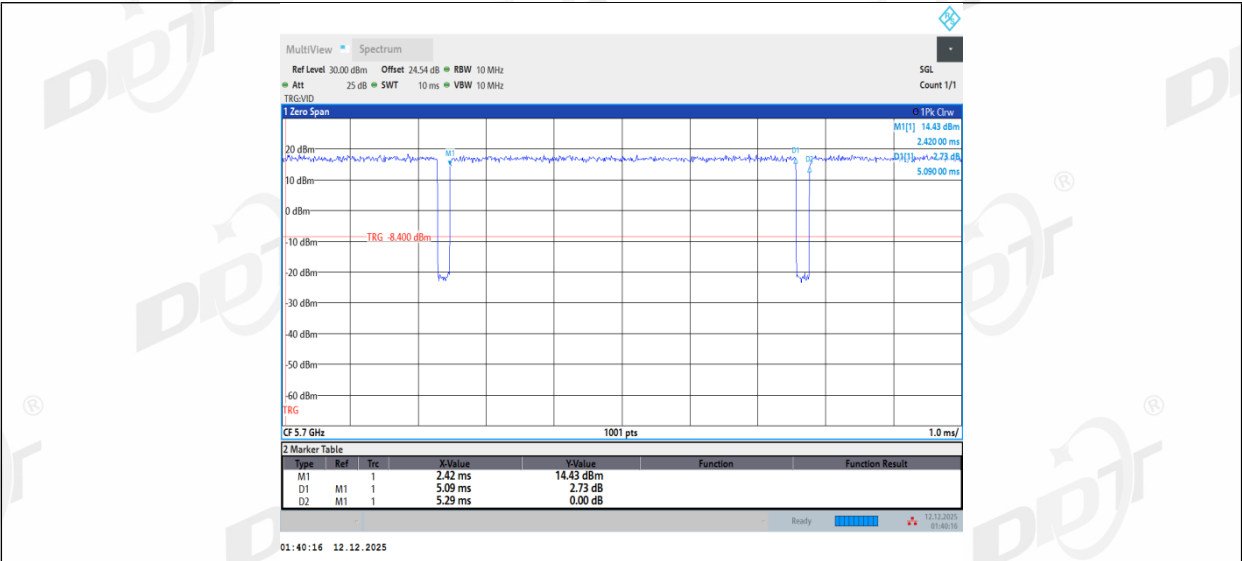


11N20SISO_Ant1_5720

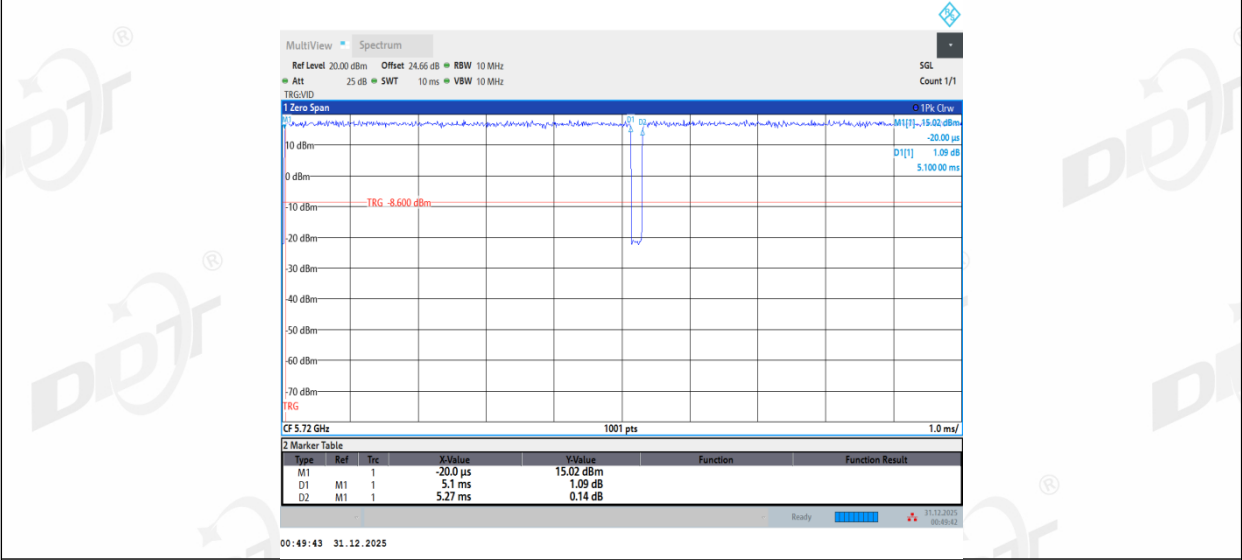


11N20SISO_Ant1_5745

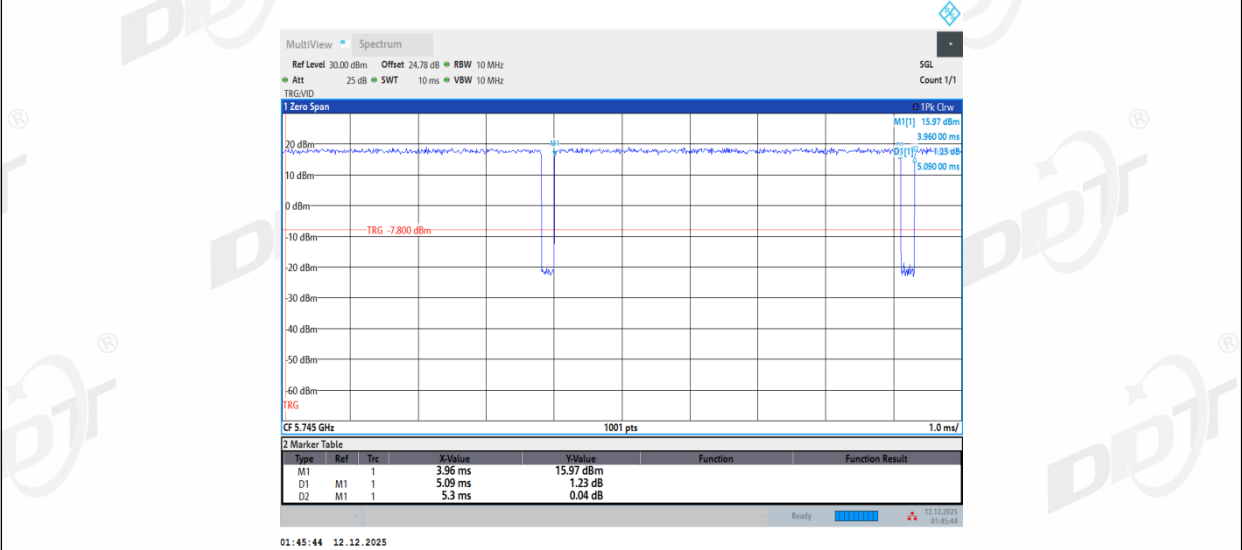


11N20SISO_Ant1_5785

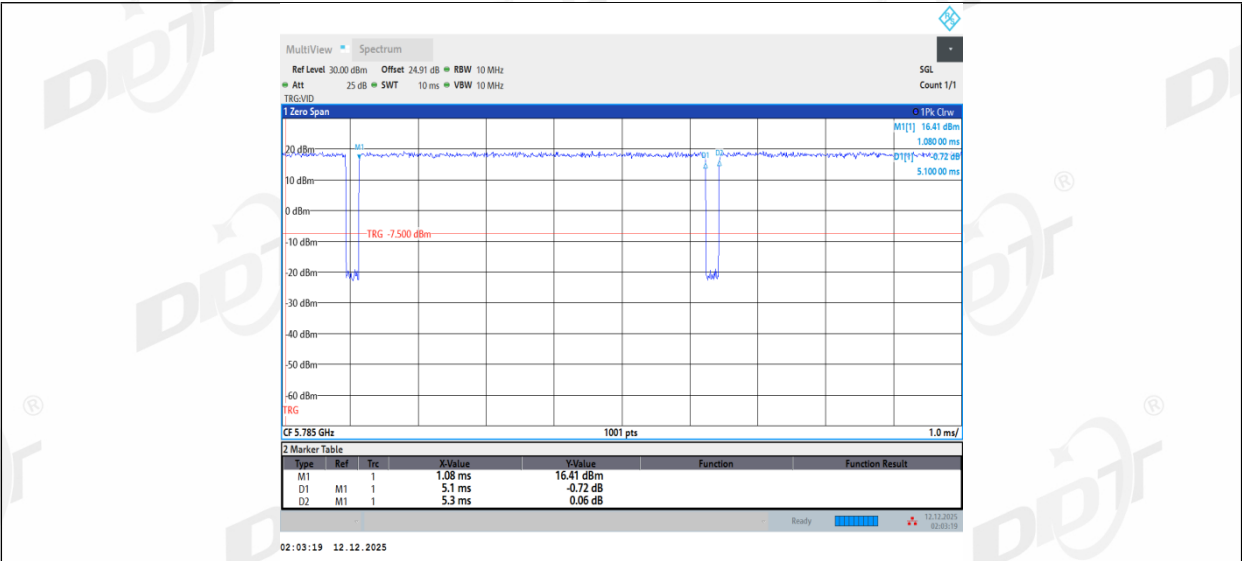


11N20SISO_Ant1_5825

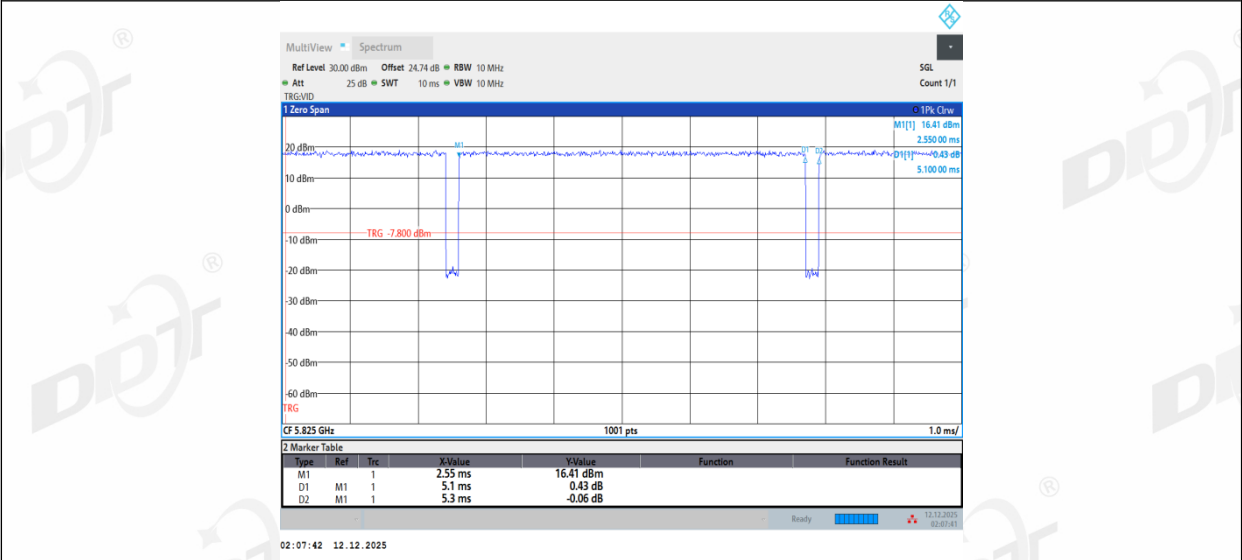


11N40SISO_Ant1_5190

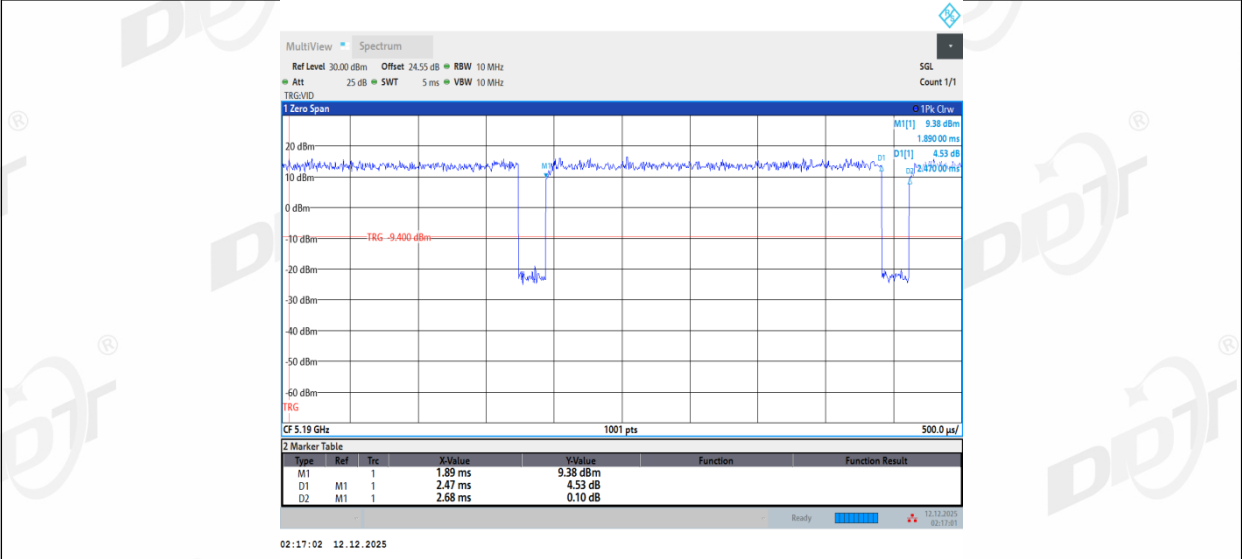


11N40SISO_Ant1_5230

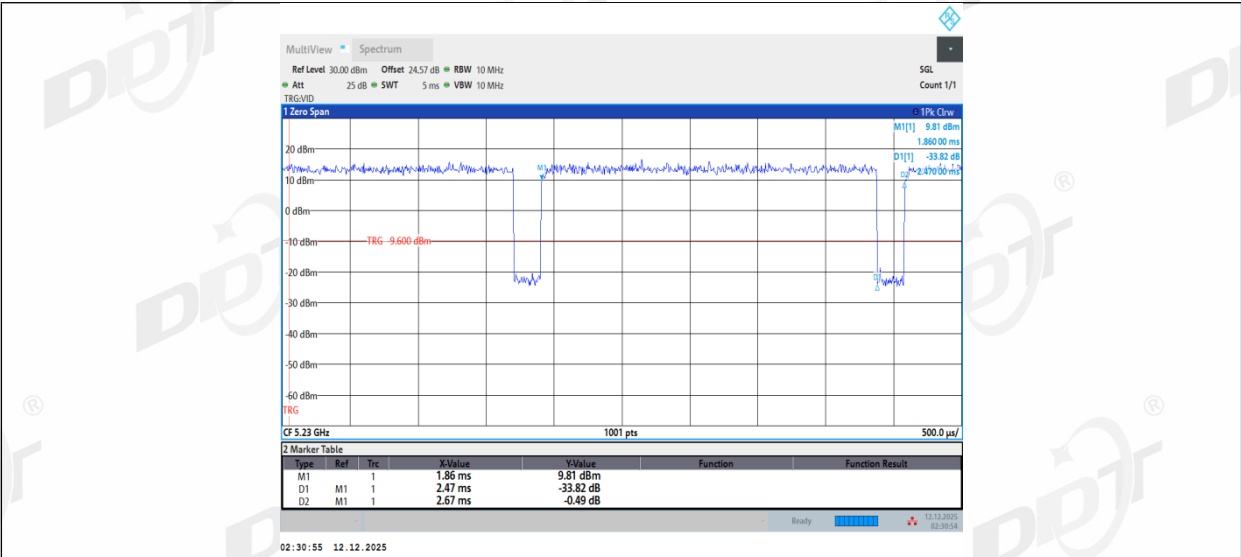


11N40SISO_Ant1_5270

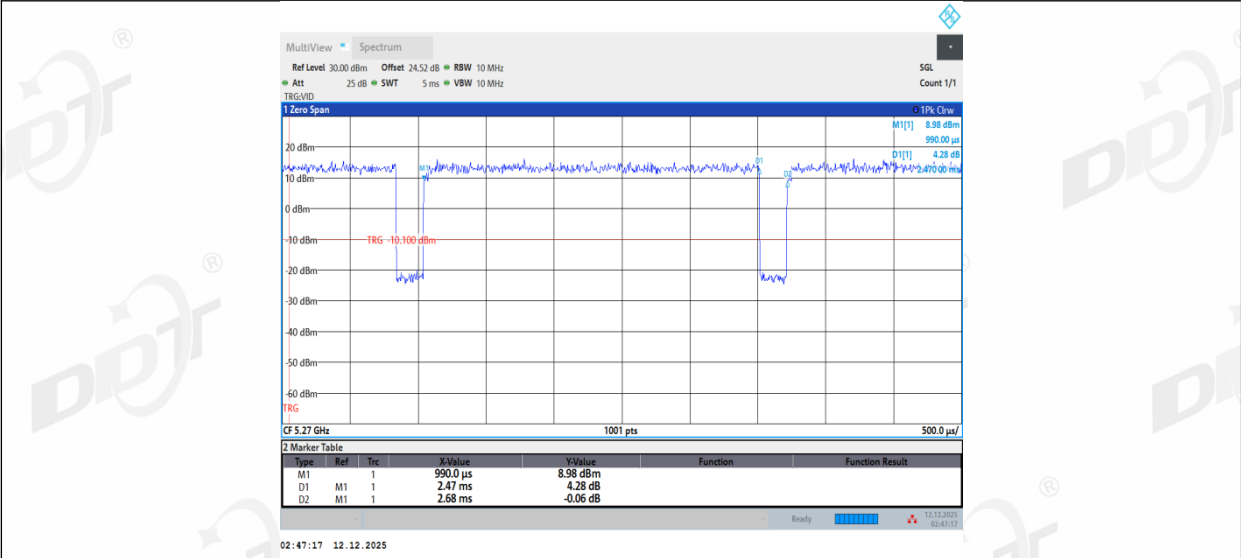


11N40SISO_Ant1_5310

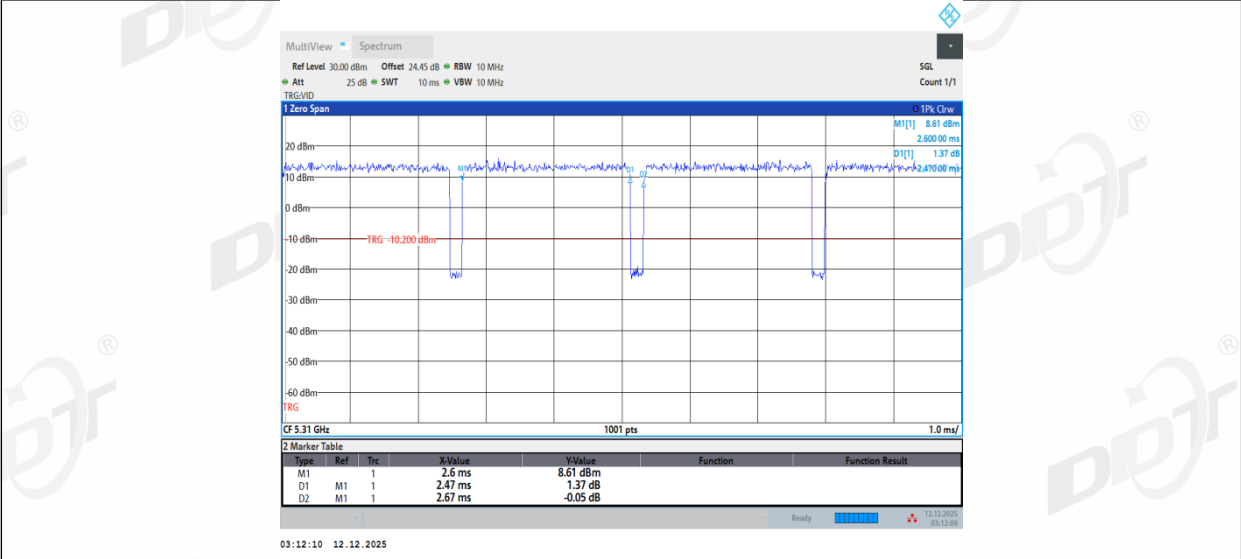


11N40SISO_Ant1_5510

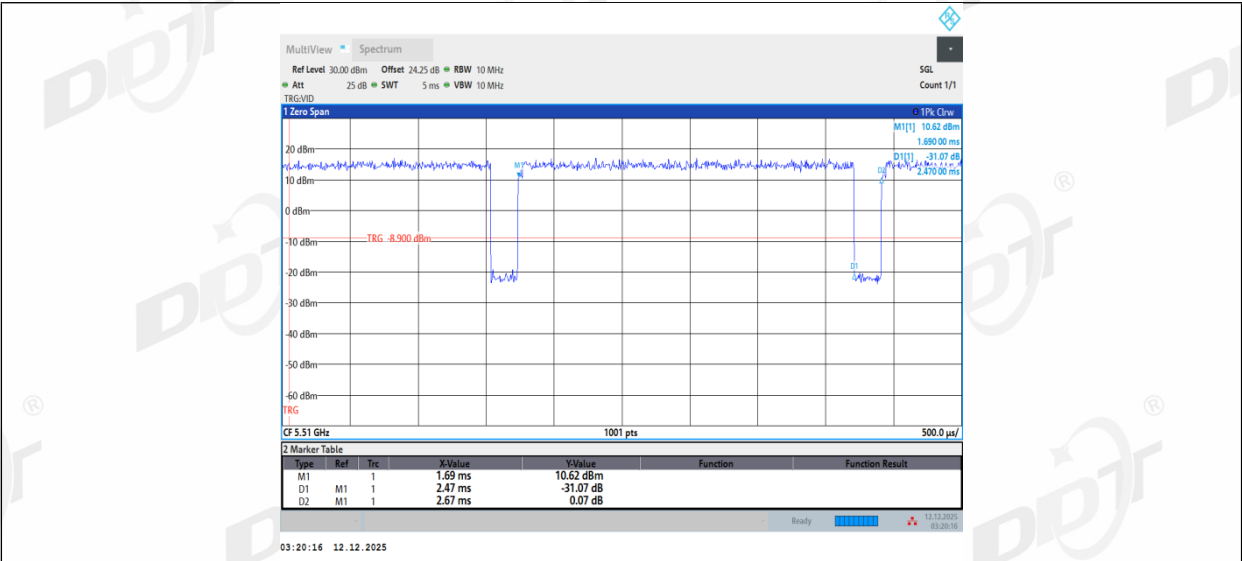


11N40SISO_Ant1_5550

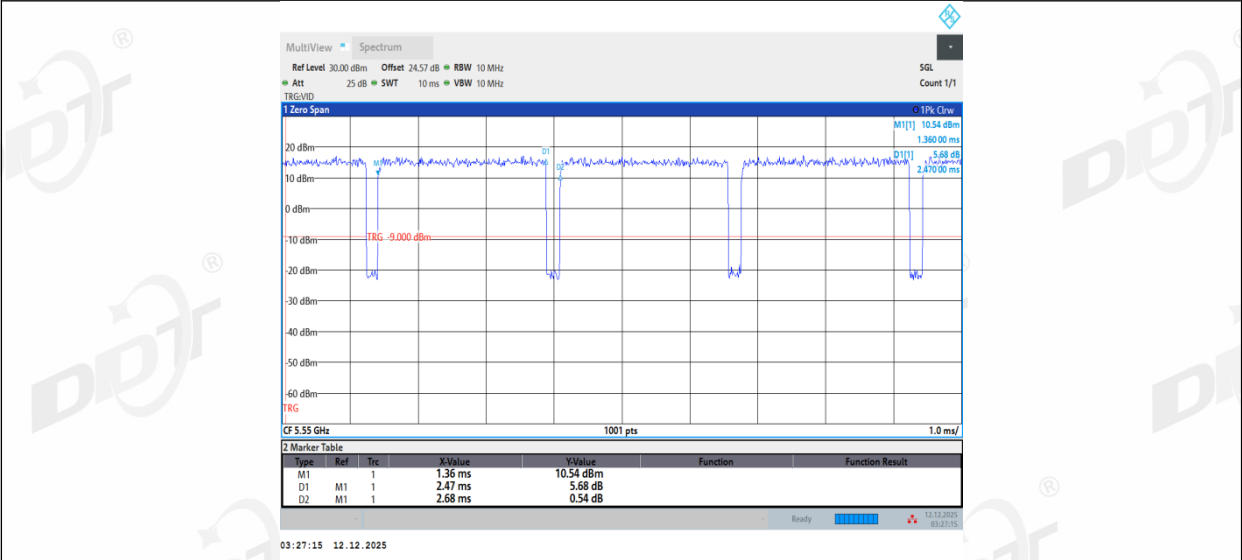


11N40SISO_Ant1_5670

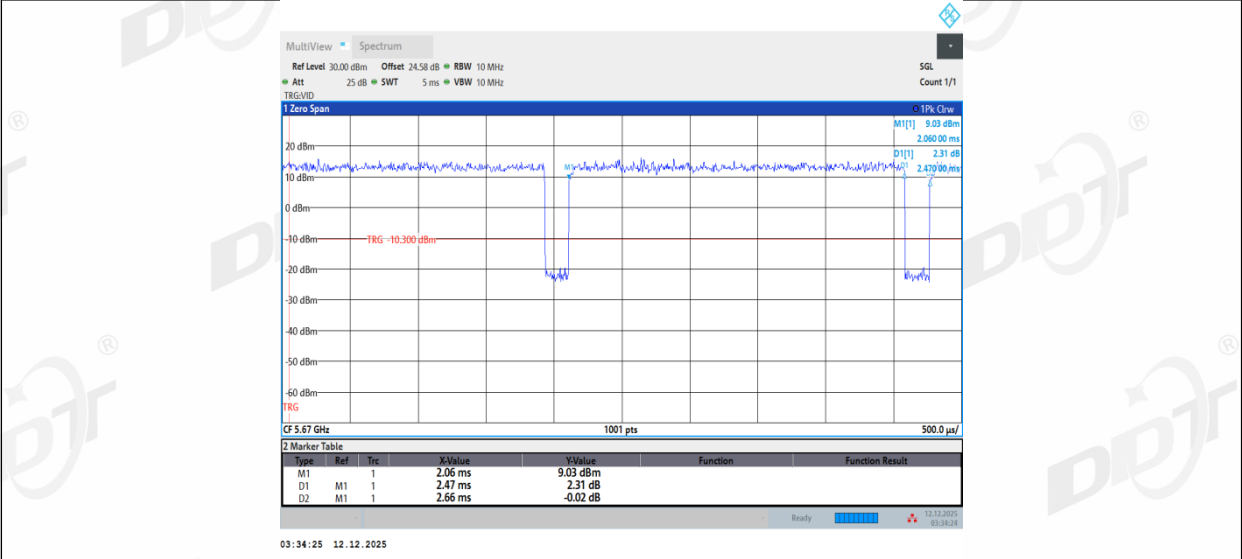


11N40SISO_Ant1_5710

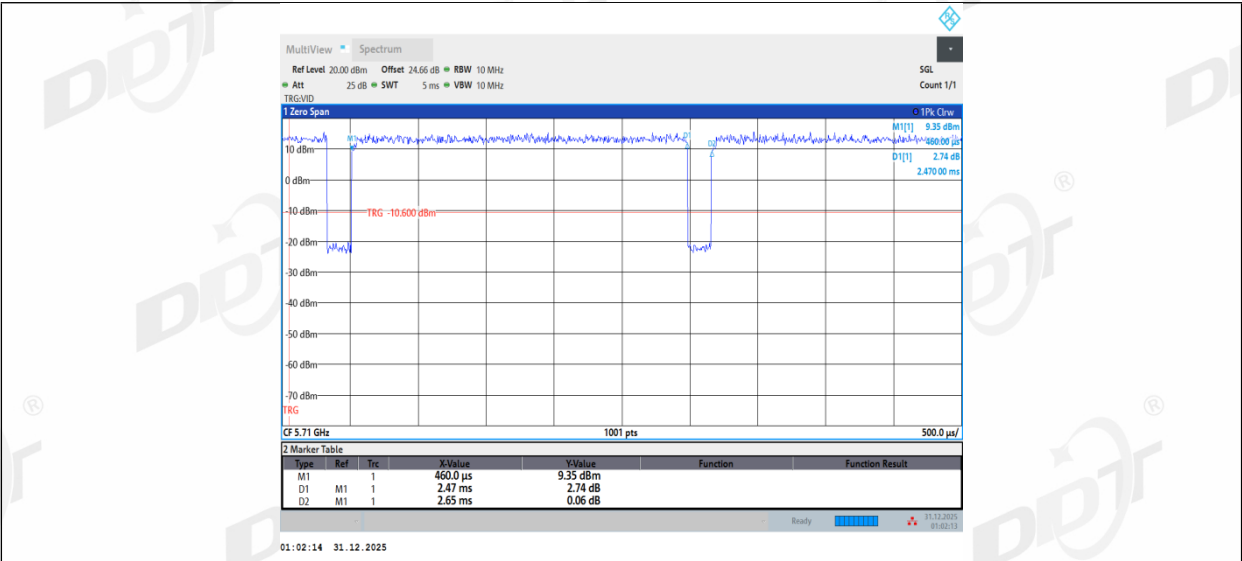


11N40SISO_Ant1_5755

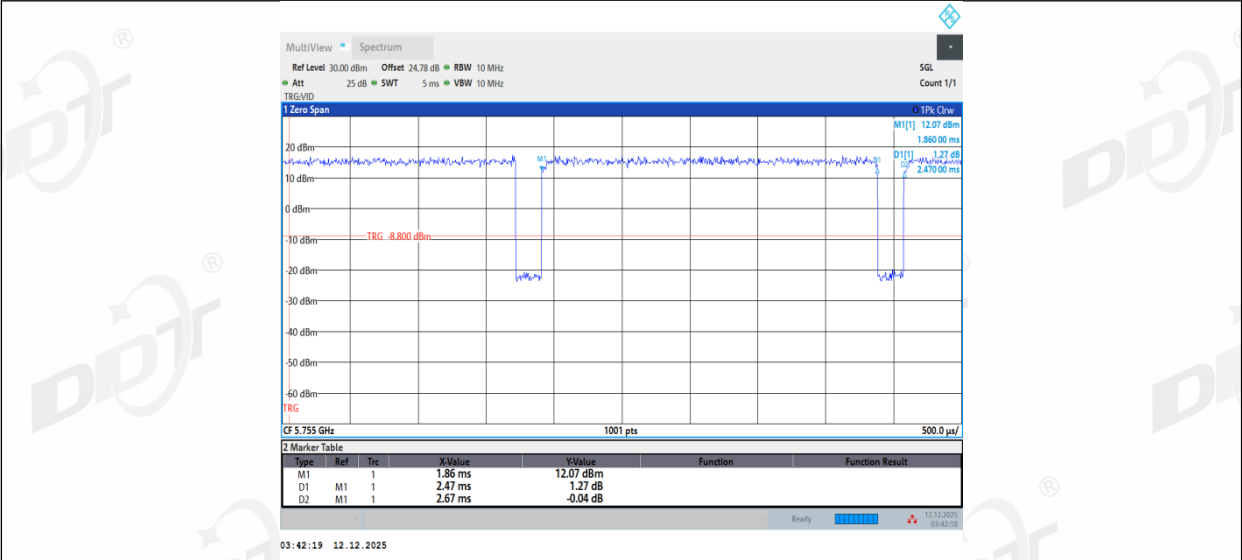


11N40SISO_Ant1_5795

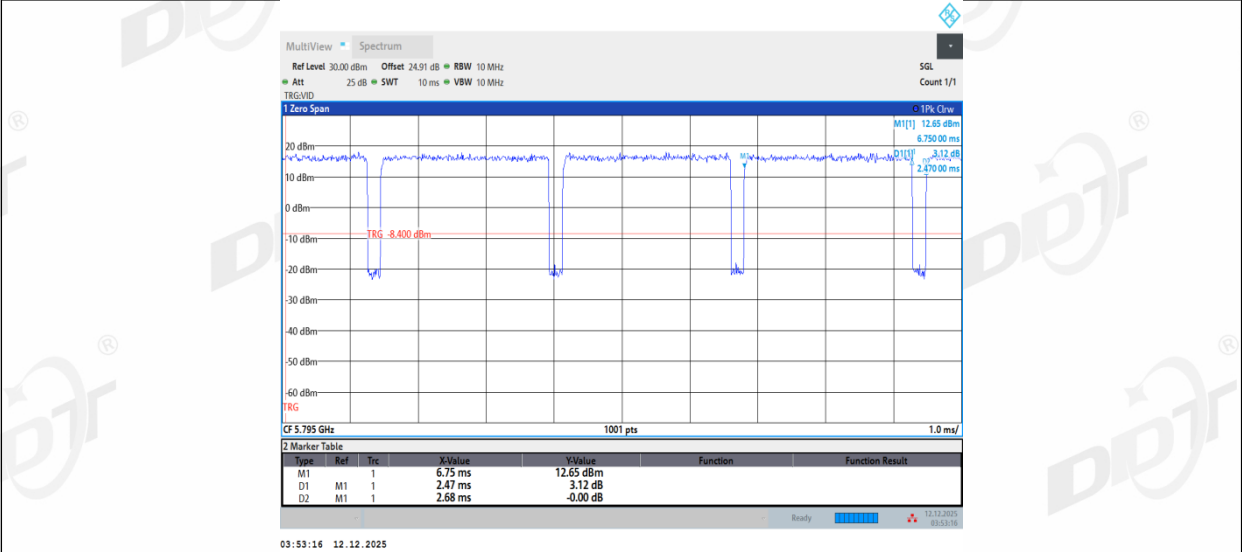


11AC20SISO_Ant1_5180

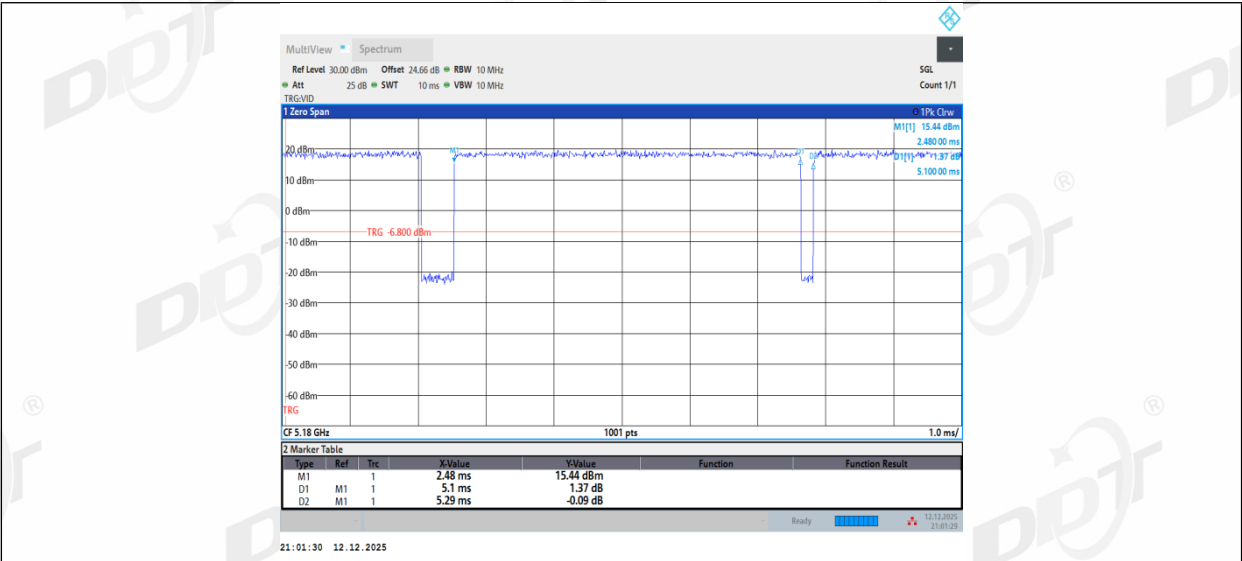


11AC20SISO_Ant1_5200

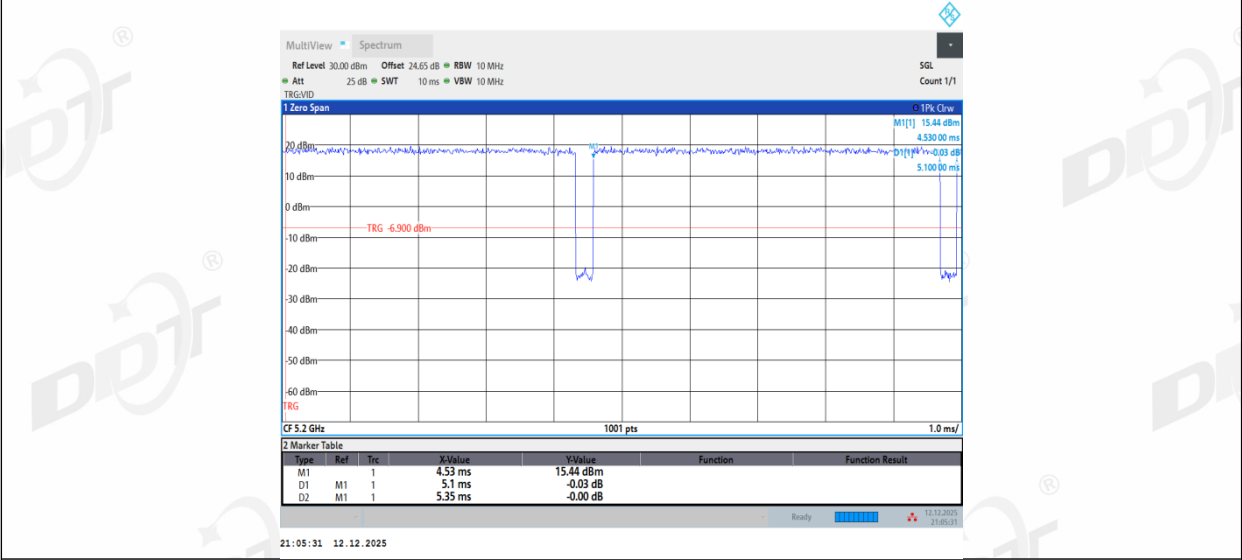


11AC20SISO_Ant1_5240

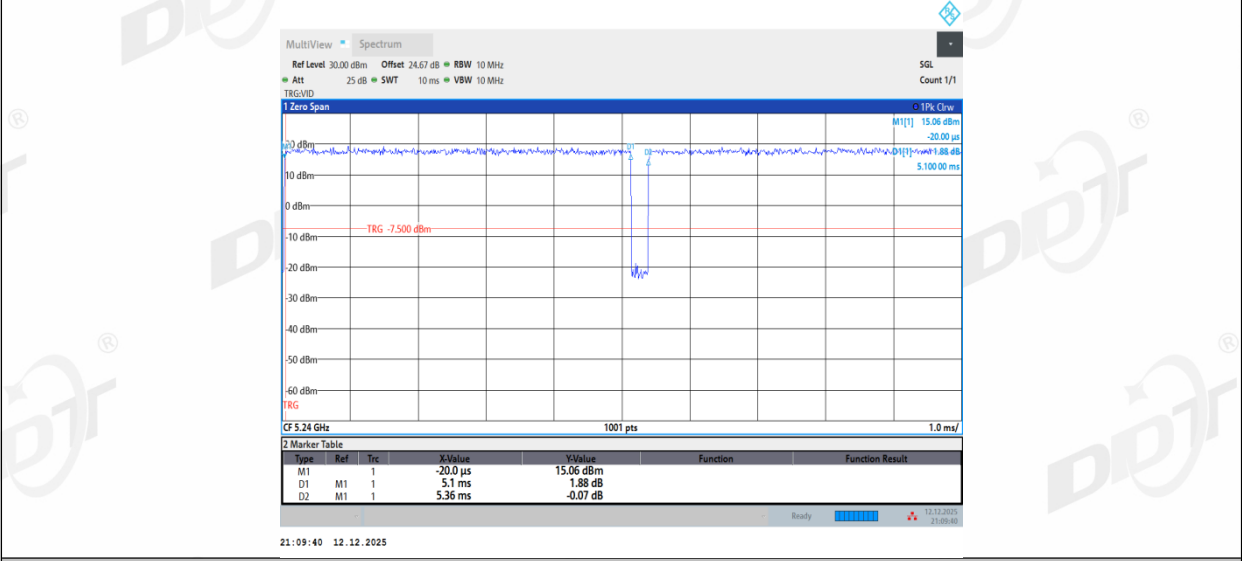


11AC20SISO_Ant1_5260

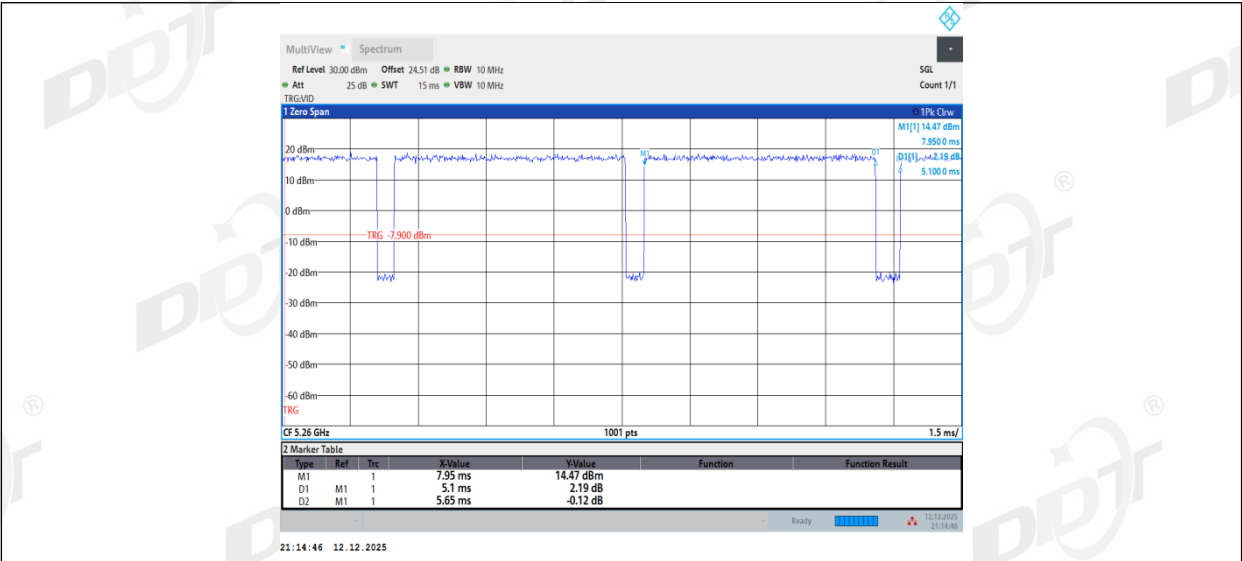


11AC20SISO_Ant1_5280

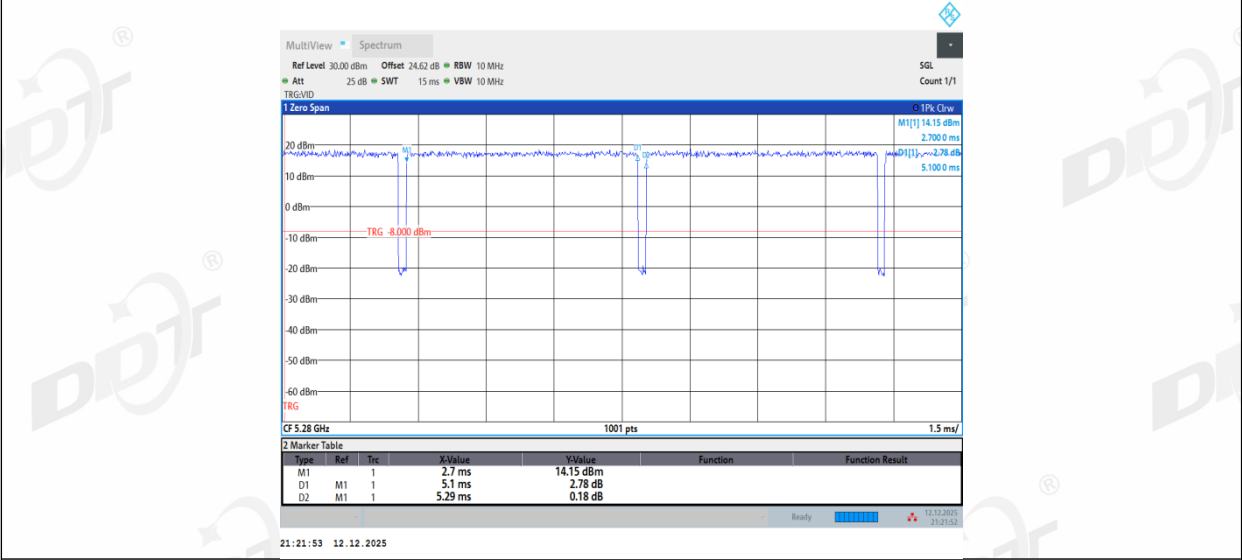


11AC20SISO_Ant1_5320

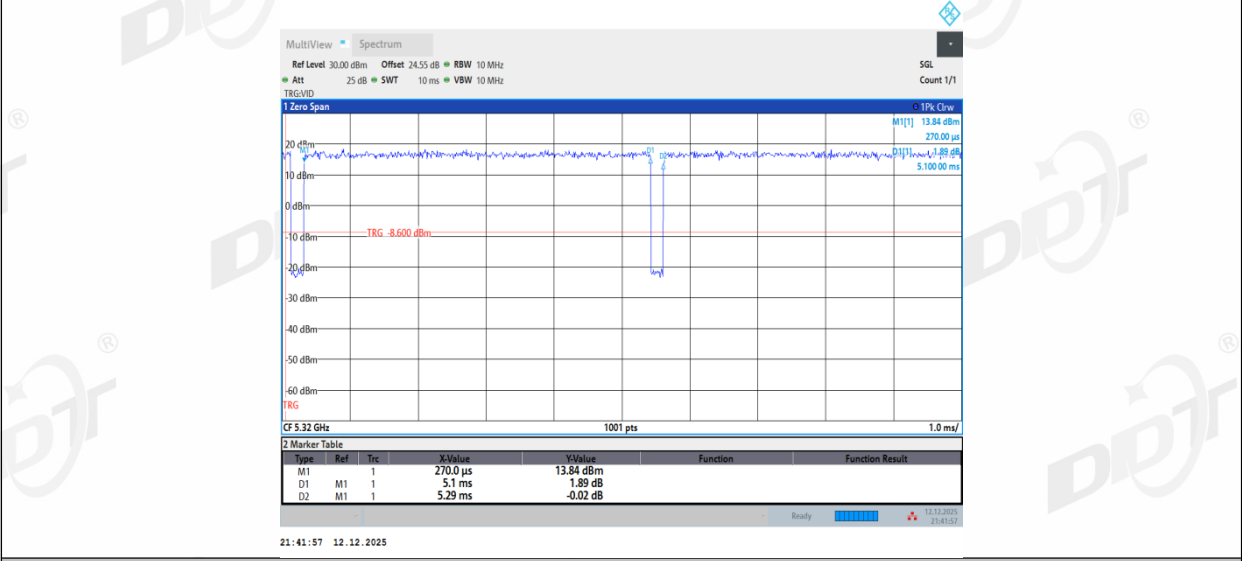


11AC20SISO_Ant1_5500

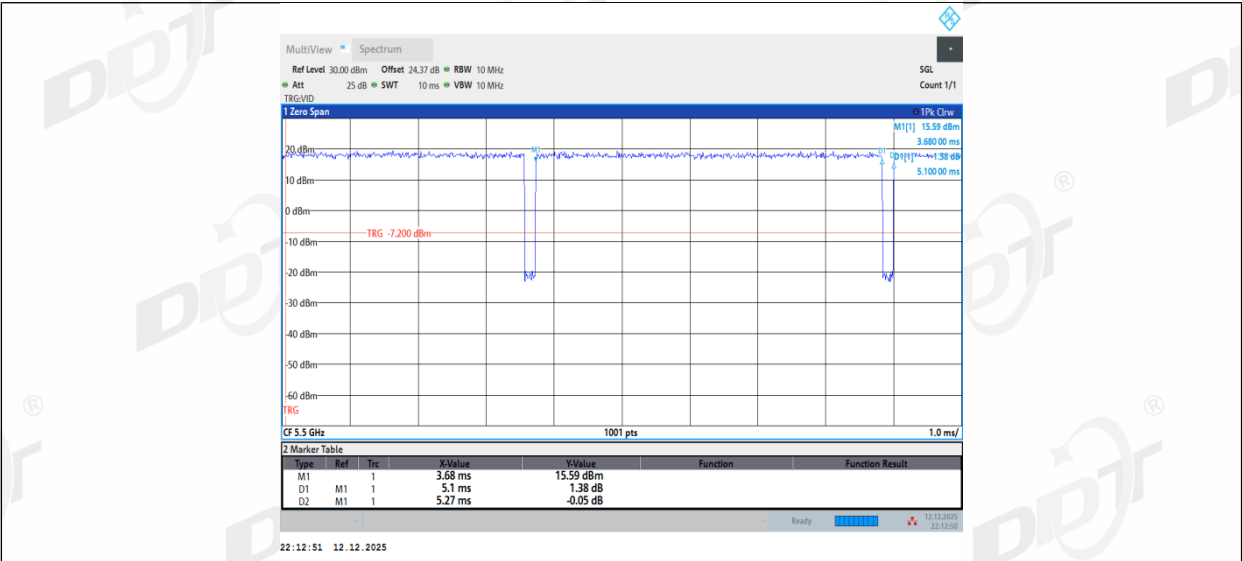


11AC20SISO_Ant1_5580

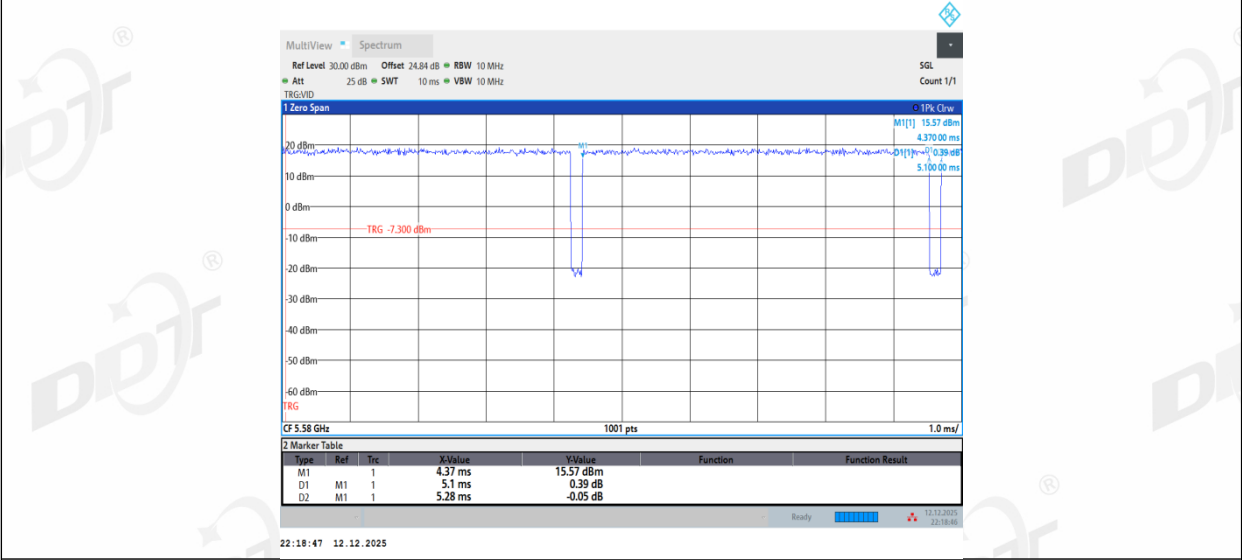


11AC20SISO_Ant1_5700

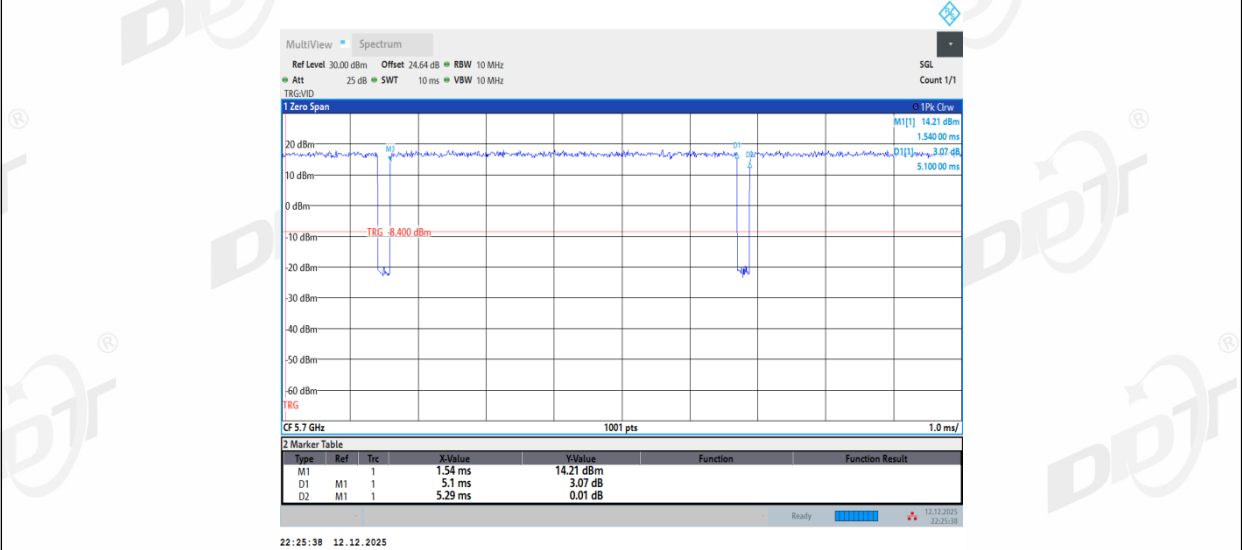


11AC20SISO_Ant1_5720

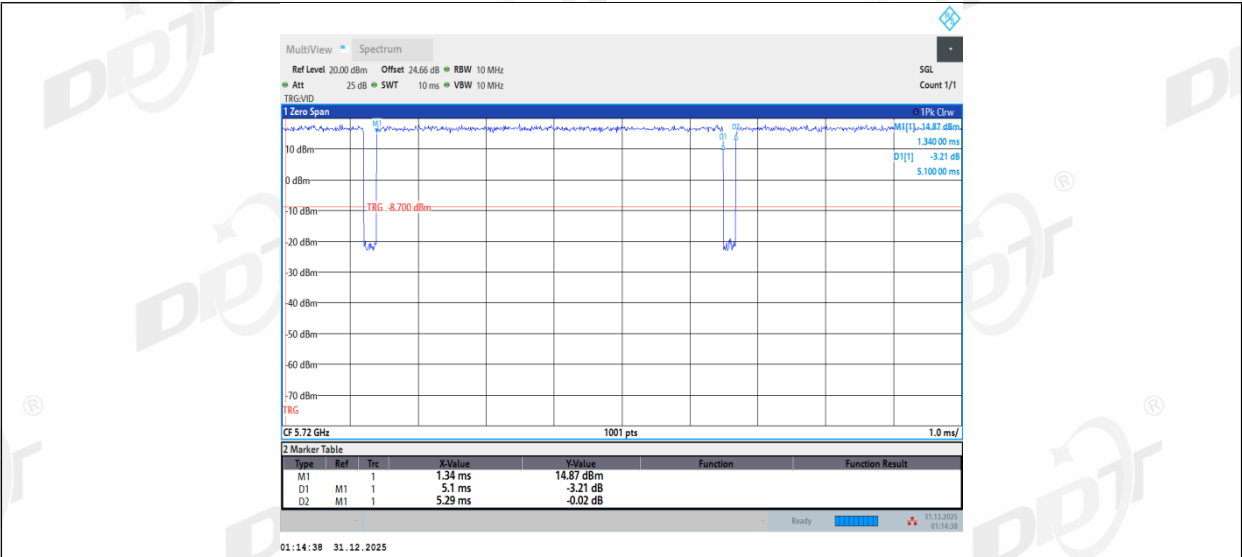


11AC20SISO_Ant1_5745

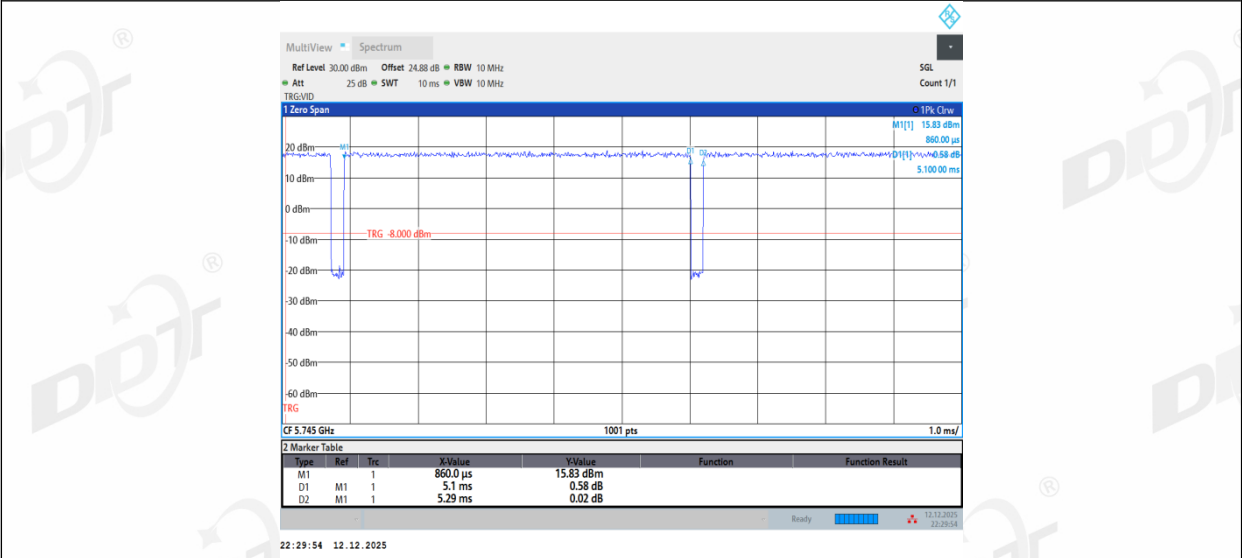


11AC20SISO_Ant1_5785

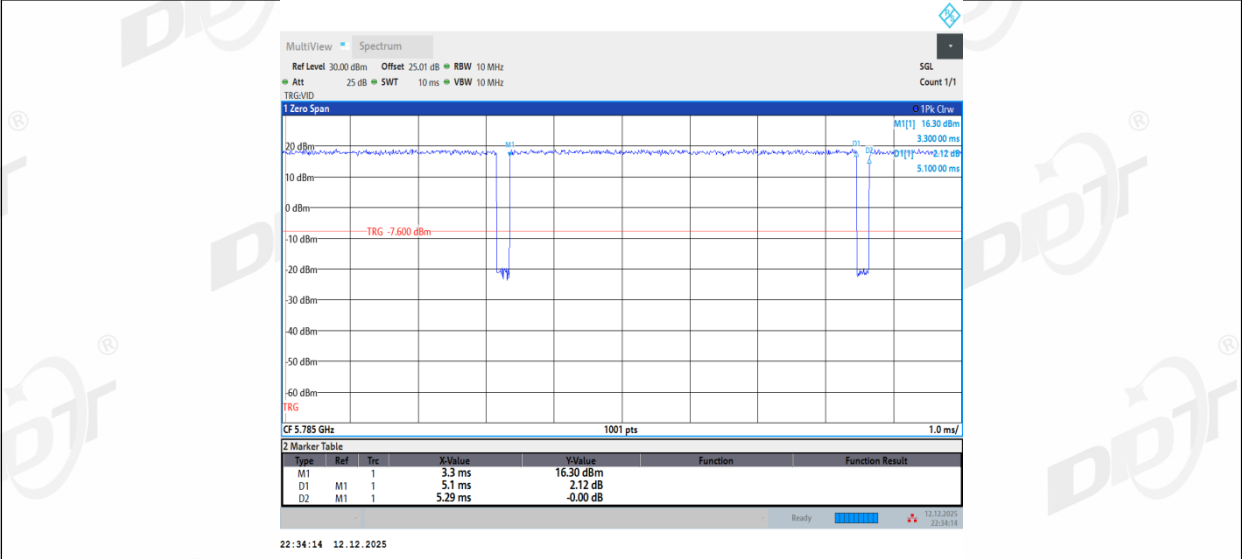


11AC20SISO_Ant1_5825

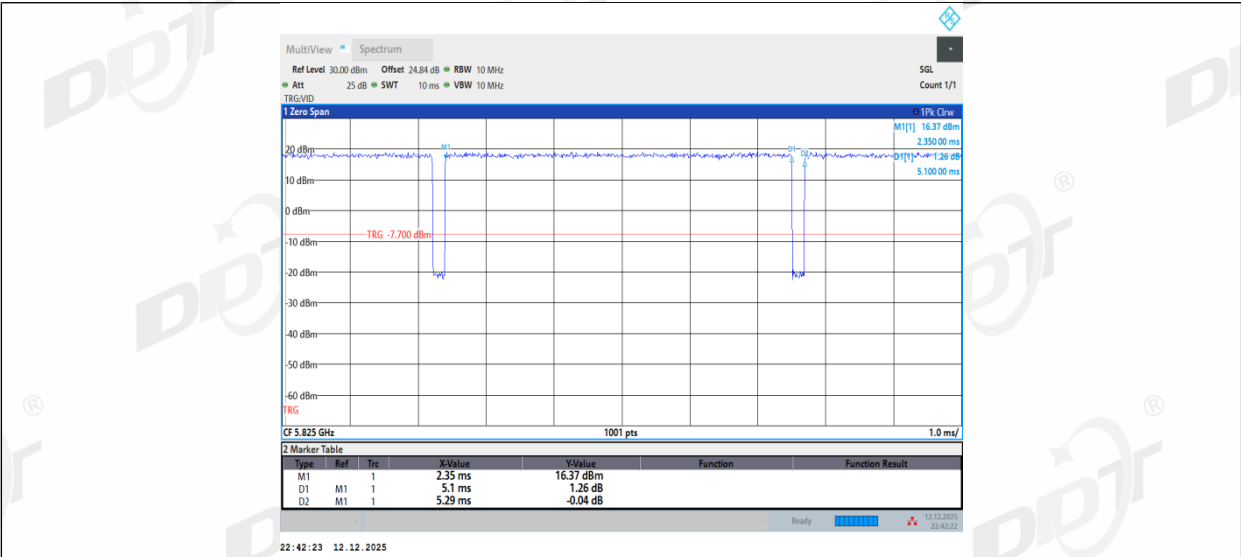


11AC40SISO_Ant1_5190

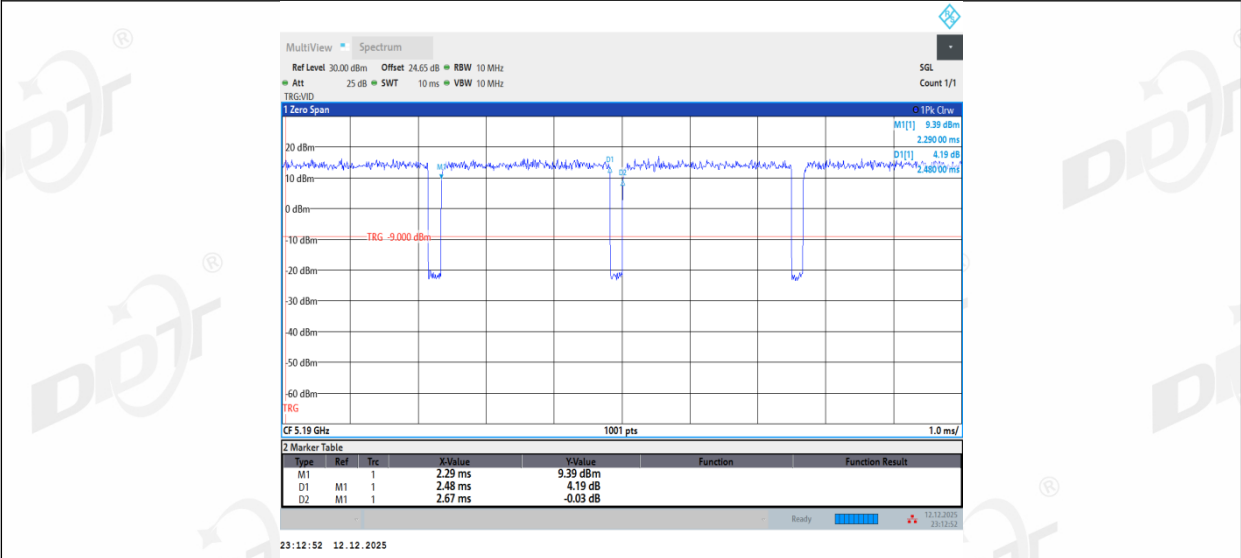


11AC40SISO_Ant1_5230

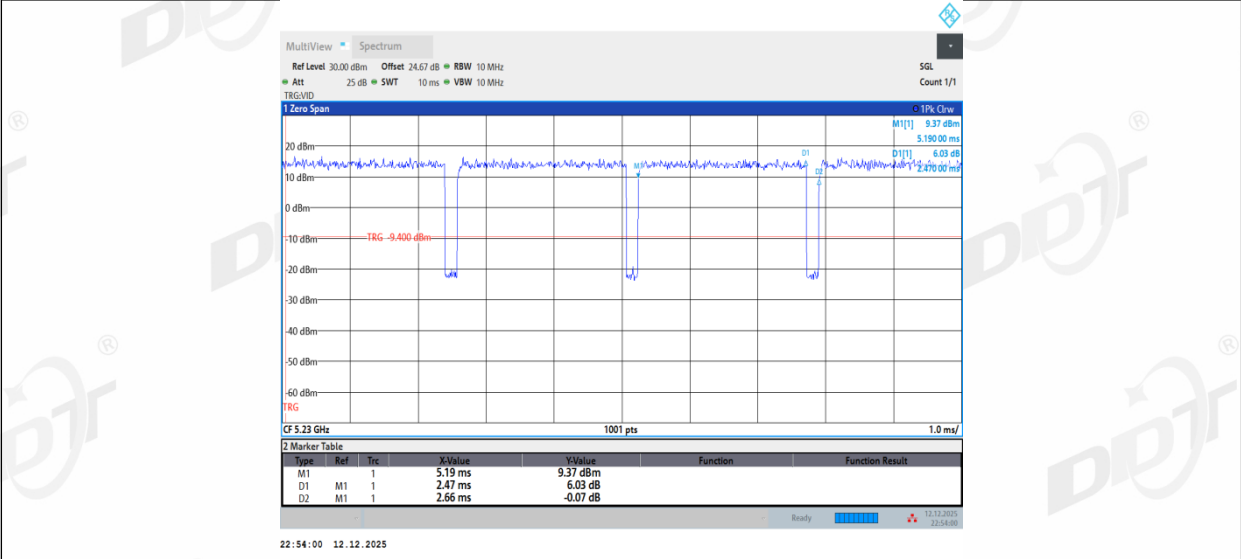


11AC40SISO_Ant1_5270

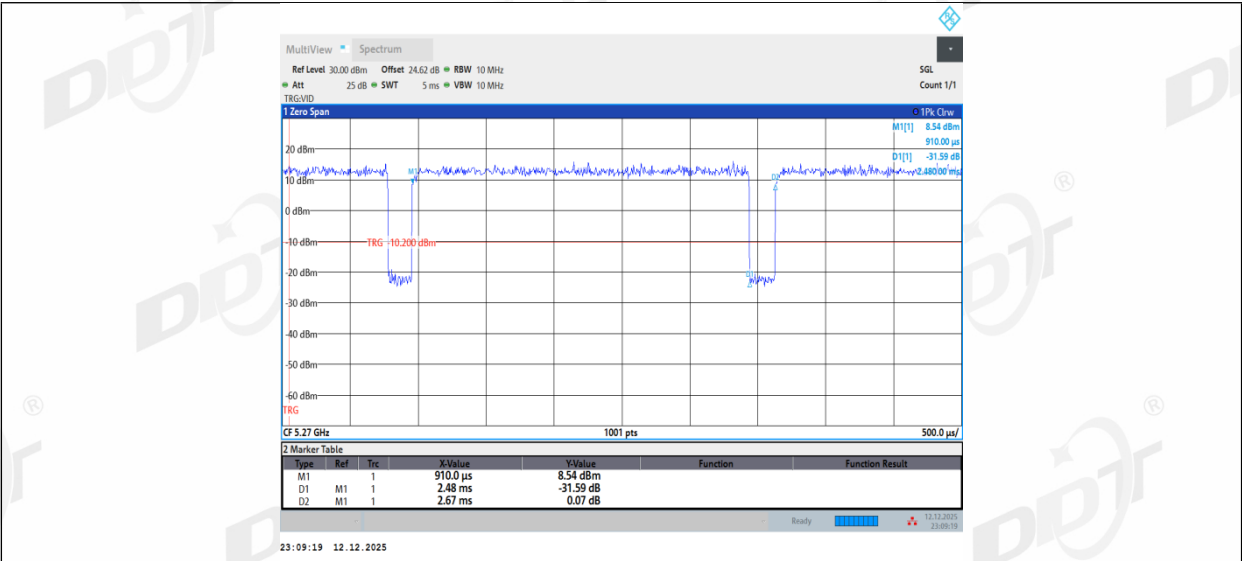

11AC40SISO_Ant1_5310

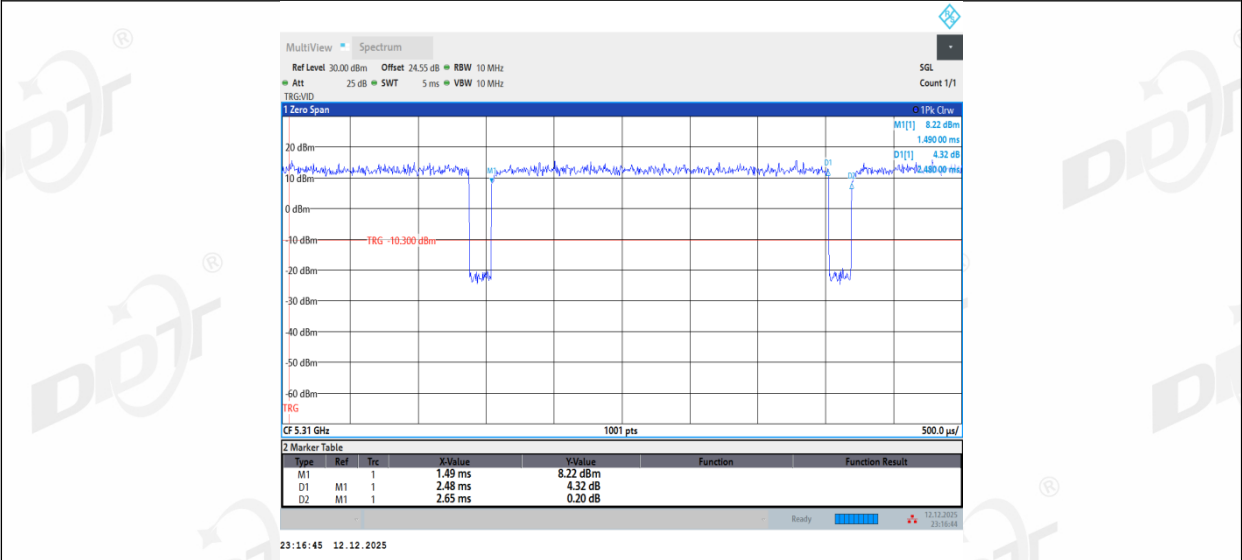


11AC40SISO_Ant1_5510

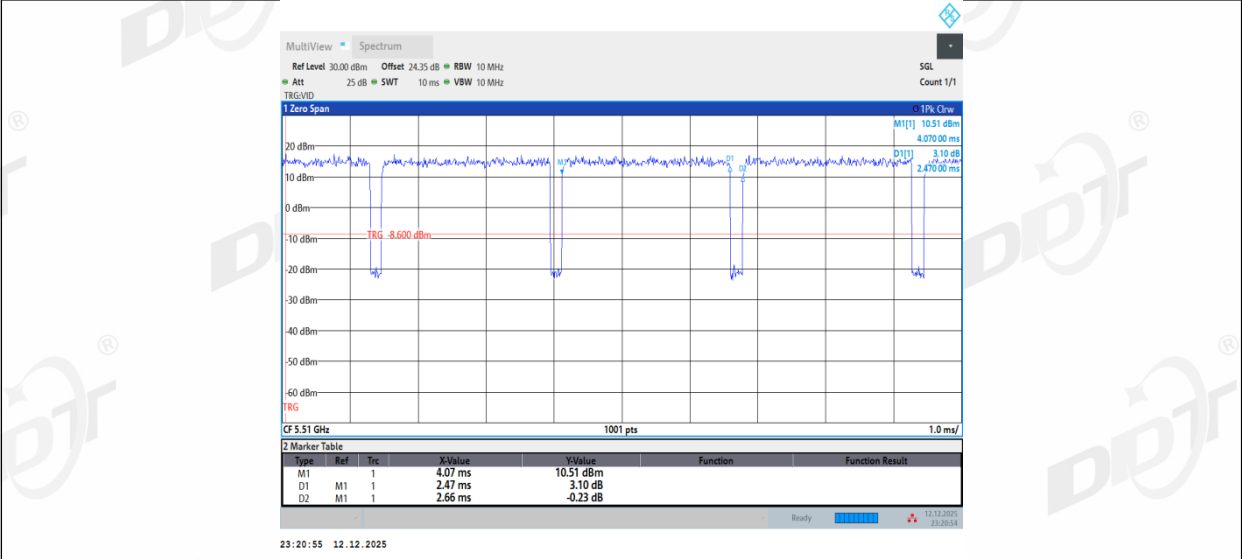


11AC40SISO_Ant1_5550




11AC40SISO_Ant1_5670

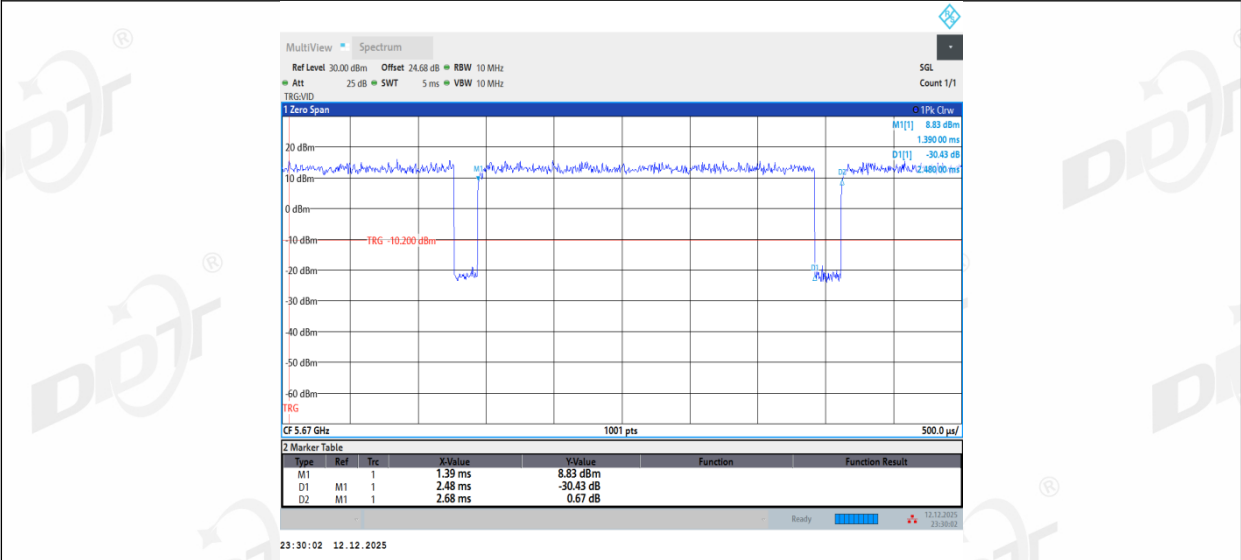


11AC40SISO_Ant1_5710

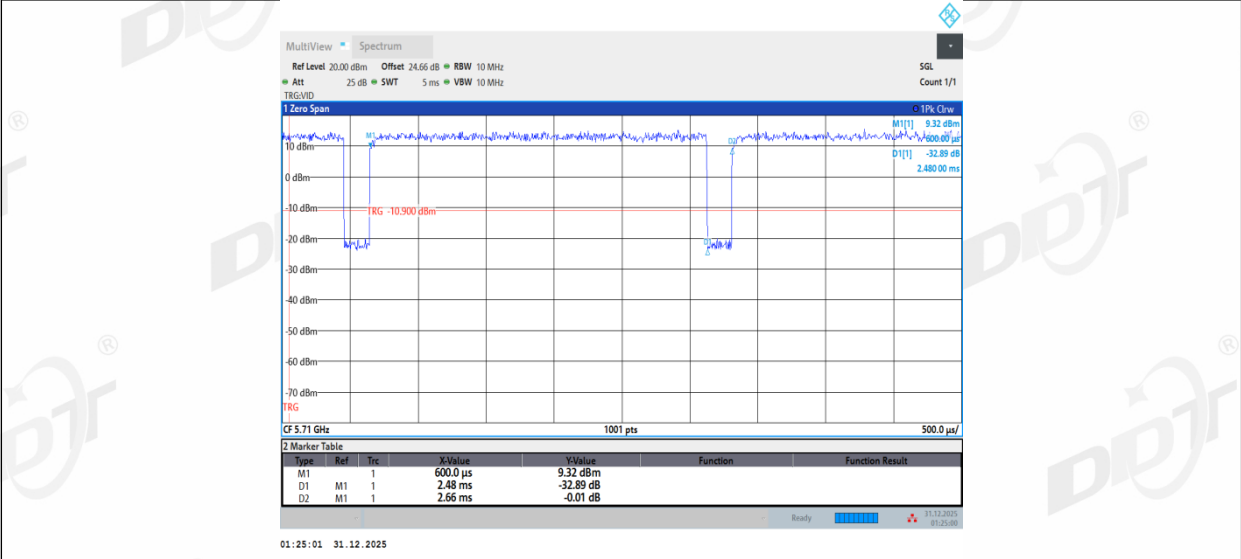


11AC40SISO_Ant1_5755

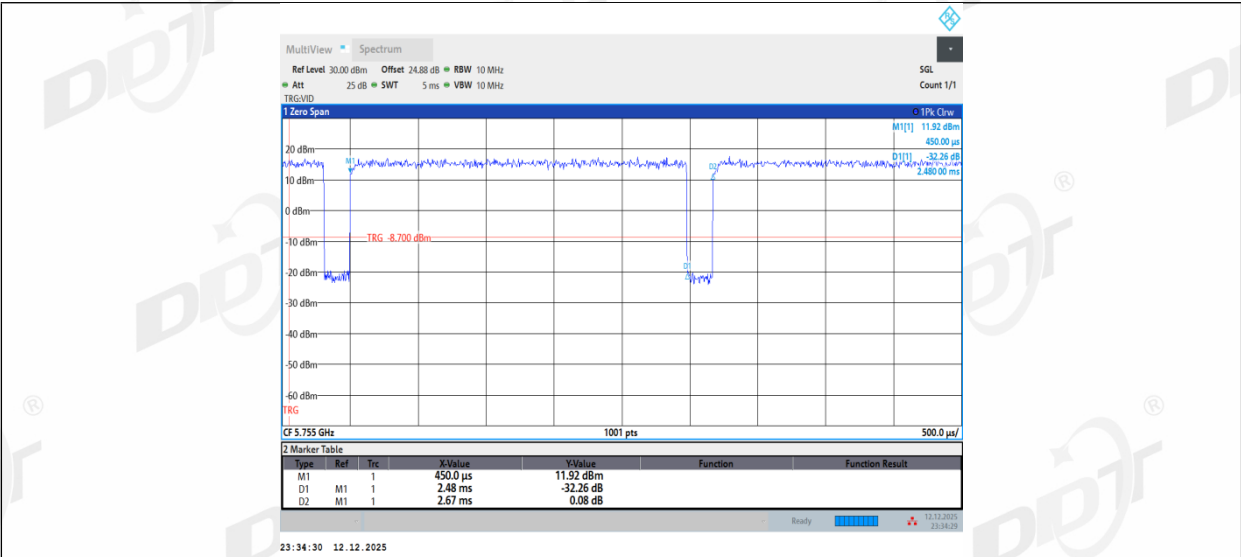


11AC40SISO_Ant1_5795

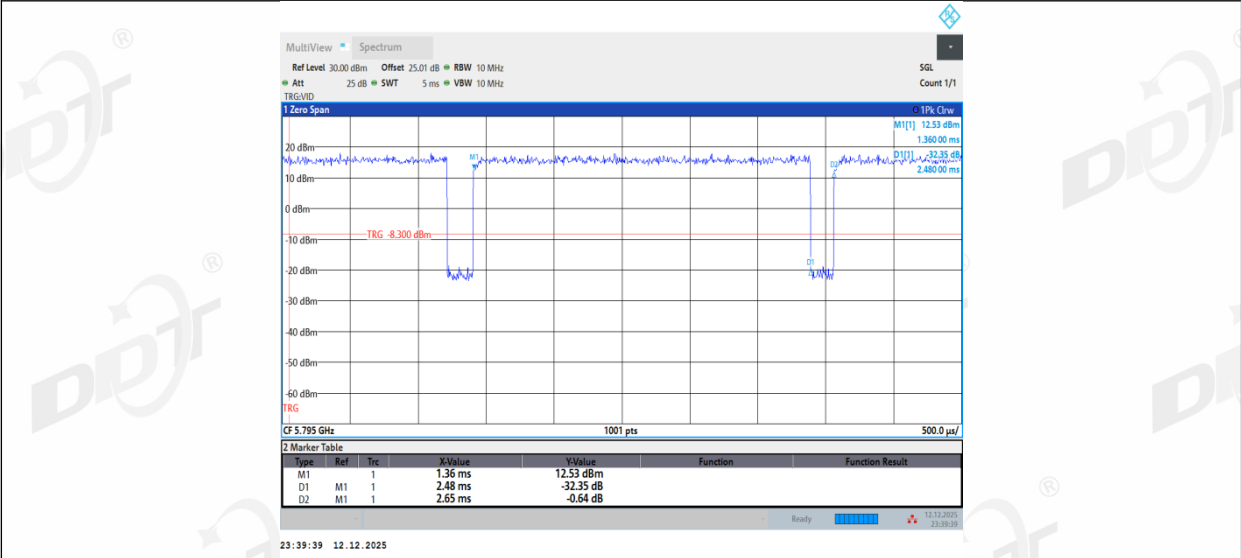


11AC80SISO_Ant1_5210

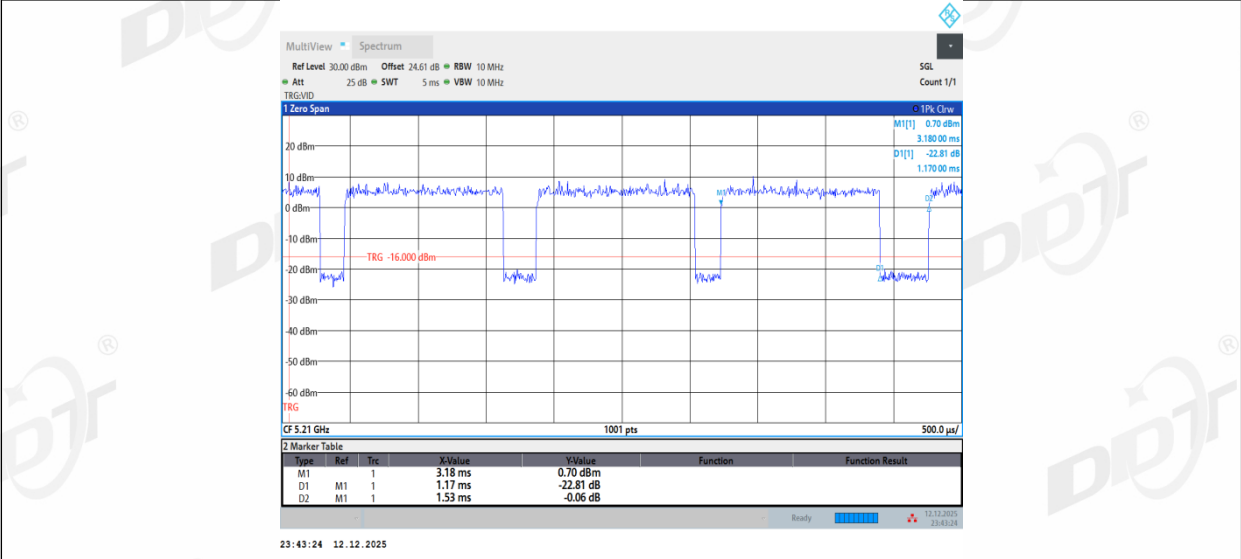


11AC80SISO_Ant1_5290

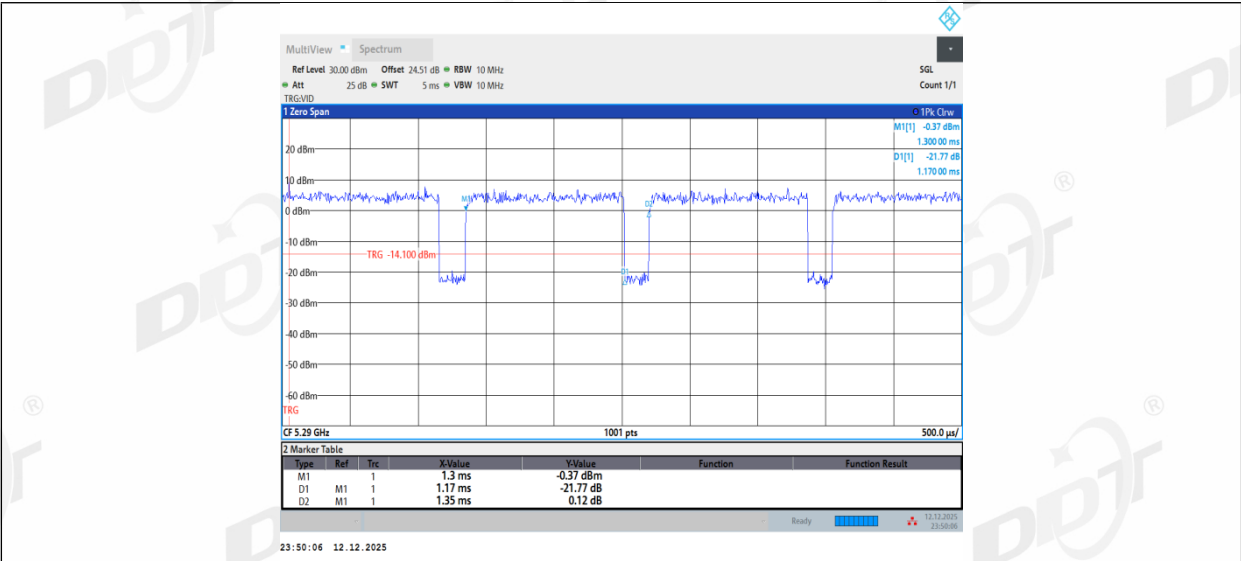


11AC80SISO_Ant1_5530

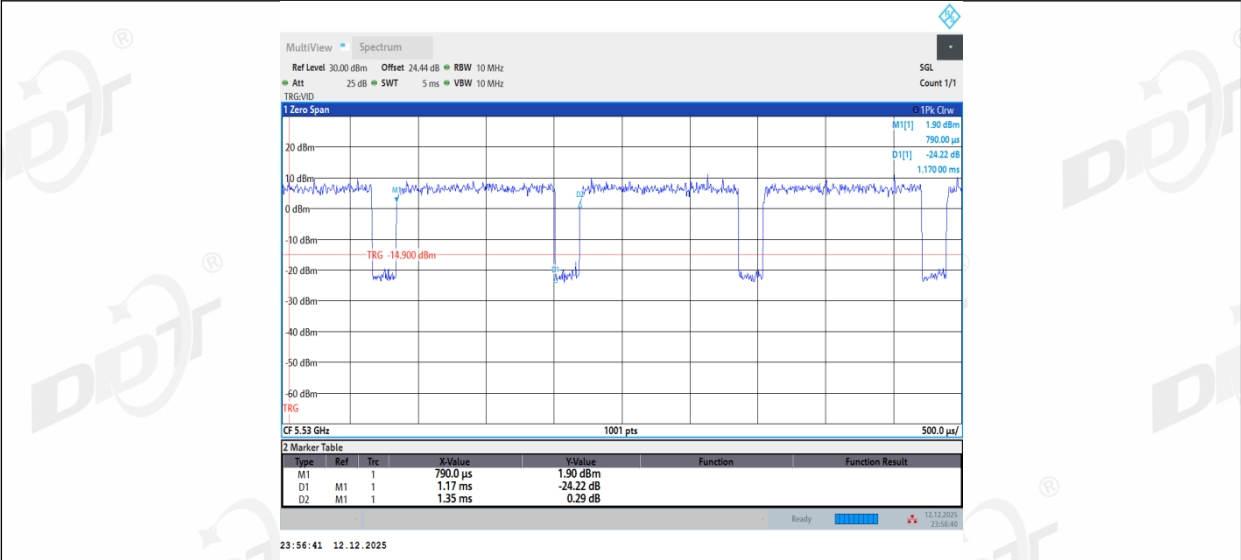

11AC80SISO_Ant1_5610

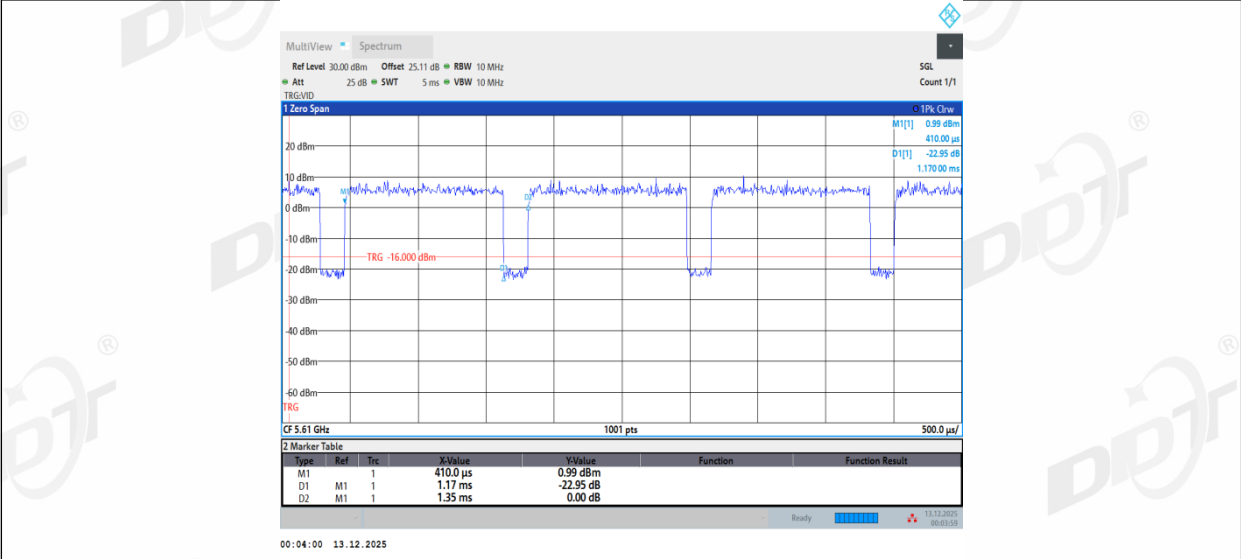


11AC80SISO_Ant1_5690

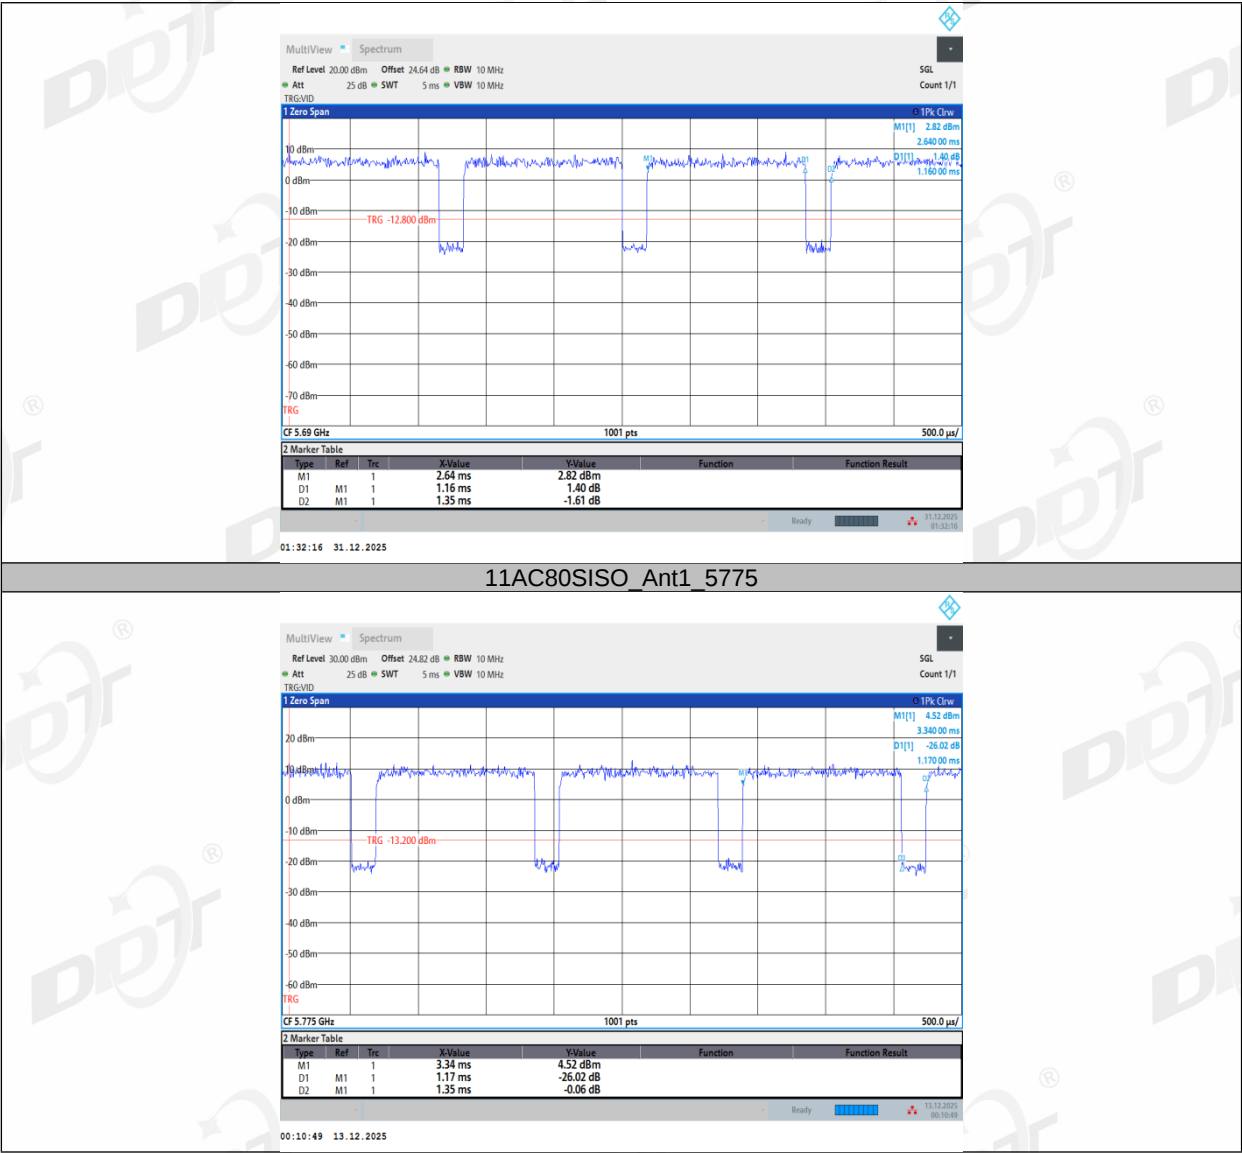

8. Maximum Output Power

8.1. Block diagram of test setup

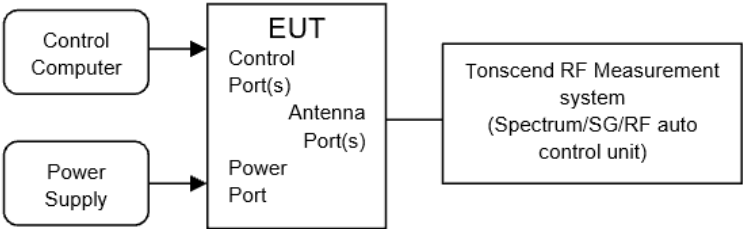

8.2. Limits

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Maximum	For FCC: outdoor access point: 1 W(30 dBm)	5150-5250

Output Power	indoor access point: 1 W(30 dBm) fixed point-to-point access points1 W(30 dBm) client devices: 250 mW (23.98 dBm)	
	For RSS: e.i.r.p. power: not exceed 200 mW (23.01 dBm) or $10 + 10 \log_{10} B$	
	For FCC: 250 mW (23.98 dBm) or $11 + 10 \log_{10} B$	
	For RSS: For conducted output power: 250 mW (23.98 dBm) or $11 + 10 \log_{10} B$	5250-5350
	For RSS: e.i.r.p. power: not exceed 1.0 W (30 dBm) or $17 + 10 \log_{10} B$	
	For FCC: 250 mW (23.98 dBm) or $11 + 10 \log_{10} B$	
	For RSS: For conducted output power: 250 mW (23.98 dBm) or $11 + 10 \log_{10} B$	For FCC:5470 - 5725 For IC:5470 - 5600 5650 - 5725
	For RSS: e.i.r.p. power: not exceed 1.0 W (30 dBm) or $17 + 10 \log_{10} B$	
	1 Watt (30 dBm)	5725-5850

Note 1: For FCC: B=26 bandwidth; For ISDE: B=99% bandwidth.

Note 2: If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi, but for fixed point-to-point transmitters operating in 5150-5250MHz band that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and operating in 5725-5850 band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power.

8.3. Test procedure

Connect each EUT's antenna output to power sensor by RF cable and attenuator
Measure the output power of each antenna port by power sensor.

8.4. Test result channel power

Test Engineer:	Tyang	Test Site:	RF Measurement System 4#
Ambient Condition:	25.6°C,49.8%RH	Test Date:	2025.12.6-2025.12.31
Test Power Supply:	AC 120V/60Hz	Sample Number:	S25081404-004


Test Mode	Ant.	Freq [MHz]	Duty Cycle [%]	DC Factor [dB]	Result [dBm]	FCC Limit [dBm]	ISED Limit [dBm]	EIRP [dBm]	ISED EIRP Limit [dBm]	Verdict
11A	Ant1	5180	88.05	0.55	14.27	$\leq 23.9_8$	≤ 19.57	17.13	$\leq 22.4_3$	PASS
		5200	91.50	0.39	14.00	$\leq 23.9_8$	≤ 19.55	16.86	$\leq 22.4_1$	PASS
		5240	90.32	0.44	13.84	$\leq 23.9_8$	≤ 19.59	16.70	$\leq 22.4_5$	PASS
		5260	88.54	0.53	13.59	$\leq 23.9_8$	≤ 23.45	16.45	$\leq 26.9_9$	PASS
		5280	89.74	0.47	13.28	$\leq 23.9_8$	≤ 23.48	16.14	$\leq 26.9_9$	PASS
		5320	89.68	0.47	12.98	$\leq 23.9_8$	≤ 23.44	15.84	$\leq 26.9_9$	PASS
		5500	89.74	0.47	14.91	$\leq 23.9_8$	≤ 23.53	17.77	$\leq 26.9_9$	PASS
		5580	89.74	0.47	14.57	$\leq 23.9_8$	≤ 23.51	17.43	$\leq 26.9_9$	PASS
		5700	89.74	0.47	13.45	≤ 23.9	≤ 23.52	16.31	≤ 26.9	PASS

						8			9	
		5720	90.32	0.44	14.25	≤ 23.9 8	≤ 23.67	17.11	≤ 26.9 9	PASS
		5745	91.45	0.39	14.15	≤ 30.0 0	≤ 30.00	17.01	---	PASS
		5785	90.91	0.41	14.59	≤ 30.0 0	≤ 30.00	17.45	---	PASS
11N20SIS O	Ant1	5825	90.26	0.45	14.82	≤ 30.0 0	≤ 30.00	17.68	---	PASS
		5180	96.40	0.16	13.66	≤ 23.9 8	≤ 19.79	16.52	≤ 22.6 5	PASS
		5200	96.58	0.15	13.74	≤ 23.9 8	≤ 19.76	16.60	≤ 22.6 2	PASS
		5240	96.59	0.15	13.59	≤ 23.9 8	≤ 19.79	16.45	≤ 22.6 5	PASS
		5260	96.04	0.18	13.18	≤ 23.9 8	≤ 23.64	16.04	≤ 26.9 9	PASS
		5280	96.77	0.14	13.07	≤ 23.9 8	≤ 23.64	15.93	≤ 26.9 9	PASS
		5320	96.58	0.15	12.84	≤ 23.9 8	≤ 23.66	15.70	≤ 26.9 9	PASS
		5500	96.23	0.17	14.60	≤ 23.9 8	≤ 23.64	17.46	≤ 26.9 9	PASS
		5580	96.59	0.15	14.29	≤ 23.9 8	≤ 23.66	17.15	≤ 26.9 9	PASS
		5700	96.22	0.17	13.21	≤ 23.9 8	≤ 23.72	16.07	≤ 26.9 9	PASS
		5720	96.77	0.14	13.75	≤ 23.9 8	≤ 23.79	16.61	≤ 26.9 9	PASS
		5745	96.04	0.18	14.11	≤ 30.0 0	≤ 30.00	16.97	---	PASS
		5785	96.23	0.17	14.42	≤ 30.0 0	≤ 30.00	17.28	---	PASS
		5825	96.23	0.17	14.58	≤ 30.0 0	≤ 30.00	17.44	---	PASS
11N40SIS O	Ant1	5190	92.16	0.35	12.16	≤ 23.9 8	≤ 20.15	15.02	≤ 23.0 1	PASS
		5230	92.51	0.34	12.15	≤ 23.9 8	≤ 20.15	15.01	≤ 23.0 1	PASS
		5270	92.16	0.35	11.67	≤ 23.9 8	≤ 23.98	14.53	≤ 26.9 9	PASS
		5310	92.51	0.34	11.32	≤ 23.9 8	≤ 23.98	14.18	≤ 26.9 9	PASS
		5510	92.51	0.34	13.57	≤ 23.9 8	≤ 23.98	16.43	≤ 26.9 9	PASS
		5550	92.16	0.35	13.44	≤ 23.9 8	≤ 23.98	16.30	≤ 26.9 9	PASS
		5670	92.86	0.32	11.99	≤ 23.9 8	≤ 23.98	14.85	≤ 26.9 9	PASS
		5710	93.21	0.31	12.64	≤ 23.9 8	≤ 23.98	15.50	≤ 26.9 9	PASS
		5755	92.51	0.34	14.56	≤ 30.0 0	≤ 30.00	17.42	---	PASS
		5795	92.16	0.35	15.02	≤ 30.0 0	≤ 30.00	17.88	---	PASS
11AC20SI SO	Ant1	5180	96.41	0.16	13.88	≤ 23.9 8	≤ 19.74	16.74	≤ 22.6 0	PASS
		5200	95.33	0.21	13.77	≤ 23.9 8	≤ 19.77	16.63	≤ 22.6 3	PASS
		5240	95.15	0.22	13.46	≤ 23.9 8	≤ 19.75	16.32	≤ 22.6 1	PASS
		5260	90.27	0.44	13.14	≤ 23.9 8	≤ 23.58	16.00	≤ 26.9 9	PASS
		5280	96.41	0.16	12.78	≤ 23.9 8	≤ 23.63	15.64	≤ 26.9 9	PASS

		5320	96.41	0.16	12.57	≤ 23.9 8	≤ 23.61	15.43	≤ 26.9 9	PASS
		5500	96.77	0.14	14.32	≤ 23.9 8	≤ 23.62	17.18	≤ 26.9 9	PASS
		5580	96.59	0.15	14.17	≤ 23.9 8	≤ 23.66	17.03	≤ 26.9 9	PASS
		5700	96.41	0.16	13.04	≤ 23.9 8	≤ 23.68	15.90	≤ 26.9 9	PASS
		5720	96.41	0.16	13.49	≤ 23.9 8	≤ 23.74	16.35	≤ 26.9 9	PASS
		5745	96.41	0.16	13.98	≤ 30.0 0	≤ 30.00	16.84	---	PASS
		5785	96.41	0.16	14.30	≤ 30.0 0	≤ 30.00	17.16	---	PASS
		5825	96.41	0.16	14.54	≤ 30.0 0	≤ 30.00	17.40	---	PASS
11AC40SI SO	Ant1	5190	92.88	0.32	11.94	≤ 23.9 8	≤ 20.15	14.80	≤ 23.0 1	PASS
		5230	92.86	0.32	11.31	≤ 23.9 8	≤ 20.15	14.17	≤ 23.0 1	PASS
		5270	92.88	0.32	11.40	≤ 23.9 8	≤ 23.98	14.26	≤ 26.9 9	PASS
		5310	93.58	0.29	11.04	≤ 23.9 8	≤ 23.98	13.90	≤ 26.9 9	PASS
		5510	92.86	0.32	13.24	≤ 23.9 8	≤ 23.98	16.10	≤ 26.9 9	PASS
		5550	93.94	0.27	13.06	≤ 23.9 8	≤ 23.98	15.92	≤ 26.9 9	PASS
		5670	92.54	0.34	11.85	≤ 23.9 8	≤ 23.98	14.71	≤ 26.9 9	PASS
		5710	93.23	0.30	12.46	≤ 23.9 8	≤ 23.98	15.32	≤ 26.9 9	PASS
		5755	92.88	0.32	14.56	≤ 30.0 0	≤ 30.00	17.42	---	PASS
		5795	93.58	0.29	14.93	≤ 30.0 0	≤ 30.00	17.79	---	PASS
11AC80SI SO	Ant1	5210	76.47	1.17	7.17	≤ 23.9 8	≤ 20.15	10.03	≤ 23.0 1	PASS
		5290	86.67	0.62	7.69	≤ 23.9 8	≤ 23.98	10.55	≤ 26.9 9	PASS
		5530	86.67	0.62	9.84	≤ 23.9 8	≤ 23.98	12.70	≤ 26.9 9	PASS
		5610	86.67	0.62	9.05	≤ 23.9 8	≤ 23.98	11.91	≤ 26.9 9	PASS
		5690	85.93	0.66	9.65	≤ 23.9 8	≤ 23.98	12.51	≤ 26.9 9	PASS
		5775	86.67	0.62	12.38	≤ 30.0 0	≤ 30.00	15.24	---	PASS

9. Power Spectral Density

9.1. Block diagram of test setup

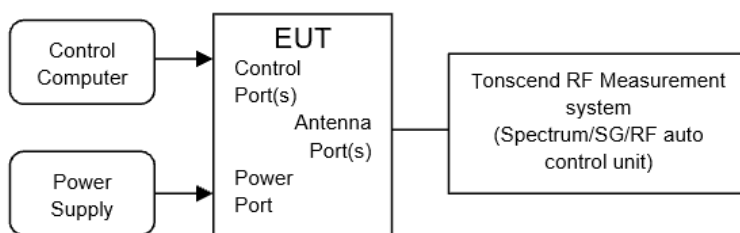

9.2. Limits

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	For FCC: Other than Mobile and portable:17 dBm/MHz Mobile and portable client devices:11 dBm/MHz	5150-5250
	For RSS eirp: 10 dBm/MHz	
	11 dBm/MHz	5250-5350
	11 dBm/MHz	For FCC: 5470 - 5725 For ISDE: 5470 - 5600 5650 - 5725
	30 dBm/500 kHz	5725-5850
Note: If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi, but for fixed point-to-point transmitters operating in 5150-5250MHz band that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum Power Spectral Density.		

9.3. Test procedure

The transmitter output was connected to a spectrum analyzer. Power density was measured by spectrum analyzer with 1MHz RBW and 3MHz VBW.

Connect the UUT to the spectrum analyser and use the following settings:

5150 MHz~5250 MHz, 5250 MHz~5350 MHz, 5470 MHz~5725 MHz

Center Frequency	The centre frequency of the channel under test
Detector	RMS
RBW	1MHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

5725 MHz-5850 MHz

Center Frequency	The centre frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

9.4. Test result

Test Engineer:	Tyang	Test Site:	RF Measurement System 4#
Ambient Condition:	25.6°C,49.8%RH	Test Date:	2025.12.6-2025.12.31
Test Power Supply:	AC 120V/60Hz	Sample Number:	S25081404-004


Test Mode	Antenna	Freq. [MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	EIRP [dBm/MHz]	ISED EIRP Limit [dBm/MHz]	Verdict
11A	Ant1	5180	3.33	≤11.00	6.19	≤10.00	PASS
		5200	3.44	≤11.00	6.30	≤10.00	PASS
		5240	3.14	≤11.00	6.00	≤10.00	PASS
		5260	2.93	≤11.00	5.79	---	PASS
		5280	2.36	≤11.00	5.22	---	PASS
		5320	1.99	≤11.00	4.85	---	PASS
		5500	3.95	≤11.00	6.81	---	PASS
		5580	3.63	≤11.00	6.49	---	PASS
		5700	2.45	≤11.00	5.31	---	PASS
		5720_UNII-2C	2.95	≤11.00	5.81	---	PASS
		5720_UNII-3	-1.82	≤30.00	1.04	---	PASS
		5745	0.56	≤30.00	3.42	---	PASS
		5785	1.10	≤30.00	3.96	---	PASS
		5825	0.93	≤30.00	3.79	---	PASS
11N20SISO	Ant1	5180	2.56	≤11.00	5.42	≤10.00	PASS
		5200	2.88	≤11.00	5.74	≤10.00	PASS
		5240	2.63	≤11.00	5.49	≤10.00	PASS
		5260	2.36	≤11.00	5.22	---	PASS
		5280	2.04	≤11.00	4.90	---	PASS
		5320	1.78	≤11.00	4.64	---	PASS
		5500	3.45	≤11.00	6.31	---	PASS
		5580	3.26	≤11.00	6.12	---	PASS
		5700	2.00	≤11.00	4.86	---	PASS
		5720_UNII-2C	2.22	≤11.00	5.08	---	PASS
		5720_UNII-3	-2.64	≤30.00	0.22	---	PASS
		5745	0.22	≤30.00	3.08	---	PASS
		5785	0.69	≤30.00	3.55	---	PASS
		5825	0.60	≤30.00	3.46	---	PASS
11N40SISO	Ant1	5190	-2.18	≤11.00	0.68	≤10.00	PASS
		5230	-2.29	≤11.00	0.57	≤10.00	PASS
		5270	-2.73	≤11.00	0.13	---	PASS
		5310	-3.10	≤11.00	-0.24	---	PASS
		5510	-0.96	≤11.00	1.90	---	PASS
		5550	-0.86	≤11.00	2.00	---	PASS
		5670	-2.65	≤11.00	0.21	---	PASS
		5710_UNII-2C	-2.35	≤11.00	0.51	---	PASS
		5710_UNII-3	-8.54	≤30.00	-5.68	---	PASS
		5755	-2.97	≤30.00	-0.11	---	PASS
		5795	-2.36	≤30.00	0.50	---	PASS
		5825	-2.36	≤30.00	0.50	---	PASS
11AC20SISO	Ant1	5180	2.78	≤11.00	5.64	≤10.00	PASS
		5200	3.00	≤11.00	5.86	≤10.00	PASS
		5240	2.59	≤11.00	5.45	≤10.00	PASS
		5260	2.09	≤11.00	4.95	---	PASS
		5280	1.75	≤11.00	4.61	---	PASS
		5320	1.42	≤11.00	4.28	---	PASS
		5500	3.01	≤11.00	5.87	---	PASS
		5580	2.88	≤11.00	5.74	---	PASS
		5700	1.78	≤11.00	4.64	---	PASS
		5720_UNII-2C	1.98	≤11.00	4.84	---	PASS
		5720_UNII-3	-2.89	≤30.00	-0.03	---	PASS


		5745	0.02	≤30.00	2.88	---	PASS
		5785	0.54	≤30.00	3.40	---	PASS
		5825	0.50	≤30.00	3.36	---	PASS
11AC40SIS O	Ant1	5190	-2.43	≤11.00	0.43	≤10.00	PASS
		5230	-3.21	≤11.00	-0.35	≤10.00	PASS
		5270	-2.94	≤11.00	-0.08	---	PASS
		5310	-3.38	≤11.00	-0.52	---	PASS
		5510	-1.42	≤11.00	1.44	---	PASS
		5550	-1.29	≤11.00	1.57	---	PASS
		5670	-2.71	≤11.00	0.15	---	PASS
		5710_UNII-2C	-2.53	≤11.00	0.33	---	PASS
		5710_UNII-3	-8.92	≤30.00	-6.06	---	PASS
		5755	-2.85	≤30.00	0.01	---	PASS
		5795	-2.34	≤30.00	0.52	---	PASS
		5210	-10.40	≤11.00	-7.54	≤10.00	PASS
		5290	-11.04	≤11.00	-8.18	---	PASS
11AC80SIS O	Ant1	5530	-8.68	≤11.00	-5.82	---	PASS
		5610	-9.30	≤11.00	-6.44	---	PASS
		5690_UNII-2C	-9.82	≤11.00	-6.96	---	PASS
		5690_UNII-3	-12.98	≤30.00	-10.12	---	PASS
		5775	-9.33	≤30.00	-6.47	---	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.


2.The Duty Cycle Factor is compensated in the graph.

9.5. Test graphs

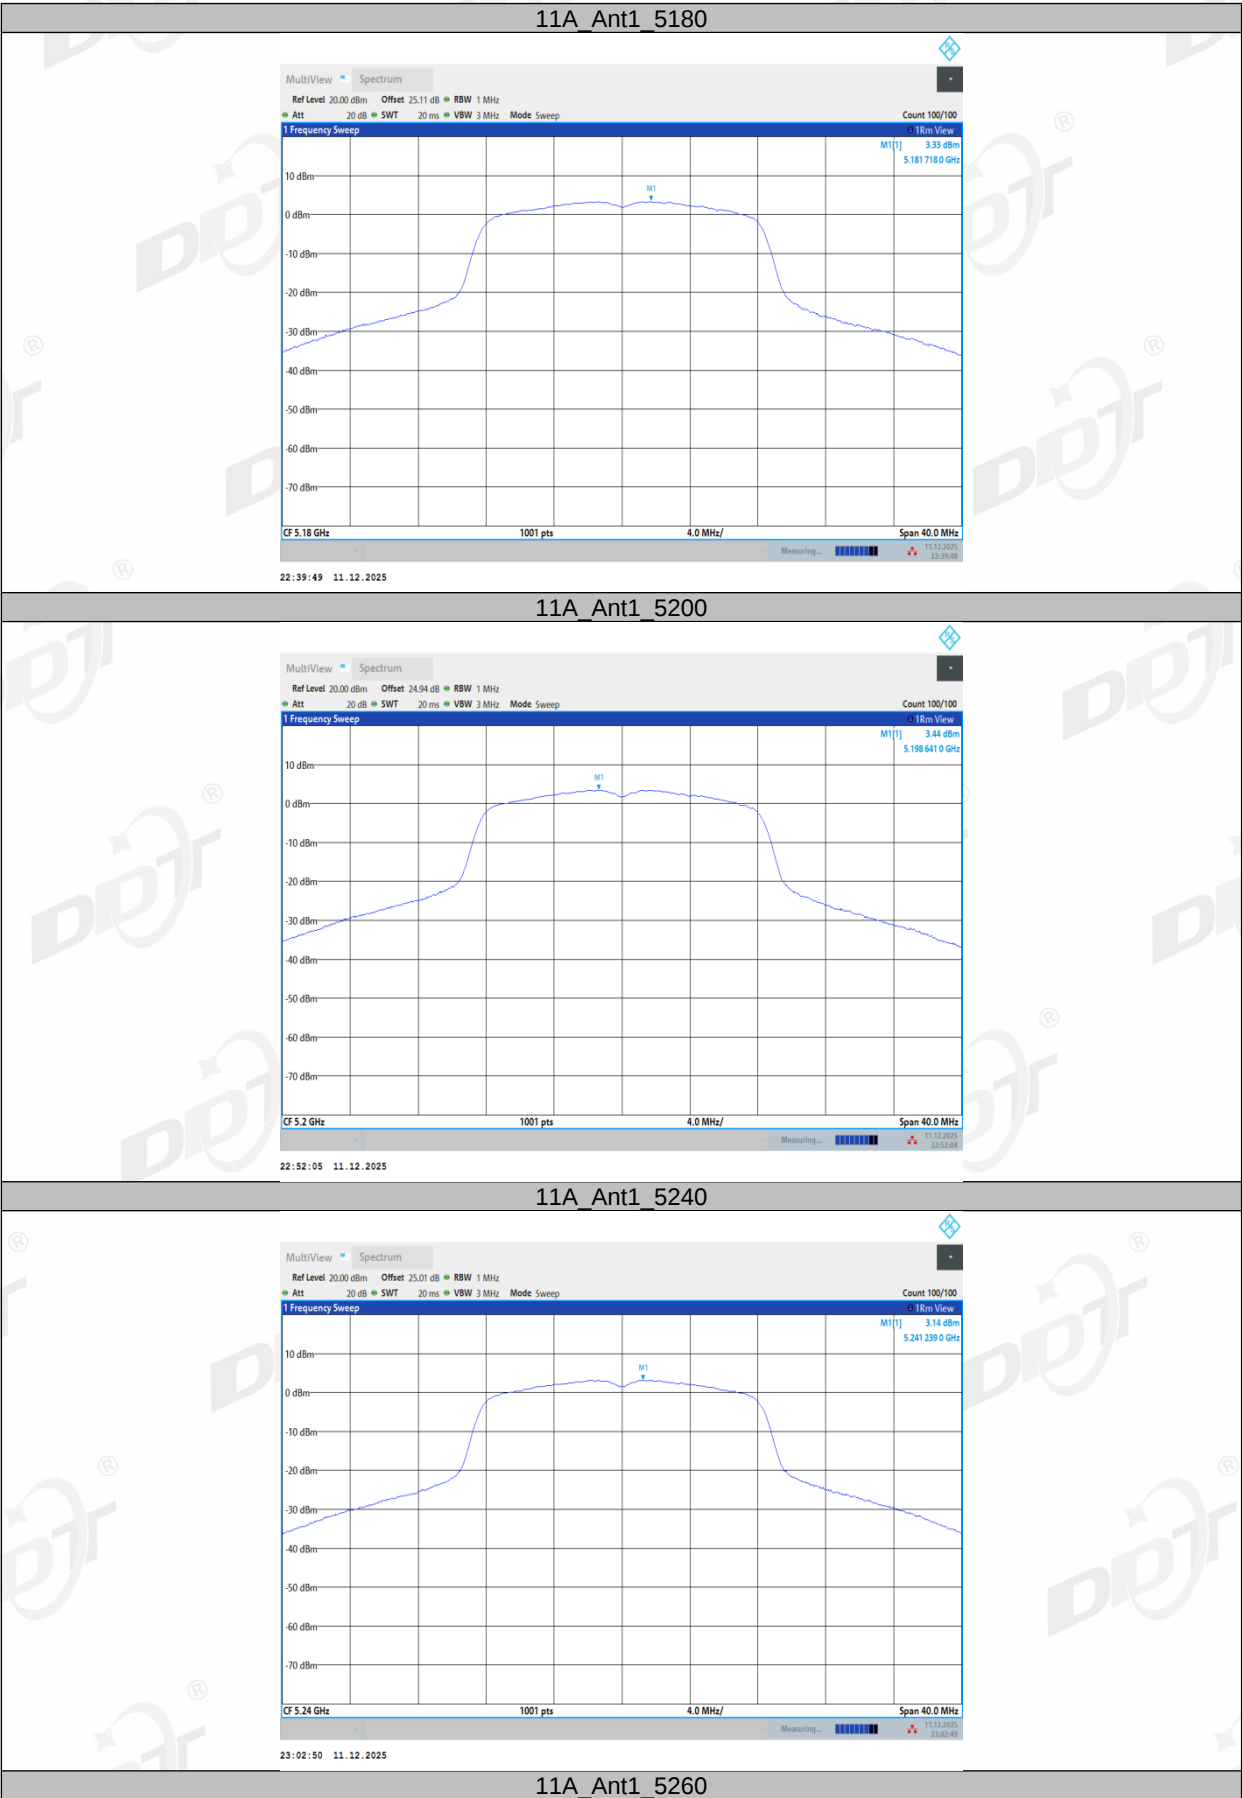


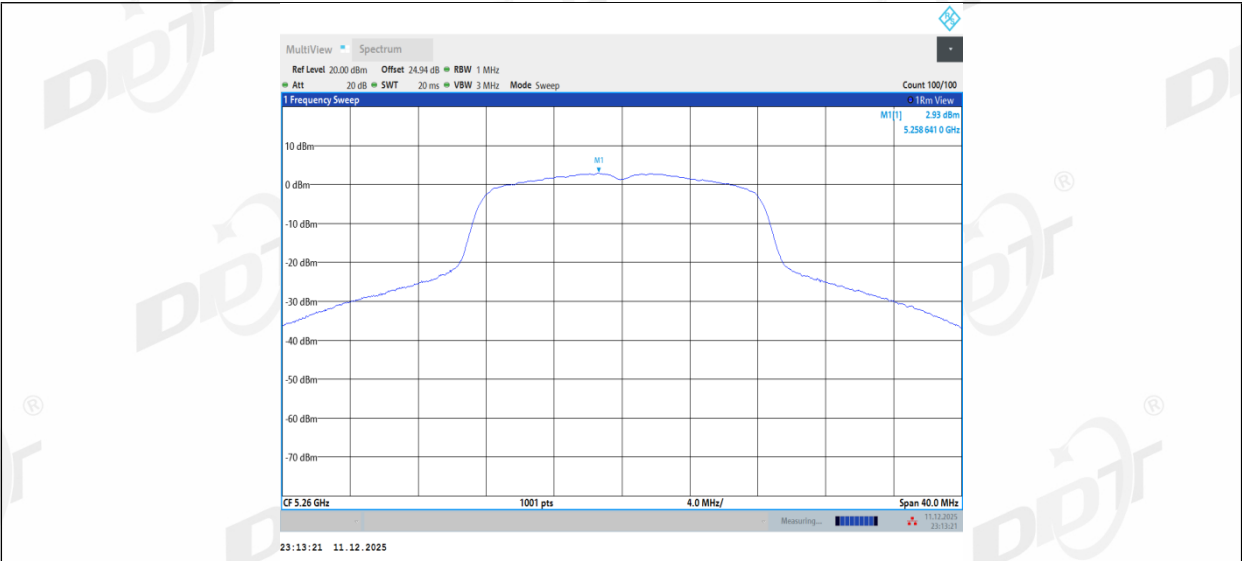


11A_Ant1_5280

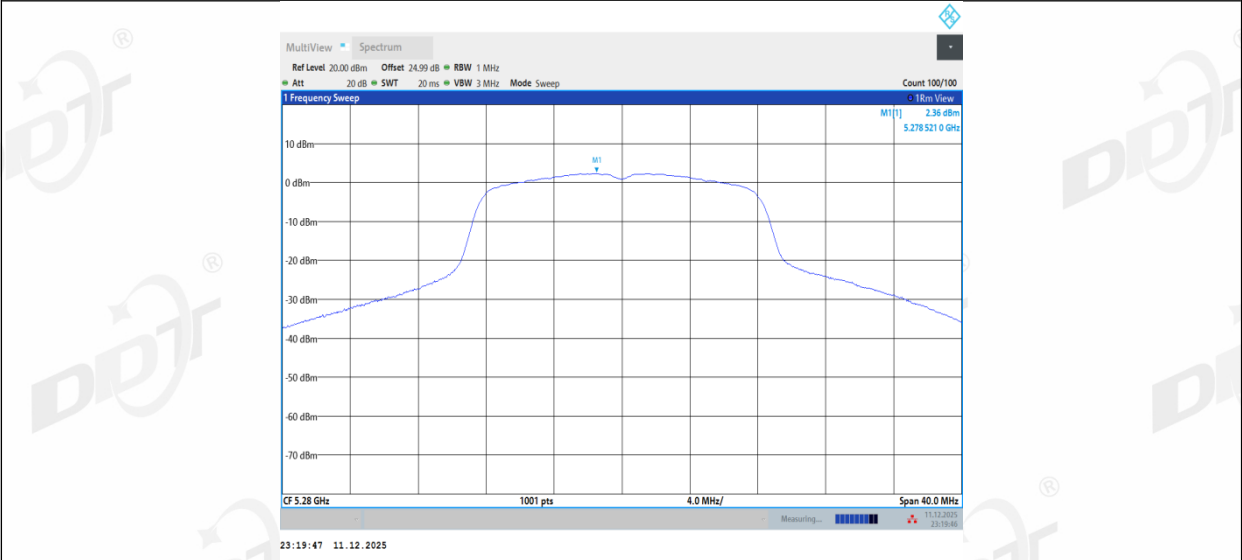


11A_Ant1_5320

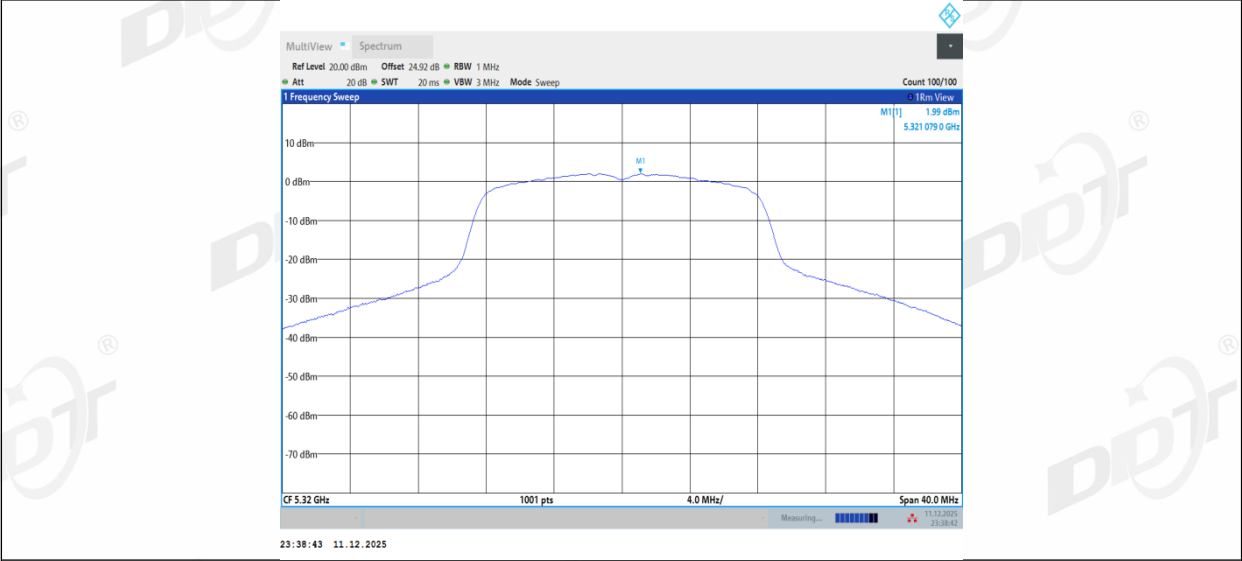


11A_Ant1_5500

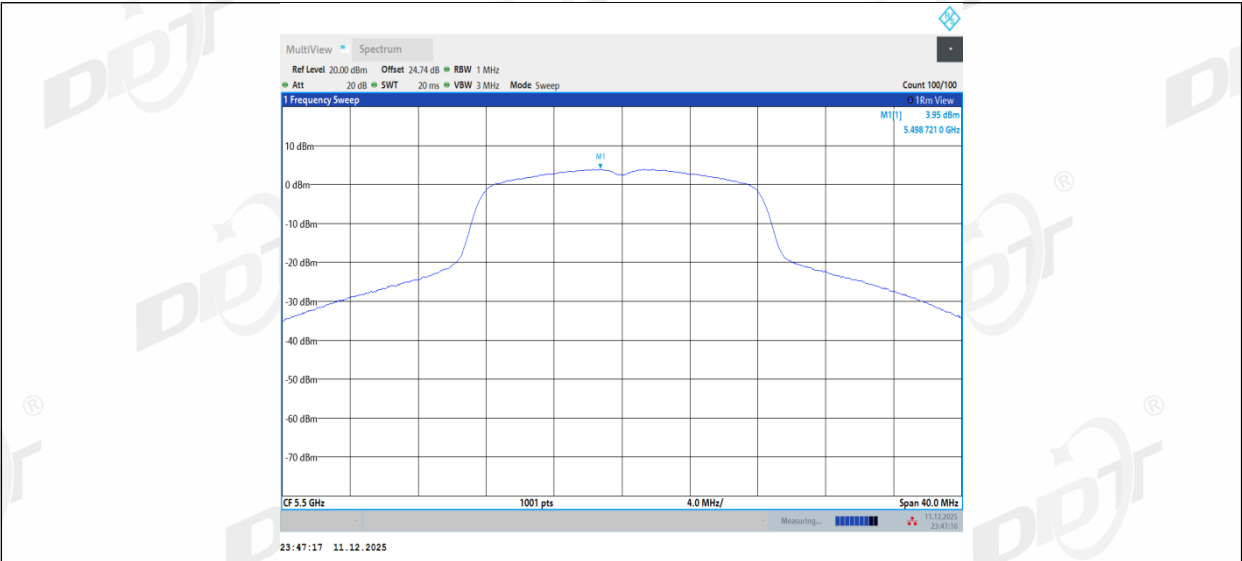


11A_Ant1_5580

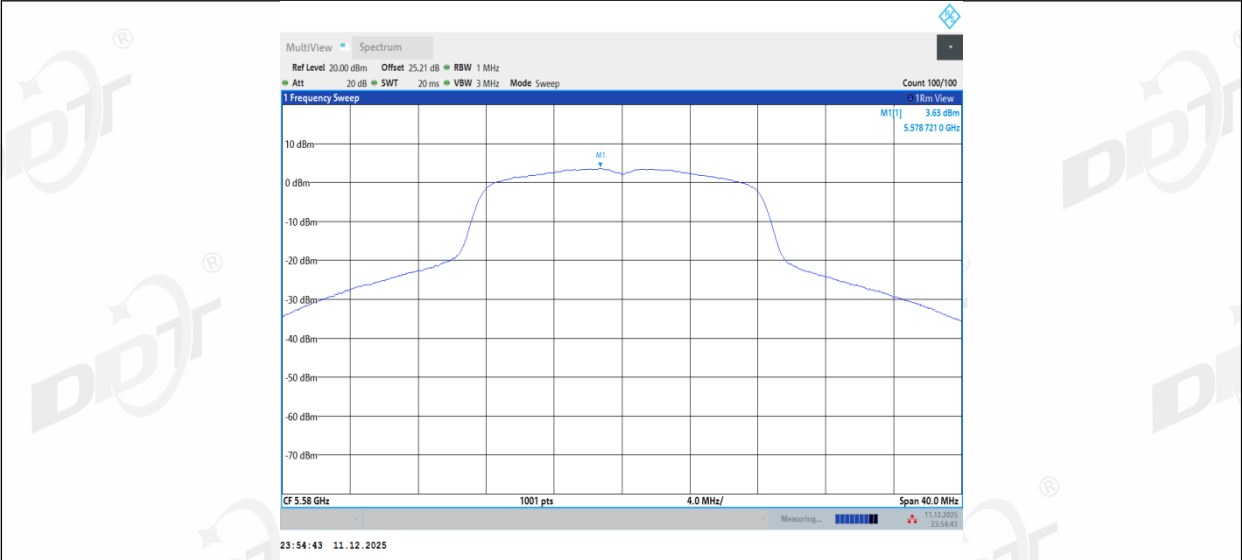


11A_Ant1_5700

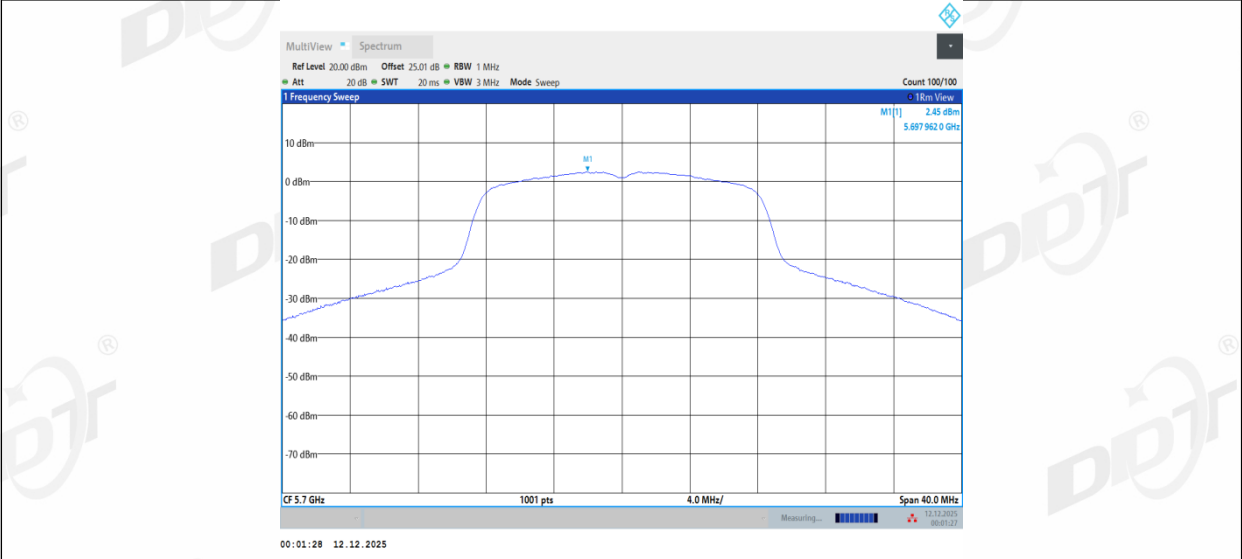


11A_Ant1_5720_UNII-2C

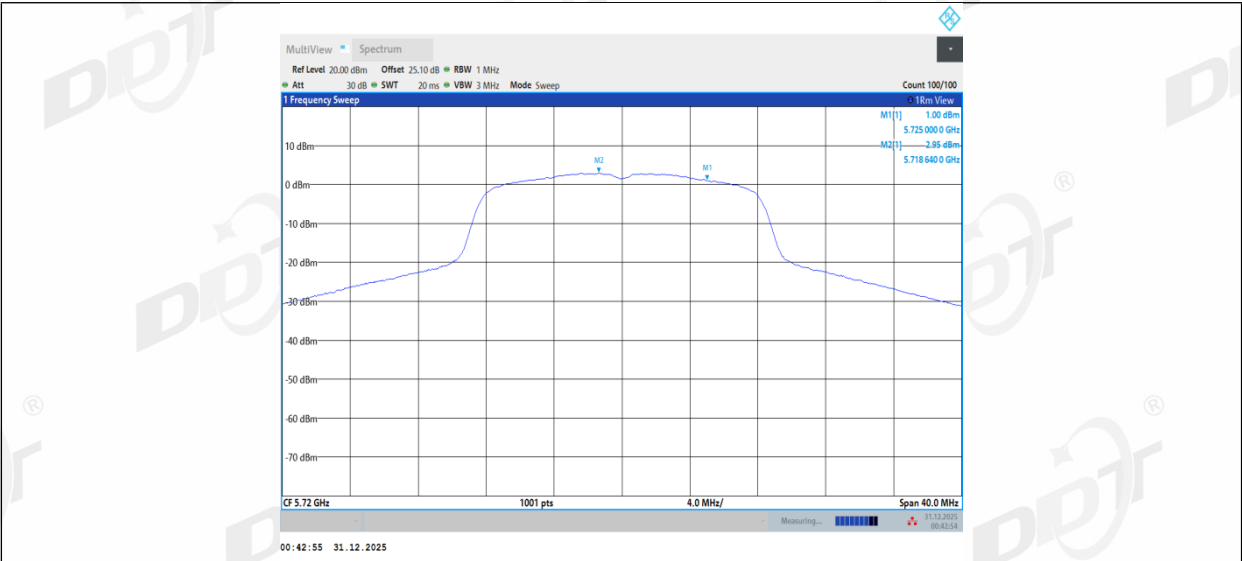


11A_Ant1_5720_UNII-3

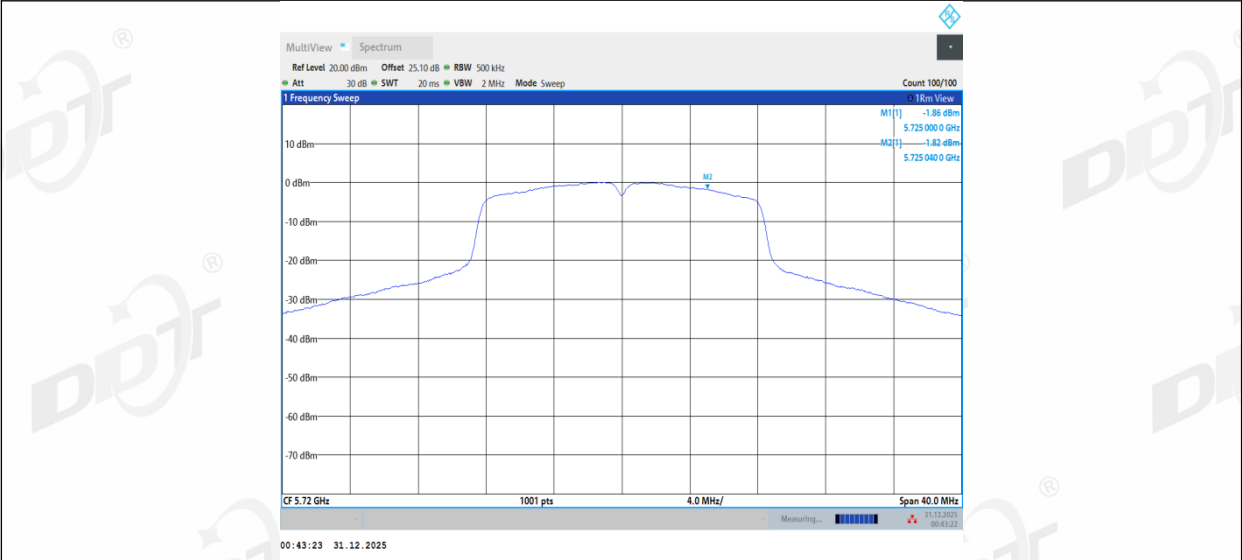


11A_Ant1_5745

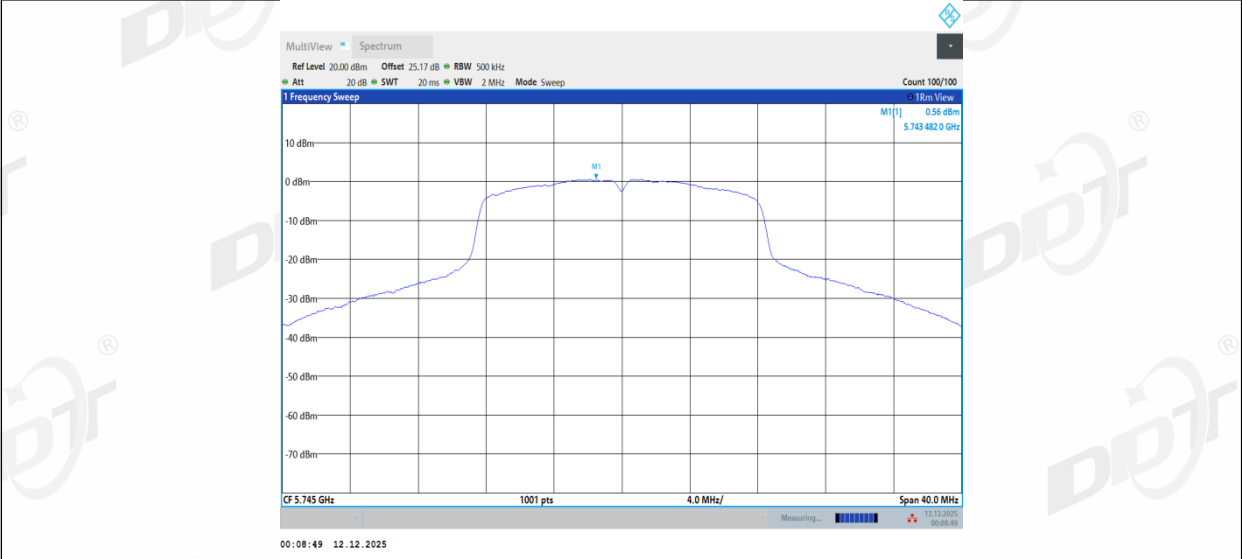


11A_Ant1_5785

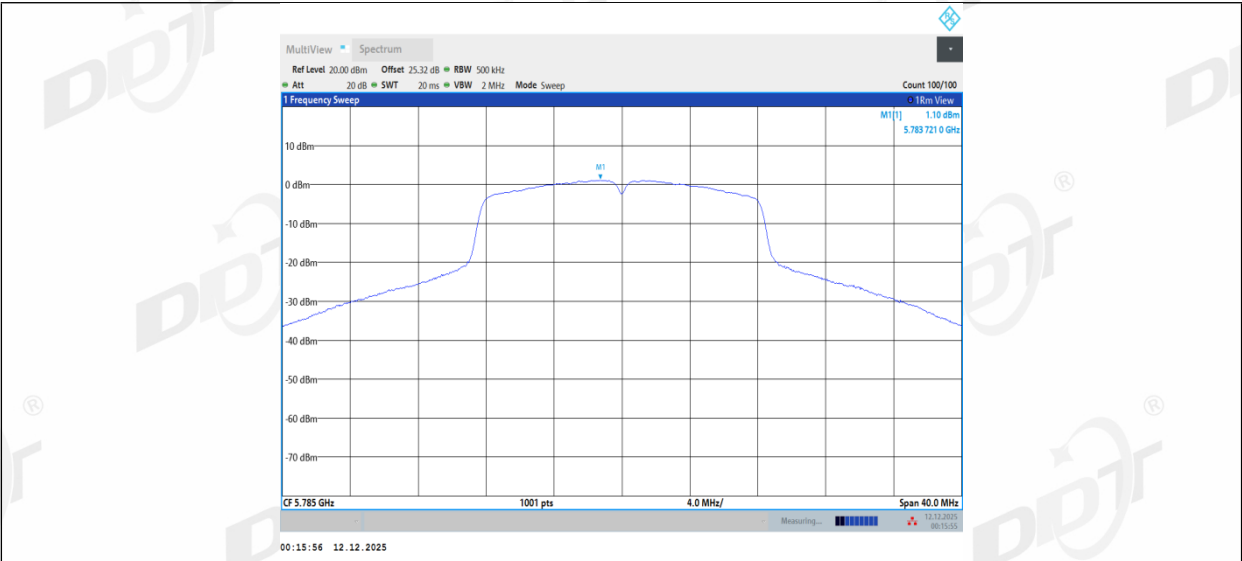


11A_Ant1_5825

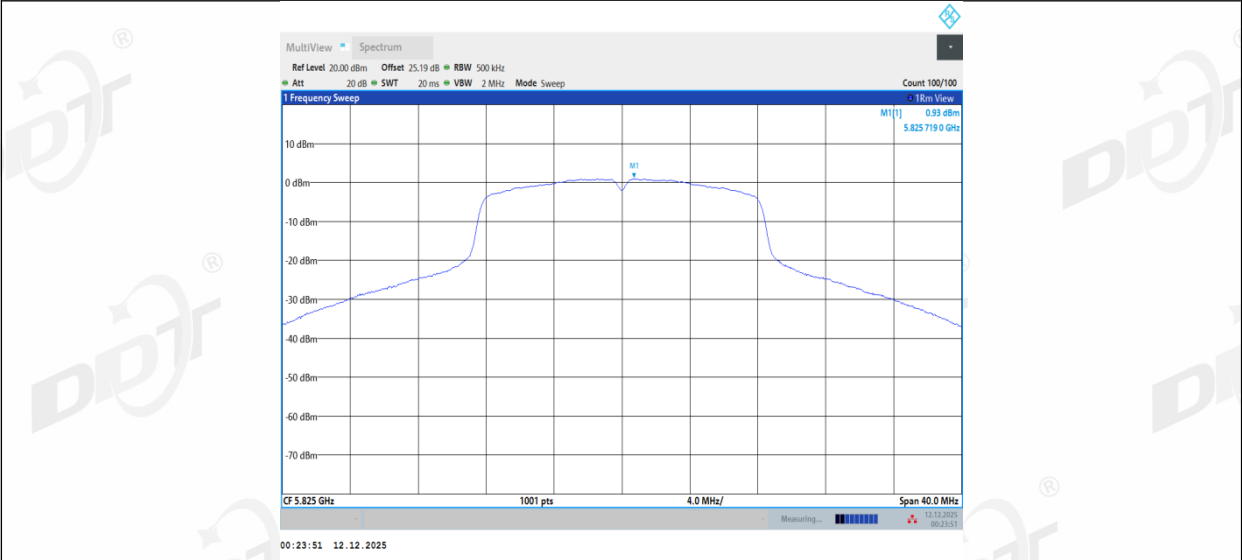


11N20SISO_Ant1_5180

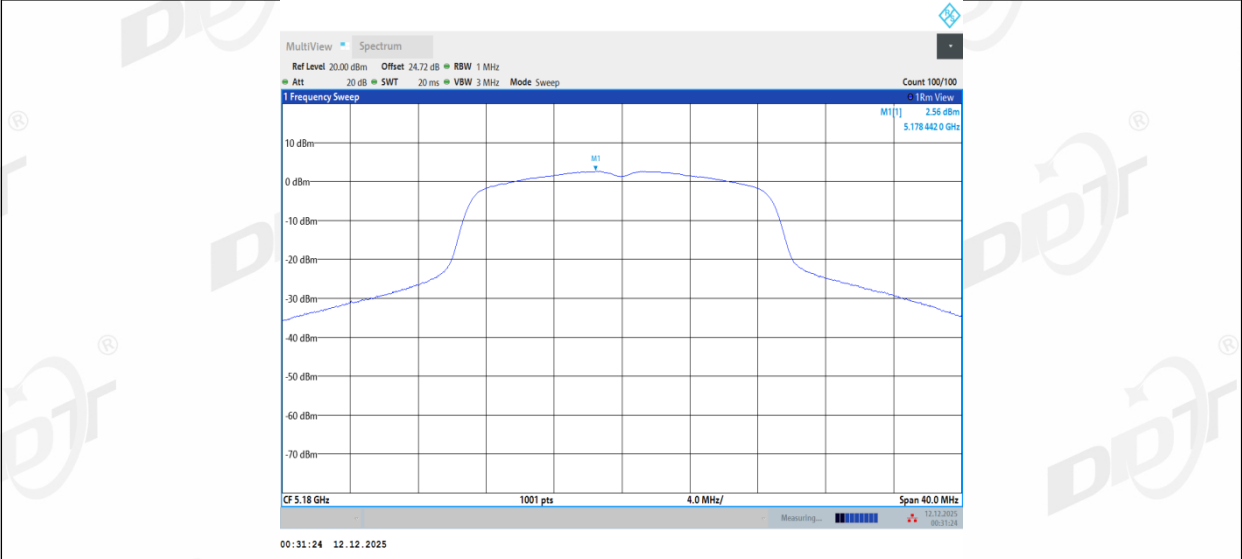


11N20SISO_Ant1_5200

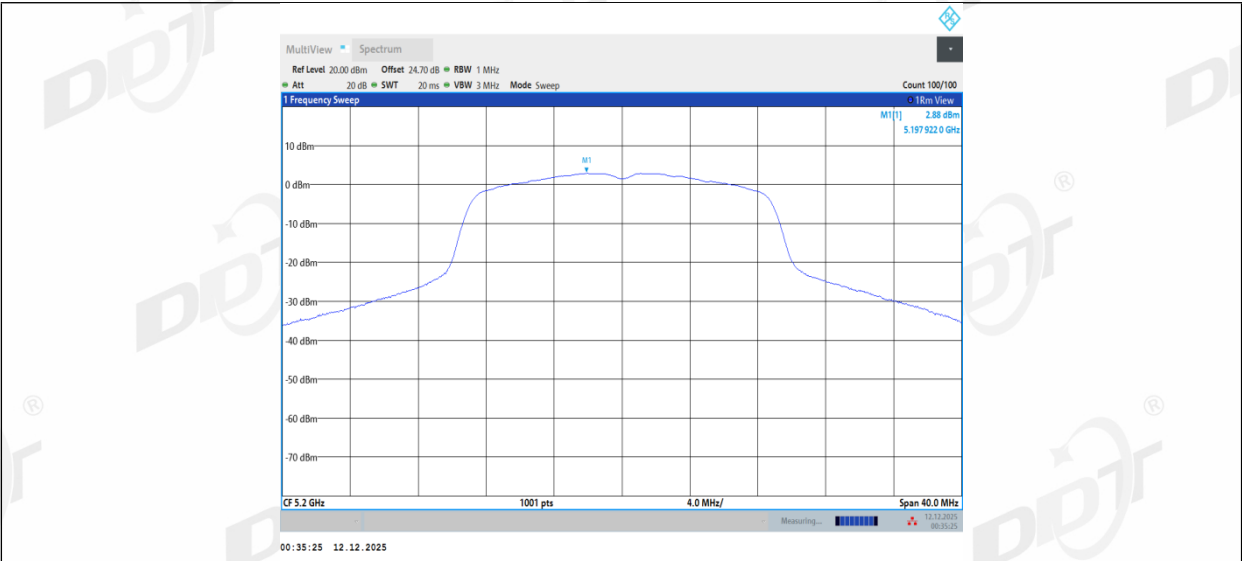


11N20SISO_Ant1_5240

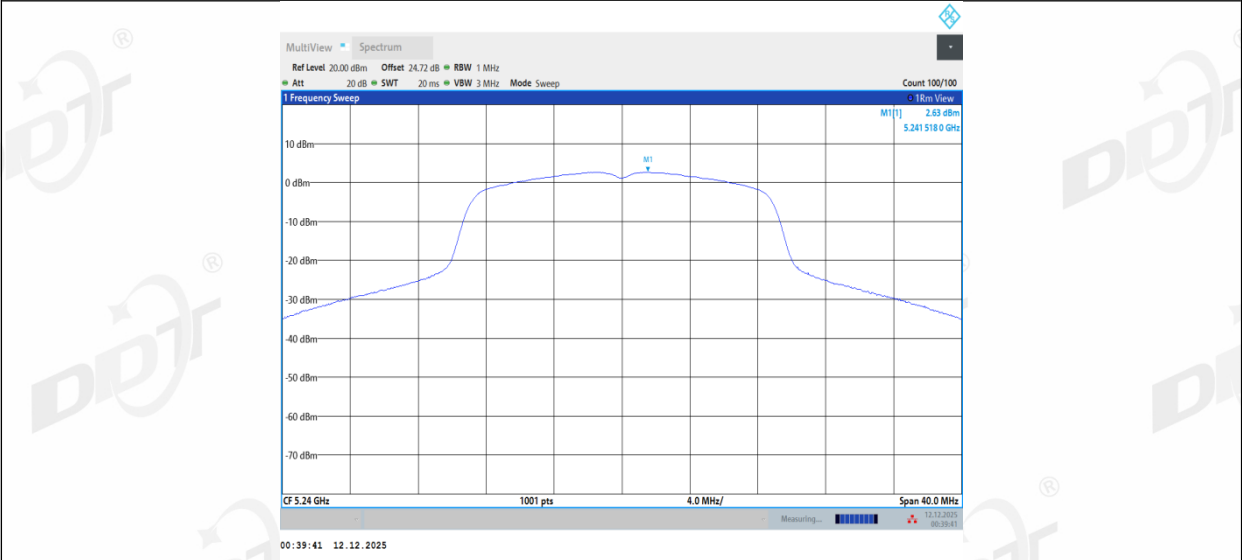


11N20SISO_Ant1_5260

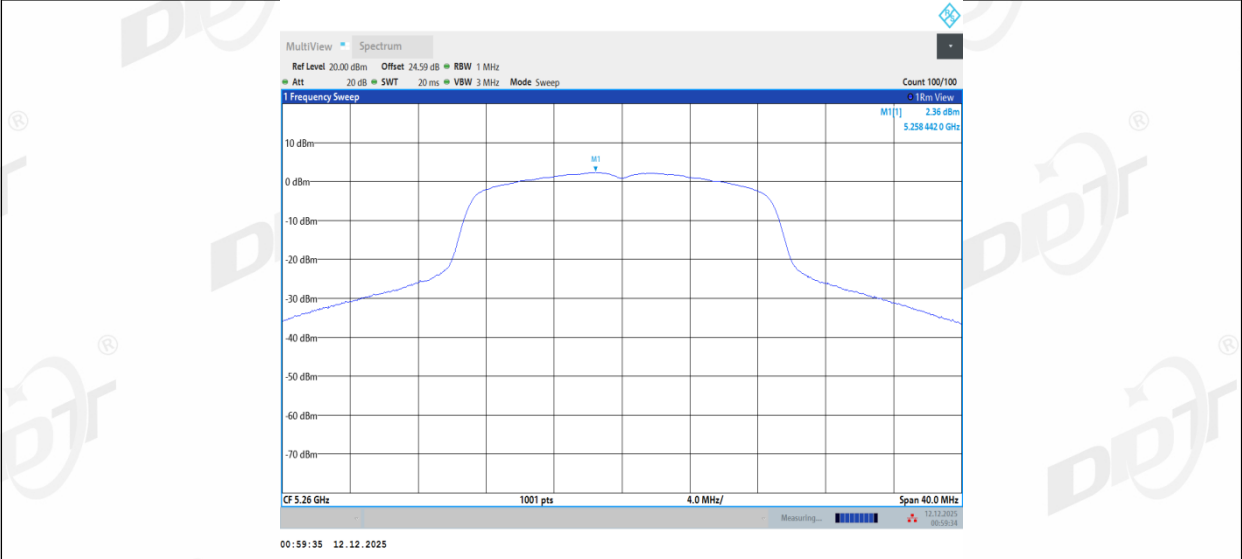


11N20SISO_Ant1_5280

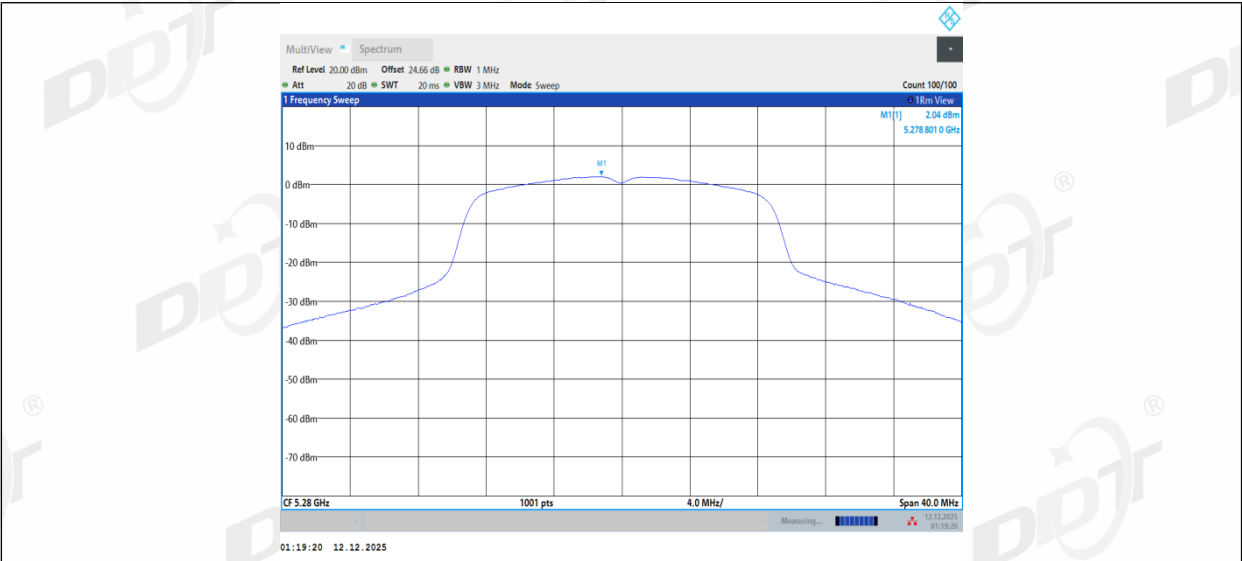

11N20SISO_Ant1_5320

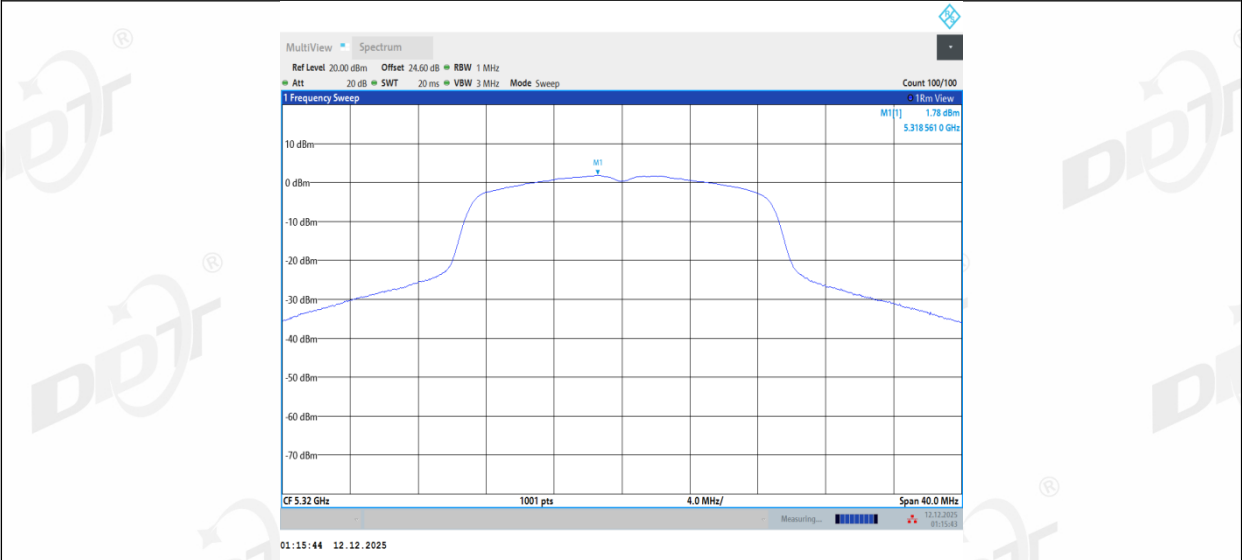

11N20SISO_Ant1_5500

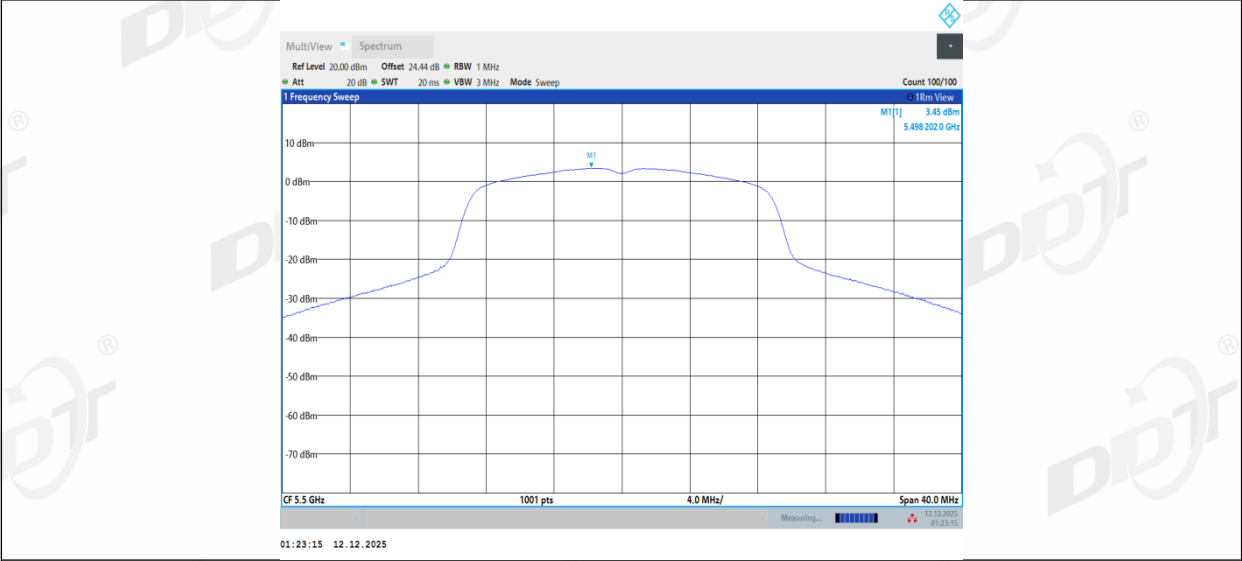

11N20SISO_Ant1_5580