

AVM Manual


2.4 GHz Wireless Microphone System . User Manual

Quick Start

1	Remove the battery insulation tabs (if fitted). Fully charge the microphones and receiver before first use.
2	Connect the receiver to a compatible 6.35 mm microphone input on your speaker, amplifier or mixer.
3	Turn on the receiver, then turn on both microphones. They pair automatically.
4	When the connection indicator stays on, lower the speaker volume first, then raise it gradually and begin using the microphones

Microphone Controls

1. Battery/charging indicator
The moving battery bars indicate charging. When fully charged, the charging symbol turns off.
2. Connection indicator
Flashing: not connected. Steady: connected.
3. Power / Mute
Press and hold to turn the microphone on or off.Press briefly to mute or unmute.
4. Set
Reset microphone volume.
- 5/6. Volume +/Volume -
Adjusts microphone output volume.
7. USB-C charging port

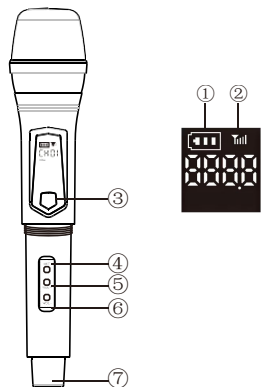

Radio Specifications

Name	Frequency band	Maximum RF power
Microphone	2402–2480 MHz	6.52 dBm
Receiver	2402–2480 MHz	4.15 dBm

Specifications and functions may vary slightly by production version.

Charging

Use a 5 V USB power source and the supplied cable. Charge in a dry, ventilated area. The first full charge normally takes about 3-4 hours. Do not use a damaged cable or continue charging if the product becomes unusually hot.

Troubleshooting

Problem	What to do
No sound	Confirm the receiver is connected to a 6.35 mm MIC input; check speaker input selection and volume; make sure the microphone is not muted.
Indicator keeps flashing	Move the microphone closer to the receiver. Turn both units off, then restart the receiver followed by the microphone.
Intermittent sound	Fully charge all devices, reduce obstacles, and keep away from strong 2.4 GHz interference such as Wi-Fi routers.
Feedback / loud squeal	Lower microphone or echo volume. Keep the microphone behind the speaker and do not point it toward the speaker.

Safety Information

Do not disassemble, modify or repair this product. Keep it away from water, excessive humidity, fire, high temperatures and direct sunlight. Keep small parts away from children. Stop use immediately if the product is damaged, overheats or operates abnormally.

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

RF Exposure Information

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.