







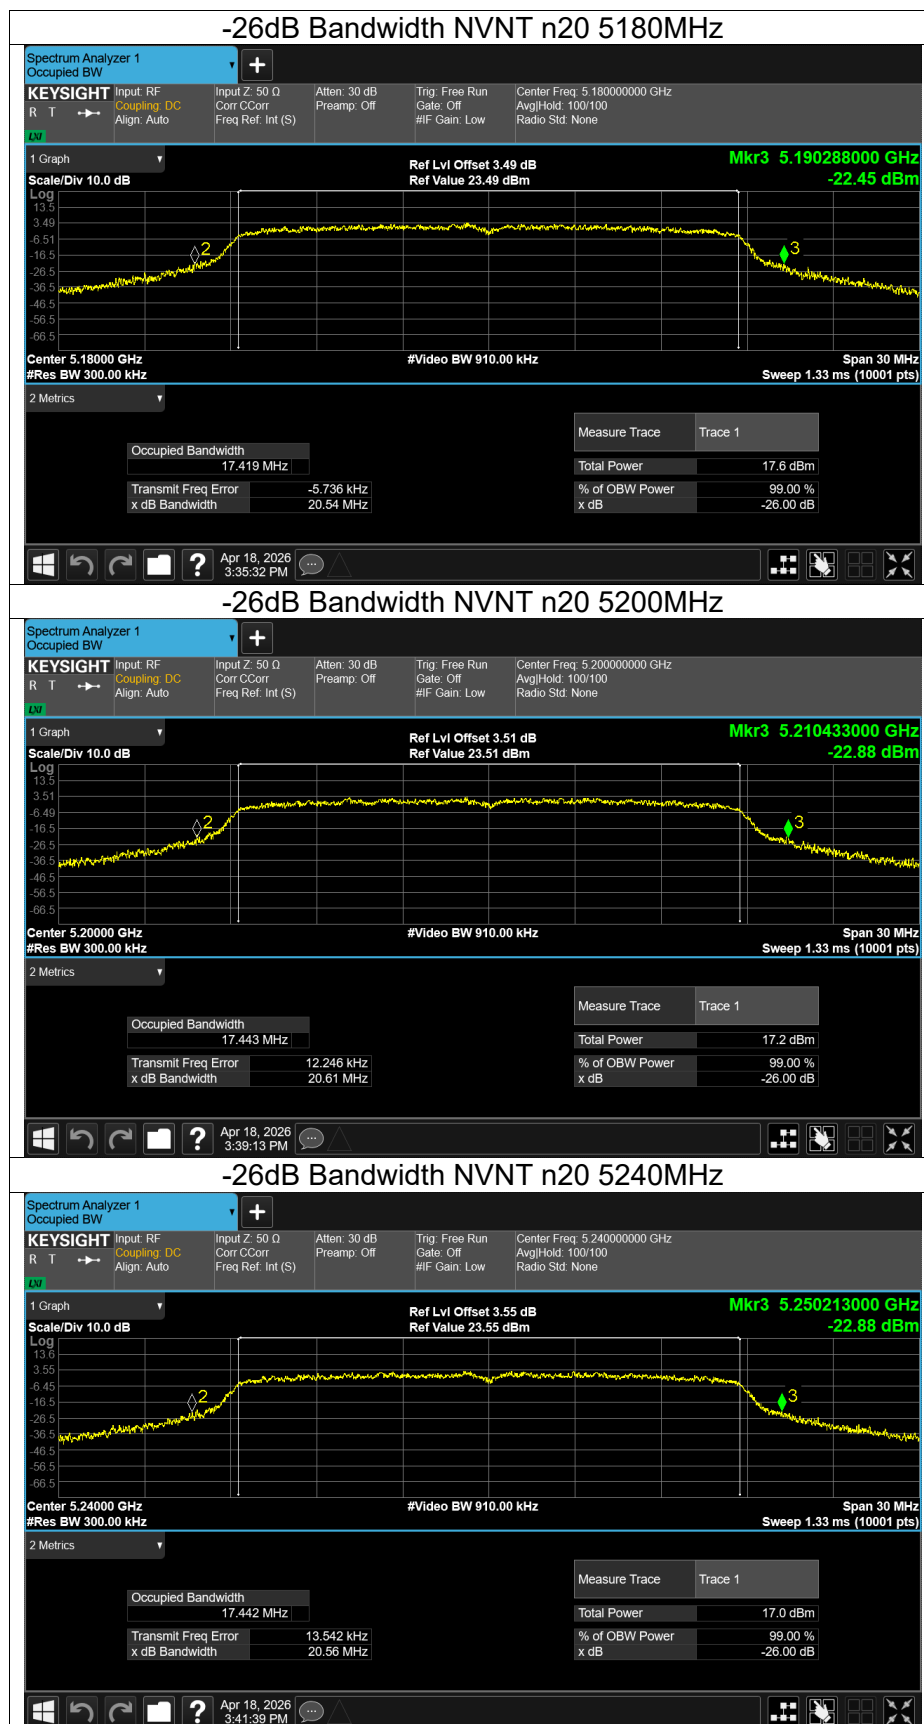

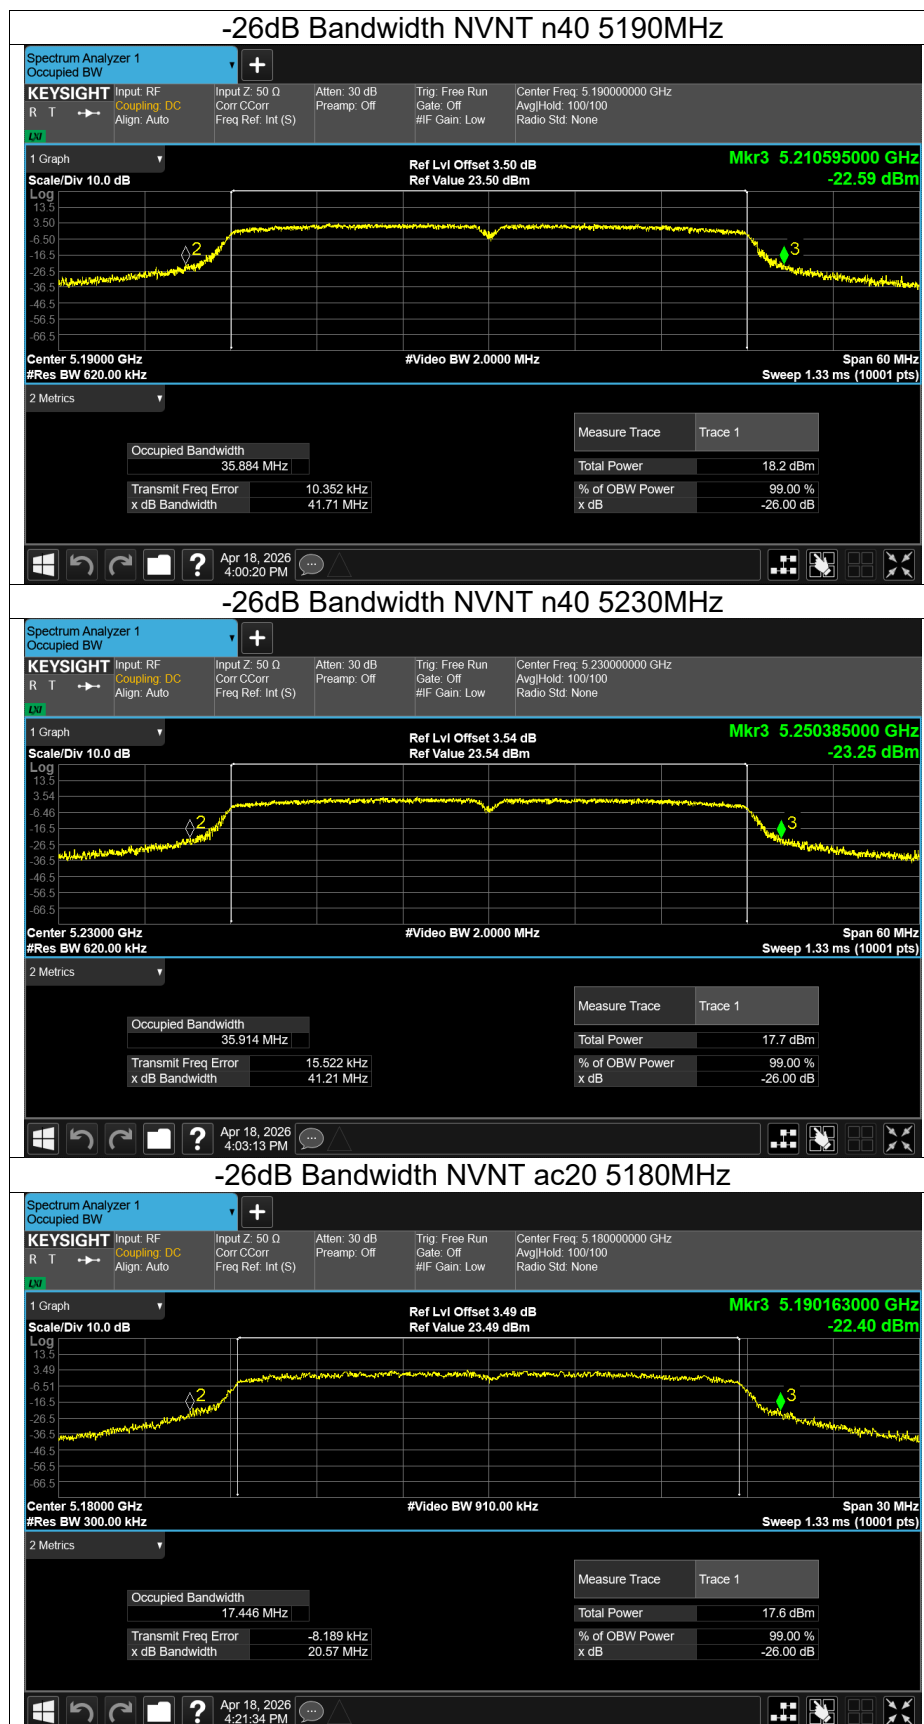

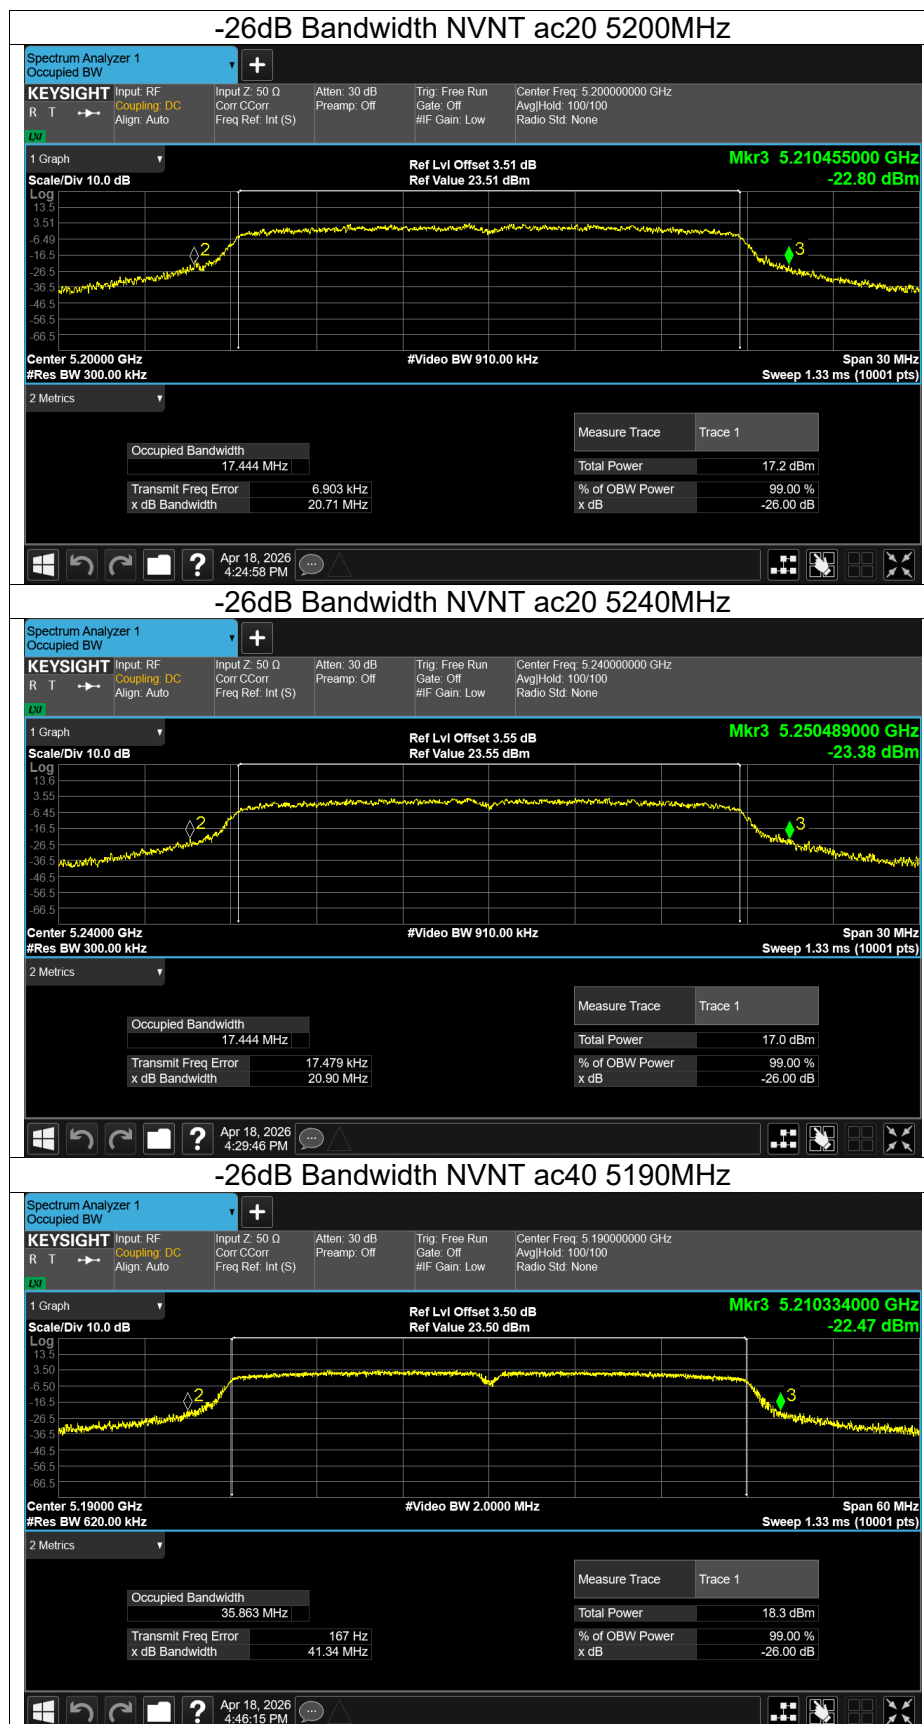



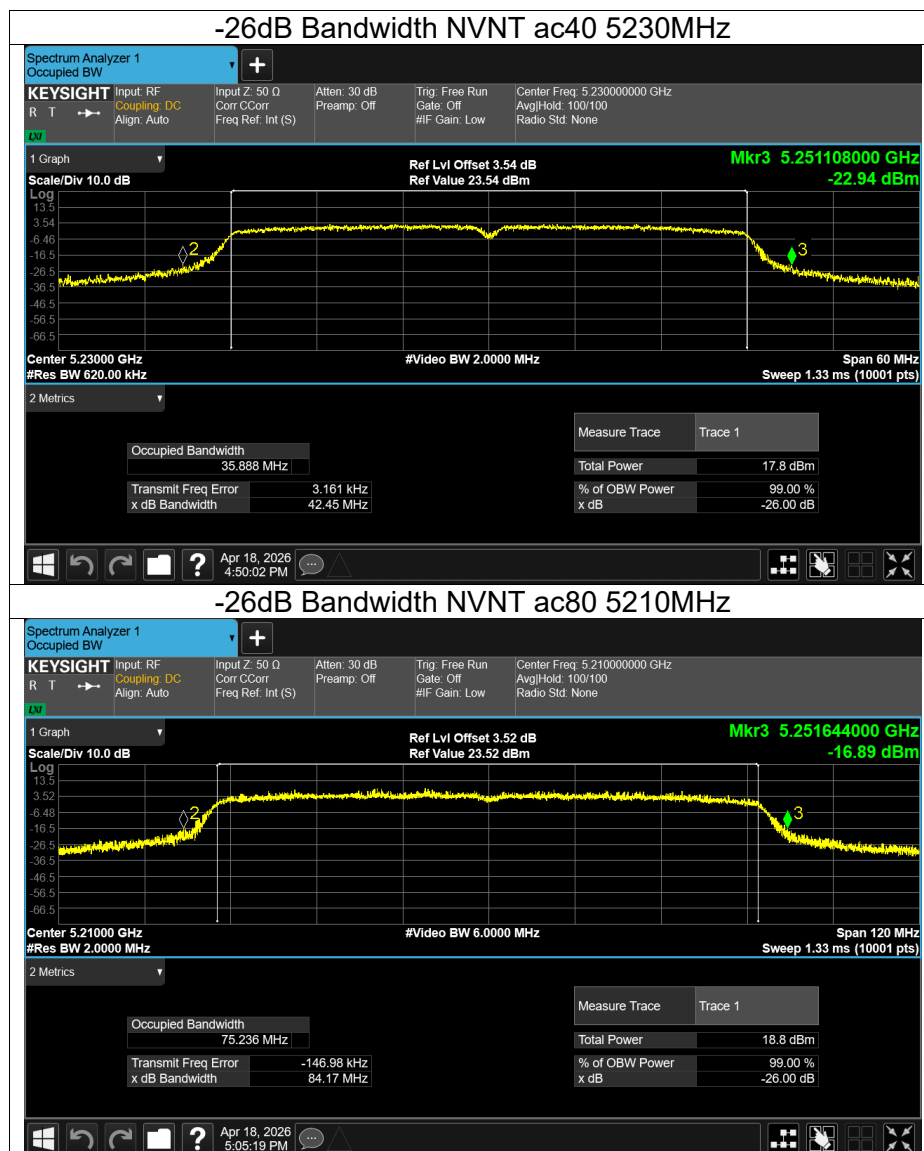






Occupied Channel Bandwidth




Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.274
NVNT	a	5200	16.289
NVNT	a	5240	16.296
NVNT	a	5745	16.245
NVNT	a	5785	16.233
NVNT	a	5825	16.256
NVNT	n20	5180	17.393
NVNT	n20	5200	17.418
NVNT	n20	5240	17.418
NVNT	n20	5745	17.406
NVNT	n20	5785	17.42
NVNT	n20	5825	17.409
NVNT	n40	5190	35.829
NVNT	n40	5230	35.848
NVNT	n40	5755	35.787
NVNT	n40	5795	35.815
NVNT	ac20	5180	17.403
NVNT	ac20	5200	17.42
NVNT	ac20	5240	17.409
NVNT	ac20	5745	17.403
NVNT	ac20	5785	17.385
NVNT	ac20	5825	17.391
NVNT	ac40	5190	35.83
NVNT	ac40	5230	35.837
NVNT	ac40	5755	35.791
NVNT	ac40	5795	35.77
NVNT	ac80	5210	75.168
NVNT	ac80	5775	74.937






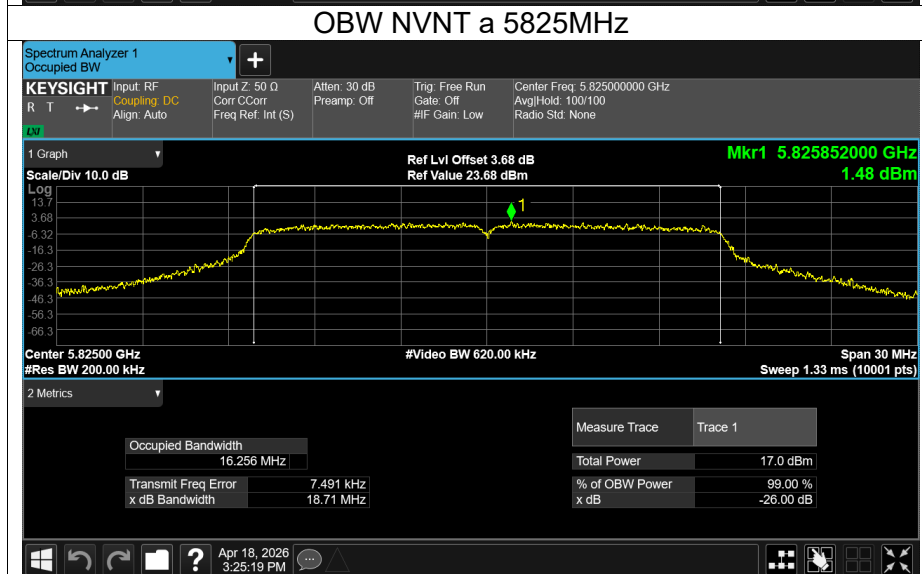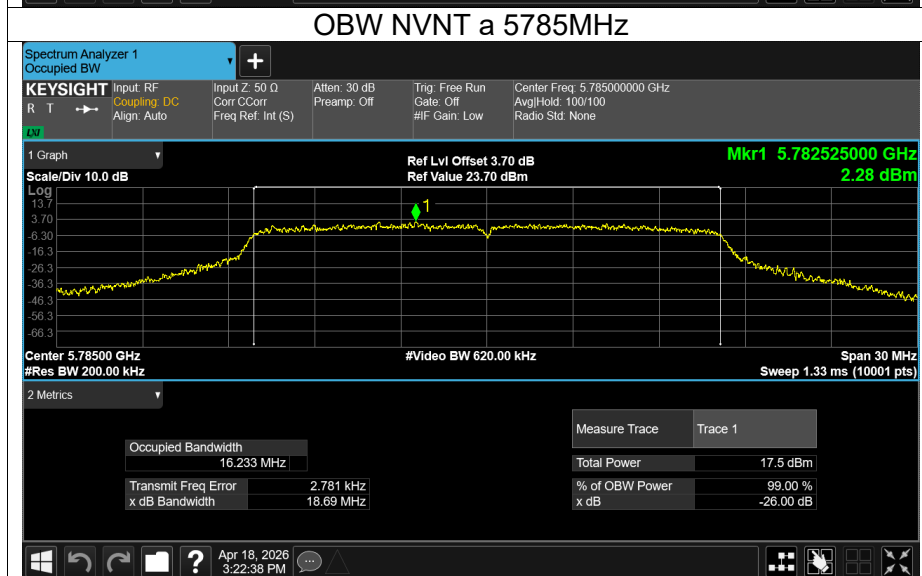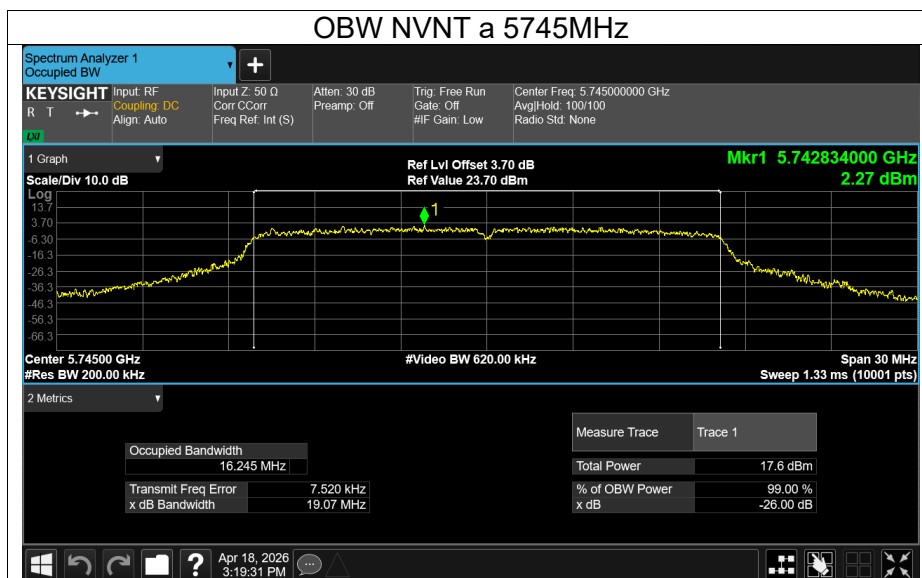


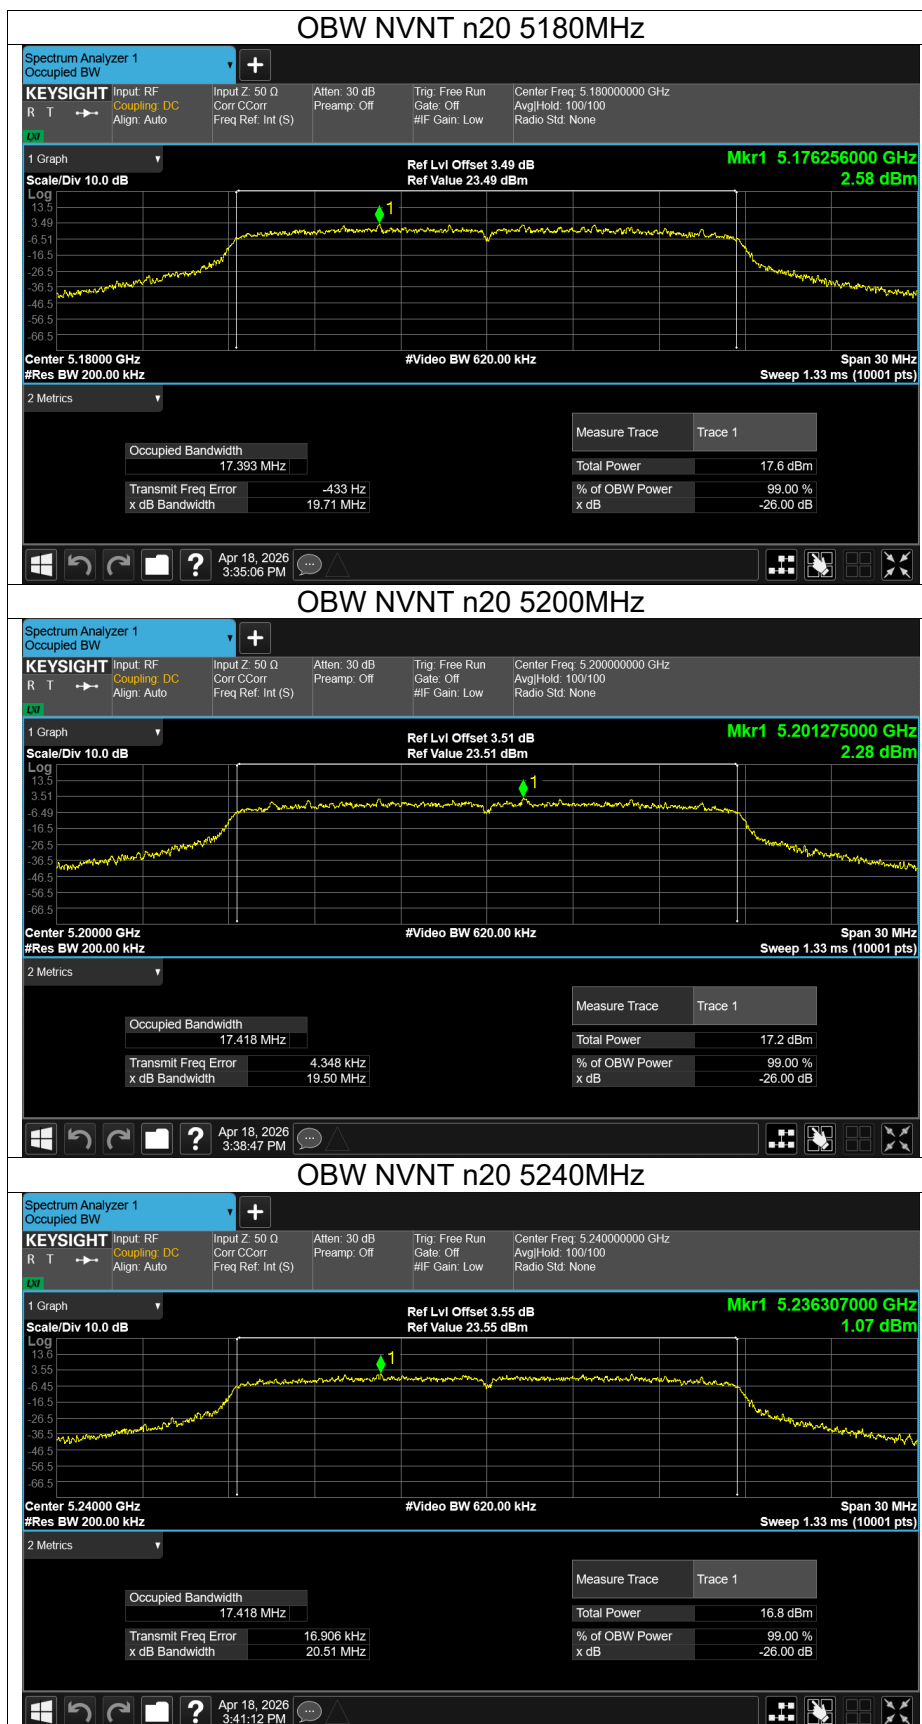




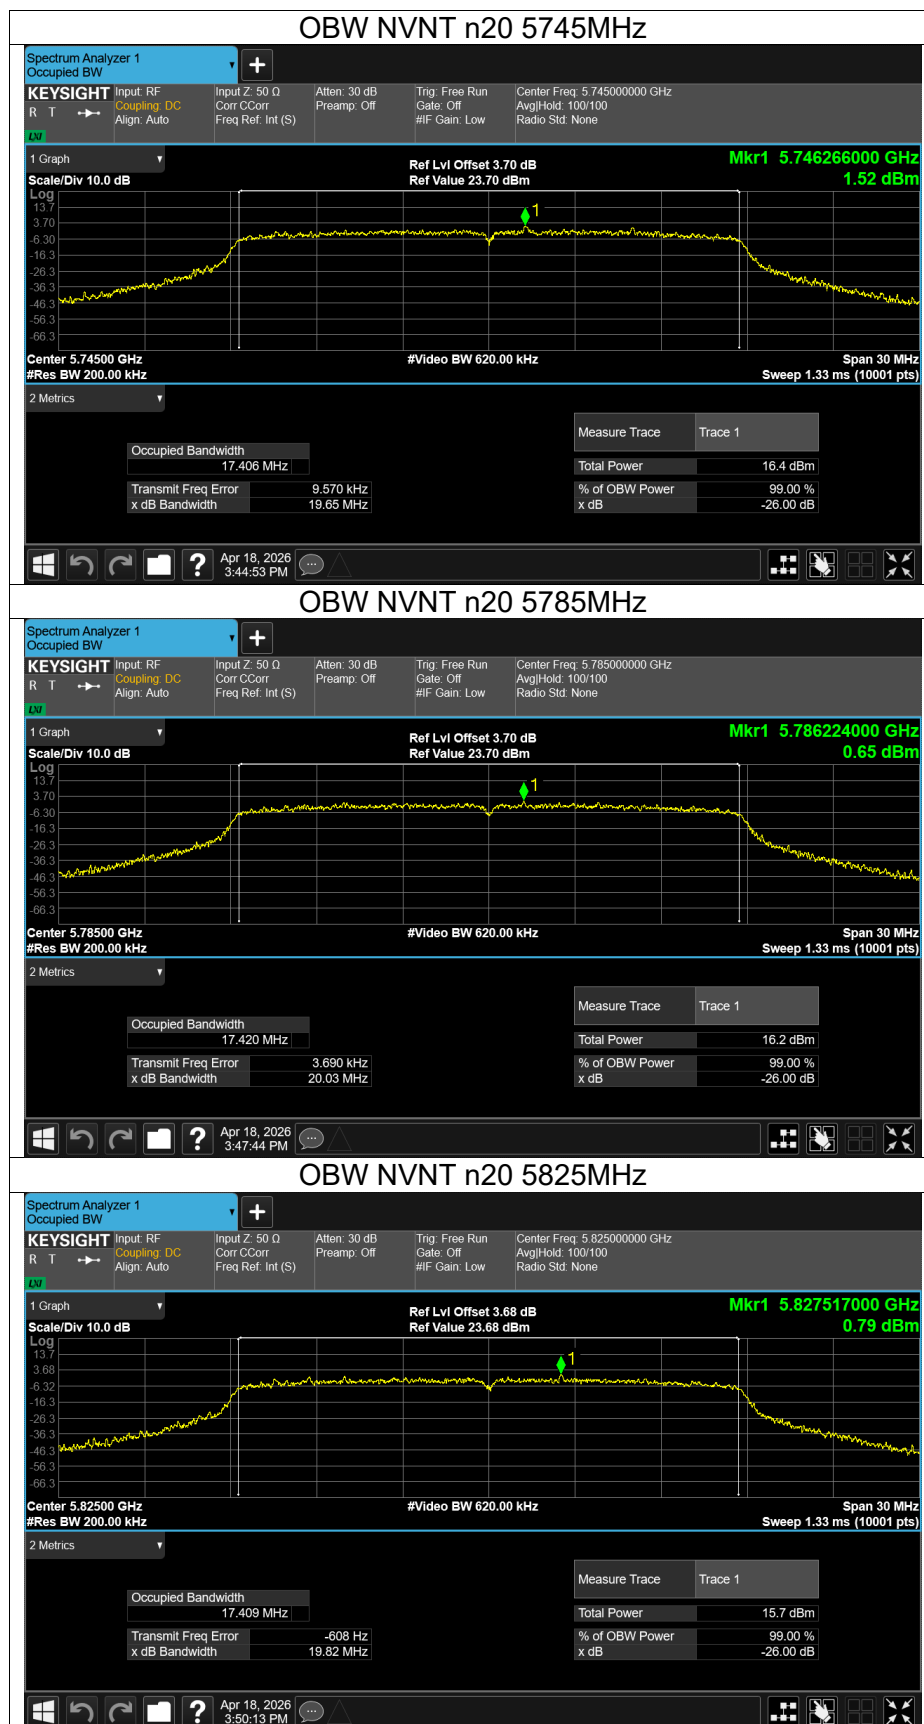


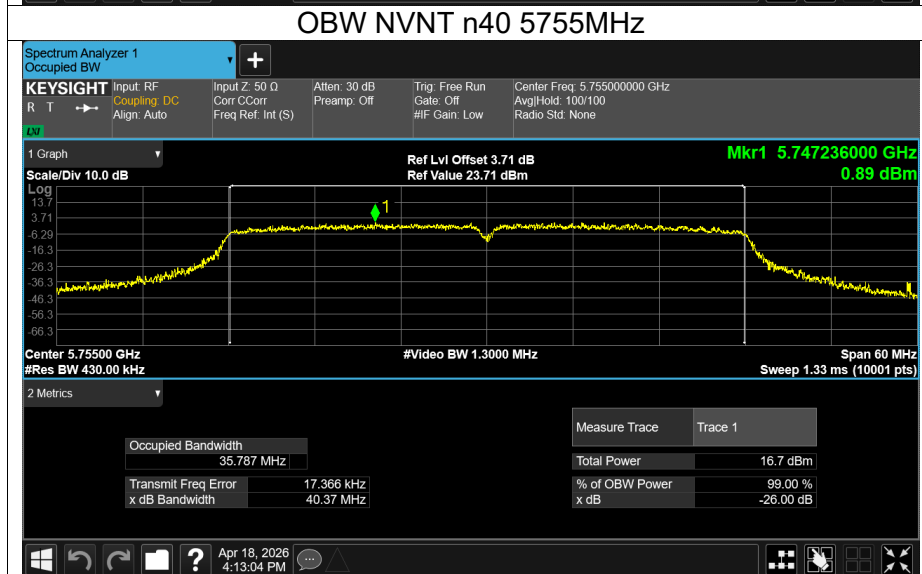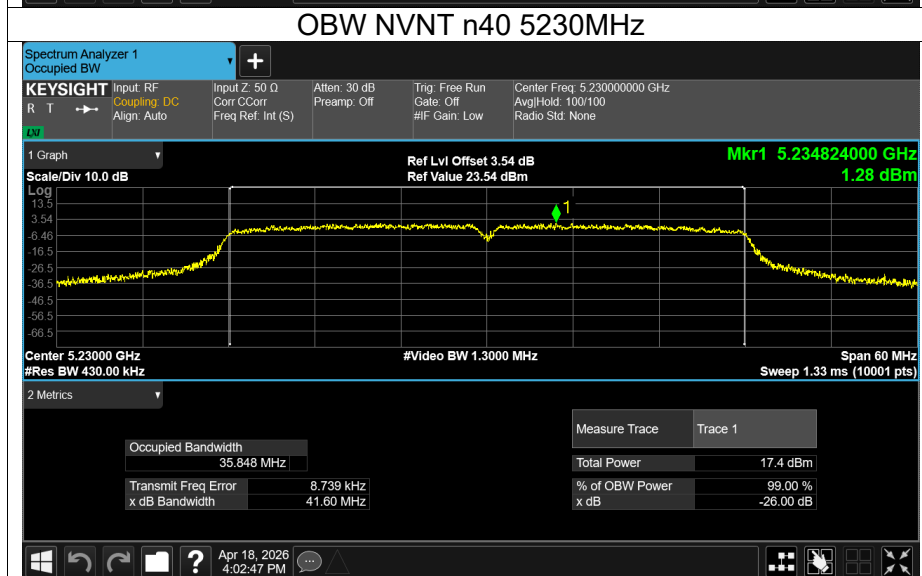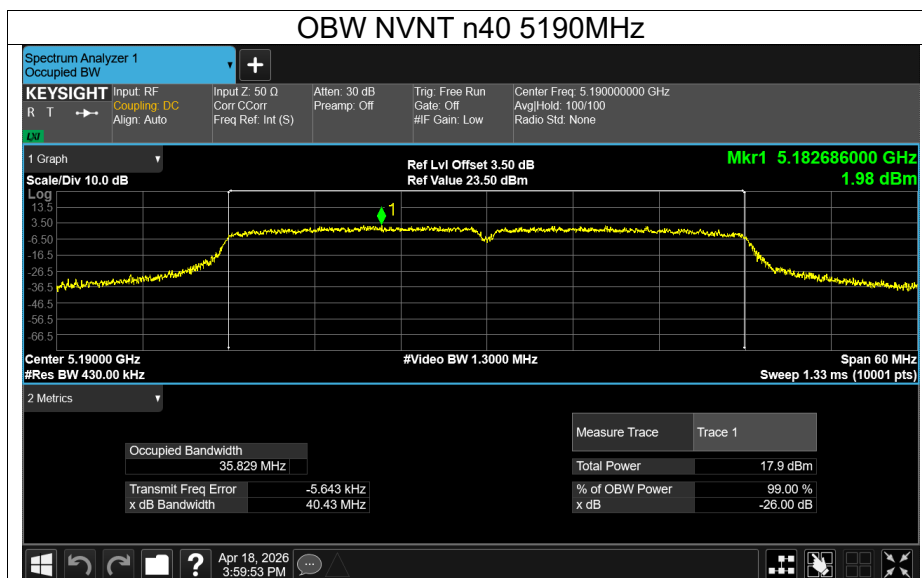


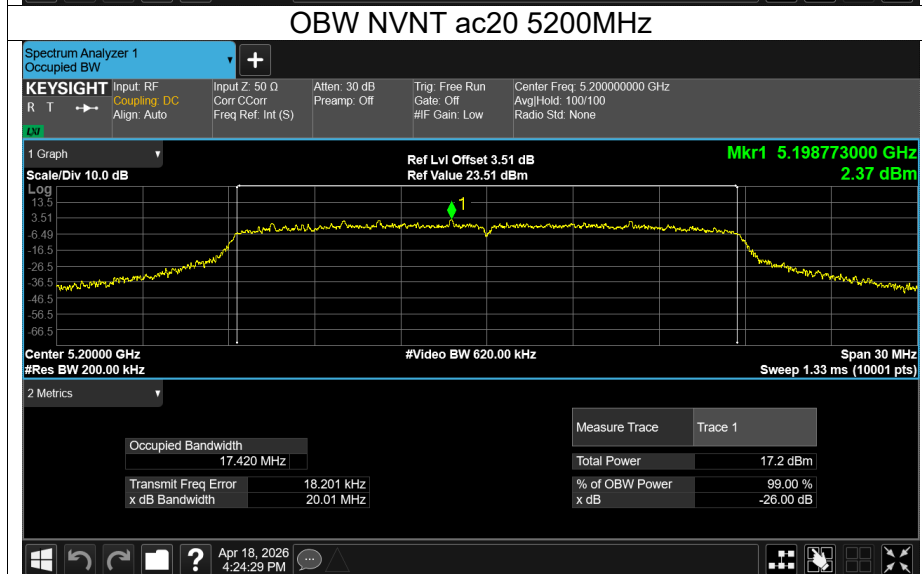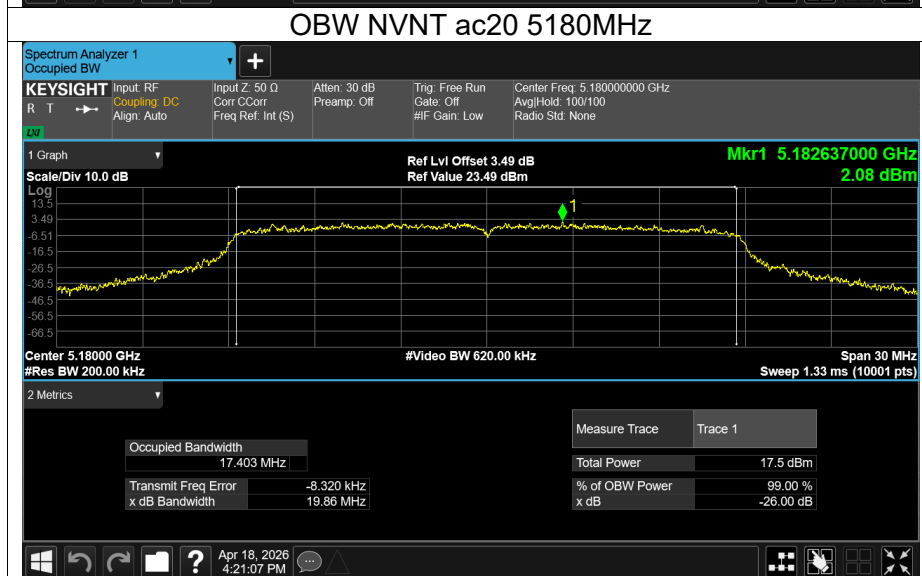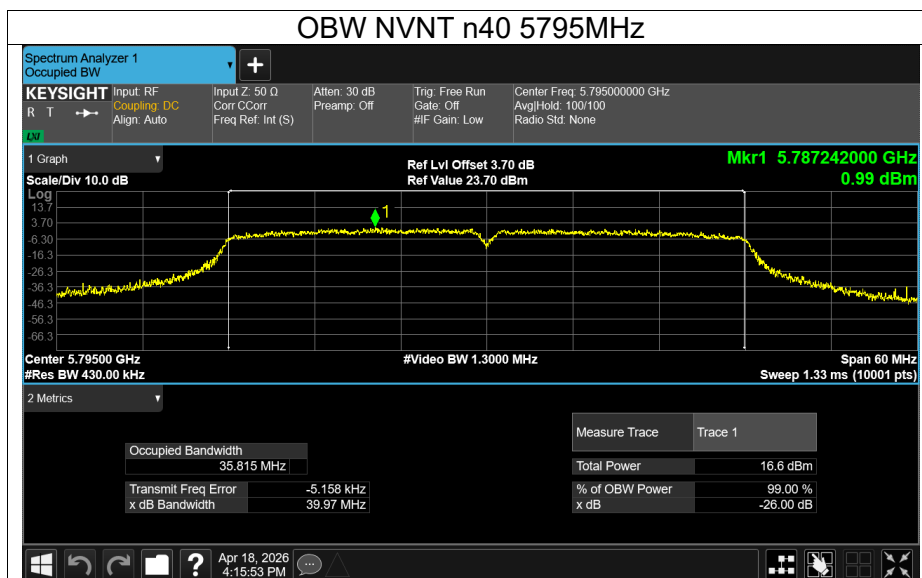

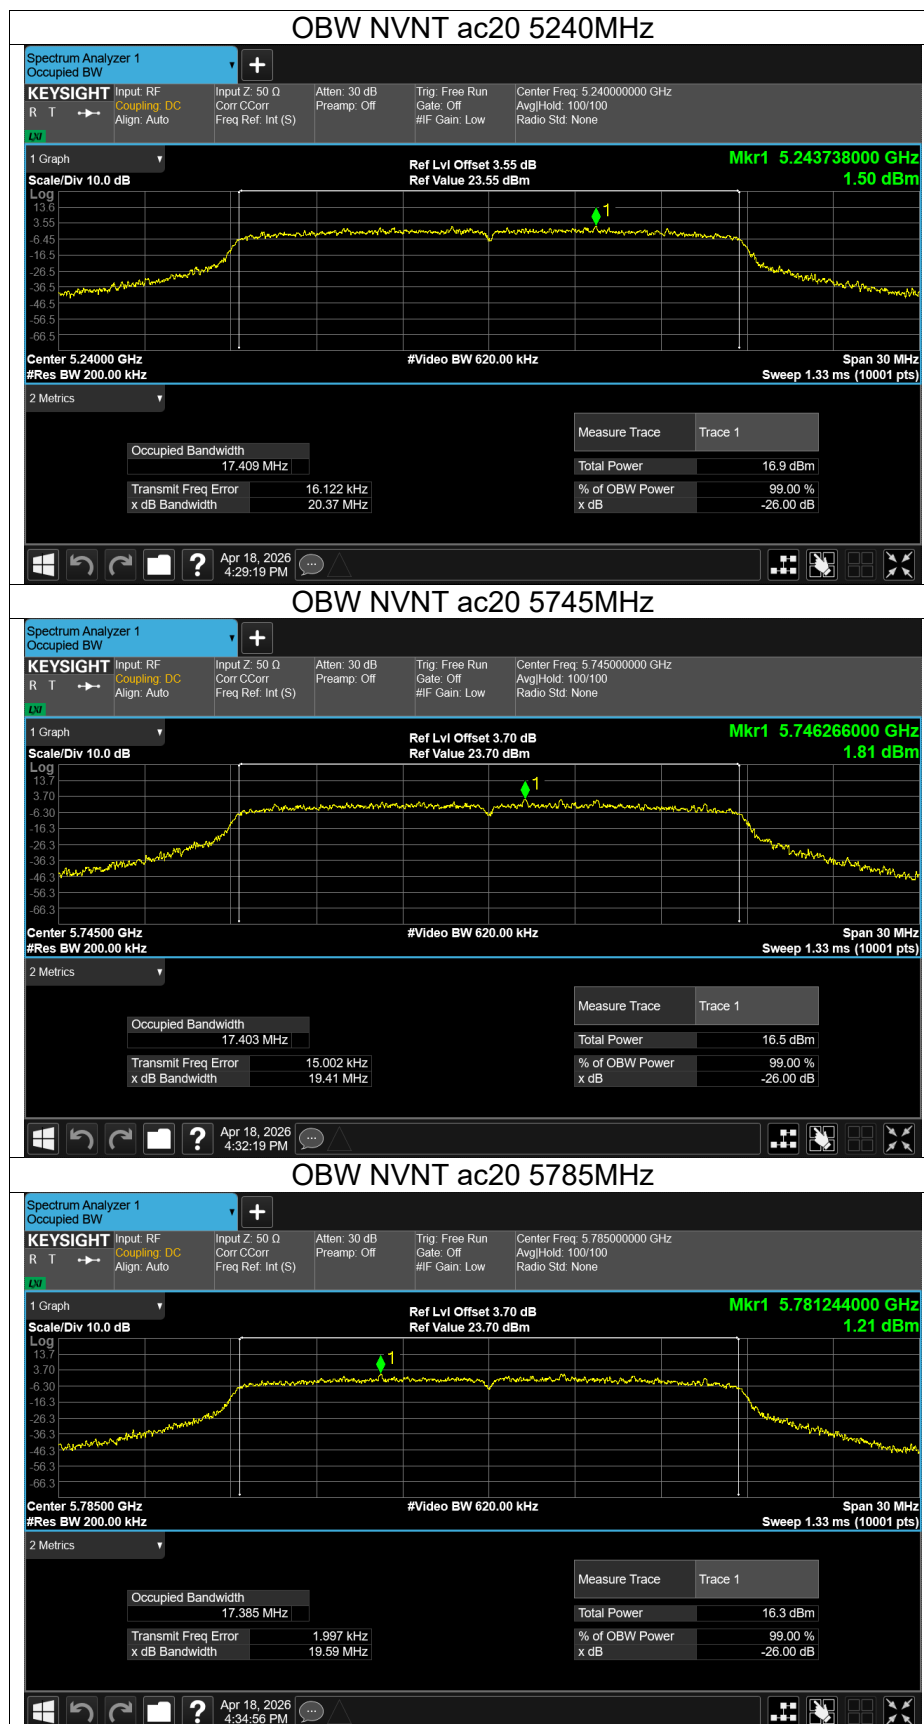

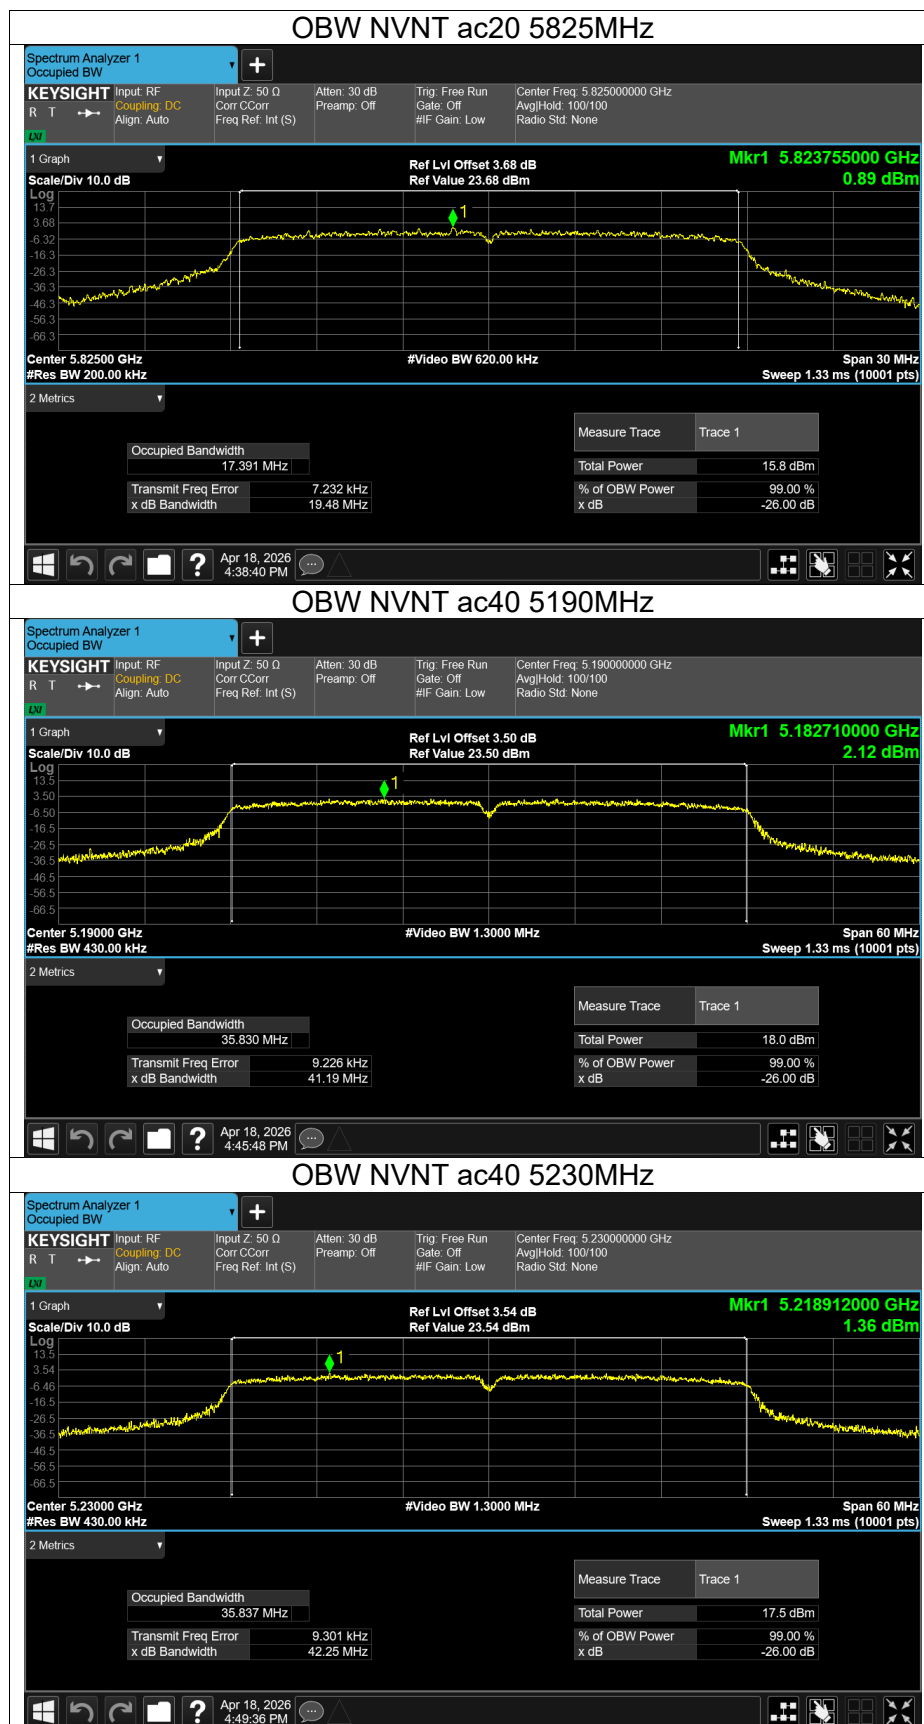

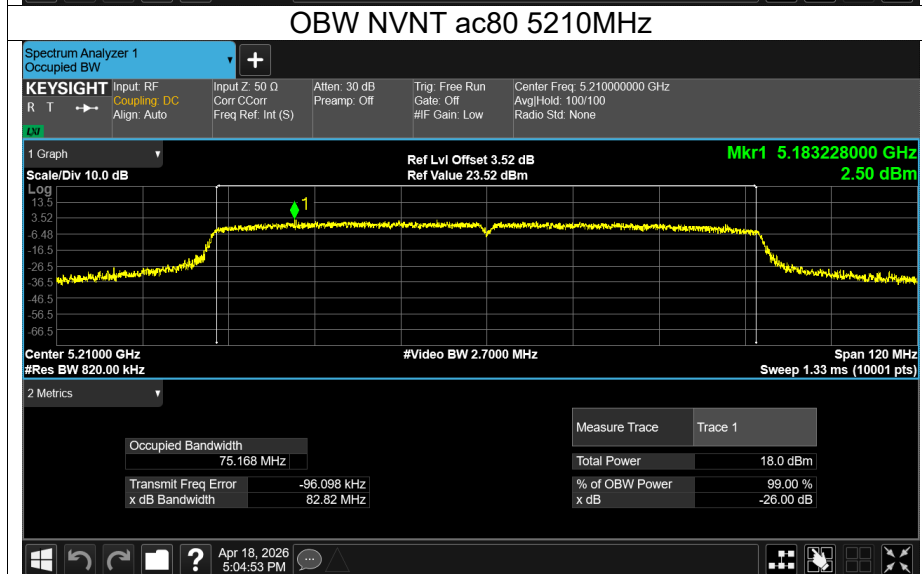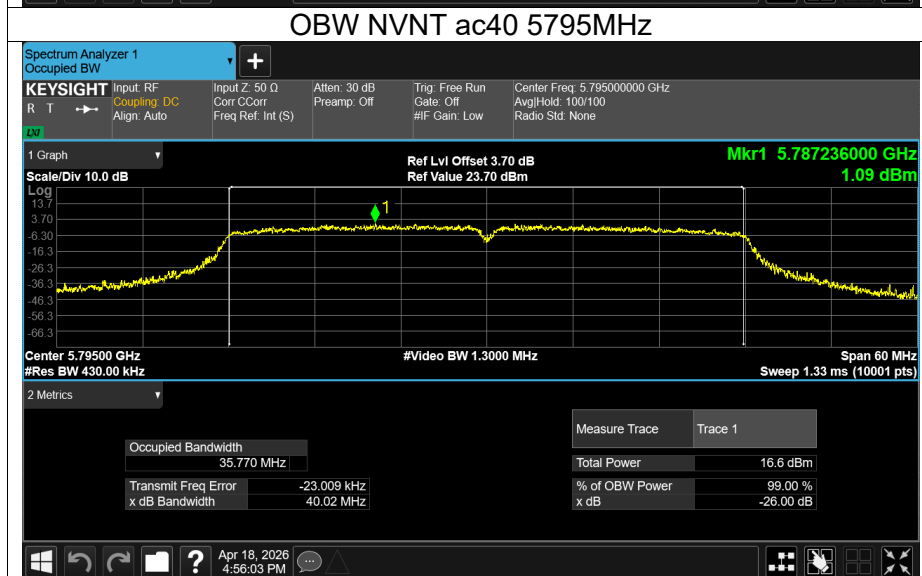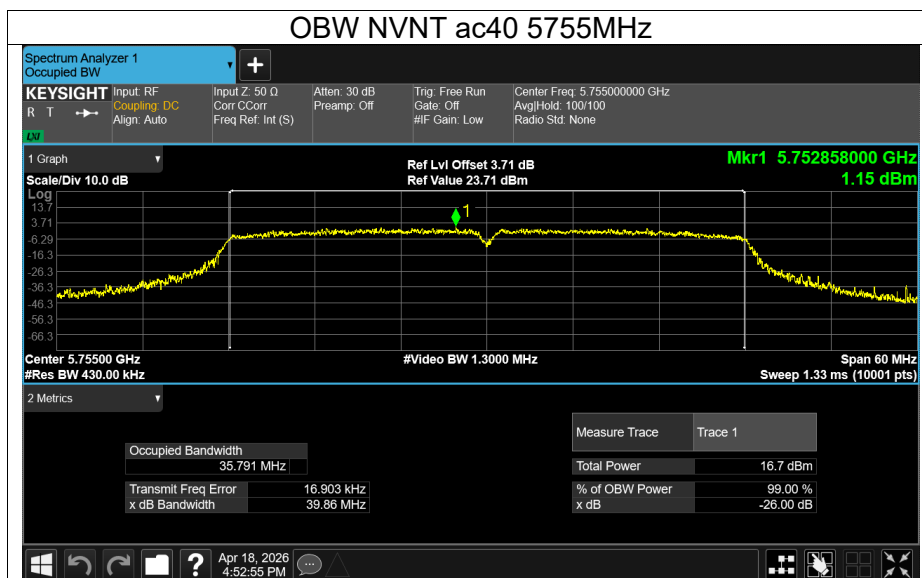

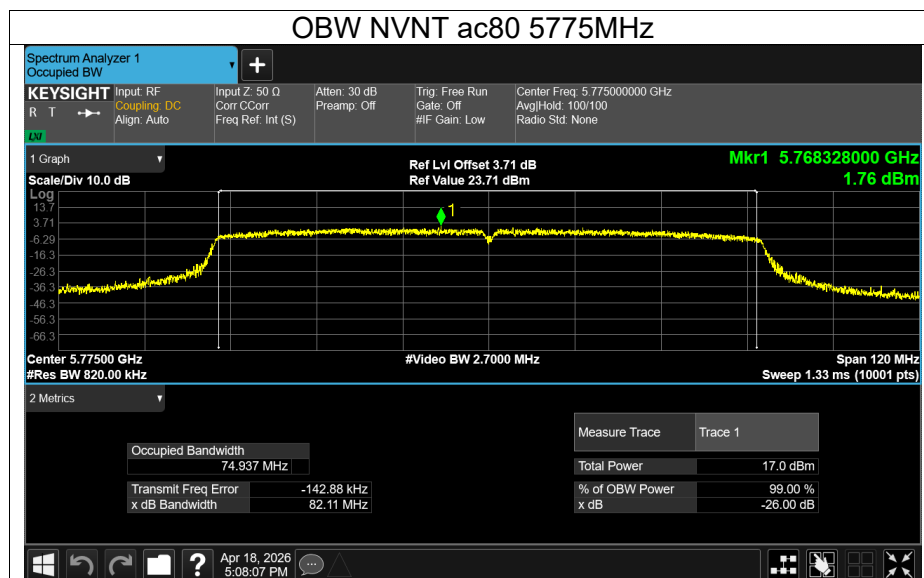






Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	1.4	0.21	1.61	11	Pass
NVNT	a	5200	1.41	0.22	1.63	11	Pass
NVNT	a	5240	1.27	0.22	1.49	11	Pass
NVNT	n20	5180	0.93	0.23	1.16	11	Pass
NVNT	n20	5200	1.18	0.23	1.41	11	Pass
NVNT	n20	5240	-0.71	0.29	-0.42	11	Pass
NVNT	n40	5190	-3.03	0.46	-2.57	11	Pass
NVNT	n40	5230	-3.1	0.46	-2.64	11	Pass
NVNT	ac20	5180	-0.55	0.34	-0.21	11	Pass
NVNT	ac20	5200	-0.72	0.24	-0.48	11	Pass
NVNT	ac20	5240	-0.61	0.26	-0.35	11	Pass
NVNT	ac40	5190	-3.05	0.71	-2.34	11	Pass
NVNT	ac40	5230	-3.38	0.61	-2.77	11	Pass
NVNT	ac80	5210	-6.34	0.88	-5.46	11	Pass

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/510k Hz)	Conducted PSD (dBm/500k Hz)	Duty Factor (dB)	Total PSD (dBm/500k Hz)	Limit (dBm/500k Hz)	Verdict
NVNT	a	5745	-1.51	-1.60	0.22	-1.38	30	Pass
NVNT	a	5785	-1.46	-1.55	0.34	-1.21	30	Pass
NVNT	a	5825	-1.28	-1.37	0.29	-1.08	30	Pass
NVNT	n20	5745	-3.75	-3.84	0.31	-3.53	30	Pass
NVNT	n20	5785	-3.49	-3.58	0.33	-3.25	30	Pass
NVNT	n20	5825	-3.59	-3.68	0.21	-3.47	30	Pass
NVNT	n40	5755	-6.38	-6.47	0.53	-5.94	30	Pass
NVNT	n40	5795	-5.84	-5.93	0.56	-5.37	30	Pass
NVNT	ac20	5745	-3.78	-3.87	0.32	-3.55	30	Pass
NVNT	ac20	5785	-3.39	-3.48	0.32	-3.16	30	Pass
NVNT	ac20	5825	-3.53	-3.62	0.24	-3.38	30	Pass
NVNT	ac40	5755	-6.23	-6.32	0.63	-5.69	30	Pass
NVNT	ac40	5795	-6.18	-6.27	0.74	-5.53	30	Pass
NVNT	ac80	5775	-9.21	-9.30	1.36	-7.94	30	Pass

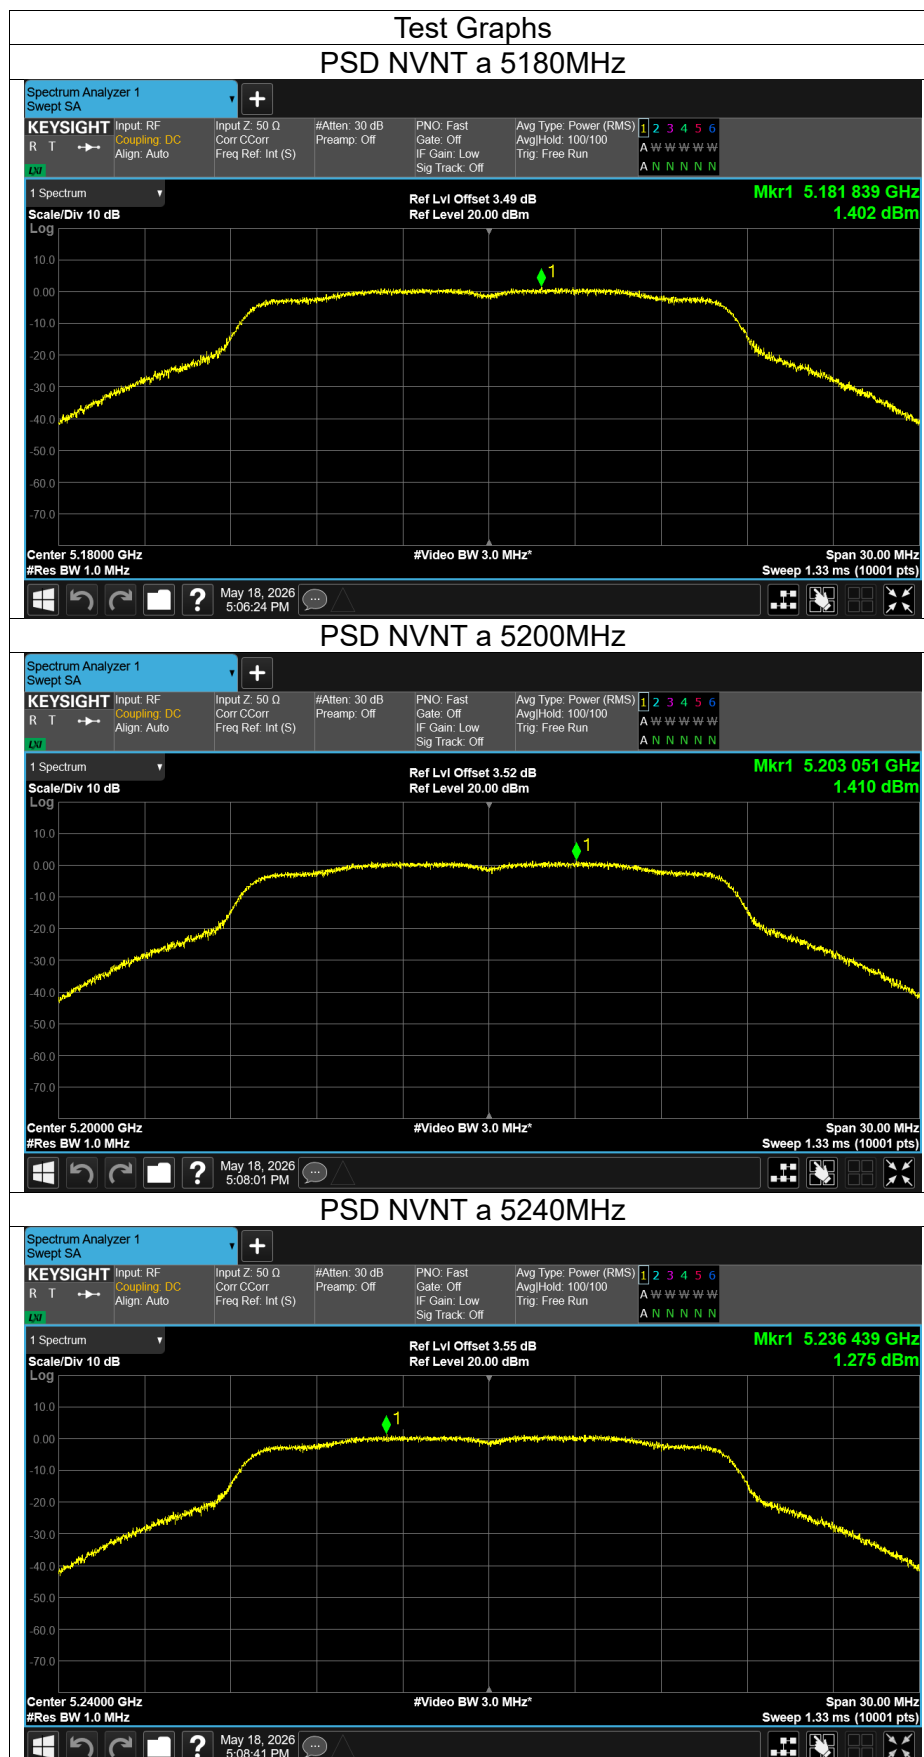


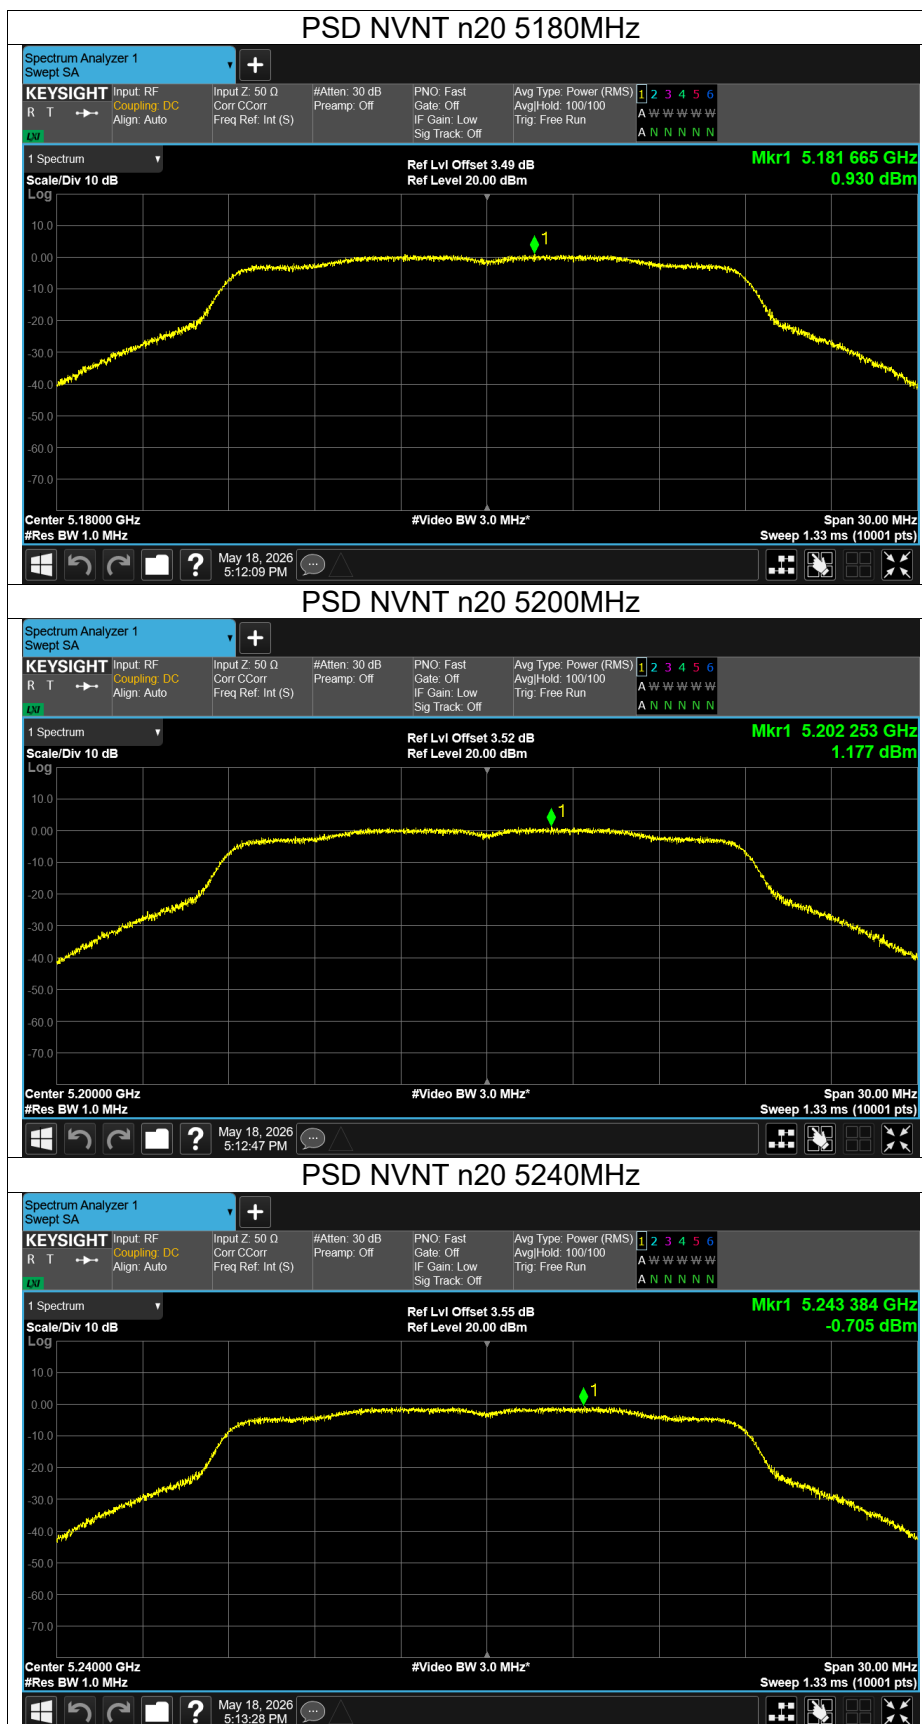


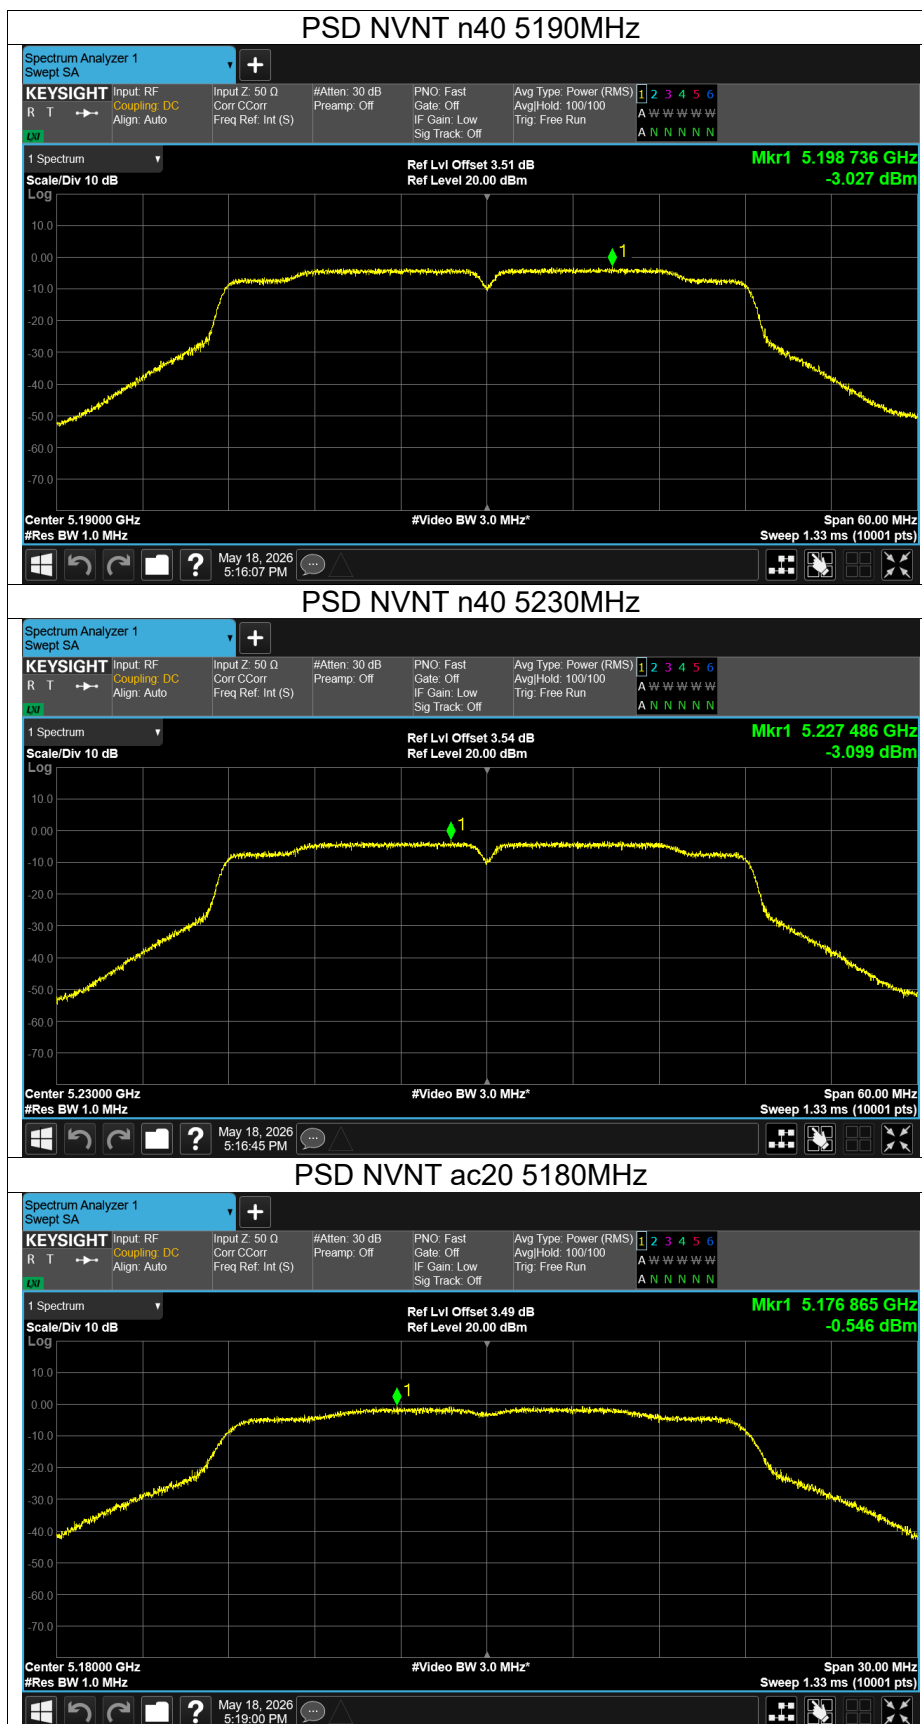


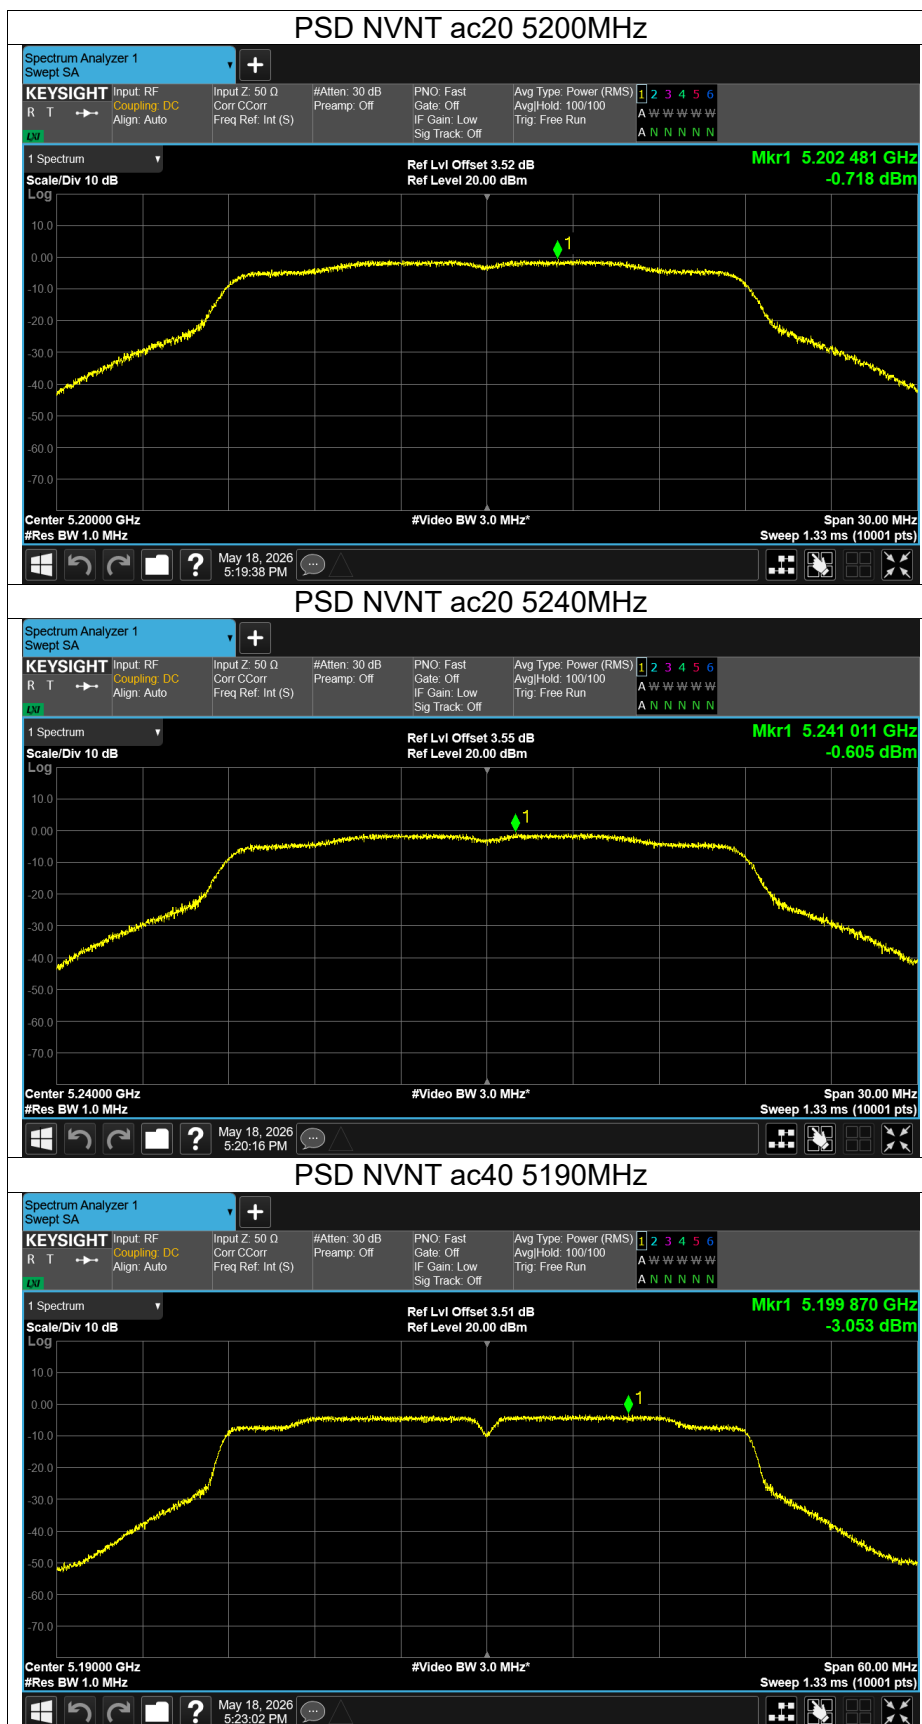





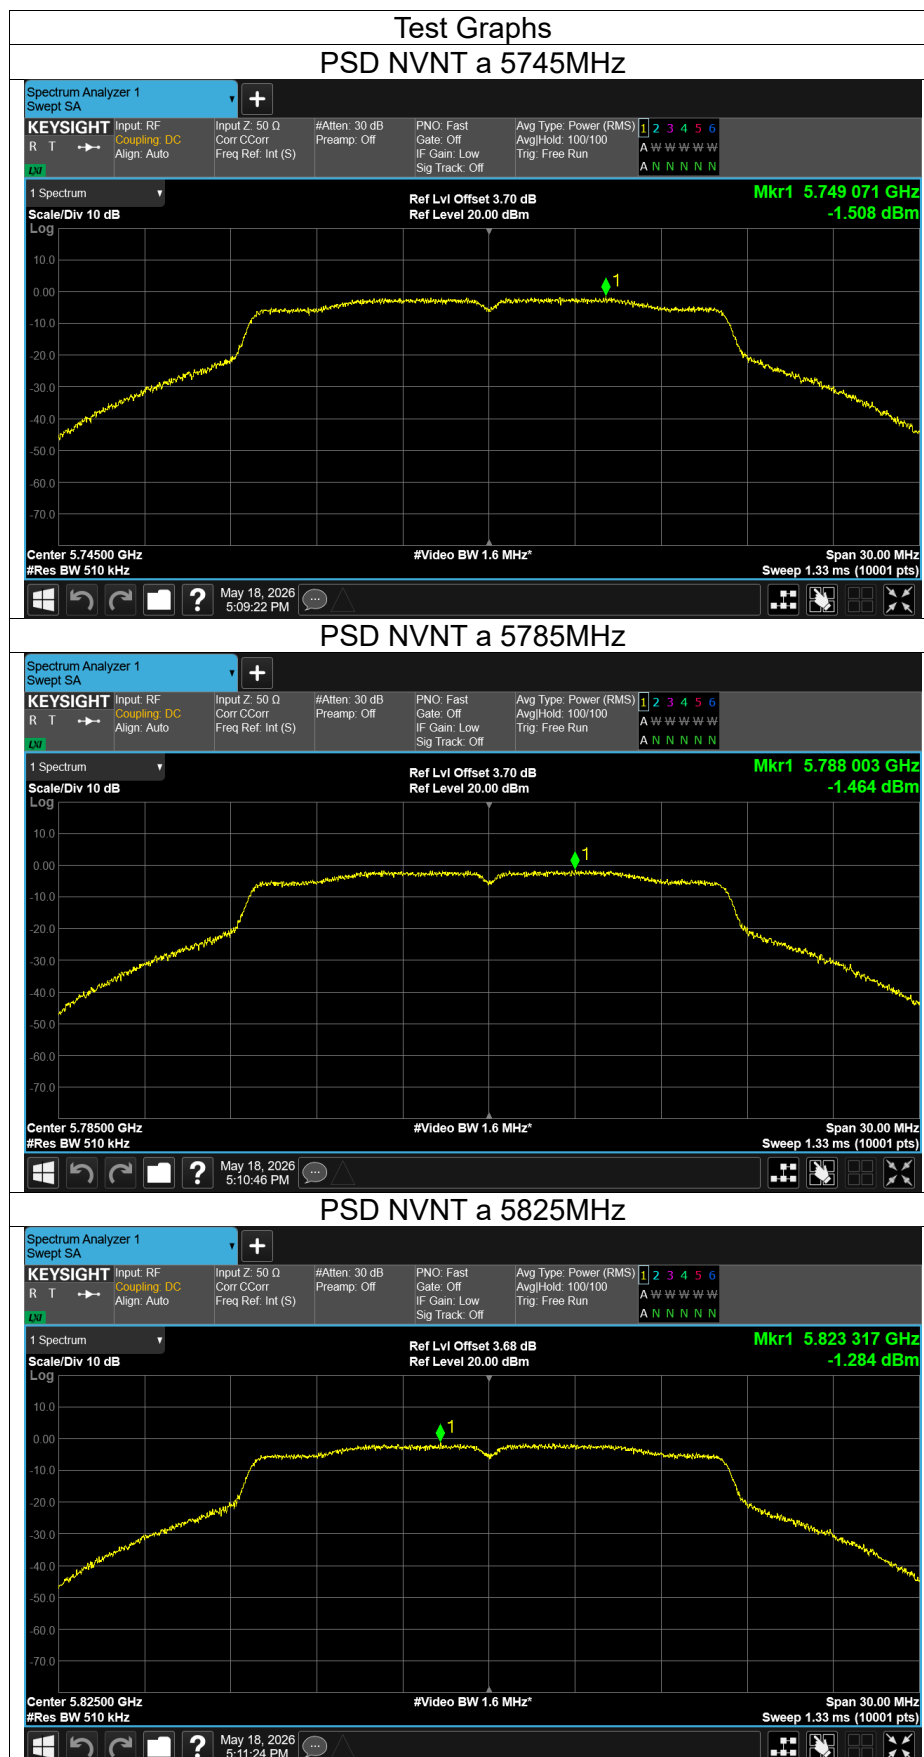

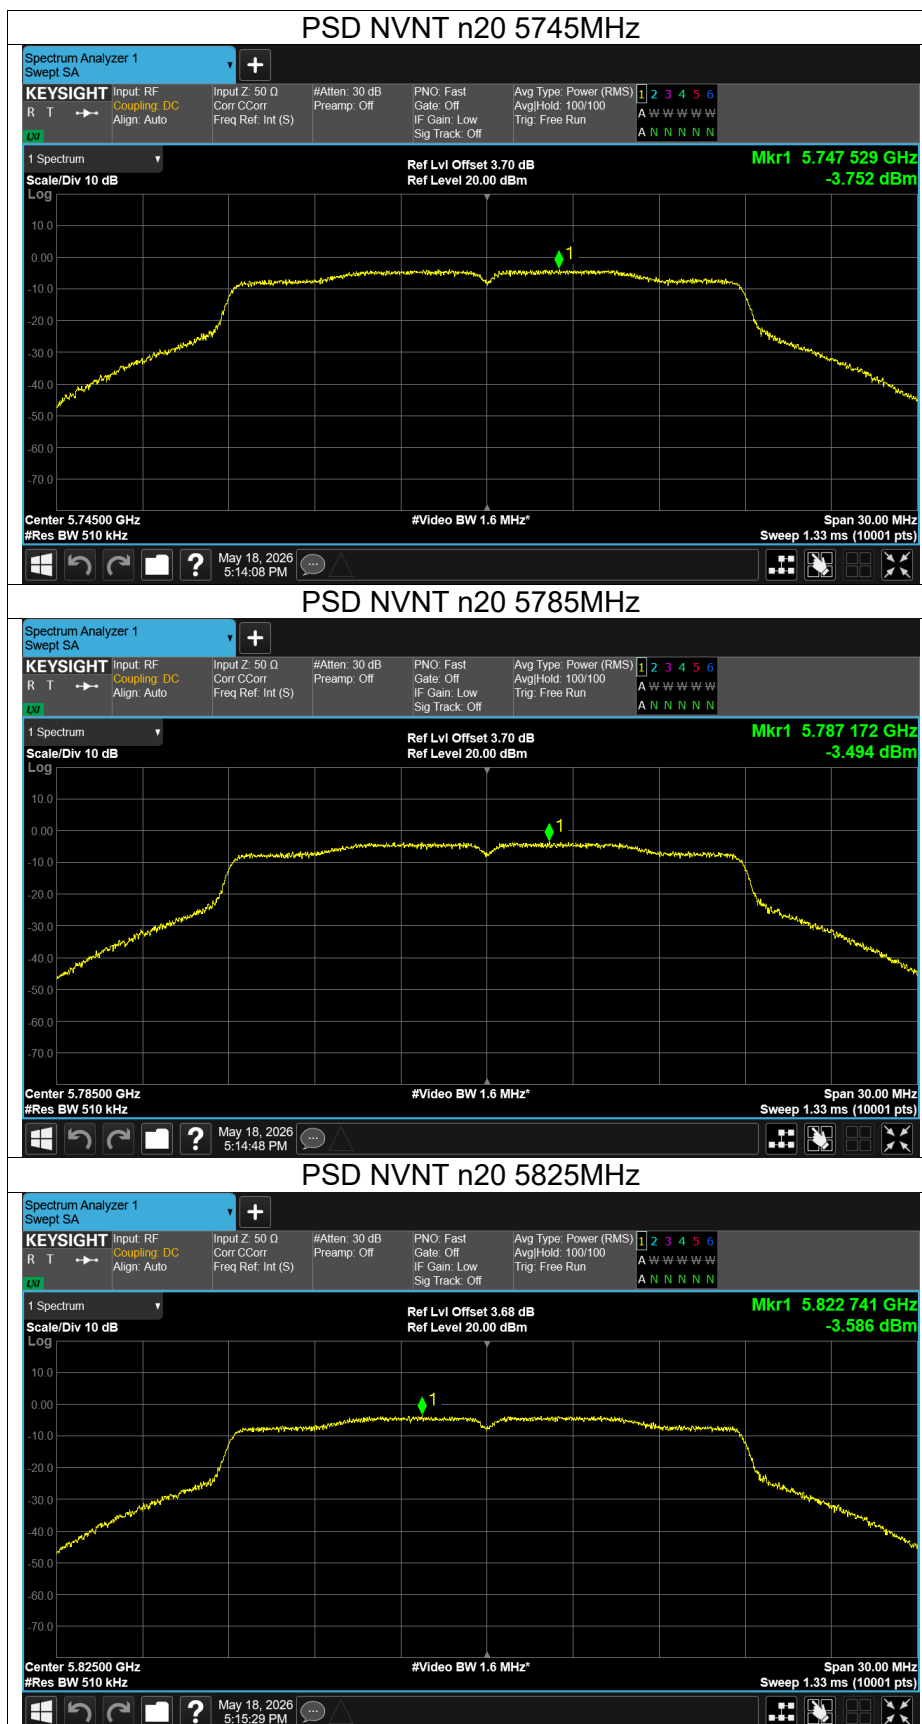

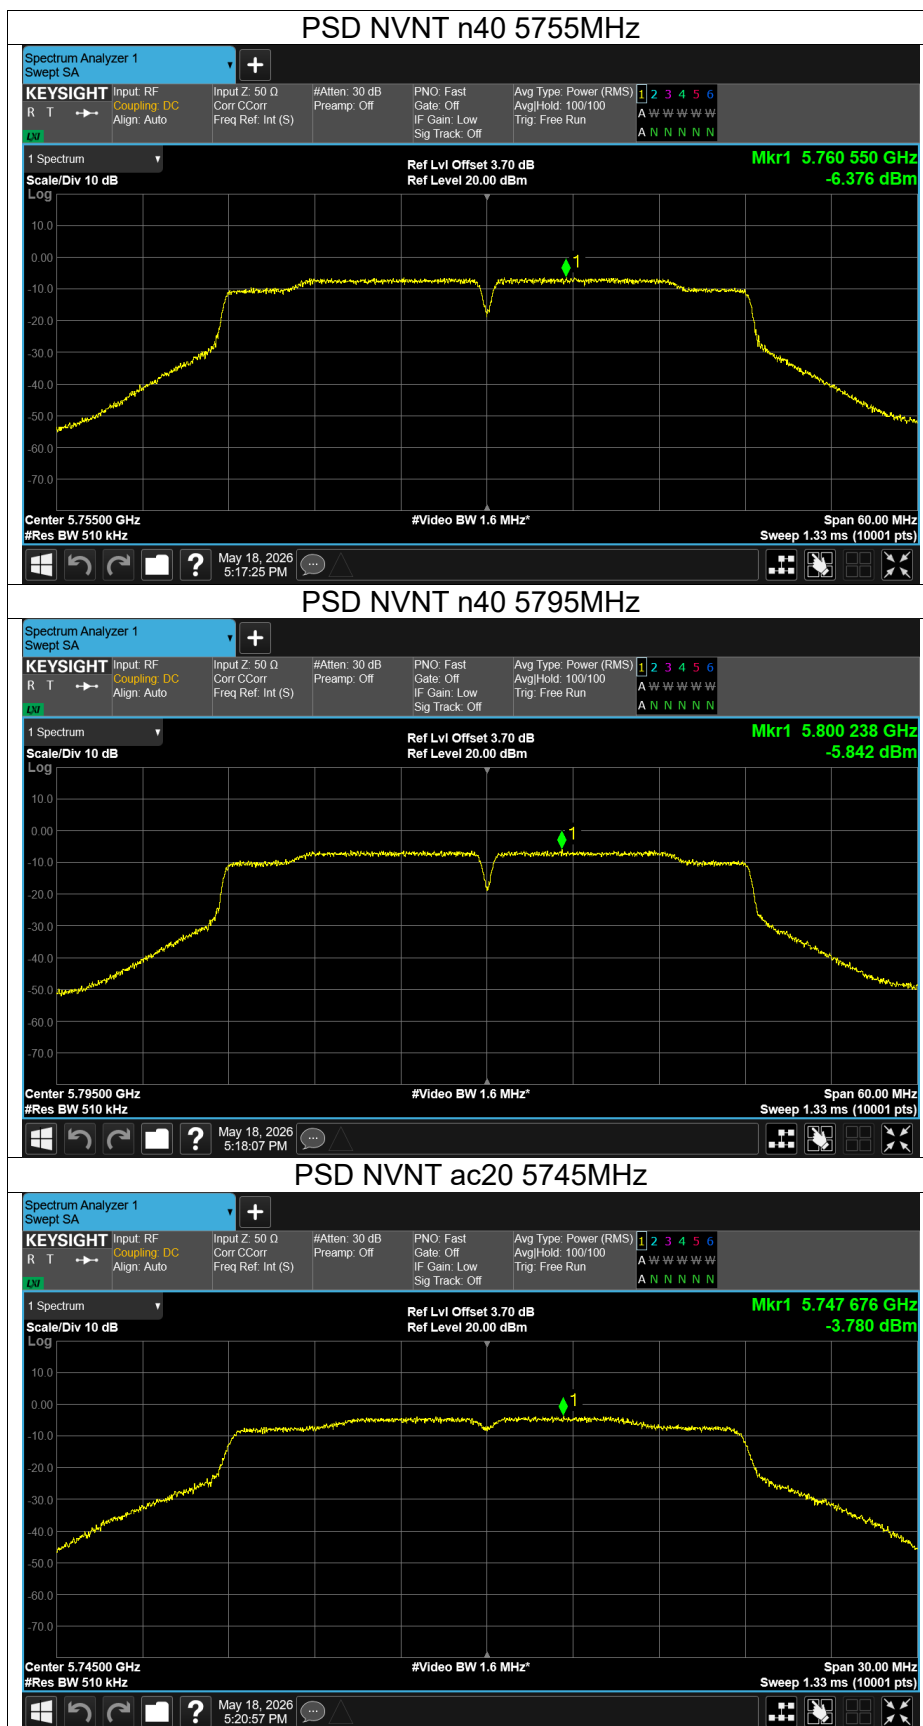

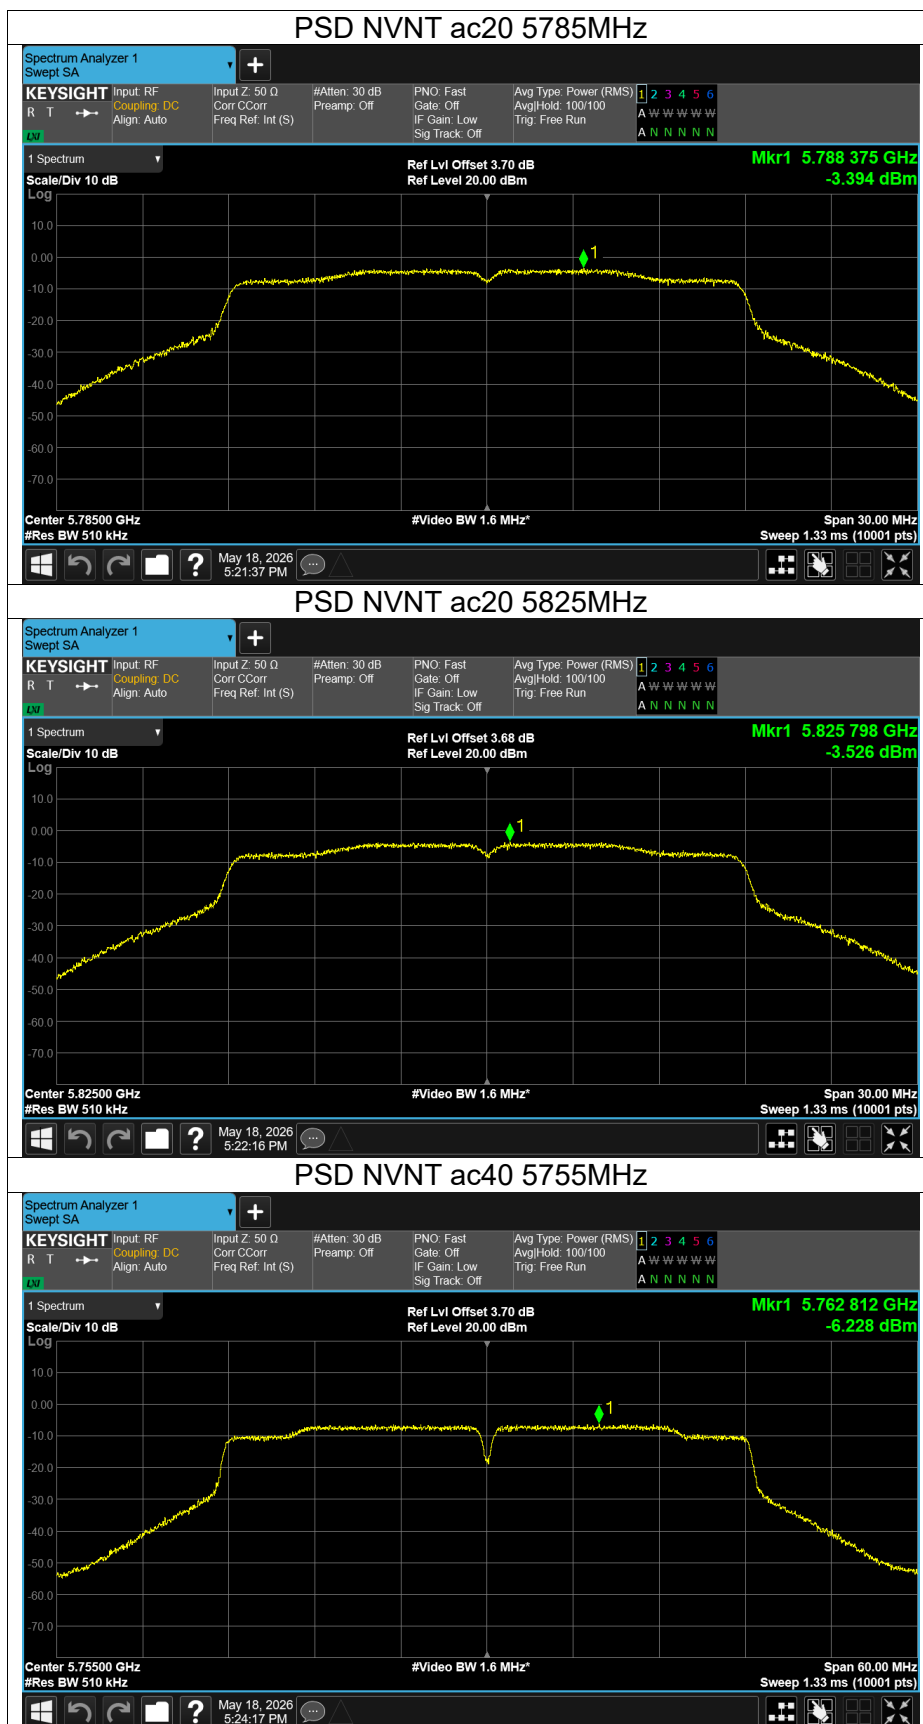

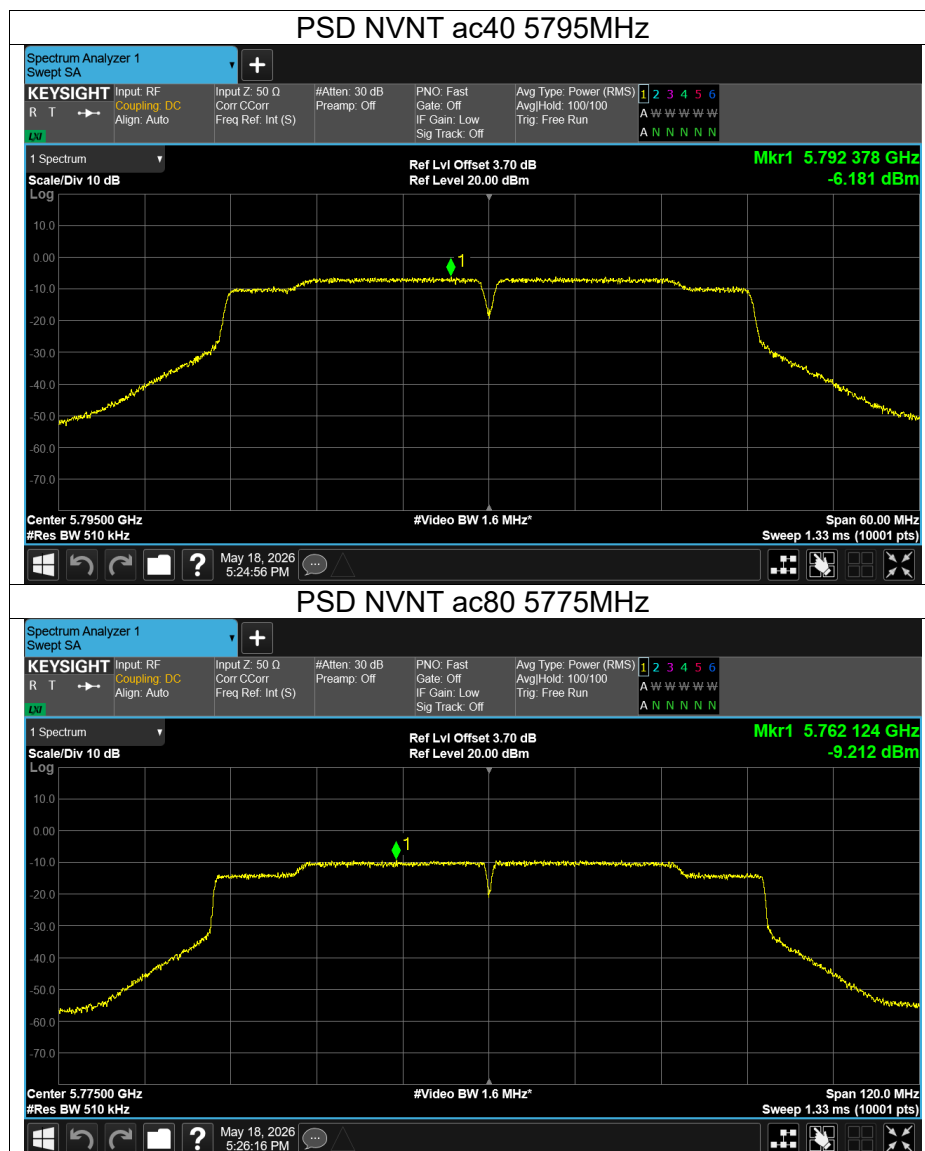



Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	-35.7	-27	Pass
NVNT	a	5240	-43.2	-27	Pass
NVNT	n20	5180	-37.68	-27	Pass
NVNT	n20	5240	-42.39	-27	Pass
NVNT	n40	5190	-31.67	-27	Pass
NVNT	n40	5230	-41.5	-27	Pass
NVNT	ac20	5180	-36.85	-27	Pass
NVNT	ac20	5240	-42.39	-27	Pass
NVNT	ac40	5190	-30.48	-27	Pass
NVNT	ac40	5230	-41.85	-27	Pass
NVNT	ac80	5210	-28.91	-27	Pass

Condition	Mode	Frequency (MHz)	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	-38.32	15.6	Pass
NVNT	a	5825	-41.28	15.6	Pass
NVNT	n20	5745	-37.67	15.6	Pass
NVNT	n20	5825	-40.67	15.6	Pass
NVNT	n40	5755	-32.67	15.6	Pass
NVNT	n40	5795	-35.98	15.6	Pass
NVNT	ac20	5745	-38.17	15.6	Pass
NVNT	ac20	5825	-40.57	15.6	Pass
NVNT	ac40	5755	-28.04	15.6	Pass
NVNT	ac40	5795	-34.82	15.6	Pass
NVNT	ac80	5775	-38.03	15.6	Pass

