

Appendix - BT

1. Bandwidth

1.1 Test Result

1.1.1 OBW


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.871	/	Pass
		2441	DH5	1	0.874	/	Pass
		2480	DH5	1	0.863	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.144	/	Pass
		2441	2DH5	1	1.139	/	Pass
		2480	2DH5	1	1.134	/	Pass
8DPSK	SISO	2402	3DH5	1	1.143	/	Pass
		2441	3DH5	1	1.142	/	Pass
		2480	3DH5	1	1.136	/	Pass


1.1.2 20dB BW


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.974	/	Pass
		2441	DH5	1	0.985	/	Pass
		2480	DH5	1	0.966	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.237	/	Pass
		2441	2DH5	1	1.238	/	Pass
		2480	2DH5	1	1.205	/	Pass
8DPSK	SISO	2402	3DH5	1	1.227	/	Pass
		2441	3DH5	1	1.265	/	Pass
		2480	3DH5	1	1.223	/	Pass


1.2 Test Graph


1.2.1 OBW

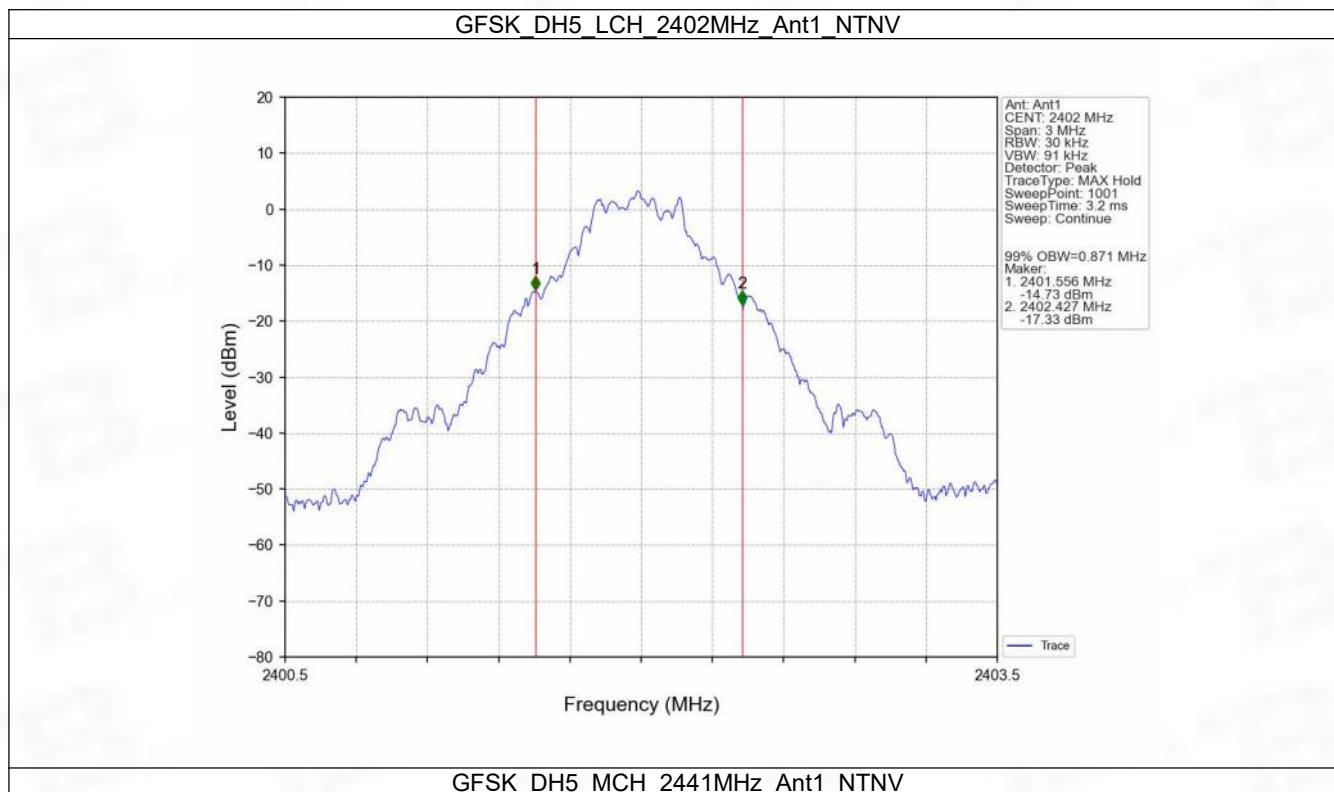


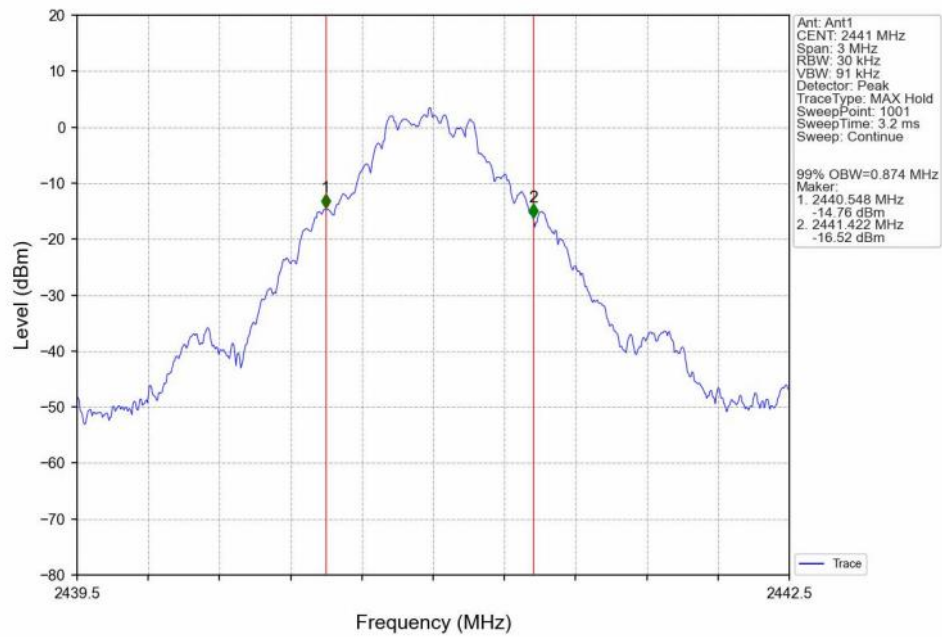


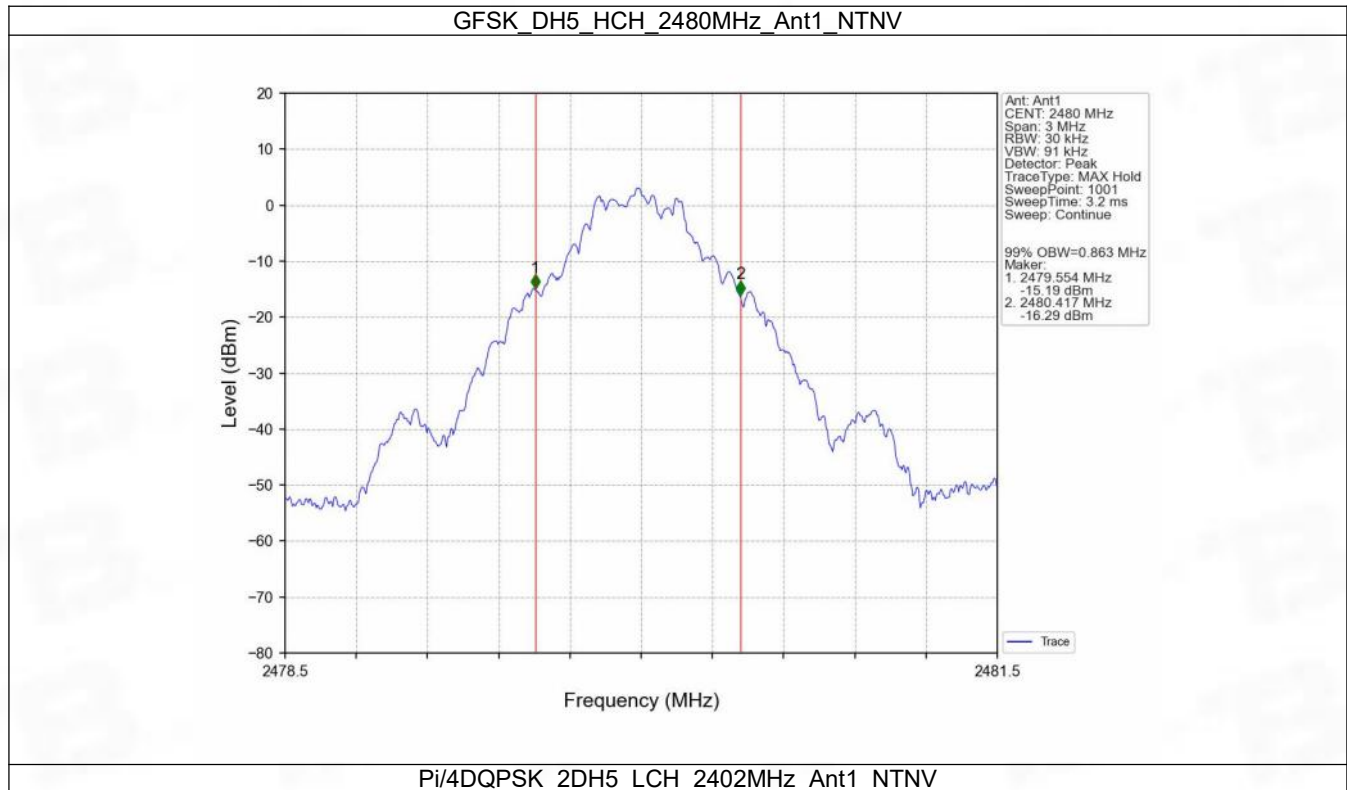


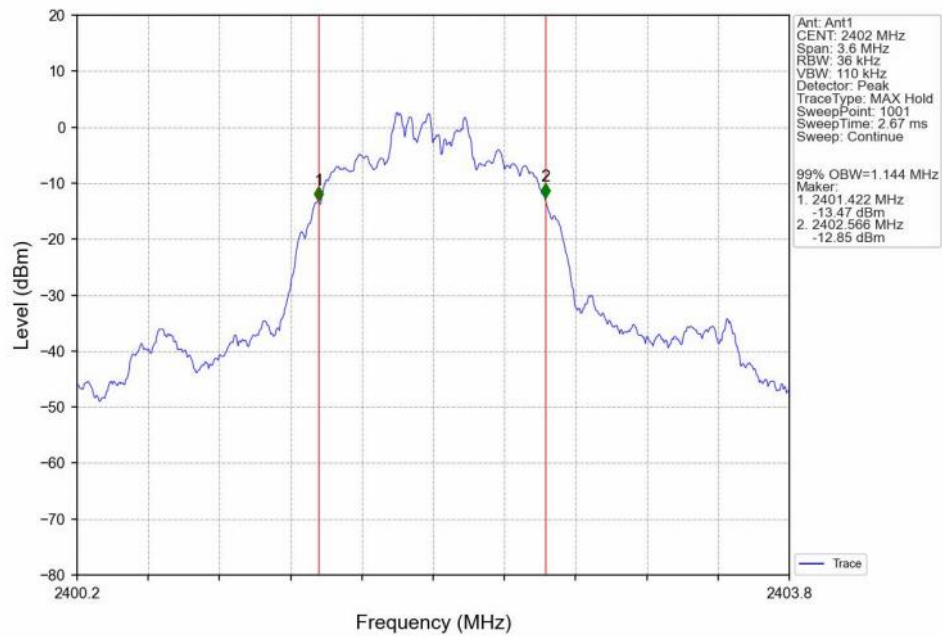


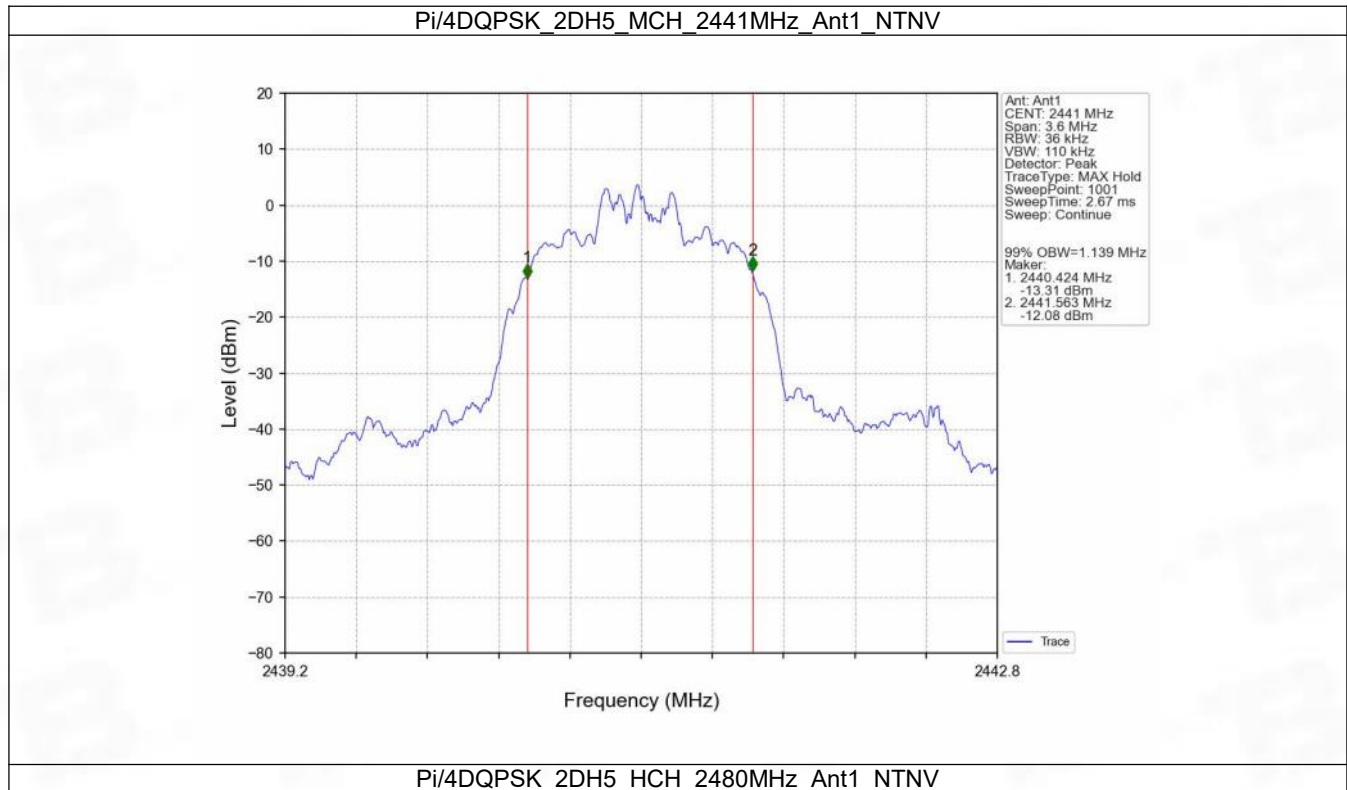

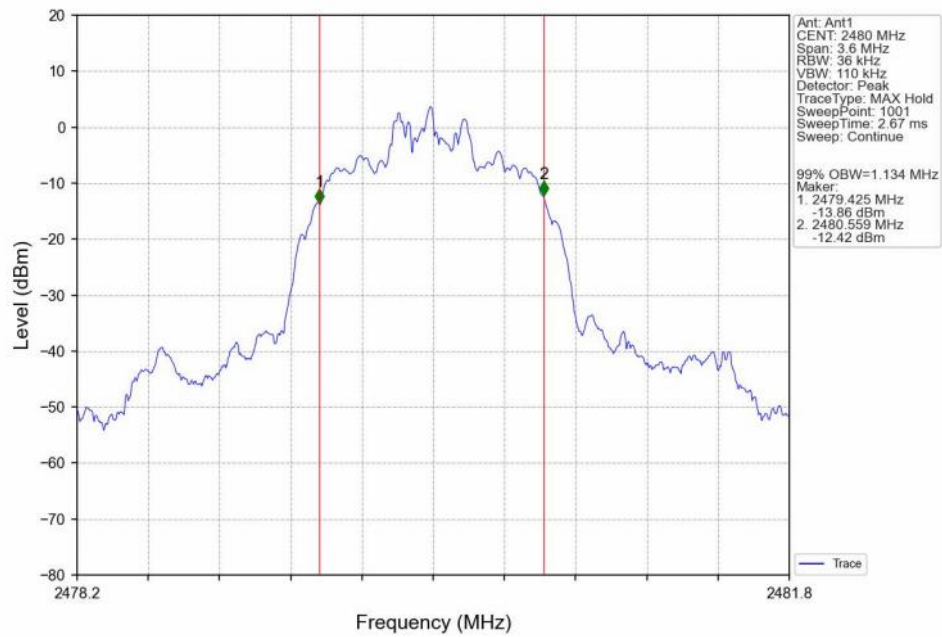


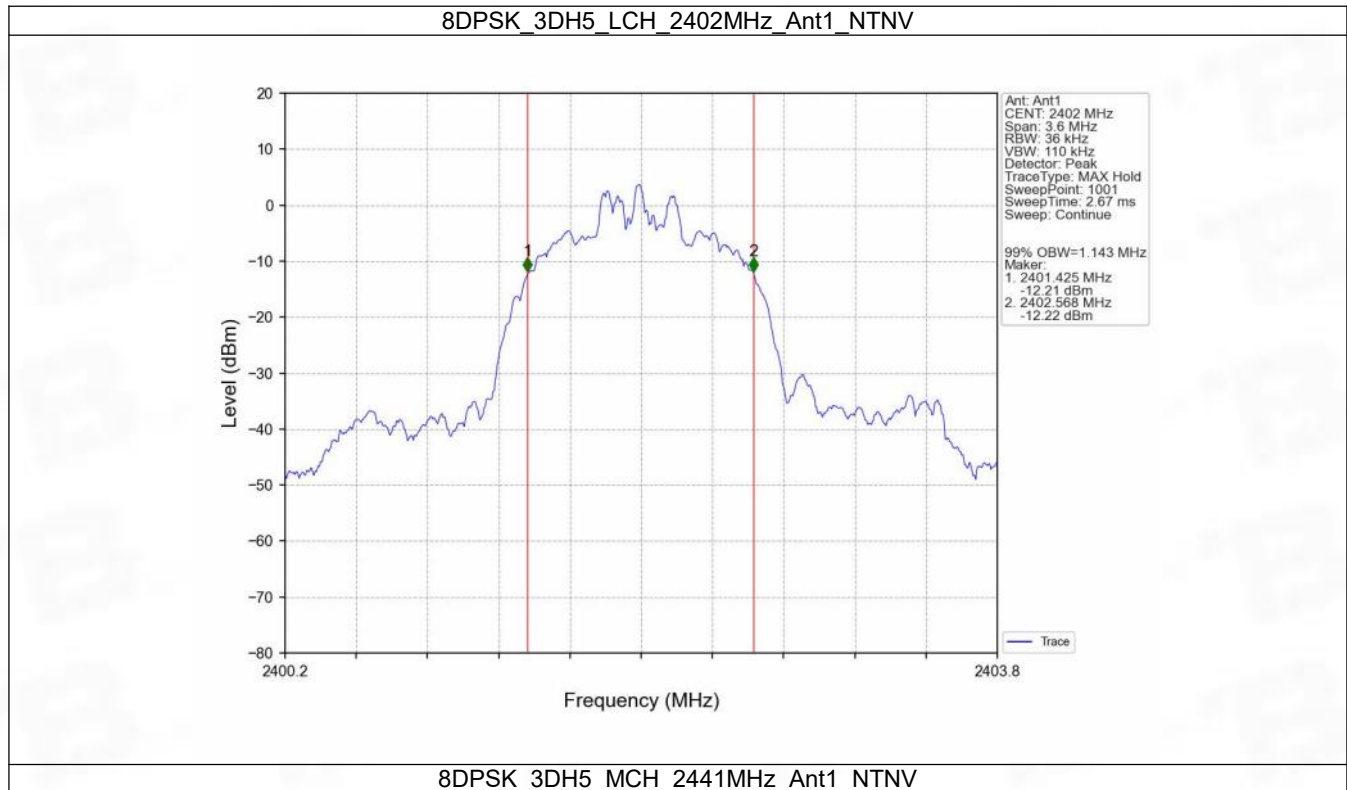


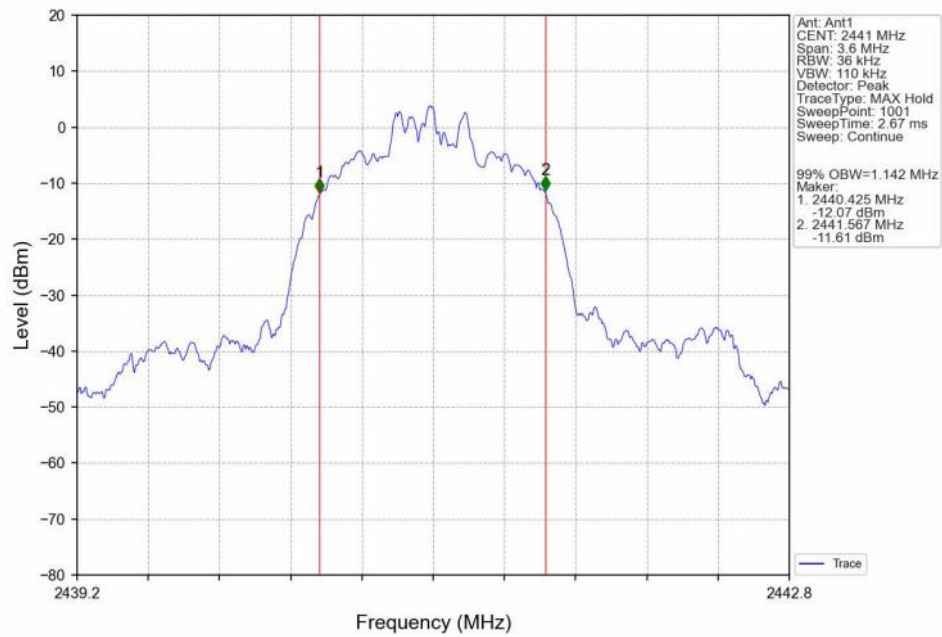


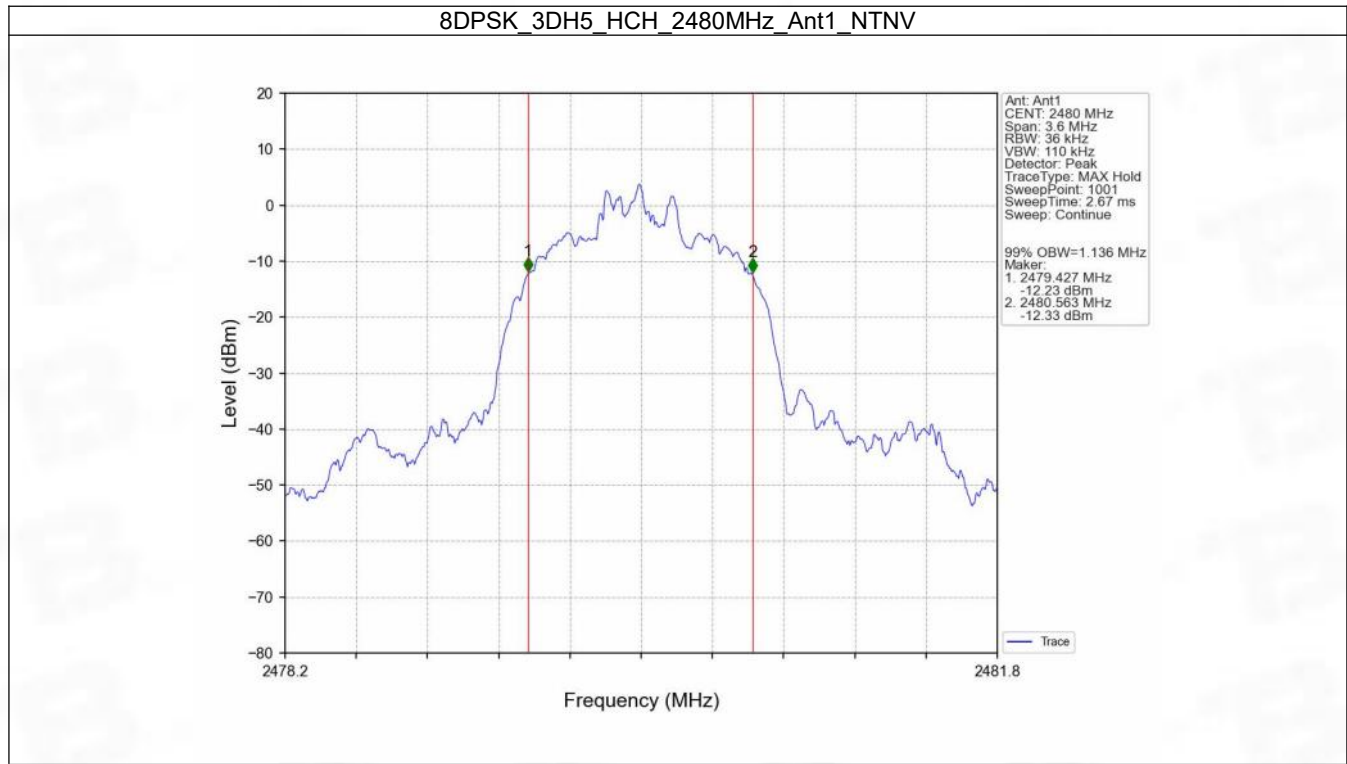


1.2.2 20dB BW

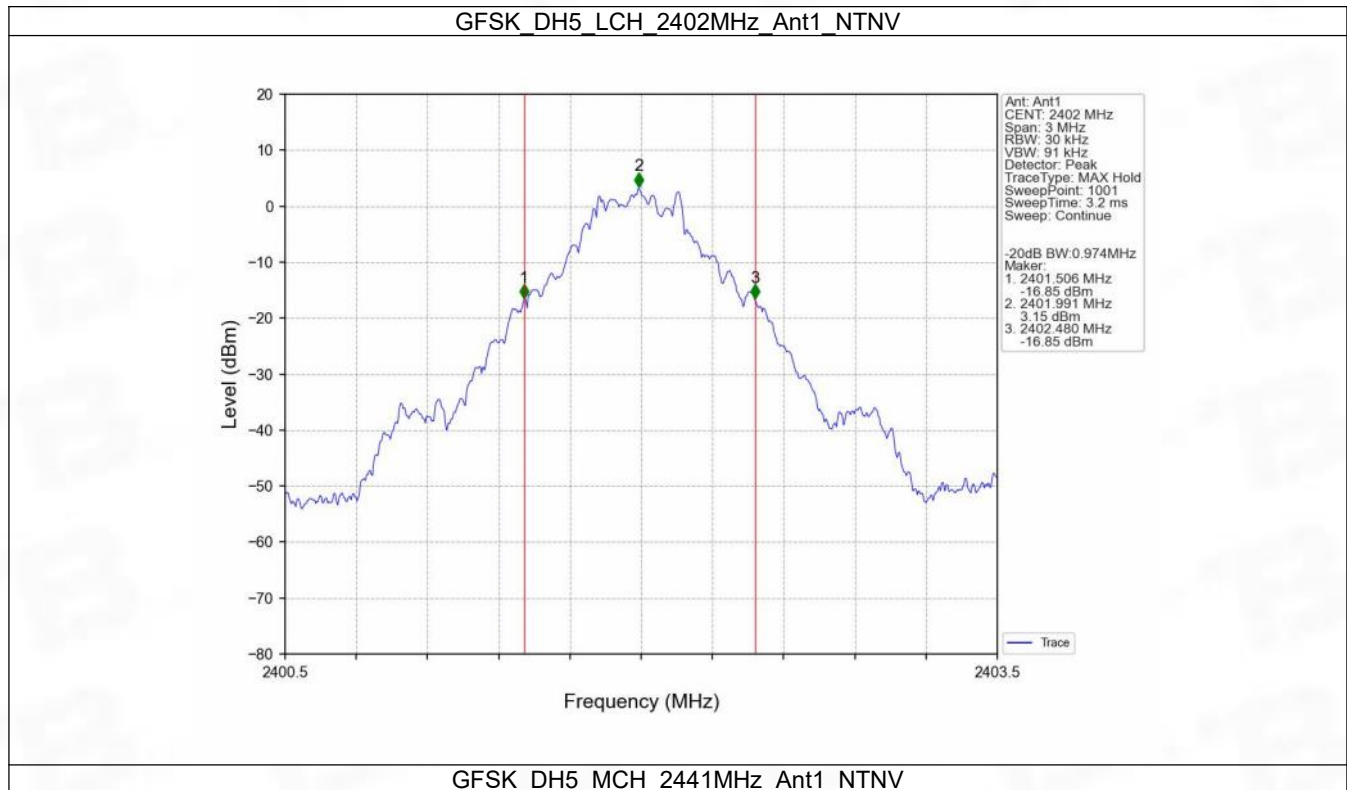


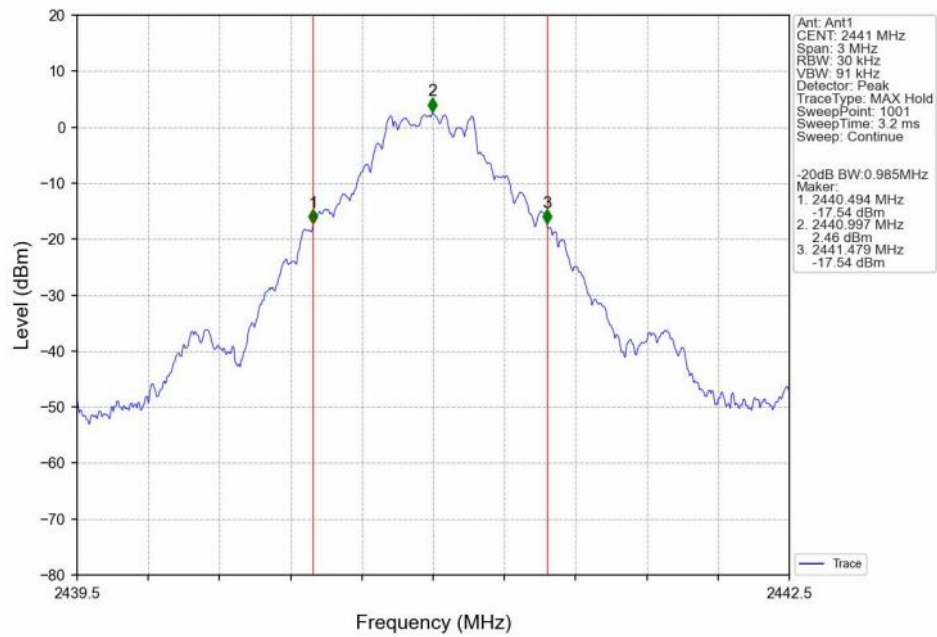

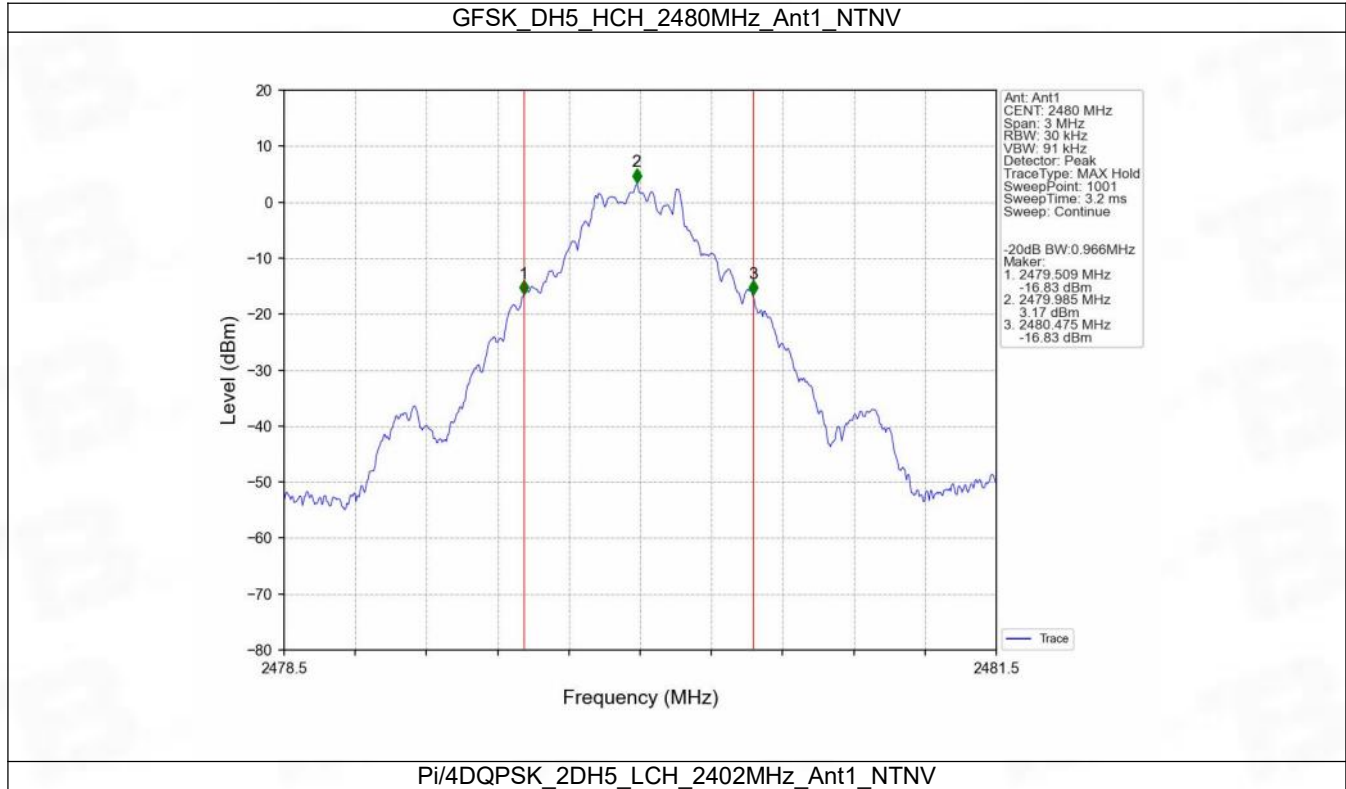


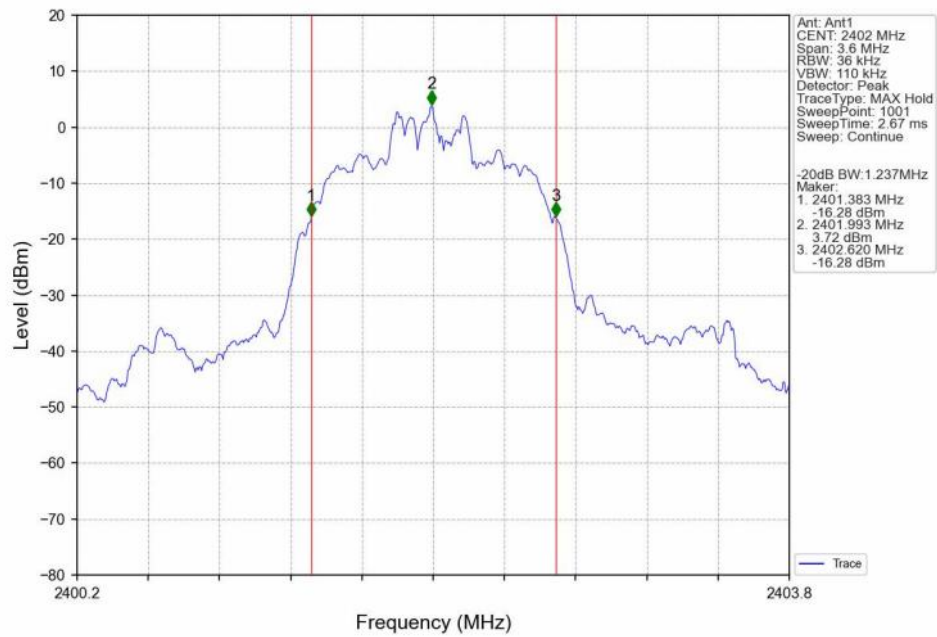


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

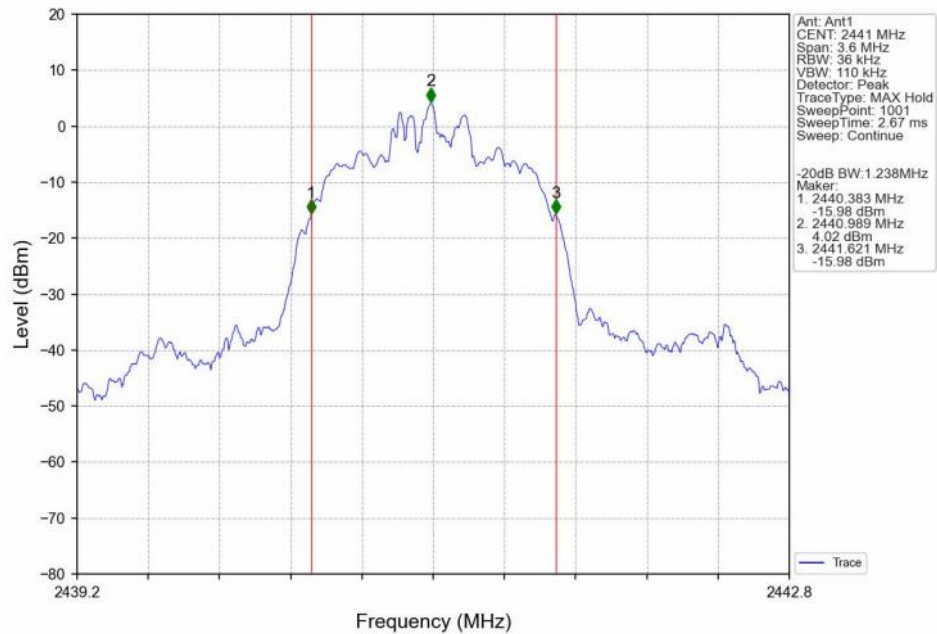


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

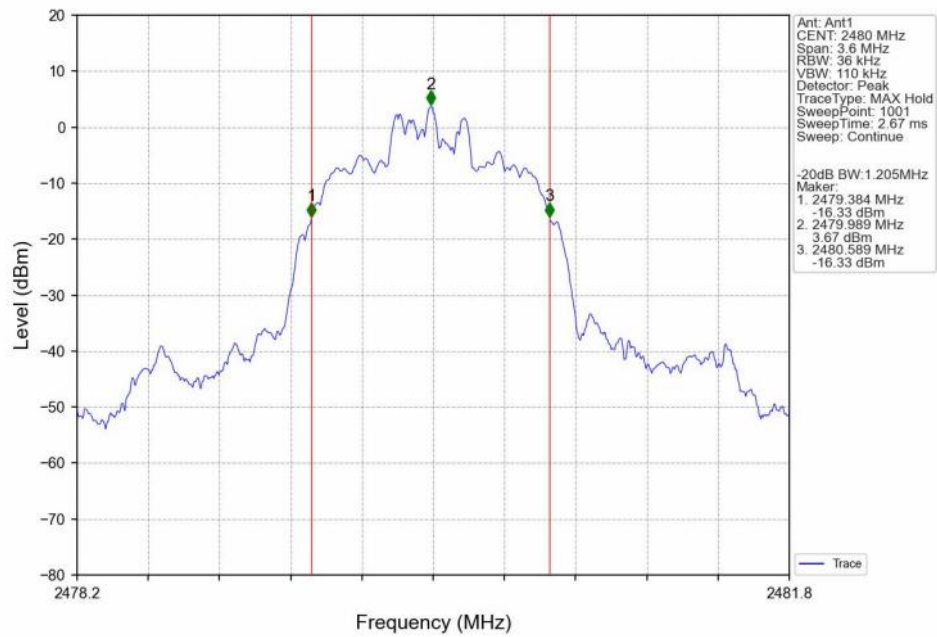


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

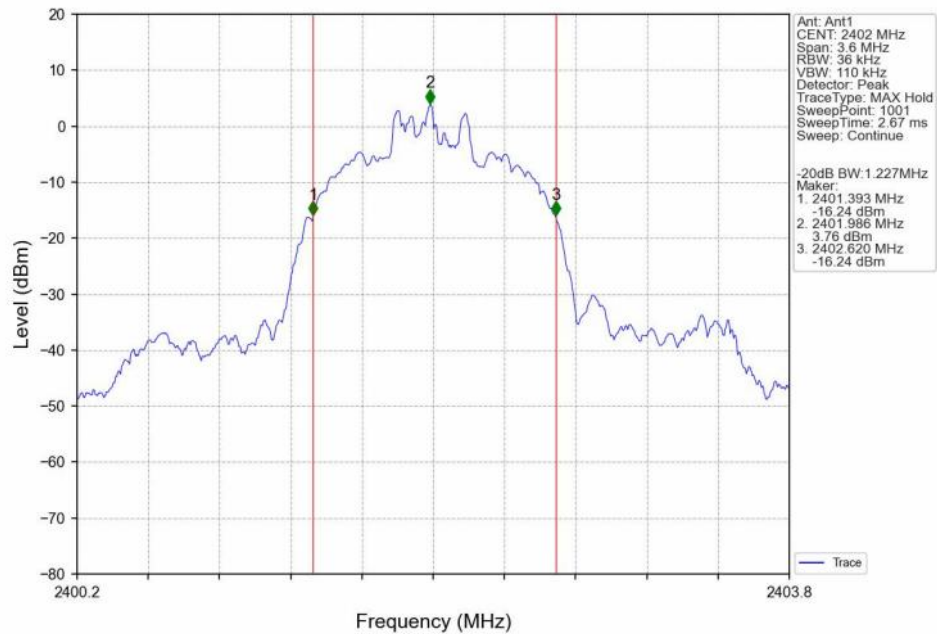

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

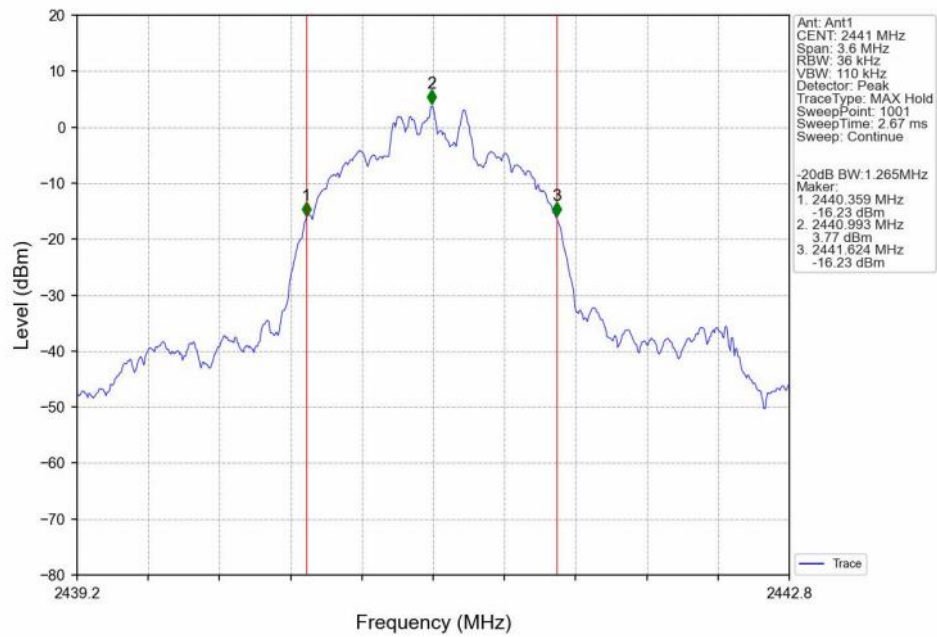

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

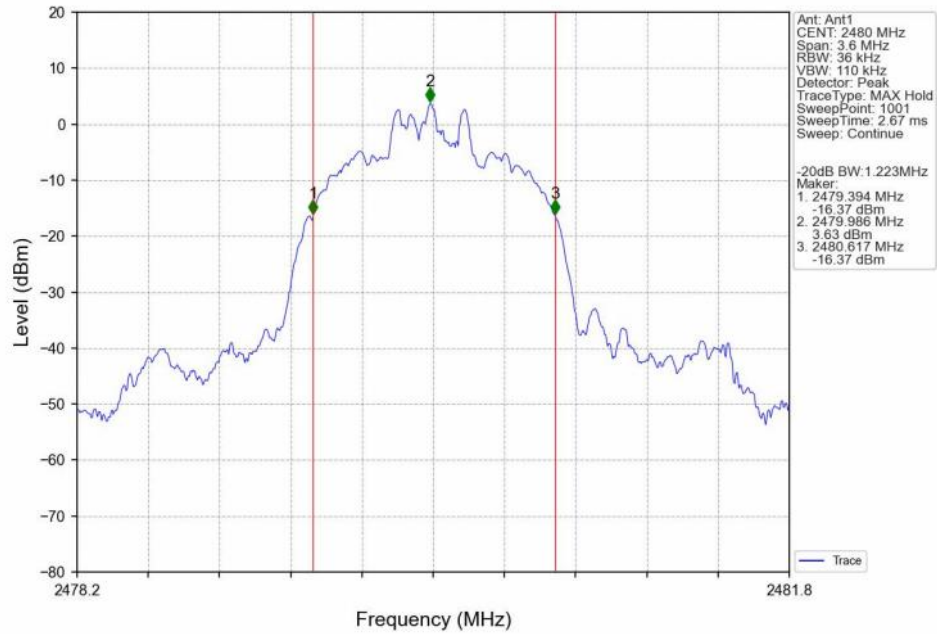

2. Maximum Conducted Output Power

2.1 Test Result


2.1.1 Power


Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	4.65	≤ 30	Pass
		2441	DH5	4.87	≤ 30	Pass
		2480	DH5	4.46	≤ 30	Pass
Pi/4DQPSK	SISO	2402	2DH5	4.67	≤ 20.97	Pass
		2441	2DH5	4.86	≤ 20.97	Pass
		2480	2DH5	4.46	≤ 20.97	Pass
8DPSK	SISO	2402	3DH5	4.66	≤ 20.97	Pass
		2441	3DH5	4.86	≤ 20.97	Pass
		2480	3DH5	4.46	≤ 20.97	Pass


Note1: Antenna Gain: Ant1: -0.80dBi;


2.2 Test Graph


2.2.1 Power

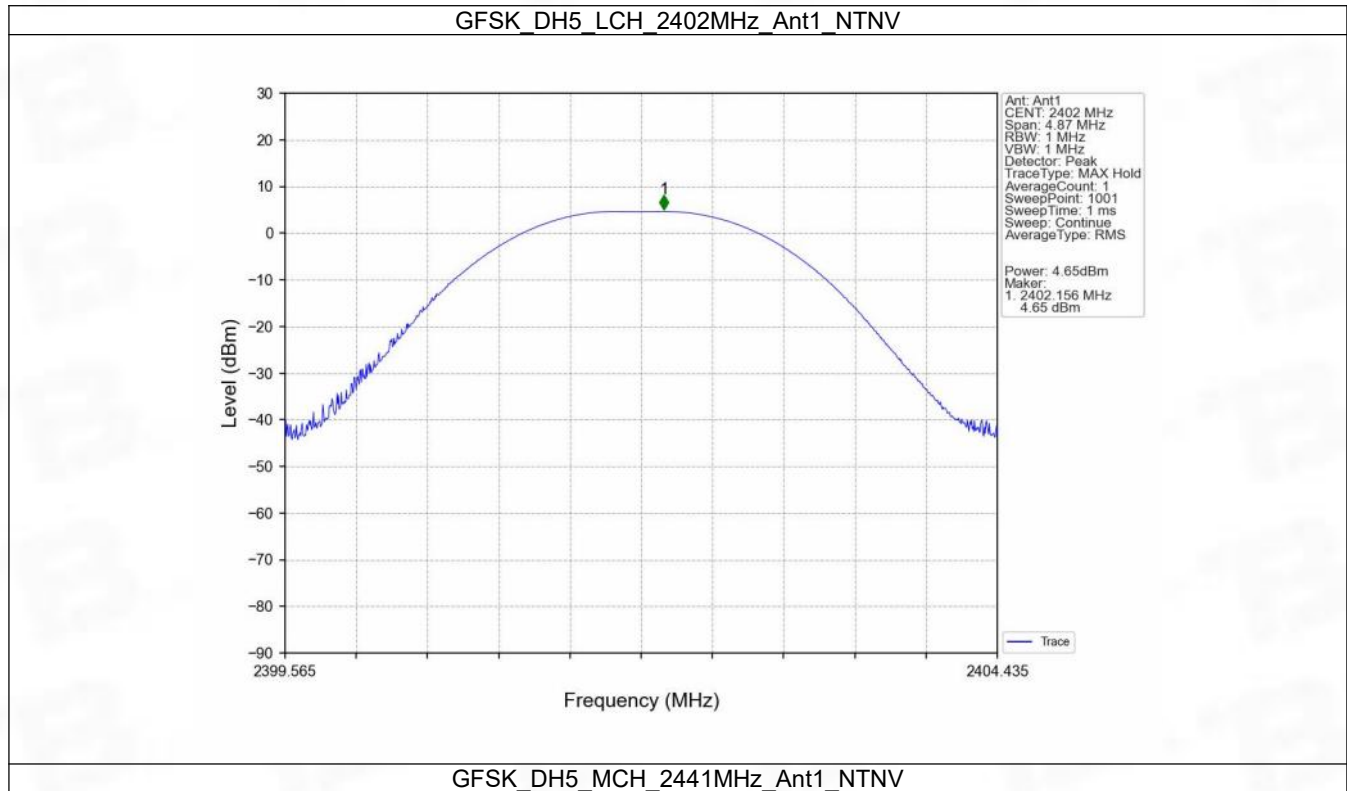


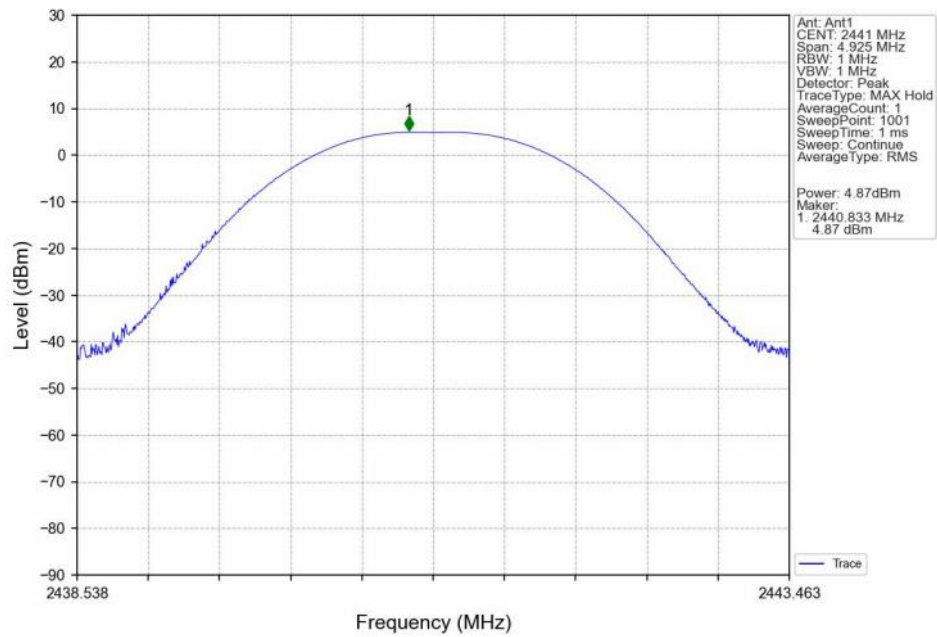


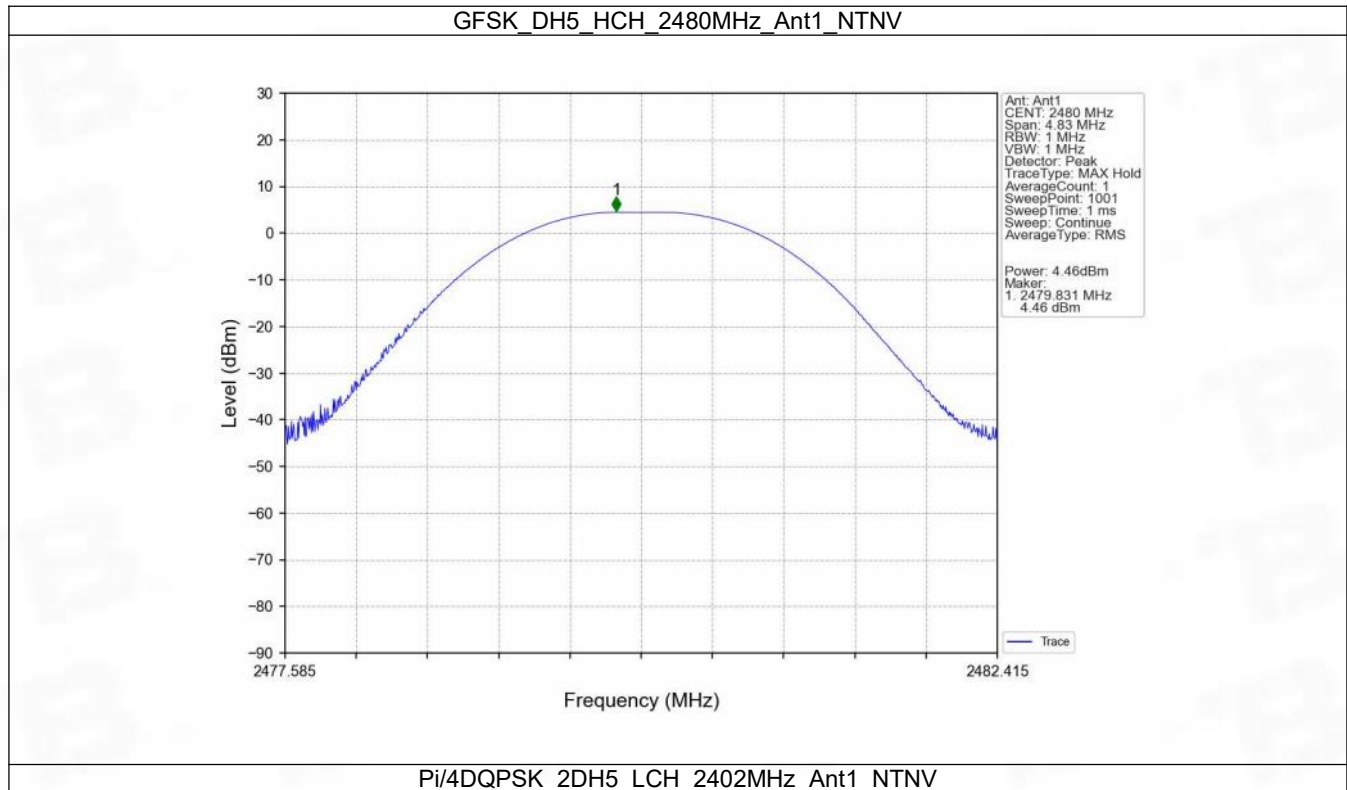


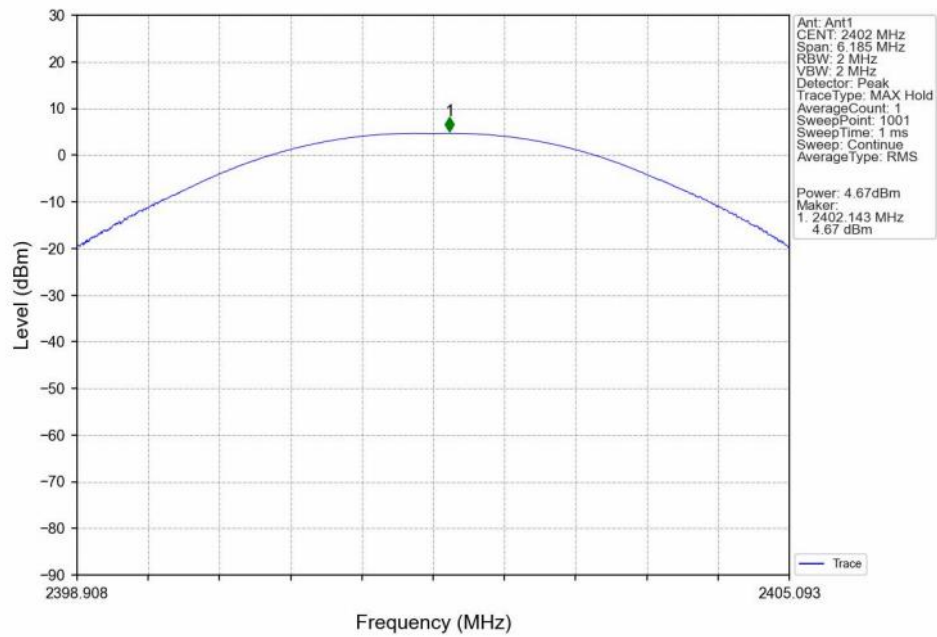


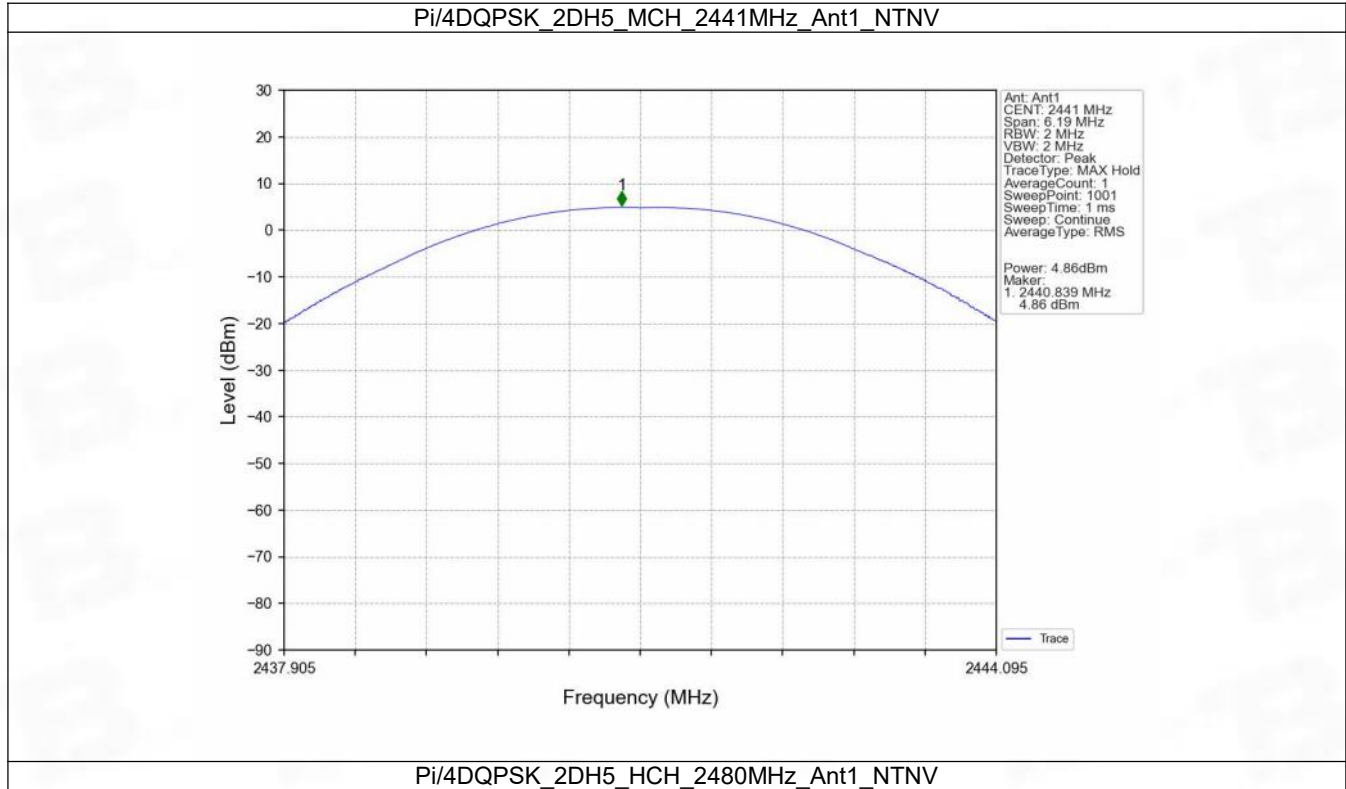

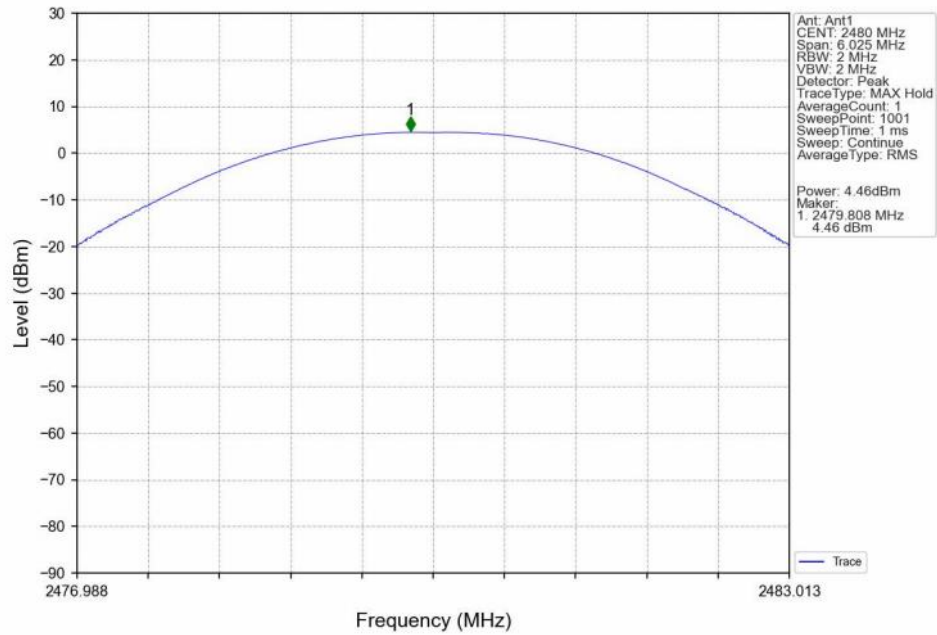

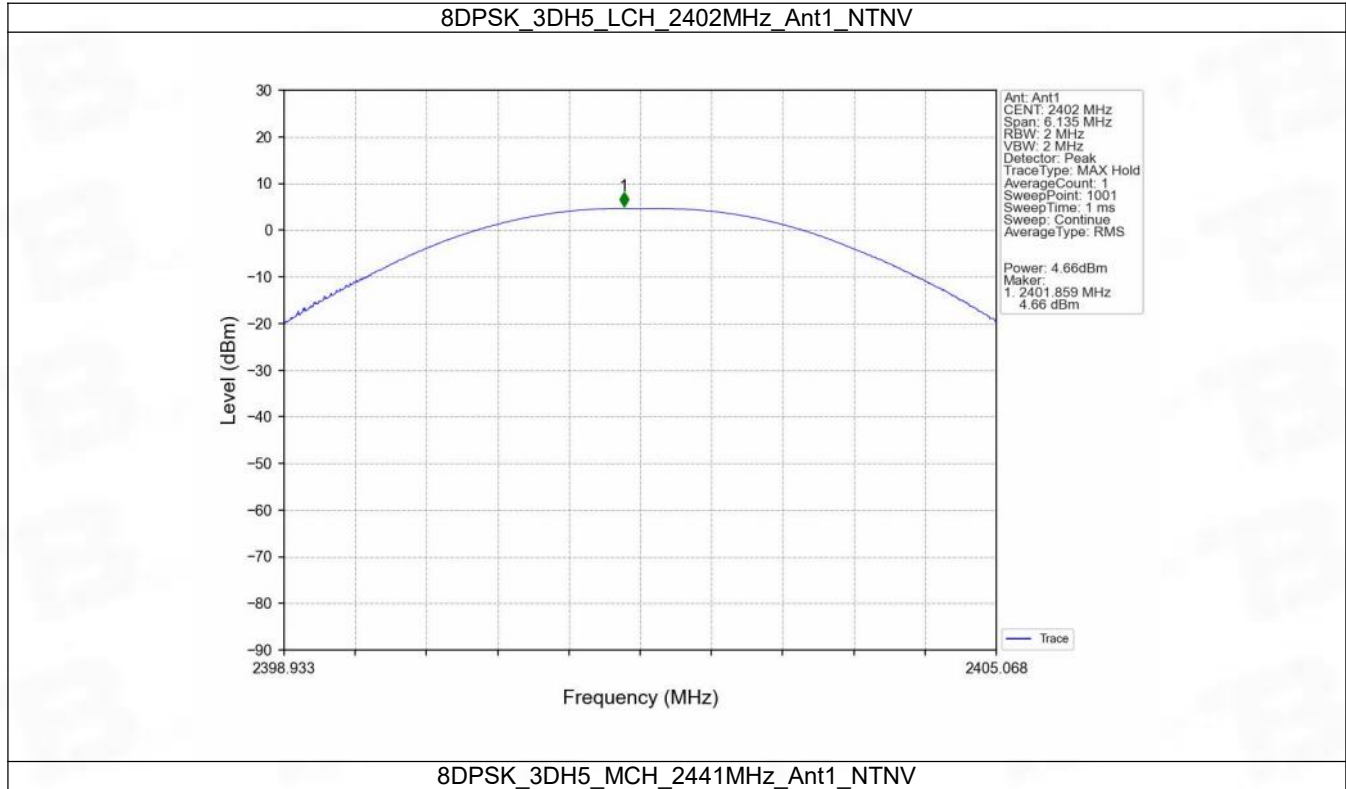

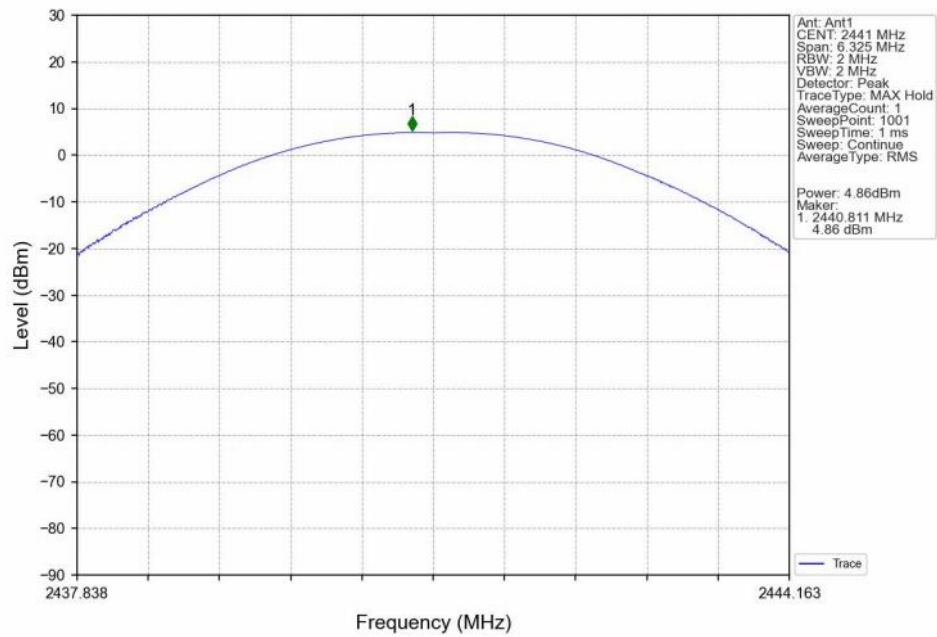

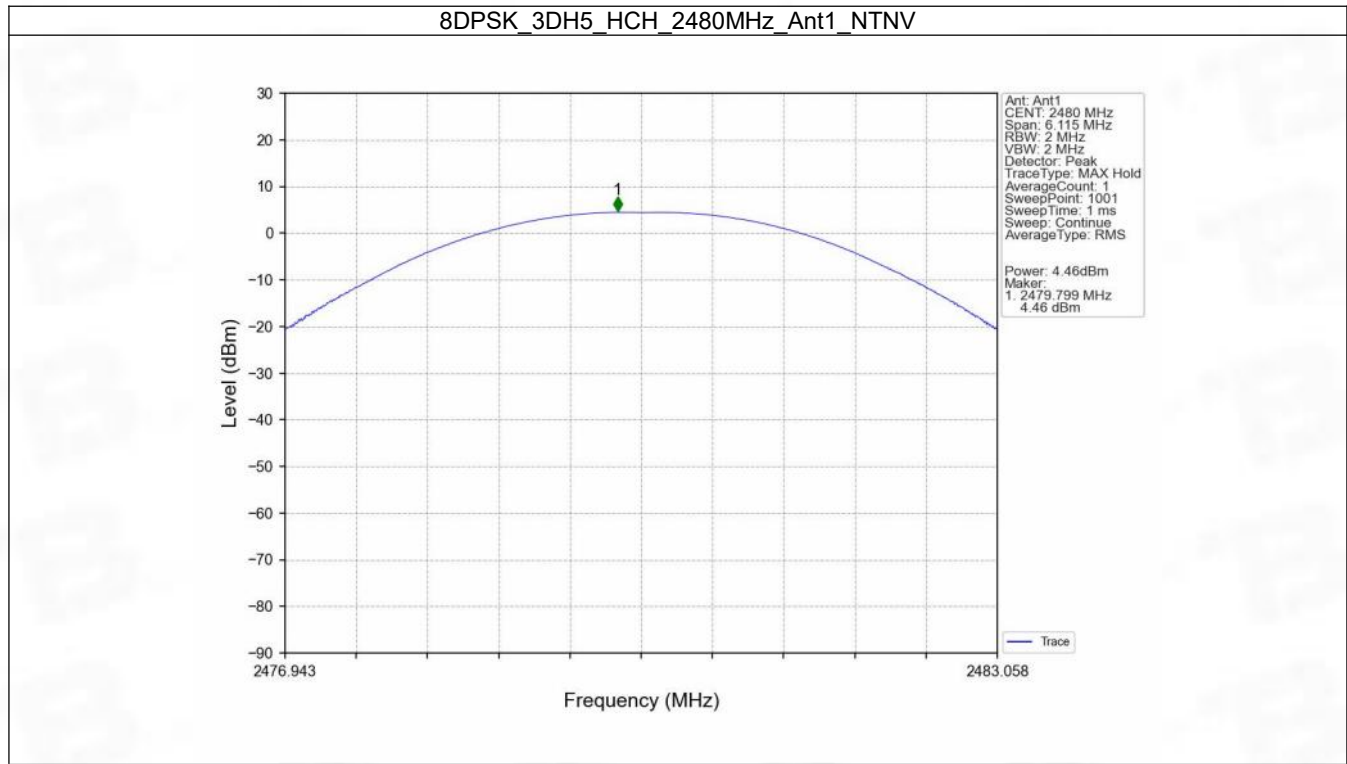

3. Carrier Frequency Separation


3.1 Test Result


3.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	0.996	0.985	≥ 0.985	Pass
$\pi/4$ DQPSK	SISO	HOPP	2DH5	0.996	1.238	≥ 0.825	Pass
8DPSK	SISO	HOPP	3DH5	0.998	1.265	≥ 0.843	Pass

3.2 Test Graph

3.2.1 Ant1

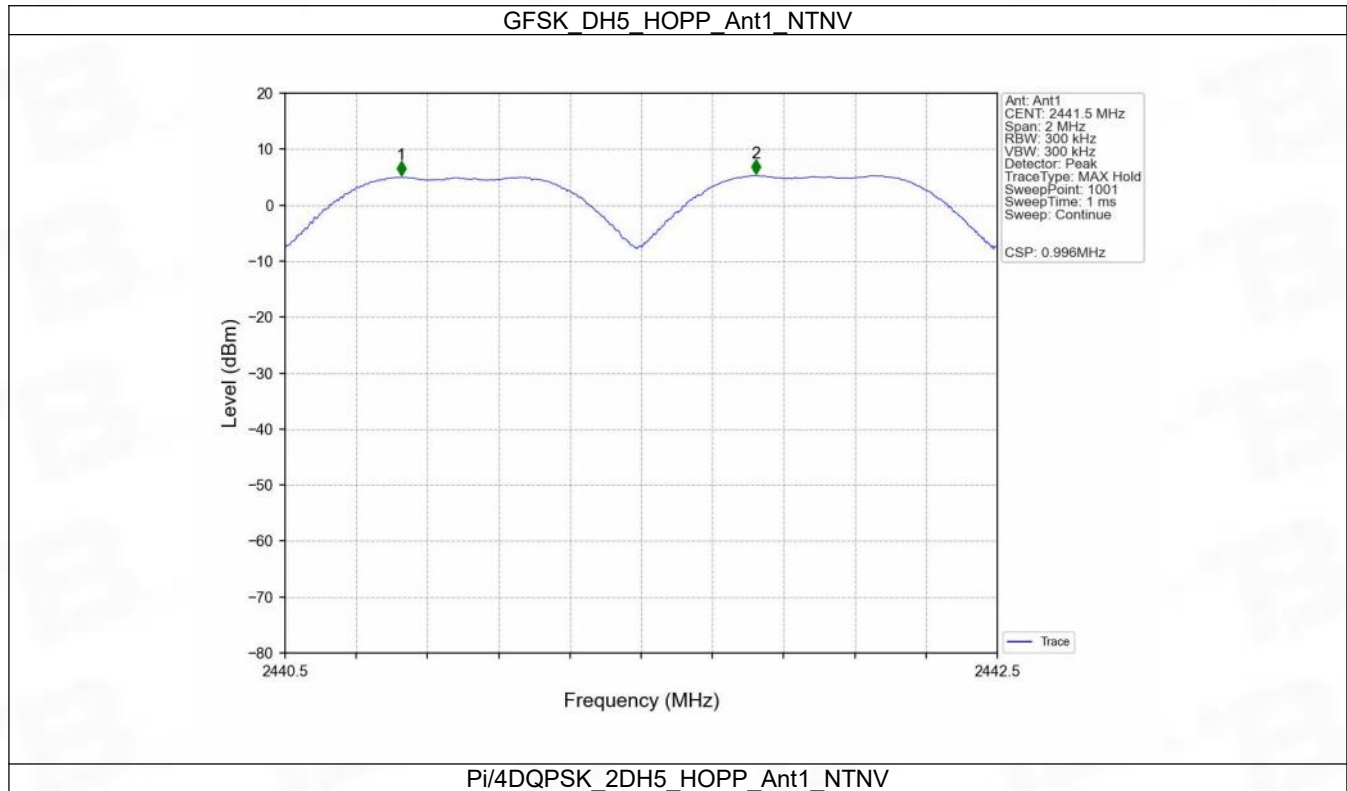

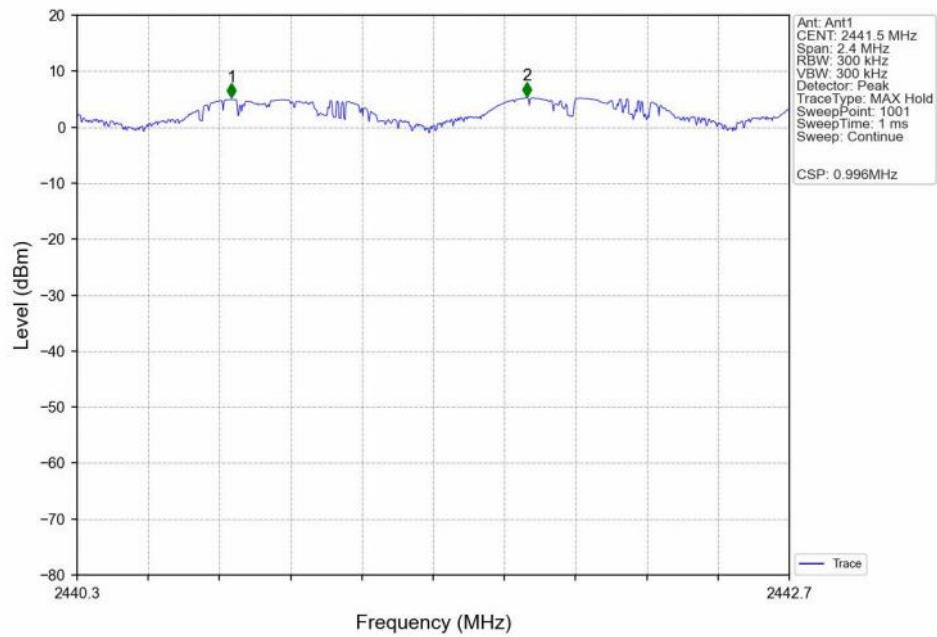

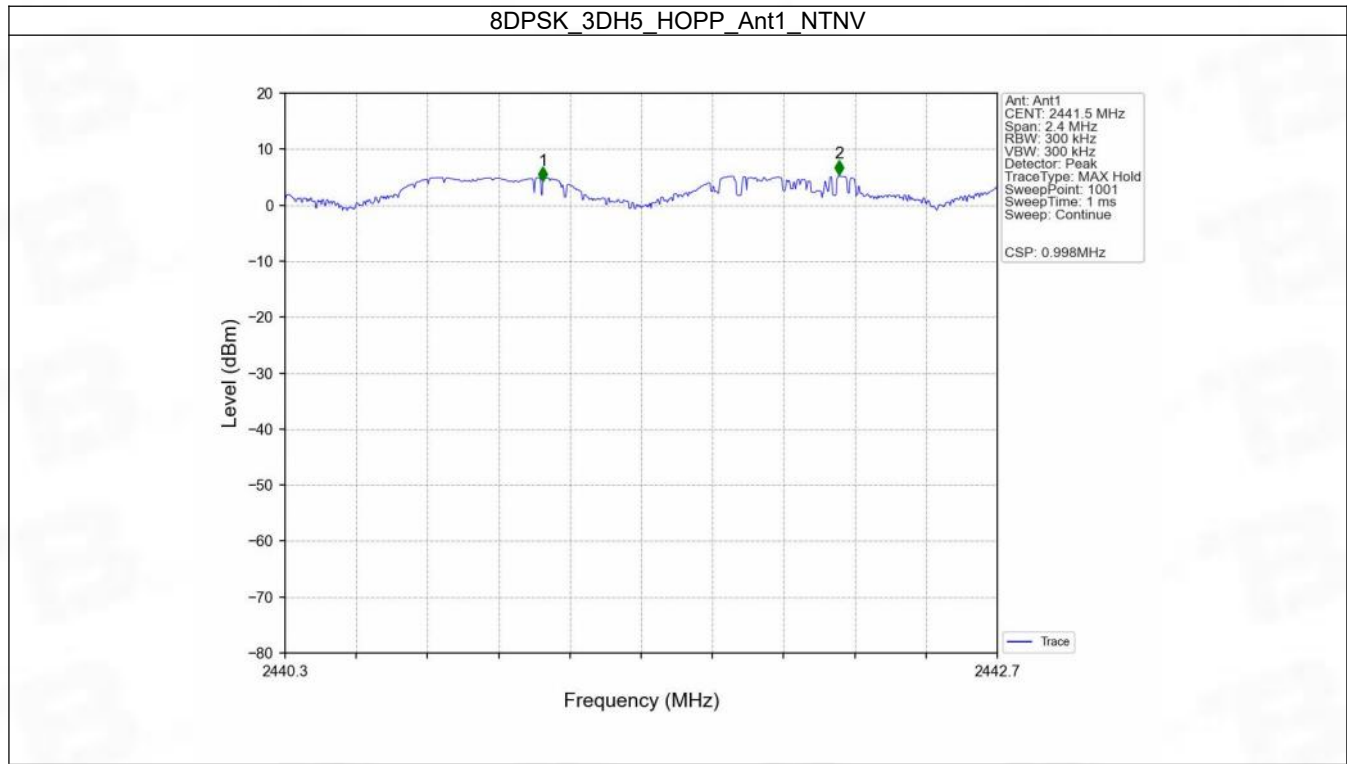

4. Number of Hopping Frequencies


4.1 Test Result


4.1.1 HoppNum


Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass

4.2 Test Graph

4.2.1 HoppNum

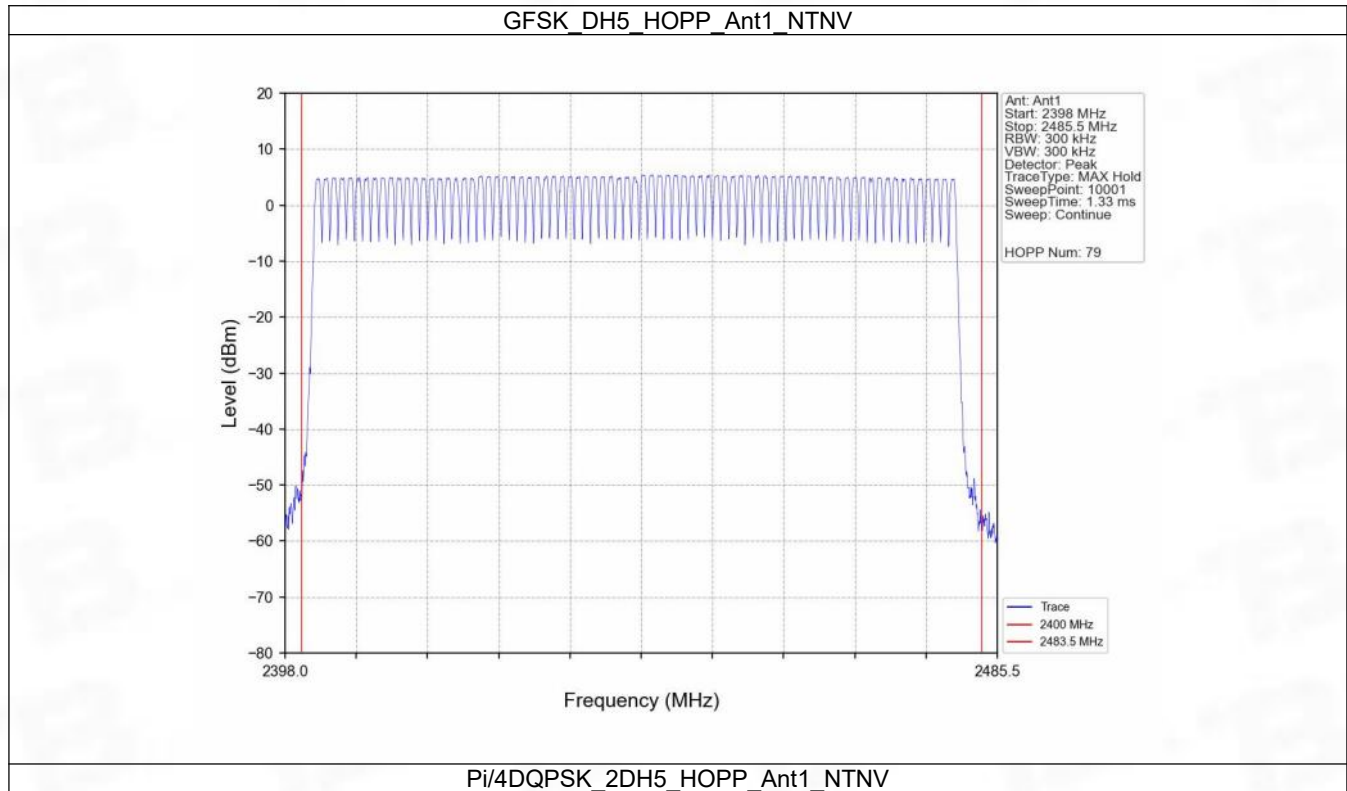

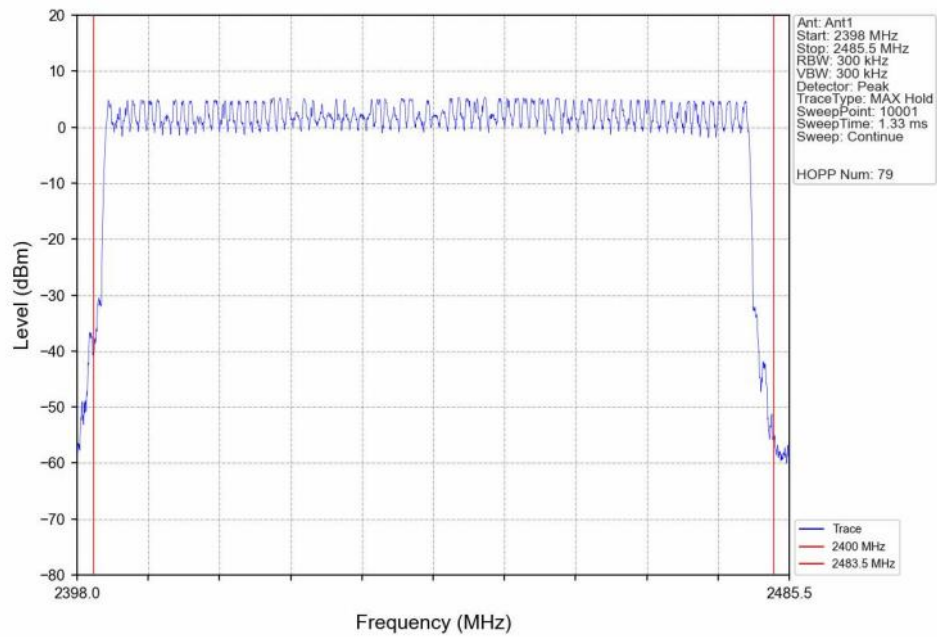

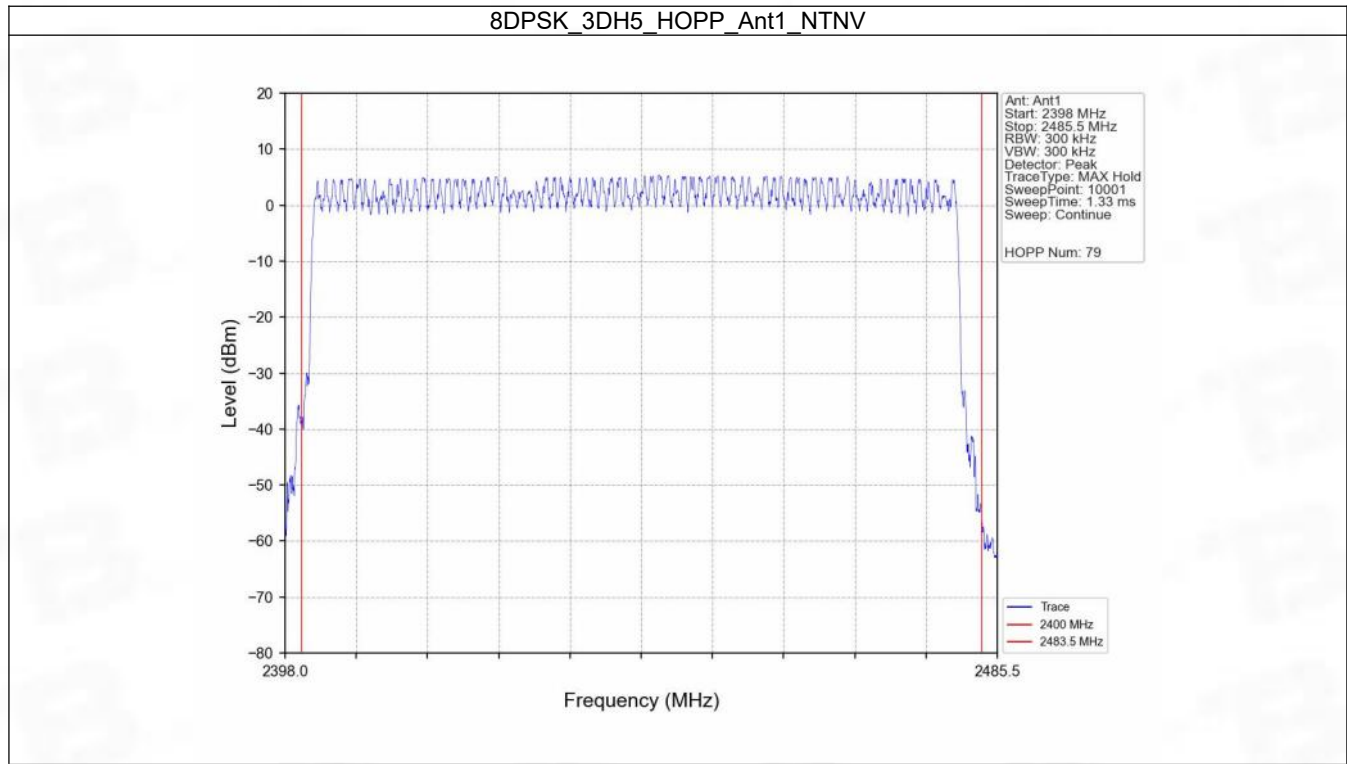

5. Time of Occupancy (Dwell Time)


5.1 Test Result


5.1.1 Ant1


Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.412	31.600	320	131.840	<=400	Pass
			DH3	1.664	31.600	169	281.216	<=400	Pass
			DH5	2.916	31.600	119	347.004	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.422	31.600	320	135.040	<=400	Pass
			2DH3	1.674	31.600	164	274.536	<=400	Pass
			2DH5	2.924	31.600	100	292.400	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.422	31.600	320	135.040	<=400	Pass
			3DH3	1.674	31.600	155	259.470	<=400	Pass
			3DH5	2.922	31.600	110	321.420	<=400	Pass


5.2 Test Graph


5.2.1 Ant1

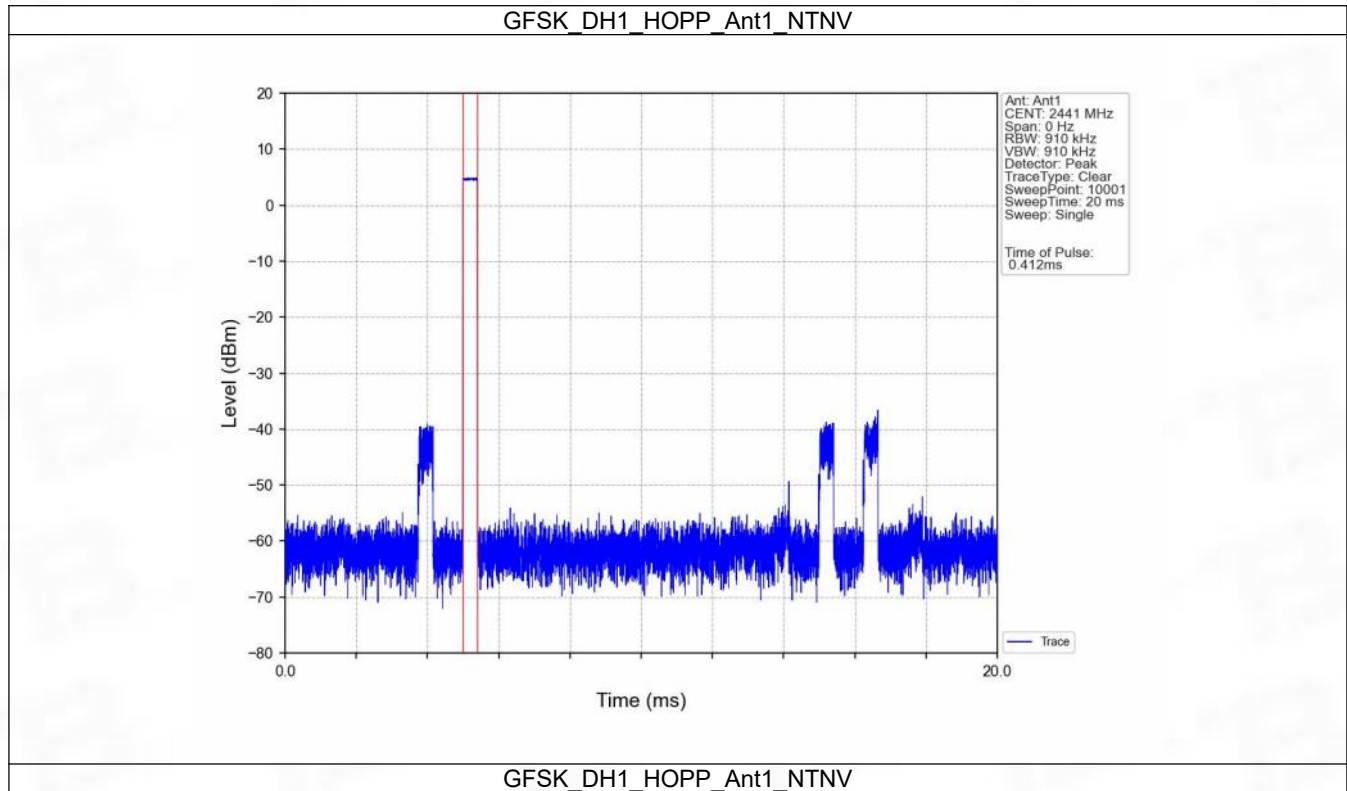


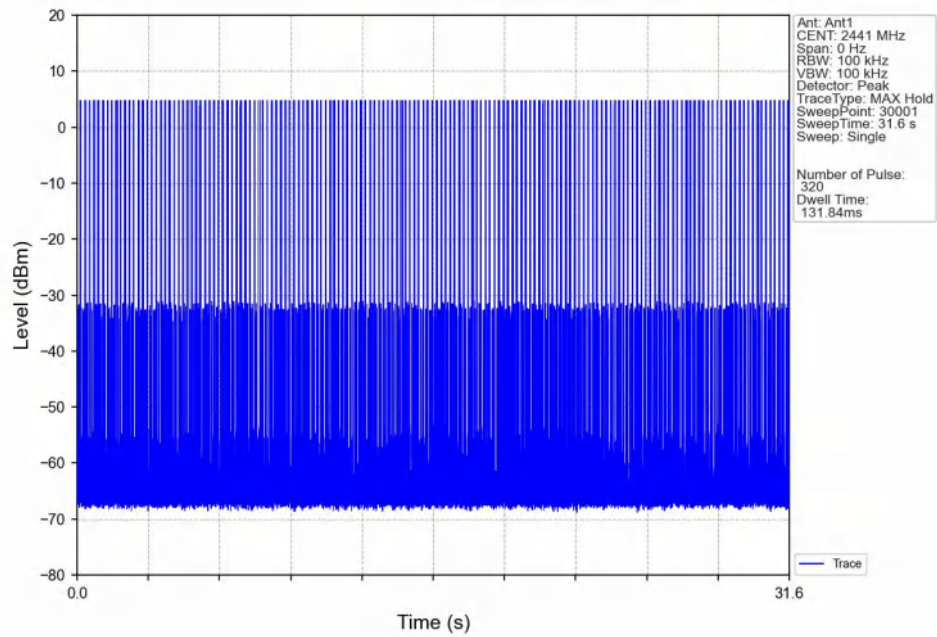


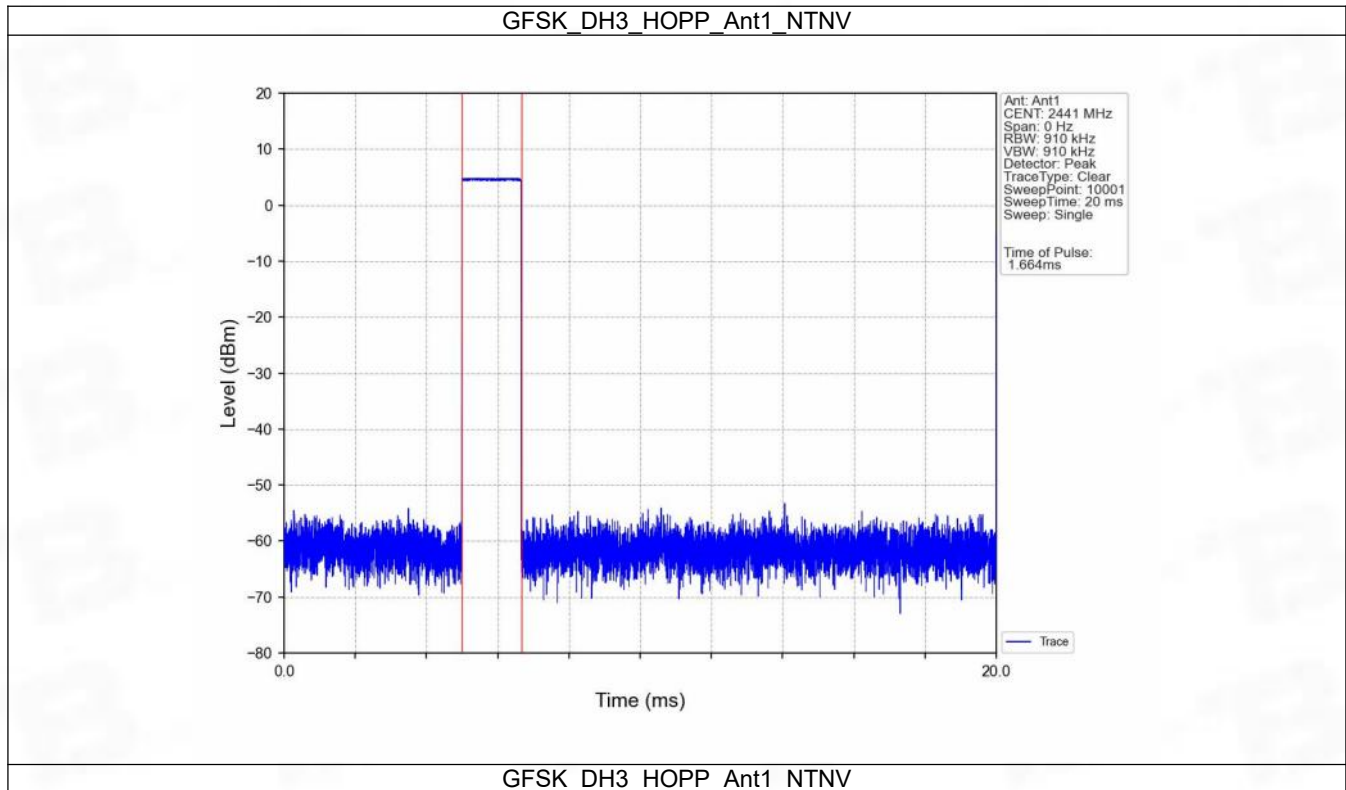


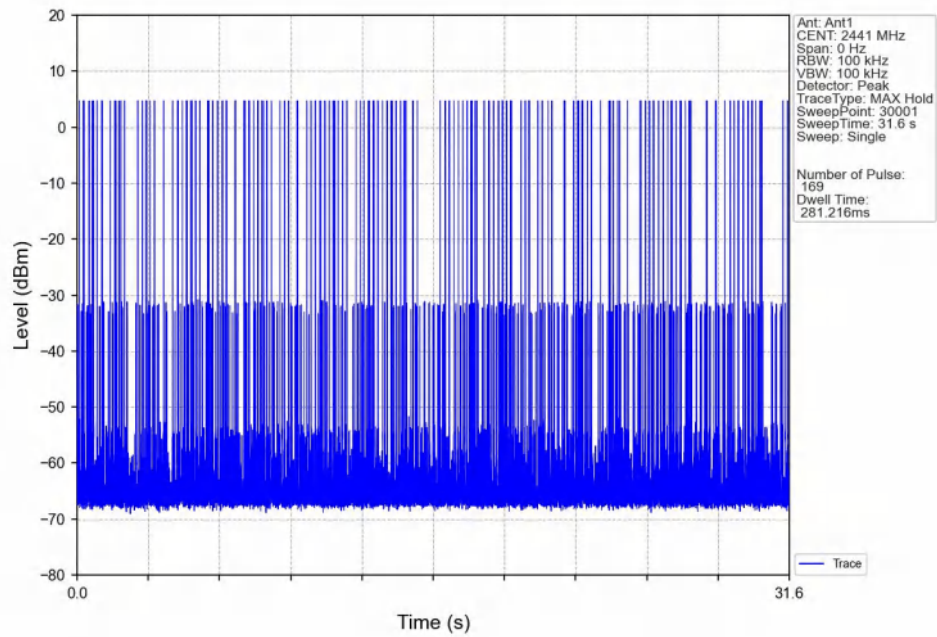


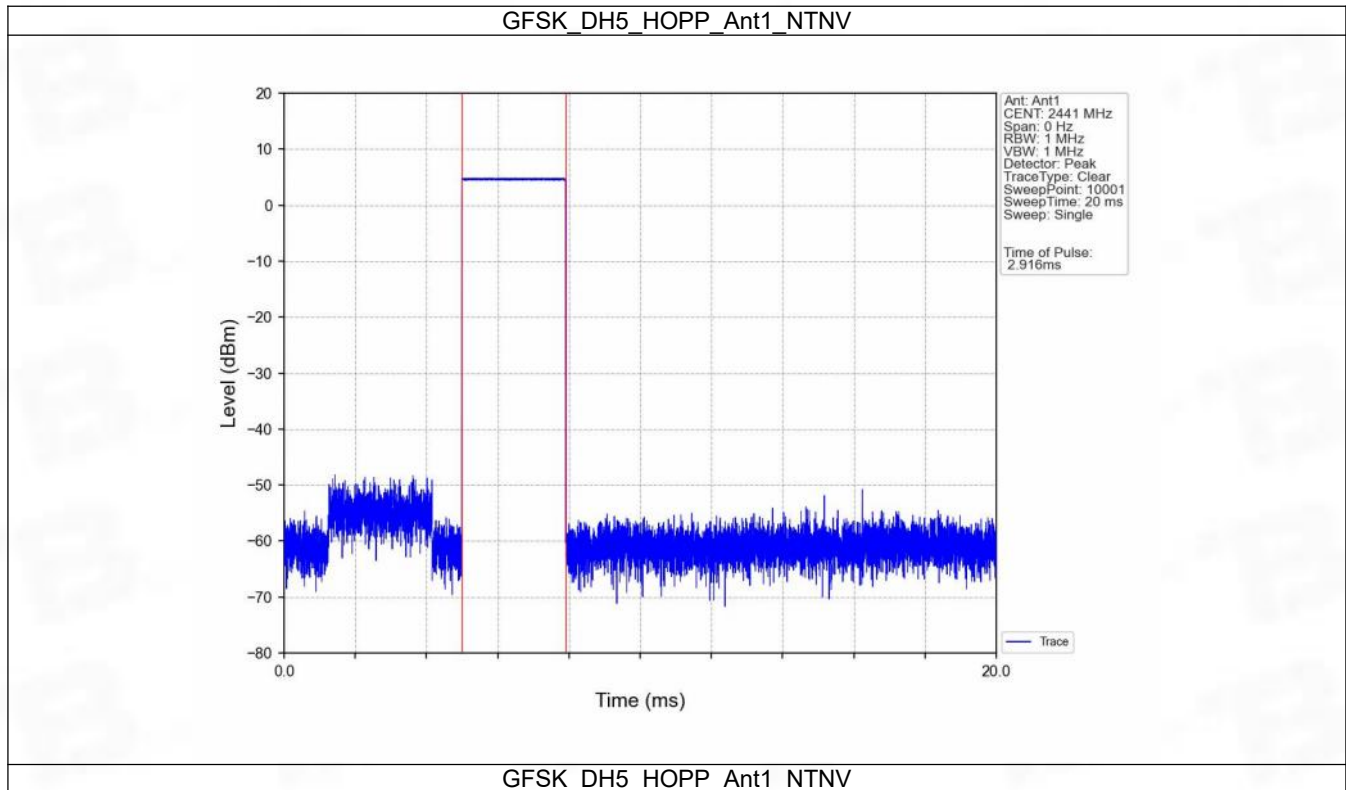


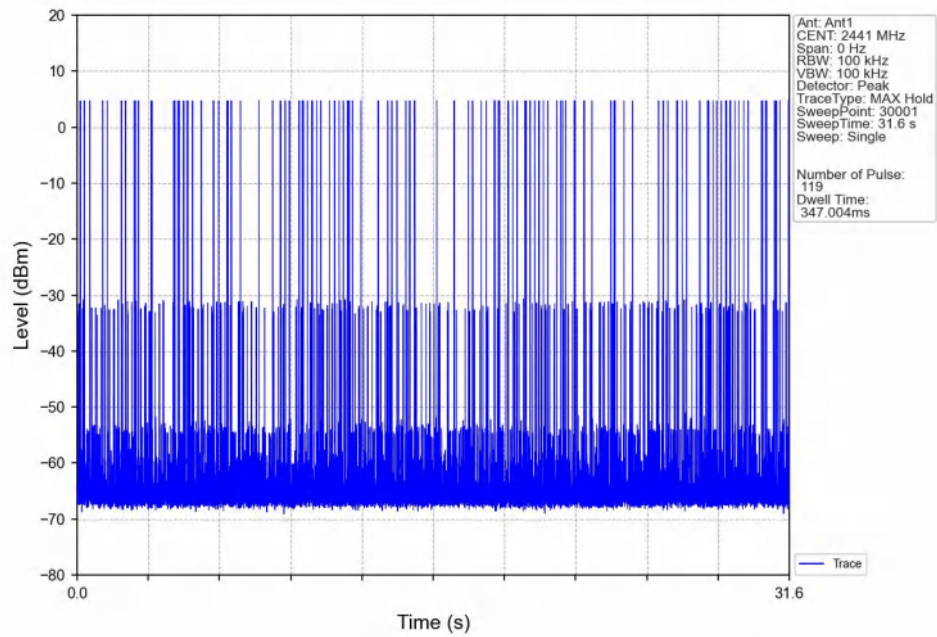


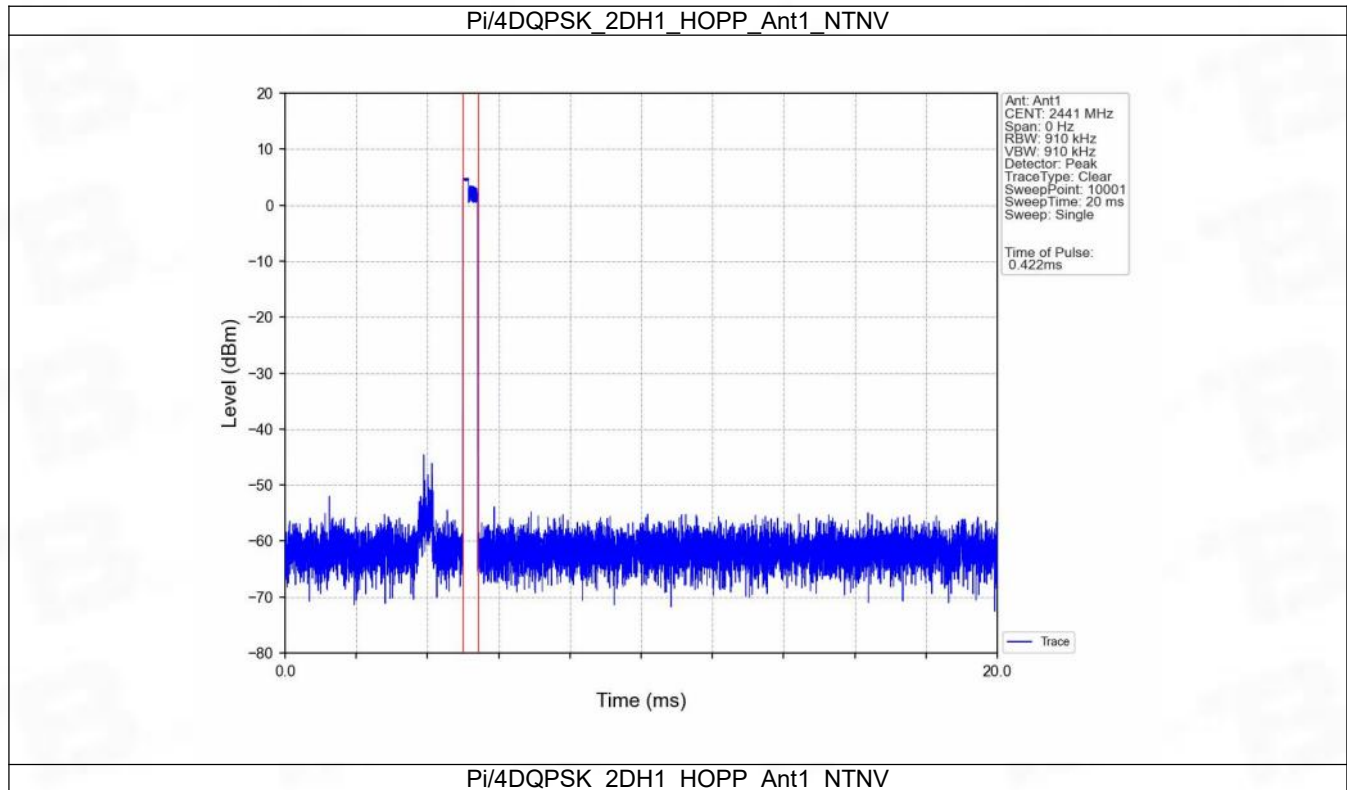


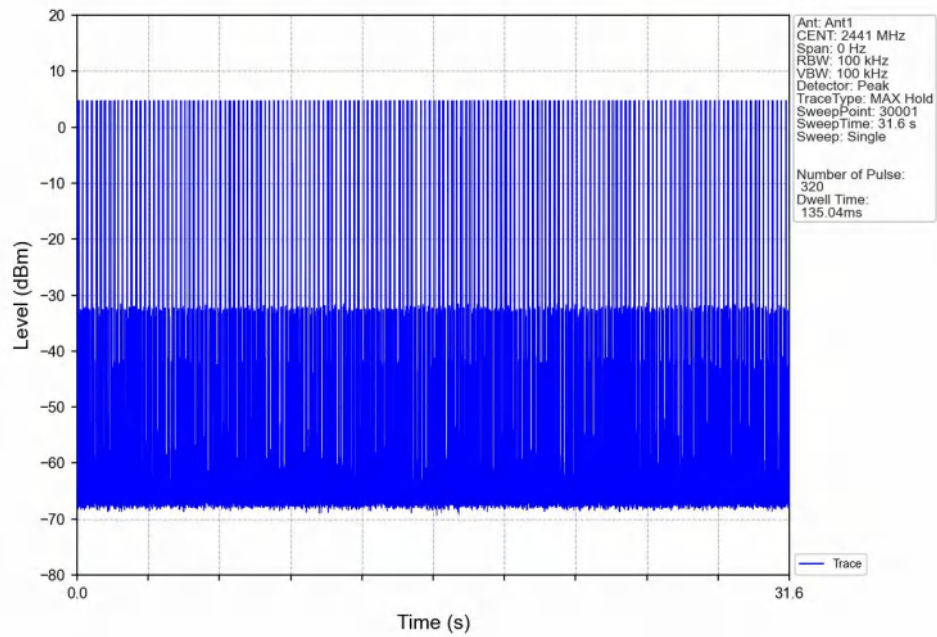


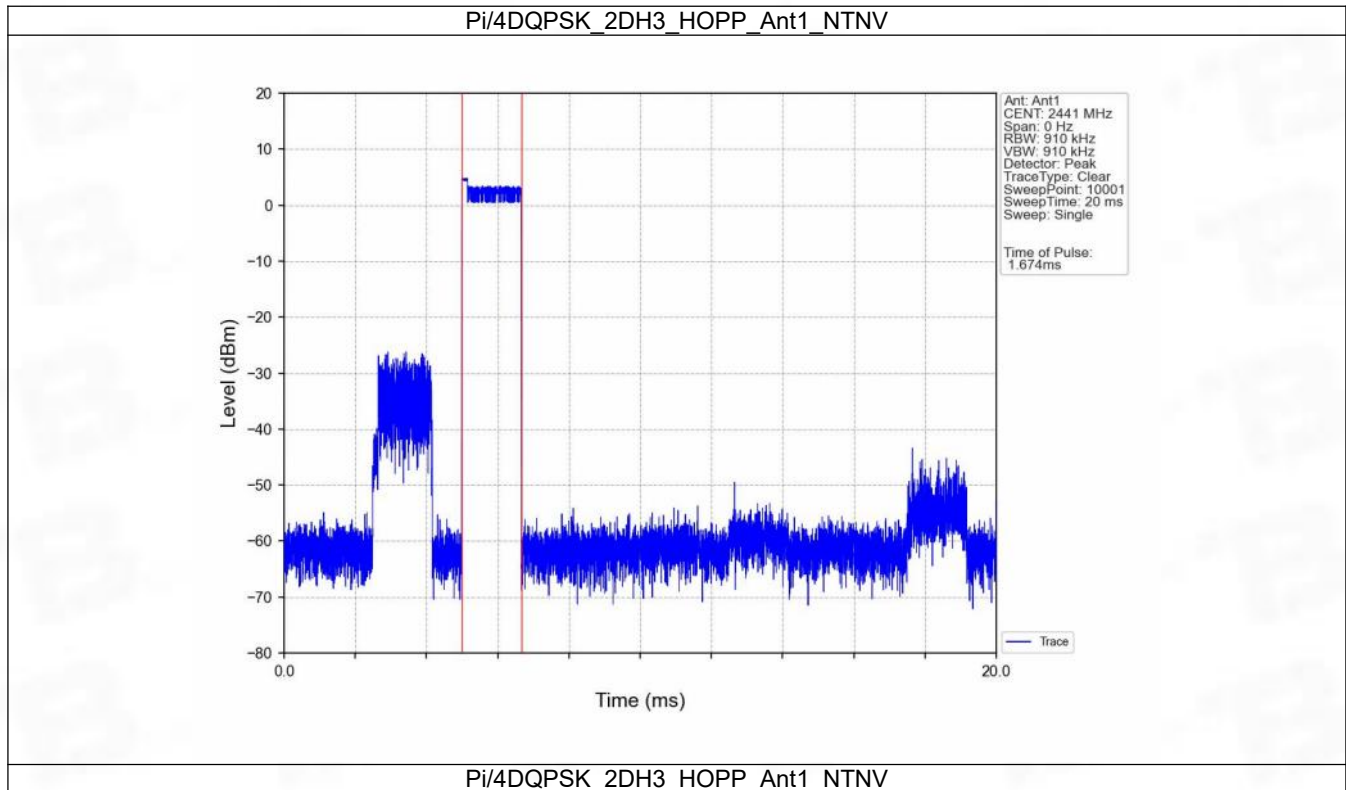


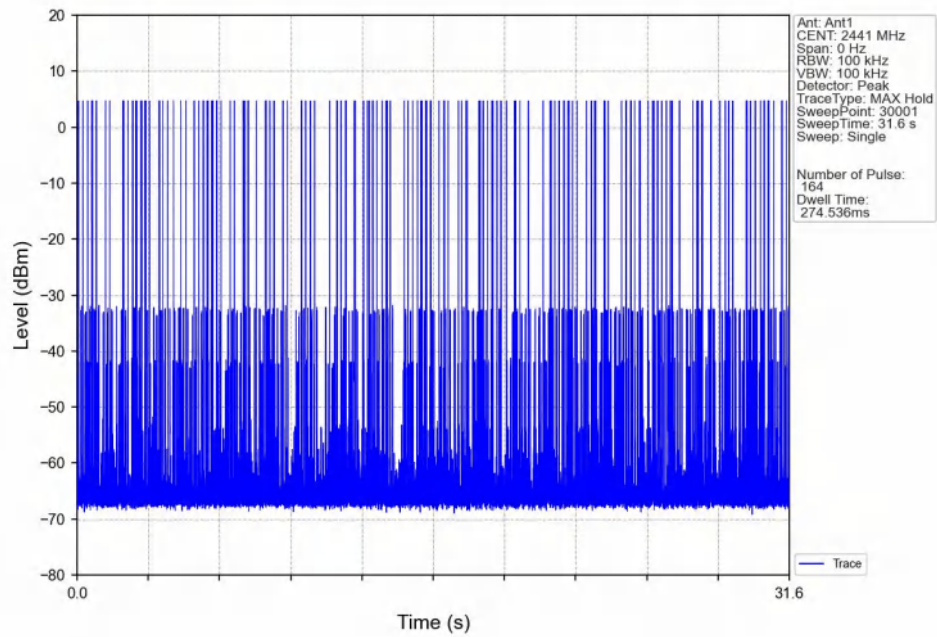


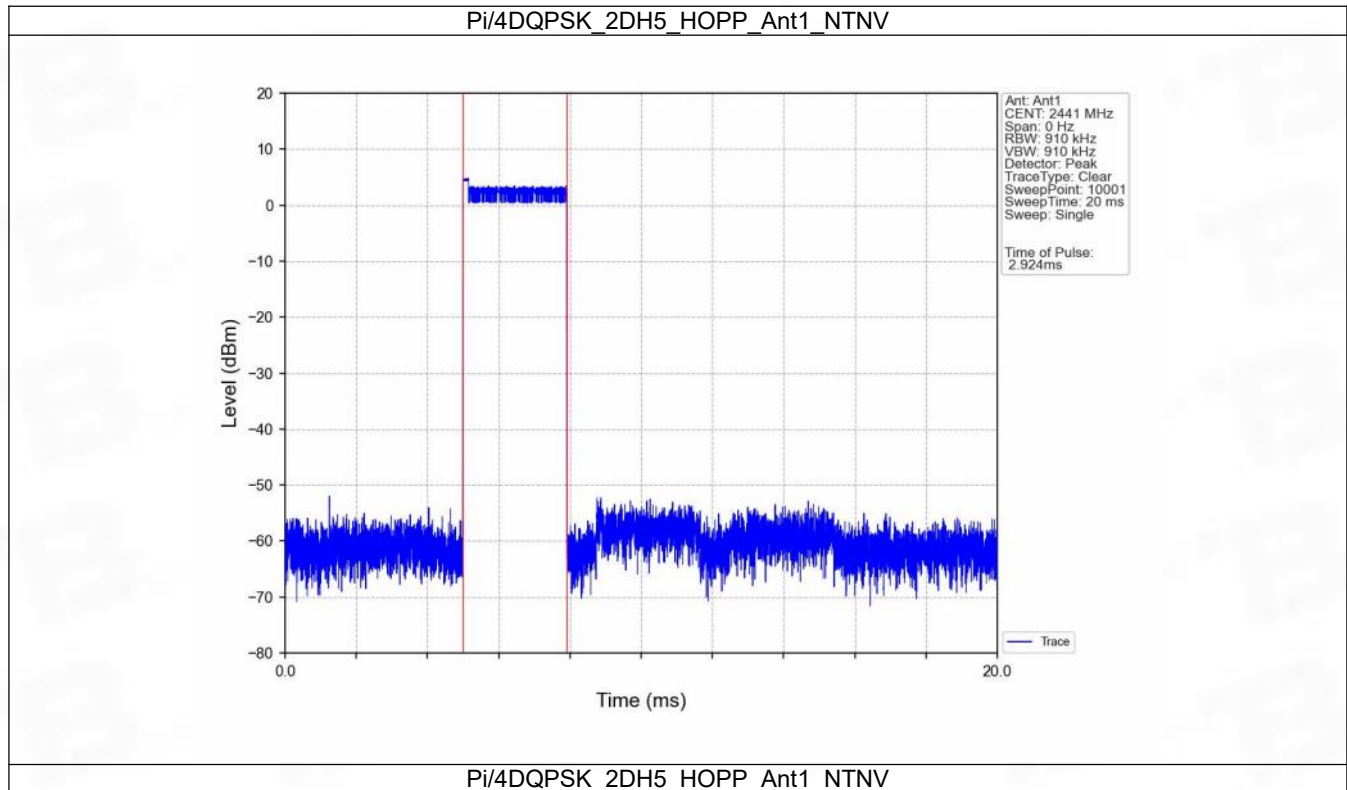


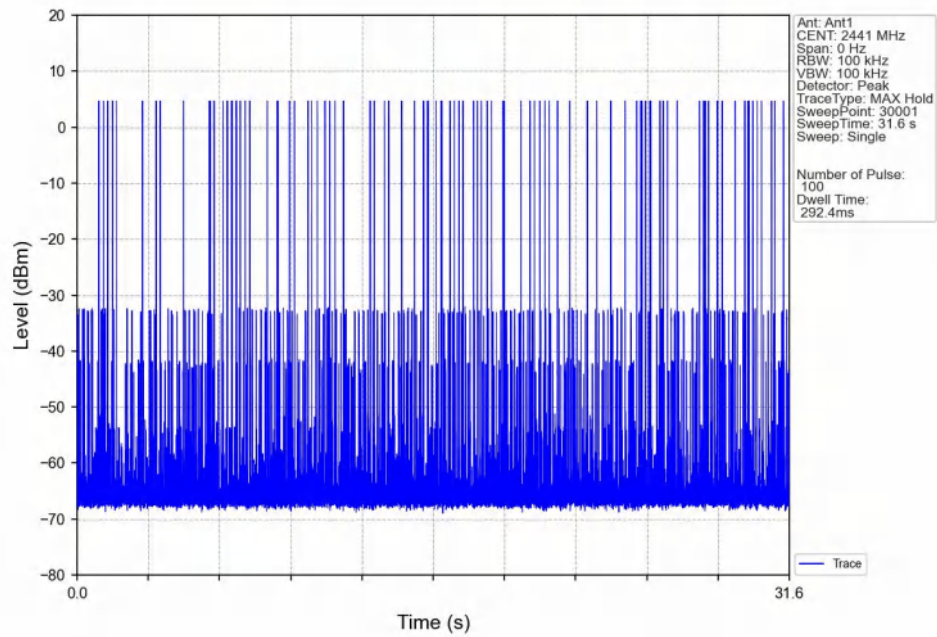


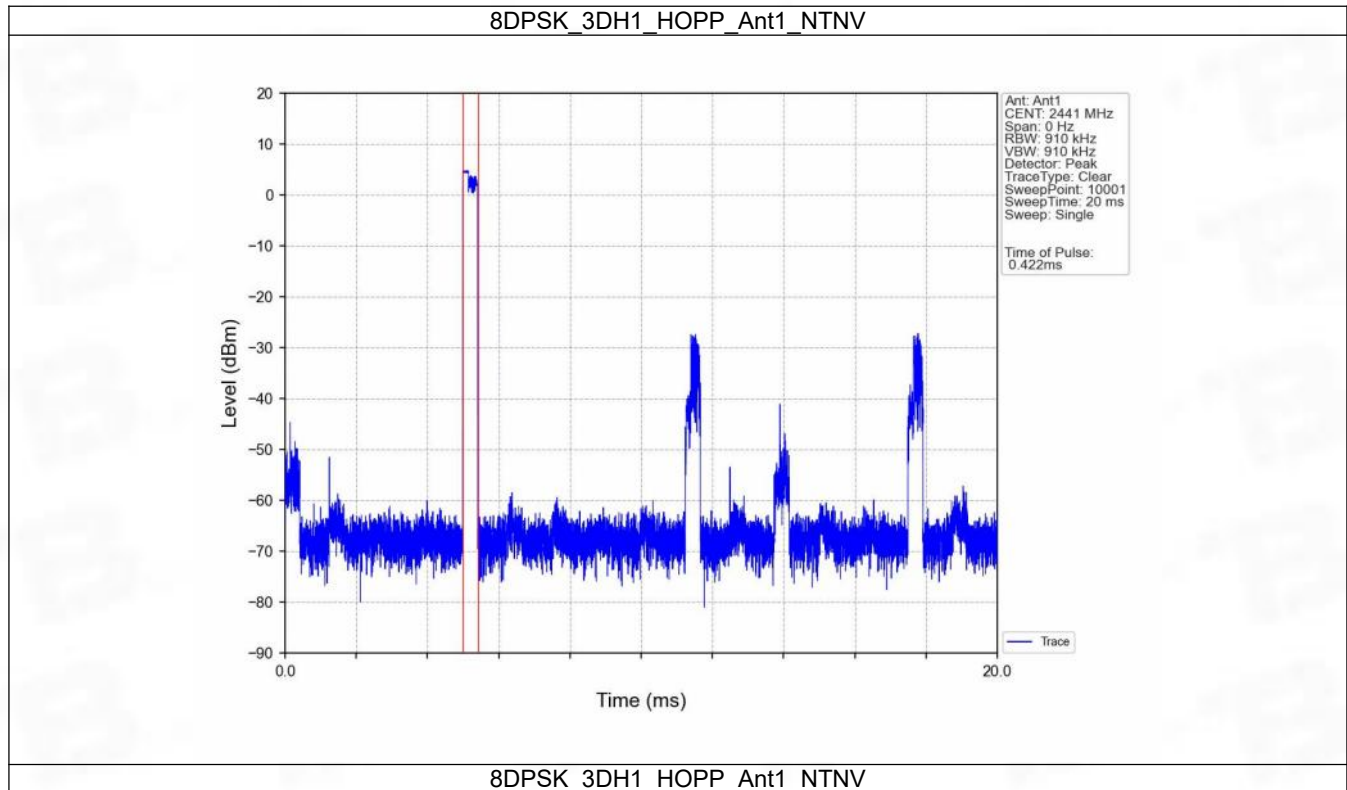


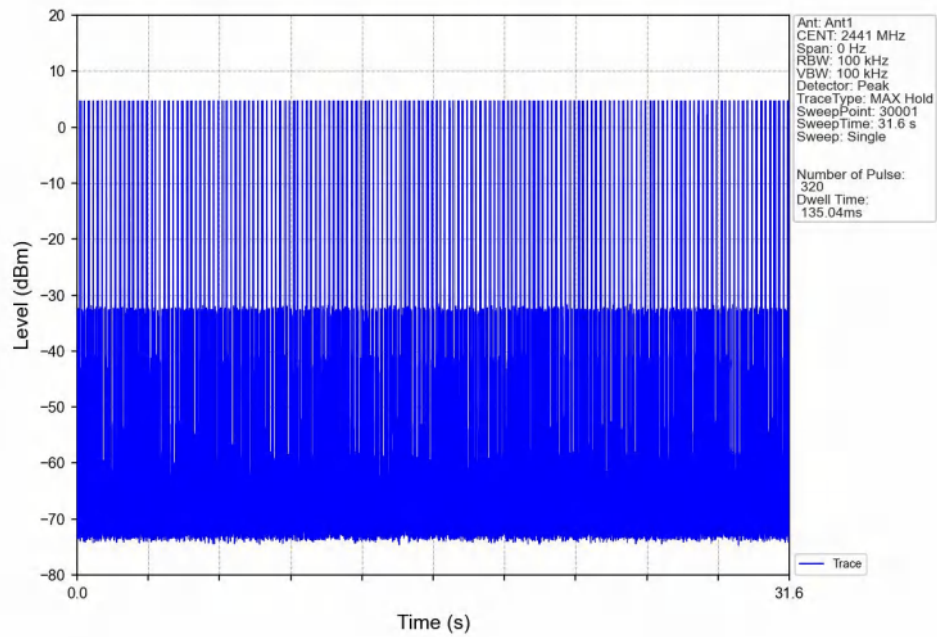

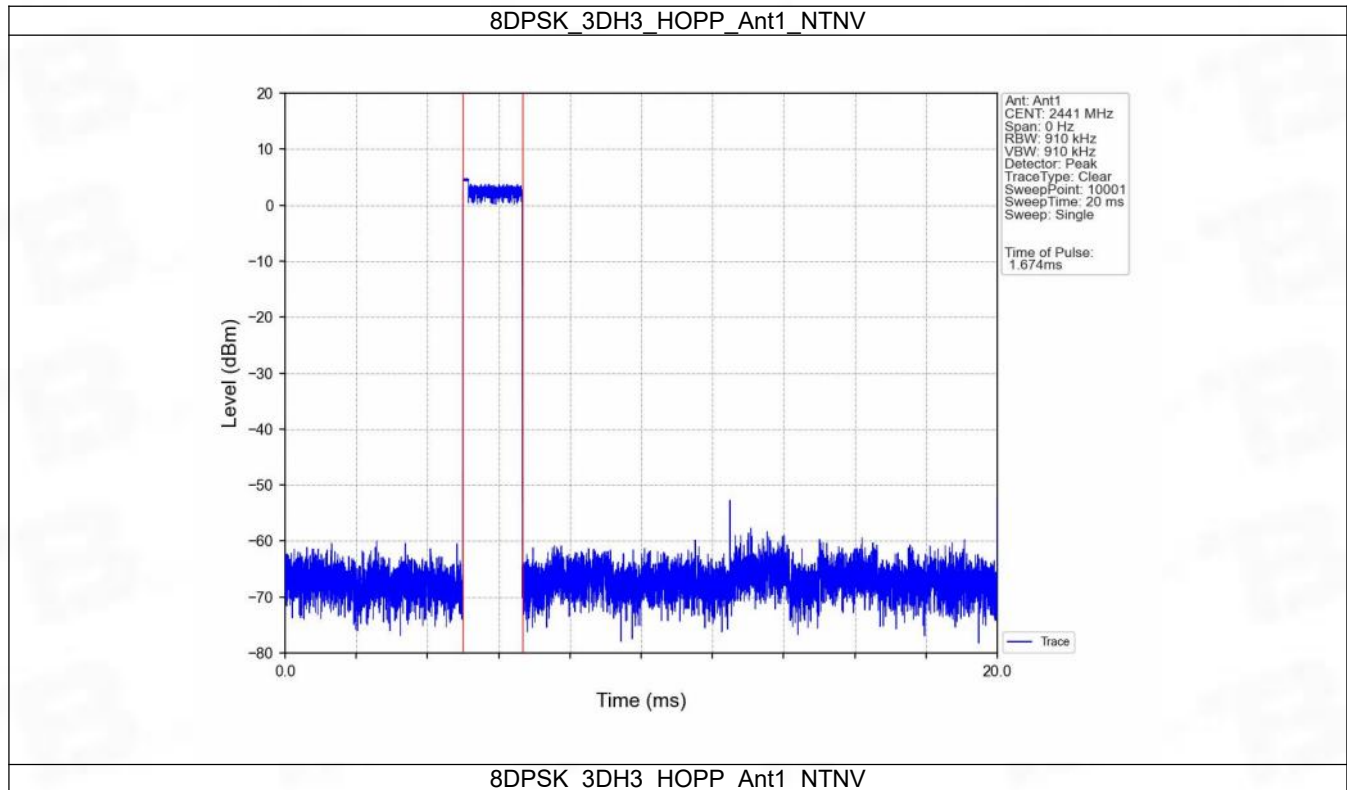

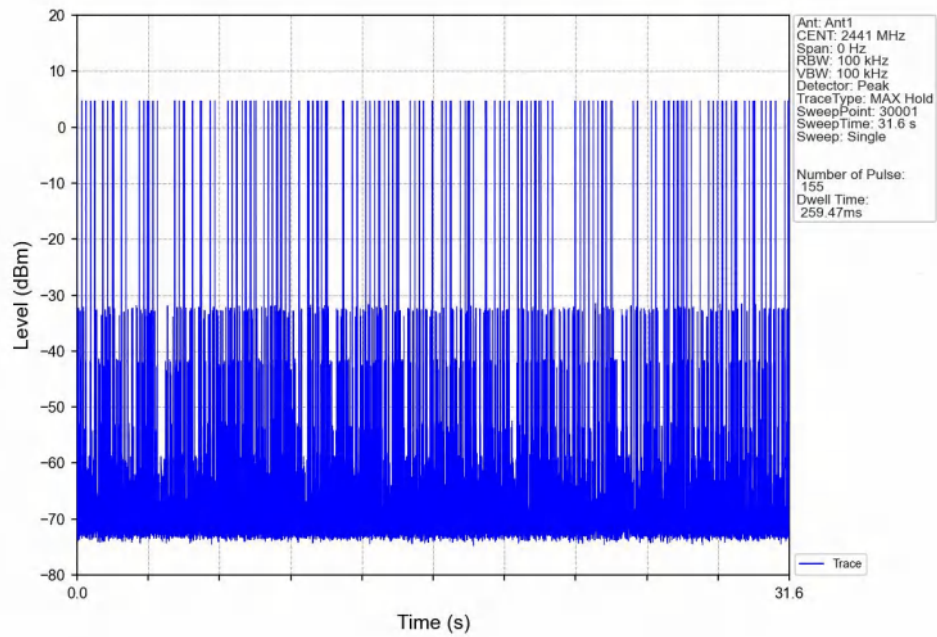

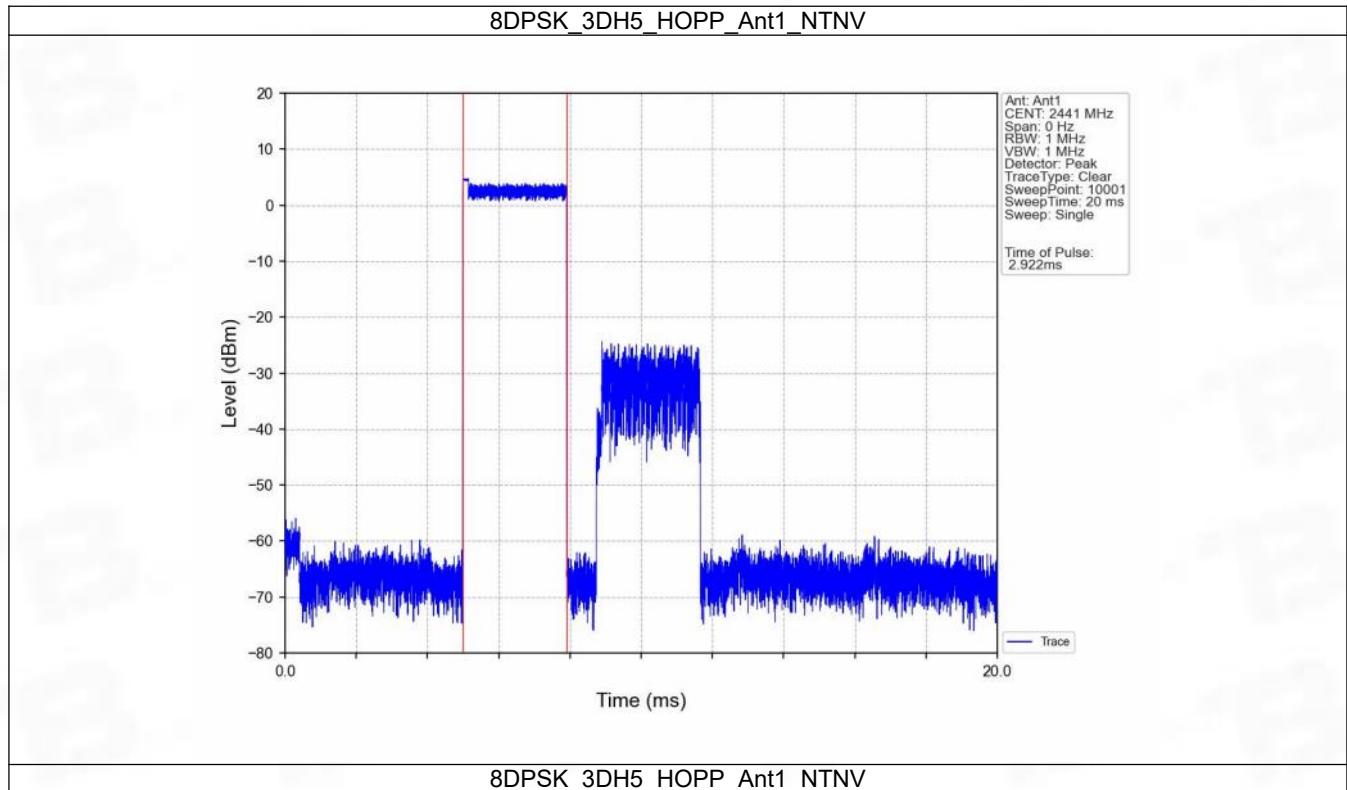

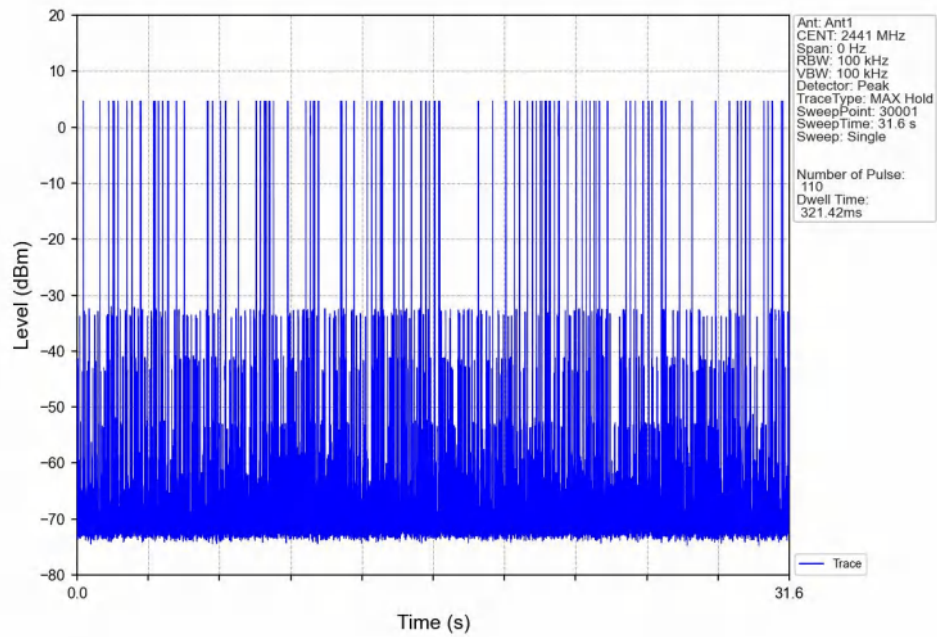

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Test Result

6.1.1 Ref

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	4.56
		2441	DH5	1	4.80
		2480	DH5	1	4.41
		HOPP	DH5	1	5.14
					5.14
Pi/4DQPSK	SISO	2402	2DH5	1	4.57
		2441	2DH5	1	4.80
		2480	2DH5	1	4.39
		HOPP	2DH5	1	5.03
					5.03
8DPSK	SISO	2402	3DH5	1	4.57
		2441	3DH5	1	4.78
		2480	3DH5	1	4.35
		HOPP	3DH5	1	5.07
					5.07

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


6.1.2 CSE


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	4.56	-15.44	Pass
		2441	DH5	1	4.80	-15.20	Pass
		2480	DH5	1	4.41	-15.59	Pass
		HOPP	DH5	1	5.14	-14.86	Pass
					5.14	-14.86	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	4.57	-15.43	Pass
		2441	2DH5	1	4.80	-15.20	Pass
		2480	2DH5	1	4.39	-15.61	Pass
		HOPP	2DH5	1	5.03	-14.97	Pass
					5.03	-14.97	Pass
8DPSK	SISO	2402	3DH5	1	4.57	-15.43	Pass
		2441	3DH5	1	4.78	-15.22	Pass
		2480	3DH5	1	4.35	-15.65	Pass

		HOPP	3DH5	1	5.07	-14.93	Pass
					5.07	-14.93	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.							


6.2 Test Graph

6.2.1 Ref

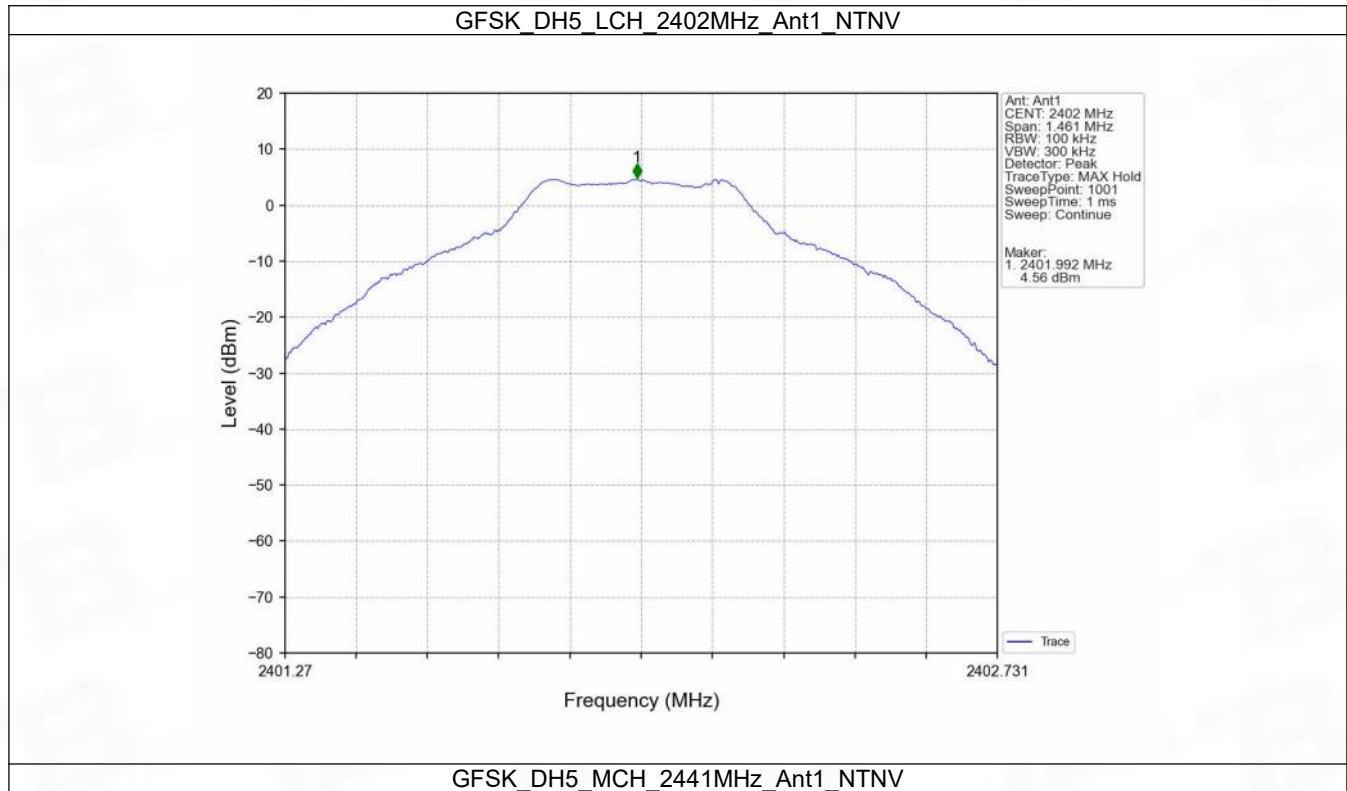


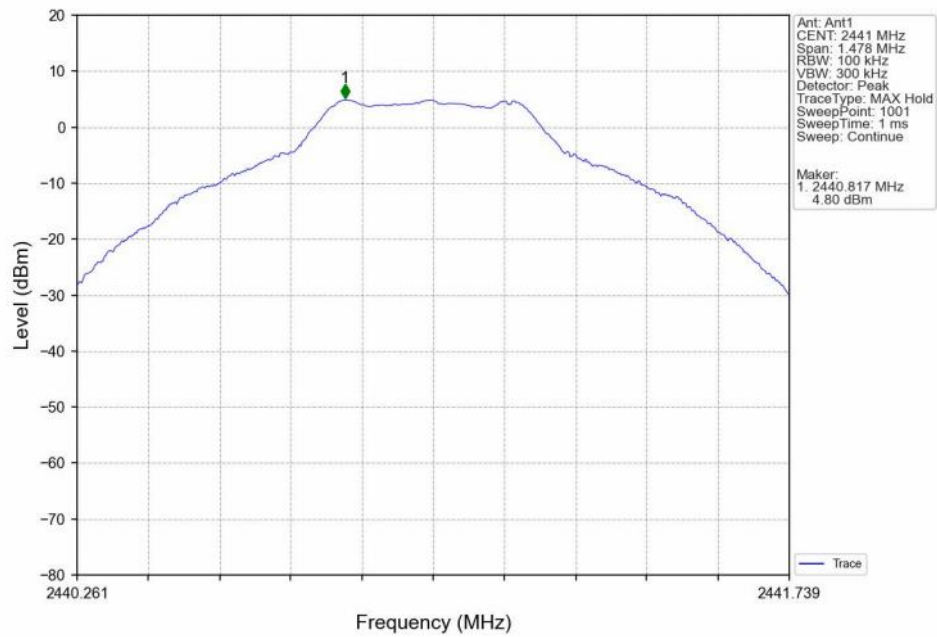



GFSK_DH5_HCH_2480MHz_Ant1_NTNV

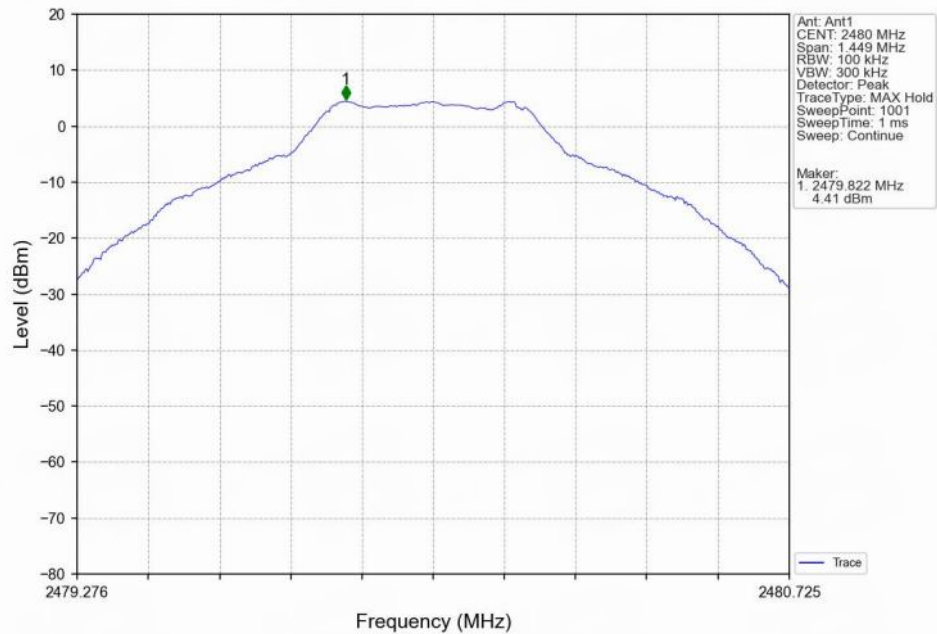


GFSK_DH5_HOPP_Ant1_NTNV

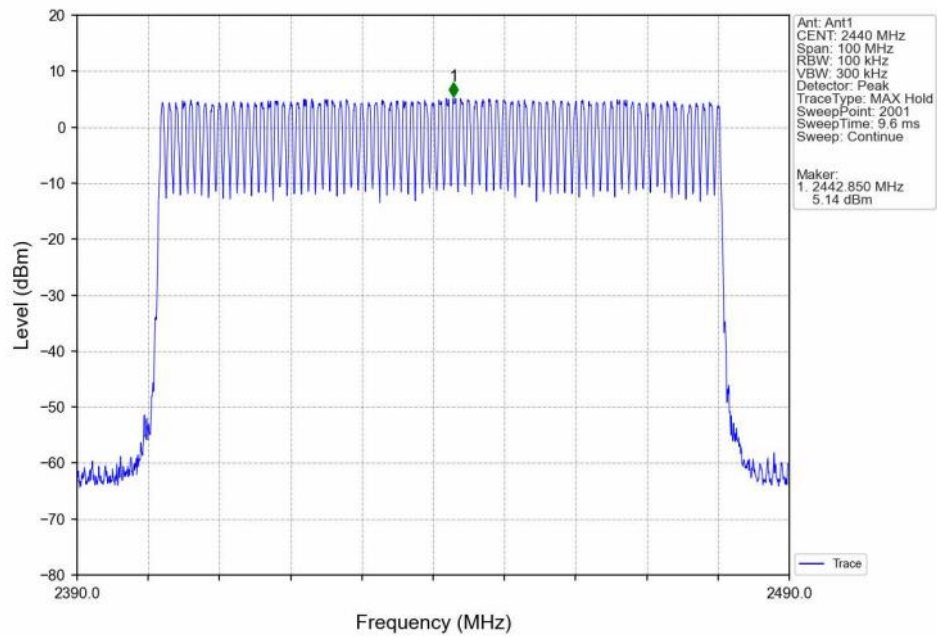

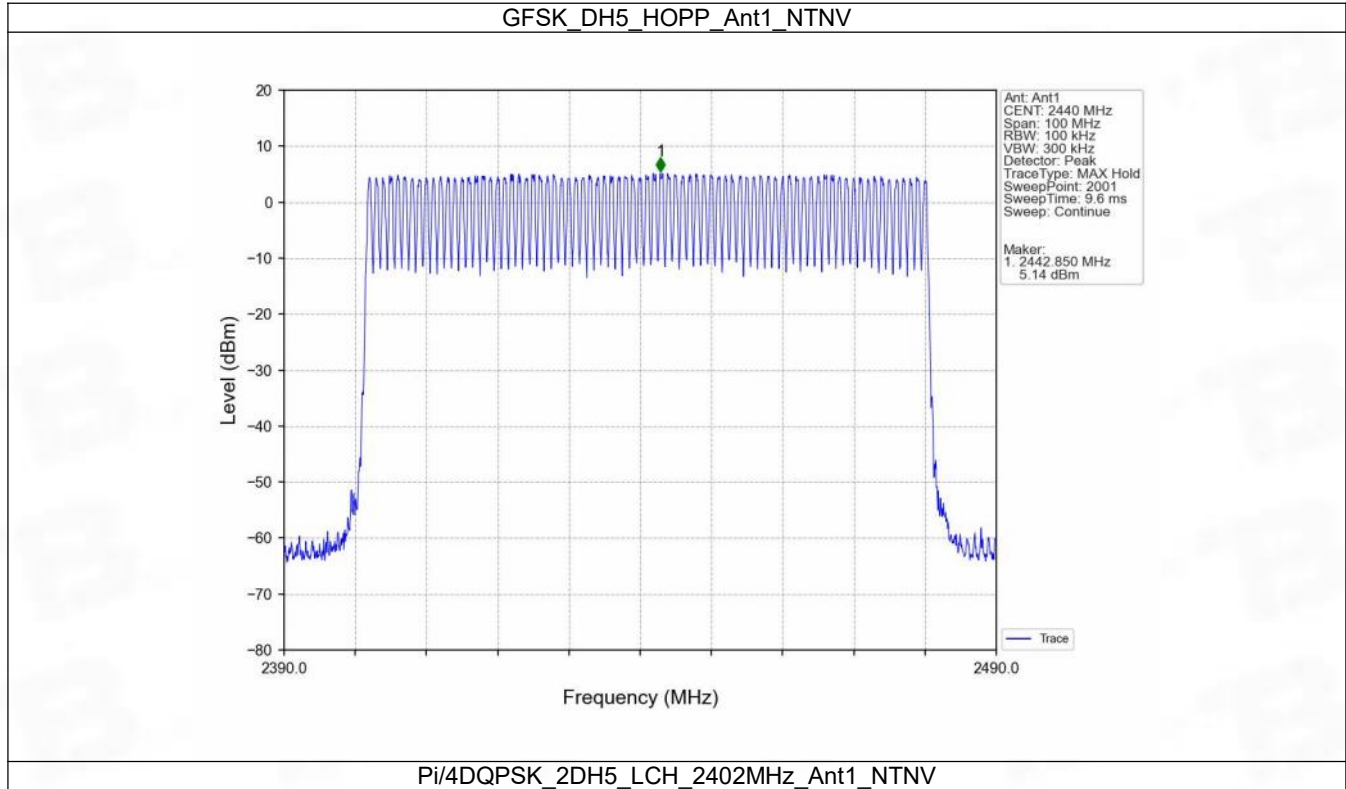


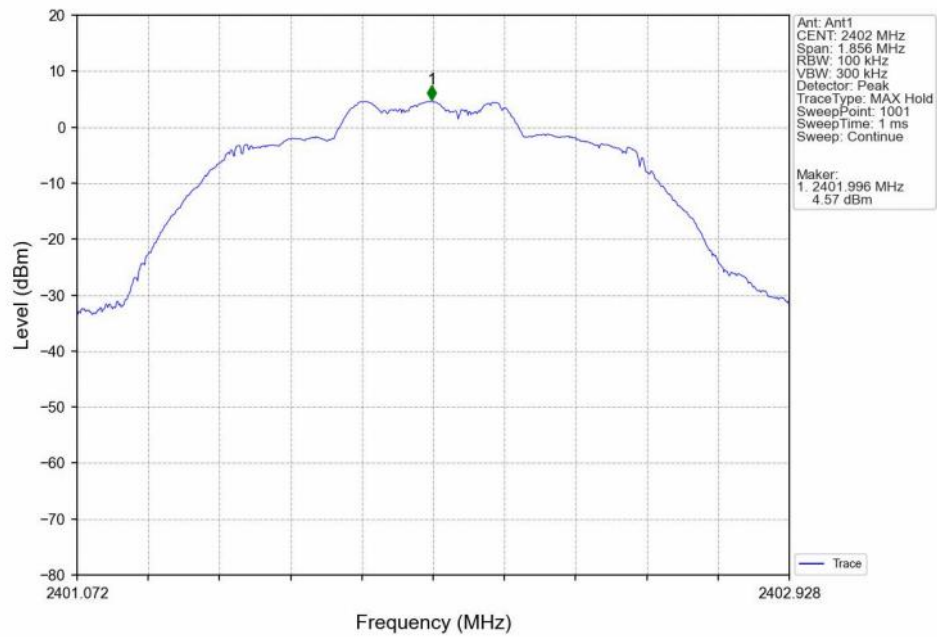



Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

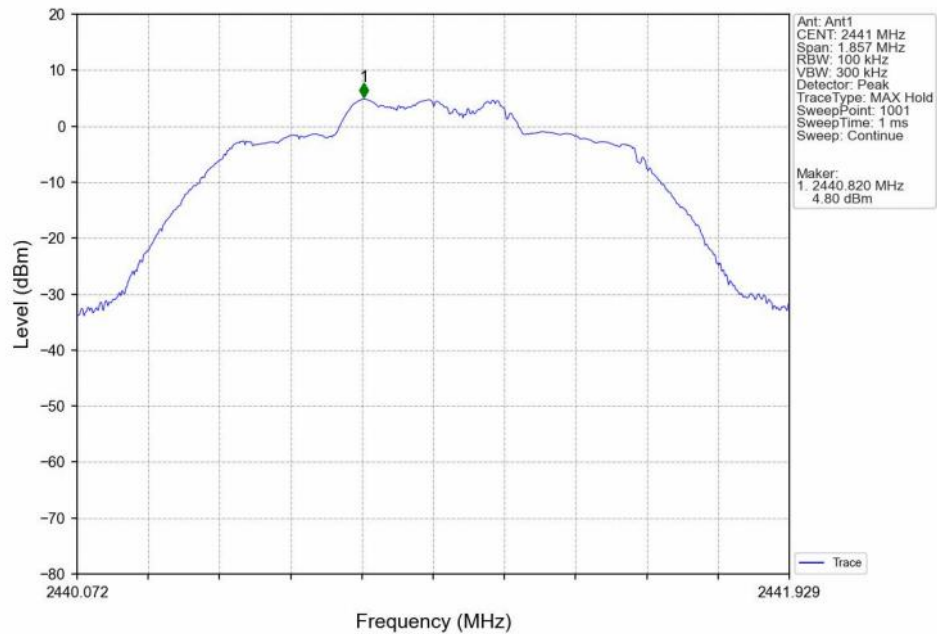



Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

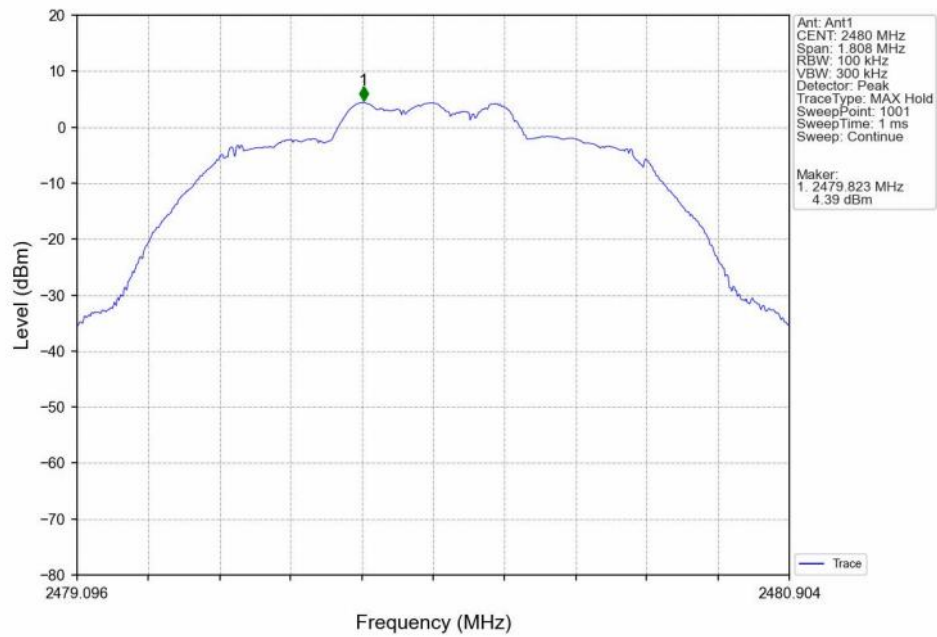

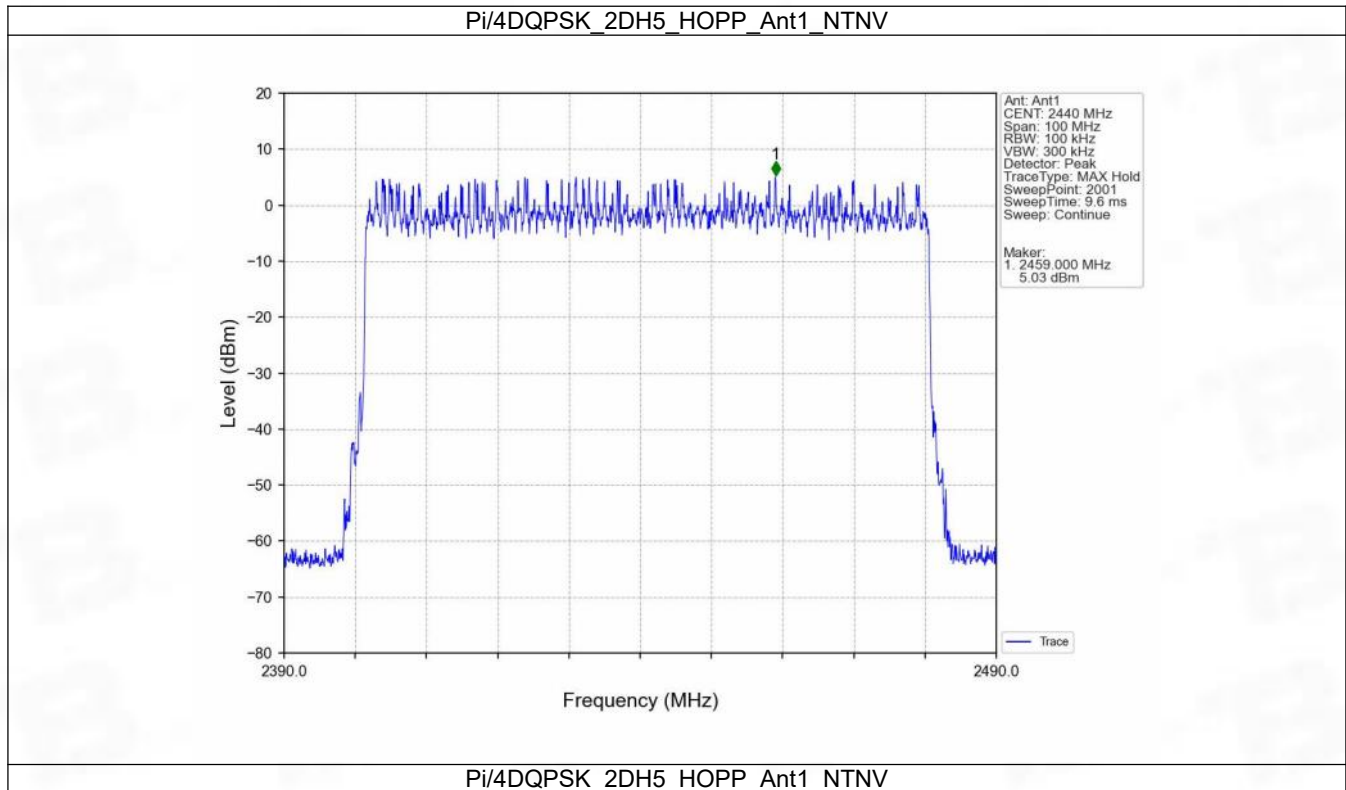


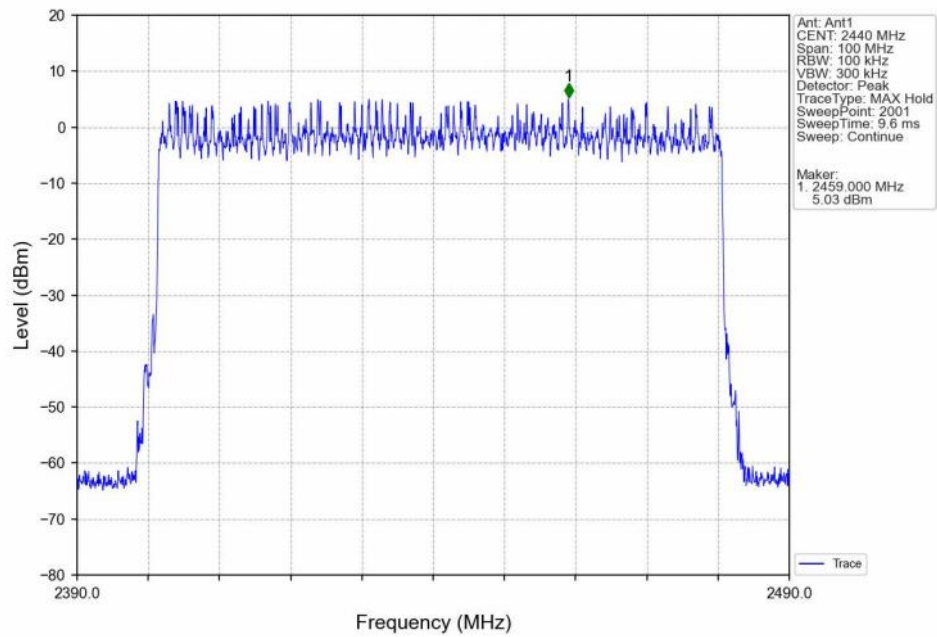

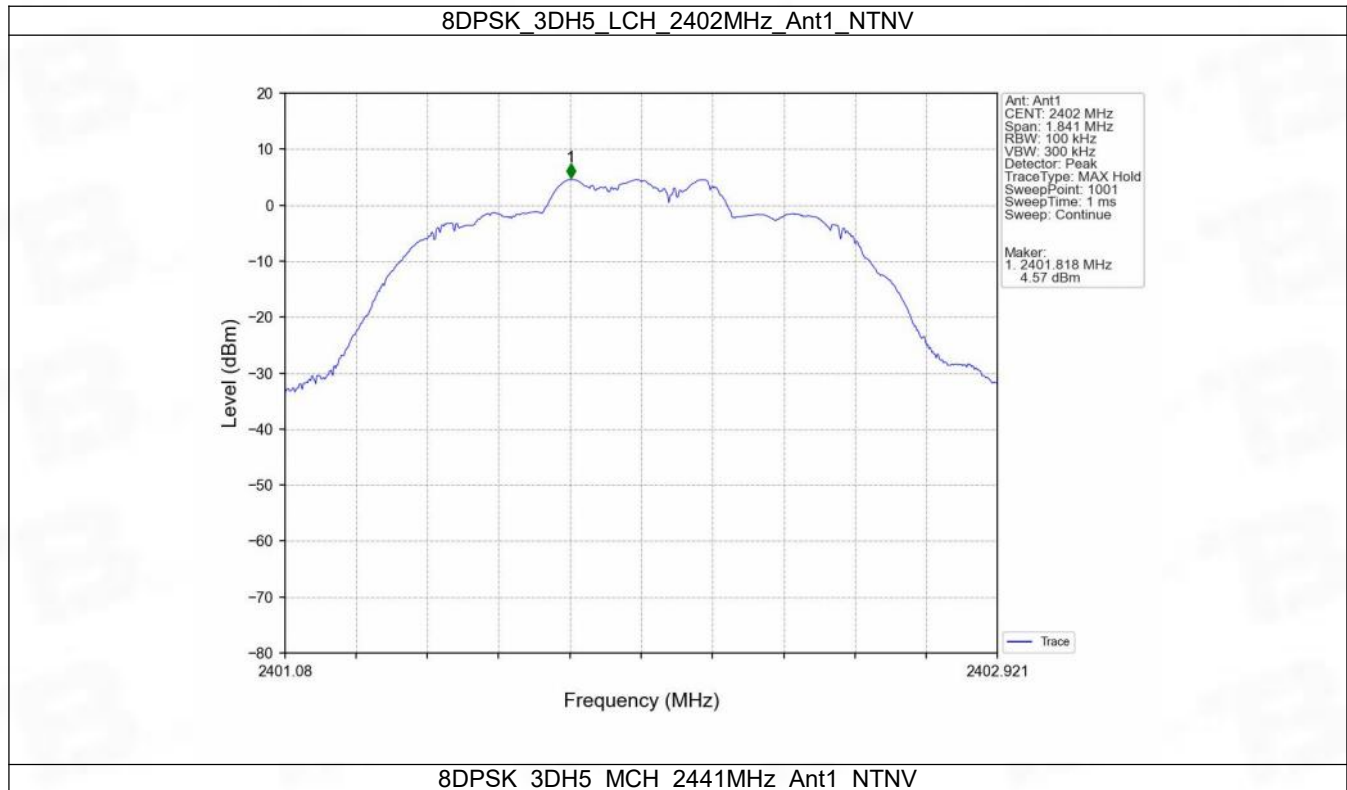


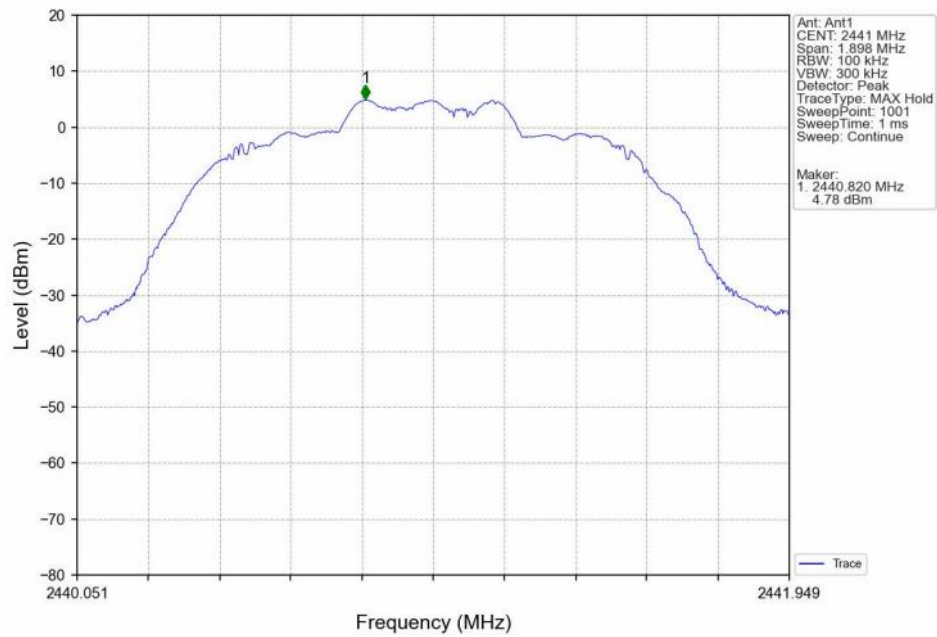


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

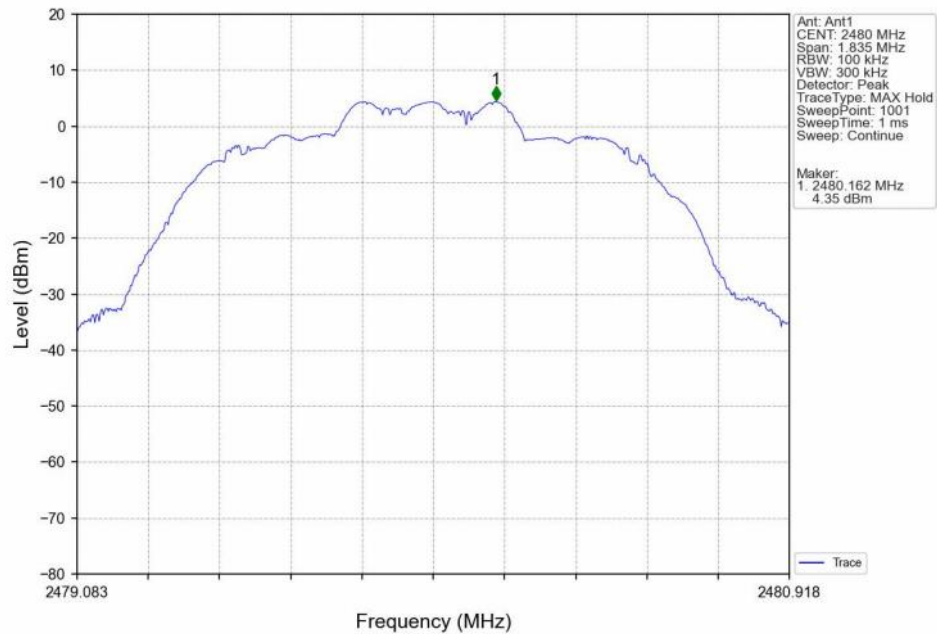



8DPSK_3DH5_HOPP_Ant1_NTNV

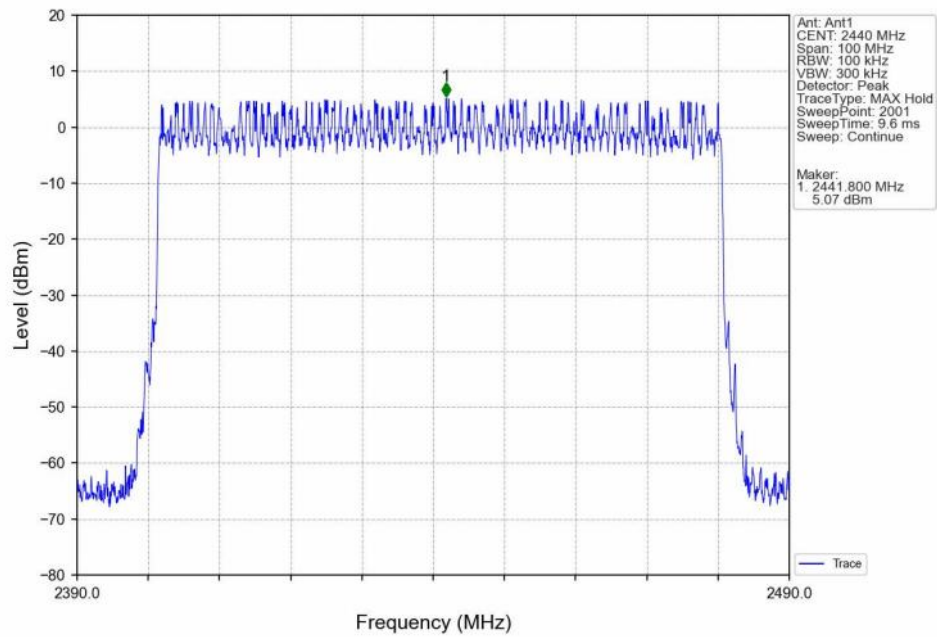


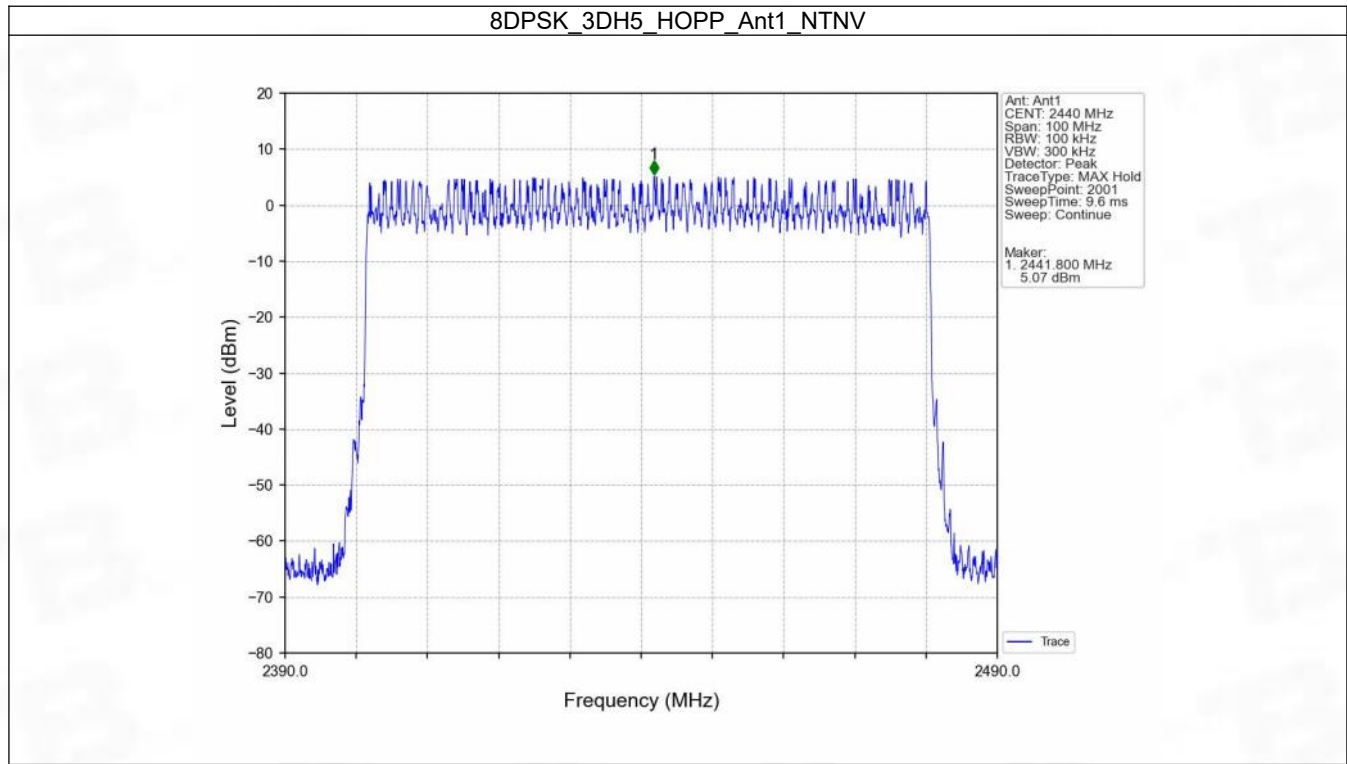



6.2.2 CSE

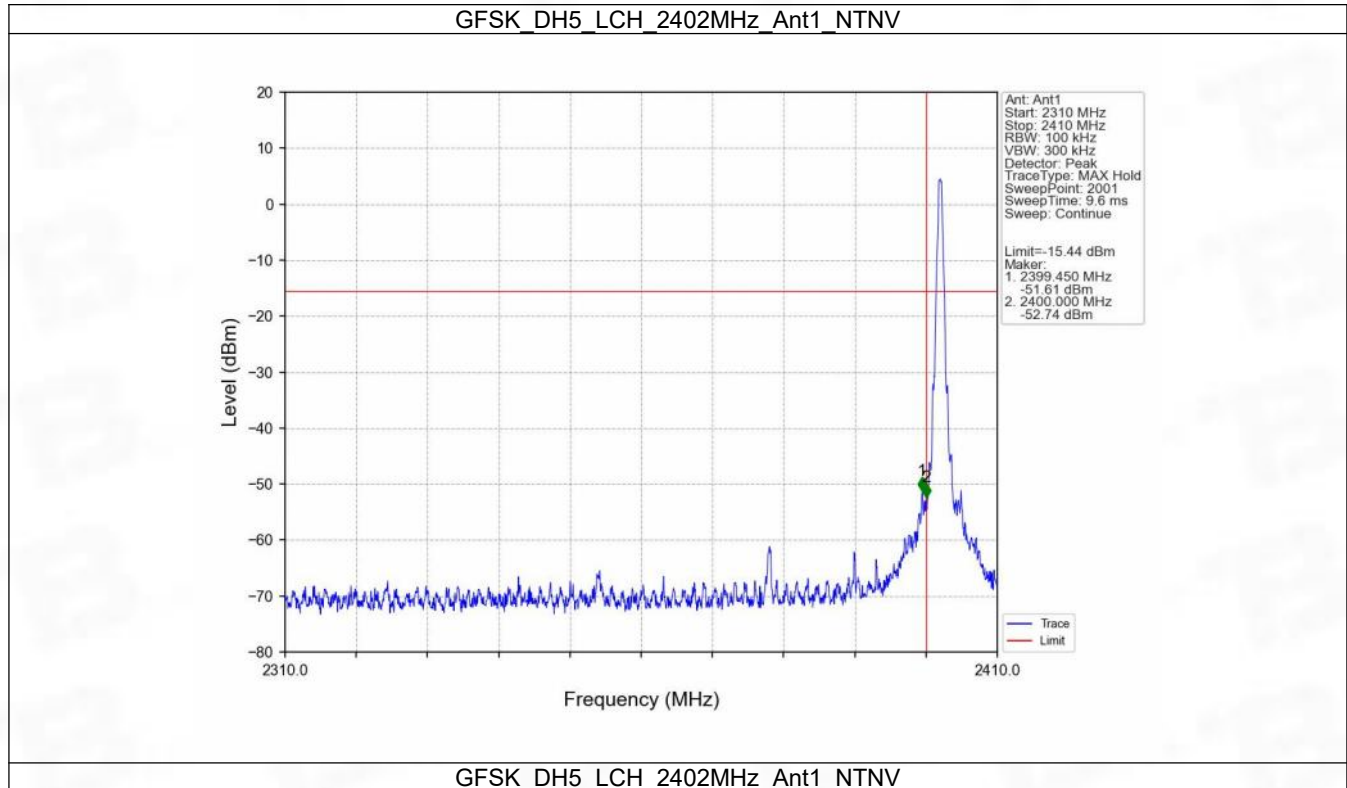


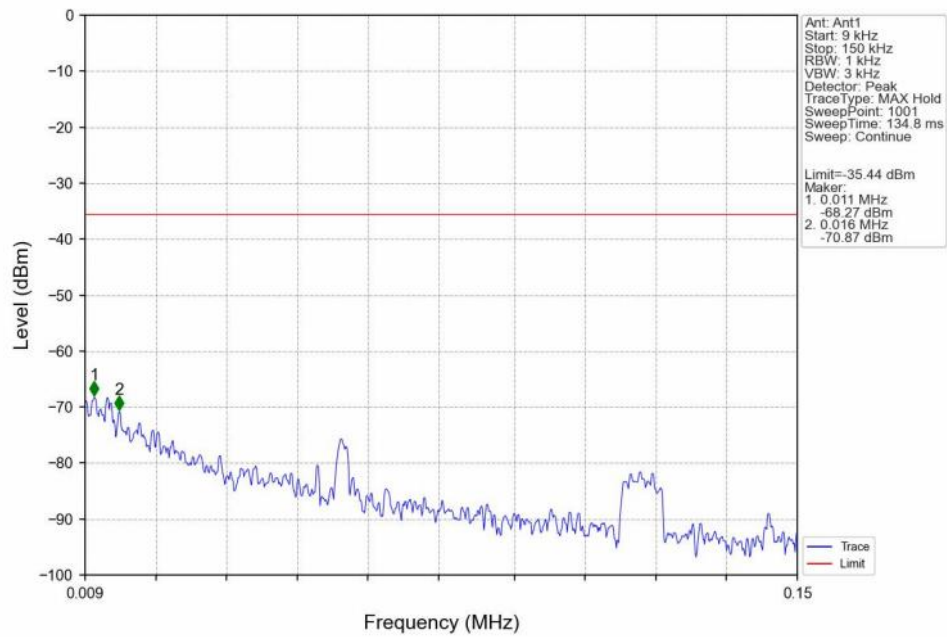


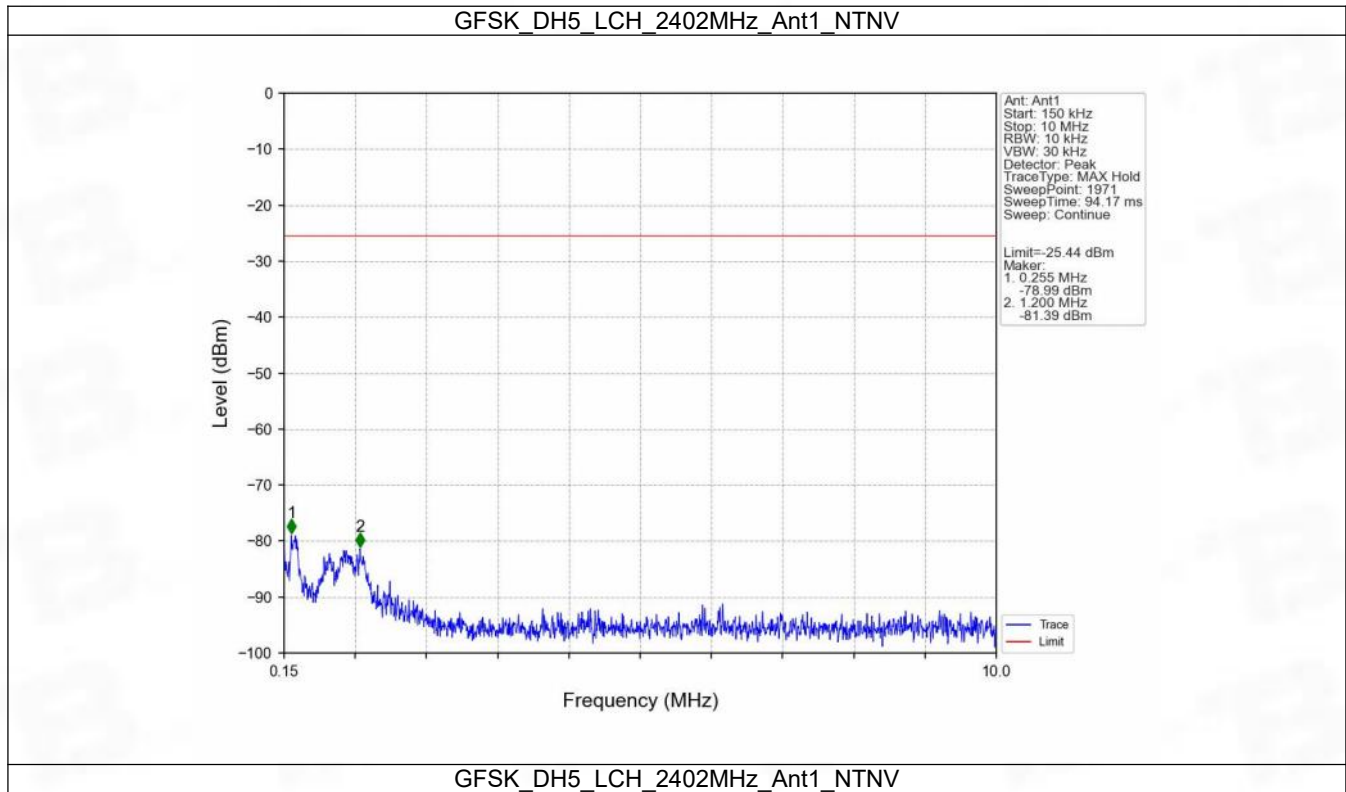


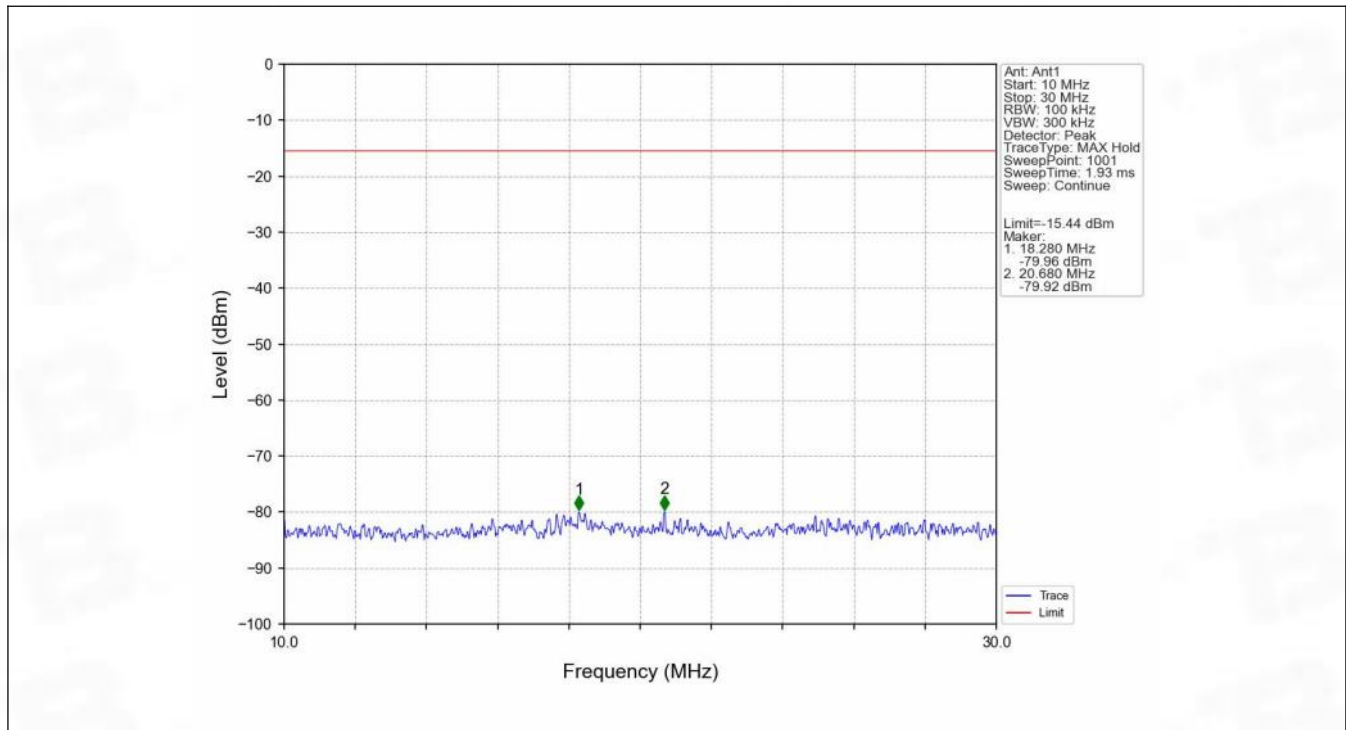


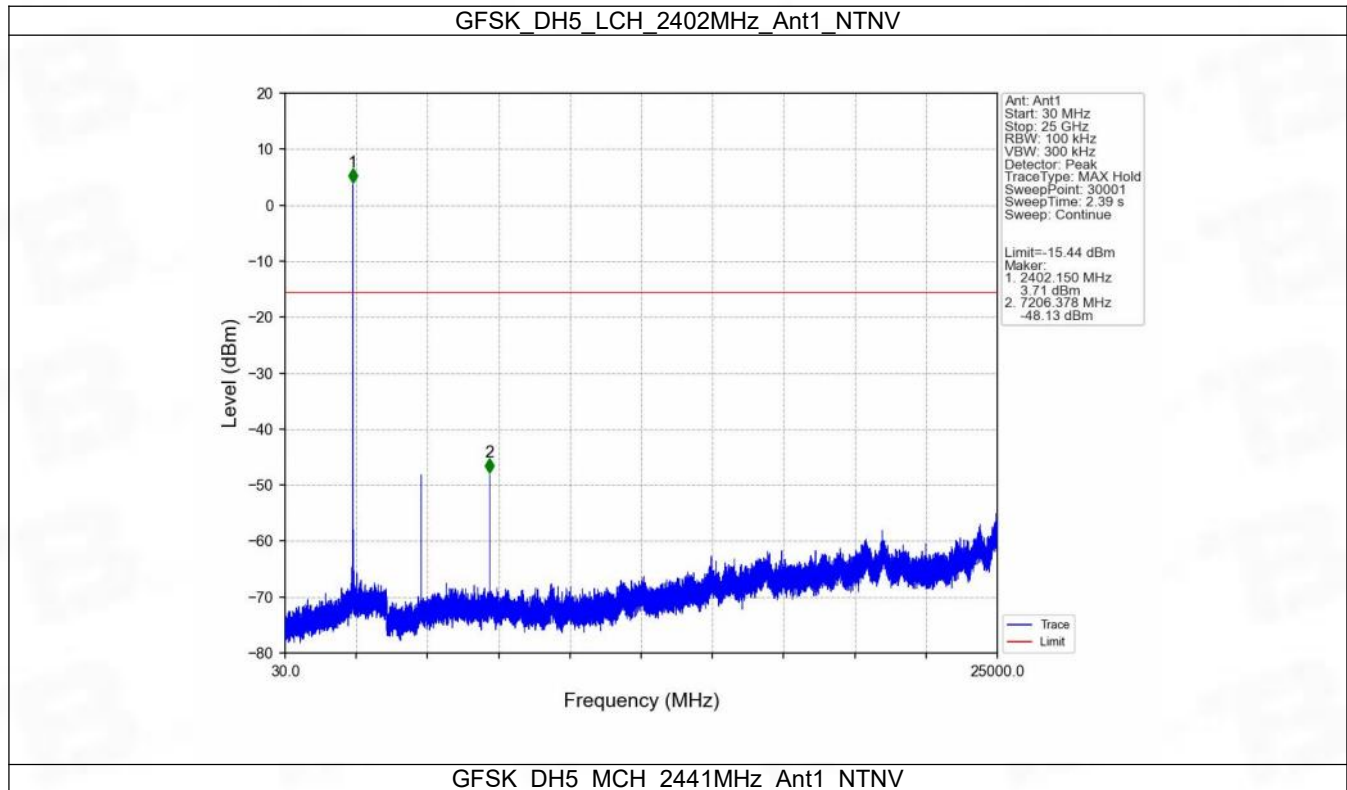


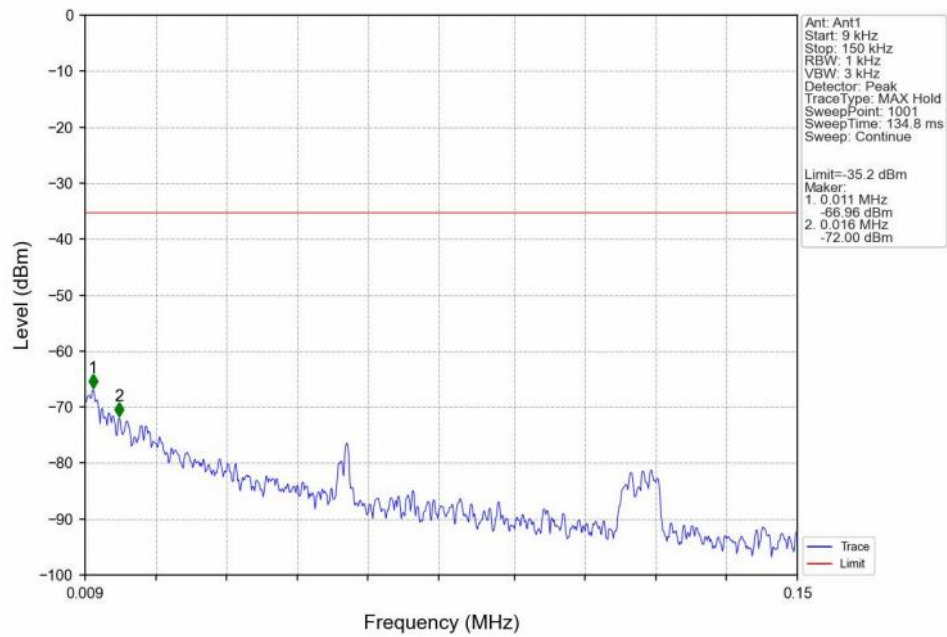


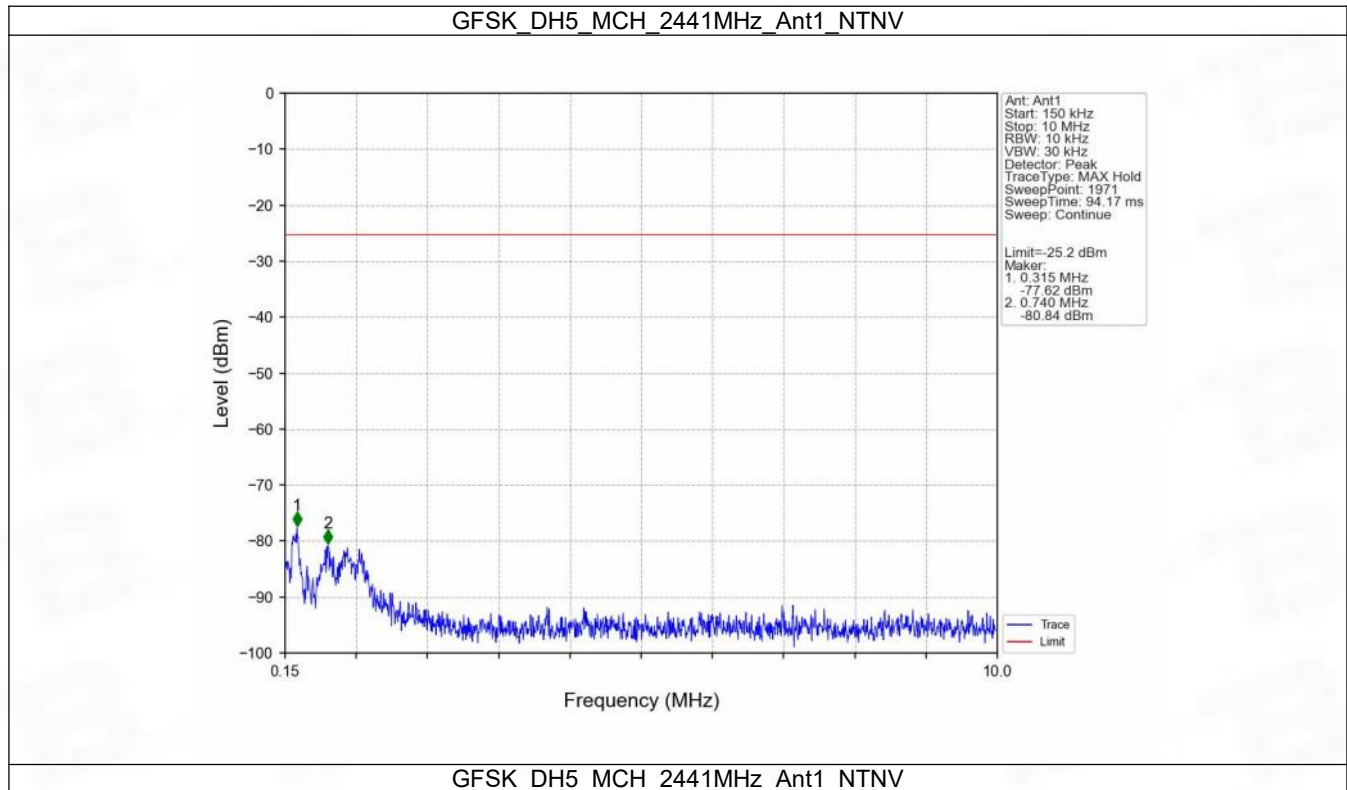


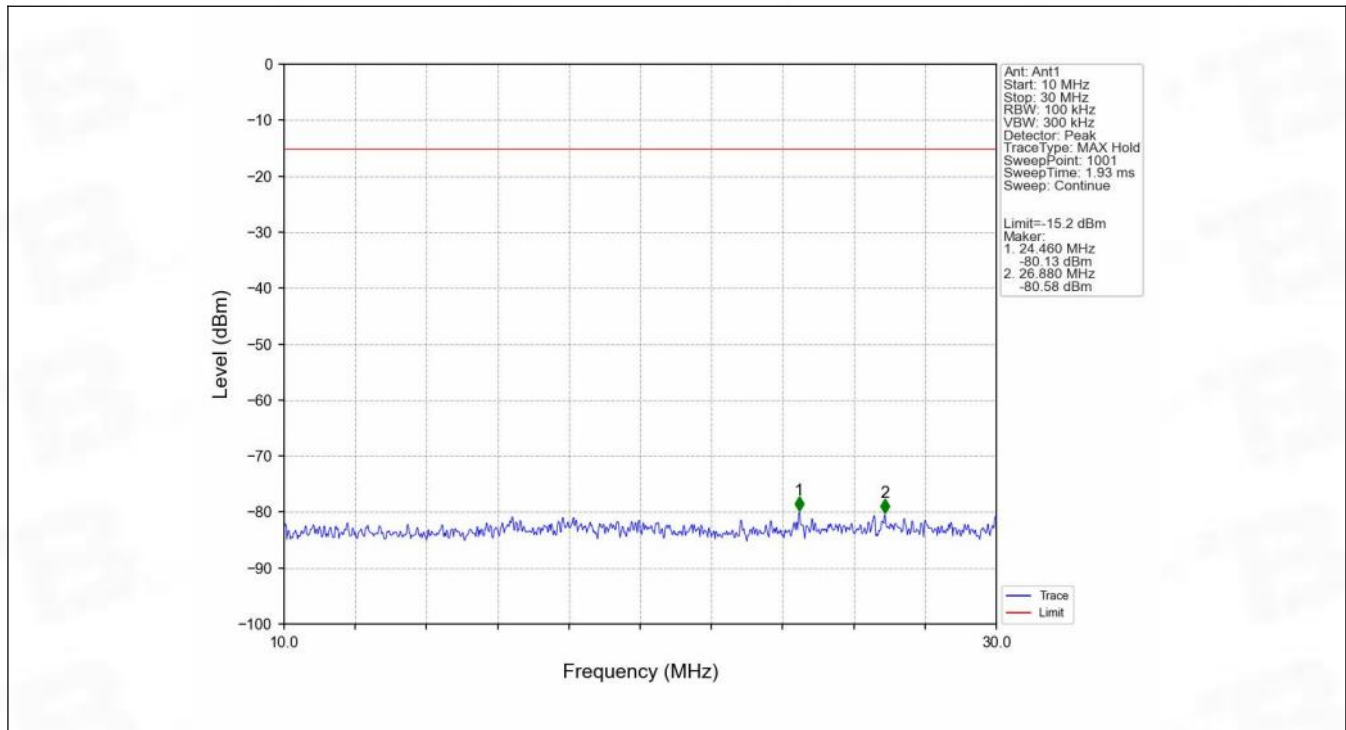


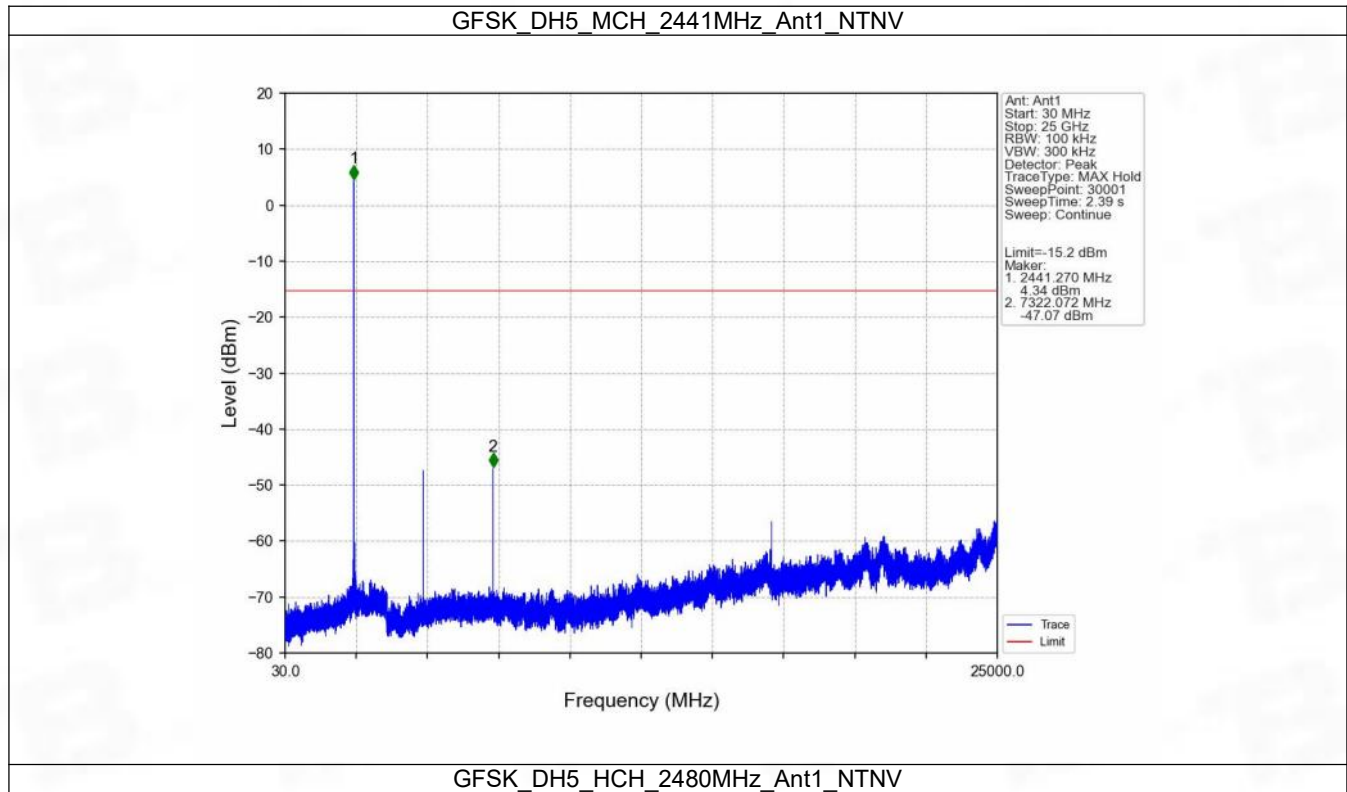


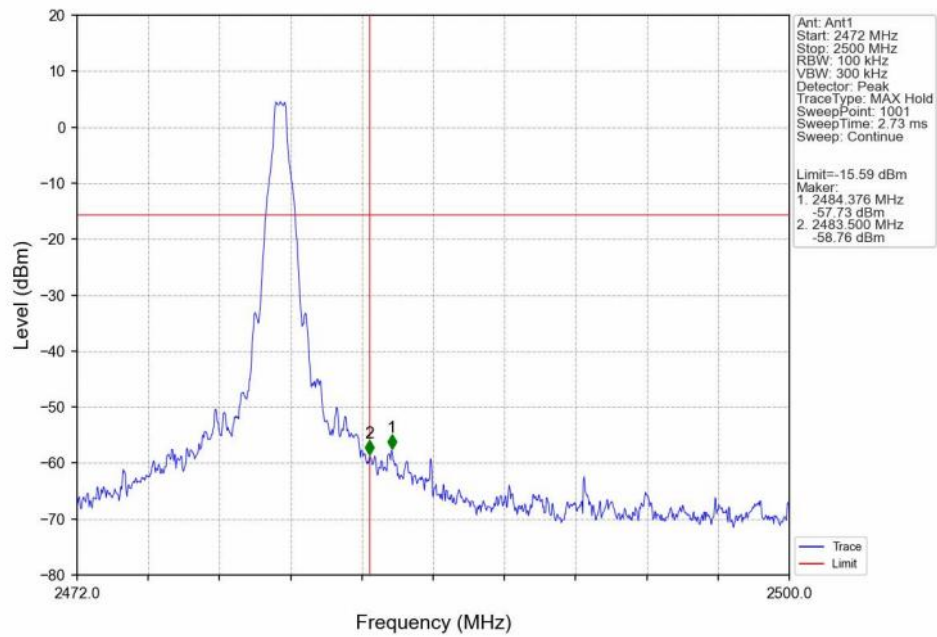


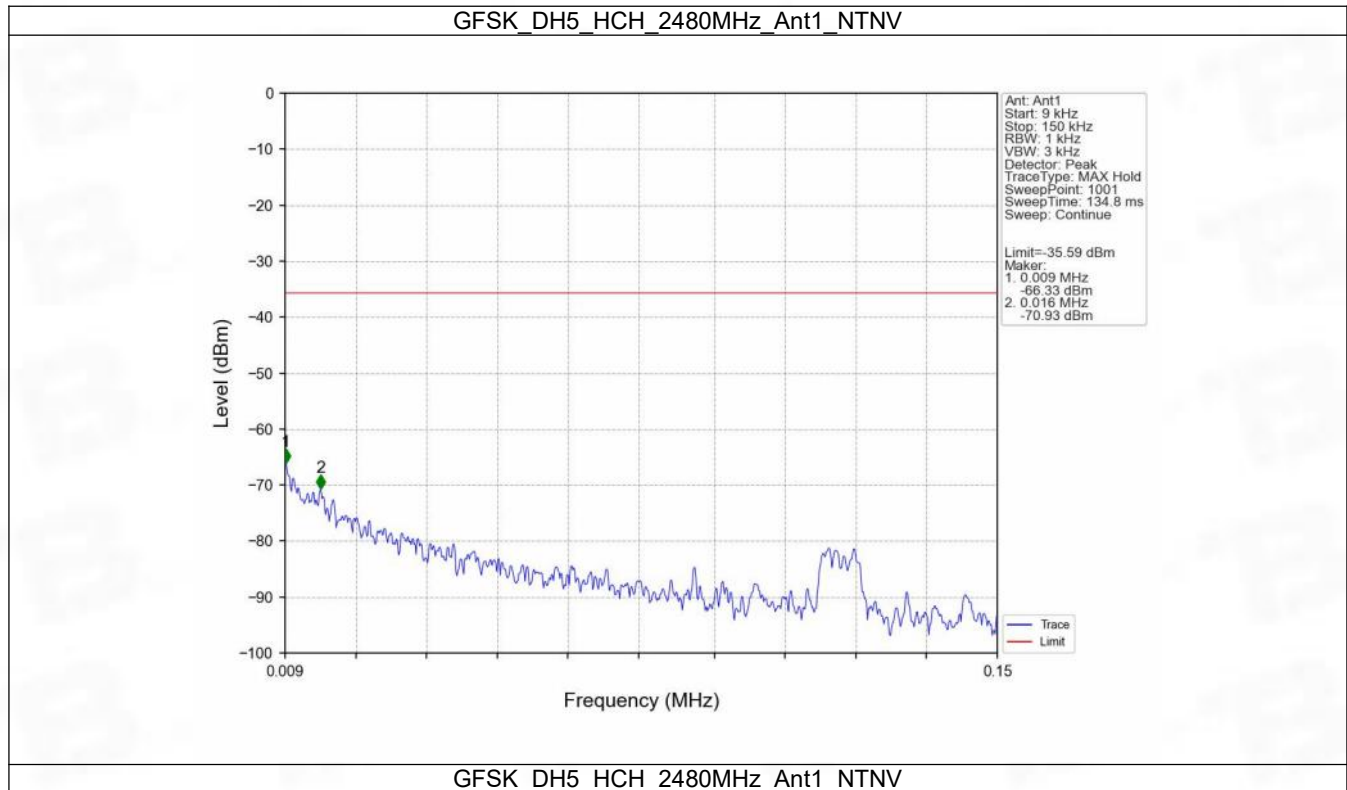


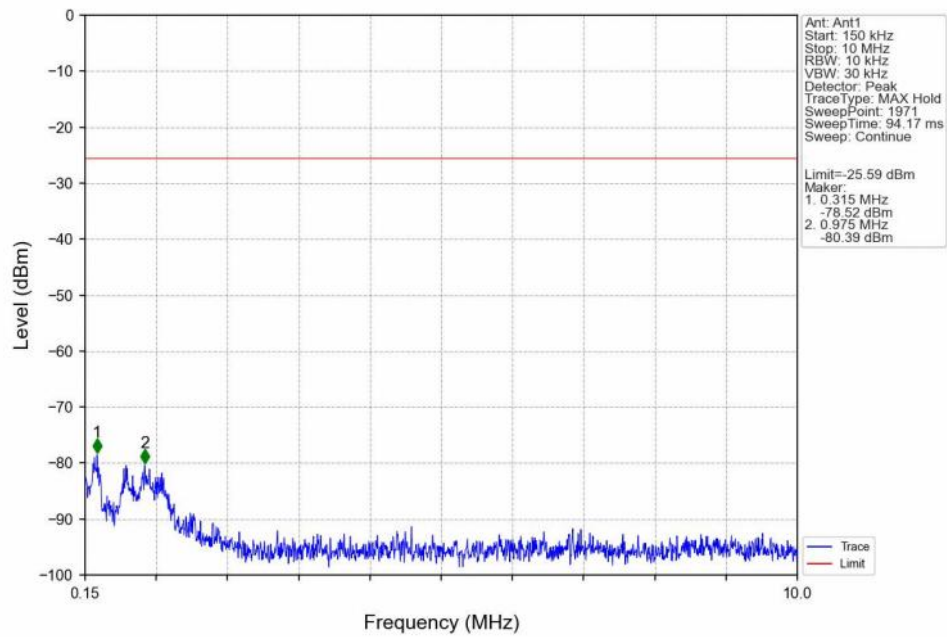


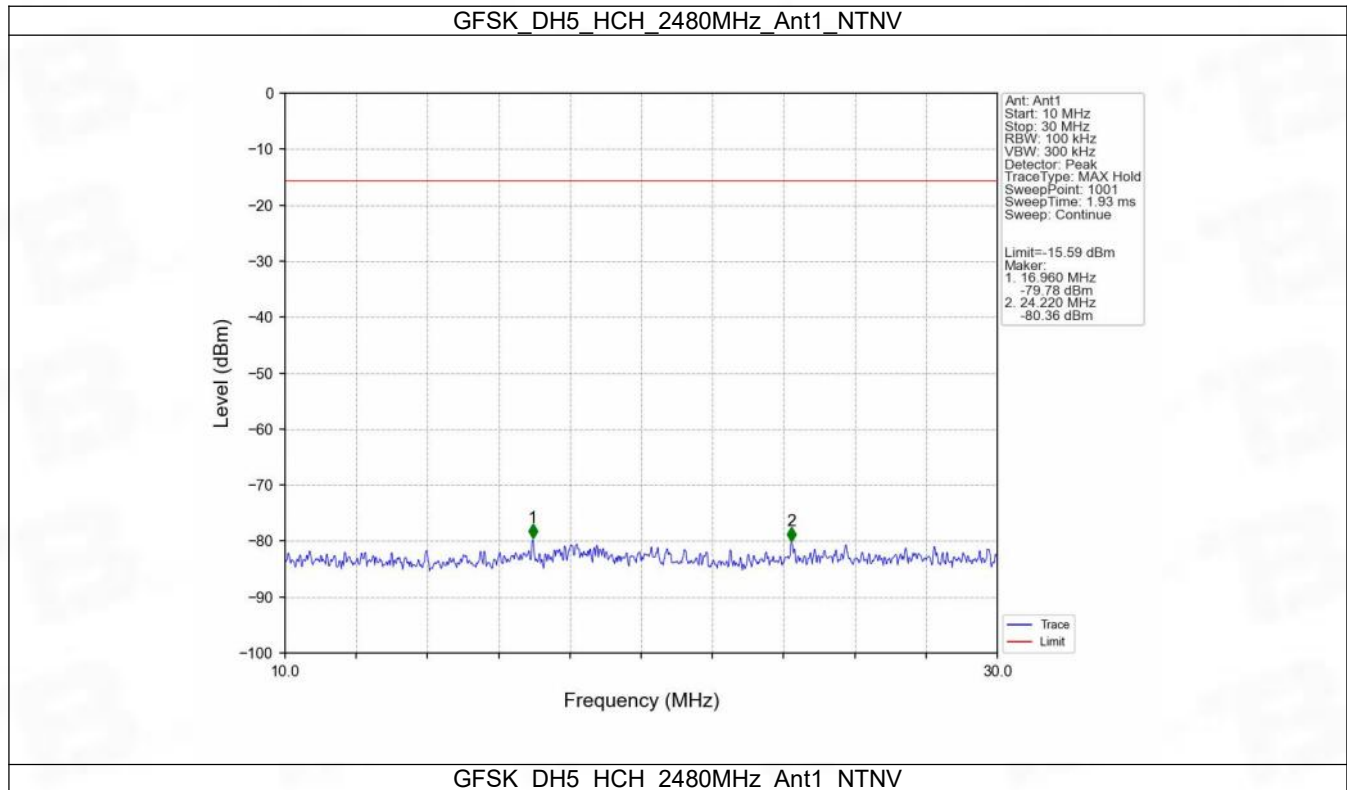


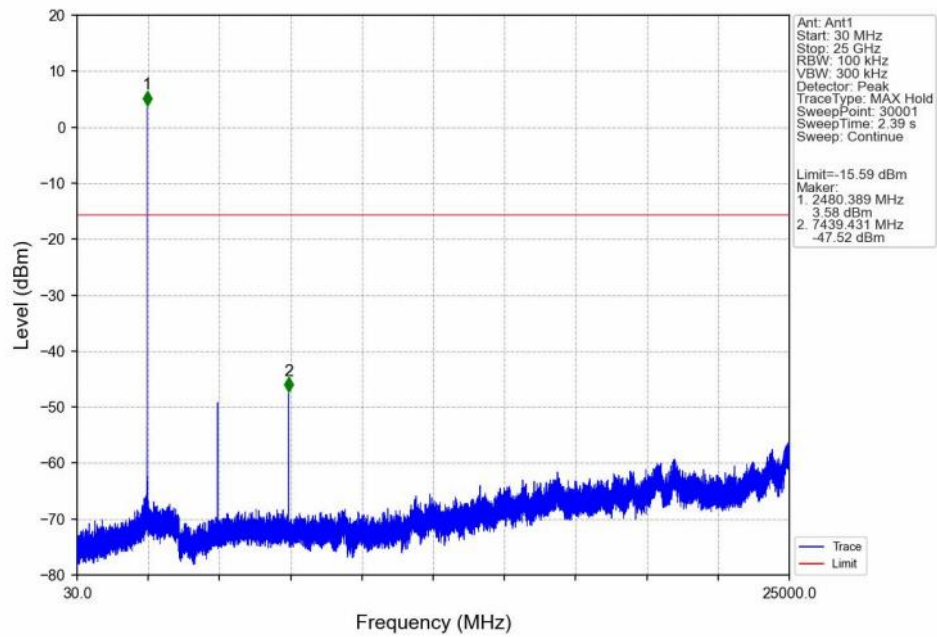


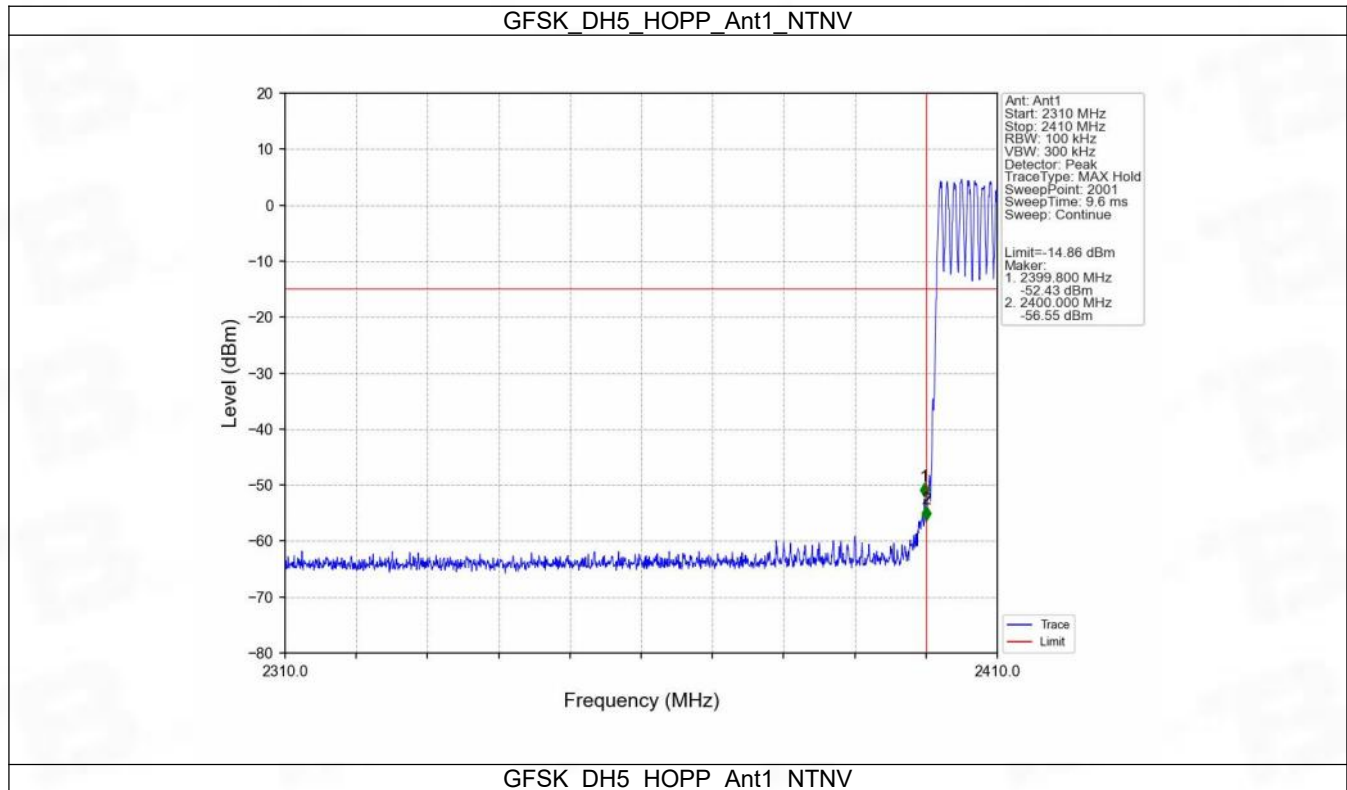


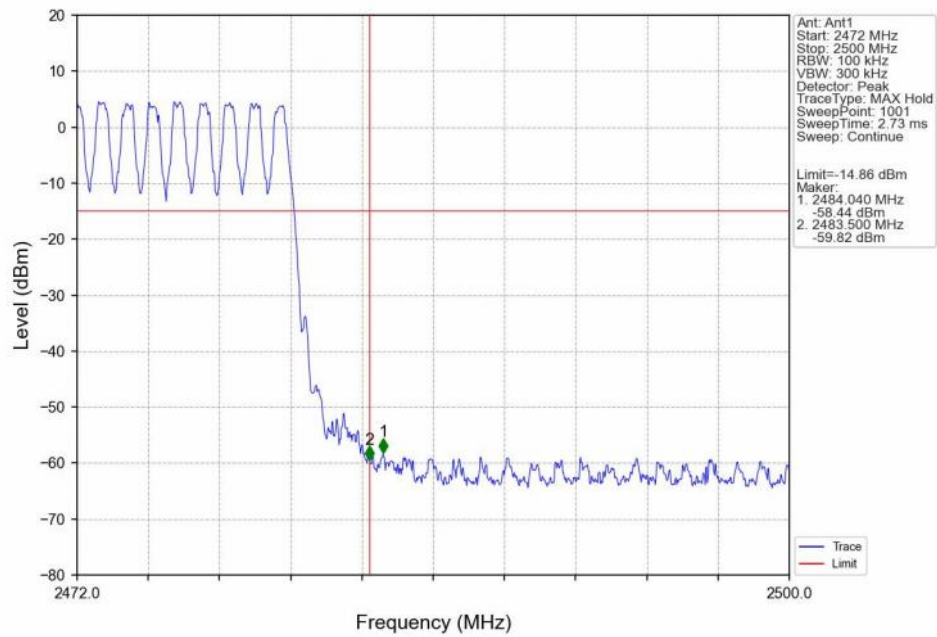


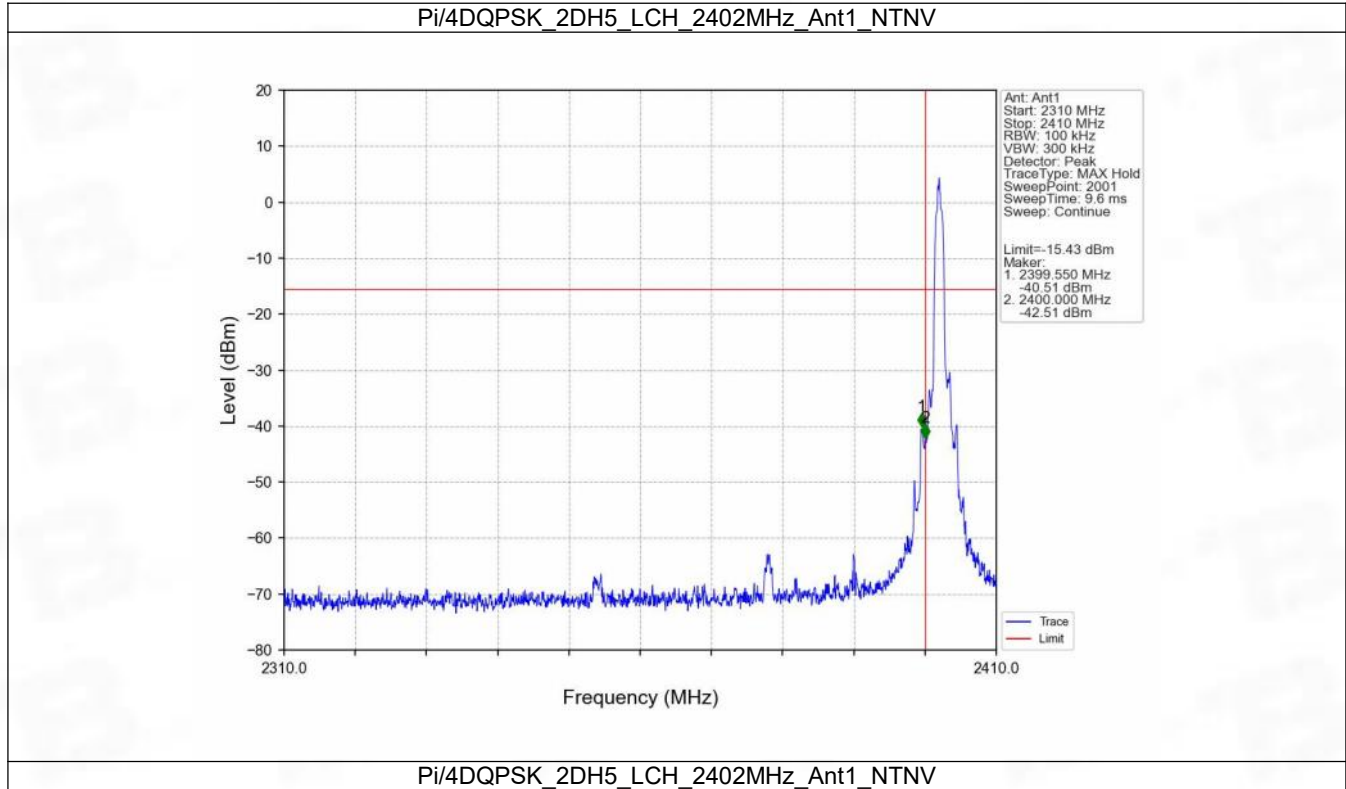


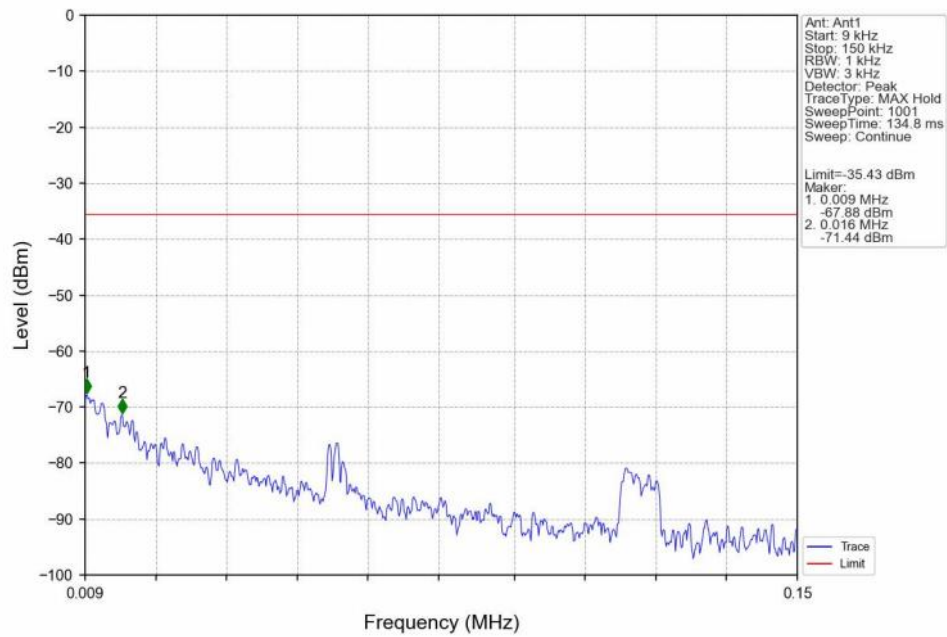


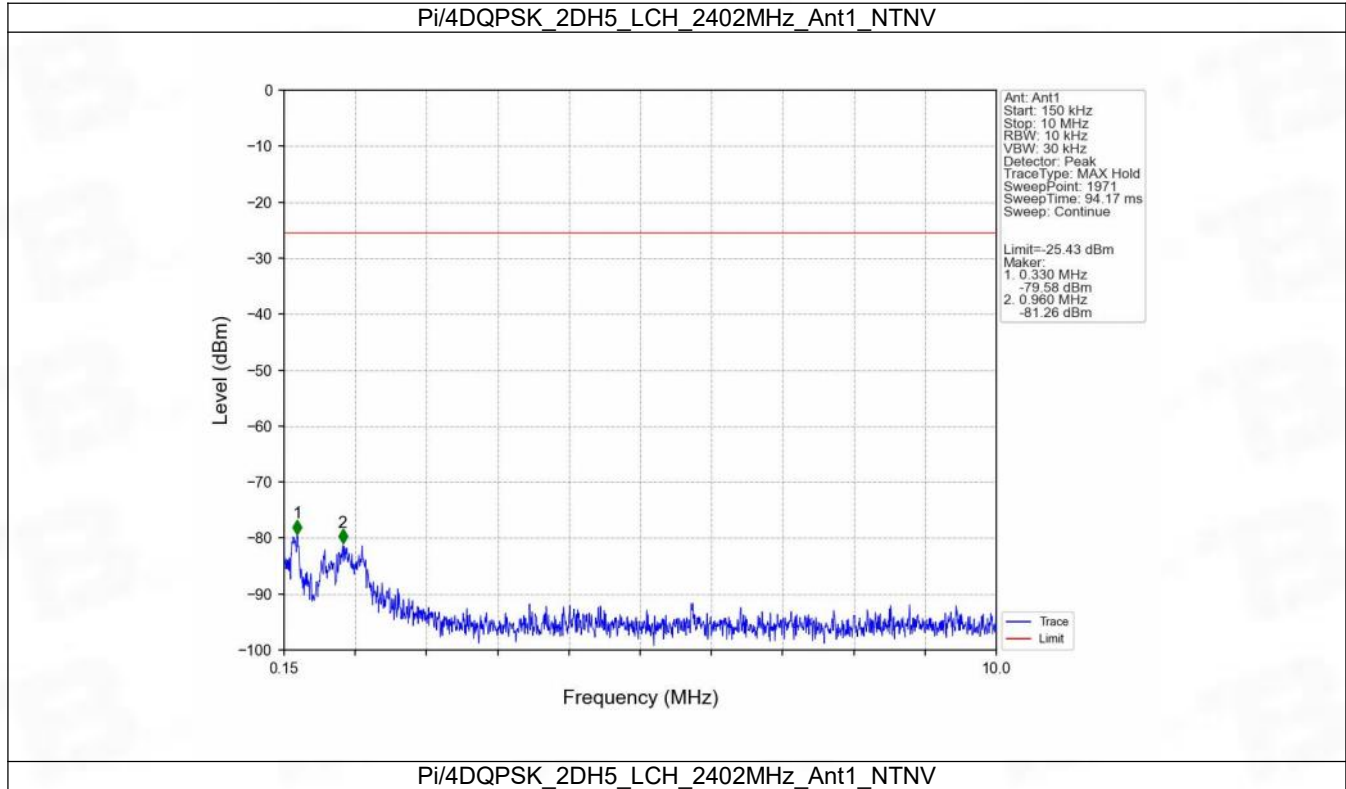


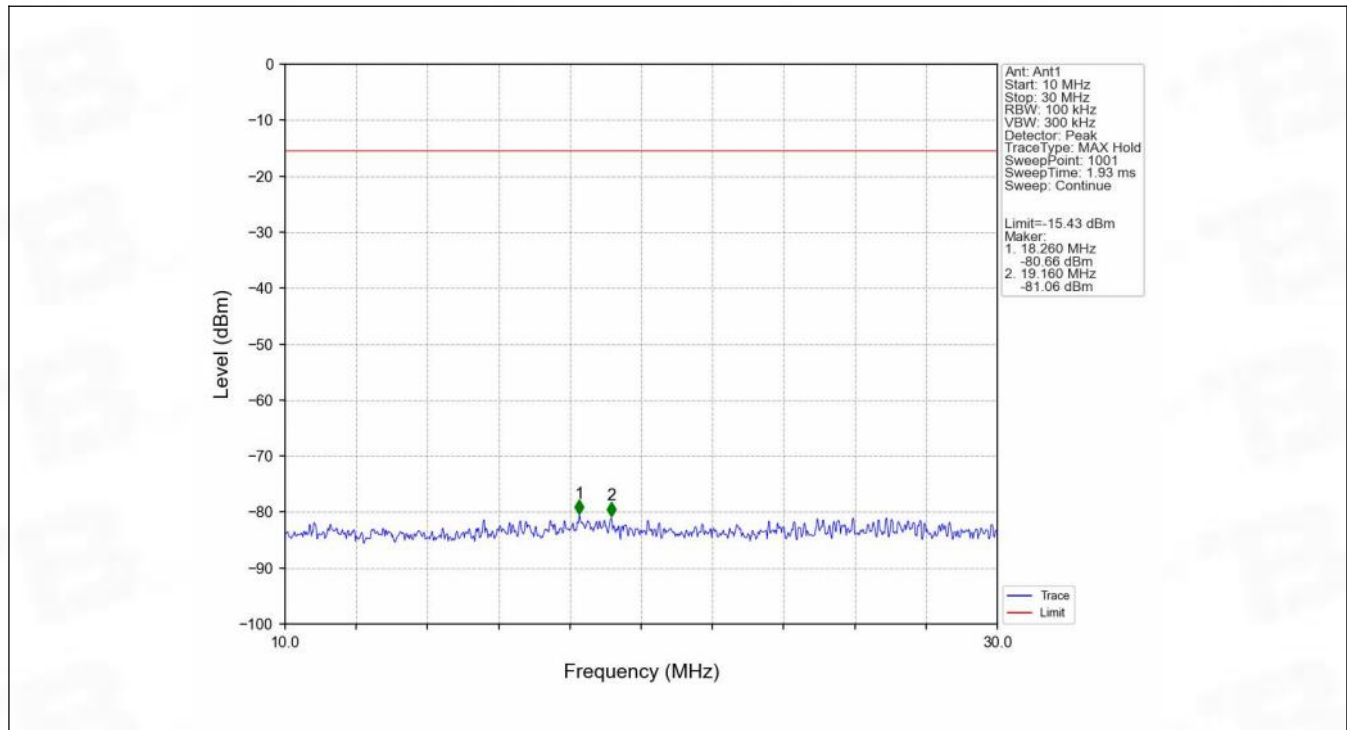


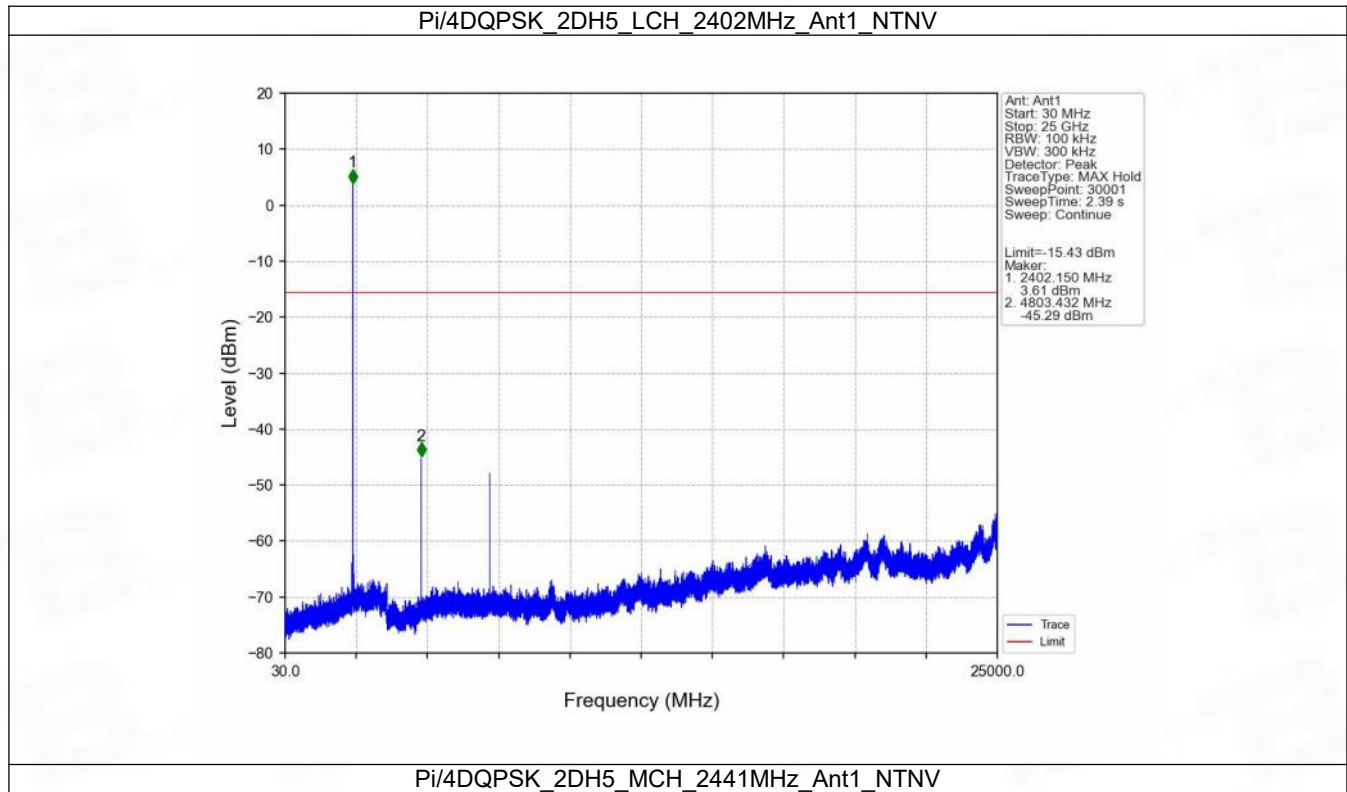


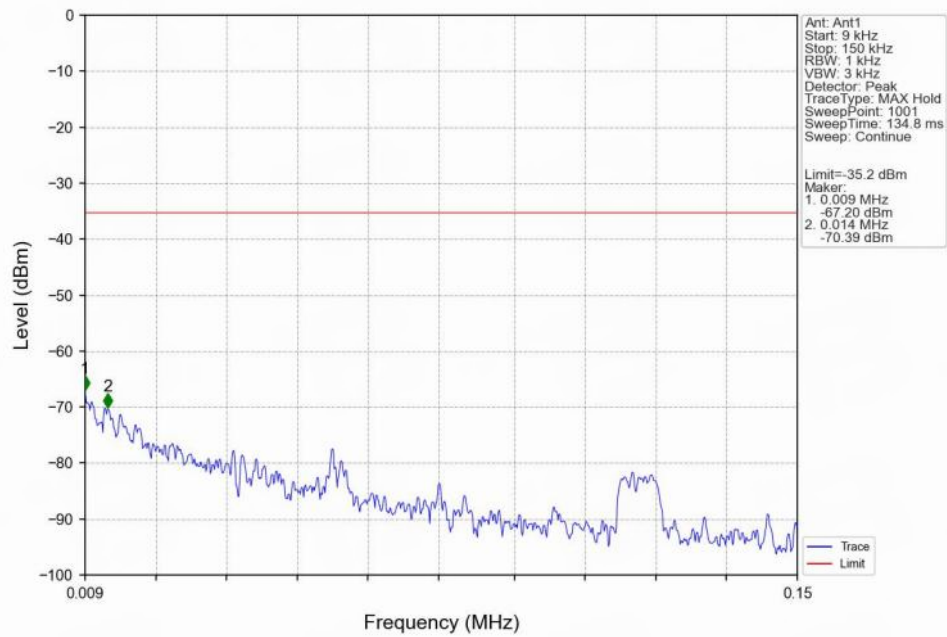


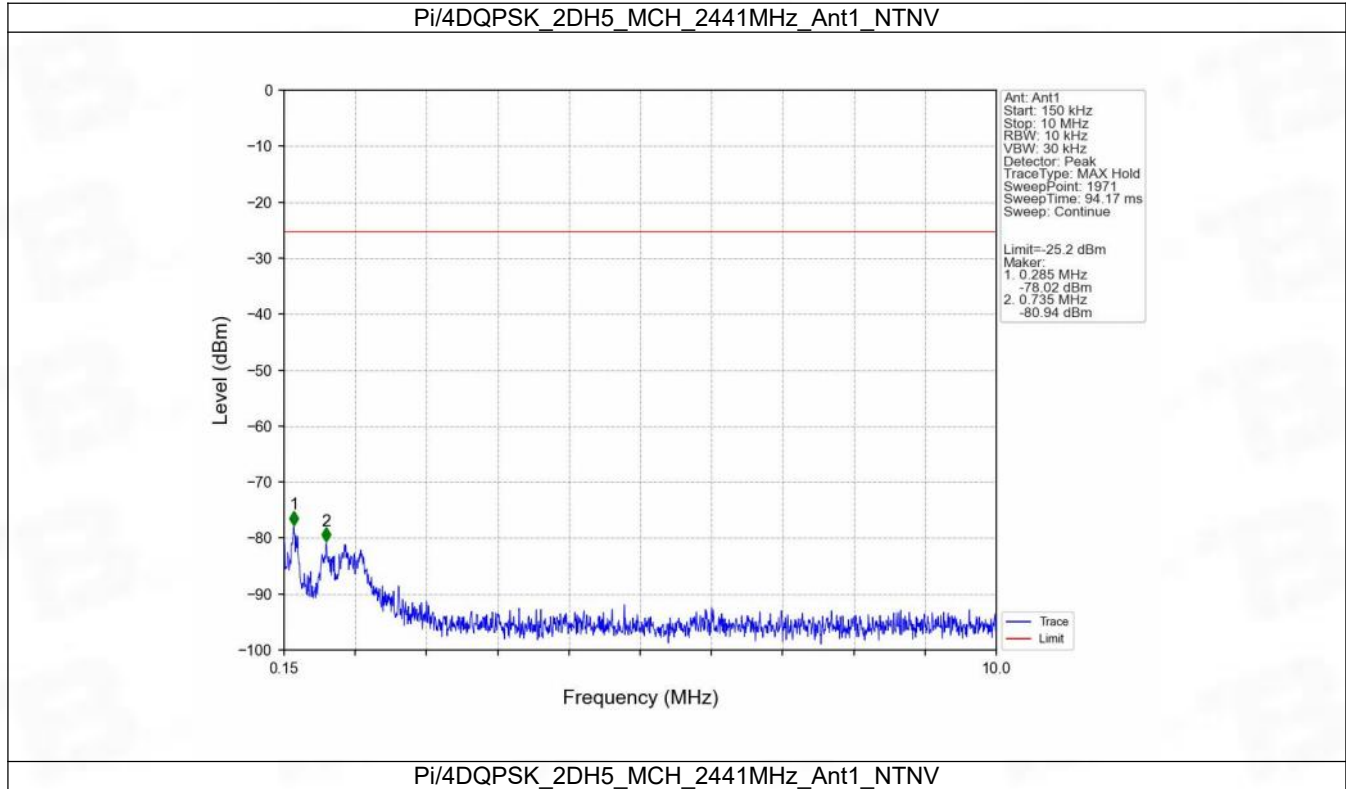


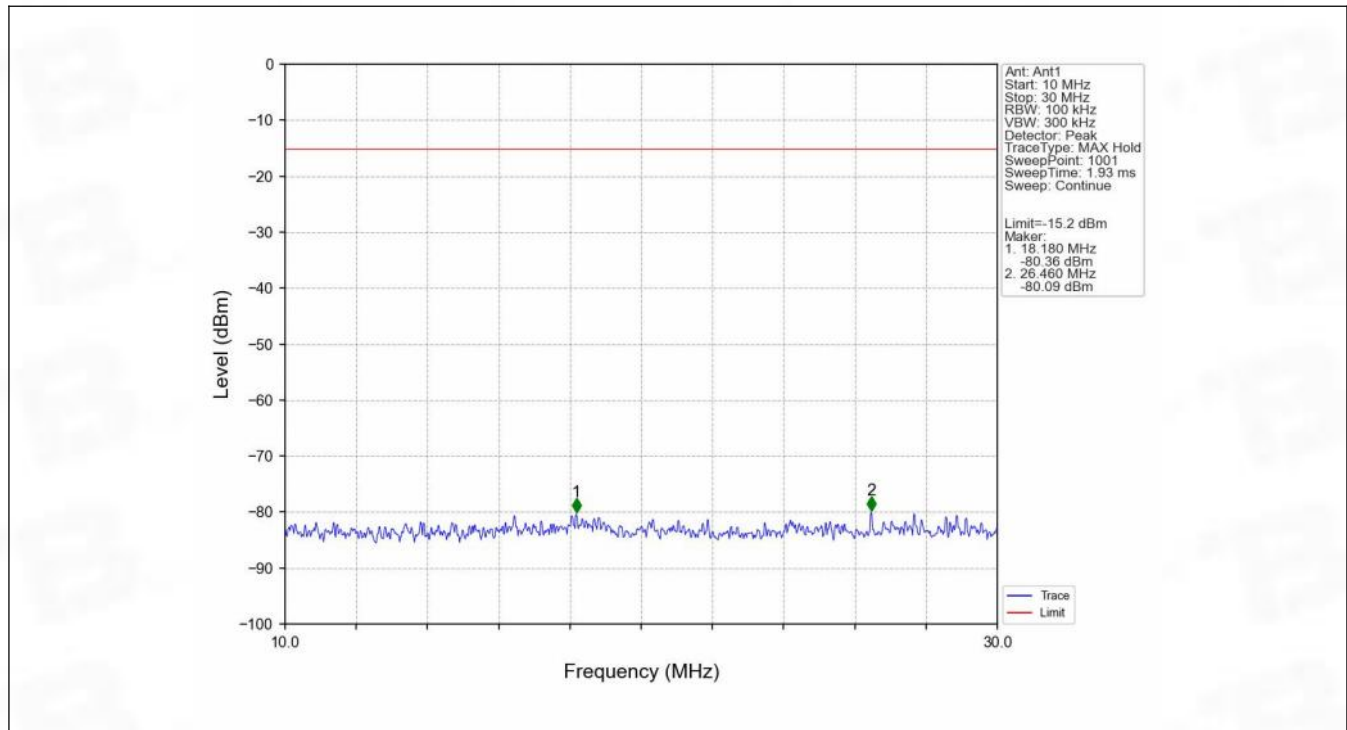


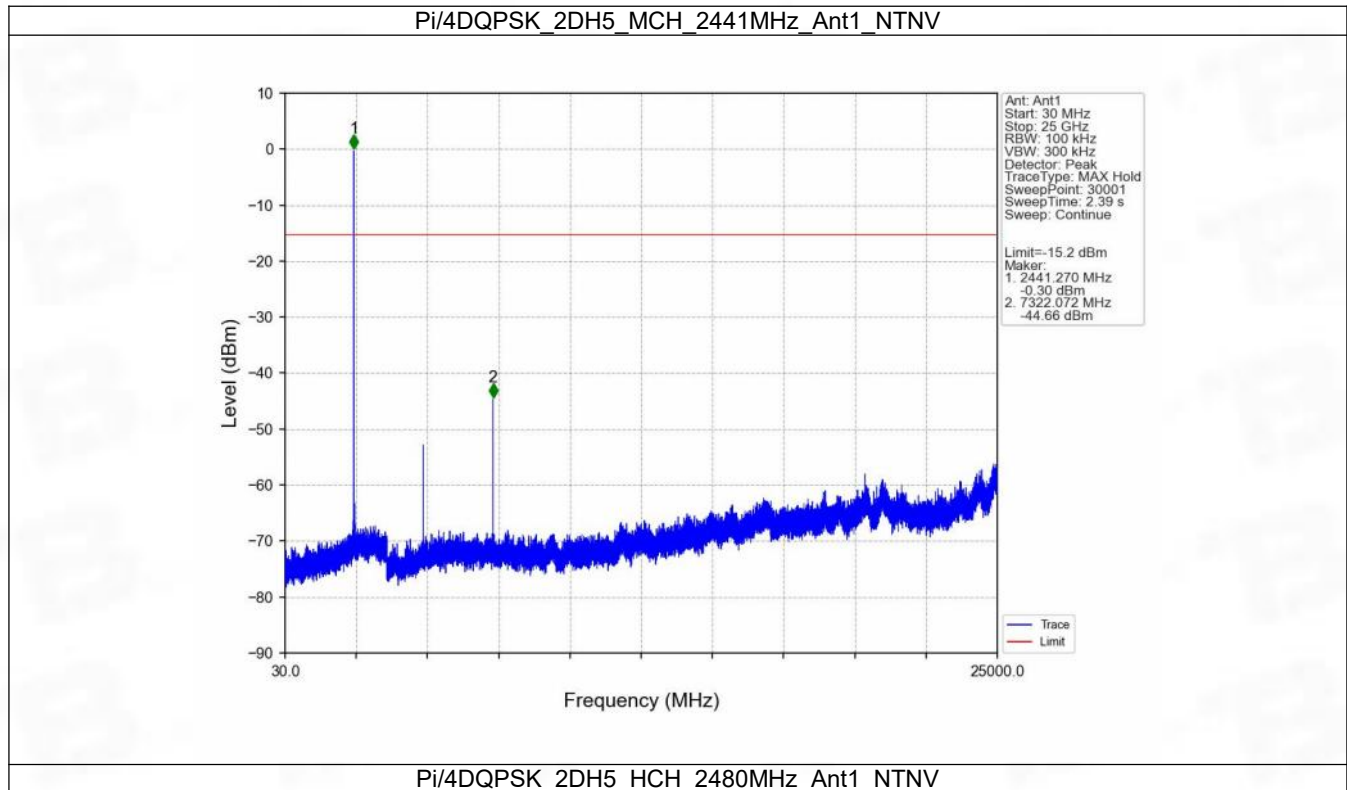


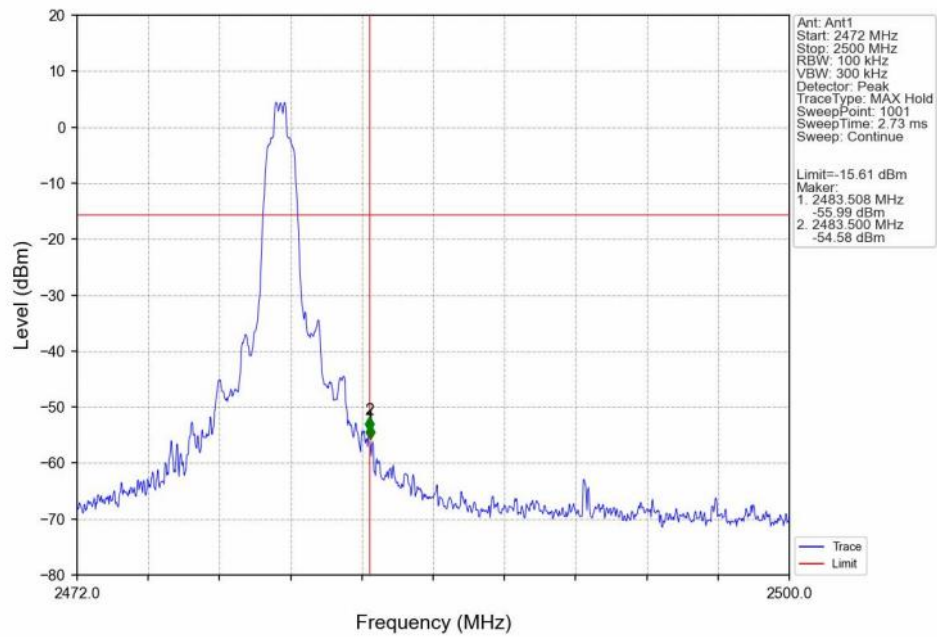


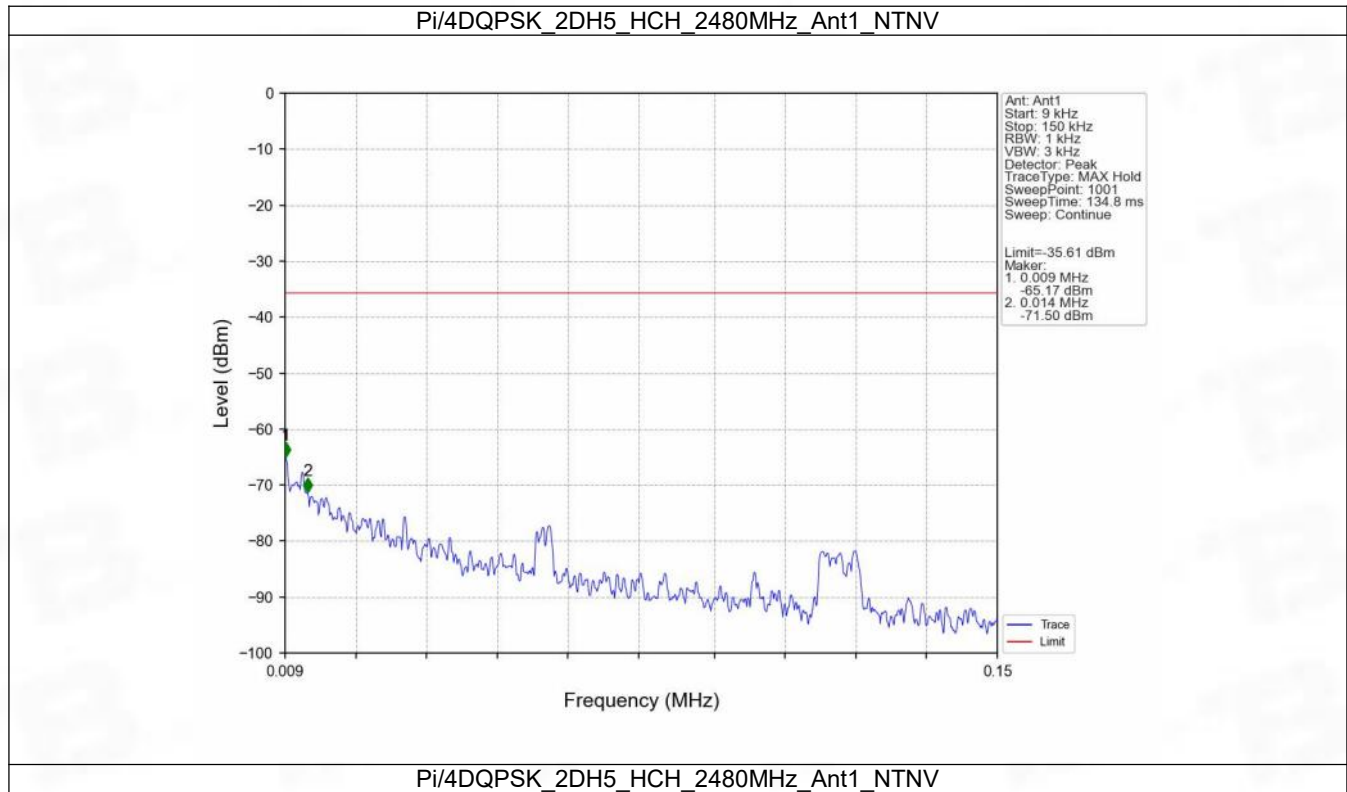


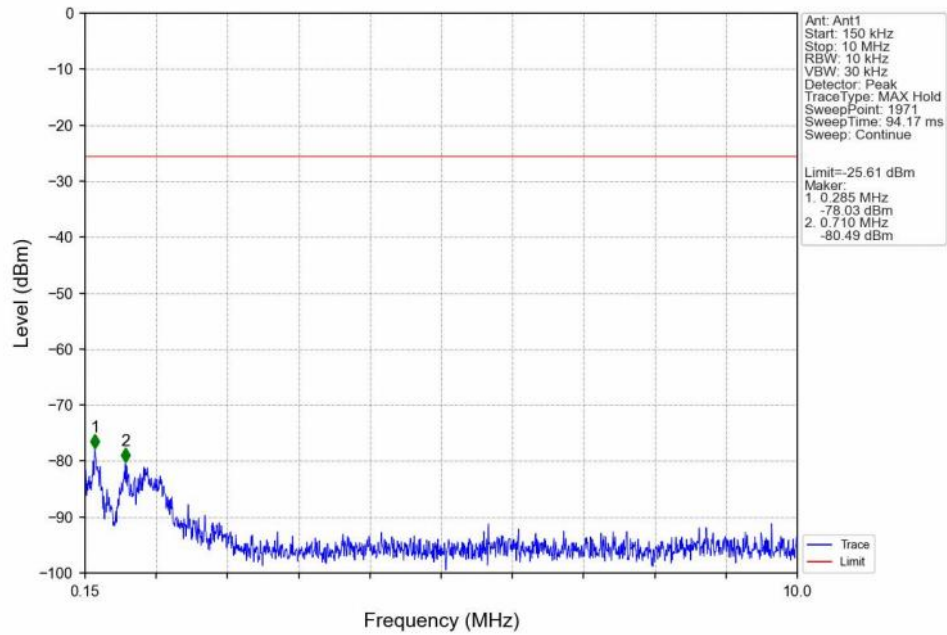


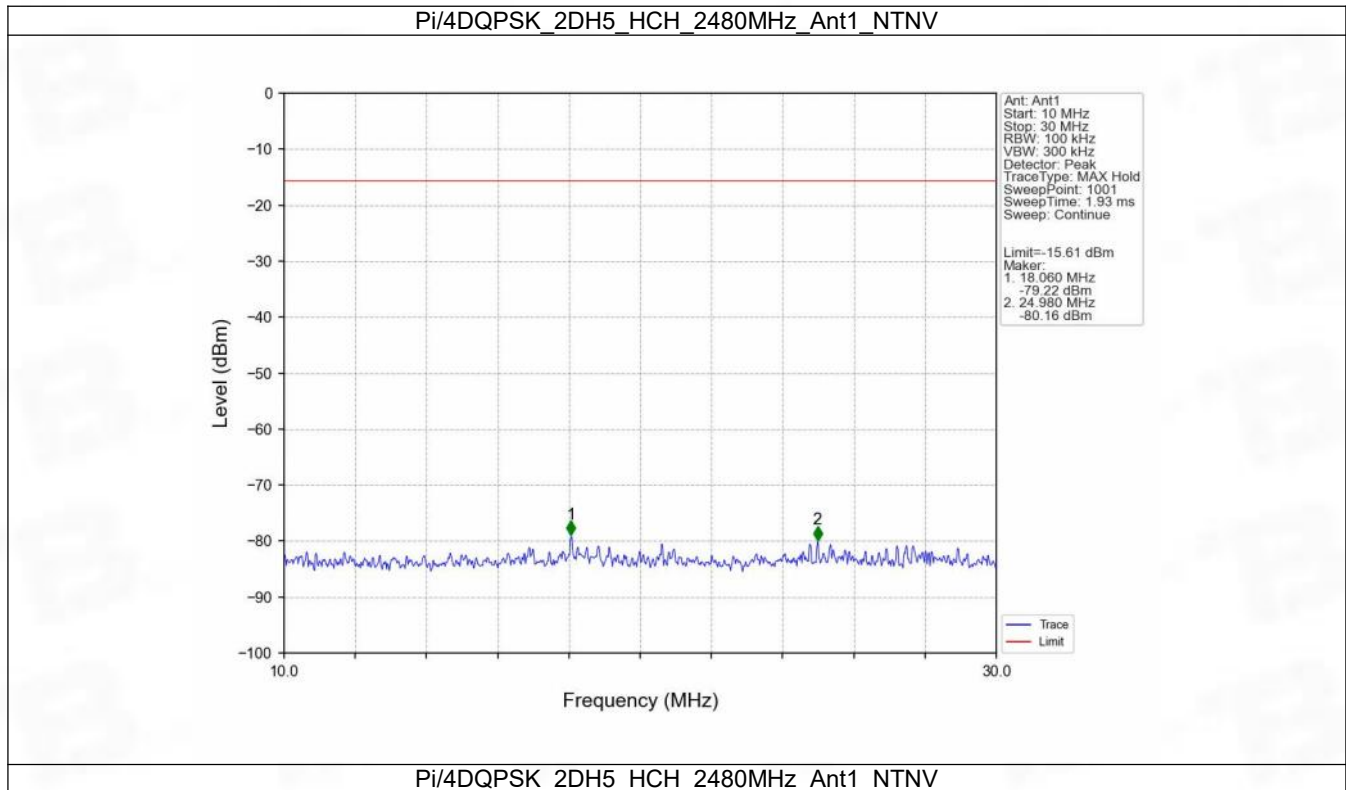


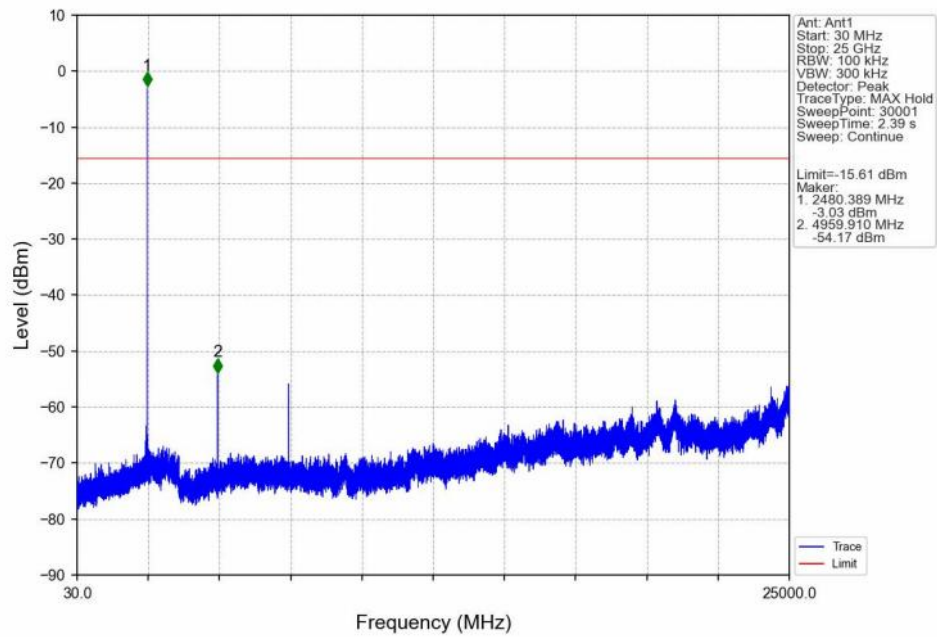


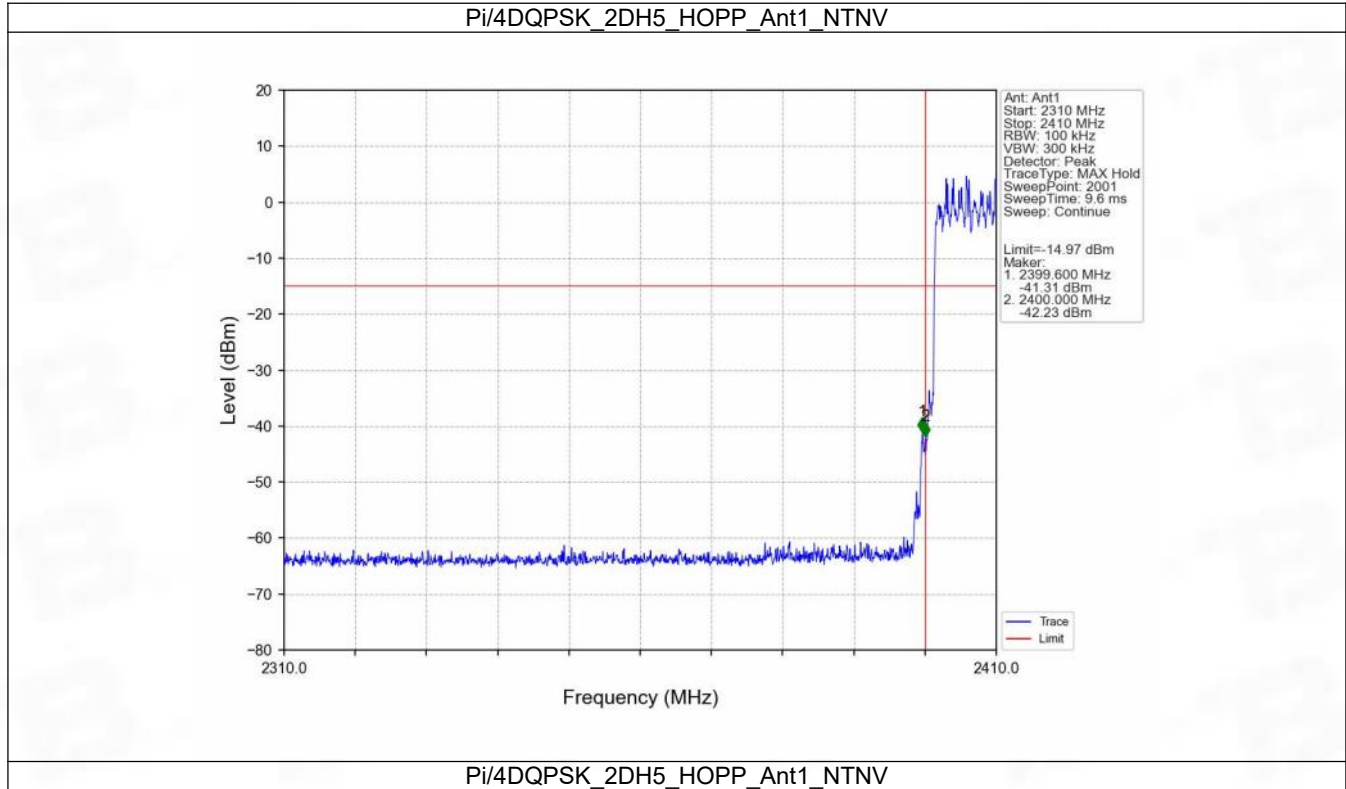


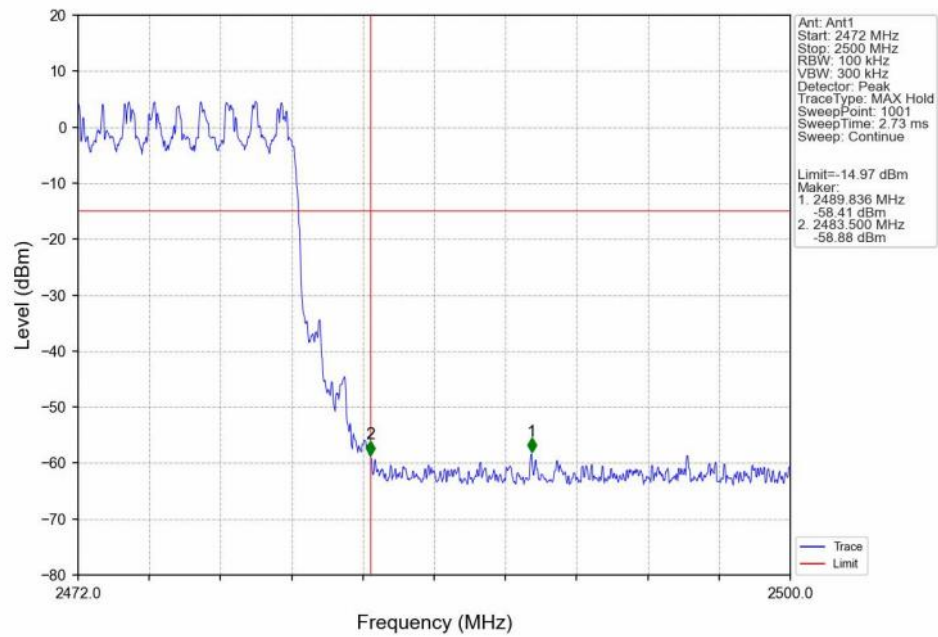


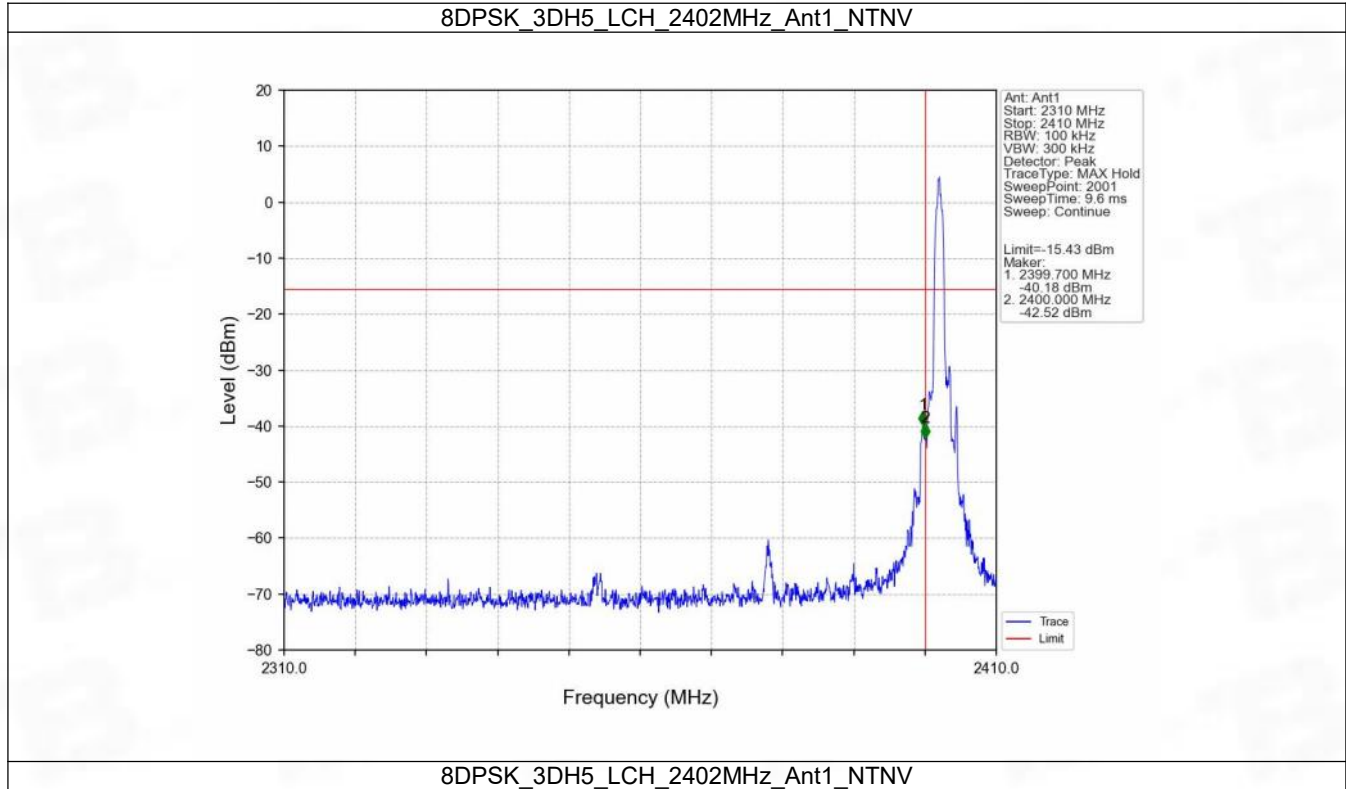


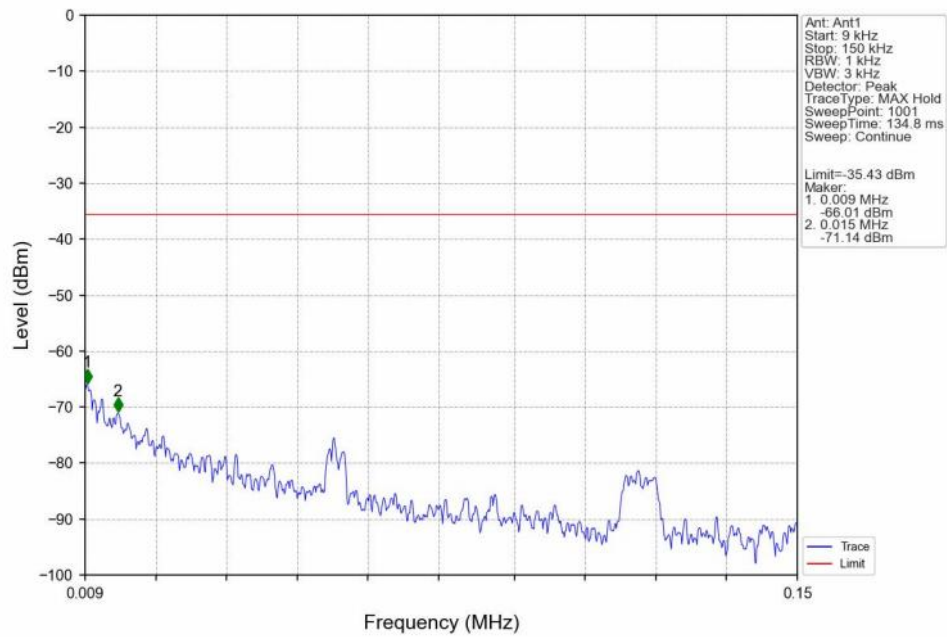


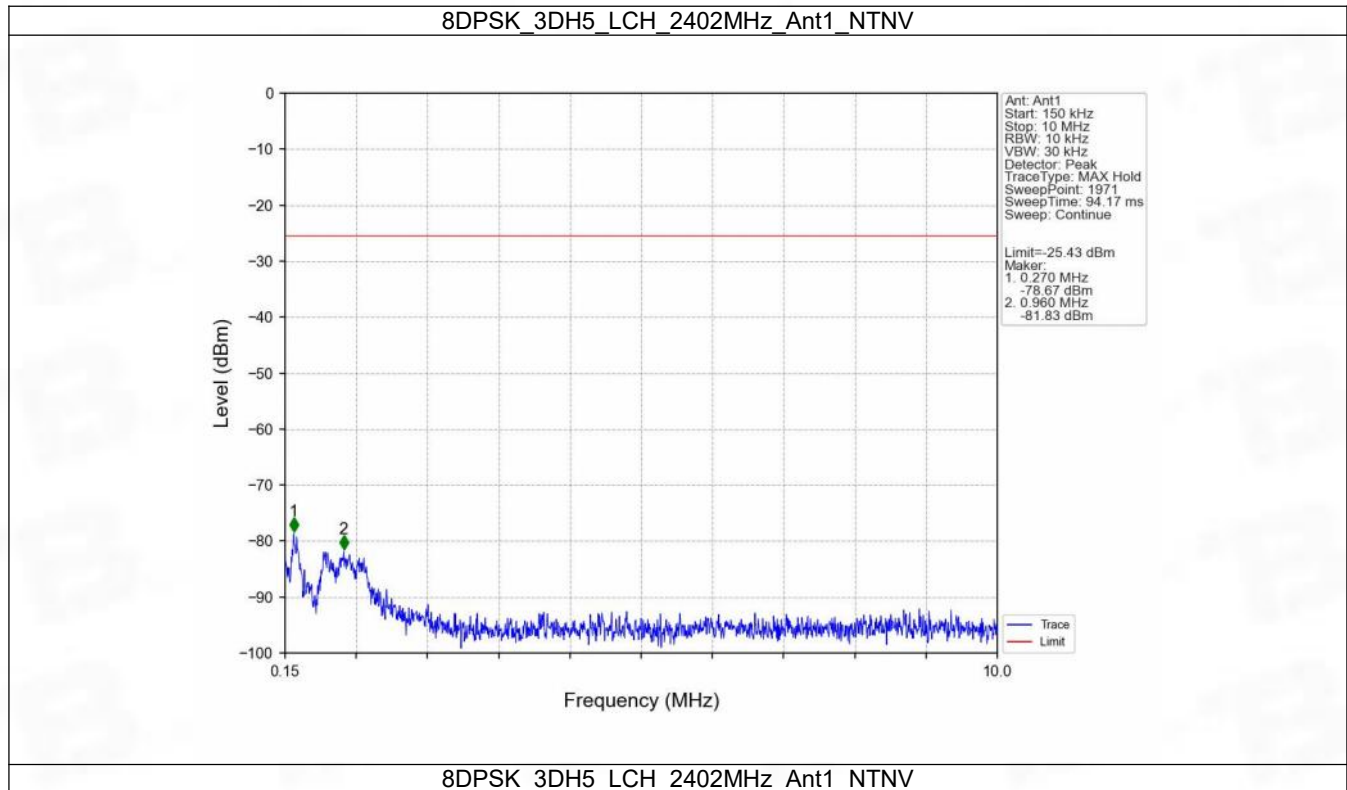


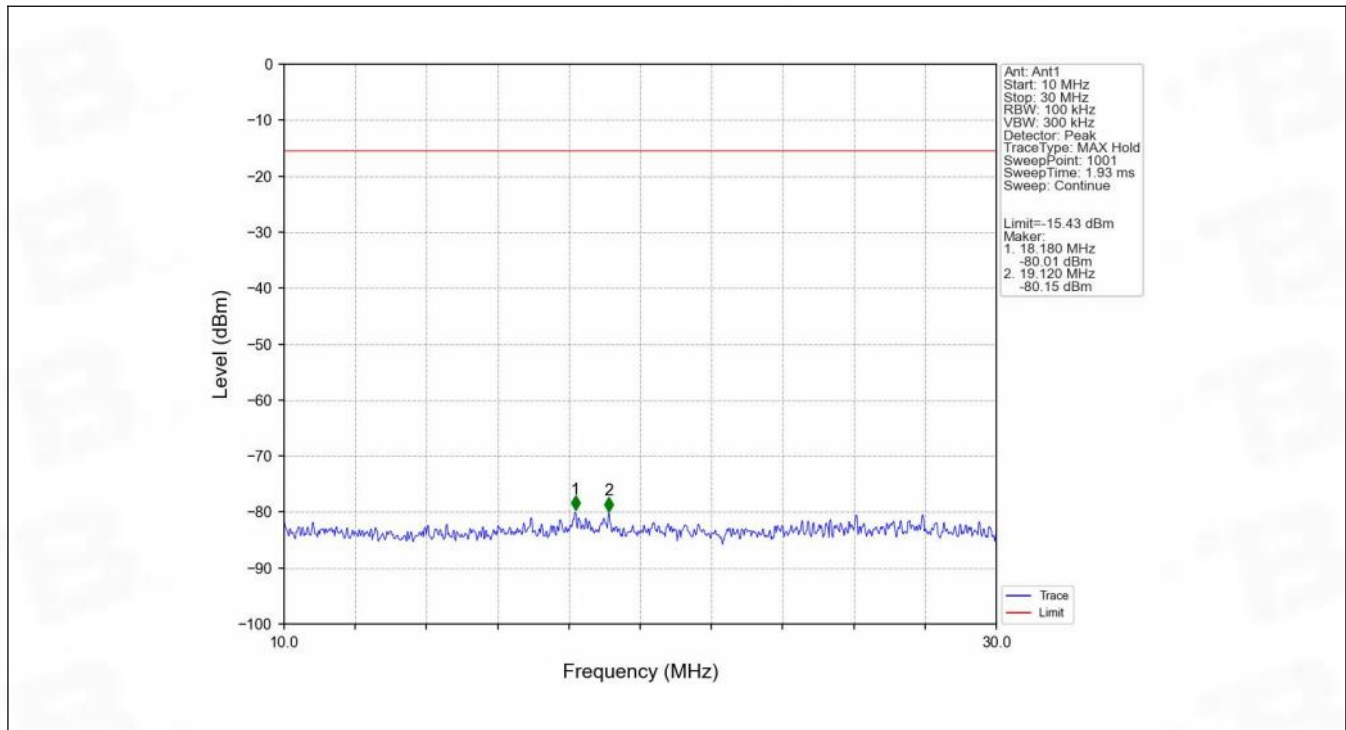


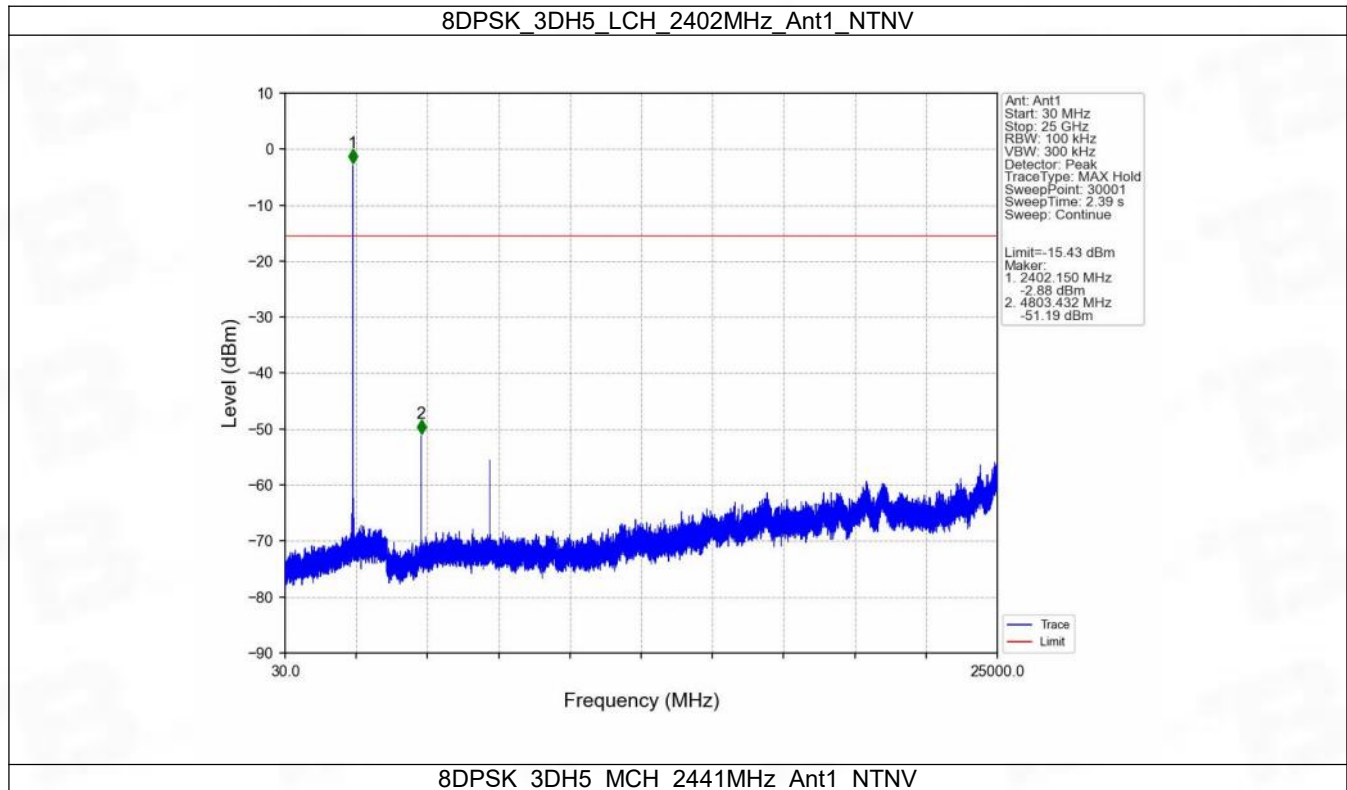


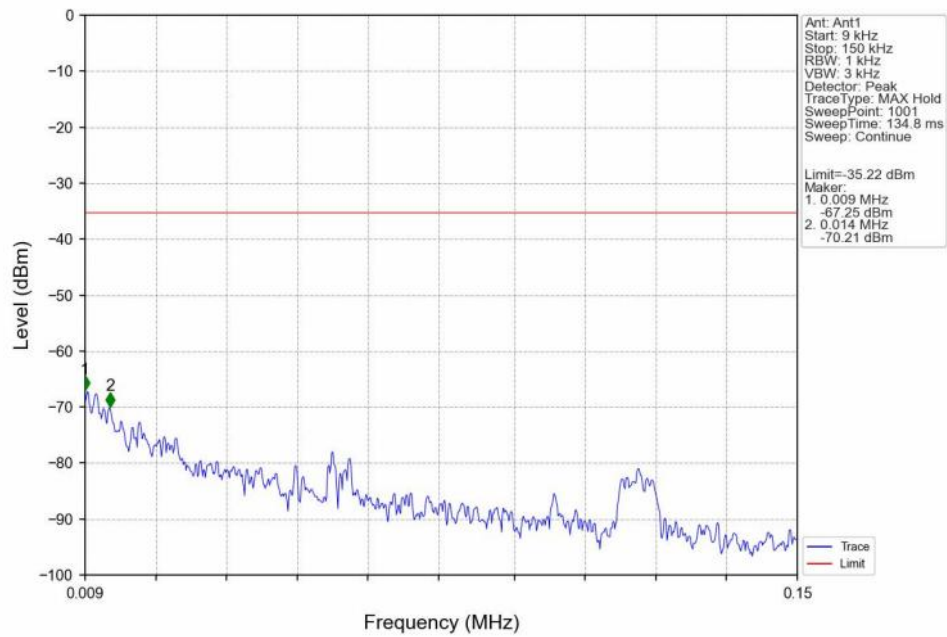


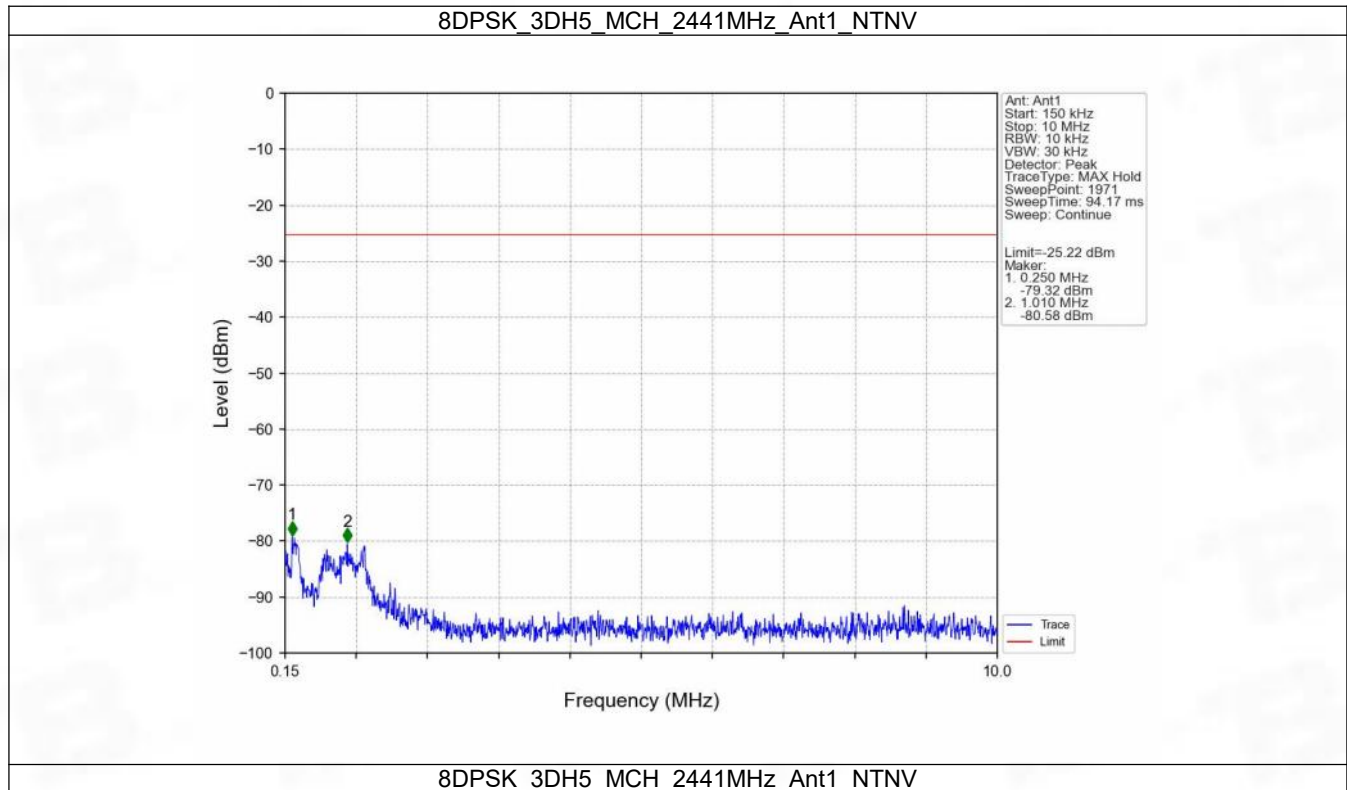


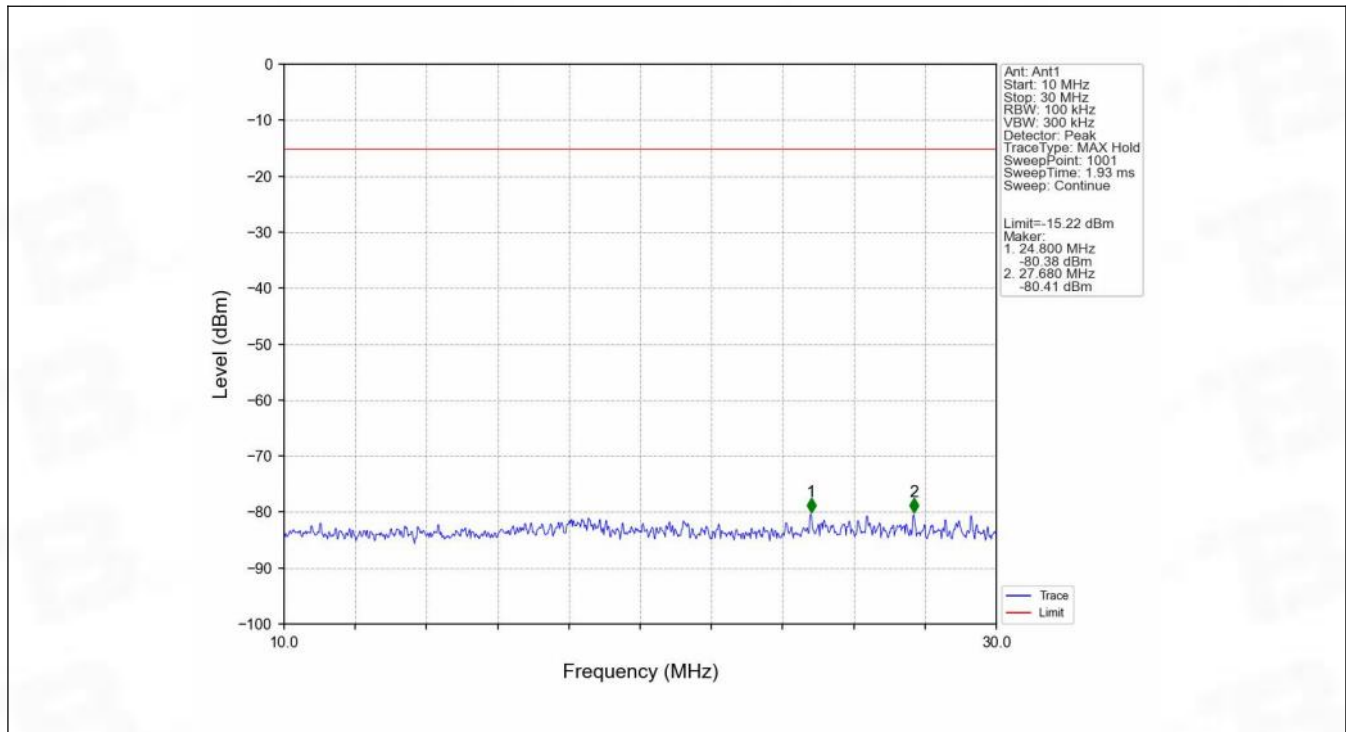


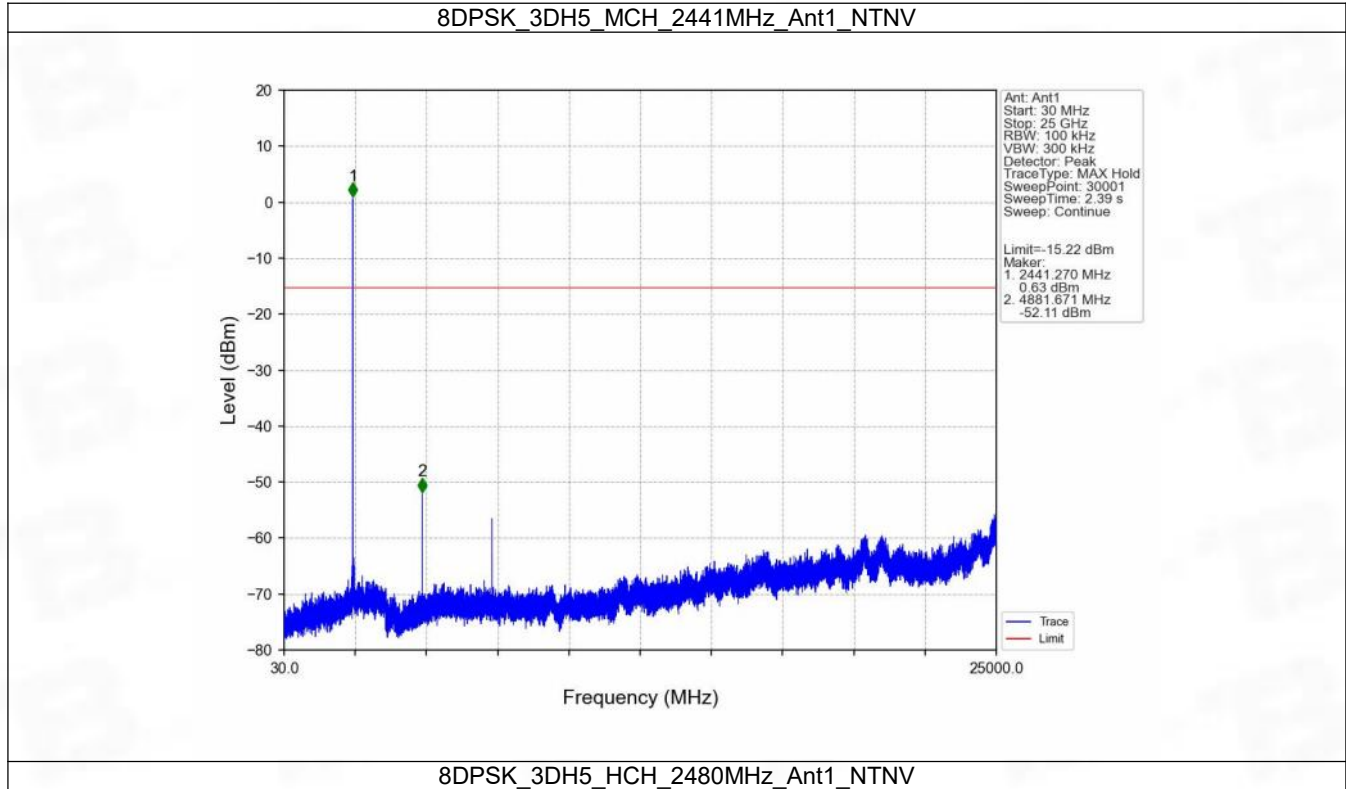


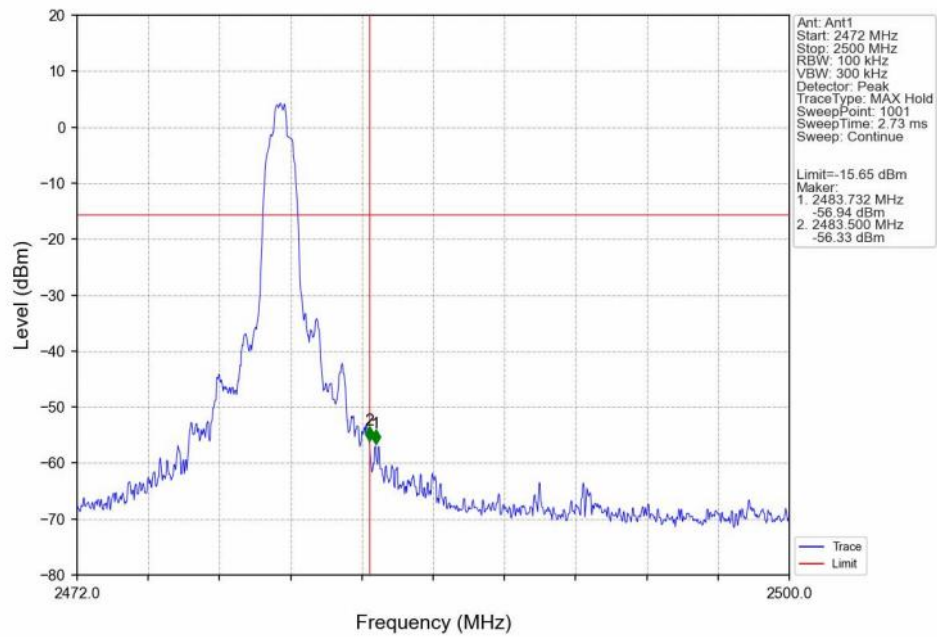


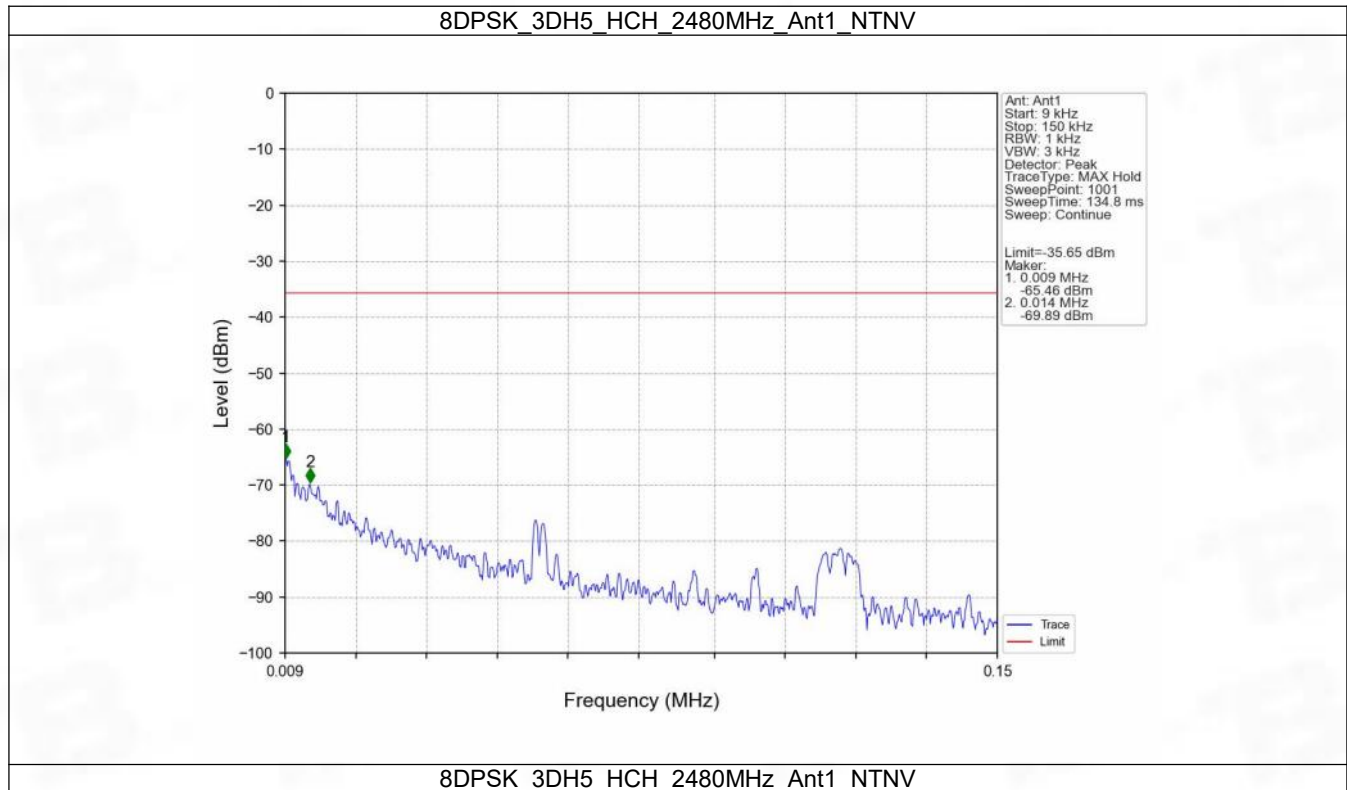


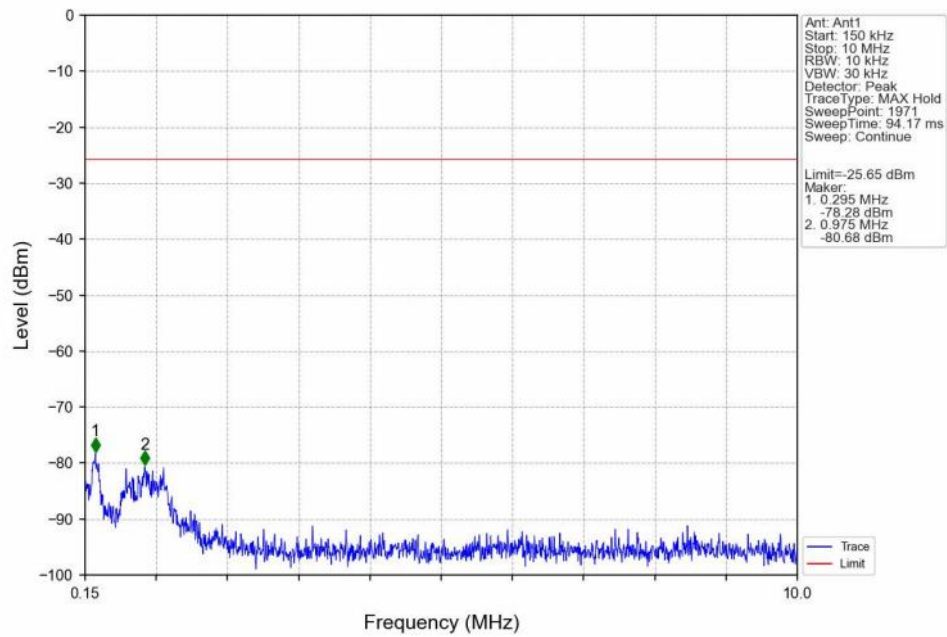

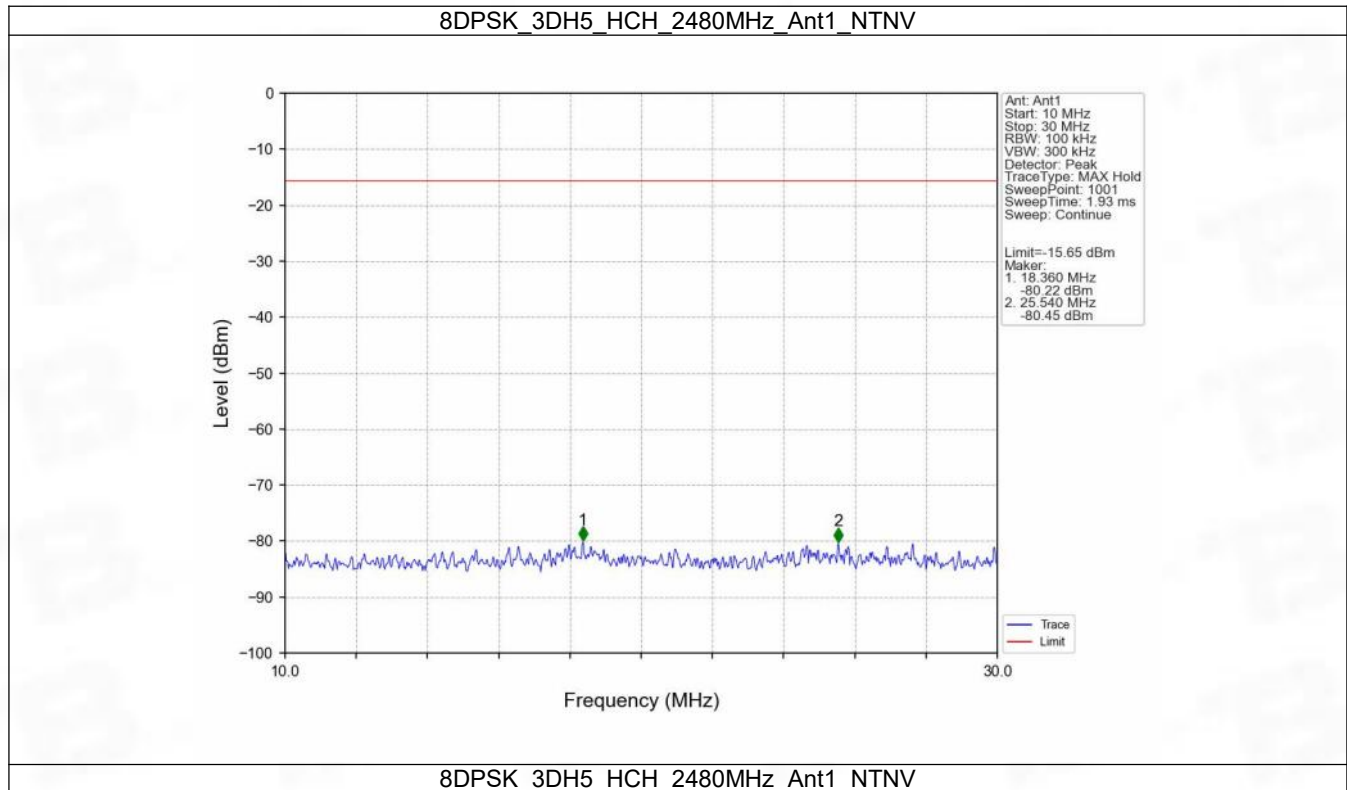

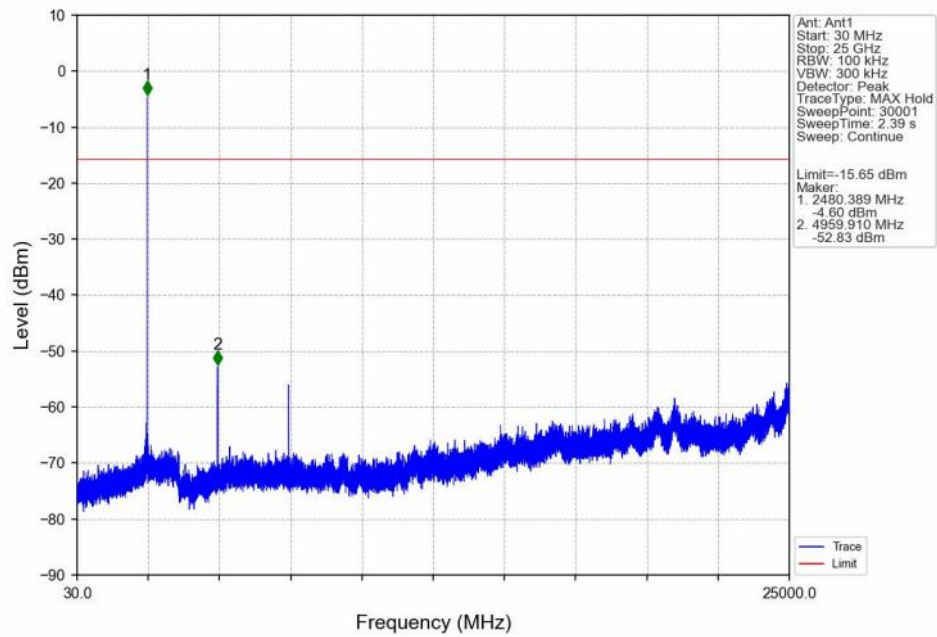

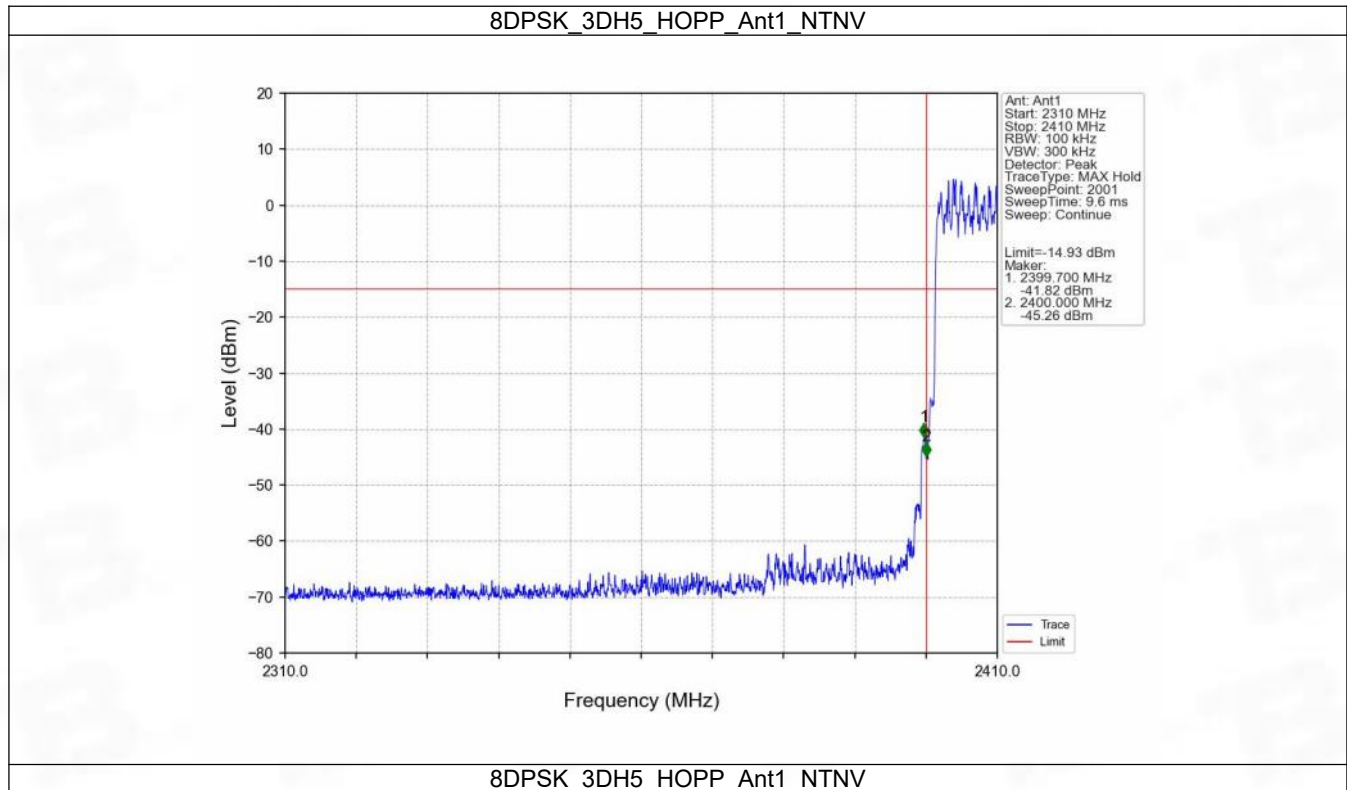

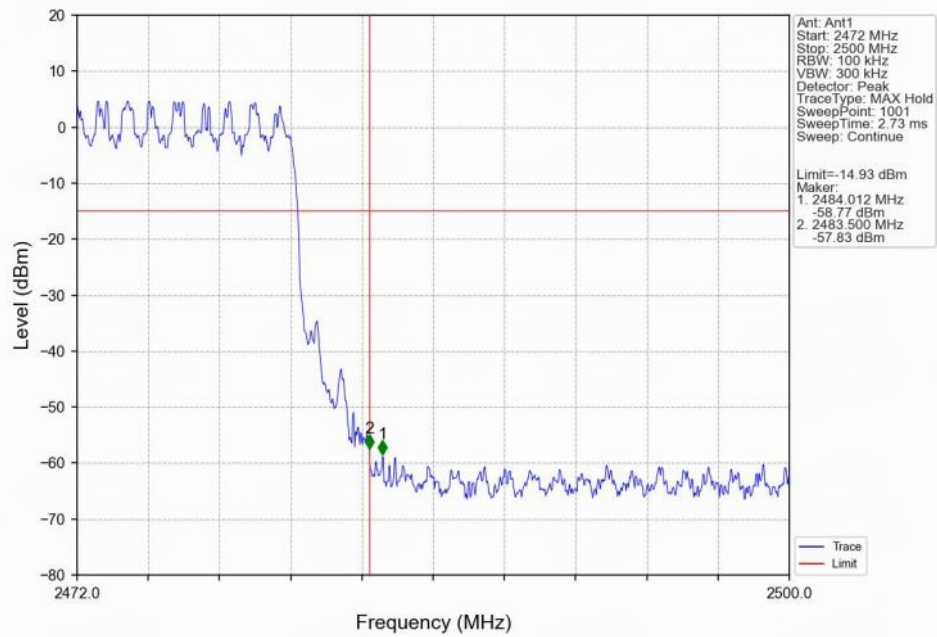

7. Form731

7.1 Test Result

7.1.1 Form731

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0031	4.87