



Appendix B

RF Test Data for BT (BLE) (Conducted Measurement)

Product Name: Smart Bike Trainer

Trade Mark: N/A

Test Model: R200

Environmental Conditions

Temperature:	25.3° C
Relative Humidity:	52.4%
ATM Pressure:	100.0 kPa
Test Engineer:	Emiya lin
Supervised by:	Simba Haung



Contents

	Page
COVER PAGE	
1 Duty Cycle	3
1.1 Test Result	3
1.2 Test Graphs	4
2 Maximum Conducted Output Power	7
2.1 Test Result	7
2.2 Test Graphs	8
3 -6dB Bandwidth	10
3.1 Test Result	10
3.2 Test Graphs	11
4 Maximum Power Spectral Density Level	13
4.1 Test Result	13
4.2 Test Graphs	14
5 Band Edge	16
5.1 Test Result	16
5.2 Test Graphs	17
6 Conducted RF Spurious Emission	19
6.1 Test Result	19
6.2 Test Graphs	20
7 Restrict Band	23
7.1 Test Result	23
7.2 Test Graphs	24





1 Duty Cycle


1.1 Test Result

Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor	1/T (kHz)
BLE 1M	2402	64.8	1.88	2.56
BLE 1M	2440	64.8	1.88	2.5
BLE 1M	2480	64.79	1.88	2.5
BLE 2M	2402	35.2	4.54	4.76
BLE 2M	2440	35.21	4.53	4.76
BLE 2M	2480	35.2	4.54	4.76

1.2 Test Graphs

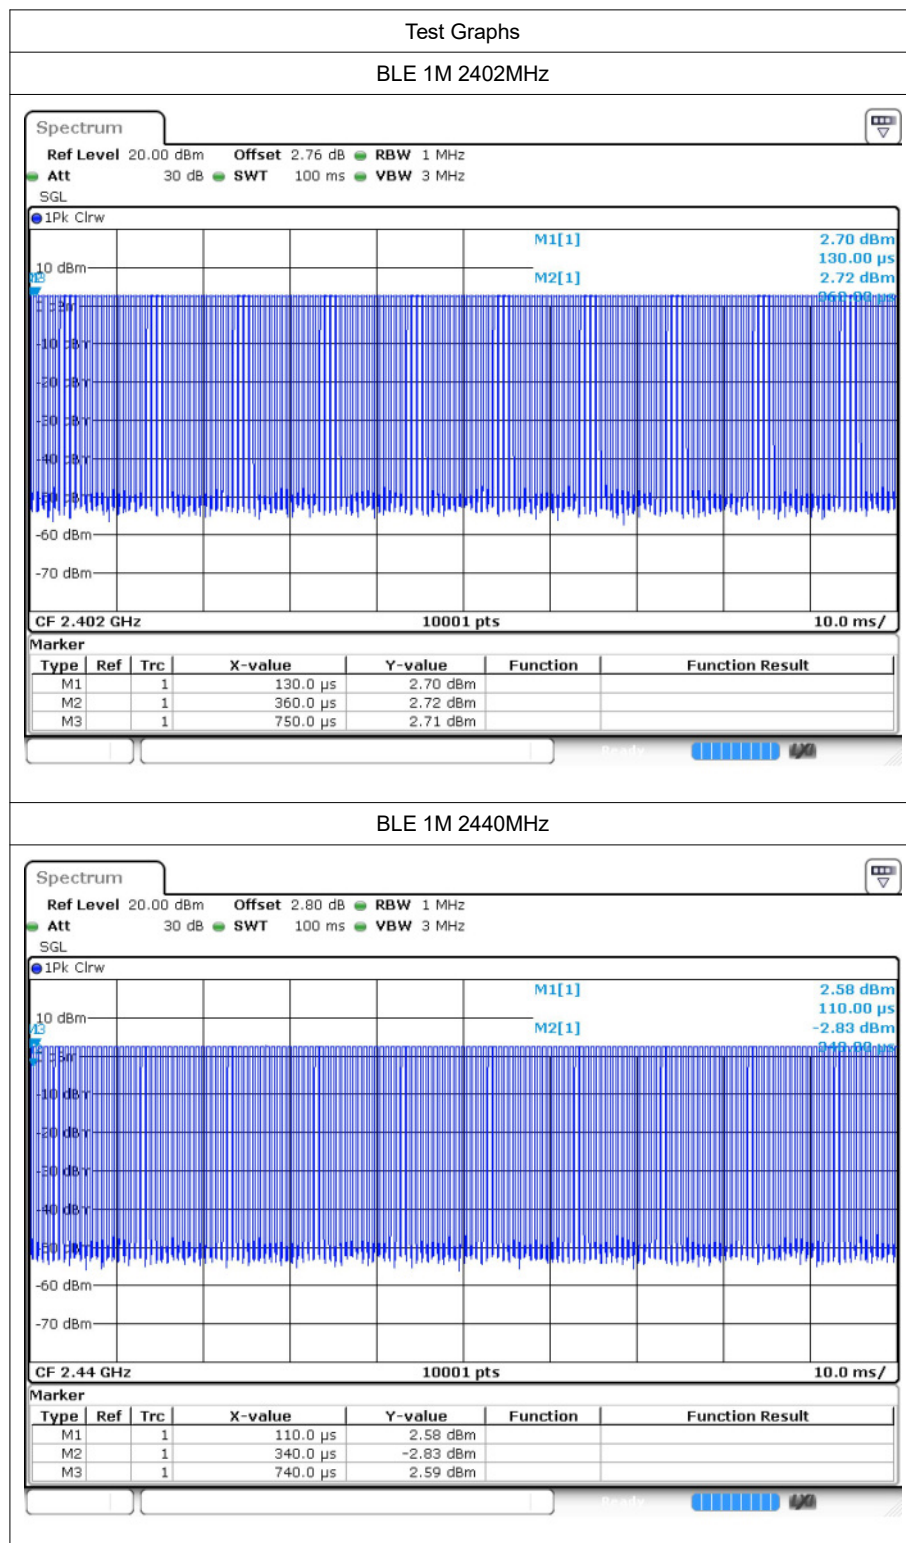

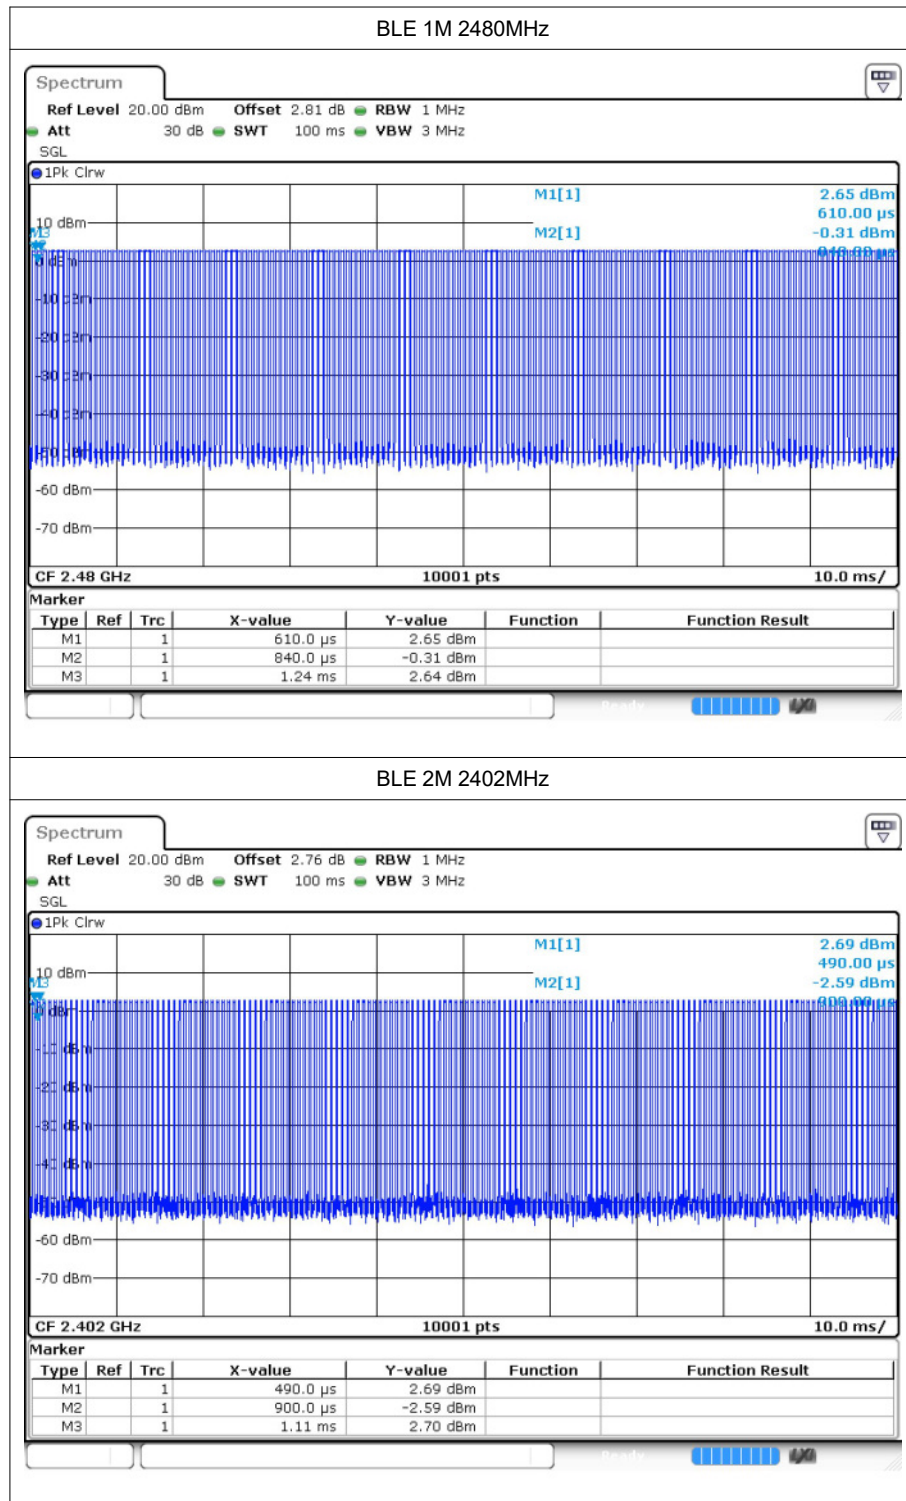

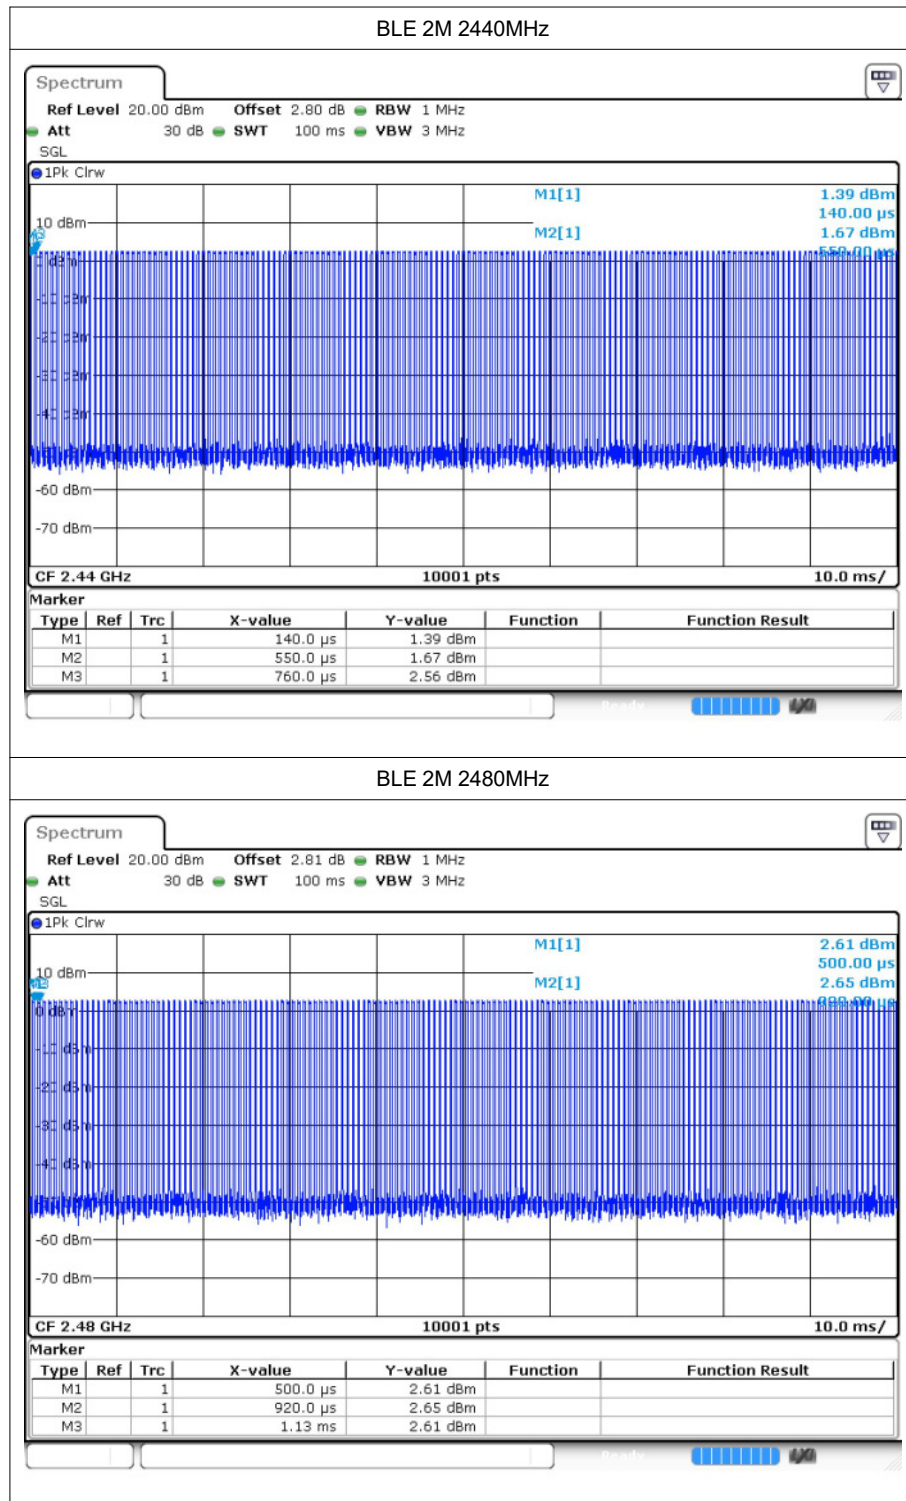





2 Maximum Conducted Output Power

2.1 Test Result

Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	2.72	30	Pass
BLE 1M	2440	2.62	30	Pass
BLE 1M	2480	2.66	30	Pass

2.2 Test Graphs

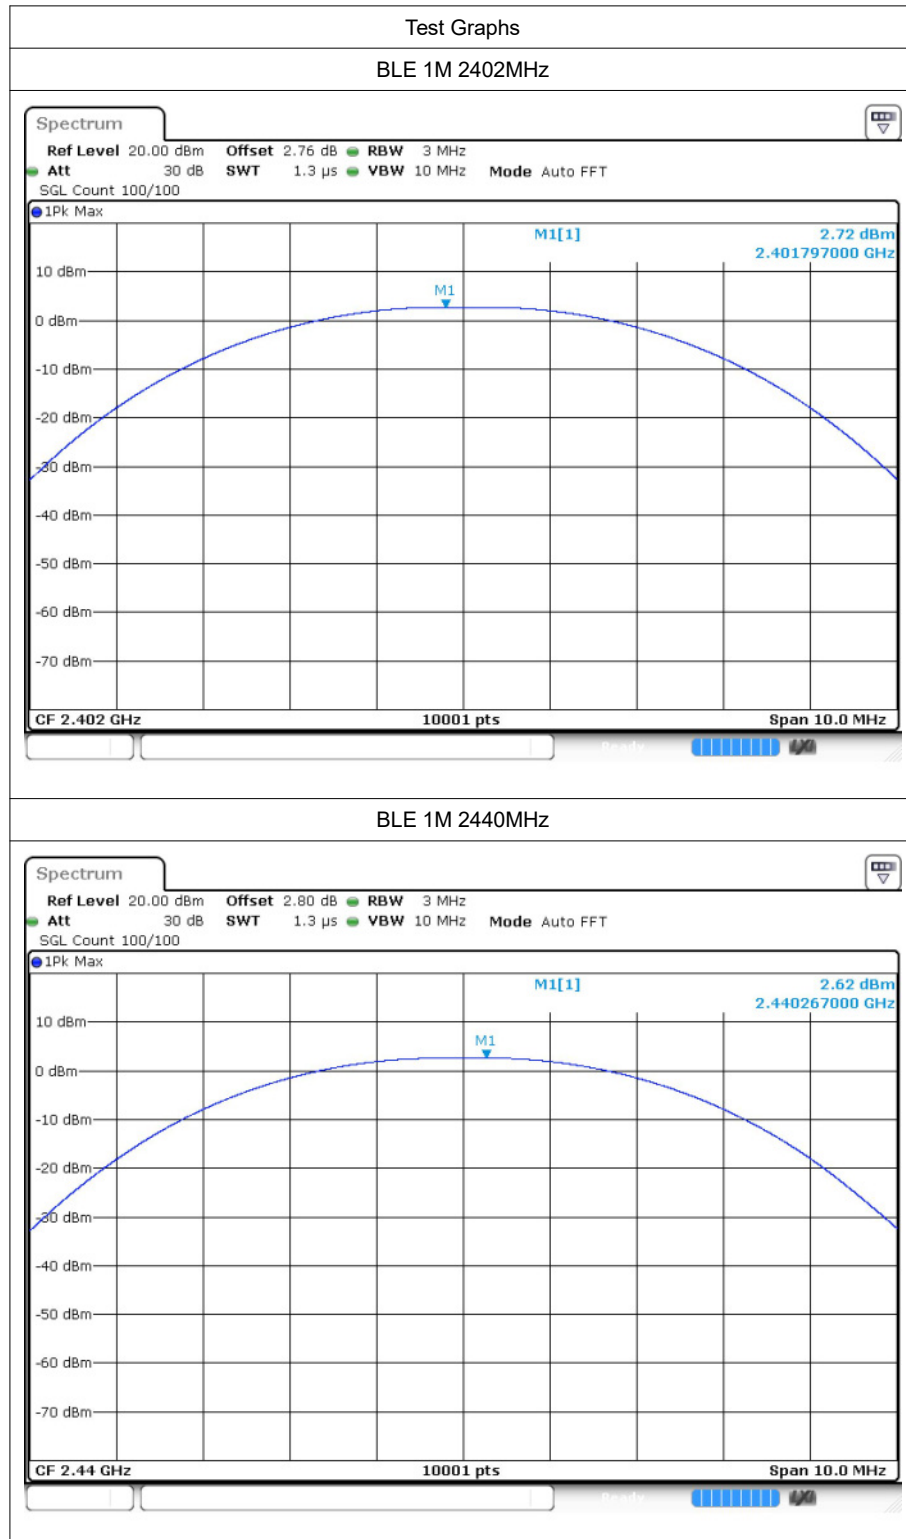

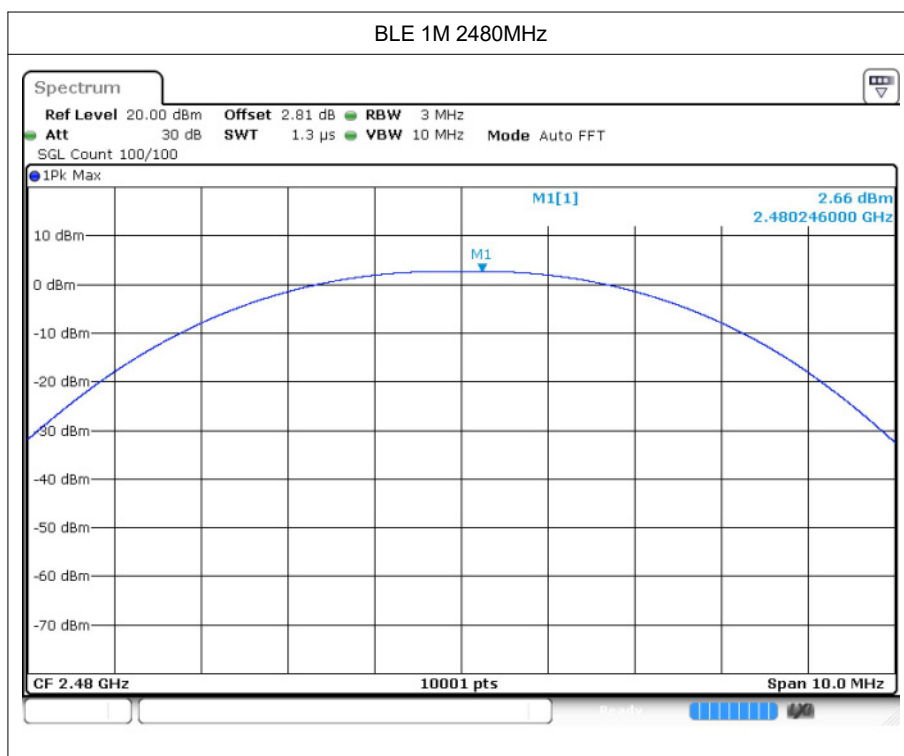





3 -6dB Bandwidth

3.1 Test Result

Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
BLE 1M	2402	0.725	0.5	Pass
BLE 1M	2440	0.705	0.5	Pass
BLE 1M	2480	0.696	0.5	Pass

3.2 Test Graphs

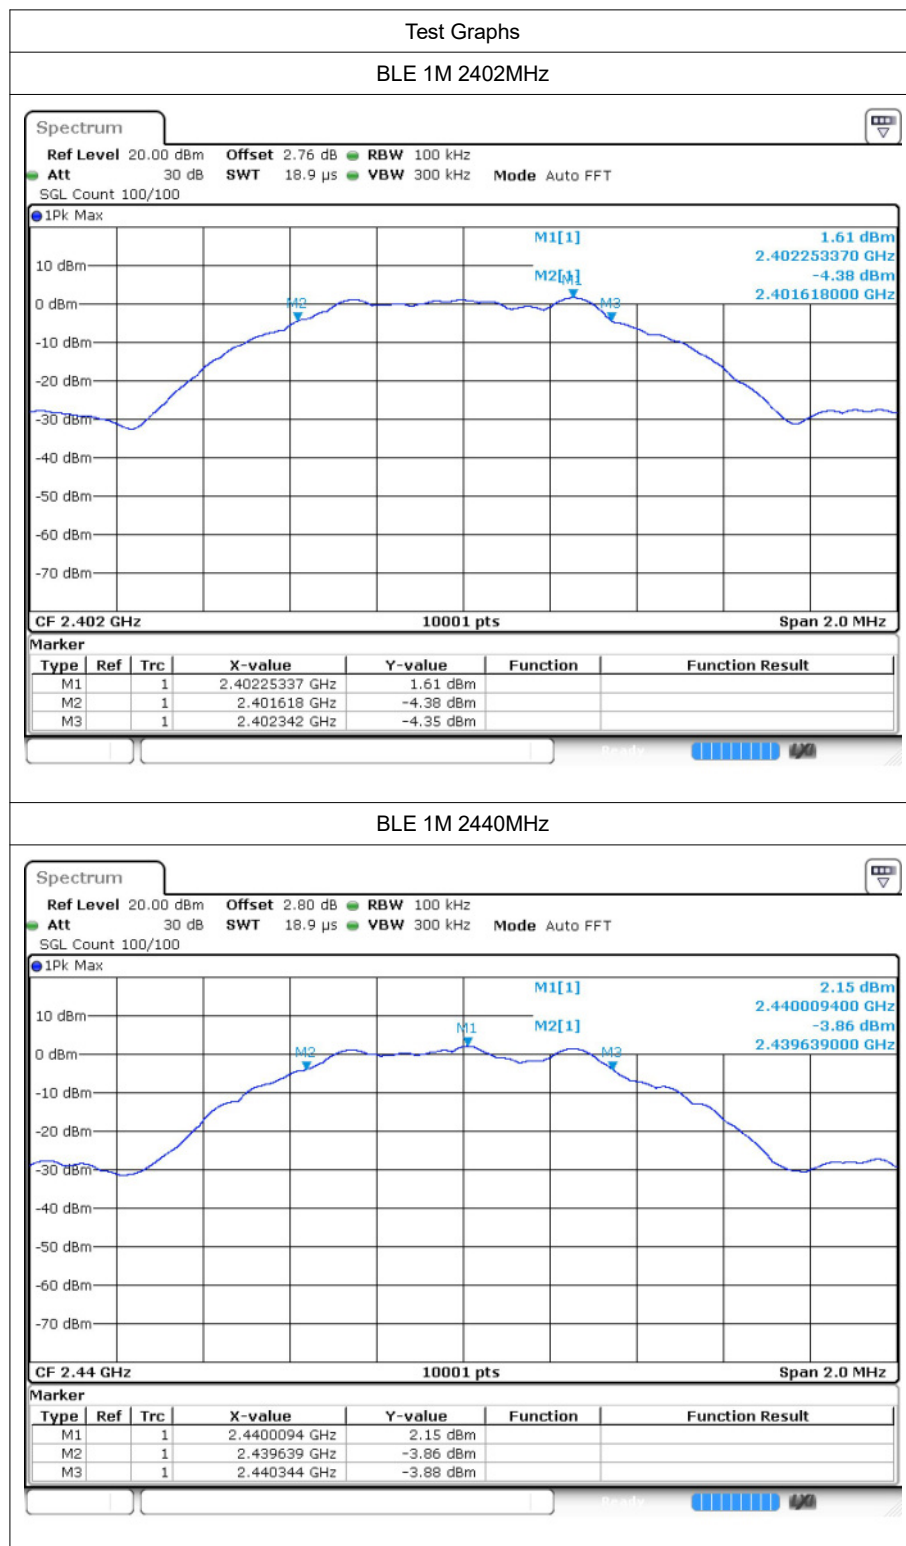

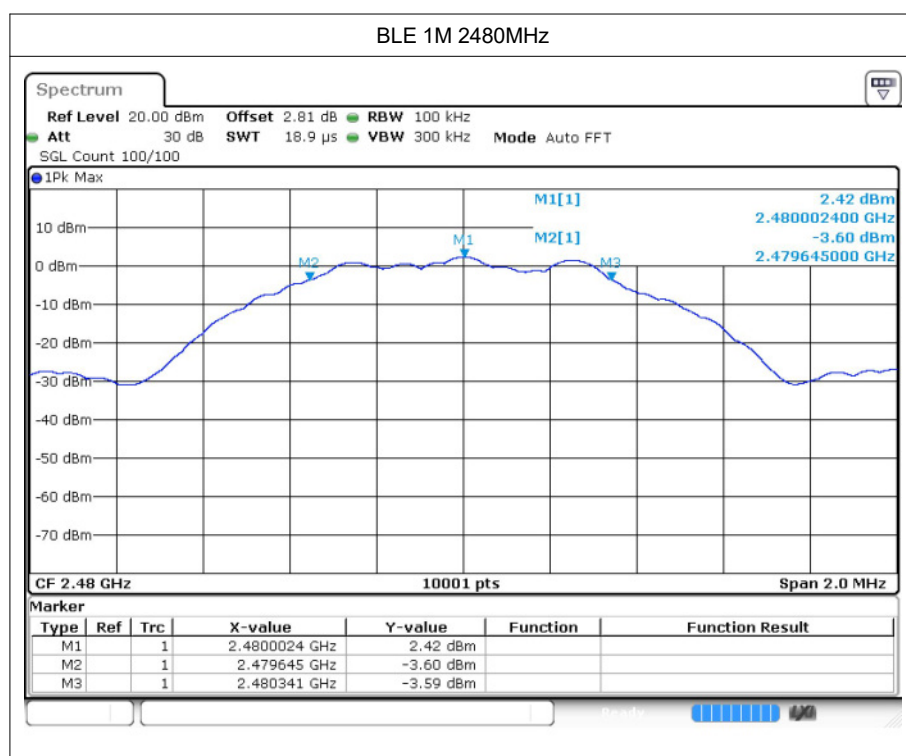





4 Maximum Power Spectral Density Level

4.1 Test Result

Mode	Frequency (MHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 1M	2402	-12.95	≤8	Pass
BLE 1M	2440	-13.09	≤8	Pass
BLE 1M	2480	-12.97	≤8	Pass

4.2 Test Graphs

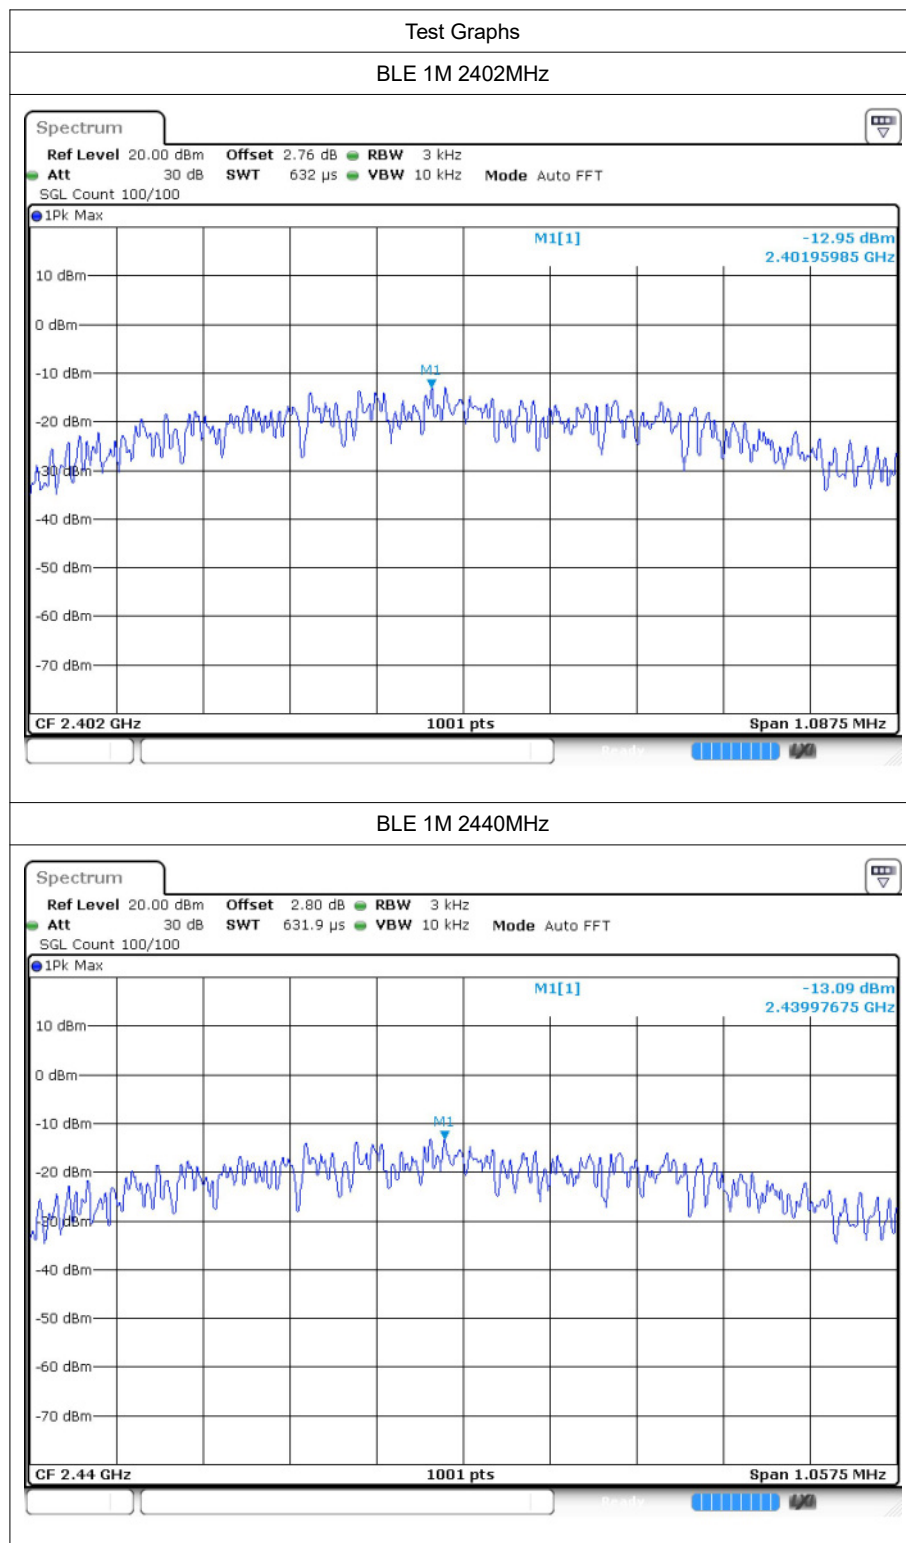

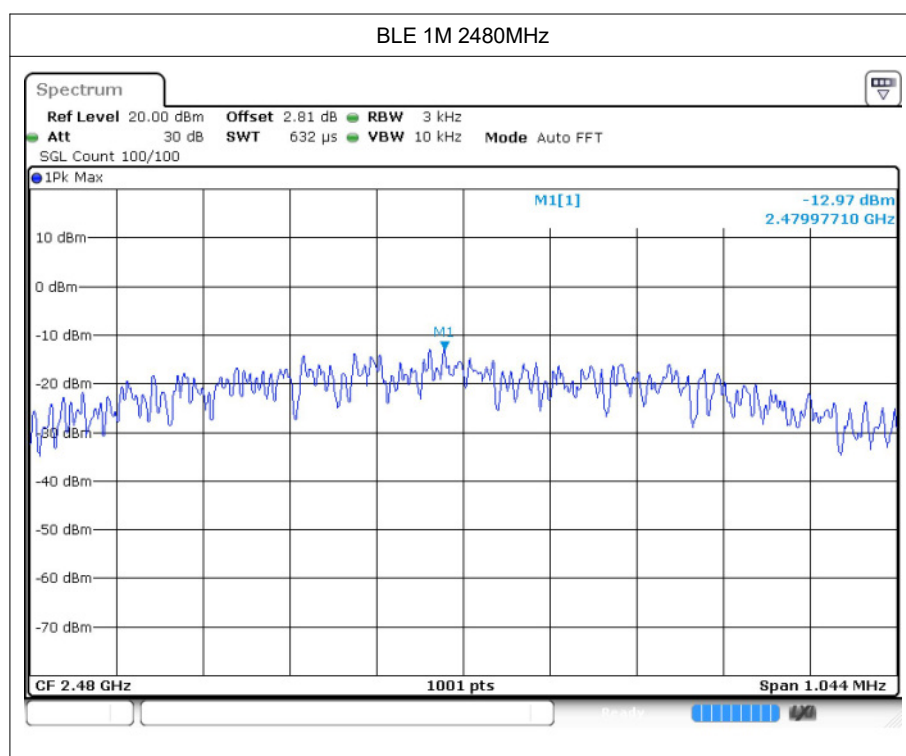





5 Band Edge

5.1 Test Result

Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-56.83	-20	Pass
BLE 1M	2480	-57.04	-20	Pass

5.2 Test Graphs

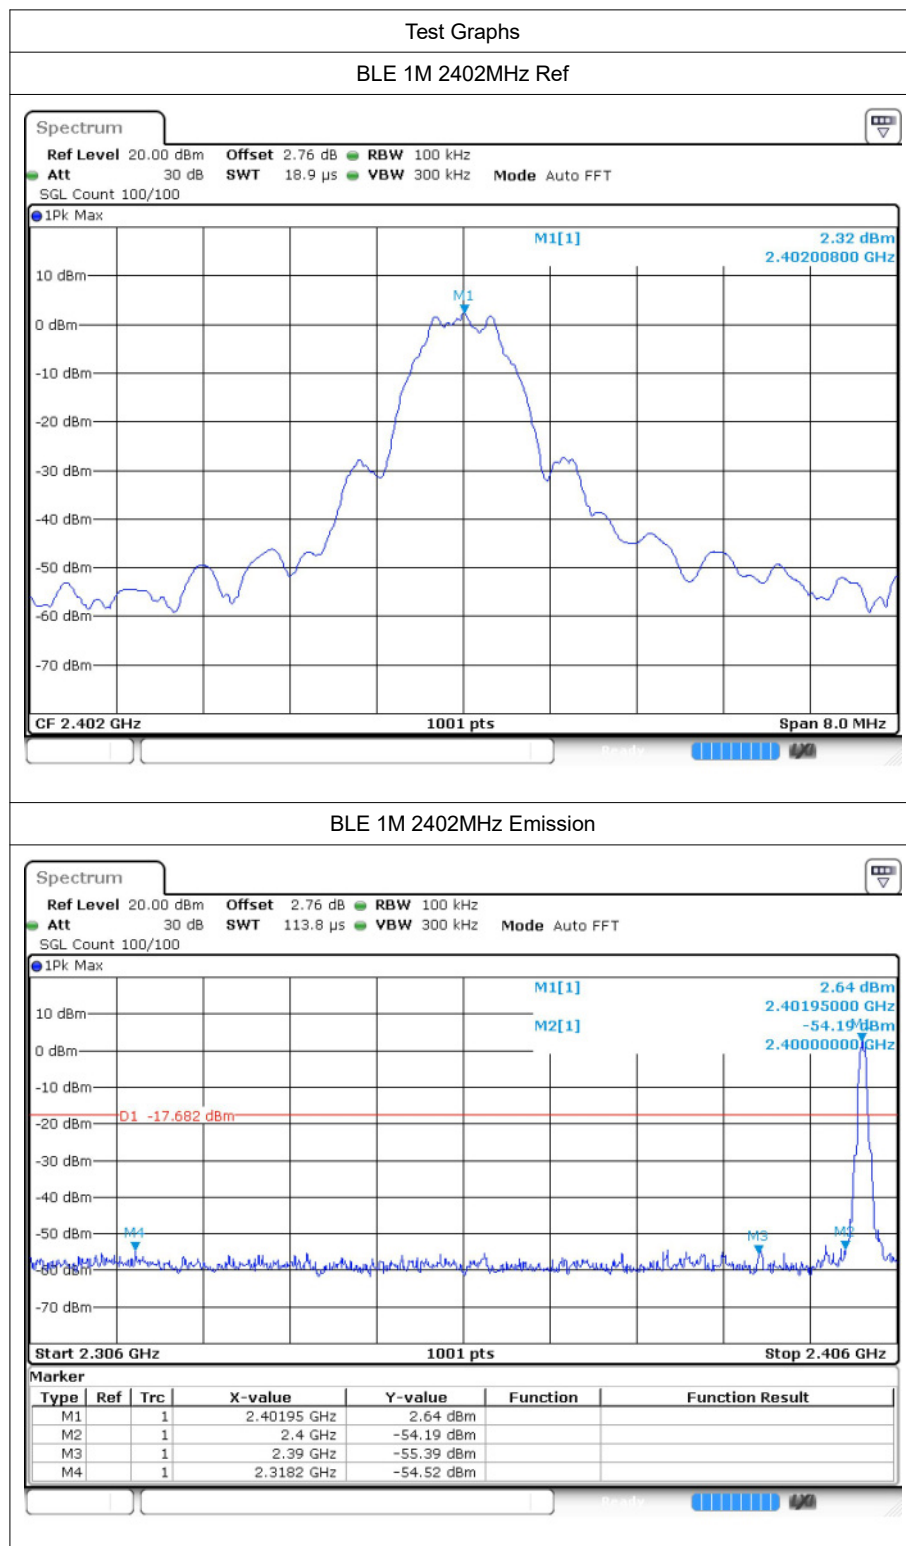

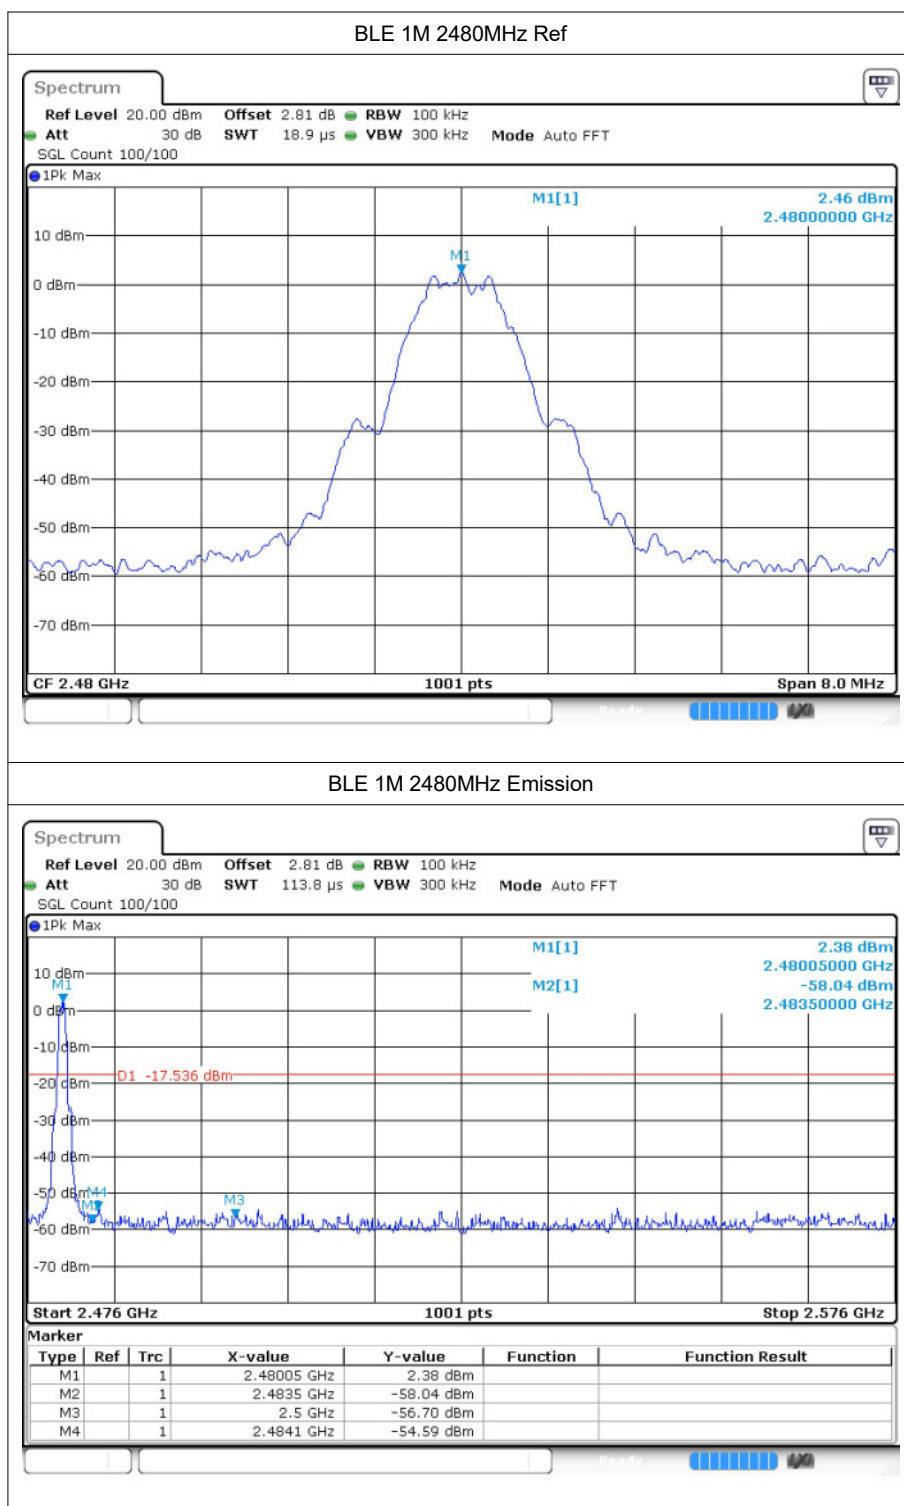



6 Conducted RF Spurious Emission


6.1 Test Result

Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-45.67	-20	Pass
BLE 1M	2440	-45.27	-20	Pass
BLE 1M	2480	-46.44	-20	Pass

6.2 Test Graphs

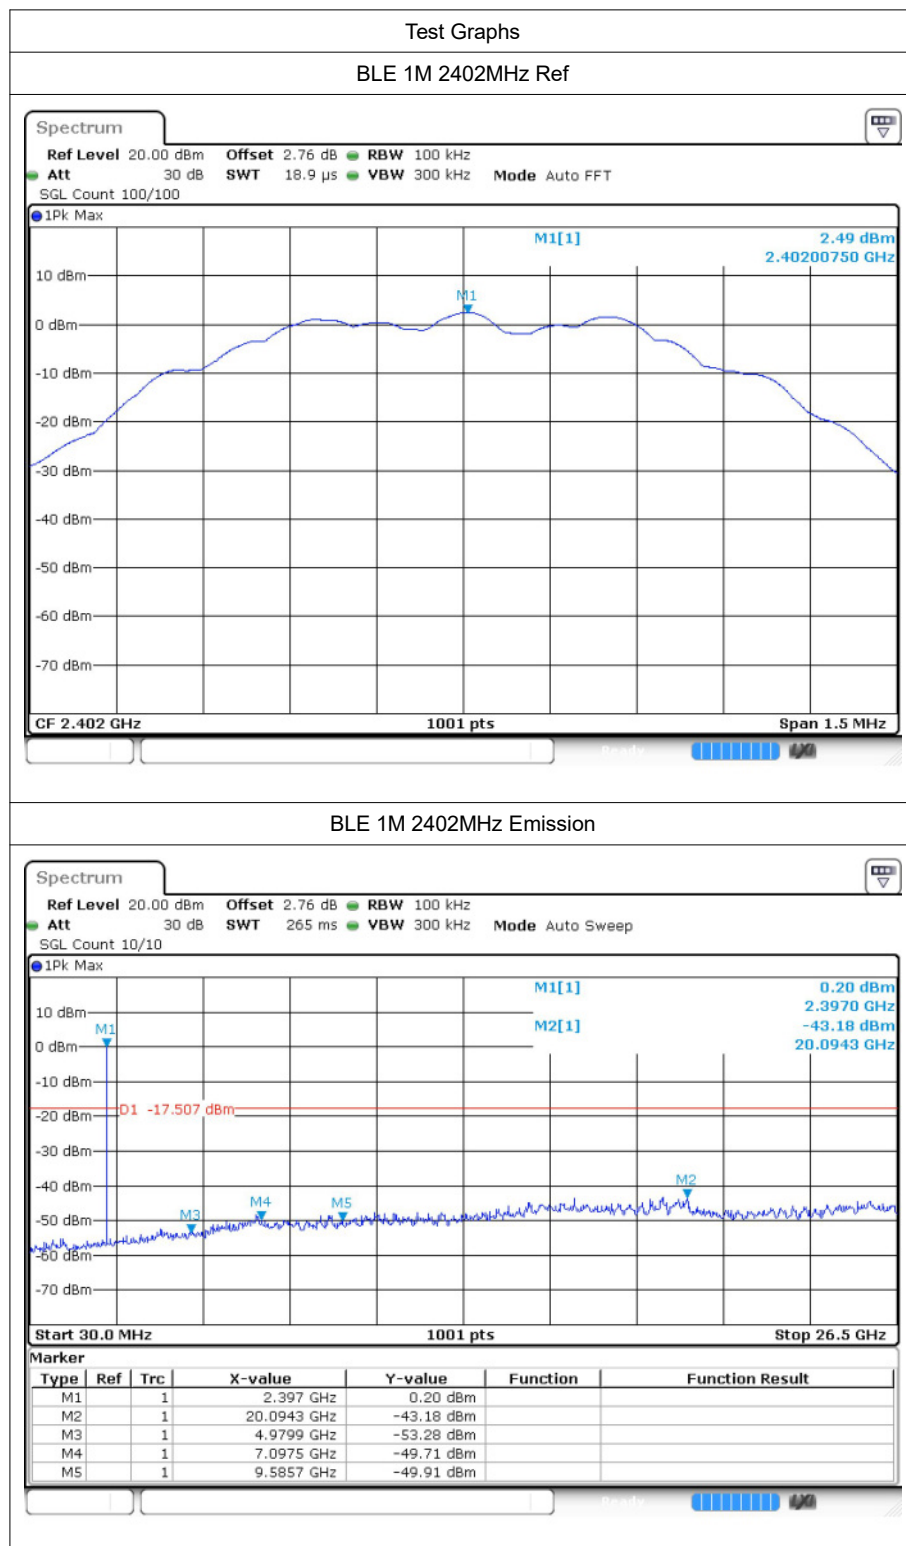

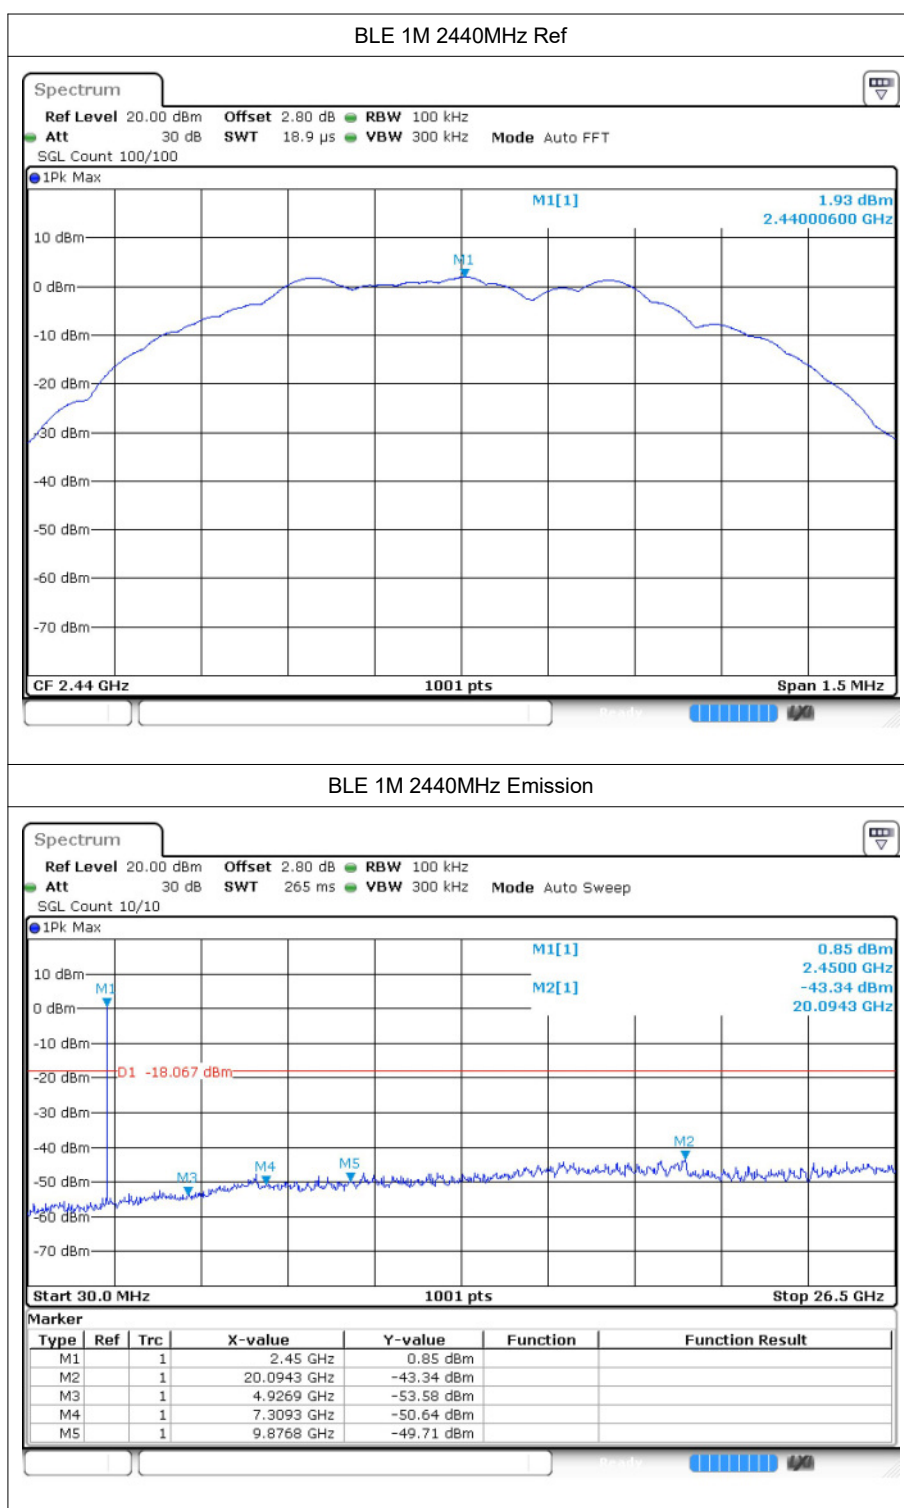

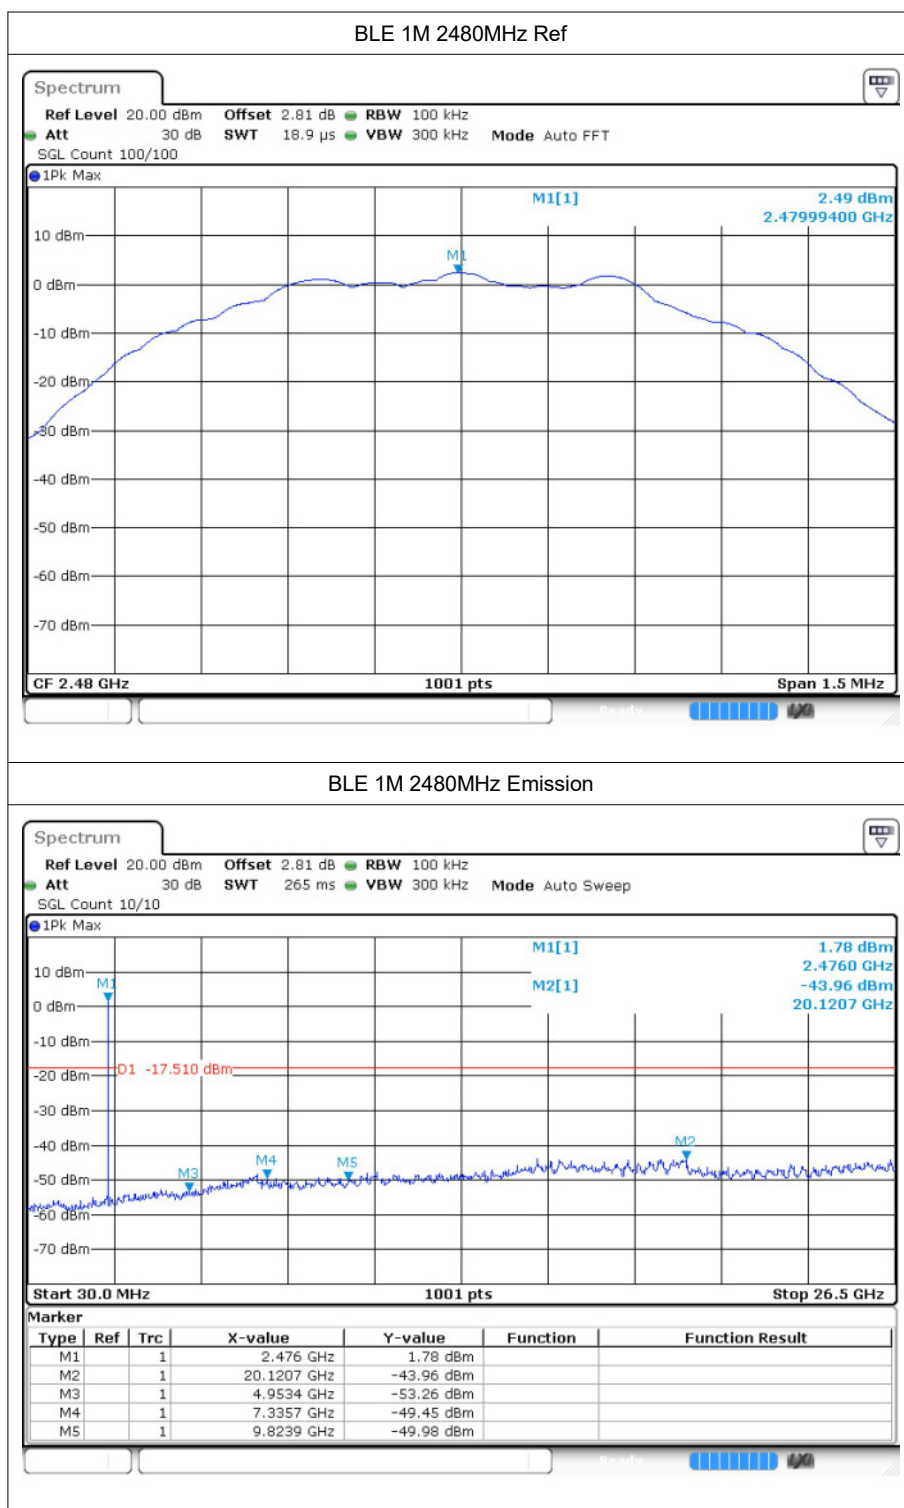





7 Restrict Band

7.1 Test Result

Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-50.89	3.1	-	47.47	Peak	74	Pass
BLE 1M	2402	2310	-55.59	3.1	1.88	44.65	Average	54	Pass
BLE 1M	2402	2342.16	-45.73	3.1	-	52.63	Peak	74	Pass
BLE 1M	2402	2337.936	-54.22	3.1	1.88	46.02	Average	54	Pass
BLE 1M	2402	2390	-49.95	3.1	-	48.41	Peak	74	Pass
BLE 1M	2402	2390	-55.58	3.1	1.88	44.66	Average	54	Pass
BLE 1M	2480	2483.5	-47.69	3.1	-	50.67	Peak	74	Pass
BLE 1M	2480	2483.5	-54.27	3.1	1.88	45.97	Average	54	Pass
BLE 1M	2480	2492.2	-45.77	3.1	-	52.59	Peak	74	Pass
BLE 1M	2480	2483.824	-54	3.1	1.88	46.24	Average	54	Pass
BLE 1M	2480	2500	-48.43	3.1	-	49.93	Peak	74	Pass
BLE 1M	2480	2500	-55.39	3.1	1.88	44.85	Average	54	Pass

7.2 Test Graphs

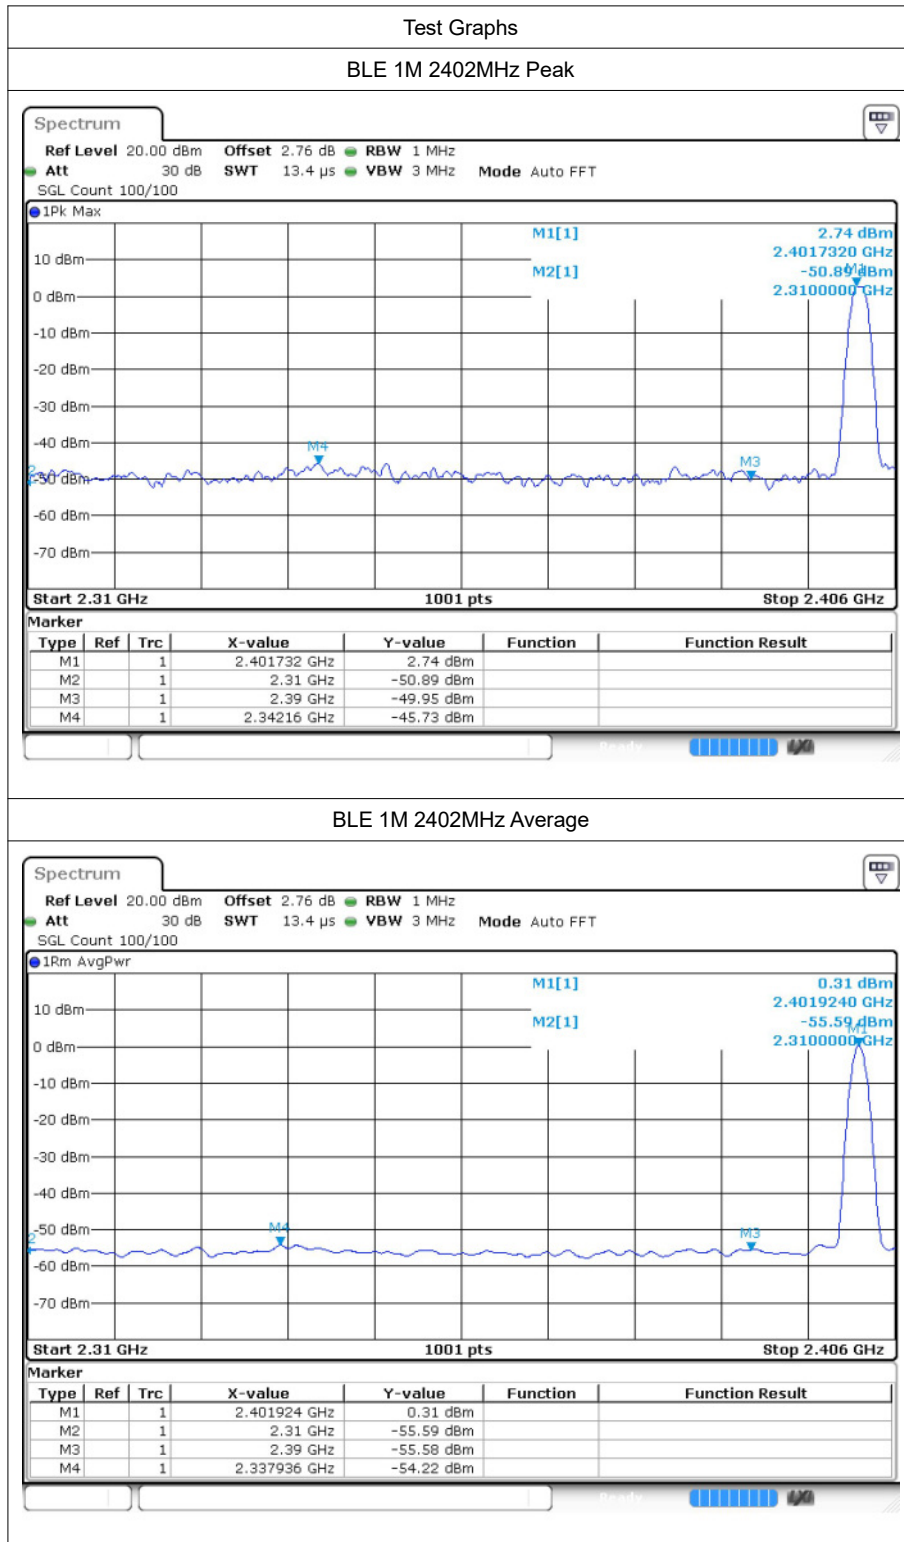

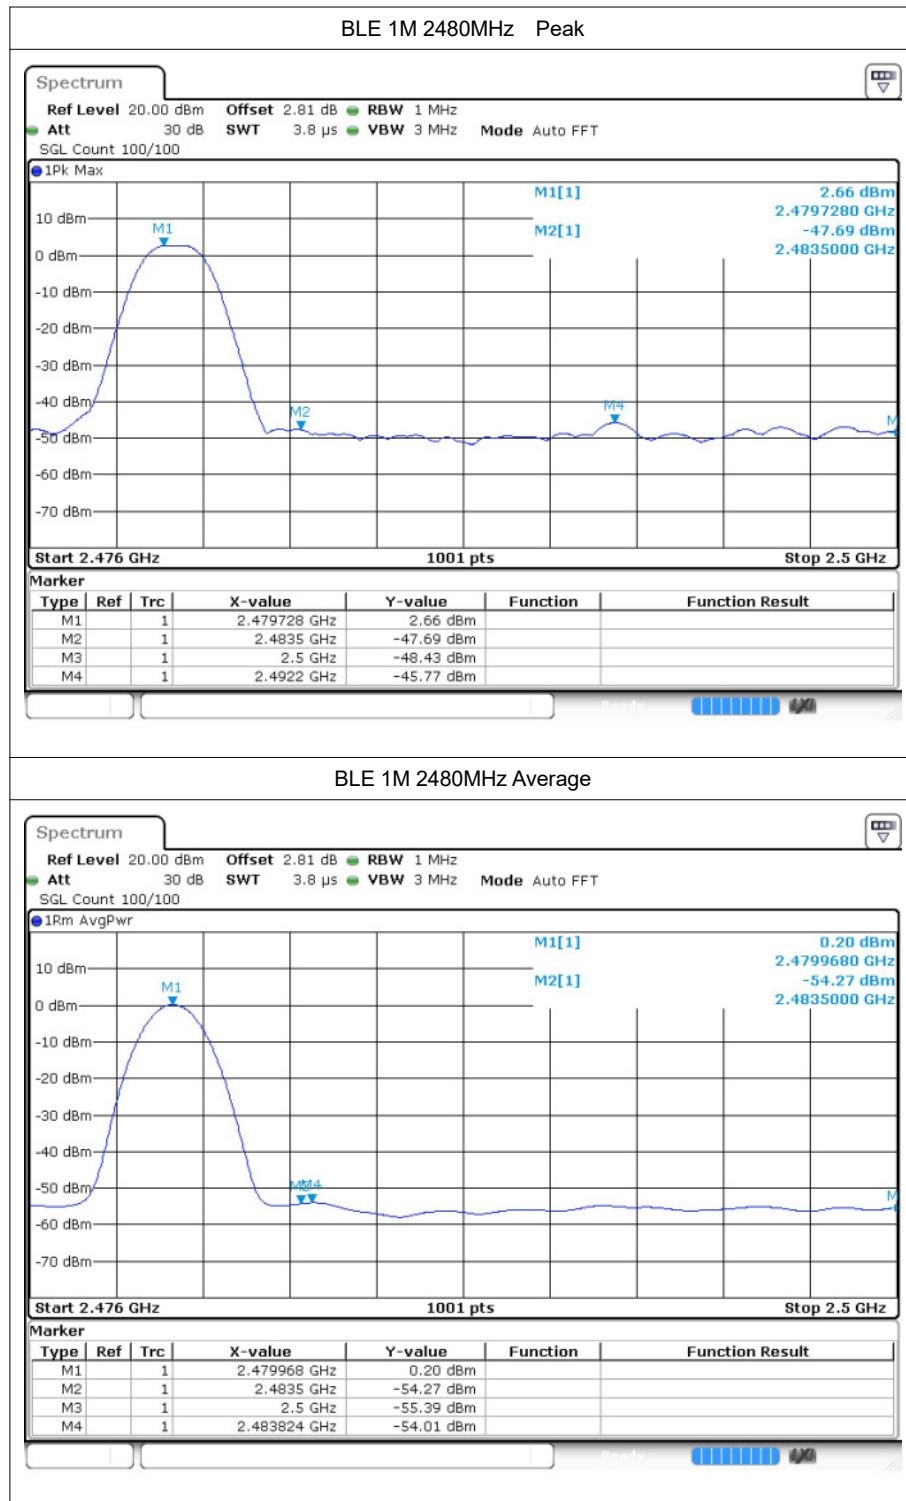

---The End---