




Test Mode : 2TX 11ax20 CH93 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

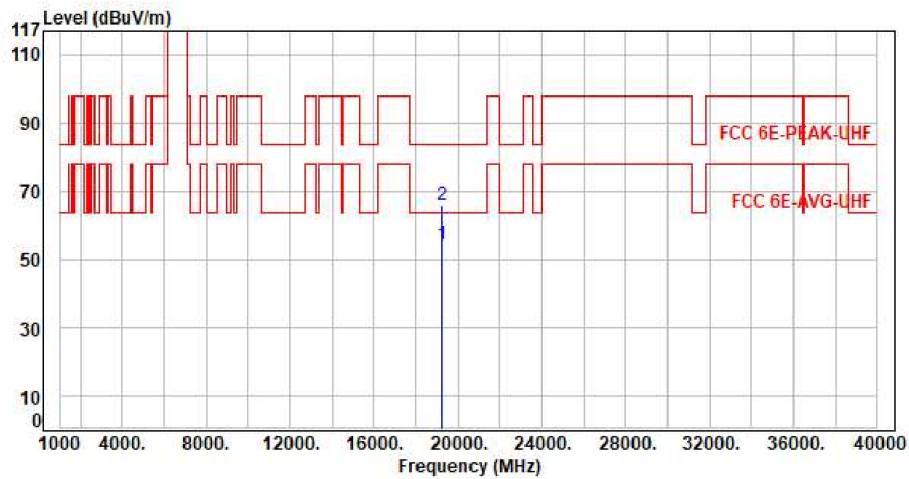


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19245.00           | 10.81          | 43.59             | 54.40             | 63.54             | -9.14          | Average  | 150            | 360              | P   |
| 2   | 19245.00           | 10.81          | 55.10             | 65.91             | 83.54             | -17.63         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH03 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

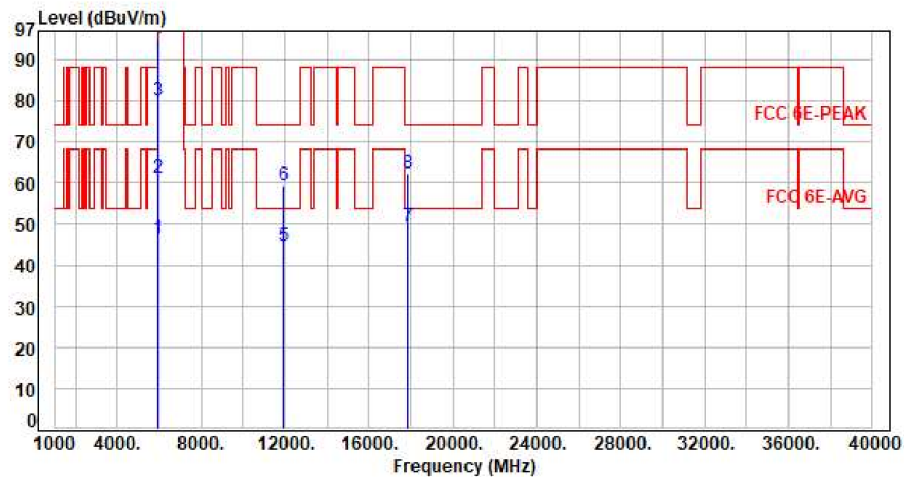


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 0.85        | 45.50          | 46.35          | 68.20          | -21.85      | Average  | 200         | 62            | P   |
| 2   | 5925.00         | 0.85        | 60.44          | 61.29          | 88.20          | -26.91      | Peak     | 200         | 62            | P   |
| 3   | 5965.00         | 0.86        | 79.27          | 80.13          | 200.00         | -119.87     | Average  | 200         | 62            | P   |
| 4   | 5965.00         | 0.86        | 94.15          | 95.01          | 200.00         | -104.99     | Peak     | 200         | 62            | P   |
| 5   | 11930.00        | 3.86        | 40.72          | 44.58          | 54.00          | -9.42       | Average  | 100         | 158           | P   |
| 6   | 11930.00        | 3.86        | 55.43          | 59.29          | 74.00          | -14.71      | Peak     | 100         | 158           | P   |
| 7   | 17895.00        | 4.99        | 44.35          | 49.34          | 54.00          | -4.66       | Average  | 100         | 21            | P   |
| 8   | 17895.00        | 4.99        | 57.39          | 62.38          | 74.00          | -11.62      | Peak     | 100         | 21            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH03 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

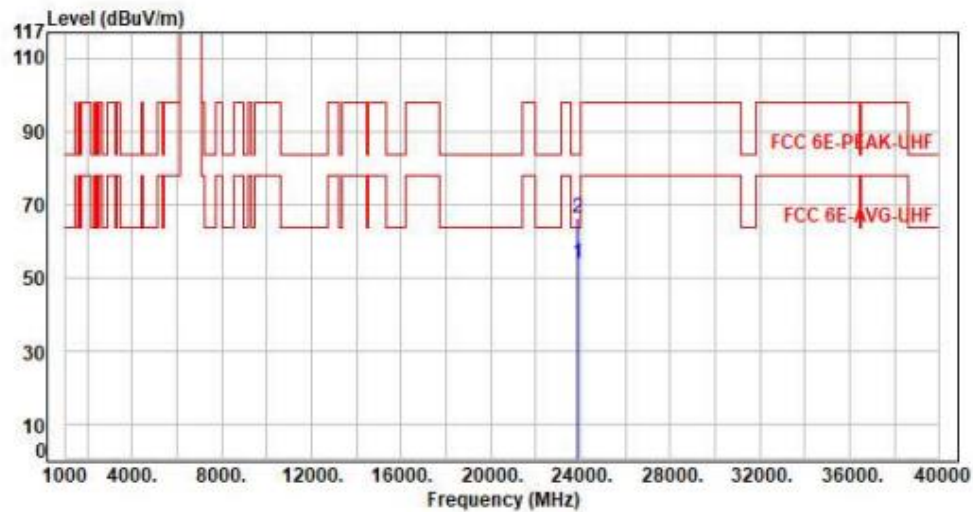

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 23860.00        | 11.25       | 42.57          | 53.82          | 63.54          | -9.72       | Average  | 150         | 360           | P   |
| 2   | 23860.00        | 11.25       | 54.88          | 66.13          | 83.54          | -17.41      | Peak     | 150         | 360           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH03 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

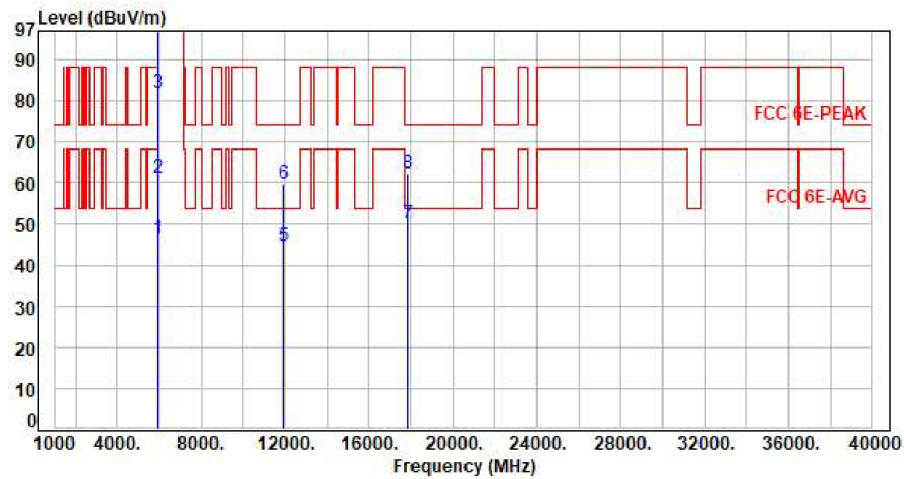


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 0.85        | 45.72          | 46.57          | 68.20          | -21.63      | Average  | 100         | 184           | P   |
| 2   | 5925.00         | 0.85        | 60.33          | 61.18          | 88.20          | -27.02      | Peak     | 100         | 184           | P   |
| 3   | 5965.00         | 0.86        | 80.88          | 81.74          | 200.00         | -118.26     | Average  | 100         | 184           | P   |
| 4   | 5965.00         | 0.86        | 95.94          | 96.80          | 200.00         | -103.20     | Peak     | 100         | 184           | P   |
| 5   | 11930.00        | 3.86        | 40.62          | 44.48          | 54.00          | -9.52       | Average  | 100         | 235           | P   |
| 6   | 11930.00        | 3.86        | 55.90          | 59.76          | 74.00          | -14.24      | Peak     | 100         | 235           | P   |
| 7   | 17895.00        | 4.99        | 45.20          | 50.19          | 54.00          | -3.81       | Average  | 100         | 271           | P   |
| 8   | 17895.00        | 4.99        | 57.38          | 62.37          | 74.00          | -11.63      | Peak     | 100         | 271           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH03 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

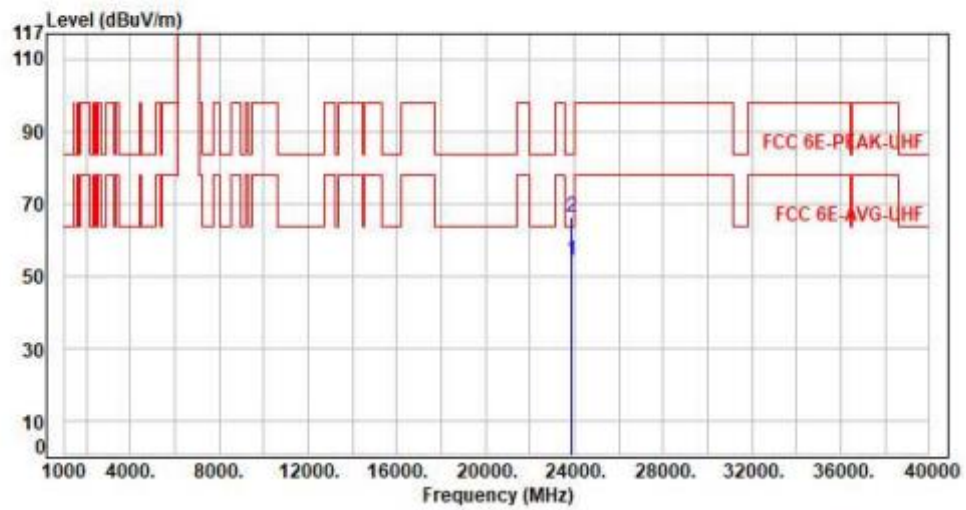

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 23860.00           | 11.25          | 42.93             | 54.18             | 63.54             | -9.36          | Average  | 150            | 360              | P   |
| 2   | 23860.00           | 11.25          | 55.12             | 66.37             | 83.54             | -17.17         | Peak     | 150            | 360              | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH43 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

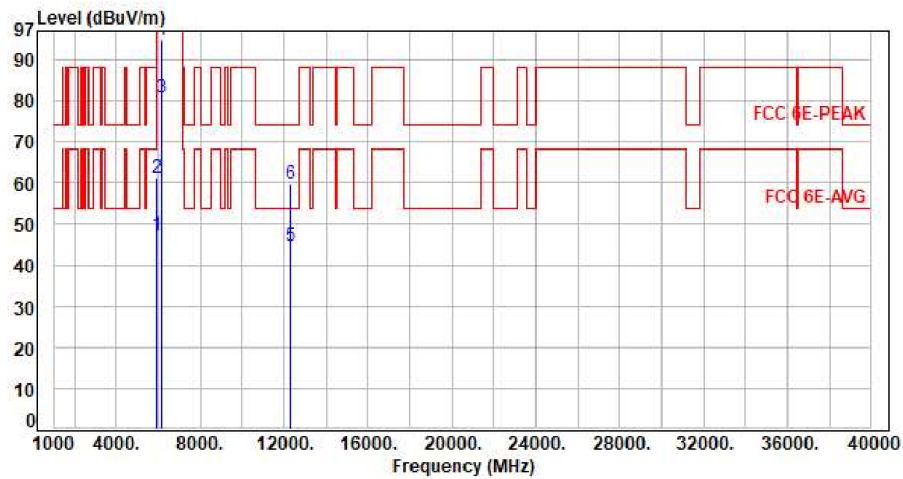


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5925.00            | 0.85           | 46.51             | 47.36             | 68.20             | -20.84         | Average  | 211            | 62               | P   |
| 2   | 5925.00            | 0.85           | 60.36             | 61.21             | 88.20             | -26.99         | Peak     | 211            | 62               | P   |
| 3   | 6165.00            | 1.51           | 79.16             | 80.67             | 200.00            | -119.33        | Average  | 211            | 62               | P   |
| 4   | 6165.00            | 1.51           | 93.33             | 94.84             | 200.00            | -105.16        | Peak     | 211            | 62               | P   |
| 5   | 12330.00           | 3.94           | 40.75             | 44.69             | 54.00             | -9.31          | Average  | 100            | 166              | P   |
| 6   | 12330.00           | 3.94           | 55.94             | 59.88             | 74.00             | -14.12         | Peak     | 100            | 166              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH43 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

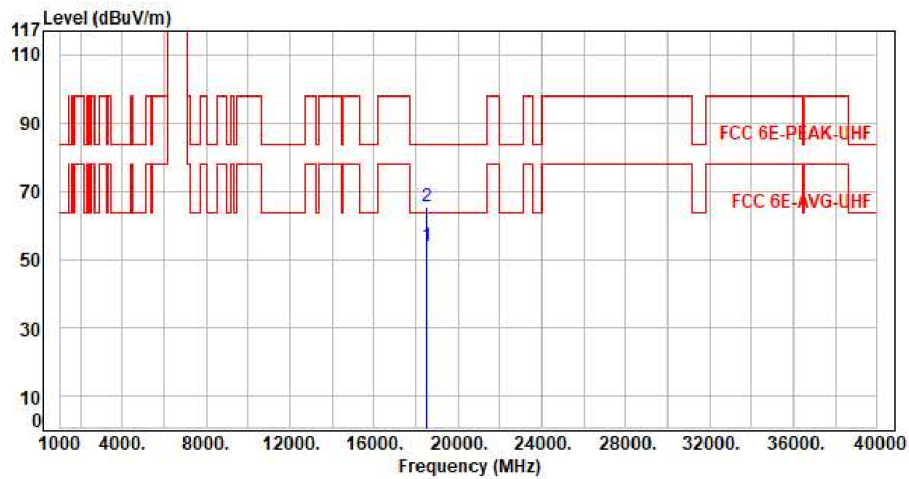


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 18495.00           | 10.33          | 43.42             | 53.75             | 63.54             | -9.79          | Average  | 150            | 360              | P   |
| 2   | 18495.00           | 10.33          | 54.87             | 65.20             | 83.54             | -18.34         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH43 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

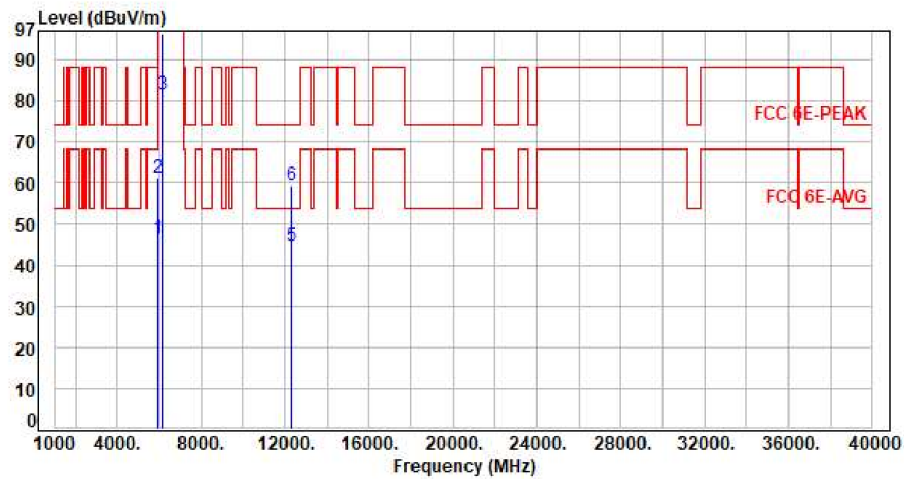


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5925.00            | 0.85           | 45.71             | 46.56             | 68.20             | -21.64         | Average  | 100            | 185              | P   |
| 2   | 5925.00            | 0.85           | 60.36             | 61.21             | 88.20             | -26.99         | Peak     | 100            | 185              | P   |
| 3   | 6165.00            | 1.51           | 80.02             | 81.53             | 200.00            | -118.47        | Average  | 100            | 185              | P   |
| 4   | 6165.00            | 1.51           | 94.89             | 96.40             | 200.00            | -103.60        | Peak     | 100            | 185              | P   |
| 5   | 12330.00           | 3.94           | 40.82             | 44.76             | 54.00             | -9.24          | Average  | 100            | 225              | P   |
| 6   | 12330.00           | 3.94           | 55.60             | 59.54             | 74.00             | -14.46         | Peak     | 100            | 225              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH43 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

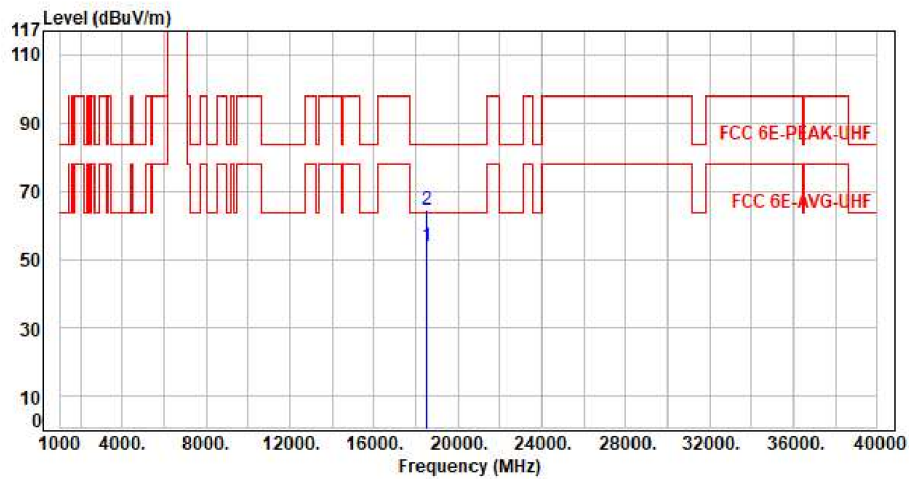


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 18495.00           | 10.33          | 43.59             | 53.92             | 63.54             | -9.62          | Average  | 150            | 360              | P   |
| 2   | 18495.00           | 10.33          | 54.36             | 64.69             | 83.54             | -18.85         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH91 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

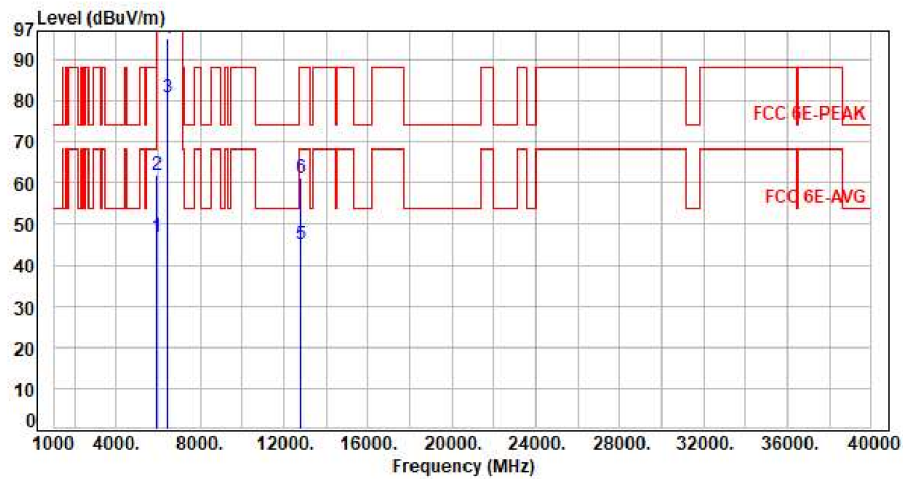


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 0.85        | 45.92          | 46.77          | 68.20          | -21.43      | Average  | 225         | 67            | P   |
| 2   | 5925.00         | 0.85        | 61.01          | 61.86          | 88.20          | -26.34      | Peak     | 225         | 67            | P   |
| 3   | 6405.00         | 2.90        | 77.83          | 80.73          | 200.00         | -119.27     | Average  | 225         | 67            | P   |
| 4   | 6405.00         | 2.90        | 92.42          | 95.32          | 200.00         | -104.68     | Peak     | 225         | 67            | P   |
| 5   | 12810.00        | 4.65        | 40.28          | 44.93          | 68.20          | -23.27      | Average  | 100         | 169           | P   |
| 6   | 12810.00        | 4.65        | 56.48          | 61.13          | 88.20          | -27.07      | Peak     | 100         | 169           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH91 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

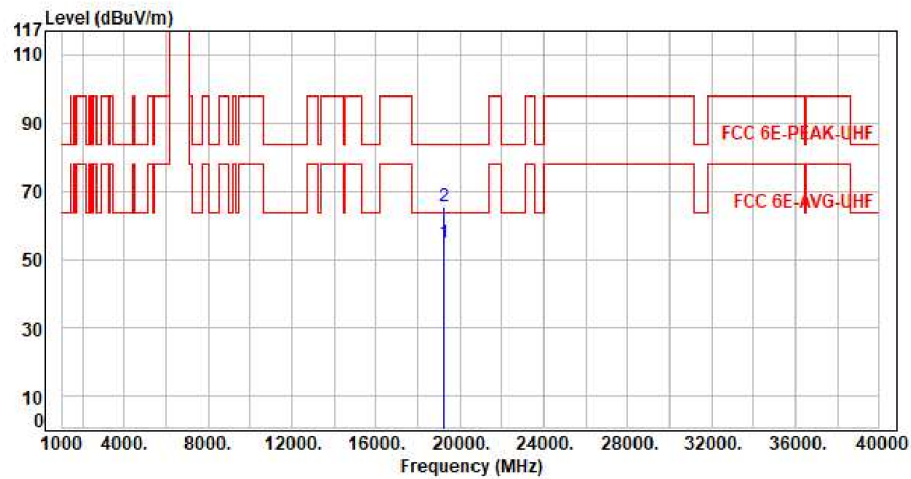


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19215.00           | 10.92          | 43.58             | 54.50             | 63.54             | -9.04          | Average  | 150            | 360              | P   |
| 2   | 19215.00           | 10.92          | 54.28             | 65.20             | 83.54             | -18.34         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH91 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

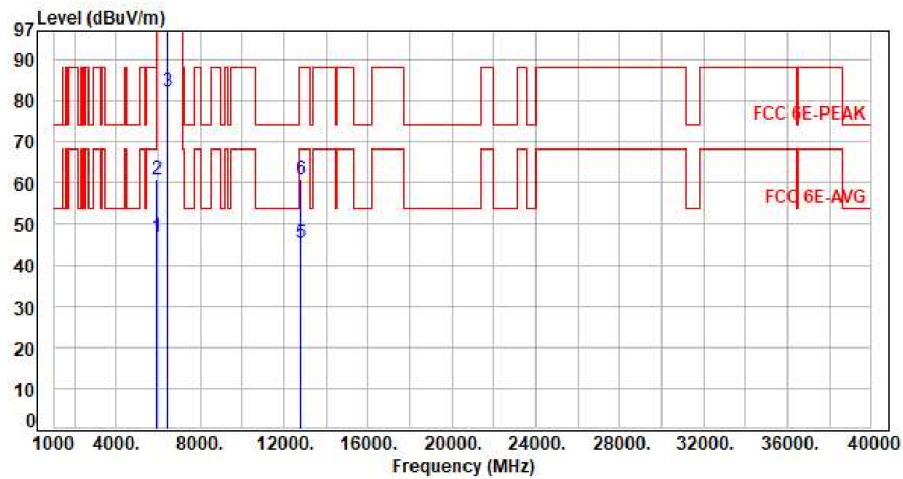


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5925.00            | 0.85           | 45.91             | 46.76             | 68.20             | -21.44         | Average  | 109            | 182              | P   |
| 2   | 5925.00            | 0.85           | 60.13             | 60.98             | 88.20             | -27.22         | Peak     | 109            | 182              | P   |
| 3   | 6405.00            | 2.90           | 79.35             | 82.25             | 200.00            | -117.75        | Average  | 109            | 182              | P   |
| 4   | 6405.00            | 2.90           | 94.26             | 97.16             | 200.00            | -102.84        | Peak     | 109            | 182              | P   |
| 5   | 12810.00           | 4.65           | 40.65             | 45.30             | 68.20             | -22.90         | Average  | 100            | 234              | P   |
| 6   | 12810.00           | 4.65           | 56.07             | 60.72             | 88.20             | -27.48         | Peak     | 100            | 234              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax40 CH91 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

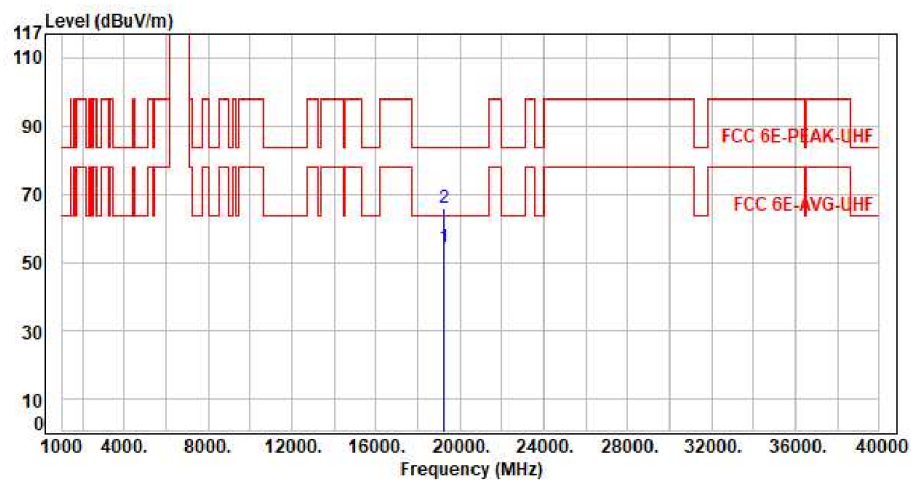


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 19215.00           | 10.92          | 43.22             | 54.14             | 63.54             | -9.40          | Average  | 150            | 360              | P   |
| 2   | 19215.00           | 10.92          | 55.05             | 65.97             | 83.54             | -17.57         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH07 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

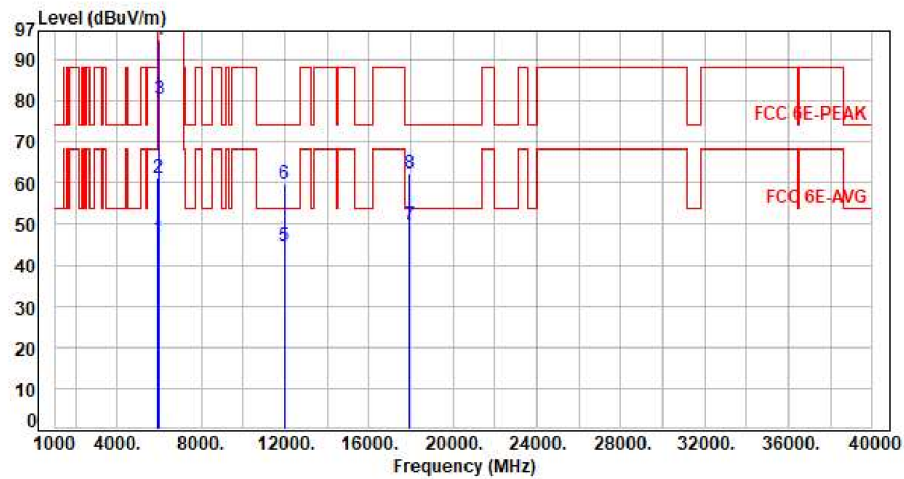


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 0.85        | 45.76          | 46.61          | 68.20          | -21.59      | Average  | 203         | 65            | P   |
| 2   | 5925.00         | 0.85        | 60.25          | 61.10          | 88.20          | -27.10      | Peak     | 203         | 65            | P   |
| 3   | 5985.00         | 0.82        | 79.53          | 80.35          | 200.00         | -119.65     | Average  | 203         | 65            | P   |
| 4   | 5985.00         | 0.82        | 93.81          | 94.63          | 200.00         | -105.37     | Peak     | 203         | 65            | P   |
| 5   | 11970.00        | 3.92        | 40.69          | 44.61          | 54.00          | -9.39       | Average  | 100         | 161           | P   |
| 6   | 11970.00        | 3.92        | 55.75          | 59.67          | 74.00          | -14.33      | Peak     | 100         | 161           | P   |
| 7   | 17955.00        | 5.03        | 44.58          | 49.61          | 54.00          | -4.39       | Average  | 100         | 24            | P   |
| 8   | 17955.00        | 5.03        | 57.36          | 62.39          | 74.00          | -11.61      | Peak     | 100         | 24            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH07 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Vertical

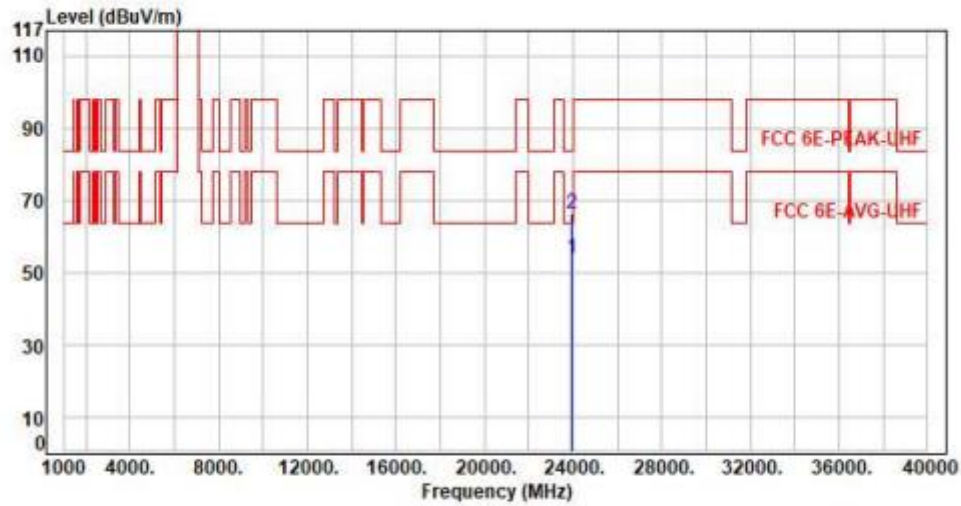


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 23940.00           | 11.24          | 42.73             | 53.97             | 63.54             | -9.57          | Average  | 150            | 360              | P   |
| 2   | 23940.00           | 11.24          | 54.97             | 66.21             | 83.54             | -17.33         | Peak     | 150            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH07 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

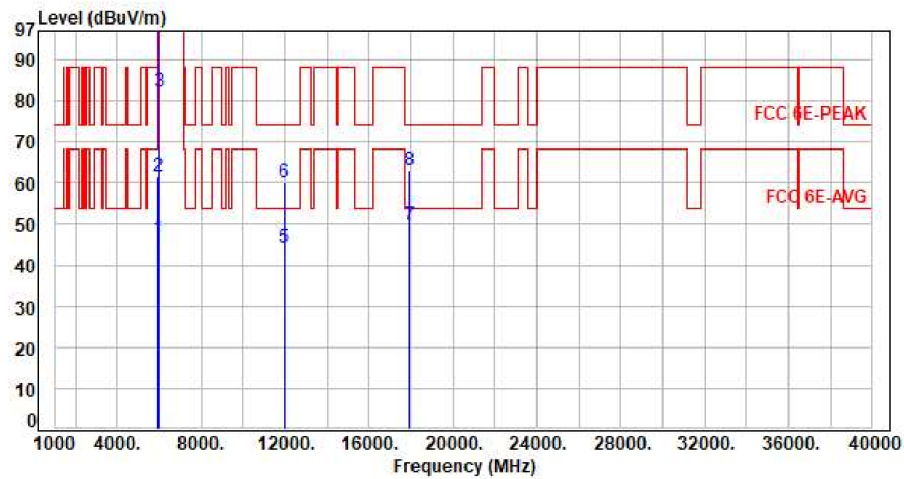


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5925.00         | 0.85        | 45.49          | 46.34          | 68.20          | -21.86      | Average  | 100         | 182           | P   |
| 2   | 5925.00         | 0.85        | 60.58          | 61.43          | 88.20          | -26.77      | Peak     | 100         | 182           | P   |
| 3   | 5985.00         | 0.82        | 81.58          | 82.40          | 200.00         | -117.60     | Average  | 100         | 182           | P   |
| 4   | 5985.00         | 0.82        | 96.44          | 97.26          | 200.00         | -102.74     | Peak     | 100         | 182           | P   |
| 5   | 11970.00        | 3.92        | 40.52          | 44.44          | 54.00          | -9.56       | Average  | 100         | 237           | P   |
| 6   | 11970.00        | 3.92        | 56.31          | 60.23          | 74.00          | -13.77      | Peak     | 100         | 237           | P   |
| 7   | 17955.00        | 5.03        | 44.87          | 49.90          | 54.00          | -4.10       | Average  | 100         | 264           | P   |
| 8   | 17955.00        | 5.03        | 58.22          | 63.25          | 74.00          | -10.75      | Peak     | 100         | 264           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 2TX 11ax80 CH07 NSS1 MCS0  
Voltage : From Adapter(AC 120V/60Hz)  
Pol : Horizontal

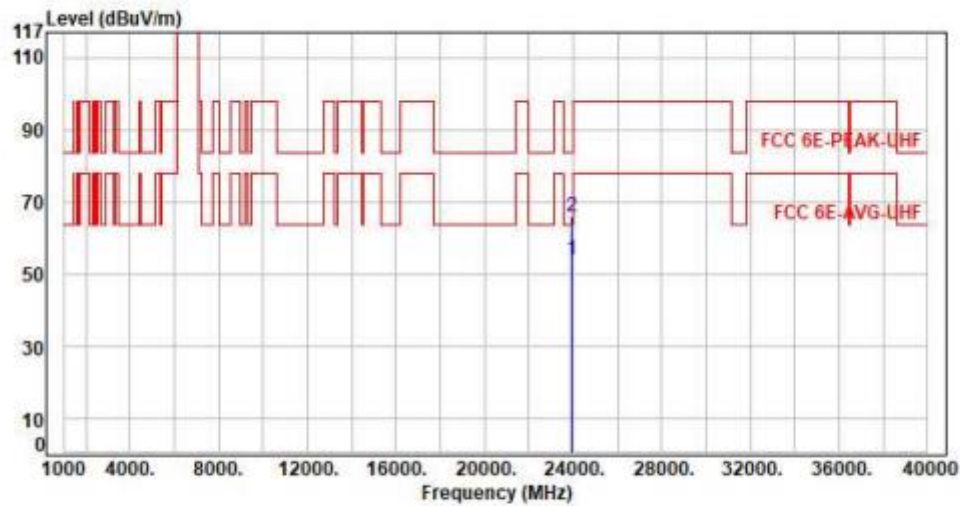

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 23940.00        | 11.24       | 42.77          | 54.01          | 63.54          | -9.53       | Average  | 150         | 360           | P   |
| 2   | 23940.00        | 11.24       | 54.65          | 65.89          | 83.54          | -17.65      | Peak     | 150         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor