


EMC TEST REPORT

Applicant	Copeland Comfort Control Lp
FCC ID	2A4JN-OS01-SG5468
Product	outdoor remote sensor
Brand	Sensi
Model	OS01-SG
Report No.	EFTA25021415-IE-10-E1
Issue Date	May 14, 2026

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2025)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.



Prepared by: Liu Wei



Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory	4
1.1	Notes of the Test Report.....	4
1.2	Test Facility	4
1.3	Testing Location.....	4
2	General Description of Equipment Under Test	5
2.1	Applicant and Manufacturer Information	5
2.2	General Information	5
2.3	Applied Standards	6
2.4	Test Mode	7
3	Test Case Results	8
3.1	Radiated Emission.....	8
3.2	Conducted Emission.....	13
4	Uncertainty Measurement.....	15
5	Main Test Instruments	16
6	The EUT Appearance.....	17
7	Test Setup Photos	18
8	Product Change Description	19

Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	NA ^{Note 1}
Date of Testing: December 20, 2024 ~ December 23, 2024			
Date of Sample Received: November 3, 2024			
Note:			
1. The equipment is not connected to the public network, so test items do not apply.			
The conformity assessment in this report is based on a direct comparison of the test results with the limits by Eurofins TA Technology (Shanghai) Co., Ltd., without considering measurement uncertainty.			

OS01-SG (FCC ID: 2A4JN-OS01-SG5468) is a variant model of RS01-SG (FCC ID: 2A4JN-OS01-SG5468).

Detailed changes are listed below:

This design is based on the indoor remote sensor RS01-SG (FCC ID: 2A4JN-OS01-SG5468), The PCB design of the above is exactly the same no change for PCB layout while add conformal coating on the component side, change from AAA battery to AA battery; reskin the plastic cover, base; add bracket, middle button.

Considering to the difference, after technical assessment, this product only tested Radiated Emission based on the worst case of the original report.

The detailed product change description please refers to the Difference Declaration Letter.

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Kain.Xu@cpt.eurofinscn.com

2 General Description of Equipment Under Test

2.1 Applicant and Manufacturer Information

Applicant	Copeland Comfort Control Lp
Applicant address	8100 West Florissant Ave, St. Louis, United States of America
Manufacturer	Copeland Comfort Control Lp
Manufacturer address	8100 West Florissant Ave, St. Louis, United States of America

2.2 General Information

EUT Description			
Device Type	Movable Device		
Model	OS01-SG		
Lab internal SN	R2301A0085/S01		
HW Version	0059-5468		
SW Version	0170-1641v01_02_0x66		
Power Rating	DC 3.0V		
Connecting I/O Port(s)	Please refer to the User's Manual.		
Antenna Type	PCB Antenna		
Frequency	Band	Tx (MHz)	Rx (MHz)
	Model 900MHz	902.46 ~ 927.54	902.46 ~ 927.54
EUT Accessory			
Battery	Manufacturer: Energizer Model: AA E91		
BASE	Manufacturer: Copeland ComfortControl Lp PN: 0004 202900 (4.437" x 3.115" x 0.664")		
Cover	Manufacturer: Copeland ComfortControl Lp PN: 0016 931200 (4.638" x 3.115" x 0.772")		
Bracket	Manufacturer: Copeland ComfortControl Lp PN: 0006 228200 (2.68" x 2.2" x 0.679")		
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.			

2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2025)

ANSI C63.4-2014

2.4 Test Mode

Test Mode	
Mode 1	BATTERY + EUT + Sub-G + Receiver

Test Type	Test Mode	Worst Mode
Radiated Emission	Mode 1	Mode 1
Conducted Emission	--	--
After technical evaluation or/and preliminary test, the test data of the worst-case condition was recorded in this report.		

3 Test Case Results

3.1 Radiated Emission

Ambient Condition

Temperature	Relative humidity	Pressure
15°C~35°C	30%~60%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Test Setup

Below 1GHz

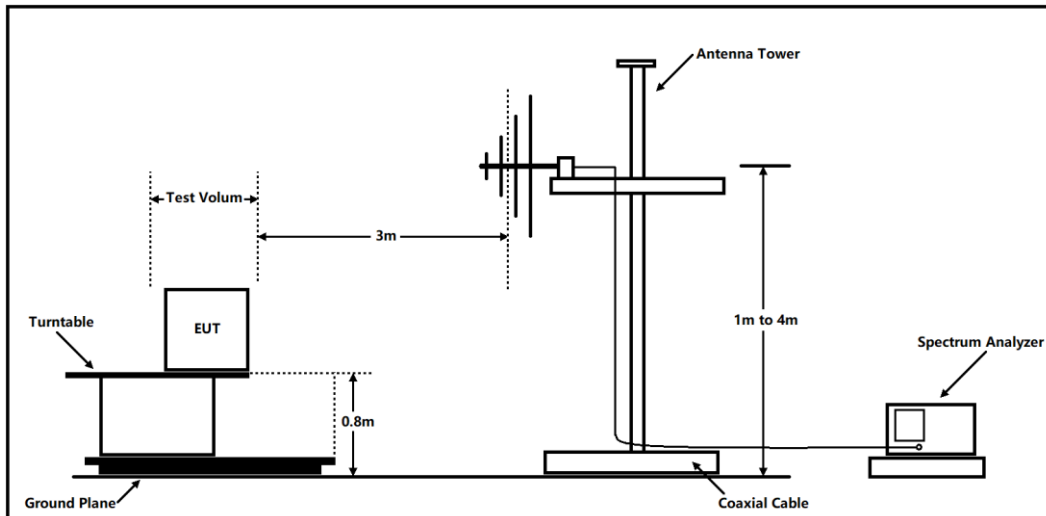

Above 1GHz

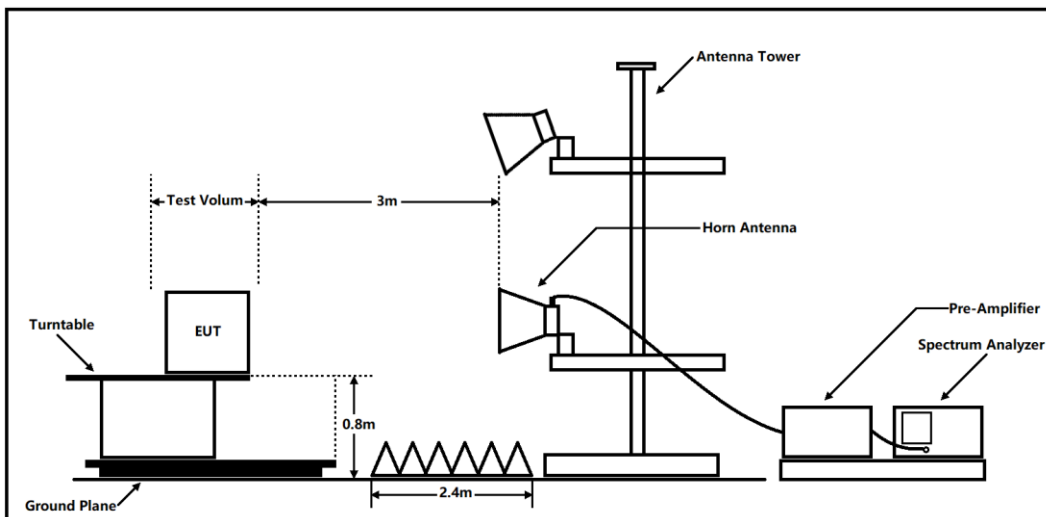

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits**Class B**


Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

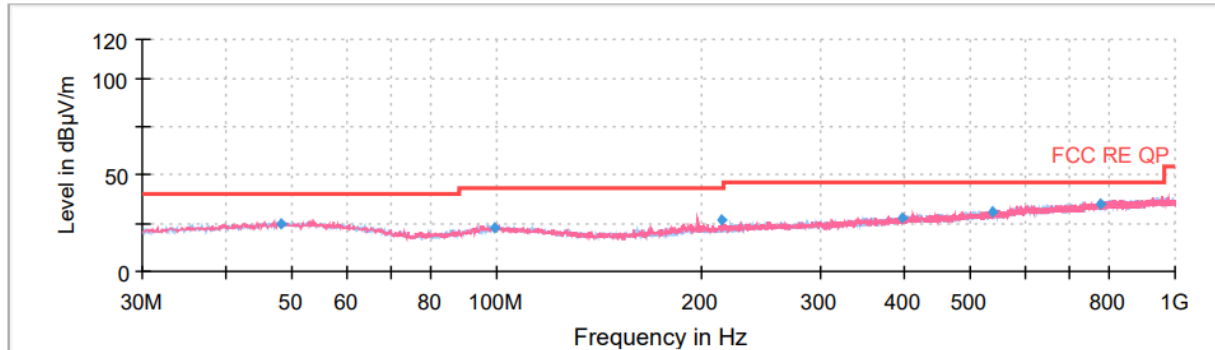


QP Level @Spectrum Overview H QP Level @Spectrum Overview V QP Level @Final Results QP Limit

Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
47.90	24.78	40.00	15.22	123.0	V	316.00	20
99.55	23.02	43.50	20.48	100.0	V	164.00	19
214.54	27.05	43.50	16.45	207.0	V	160.00	18
397.12	27.53	46.00	18.47	222.0	V	113.00	23
538.65	30.69	46.00	15.31	177.0	V	263.00	26
774.78	35.09	46.00	10.91	116.0	V	120.00	30

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

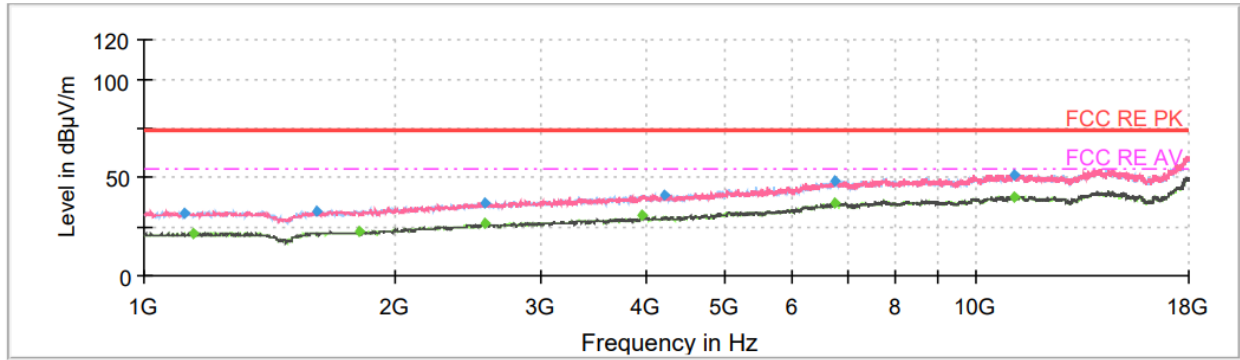

~ PK Level @Spectrum Overview H
 ~ PK Level @Spectrum Overview V
 ◆ PK Level @Final Results
 --- PK Limit
~ AVG Level @Spectrum Overview H
 ~ AVG Level @Spectrum Overview V
 ◆ AVG Level @Final Results
 --- AVG Limit

Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1119.00	32.18	---	74.00	41.82	500.00	100.0	V	156.00	-15
1144.50	---	21.78	54.00	32.22	500.00	200.0	H	0.00	-15
1612.00	33.28	---	74.00	40.72	500.00	200.0	V	240.00	-12
1811.75	---	22.07	54.00	31.93	500.00	100.0	H	120.00	-11
2564.00	---	26.19	54.00	27.81	500.00	200.0	H	293.00	-7
2566.13	37.34	---	74.00	36.66	500.00	200.0	V	18.00	-7
3962.25	---	30.26	54.00	23.74	500.00	200.0	H	346.00	-4
4223.63	41.37	---	74.00	32.63	500.00	200.0	H	253.00	-3
6765.13	48.23	---	74.00	25.77	500.00	200.0	V	8.00	5
6769.38	---	36.88	54.00	17.12	500.00	100.0	H	230.00	5
11091.63	---	40.35	54.00	13.65	500.00	200.0	V	131.00	9
11108.63	51.63	---	74.00	22.37	500.00	100.0	H	216.00	9

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Peak Margin = Limit –MAX Peak/ Average

3.2 Conducted Emission


Ambient Condition

Temperature	Relative humidity	Pressure
15°C~35°C	30%~60%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

Test Setup

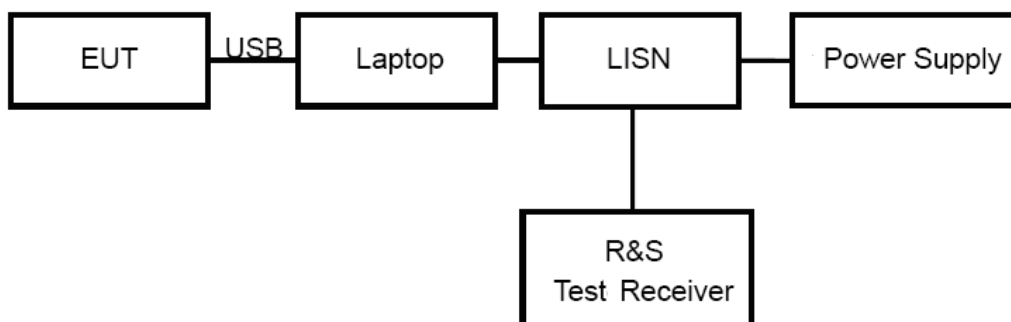

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Test Results

This is product provide by battery, not applicable conducted emission.

4 Uncertainty Measurement

Case	Uncertainty	Factor k
Radiated Emission 30MHz – 200MHz	4.17 dB	1.96
Radiated Emission 200MHz – 1GHz	4.84 dB	1.96
Radiated Emission 1GHz – 18GHz	4.35 dB	1.96

5 Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESCI3	100948	2024-05-07	2025-05-06
Signal Analyzer	R&S	FSV40	101186	2024-05-07	2025-05-06
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2023-07-14	2026-07-13
Horn Antenna	SCHWARZBECK	BBHA 9120D	430	2024-07-18	2027-07-17
Amplifier	MWPA.CN	MWLA-010200G 40	YQ2103039B0 1	2024-05-07	2025-05-06
Software	R&S	EMC32	9.26.01	/	/

*****END OF REPORT *****

6 The EUT Appearance

Refer to *EUT Appearance*.

7 Test Setup Photos

Refer to *EMC Test Setup*.

8 Product Change Description

Refer to Product Change Description.