

FCC Appendix RF Test Data for 5.3GWIFI

Product Name: Smart Diagnostic System

Test Model: VD800

Environmental Conditions


Temperature:	24.2° C
Relative Humidity:	53.2%
ATM Pressure:	100.0 kPa
Test Engineer:	Zoey Cao
Supervised by:	Eric Wang

1. -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant1	29.49	---	Pass
NVNT	a	5300	Ant1	27.649	---	Pass
NVNT	a	5320	Ant1	28.819	---	Pass
NVNT	n20	5260	Ant1	28.571	---	Pass
NVNT	n20	5300	Ant1	28.745	---	Pass
NVNT	n20	5320	Ant1	27.902	---	Pass
NVNT	n40	5270	Ant1	51.804	---	Pass
NVNT	n40	5310	Ant1	48.252	---	Pass
NVNT	ac20	5260	Ant1	28.016	---	Pass
NVNT	ac20	5300	Ant1	28.655	---	Pass
NVNT	ac20	5320	Ant1	28.21	---	Pass
NVNT	ac40	5270	Ant1	50.563	---	Pass
NVNT	ac40	5310	Ant1	53.597	---	Pass
NVNT	ac80	5290	Ant1	85.189	---	Pass

Test Graphs


-26dB Bandwidth NVNT a 5260MHz Ant1

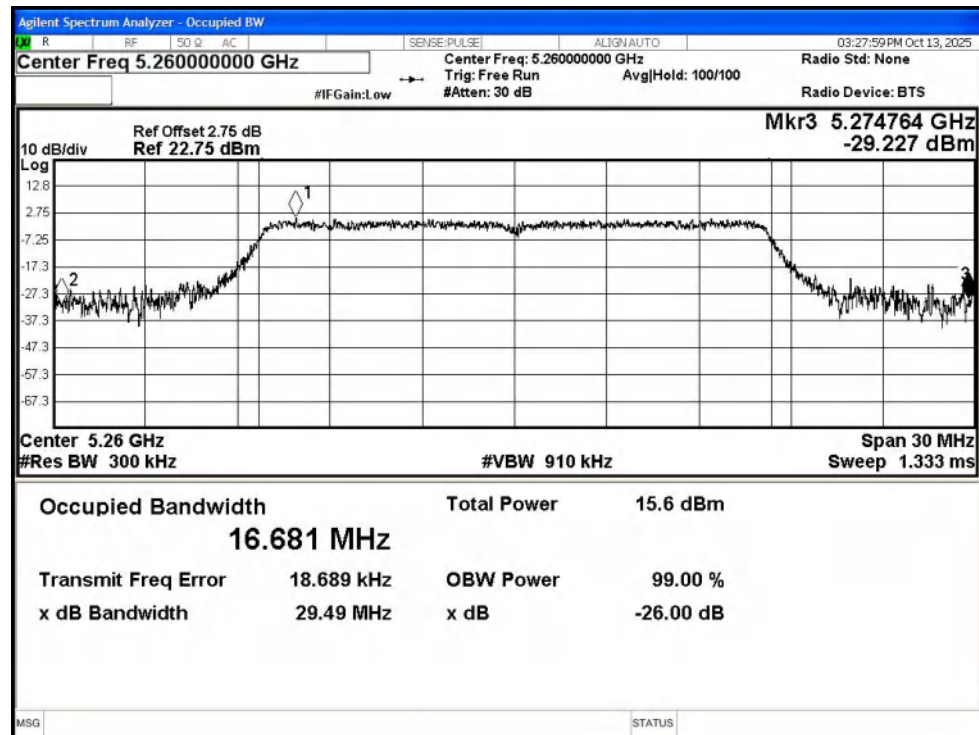


-26dB Bandwidth NVNT a 5300MHz Ant1

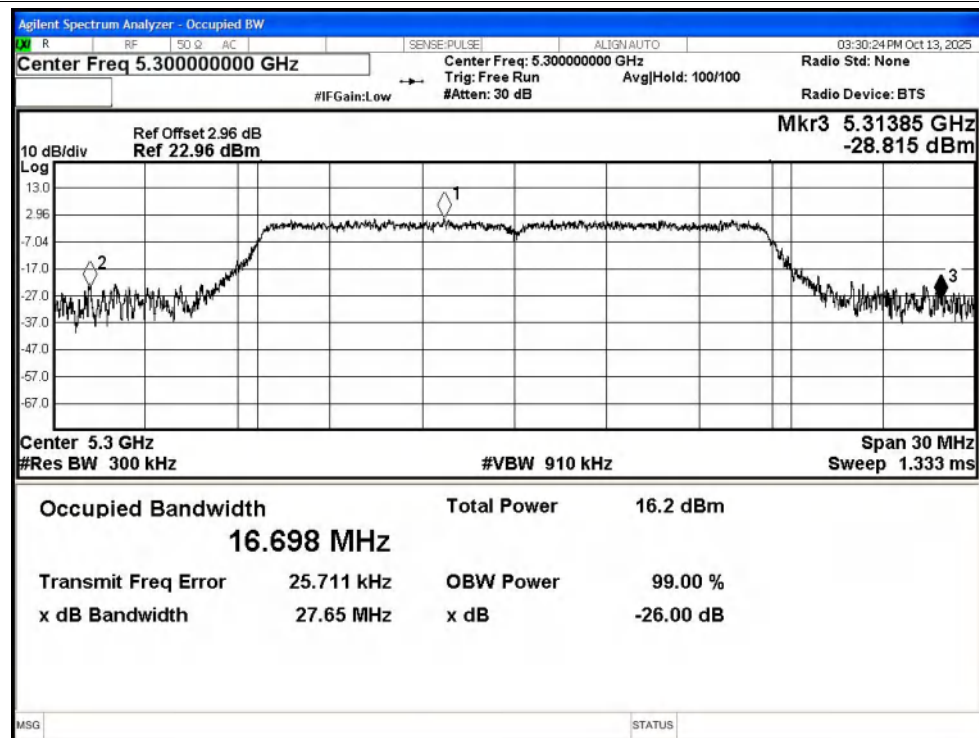


-26dB Bandwidth NVNT a 5320MHz Ant1

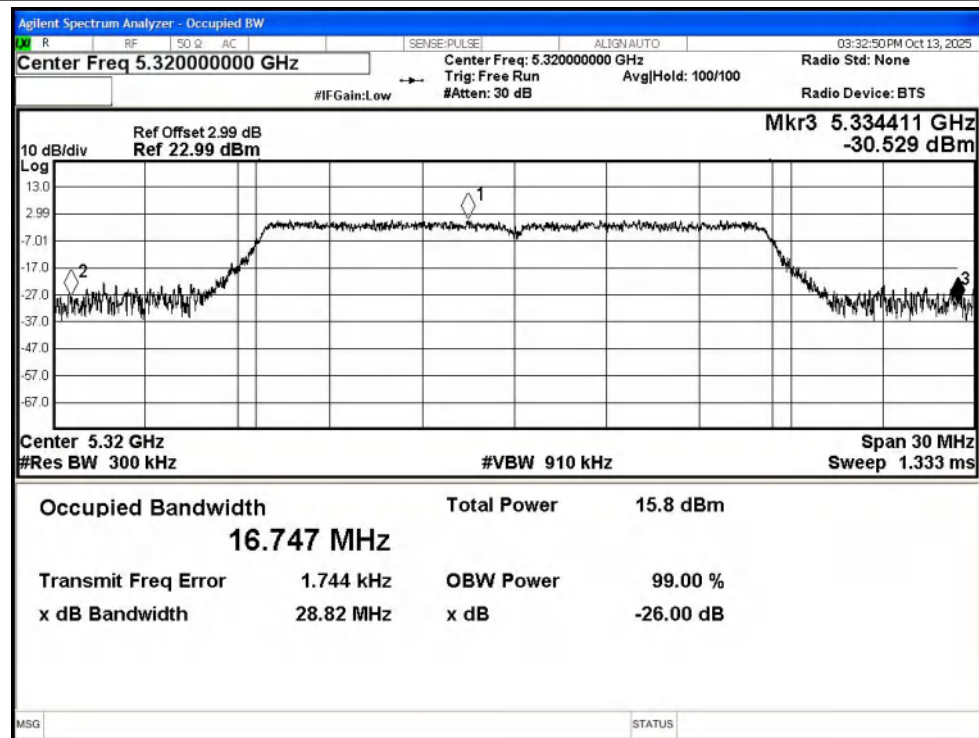


-26dB Bandwidth NVNT n20 5260MHz Ant1

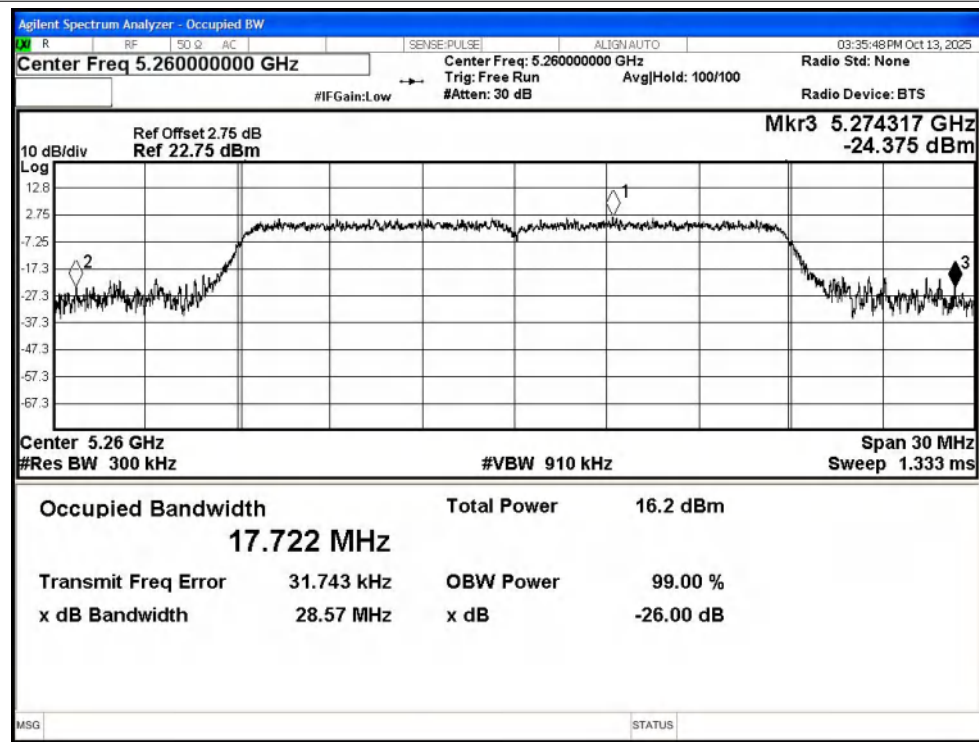


-26dB Bandwidth NVNT n20 5300MHz Ant1

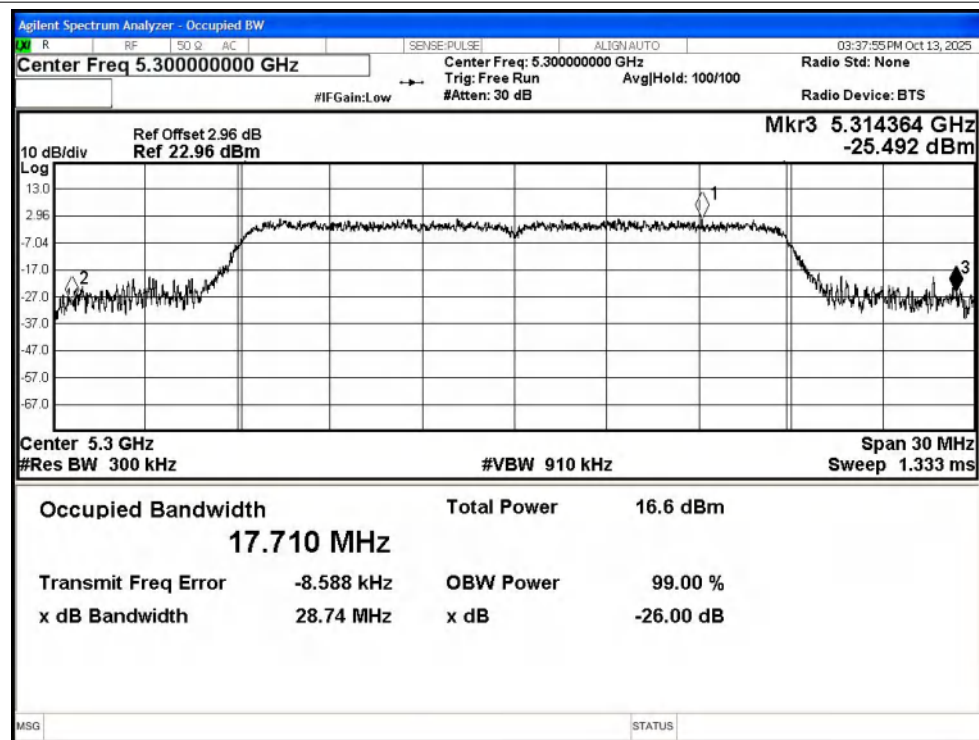


-26dB Bandwidth NVNT n20 5320MHz Ant1

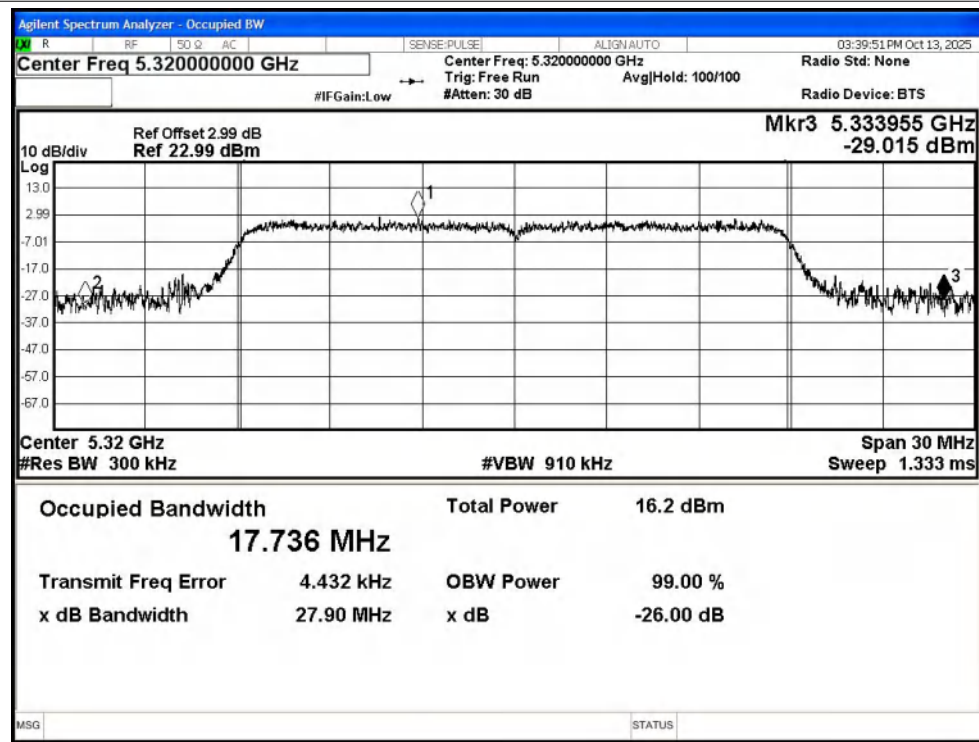


-26dB Bandwidth NVNT n40 5270MHz Ant1

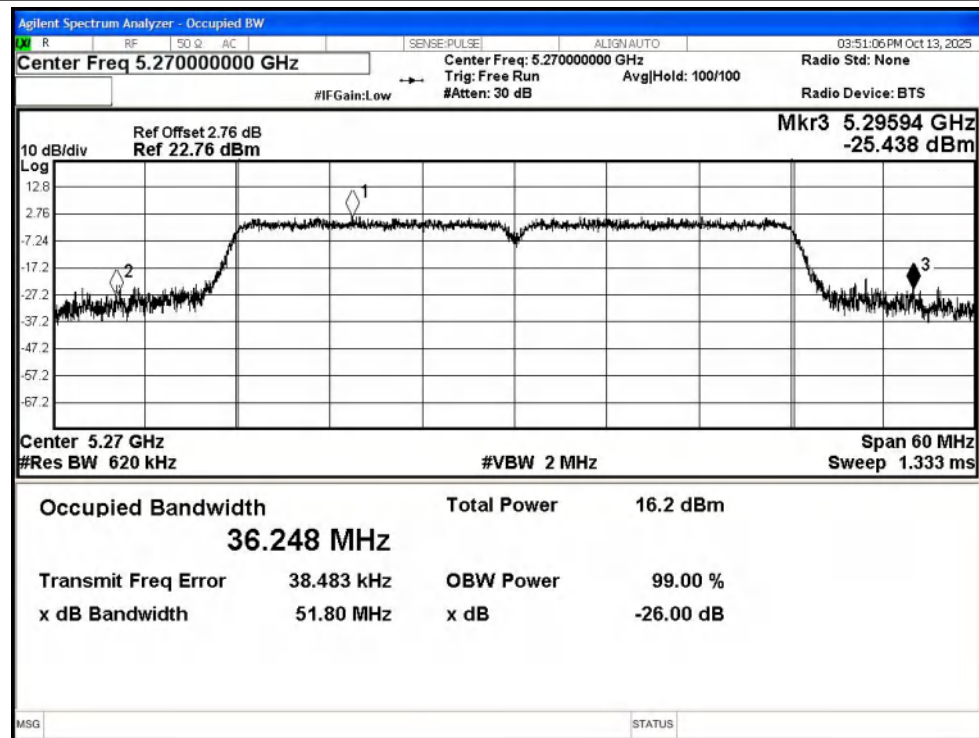


-26dB Bandwidth NVNT n40 5310MHz Ant1

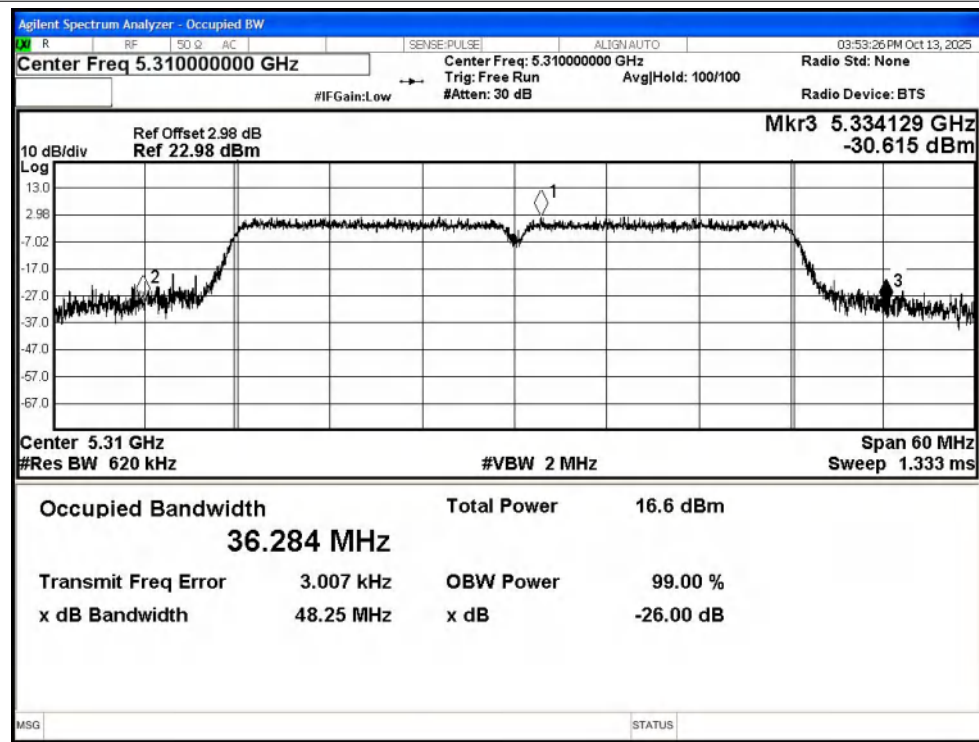


-26dB Bandwidth NVNT ac20 5260MHz Ant1

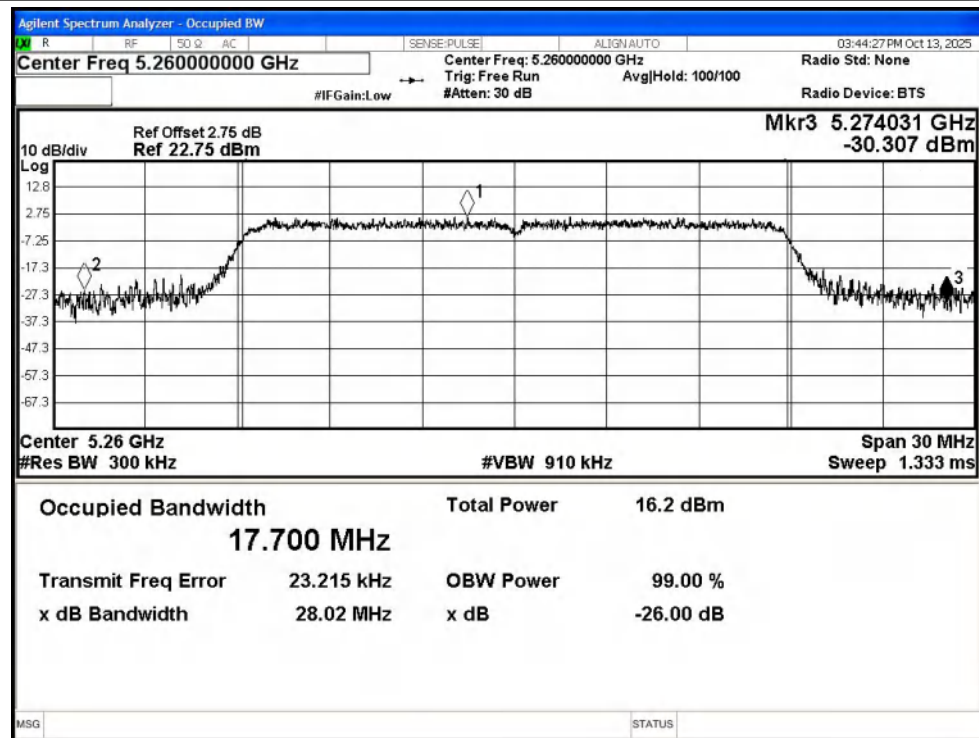


-26dB Bandwidth NVNT ac20 5300MHz Ant1

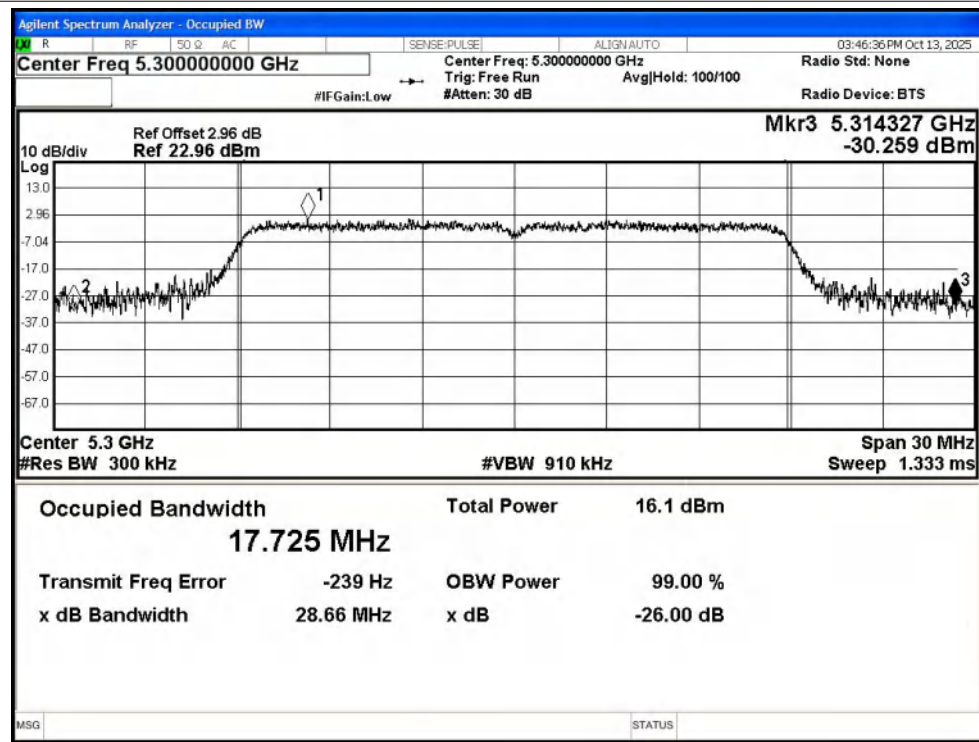


-26dB Bandwidth NVNT ac20 5320MHz Ant1

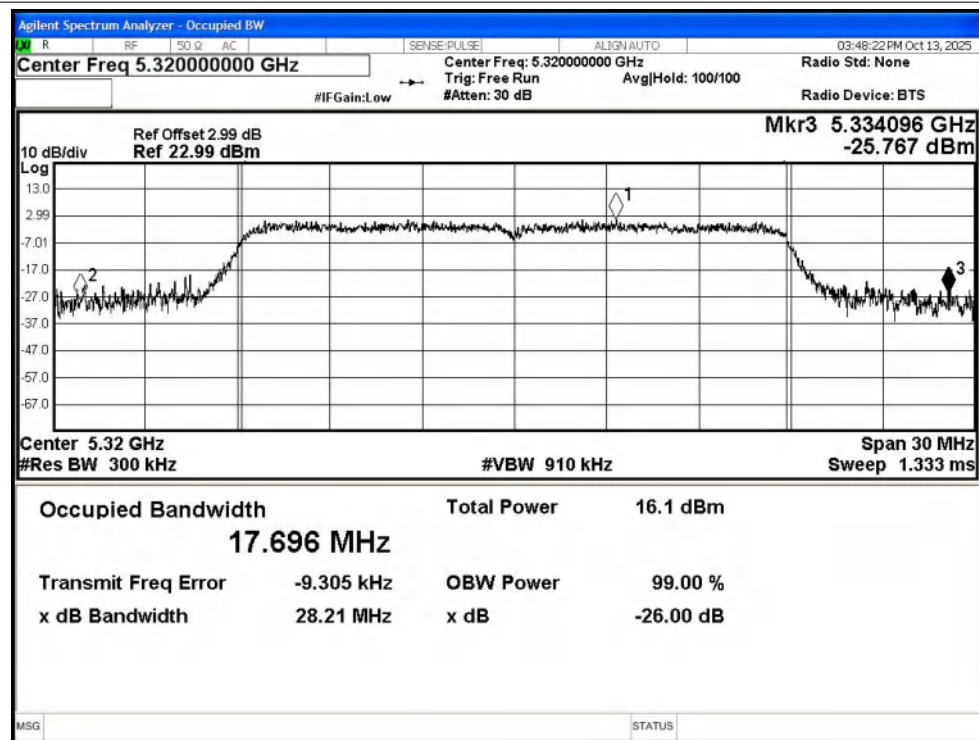


-26dB Bandwidth NVNT ac40 5270MHz Ant1

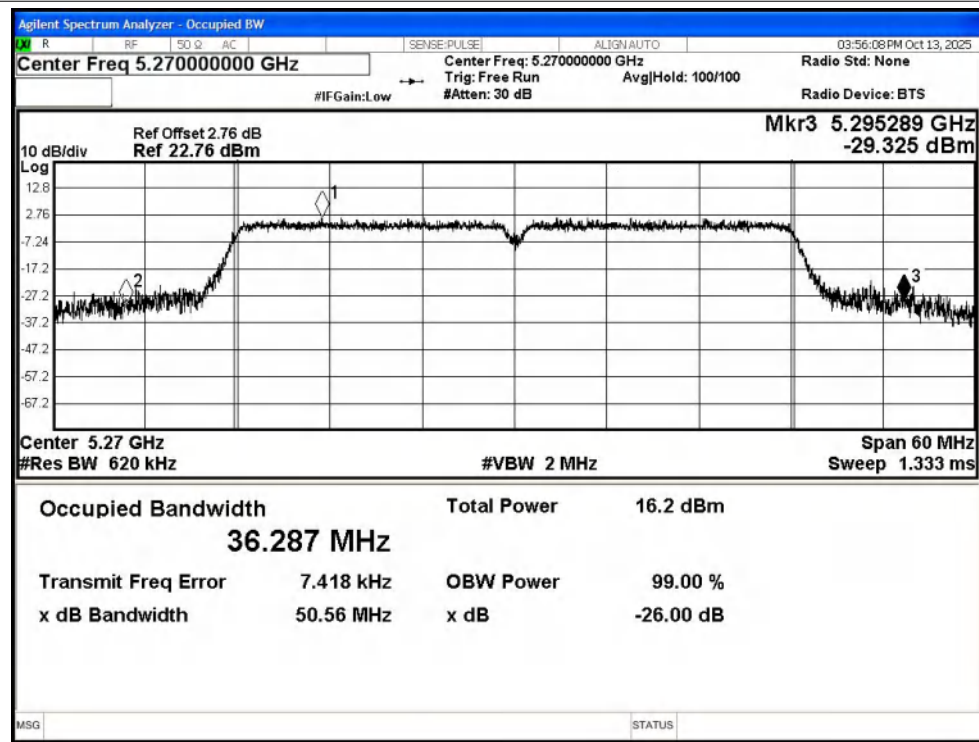

-26dB Bandwidth NVNT ac40 5310MHz Ant1

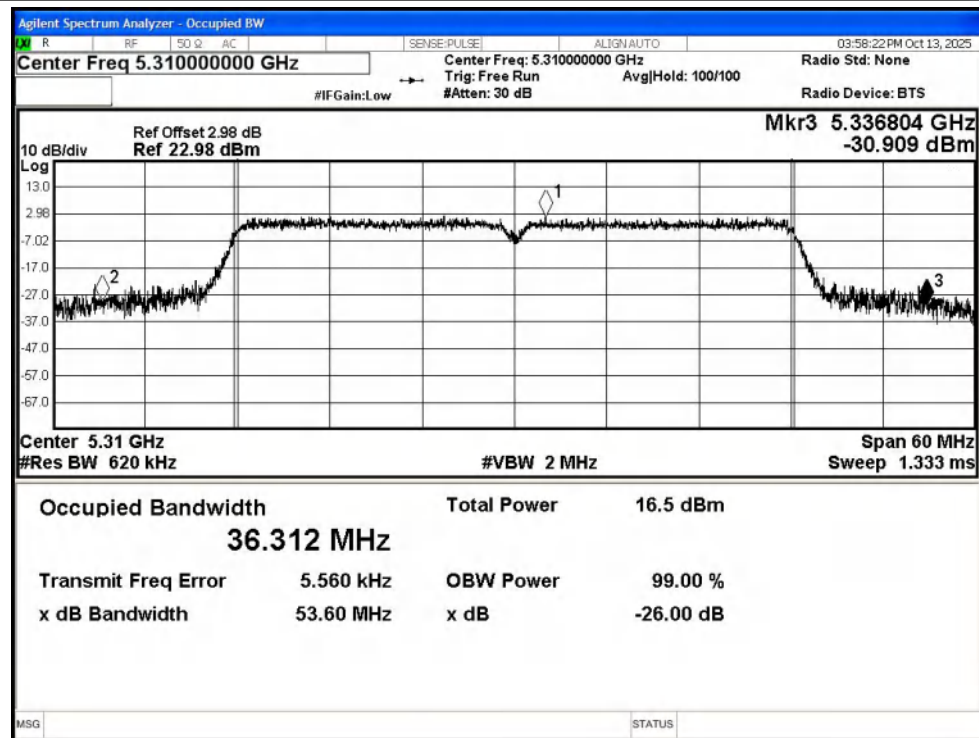

-26dB Bandwidth NVNT ac80 5290MHz Ant1

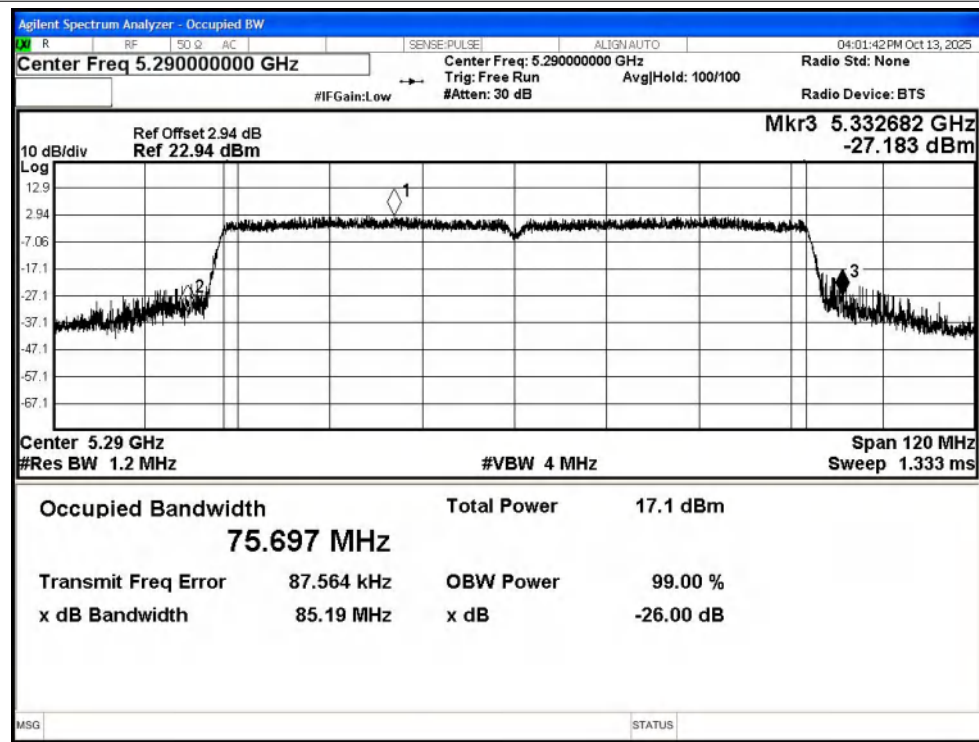

2. Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	10.09	0.1	10.19	24	Pass
NVNT	a	5300	Ant1	10.68	0.1	10.78	24	Pass
NVNT	a	5320	Ant1	10.28	0.1	10.38	24	Pass
NVNT	n20	5260	Ant1	10.26	0.11	10.37	24	Pass
NVNT	n20	5300	Ant1	10.61	0.12	10.73	24	Pass
NVNT	n20	5320	Ant1	10.65	0.12	10.77	24	Pass
NVNT	n40	5270	Ant1	9.62	0.23	9.85	24	Pass
NVNT	n40	5310	Ant1	10.47	0.23	10.7	24	Pass
NVNT	ac20	5260	Ant1	10.24	0.11	10.35	24	Pass
NVNT	ac20	5300	Ant1	10.69	0.11	10.8	24	Pass
NVNT	ac20	5320	Ant1	10.64	0.11	10.75	24	Pass
NVNT	ac40	5270	Ant1	9.69	0.23	9.92	24	Pass
NVNT	ac40	5310	Ant1	10.43	0.23	10.66	24	Pass
NVNT	ac80	5290	Ant1	10.2	0.47	10.67	24	Pass

3. Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5260	Ant1	-0.45	0.1	-0.35	11	Pass
NVNT	a	5300	Ant1	0.02	0.1	0.12	11	Pass
NVNT	a	5320	Ant1	0.03	0.1	0.13	11	Pass
NVNT	n20	5260	Ant1	-0.05	0.11	0.06	11	Pass
NVNT	n20	5300	Ant1	0.07	0.12	0.19	11	Pass
NVNT	n20	5320	Ant1	-0.31	0.12	-0.19	11	Pass
NVNT	n40	5270	Ant1	-4.15	0.23	-3.92	11	Pass
NVNT	n40	5310	Ant1	-3.68	0.23	-3.45	11	Pass
NVNT	ac20	5260	Ant1	0.14	0.11	0.25	11	Pass
NVNT	ac20	5300	Ant1	-0.22	0.11	-0.11	11	Pass
NVNT	ac20	5320	Ant1	-0.19	0.11	-0.08	11	Pass
NVNT	ac40	5270	Ant1	-4.02	0.23	-3.79	11	Pass
NVNT	ac40	5310	Ant1	-3.62	0.23	-3.39	11	Pass
NVNT	ac80	5290	Ant1	-6.83	0.47	-6.36	11	Pass

Test Graphs


PSD NVNT a 5260MHz Ant1

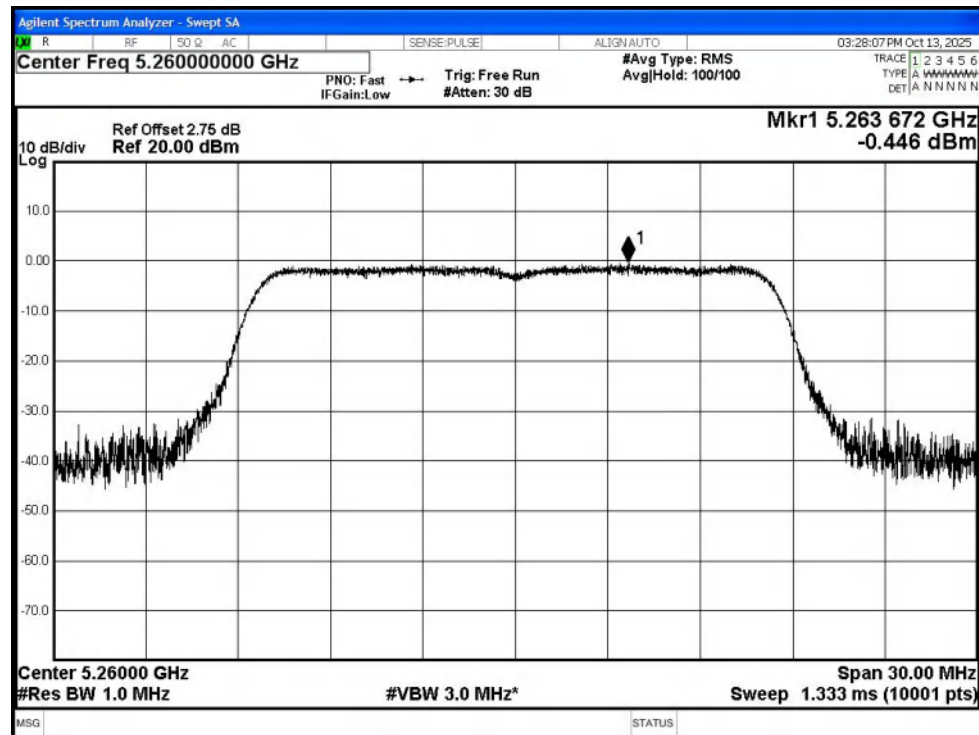


PSD NVNT a 5300MHz Ant1

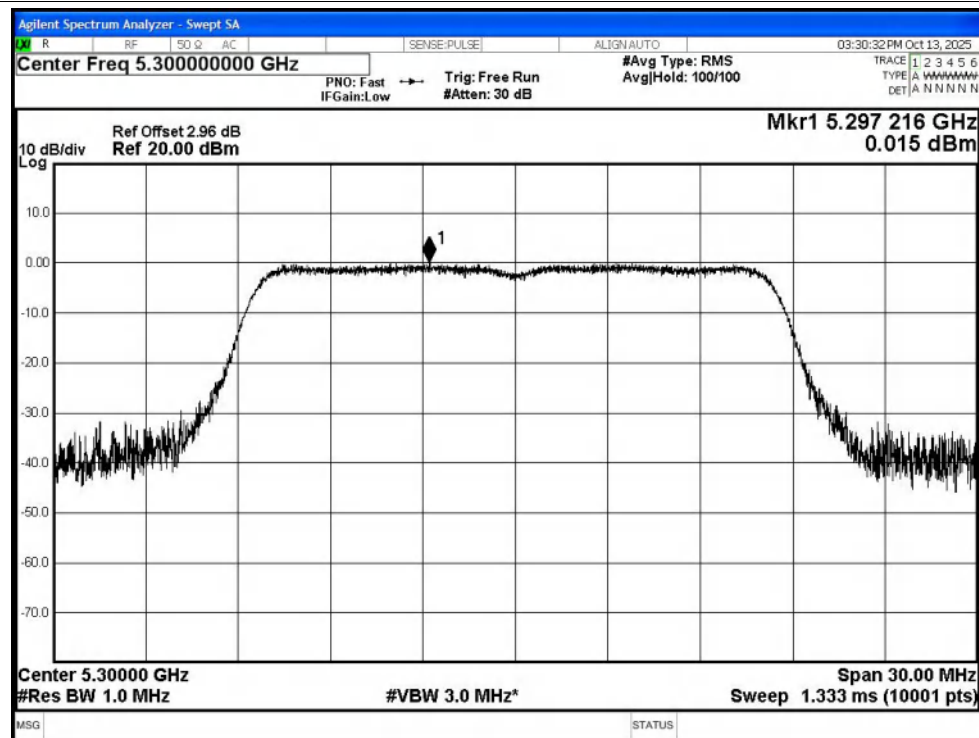


PSD NVNT a 5320MHz Ant1

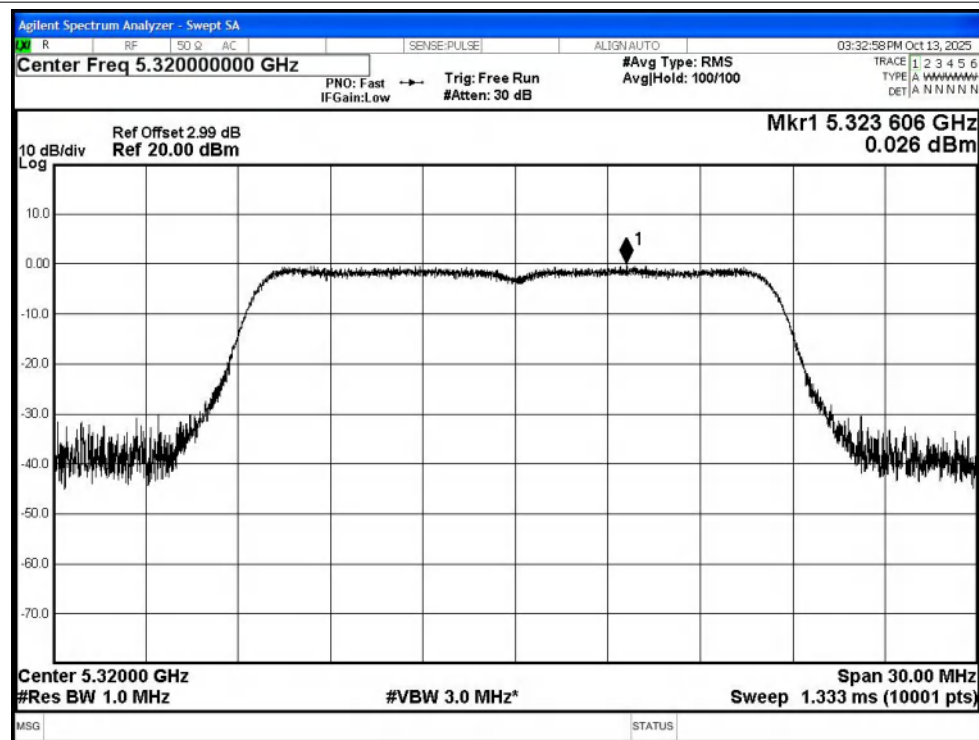


PSD NVNT n20 5260MHz Ant1

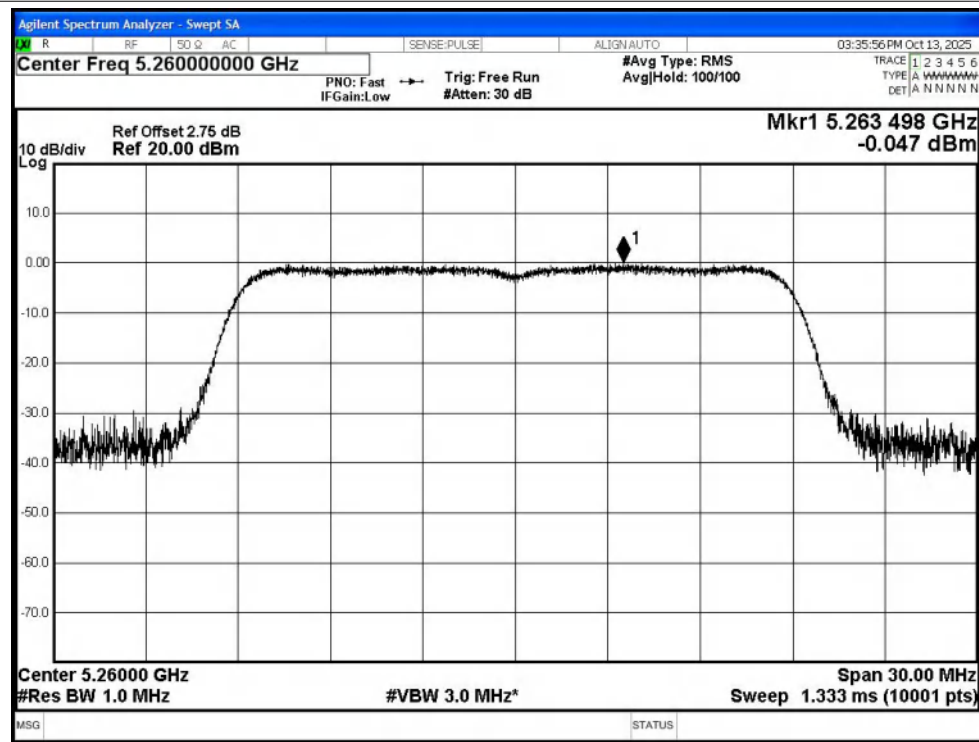


PSD NVNT n20 5300MHz Ant1

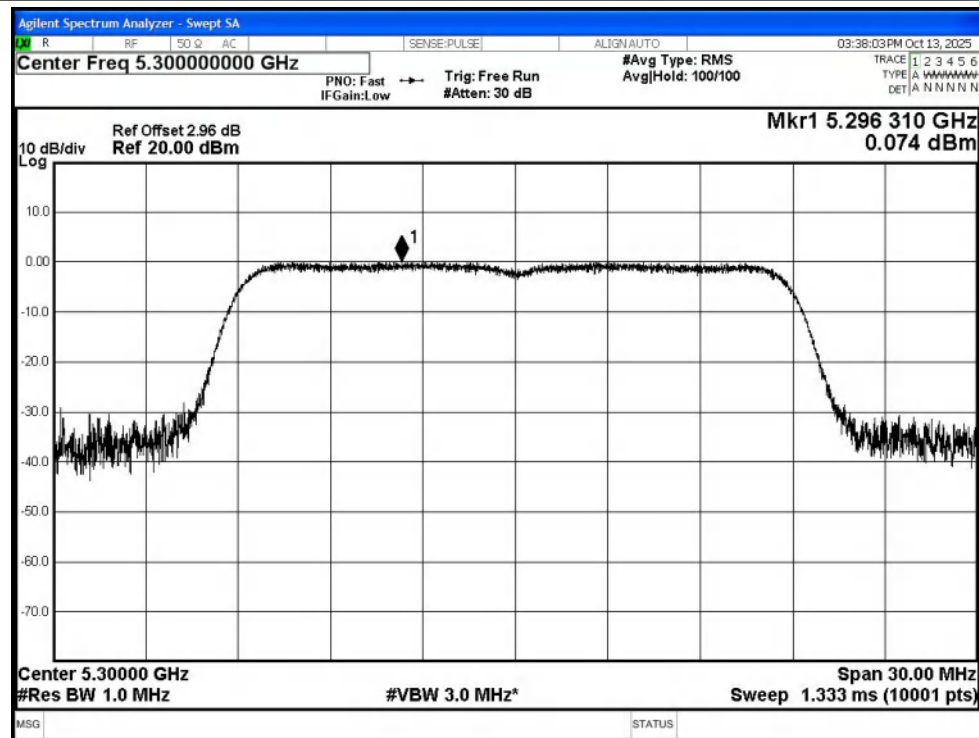


PSD NVNT n20 5320MHz Ant1

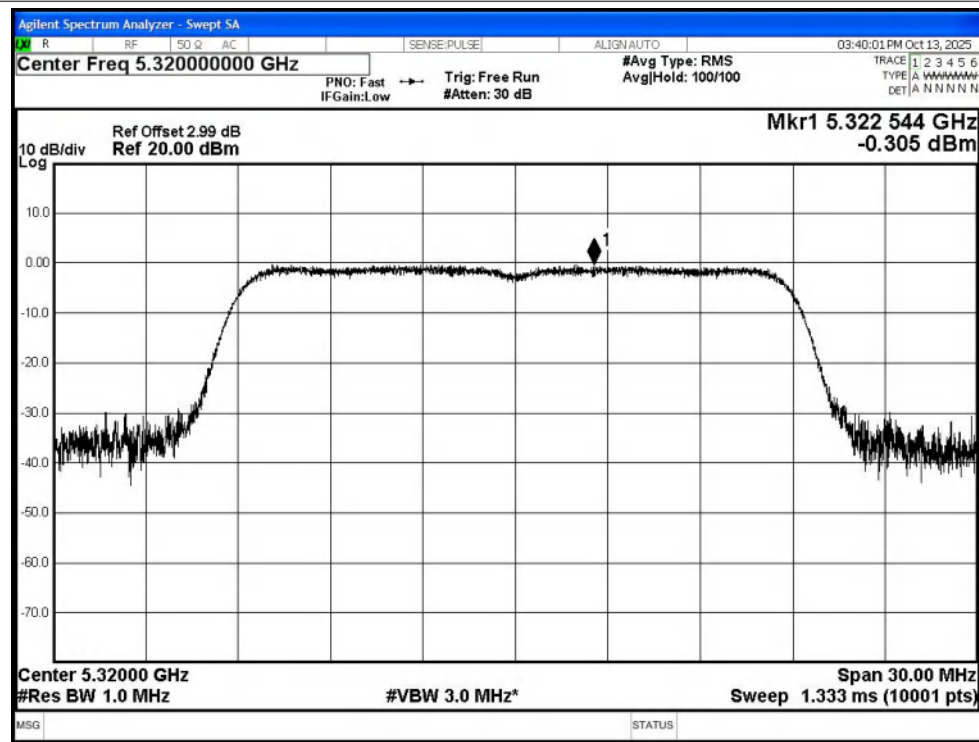


PSD NVNT n40 5270MHz Ant1

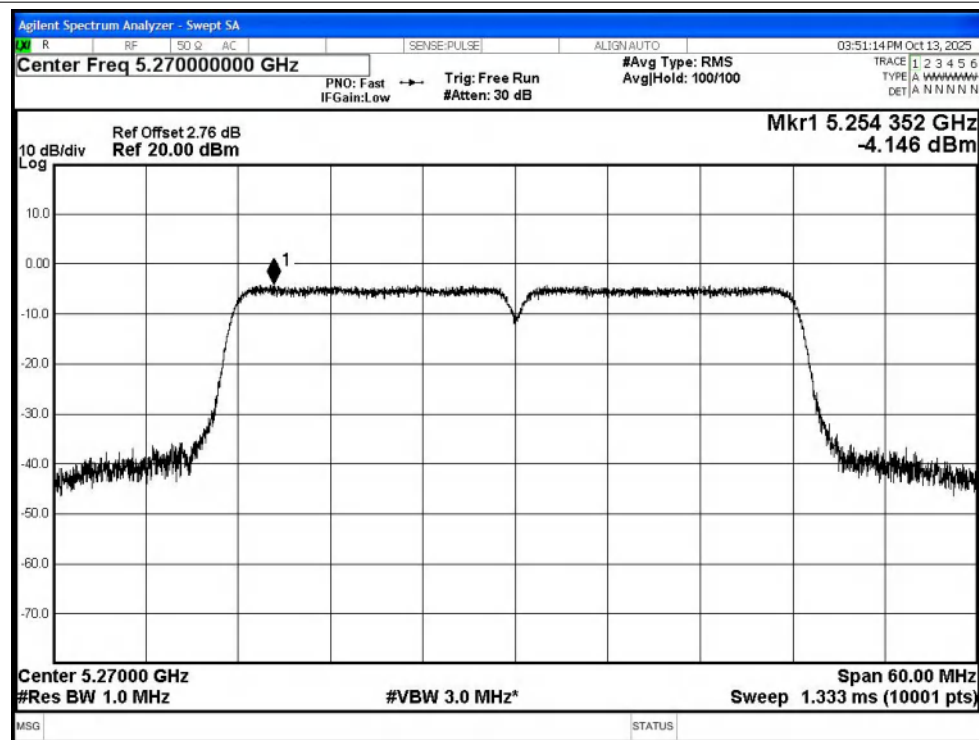


PSD NVNT n40 5310MHz Ant1

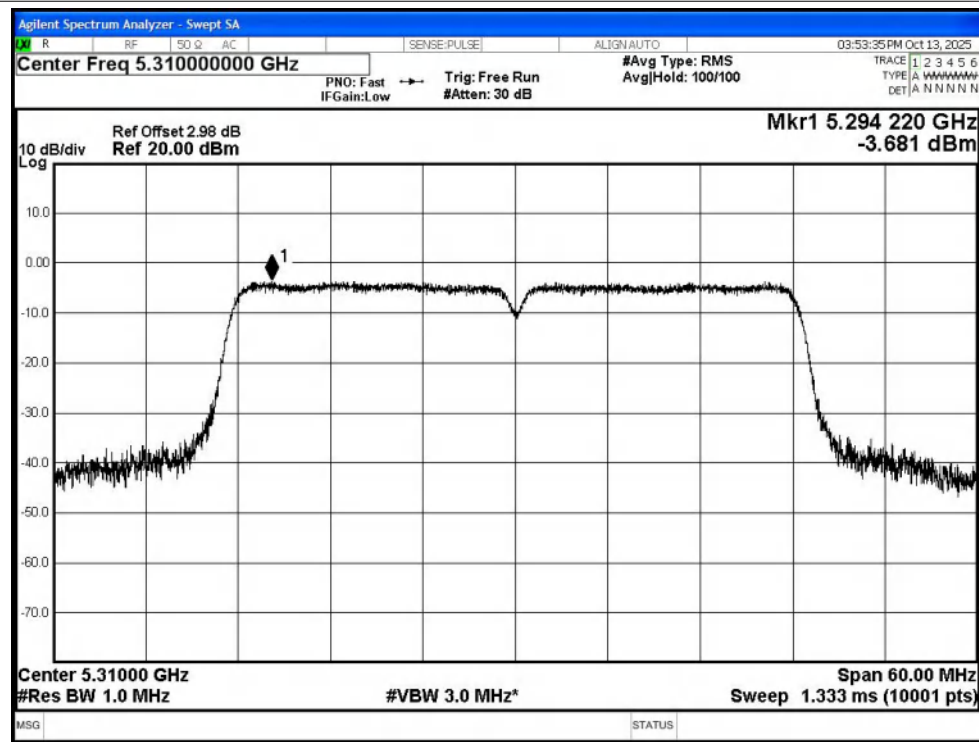


PSD NVNT ac20 5260MHz Ant1

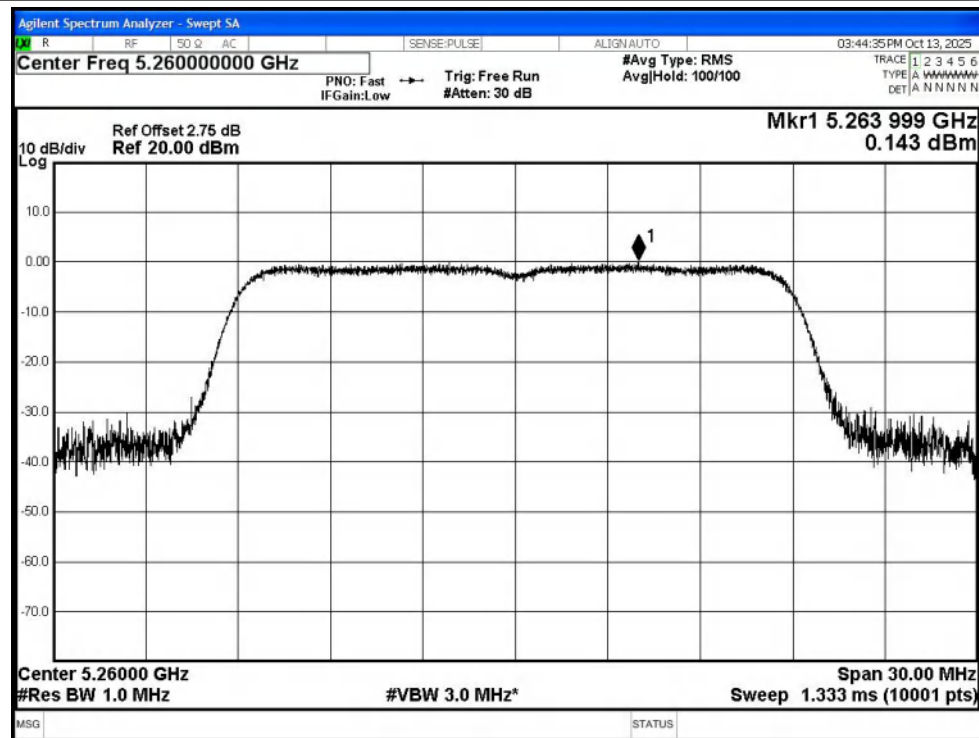


PSD NVNT ac20 5300MHz Ant1

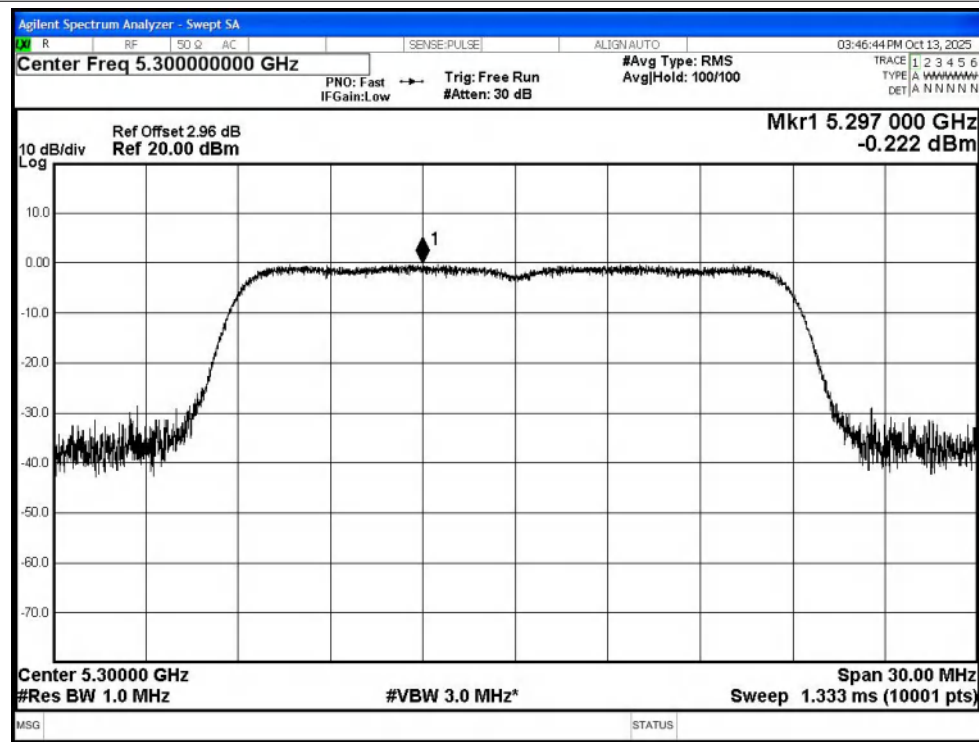


PSD NVNT ac20 5320MHz Ant1

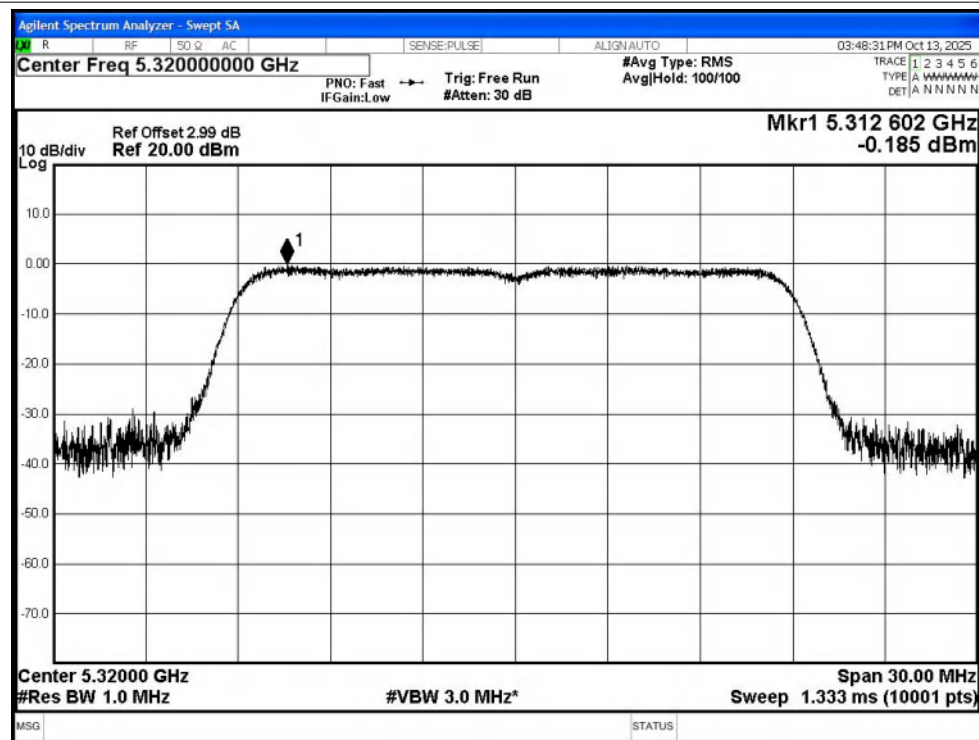


PSD NVNT ac40 5270MHz Ant1

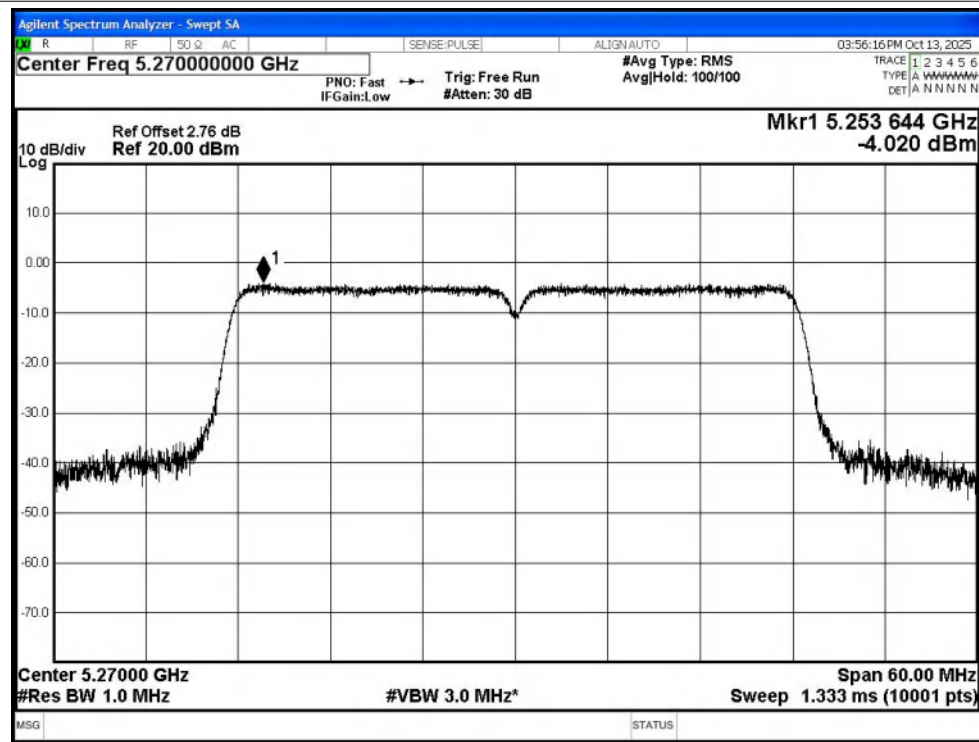

PSD NVNT ac40 5310MHz Ant1

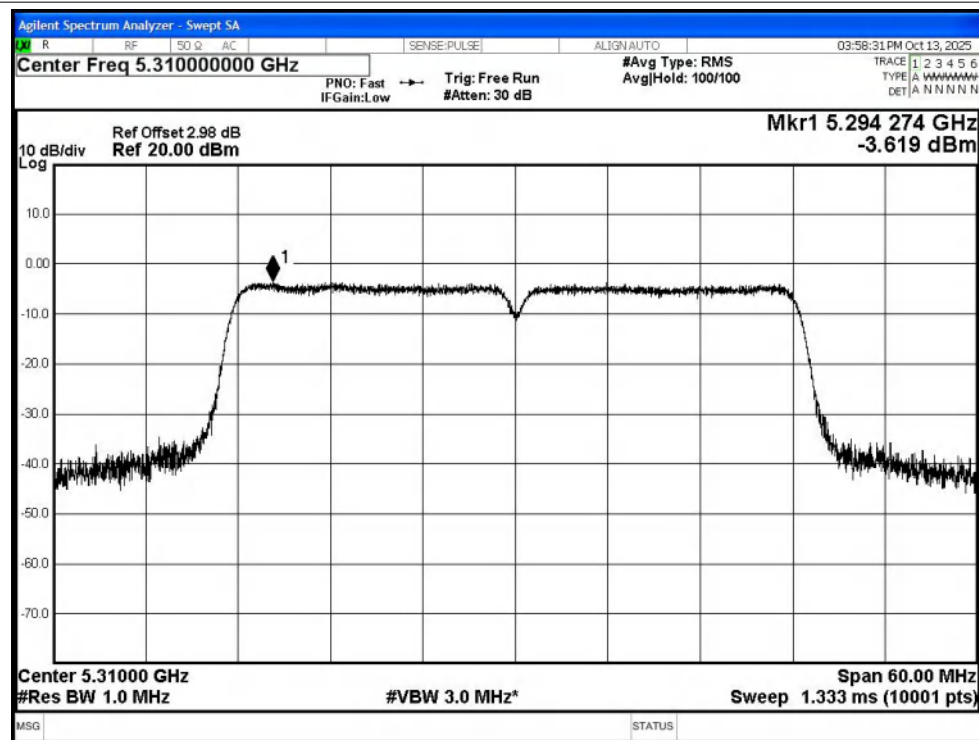

PSD NVNT ac80 5290MHz Ant1

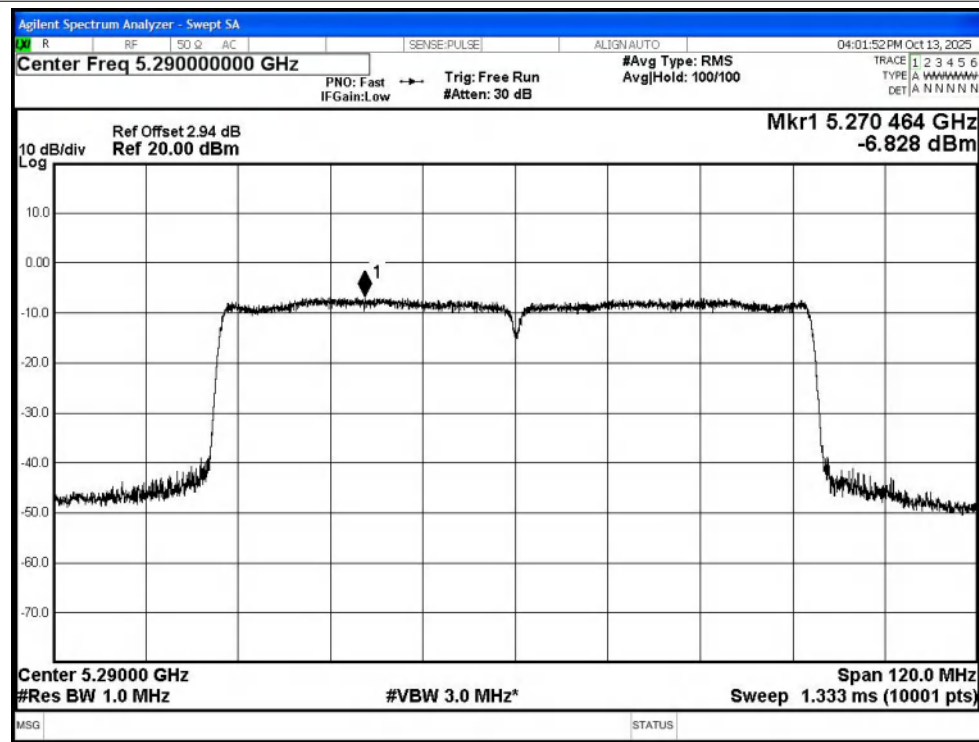


4. Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5260	Ant1	4500	-49.87	2.57	-	47.93	Peak	68.2	Pass
NVNT	a	5260	Ant1	4500	-59.03	2.57	0.1	38.87	Average	54	Pass
NVNT	a	5260	Ant1	5027.28	-46.31	2.57	-	51.49	Peak	68.2	Pass
NVNT	a	5260	Ant1	4787.82	-55.14	2.57	0.1	42.76	Average	54	Pass
NVNT	a	5260	Ant1	5150	-48.6	2.57	-	49.20	Peak	68.2	Pass
NVNT	a	5260	Ant1	5150	-56.51	2.57	0.1	41.39	Average	54	Pass
NVNT	a	5320	Ant1	5350	-37.46	2.57	-	60.34	Peak	68.2	Pass
NVNT	a	5320	Ant1	5350	-49.95	2.57	0.1	47.95	Average	54	Pass
NVNT	a	5320	Ant1	5350.2	-34.72	2.57	-	63.08	Peak	68.2	Pass
NVNT	a	5320	Ant1	5350.4	-49.45	2.57	0.1	48.45	Average	54	Pass
NVNT	a	5320	Ant1	5460	-50.37	2.57	-	47.43	Peak	68.2	Pass
NVNT	a	5320	Ant1	5460	-57.95	2.57	0.1	39.95	Average	54	Pass
NVNT	n20	5260	Ant1	4500	-52.25	2.57	-	45.55	Peak	68.2	Pass
NVNT	n20	5260	Ant1	4500	-59.39	2.57	0.11	38.52	Average	54	Pass
NVNT	n20	5260	Ant1	4772.22	-44.28	2.57	-	53.52	Peak	68.2	Pass
NVNT	n20	5260	Ant1	4787.82	-54.35	2.57	0.11	43.56	Average	54	Pass
NVNT	n20	5260	Ant1	5150	-47.91	2.57	-	49.89	Peak	68.2	Pass
NVNT	n20	5260	Ant1	5150	-56.56	2.57	0.11	41.35	Average	54	Pass
NVNT	n20	5320	Ant1	5350	-36.64	2.57	-	61.16	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5350	-48.76	2.57	0.12	49.16	Average	54	Pass
NVNT	n20	5320	Ant1	5350.2	-32.5	2.57	-	65.30	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5350	-48.76	2.57	0.12	49.16	Average	54	Pass
NVNT	n20	5320	Ant1	5460	-49.67	2.57	-	48.13	Peak	68.2	Pass
NVNT	n20	5320	Ant1	5460	-57.93	2.57	0.12	39.99	Average	54	Pass
NVNT	n40	5270	Ant1	4500	-50.07	2.57	-	47.73	Peak	68.2	Pass
NVNT	n40	5270	Ant1	4500	-59.23	2.57	0.23	38.80	Average	54	Pass
NVNT	n40	5270	Ant1	4806.99	-42.46	2.57	-	55.34	Peak	68.2	Pass
NVNT	n40	5270	Ant1	4806.99	-52.11	2.57	0.23	45.92	Average	54	Pass
NVNT	n40	5270	Ant1	5150	-49	2.57	-	48.80	Peak	68.2	Pass
NVNT	n40	5270	Ant1	5150	-56.99	2.57	0.23	41.04	Average	54	Pass
NVNT	n40	5310	Ant1	5350	-39	2.57	-	58.80	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5350	-49.04	2.57	0.23	48.99	Average	54	Pass
NVNT	n40	5310	Ant1	5350.8	-34.82	2.57	-	62.98	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5350.2	-48.86	2.57	0.23	49.17	Average	54	Pass
NVNT	n40	5310	Ant1	5460	-51	2.57	-	46.80	Peak	68.2	Pass
NVNT	n40	5310	Ant1	5460	-58.2	2.57	0.23	39.83	Average	54	Pass
NVNT	ac20	5260	Ant1	4500	-51	2.57	-	46.80	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	4500	-59.35	2.57	0.11	38.56	Average	54	Pass

NVNT	ac20	5260	Ant1	4772.22	-46.11	2.57	-	51.69	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	4787.82	-54.78	2.57	0.11	43.13	Average	54	Pass
NVNT	ac20	5260	Ant1	5150	-48.36	2.57	-	49.44	Peak	68.2	Pass
NVNT	ac20	5260	Ant1	5150	-56.24	2.57	0.11	41.67	Average	54	Pass
NVNT	ac20	5320	Ant1	5350	-35.94	2.57	-	61.86	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5350	-49.45	2.57	0.11	48.46	Average	54	Pass
NVNT	ac20	5320	Ant1	5351.2	-32.71	2.57	-	65.09	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5351	-48	2.57	0.11	49.91	Average	54	Pass
NVNT	ac20	5320	Ant1	5460	-50.72	2.57	-	47.08	Peak	68.2	Pass
NVNT	ac20	5320	Ant1	5460	-57.79	2.57	0.11	40.12	Average	54	Pass
NVNT	ac40	5270	Ant1	4500	-50.82	2.57	-	46.98	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	4500	-58.79	2.57	0.23	39.24	Average	54	Pass
NVNT	ac40	5270	Ant1	4806.99	-42.97	2.57	-	54.83	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	4806.99	-52.17	2.57	0.23	45.86	Average	54	Pass
NVNT	ac40	5270	Ant1	5150	-49.08	2.57	-	48.72	Peak	68.2	Pass
NVNT	ac40	5270	Ant1	5150	-56.98	2.57	0.23	41.05	Average	54	Pass
NVNT	ac40	5310	Ant1	5350	-36.67	2.57	-	61.13	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5350	-48.87	2.57	0.23	49.16	Average	54	Pass
NVNT	ac40	5310	Ant1	5351	-35.73	2.57	-	62.07	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5350.2	-48.42	2.57	0.23	49.61	Average	54	Pass
NVNT	ac40	5310	Ant1	5460	-50.23	2.57	-	47.57	Peak	68.2	Pass
NVNT	ac40	5310	Ant1	5460	-58.34	2.57	0.23	39.69	Average	54	Pass
NVNT	ac80	5290	Ant1	4500	-50.23	2.57	-	47.57	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	4500	-59.42	2.57	0.47	38.85	Average	54	Pass
NVNT	ac80	5290	Ant1	5129.88	-46.68	2.57	-	51.12	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5149.89	-55.24	2.57	0.47	43.03	Average	54	Pass
NVNT	ac80	5290	Ant1	5150	-46.77	2.57	-	51.03	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5150	-55.24	2.57	0.47	43.03	Average	54	Pass
NVNT	ac80	5290	Ant1	5350	-39.96	2.57	-	57.84	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5350	-49.68	2.57	0.47	48.59	Average	54	Pass
NVNT	ac80	5290	Ant1	5359.25	-38.18	2.57	-	59.62	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5353.75	-48.47	2.57	0.47	49.80	Average	54	Pass
NVNT	ac80	5290	Ant1	5460	-49.69	2.57	-	48.11	Peak	68.2	Pass
NVNT	ac80	5290	Ant1	5460	-58.21	2.57	0.47	40.06	Average	54	Pass

Restrict Band NVNT n40 5310MHz Ant1 Peak

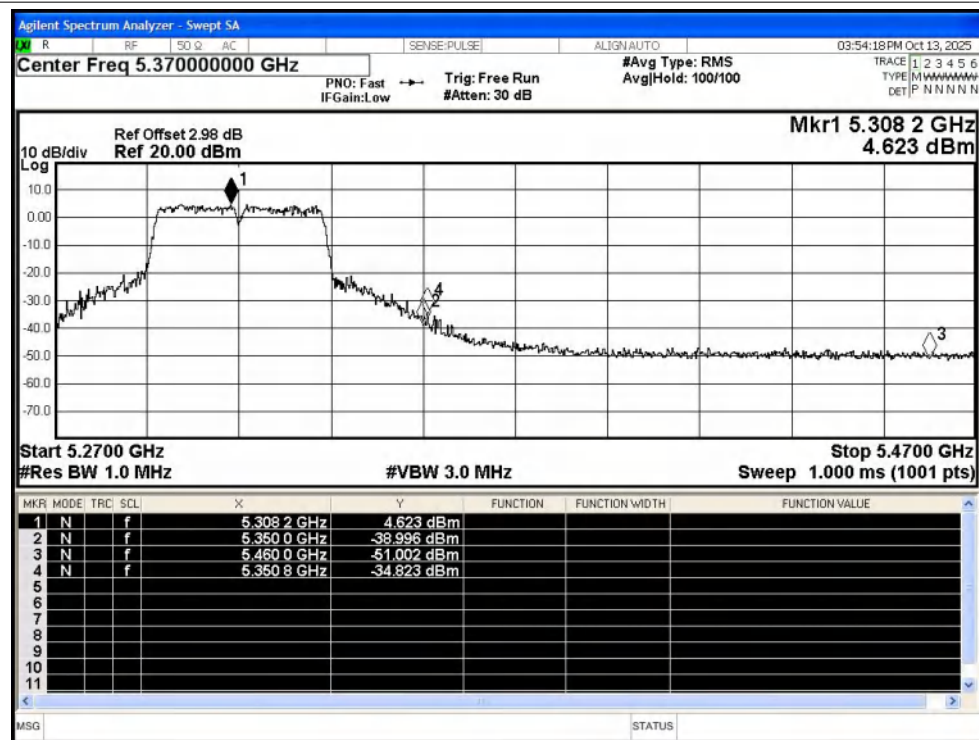



Restrict Band NVNT n40 5310MHz Ant1 Average

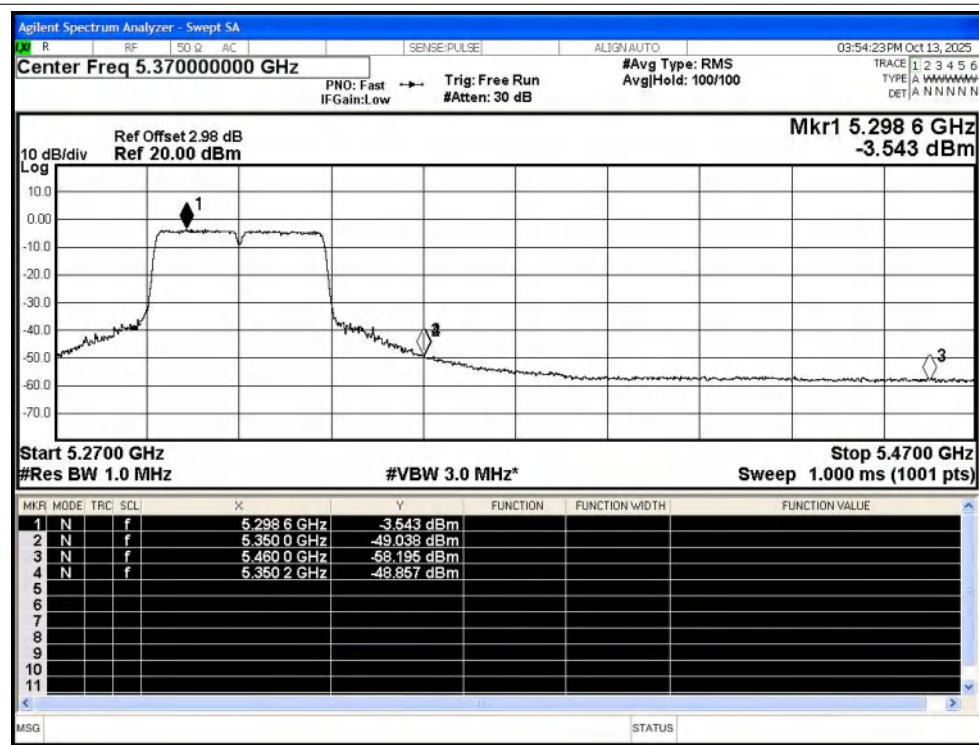


5. Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5260	Ant1	5260	0	0	25	Pass
NVNT	a	5300	Ant1	5300	0	0	25	Pass
NVNT	a	5320	Ant1	5320	0	0	25	Pass
NVNT	n20	5260	Ant1	5260	0	0	25	Pass
NVNT	n20	5300	Ant1	5299.98	-20000	-3.77	25	Pass
NVNT	n20	5320	Ant1	5319.98	-20000	-3.76	25	Pass
NVNT	n40	5270	Ant1	5270	0	0	25	Pass
NVNT	n40	5310	Ant1	5309.96	-40000	-7.53	25	Pass
NVNT	ac20	5260	Ant1	5260	0	0	25	Pass
NVNT	ac20	5300	Ant1	5299.98	-20000	-3.77	25	Pass
NVNT	ac20	5320	Ant1	5319.96	-40000	-7.52	25	Pass
NVNT	ac40	5270	Ant1	5269.96	-40000	-7.59	25	Pass
NVNT	ac40	5310	Ant1	5309.96	-40000	-7.53	25	Pass
NVNT	ac80	5290	Ant1	5290	0	0	25	Pass


Freq. Stability NVNT a 5260MHz Ant1

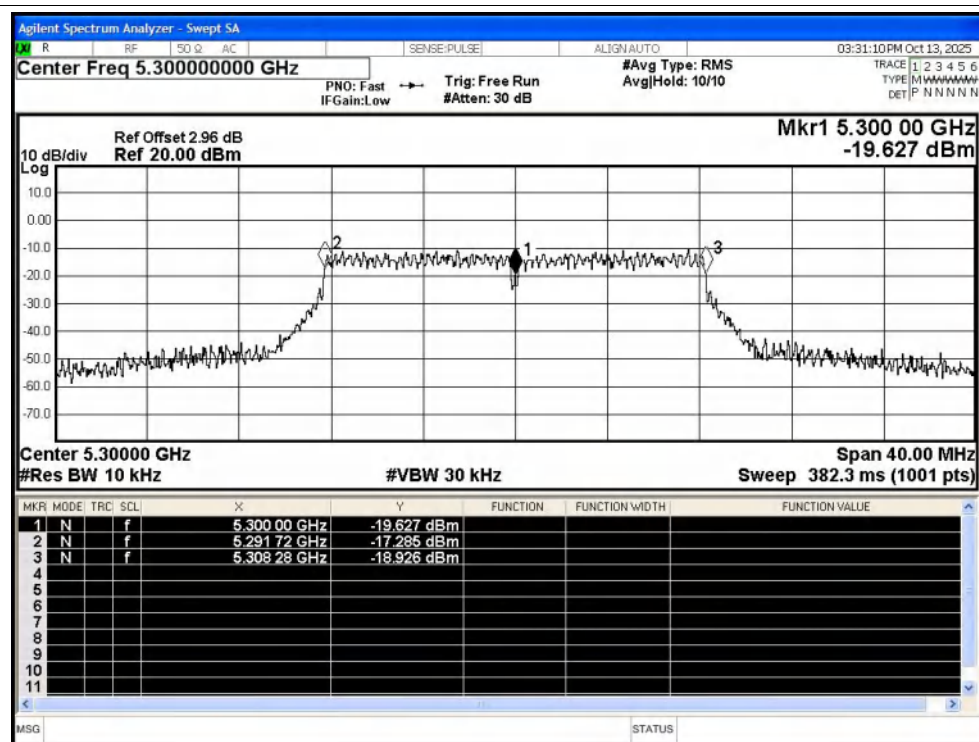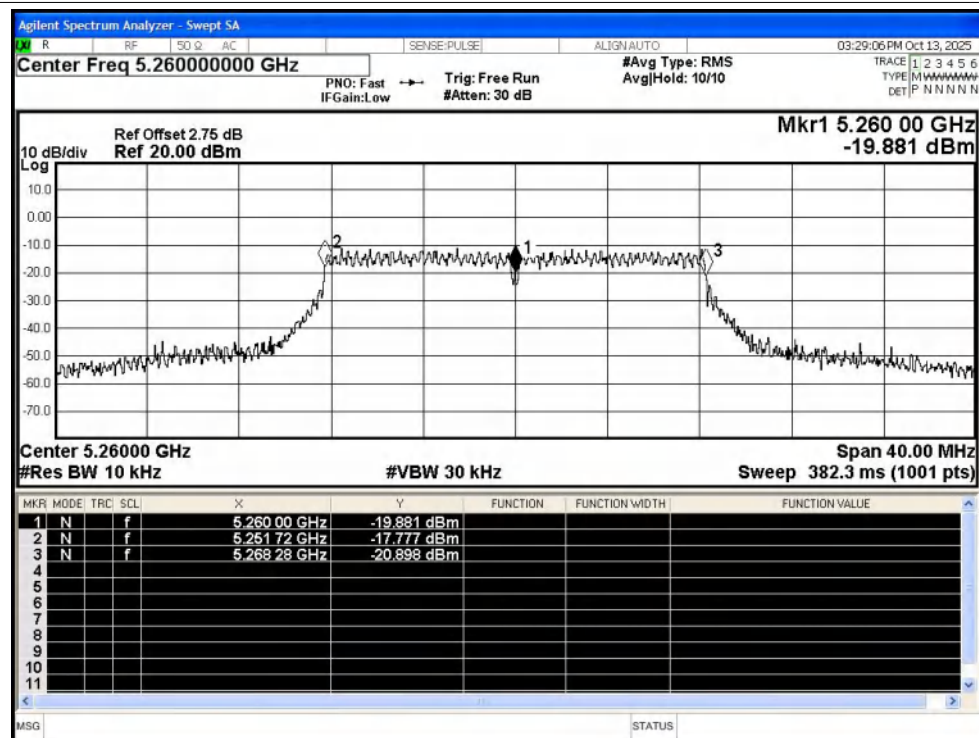


Freq. Stability NVNT n20 5300MHz Ant1

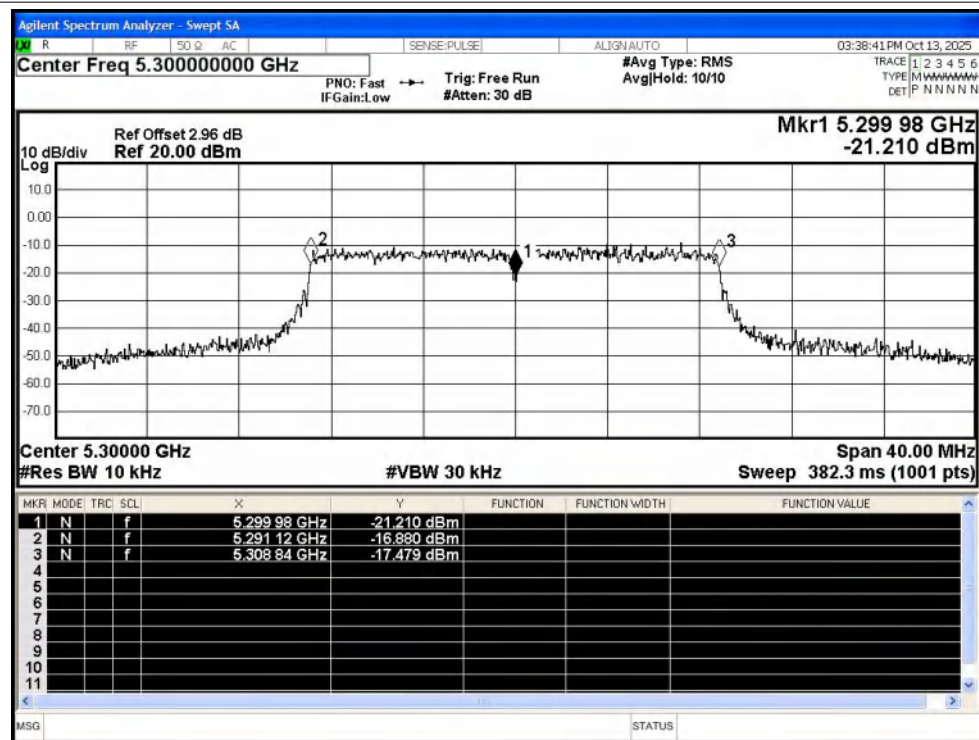


Freq. Stability NVNT n20 5320MHz Ant1

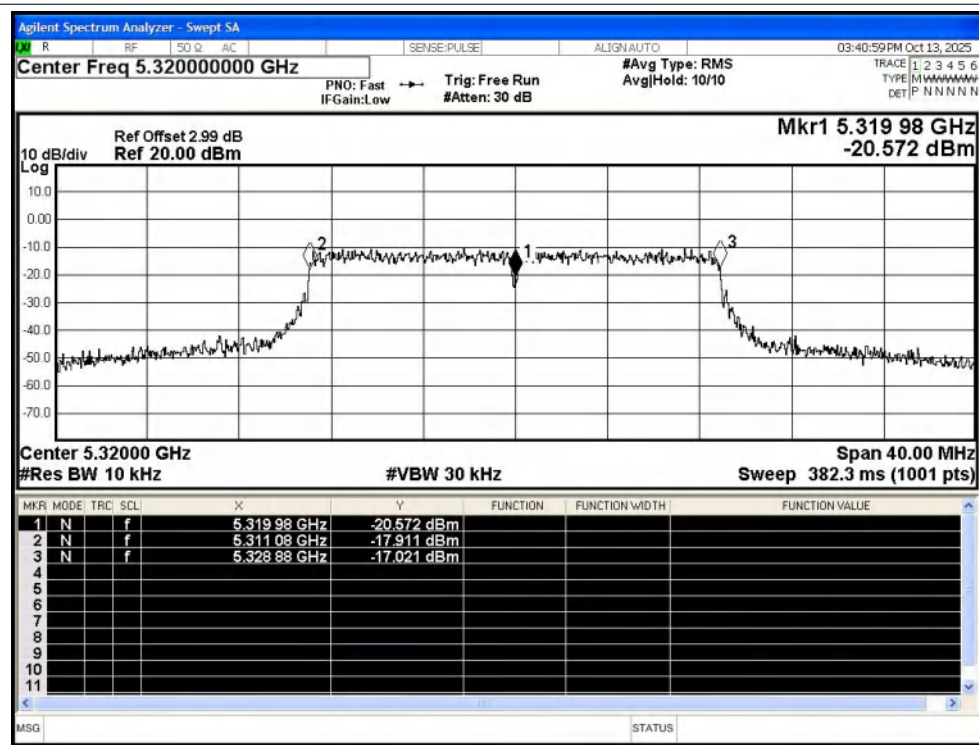


Freq. Stability NVNT n40 5270MHz Ant1

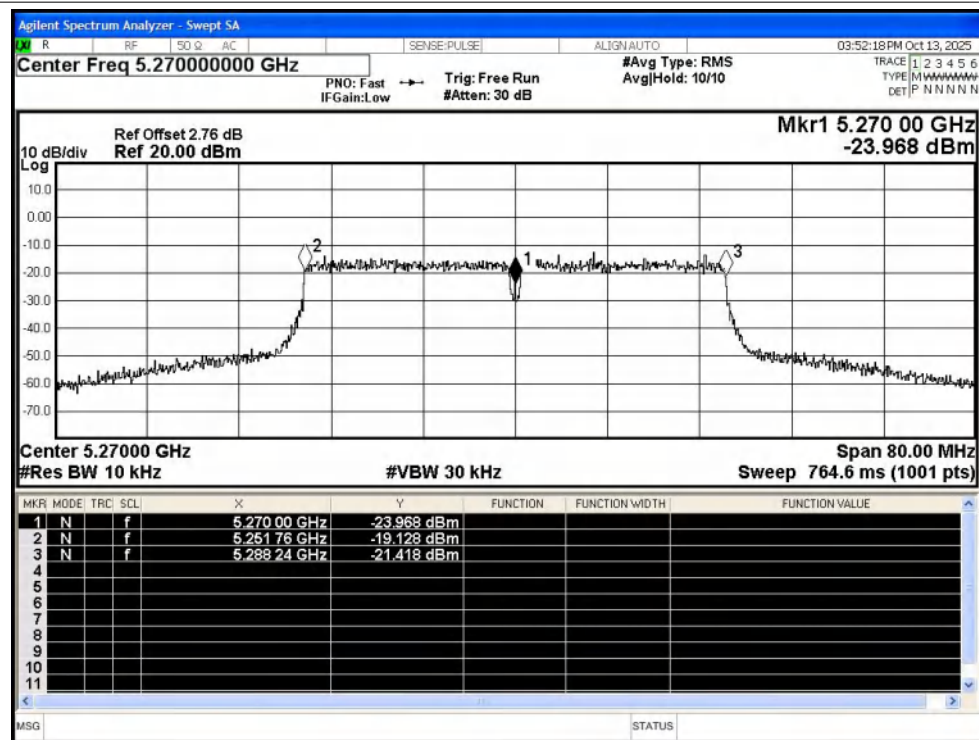


Freq. Stability NVNT n40 5310MHz Ant1

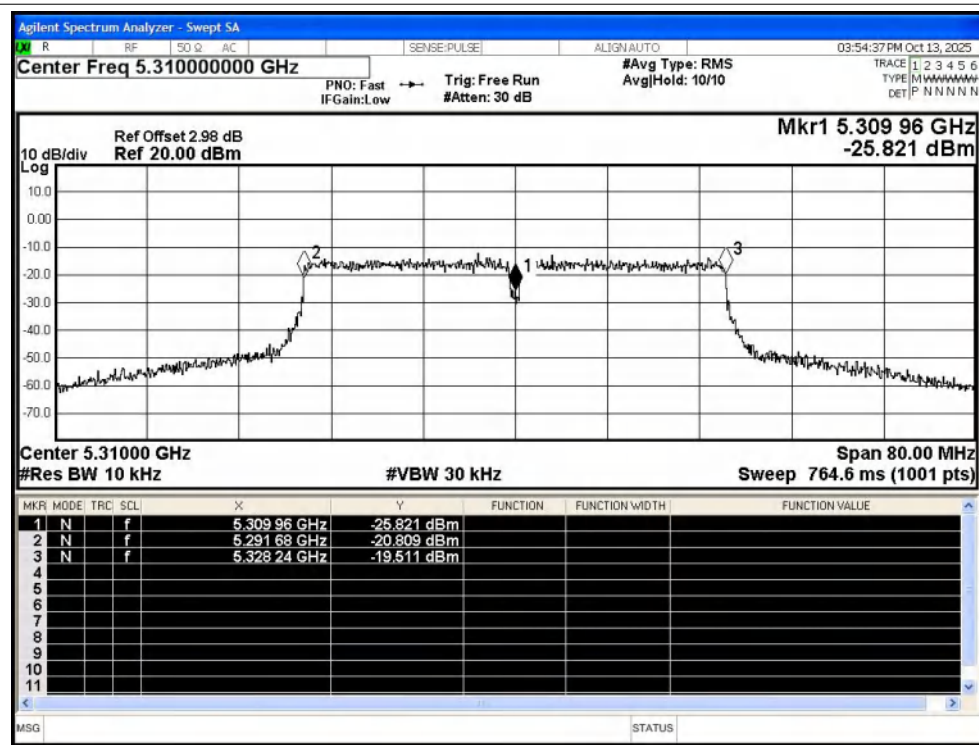


Freq. Stability NVNT ac20 5260MHz Ant1

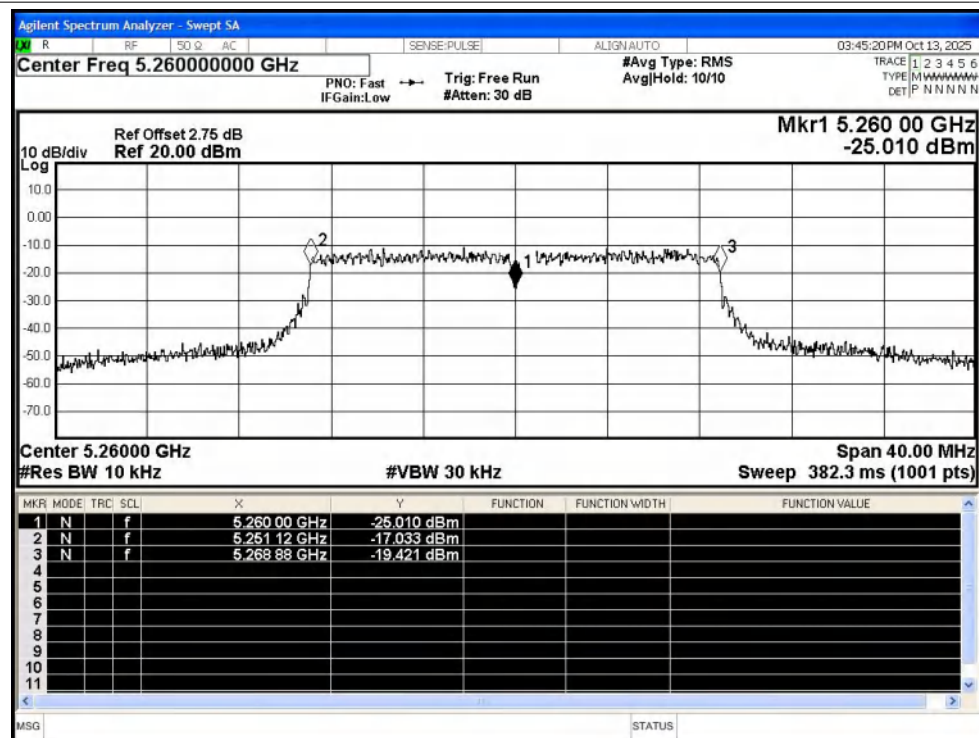


Freq. Stability NVNT ac20 5300MHz Ant1

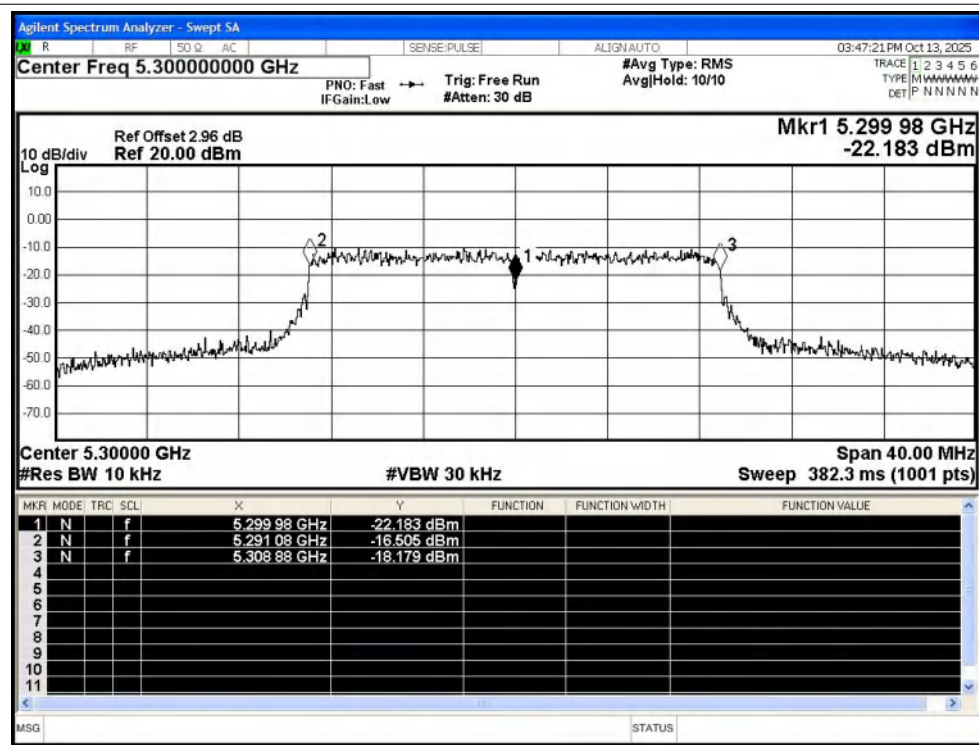

Freq. Stability NVNT ac20 5320MHz Ant1

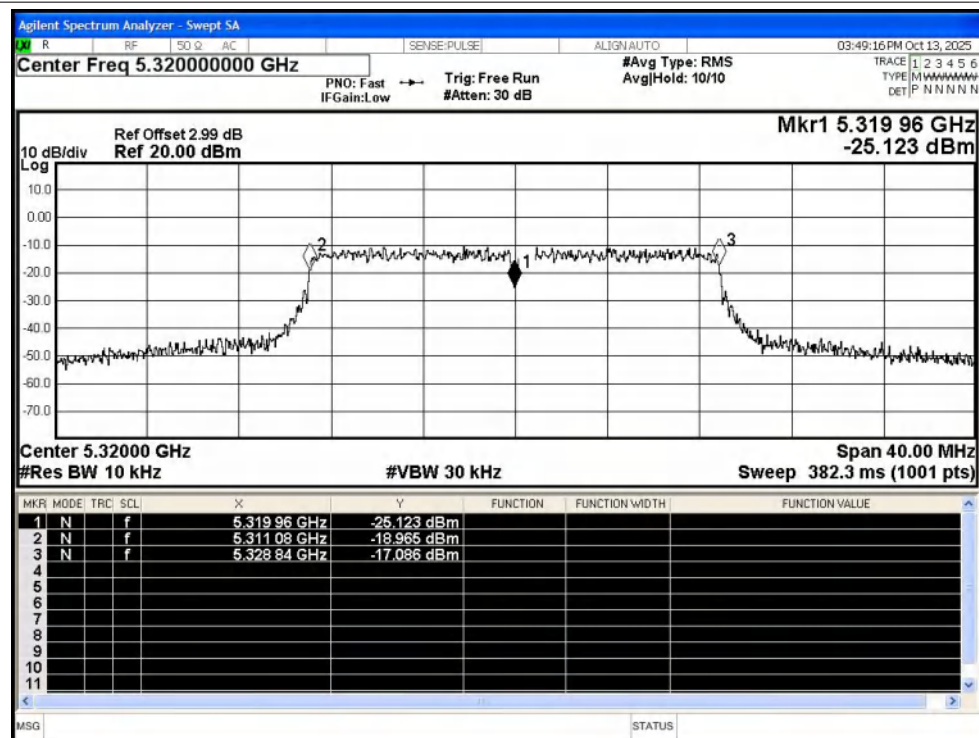


Freq. Stability NVNT ac40 5270MHz Ant1

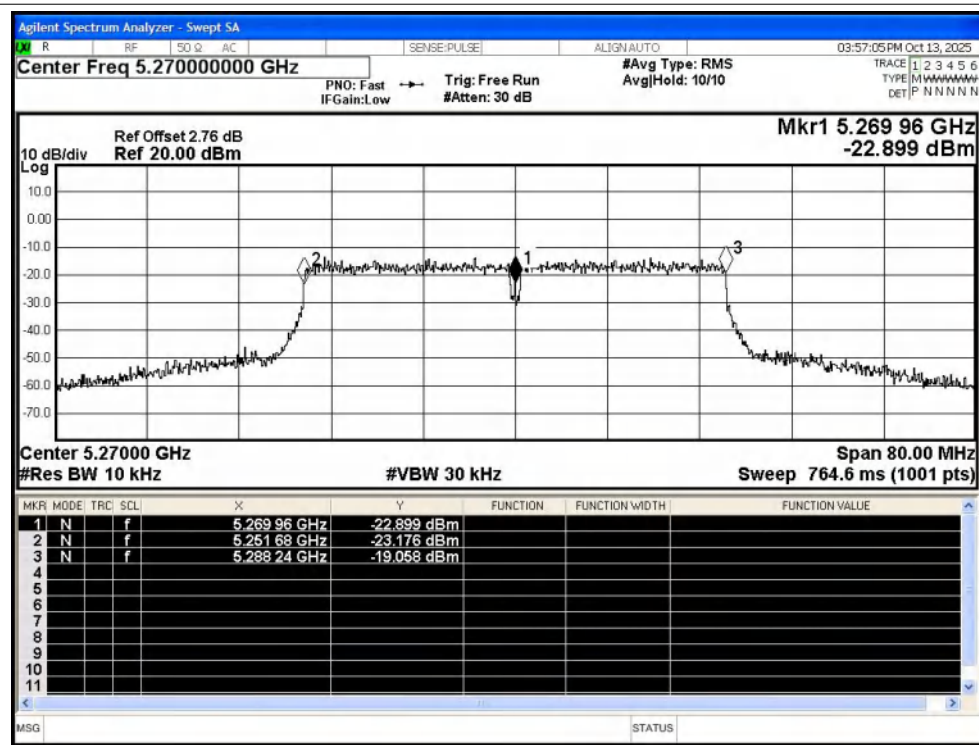


6. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	Ant1	97.77	0.1	0.36
NVNT	a	5300	Ant1	97.81	0.1	0.36
NVNT	a	5320	Ant1	97.81	0.1	0.36
NVNT	n20	5260	Ant1	97.39	0.11	0.43
NVNT	n20	5300	Ant1	97.35	0.12	0.43
NVNT	n20	5320	Ant1	97.35	0.12	0.43
NVNT	n40	5270	Ant1	94.82	0.23	0.88
NVNT	n40	5310	Ant1	94.74	0.23	0.88
NVNT	ac20	5260	Ant1	97.4	0.11	0.43
NVNT	ac20	5300	Ant1	97.4	0.11	0.43
NVNT	ac20	5320	Ant1	97.4	0.11	0.43
NVNT	ac40	5270	Ant1	94.85	0.23	0.88
NVNT	ac40	5310	Ant1	94.85	0.23	0.88
NVNT	ac80	5290	Ant1	89.84	0.47	1.82

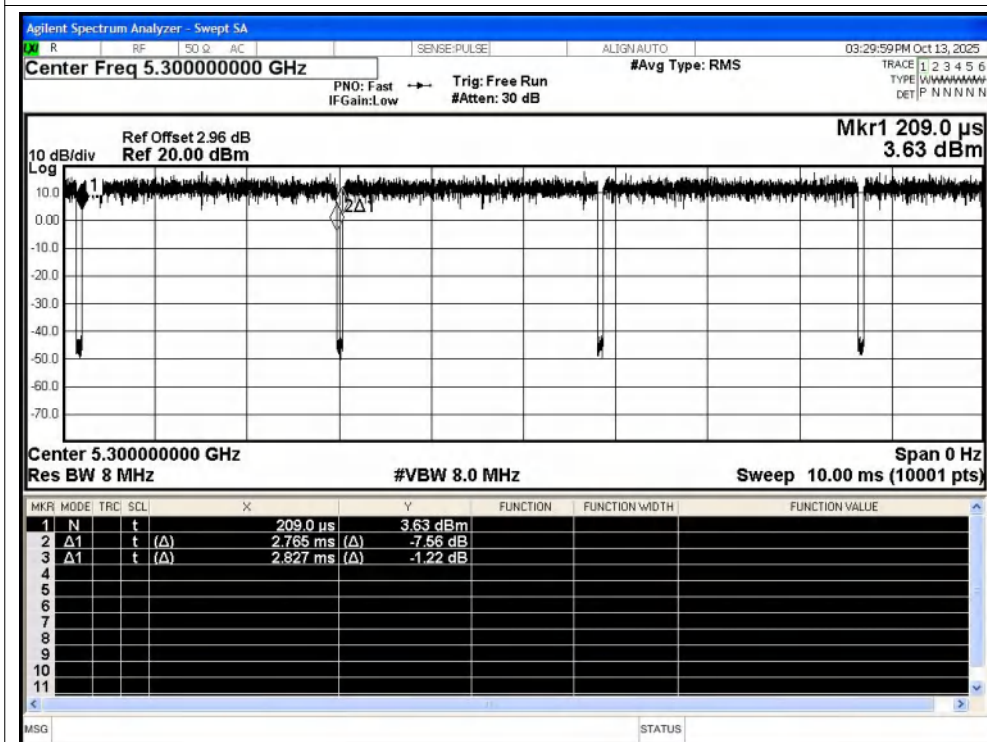


Duty Cycle NVNT a 5320MHz Ant1

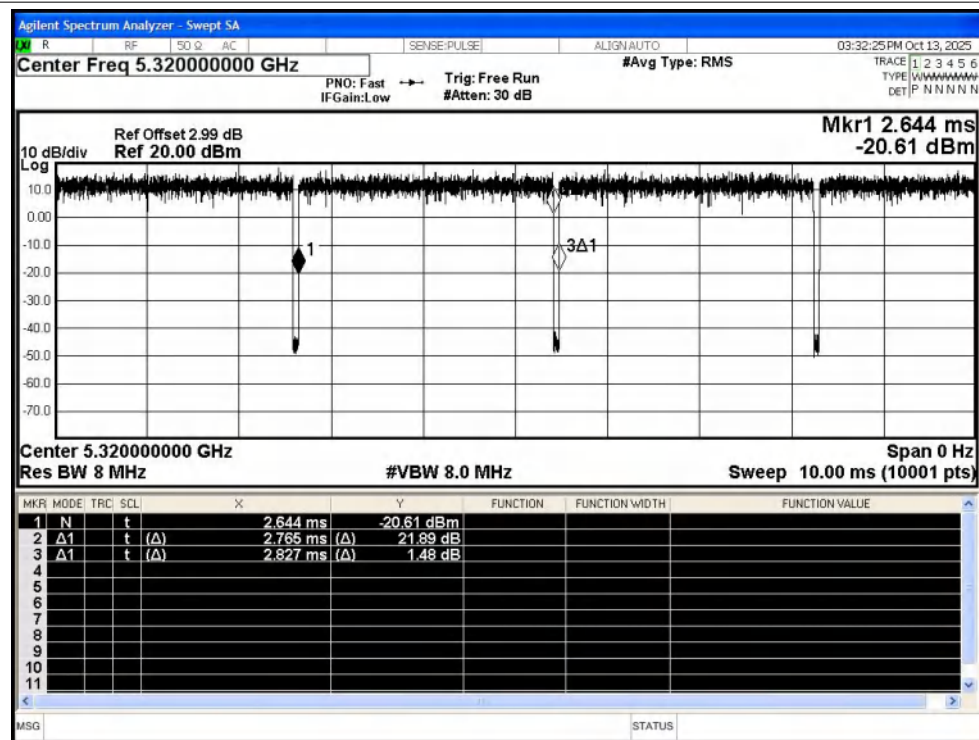


Duty Cycle NVNT n20 5260MHz Ant1

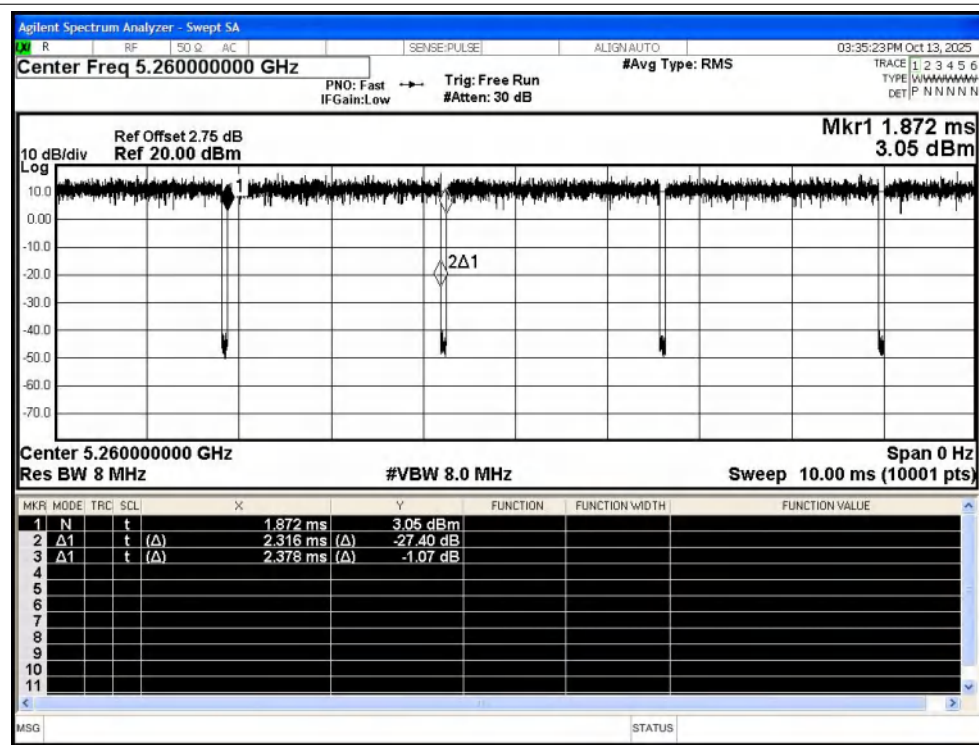


Duty Cycle NVNT n20 5300MHz Ant1

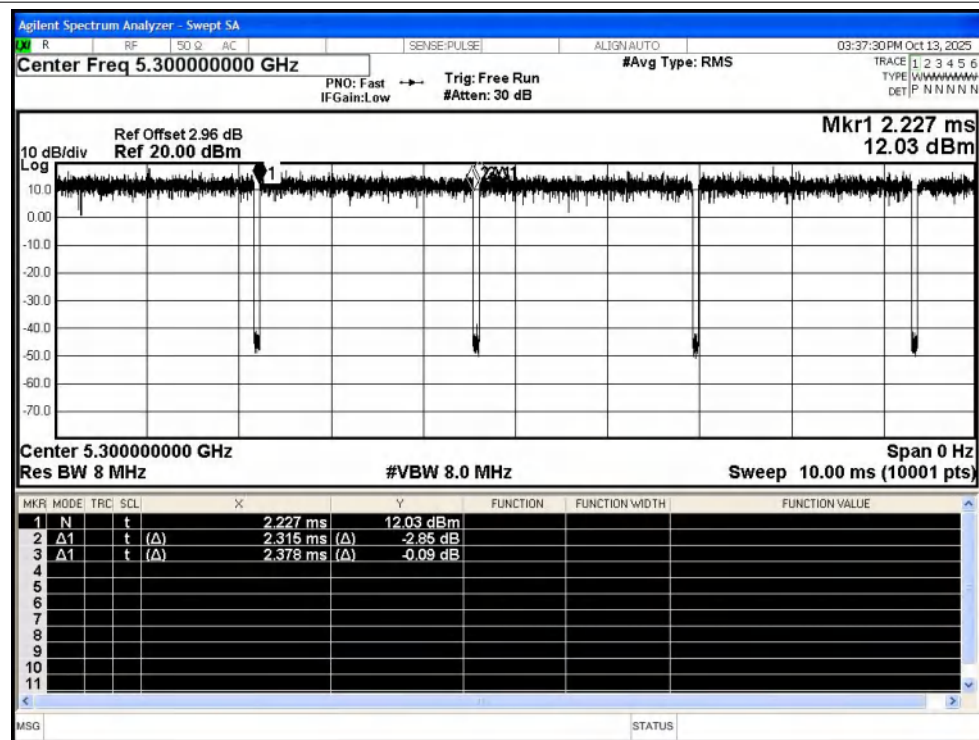


Duty Cycle NVNT n20 5320MHz Ant1

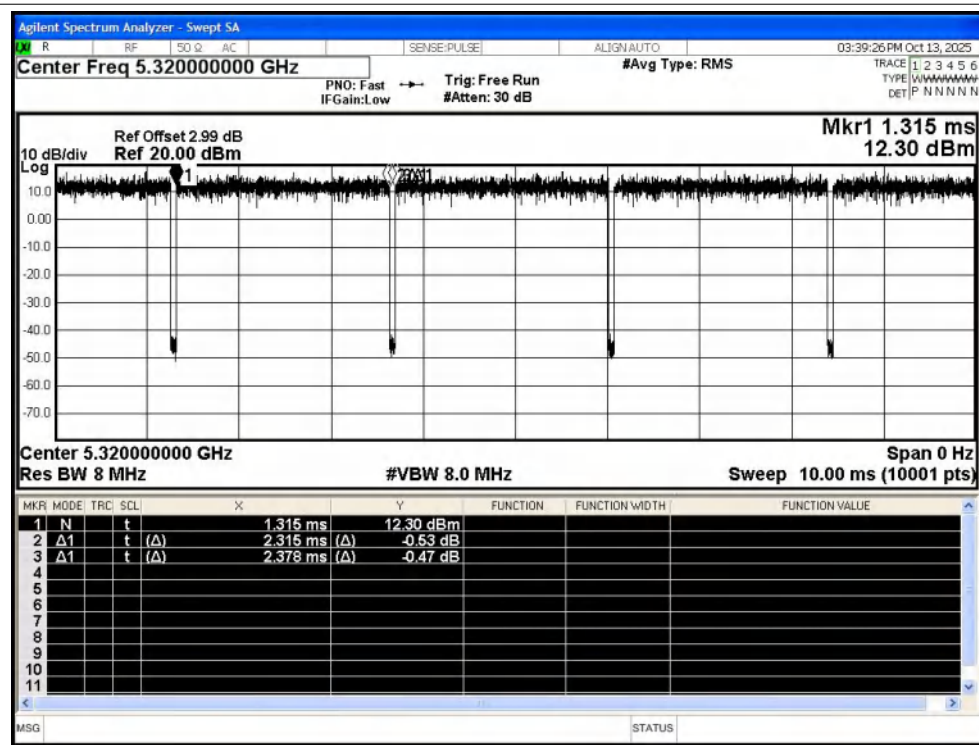


Duty Cycle NVNT n40 5270MHz Ant1

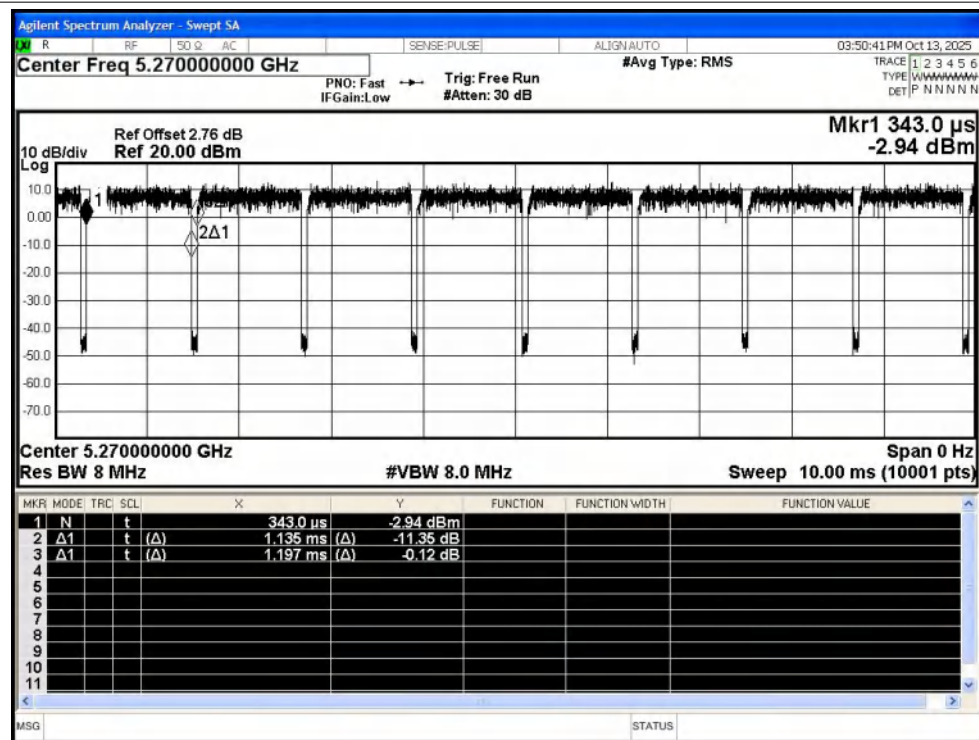

Duty Cycle NVNT n40 5310MHz Ant1

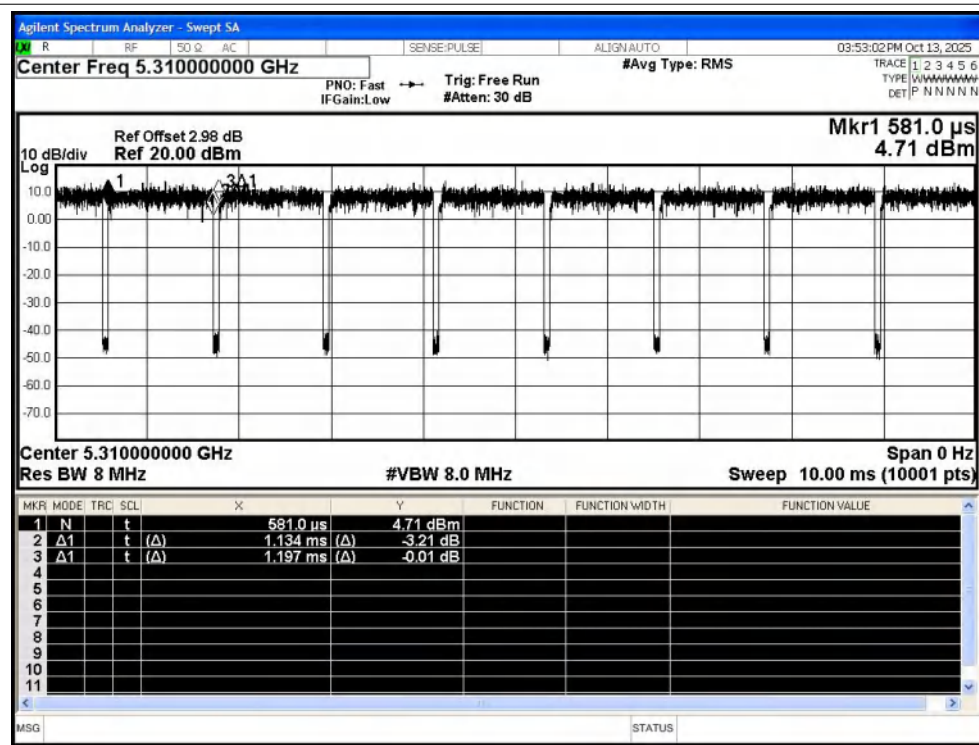

Duty Cycle NVNT ac20 5260MHz Ant1

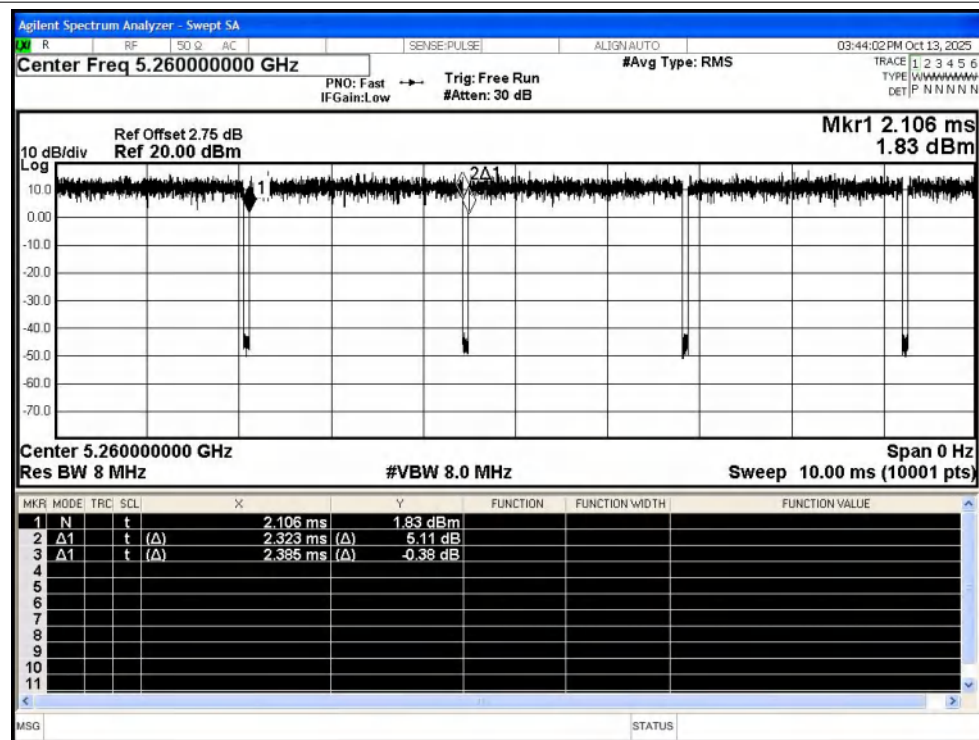

Duty Cycle NVNT ac20 5300MHz Ant1

