



Appendix A

RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: Digital Conference System

Test Model: TS-W310A

Environmental Conditions

Temperature:	23.4°C
Relative Humidity:	52.8%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Luo
Supervised by:	Paddi Chen




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




A.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)
NVNT	a	5180	Ant1	29.93
NVNT	a	5200	Ant1	29.32
NVNT	a	5240	Ant1	29.6
NVNT	n20	5180	Ant1	29.89
NVNT	n20	5200	Ant1	29.51
NVNT	n20	5240	Ant1	28.84
NVNT	n40	5190	Ant1	48.55
NVNT	n40	5230	Ant1	47.53
NVNT	ac20	5180	Ant1	29.74
NVNT	ac20	5200	Ant1	29.22
NVNT	ac20	5240	Ant1	29.51
NVNT	ac40	5190	Ant1	46.55
NVNT	ac40	5230	Ant1	46.56
NVNT	ax20	5180	Ant1	28.61
NVNT	ax20	5200	Ant1	28.86
NVNT	ax20	5240	Ant1	29.26
NVNT	ax40	5190	Ant1	48.83
NVNT	ax40	5230	Ant1	47.27



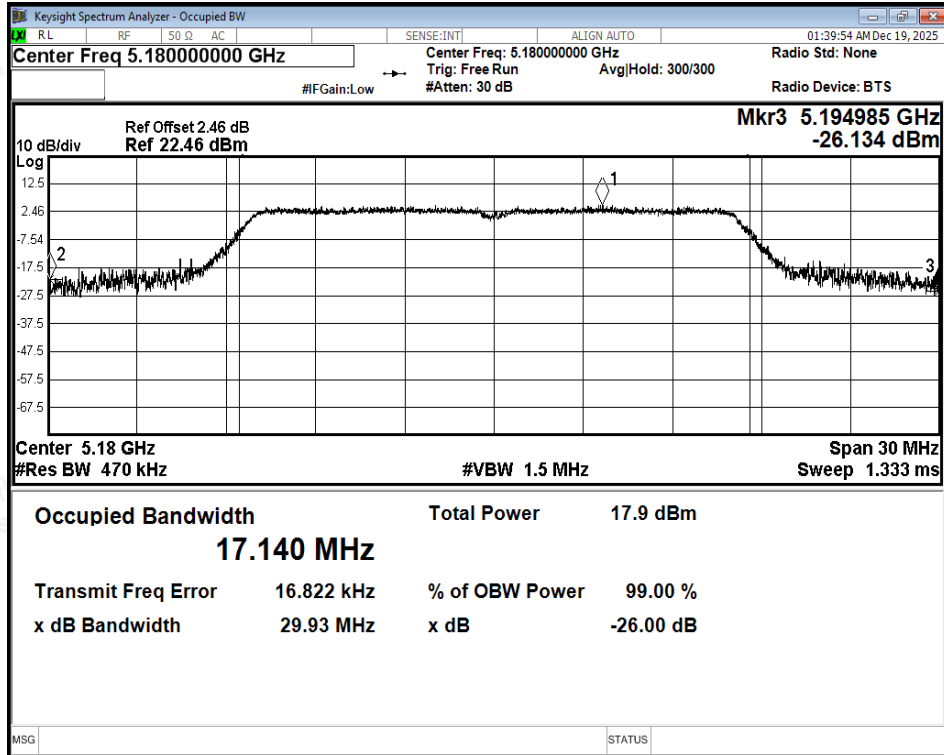


-26dB Bandwidth NVNT a 5180MHz Ant1

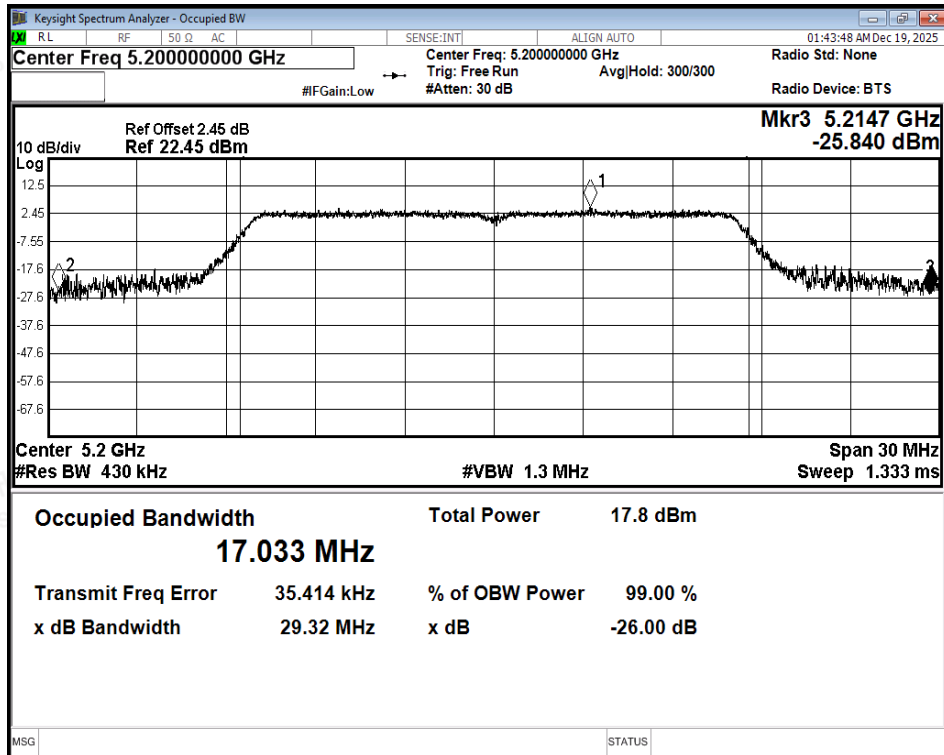


-26dB Bandwidth NVNT a 5200MHz Ant1



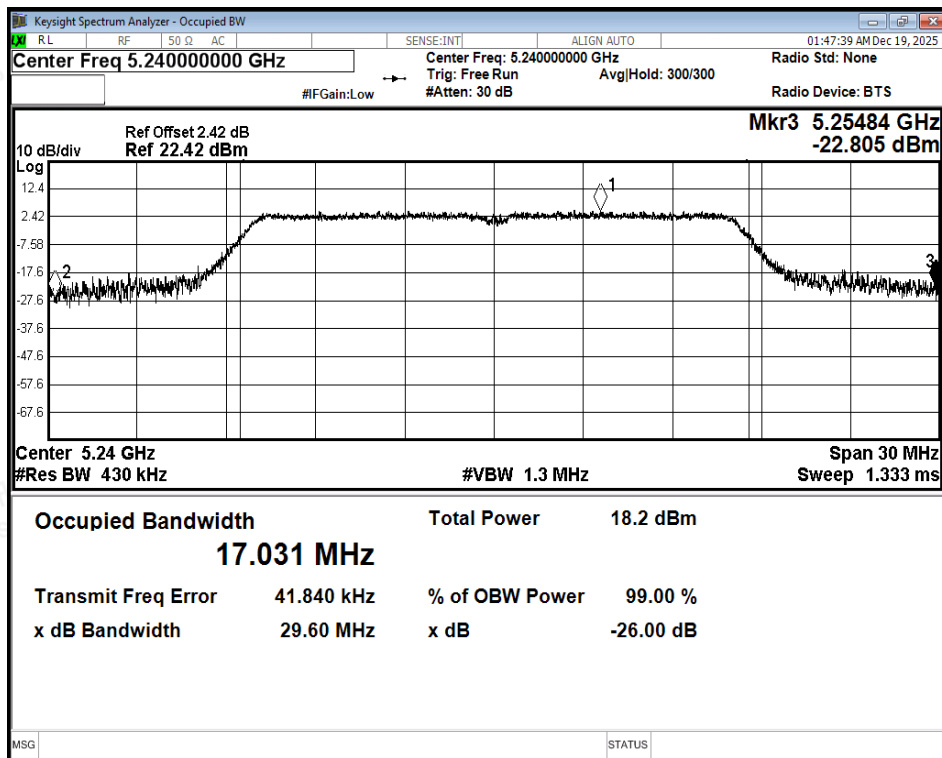

-26dB Bandwidth NVNT a 5240MHz Ant1

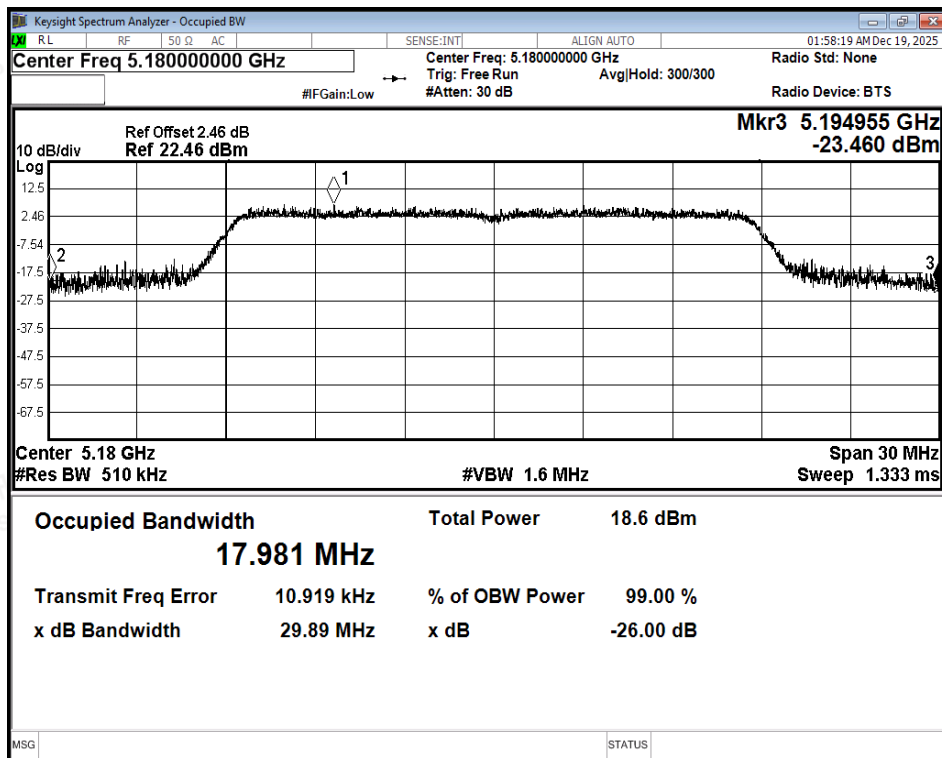

-26dB Bandwidth NVNT n20 5180MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

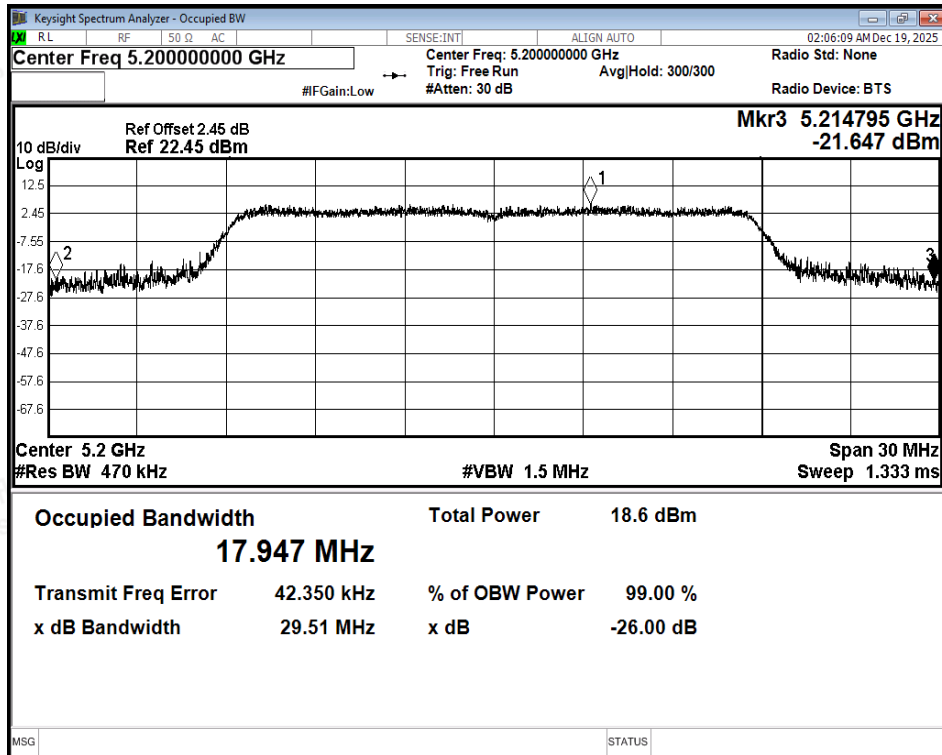


-26dB Bandwidth NVNT n20 5200MHz Ant1

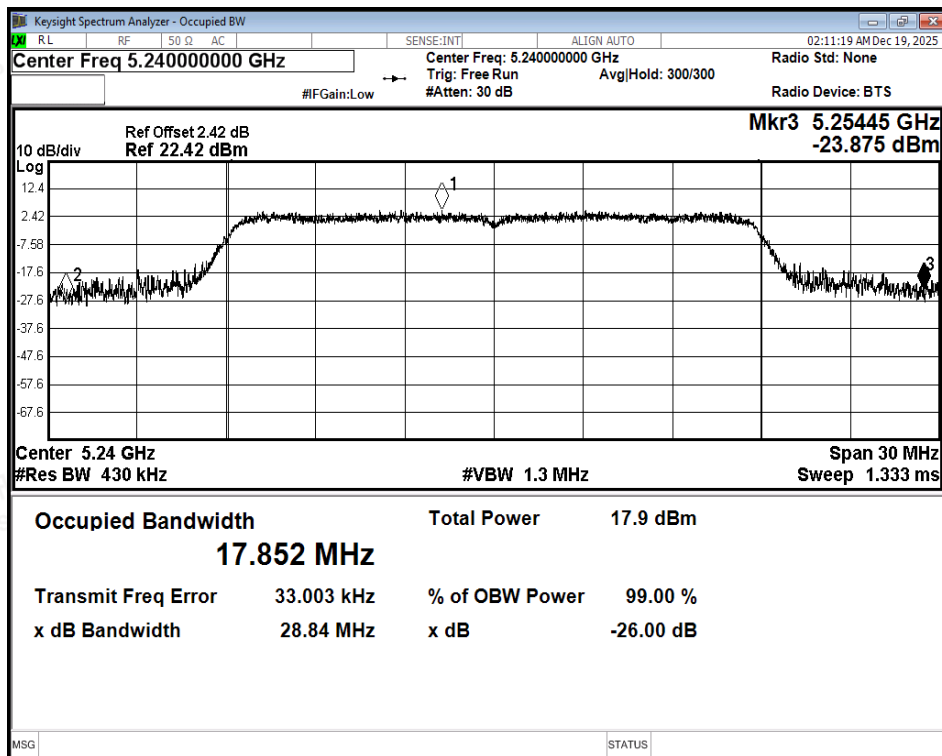


-26dB Bandwidth NVNT n20 5240MHz Ant1



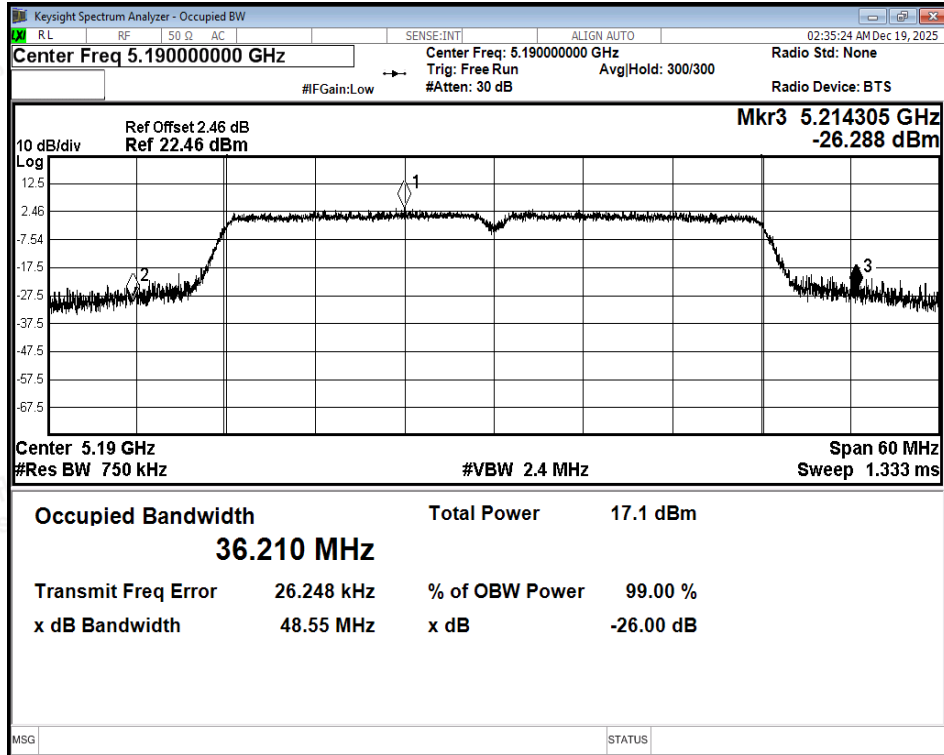


-26dB Bandwidth NVNT n40 5190MHz Ant1

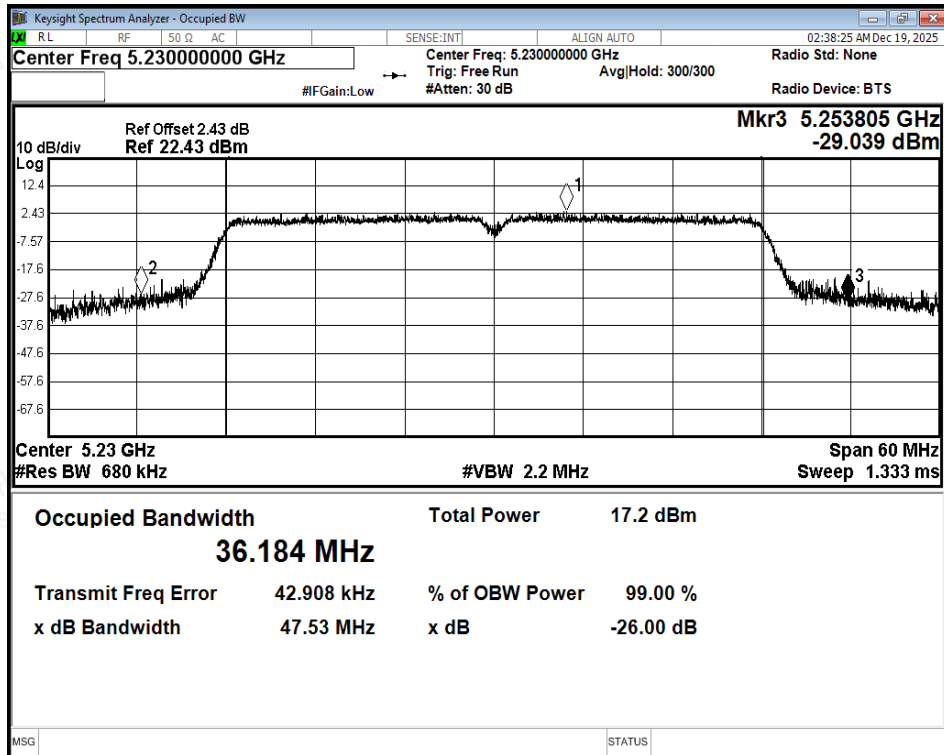


-26dB Bandwidth NVNT n40 5230MHz Ant1



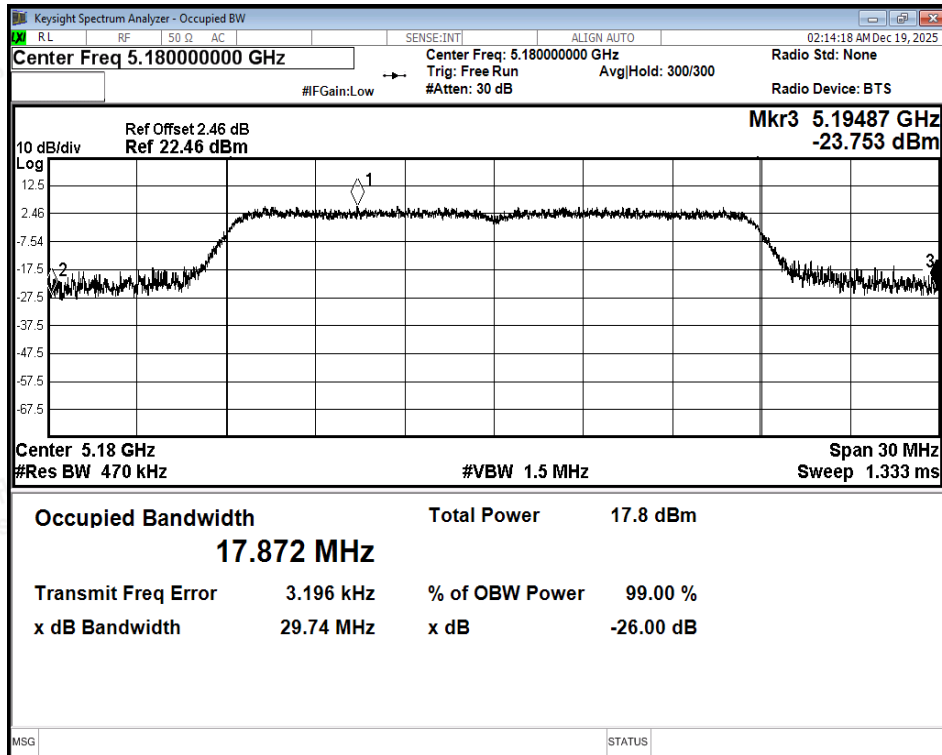


-26dB Bandwidth NVNT ac20 5180MHz Ant1

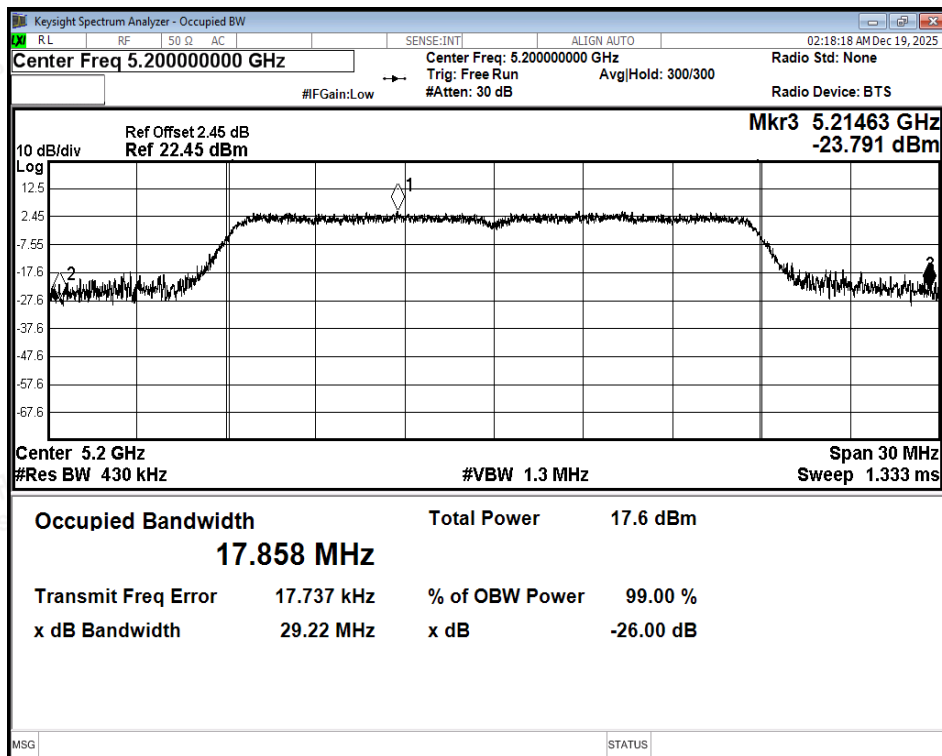


-26dB Bandwidth NVNT ac20 5200MHz Ant1



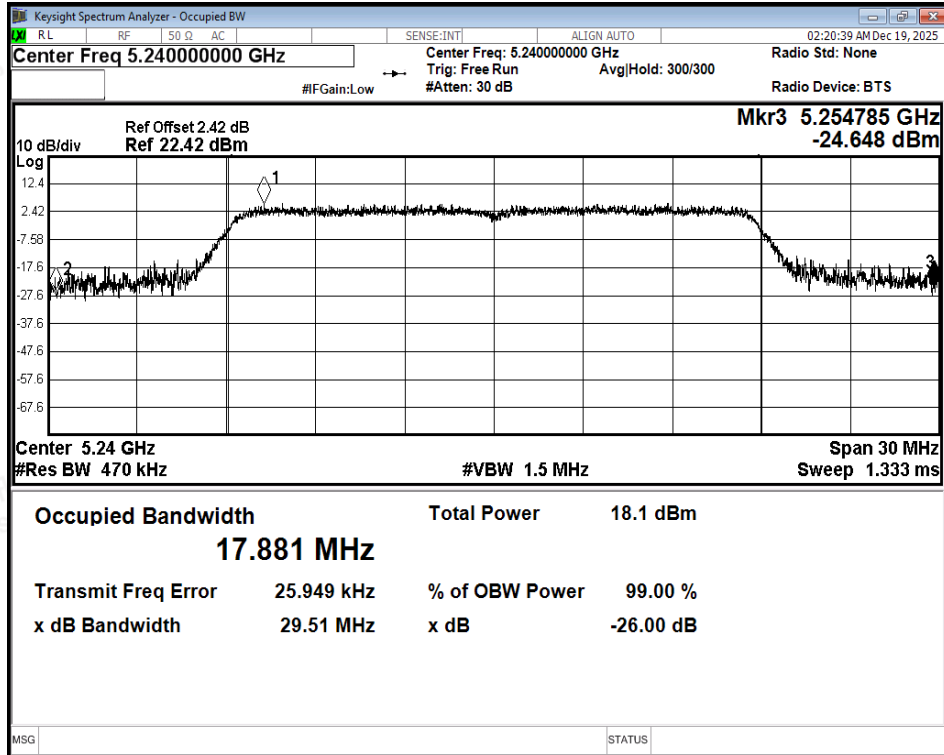


-26dB Bandwidth NVNT ac20 5240MHz Ant1

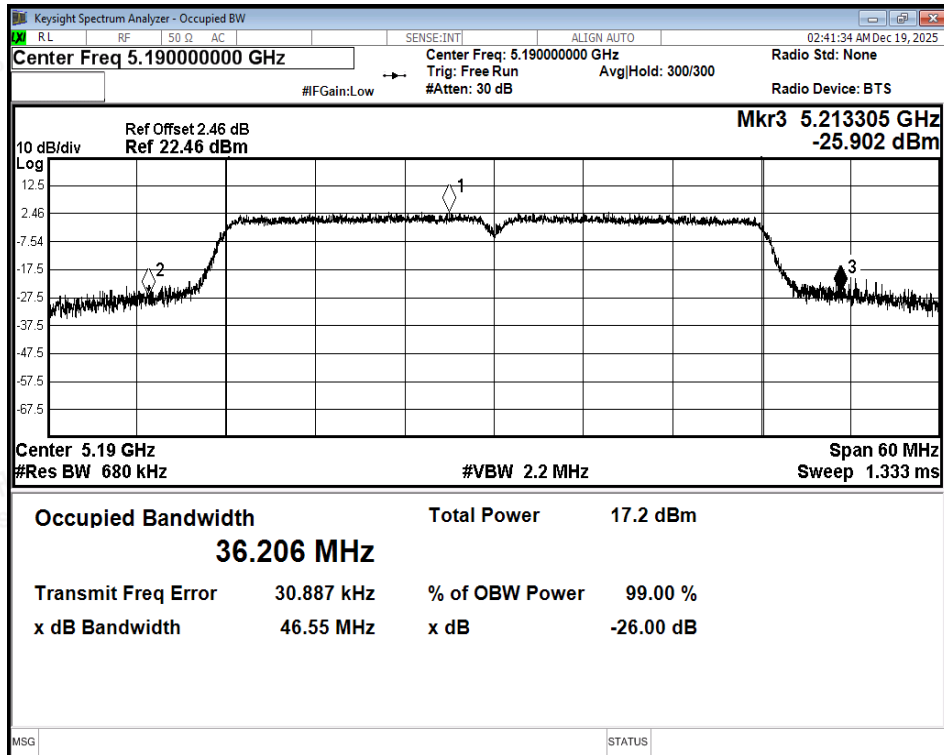


-26dB Bandwidth NVNT ac40 5190MHz Ant1



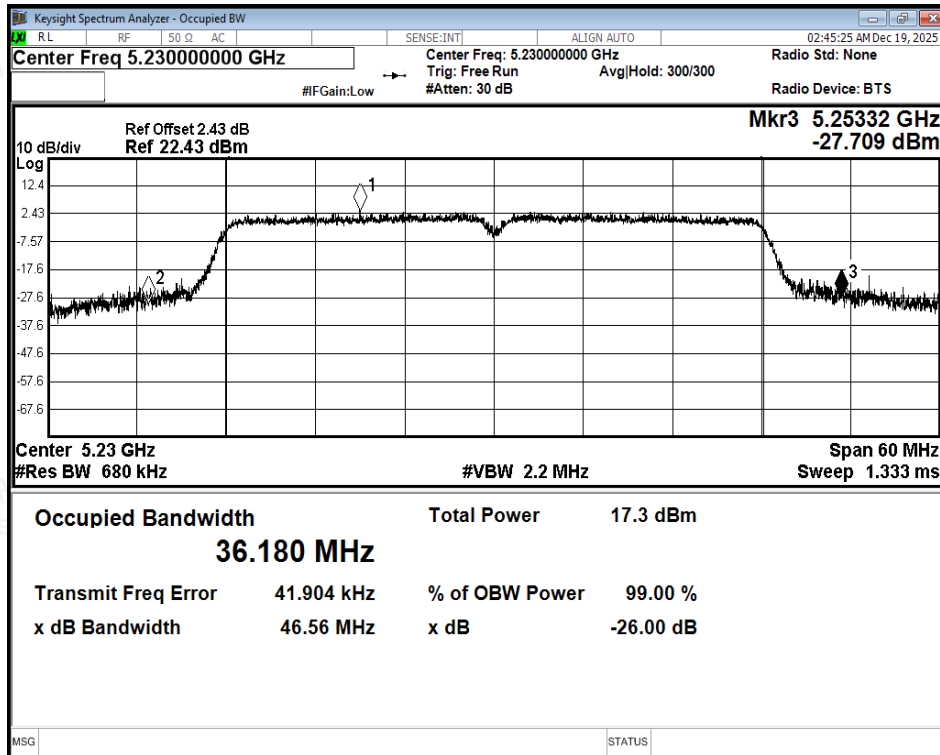


-26dB Bandwidth NVNT ac40 5230MHz Ant1

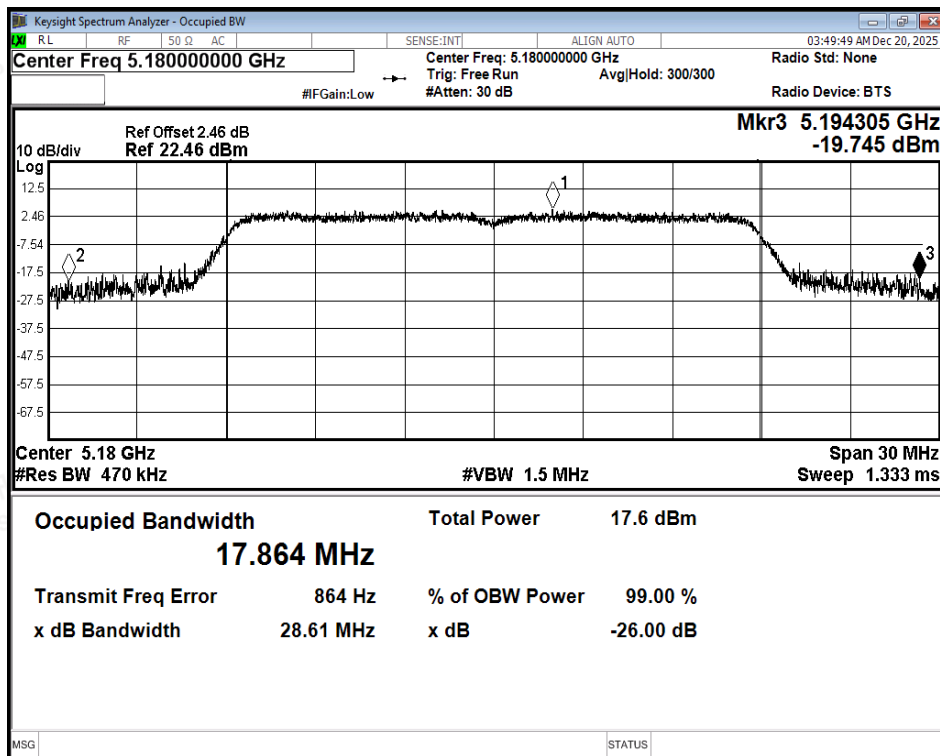


-26dB Bandwidth NVNT ax20 5180MHz Ant1



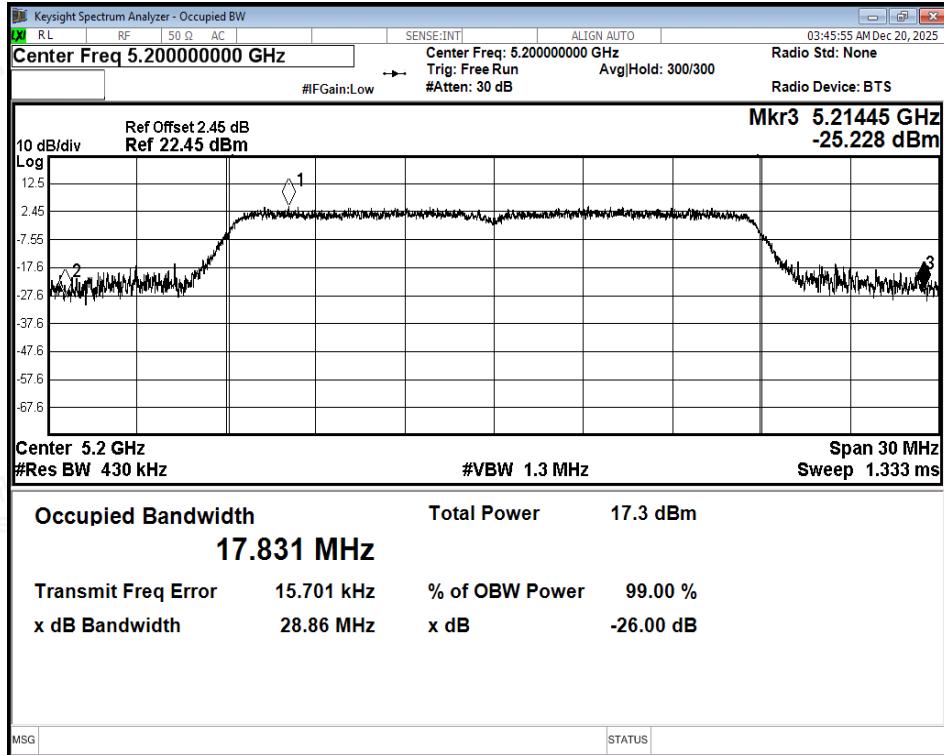


-26dB Bandwidth NVNT ax20 5200MHz Ant1

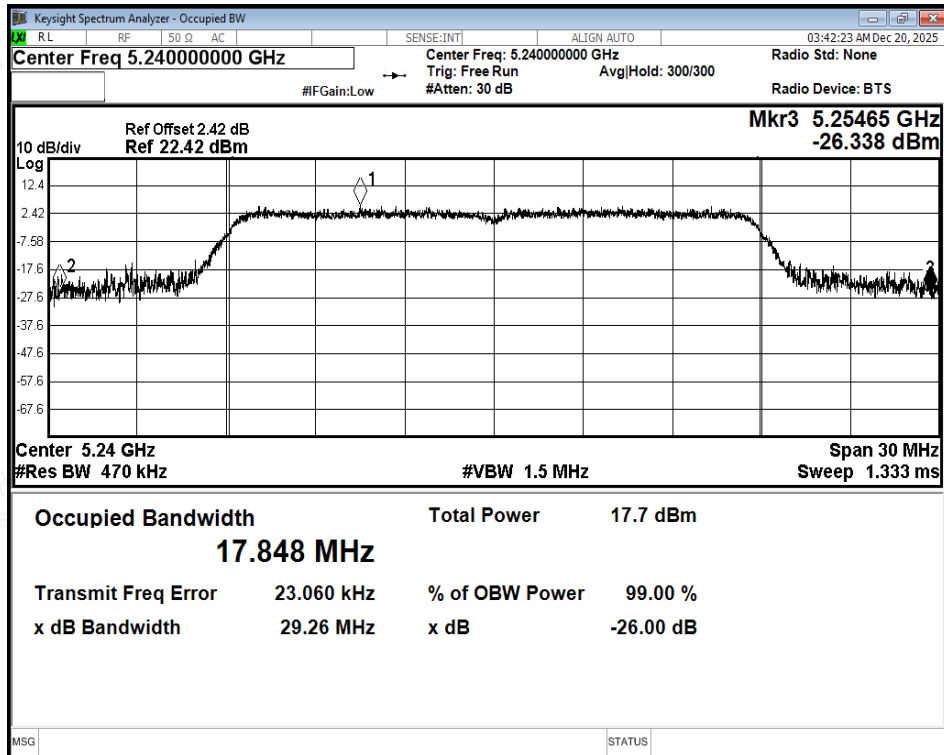


-26dB Bandwidth NVNT ax20 5240MHz Ant1



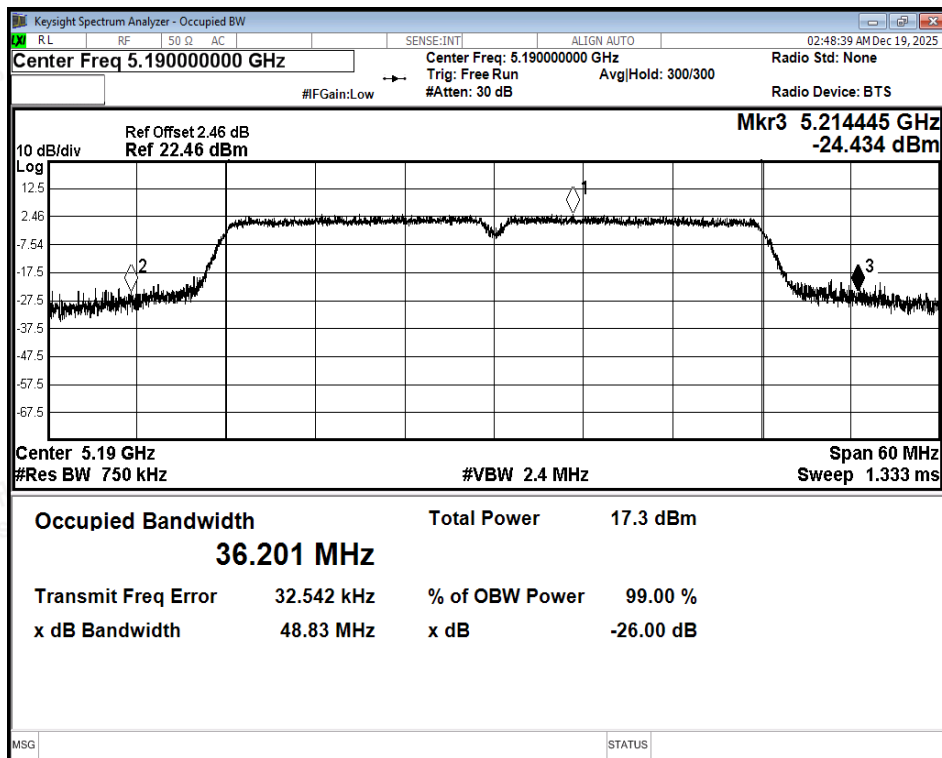

-26dB Bandwidth NVNT ax40 5190MHz Ant1

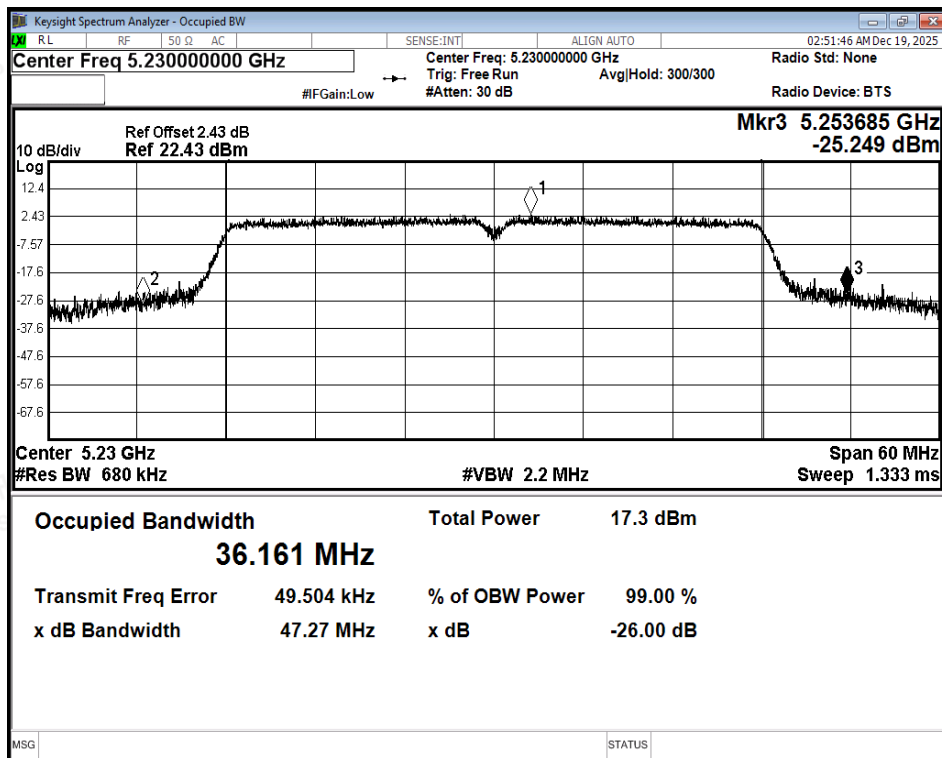

-26dB Bandwidth NVNT ax40 5230MHz Ant1



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



A.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted(dBm)	Verdict
NVNT	a	5180	Ant1	19.57	0.11	19.68	23.77	Pass
NVNT	a	5200	Ant1	19.31	0.1	19.41	23.77	Pass
NVNT	a	5240	Ant1	18.61	0.1	18.71	23.77	Pass
NVNT	n20	5180	Ant1	19.42	0.13	19.55	23.77	Pass
NVNT	n20	5200	Ant1	19.19	0.11	19.30	23.77	Pass
NVNT	n20	5240	Ant1	19.36	0.13	19.49	23.77	Pass
NVNT	n40	5190	Ant1	16.48	0.23	16.71	23.77	Pass
NVNT	n40	5230	Ant1	17.69	0.23	17.92	23.77	Pass
NVNT	ac20	5180	Ant1	18.32	0.13	18.45	23.77	Pass
NVNT	ac20	5200	Ant1	18.24	0.11	18.35	23.77	Pass
NVNT	ac20	5240	Ant1	18.39	0.11	18.50	23.77	Pass
NVNT	ac40	5190	Ant1	17.57	0.23	17.80	23.77	Pass
NVNT	ac40	5230	Ant1	17.83	0.23	18.06	23.77	Pass
NVNT	ax20	5180	Ant1	18.29	0.11	18.40	23.77	Pass
NVNT	ax20	5200	Ant1	16.79	0.11	16.90	23.77	Pass
NVNT	ax20	5240	Ant1	18.4	0.13	18.53	23.77	Pass
NVNT	ax40	5190	Ant1	17.6	0.23	17.83	23.77	Pass
NVNT	ax40	5230	Ant1	17.67	0.23	17.90	23.77	Pass





A.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total Conducted PSD (dBm)	Limit Conducted(dBm)	Verdict
NVNT	a	5180	Ant1	0.4	0.11	0.51	10.77	Pass
NVNT	a	5200	Ant1	0.3	0.11	0.41	10.77	Pass
NVNT	a	5240	Ant1	0.69	0.11	0.8	10.77	Pass
NVNT	n20	5180	Ant1	0.47	0.13	0.6	10.77	Pass
NVNT	n20	5200	Ant1	0.31	0.11	0.42	10.77	Pass
NVNT	n20	5240	Ant1	-0.22	0.13	-0.09	10.77	Pass
NVNT	n40	5190	Ant1	-4.44	0.23	-4.21	10.77	Pass
NVNT	n40	5230	Ant1	-4.3	0.23	-4.07	10.77	Pass
NVNT	ac20	5180	Ant1	-0.38	0.13	-0.25	10.77	Pass
NVNT	ac20	5200	Ant1	-0.53	0.11	-0.42	10.77	Pass
NVNT	ac20	5240	Ant1	0.01	0.11	0.12	10.77	Pass
NVNT	ac40	5190	Ant1	-4.43	0.23	-4.2	10.77	Pass
NVNT	ac40	5230	Ant1	-4.32	0.23	-4.09	10.77	Pass
NVNT	ax20	5180	Ant1	-0.56	0.11	-0.45	10.77	Pass
NVNT	ax20	5200	Ant1	-0.81	0.11	-0.7	10.77	Pass
NVNT	ax20	5240	Ant1	-0.56	0.13	-0.43	10.77	Pass
NVNT	ax40	5190	Ant1	-4.41	0.23	-4.18	10.77	Pass
NVNT	ax40	5230	Ant1	-4.21	0.23	-3.98	10.77	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

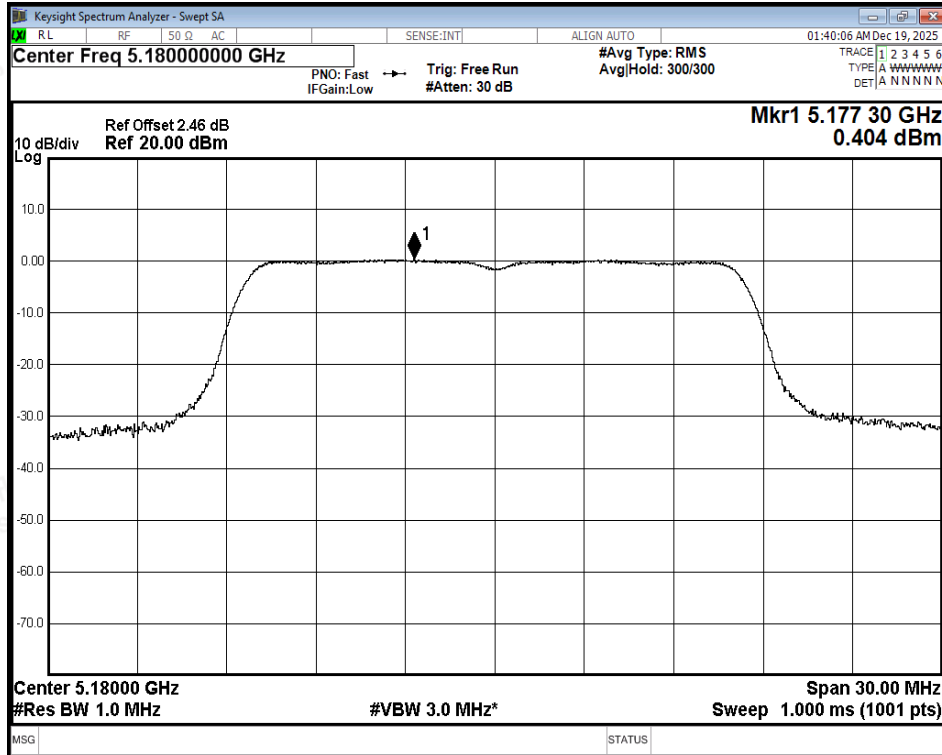


PSD NVNT a 5180MHz Ant1

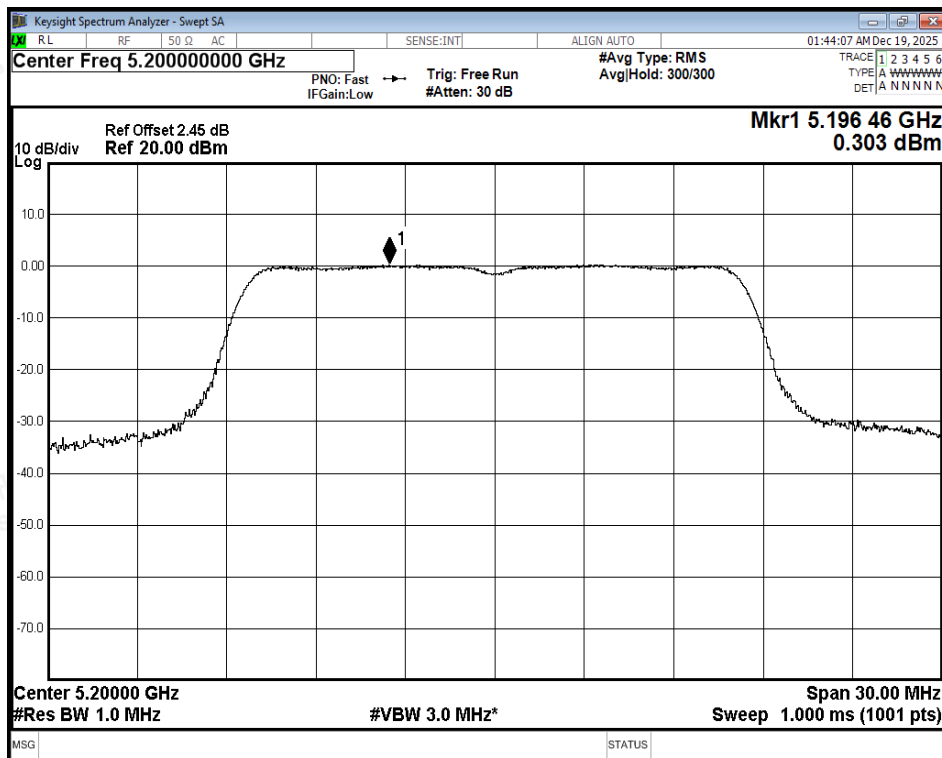


PSD NVNT a 5200MHz Ant1



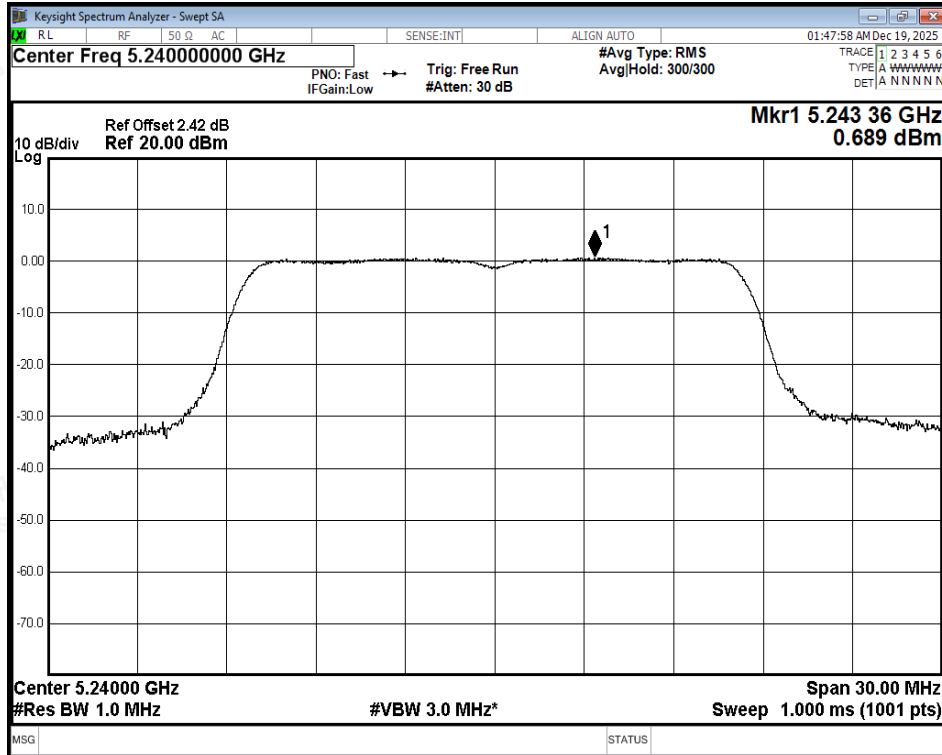


PSD NVNT a 5240MHz Ant1

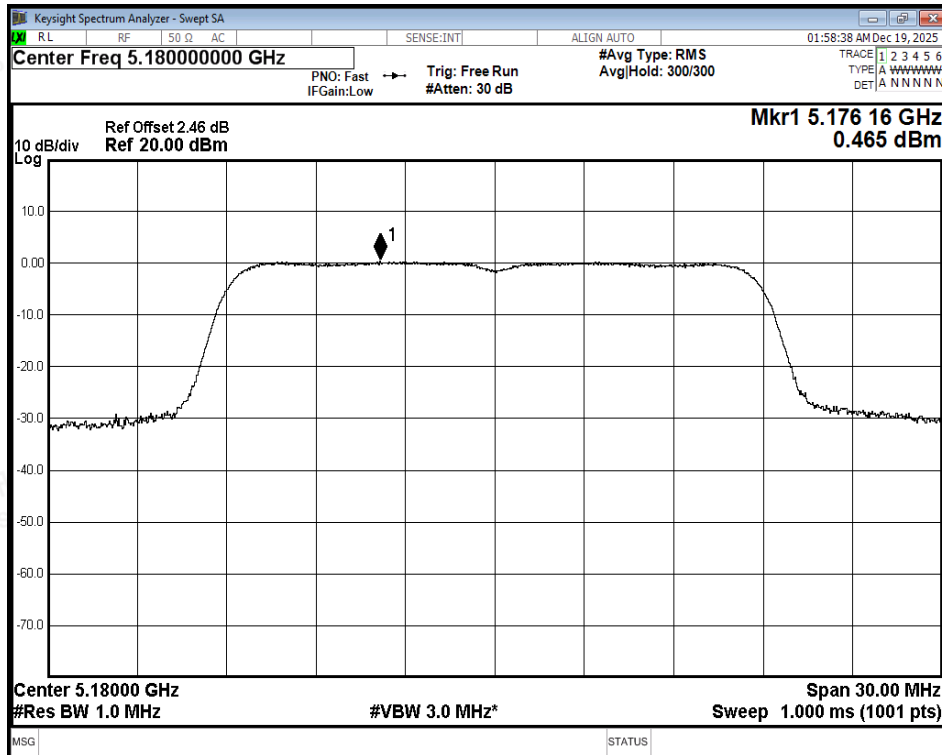


PSD NVNT n20 5180MHz Ant1



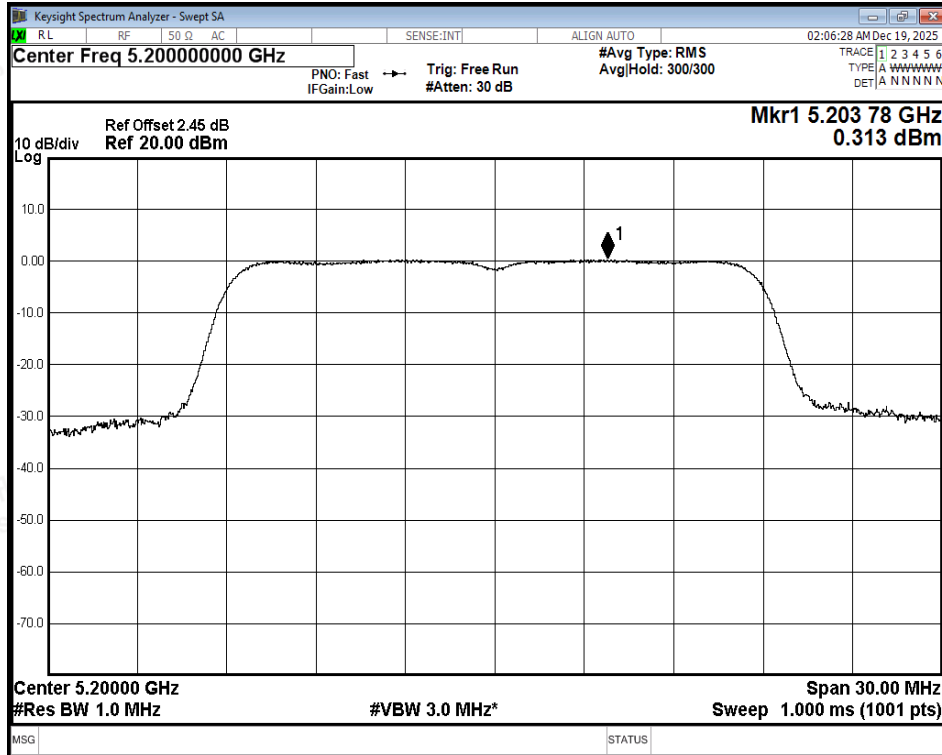


PSD NVNT n20 5200MHz Ant1

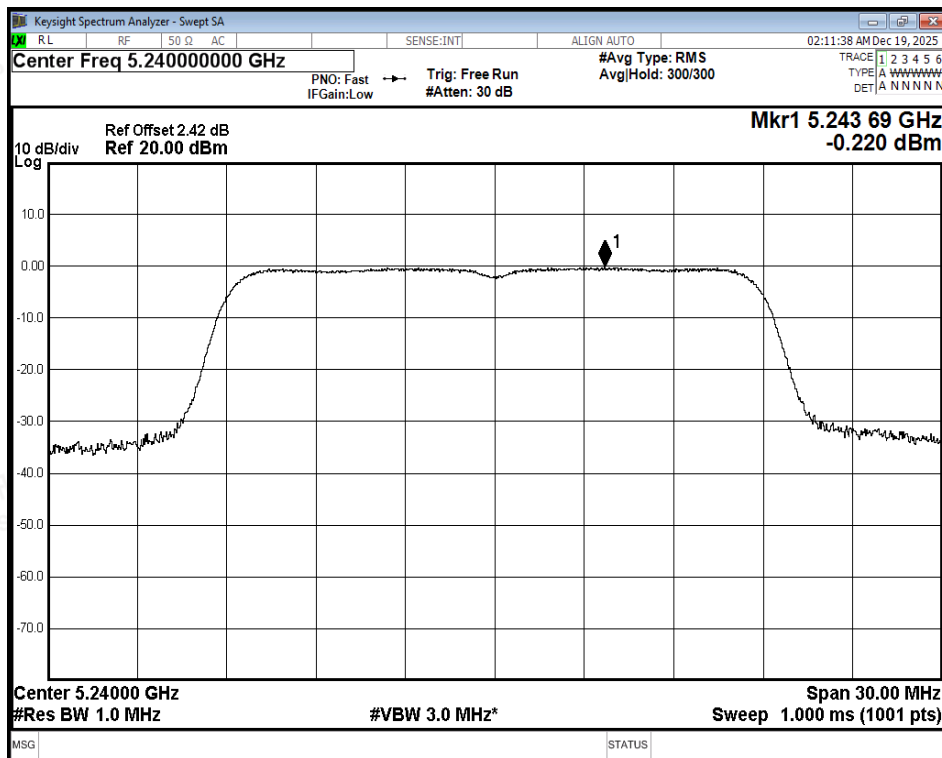


PSD NVNT n20 5240MHz Ant1



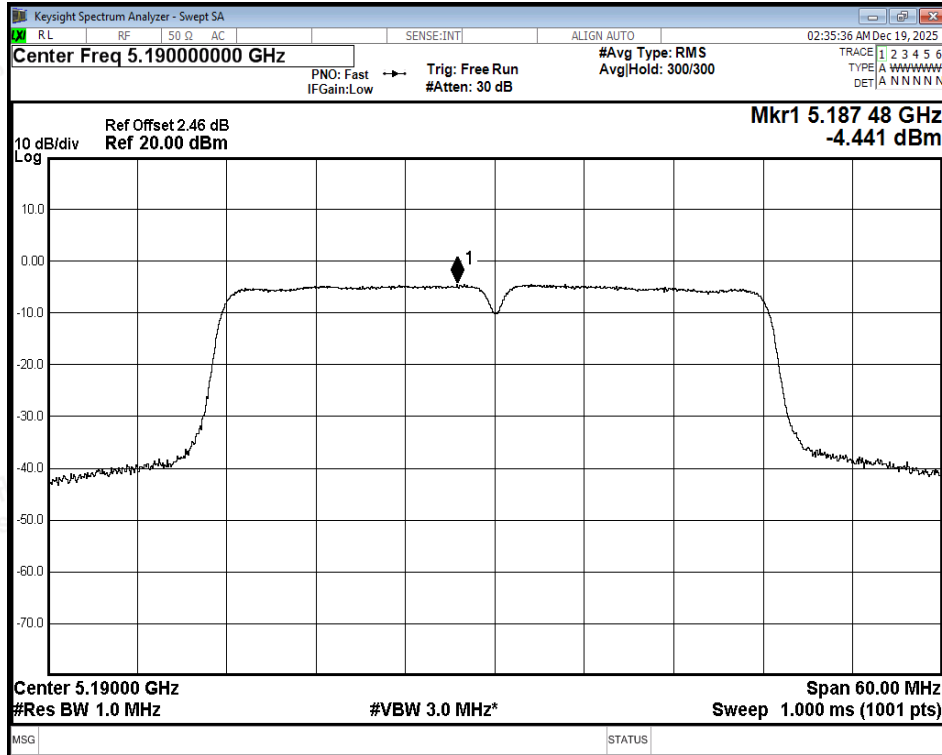


PSD NVNT n40 5190MHz Ant1

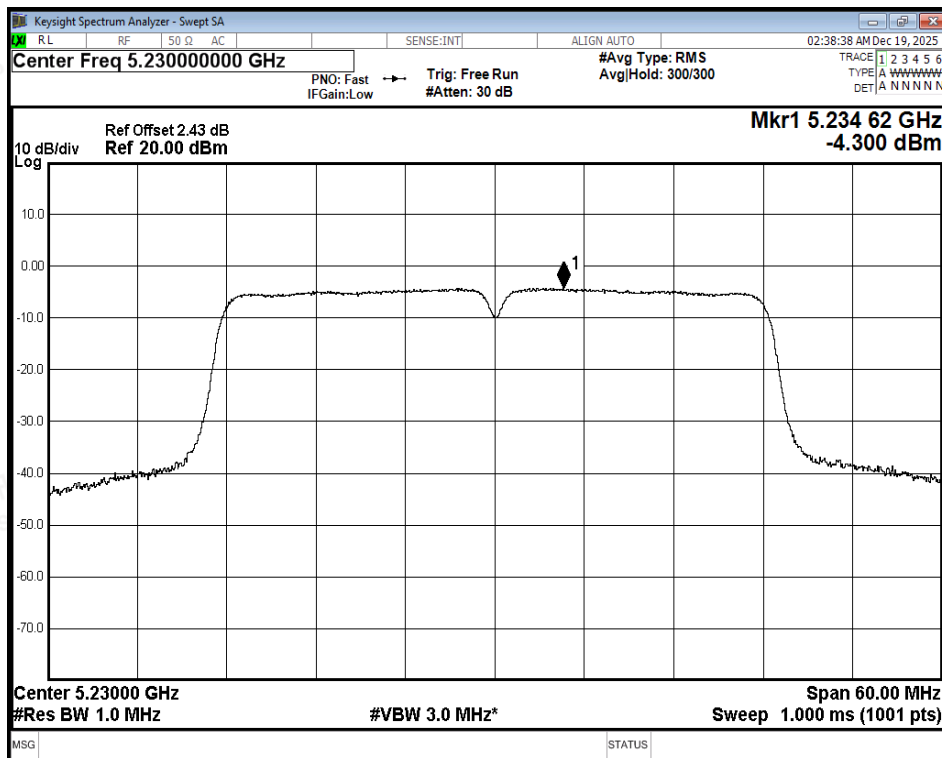


PSD NVNT n40 5230MHz Ant1



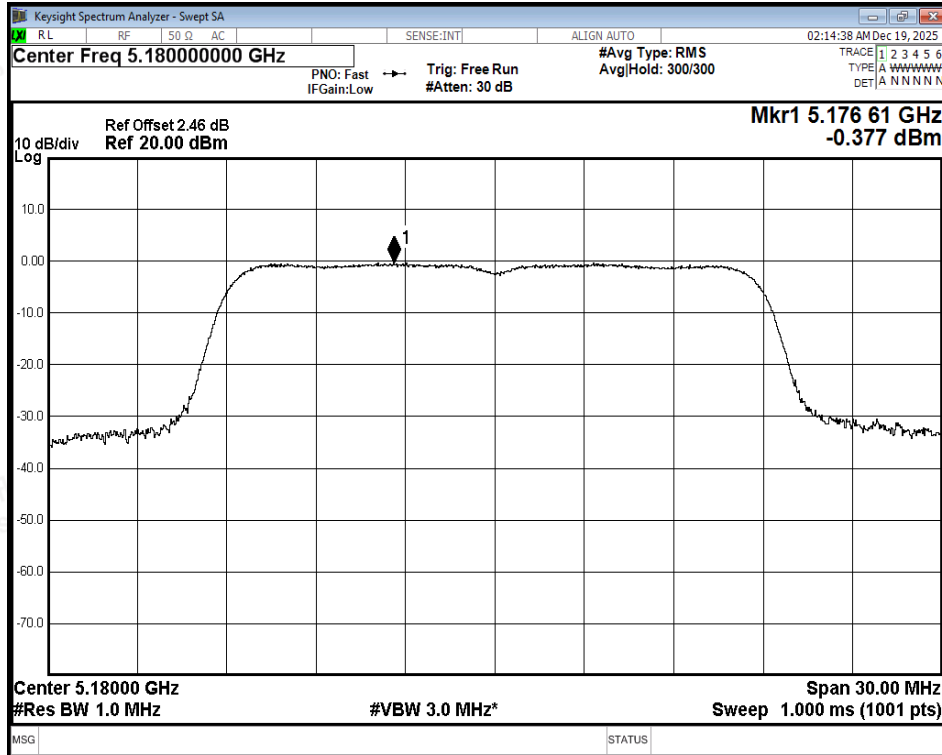


PSD NVNT ac20 5180MHz Ant1

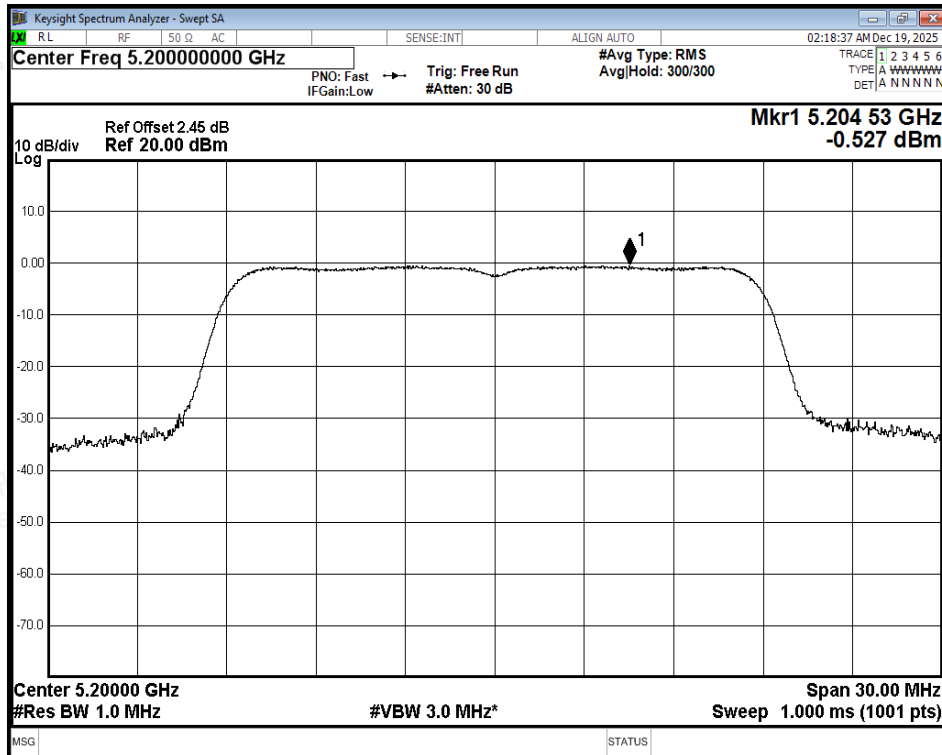


PSD NVNT ac20 5200MHz Ant1



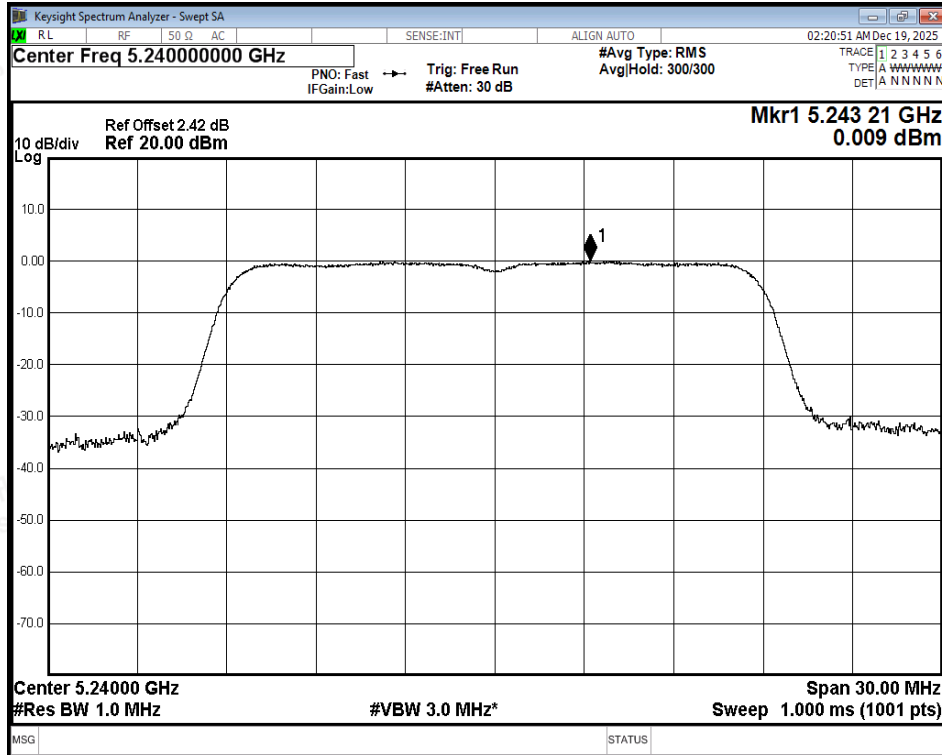


PSD NVNT ac20 5240MHz Ant1

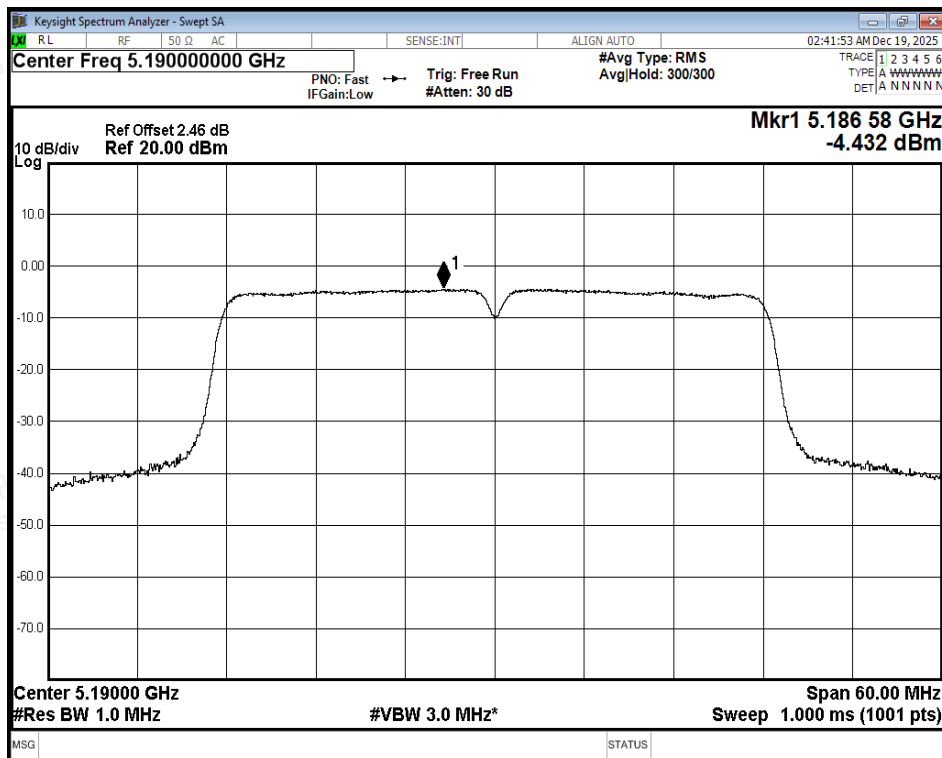


PSD NVNT ac40 5190MHz Ant1



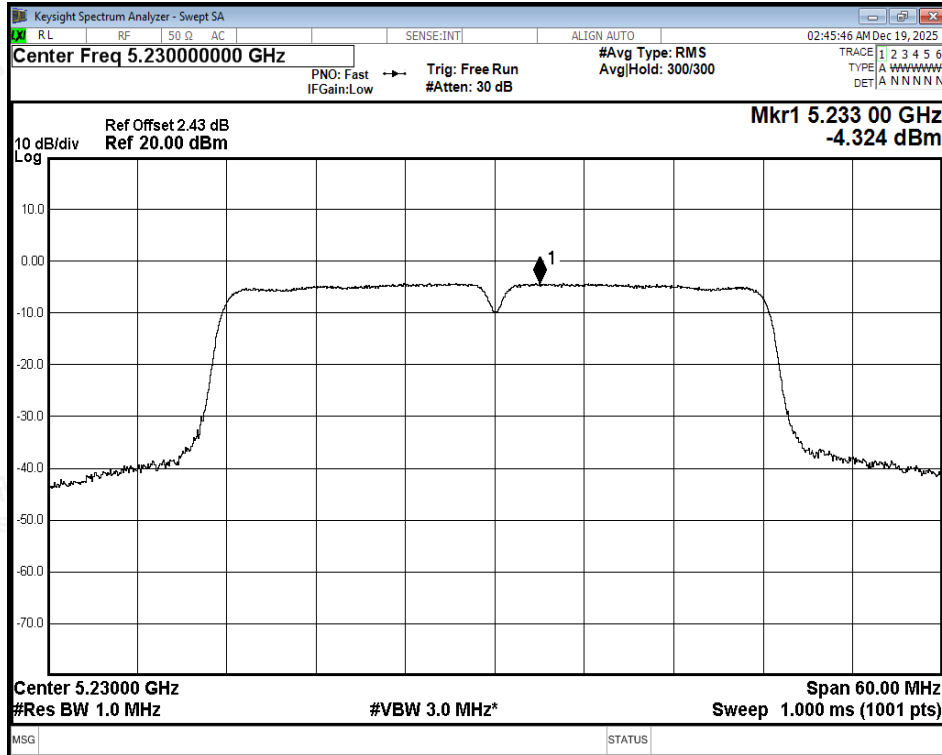


PSD NVNT ac40 5230MHz Ant1

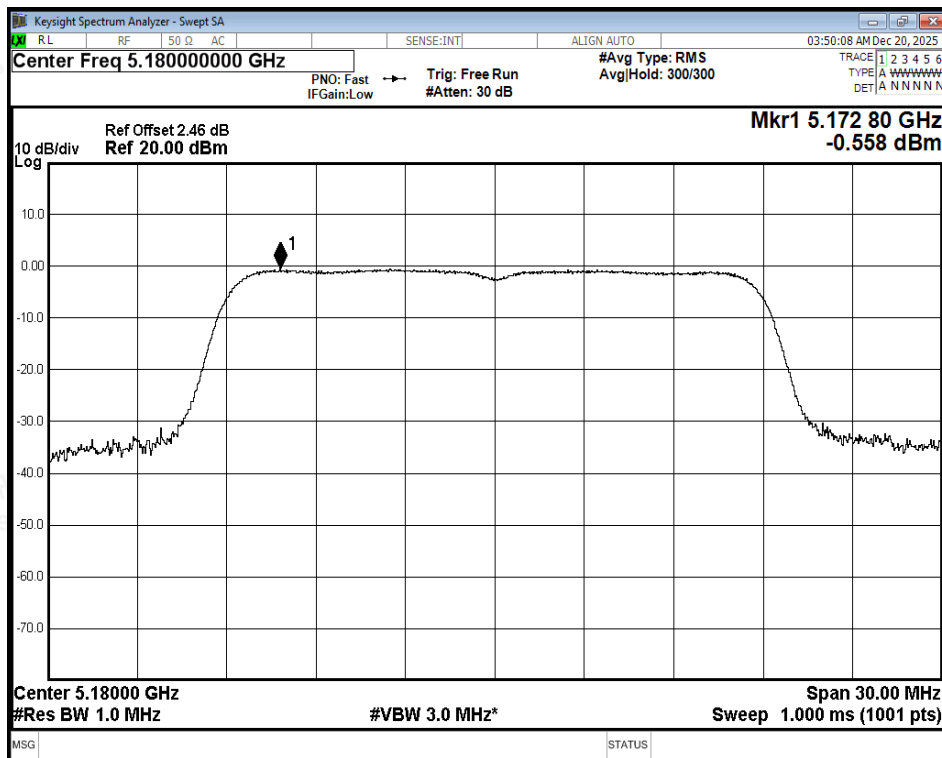


PSD NVNT ax20 5180MHz Ant1



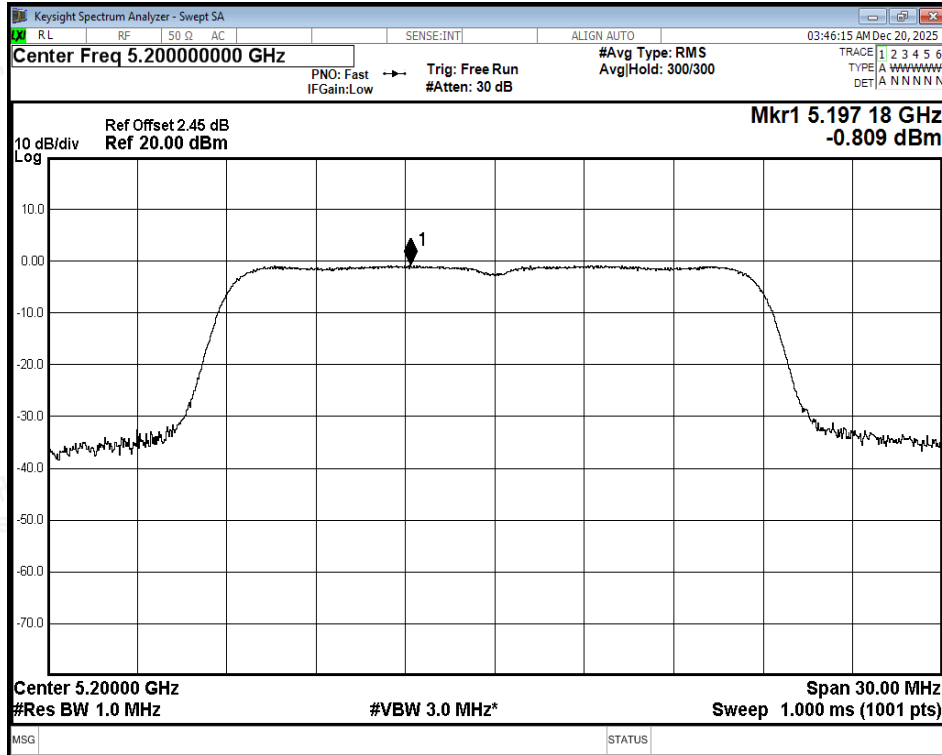


PSD NVNT ax20 5200MHz Ant1

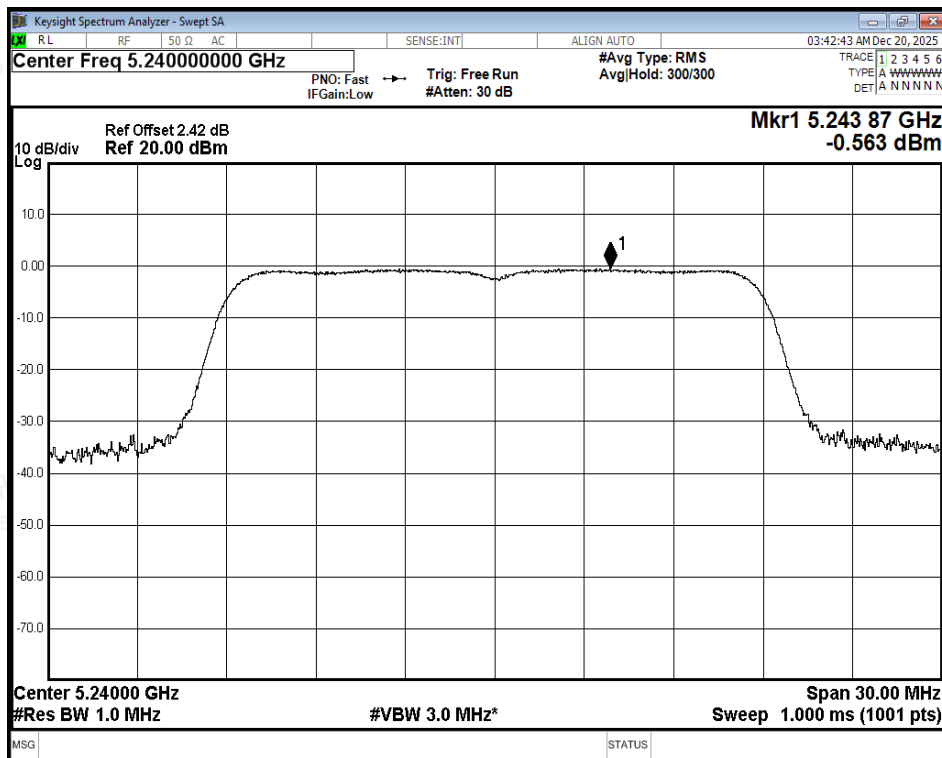


PSD NVNT ax20 5240MHz Ant1



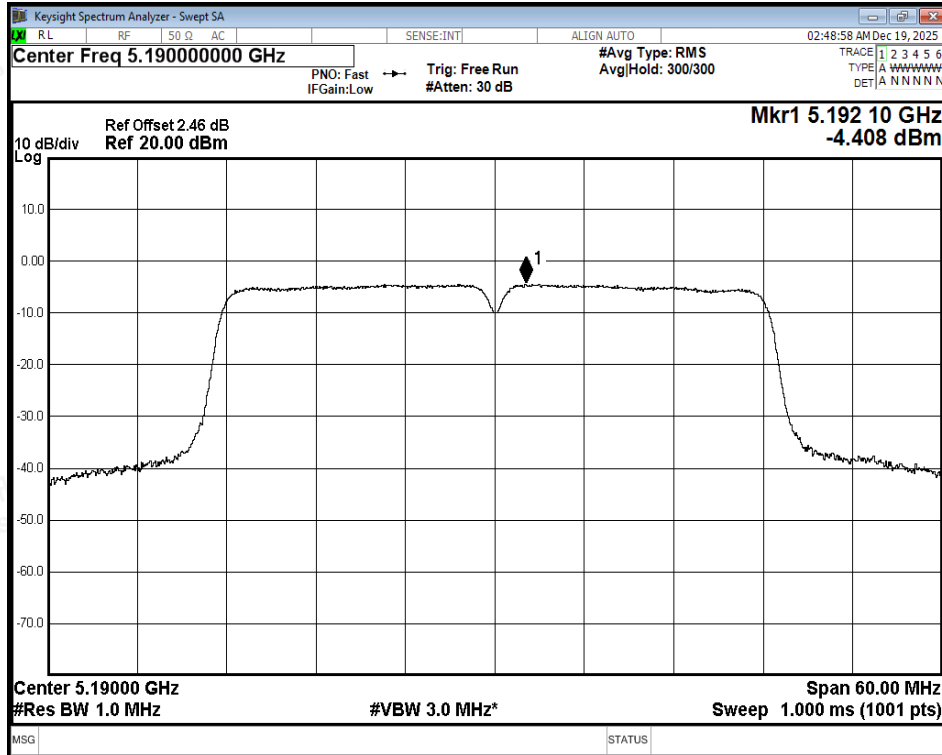

PSD NVNT ax40 5190MHz Ant1

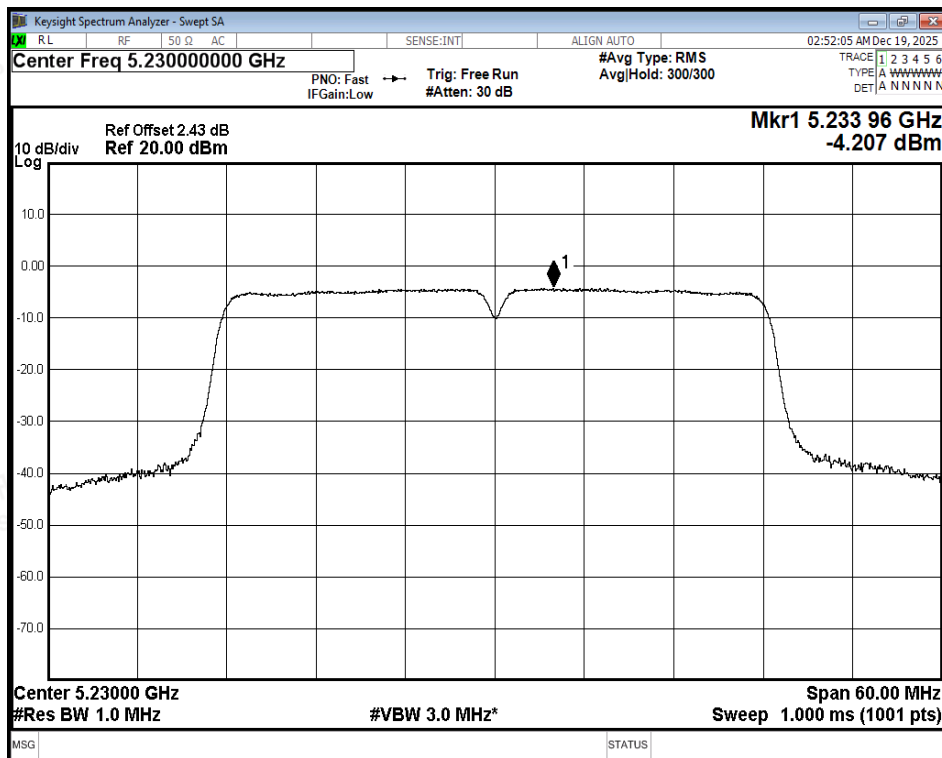

PSD NVNT ax40 5230MHz Ant1





A.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant1	4500	-62.15	6.23	39.31	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-69.55	6.23	31.91	Average	54	Pass
NVNT	a	5180	Ant1	5149.6	-46.13	6.23	55.33	Peak	68.2	Pass
NVNT	a	5180	Ant1	5149.6	-55.51	6.23	45.95	Average	54	Pass
NVNT	a	5180	Ant1	5150	-49.5	6.23	51.96	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-55.45	6.23	46.01	Average	54	Pass
NVNT	a	5240	Ant1	5350	-59.45	6.23	42.01	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-64.21	6.23	37.25	Average	54	Pass
NVNT	a	5240	Ant1	5352.24	-56.45	6.23	45.01	Peak	68.2	Pass
NVNT	a	5240	Ant1	5351.04	-64.19	6.23	37.27	Average	54	Pass
NVNT	a	5240	Ant1	5460	-60.75	6.23	40.71	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-67.65	6.23	33.81	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-62.37	6.23	39.09	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-69.55	6.23	31.91	Average	54	Pass
NVNT	n20	5180	Ant1	5149.6	-44.44	6.23	57.02	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5149.6	-50.85	6.23	50.61	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-43.17	6.23	58.29	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-50.06	6.23	51.4	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-50.22	6.23	51.24	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-58.01	6.23	43.45	Average	54	Pass
NVNT	n20	5240	Ant1	5414.16	-47.98	6.23	53.48	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5440.08	-57.64	6.23	43.82	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-50.64	6.23	50.82	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-57.92	6.23	43.54	Average	54	Pass
NVNT	n40	5190	Ant1	4500	-61.66	6.23	39.8	Peak	68.2	Pass
NVNT	n40	5190	Ant1	4500	-69.57	6.23	31.89	Average	54	Pass
NVNT	n40	5190	Ant1	5148.97	-42.83	6.23	58.63	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5149.7	-52.5	6.23	48.96	Average	54	Pass
NVNT	n40	5190	Ant1	5150	-47.48	6.23	53.98	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5150	-52.67	6.23	48.79	Average	54	Pass
NVNT	n40	5230	Ant1	5350	-49.92	6.23	51.54	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5350	-58.1	6.23	43.36	Average	54	Pass
NVNT	n40	5230	Ant1	5405.19	-47.69	6.23	53.77	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5451.63	-57.4	6.23	44.06	Average	54	Pass
NVNT	n40	5230	Ant1	5460	-50.18	6.23	51.28	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5460	-57.68	6.23	43.78	Average	54	Pass
NVNT	ac20	5180	Ant1	4500	-60.61	6.23	40.85	Peak	68.2	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



NVNT	ac20	5180	Ant1	4500	-69.56	6.23	31.9	Average	54	Pass
NVNT	ac20	5180	Ant1	5149.6	-43.03	6.23	58.43	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5149.6	-50.55	6.23	50.91	Average	54	Pass
NVNT	ac20	5180	Ant1	5150	-44.55	6.23	56.91	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5150	-50.03	6.23	51.43	Average	54	Pass
NVNT	ac20	5240	Ant1	5350	-51.23	6.23	50.23	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5350	-57.82	6.23	43.64	Average	54	Pass
NVNT	ac20	5240	Ant1	5421.12	-48.47	6.23	52.99	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5428.32	-57.64	6.23	43.82	Average	54	Pass
NVNT	ac20	5240	Ant1	5460	-49.49	6.23	51.97	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5460	-57.86	6.23	43.6	Average	54	Pass
NVNT	ac40	5190	Ant1	4500	-62.45	6.23	39.01	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	4500	-69.41	6.23	32.05	Average	54	Pass
NVNT	ac40	5190	Ant1	5148.24	-46.32	6.23	55.14	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5149.7	-53.34	6.23	48.12	Average	54	Pass
NVNT	ac40	5190	Ant1	5150	-47.83	6.23	53.63	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5150	-52.87	6.23	48.59	Average	54	Pass
NVNT	ac40	5230	Ant1	5350	-51.09	6.23	50.37	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5350	-58.12	6.23	43.34	Average	54	Pass
NVNT	ac40	5230	Ant1	5448.39	-48.18	6.23	53.28	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5446.77	-57.43	6.23	44.03	Average	54	Pass
NVNT	ac40	5230	Ant1	5460	-49.81	6.23	51.65	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5460	-57.8	6.23	43.66	Average	54	Pass
NVNT	ax20	5180	Ant1	4500	-62.4	6.23	39.06	Peak	68.2	Pass
NVNT	ax20	5180	Ant1	4500	-69.46	6.23	32	Average	54	Pass
NVNT	ax20	5180	Ant1	5147.5	-45.22	6.23	56.24	Peak	68.2	Pass
NVNT	ax20	5180	Ant1	5149.6	-49.35	6.23	52.11	Average	54	Pass
NVNT	ax20	5180	Ant1	5150	-42.18	6.23	59.28	Peak	68.2	Pass
NVNT	ax20	5180	Ant1	5150	-49.35	6.23	52.11	Average	54	Pass
NVNT	ax20	5240	Ant1	5350	-50.65	6.23	50.81	Peak	68.2	Pass
NVNT	ax20	5240	Ant1	5350	-57.3	6.23	44.16	Average	54	Pass
NVNT	ax20	5240	Ant1	5443.44	-48.3	6.23	53.16	Peak	68.2	Pass
NVNT	ax20	5240	Ant1	5351.04	-57.05	6.23	44.41	Average	54	Pass
NVNT	ax20	5240	Ant1	5460	-51.11	6.23	50.35	Peak	68.2	Pass
NVNT	ax20	5240	Ant1	5460	-57.86	6.23	43.6	Average	54	Pass
NVNT	ax40	5190	Ant1	4500	-60.99	6.23	40.47	Peak	68.2	Pass
NVNT	ax40	5190	Ant1	4500	-69.46	6.23	32	Average	54	Pass
NVNT	ax40	5190	Ant1	5149.7	-49.04	6.23	52.42	Peak	68.2	Pass
NVNT	ax40	5190	Ant1	5149.7	-52.82	6.23	48.64	Average	54	Pass
NVNT	ax40	5190	Ant1	5150	-46.98	6.23	54.48	Peak	68.2	Pass
NVNT	ax40	5190	Ant1	5150	-52.37	6.23	49.09	Average	54	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




NVNT	ax40	5230	Ant1	5350	-49.58	6.23	51.88	Peak	68.2	Pass
NVNT	ax40	5230	Ant1	5350	-57.81	6.23	43.65	Average	54	Pass
NVNT	ax40	5230	Ant1	5375.22	-47.45	6.23	54.01	Peak	68.2	Pass
NVNT	ax40	5230	Ant1	5450.01	-57.43	6.23	44.03	Average	54	Pass
NVNT	ax40	5230	Ant1	5460	-50.65	6.23	50.81	Peak	68.2	Pass
NVNT	ax40	5230	Ant1	5460	-57.75	6.23	43.71	Average	54	Pass



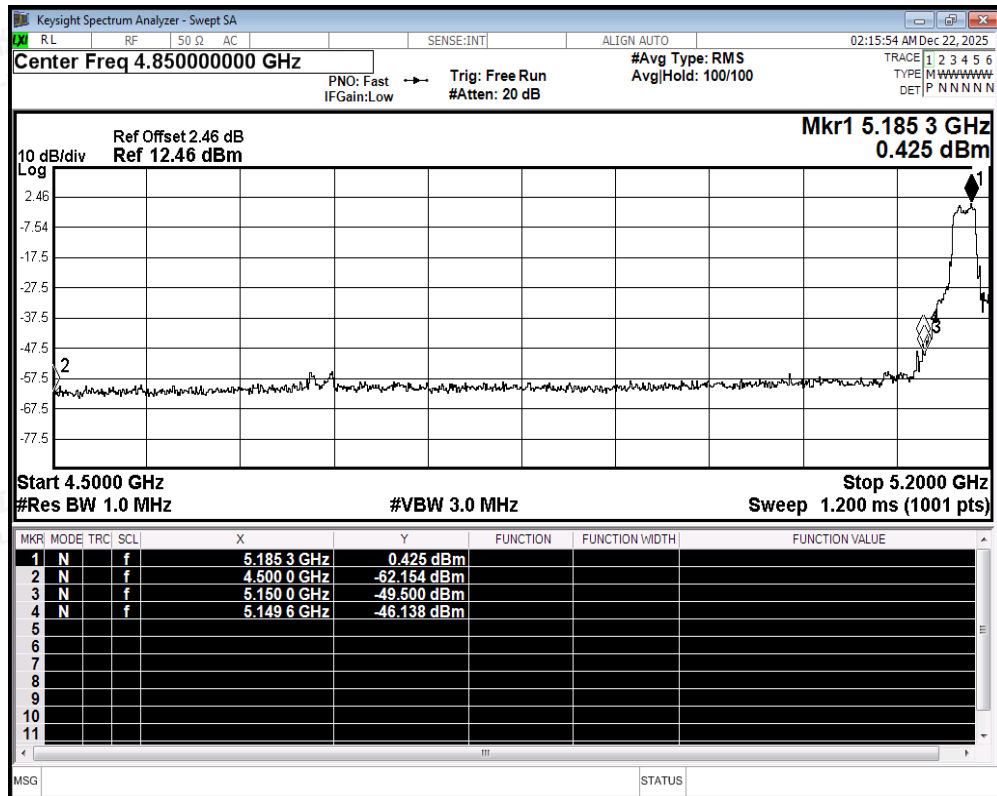


Restrict Band NVNT a 5180MHz Ant1 Peak

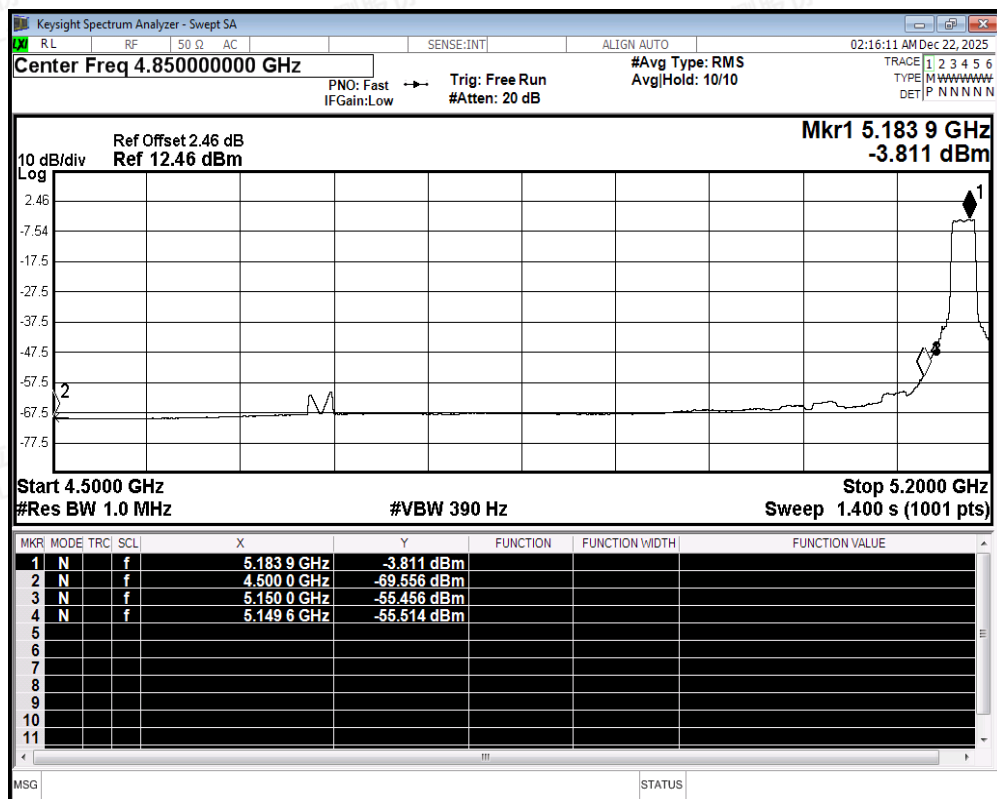


Restrict Band NVNT a 5180MHz Ant1 Average



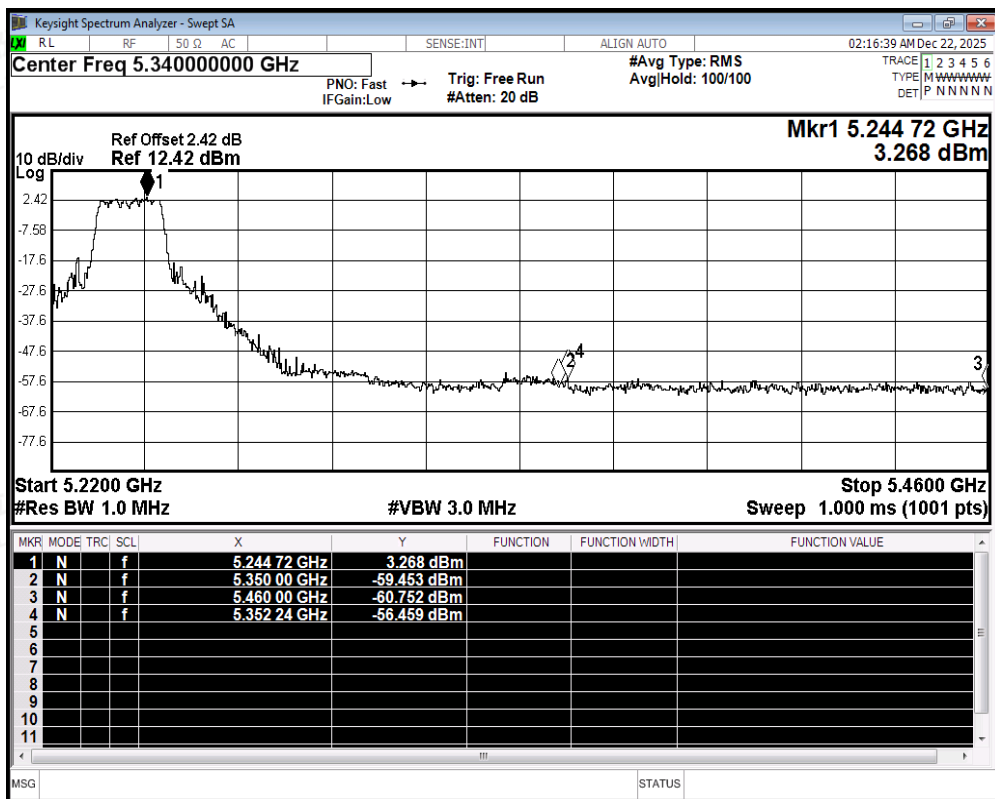


Restrict Band NVNT a 5240MHz Ant1 Peak

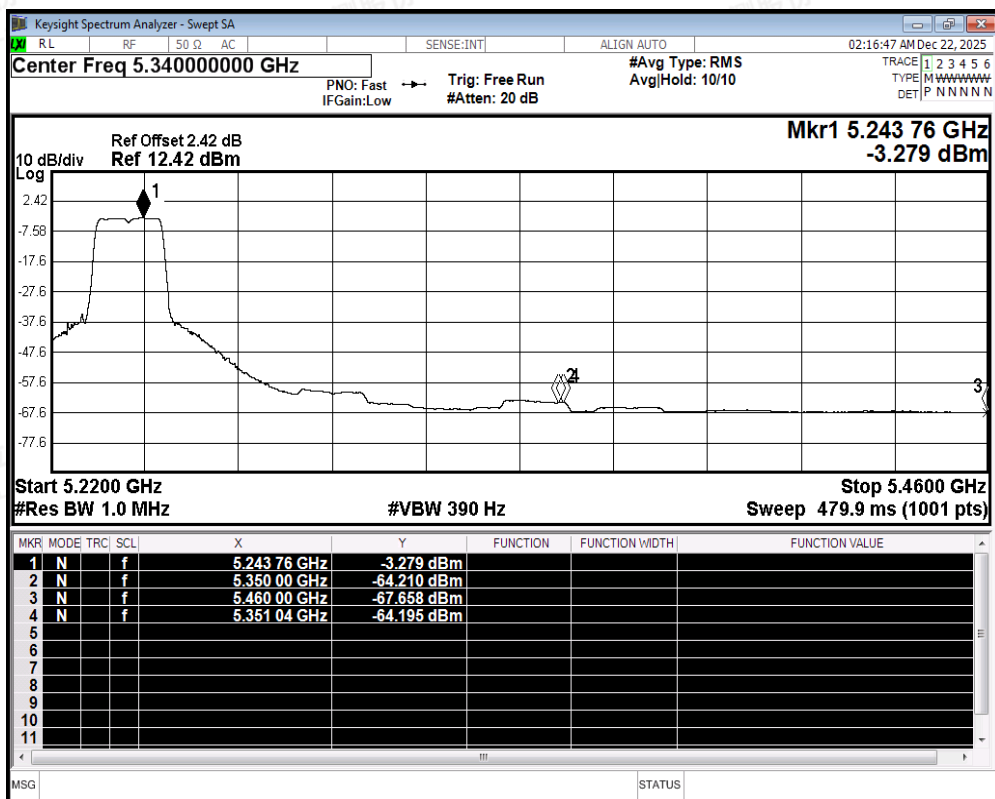


Restrict Band NVNT a 5240MHz Ant1 Average



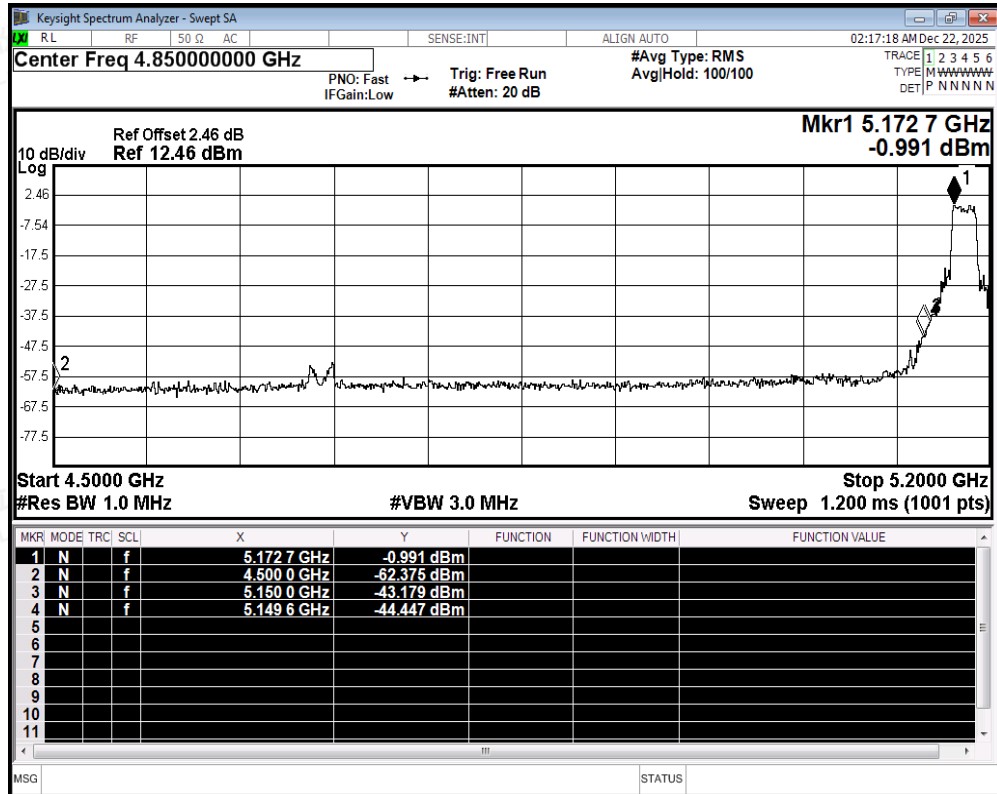


Restrict Band NVNT n20 5180MHz Ant1 Peak

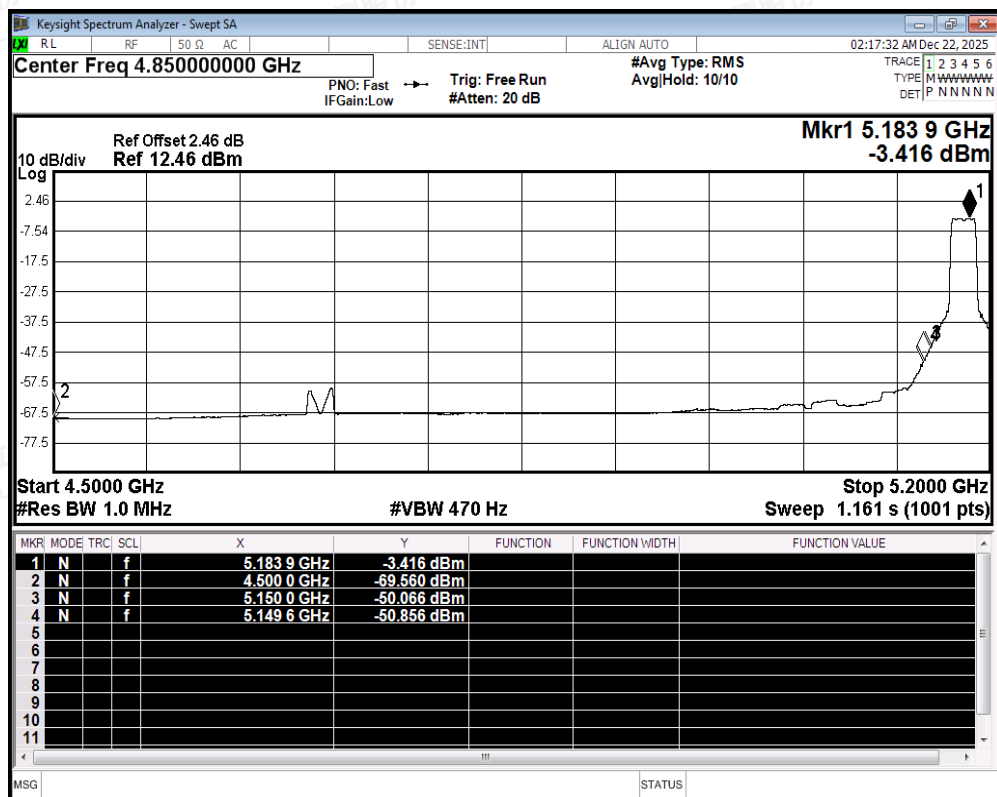


Restrict Band NVNT n20 5180MHz Ant1 Average



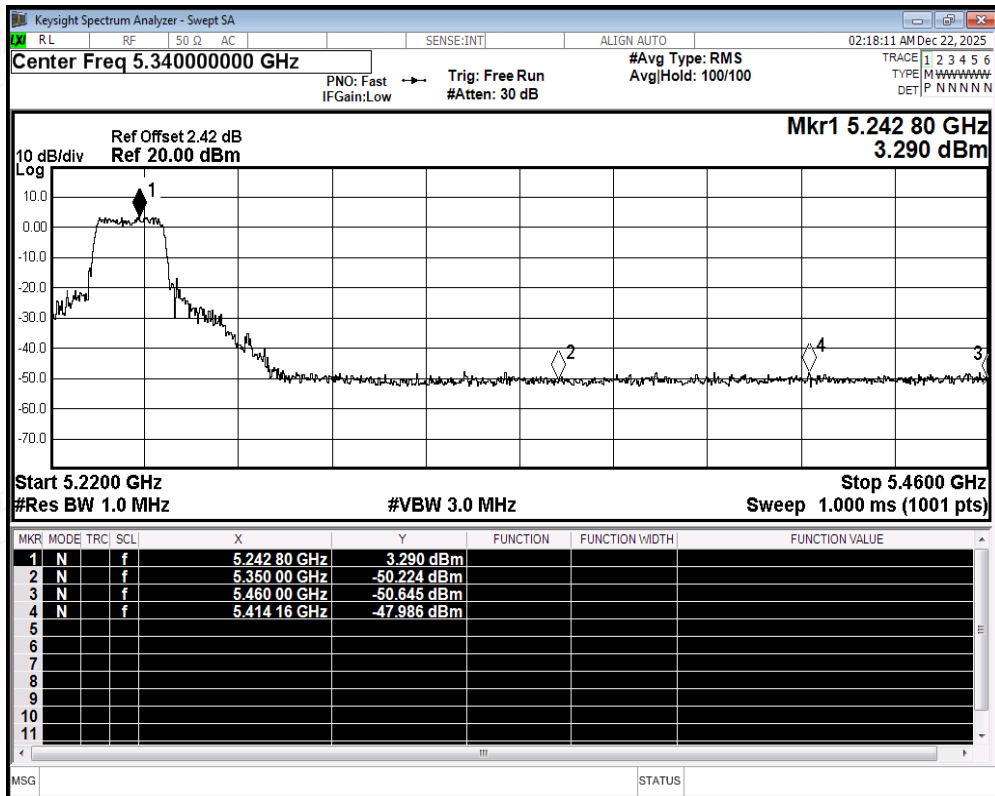


Restrict Band NVNT n20 5240MHz Ant1 Peak

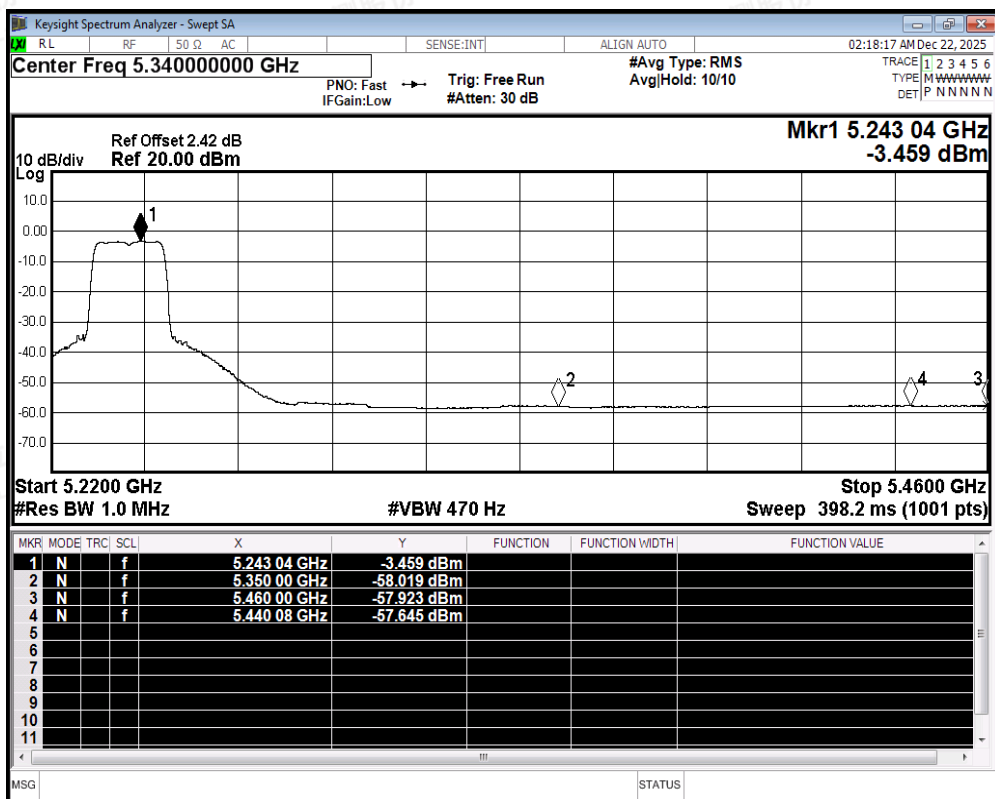


Restrict Band NVNT n20 5240MHz Ant1 Average



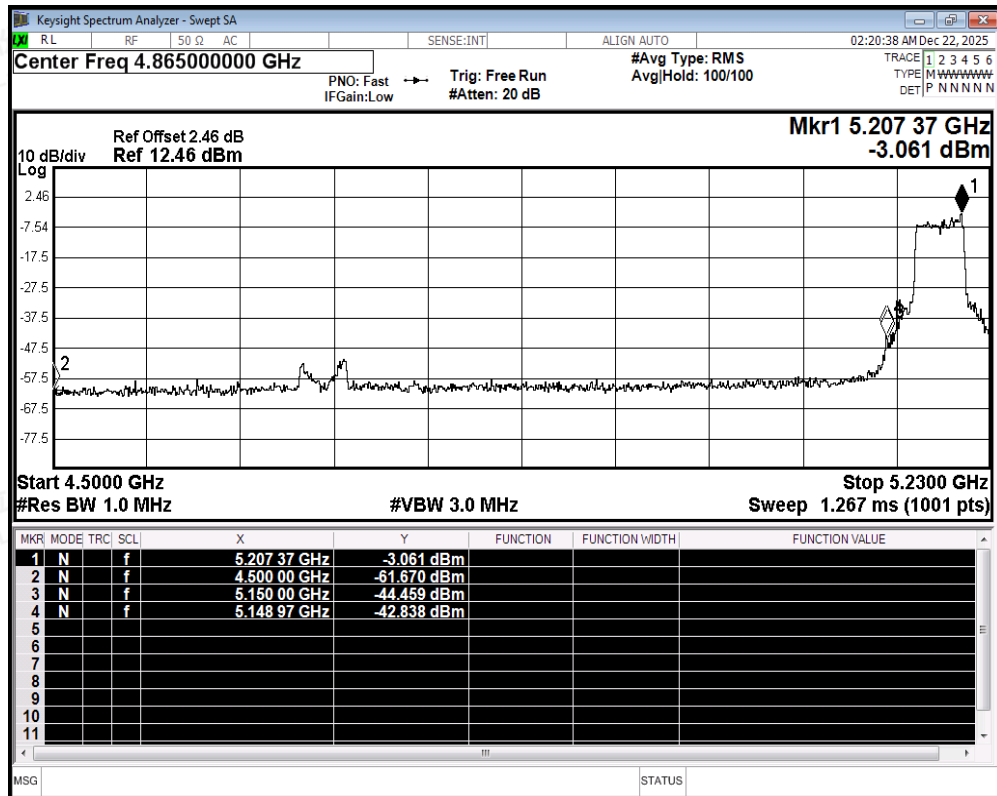


Restrict Band NVNT n40 5190MHz Ant1 Peak

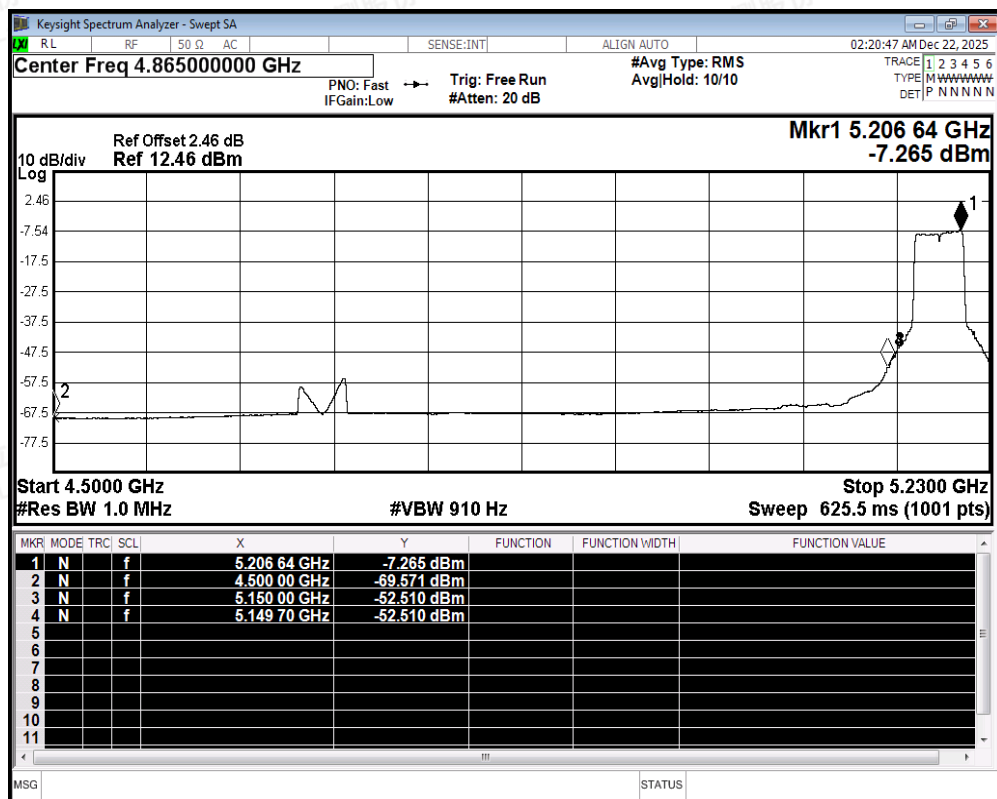


Restrict Band NVNT n40 5190MHz Ant1 Average



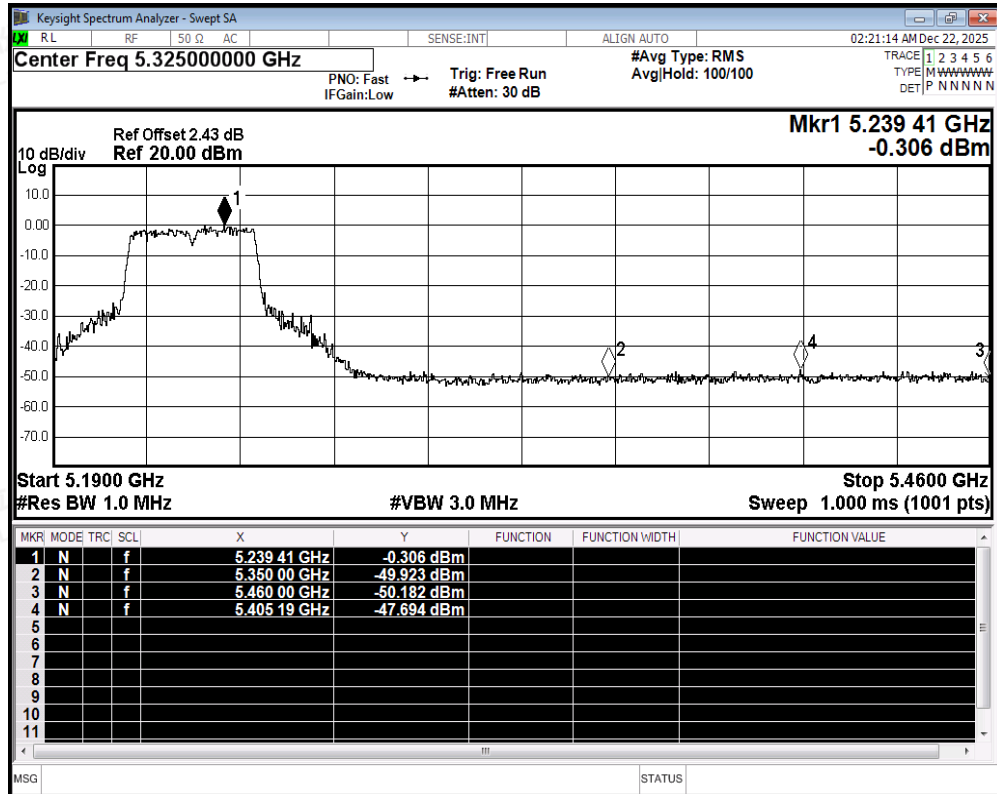


Restrict Band NVNT n40 5230MHz Ant1 Peak

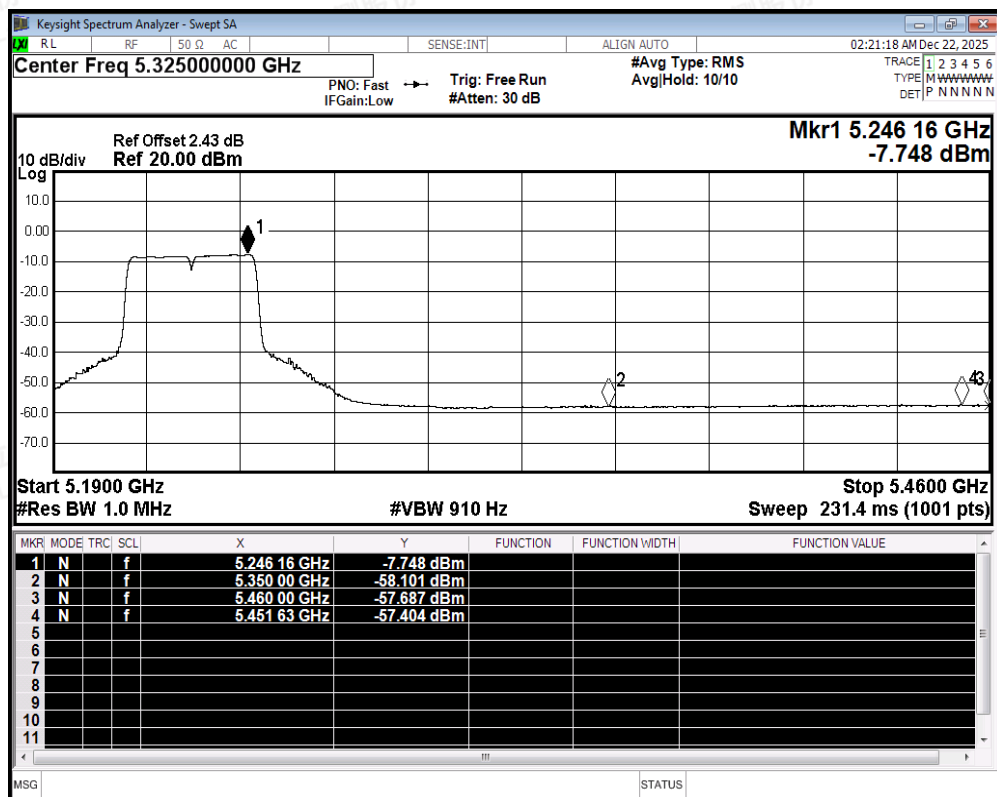


Restrict Band NVNT n40 5230MHz Ant1 Average



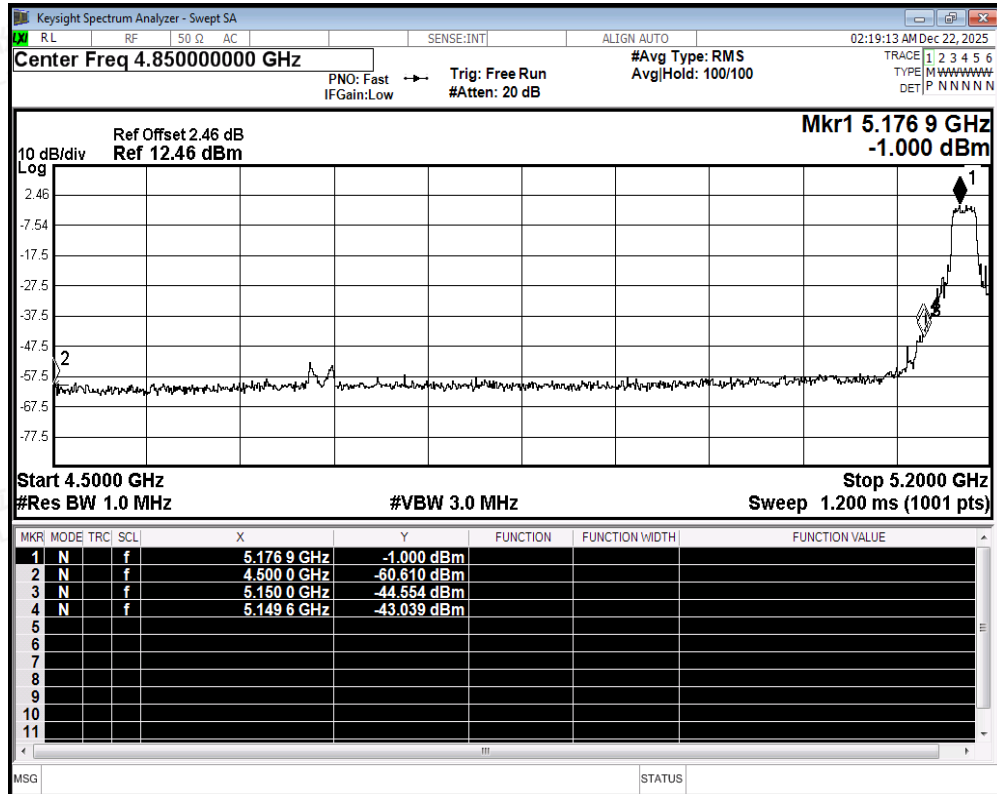


Restrict Band NVNT ac20 5180MHz Ant1 Peak

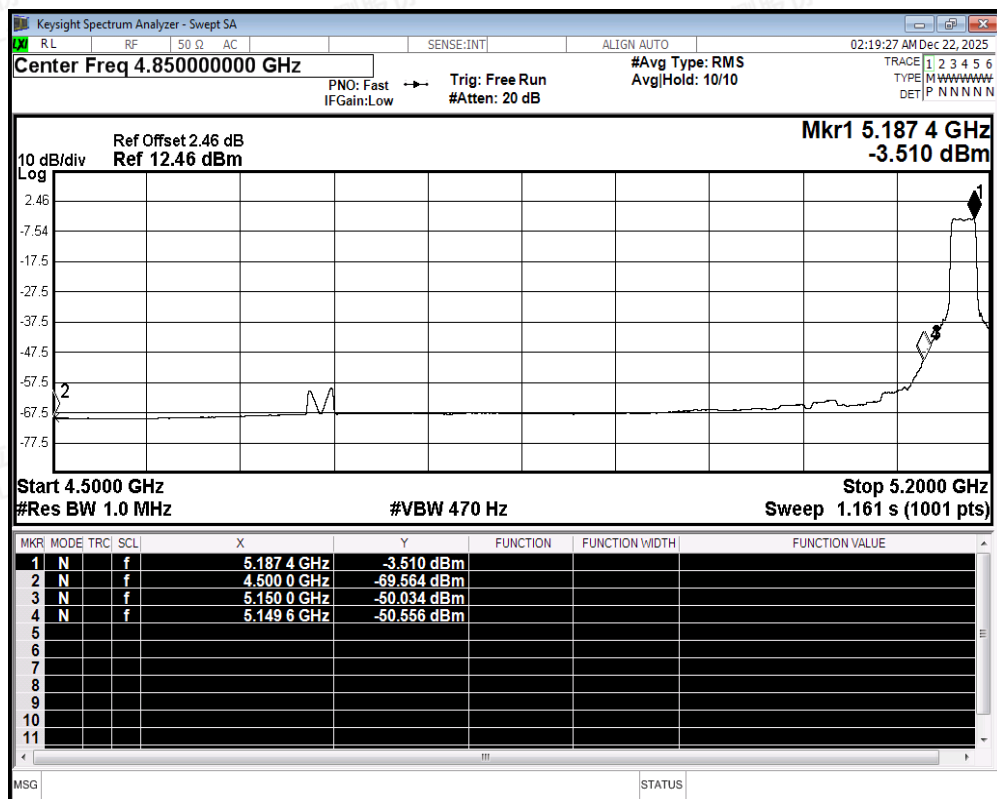


Restrict Band NVNT ac20 5180MHz Ant1 Average



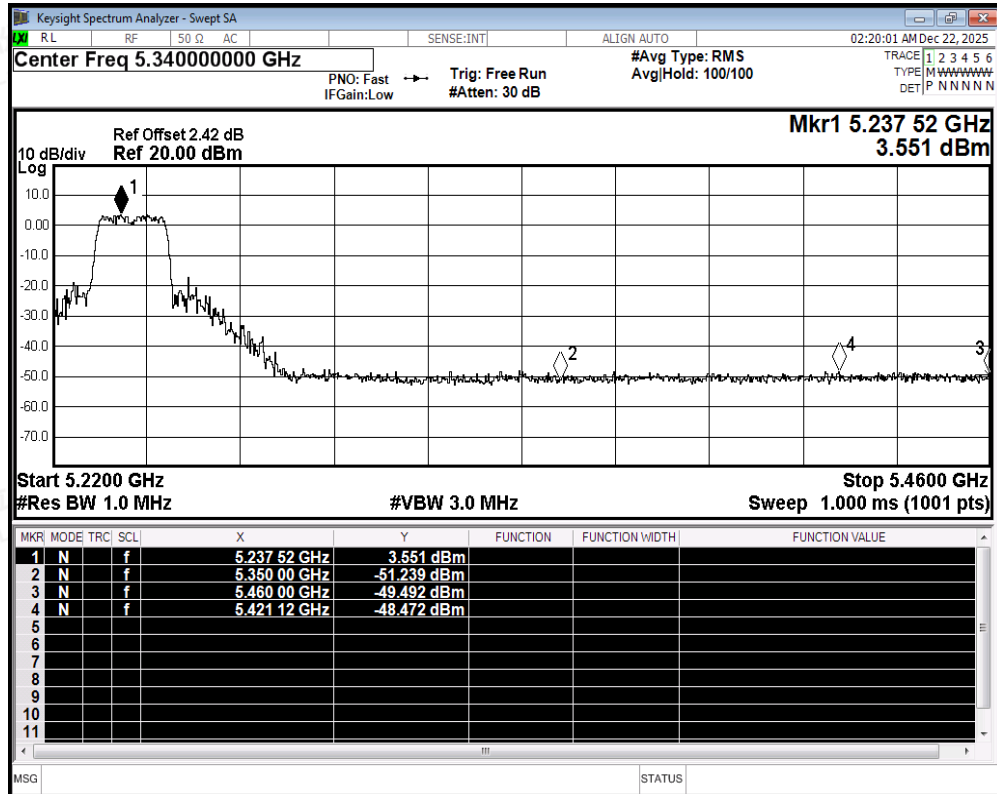


Restrict Band NVNT ac20 5240MHz Ant1 Peak

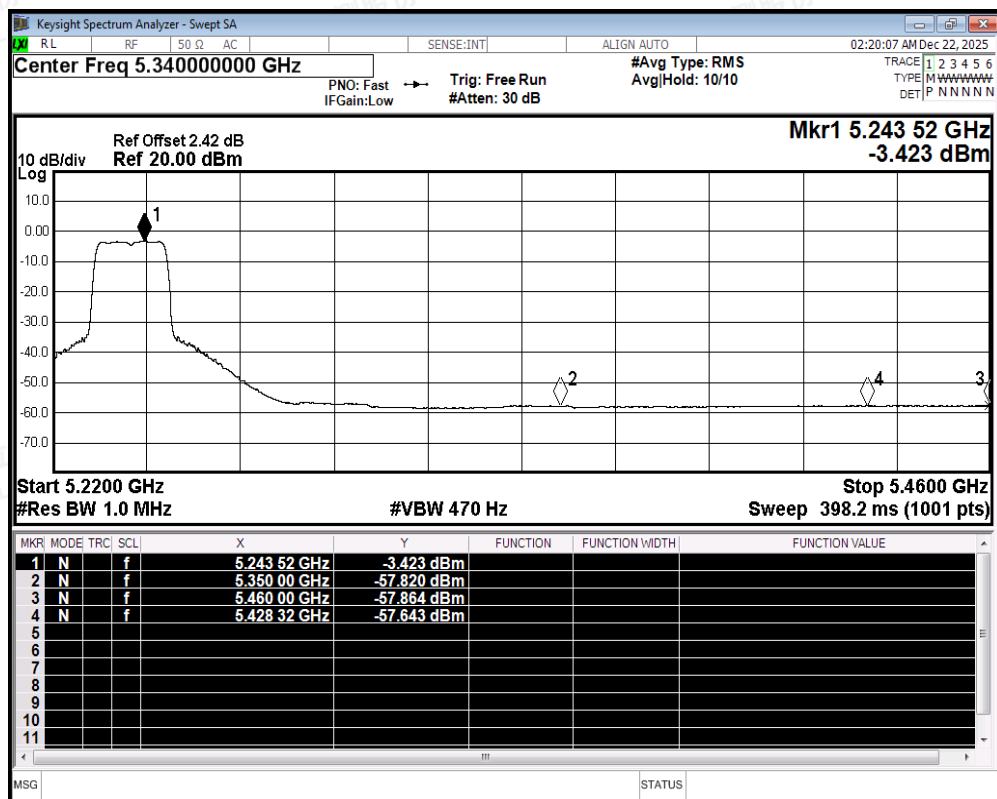


Restrict Band NVNT ac20 5240MHz Ant1 Average



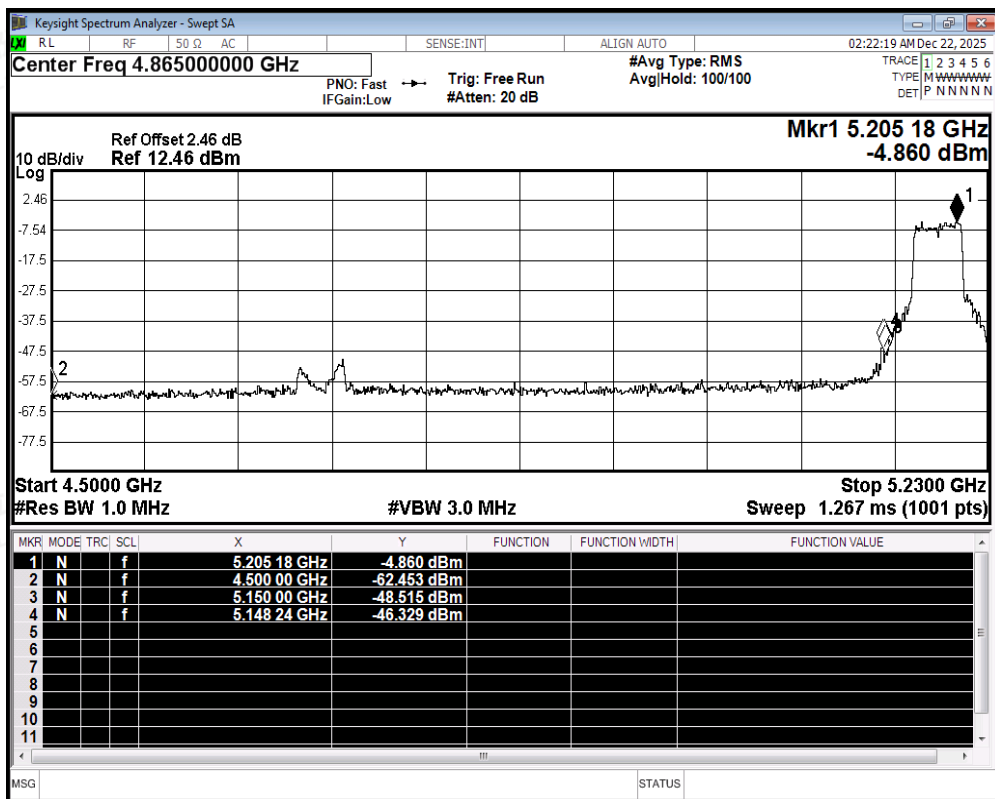


Restrict Band NVNT ac40 5190MHz Ant1 Peak

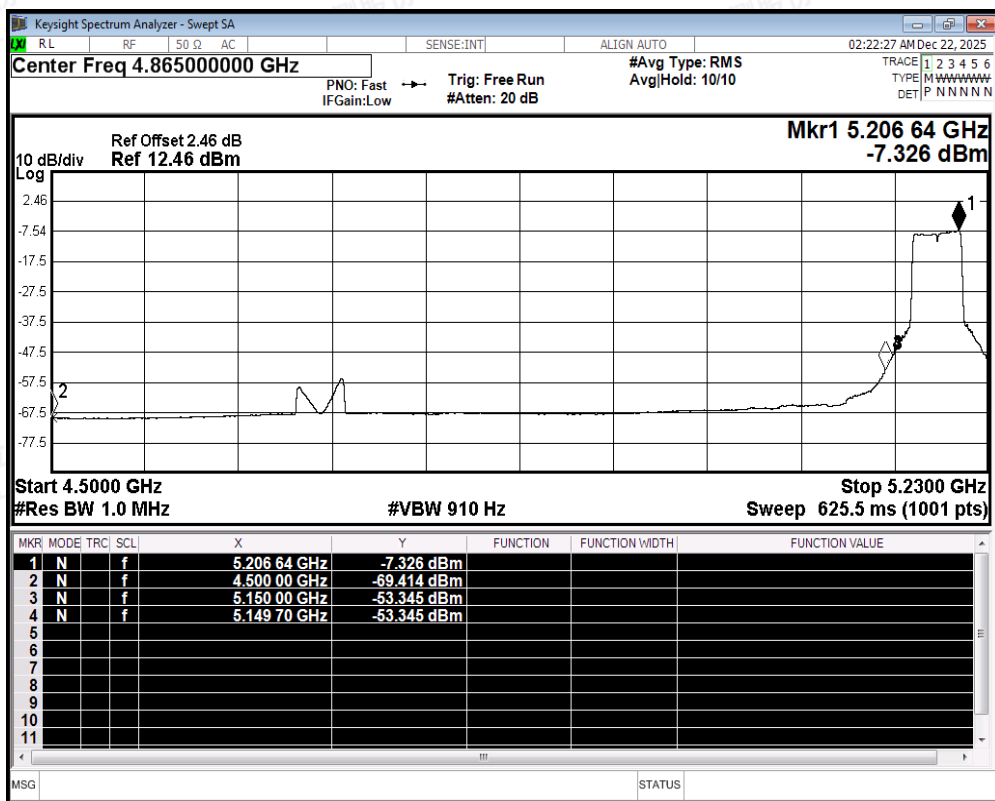


Restrict Band NVNT ac40 5190MHz Ant1 Average



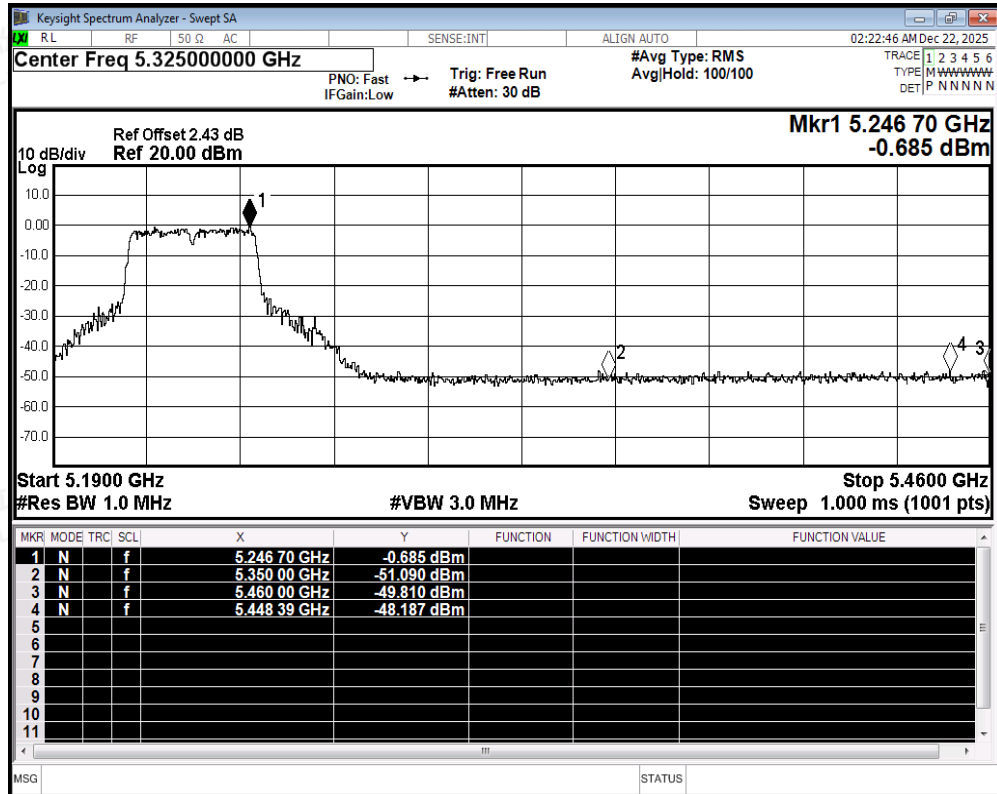


Restrict Band NVNT ac40 5230MHz Ant1 Peak

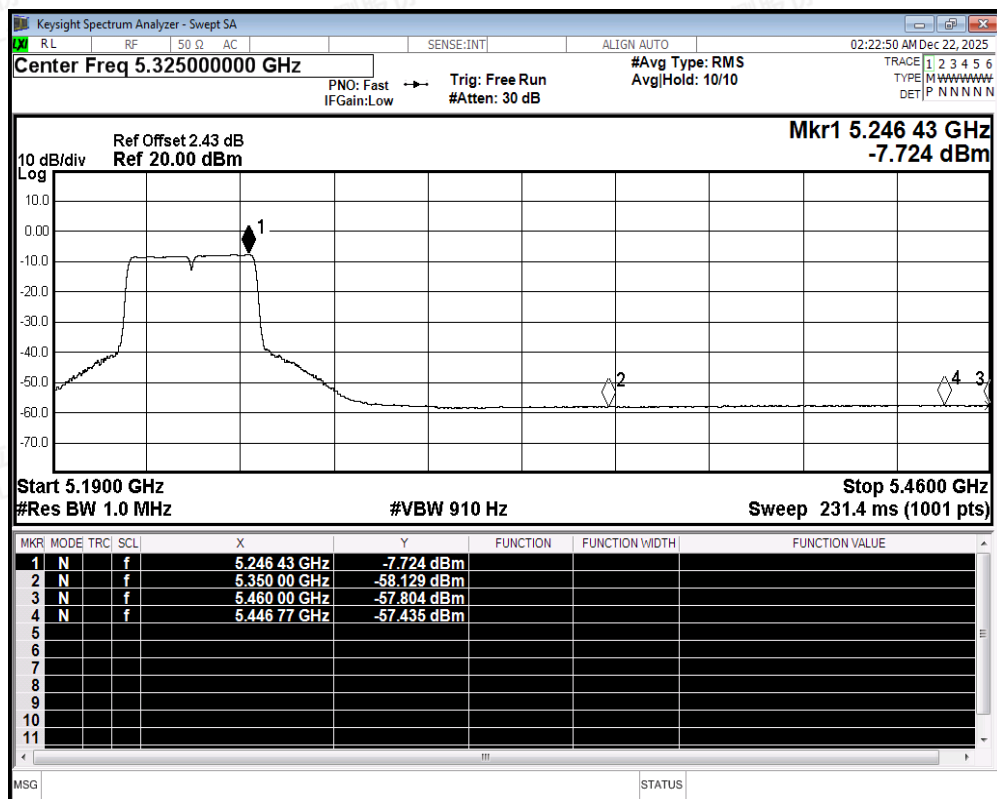


Restrict Band NVNT ac40 5230MHz Ant1 Average



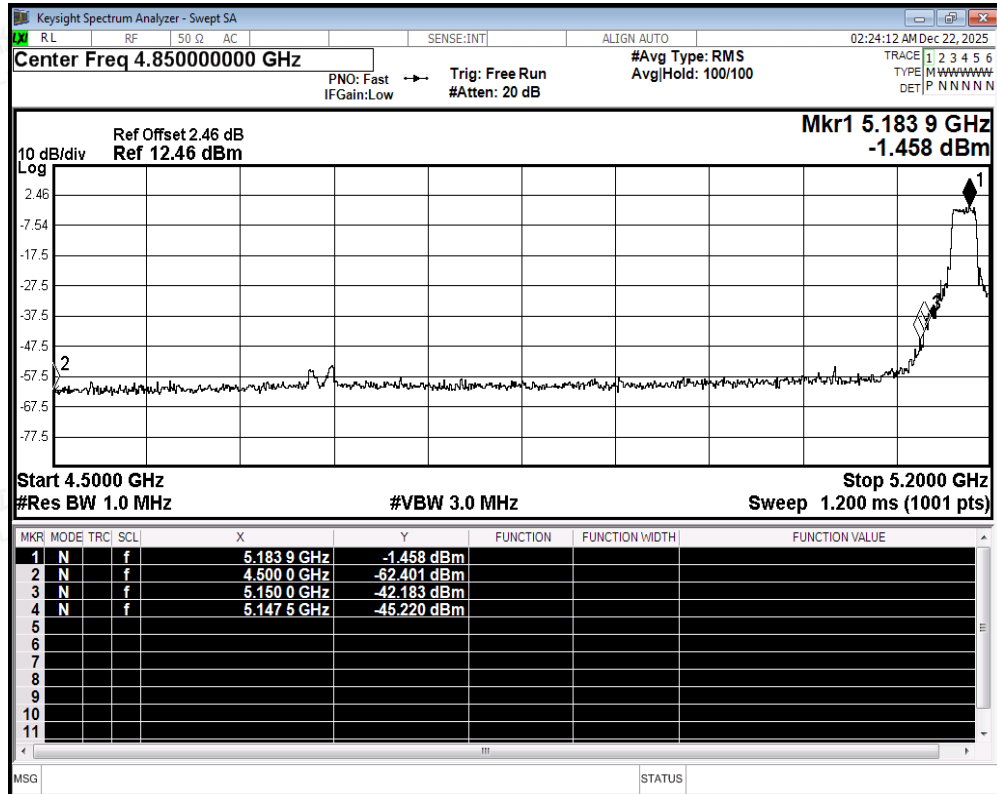


Restrict Band NVNT ax20 5180MHz Ant1 Peak

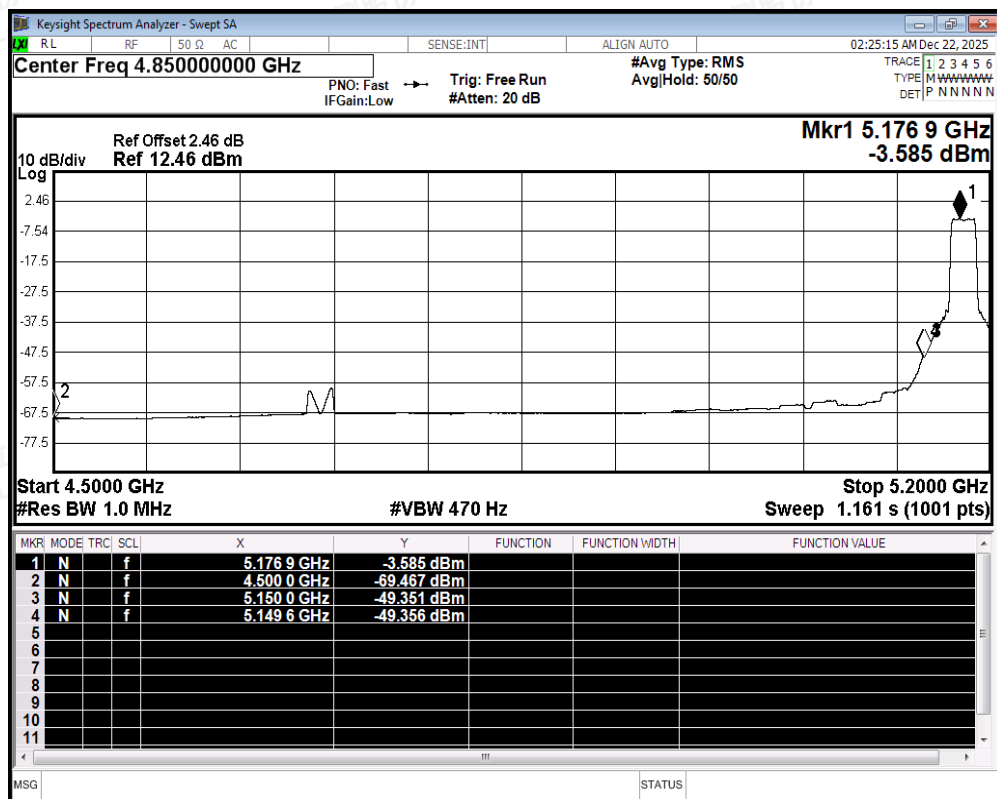


Restrict Band NVNT ax20 5180MHz Ant1 Average



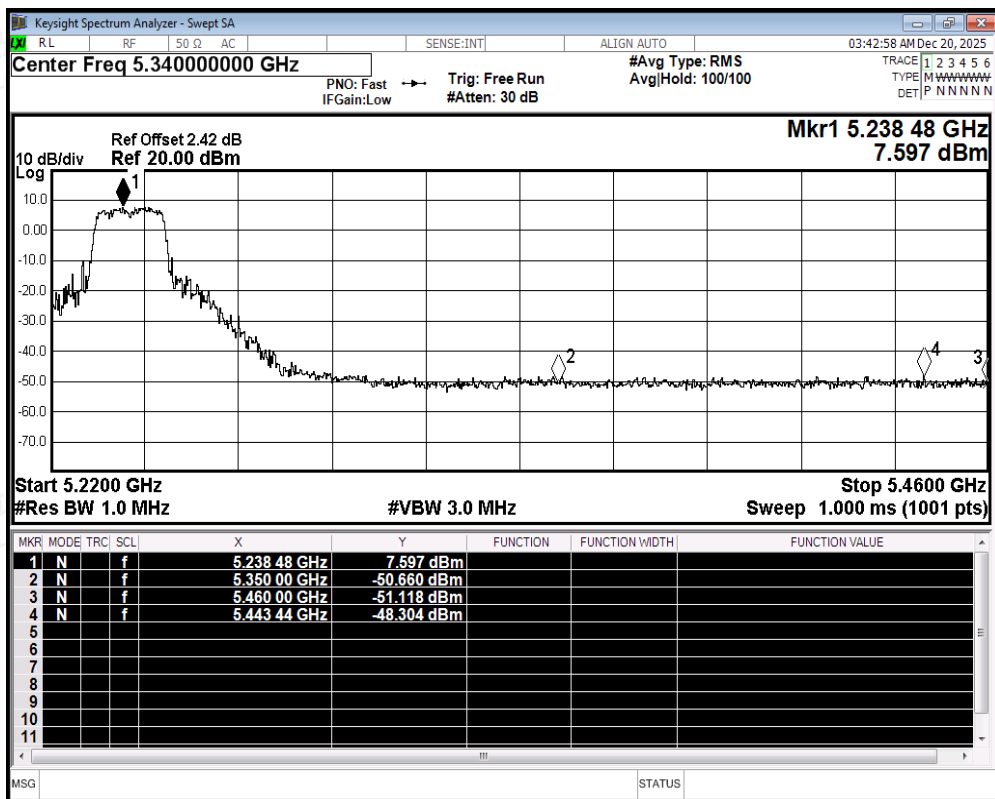

Restrict Band NVNT ax20 5240MHz Ant1 Peak

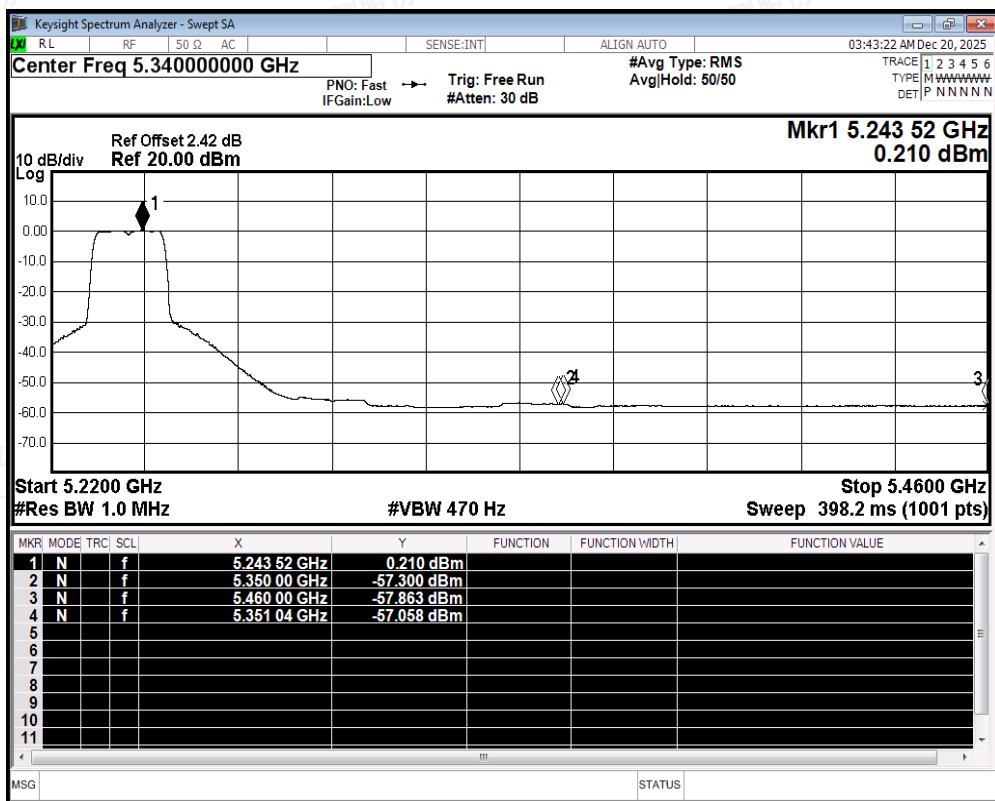

Restrict Band NVNT ax20 5240MHz Ant1 Average




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

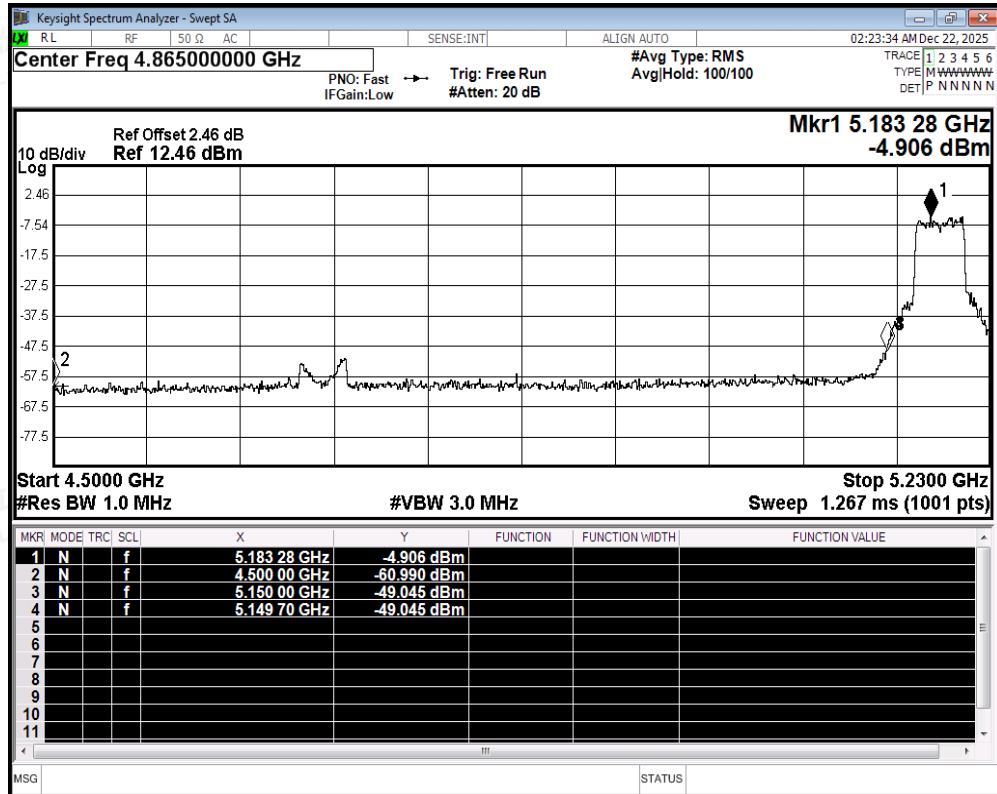


Restrict Band NVNT ax40 5190MHz Ant1 Peak

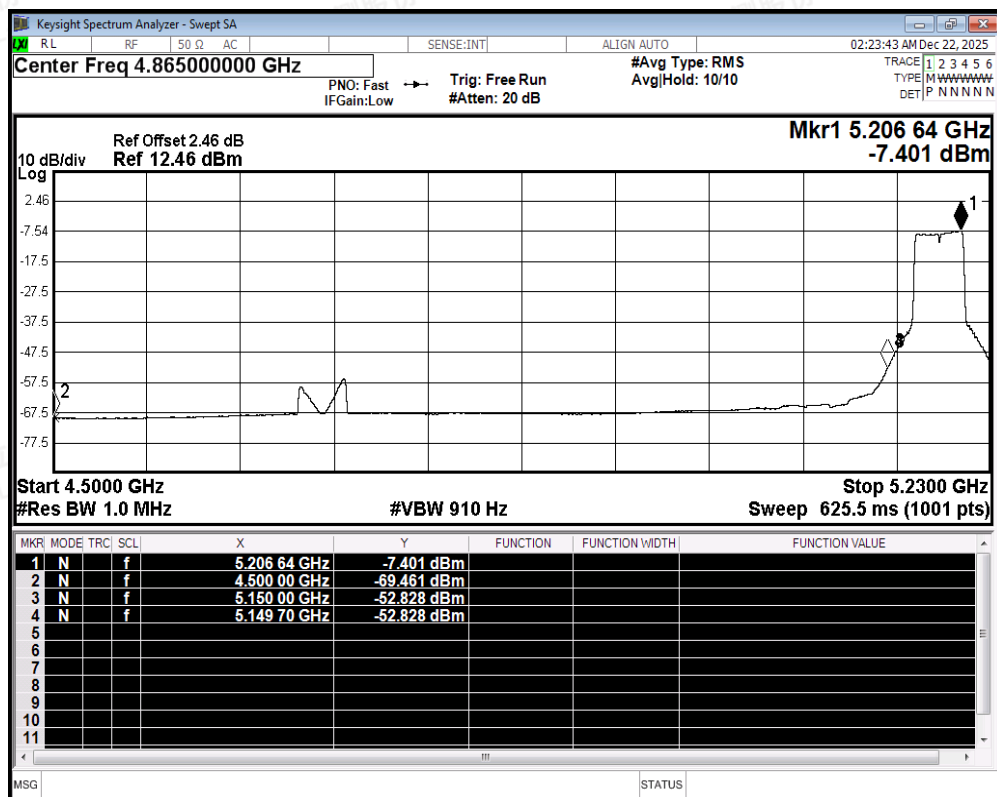


Restrict Band NVNT ax40 5190MHz Ant1 Average



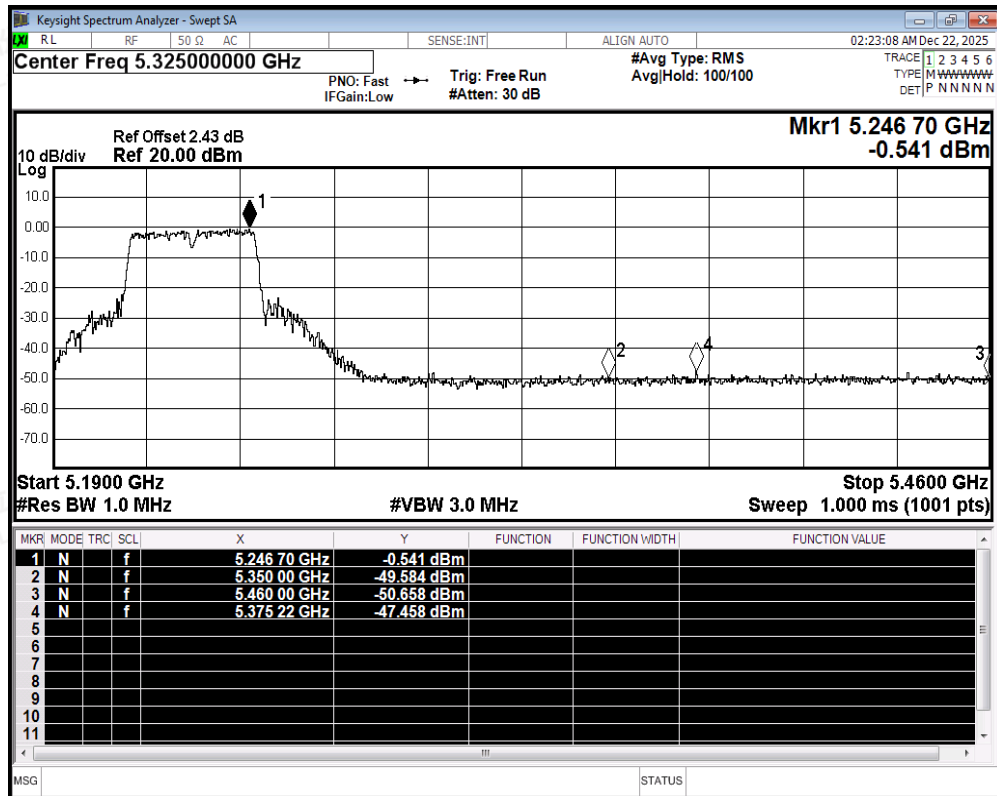

Restrict Band NVNT ax40 5230MHz Ant1 Peak

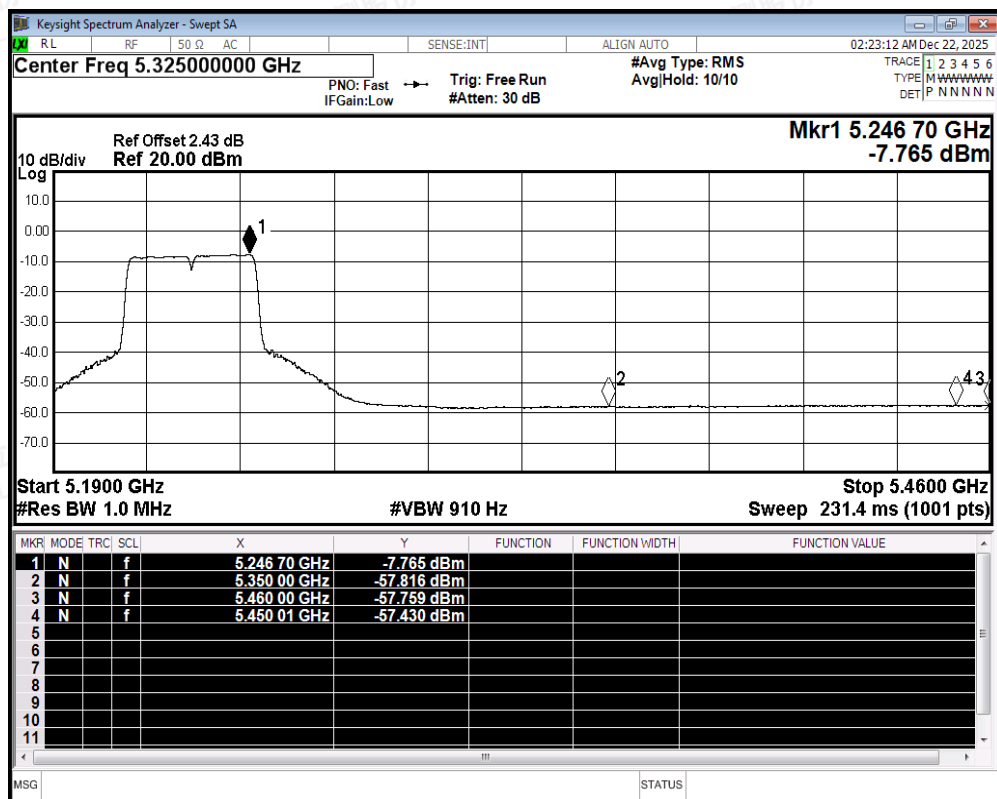

Restrict Band NVNT ax40 5230MHz Ant1 Average







A.5 Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5180	Ant1	5180	0	0	25	Pass
NVNT	a	5200	Ant1	5200	0	0	25	Pass
NVNT	a	5240	Ant1	5240	0	0	25	Pass
NVNT	n20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
NVNT	n20	5200	Ant1	5200	0	0	25	Pass
NVNT	n20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
NVNT	n40	5190	Ant1	5190	0	0	25	Pass
NVNT	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
NVNT	ac20	5180	Ant1	5180	0	0	25	Pass
NVNT	ac20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
NVNT	ac20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
NVNT	ac40	5190	Ant1	5190	0	0	25	Pass
NVNT	ac40	5230	Ant1	5230	0	0	25	Pass
NVNT	ax20	5180	Ant1	5179.98	-20000	-3.86	25	Pass
NVNT	ax20	5200	Ant1	5200	0	0	25	Pass
NVNT	ax20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
NVNT	ax40	5190	Ant1	5190	0	0	25	Pass
NVNT	ax40	5230	Ant1	5230	0	0	25	Pass



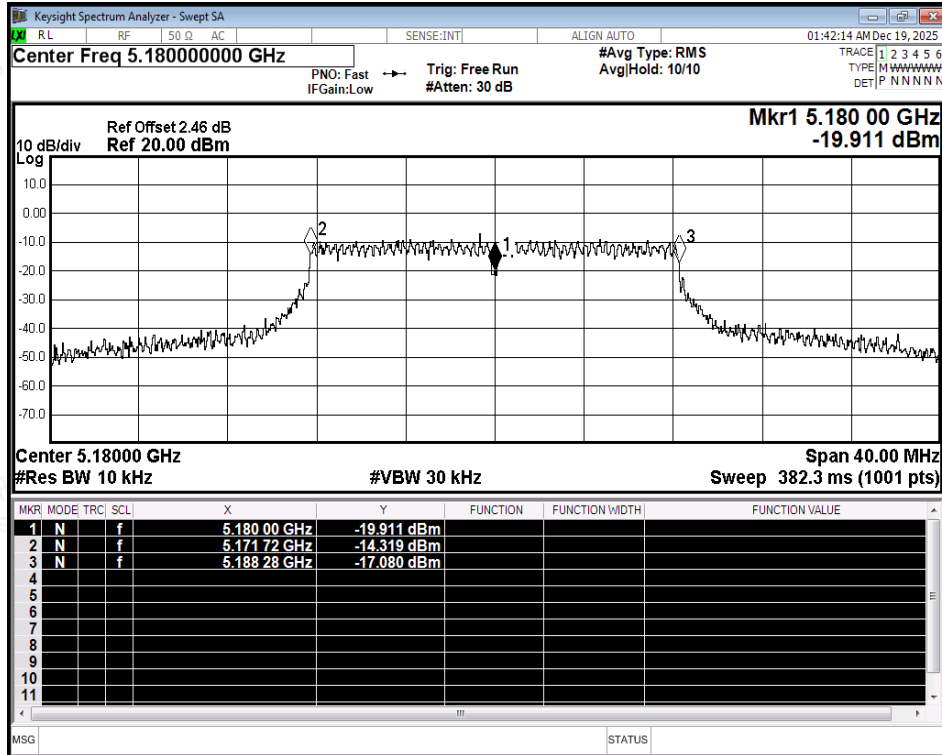


Freq. Stability NVNT a 5180MHz Ant1

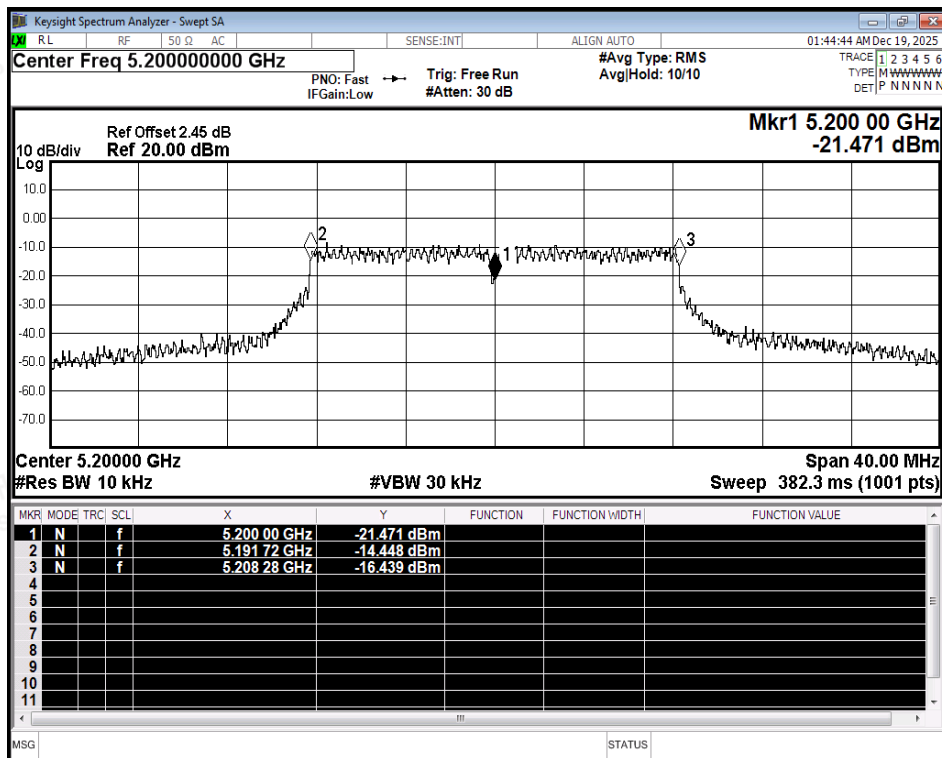


Freq. Stability NVNT a 5200MHz Ant1



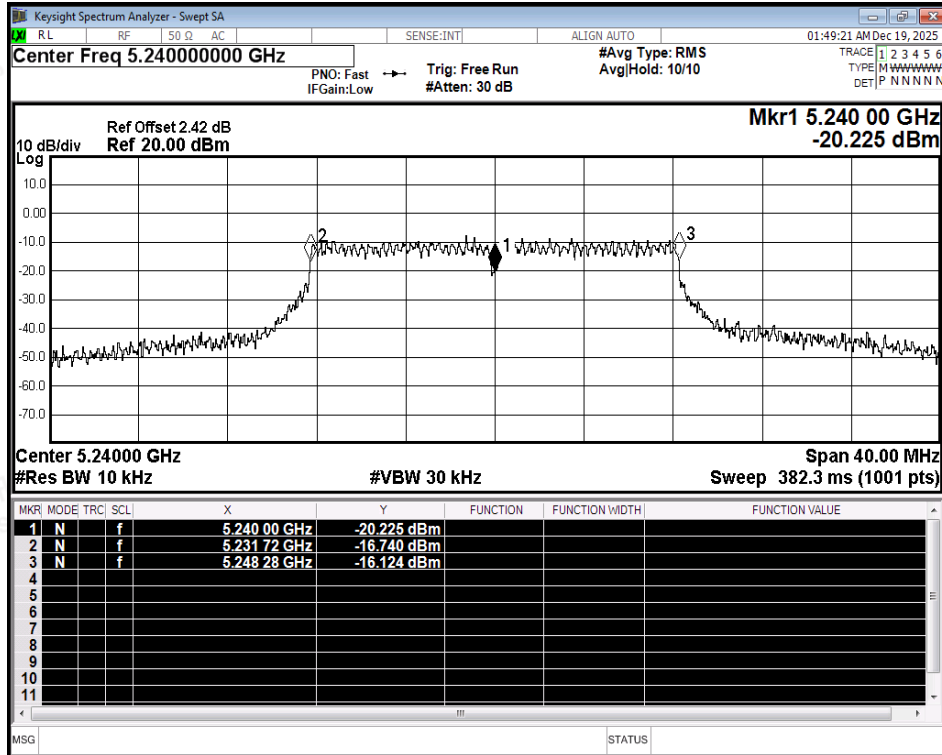


Freq. Stability NVNT a 5240MHz Ant1

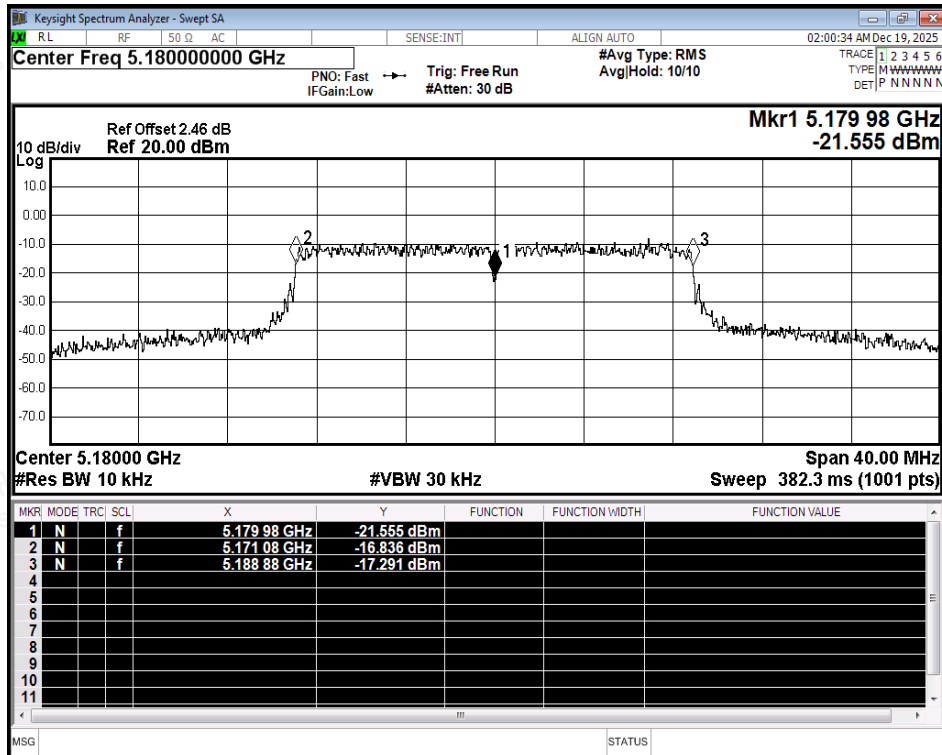


Freq. Stability NVNT n20 5180MHz Ant1



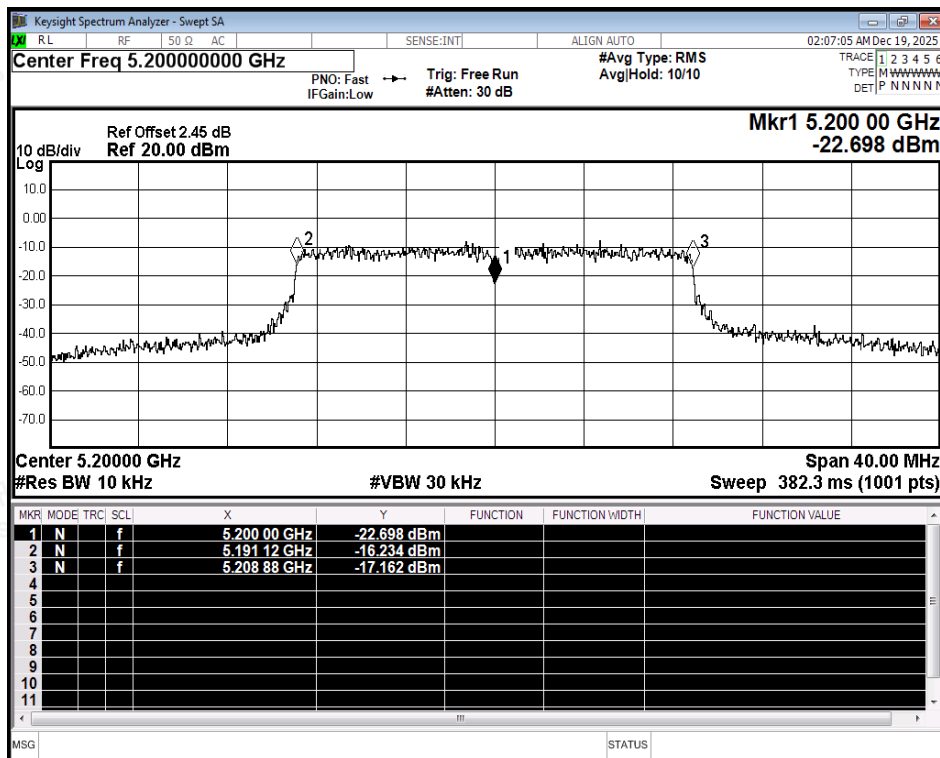


Freq. Stability NVNT n20 5200MHz Ant1

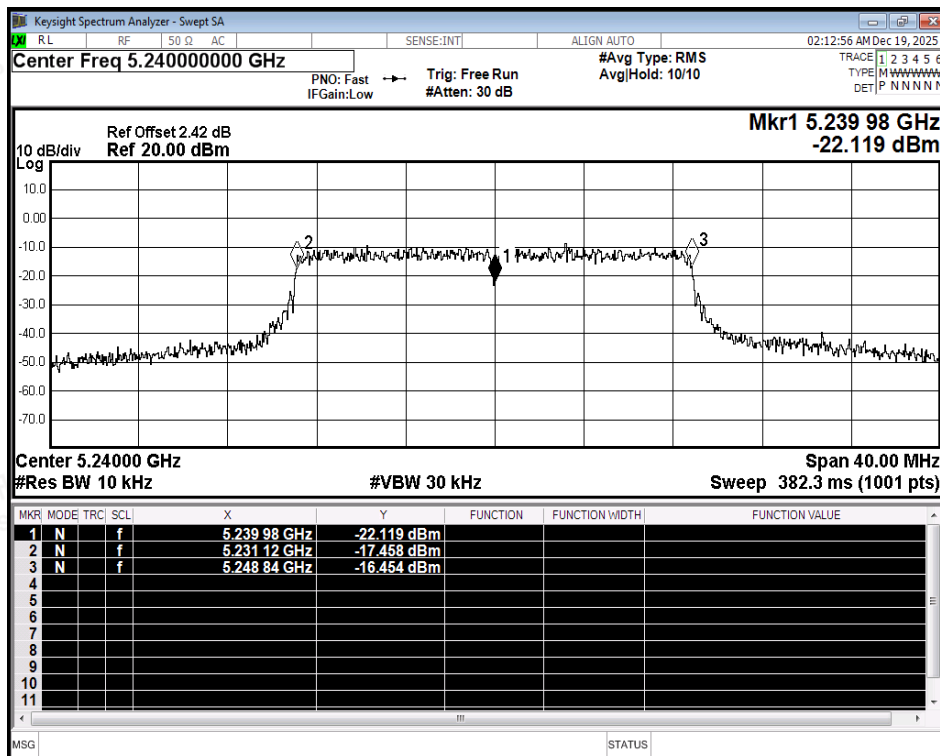


Freq. Stability NVNT n20 5240MHz Ant1



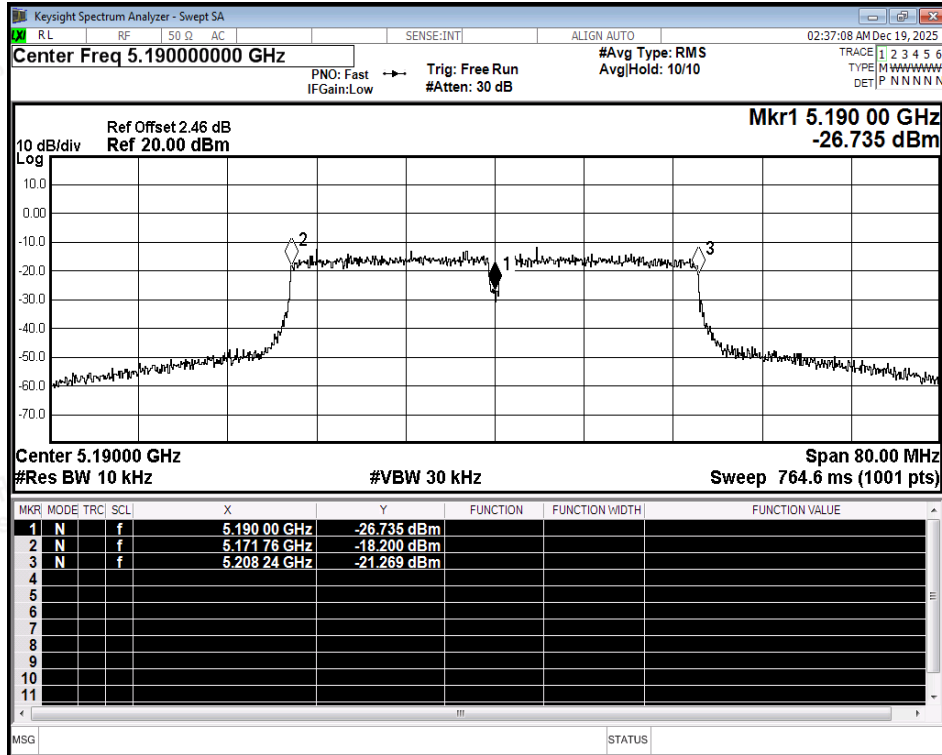


Freq. Stability NVNT n40 5190MHz Ant1

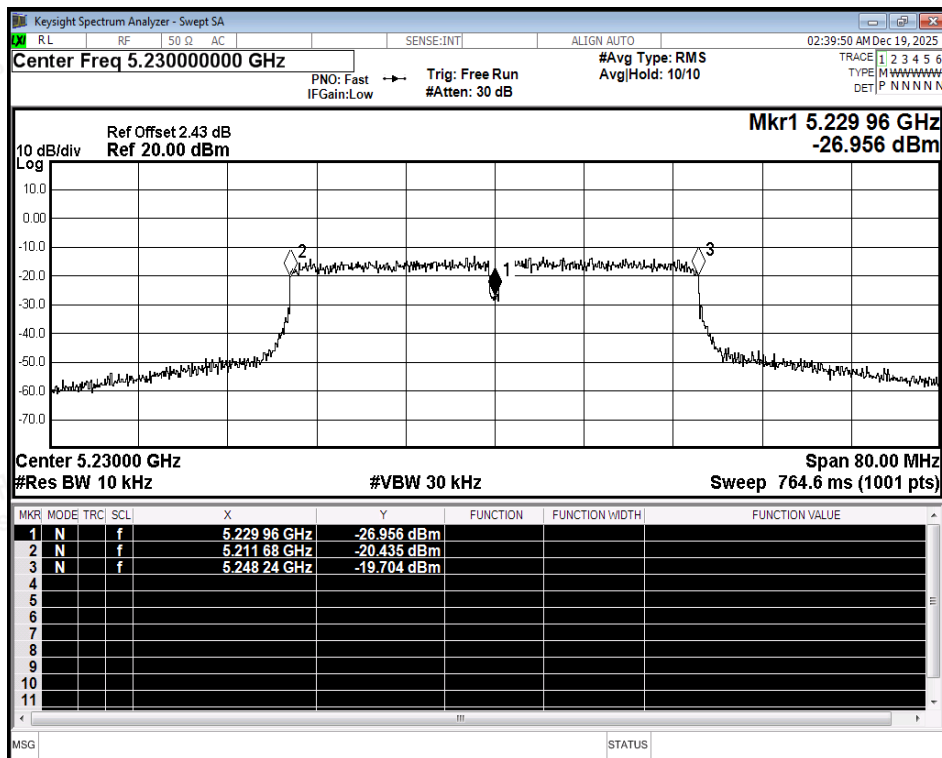


Freq. Stability NVNT n40 5230MHz Ant1



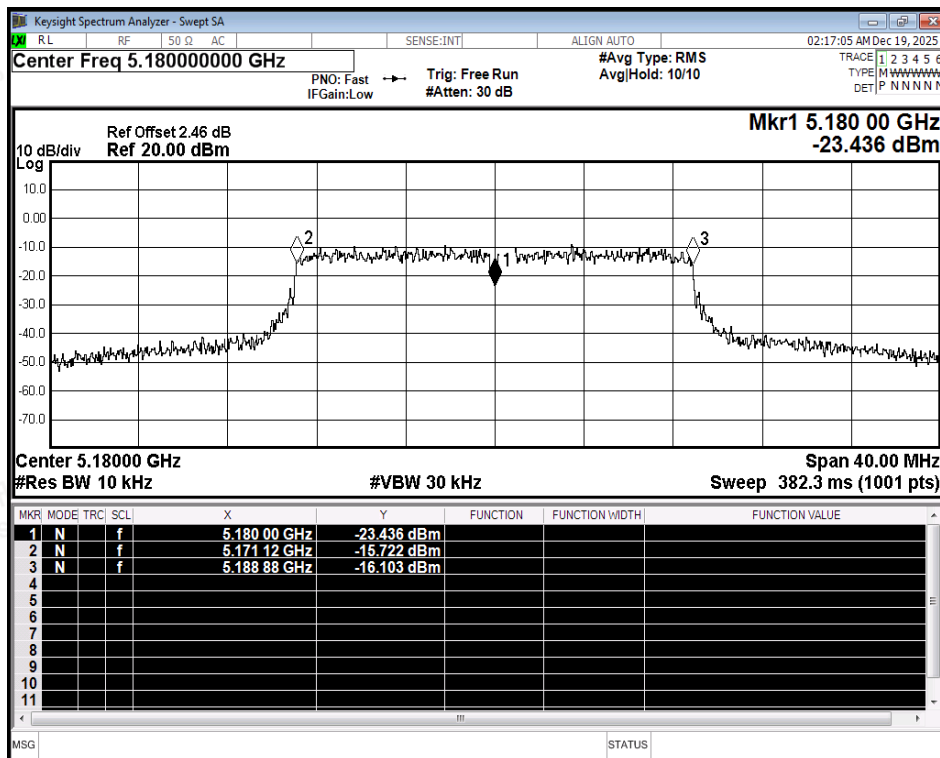

Freq. Stability NVNT ac20 5180MHz Ant1

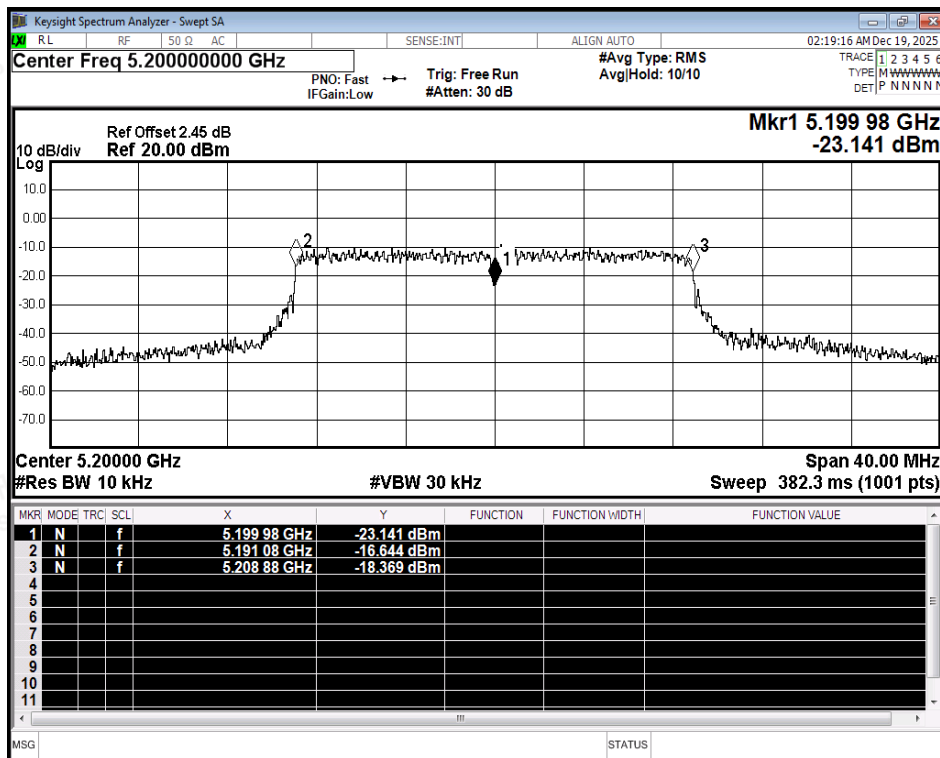

Freq. Stability NVNT ac20 5200MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

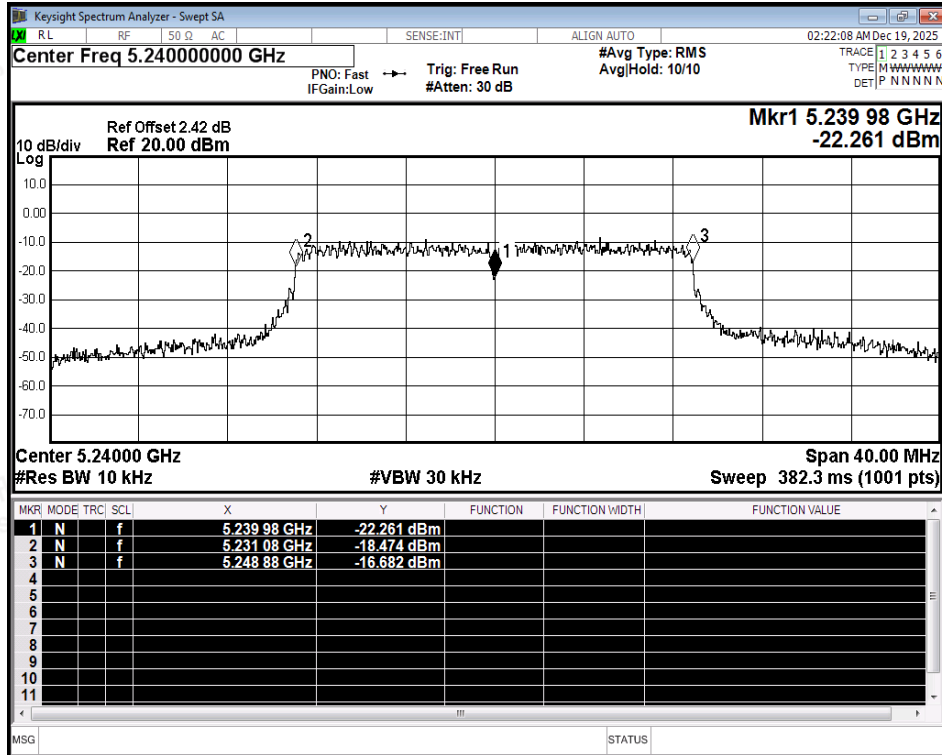


Freq. Stability NVNT ac20 5240MHz Ant1

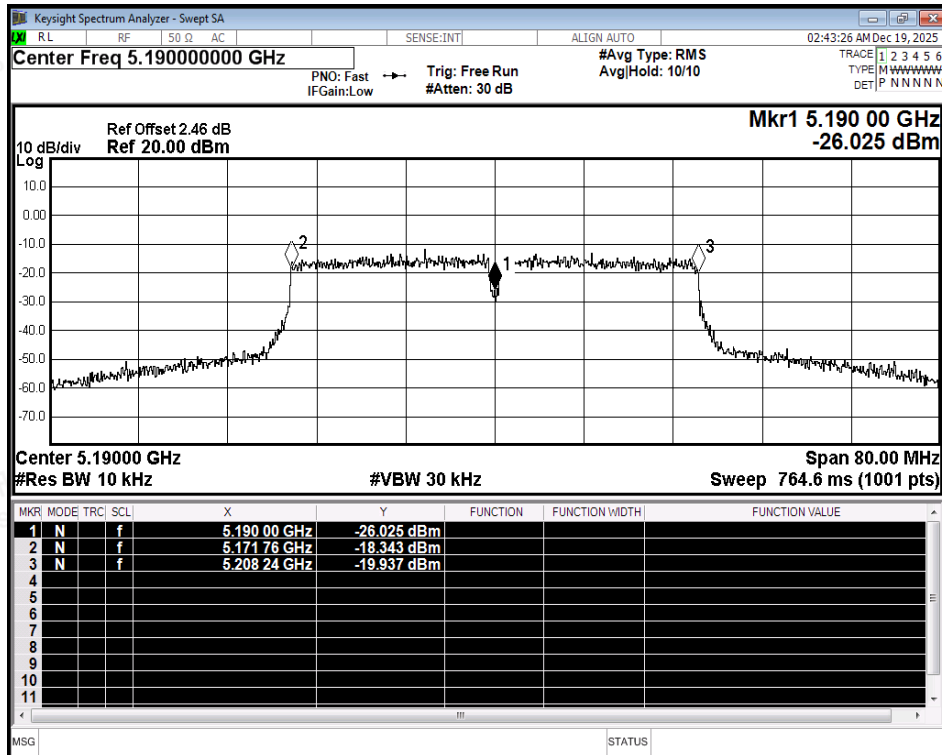


Freq. Stability NVNT ac40 5190MHz Ant1



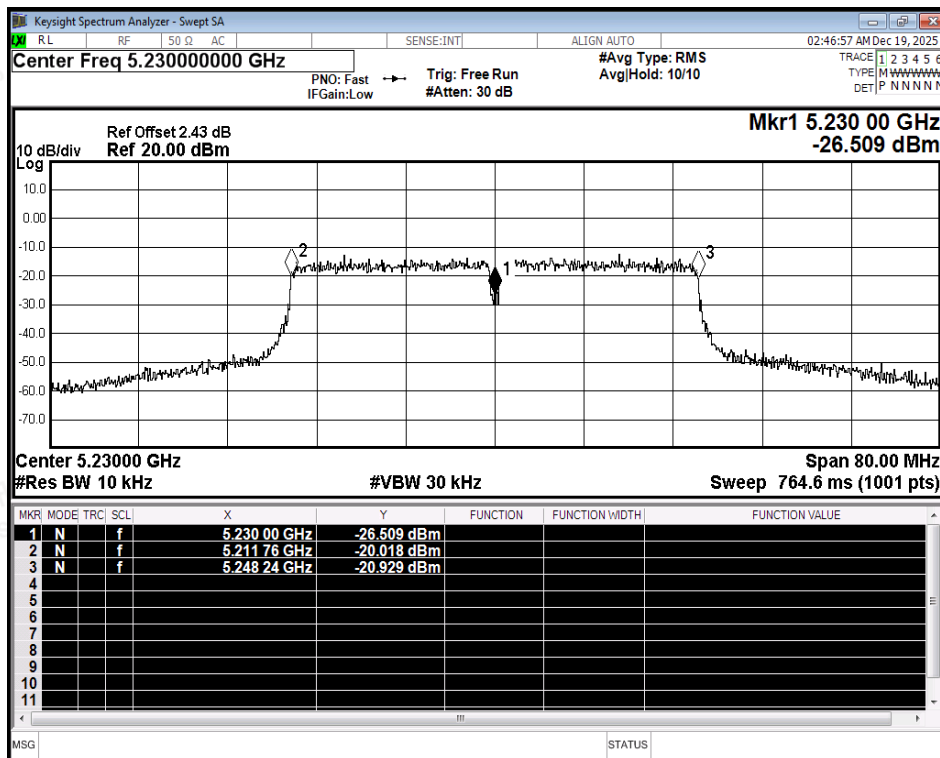


Freq. Stability NVNT ac40 5230MHz Ant1

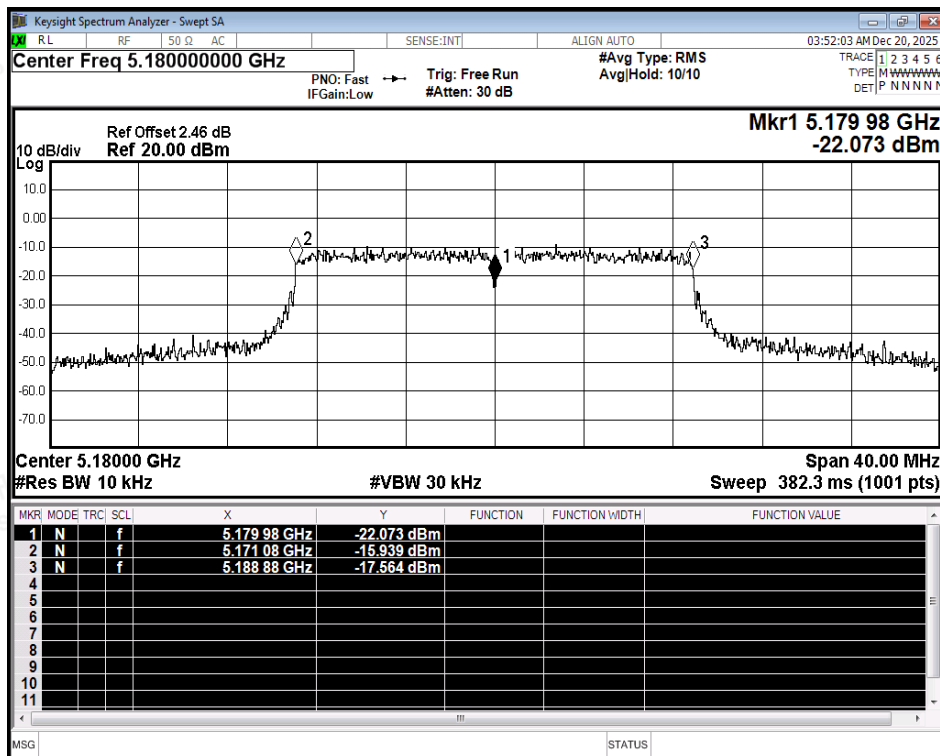


Freq. Stability NVNT ax20 5180MHz Ant1



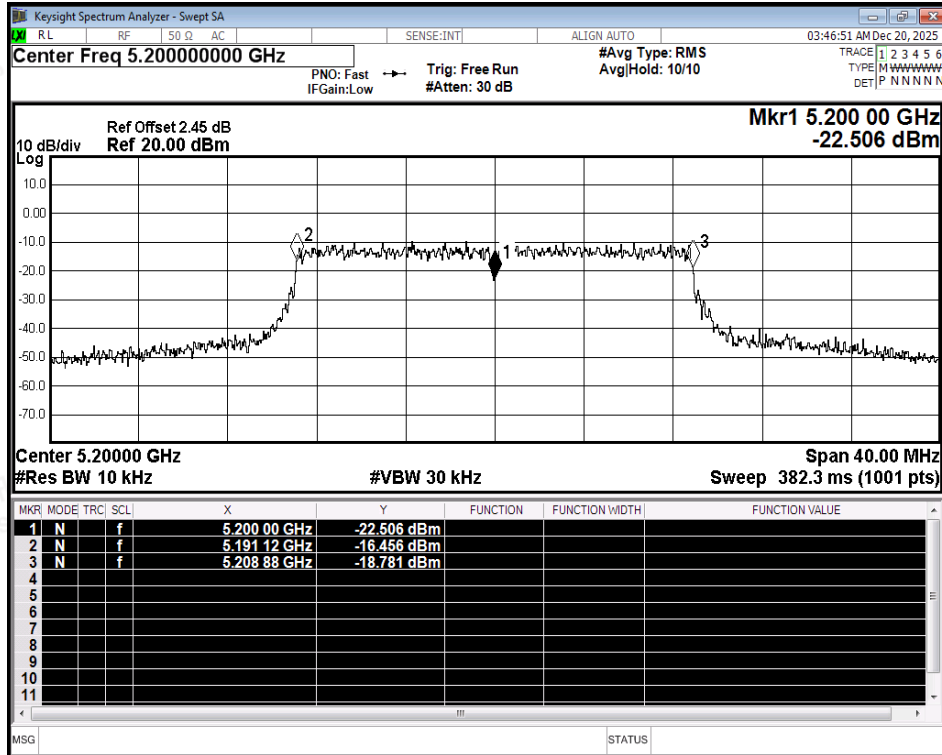


Freq. Stability NVNT ax20 5200MHz Ant1

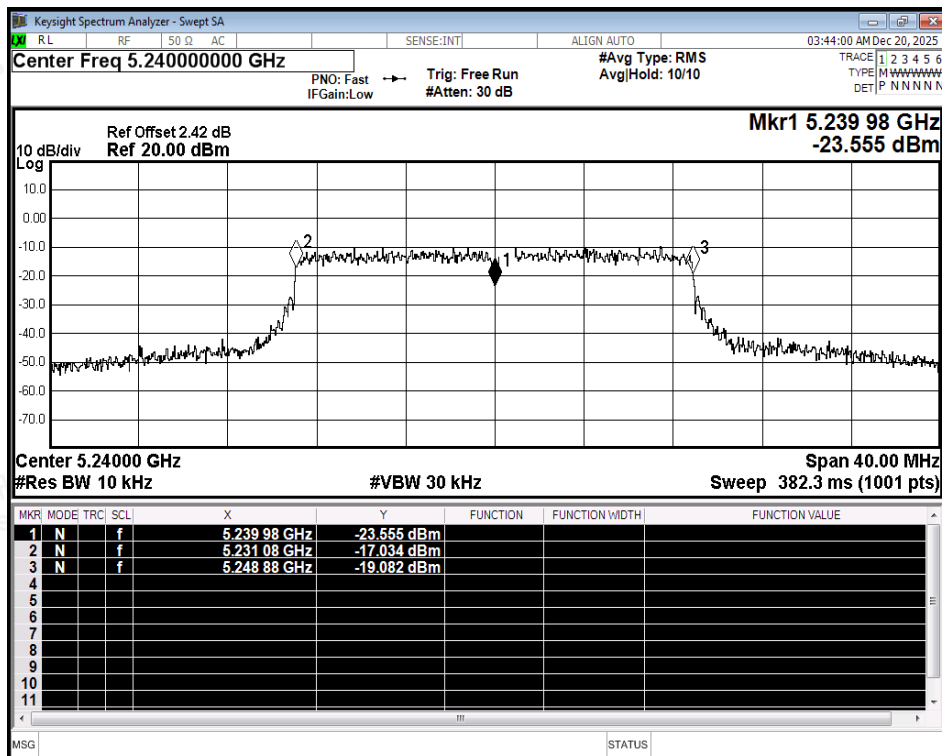


Freq. Stability NVNT ax20 5240MHz Ant1



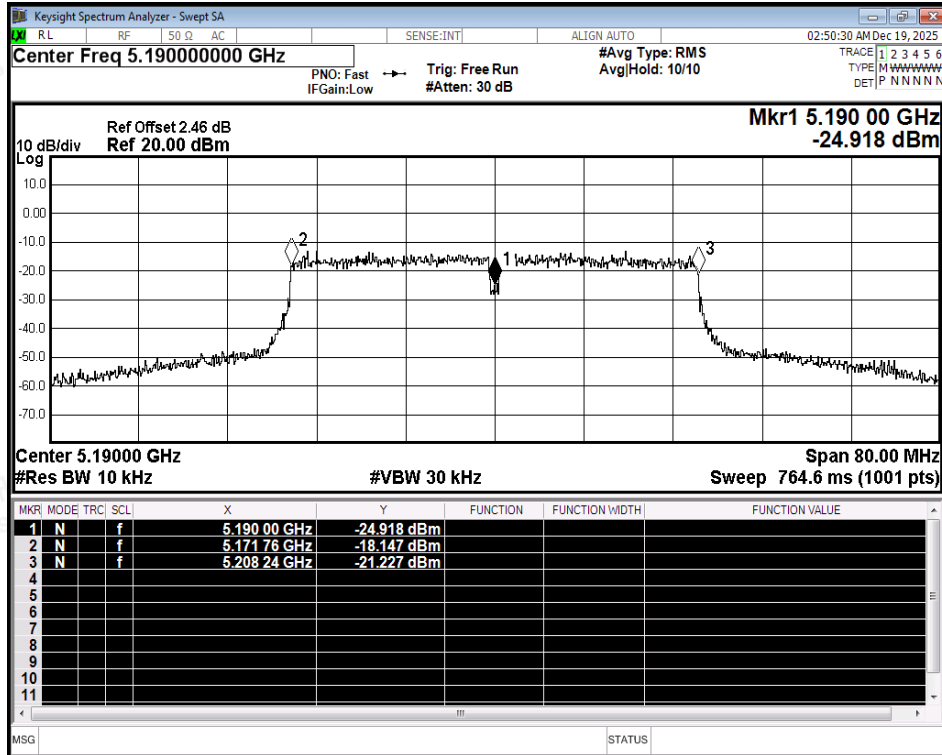

Freq. Stability NVNT ax40 5190MHz Ant1

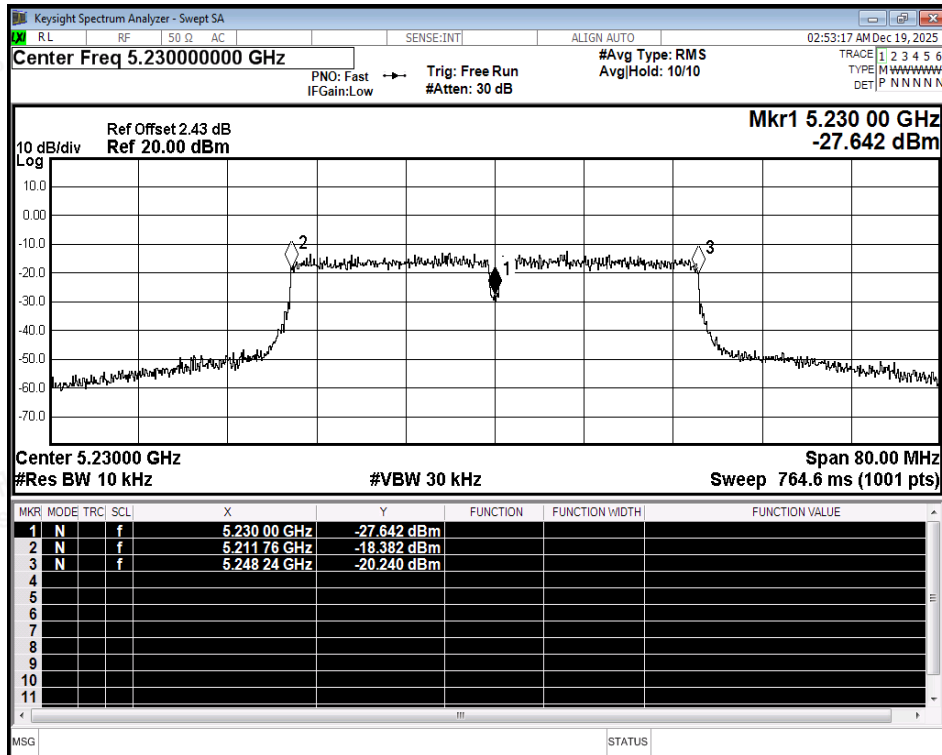

Freq. Stability NVNT ax40 5230MHz Ant1







A.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	97.46	0.11	0.37
NVNT	a	5200	Ant1	97.83	0.1	0.37
NVNT	a	5240	Ant1	97.83	0.1	0.37
NVNT	n20	5180	Ant1	97	0.13	0.44
NVNT	n20	5200	Ant1	97.41	0.11	0.44
NVNT	n20	5240	Ant1	97	0.13	0.44
NVNT	n40	5190	Ant1	94.87	0.23	0.9
NVNT	n40	5230	Ant1	94.87	0.23	0.9
NVNT	ac20	5180	Ant1	97.01	0.13	0.44
NVNT	ac20	5200	Ant1	97.42	0.11	0.44
NVNT	ac20	5240	Ant1	97.42	0.11	0.44
NVNT	ac40	5190	Ant1	94.92	0.23	0.89
NVNT	ac40	5230	Ant1	94.87	0.23	0.9
NVNT	ax20	5180	Ant1	97.42	0.11	0.44
NVNT	ax20	5200	Ant1	97.42	0.11	0.44
NVNT	ax20	5240	Ant1	97.01	0.13	0.44
NVNT	ax40	5190	Ant1	94.87	0.23	0.9
NVNT	ax40	5230	Ant1	94.92	0.23	0.89



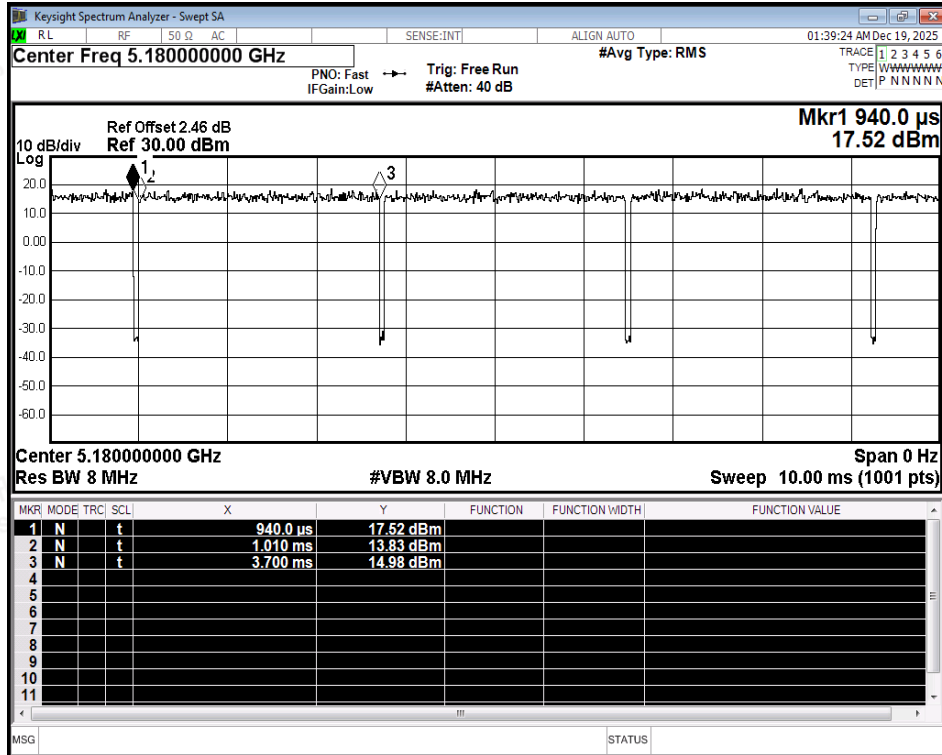


Duty Cycle NVNT a 5180MHz Ant1

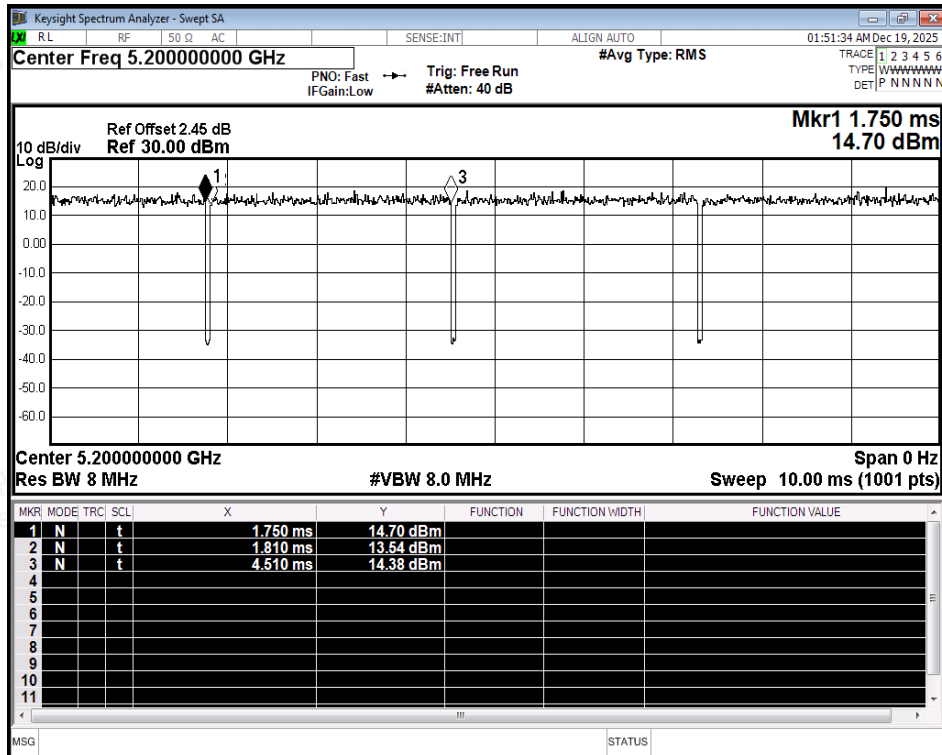


Duty Cycle NVNT a 5200MHz Ant1



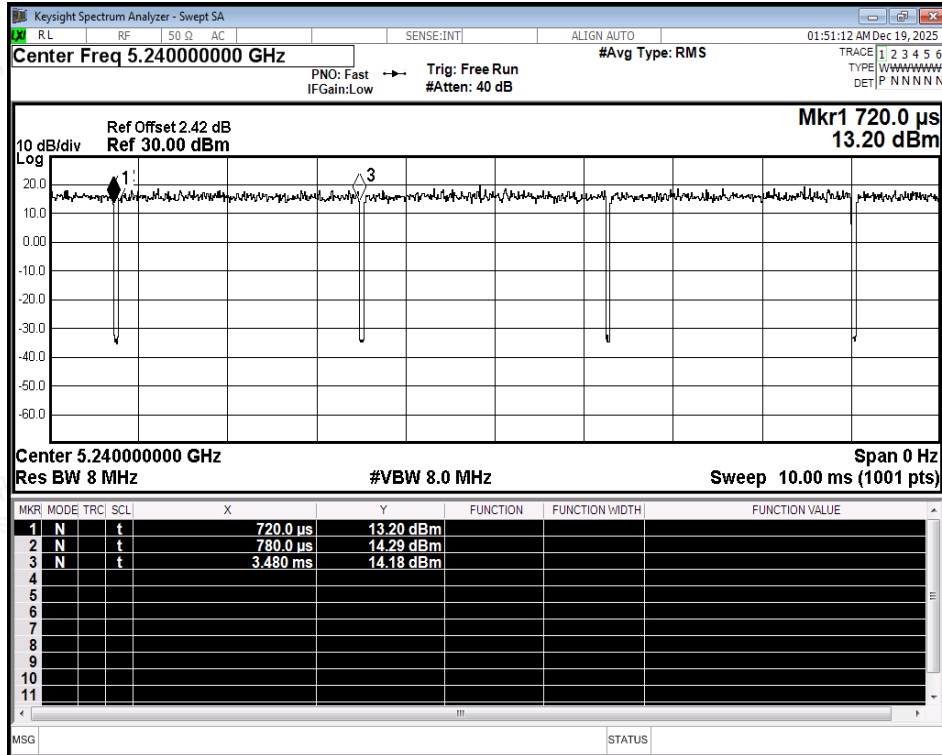


Duty Cycle NVNT a 5240MHz Ant1

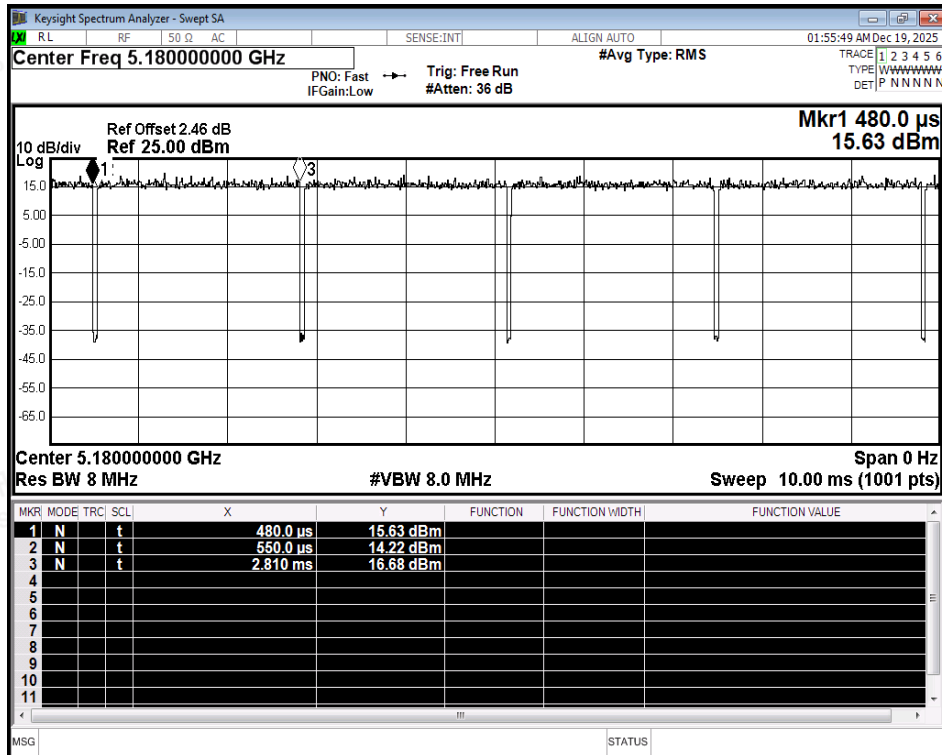


Duty Cycle NVNT n20 5180MHz Ant1



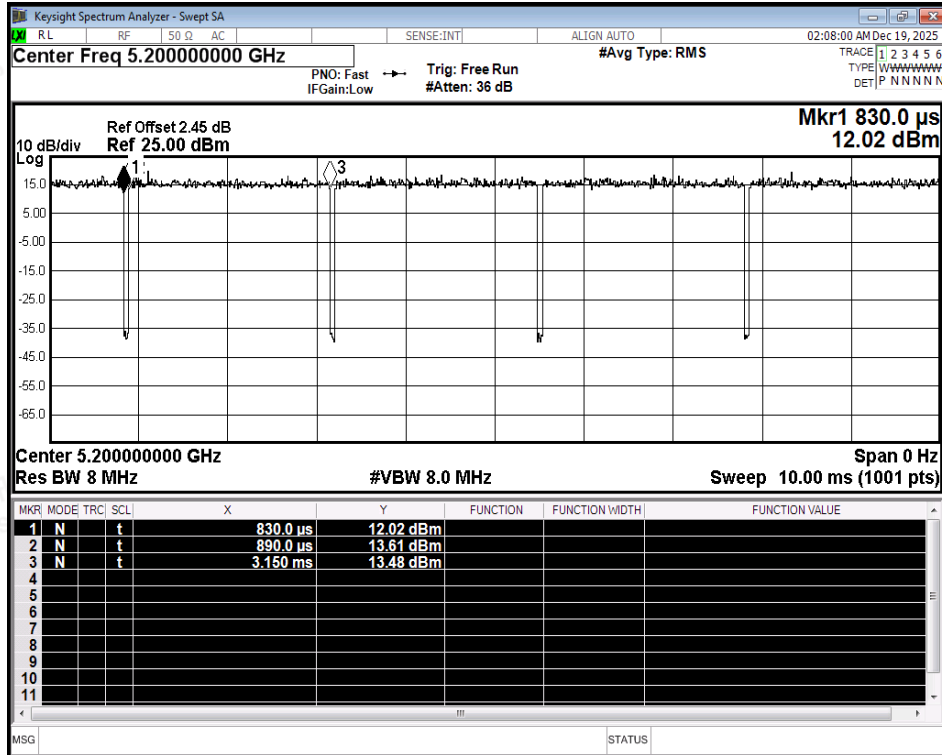


Duty Cycle NVNT n20 5200MHz Ant1

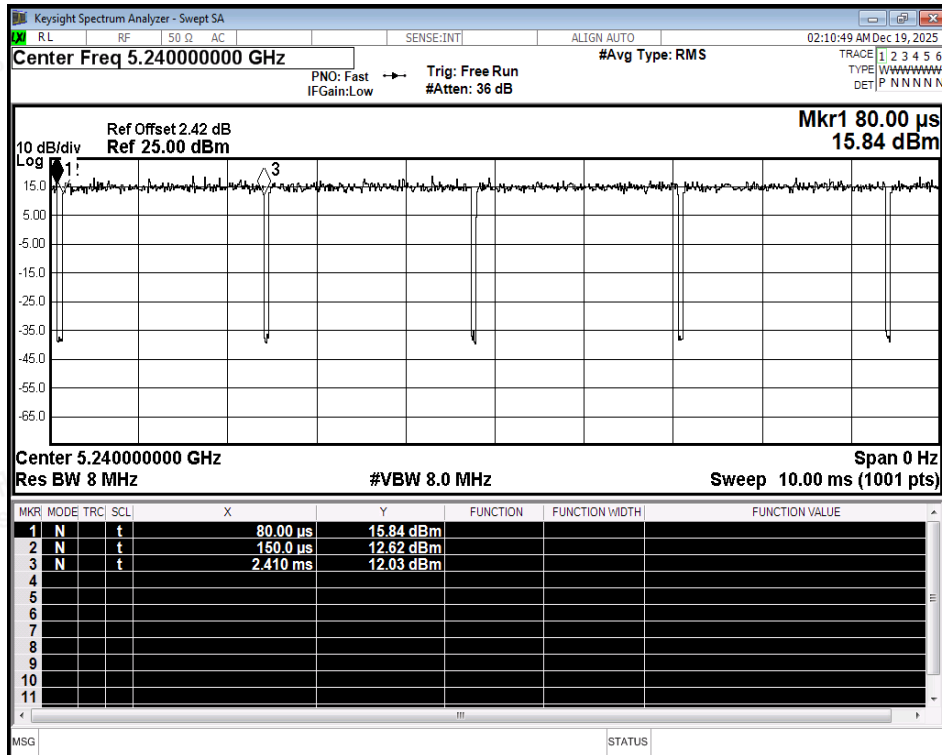


Duty Cycle NVNT n20 5240MHz Ant1



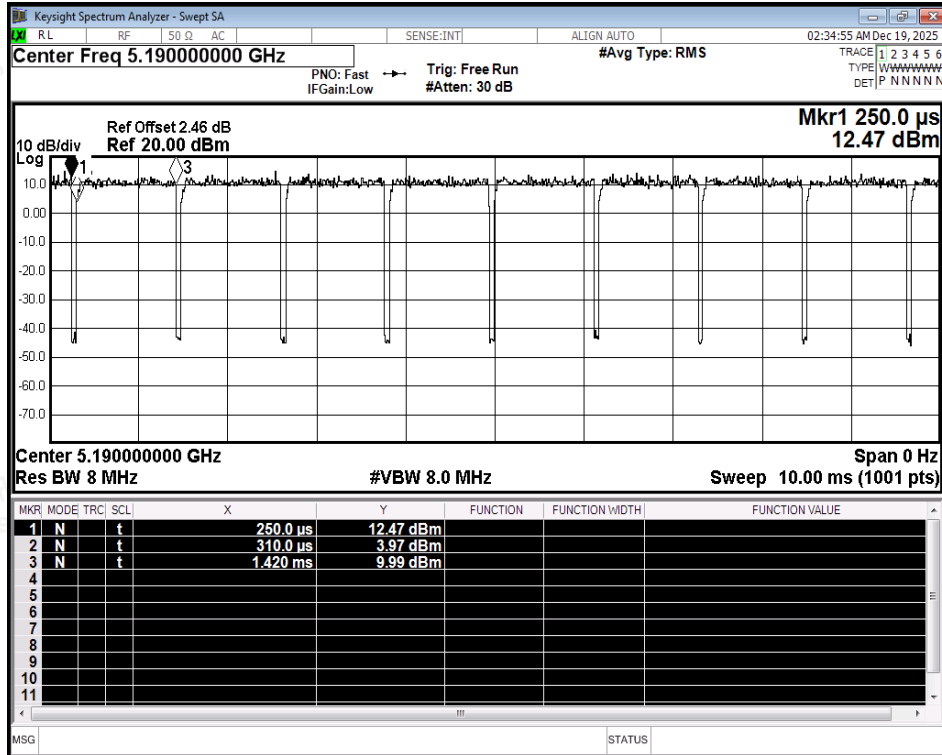


Duty Cycle NVNT n40 5190MHz Ant1

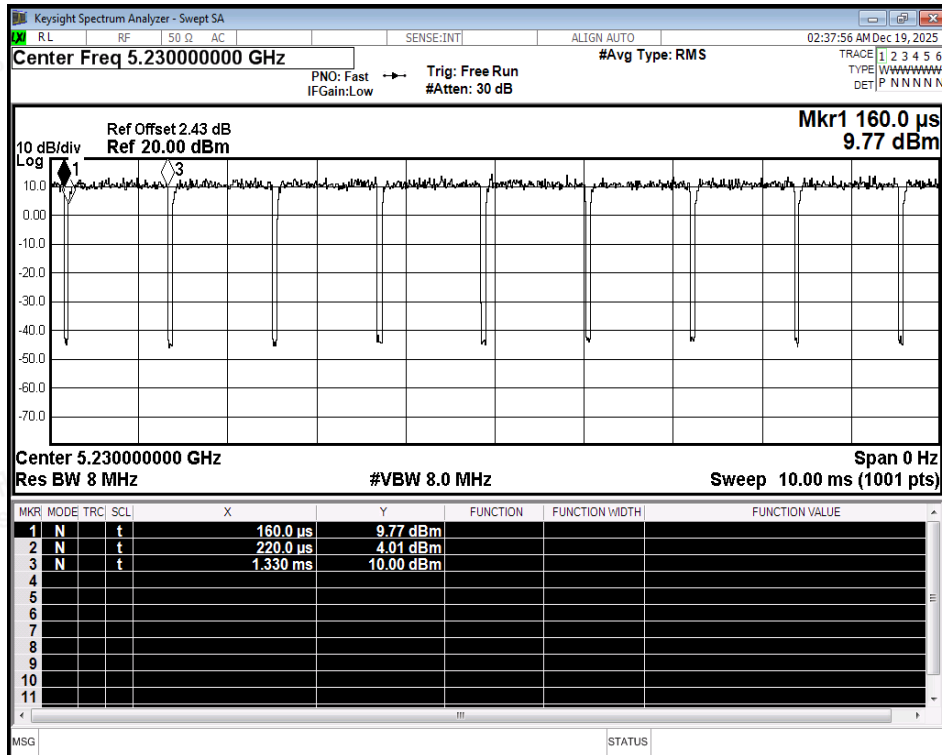


Duty Cycle NVNT n40 5230MHz Ant1



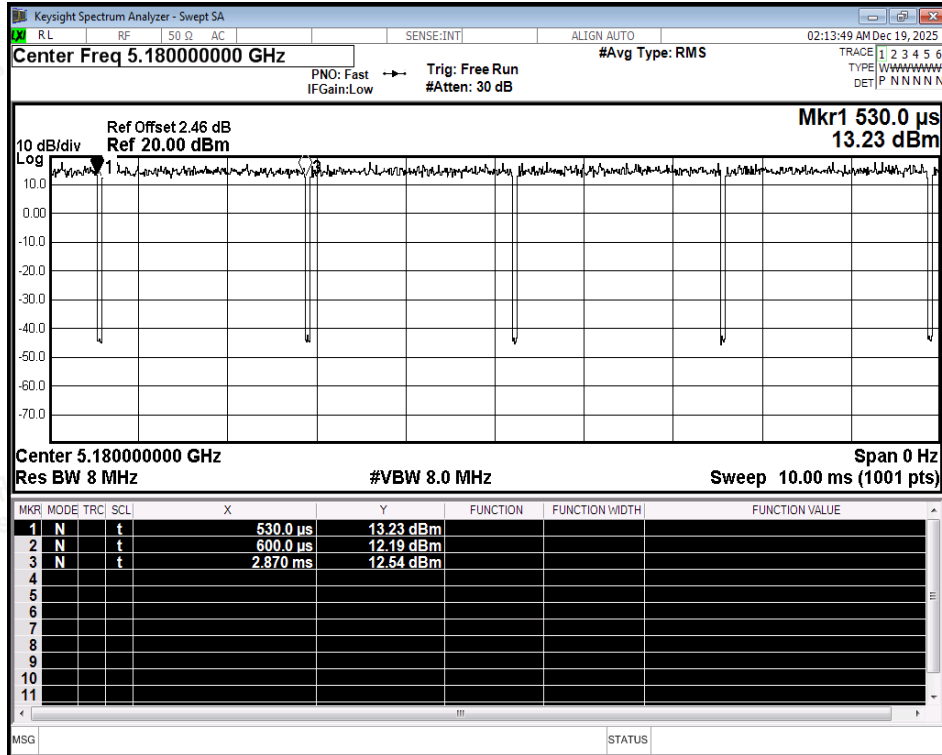


Duty Cycle NVNT ac20 5180MHz Ant1

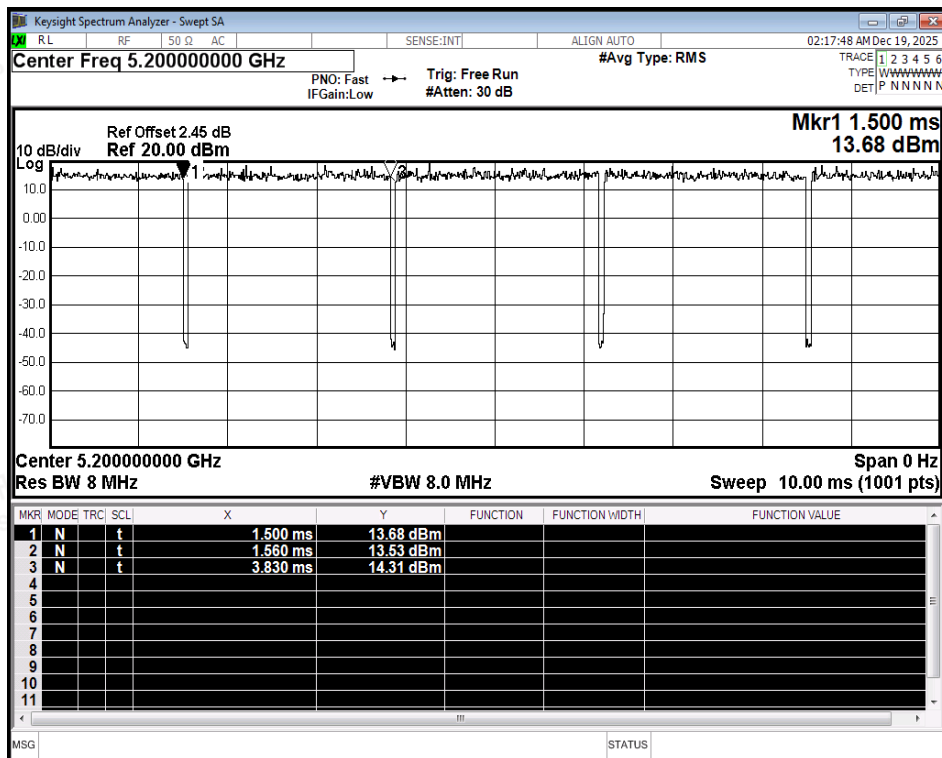


Duty Cycle NVNT ac20 5200MHz Ant1



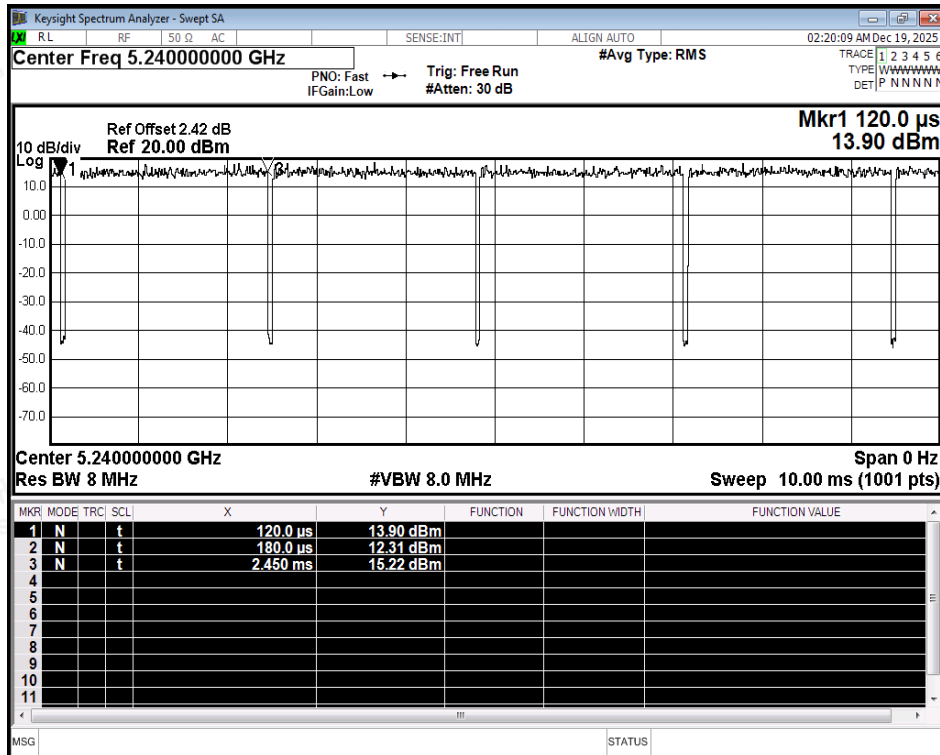


Duty Cycle NVNT ac20 5240MHz Ant1

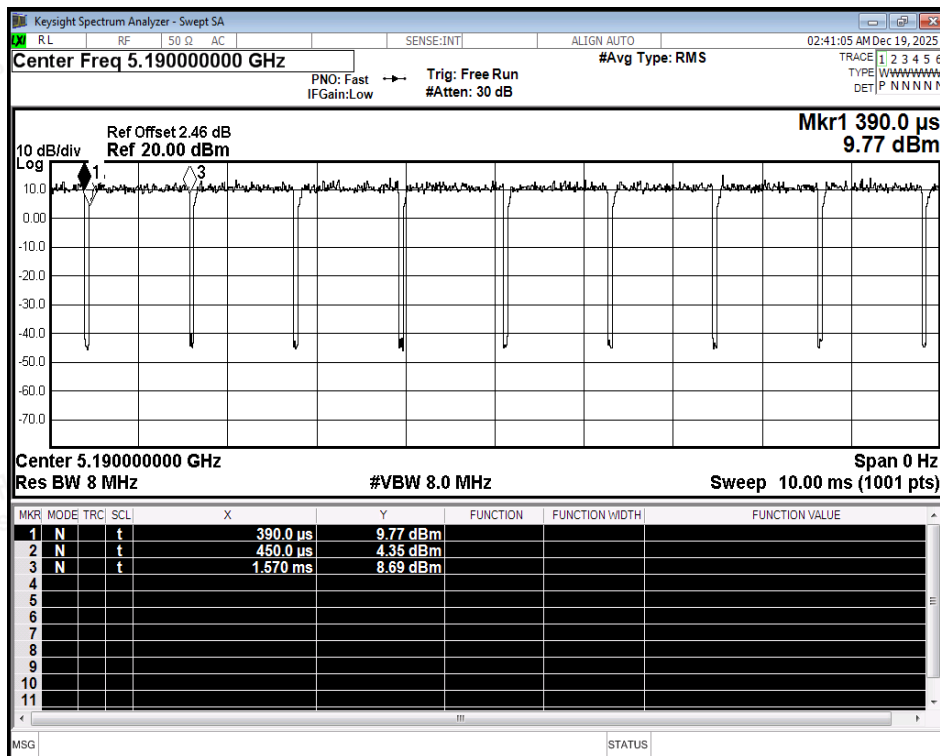


Duty Cycle NVNT ac40 5190MHz Ant1



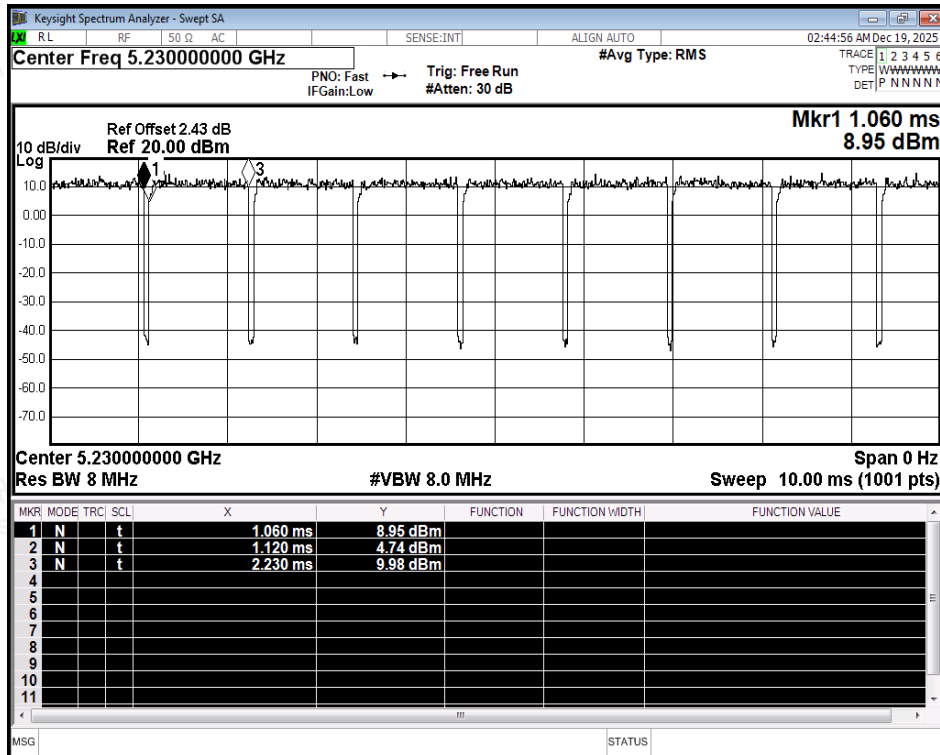

Duty Cycle NVNT ac40 5230MHz Ant1

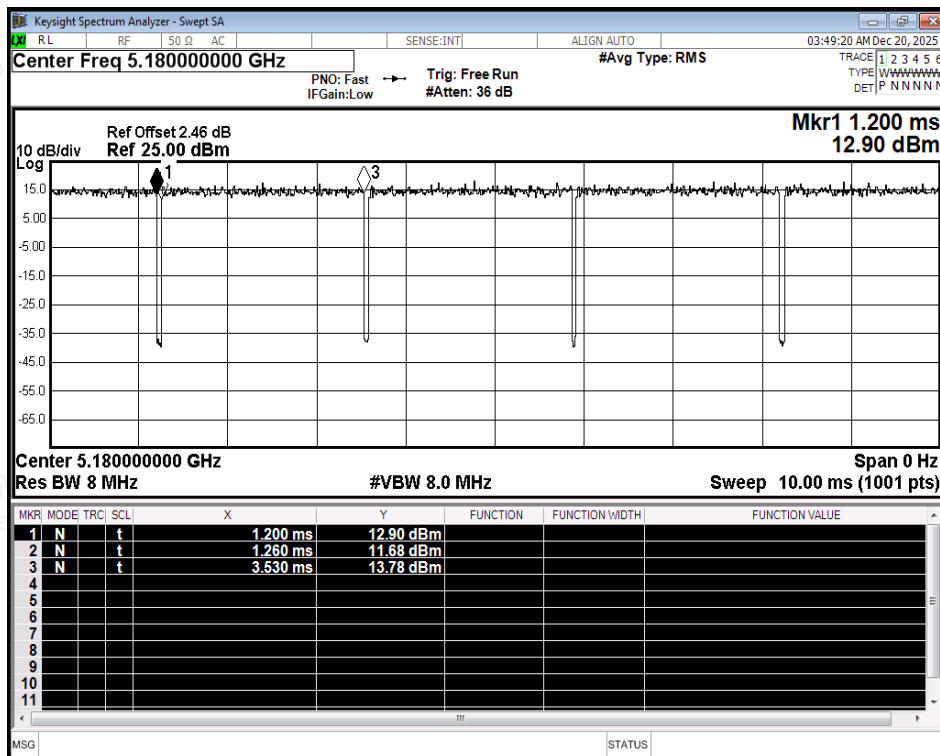

Duty Cycle NVNT ax20 5180MHz Ant1




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

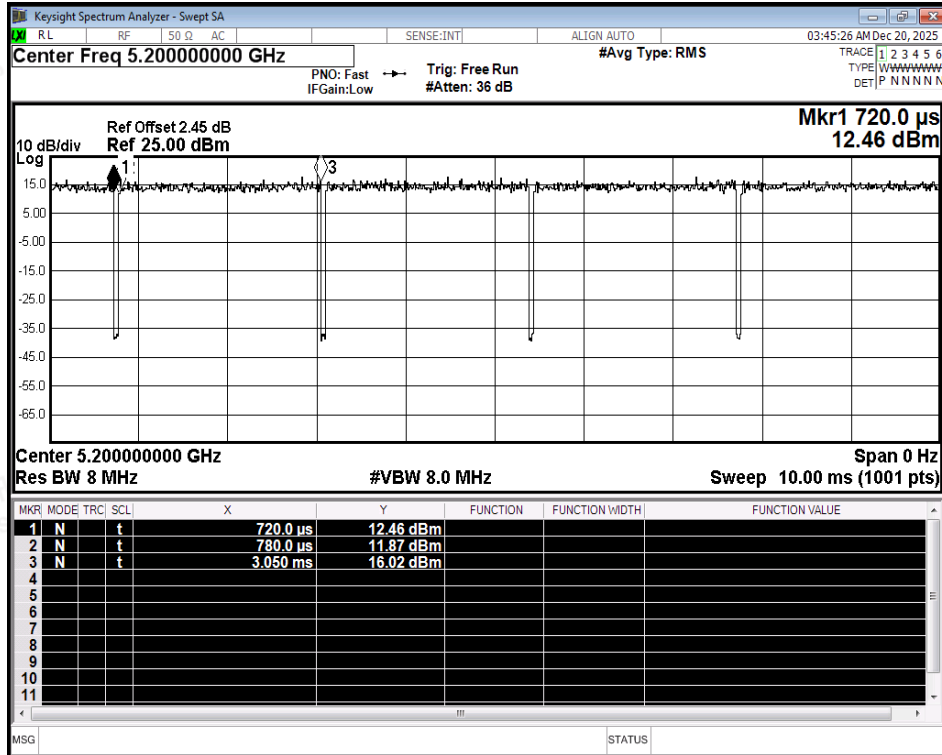


Duty Cycle NVNT ax20 5200MHz Ant1

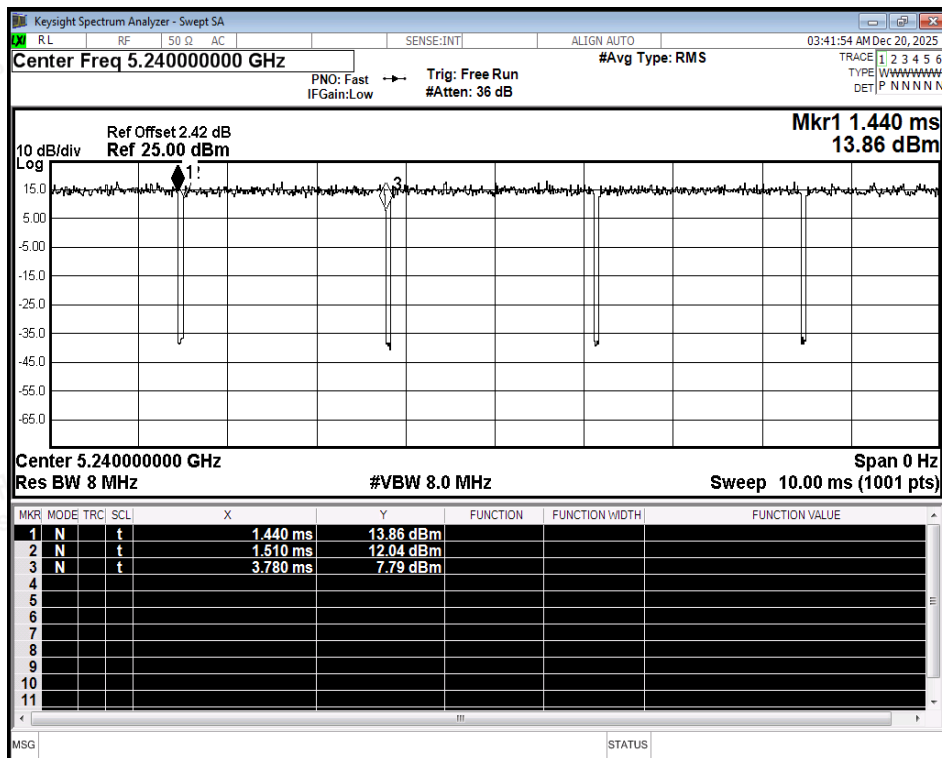


Duty Cycle NVNT ax20 5240MHz Ant1



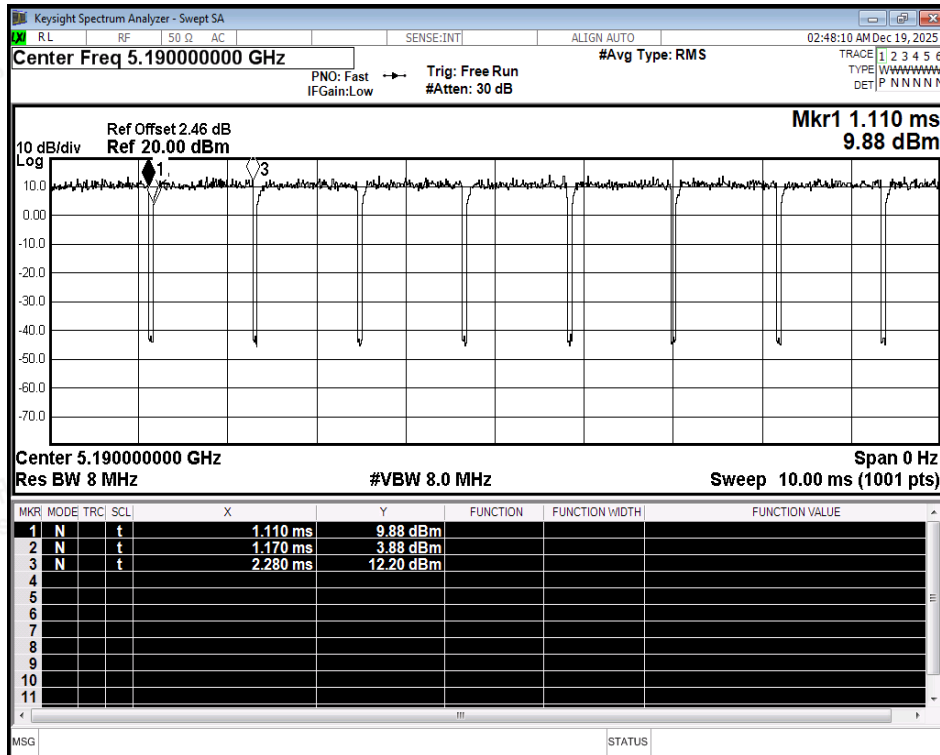

Duty Cycle NVNT ax40 5190MHz Ant1

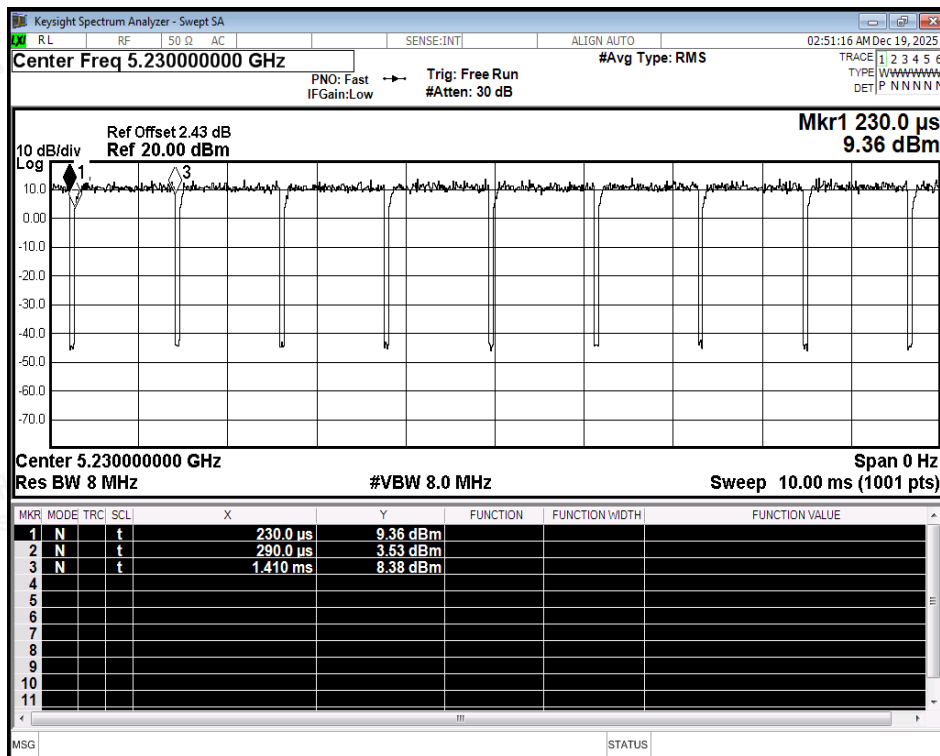

Duty Cycle NVNT ax40 5230MHz Ant1

