



TEST REPORT

Product Name: Wandr
FCC ID: 2BEW9-WANDR-W1
Trademark: OneScreen
Model Number: Wandr-W1
Prepared For: NZS Inc. DBA OneScreen
Address: 12335 World Trade Drive, Suite 9, San Diego, CA 92128
Manufacturer: NZS Inc. DBA OneScreen
Address: 12335 World Trade Drive, Suite 9, San Diego, CA 92128
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jun. 03, 2024
Sample tested Date: Jun. 03, 2024 to Jun. 17, 2024
Issue Date: Jun. 17, 2024
Report No.: CTB240617025RF
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Channel List	6
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	39
8.1 Block Diagram Of Test Setup	39
8.2 Limit	39
8.3 Test procedure	39
8.4 Test Result	40
9. CONDUCTED OUTPUT POWER	56
9.1 Block Diagram Of Test Setup	56
9.2 Limit	56
9.3 Test procedure	56
9.4 Test Result	57
10. 6DB OCCUPIED BANDWIDTH	58
10.1 Block Diagram Of Test Setup	58
10.2 Limit	58
10.3 Test procedure	58
10.4 Test Result	59
11. POWER SPECTRAL DENSITY	69
11.1 Block Diagram Of Test Setup	69
11.2 Limit	69
11.3 Test procedure	69
11.4 Test Result	70
12. ANTENNA REQUIREMENT	79
13. EUT TEST SETUP PHOTOGRAPHS	80

(Note: N/A means not applicable)



1. **VERSION**

Report No.	Issue Date	Description	Approved
CTB240617025RF	Jun. 17, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	Wandr-W1
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	v1.19.7.1-72-g0aa48ffc0.20231215
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 16.024dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM
Antenna installation:	WiFi (2.4G): FPC antenna
Antenna Gain:	WiFi (2.4G): Ant1: 3.36dBi Ant2: 2.80dBi
Ratings:	Adapter: INPUT: 100-240V~50/60Hz 1.8A Max OUTPUT: 19.0V=4.74A 90.06W

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	SWITCHING ADAPTER	SOY	SOY-1900474	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 3.36dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=1.68dB,

So the directional gain for PSD is 5.04dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 3.36dBi

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11n20	65M
802.11n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	19V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2024.07.05

Continuous disturbance

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05



12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
----	--------	------	--------------	---	---	---

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

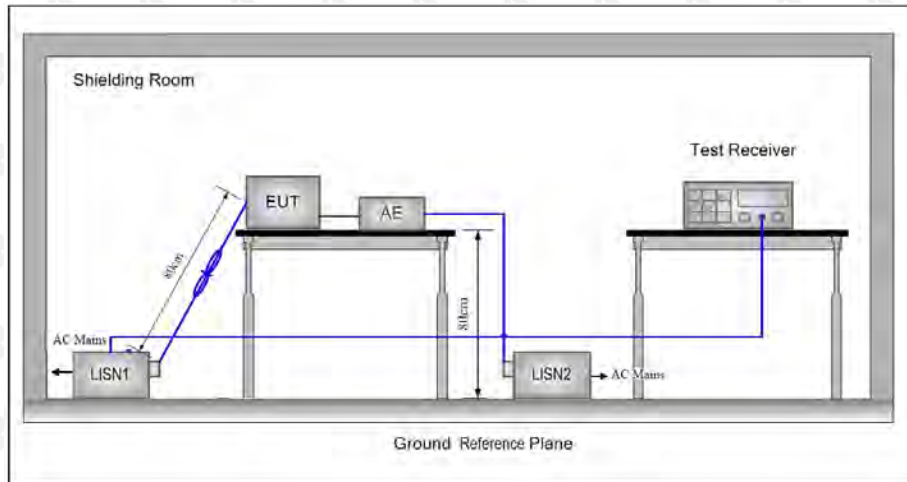

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

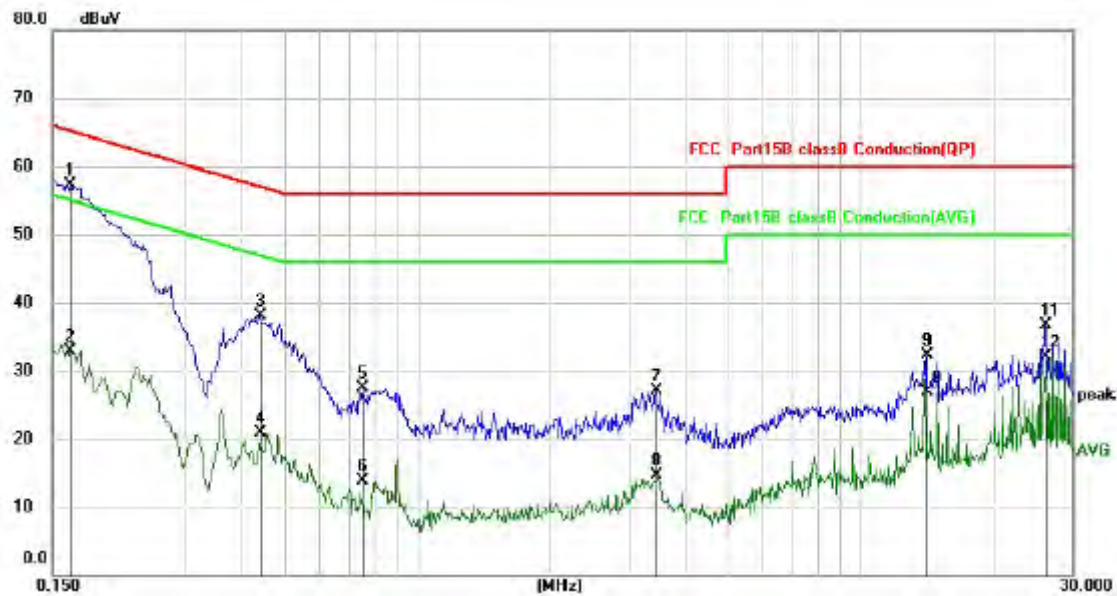

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1650	47.42	9.95	57.37	65.21	-7.84	QP
2		0.1650	22.89	9.95	32.84	55.21	-22.37	AVG
3		0.4420	28.14	9.98	38.12	57.02	-18.90	QP
4		0.4420	10.98	9.98	20.96	47.02	-26.06	AVG
5		0.7539	17.41	10.02	27.43	56.00	-28.57	QP
6		0.7539	3.81	10.02	13.83	46.00	-32.17	AVG
7		3.4420	16.87	10.23	27.10	56.00	-28.90	QP
8		3.4420	4.55	10.23	14.78	46.00	-31.22	AVG
9		14.1179	21.60	10.70	32.30	60.00	-27.70	QP
10		14.1179	16.24	10.70	26.94	50.00	-23.06	AVG
11		26.0259	25.65	11.10	36.75	60.00	-23.25	QP
12		26.0259	20.93	11.10	32.03	50.00	-17.97	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

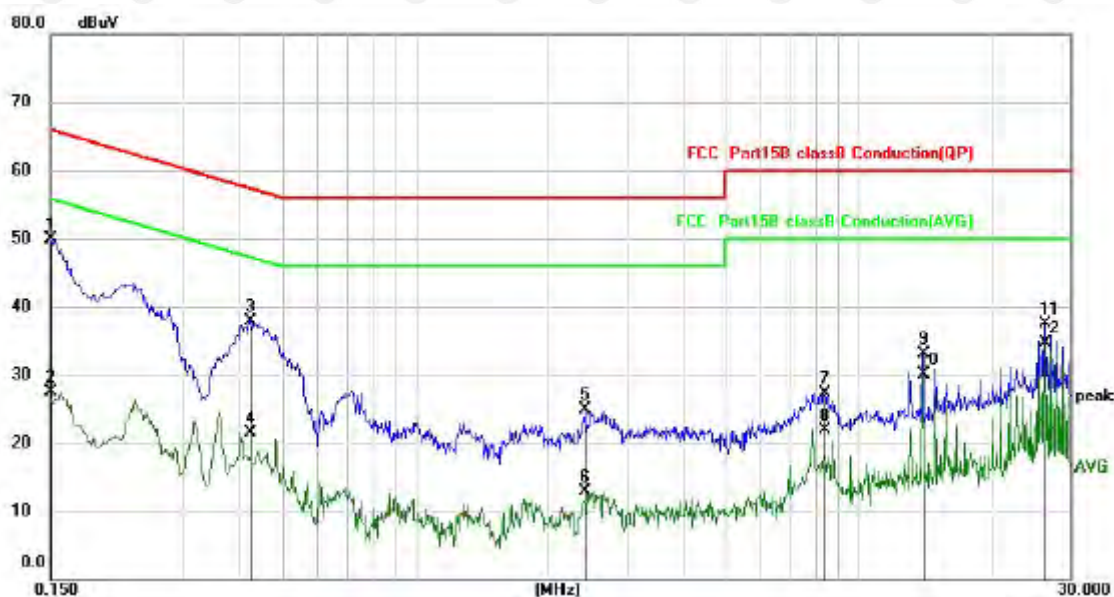

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1500	40.00	9.95	49.95	66.00	-16.05	QP
2		0.1500	17.55	9.95	27.50	56.00	-28.50	AVG
3		0.4259	28.02	9.98	38.00	57.33	-19.33	QP
4		0.4259	11.56	9.98	21.54	47.33	-25.79	AVG
5		2.4140	14.75	10.13	24.88	56.00	-31.12	QP
6		2.4140	2.82	10.13	12.95	46.00	-33.05	AVG
7		8.3500	16.75	10.55	27.30	60.00	-32.70	QP
8		8.3500	11.31	10.55	21.86	50.00	-28.14	AVG
9		13.9778	22.47	10.70	33.17	60.00	-26.83	QP
10		13.9778	19.41	10.70	30.11	50.00	-19.89	AVG
11		26.2056	26.34	11.11	37.45	60.00	-22.55	QP
12	*	26.2056	23.56	11.11	34.67	50.00	-15.33	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

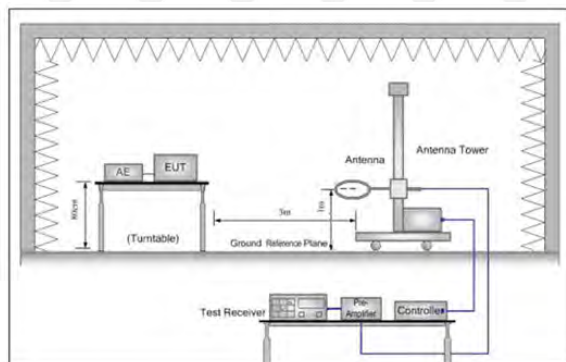


Figure 1. Below 30MHz



Figure 2. 30MHz to 1GHz

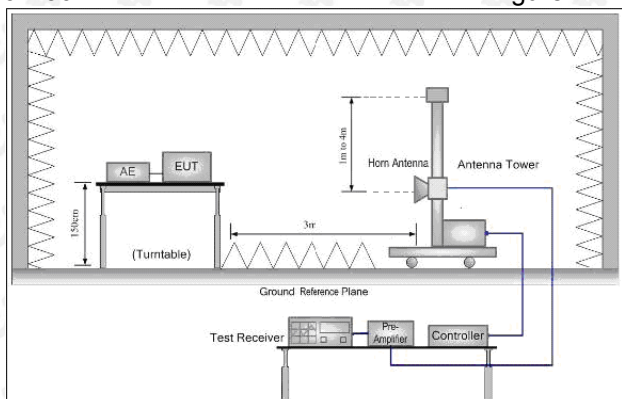


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:


Antenna polarity: H



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	52.3911	31.98	-15.34	16.64	40.00	-23.36	QP
2	120.2766	40.49	-15.37	25.12	43.50	-18.38	QP
3	168.4137	38.69	-13.56	25.13	43.50	-18.37	QP
4	256.5210	41.59	-15.30	26.29	46.00	-19.71	QP
5	426.5210	35.47	-10.65	24.82	46.00	-21.18	QP
6 *	578.6700	34.22	-5.96	28.26	46.00	-17.74	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

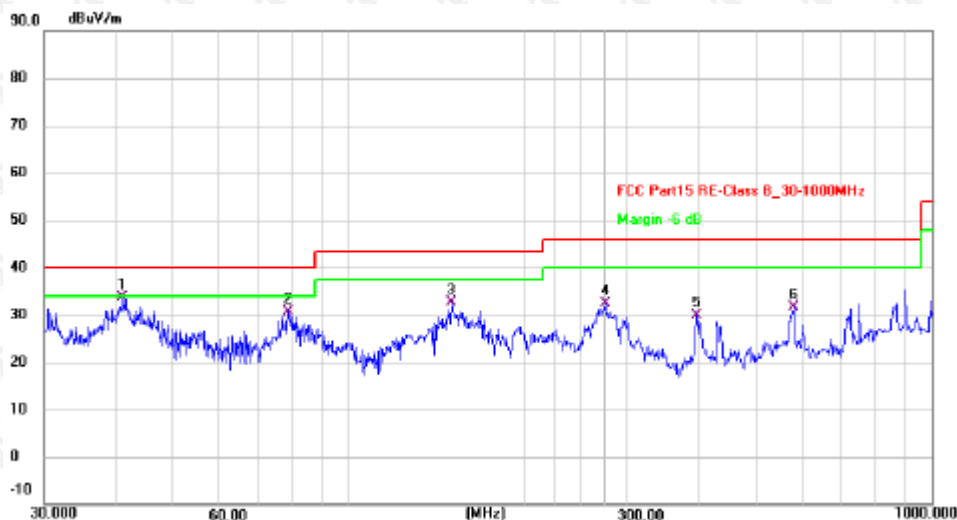

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	40.9880	47.41	-13.74	33.67	40.00	-6.33	QP
2	78.6885	49.22	-18.53	30.69	40.00	-9.31	QP
3	150.0107	45.23	-12.54	32.69	43.50	-10.81	QP
4	275.1570	46.58	-14.31	32.27	46.00	-13.73	QP
5	394.8544	41.46	-11.59	29.87	46.00	-16.13	QP
6	580.7025	37.41	-5.90	31.51	46.00	-14.49	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.39	-3.64	61.75	74	-12.25	peak
4824	50.64	-3.64	47.00	54	-7.00	AVG
7236	59.02	-0.95	58.07	74	-15.93	peak
7236	44.06	-0.95	43.11	54	-10.89	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.73	-3.64	62.09	74	-11.91	peak
4824	46.98	-3.64	43.34	54	-10.66	AVG
7236	58.93	-0.95	57.98	74	-16.02	peak
7236	43.52	-0.95	42.57	54	-11.43	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.33	-3.51	60.82	74	-13.18	peak
4874	49.65	-3.51	46.14	54	-7.86	AVG
7311	57.52	-0.82	56.70	74	-17.30	peak
7311	43.32	-0.82	42.50	54	-11.50	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.85	-3.51	61.34	74	-12.66	peak
4874	48.01	-3.51	44.50	54	-9.50	AVG
7311	59.17	-0.82	58.35	74	-15.65	peak
7311	42.40	-0.82	41.58	54	-12.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.48	-3.43	59.05	74	-14.95	peak
4924	46.84	-3.43	43.41	54	-10.59	AVG
7386	57.16	-0.75	56.41	74	-17.59	peak
7386	42.99	-0.75	42.24	54	-11.76	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.57	-3.43	61.14	74	-12.86	peak
4924	45.74	-3.43	42.31	54	-11.69	AVG
7386	57.90	-0.75	57.15	74	-16.85	peak
7386	41.09	-0.75	40.34	54	-13.66	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.60	-3.64	62.96	74	-11.04	peak
4824	50.76	-3.64	47.12	54	-6.88	AVG
7236	56.92	-0.95	55.97	74	-18.03	peak
7236	44.90	-0.95	43.95	54	-10.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.19	-3.64	62.55	74	-11.45	peak
4824	46.86	-3.64	43.22	54	-10.78	AVG
7236	56.85	-0.95	55.90	74	-18.10	peak
7236	45.66	-0.95	44.71	54	-9.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.96	-3.51	60.45	74	-13.55	peak
4874	50.21	-3.51	46.70	54	-7.30	AVG
7311	58.21	-0.82	57.39	74	-16.61	peak
7311	44.12	-0.82	43.30	54	-10.70	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.06	-3.51	60.55	74	-13.45	peak
4874	47.12	-3.51	43.61	54	-10.39	AVG
7311	59.55	-0.82	58.73	74	-15.27	peak
7311	43.62	-0.82	42.80	54	-11.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.44	-3.43	59.01	74	-14.99	peak
4924	47.02	-3.43	43.59	54	-10.41	AVG
7386	59.42	-0.75	58.67	74	-15.33	peak
7386	44.77	-0.75	44.02	54	-9.98	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.62	-3.43	61.19	74	-12.81	peak
4924	46.71	-3.43	43.28	54	-10.72	AVG
7386	56.30	-0.75	55.55	74	-18.45	peak
7386	41.56	-0.75	40.81	54	-13.19	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.37	-3.64	60.73	74	-13.27	peak
4824	49.74	-3.64	46.10	54	-7.90	AVG
7236	56.80	-0.95	55.85	74	-18.15	peak
7236	44.58	-0.95	43.63	54	-10.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	67.29	-3.64	63.65	74	-10.35	peak
4824	47.69	-3.64	44.05	54	-9.95	AVG
7236	57.35	-0.95	56.40	74	-17.60	peak
7236	45.59	-0.95	44.64	54	-9.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.91	-3.51	60.40	74	-13.60	peak
4874	50.03	-3.51	46.52	54	-7.48	AVG
7311	59.52	-0.82	58.70	74	-15.30	peak
7311	44.31	-0.82	43.49	54	-10.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.31	-3.51	60.80	74	-13.20	peak
4874	48.17	-3.51	44.66	54	-9.34	AVG
7311	59.87	-0.82	59.05	74	-14.95	peak
7311	42.42	-0.82	41.60	54	-12.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.12	-3.43	59.69	74	-14.31	peak
4924	46.28	-3.43	42.85	54	-11.15	AVG
7386	58.53	-0.75	57.78	74	-16.22	peak
7386	43.74	-0.75	42.99	54	-11.01	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.24	-3.43	61.81	74	-12.19	peak
4924	45.75	-3.43	42.32	54	-11.68	AVG
7386	56.97	-0.75	56.22	74	-17.78	peak
7386	41.43	-0.75	40.68	54	-13.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.71	-3.63	62.08	74	-11.92	peak
4844	49.29	-3.63	45.66	54	-8.34	AVG
7266	58.58	-0.94	57.64	74	-16.36	peak
7266	44.11	-0.94	43.17	54	-10.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.45	-3.63	61.82	74	-12.18	peak
4844	47.76	-3.63	44.13	54	-9.87	AVG
7266	58.80	-0.94	57.86	74	-16.14	peak
7266	45.81	-0.94	44.87	54	-9.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.47	-3.51	60.96	74	-13.04	peak
4874	48.16	-3.51	44.65	54	-9.35	AVG
7311	59.56	-0.82	58.74	74	-15.26	peak
7311	45.60	-0.82	44.78	54	-9.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.25	-3.51	58.74	74	-15.26	peak
4874	46.44	-3.51	42.93	54	-11.07	AVG
7311	56.64	-0.82	55.82	74	-18.18	peak
7311	43.36	-0.82	42.54	54	-11.46	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.95	-3.43	59.52	74	-14.48	peak
4904	48.31	-3.43	44.88	54	-9.12	AVG
7356	56.22	-0.75	55.47	74	-18.53	peak
7356	42.95	-0.75	42.20	54	-11.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	63.04	-3.43	59.61	74	-14.39	peak
4904	48.32	-3.43	44.89	54	-9.11	AVG
7356	58.98	-0.75	58.23	74	-15.77	peak
7356	42.14	-0.75	41.39	54	-12.61	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.23	-5.81	52.42	74	-21.58	peak
2390	/	-5.81	/	54	/	AVG
2399	64.95	-5.84	59.11	74	-14.89	peak
2399	48.63	-5.84	42.79	54	-11.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.04	-5.81	51.23	74	-22.77	peak
2390	/	-5.81	/	54	/	AVG
2399	62.46	-5.84	56.62	74	-17.38	peak
2399	46.33	-5.84	40.49	54	-13.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.40	-5.65	51.75	74	-22.25	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.99	-5.65	51.34	74	-22.66	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.18	-5.81	52.37	74	-21.63	peak
2390	/	-5.81	/	54	/	AVG
2399	62.17	-5.84	56.33	74	-17.67	peak
2399	46.99	-5.84	41.15	54	-12.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.68	-5.81	50.87	74	-23.13	peak
2390	/	-5.81	/	54	/	AVG
2399	63.38	-5.84	57.54	74	-16.46	peak
2399	46.39	-5.84	40.55	54	-13.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.35	-5.65	51.70	74	-22.30	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.58	-5.65	50.93	74	-23.07	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.82	-5.81	51.01	74	-22.99	peak
2390	/	-5.81	/	54	/	AVG
2399	62.22	-5.84	56.38	74	-17.62	peak
2399	47.00	-5.84	41.16	54	-12.84	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.11	-5.81	51.30	74	-22.70	peak
2390	/	-5.81	/	54	/	AVG
2399	61.43	-5.84	55.59	74	-18.41	peak
2399	47.54	-5.84	41.70	54	-12.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.06	-5.65	51.41	74	-22.59	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.21	-5.65	51.56	74	-22.44	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.44	-5.81	52.63	74	-21.37	peak
2390	/	-5.81	/	54	/	AVG
2399	62.13	-5.84	56.29	74	-17.71	peak
2399	45.75	-5.84	39.91	54	-14.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.91	-5.81	53.10	74	-20.90	peak
2390	/	-5.81	/	54	/	AVG
2399	61.80	-5.84	55.96	74	-18.04	peak
2399	46.75	-5.84	40.91	54	-13.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.55	-5.65	51.90	74	-22.10	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.86	-5.65	50.21	74	-23.79	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

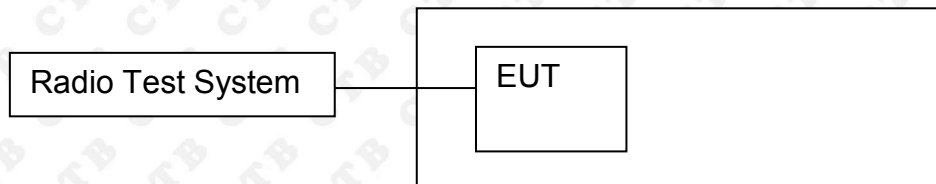

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:




BAND EDGE Graphs

802.11g/LCH

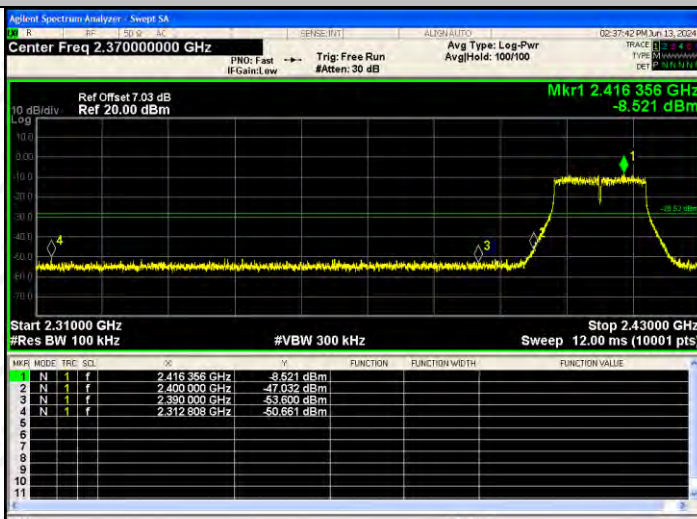


802.11g/HCH

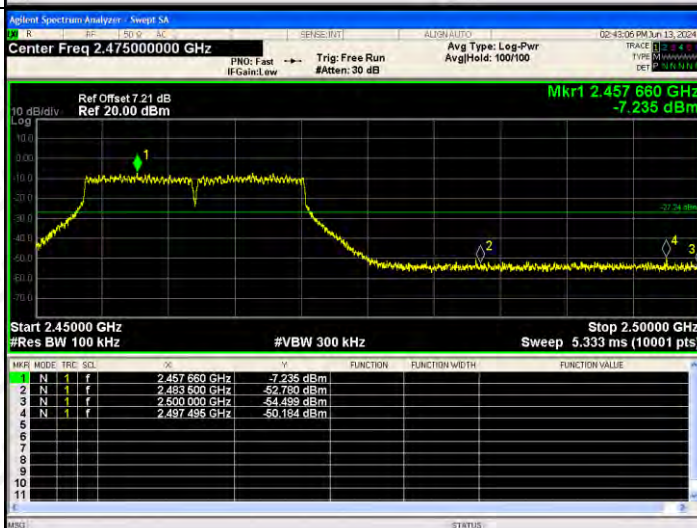

BAND EDGE Graphs

802.11n(HT20)/L
CH

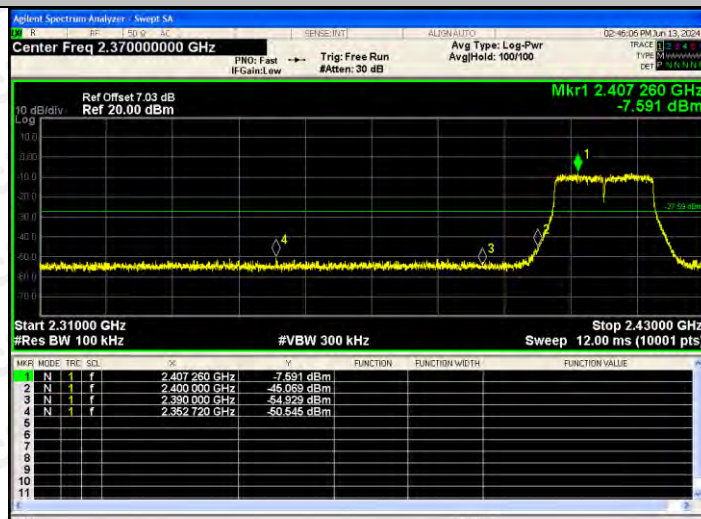


802.11n(HT20)/H
CH




BAND EDGE Graphs




802.11n(HT40)/L
CH

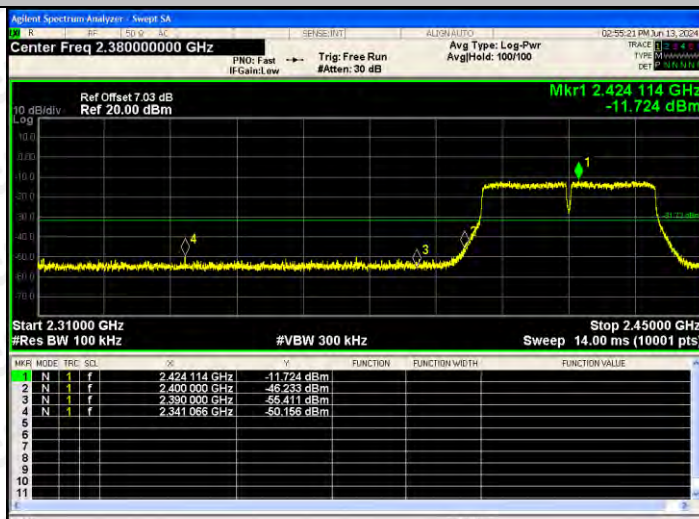

802.11n(HT40)/H
CH

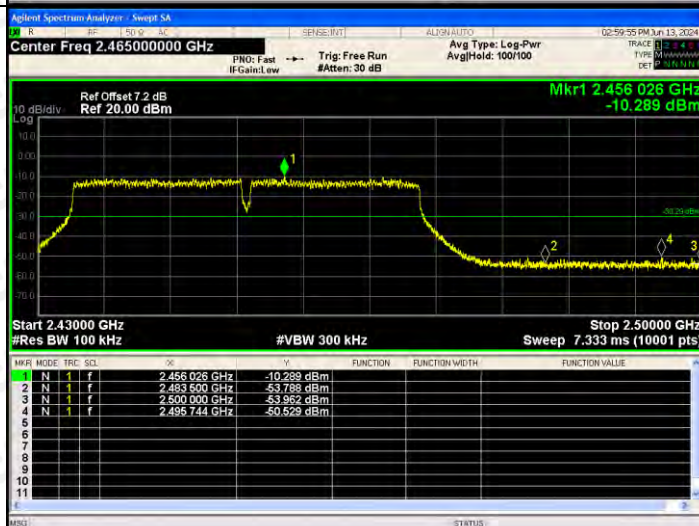




RF Conducted Spurious Emissions Graphs

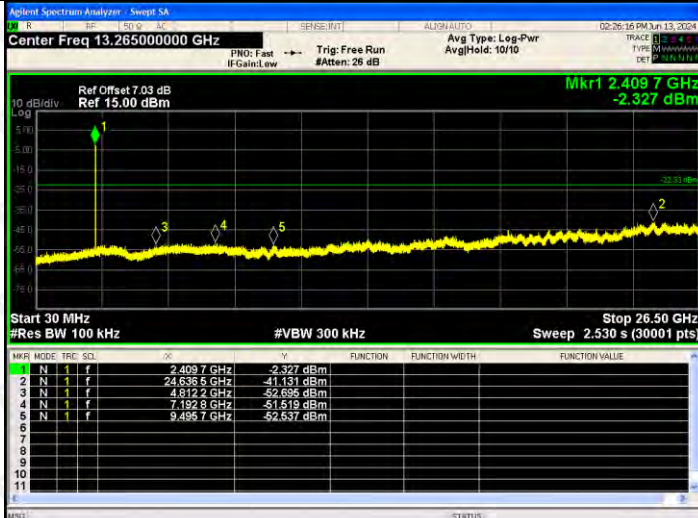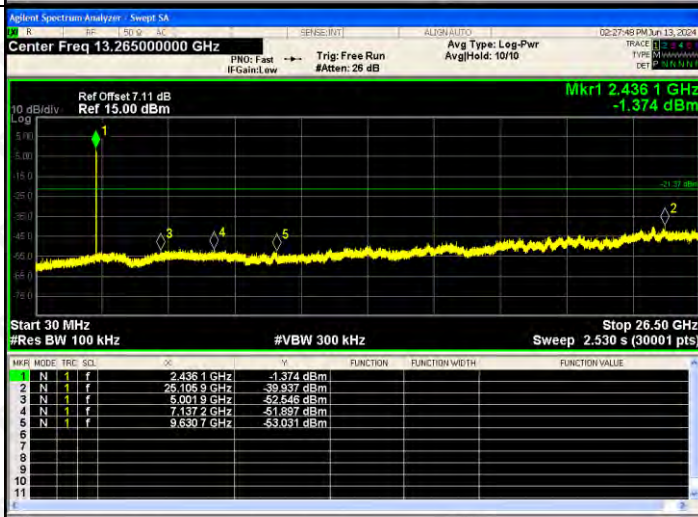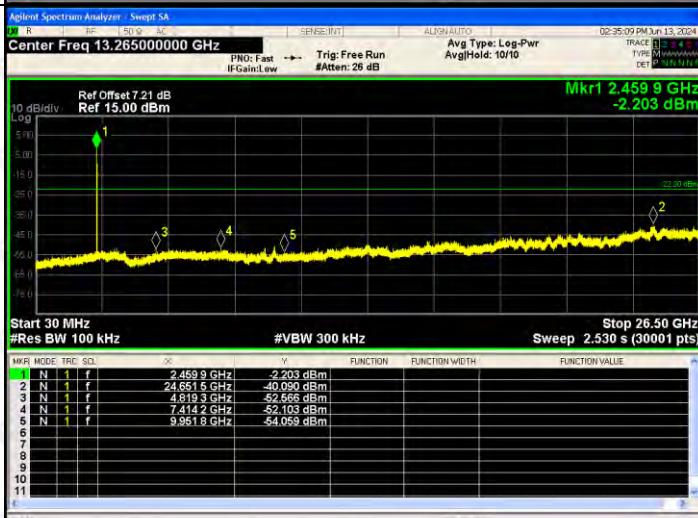802.11b /LCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4097 GHz</td><td>-2.327 dBm</td></tr><tr><td>2</td><td>N</td><td>24.6385 GHz</td><td>-41.131 dBm</td></tr><tr><td>3</td><td>N</td><td>4.8122 GHz</td><td>-52.695 dBm</td></tr><tr><td>4</td><td>N</td><td>7.1928 GHz</td><td>-51.519 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6957 GHz</td><td>-52.637 dBm</td></tr></table>	MNR	MODE	FREQ	POWER	1	N	2.4097 GHz	-2.327 dBm	2	N	24.6385 GHz	-41.131 dBm	3	N	4.8122 GHz	-52.695 dBm	4	N	7.1928 GHz	-51.519 dBm	5	N	9.6957 GHz	-52.637 dBm
MNR	MODE	FREQ	POWER																						
1	N	2.4097 GHz	-2.327 dBm																						
2	N	24.6385 GHz	-41.131 dBm																						
3	N	4.8122 GHz	-52.695 dBm																						
4	N	7.1928 GHz	-51.519 dBm																						
5	N	9.6957 GHz	-52.637 dBm																						
802.11b /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4361 GHz</td><td>-1.374 dBm</td></tr><tr><td>2</td><td>N</td><td>25.1099 GHz</td><td>-39.937 dBm</td></tr><tr><td>3</td><td>N</td><td>5.0019 GHz</td><td>-52.546 dBm</td></tr><tr><td>4</td><td>N</td><td>7.1372 GHz</td><td>-51.897 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6307 GHz</td><td>-53.031 dBm</td></tr></table>	MNR	MODE	FREQ	POWER	1	N	2.4361 GHz	-1.374 dBm	2	N	25.1099 GHz	-39.937 dBm	3	N	5.0019 GHz	-52.546 dBm	4	N	7.1372 GHz	-51.897 dBm	5	N	9.6307 GHz	-53.031 dBm
MNR	MODE	FREQ	POWER																						
1	N	2.4361 GHz	-1.374 dBm																						
2	N	25.1099 GHz	-39.937 dBm																						
3	N	5.0019 GHz	-52.546 dBm																						
4	N	7.1372 GHz	-51.897 dBm																						
5	N	9.6307 GHz	-53.031 dBm																						
802.11b /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4599 GHz</td><td>-2.203 dBm</td></tr><tr><td>2</td><td>N</td><td>24.6515 GHz</td><td>-40.090 dBm</td></tr><tr><td>3</td><td>N</td><td>4.8193 GHz</td><td>-52.566 dBm</td></tr><tr><td>4</td><td>N</td><td>7.4142 GHz</td><td>-52.103 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6519 GHz</td><td>-54.059 dBm</td></tr></table>	MNR	MODE	FREQ	POWER	1	N	2.4599 GHz	-2.203 dBm	2	N	24.6515 GHz	-40.090 dBm	3	N	4.8193 GHz	-52.566 dBm	4	N	7.4142 GHz	-52.103 dBm	5	N	9.6519 GHz	-54.059 dBm
MNR	MODE	FREQ	POWER																						
1	N	2.4599 GHz	-2.203 dBm																						
2	N	24.6515 GHz	-40.090 dBm																						
3	N	4.8193 GHz	-52.566 dBm																						
4	N	7.4142 GHz	-52.103 dBm																						
5	N	9.6519 GHz	-54.059 dBm																						

RF Conducted Spurious Emissions Graphs

802.11g /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.414 9 GHz -10.353 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.414 9 GHz</td><td>-10.353 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4858 GHz</td><td>-40.803 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.769 0 GHz</td><td>-54.012 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.228 1 GHz</td><td>-52.344 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.517 7 GHz</td><td>-51.841 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.414 9 GHz	-10.353 dBm				2	N	1	f	2.4858 GHz	-40.803 dBm				3	N	1	f	4.769 0 GHz	-54.012 dBm				4	N	1	f	7.228 1 GHz	-52.344 dBm				5	N	1	f	9.517 7 GHz	-51.841 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.414 9 GHz	-10.353 dBm																																																		
2	N	1	f	2.4858 GHz	-40.803 dBm																																																		
3	N	1	f	4.769 0 GHz	-54.012 dBm																																																		
4	N	1	f	7.228 1 GHz	-52.344 dBm																																																		
5	N	1	f	9.517 7 GHz	-51.841 dBm																																																		
802.11g /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.431 7 GHz -9.723 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.431 7 GHz</td><td>-9.723 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4715 GHz</td><td>-39.589 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.768 4 GHz</td><td>-53.204 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.230 7 GHz</td><td>-52.885 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.740 1 GHz</td><td>-52.635 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.431 7 GHz	-9.723 dBm				2	N	1	f	2.4715 GHz	-39.589 dBm				3	N	1	f	4.768 4 GHz	-53.204 dBm				4	N	1	f	7.230 7 GHz	-52.885 dBm				5	N	1	f	9.740 1 GHz	-52.635 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.431 7 GHz	-9.723 dBm																																																		
2	N	1	f	2.4715 GHz	-39.589 dBm																																																		
3	N	1	f	4.768 4 GHz	-53.204 dBm																																																		
4	N	1	f	7.230 7 GHz	-52.885 dBm																																																		
5	N	1	f	9.740 1 GHz	-52.635 dBm																																																		
802.11g /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.21 dB Ref 15.00 dBm Mkr1 2.456 4 GHz -7.332 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.456 4 GHz</td><td>-7.332 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.051 2 GHz</td><td>-40.415 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.113 1 GHz</td><td>-53.041 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.255 3 GHz</td><td>-52.286 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>10.019 8 GHz</td><td>-53.263 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.456 4 GHz	-7.332 dBm				2	N	1	f	25.051 2 GHz	-40.415 dBm				3	N	1	f	5.113 1 GHz	-53.041 dBm				4	N	1	f	7.255 3 GHz	-52.286 dBm				5	N	1	f	10.019 8 GHz	-53.263 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.456 4 GHz	-7.332 dBm																																																		
2	N	1	f	25.051 2 GHz	-40.415 dBm																																																		
3	N	1	f	5.113 1 GHz	-53.041 dBm																																																		
4	N	1	f	7.255 3 GHz	-52.286 dBm																																																		
5	N	1	f	10.019 8 GHz	-53.263 dBm																																																		

RF Conducted Spurious Emissions Graphs

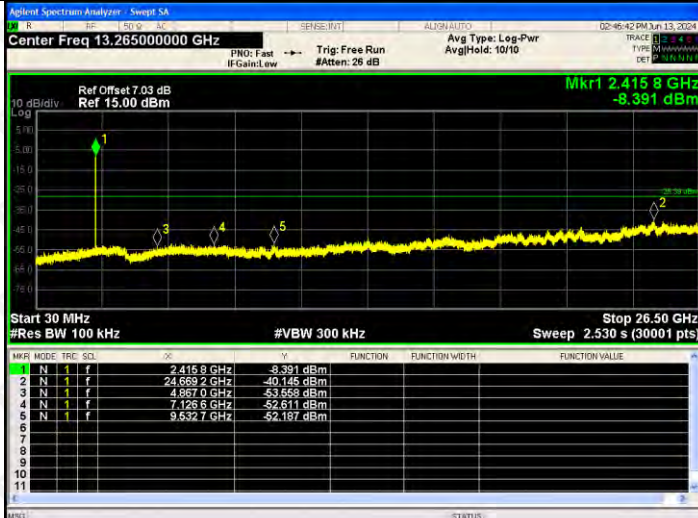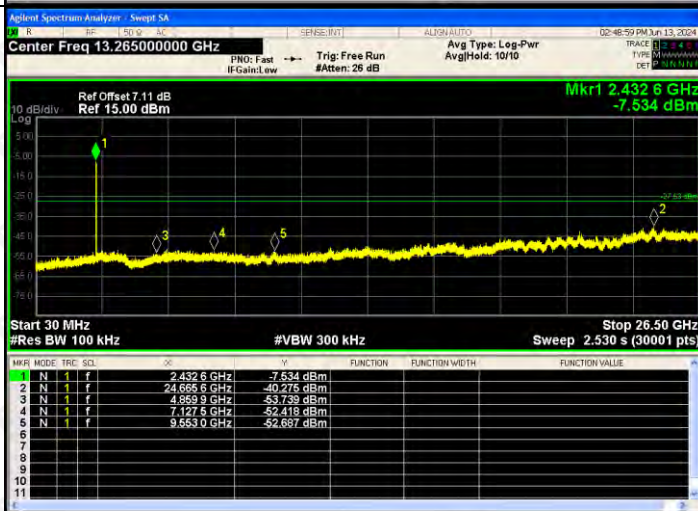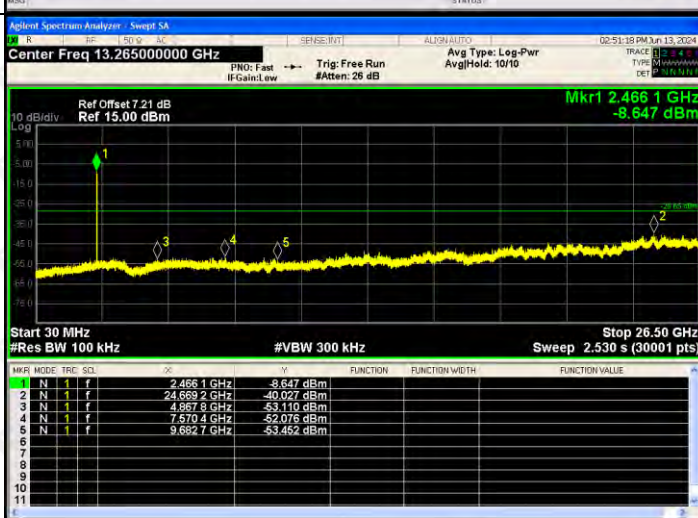802.11n (HT20)/ LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4158 GHz</td><td>-8.391 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6892 GHz</td><td>-40.145 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8670 GHz</td><td>-53.558 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1268 GHz</td><td>-52.611 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5327 GHz</td><td>-52.157 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4158 GHz	-8.391 dBm				2	N	1	f	24.6892 GHz	-40.145 dBm				3	N	1	f	4.8670 GHz	-53.558 dBm				4	N	1	f	7.1268 GHz	-52.611 dBm				5	N	1	f	9.5327 GHz	-52.157 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4158 GHz	-8.391 dBm																																																			
2	N	1	f	24.6892 GHz	-40.145 dBm																																																			
3	N	1	f	4.8670 GHz	-53.558 dBm																																																			
4	N	1	f	7.1268 GHz	-52.611 dBm																																																			
5	N	1	f	9.5327 GHz	-52.157 dBm																																																			
802.11 n(HT20) /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4326 GHz</td><td>-7.534 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6892 GHz</td><td>-40.275 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8699 GHz</td><td>-53.739 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1275 GHz</td><td>-52.419 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5530 GHz</td><td>-52.657 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4326 GHz	-7.534 dBm				2	N	1	f	24.6892 GHz	-40.275 dBm				3	N	1	f	4.8699 GHz	-53.739 dBm				4	N	1	f	7.1275 GHz	-52.419 dBm				5	N	1	f	9.5530 GHz	-52.657 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4326 GHz	-7.534 dBm																																																			
2	N	1	f	24.6892 GHz	-40.275 dBm																																																			
3	N	1	f	4.8699 GHz	-53.739 dBm																																																			
4	N	1	f	7.1275 GHz	-52.419 dBm																																																			
5	N	1	f	9.5530 GHz	-52.657 dBm																																																			
802.11 n(HT20) /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4661 GHz</td><td>-8.647 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6892 GHz</td><td>-40.027 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8678 GHz</td><td>-53.110 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.5704 GHz</td><td>-52.076 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6927 GHz</td><td>-53.452 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4661 GHz	-8.647 dBm				2	N	1	f	24.6892 GHz	-40.027 dBm				3	N	1	f	4.8678 GHz	-53.110 dBm				4	N	1	f	7.5704 GHz	-52.076 dBm				5	N	1	f	9.6927 GHz	-53.452 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4661 GHz	-8.647 dBm																																																			
2	N	1	f	24.6892 GHz	-40.027 dBm																																																			
3	N	1	f	4.8678 GHz	-53.110 dBm																																																			
4	N	1	f	7.5704 GHz	-52.076 dBm																																																			
5	N	1	f	9.6927 GHz	-53.452 dBm																																																			


802.11n (HT40)/ LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.437 9 GHz -12.333 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>OK</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.437 9 GHz</td><td></td><td></td><td>-12.333 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>24.683 3 GHz</td><td></td><td></td><td>-40.339 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>4.836 1 GHz</td><td></td><td></td><td>-53.366 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>7.249 3 GHz</td><td></td><td></td><td>-52.310 dBm</td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td></td><td>9.584 9 GHz</td><td></td><td></td><td>-52.933 dBm</td></tr></table>	MNR	MODE	TRC	SOL	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.437 9 GHz			-12.333 dBm	2	N	1	f		24.683 3 GHz			-40.339 dBm	3	N	1	f		4.836 1 GHz			-53.366 dBm	4	N	1	f		7.249 3 GHz			-52.310 dBm	5	N	1	f		9.584 9 GHz			-52.933 dBm
MNR	MODE	TRC	SOL	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f		2.437 9 GHz			-12.333 dBm																																															
2	N	1	f		24.683 3 GHz			-40.339 dBm																																															
3	N	1	f		4.836 1 GHz			-53.366 dBm																																															
4	N	1	f		7.249 3 GHz			-52.310 dBm																																															
5	N	1	f		9.584 9 GHz			-52.933 dBm																																															
802.11 n(HT40) /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.450 2 GHz -11.468 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>OK</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.450 2 GHz</td><td></td><td></td><td>-11.468 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>24.617 1 GHz</td><td></td><td></td><td>-40.227 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>4.979 9 GHz</td><td></td><td></td><td>-53.068 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>7.434 5 GHz</td><td></td><td></td><td>-52.684 dBm</td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td></td><td>9.698 9 GHz</td><td></td><td></td><td>-53.676 dBm</td></tr></table>	MNR	MODE	TRC	SOL	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.450 2 GHz			-11.468 dBm	2	N	1	f		24.617 1 GHz			-40.227 dBm	3	N	1	f		4.979 9 GHz			-53.068 dBm	4	N	1	f		7.434 5 GHz			-52.684 dBm	5	N	1	f		9.698 9 GHz			-53.676 dBm
MNR	MODE	TRC	SOL	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f		2.450 2 GHz			-11.468 dBm																																															
2	N	1	f		24.617 1 GHz			-40.227 dBm																																															
3	N	1	f		4.979 9 GHz			-53.068 dBm																																															
4	N	1	f		7.434 5 GHz			-52.684 dBm																																															
5	N	1	f		9.698 9 GHz			-53.676 dBm																																															
802.11 n(HT40) /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.2 dB Ref 15.00 dBm Mkr1 2.448 5 GHz -10.800 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>OK</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td></td><td>2.448 5 GHz</td><td></td><td></td><td>-10.800 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td></td><td>24.651 5 GHz</td><td></td><td></td><td>-39.591 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td></td><td>4.795 5 GHz</td><td></td><td></td><td>-52.253 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td></td><td>7.629 0 GHz</td><td></td><td></td><td>-52.772 dBm</td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td></td><td>9.951 8 GHz</td><td></td><td></td><td>-53.067 dBm</td></tr></table>	MNR	MODE	TRC	SOL	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f		2.448 5 GHz			-10.800 dBm	2	N	1	f		24.651 5 GHz			-39.591 dBm	3	N	1	f		4.795 5 GHz			-52.253 dBm	4	N	1	f		7.629 0 GHz			-52.772 dBm	5	N	1	f		9.951 8 GHz			-53.067 dBm
MNR	MODE	TRC	SOL	OK	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f		2.448 5 GHz			-10.800 dBm																																															
2	N	1	f		24.651 5 GHz			-39.591 dBm																																															
3	N	1	f		4.795 5 GHz			-52.253 dBm																																															
4	N	1	f		7.629 0 GHz			-52.772 dBm																																															
5	N	1	f		9.951 8 GHz			-53.067 dBm																																															

ANT2:




BAND EDGE Graphs

802.11g/LCH

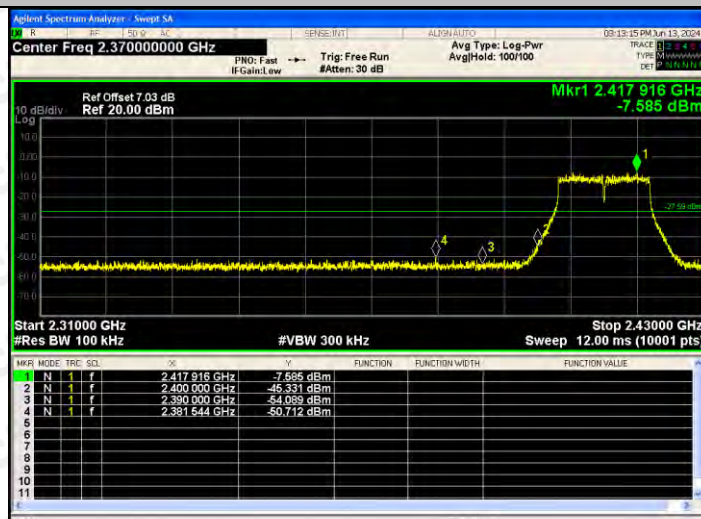


802.11g/HCH

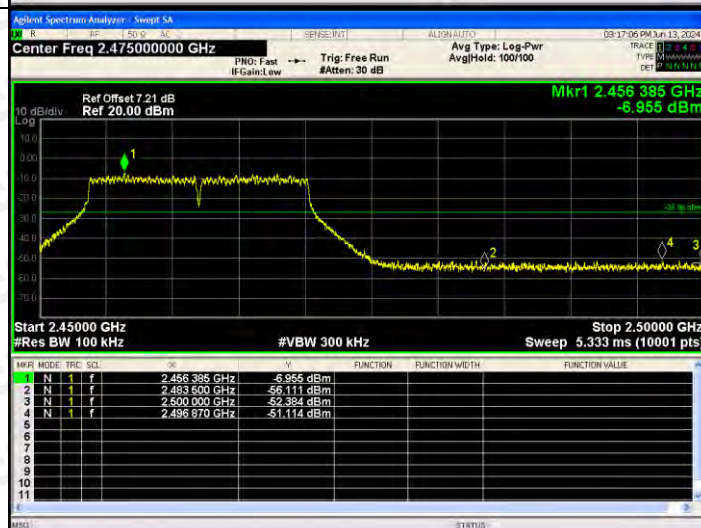


BAND EDGE Graphs

802.11n(HT20)/L
CH

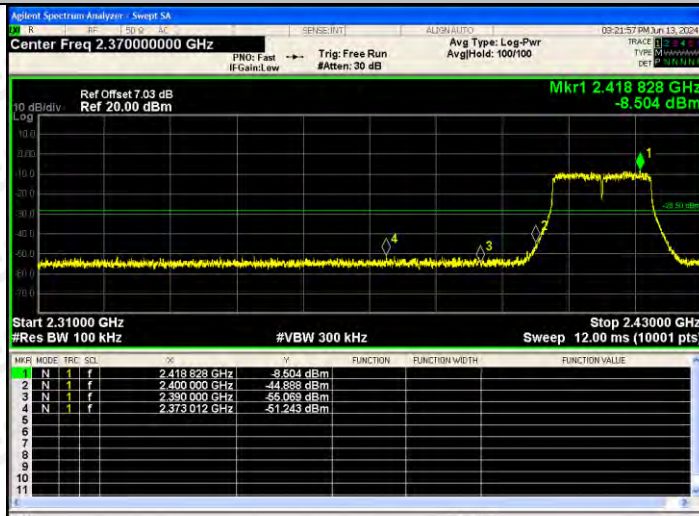


802.11n(HT20)/H
CH

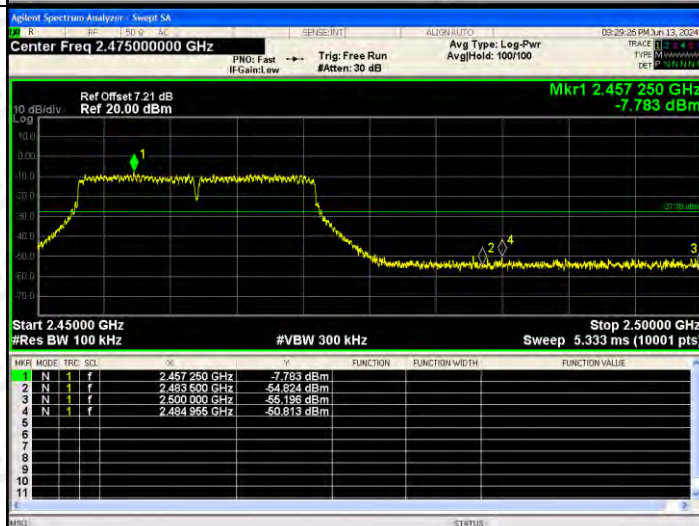

BAND EDGE Graphs




802.11n(HT40)/L
CH

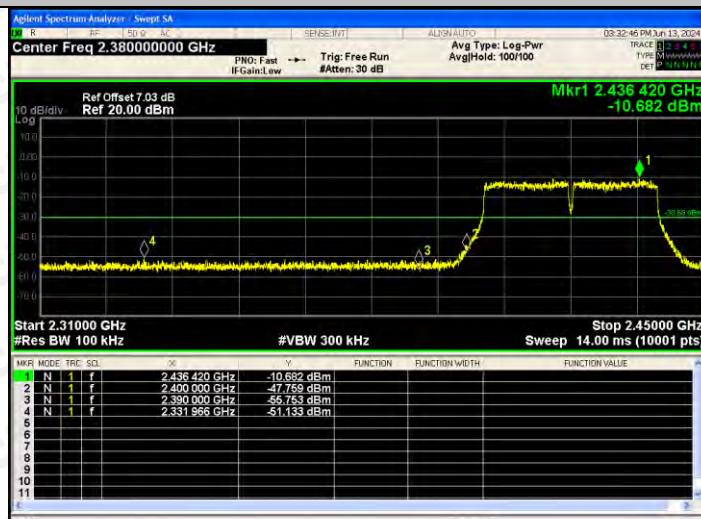


802.11n(HT40)/H
CH





RF Conducted Spurious Emissions Graphs

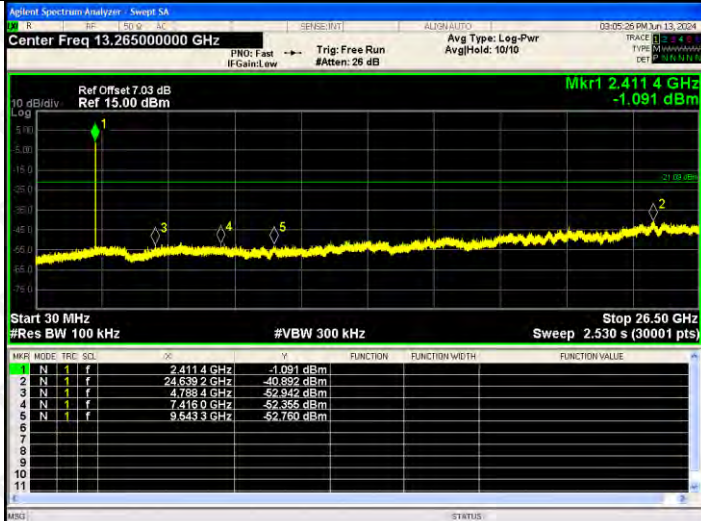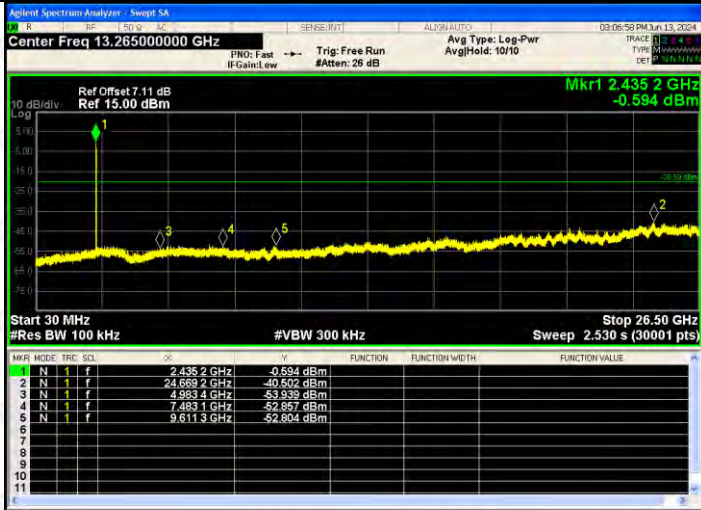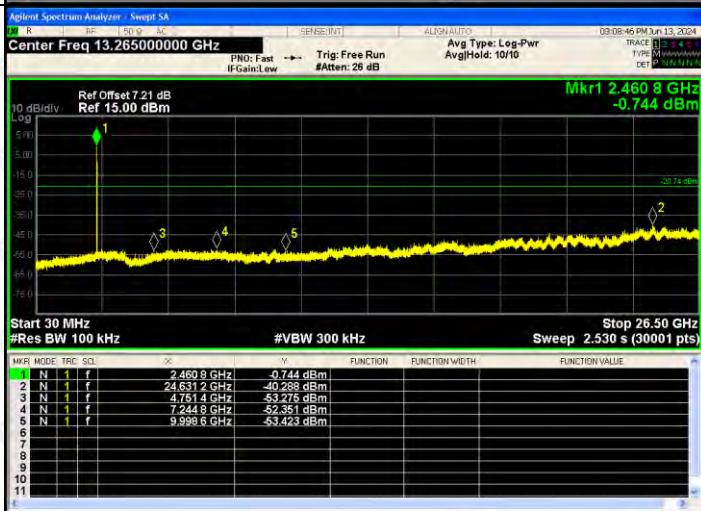802.11b /LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4114 GHz</td><td>-1.091 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4339 GHz</td><td>-40.892 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7884 GHz</td><td>-52.942 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4150 GHz</td><td>-52.355 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5453 GHz</td><td>-52.759 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4114 GHz	-1.091 dBm				2	N	1	f	2.4339 GHz	-40.892 dBm				3	N	1	f	4.7884 GHz	-52.942 dBm				4	N	1	f	7.4150 GHz	-52.355 dBm				5	N	1	f	9.5453 GHz	-52.759 dBm				
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4114 GHz	-1.091 dBm																																																			
2	N	1	f	2.4339 GHz	-40.892 dBm																																																			
3	N	1	f	4.7884 GHz	-52.942 dBm																																																			
4	N	1	f	7.4150 GHz	-52.355 dBm																																																			
5	N	1	f	9.5453 GHz	-52.759 dBm																																																			
802.11b /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4352 GHz</td><td>-0.594 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4669 GHz</td><td>-40.502 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9834 GHz</td><td>-53.939 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4837 GHz</td><td>-52.887 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.6113 GHz</td><td>-52.804 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4352 GHz	-0.594 dBm				2	N	1	f	2.4669 GHz	-40.502 dBm				3	N	1	f	4.9834 GHz	-53.939 dBm				4	N	1	f	7.4837 GHz	-52.887 dBm				5	N	1	f	9.6113 GHz	-52.804 dBm				
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4352 GHz	-0.594 dBm																																																			
2	N	1	f	2.4669 GHz	-40.502 dBm																																																			
3	N	1	f	4.9834 GHz	-53.939 dBm																																																			
4	N	1	f	7.4837 GHz	-52.887 dBm																																																			
5	N	1	f	9.6113 GHz	-52.804 dBm																																																			
802.11b /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4608 GHz</td><td>-0.744 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4631 GHz</td><td>-40.288 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7614 GHz</td><td>-53.275 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2448 GHz</td><td>-52.351 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5998 GHz</td><td>-53.423 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4608 GHz	-0.744 dBm				2	N	1	f	2.4631 GHz	-40.288 dBm				3	N	1	f	4.7614 GHz	-53.275 dBm				4	N	1	f	7.2448 GHz	-52.351 dBm				5	N	1	f	9.5998 GHz	-53.423 dBm				
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4608 GHz	-0.744 dBm																																																			
2	N	1	f	2.4631 GHz	-40.288 dBm																																																			
3	N	1	f	4.7614 GHz	-53.275 dBm																																																			
4	N	1	f	7.2448 GHz	-52.351 dBm																																																			
5	N	1	f	9.5998 GHz	-53.423 dBm																																																			




RF Conducted Spurious Emissions Graphs

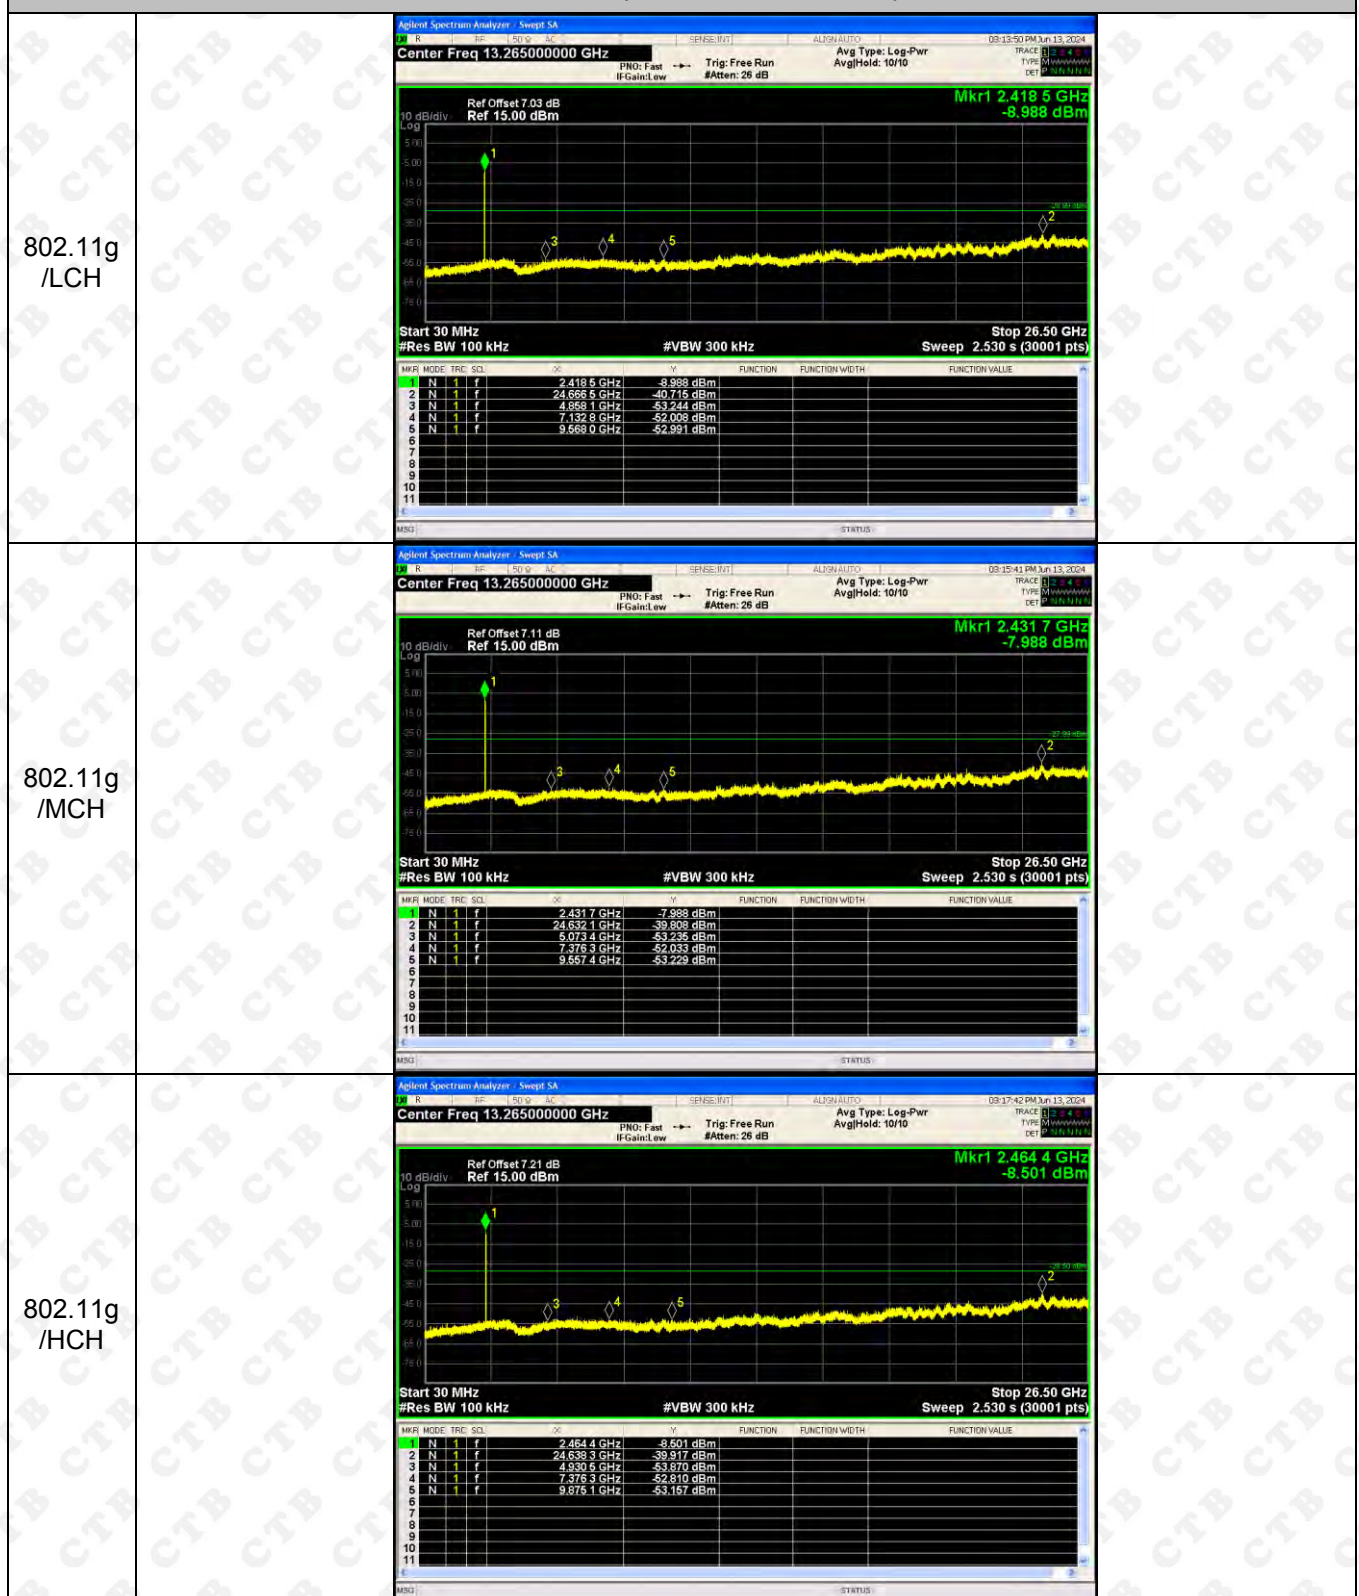

RF Conducted Spurious Emissions Graphs

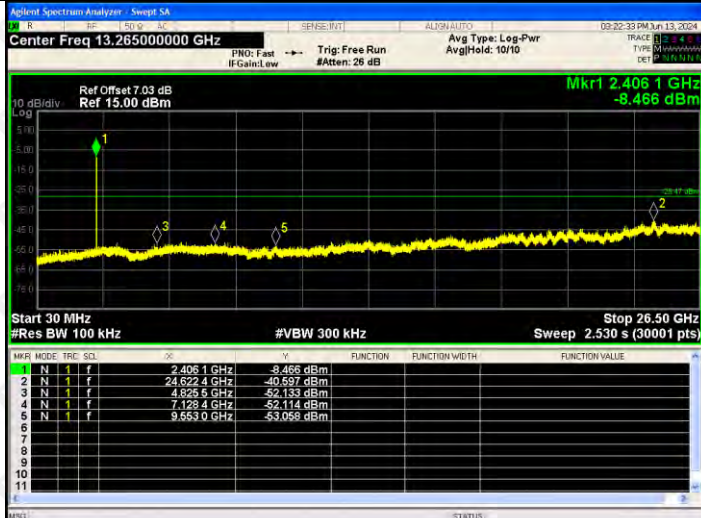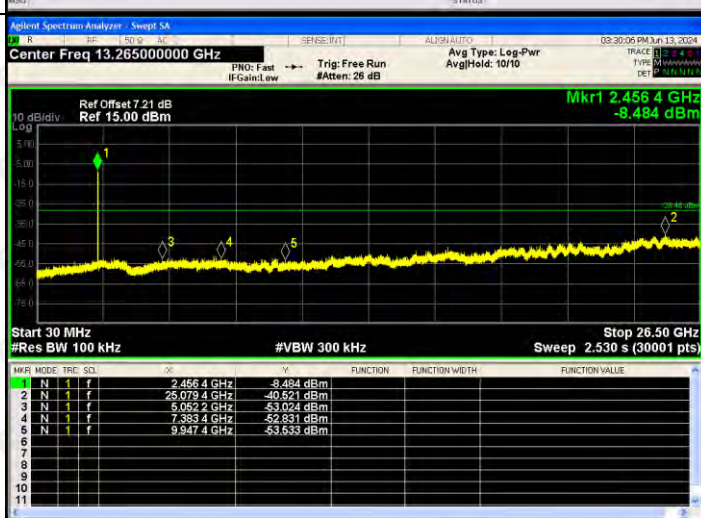802.11n (HT20)/ LCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4061 GHz</td><td>-9.486 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.6224 GHz</td><td>-40.697 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8255 GHz</td><td>-52.133 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1624 GHz</td><td>-52.114 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5530 GHz</td><td>-53.055 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4061 GHz	-9.486 dBm				2	N	1	f	24.6224 GHz	-40.697 dBm				3	N	1	f	4.8255 GHz	-52.133 dBm				4	N	1	f	7.1624 GHz	-52.114 dBm				5	N	1	f	9.5530 GHz	-53.055 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4061 GHz	-9.486 dBm																																																			
2	N	1	f	24.6224 GHz	-40.697 dBm																																																			
3	N	1	f	4.8255 GHz	-52.133 dBm																																																			
4	N	1	f	7.1624 GHz	-52.114 dBm																																																			
5	N	1	f	9.5530 GHz	-53.055 dBm																																																			
802.11 n(HT20) /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4326 GHz</td><td>-9.071 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.1627 GHz</td><td>-40.117 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7575 GHz</td><td>-52.365 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.2104 GHz</td><td>-52.207 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5501 GHz</td><td>-53.201 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4326 GHz	-9.071 dBm				2	N	1	f	25.1627 GHz	-40.117 dBm				3	N	1	f	4.7575 GHz	-52.365 dBm				4	N	1	f	7.2104 GHz	-52.207 dBm				5	N	1	f	9.5501 GHz	-53.201 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4326 GHz	-9.071 dBm																																																			
2	N	1	f	25.1627 GHz	-40.117 dBm																																																			
3	N	1	f	4.7575 GHz	-52.365 dBm																																																			
4	N	1	f	7.2104 GHz	-52.207 dBm																																																			
5	N	1	f	9.5501 GHz	-53.201 dBm																																																			
802.11 n(HT20) /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4564 GHz</td><td>-9.484 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.0794 GHz</td><td>-40.521 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0522 GHz</td><td>-53.024 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.3834 GHz</td><td>-52.831 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.9474 GHz</td><td>-53.535 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4564 GHz	-9.484 dBm				2	N	1	f	25.0794 GHz	-40.521 dBm				3	N	1	f	5.0522 GHz	-53.024 dBm				4	N	1	f	7.3834 GHz	-52.831 dBm				5	N	1	f	9.9474 GHz	-53.535 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.4564 GHz	-9.484 dBm																																																			
2	N	1	f	25.0794 GHz	-40.521 dBm																																																			
3	N	1	f	5.0522 GHz	-53.024 dBm																																																			
4	N	1	f	7.3834 GHz	-52.831 dBm																																																			
5	N	1	f	9.9474 GHz	-53.535 dBm																																																			

RF Conducted Spurious Emissions Graphs

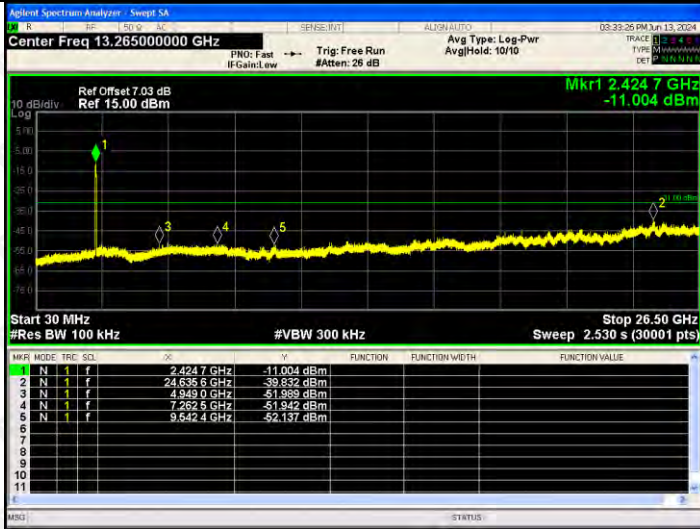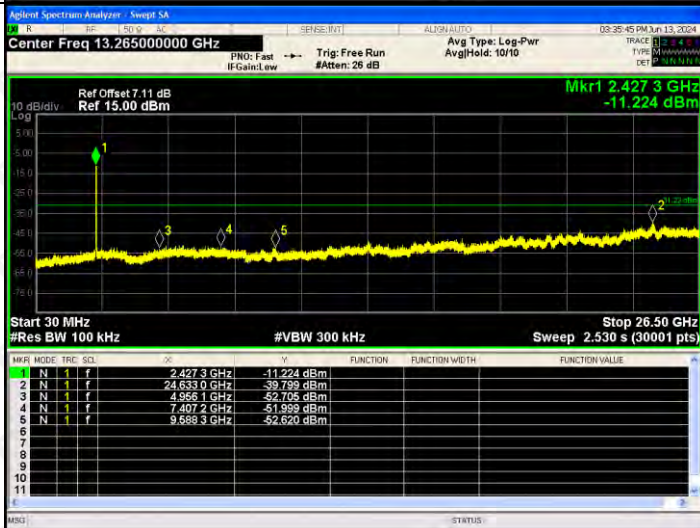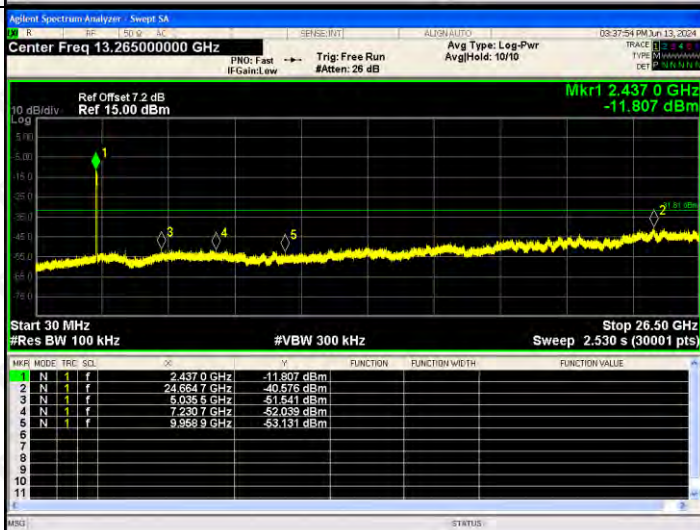802.11 n(HT40) /LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.424 7 GHz -11.004 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.424 7 GHz</td><td>-11.004 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.635 6 GHz</td><td>-39.832 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.949 0 GHz</td><td>-51.989 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.262 5 GHz</td><td>-51.842 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.542 4 GHz</td><td>-52.137 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.424 7 GHz	-11.004 dBm				2	N	1	f	24.635 6 GHz	-39.832 dBm				3	N	1	f	4.949 0 GHz	-51.989 dBm				4	N	1	f	7.262 5 GHz	-51.842 dBm				5	N	1	f	9.542 4 GHz	-52.137 dBm			
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.424 7 GHz	-11.004 dBm																																																		
2	N	1	f	24.635 6 GHz	-39.832 dBm																																																		
3	N	1	f	4.949 0 GHz	-51.989 dBm																																																		
4	N	1	f	7.262 5 GHz	-51.842 dBm																																																		
5	N	1	f	9.542 4 GHz	-52.137 dBm																																																		
802.11 n(HT40) /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.427 3 GHz -11.224 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.427 3 GHz</td><td>-11.224 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.633 0 GHz</td><td>-39.799 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.956 1 GHz</td><td>-52.705 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.407 2 GHz</td><td>-51.959 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.588 3 GHz</td><td>-52.620 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.427 3 GHz	-11.224 dBm				2	N	1	f	24.633 0 GHz	-39.799 dBm				3	N	1	f	4.956 1 GHz	-52.705 dBm				4	N	1	f	7.407 2 GHz	-51.959 dBm				5	N	1	f	9.588 3 GHz	-52.620 dBm			
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.427 3 GHz	-11.224 dBm																																																		
2	N	1	f	24.633 0 GHz	-39.799 dBm																																																		
3	N	1	f	4.956 1 GHz	-52.705 dBm																																																		
4	N	1	f	7.407 2 GHz	-51.959 dBm																																																		
5	N	1	f	9.588 3 GHz	-52.620 dBm																																																		
802.11 n(HT40) /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.2 dB Ref 15.00 dBm Mkr1 2.437 0 GHz -11.807 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.437 0 GHz</td><td>-11.807 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.664 7 GHz</td><td>-40.576 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.035 5 GHz</td><td>-51.541 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.230 7 GHz</td><td>-52.039 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.558 9 GHz</td><td>-53.131 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 0 GHz	-11.807 dBm				2	N	1	f	24.664 7 GHz	-40.576 dBm				3	N	1	f	5.035 5 GHz	-51.541 dBm				4	N	1	f	7.230 7 GHz	-52.039 dBm				5	N	1	f	9.558 9 GHz	-53.131 dBm			
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.437 0 GHz	-11.807 dBm																																																		
2	N	1	f	24.664 7 GHz	-40.576 dBm																																																		
3	N	1	f	5.035 5 GHz	-51.541 dBm																																																		
4	N	1	f	7.230 7 GHz	-52.039 dBm																																																		
5	N	1	f	9.558 9 GHz	-53.131 dBm																																																		

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	12.403	12.635	/	30
	MCH	12.727	13.434	/	30
	HCH	11.577	13.081	/	30
802.11g	LCH	12.758	12.219	/	30
	MCH	12.906	12.633	/	30
	HCH	12.973	12.593	/	30
802.11n(HT20)	LCH	12.772	12.136	15.476	30
	MCH	12.927	12.356	15.661	30
	HCH	12.864	12.271	15.588	30
802.11n(HT40)	LCH	12.699	12.45	15.587	30
	MCH	12.960	13.067	16.024	30
	HCH	13.350	12.590	15.997	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

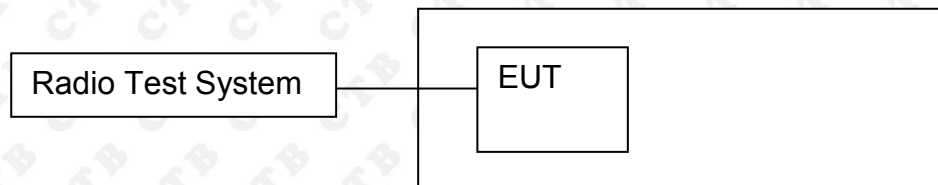

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.128	500	PASS
	MCH	10.125	500	PASS
	HCH	10.091	500	PASS
802.11g	LCH	16.522	500	PASS
	MCH	16.500	500	PASS
	HCH	16.502	500	PASS
802.11n(HT20)	LCH	17.746	500	PASS
	MCH	17.761	500	PASS
	HCH	17.777	500	PASS
802.11n(HT40)	LCH	36.522	500	PASS
	MCH	36.538	500	PASS
	HCH	36.471	500	PASS

ANT2:


Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.115	500	PASS
	MCH	10.099	500	PASS
	HCH	10.117	500	PASS
802.11g	LCH	16.530	500	PASS
	MCH	16.513	500	PASS
	HCH	16.525	500	PASS
802.11n(HT20)	LCH	17.778	500	PASS
	MCH	17.767	500	PASS
	HCH	17.758	500	PASS
802.11n(HT40)	LCH	36.476	500	PASS
	MCH	36.477	500	PASS
	HCH	36.484	500	PASS

ANT1:

Test Graph:




802.11g/LCH



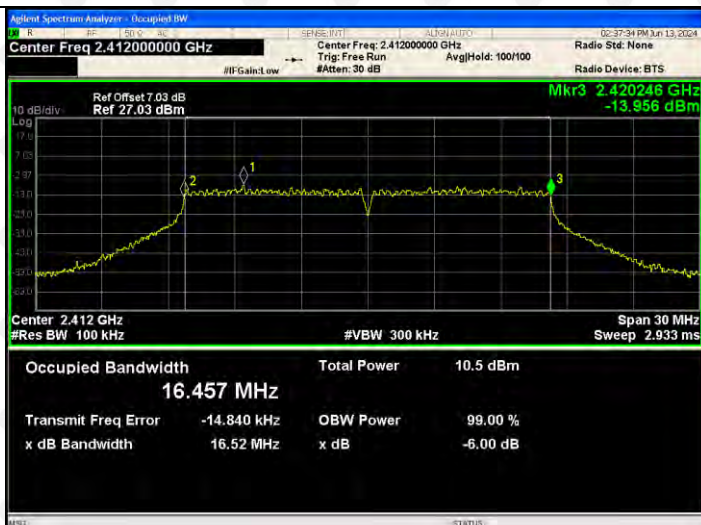




802.11g/MCH



802.11g/HCH

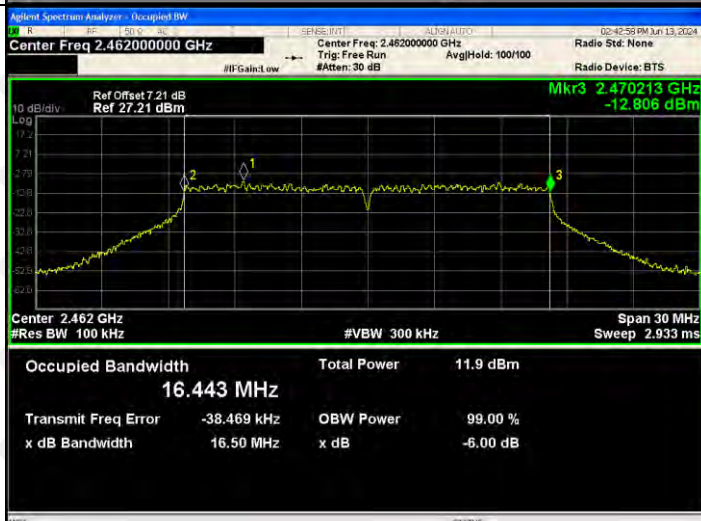

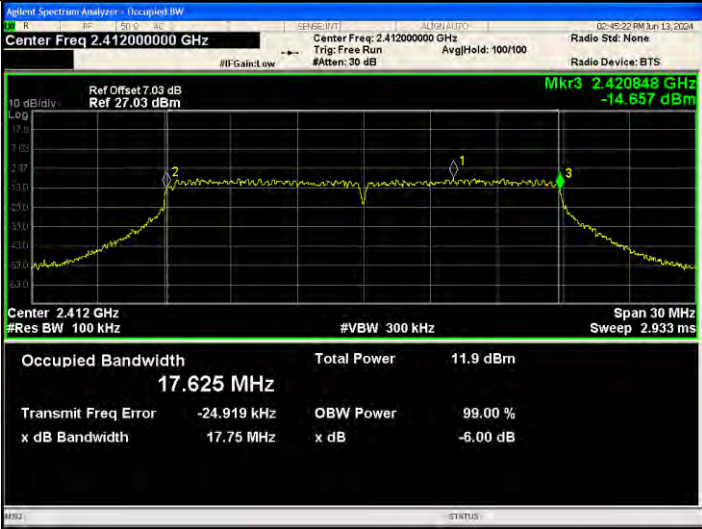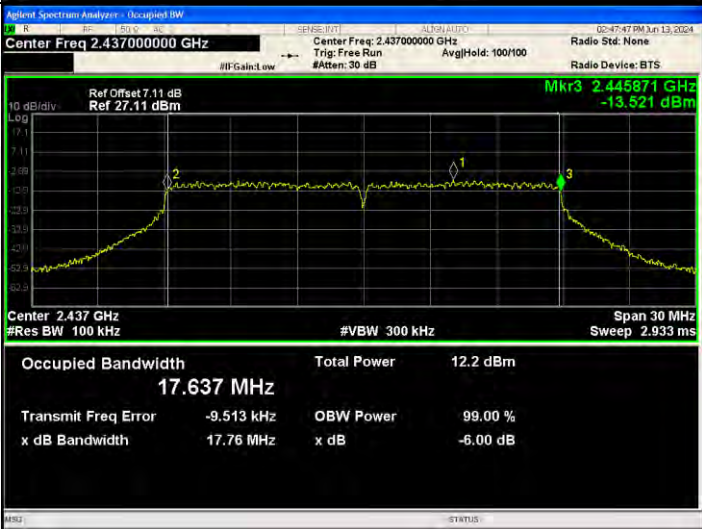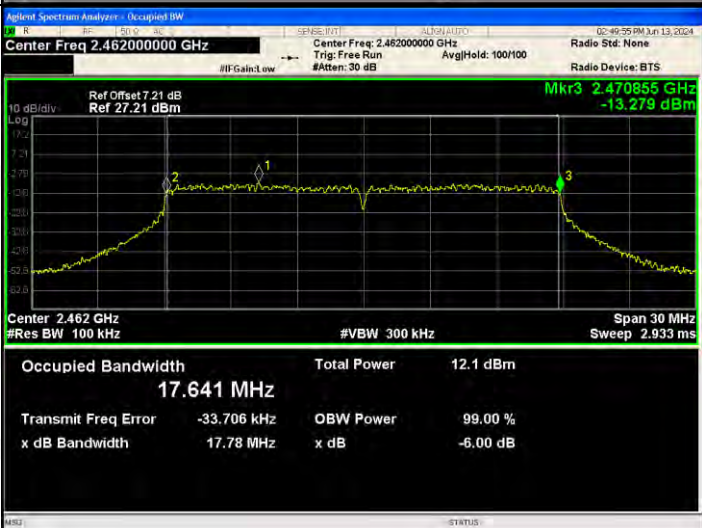802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Occupied Bandwidth 17.625 MHz Total Power 11.9 dBm Transmit Freq Error -24.919 kHz OBW Power 99.00 % x dB Bandwidth 17.75 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Occupied Bandwidth 17.637 MHz Total Power 12.2 dBm Transmit Freq Error -9.513 kHz OBW Power 99.00 % x dB Bandwidth 17.76 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 7.21 dB Ref 27.21 dBm Occupied Bandwidth 17.641 MHz Total Power 12.1 dBm Transmit Freq Error -33.706 kHz OBW Power 99.00 % x dB Bandwidth 17.78 MHz x dB -6.00 dB

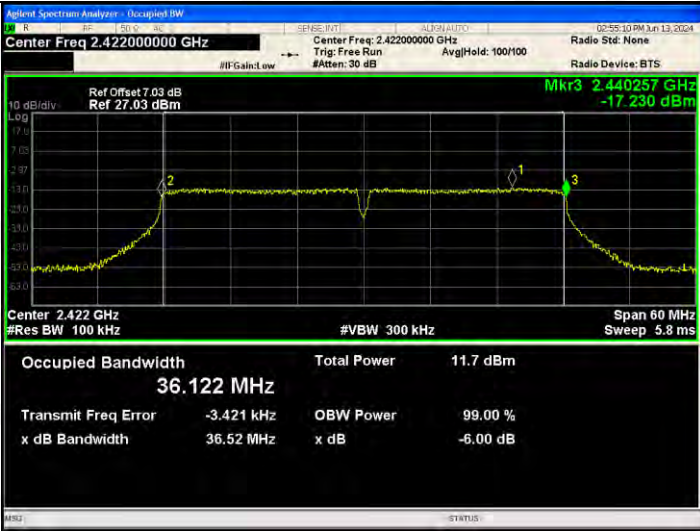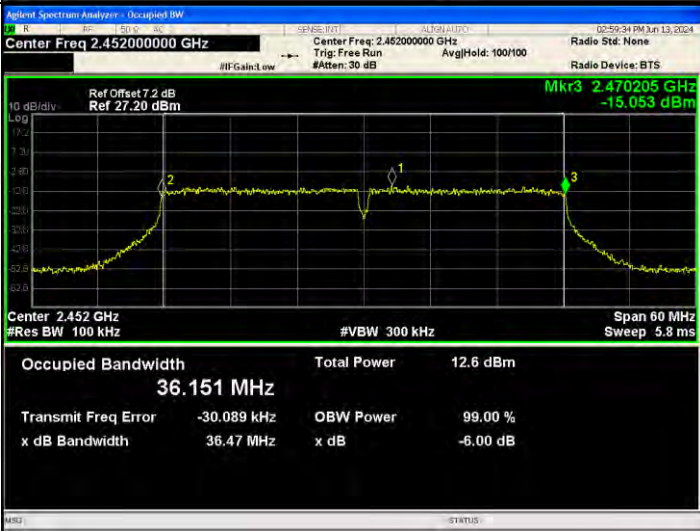
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Occupied Bandwidth 36.122 MHz Total Power 11.7 dBm Transmit Freq Error -3.421 kHz OBW Power 99.00 % x dB Bandwidth 36.52 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Occupied Bandwidth 36.132 MHz Total Power 11.9 dBm Transmit Freq Error -4.572 kHz OBW Power 99.00 % x dB Bandwidth 36.54 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.2 dB Ref 27.20 dBm Occupied Bandwidth 36.151 MHz Total Power 12.6 dBm Transmit Freq Error -30.089 kHz OBW Power 99.00 % x dB Bandwidth 36.47 MHz x dB -6.00 dB

ANT2:

Test Graph:




802.11g/LCH



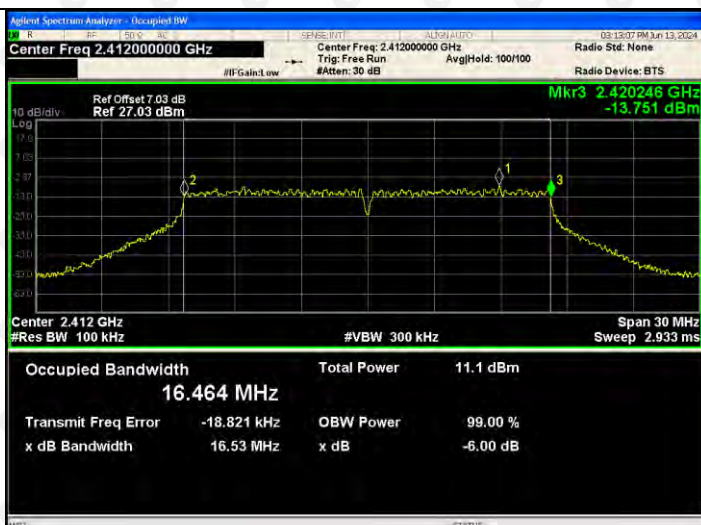





802.11g/MCH



802.11g/HCH

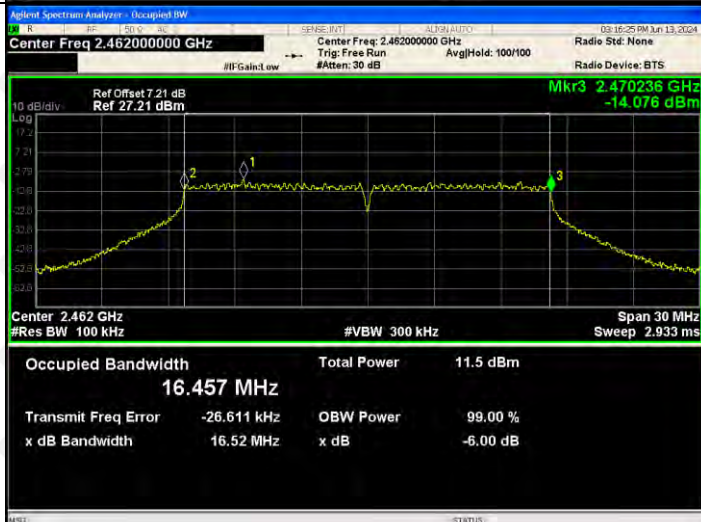


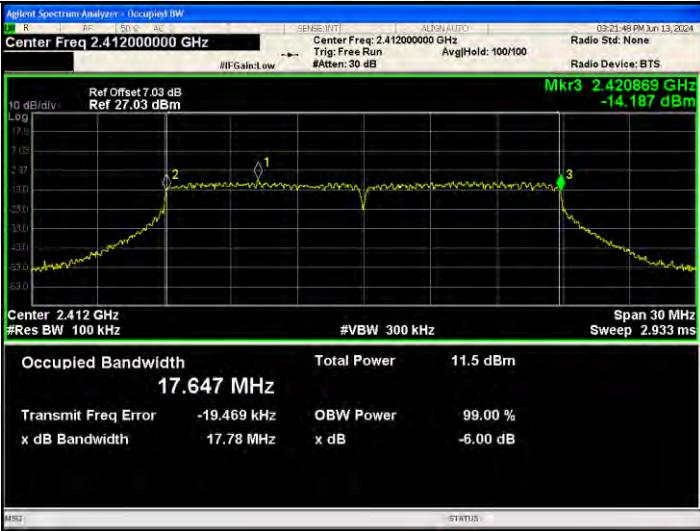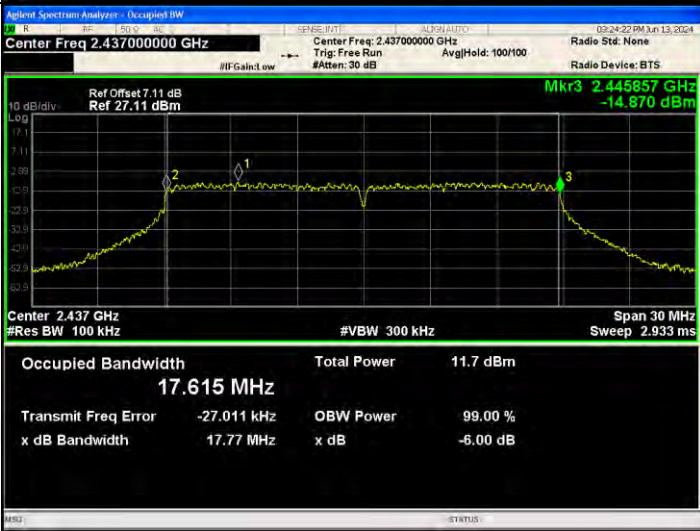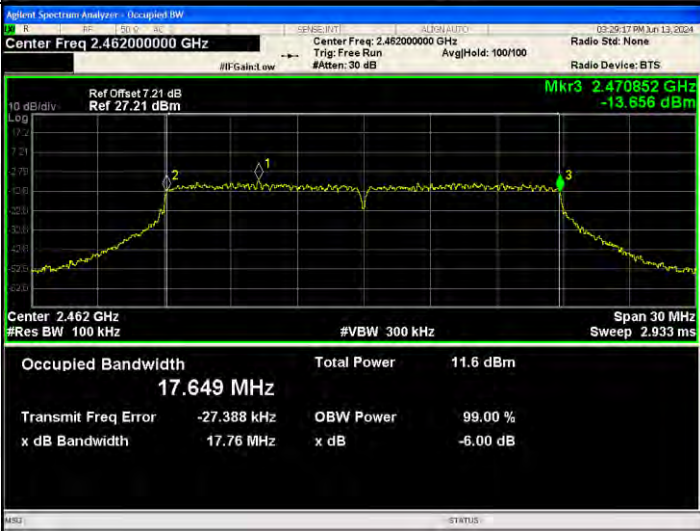802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Center Freq: 2.41200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Mkr3 2.420869 GHz -14.187 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.647 MHz Total Power 11.5 dBm Transmit Freq Error -19.469 kHz OBW Power 99.00 % x dB Bandwidth 17.78 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Center Freq: 2.43700000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Mkr3 2.445857 GHz -14.670 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.615 MHz Total Power 11.7 dBm Transmit Freq Error -27.011 kHz OBW Power 99.00 % x dB Bandwidth 17.77 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 27.21 dBm Center Freq: 2.46200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Mkr3 2.470852 GHz -13.656 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.649 MHz Total Power 11.6 dBm Transmit Freq Error -27.388 kHz OBW Power 99.00 % x dB Bandwidth 17.76 MHz x dB -6.00 dB

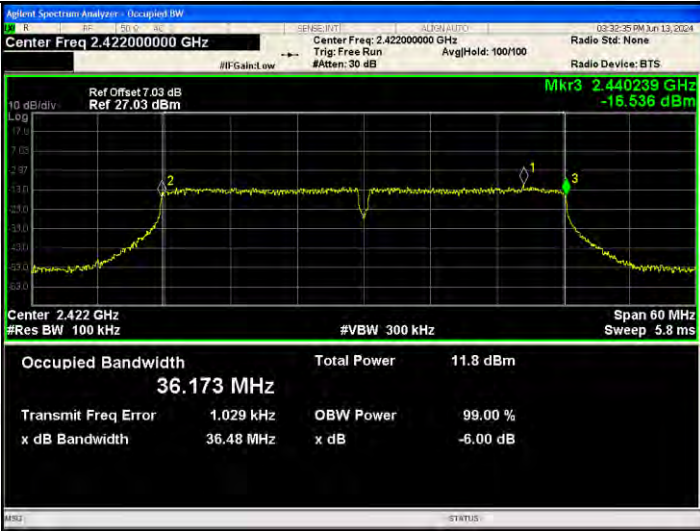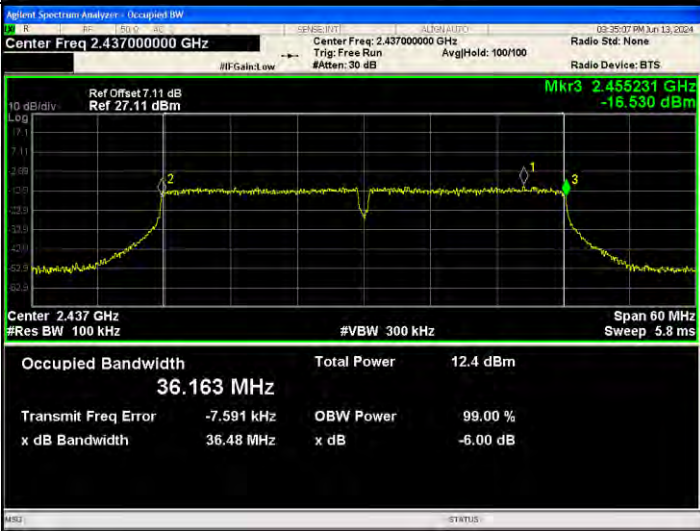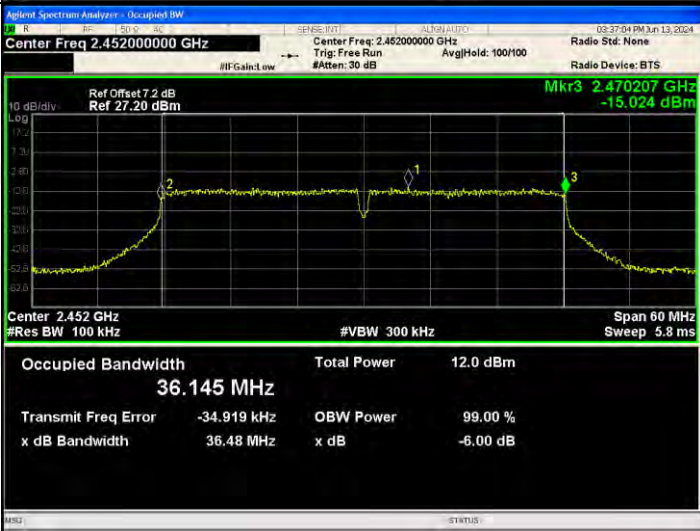802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.440239 GHz -16.536 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.173 MHz Total Power 11.8 dBm Transmit Freq Error 1.029 kHz OBW Power 99.00 % x dB Bandwidth 36.48 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.455231 GHz -16.530 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.163 MHz Total Power 12.4 dBm Transmit Freq Error -7.591 kHz OBW Power 99.00 % x dB Bandwidth 36.48 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.2 dB Ref 27.20 dBm Mkr3 2.470207 GHz -15.024 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.145 MHz Total Power 12.0 dBm Transmit Freq Error -34.919 kHz OBW Power 99.00 % x dB Bandwidth 36.48 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

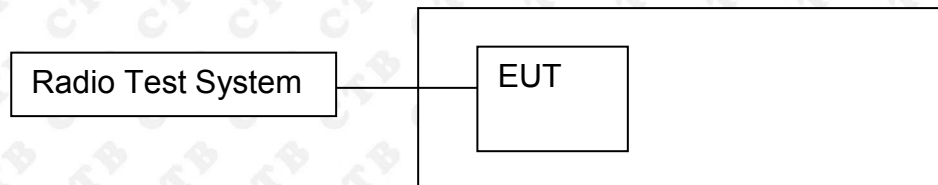

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-21.217	-19.946	/	8
	MCH	-20.866	-20.490	/	8
	HCH	-21.339	-20.456	/	8
802.11g	LCH	-22.417	-21.628	/	8
	MCH	-20.809	-21.244	/	8
	HCH	-21.028	-21.289	/	8
802.11n(H T20)	LCH	-21.274	-21.851	-18.543	8
	MCH	-21.180	-21.890	-18.510	8
	HCH	-21.587	-21.882	-18.722	8
802.11n(H T40)	LCH	-23.050	-23.491	-20.255	8
	MCH	-11.845	-10.001	-7.816	8
	HCH	-10.402	-10.832	-7.601	8

ANT1: Test Graph

Graphs

802.11b /LCH



802.11b /MCH



802.11b/HCH



802.11g/LCH





802.11g/MCH




802.11g/HCH

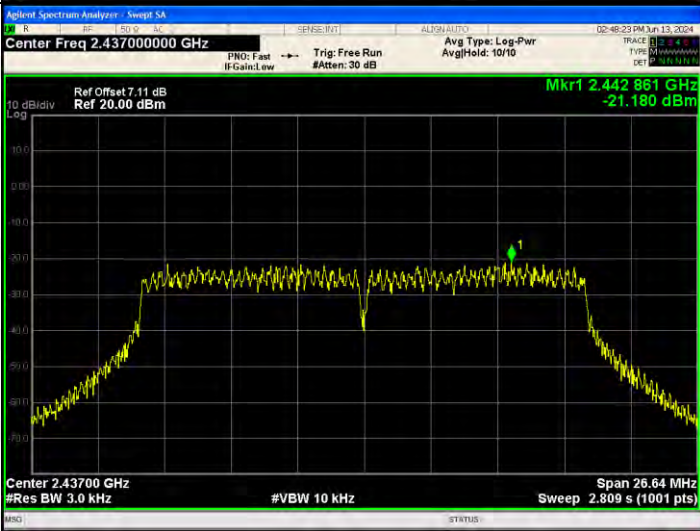

802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.419181 GHz -21.274 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 26.62 MHz Sweep 2.807 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.442881 GHz -21.180 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 26.64 MHz Sweep 2.809 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.467886 GHz -21.587 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 26.67 MHz Sweep 2.812 s (1001 pts)

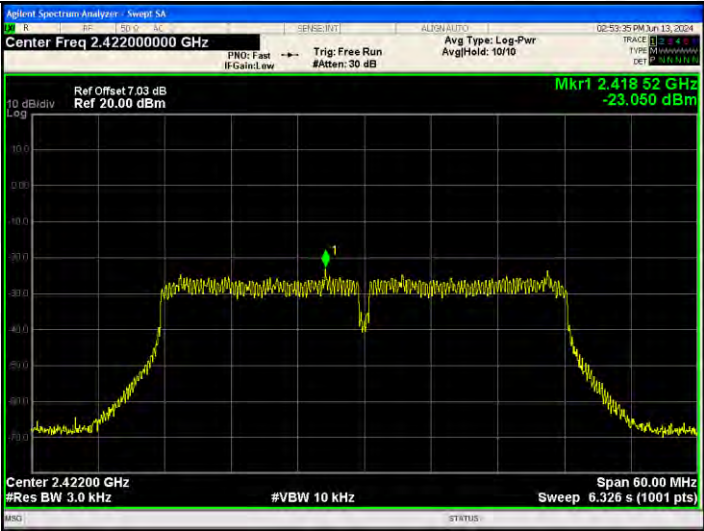802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.422000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.41852 GHz -23.050 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.43283 GHz -11.845 dBm Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Span 54.81 MHz Sweep 5.267 ms (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.452000000 GHz Ref Offset 7.2 dB Ref 20.00 dBm Mkr1 2.44828 GHz -10.402 dBm Center 2.45200 GHz #Res BW 100 kHz #VBW 300 kHz Span 54.71 MHz Sweep 5.267 ms (1001 pts)

ANT 2: Test Graph

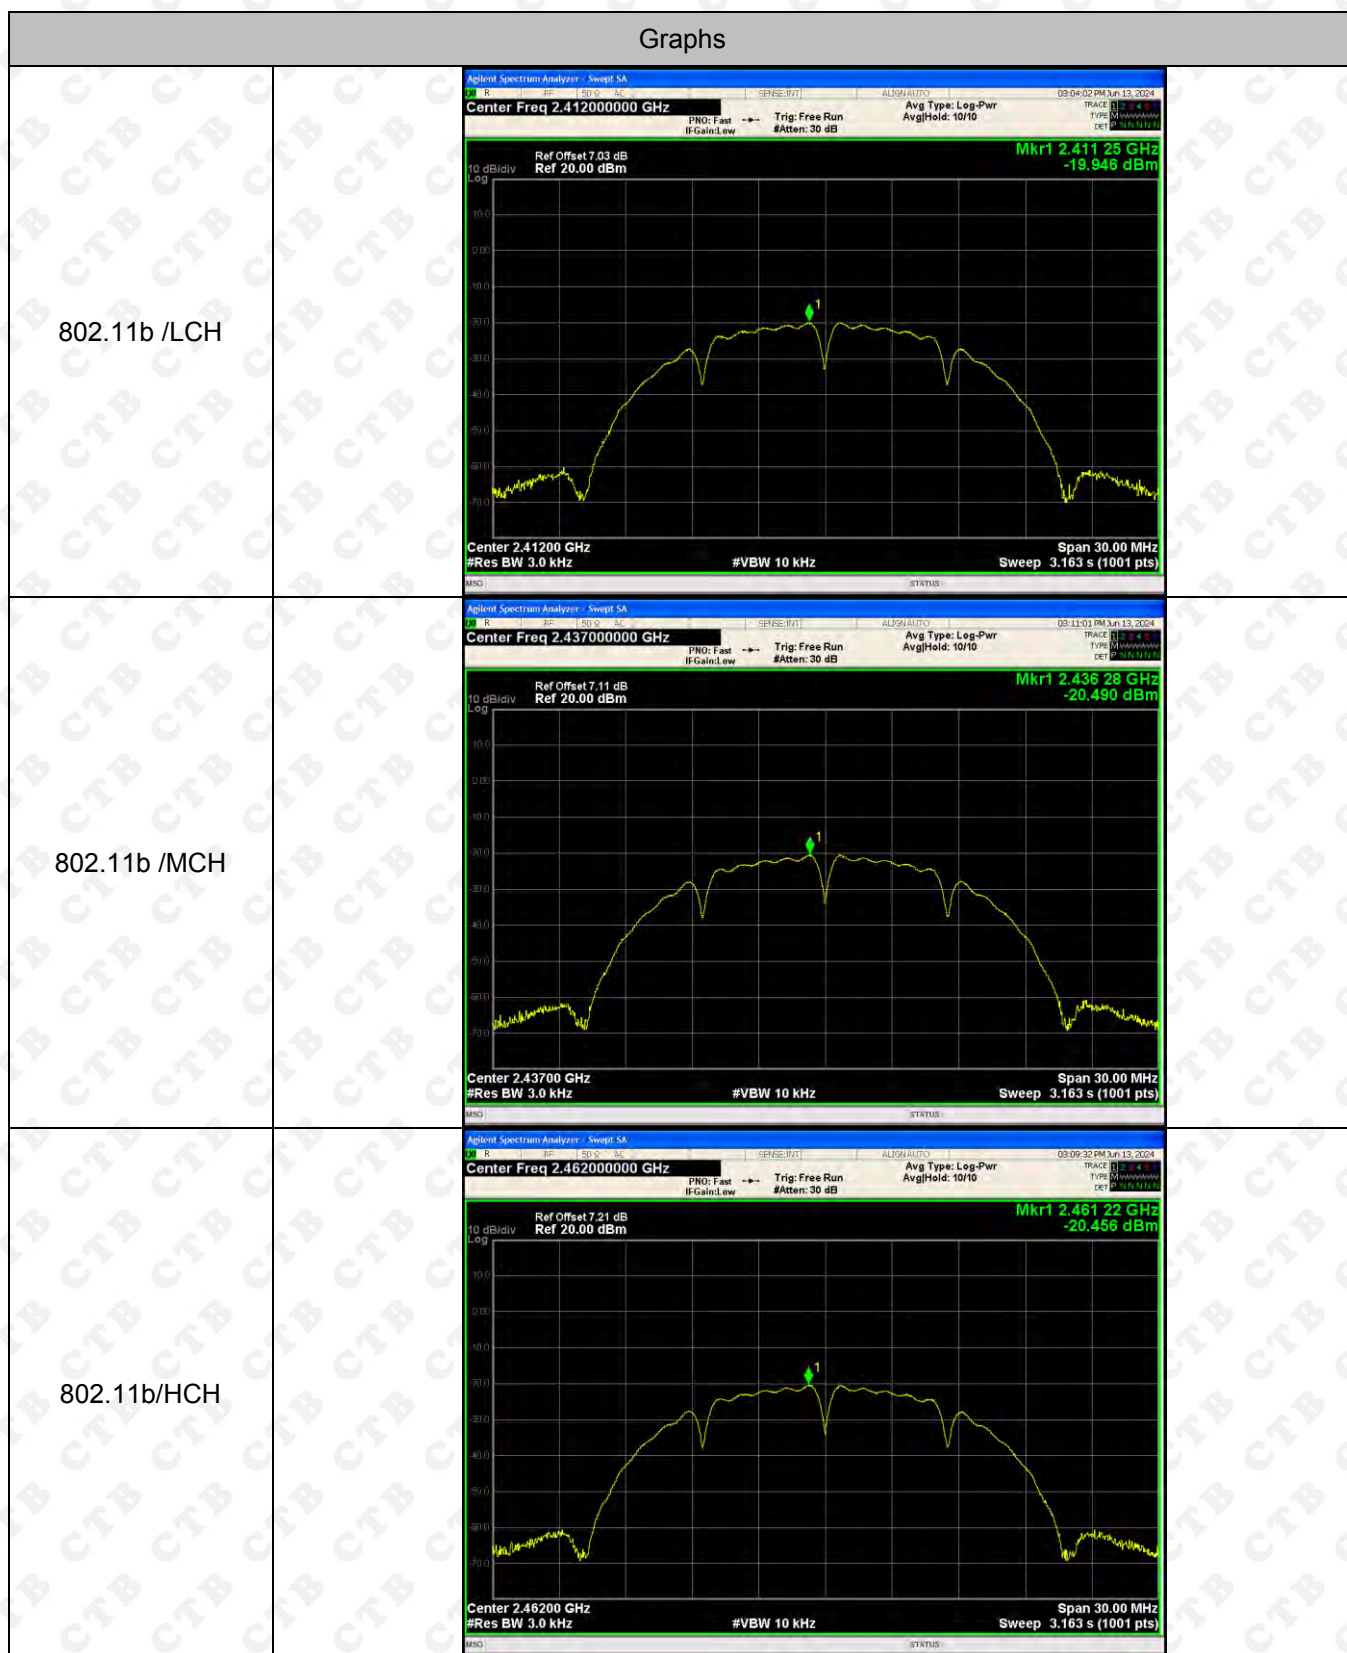

802.11g/LCH




802.11g/MCH



802.11g/HCH



802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.419 14 GHz -21.851 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.442 81 GHz -21.890 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.454 14 GHz -21.882 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

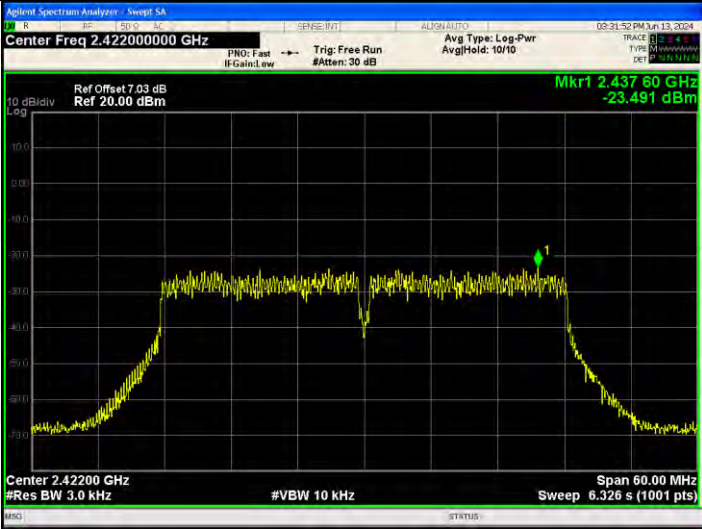802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.42200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.43760 GHz -23.491 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.45140 GHz -10.001 dBm Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Span 60.00 MHz Sweep 5.800 ms (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.45200000 GHz Ref Offset 7.2 dB Ref 20.00 dBm Mkr1 2.45452 GHz -10.832 dBm Center 2.45200 GHz #Res BW 100 kHz #VBW 300 kHz Span 60.00 MHz Sweep 5.800 ms (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is Ant1: 3.36dBi, Ant2: 2.80dBi.


13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

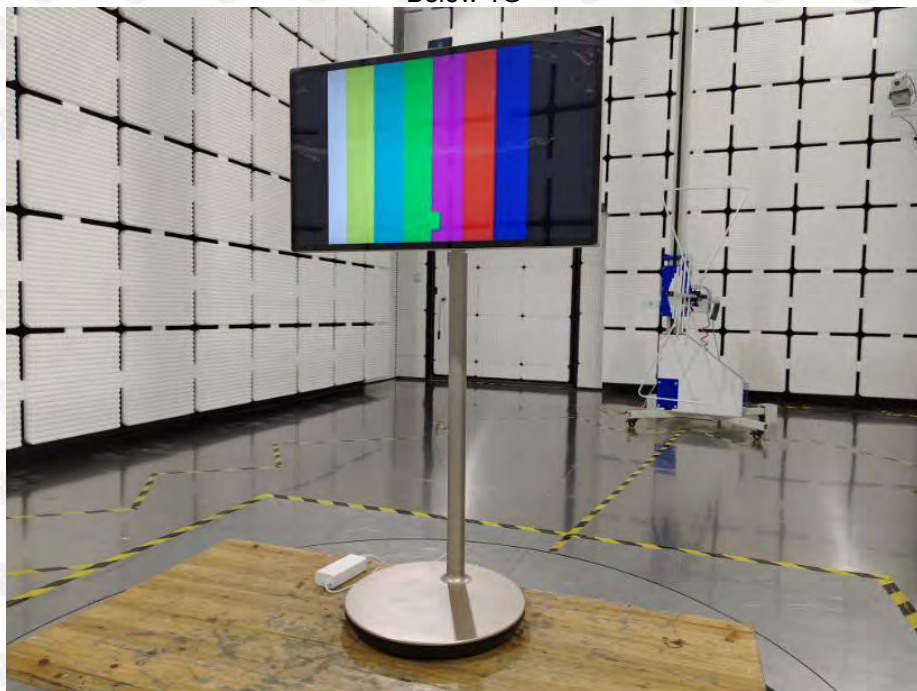

Above 1G

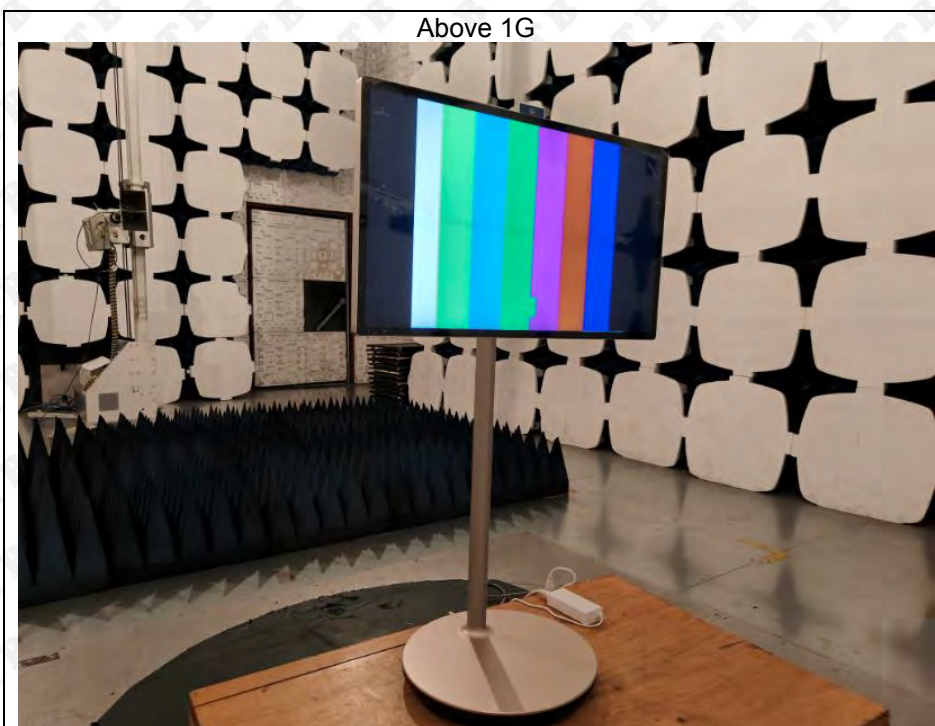

Conducted Emission



***** END OF REPORT *****