


1.Locking From Outside

Auto Lock Mode

In Auto Lock mode, 5 seconds after unlocking, the bolt will automatically extend to lock the door.
(The auto-lock time can be configured in the app.)

Manual Mode

Touch the panel to wake up the device, then press the lock button  to lock.



Key Mode





2.Restore Factory Settings


When the door lock is reset to factory settings, all user keys will be deleted and all local settings will return to their original factory defaults.

To perform a factory reset:

Open the battery cover on the back panel, then **press and hold the [SET] button for 5 seconds**. Initialization is complete when the green light on the front panel turns on.

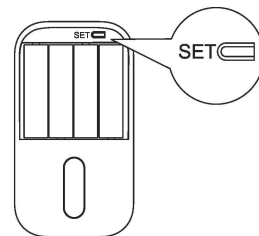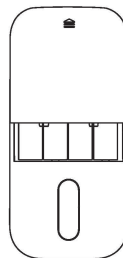


And if the lock connected to the Smart Life APP already, you can also reset the lock in Smart Life App.

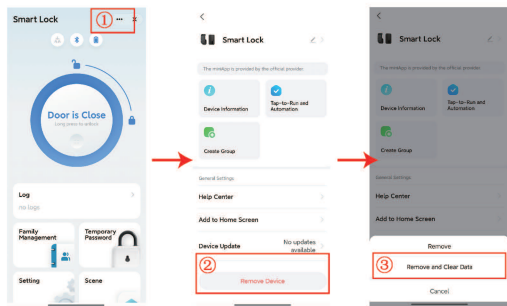

① When the phone is connected to the door lock via Bluetooth or Tuya Matter Gateway, performing a factory reset through the app will erase all local unlocking methods and restore the lock to its original factory state. After the reset, other users can re-pair the lock through the app.

② When the phone is not connected to the lock via Bluetooth, performing a factory reset in the app will not immediately clear the unlocking data on the lock. However, once another user re-pairs with the lock through the app, all previous data on the lock will become invalid.

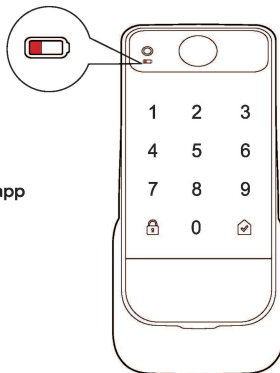


3.Low power

When the battery level falls below 20%, the low battery indicator will turn on, and the app will send a low battery notification. Please replace the batteries as soon as possible.

5. Emergency Power Supply

When the battery level is too low to unlock the door, you can use the USB-C emergency power port to temporarily power the lock for emergency access. Note: This port is for power supply only and cannot be used to charge the batteries.

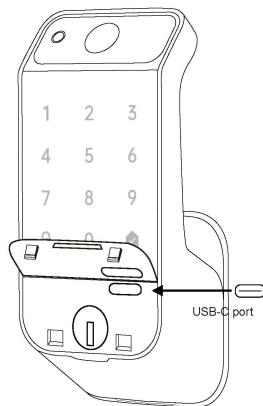


USING THE SMART LIFE APP

1. App Registration and Login


- ① **No Account:** You can choose to register or log in via Email verification.
- ② **Tap [Sign Up]** to enter the registration page. Follow the prompts to request an Email verification code and set your password.
- ③ **Existing Account:** Tap [Log In] to log into the app.

2. Add Door Lock

- ① **On the app home page, tap the [Add Device] icon.** Short press the SET button located under the battery cover on the rear lock panel to enter pairing mode. The device indicator will start flashing blue, indicating that it is in pairing status. (If your home has a Tuya Matter gateway, please update the gateway to the latest version and ensure that your phone and the gateway are connected to the same Wi-Fi network. The device supports only Matter gateways and is not compatible with Tuya Bluetooth gateways.)

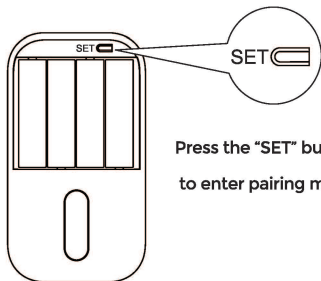

Press the "SET" button briefly
to enter pairing mode.

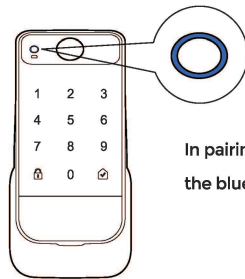

In pairing mode,
the blue light flashes.



② Wait for the phone to scan the device, then select [Add] and tap the [+] icon to proceed. (Please make sure to perform this operation indoors. Once pairing is complete, the door lock will automatically detect the door opening direction.)

③ Wait for the device to be added. Once successful, the smart lock control interface will appear.

3.Connect to HomePod, Alexa, or Google Home Matter Network

TIPS: Make sure your phone and HomePod/Alexa/Google Assistant are connected to the same Wi-Fi network.

If your home includes a gateway device such as a HomePod, Alexa, or Google Home, go to the main page of the smart lock in the Smart Life app, tap the "... " icon in the top right corner, and select the option to connect the lock to Apple Home, Alexa, or Google Home. Then, follow the on-screen instructions to complete the setup.

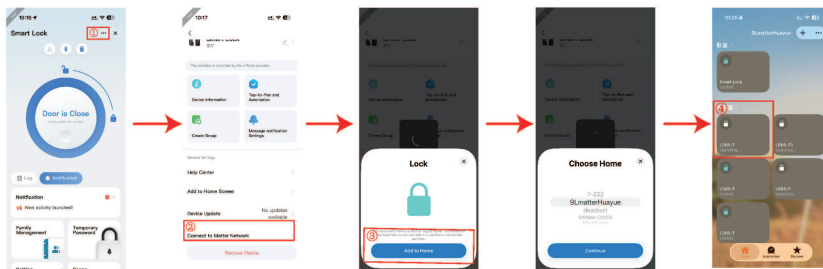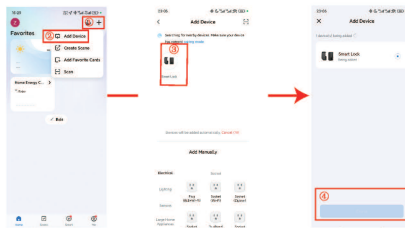


(If a Tuya Matter gateway exists on the same local network, the device will be automatically activated as a Matter device. To share it with HomePod, Alexa, or Google Assistant, tap the "... " icon in the top right corner, select [Share Device], and copy the Matter sharing code into the corresponding third-party app to complete activation.)

Devices that support Matter connection for door locks.

- Echo Hub \ Echo (4th-gen) \ Echo Show 8 (third-gen)
- Echo Show 10 (3rd) Gen \ Echo Show 15 (second-gen)
- Echo Show 21 (second-gen) \ Echo Plus (2nd) Gen
- Echo Studio (1st and 2nd) Gen \ Eero 6, 6+, Pro, Pro 6E, Pro 6, Beacon, Max 7, Outdoor7 \ Eero PoE 6, PoE gateway
- Apple HomePod (second-gen) \ Apple HomePod Mini
- Apple TV 4K Wi-Fi Ethernet (2022 version) \ Apple TV 4K (2021 version)
- Nest Hub (second-gen)
- Nest Hub Max
- Google TV Streamer 4K
- Google Nest Wifi Pro
- Aeotec SmartThings Smart Home Hub \ Samsung SmartThings Station
- Samsung SmartThings Hub Dongle | Samsung SmartThings Hub v3
- Samsung Smart TVs (2023 and newer), Smart Monitor
- M80C (2023 and newer), and Q-Series Soundbars (2023 and newer)
- Samsung Bespoke Family Hub refrigerator (2023 and newer)

4. Door Lock Homepage

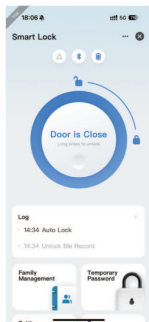


①The top of the homepage displays the Device Name, Lock/Unlock Button, Network/Lock status and current Battery Level.

Below that, you'll find shortcuts to [Log], [Family Management], [Temporary Password], [Setting], and [Scene].

②After connecting to the Bluetooth of door lock, you can long press the button to unlock, and press the button again to lock.

(Note: There may be a slight delay when operating the lock due to network conditions after successful pairing. The smart lock can only be connected to one mobile phone at a time via bluetooth. When the smart lock is connected to another mobile phone in the household, the connection may fail.)

5. Member Management-Add Family Members

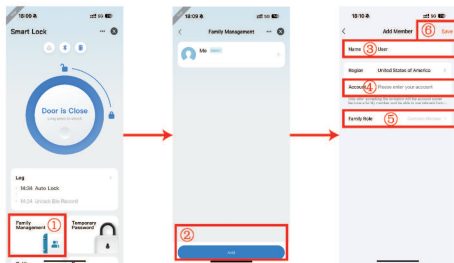

①In the [Member Management] section, tap the [Add] icon in the bottom enter the member's name and Smart Life account, choose the appropriate permissions, and tap [Save] to add the member.

(Note: To add an administrator account, it must be a registered Smart Life account; unregistered accounts cannot be added.)

②The added account will receive an invitation in the Smart Life app. After accepting the invitation, the user will gain permission to manage the device.


③By default, users who add other members will not have administrator privileges.

6. Access Method Management

Fingerprint Management

- ① In the [Family Management] section, select the [Family Member] account with the appropriate permissions.
- ② Tap [Add Fingerprint Unlock], then Tap [Start adding] button.
- ③ Place your finger on the fingerprint sensor of the door lock and repeat the scanning process eight times. Make sure to scan different areas of the same finger each time to ensure a complete fingerprint capture. When the mobile app indicates that enrollment is complete, tap [Save] to finish.


(To ensure accurate fingerprint enrollment, please make sure your finger is clean, dry, and free of any dirt, moisture, or peeling skin before starting the process.)

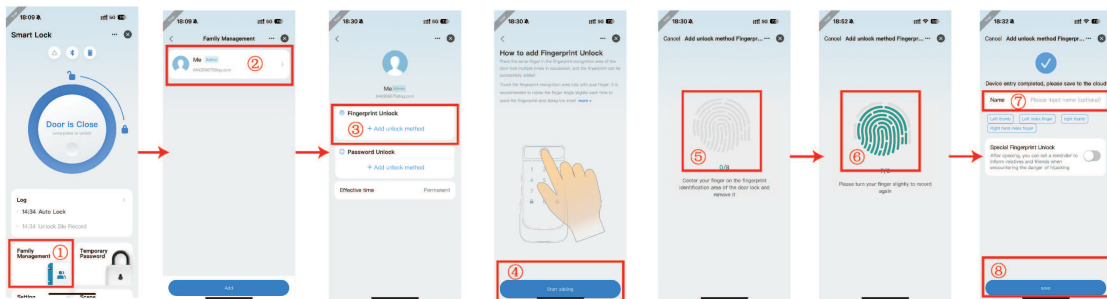

Password Management

- ① In the [Family Management] section, select the [Family Member] account with the appropriate permissions.
- ② Tap [Add Password Unlock], then enter a 6–10 digit password.

Note: Do not use identical or sequential numbers (e.g., 000000 or 123456).

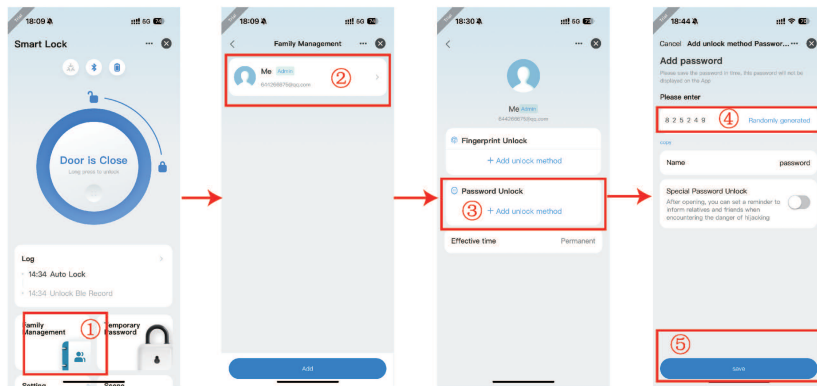

7. Door Opening Records and Device Alerts

When the door lock is connected to the phone via Bluetooth or Tuya Matter Gateway, door opening records and alerts will be displayed in real time within the app. If the lock is not connected, the records will be temporarily stored locally on the lock and automatically synced to the app the next time it connects during a door opening event.

