

承 認 書

SPECIFICATION FOR APPROVAL

客 戶: CUSTOMER:	伟高域
客 戶 料 號: CUST P/N:	WGY-1623
音 澤 料 號: FINE P/N:	G43.5*0.75-20.5-0.08*48P-10TS-6.7UH-L45MM+BJ
產 品 型 號: DESC:	Φ43.5MMX0.75MM
日 期: DATE:	2026/04/24
版 本: Version:	A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
何立成	马莉	但可清	

Dongguan Yinze Electronic Technology Co., Ltd.

Factory Address: Building 2, No. 901, Xinghan Road (Chuangfu Central City), Chaishan Town, Dongguan City

但可清 TEL: 18617251159


Version Change History

[illegible]


SPECIFICATION

產品型號: DESC	G43.5*0.75-20.5-0.08*48P-10 TS-6.7UH-L45MM+BJ	版本 Rev: A.0	客戶 CUST:	伟高域
			客戶料号 CUST P/N:	WGY-1623

一、尺寸 DIMENSION:(mm)

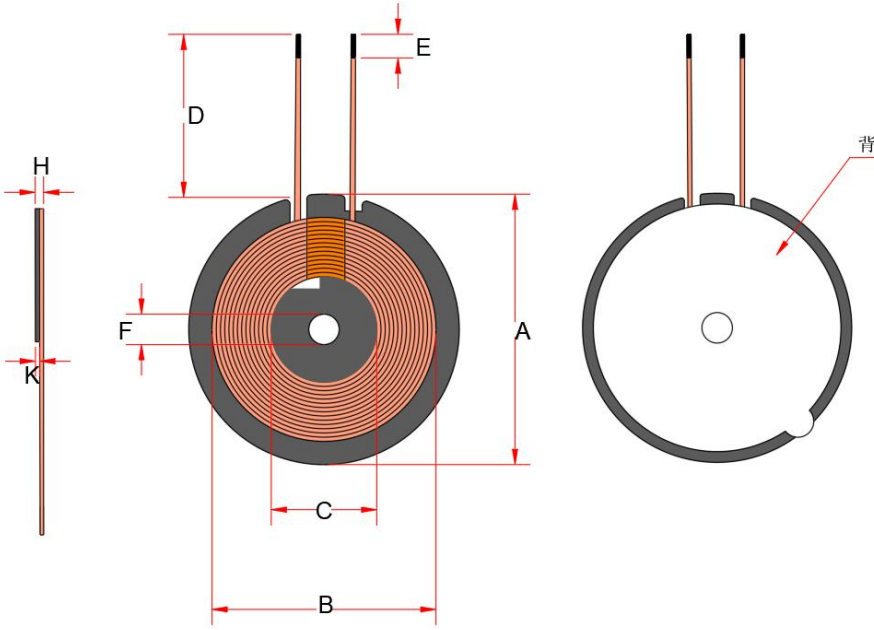	A	43.5±0.5mm
	B	38.5±0.5mm
	C	20.5±0.5mm
	D	45 ±2mm
	E	3±2mm
	F	5.3±0.2mm
	H	1.6±0.15mm
	K	0.75±0.05mm
	I	
注:		
1.交叉出线;		
2.线圈贴 43.5mm 双槽磁片,		
磁片尺寸 43.5±0.5mm,, 厚度为 0.75±0.05mm.		
3.磁片背面贴背胶		

二、原理图 SCHEMATIC DIAGRAM:

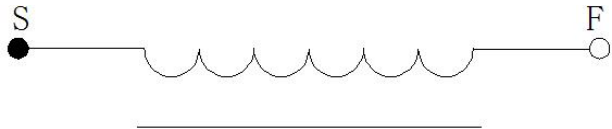

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	热风线 0.08*48P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.7uH ±10%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.7uH ±10%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤100mΩ	100KHz/1.0V	LCZ METER 1062B

编制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
何立成 2026.04.24	