

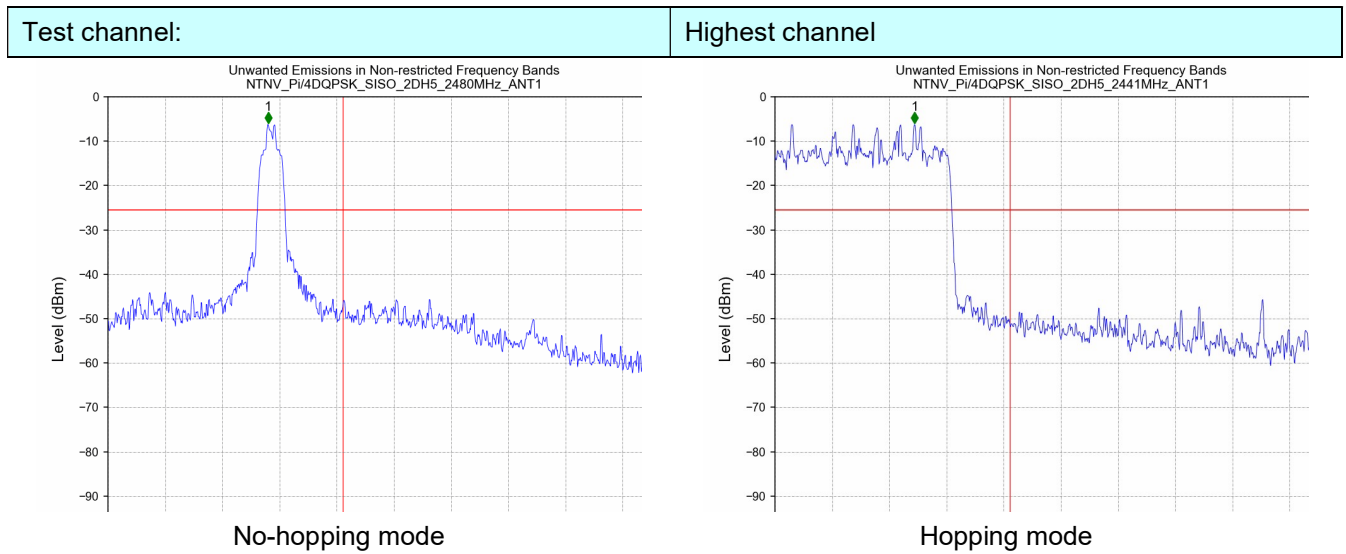



$\pi/4$ -DQPSK Mode:

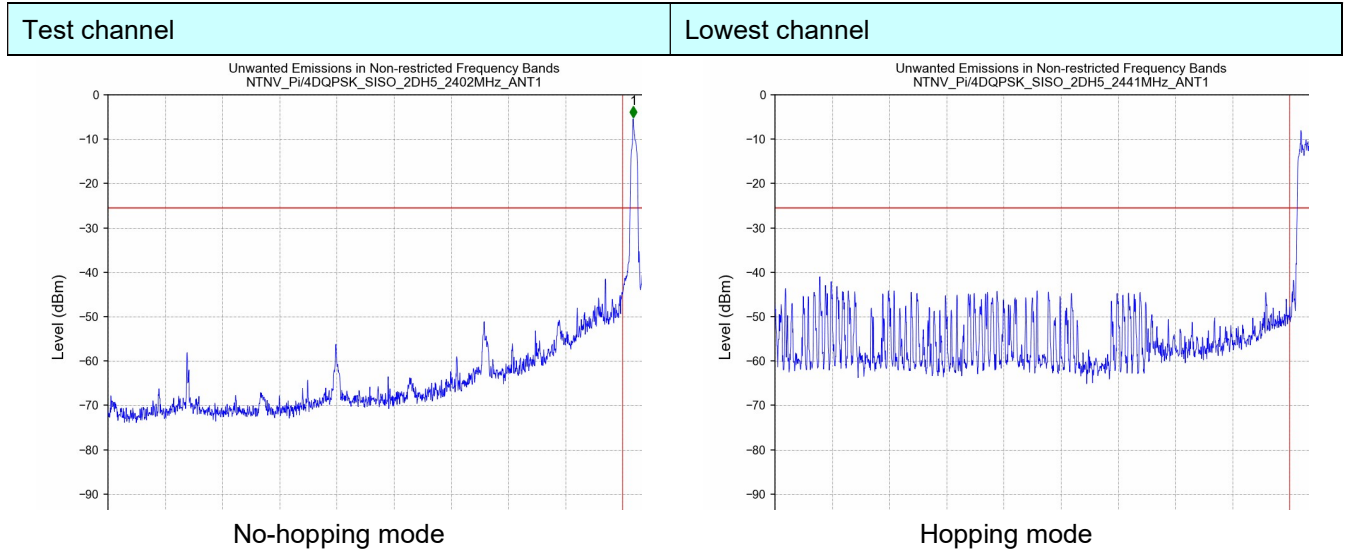

8-DPSK Mode:

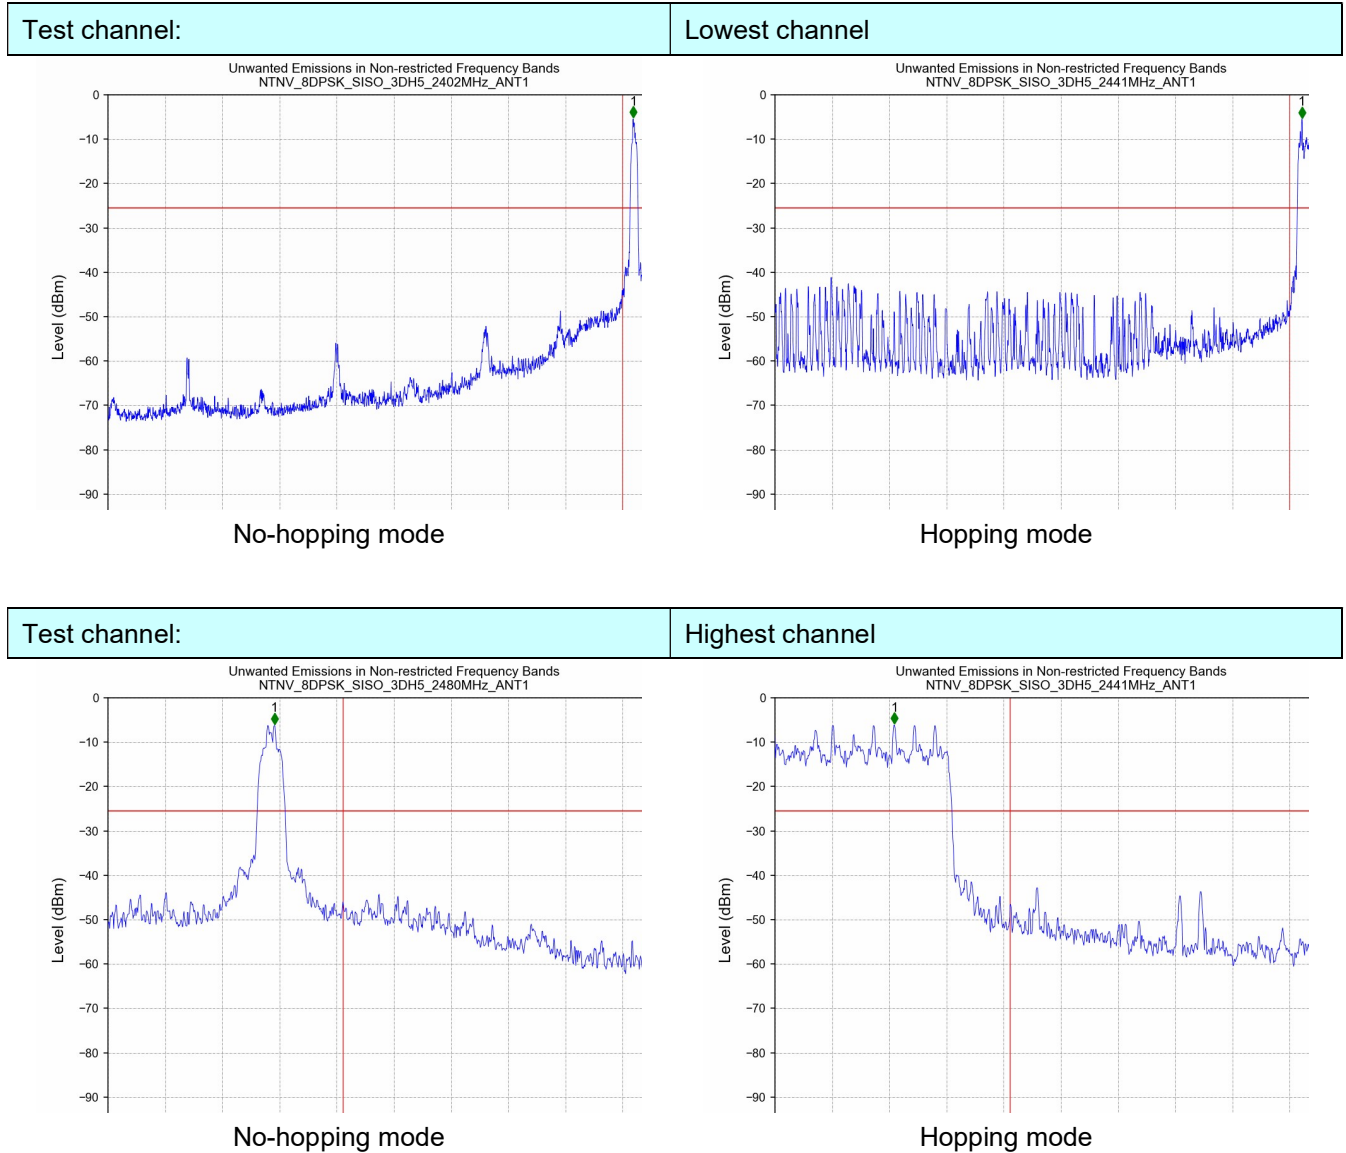

6.7.2. Radiated Emission Method

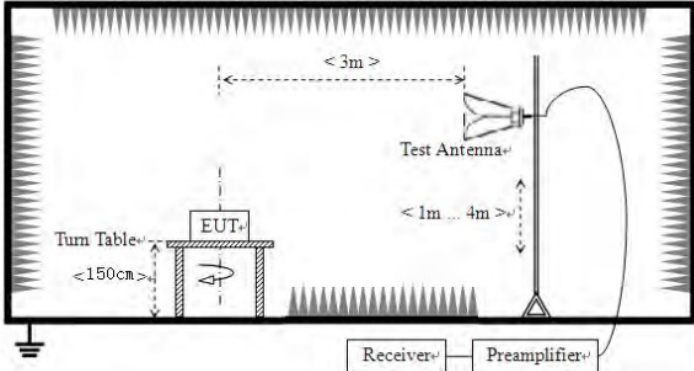Test Requirement:	FCC Part15 C Section 15.209 and 15.205						
Test Method:	ANSI C63.10:2013						
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.						
Test site:	Measurement Distance: 3m						
Receiver setup:	Frequency	Detector		RBW	VBW	Remark	
	Above 1GHz	Peak		1MHz	3MHz	Peak Value	
		Peak		1MHz	10Hz	Average Value	
Limit:	Frequency			Limit (dBuV/m @3m)		Remark	
	Above 1GHz			54.00		Average Value	
				74.00		Peak Value	
Test setup:							
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.						
Test Instruments:	Refer to section 6.0 for details						
Test mode:	Refer to section 5.2 for details						
Test results:	Pass						
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar	

**Measurement Data**

Remark: GFSK, Pi/4 DQPSK,8-DPSK all have been tested, only worse case GFSK is reported.

Operation Mode: GFSK TX Low channel(2402MHz)

Horizontal (Worst case)

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.21	26.20	5.72	33.30	57.83	74.00	-16.17	peak
2390	43.98	26.20	5.72	33.30	42.60	54.00	-11.40	AVG

Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	60.01	26.20	5.72	33.30	58.63	74.00	-15.37	peak
2390	45.99	26.20	5.72	33.30	44.61	54.00	-9.39	AVG

Operation Mode: GFSK TX High channel (2480MHz)

Horizontal (Worst case)


Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.02	28.60	6.97	32.70	57.89	74.00	-16.11	peak
2483.5	42.11	28.60	6.97	32.70	44.98	54.00	-9.02	AVG

Vertical:


Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.96	28.60	6.97	32.70	58.83	74.00	-15.17	peak
2483.5	40.79	28.60	6.97	32.70	43.66	54.00	-10.34	AVG

6.8. Spurious Emission


6.8.1. Conducted Emission Method

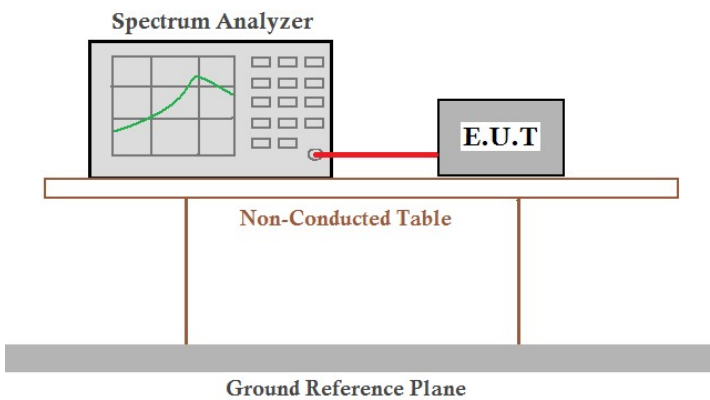Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.10:2013					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar


Reference

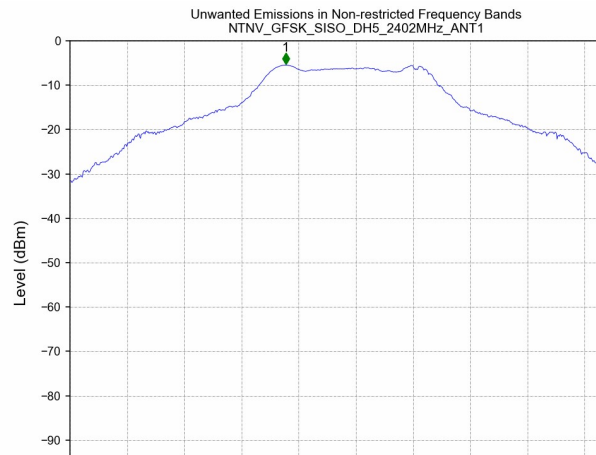

GFSK

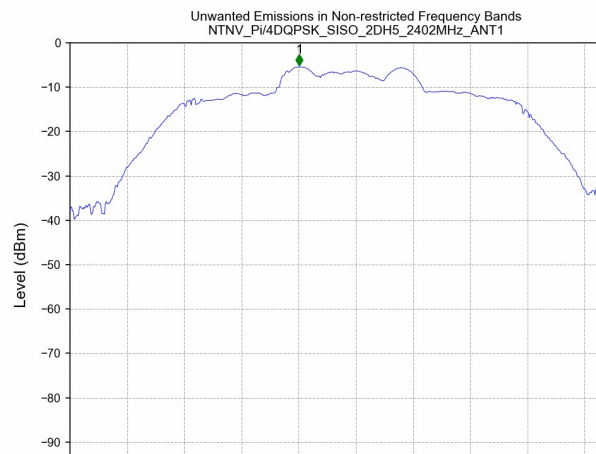


$\pi/4$ QPSK

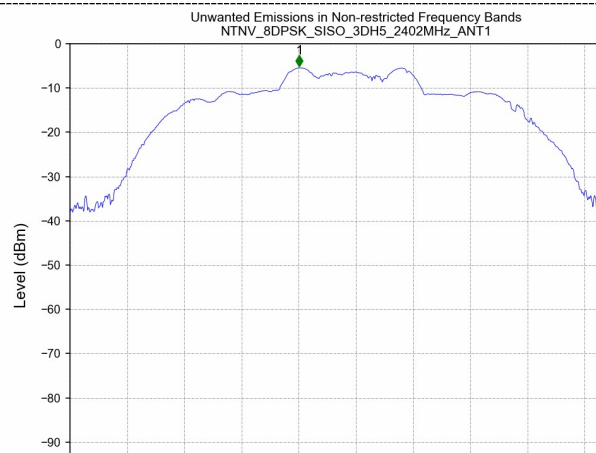


8-DPSK


GFSK

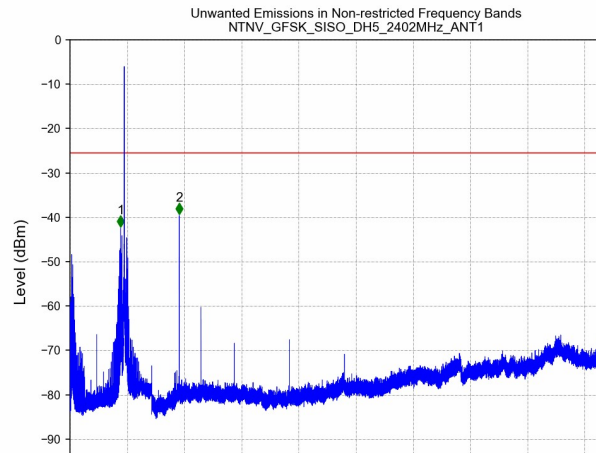

CH00

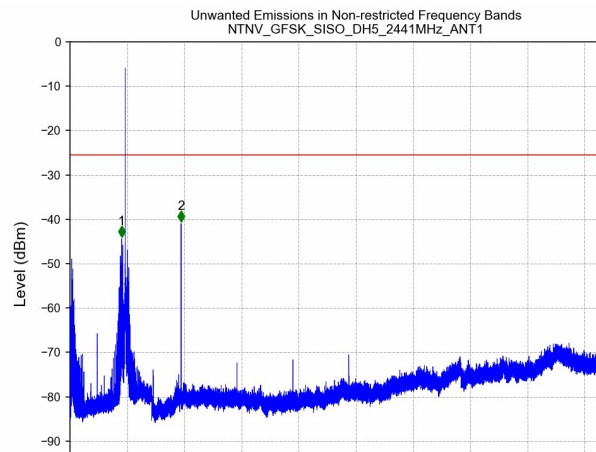


CH39

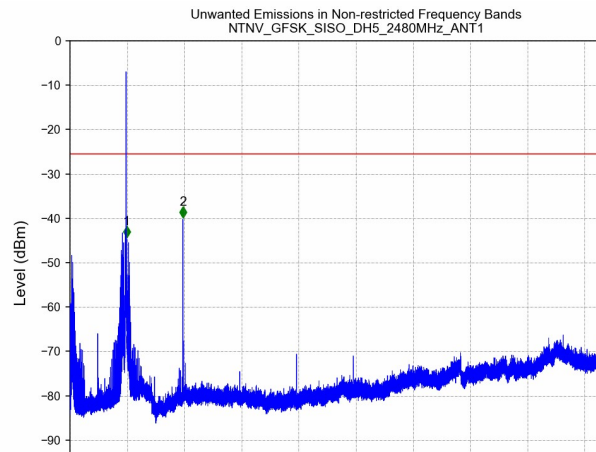




CH78


$\pi/4$ DQPSK

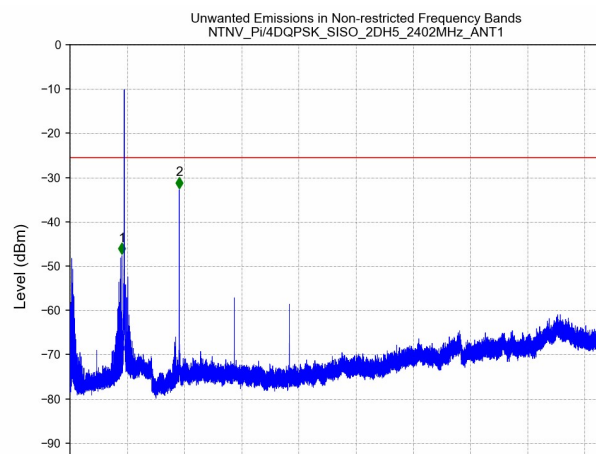

CH00

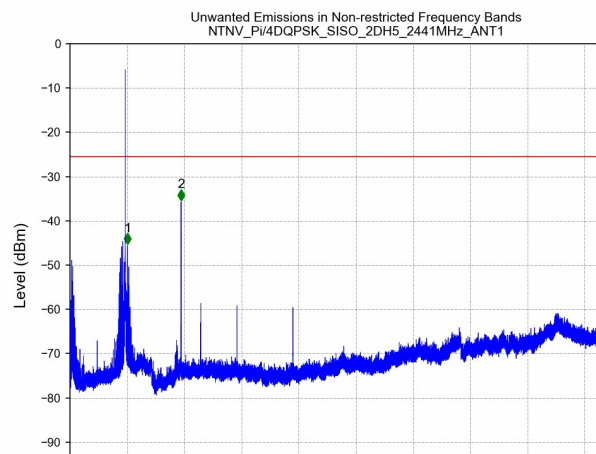


CH39

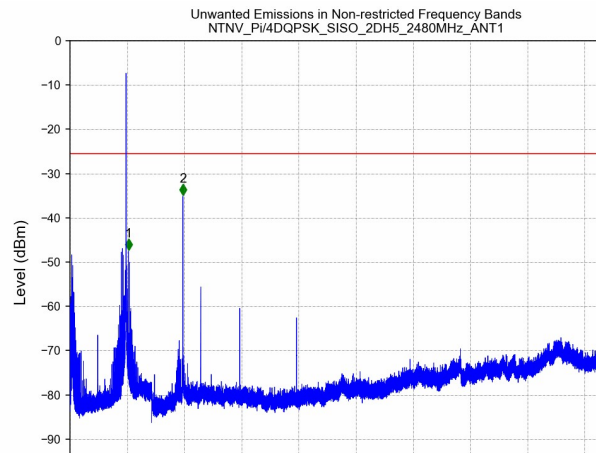

CH78


8-DPSK

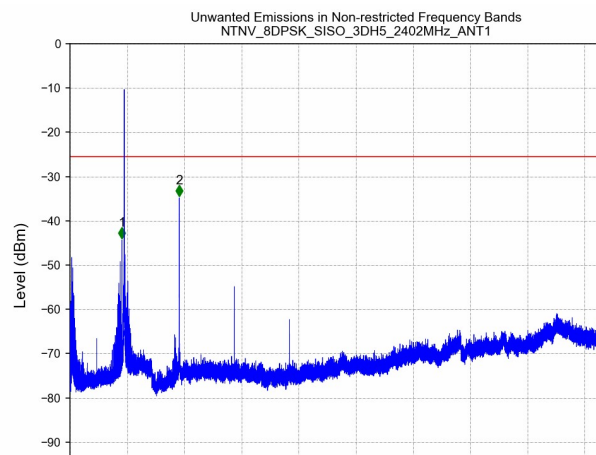


CH00



Report No.: HTT202202145F01

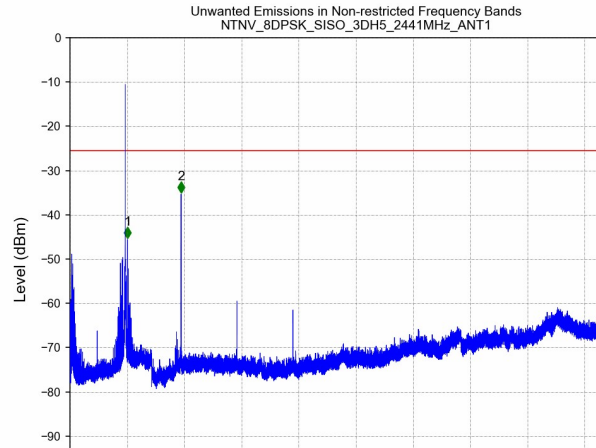



CH39

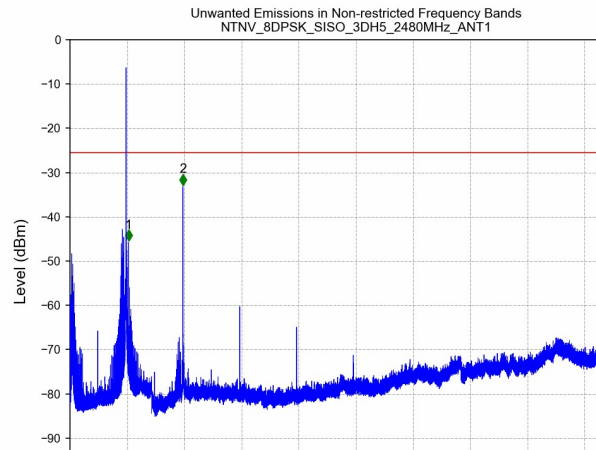


CH78

6.8.2. Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Limit (uV/m)	Value	Measurement	

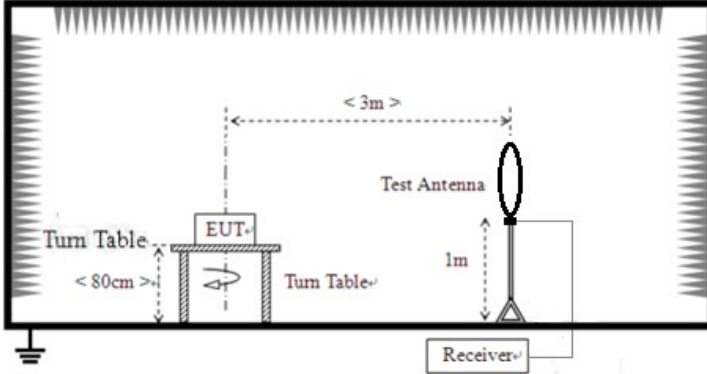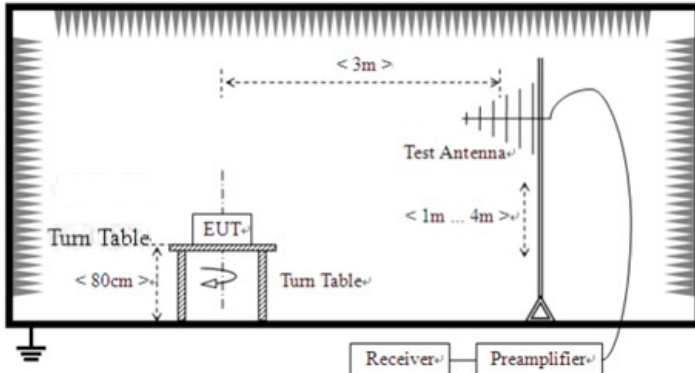				Distance
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m
	1.705MHz-30MHz	30	QP	30m
	30MHz-88MHz	100	QP	3m
	88MHz-216MHz	150	QP	
	216MHz-960MHz	200	QP	
	960MHz-1GHz	500	QP	
	Above 1GHz	500	Average	
		5000	Peak	
Test setup:	For radiated emissions from 9kHz to 30MHz			
				
	For radiated emissions from 30MHz to1GHz			
				
	For radiated emissions above 1GHz			

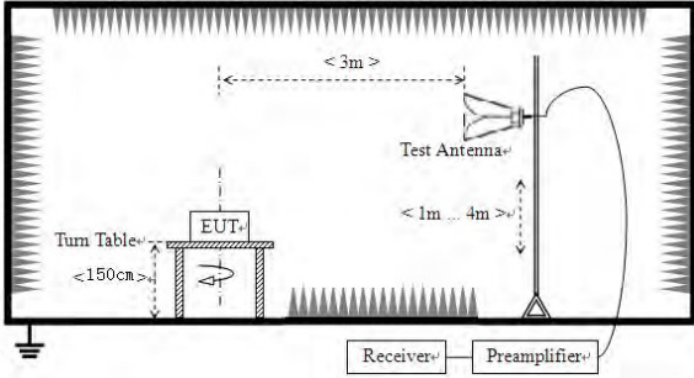	
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1012mbar
Test voltage:	AC 120V, 60Hz
Test results:	Pass

Measurement data:

Shenzhen HTT Technology Co.,Ltd.

Tel: 0755-23595200 Fax: 0755-23595201

1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road, Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China



Remarks:


- 1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.*
- 2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

■ **9kHz~30MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

For 30MHz-1GHz


Horizontal

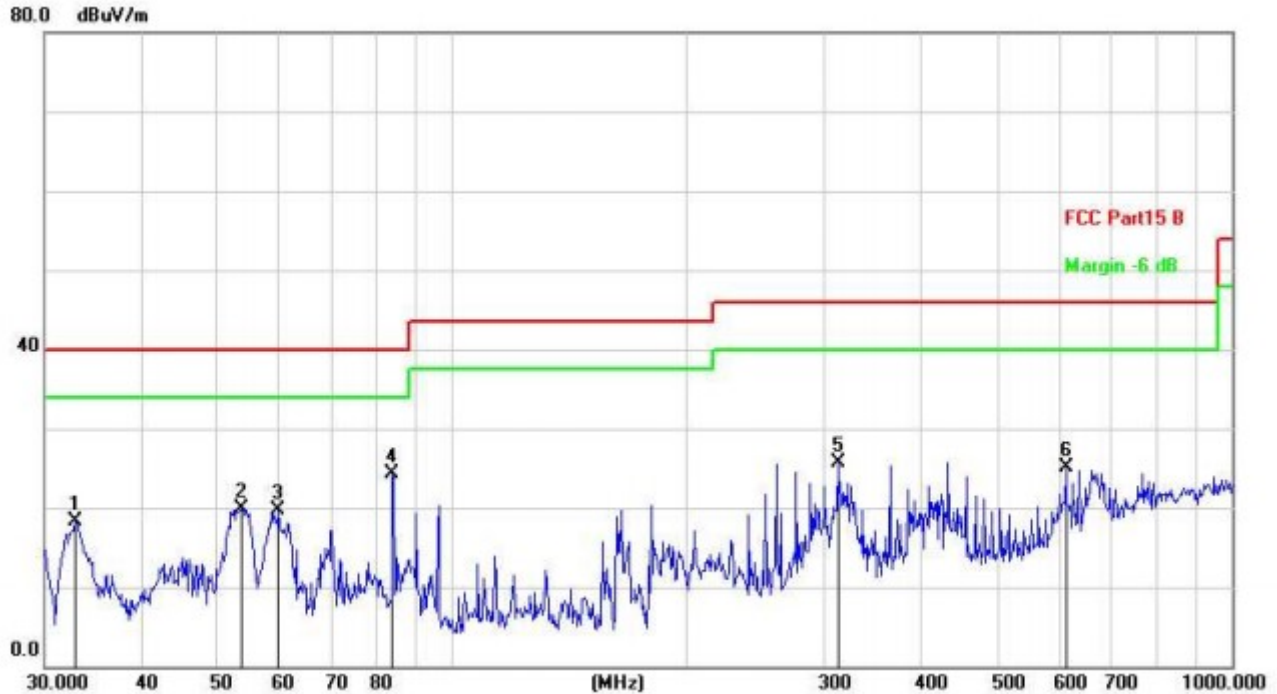

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		32.8637	36.54	-18.29	18.25	40.00	-21.75	QP
2		53.6931	37.49	-17.54	19.95	40.00	-20.05	QP
3		59.8588	37.80	-18.12	19.68	40.00	-20.32	QP
4	*	83.8156	46.36	-21.97	24.39	40.00	-15.61	QP
5		312.1792	42.94	-17.28	25.66	46.00	-20.34	QP
6		612.0642	35.16	-10.14	25.02	46.00	-20.98	QP

Final Level =Receiver Read level + Correct Factor

Vertical

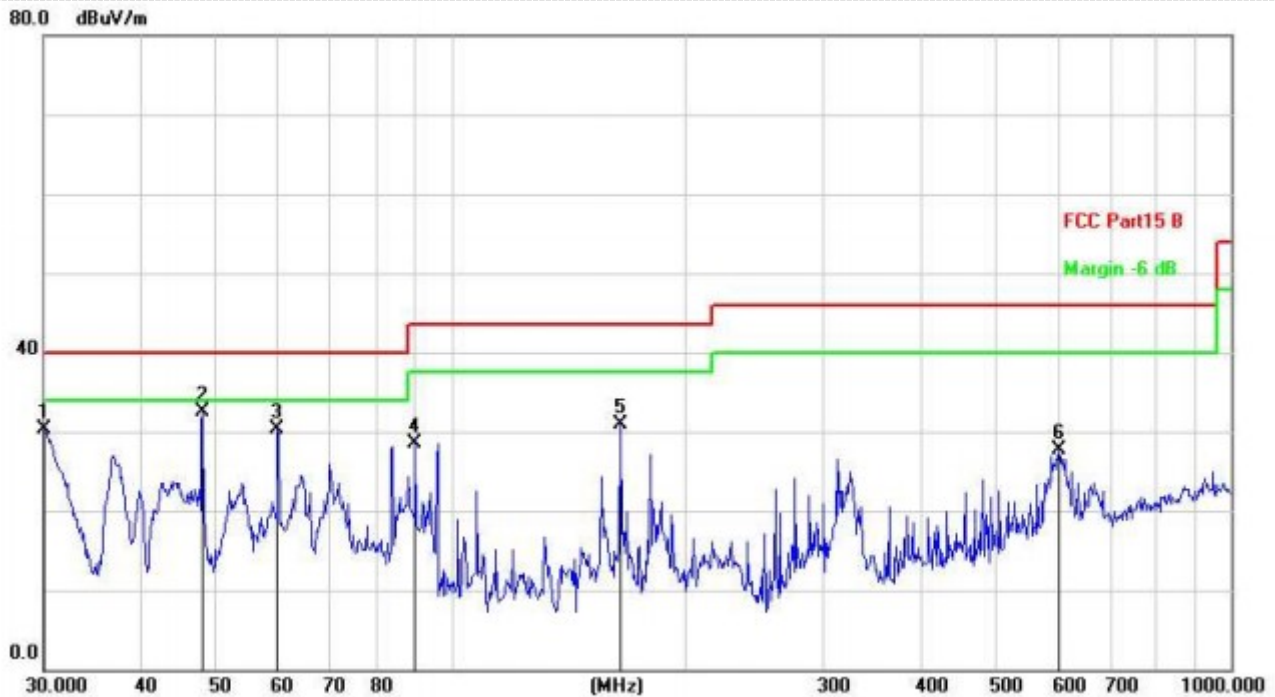

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		30.1054	48.83	-18.58	30.25	40.00	-9.75	QP
2	*	47.9940	49.79	-17.28	32.51	40.00	-7.49	QP
3		59.8588	48.47	-18.12	30.35	40.00	-9.65	QP
4		89.9047	50.51	-21.91	28.60	43.50	-14.90	QP
5		164.9075	49.50	-18.55	30.95	43.50	-12.55	QP
6		601.4265	37.78	-10.16	27.62	46.00	-18.38	QP

Final Level = Receiver Read level + Correct Factor

**For 1GHz to 25GHz**

Remark: For test above 1GHz GFSK, Pi/4 DQPSK and 8-DPSK were test at Low, Middle, and High channel; only the worst result of GFSK was reported as below:

CH Low (2402MHz)**Horizontal:**

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	51.36	31.40	8.18	31.50	59.44	74.00	-14.56	peak
4804	34.62	31.40	8.18	31.50	42.70	54.00	-11.30	AVG
7206	45.03	35.80	10.83	31.40	60.26	74.00	-13.74	peak
7206	28.45	35.80	10.83	31.40	43.68	54.00	-10.32	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	51.06	31.40	8.18	31.50	59.14	74.00	-14.86	peak
4804	37.15	31.40	8.18	31.50	45.23	54.00	-8.77	AVG
7206	44.16	35.80	10.83	31.40	59.39	74.00	-14.61	peak
7206	27.46	35.80	10.83	31.40	42.69	54.00	-11.31	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH Middle (2441MHz)

Horizontal:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4880	51.48	31.40	9.17	32.10	59.95	74.00	-14.05	peak
4880	35.78	31.40	9.17	32.10	44.25	54.00	-9.75	AVG
7320	42.74	35.80	10.83	31.40	57.97	74.00	-16.03	peak
7320	29.33	35.80	10.83	31.40	44.56	54.00	-9.44	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4880	51.48	31.40	9.17	32.10	59.95	74.00	-14.05	peak
4880	37.15	31.40	9.17	32.10	45.62	54.00	-8.38	AVG
7320	42.22	35.80	10.83	31.40	57.45	74.00	-16.55	peak
7320	28.15	35.80	10.83	31.40	43.38	54.00	-10.62	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	51.26	31.40	9.17	32.10	59.73	74.00	-14.27	peak
4960	35.12	31.40	9.17	32.10	43.59	54.00	-10.41	AVG
7440	42.99	35.80	10.83	31.40	58.22	74.00	-15.78	peak
7440	26.45	35.80	10.83	31.40	41.68	54.00	-12.32	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB/m)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	51.11	31.40	9.17	32.10	59.58	74.00	-14.42	peak
4960	37.15	31.40	9.17	32.10	45.62	54.00	-8.38	AVG
7440	43.66	35.80	10.83	31.40	58.89	74.00	-15.11	peak
7440	27.55	35.80	10.83	31.40	42.78	54.00	-11.22	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

(1) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(2) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed.



7. Test Setup Photo

Reference to the **appendix I** for details.

8. EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----