




# Power Spectral Density spectrum plot of Chain A value:

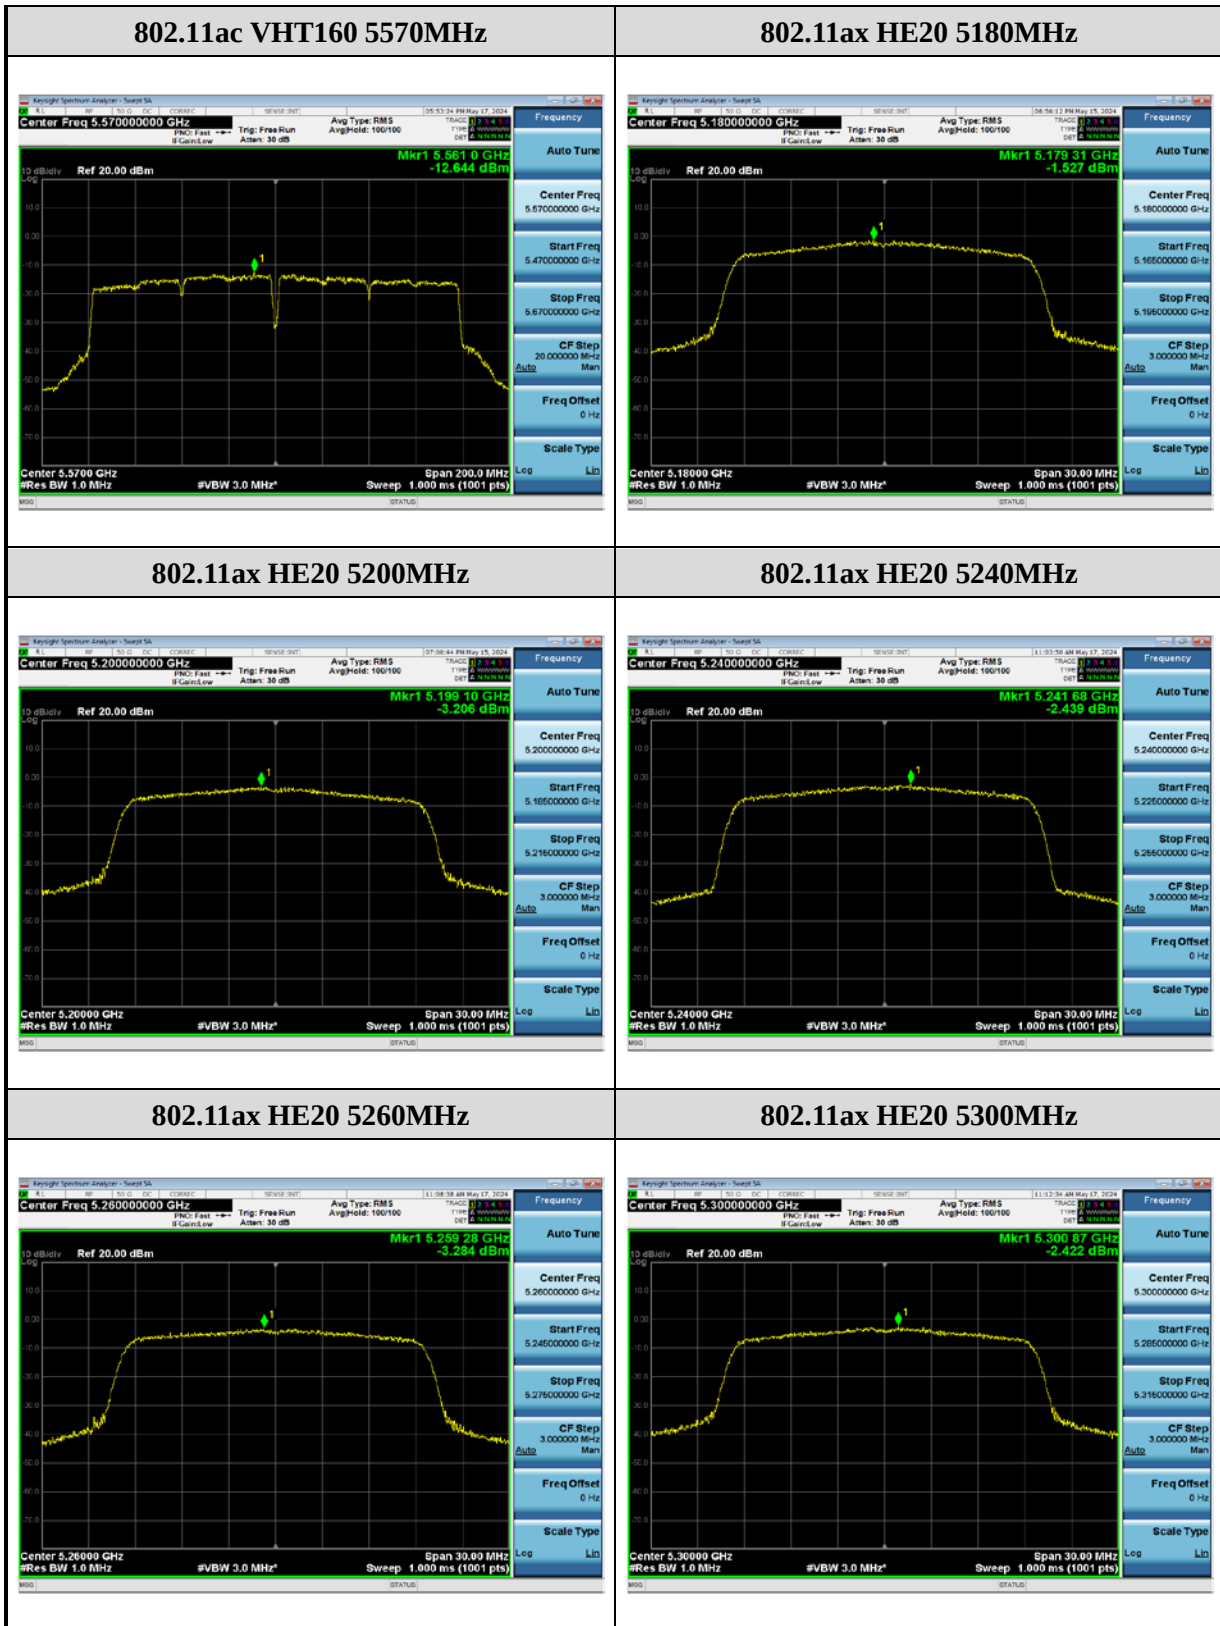


# Power Spectral Density spectrum plot of Chain A value:

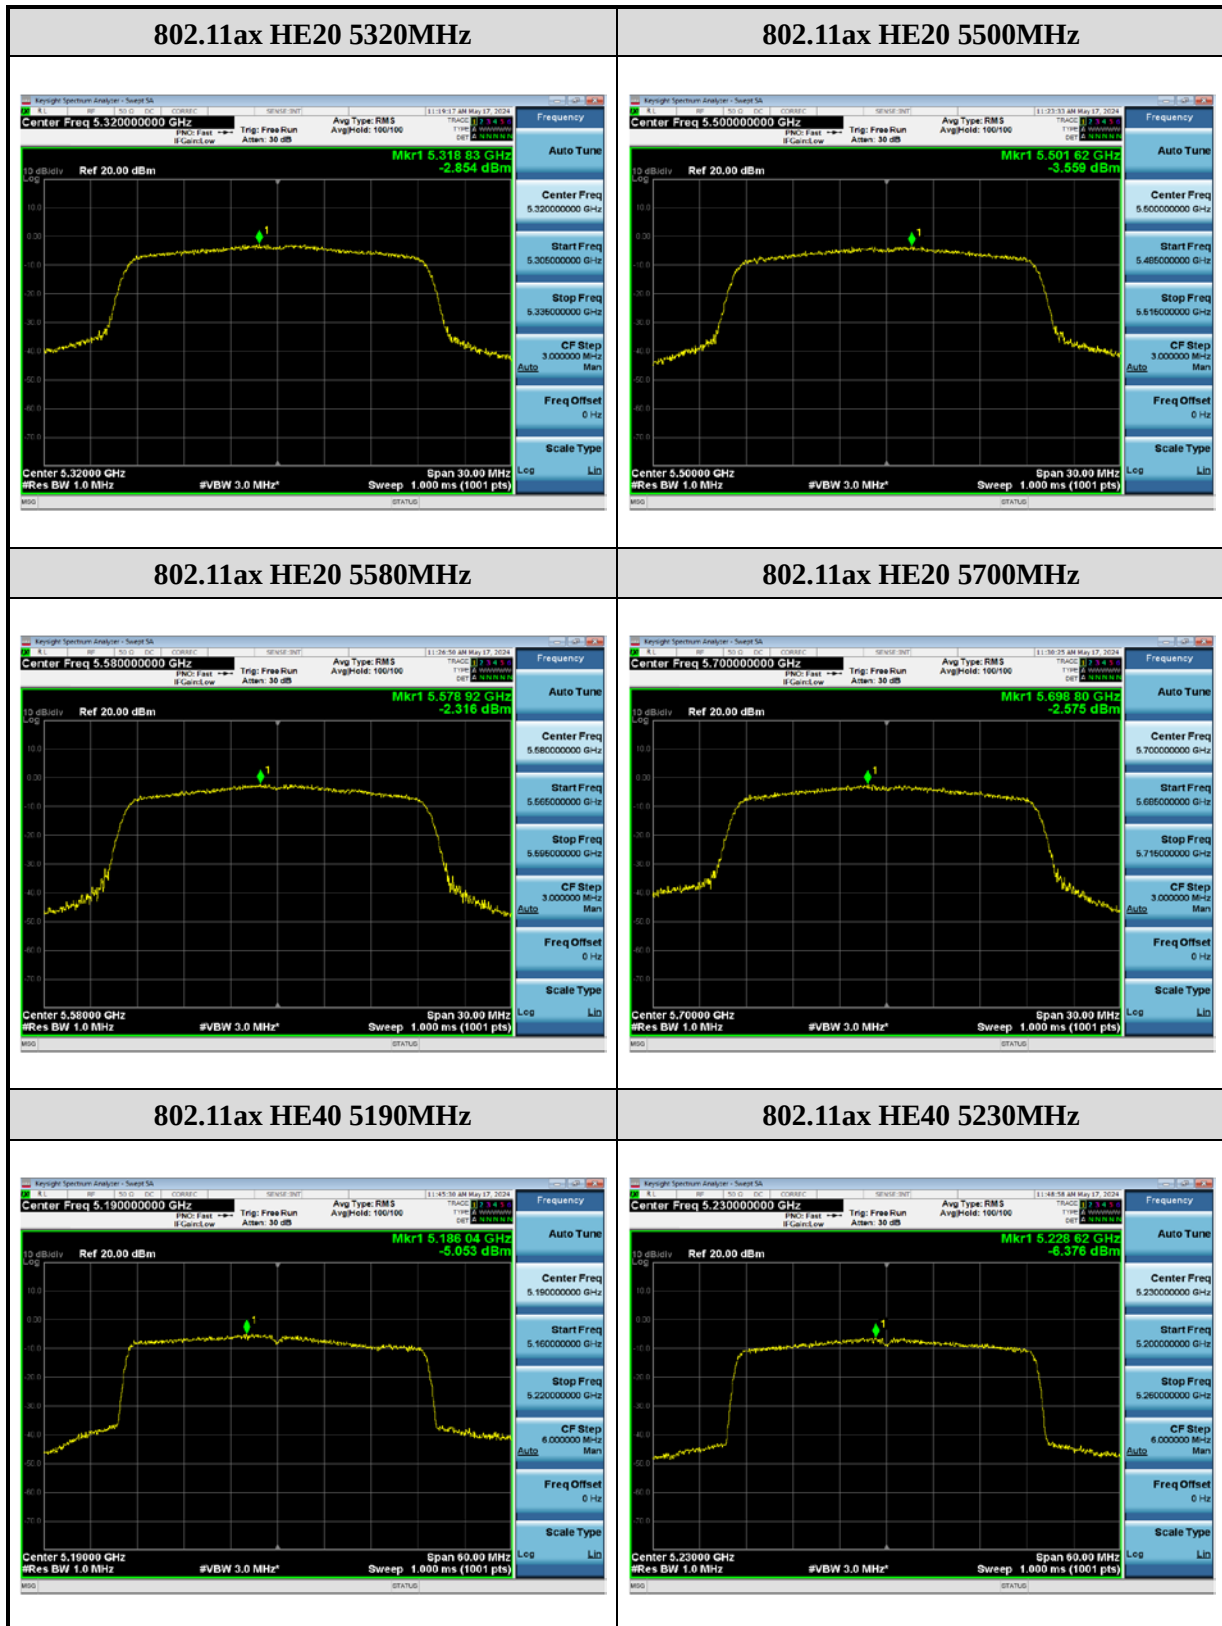

### Power Spectral Density spectrum plot of Chain A value:

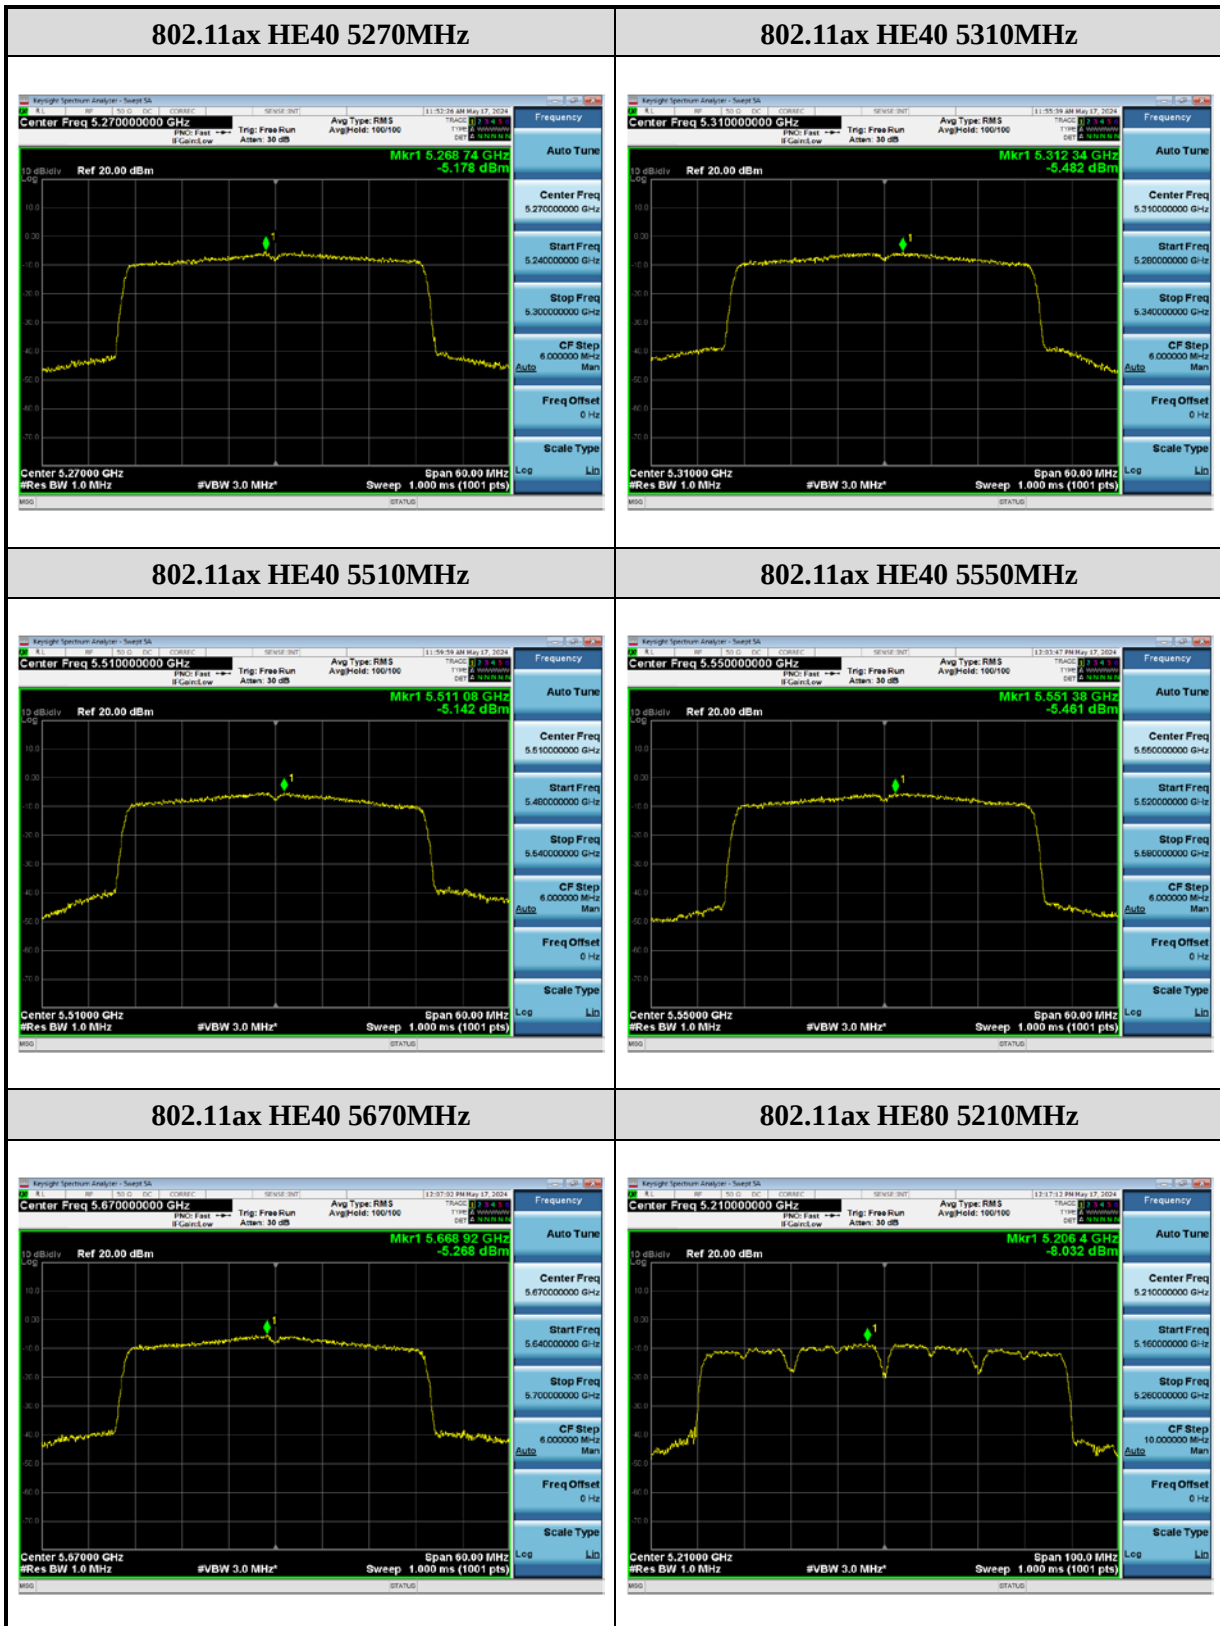

# Power Spectral Density spectrum plot of Chain A value:

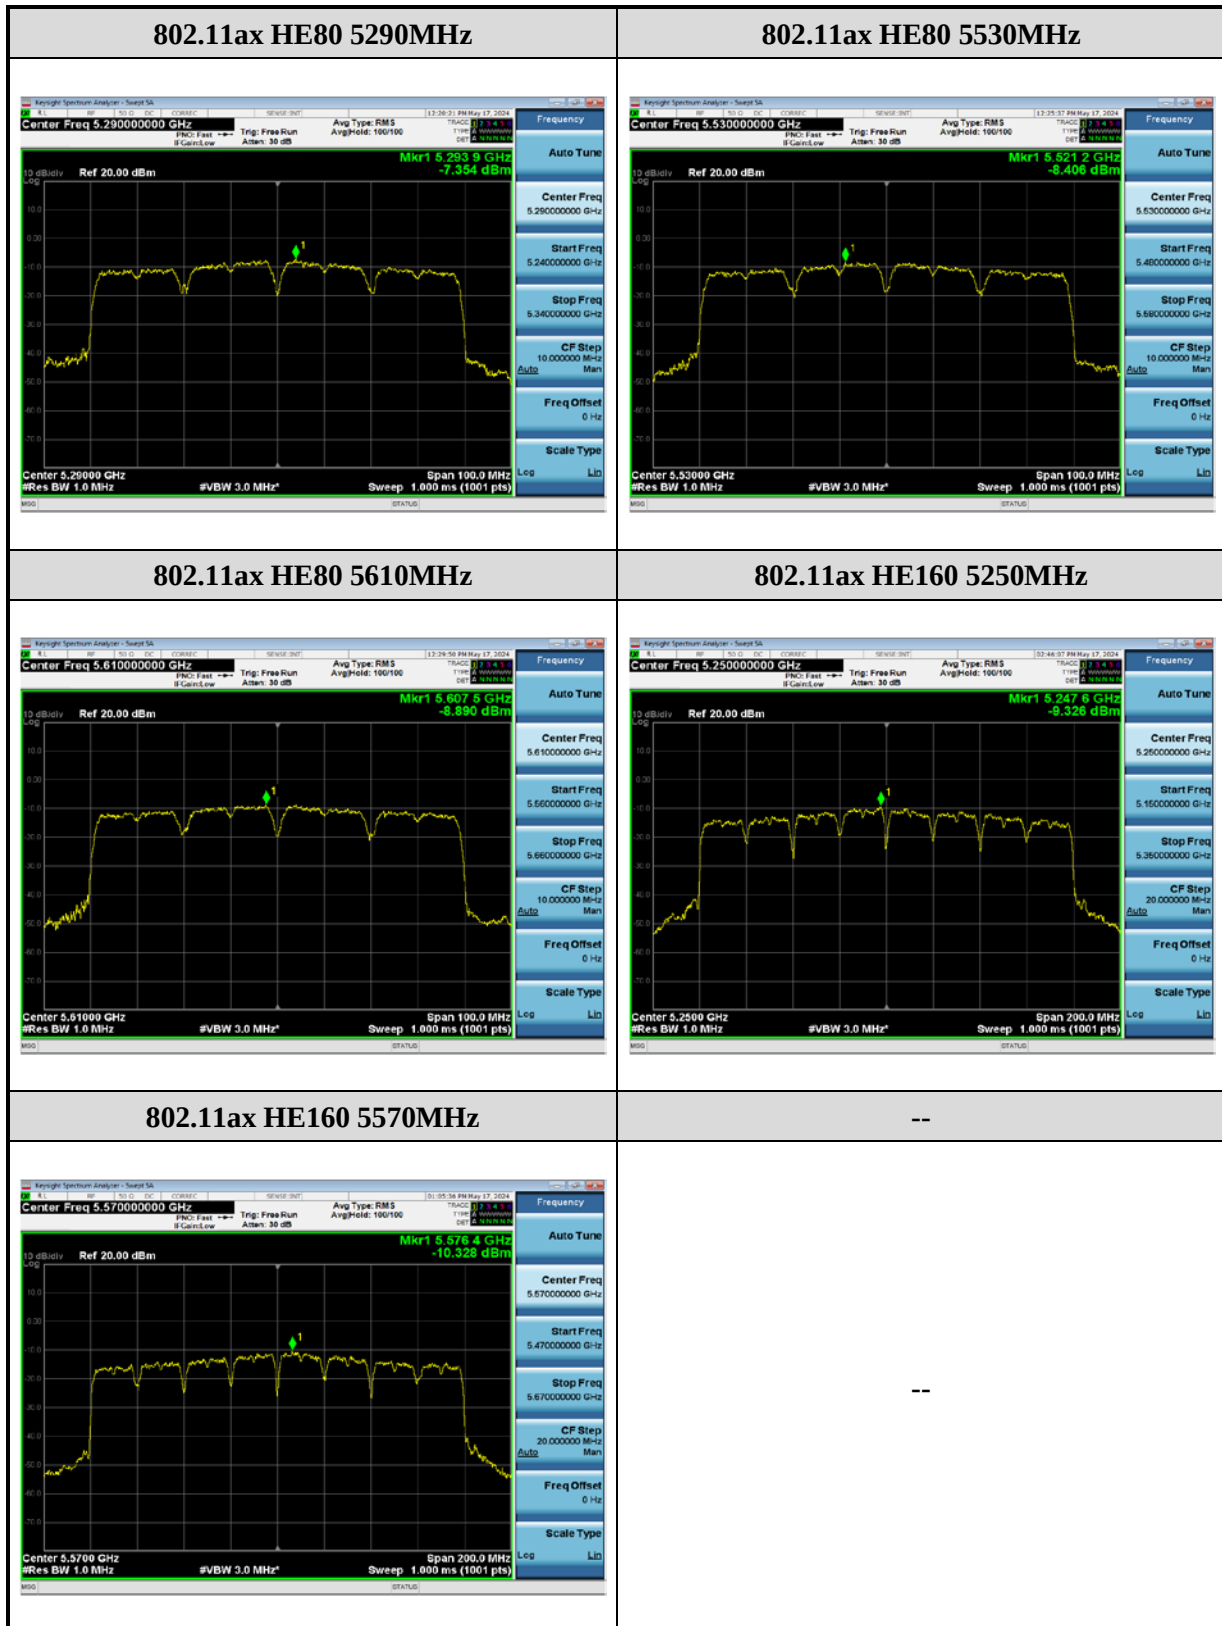

For 5725 MHz ~ 5850 MHz

#### 802.11a

| Frequency<br>(MHz) | PSD (dBm/500kHz) |         | Total PSD<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) | Result |
|--------------------|------------------|---------|---------------------------|-----------------------|--------|
|                    | Chain A          | Chain B |                           |                       |        |
| 5745               | -2.75            | --      | --                        | < 30                  | Pass   |
| 5785               | -1.96            | --      | --                        | < 30                  | Pass   |
| 5825               | -2.17            | --      | --                        | < 30                  | Pass   |

Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2.  $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$

#### 802.11n HT20

| Frequency<br>(MHz) | PSD (dBm/500kHz) |         | Total PSD<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) | Result |
|--------------------|------------------|---------|---------------------------|-----------------------|--------|
|                    | Chain A          | Chain B |                           |                       |        |
| 5745               | -3.42            | --      | --                        | < 30                  | Pass   |
| 5785               | -2.66            | --      | --                        | < 30                  | Pass   |
| 5825               | -2.44            | --      | --                        | < 30                  | Pass   |

Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2.  $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$
3. Section E) method 2) b) of power density measurement of KDB 662911 is used for calculating total power density.

**802.11ac VHT40**

| Frequency<br>(MHz) | PSD (dBm) |         | Total PSD<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) | Result |
|--------------------|-----------|---------|---------------------------|-----------------------|--------|
|                    | Chain A   | Chain B |                           |                       |        |
| 5755               | -4.77     | --      | --                        | < 30                  | Pass   |
| 5795               | -4.06     | --      | --                        | < 30                  | Pass   |

Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2.  $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$
3. Section E) method 2) b) of power density measurement of KDB 662911 is used for calculating total power density.

**802.11ac VHT80**

| Frequency<br>(MHz) | PSD (dBm) |         | Total PSD<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) | Result |
|--------------------|-----------|---------|---------------------------|-----------------------|--------|
|                    | Chain A   | Chain B |                           |                       |        |
| 5775               | -6.42     | --      | --                        | < 30                  | Pass   |

Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2.  $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$
3. Section E) method 2) b) of power density measurement of KDB 662911 is used for calculating total power density.

**802.11ax HE20**

| Frequency<br>(MHz) | PSD (dBm) |         | Total PSD<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) | Result |
|--------------------|-----------|---------|---------------------------|-----------------------|--------|
|                    | Chain A   | Chain B |                           |                       |        |
| 5745               | -4.17     | --      | --                        | < 30                  | Pass   |
| 5785               | -3.69     | --      | --                        | < 30                  | Pass   |
| 5825               | -3.54     | --      | --                        | < 30                  | Pass   |

Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2.  $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$
3. Section E) method 2) b) of power density measurement of KDB 662911 is used for calculating total power density.

**802.11ax HE40**

| Frequency<br>(MHz) | PSD (dBm) |         | Total PSD<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) | Result |
|--------------------|-----------|---------|---------------------------|-----------------------|--------|
|                    | Chain A   | Chain B |                           |                       |        |
| 5755               | -4.38     | --      | --                        | < 30                  | Pass   |
| 5795               | -5.33     | --      | --                        | < 30                  | Pass   |

備 Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2.  $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$
3. Section E) method 2) b) of power density measurement of KDB 662911 is used for calculating total power density.


**802.11ax HE80**

| Frequency<br>(MHz) | PSD (dBm) |         | Total PSD<br>(dBm/500kHz) | Limit<br>(dBm/500kHz) | Result |
|--------------------|-----------|---------|---------------------------|-----------------------|--------|
|                    | Chain A   | Chain B |                           |                       |        |
| 5775               | -7.13     | --      | --                        | < 30                  | Pass   |


Remark:

1. Measured value = Reading value on a spectrum analyzer + cable loss + duty factor
2.  $\text{PSD(dBm/500kHz)} = \text{Measured value} + 10 \cdot \log(500\text{kHz}/1\text{MHz})$
3. Section E) method 2) b) of power density measurement of KDB 662911 is used for calculating total power density.


Power Spectral Density spectrum plot of Chain A value:

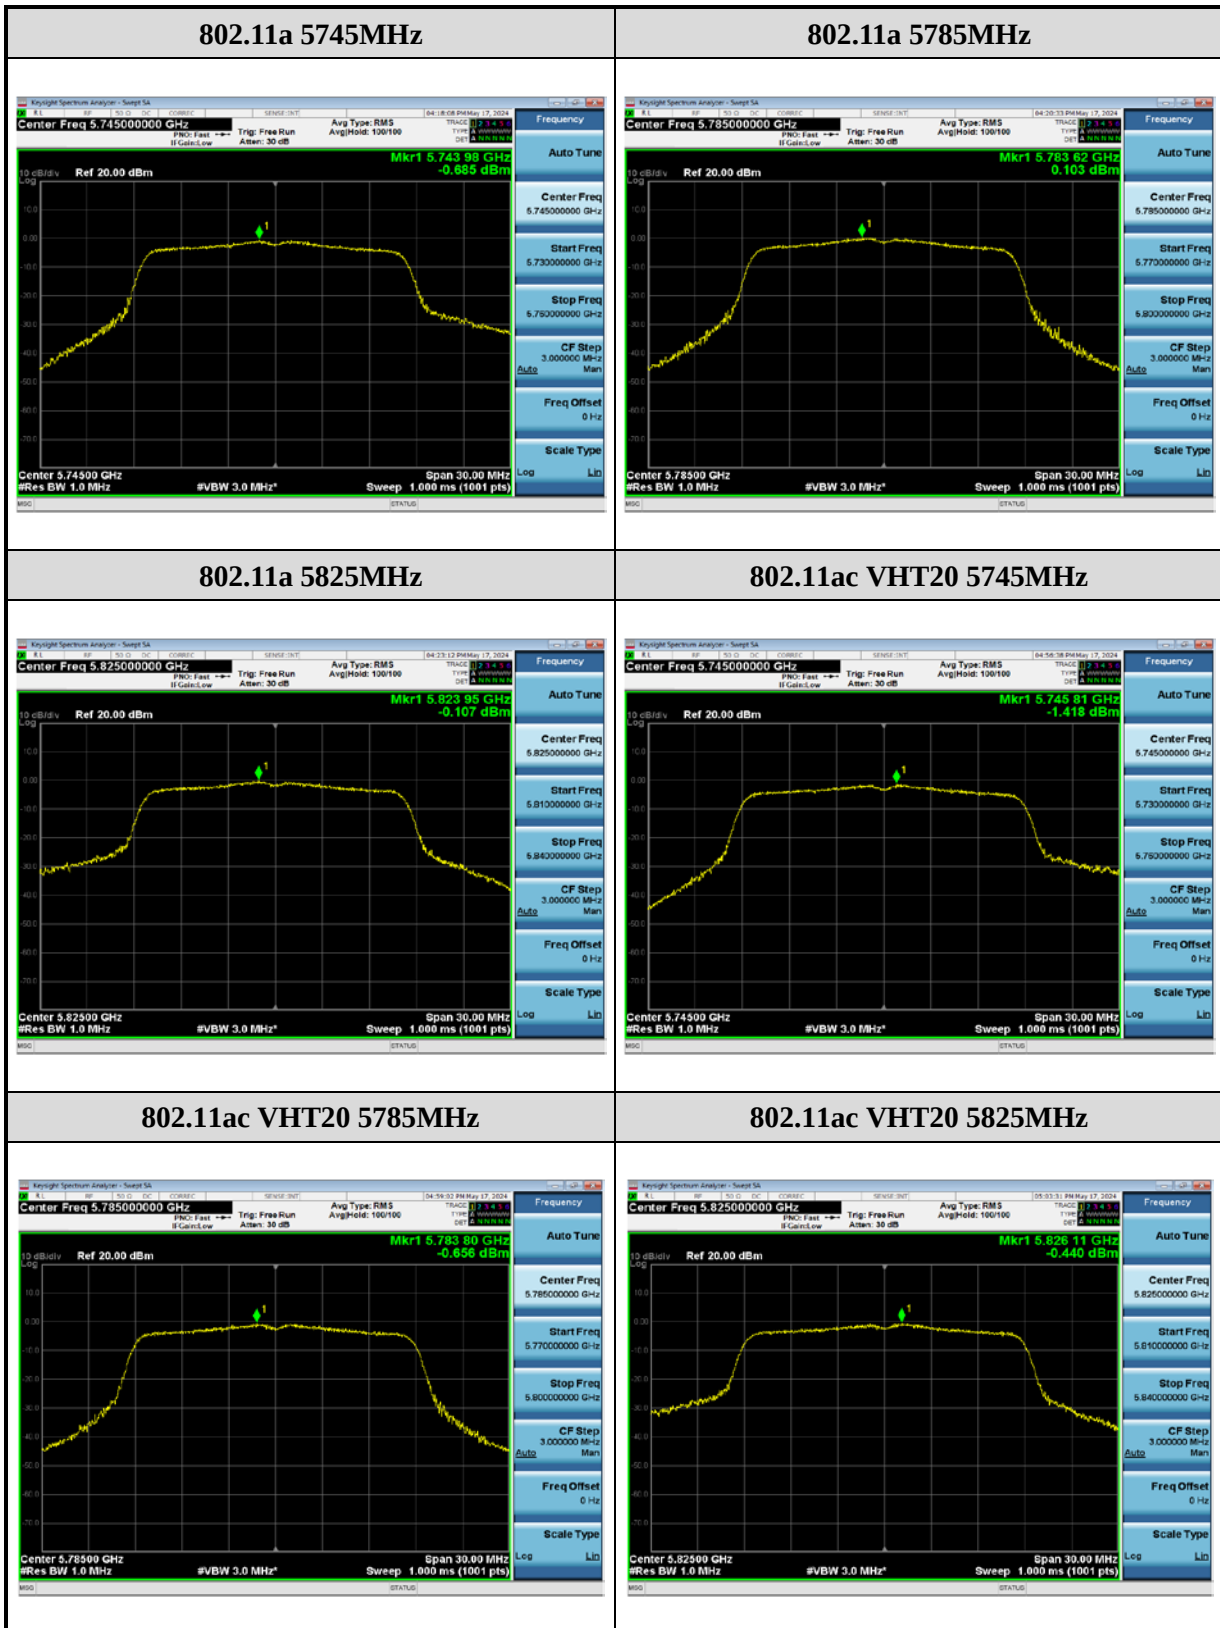

# Power Spectral Density spectrum plot of Chain A value:

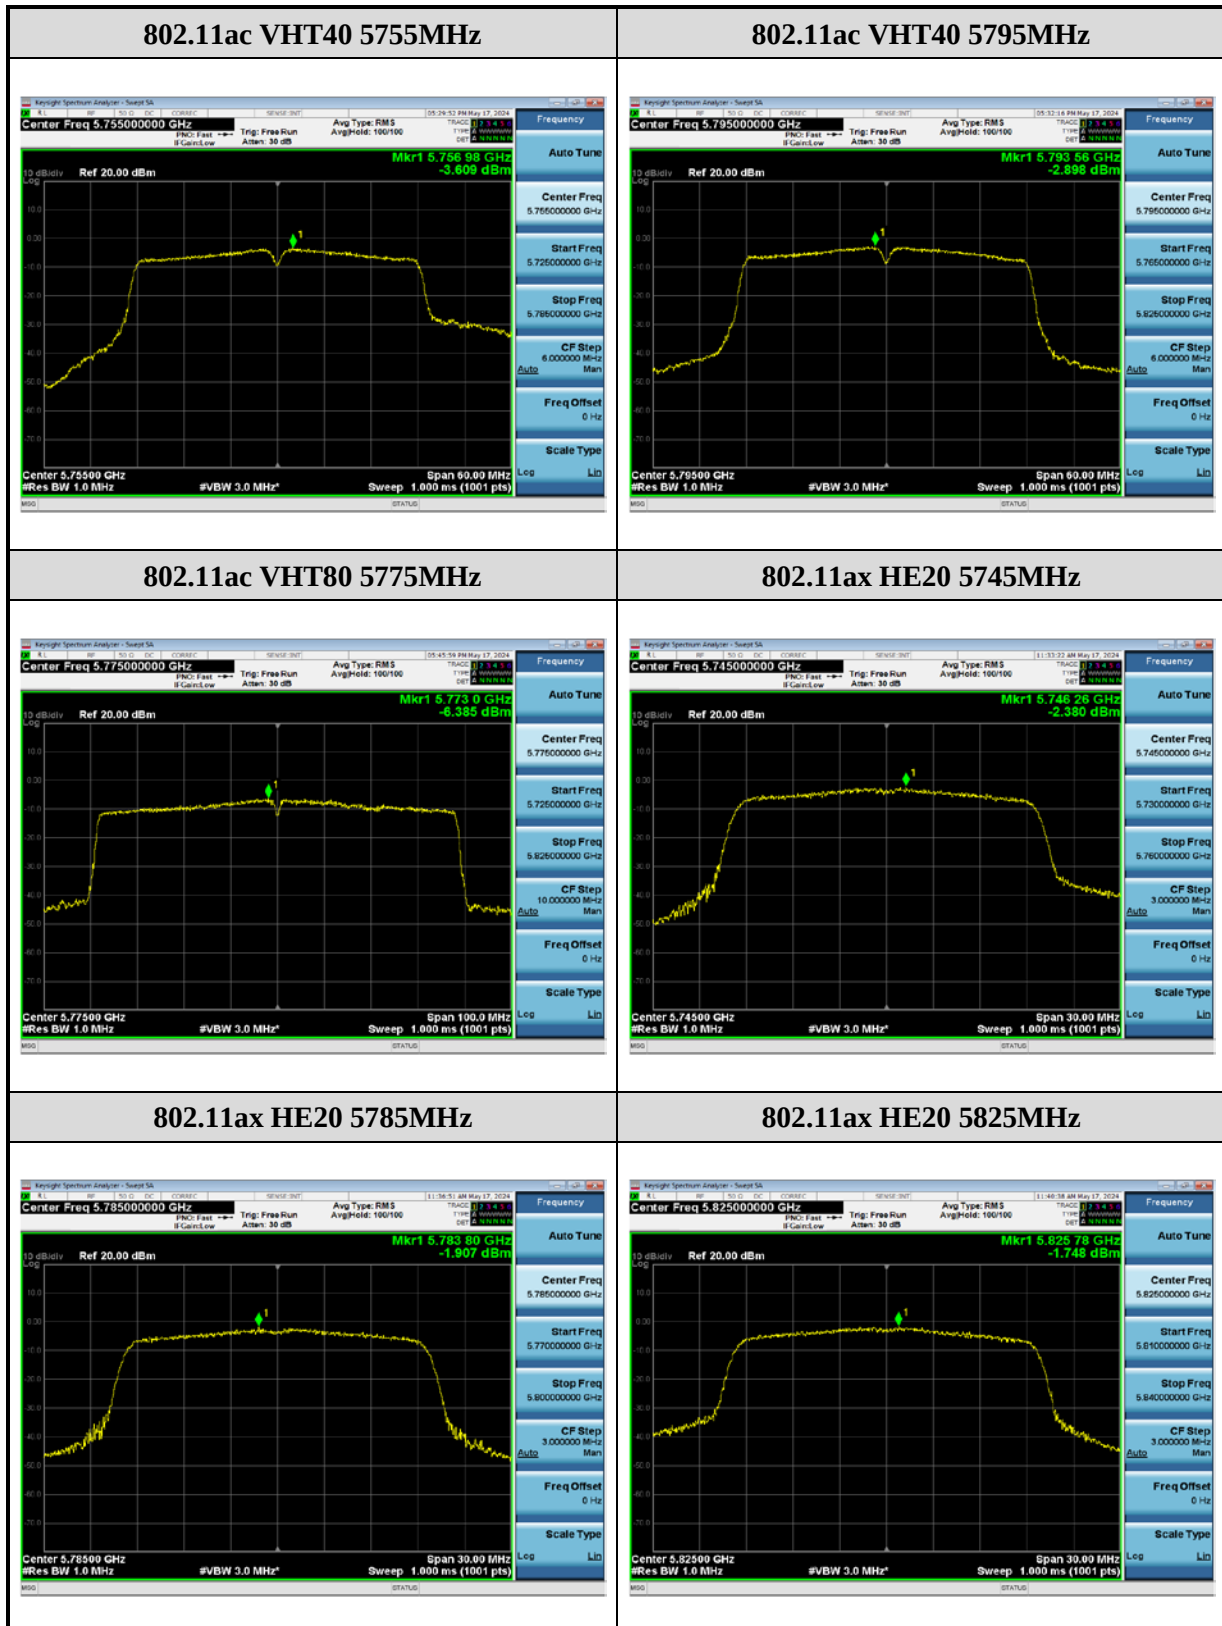

### Power Spectral Density spectrum plot of Chain A value:

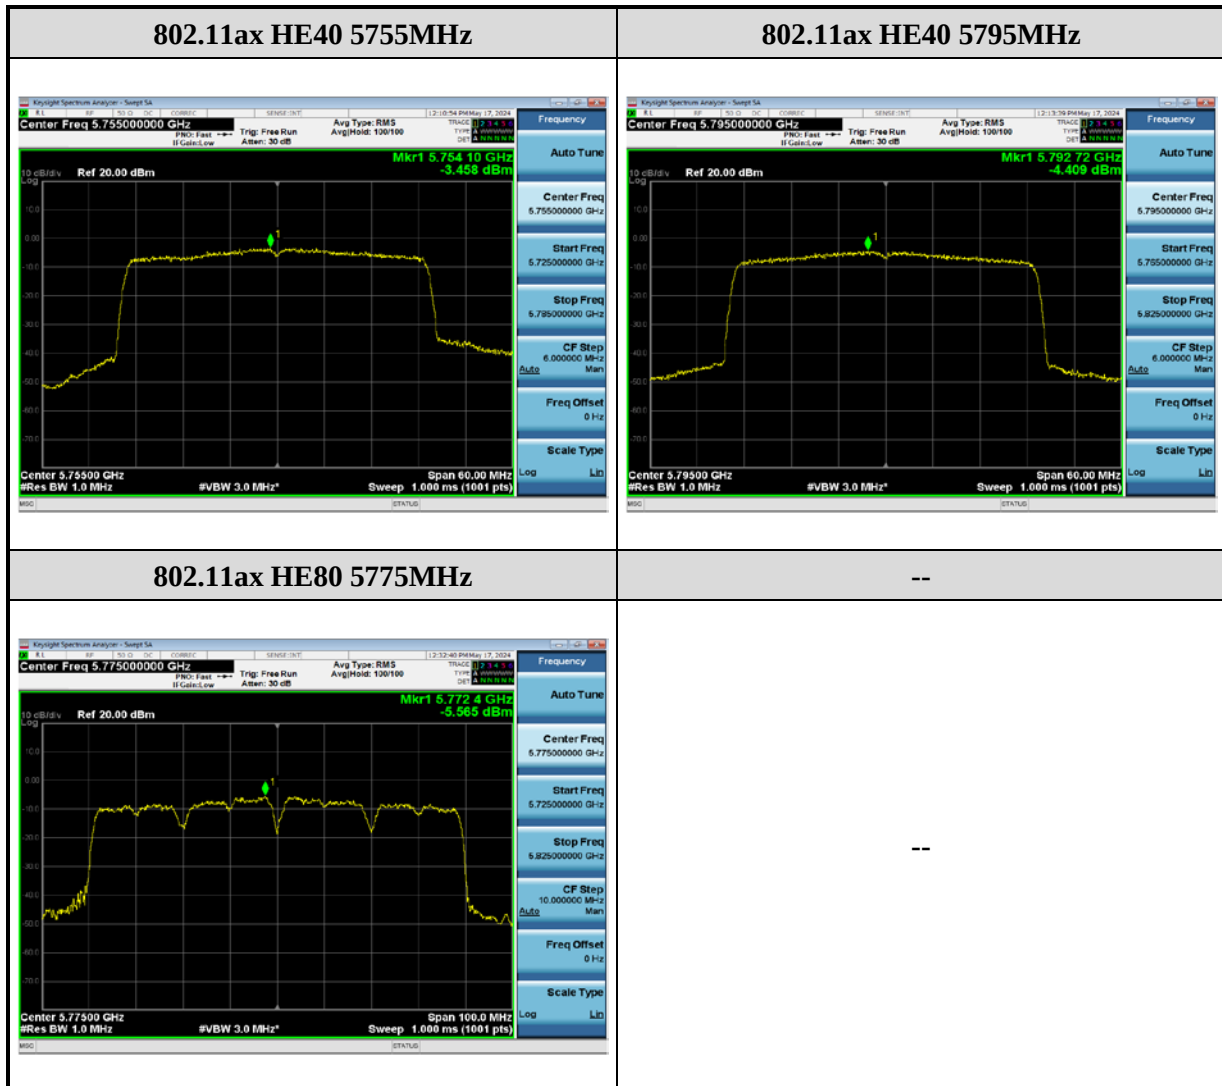

## 2.5 Unwanted Emission Measurement

### 2.5.1 Limit

#### 1. Un- restricted bands unwanted emission limit :

| Operating Band (MHz) | Limit of all emissions outside of the operating band                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5150 ~ 5250          | -27dBm/MHz, EIRP                                                                                                                                                                                                                                                                                                                                                                                                                |
| 5250 ~ 5350          | -27dBm/MHz, EIRP                                                                                                                                                                                                                                                                                                                                                                                                                |
| 5470 ~ 5725          | -27dBm/MHz, EIRP                                                                                                                                                                                                                                                                                                                                                                                                                |
| 5725 ~ 5850          | All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. |

| EIRP (dBm) | Field Strength at 3m (dBμV/m) |
|------------|-------------------------------|
| - 27       | 68.2                          |

#### 2. Restricted bands unwanted emission limit :


| Frequency (MHz) | Field Strength (μV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 0.009 – 0.490   | 2400/F(kHz)           | 300                      |
| 0.490 – 1.705   | 24000/F(kHz)          | 30                       |
| 1.705 – 30.0    | 30                    | 30                       |
| 30 – 88         | 100                   | 3                        |
| 88 – 216        | 150                   | 3                        |
| 216 - 960       | 200                   | 3                        |
| Above 960       | 500                   | 3                        |

#### Remarks:


1. RF Voltage (dBuV) = 20 log RF Voltage(uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

## 2.5.2 Test Setup


### Below 30MHz

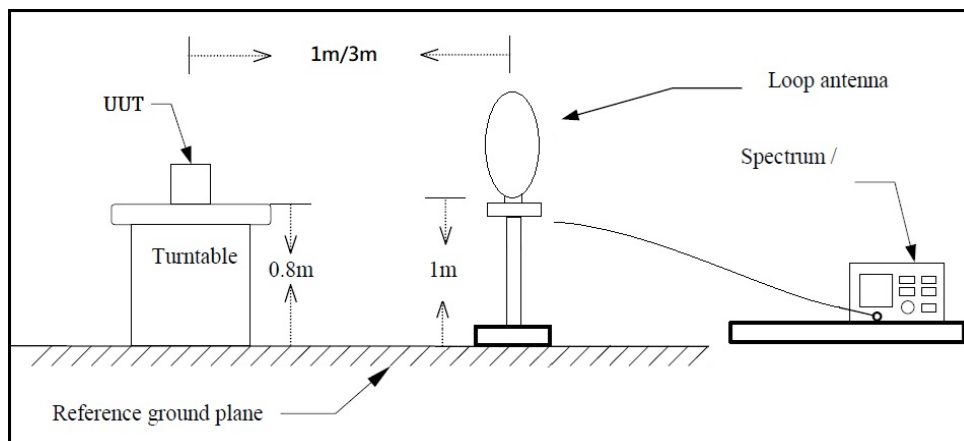

### 30MHz~1GHz

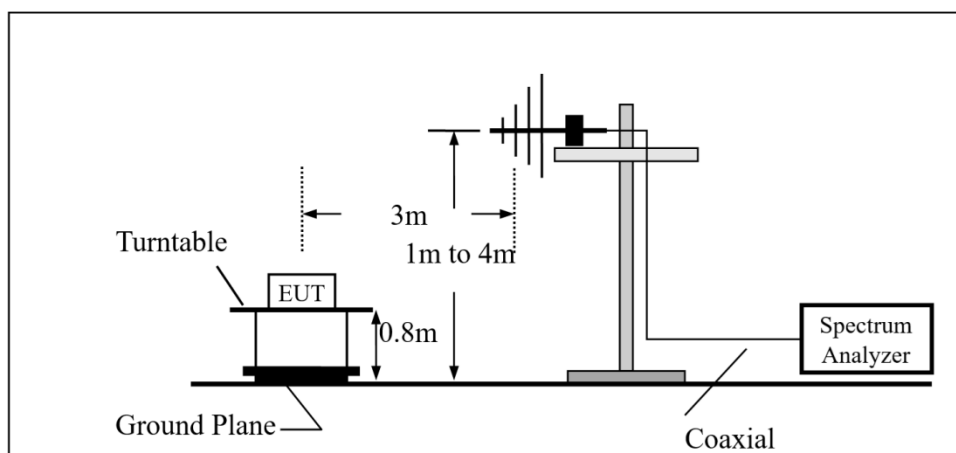

### Above 1GHz

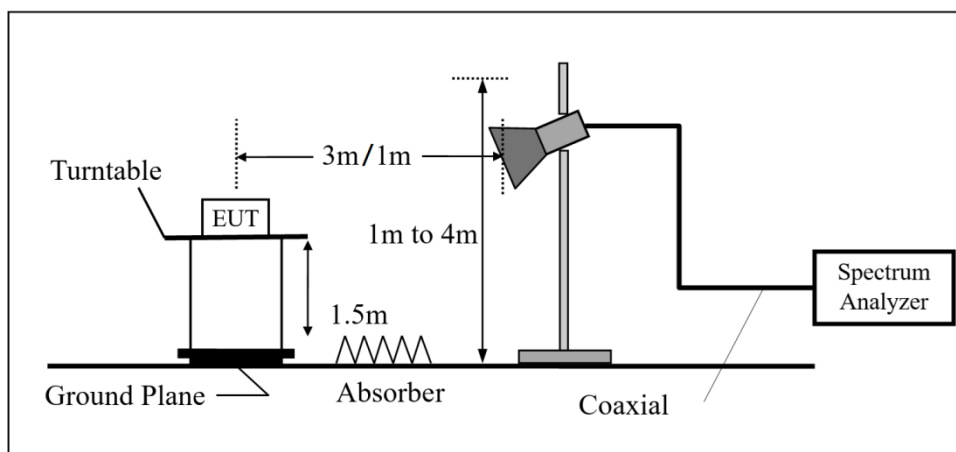

### 2.5.3 Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according test procedure of KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

The following bandwidths were used during emissions testing.

| Frequency          | RBW                | VBW     |
|--------------------|--------------------|---------|
| 9 kHz to 150 kHz   | 200 Hz to 300 Hz   | 3 × RBW |
| 0.15 MHz to 30 MHz | 9 kHz to 10 kHz    | 3 × RBW |
| 30 MHz to 1000 MHz | 100 kHz to 120 kHz | 3 × RBW |
| >1000 MHz          | 1 MHz              | 3 × RBW |

#### For Radiated emission below 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters above the ground in a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### For Radiated emission Above 30MHz

- (1) The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for the test. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, the height of the antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- (6) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets the average limit, measurement with the average detector is unnecessary.

## 2.5.4 Duty Cycle


| Type of Modulation | Frequency (MHz) | on time (ms) | on+off time (ms) | Duty cycle | Duty Factor (dB) | 1/T Minimum VBW (kHz) |
|--------------------|-----------------|--------------|------------------|------------|------------------|-----------------------|
| 802.11a            | 5180            | 1.426        | 1.774            | 0.804      | 0.948            | 0.701                 |
| 802.11ac VHT20     | 5180            | 1.334        | 1.682            | 0.793      | 1.007            | 0.750                 |
| 802.11ac VHT40     | 5190            | 0.665        | 1.017            | 0.654      | 1.845            | 1.504                 |
| 802.11ac VHT80     | 5210            | 0.344        | 0.682            | 0.504      | 2.974            | 2.909                 |
| 802.11ac VHT160    | 5250            | 0.204        | 0.561            | 0.364      | 4.392            | 4.902                 |
| 802.11ax HE20      | 5180            | 1.036        | 1.373            | 0.755      | 1.223            | 0.965                 |
| 802.11ax HE40      | 5190            | 0.551        | 0.893            | 0.618      | 2.092            | 1.814                 |
| 802.11ax HE80      | 5210            | 0.042        | 0.058            | 0.717      | 1.442            | 23.866                |
| 802.11ax HE160     | 5250            | 0.041        | 0.060            | 0.693      | 1.593            | 24.213                |

## 2.5.5 Test Result of Radiated Band Edge Measurement

The following tables for radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X axis) were recorded in this report.

| Test Frequency |                                |                             |                             |                               |
|----------------|--------------------------------|-----------------------------|-----------------------------|-------------------------------|
| RF             | 802.11a /ac-VHT20 /<br>ax-HE20 | 802.11ac-VHT40 /<br>ax-HE40 | 802.11ac-VHT80 /<br>ax-HE80 | 802.11ac-VHT160 /<br>ax-HE160 |
| Tx             | CH36 (5180MHz)                 | CH38 (5190MHz)              | CH42 (5210MHz)              | CH50 (5250MHz)                |
|                | CH64 (5320MHz)                 | CH62 (5310MHz)              | CH58 (5290MHz)              | CH114 (5570MHz)               |
|                | CH100 (5500MHz)                | CH102 (5510MHz)             | CH106 (5530MHz)             |                               |
|                | CH149 (5745MHz)                | CH151 (5755MHz)             | CH155 (5775MHz)             |                               |
|                | CH165 (5825MHz)                | CH159 (5795MHz)             |                             |                               |

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/29 |
| <b>Test Channel :</b> | CH36(5180MHz)                     | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 49 %       |

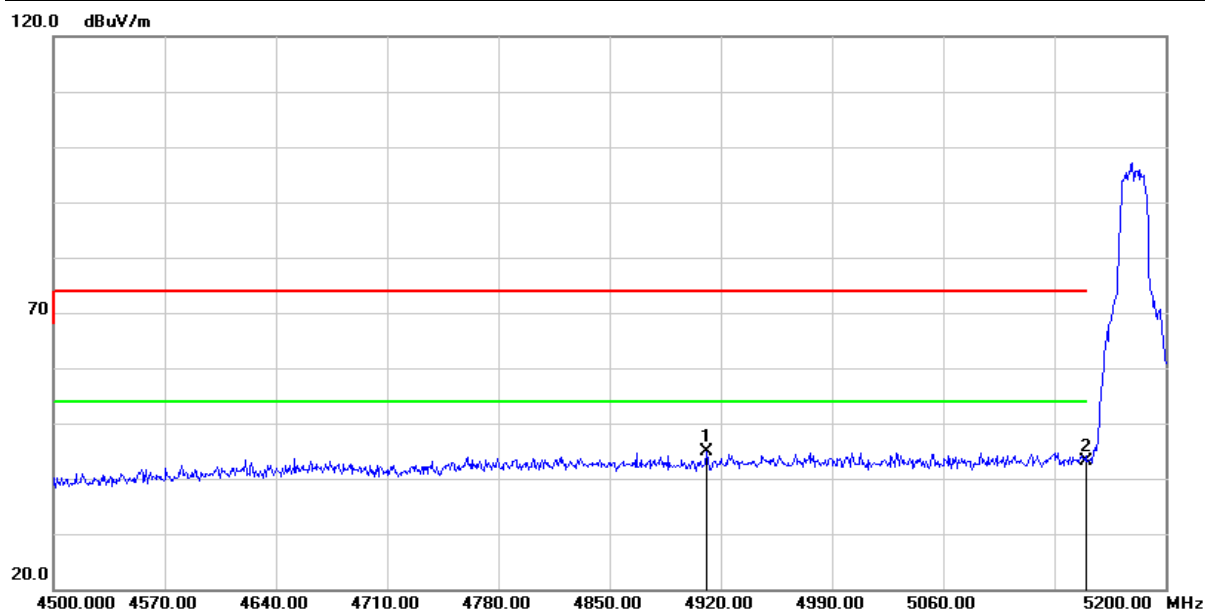


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4910.900        | 42.71            | 2.25                  | 44.96           | 74.00          | -29.04      | peak   |
| 2   | 5150.000        | 40.02            | 3.14                  | 43.16           | 74.00          | -30.84      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/29 |
| <b>Test Channel :</b> | CH36(5180MHz)                     | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 49 %       |

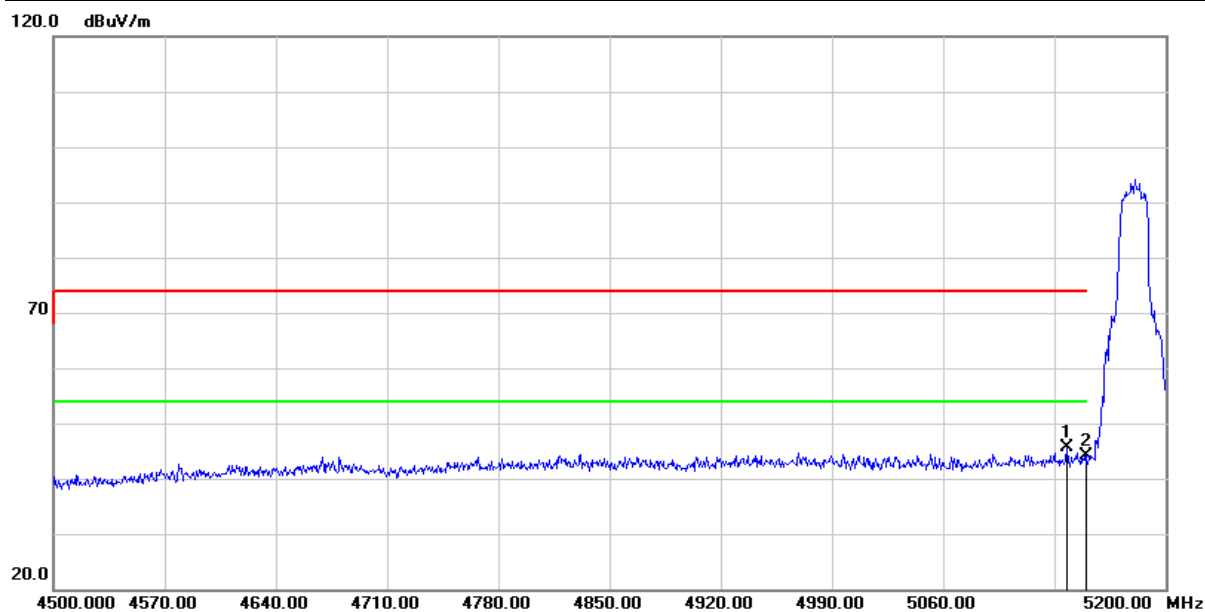


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5137.700        | 42.42            | 3.12                  | 45.54           | 74.00          | -28.46      | peak   |
| 2   | 5150.000        | 40.98            | 3.14                  | 44.12           | 74.00          | -29.88      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/29 |
| <b>Test Channel :</b> | CH64(5320MHz)                     | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

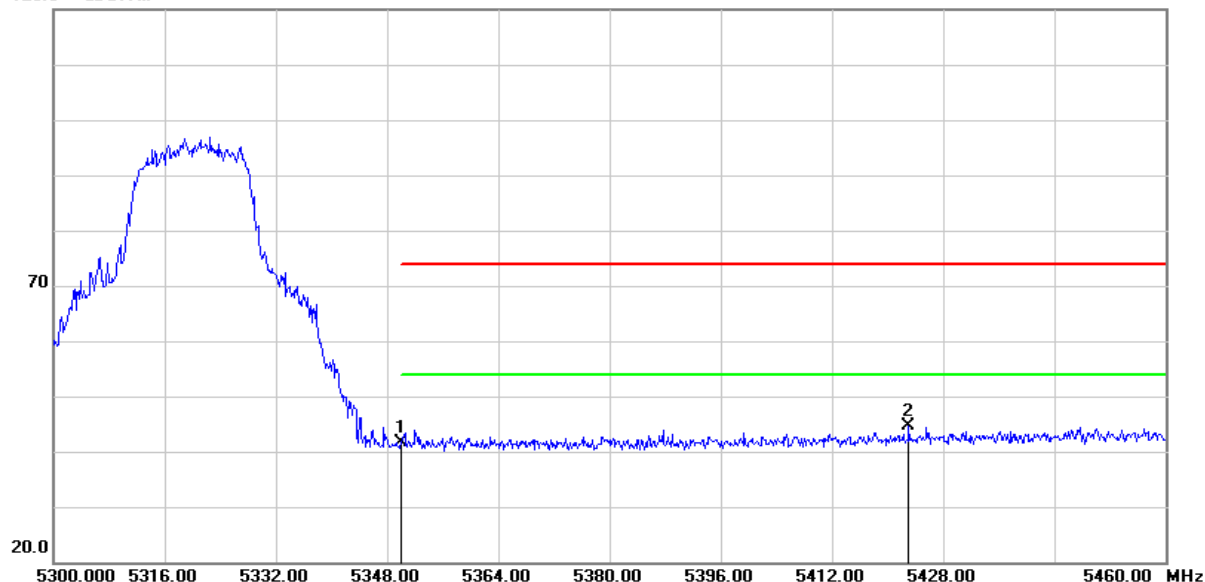


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 39.08            | 2.46                  | 41.54           | 74.00          | -32.46      | peak   |
| 2   | 5423.040        | 41.88            | 2.69                  | 44.57           | 74.00          | -29.43      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/29 |
| <b>Test Channel :</b> | CH64(5320MHz)                     | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

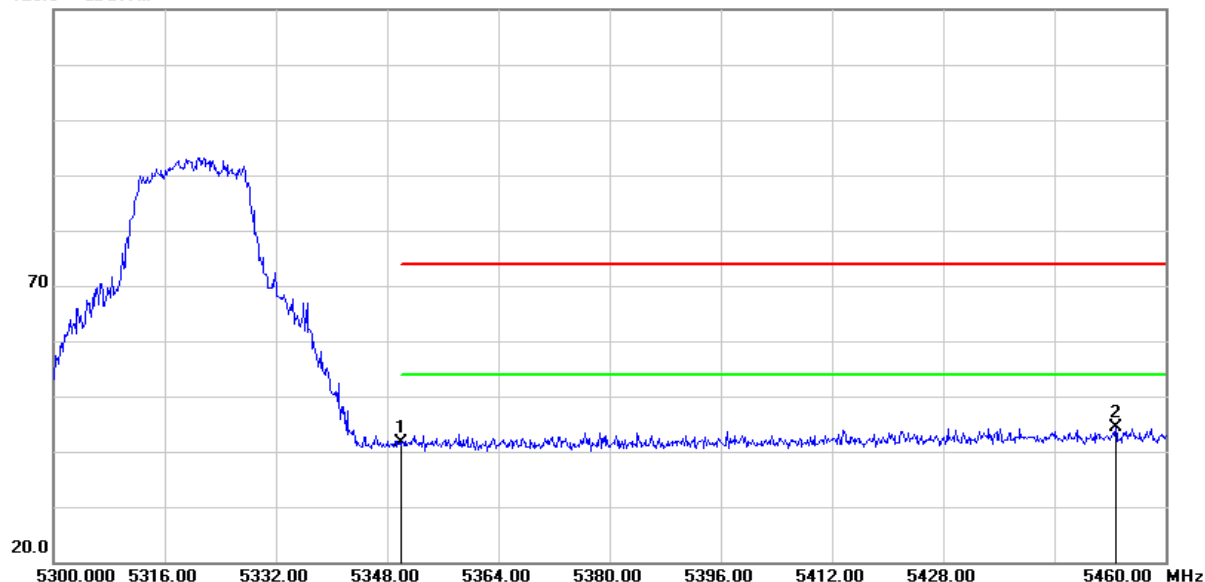


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 39.20            | 2.46                  | 41.66           | 74.00          | -32.34      | peak   |
| 2   | 5452.800        | 41.40            | 2.87                  | 44.27           | 74.00          | -29.73      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH100(5500MHz)                    | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

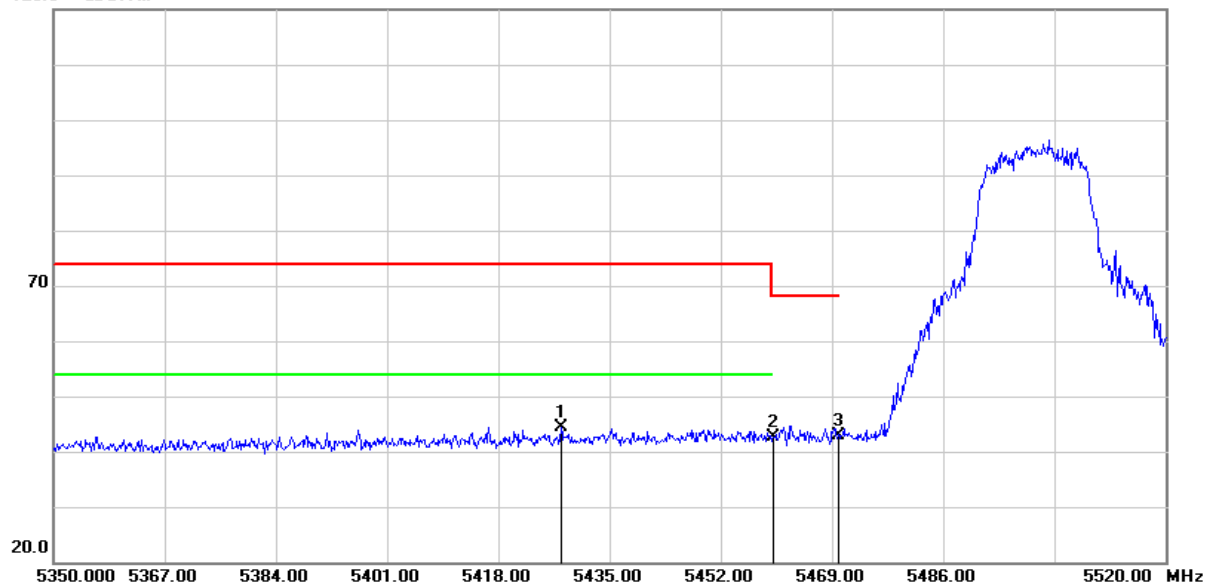


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5427.520        | 41.77            | 2.73                  | 44.50           | 74.00          | -29.50      | peak   |
| 2   | 5460.000        | 39.69            | 2.87                  | 42.56           | 74.00          | -31.44      | peak   |
| 3   | 5470.000        | 39.91            | 2.90                  | 42.81           | 68.20          | -25.39      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH100(5500MHz)                    | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

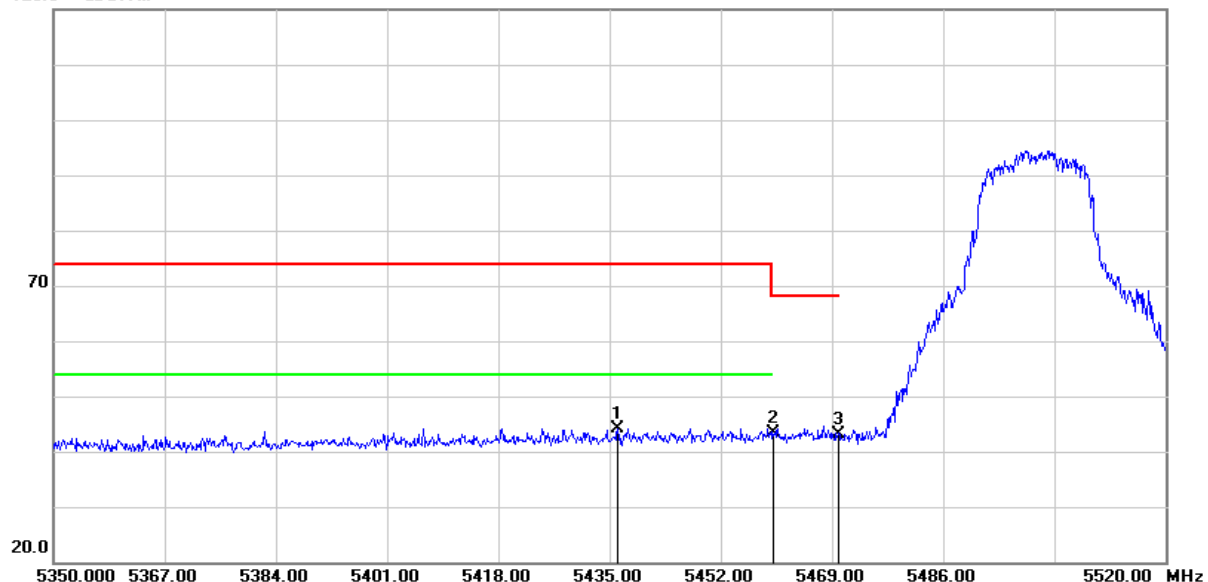


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5436.190        | 41.48            | 2.77                  | 44.25           | 74.00          | -29.75      | peak   |
| 2   | 5460.000        | 40.61            | 2.87                  | 43.48           | 74.00          | -30.52      | peak   |
| 3   | 5470.000        | 40.19            | 2.90                  | 43.09           | 68.20          | -25.11      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/29 |
| <b>Test Channel :</b> | CH149(5745MHz)                    | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 49 %       |

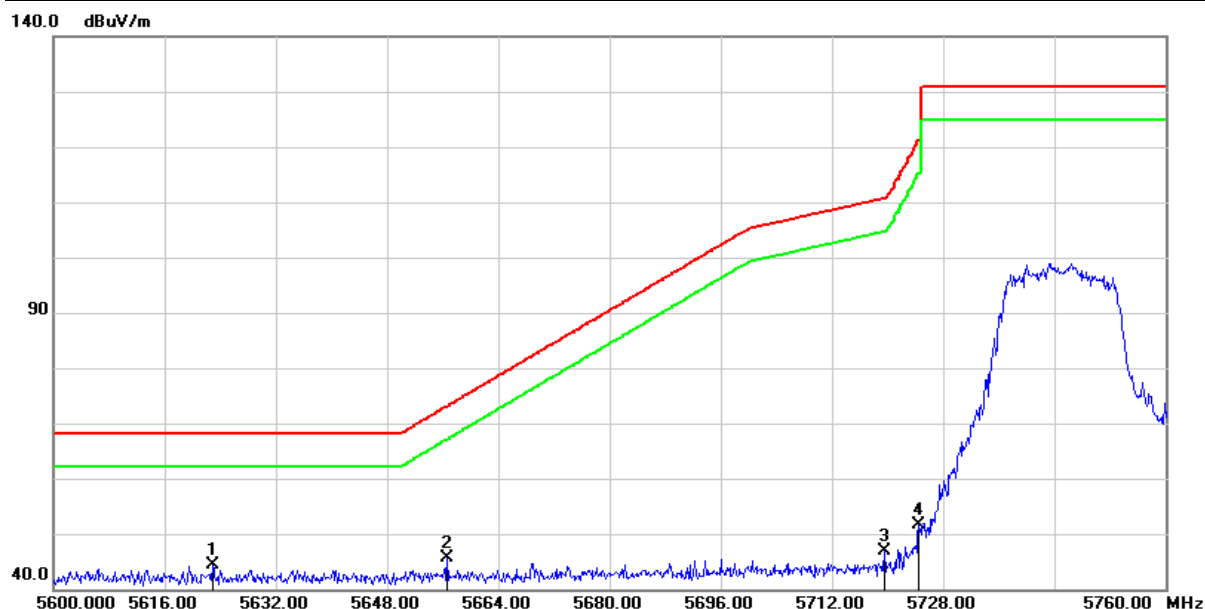


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5622.880        | 41.35            | 3.11                  | 44.46           | 68.20          | -23.74      | peak   |
| 2   | 5656.640        | 42.54            | 3.18                  | 45.72           | 73.11          | -27.39      | peak   |
| 3   | 5719.520        | 43.48            | 3.43                  | 46.91           | 110.67         | -63.76      | peak   |
| 4   | 5724.480        | 48.18            | 3.43                  | 51.61           | 121.01         | -69.40      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/29 |
| <b>Test Channel :</b> | CH149(5745MHz)                    | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 49 %       |

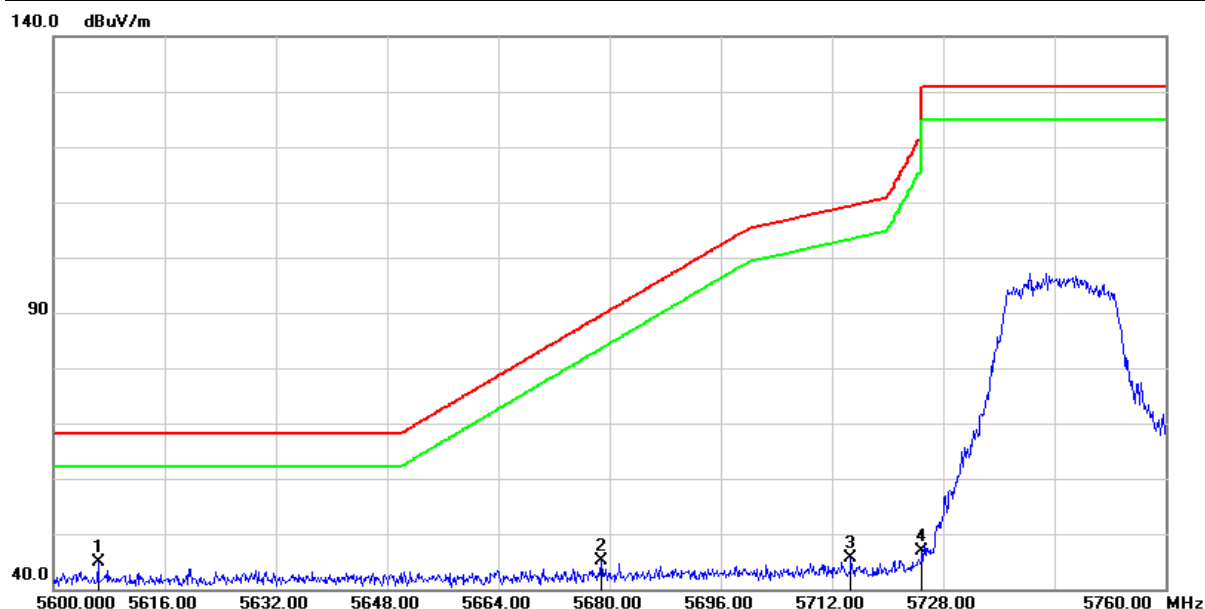


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5606.400        | 41.87            | 3.08                  | 44.95           | 68.20          | -23.25      | peak   |
| 2   | 5678.720        | 41.80            | 3.29                  | 45.09           | 89.45          | -44.36      | peak   |
| 3   | 5714.720        | 42.14            | 3.42                  | 45.56           | 109.32         | -63.76      | peak   |
| 4   | 5724.960        | 43.54            | 3.43                  | 46.97           | 122.11         | -75.14      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/29 |
| <b>Test Channel :</b> | CH165(5825MHz)                    | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 49 %       |

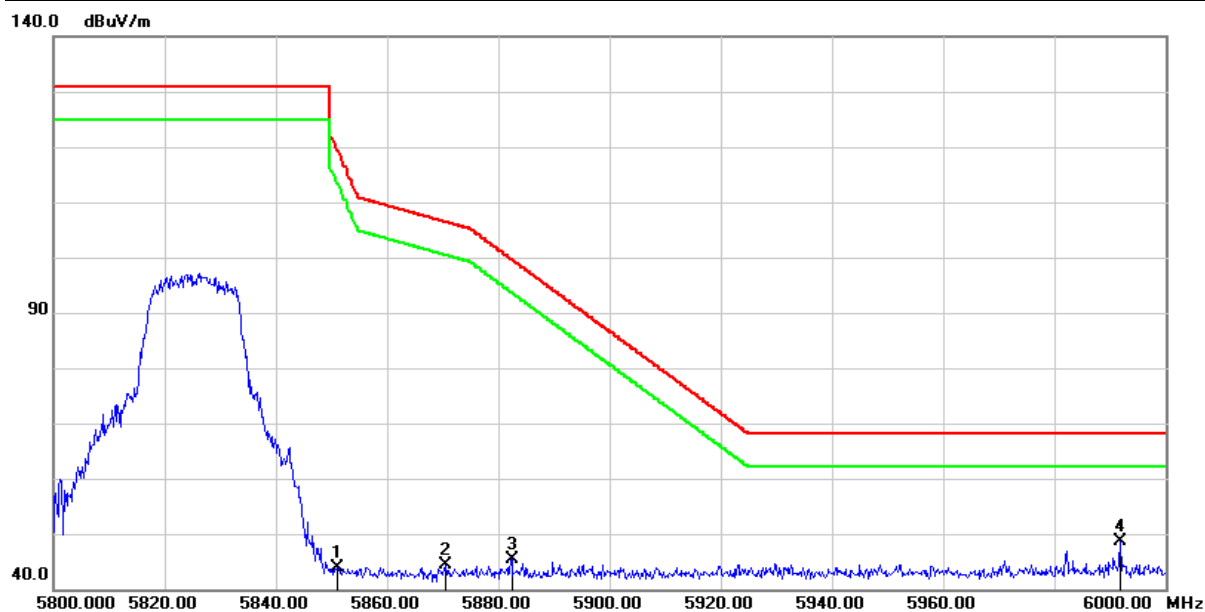


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5851.000        | 40.29            | 3.70                  | 43.99           | 119.92         | -75.93      | peak   |
| 2   | 5870.600        | 40.43            | 3.83                  | 44.26           | 106.43         | -62.17      | peak   |
| 3   | 5882.400        | 41.37            | 3.91                  | 45.28           | 99.72          | -54.44      | peak   |
| 4   | 5991.800        | 44.36            | 4.24                  | 48.60           | 68.20          | -19.60      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/29 |
| <b>Test Channel :</b> | CH165(5825MHz)                    | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 49 %       |

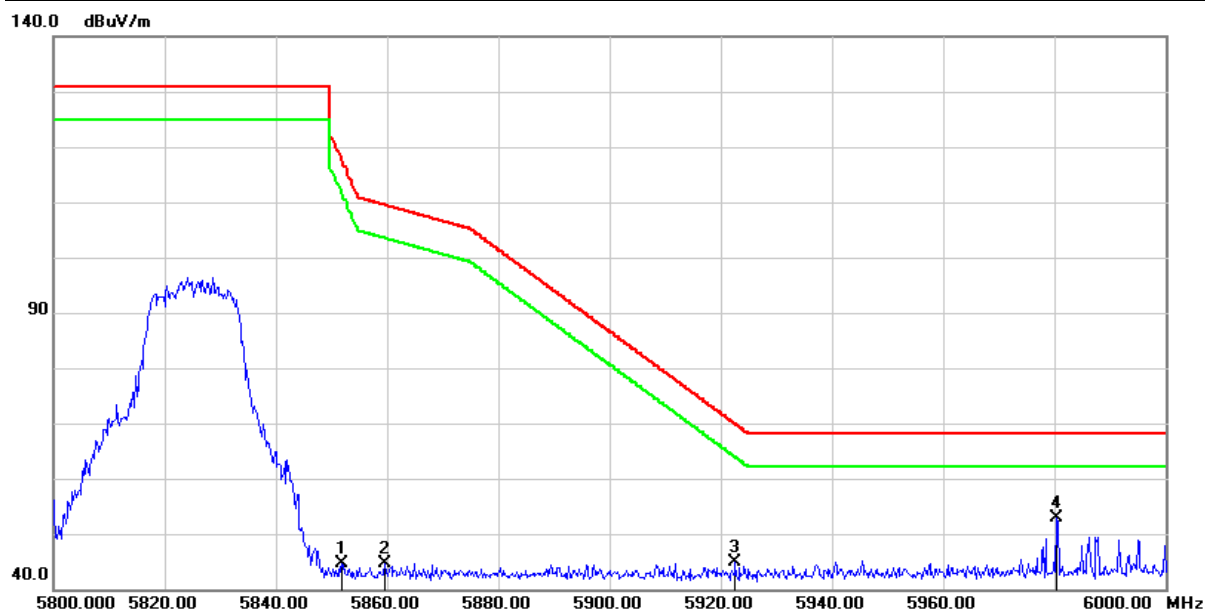


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5851.800        | 40.88            | 3.70                  | 44.58           | 118.10         | -73.52      | peak   |
| 2   | 5859.600        | 40.83            | 3.76                  | 44.59           | 109.51         | -64.92      | peak   |
| 3   | 5922.600        | 40.85            | 4.08                  | 44.93           | 69.98          | -25.05      | peak   |
| 4   | 5980.400        | 48.75            | 4.21                  | 52.96           | 68.20          | -15.24      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH36(5180MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

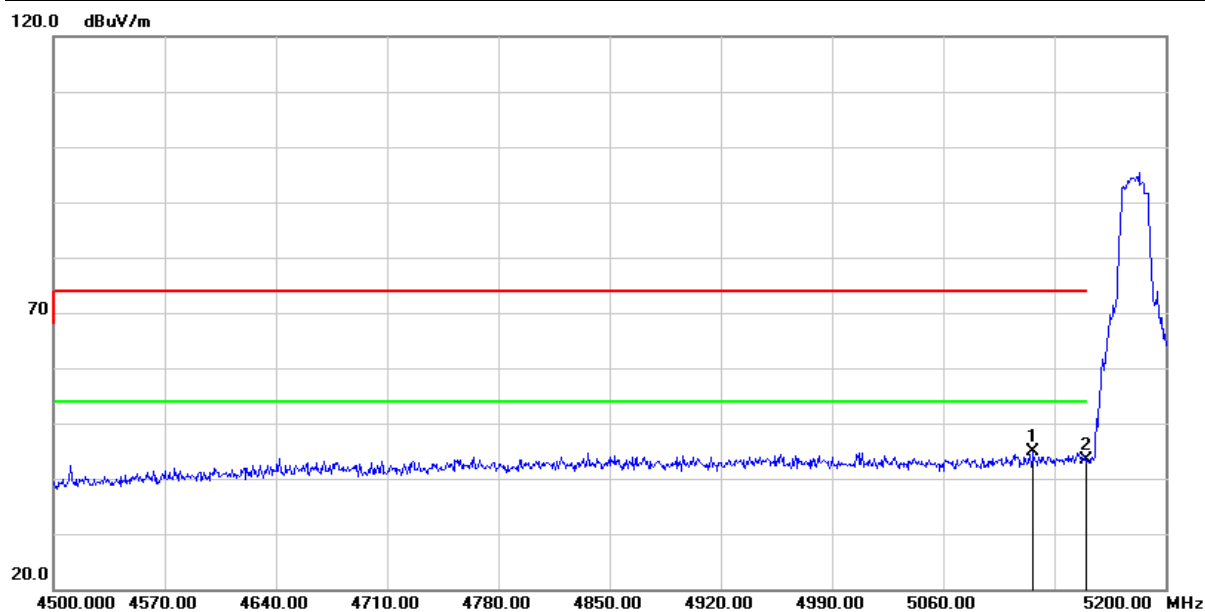


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5116.700        | 41.84            | 3.07                  | 44.91           | 74.00          | -29.09      | peak   |
| 2   | 5150.000        | 40.14            | 3.14                  | 43.28           | 74.00          | -30.72      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH36(5180MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

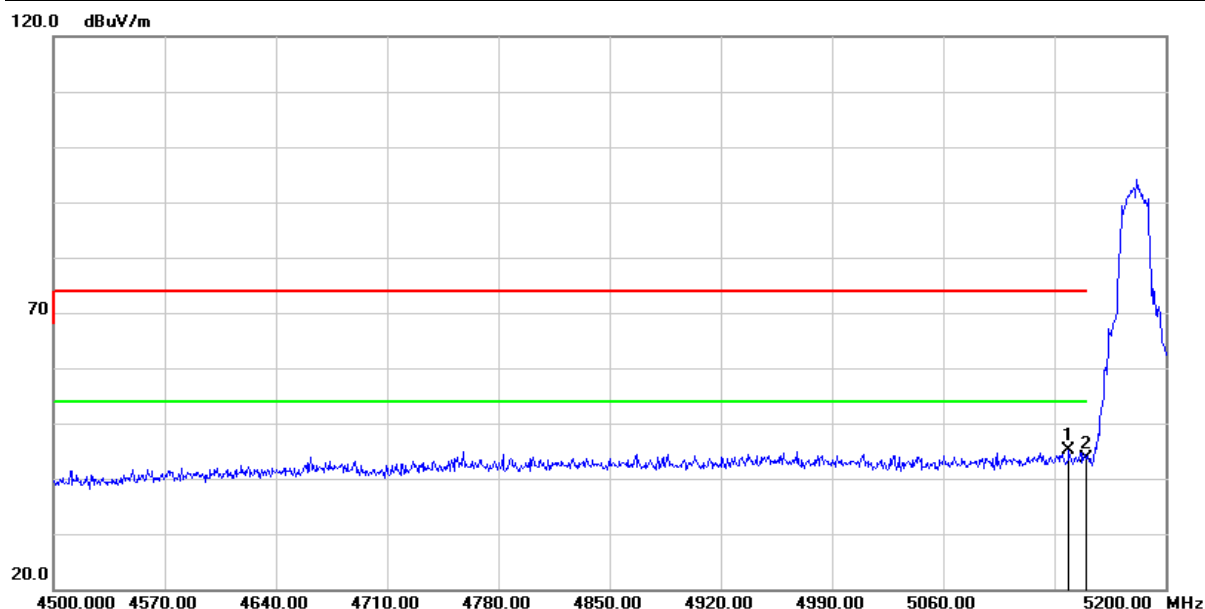


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5139.100        | 42.01            | 3.12                  | 45.13           | 74.00          | -28.87      | peak   |
| 2   | 5150.000        | 40.59            | 3.14                  | 43.73           | 74.00          | -30.27      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH64(5320MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

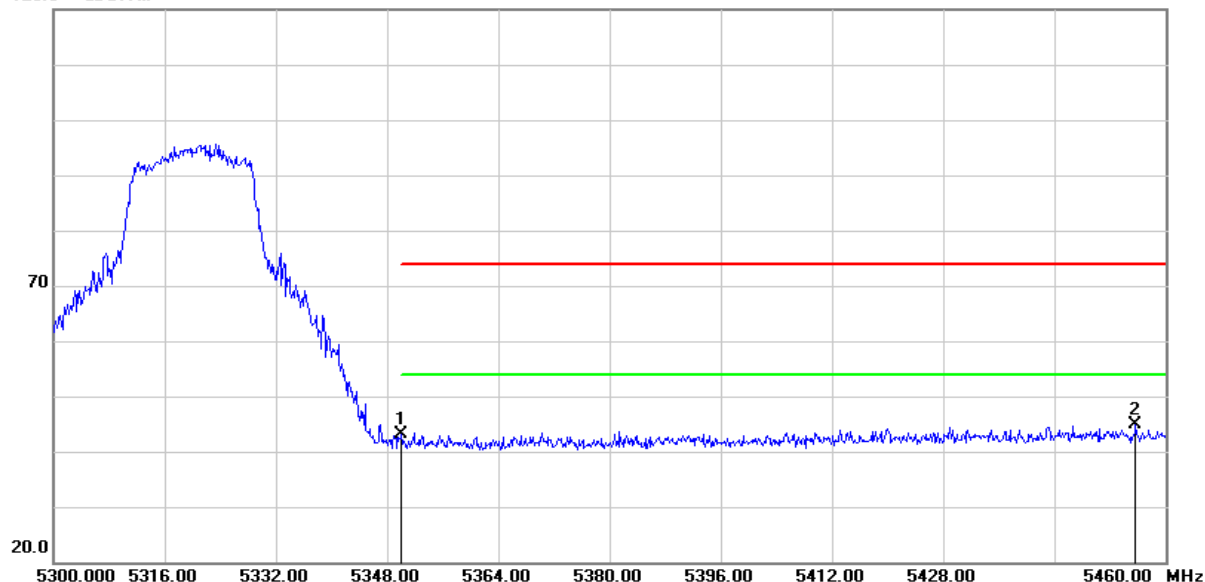


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 40.73            | 2.46                  | 43.19           | 74.00          | -30.81      | peak   |
| 2   | 5455.680        | 42.00            | 2.87                  | 44.87           | 74.00          | -29.13      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH64(5320MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

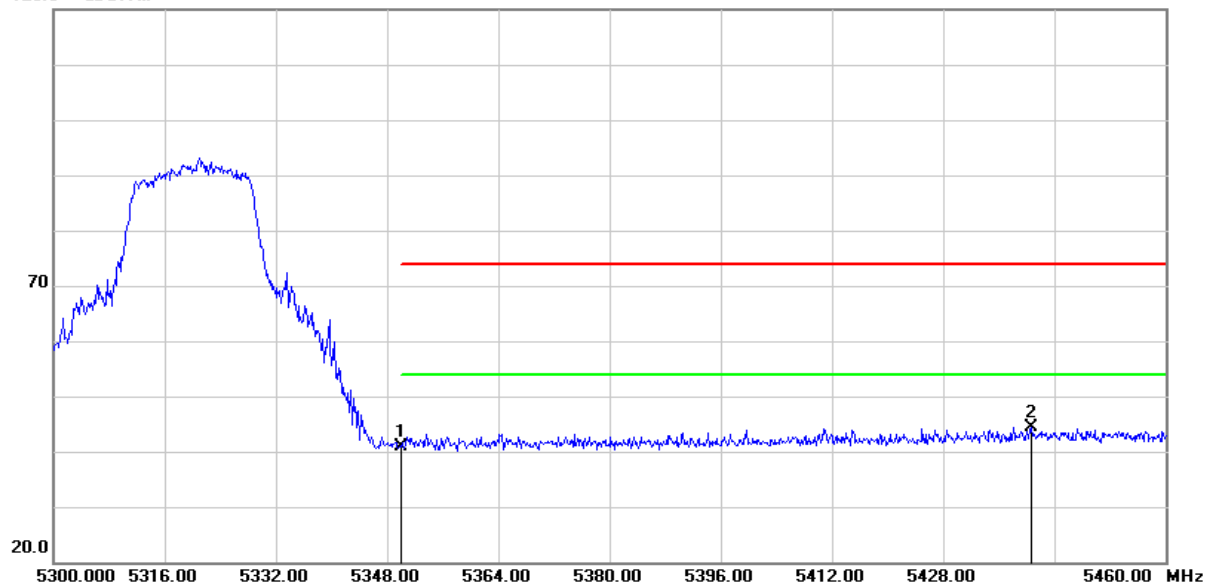


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 38.39            | 2.46                  | 40.85           | 74.00          | -33.15      | peak   |
| 2   | 5440.640        | 41.54            | 2.80                  | 44.34           | 74.00          | -29.66      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH100(5500MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

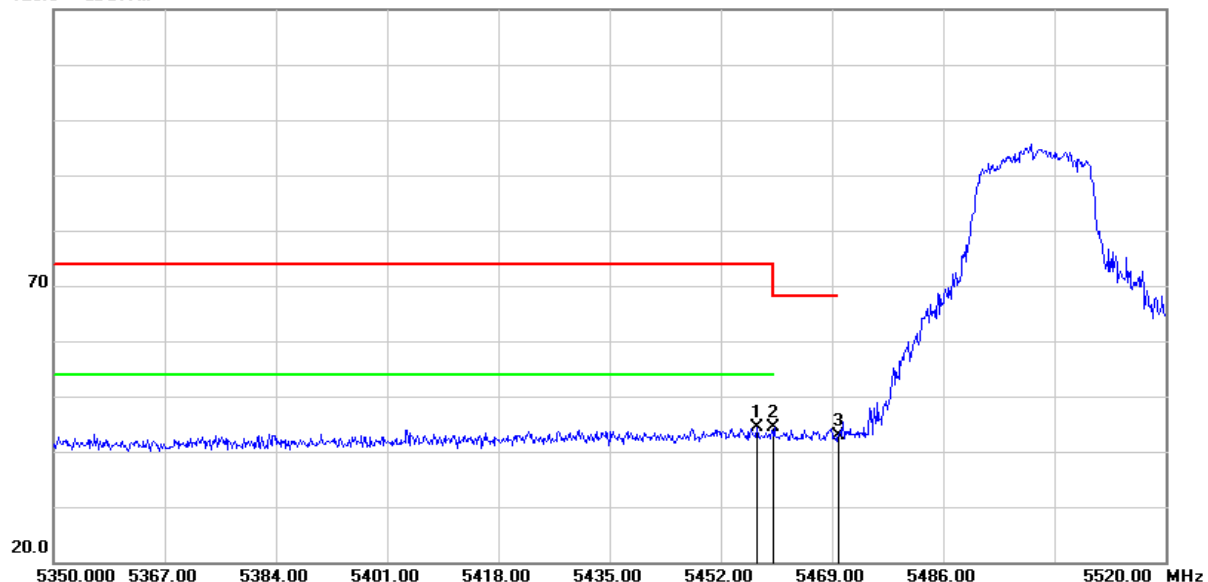


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5457.440        | 41.41            | 2.87                  | 44.28           | 74.00          | -29.72      | peak   |
| 2   | 5460.000        | 41.62            | 2.87                  | 44.49           | 74.00          | -29.51      | peak   |
| 3   | 5470.000        | 40.02            | 2.90                  | 42.92           | 68.20          | -25.28      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH100(5500MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

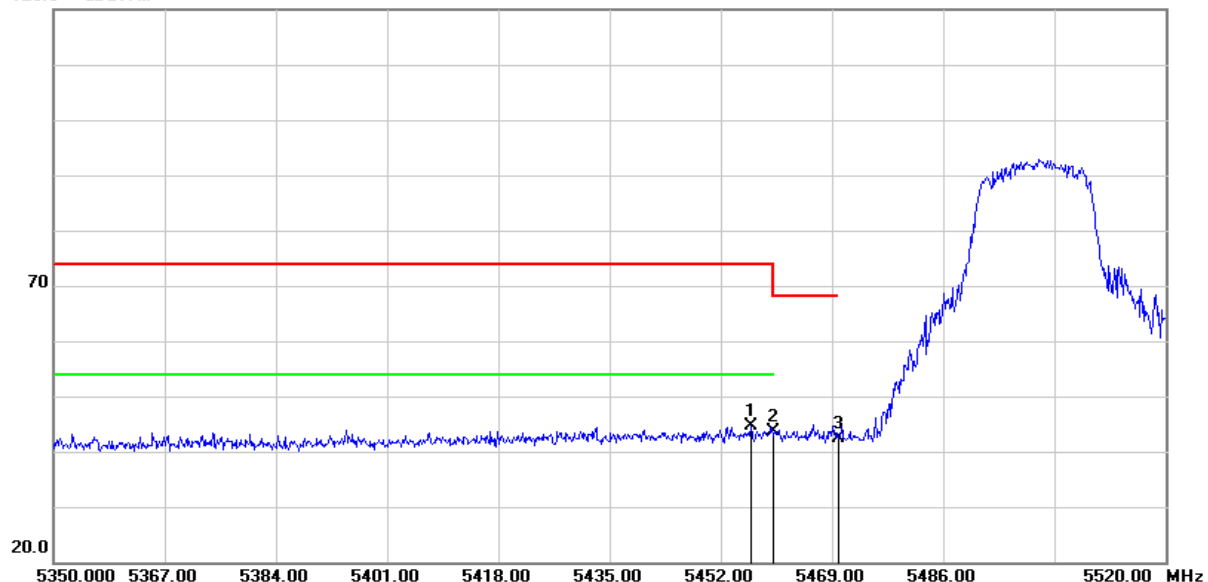


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5456.590        | 41.78            | 2.87                  | 44.65           | 74.00          | -29.35      | peak   |
| 2   | 5460.000        | 40.80            | 2.87                  | 43.67           | 74.00          | -30.33      | peak   |
| 3   | 5470.000        | 39.47            | 2.90                  | 42.37           | 68.20          | -25.83      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH149(5745MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

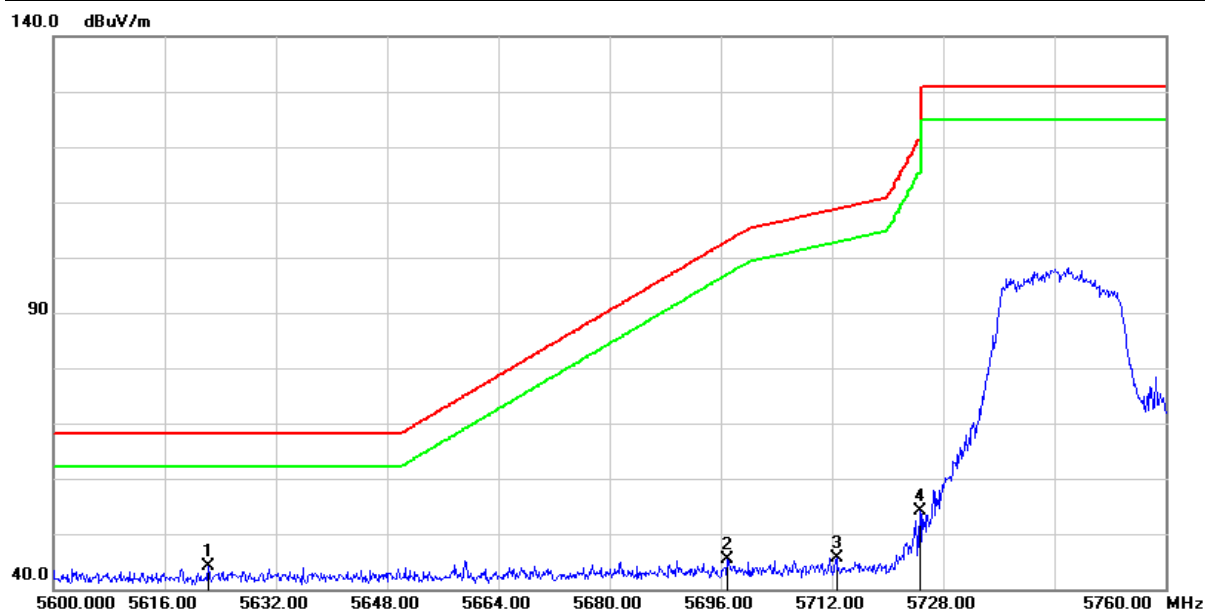


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5622.240        | 40.90            | 3.11                  | 44.01           | 68.20          | -24.19      | peak   |
| 2   | 5696.960        | 41.95            | 3.39                  | 45.34           | 102.95         | -57.61      | peak   |
| 3   | 5712.640        | 42.14            | 3.42                  | 45.56           | 108.74         | -63.18      | peak   |
| 4   | 5724.640        | 50.78            | 3.43                  | 54.21           | 121.38         | -67.17      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH149(5745MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

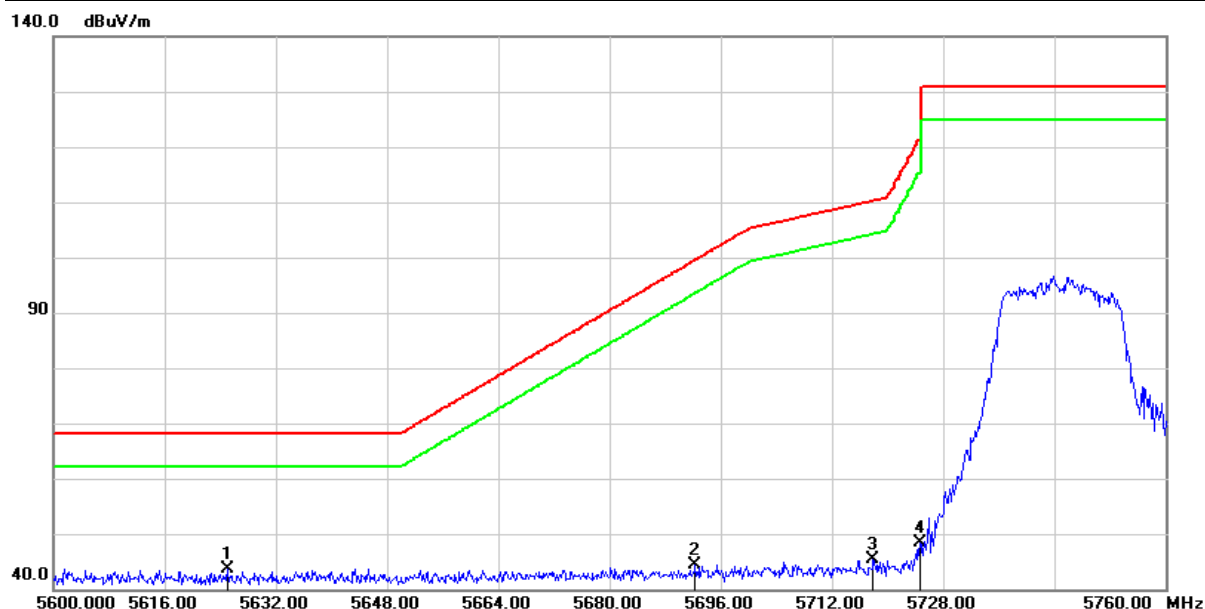

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5624.960        | 40.55            | 3.11                  | 43.66           | 68.20          | -24.54      | peak   |
| 2   | 5692.320        | 41.00            | 3.37                  | 44.37           | 99.52          | -55.15      | peak   |
| 3   | 5717.920        | 41.95            | 3.43                  | 45.38           | 110.22         | -64.84      | peak   |
| 4   | 5724.640        | 44.95            | 3.43                  | 48.38           | 121.38         | -73.00      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH165(5825MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |



| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5850.000        | 42.12            | 3.69                  | 45.81           | 122.20         | -76.39      | peak   |
| 2   | 5870.000        | 40.98            | 3.83                  | 44.81           | 106.60         | -61.79      | peak   |
| 3   | 5887.000        | 41.12            | 3.95                  | 45.07           | 96.32          | -51.25      | peak   |
| 4   | 5983.800        | 43.67            | 4.22                  | 47.89           | 68.20          | -20.31      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH165(5825MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |




| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5853.400        | 40.23            | 3.71                  | 43.94           | 114.45         | -70.51      | peak   |
| 2   | 5864.600        | 40.82            | 3.79                  | 44.61           | 108.11         | -63.50      | peak   |
| 3   | 5898.800        | 40.86            | 4.04                  | 44.90           | 87.59          | -42.69      | peak   |
| 4   | 5999.800        | 48.99            | 4.27                  | 53.26           | 68.20          | -14.94      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH38(5190MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

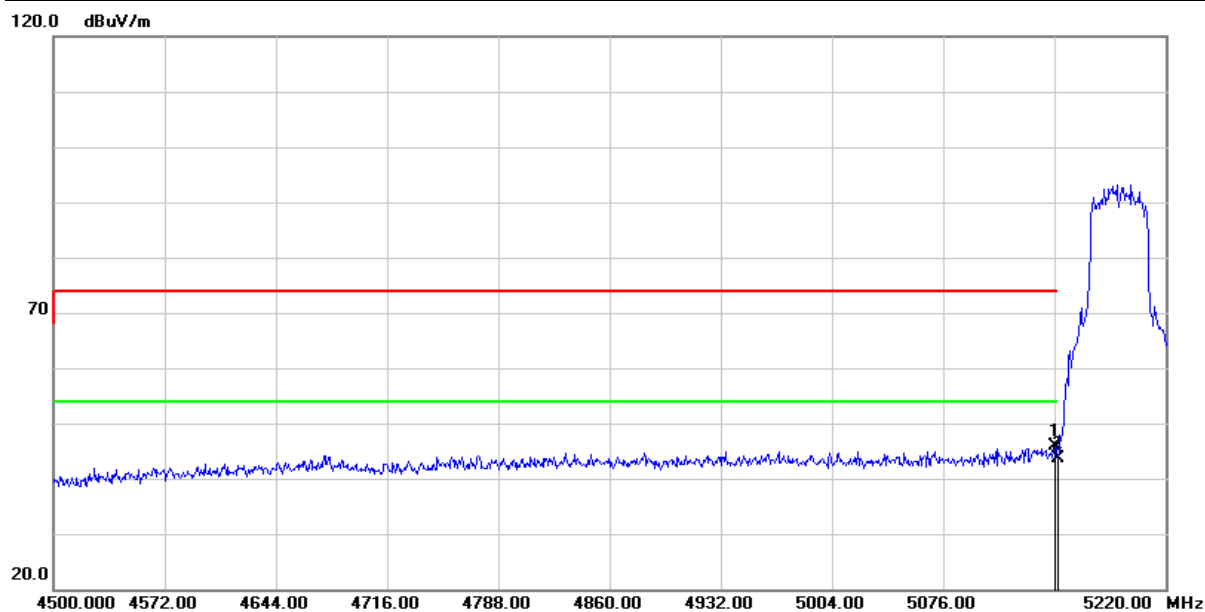


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5148.000        | 42.75            | 3.15                  | 45.90           | 74.00          | -28.10      | peak   |
| 2   | 5150.000        | 40.56            | 3.14                  | 43.70           | 74.00          | -30.30      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH38(5190MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

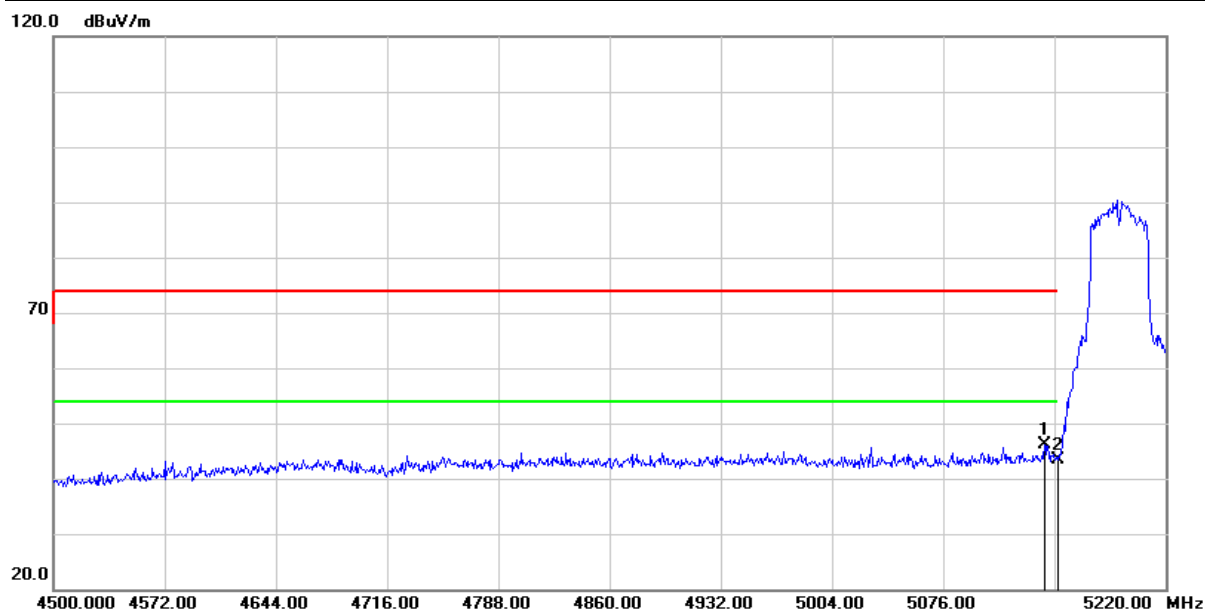


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5141.520        | 42.91            | 3.12                  | 46.03           | 74.00          | -27.97      | peak   |
| 2   | 5150.000        | 40.35            | 3.14                  | 43.49           | 74.00          | -30.51      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH62(5310MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

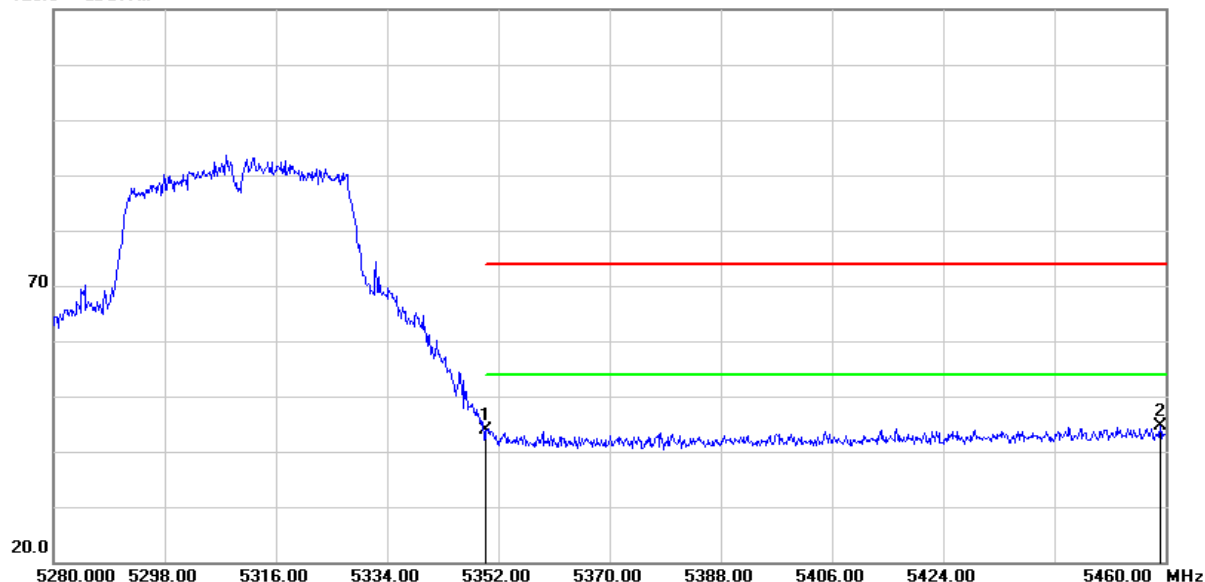


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 41.30            | 2.46                  | 43.76           | 74.00          | -30.24      | peak   |
| 2   | 5459.100        | 41.80            | 2.87                  | 44.67           | 74.00          | -29.33      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH62(5310MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

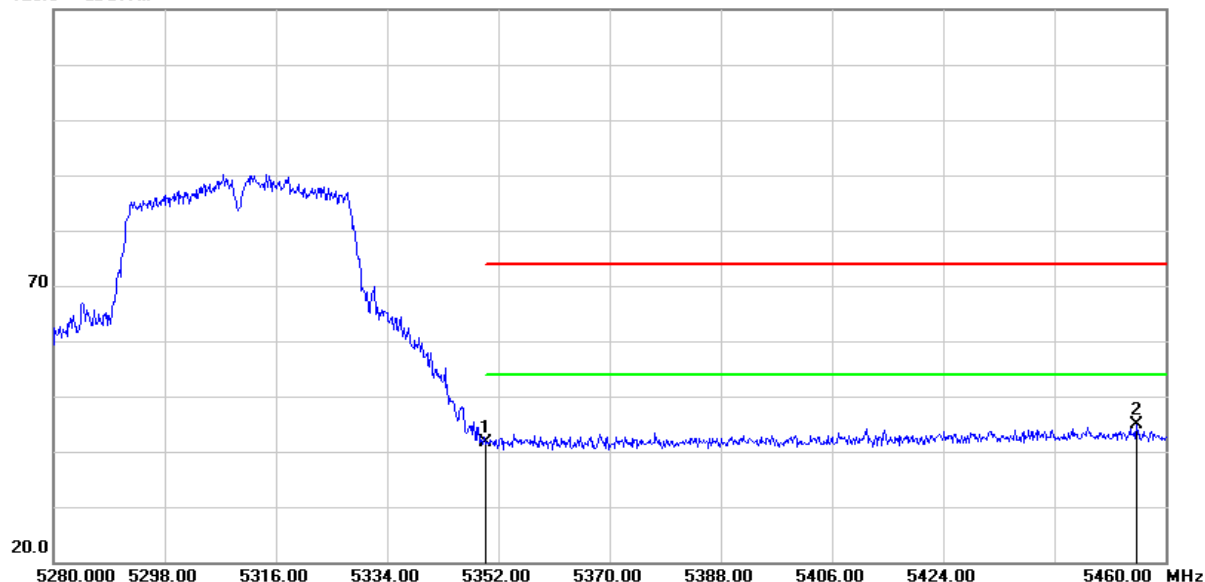


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 39.05            | 2.46                  | 41.51           | 74.00          | -32.49      | peak   |
| 2   | 5455.320        | 41.90            | 2.87                  | 44.77           | 74.00          | -29.23      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH102(5510MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

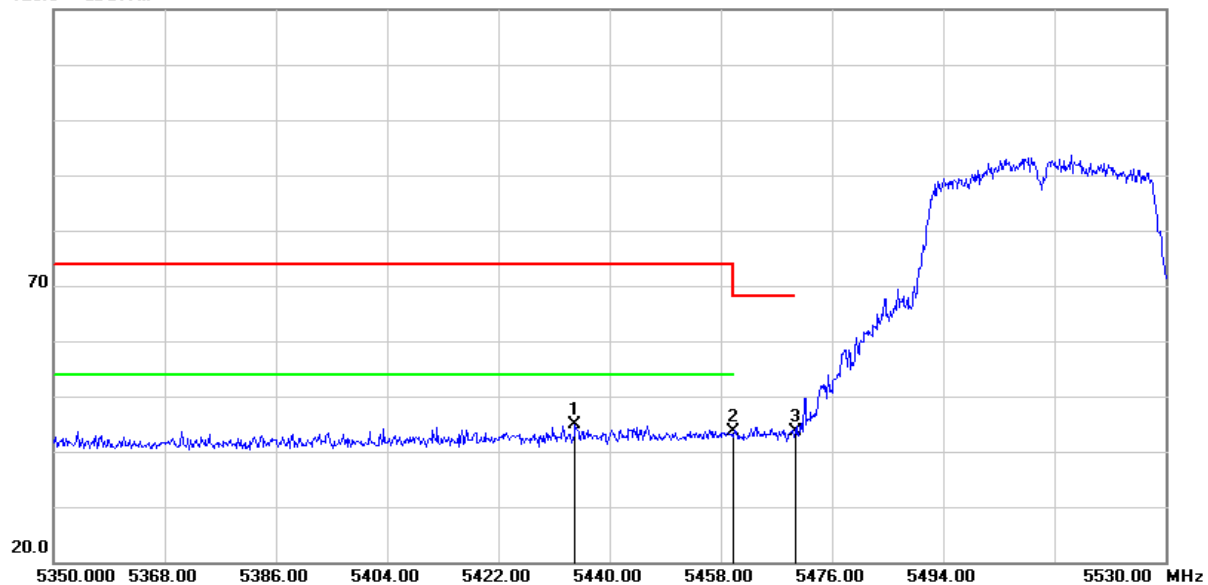


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5434.420        | 41.99            | 2.77                  | 44.76           | 74.00          | -29.24      | peak   |
| 2   | 5460.000        | 40.74            | 2.87                  | 43.61           | 74.00          | -30.39      | peak   |
| 3   | 5470.000        | 40.65            | 2.90                  | 43.55           | 68.20          | -24.65      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH102(5510MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

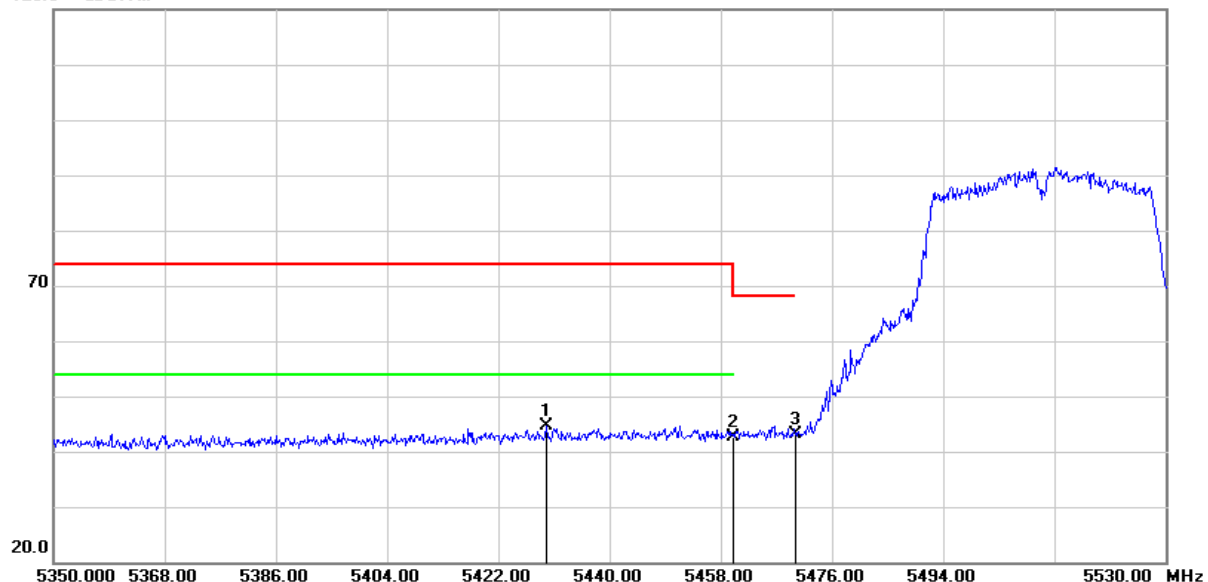


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5429.740        | 41.85            | 2.74                  | 44.59           | 74.00          | -29.41      | peak   |
| 2   | 5460.000        | 39.66            | 2.87                  | 42.53           | 74.00          | -31.47      | peak   |
| 3   | 5470.000        | 40.11            | 2.90                  | 43.01           | 68.20          | -25.19      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH151(5755MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

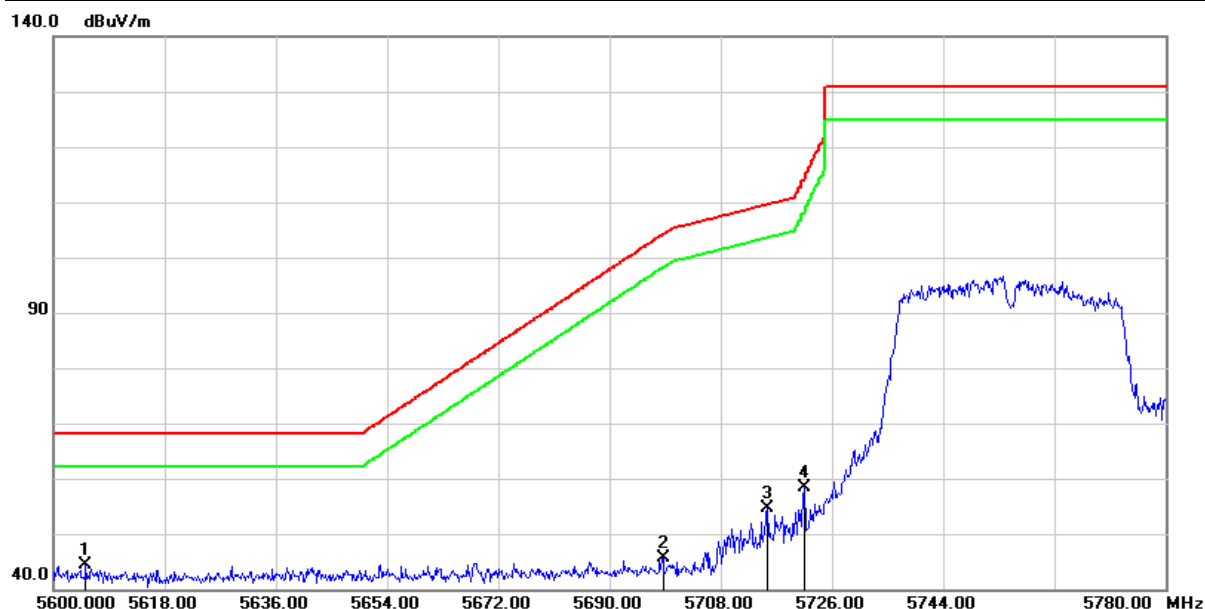


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5605.220        | 41.35            | 3.08                  | 44.43           | 68.20          | -23.77      | peak   |
| 2   | 5698.640        | 42.20            | 3.39                  | 45.59           | 104.19         | -58.60      | peak   |
| 3   | 5715.560        | 51.28            | 3.42                  | 54.70           | 109.56         | -54.86      | peak   |
| 4   | 5721.500        | 55.03            | 3.43                  | 58.46           | 114.22         | -55.76      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH151(5755MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

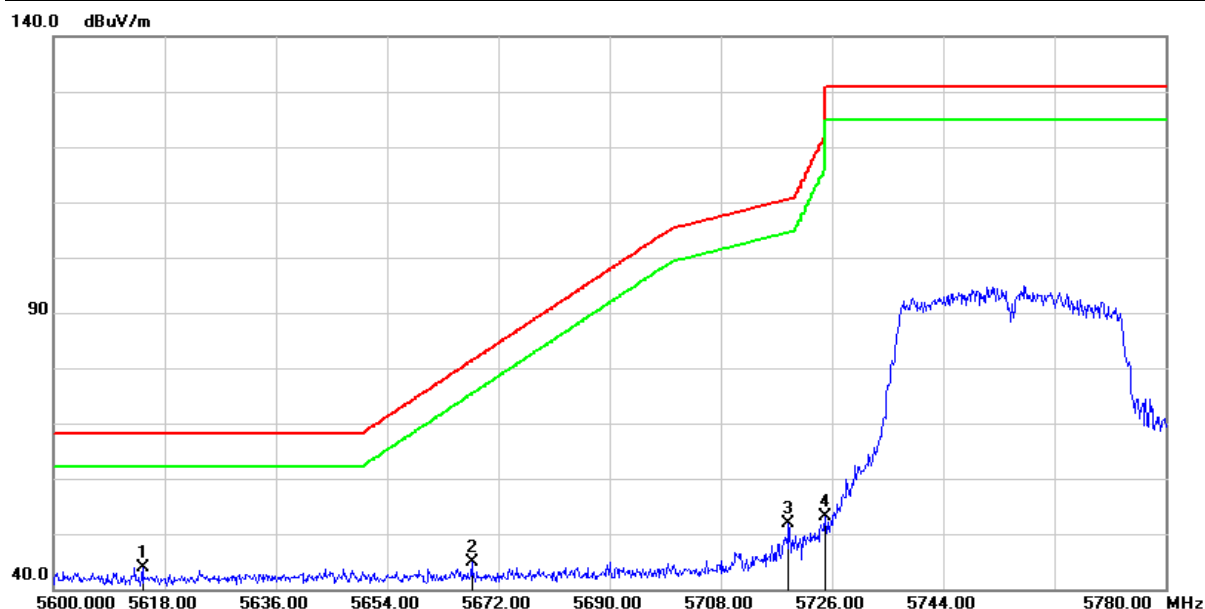


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5614.400        | 40.81            | 3.10                  | 43.91           | 68.20          | -24.29      | peak   |
| 2   | 5667.680        | 41.58            | 3.23                  | 44.81           | 81.28          | -36.47      | peak   |
| 3   | 5718.980        | 48.56            | 3.43                  | 51.99           | 110.51         | -58.52      | peak   |
| 4   | 5724.920        | 49.59            | 3.43                  | 53.02           | 122.02         | -69.00      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH159(5795MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

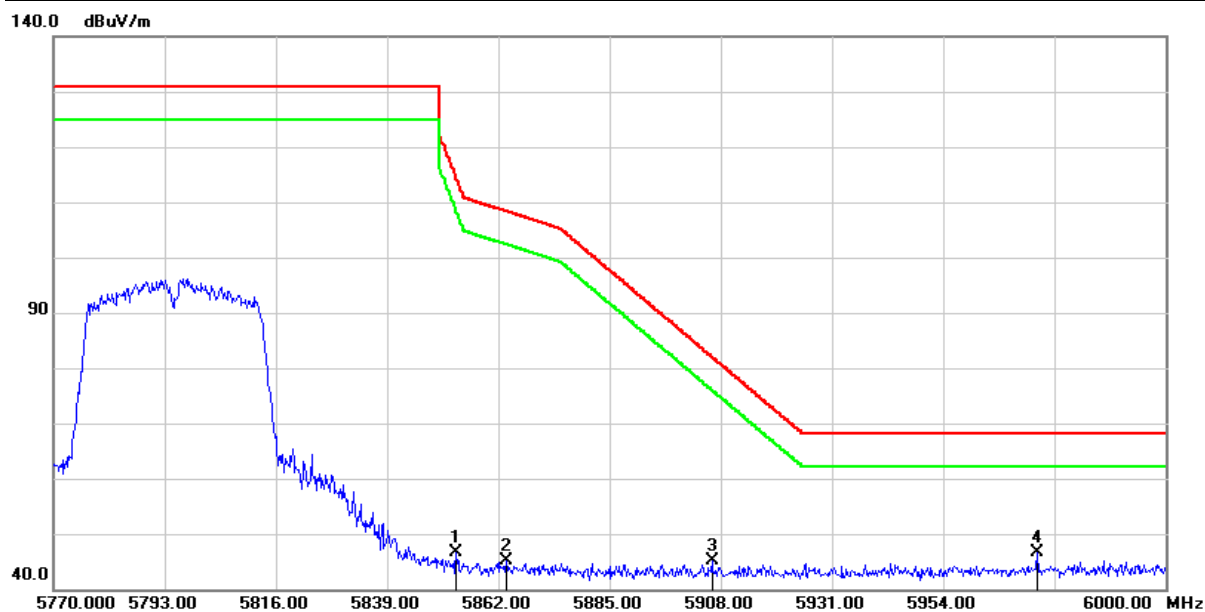


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5853.260        | 42.84            | 3.71                  | 46.55           | 114.77         | -68.22      | peak   |
| 2   | 5863.610        | 41.26            | 3.78                  | 45.04           | 108.39         | -63.35      | peak   |
| 3   | 5906.160        | 41.08            | 4.06                  | 45.14           | 82.14          | -37.00      | peak   |
| 4   | 5973.550        | 42.52            | 4.19                  | 46.71           | 68.20          | -21.49      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH159(5795MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

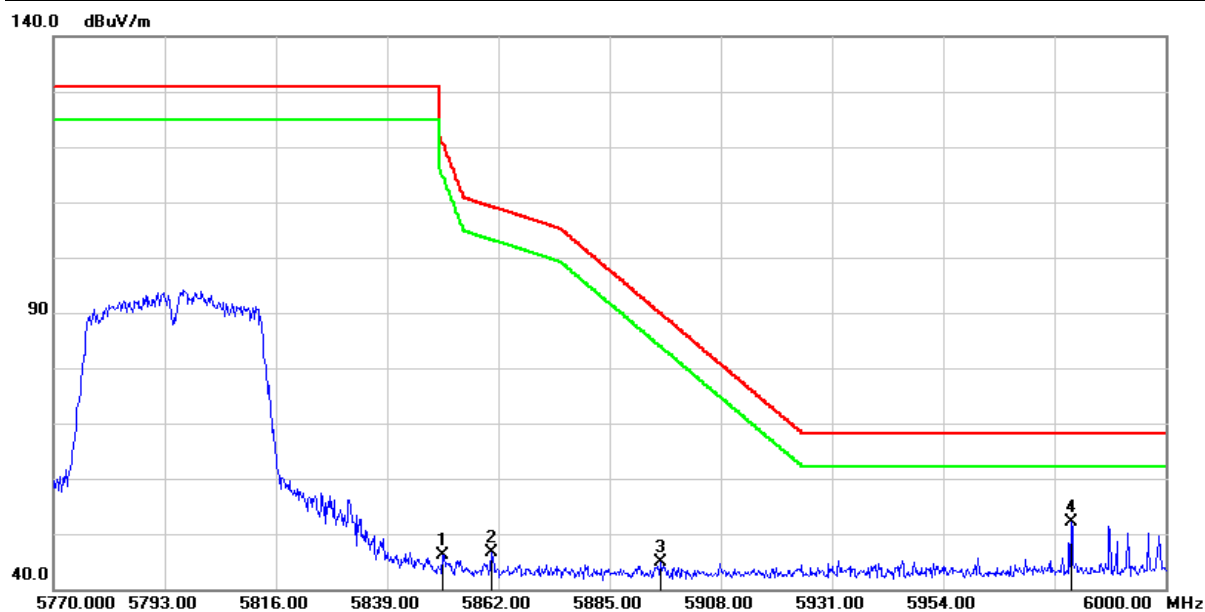


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5850.500        | 42.40            | 3.69                  | 46.09           | 121.06         | -74.97      | peak   |
| 2   | 5860.620        | 42.81            | 3.76                  | 46.57           | 109.23         | -62.66      | peak   |
| 3   | 5895.580        | 40.88            | 4.02                  | 44.90           | 89.97          | -45.07      | peak   |
| 4   | 5980.450        | 47.92            | 4.21                  | 52.13           | 68.20          | -16.07      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH42(5210MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

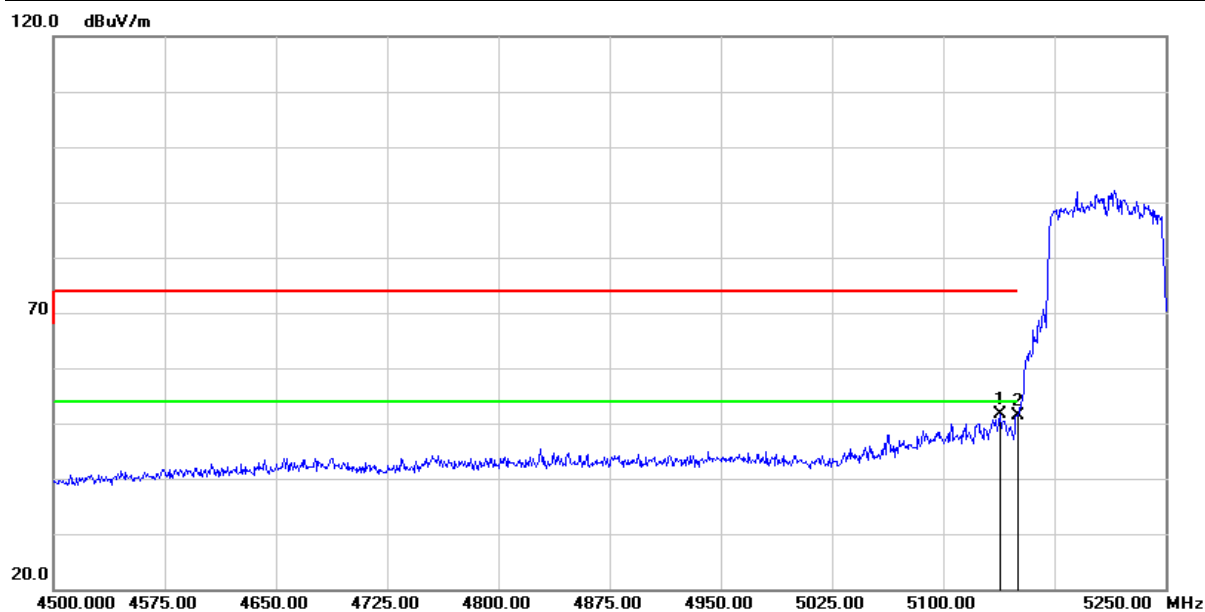


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5138.250        | 48.58            | 3.12                  | 51.70           | 74.00          | -22.30      | peak   |
| 2   | 5150.000        | 48.18            | 3.14                  | 51.32           | 74.00          | -22.68      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH42(5210MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

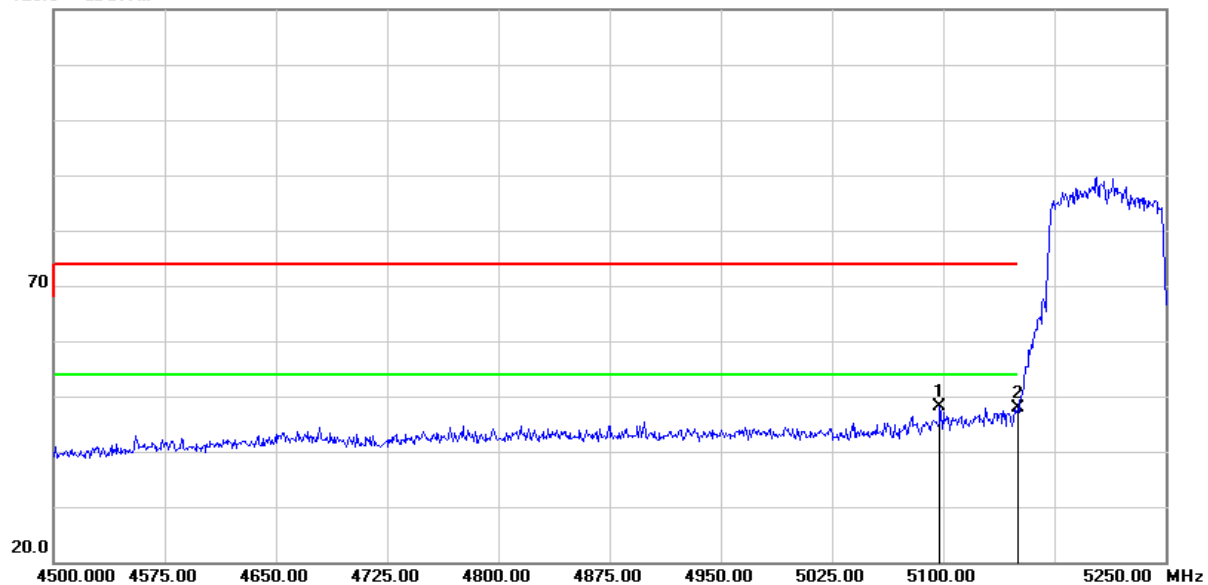


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5097.750        | 45.18            | 3.04                  | 48.22           | 74.00          | -25.78      | peak   |
| 2   | 5150.000        | 44.72            | 3.14                  | 47.86           | 74.00          | -26.14      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH58(5290MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

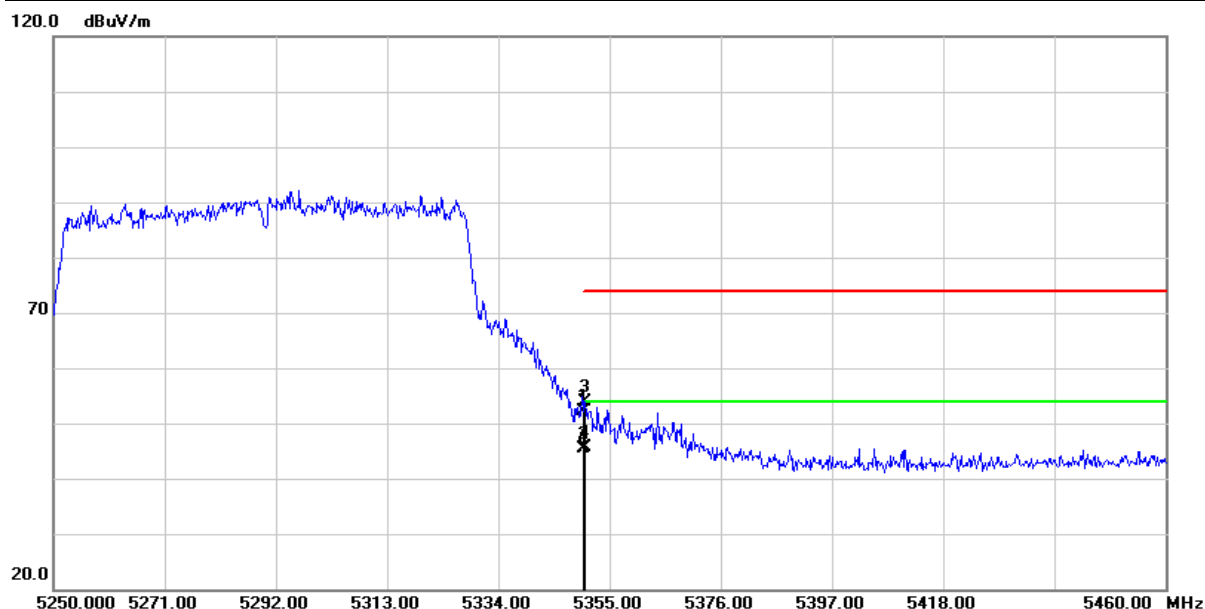


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 49.67            | 2.46                  | 52.13           | 74.00          | -21.87      | peak   |
| 2   | 5350.000        | 42.98            | 2.46                  | 45.44           | 54.00          | -8.56       | AVG    |
| 3   | 5350.380        | 51.52            | 2.46                  | 53.98           | 74.00          | -20.02      | peak   |
| 4   | 5350.380        | 43.07            | 2.46                  | 45.53           | 54.00          | -8.47       | AVG    |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH58(5290MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

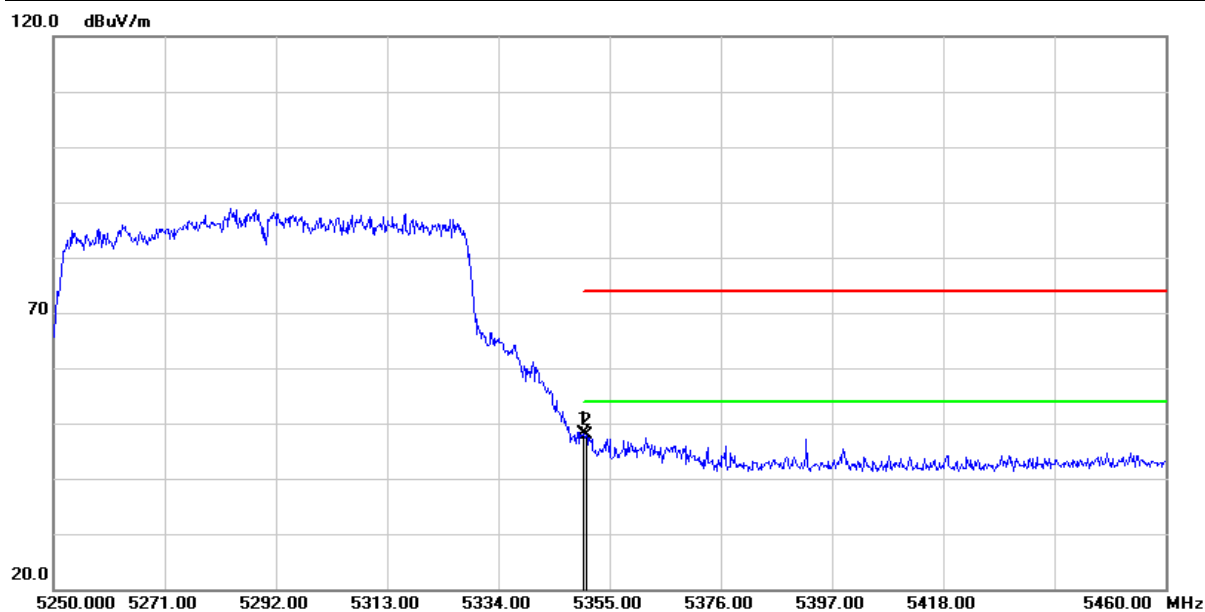


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 45.69            | 2.46                  | 48.15           | 74.00          | -25.85      | peak   |
| 2   | 5350.590        | 45.51            | 2.46                  | 47.97           | 74.00          | -26.03      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH106(5530MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

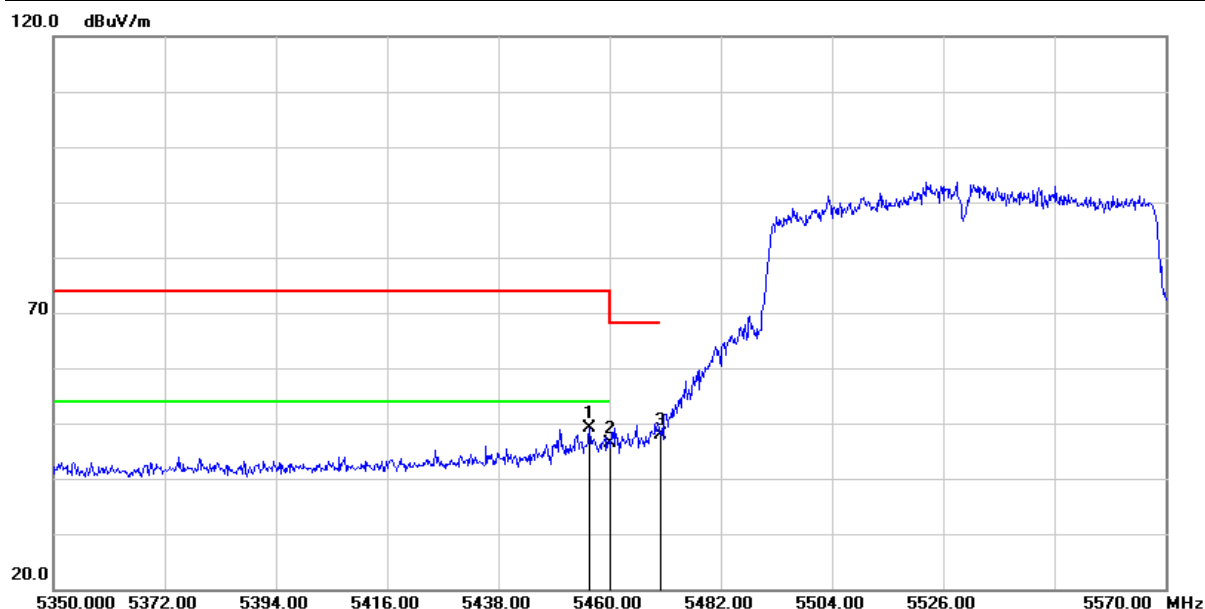


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5456.040        | 46.30            | 2.87                  | 49.17           | 74.00          | -24.83      | peak   |
| 2   | 5460.000        | 43.40            | 2.87                  | 46.27           | 74.00          | -27.73      | peak   |
| 3   | 5470.000        | 44.88            | 2.90                  | 47.78           | 68.20          | -20.42      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH106(5530MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

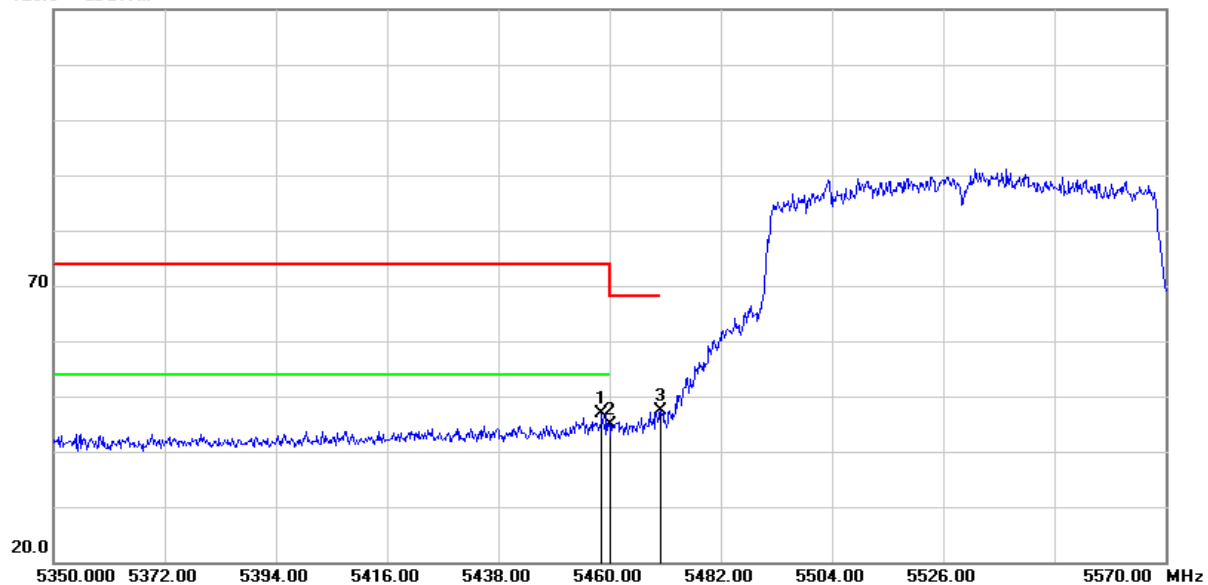


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5458.460        | 43.94            | 2.87                  | 46.81           | 74.00          | -27.19      | peak   |
| 2   | 5460.000        | 41.96            | 2.87                  | 44.83           | 74.00          | -29.17      | peak   |
| 3   | 5470.000        | 44.44            | 2.90                  | 47.34           | 68.20          | -20.86      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH155(5775MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

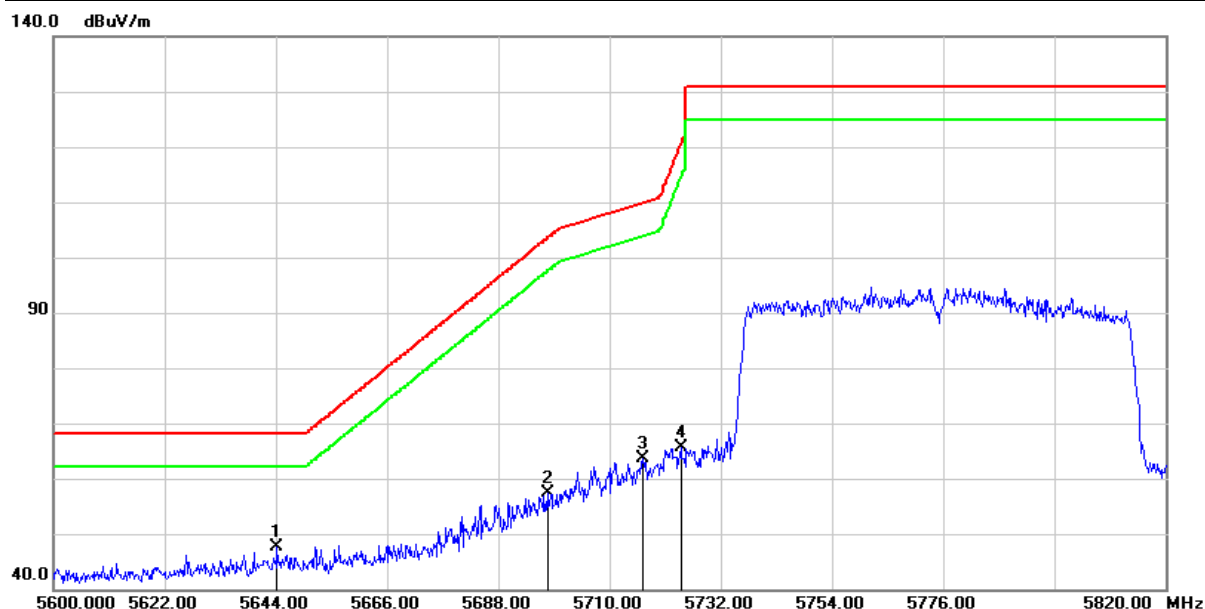


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5644.220        | 44.54            | 3.14                  | 47.68           | 68.20          | -20.52      | peak   |
| 2   | 5697.680        | 54.02            | 3.39                  | 57.41           | 103.48         | -46.07      | peak   |
| 3   | 5716.600        | 60.09            | 3.42                  | 63.51           | 109.85         | -46.34      | peak   |
| 4   | 5724.080        | 62.08            | 3.43                  | 65.51           | 120.10         | -54.59      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH155(5775MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

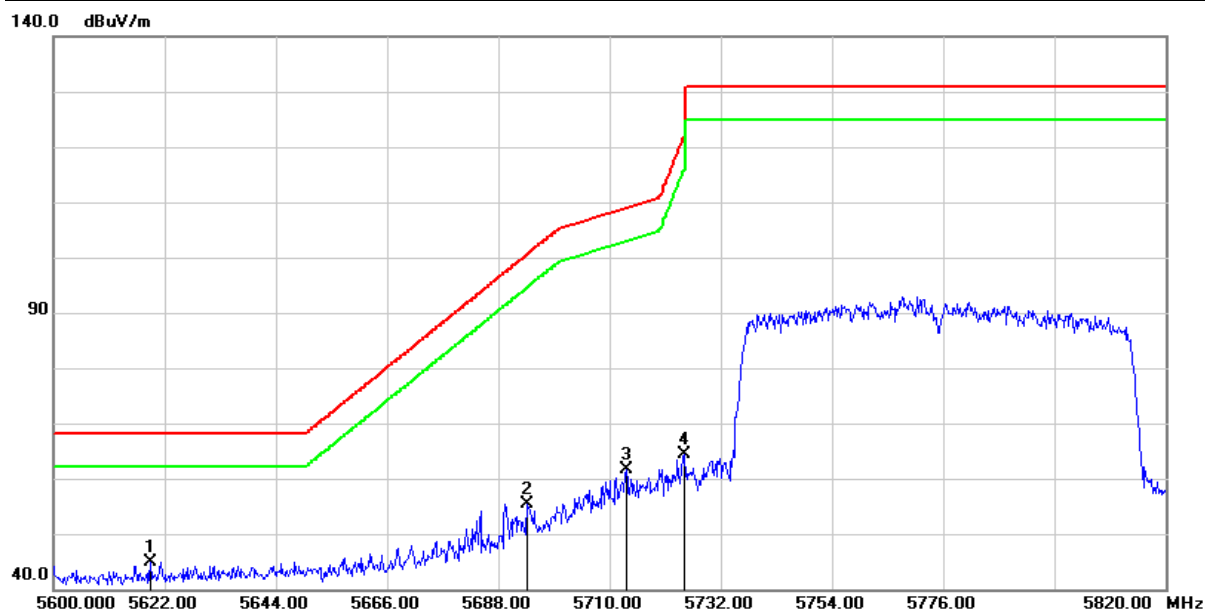


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5619.140        | 41.85            | 3.11                  | 44.96           | 68.20          | -23.24      | peak   |
| 2   | 5693.720        | 51.99            | 3.37                  | 55.36           | 100.55         | -45.19      | peak   |
| 3   | 5713.300        | 58.26            | 3.42                  | 61.68           | 108.92         | -47.24      | peak   |
| 4   | 5724.740        | 60.90            | 3.43                  | 64.33           | 121.61         | -57.28      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH155(5775MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

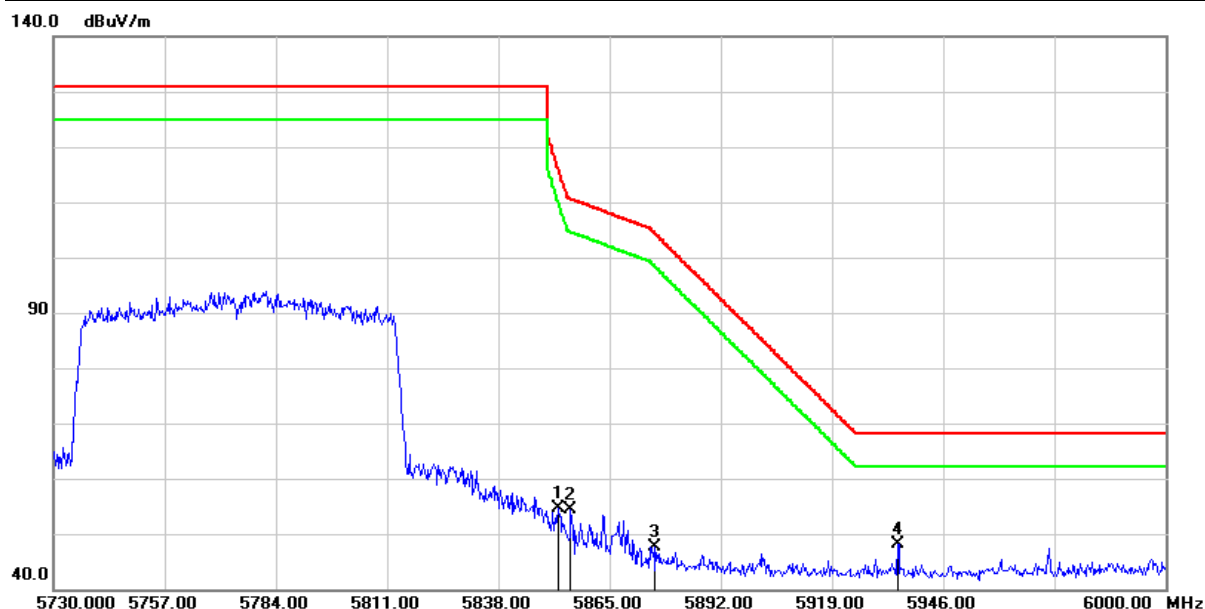


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5852.580        | 50.81            | 3.71                  | 54.52           | 116.32         | -61.80      | peak   |
| 2   | 5855.550        | 50.56            | 3.72                  | 54.28           | 110.65         | -56.37      | peak   |
| 3   | 5875.800        | 43.71            | 3.87                  | 47.58           | 104.61         | -57.03      | peak   |
| 4   | 5934.930        | 44.04            | 4.09                  | 48.13           | 68.20          | -20.07      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH155(5775MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

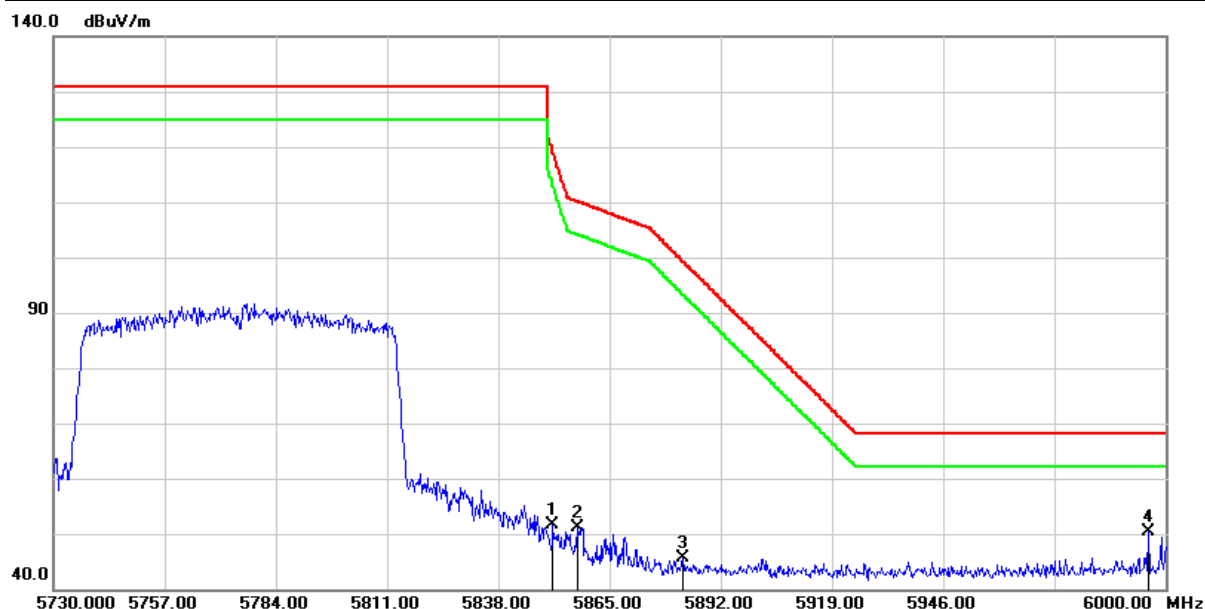


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5851.230        | 48.00            | 3.70                  | 51.70           | 119.40         | -67.70      | peak   |
| 2   | 5857.170        | 47.37            | 3.74                  | 51.11           | 110.19         | -59.08      | peak   |
| 3   | 5882.820        | 41.64            | 3.92                  | 45.56           | 99.41          | -53.85      | peak   |
| 4   | 5995.950        | 46.18            | 4.26                  | 50.44           | 68.20          | -17.76      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH50(5250MHz)                            | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

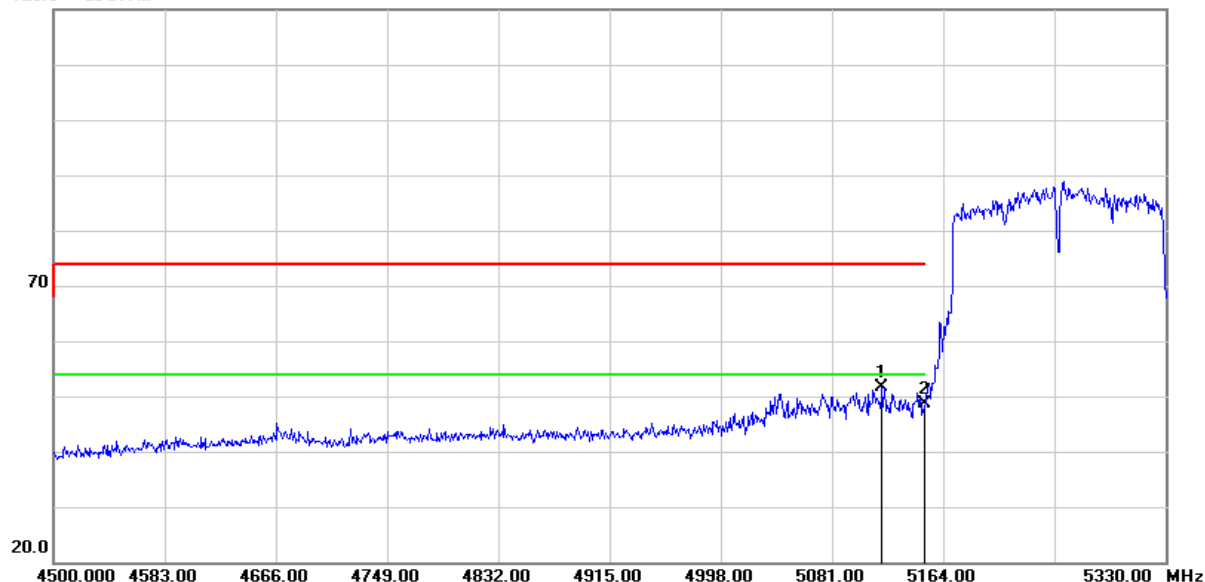


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5118.350        | 48.50            | 3.08                  | 51.58           | 74.00          | -22.42      | peak   |
| 2   | 5150.000        | 45.38            | 3.14                  | 48.52           | 74.00          | -25.48      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH50(5250MHz)                            | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 49 %       |

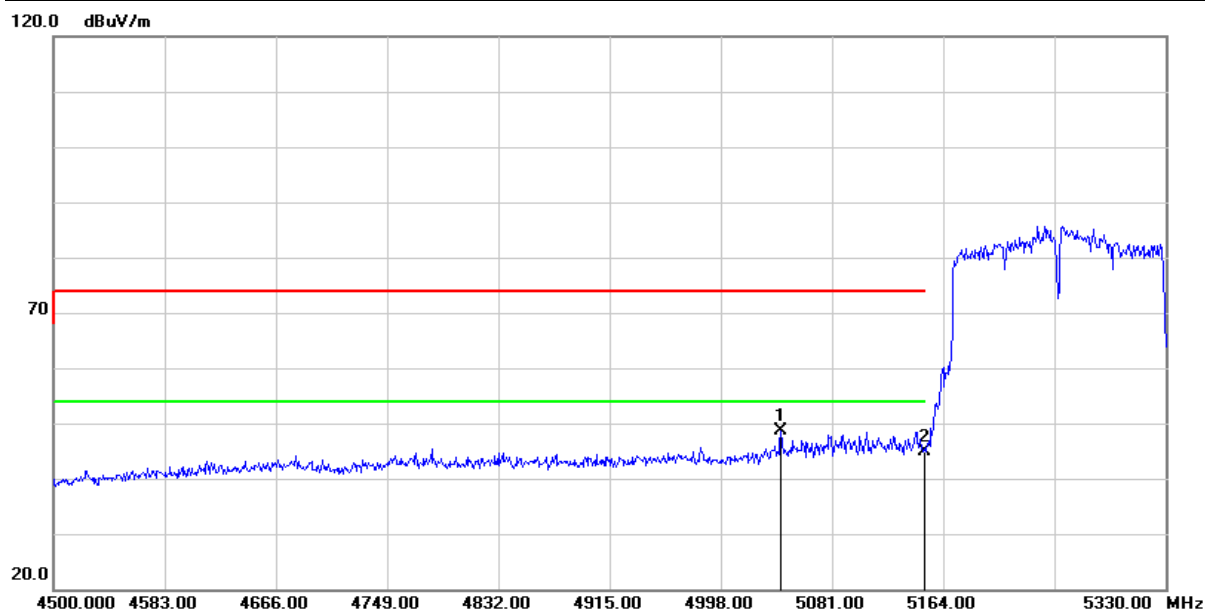


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5042.820        | 45.86            | 2.74                  | 48.60           | 74.00          | -25.40      | peak   |
| 2   | 5150.000        | 41.69            | 3.14                  | 44.83           | 74.00          | -29.17      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH50(5250MHz)                            | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

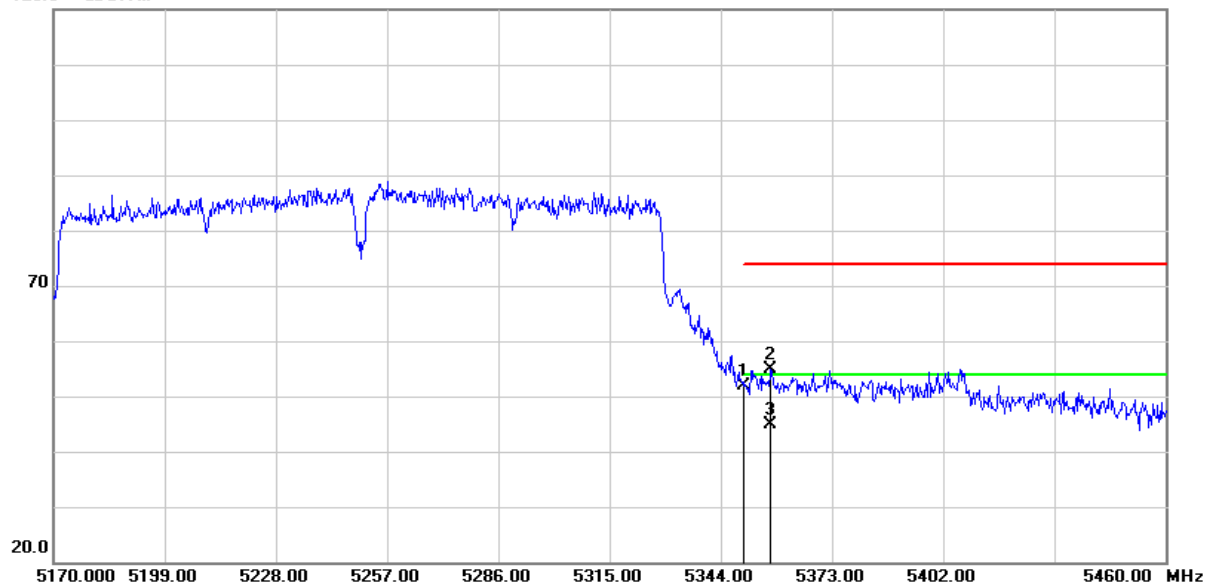


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 49.38            | 2.46                  | 51.84           | 74.00          | -22.16      | peak   |
| 2   | 5357.050        | 52.48            | 2.46                  | 54.94           | 74.00          | -19.06      | peak   |
| 3   | 5357.050        | 42.47            | 2.46                  | 44.93           | 54.00          | -9.07       | AVG    |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH50(5250MHz)                            | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

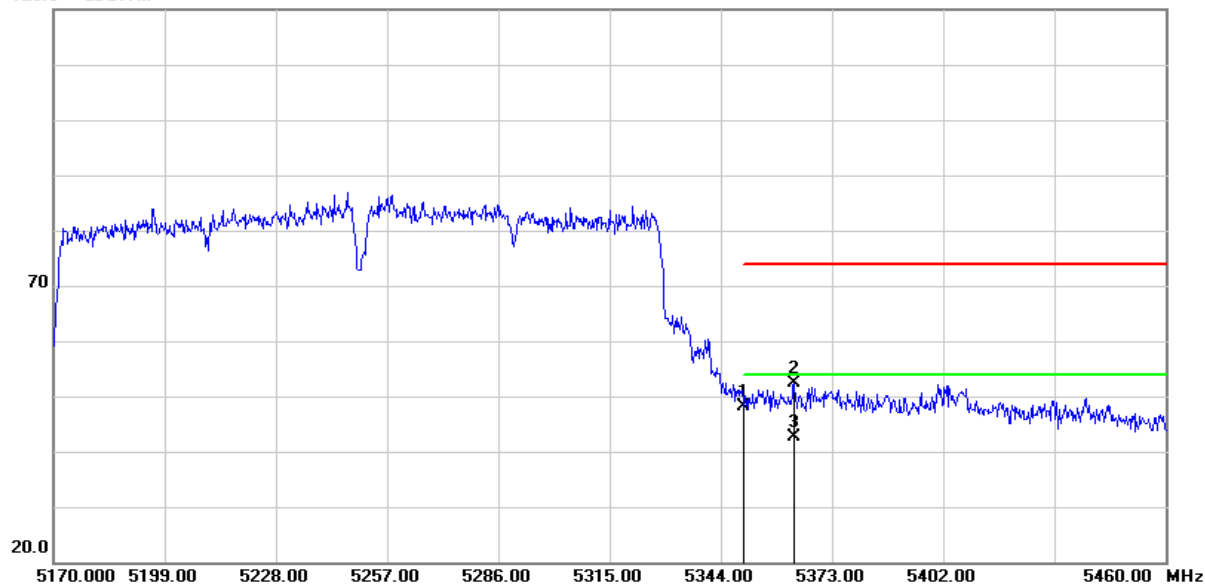


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 45.67            | 2.46                  | 48.13           | 74.00          | -25.87      | peak   |
| 2   | 5363.140        | 49.78            | 2.48                  | 52.26           | 74.00          | -21.74      | peak   |
| 3   | 5363.140        | 40.08            | 2.48                  | 42.56           | 54.00          | -11.44      | AVG    |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH114(5570MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

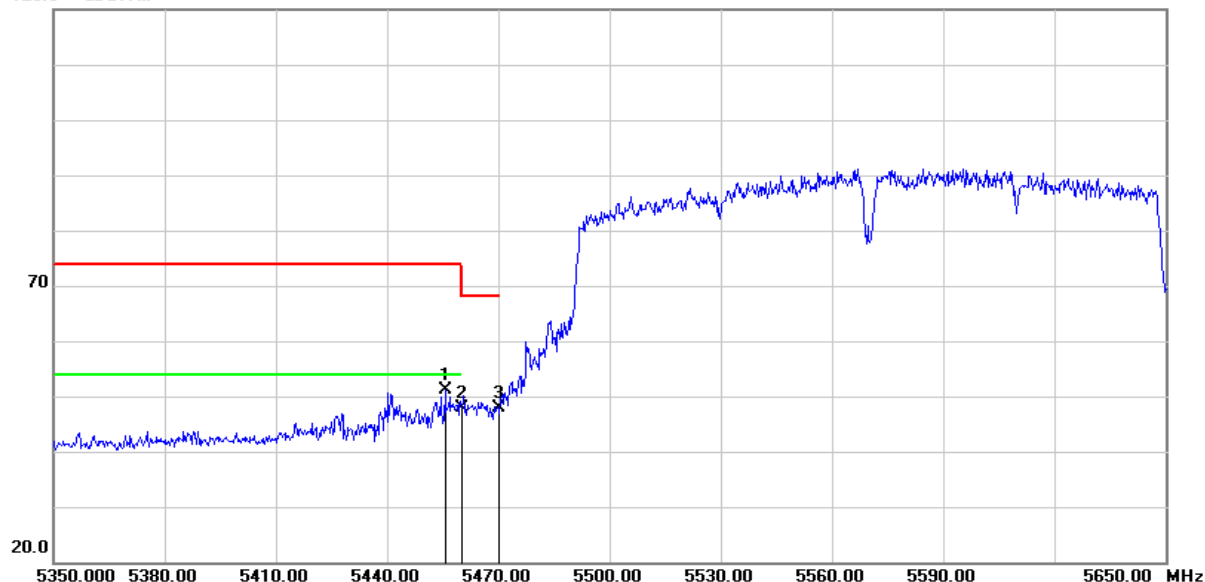


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5455.600        | 48.33            | 2.87                  | 51.20           | 74.00          | -22.80      | peak   |
| 2   | 5460.000        | 44.93            | 2.87                  | 47.80           | 74.00          | -26.20      | peak   |
| 3   | 5470.000        | 45.04            | 2.90                  | 47.94           | 68.20          | -20.26      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH114(5570MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

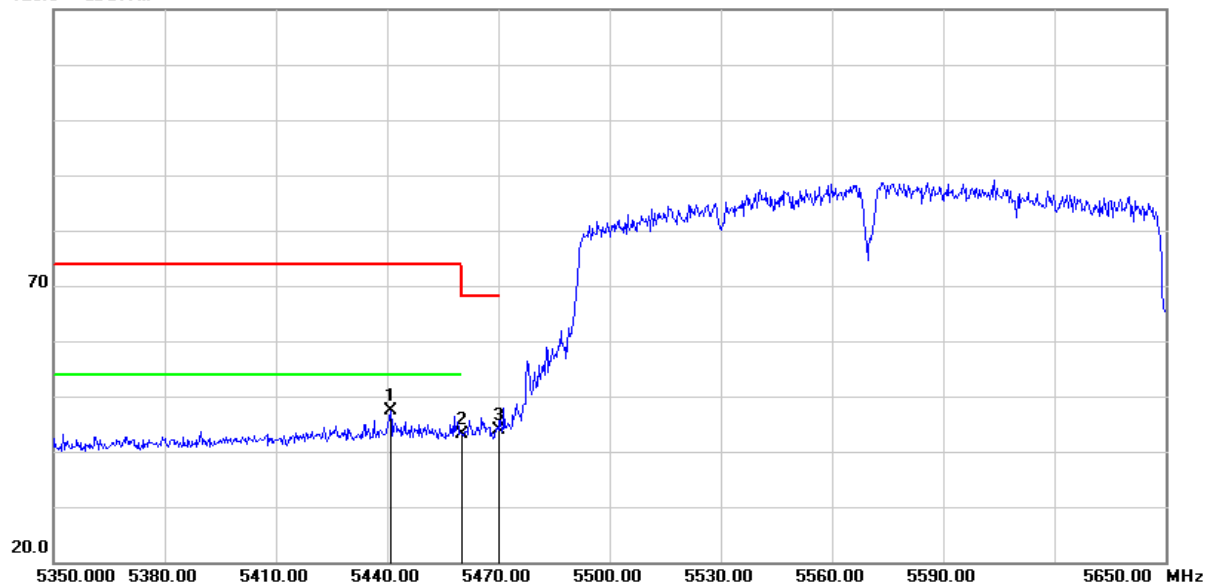


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5440.900        | 44.53            | 2.81                  | 47.34           | 74.00          | -26.66      | peak   |
| 2   | 5460.000        | 40.15            | 2.87                  | 43.02           | 74.00          | -30.98      | peak   |
| 3   | 5470.000        | 40.91            | 2.90                  | 43.81           | 68.20          | -24.39      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH36(5180MHz)                            | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 49 %       |

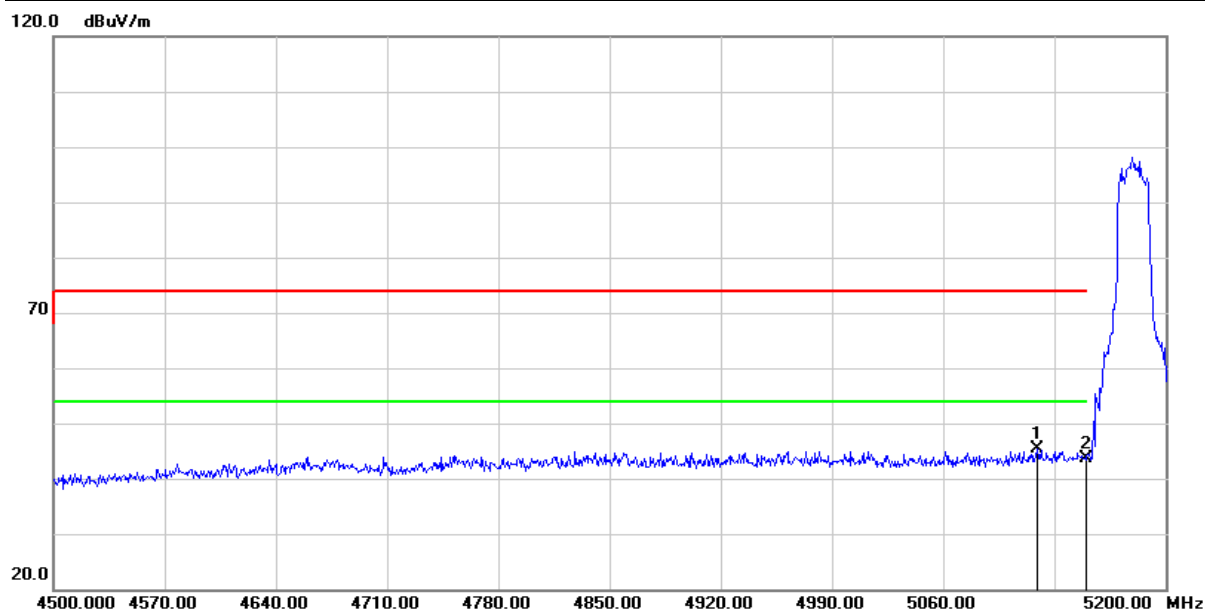


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5119.500        | 42.30            | 3.09                  | 45.39           | 74.00          | -28.61      | peak   |
| 2   | 5150.000        | 40.61            | 3.14                  | 43.75           | 74.00          | -30.25      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH36(5180MHz)                            | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 49 %       |

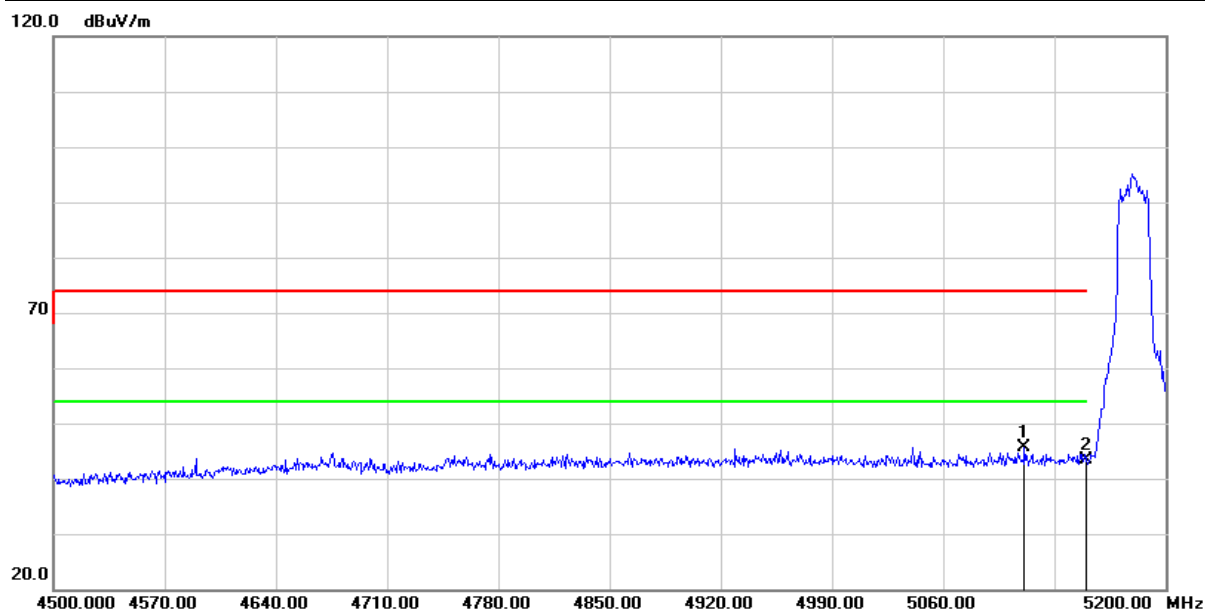


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5111.100        | 42.46            | 3.07                  | 45.53           | 74.00          | -28.47      | peak   |
| 2   | 5150.000        | 40.16            | 3.14                  | 43.30           | 74.00          | -30.70      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH64(5320MHz)                            | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 49 %       |

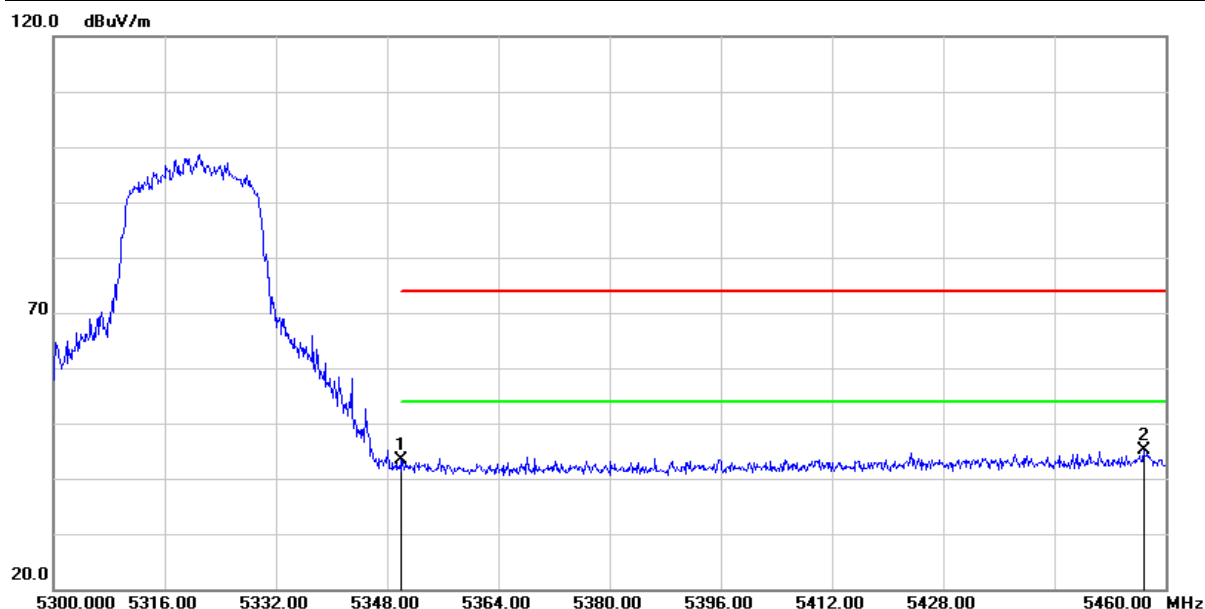


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 40.97            | 2.46                  | 43.43           | 74.00          | -30.57      | peak   |
| 2   | 5456.800        | 42.36            | 2.87                  | 45.23           | 74.00          | -28.77      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH64(5320MHz)                            | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

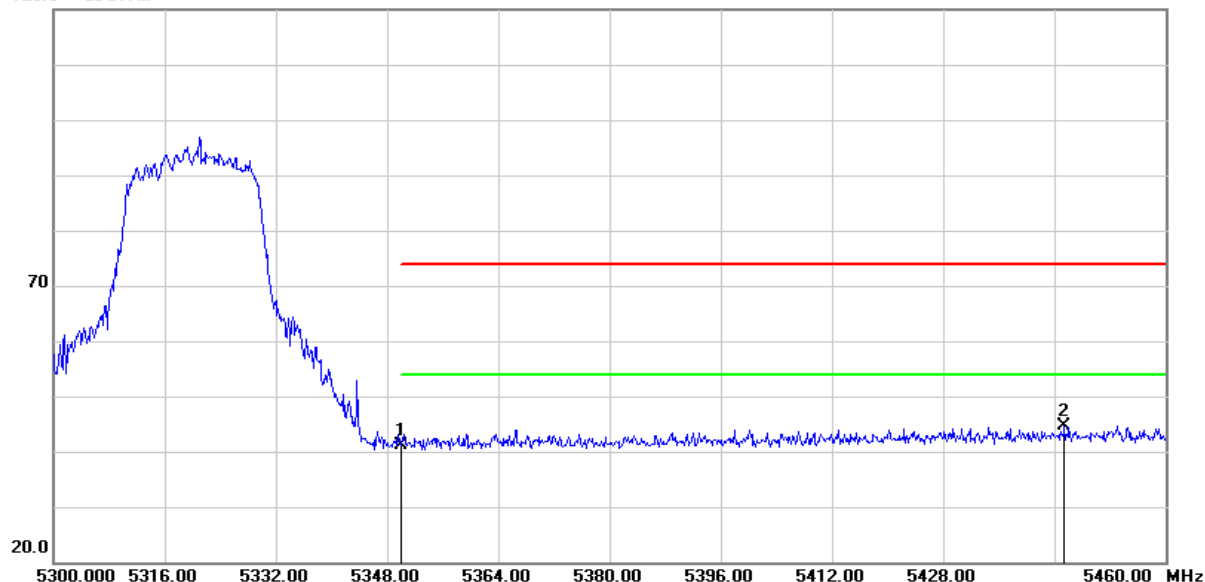


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 38.58            | 2.46                  | 41.04           | 74.00          | -32.96      | peak   |
| 2   | 5445.440        | 41.90            | 2.83                  | 44.73           | 74.00          | -29.27      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH100(5500MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 49 %       |

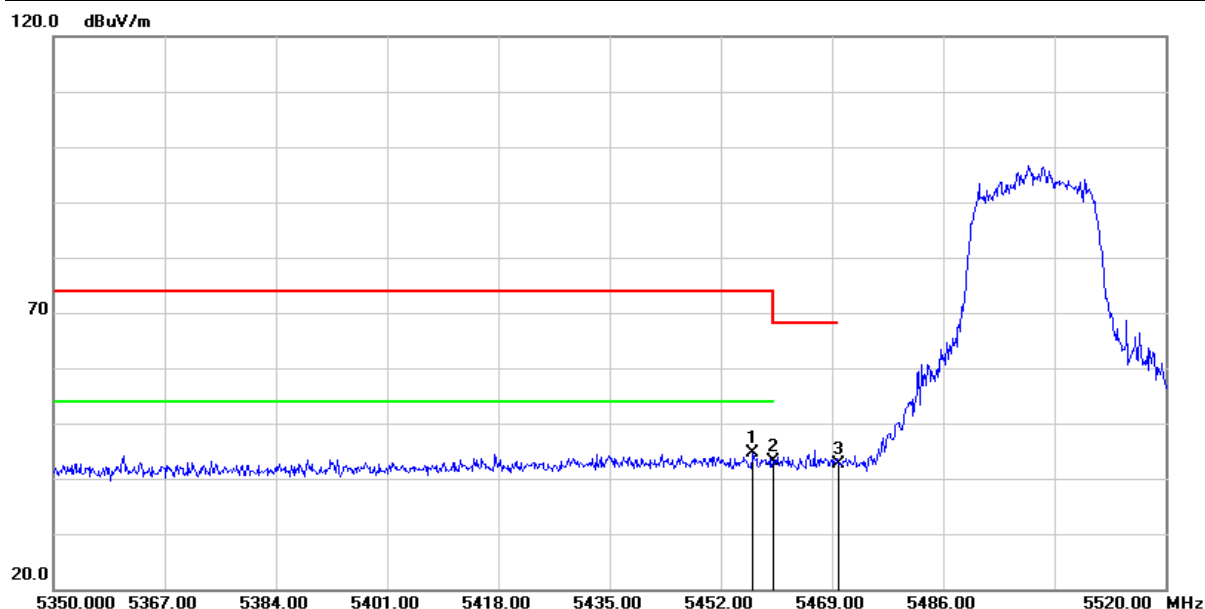


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5456.930        | 41.65            | 2.87                  | 44.52           | 74.00          | -29.48      | peak   |
| 2   | 5460.000        | 40.28            | 2.87                  | 43.15           | 74.00          | -30.85      | peak   |
| 3   | 5470.000        | 39.67            | 2.90                  | 42.57           | 68.20          | -25.63      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH100(5500MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

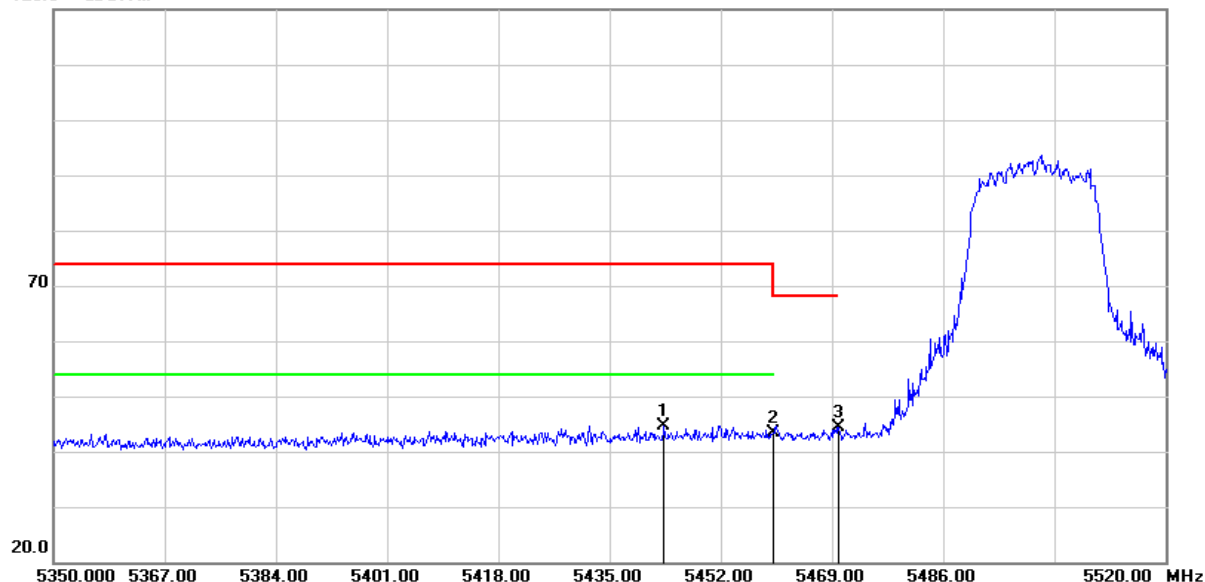


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5443.330        | 41.85            | 2.82                  | 44.67           | 74.00          | -29.33      | peak   |
| 2   | 5460.000        | 40.48            | 2.87                  | 43.35           | 74.00          | -30.65      | peak   |
| 3   | 5470.000        | 41.48            | 2.90                  | 44.38           | 68.20          | -23.82      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH149(5745MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 49 %       |

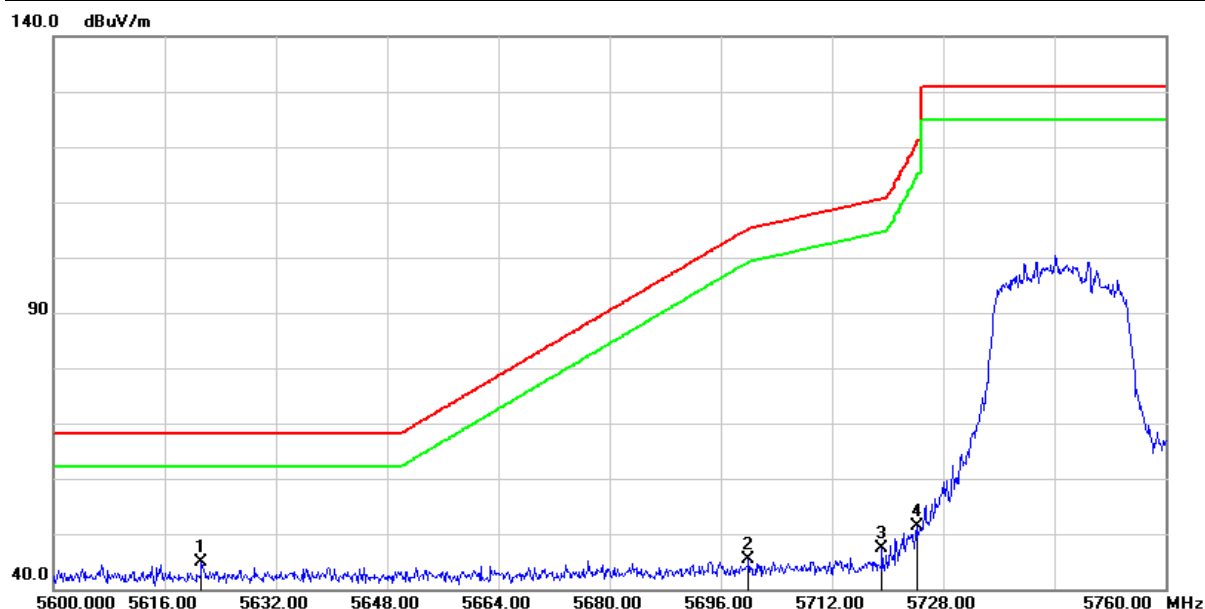

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5621.280        | 41.83            | 3.11                  | 44.94           | 68.20          | -23.26      | peak   |
| 2   | 5700.000        | 42.01            | 3.41                  | 45.42           | 105.20         | -59.78      | peak   |
| 3   | 5719.200        | 44.01            | 3.43                  | 47.44           | 110.58         | -63.14      | peak   |
| 4   | 5724.160        | 47.89            | 3.43                  | 51.32           | 120.28         | -68.96      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH149(5745MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 49 %       |



| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5613.120        | 41.03            | 3.10                  | 44.13           | 68.20          | -24.07      | peak   |
| 2   | 5687.680        | 41.75            | 3.34                  | 45.09           | 96.08          | -50.99      | peak   |
| 3   | 5717.280        | 41.71            | 3.42                  | 45.13           | 110.04         | -64.91      | peak   |
| 4   | 5724.640        | 45.77            | 3.43                  | 49.20           | 121.38         | -72.18      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH165(5825MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 49 %       |




| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5851.600        | 40.97            | 3.70                  | 44.67           | 118.55         | -73.88      | peak   |
| 2   | 5863.200        | 42.09            | 3.78                  | 45.87           | 108.50         | -62.63      | peak   |
| 3   | 5922.200        | 40.43            | 4.08                  | 44.51           | 70.27          | -25.76      | peak   |
| 4   | 5981.400        | 42.16            | 4.21                  | 46.37           | 68.20          | -21.83      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH165(5825MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 49 %       |

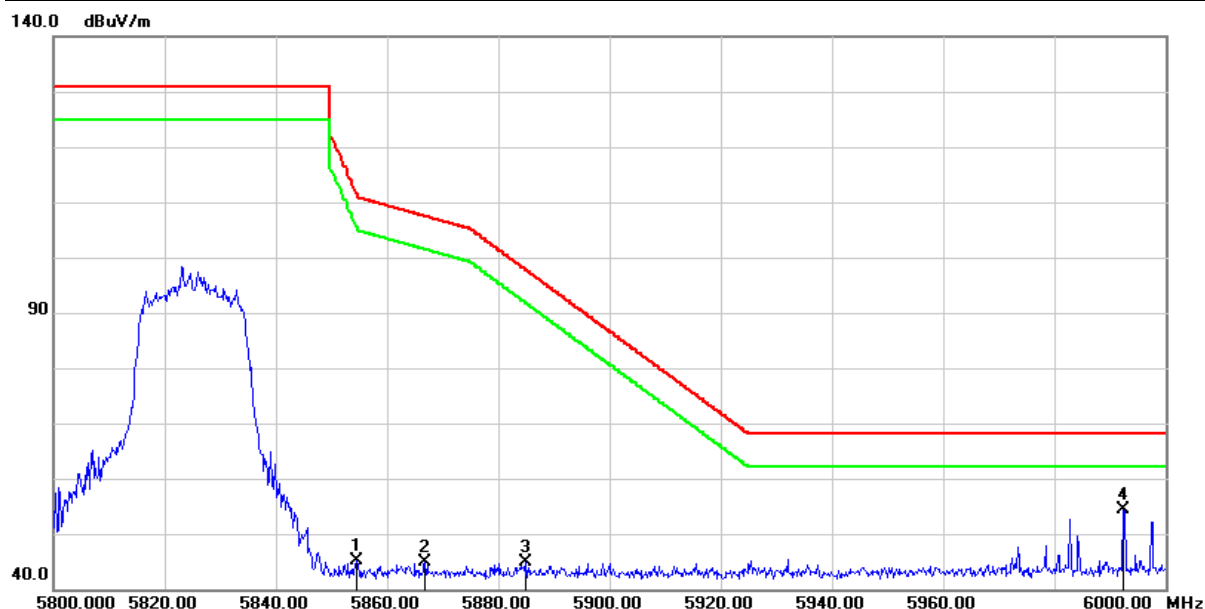


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5854.600        | 41.40            | 3.72                  | 45.12           | 111.71         | -66.59      | peak   |
| 2   | 5866.800        | 40.95            | 3.81                  | 44.76           | 107.50         | -62.74      | peak   |
| 3   | 5885.000        | 40.97            | 3.94                  | 44.91           | 97.80          | -52.89      | peak   |
| 4   | 5992.400        | 50.06            | 4.24                  | 54.30           | 68.20          | -13.90      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH36(5180MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

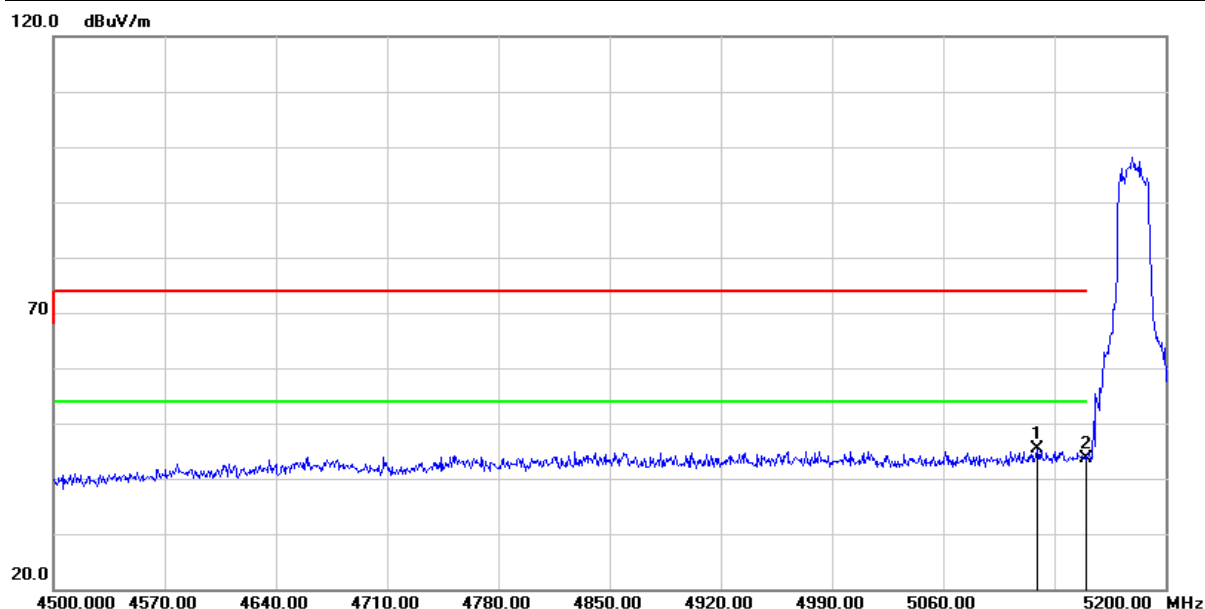


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5119.500        | 42.30            | 3.09                  | 45.39           | 74.00          | -28.61      | peak   |
| 2   | 5150.000        | 40.61            | 3.14                  | 43.75           | 74.00          | -30.25      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH36(5180MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

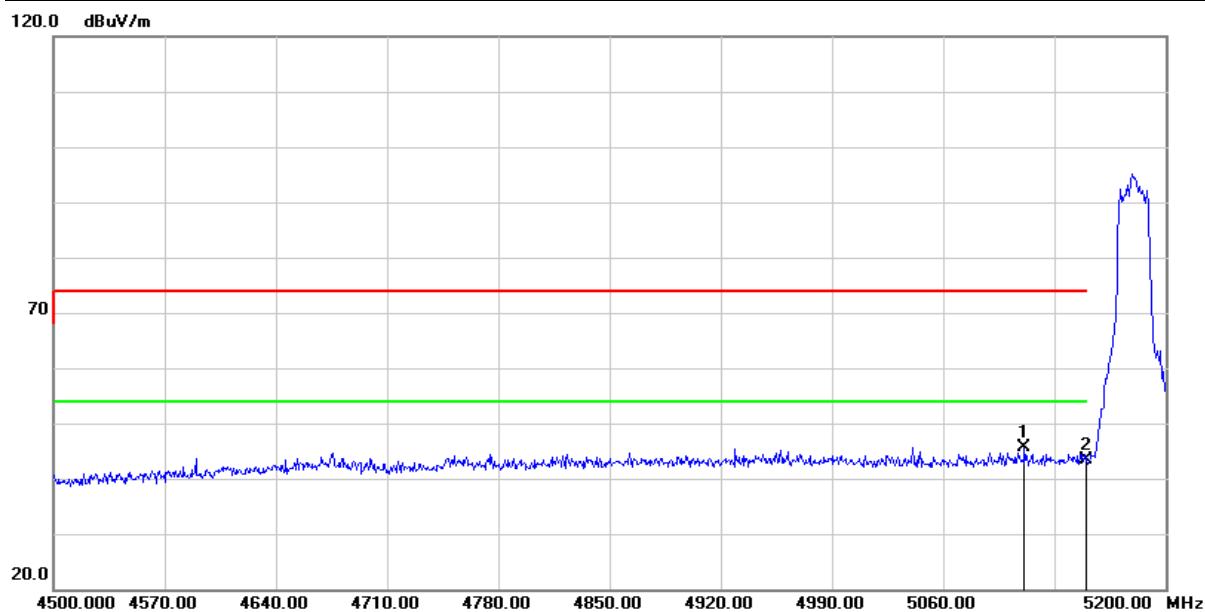


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5111.100        | 42.46            | 3.07                  | 45.53           | 74.00          | -28.47      | peak   |
| 2   | 5150.000        | 40.16            | 3.14                  | 43.30           | 74.00          | -30.70      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH64(5320MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

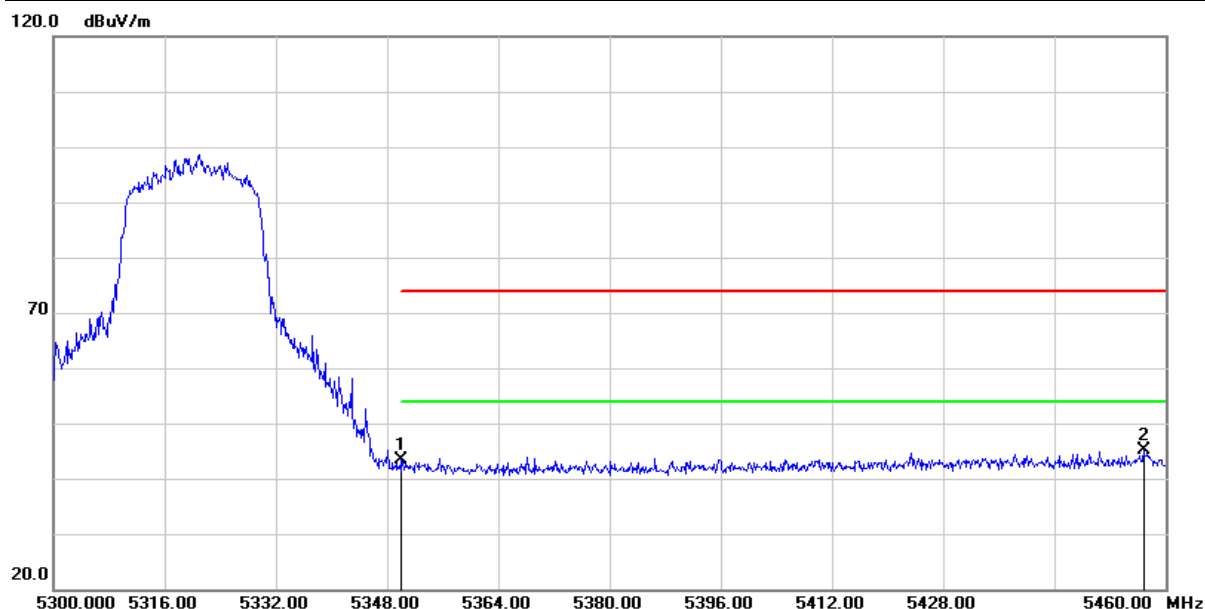


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 40.97            | 2.46                  | 43.43           | 74.00          | -30.57      | peak   |
| 2   | 5456.800        | 42.36            | 2.87                  | 45.23           | 74.00          | -28.77      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH64(5320MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

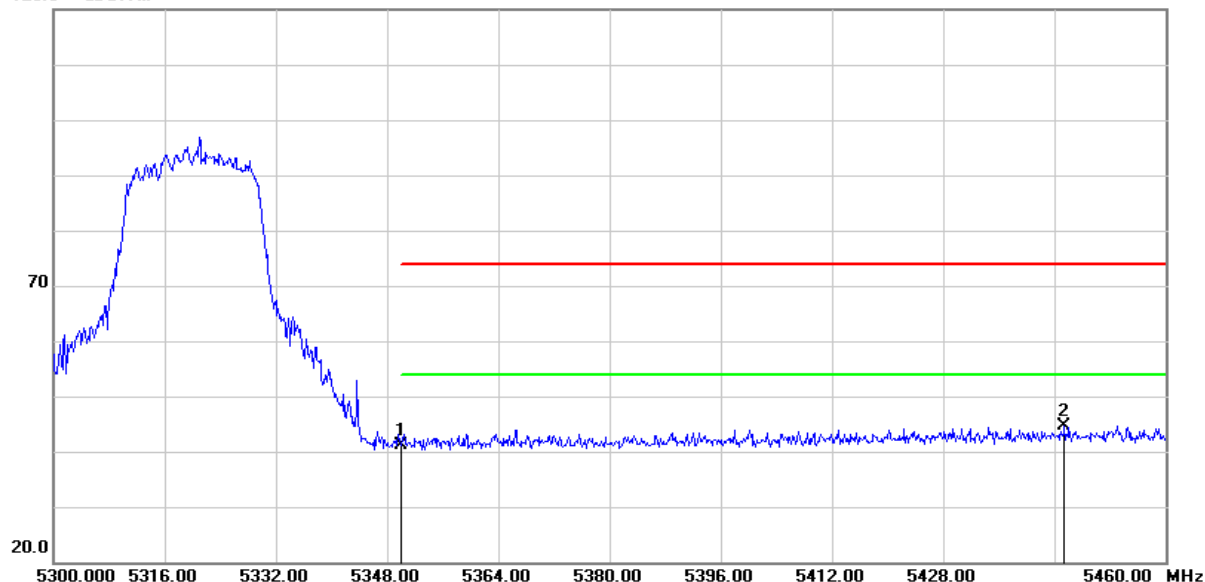


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 38.58            | 2.46                  | 41.04           | 74.00          | -32.96      | peak   |
| 2   | 5445.440        | 41.90            | 2.83                  | 44.73           | 74.00          | -29.27      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH100(5500MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

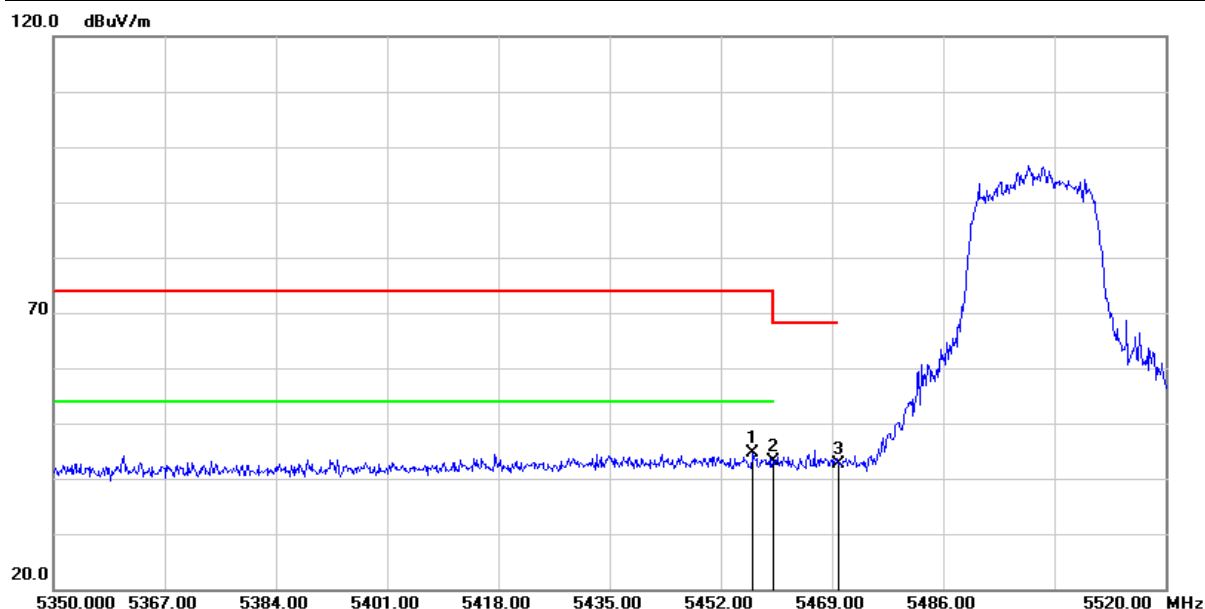


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5456.930        | 41.65            | 2.87                  | 44.52           | 74.00          | -29.48      | peak   |
| 2   | 5460.000        | 40.28            | 2.87                  | 43.15           | 74.00          | -30.85      | peak   |
| 3   | 5470.000        | 39.67            | 2.90                  | 42.57           | 68.20          | -25.63      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH100(5500MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

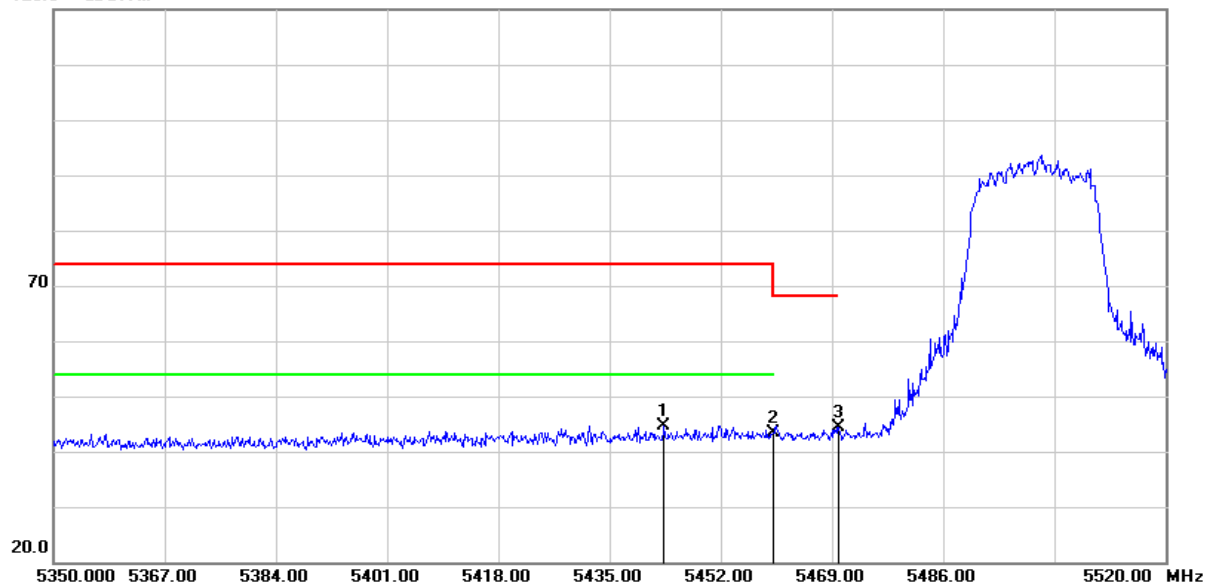


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5443.330        | 41.85            | 2.82                  | 44.67           | 74.00          | -29.33      | peak   |
| 2   | 5460.000        | 40.48            | 2.87                  | 43.35           | 74.00          | -30.65      | peak   |
| 3   | 5470.000        | 41.48            | 2.90                  | 44.38           | 68.20          | -23.82      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH149(5745MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

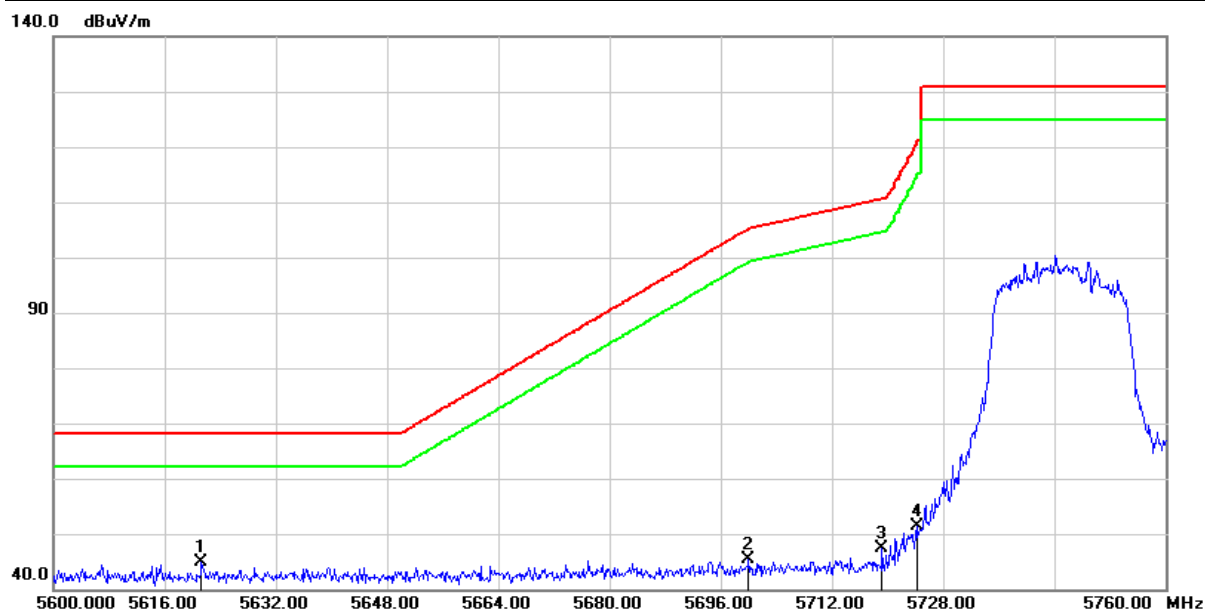

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5621.280        | 41.83            | 3.11                  | 44.94           | 68.20          | -23.26      | peak   |
| 2   | 5700.000        | 42.01            | 3.41                  | 45.42           | 105.20         | -59.78      | peak   |
| 3   | 5719.200        | 44.01            | 3.43                  | 47.44           | 110.58         | -63.14      | peak   |
| 4   | 5724.160        | 47.89            | 3.43                  | 51.32           | 120.28         | -68.96      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH149(5745MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |



| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5613.120        | 41.03            | 3.10                  | 44.13           | 68.20          | -24.07      | peak   |
| 2   | 5687.680        | 41.75            | 3.34                  | 45.09           | 96.08          | -50.99      | peak   |
| 3   | 5717.280        | 41.71            | 3.42                  | 45.13           | 110.04         | -64.91      | peak   |
| 4   | 5724.640        | 45.77            | 3.43                  | 49.20           | 121.38         | -72.18      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/04/30 |
| <b>Test Channel :</b> | CH165(5825MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |




| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5851.600        | 40.97            | 3.70                  | 44.67           | 118.55         | -73.88      | peak   |
| 2   | 5863.200        | 42.09            | 3.78                  | 45.87           | 108.50         | -62.63      | peak   |
| 3   | 5922.200        | 40.43            | 4.08                  | 44.51           | 70.27          | -25.76      | peak   |
| 4   | 5981.400        | 42.16            | 4.21                  | 46.37           | 68.20          | -21.83      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/01 |
| <b>Test Channel :</b> | CH165(5825MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

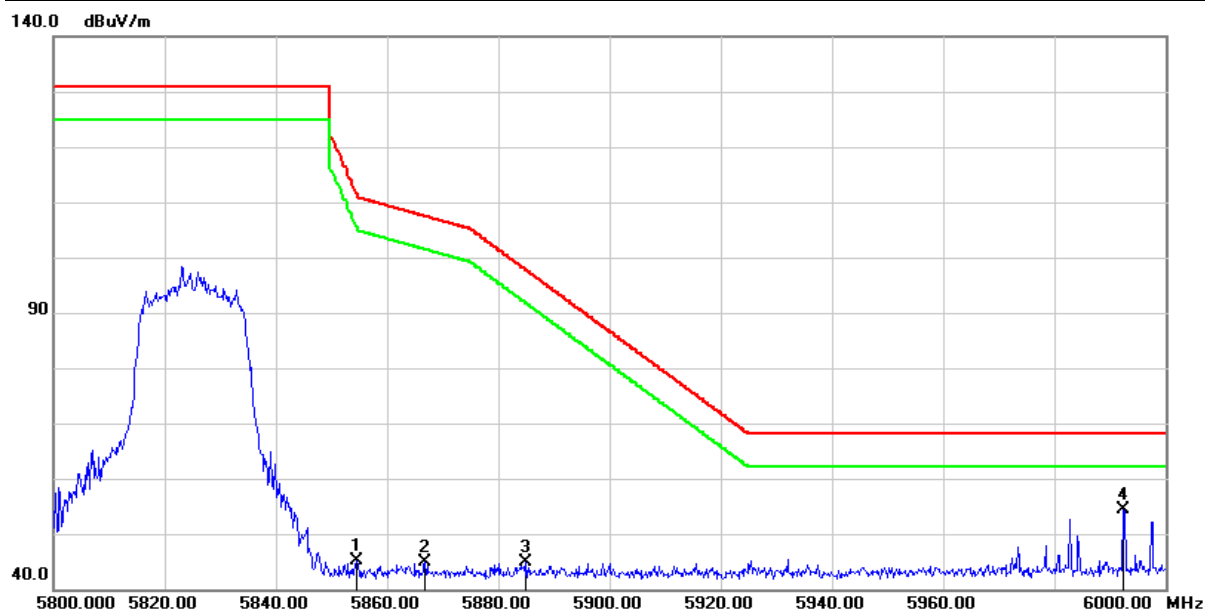


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5854.600        | 41.40            | 3.72                  | 45.12           | 111.71         | -66.59      | peak   |
| 2   | 5866.800        | 40.95            | 3.81                  | 44.76           | 107.50         | -62.74      | peak   |
| 3   | 5885.000        | 40.97            | 3.94                  | 44.91           | 97.80          | -52.89      | peak   |
| 4   | 5992.400        | 50.06            | 4.24                  | 54.30           | 68.20          | -13.90      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/01 |
| <b>Test Channel :</b> | CH38(5190MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

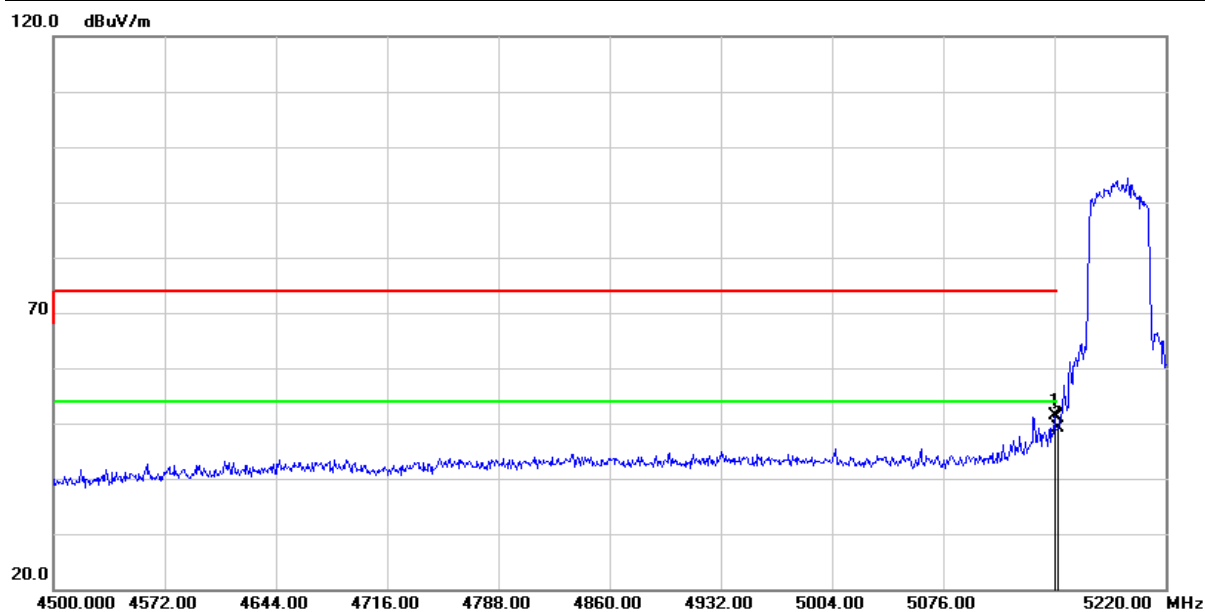


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5148.000        | 48.26            | 3.15                  | 51.41           | 74.00          | -22.59      | peak   |
| 2   | 5150.000        | 46.02            | 3.14                  | 49.16           | 74.00          | -24.84      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/01 |
| <b>Test Channel :</b> | CH38(5190MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

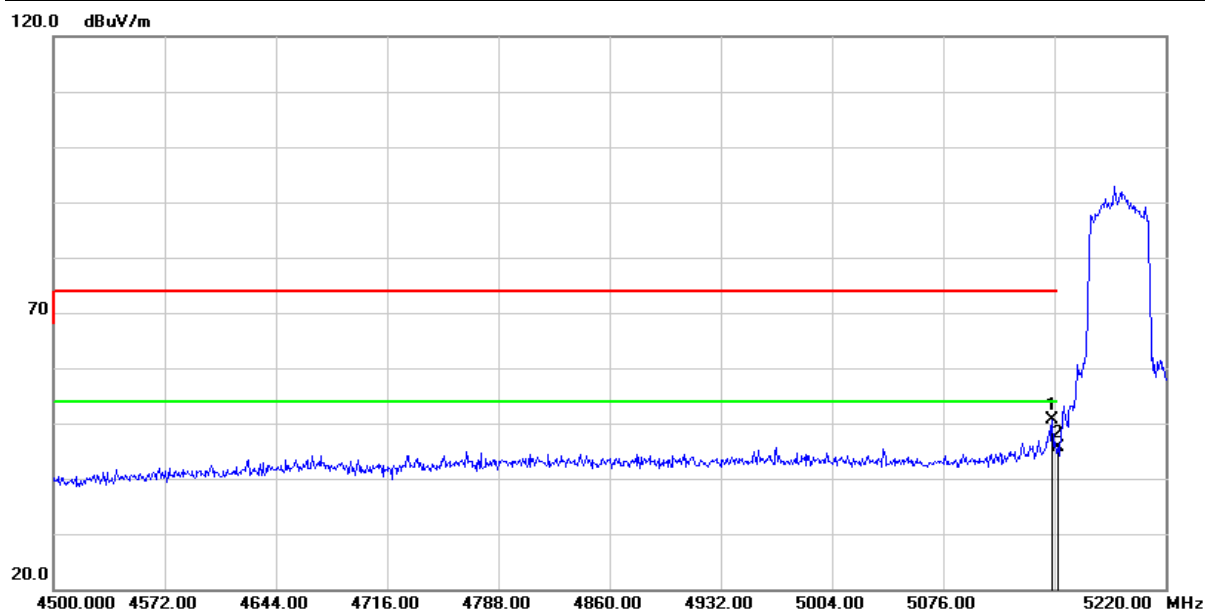


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5146.560        | 47.41            | 3.14                  | 50.55           | 74.00          | -23.45      | peak   |
| 2   | 5150.000        | 42.43            | 3.14                  | 45.57           | 74.00          | -28.43      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/01 |
| <b>Test Channel :</b> | CH62(5310MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

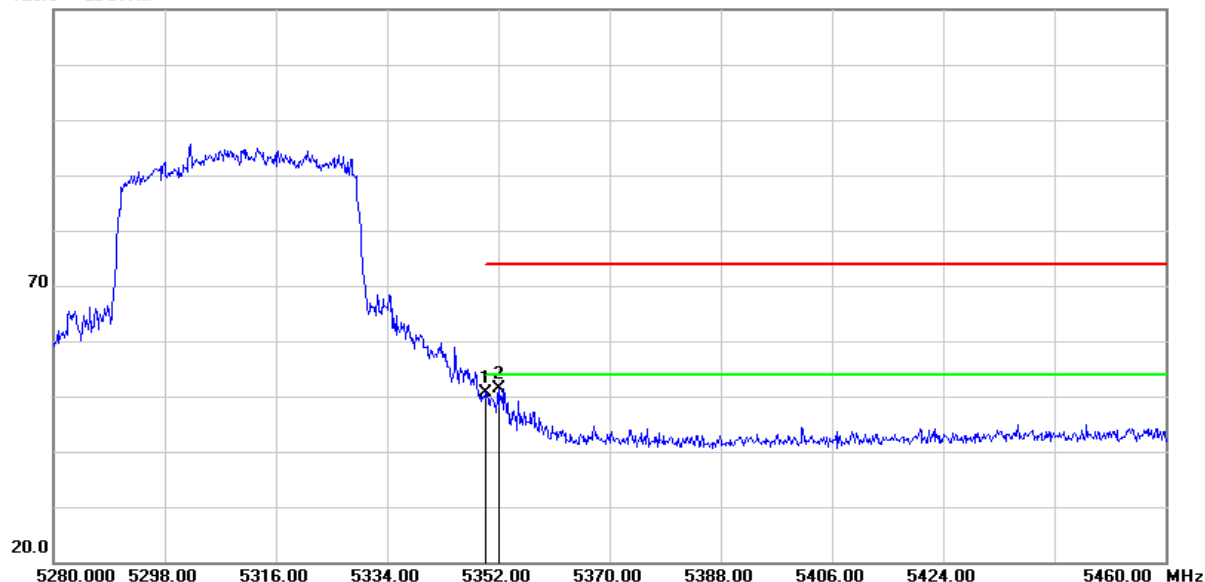


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 48.18            | 2.46                  | 50.64           | 74.00          | -23.36      | peak   |
| 2   | 5352.000        | 49.02            | 2.45                  | 51.47           | 74.00          | -22.53      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/01 |
| <b>Test Channel :</b> | CH62(5310MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

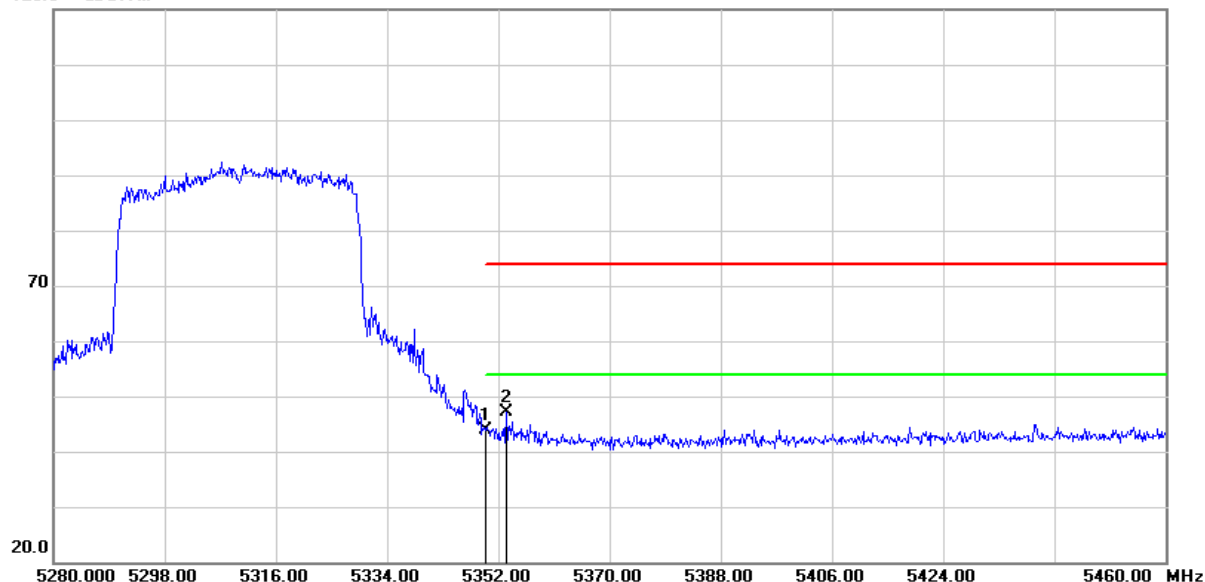


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 41.36            | 2.46                  | 43.82           | 74.00          | -30.18      | peak   |
| 2   | 5353.260        | 44.66            | 2.46                  | 47.12           | 74.00          | -26.88      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/01 |
| <b>Test Channel :</b> | CH102(5510MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

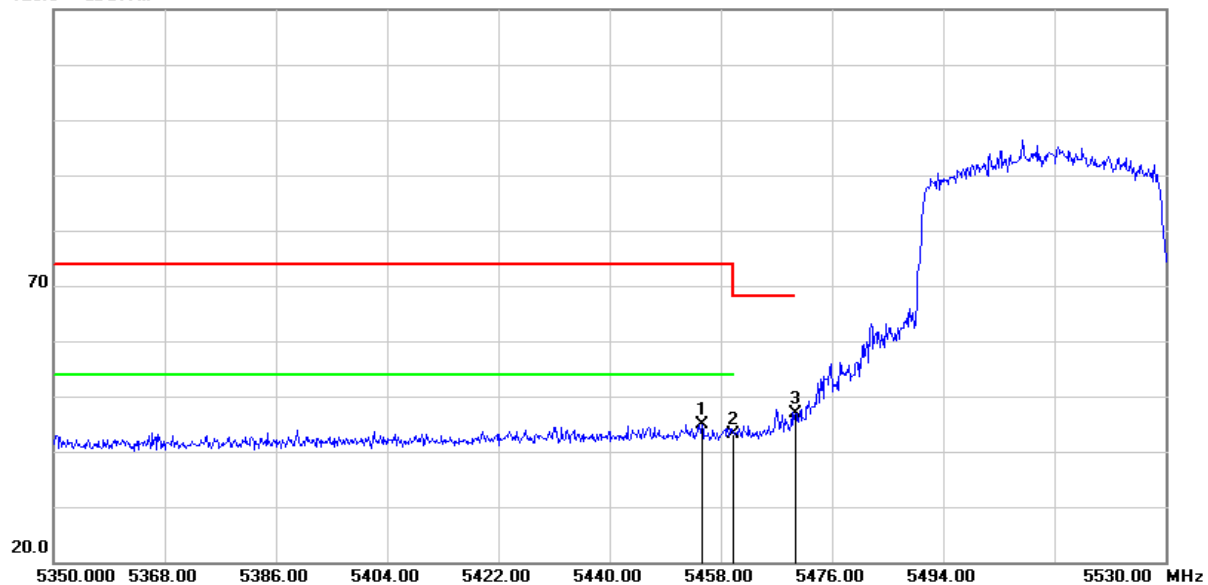


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5454.940        | 42.08            | 2.87                  | 44.95           | 74.00          | -29.05      | peak   |
| 2   | 5460.000        | 40.19            | 2.87                  | 43.06           | 74.00          | -30.94      | peak   |
| 3   | 5470.000        | 43.99            | 2.90                  | 46.89           | 68.20          | -21.31      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/01 |
| <b>Test Channel :</b> | CH102(5510MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

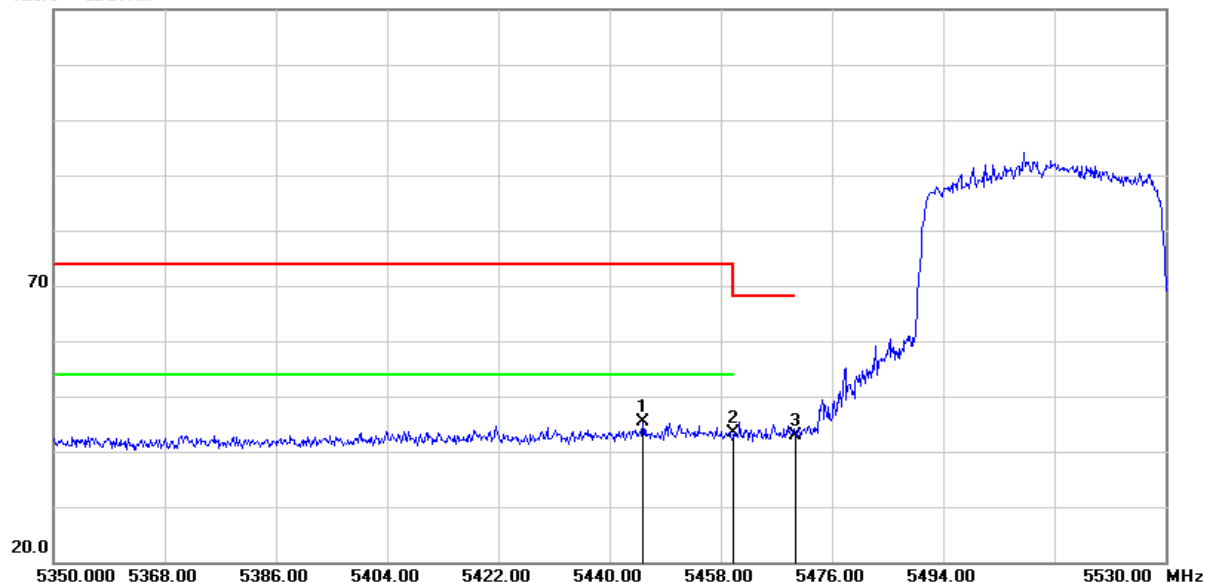


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5445.400        | 42.65            | 2.83                  | 45.48           | 74.00          | -28.52      | peak   |
| 2   | 5460.000        | 40.41            | 2.87                  | 43.28           | 74.00          | -30.72      | peak   |
| 3   | 5470.000        | 40.03            | 2.90                  | 42.93           | 68.20          | -25.27      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/01 |
| <b>Test Channel :</b> | CH151(5755MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

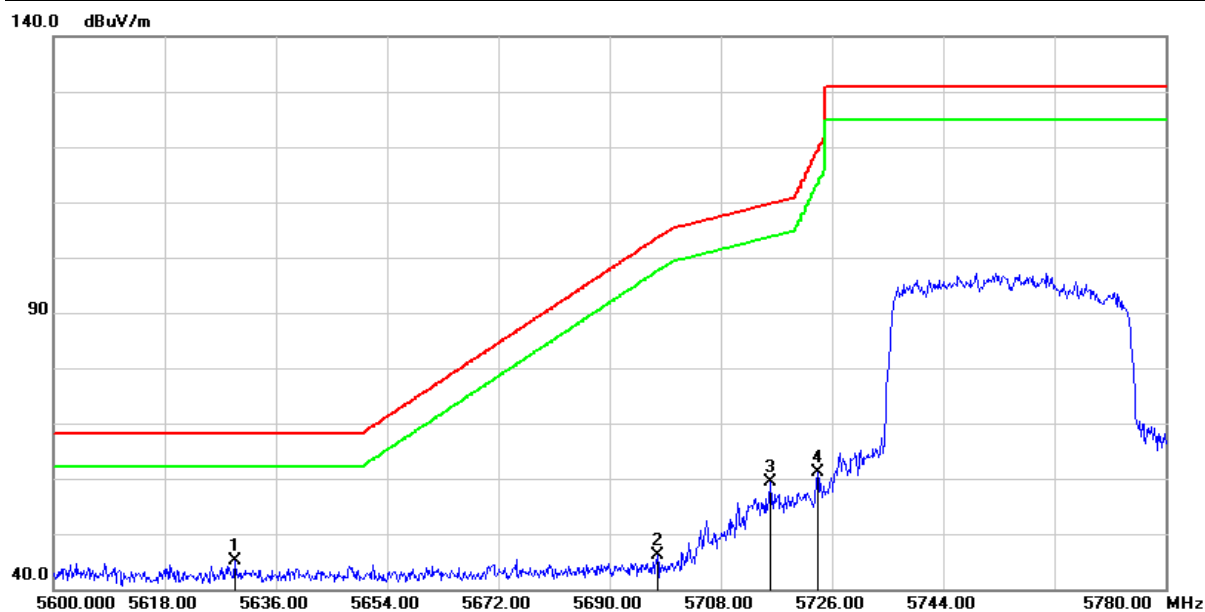


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5629.340        | 41.98            | 3.12                  | 45.10           | 68.20          | -23.10      | peak   |
| 2   | 5697.740        | 42.72            | 3.39                  | 46.11           | 103.53         | -57.42      | peak   |
| 3   | 5716.100        | 55.84            | 3.42                  | 59.26           | 109.71         | -50.45      | peak   |
| 4   | 5723.660        | 57.63            | 3.43                  | 61.06           | 119.14         | -58.08      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/01 |
| <b>Test Channel :</b> | CH151(5755MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

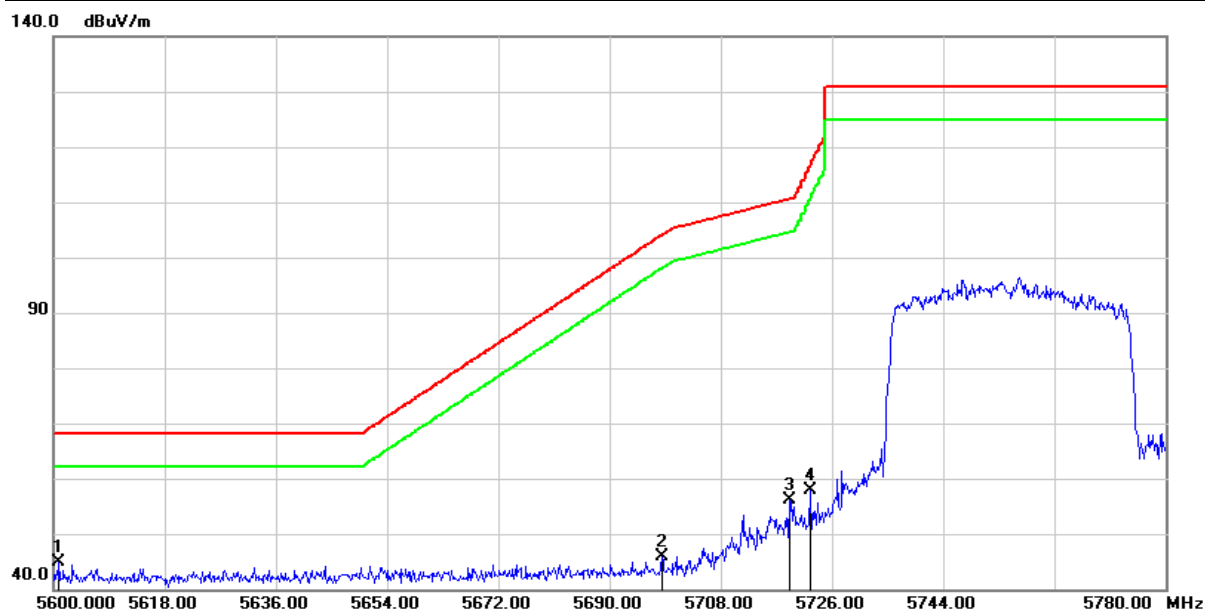


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5600.900        | 41.68            | 3.08                  | 44.76           | 68.20          | -23.44      | peak   |
| 2   | 5698.460        | 42.46            | 3.39                  | 45.85           | 104.06         | -58.21      | peak   |
| 3   | 5719.160        | 52.67            | 3.43                  | 56.10           | 110.56         | -54.46      | peak   |
| 4   | 5722.400        | 54.33            | 3.43                  | 57.76           | 116.27         | -58.51      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH159(5795MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

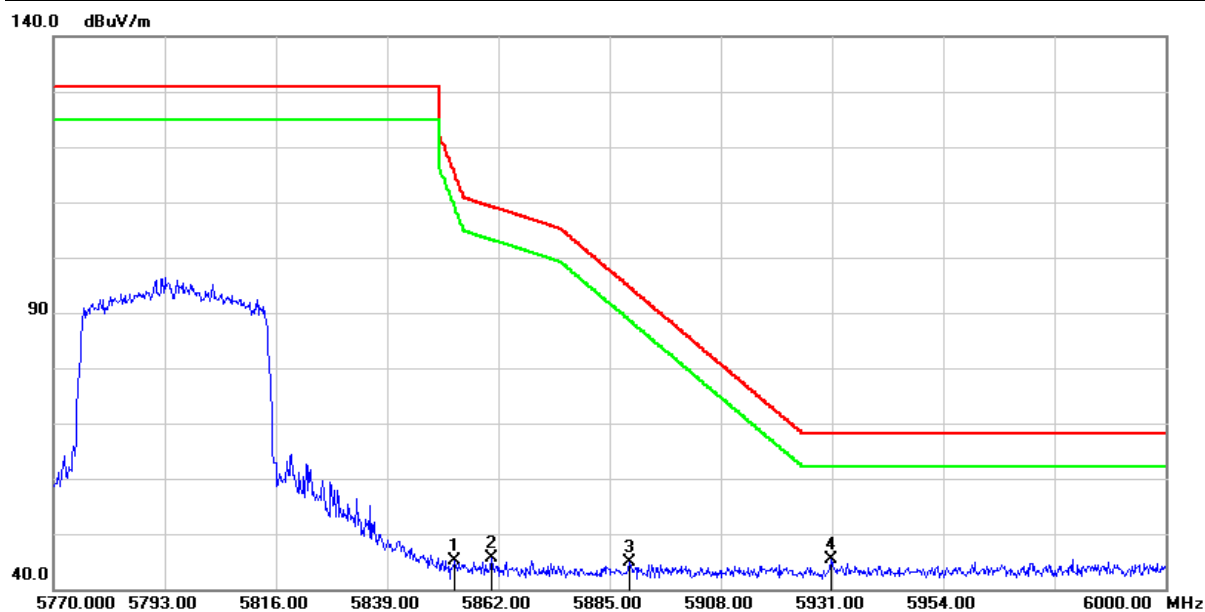


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5853.030        | 41.39            | 3.71                  | 45.10           | 115.29         | -70.19      | peak   |
| 2   | 5860.620        | 41.87            | 3.76                  | 45.63           | 109.23         | -63.60      | peak   |
| 3   | 5889.140        | 40.82            | 3.96                  | 44.78           | 94.74          | -49.96      | peak   |
| 4   | 5930.770        | 41.22            | 4.09                  | 45.31           | 68.20          | -22.89      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH159(5795MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

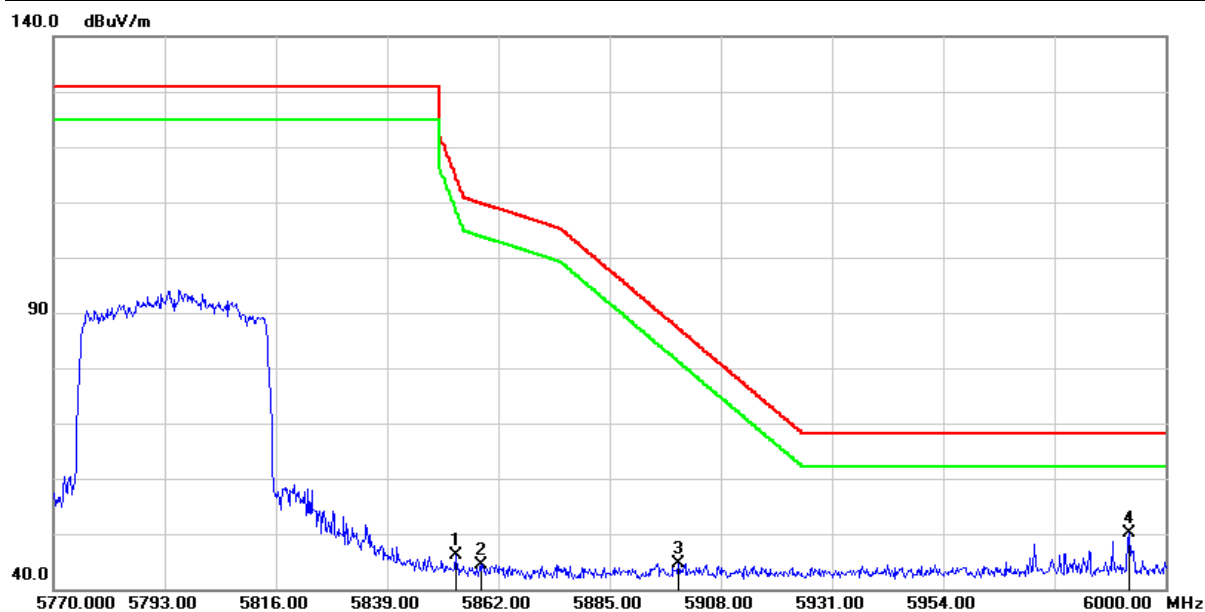


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5853.260        | 42.47            | 3.71                  | 46.18           | 114.77         | -68.59      | peak   |
| 2   | 5858.550        | 40.71            | 3.75                  | 44.46           | 109.81         | -65.35      | peak   |
| 3   | 5899.260        | 40.56            | 4.05                  | 44.61           | 87.25          | -42.64      | peak   |
| 4   | 5992.410        | 45.82            | 4.24                  | 50.06           | 68.20          | -18.14      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH42(5210MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

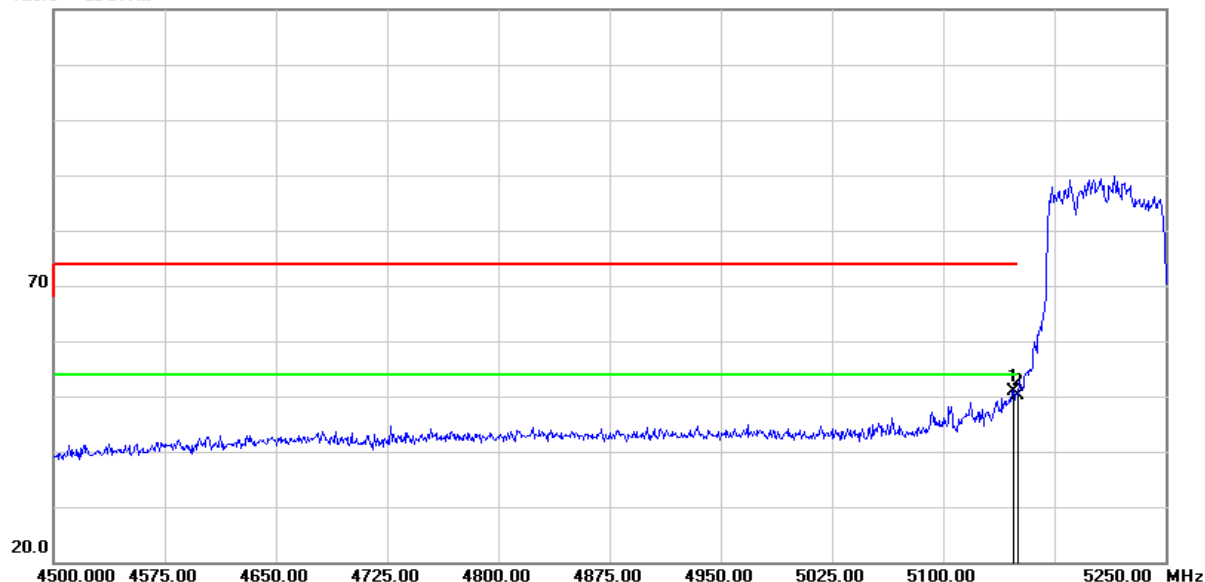


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5147.250        | 47.86            | 3.14                  | 51.00           | 74.00          | -23.00      | peak   |
| 2   | 5150.000        | 47.02            | 3.14                  | 50.16           | 74.00          | -23.84      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH42(5210MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

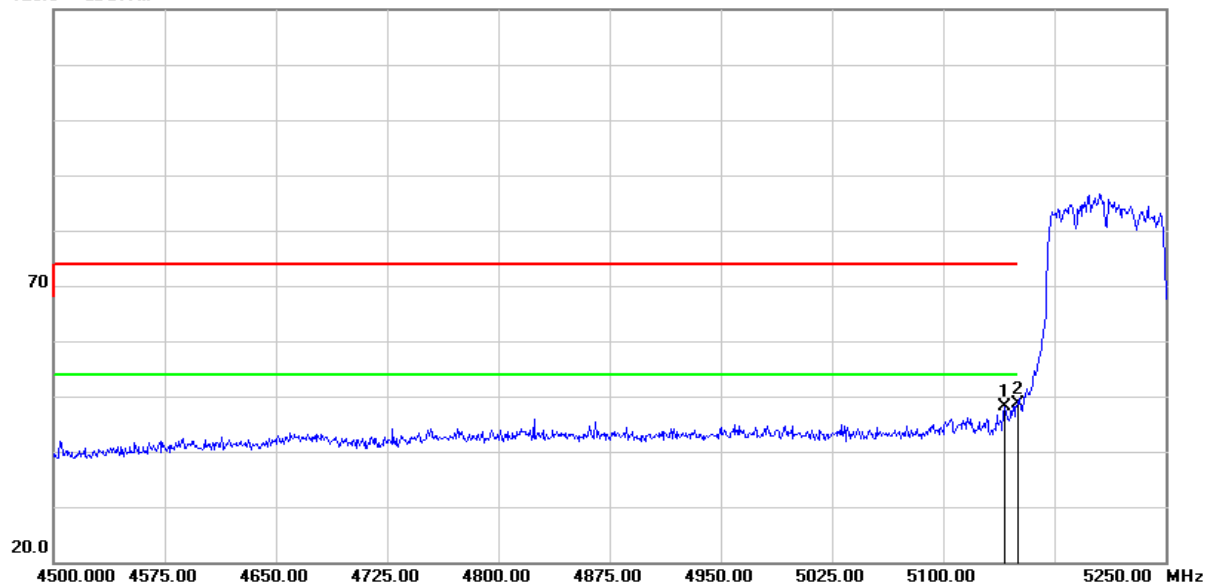


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5141.250        | 45.10            | 3.12                  | 48.22           | 74.00          | -25.78      | peak   |
| 2   | 5150.000        | 45.39            | 3.14                  | 48.53           | 74.00          | -25.47      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH58(5290MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

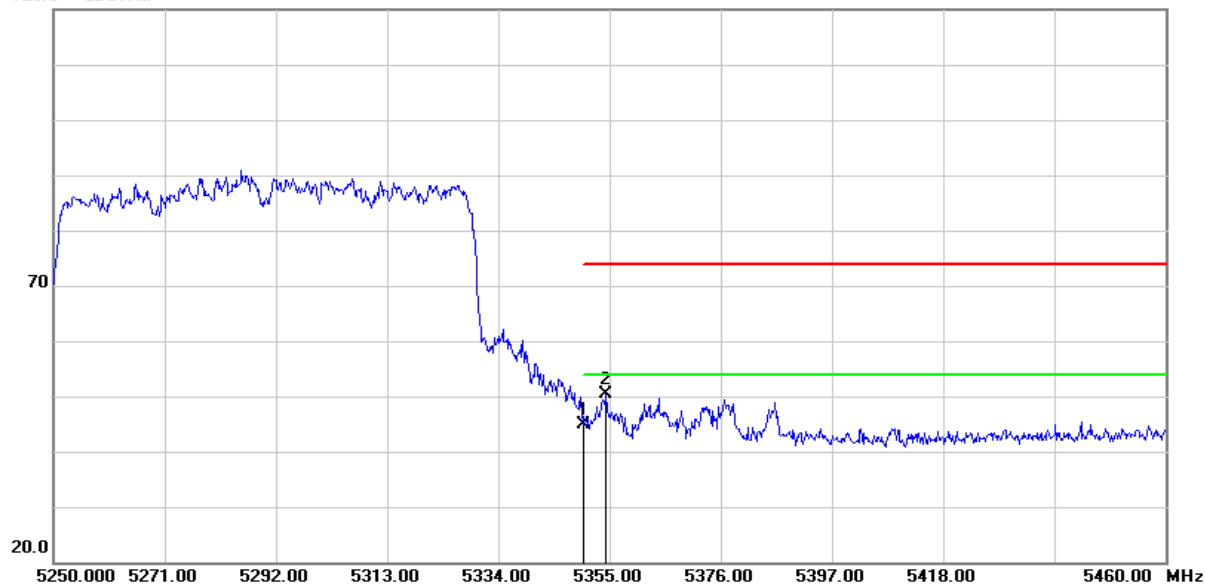


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 42.30            | 2.46                  | 44.76           | 74.00          | -29.24      | peak   |
| 2   | 5354.370        | 47.80            | 2.46                  | 50.26           | 74.00          | -23.74      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH58(5290MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

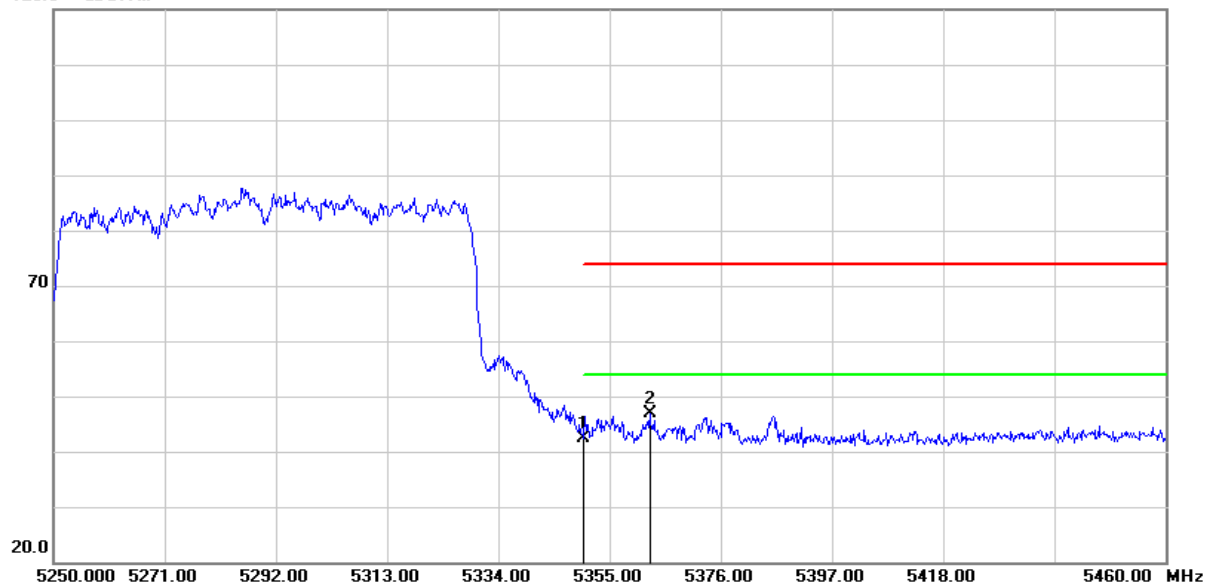


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 40.04            | 2.46                  | 42.50           | 74.00          | -31.50      | peak   |
| 2   | 5362.560        | 44.35            | 2.49                  | 46.84           | 74.00          | -27.16      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH106(5530MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

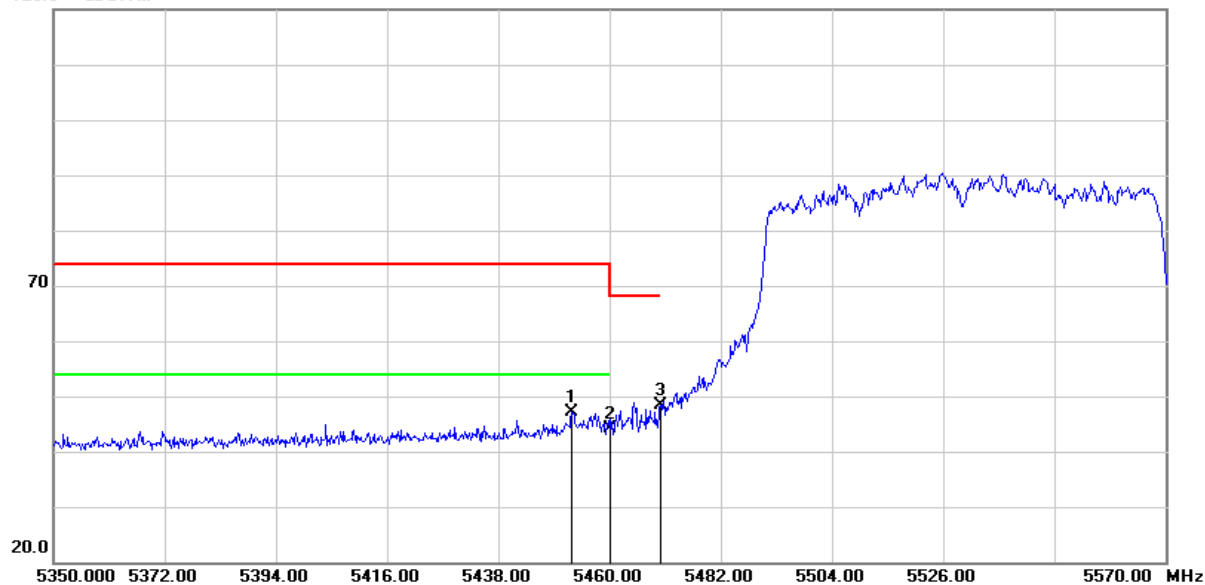


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5452.520        | 44.25            | 2.87                  | 47.12           | 74.00          | -26.88      | peak   |
| 2   | 5460.000        | 41.33            | 2.87                  | 44.20           | 74.00          | -29.80      | peak   |
| 3   | 5470.000        | 45.56            | 2.90                  | 48.46           | 68.20          | -19.74      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH106(5530MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

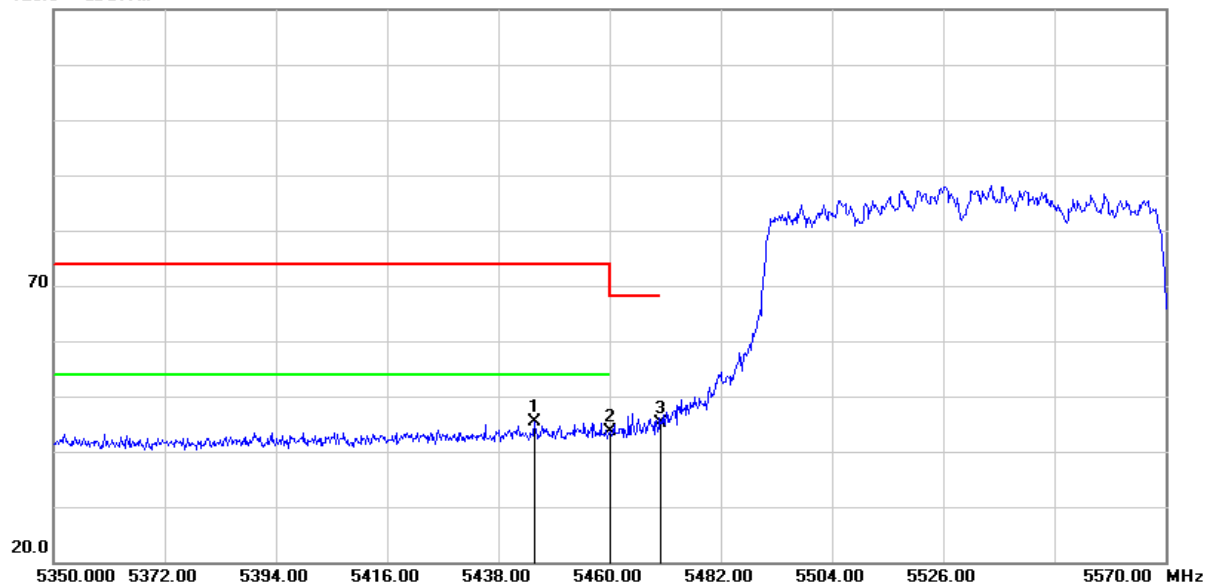


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5445.040        | 42.63            | 2.83                  | 45.46           | 74.00          | -28.54      | peak   |
| 2   | 5460.000        | 40.87            | 2.87                  | 43.74           | 74.00          | -30.26      | peak   |
| 3   | 5470.000        | 42.34            | 2.90                  | 45.24           | 68.20          | -22.96      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH155(5775MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

140.0 dBuV/m

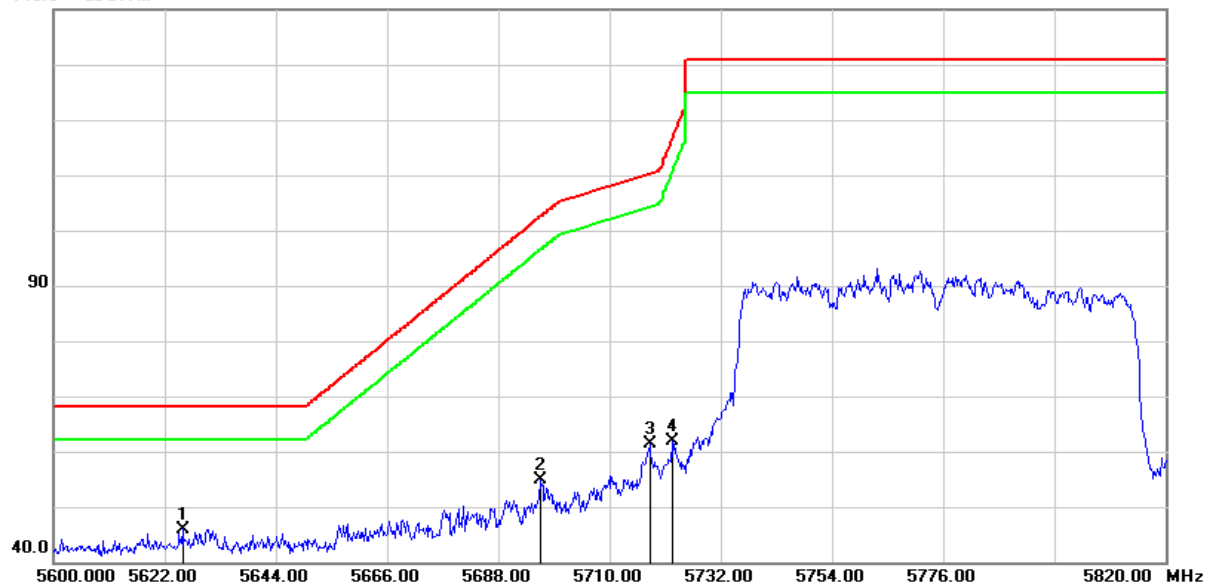


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5625.520        | 42.88            | 3.12                  | 46.00           | 68.20          | -22.20      | peak   |
| 2   | 5696.360        | 51.58            | 3.39                  | 54.97           | 102.51         | -47.54      | peak   |
| 3   | 5717.920        | 57.93            | 3.43                  | 61.36           | 110.22         | -48.86      | peak   |
| 4   | 5722.320        | 58.33            | 3.43                  | 61.76           | 116.09         | -54.33      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH155(5775MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

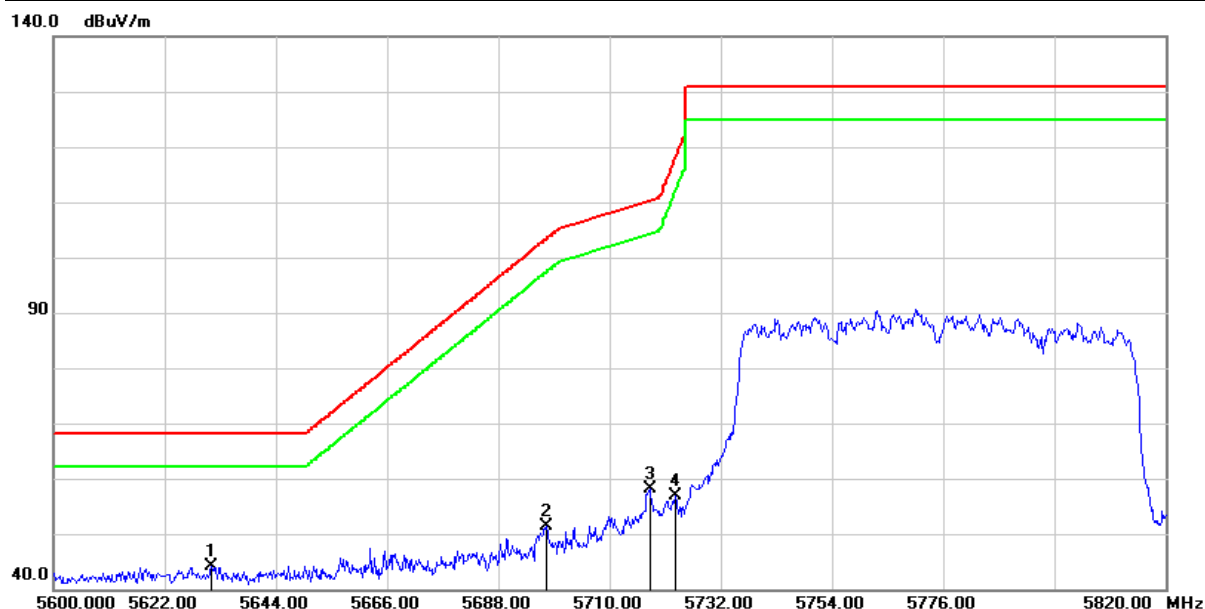


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5631.240        | 41.09            | 3.12                  | 44.21           | 68.20          | -23.99      | peak   |
| 2   | 5697.460        | 47.87            | 3.39                  | 51.26           | 103.32         | -52.06      | peak   |
| 3   | 5717.920        | 54.71            | 3.43                  | 58.14           | 110.22         | -52.08      | peak   |
| 4   | 5722.980        | 53.45            | 3.43                  | 56.88           | 117.59         | -60.71      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH155(5775MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 49 %       |

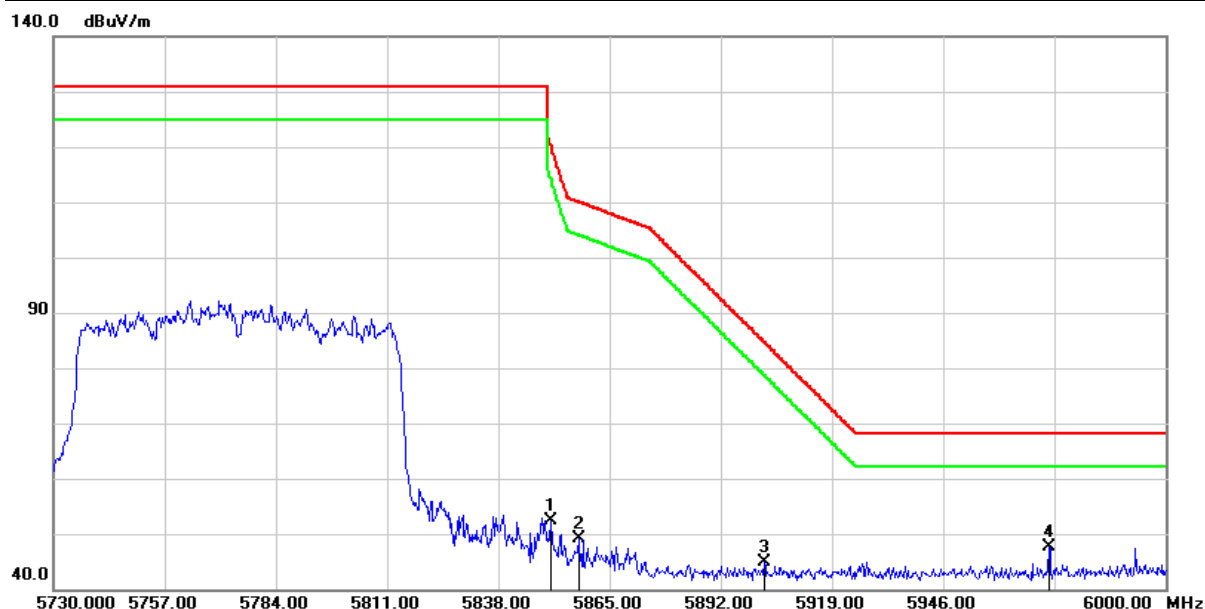


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5850.690        | 48.69            | 3.69                  | 52.38           | 120.63         | -68.25      | peak   |
| 2   | 5857.440        | 45.31            | 3.74                  | 49.05           | 110.12         | -61.07      | peak   |
| 3   | 5902.530        | 40.82            | 4.05                  | 44.87           | 84.83          | -39.96      | peak   |
| 4   | 5971.650        | 43.43            | 4.18                  | 47.61           | 68.20          | -20.59      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH155(5775MHz)                          | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 49 %       |

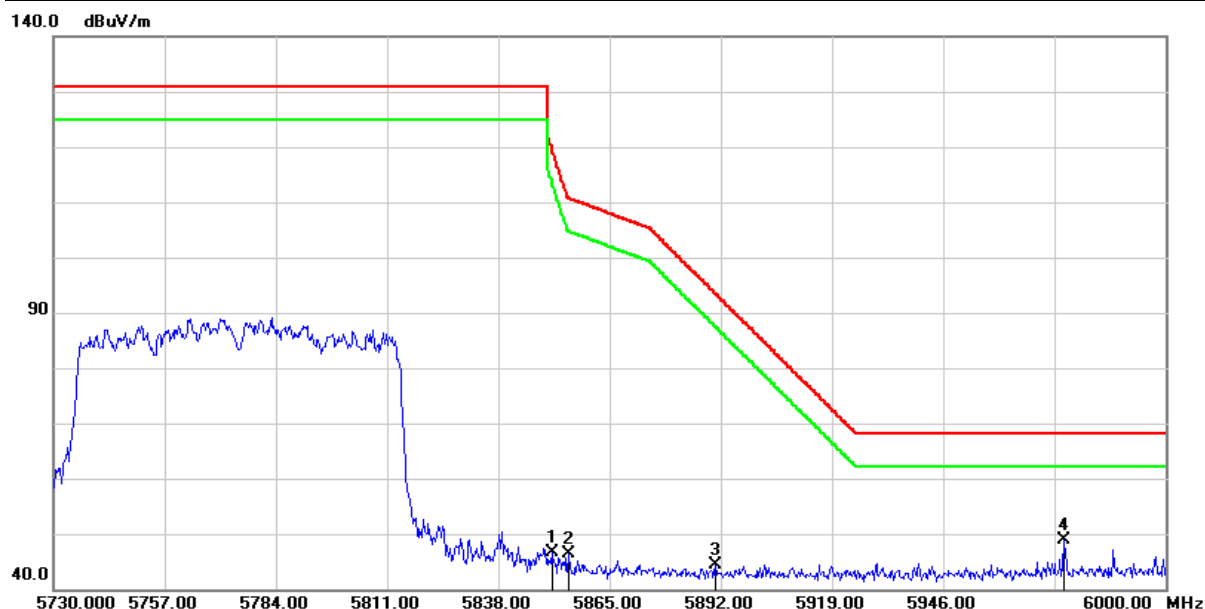

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5850.960        | 42.98            | 3.70                  | 46.68           | 120.01         | -73.33      | peak   |
| 2   | 5855.010        | 42.67            | 3.72                  | 46.39           | 110.80         | -64.41      | peak   |
| 3   | 5890.650        | 40.40            | 3.97                  | 44.37           | 93.62          | -49.25      | peak   |
| 4   | 5975.160        | 44.65            | 4.19                  | 48.84           | 68.20          | -19.36      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 9 : Transmit (802.11ax HE160M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH50(5250MHz)                            | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m




| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5046.970        | 49.93            | 2.74                  | 52.67           | 74.00          | -21.33      | peak   |
| 2   | 5046.970        | 39.89            | 2.74                  | 42.63           | 54.00          | -11.37      | AVG    |
| 3   | 5150.000        | 43.42            | 3.14                  | 46.56           | 74.00          | -27.44      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 9 : Transmit (802.11ax HE160M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH50(5250MHz)                            | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

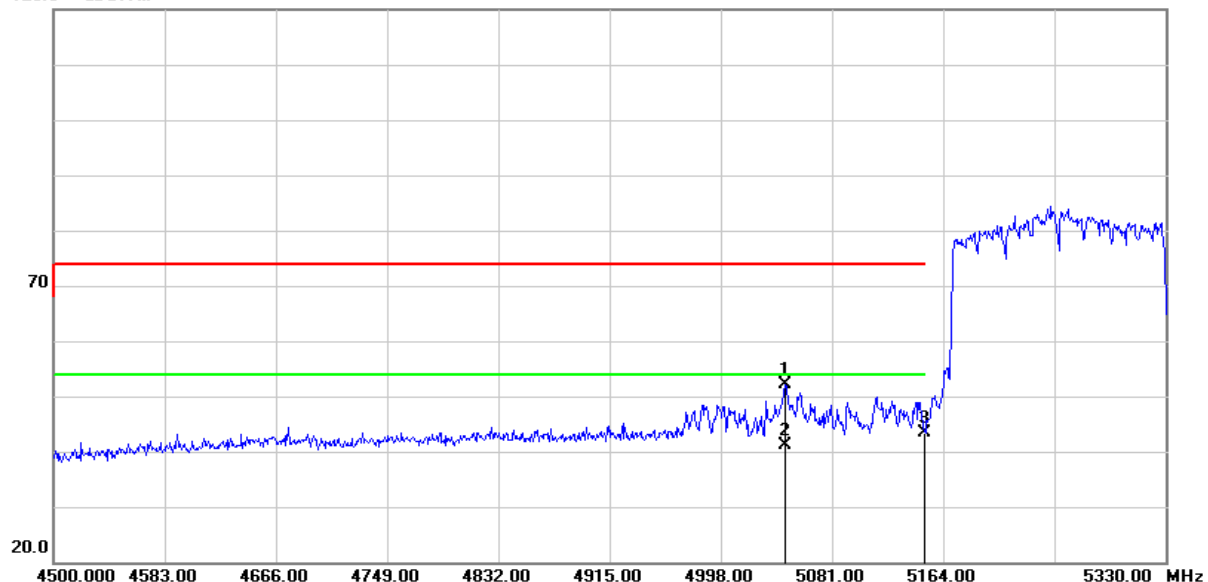


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5046.140        | 49.34            | 2.74                  | 52.08           | 74.00          | -21.92      | peak   |
| 2   | 5046.140        | 38.50            | 2.74                  | 41.24           | 54.00          | -12.76      | AVG    |
| 3   | 5150.000        | 40.21            | 3.14                  | 43.35           | 74.00          | -30.65      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 9 : Transmit (802.11ax HE160M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH50(5250MHz)                            | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

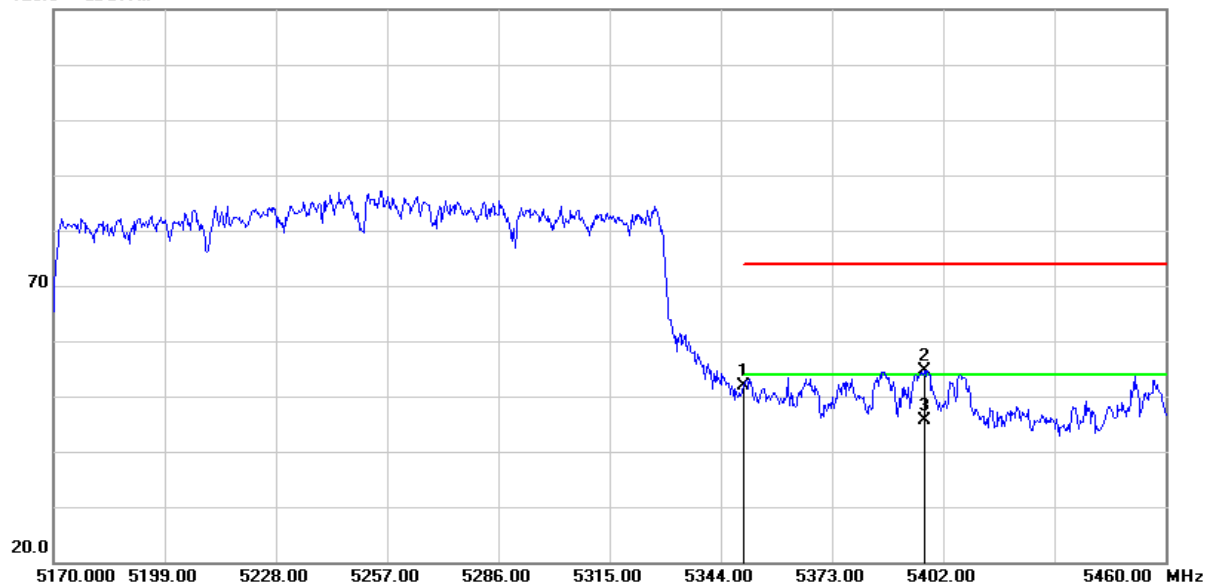


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 49.54            | 2.46                  | 52.00           | 74.00          | -22.00      | peak   |
| 2   | 5397.070        | 52.19            | 2.55                  | 54.74           | 74.00          | -19.26      | peak   |
| 3   | 5397.070        | 43.16            | 2.55                  | 45.71           | 54.00          | -8.29       | AVG    |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 9 : Transmit (802.11ax HE160M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH50(5250MHz)                            | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

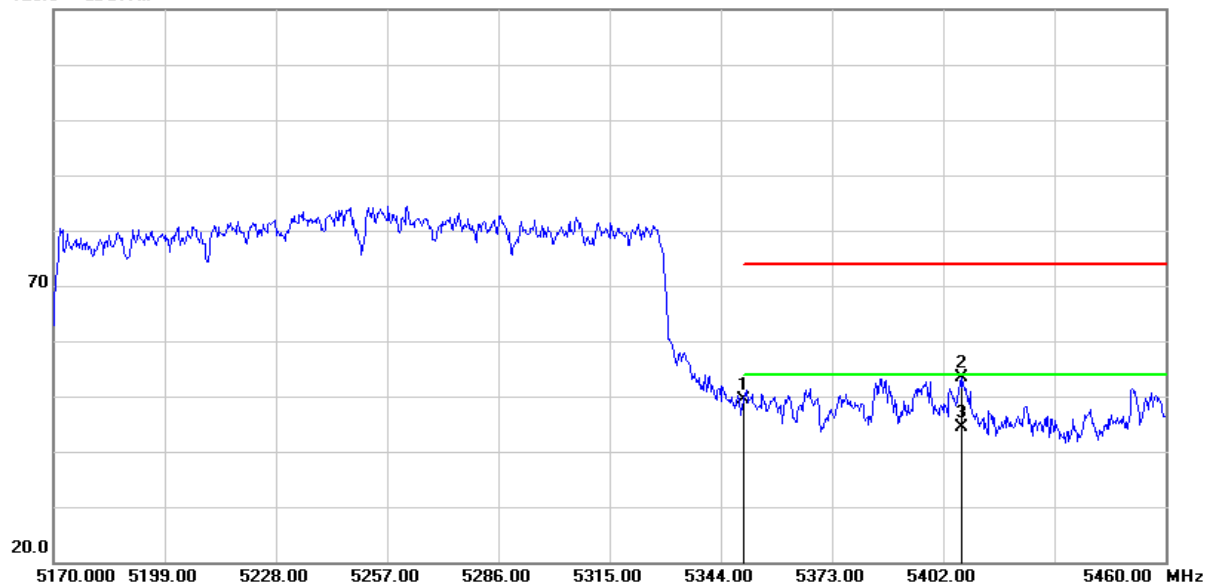


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5350.000        | 47.02            | 2.46                  | 49.48           | 74.00          | -24.52      | peak   |
| 2   | 5406.640        | 50.72            | 2.60                  | 53.32           | 74.00          | -20.68      | peak   |
| 3   | 5406.640        | 41.72            | 2.60                  | 44.32           | 54.00          | -9.68       | AVG    |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 9 : Transmit (802.11ax HE160M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH114(5570MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

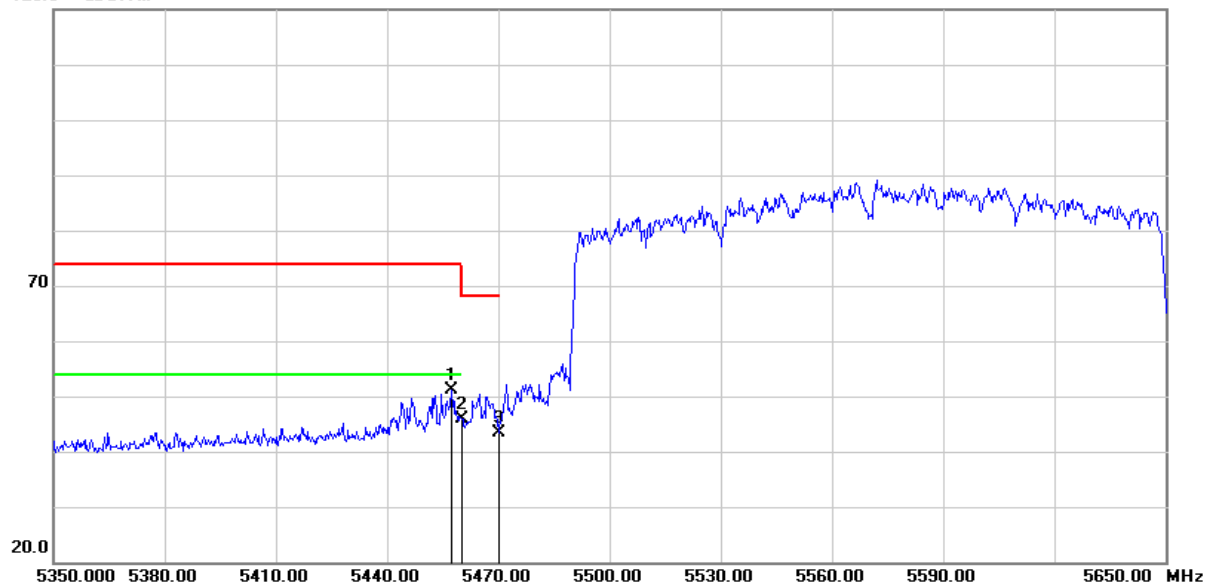


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5457.400        | 48.34            | 2.87                  | 51.21           | 74.00          | -22.79      | peak   |
| 2   | 5460.000        | 43.08            | 2.87                  | 45.95           | 74.00          | -28.05      | peak   |
| 3   | 5470.000        | 40.58            | 2.90                  | 43.48           | 68.20          | -24.72      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 9 : Transmit (802.11ax HE160M MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH114(5570MHz)                           | <b>Temperature :</b>       | 21.5 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 49 %       |

120.0 dBuV/m

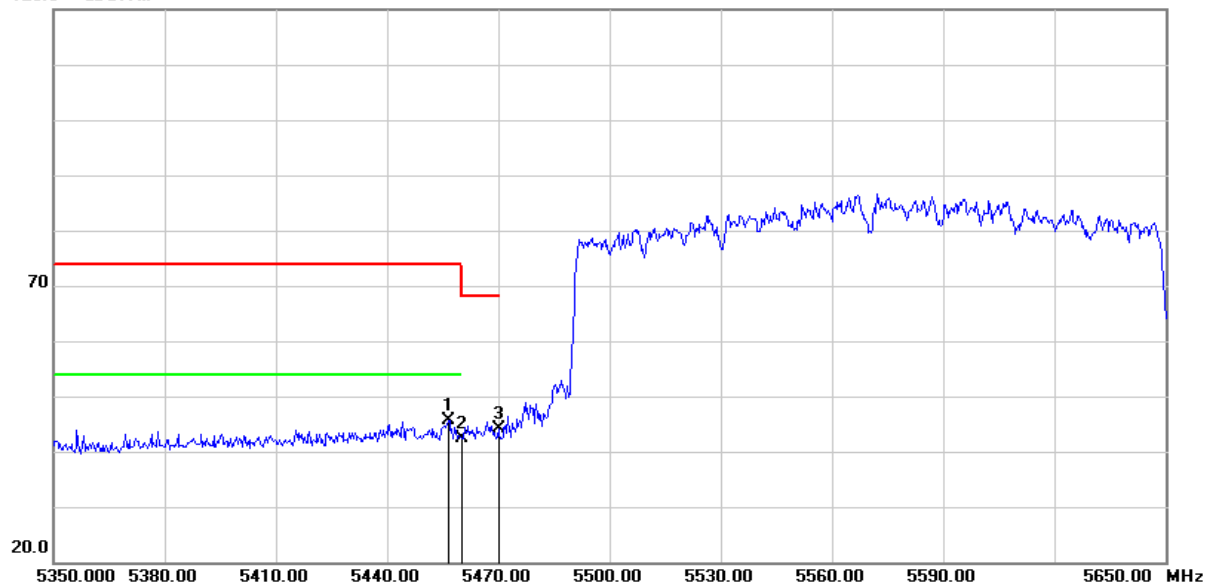

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5456.500        | 42.87            | 2.87                  | 45.74           | 74.00          | -28.26      | peak   |
| 2   | 5460.000        | 39.57            | 2.87                  | 42.44           | 74.00          | -31.56      | peak   |
| 3   | 5470.000        | 41.31            | 2.90                  | 44.21           | 68.20          | -23.99      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.


## 2.5.6 Test Result of Radiated Spurious Emission Measurement

- (1) The radiation measurement frequency is 9kHz ~ 30MHz. The interference value of this frequency range is less than the limit value of 20 dB. It is considered that the background noise value is not recorded.
- (2) The following table shows the radiation measurement frequency from 30MHz to 40GHz, pre-scanning in the X, Y and Z axes. The worst case (X-axis) is documented in this report.

| Test Frequency |                                |                             |                             |                               |
|----------------|--------------------------------|-----------------------------|-----------------------------|-------------------------------|
| RF             | 802.11a /ac-VHT20 /<br>ax-HE20 | 802.11ac-VHT40 /<br>ax-HE40 | 802.11ac-VHT80 /<br>ax-HE80 | 802.11ac-VHT160 /<br>ax-HE160 |
| Tx             | CH36 (5180MHz)                 | CH38 (5190MHz)              | CH42 (5210MHz)              | CH50 (5250MHz)                |
|                | CH40 (5200MHz)                 | CH46 (5230MHz)              | CH58 (5290MHz)              | CH114 (5570MHz)               |
|                | CH48 (5240MHz)                 | CH54 (5270MHz)              | CH106 (5530MHz)             |                               |
|                | CH52 (5260MHz)                 | CH62 (5310MHz)              | CH122 (5610MHz)             |                               |
|                | CH60 (5300MHz)                 | CH102 (5510MHz)             | CH155 (5775MHz)             |                               |
|                | CH64 (5320MHz)                 | CH110 (5550MHz)             |                             |                               |
|                | CH100 (5500MHz)                | CH134 (5670MHz)             |                             |                               |
|                | CH116 (5580MHz)                | CH151 (5755MHz)             |                             |                               |
|                | CH140 (5700MHz)                | CH159 (5795MHz)             |                             |                               |
|                | CH149 (5745MHz)                |                             |                             |                               |
|                | CH157 (5785MHz)                |                             |                             |                               |
|                | CH165 (5825MHz)                |                             |                             |                               |

### Above 1GHz Data

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH36(5180MHz)                     | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 52 %       |

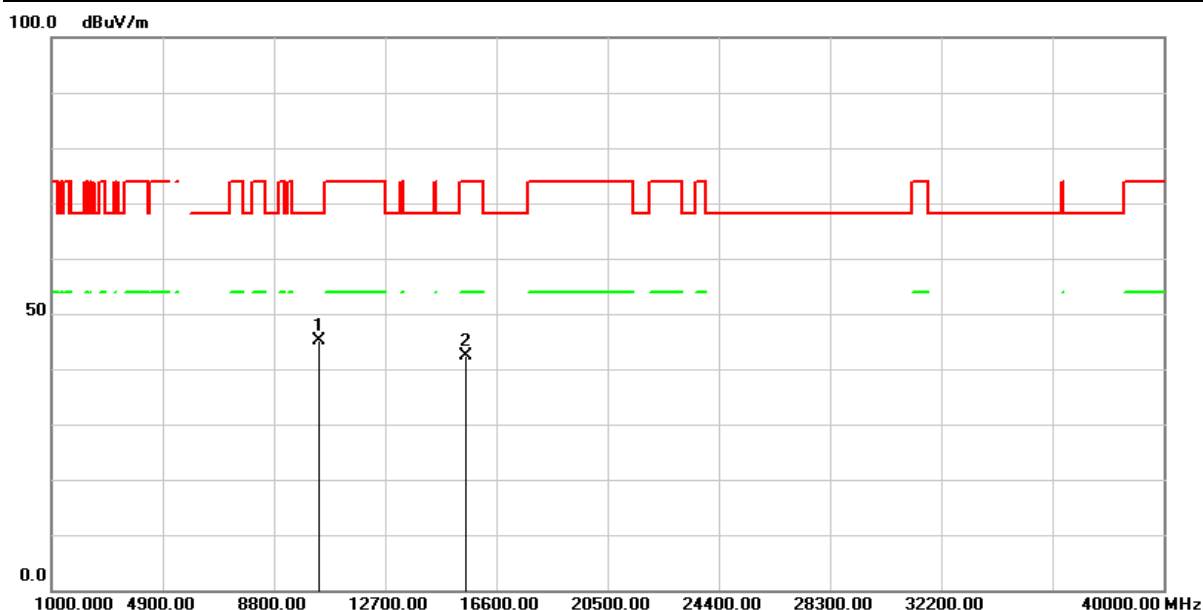


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10360.000       | 55.09            | -10.05                | 45.04           | 68.20          | -23.16      | peak   |
| 2   | 15540.000       | 50.07            | -7.80                 | 42.27           | 74.00          | -31.73      | peak   |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH36(5180MHz)                     | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 52 %       |

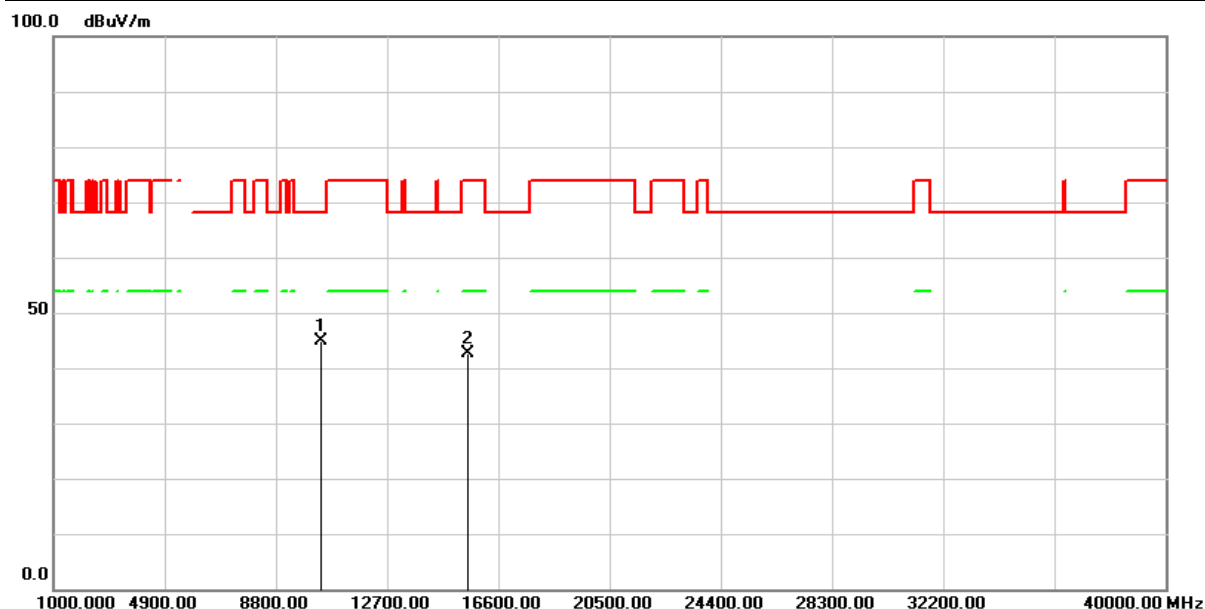


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10360.000       | 54.93            | -10.05                | 44.88           | 68.20          | -23.32      | peak   |
| 2   | 15540.000       | 50.50            | -7.80                 | 42.70           | 74.00          | -31.30      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH40(5200MHz)                     | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 52 %       |

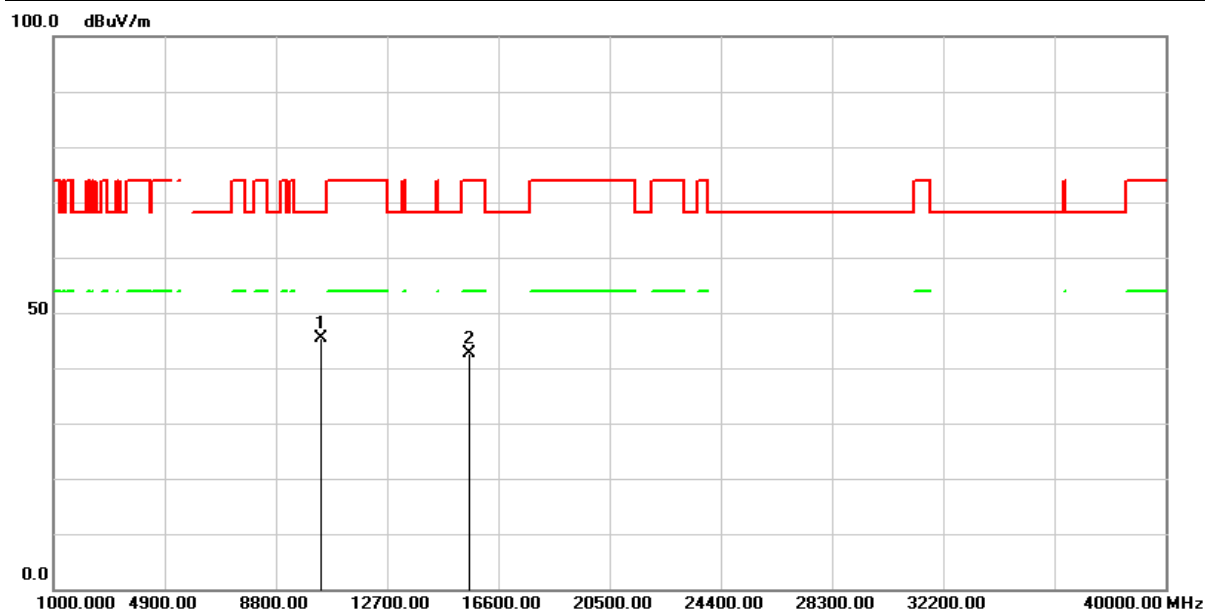


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10400.000       | 55.43            | -9.95                 | 45.48           | 68.20          | -22.72      | peak   |
| 2   | 15600.000       | 50.49            | -7.79                 | 42.70           | 74.00          | -31.30      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH40(5200MHz)                     | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 52 %       |

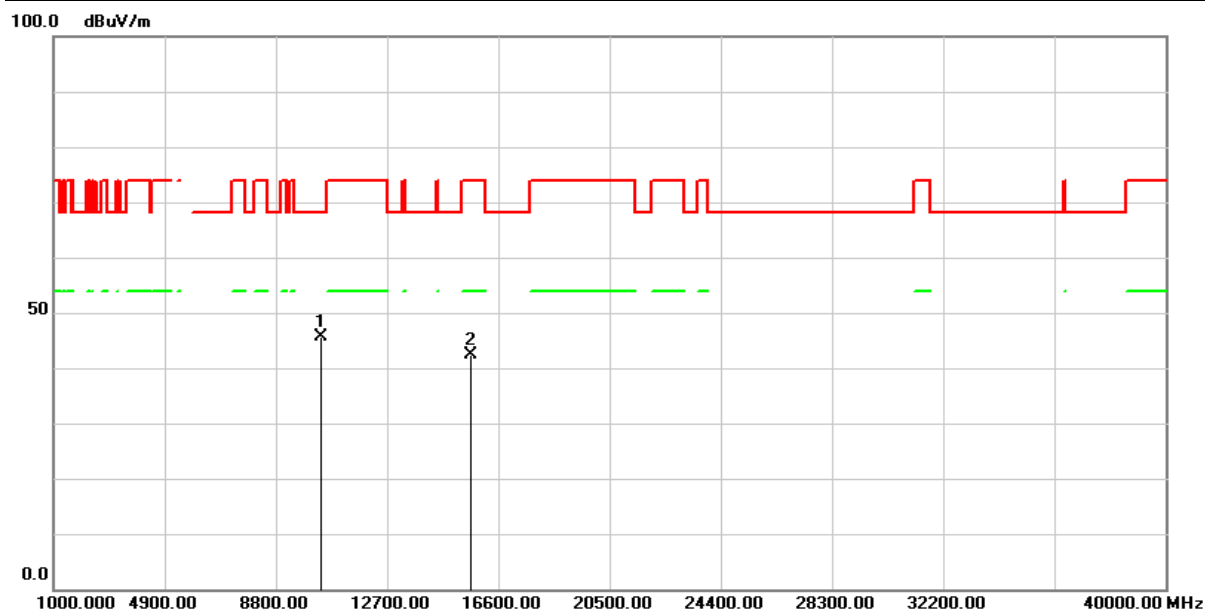


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10400.000       | 55.52            | -9.95                 | 45.57           | 68.20          | -22.63      | peak   |
| 2   | 15600.000       | 50.27            | -7.79                 | 42.48           | 74.00          | -31.52      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH48(5240MHz)                     | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 52 %       |

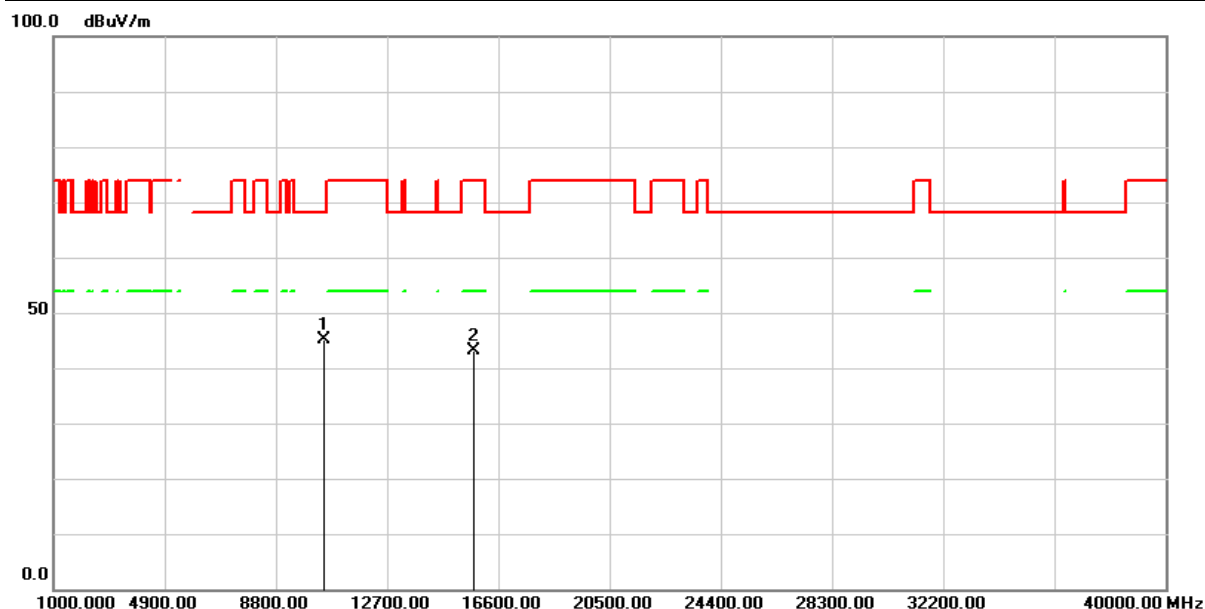


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10480.000       | 55.18            | -9.97                 | 45.21           | 68.20          | -22.99      | peak   |
| 2   | 15720.000       | 50.78            | -7.62                 | 43.16           | 74.00          | -30.84      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH48(5240MHz)                     | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 52 %       |

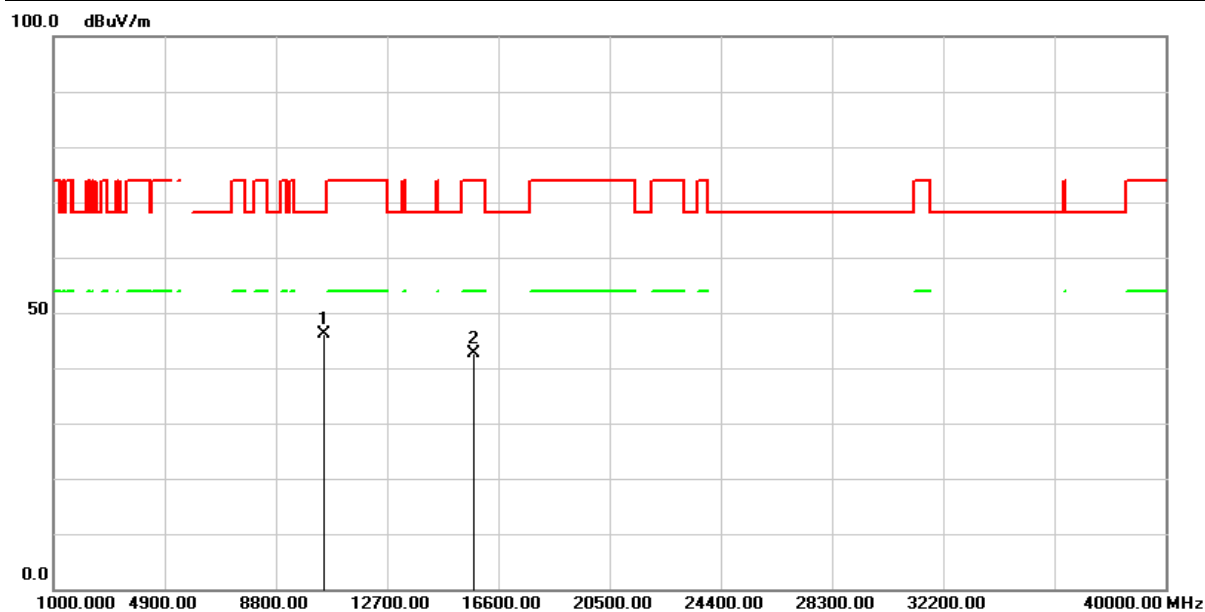


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10480.000       | 56.10            | -9.97                 | 46.13           | 68.20          | -22.07      | peak   |
| 2   | 15720.000       | 50.21            | -7.62                 | 42.59           | 74.00          | -31.41      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH52(5260MHz)                     | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 52 %       |

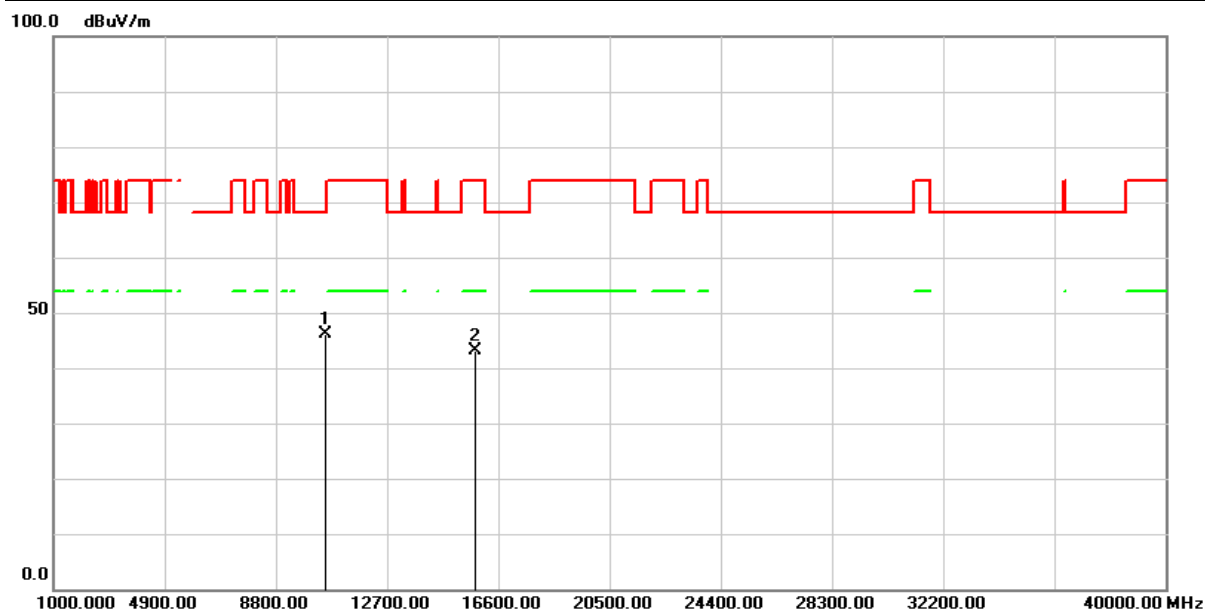


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 56.26            | -10.01                | 46.25           | 68.20          | -21.95      | peak   |
| 2   | 15780.000       | 50.58            | -7.51                 | 43.07           | 74.00          | -30.93      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH52(5260MHz)                     | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 52 %       |

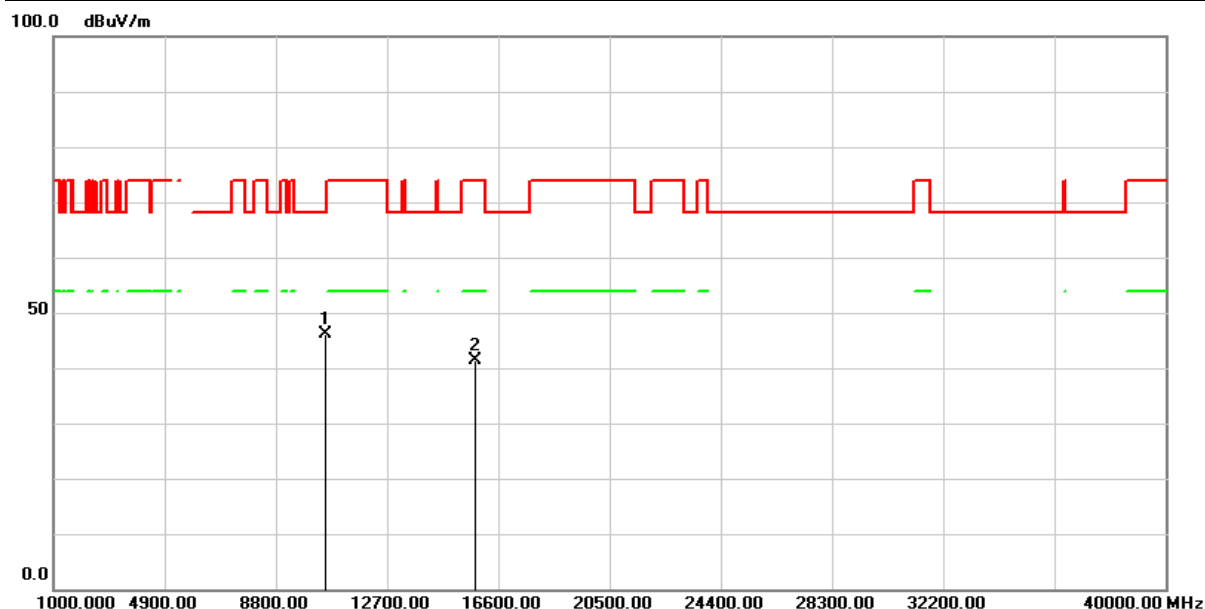


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 56.16            | -10.01                | 46.15           | 68.20          | -22.05      | peak   |
| 2   | 15780.000       | 49.00            | -7.51                 | 41.49           | 74.00          | -32.51      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH60(5300MHz)                     | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 52 %       |

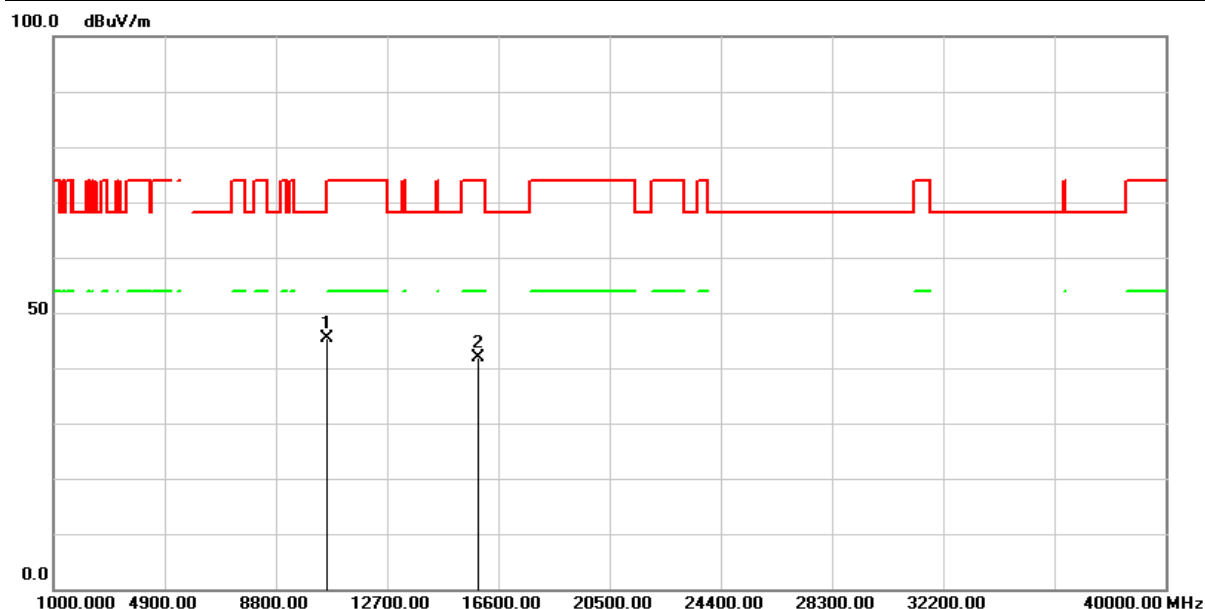


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10600.000       | 55.36            | -9.94                 | 45.42           | 68.20          | -22.78      | peak   |
| 2   | 15900.000       | 49.12            | -7.20                 | 41.92           | 74.00          | -32.08      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH60(5300MHz)                     | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 52 %       |

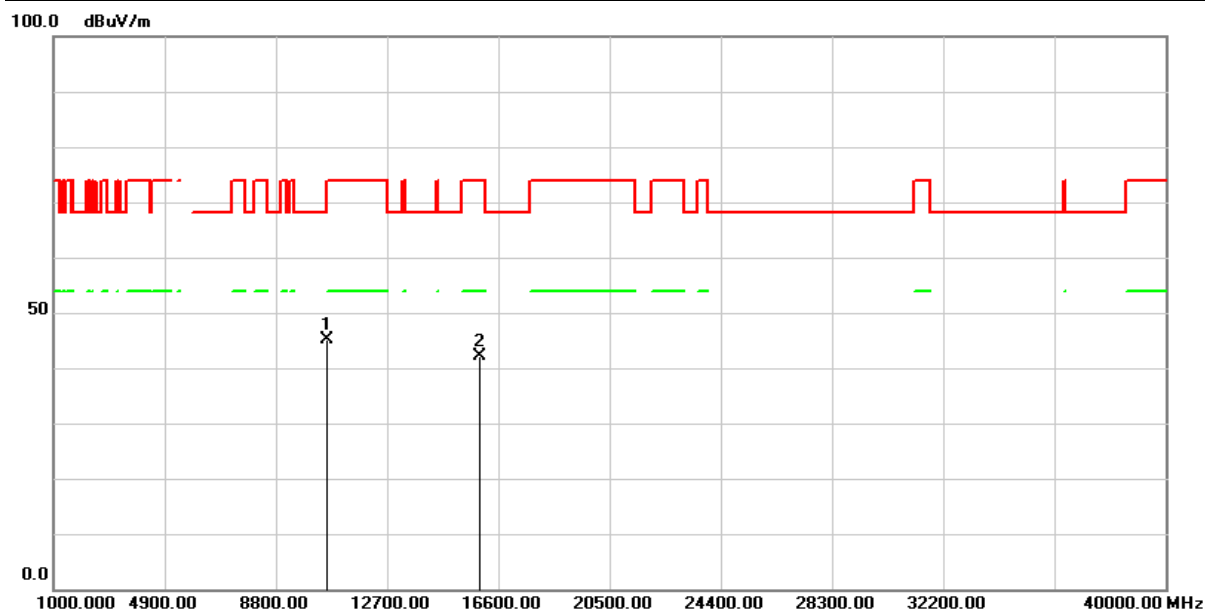


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10600.000       | 54.98            | -9.94                 | 45.04           | 68.20          | -23.16      | peak   |
| 2   | 15900.000       | 49.26            | -7.20                 | 42.06           | 74.00          | -31.94      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH64(5320MHz)                     | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 52 %       |

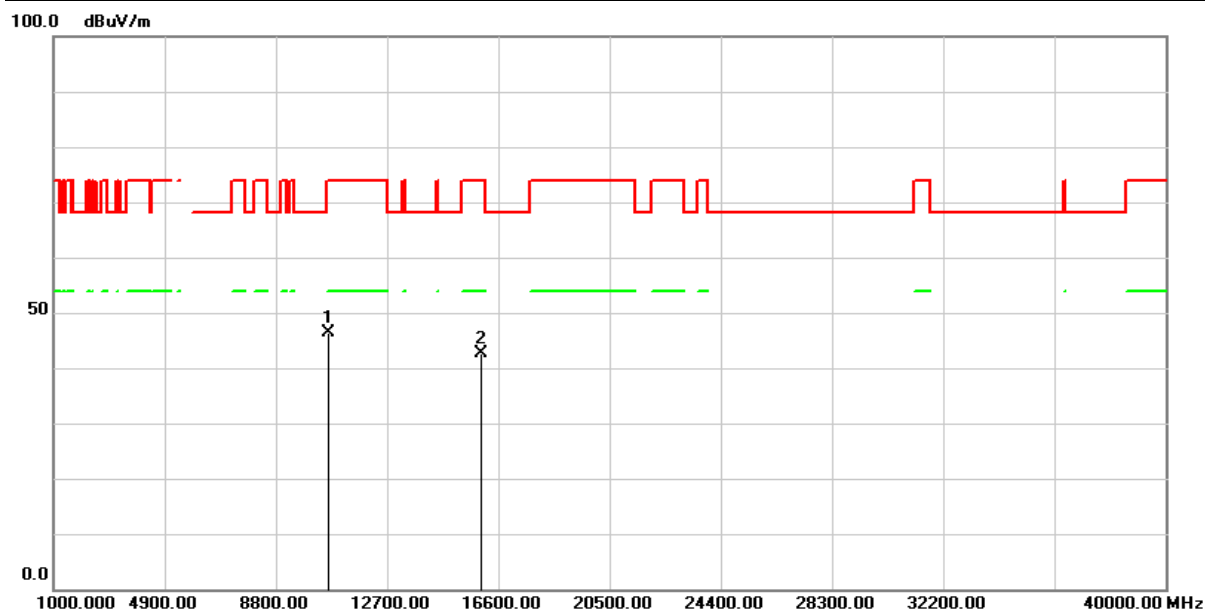


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10640.000       | 56.32            | -9.87                 | 46.45           | 74.00          | -27.55      | peak   |
| 2   | 15960.000       | 49.81            | -7.29                 | 42.52           | 74.00          | -31.48      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH64(5320MHz)                     | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 52 %       |

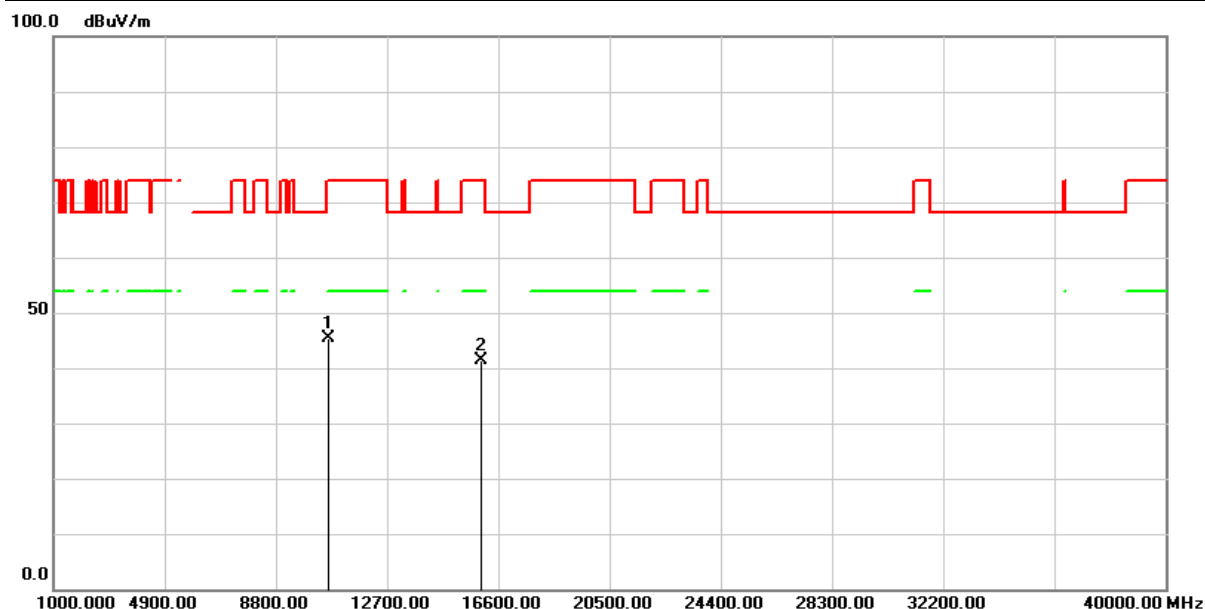


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10640.000       | 55.30            | -9.87                 | 45.43           | 74.00          | -28.57      | peak   |
| 2   | 15960.000       | 48.78            | -7.29                 | 41.49           | 74.00          | -32.51      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH100(5500MHz)                    | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 52 %       |

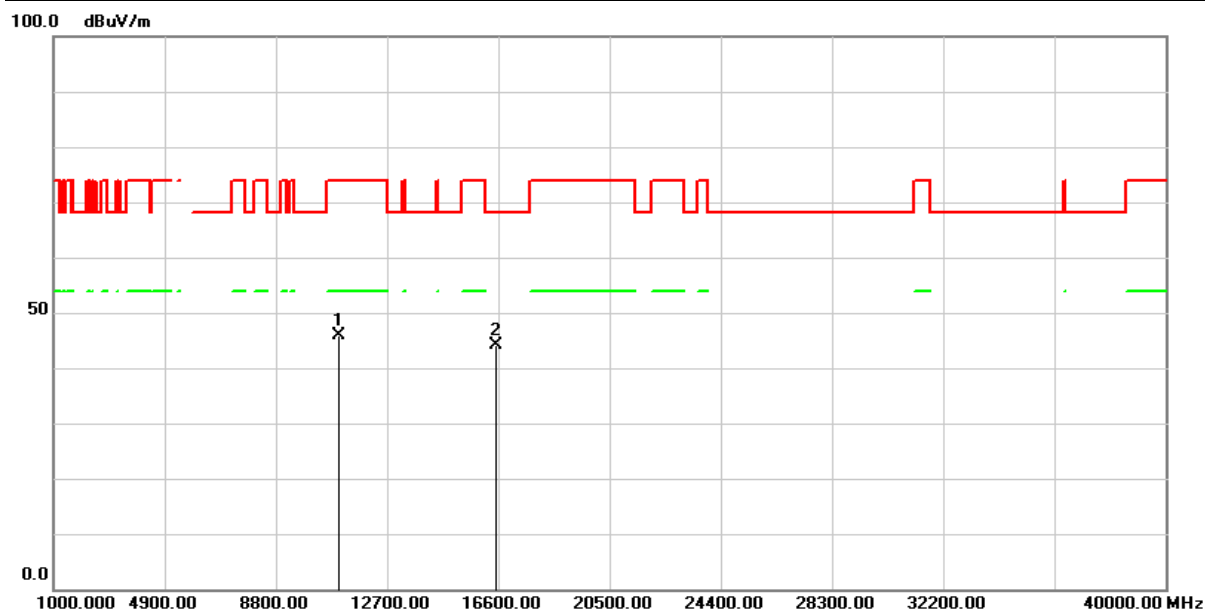


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11000.000       | 55.65            | -9.68                 | 45.97           | 74.00          | -28.03      | peak   |
| 2   | 16500.000       | 49.70            | -5.66                 | 44.04           | 68.20          | -24.16      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH100(5500MHz)                    | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 52 %       |

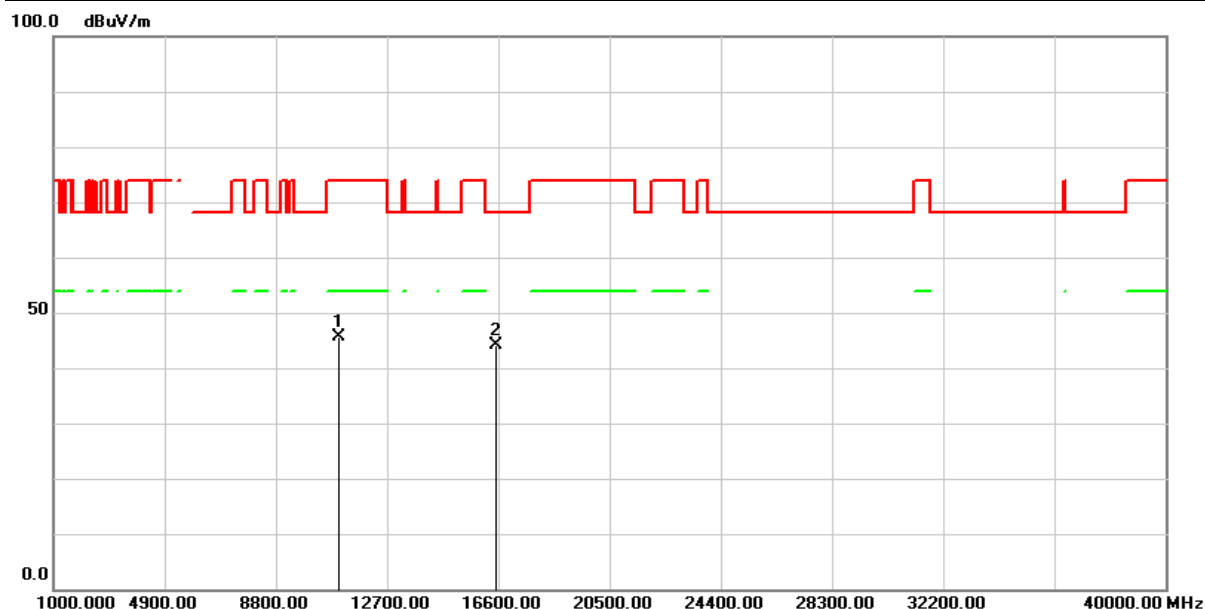


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11000.000       | 55.26            | -9.68                 | 45.58           | 74.00          | -28.42      | peak   |
| 2   | 16500.000       | 49.71            | -5.66                 | 44.05           | 68.20          | -24.15      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH116(5580MHz)                    | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 52 %       |

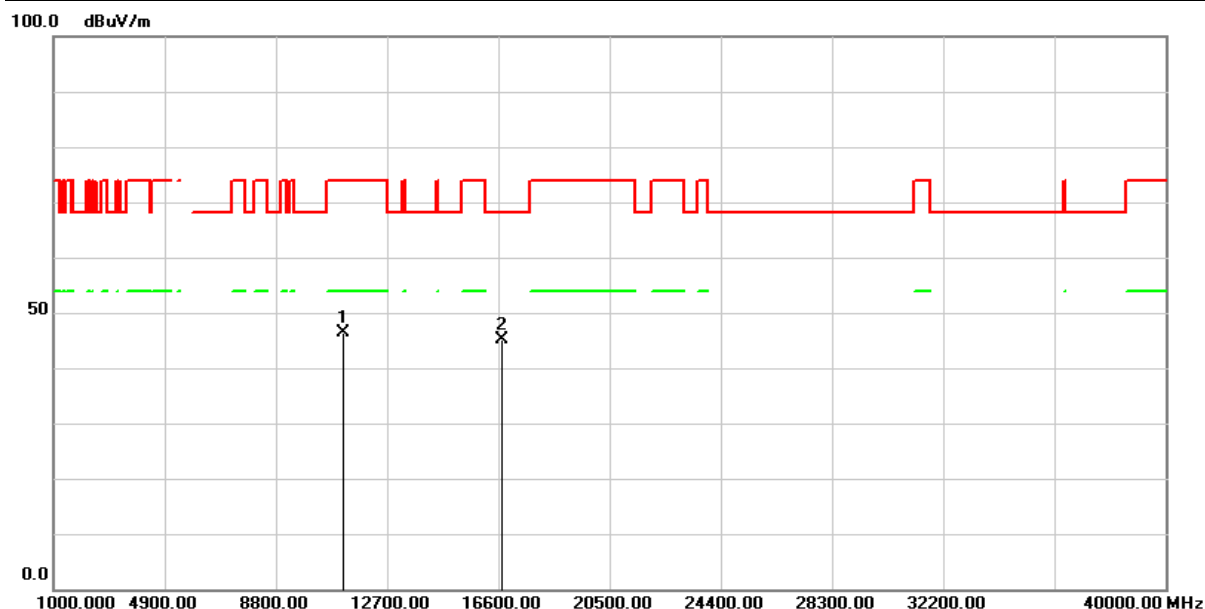


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11160.000       | 56.19            | -9.89                 | 46.30           | 74.00          | -27.70      | peak   |
| 2   | 16740.000       | 49.36            | -4.31                 | 45.05           | 68.20          | -23.15      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH116(5580MHz)                    | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 52 %       |

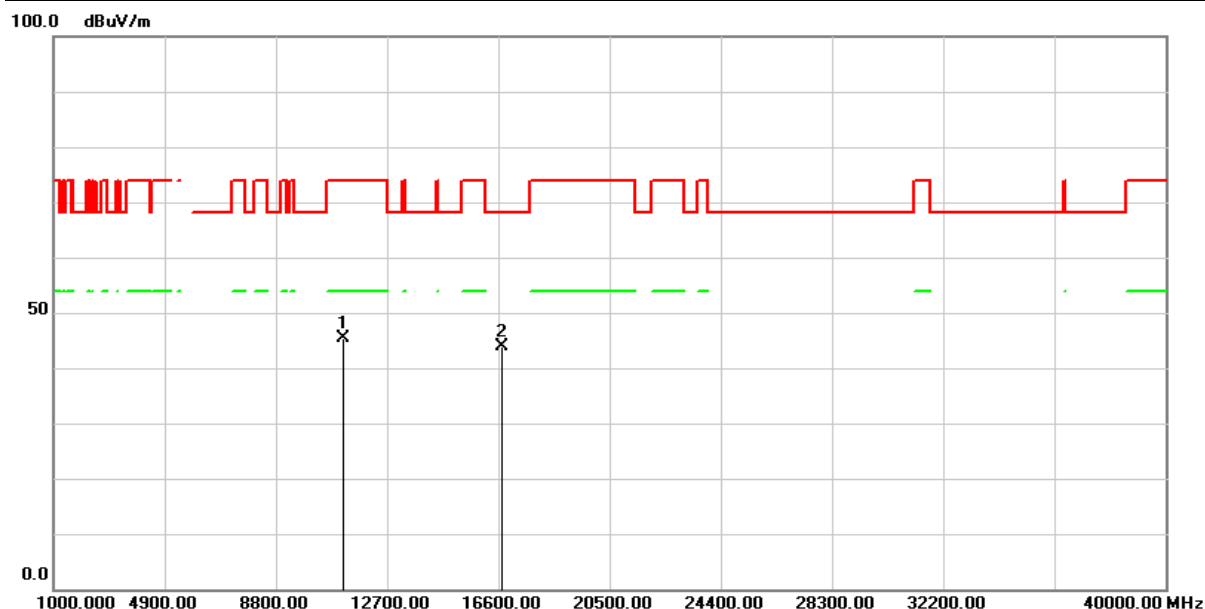


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11160.000       | 55.15            | -9.89                 | 45.26           | 74.00          | -28.74      | peak   |
| 2   | 16740.000       | 48.26            | -4.31                 | 43.95           | 68.20          | -24.25      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH140(5700MHz)                    | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 52 %       |

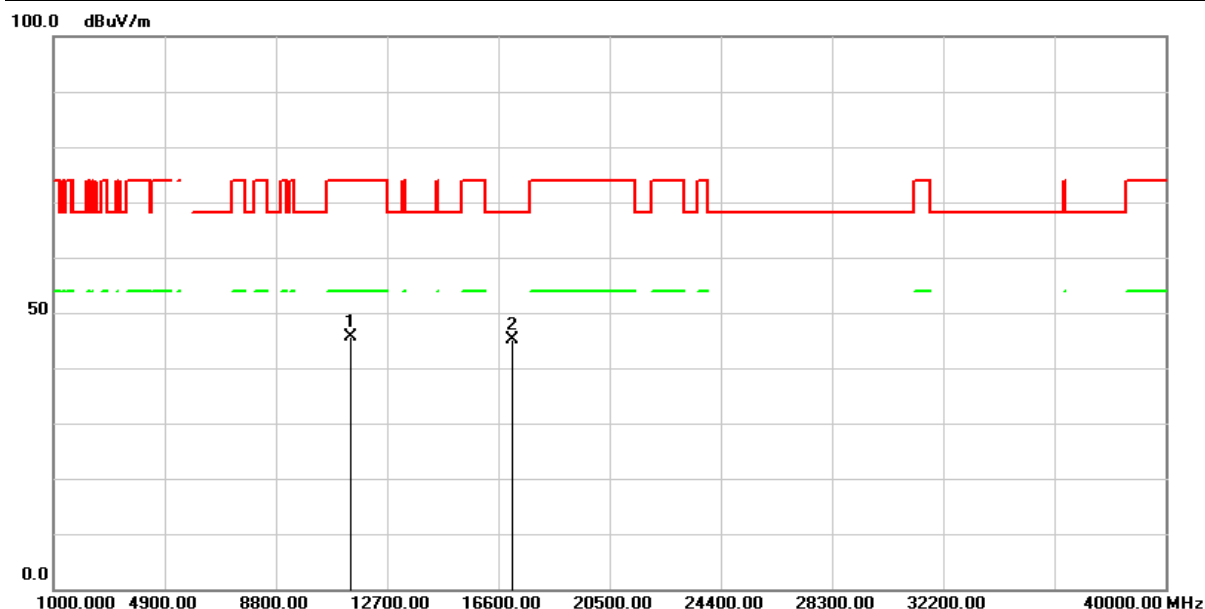


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11400.000       | 55.22            | -9.59                 | 45.63           | 74.00          | -28.37      | peak   |
| 2   | 17100.000       | 47.78            | -2.67                 | 45.11           | 68.20          | -23.09      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH140(5700MHz)                    | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 52 %       |

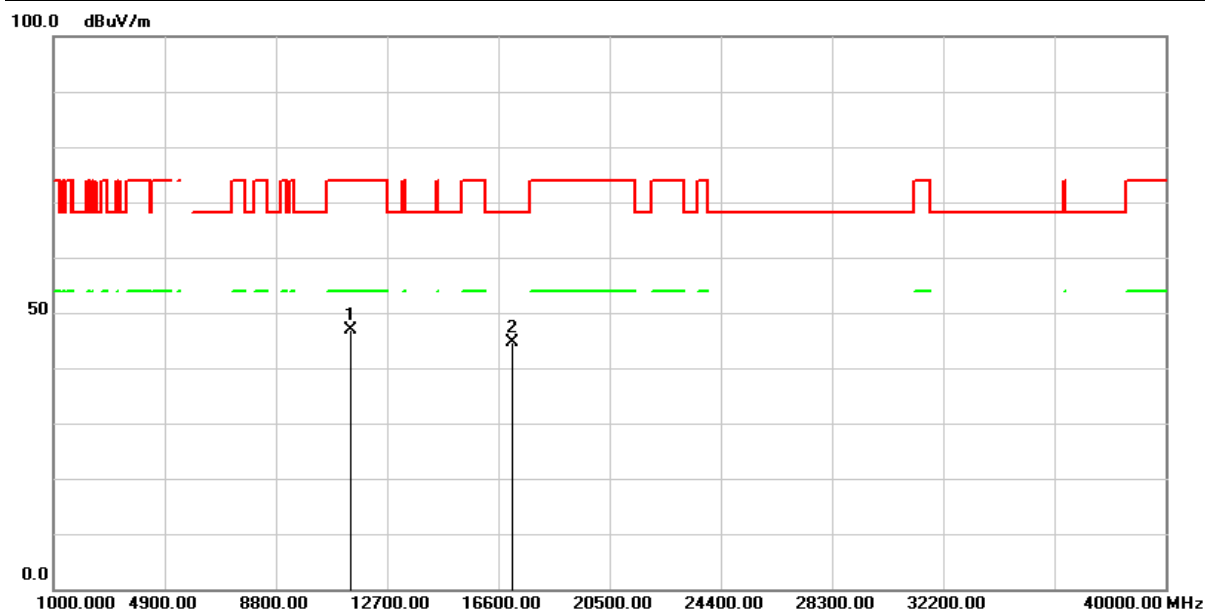


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11400.000       | 56.59            | -9.59                 | 47.00           | 74.00          | -27.00      | peak   |
| 2   | 17100.000       | 47.40            | -2.67                 | 44.73           | 68.20          | -23.47      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH149(5745MHz)                    | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 52 %       |

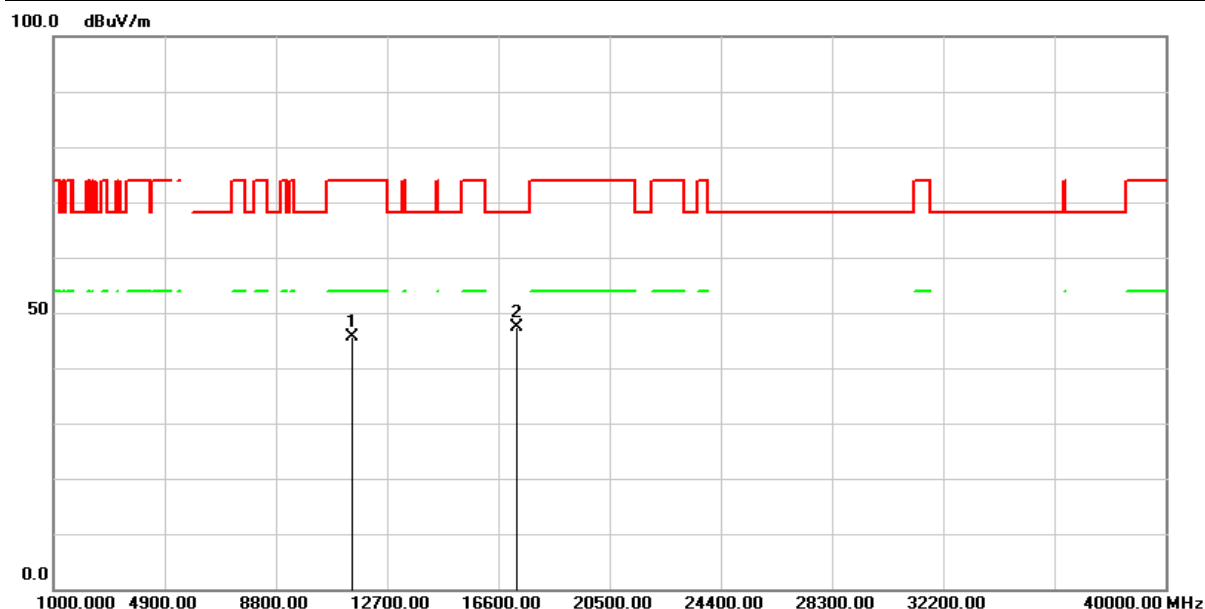


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11490.000       | 55.19            | -9.45                 | 45.74           | 74.00          | -28.26      | peak   |
| 2   | 17235.000       | 49.54            | -2.24                 | 47.30           | 68.20          | -20.90      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH149(5745MHz)                    | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 52 %       |

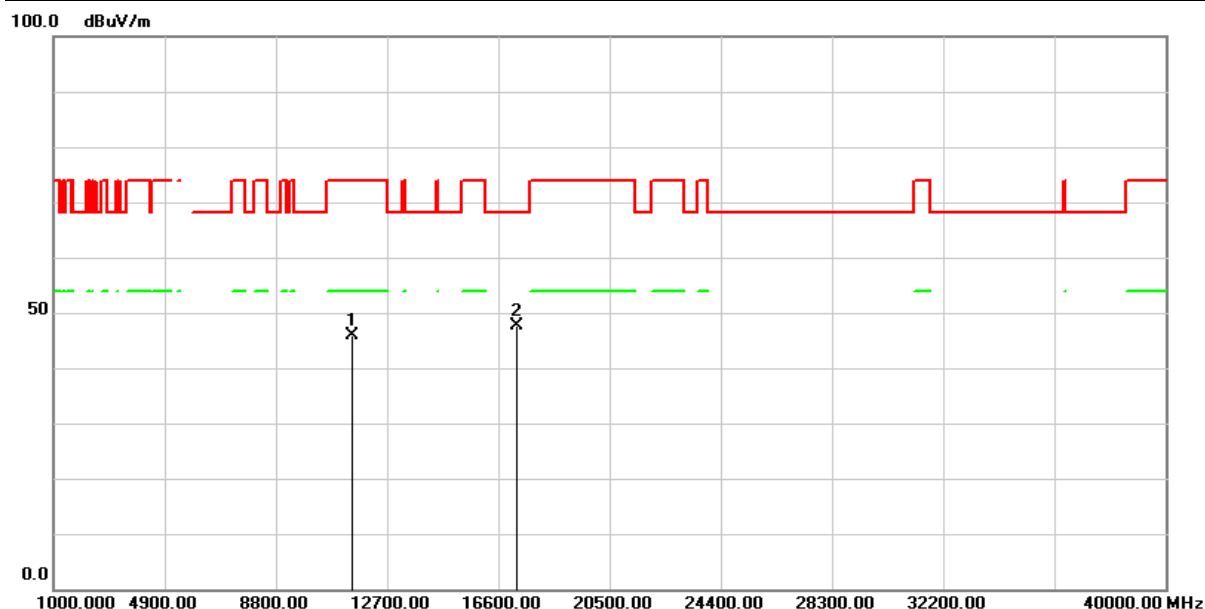


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11490.000       | 55.22            | -9.45                 | 45.77           | 74.00          | -28.23      | peak   |
| 2   | 17235.000       | 49.96            | -2.24                 | 47.72           | 68.20          | -20.48      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH157(5785MHz)                    | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 52 %       |

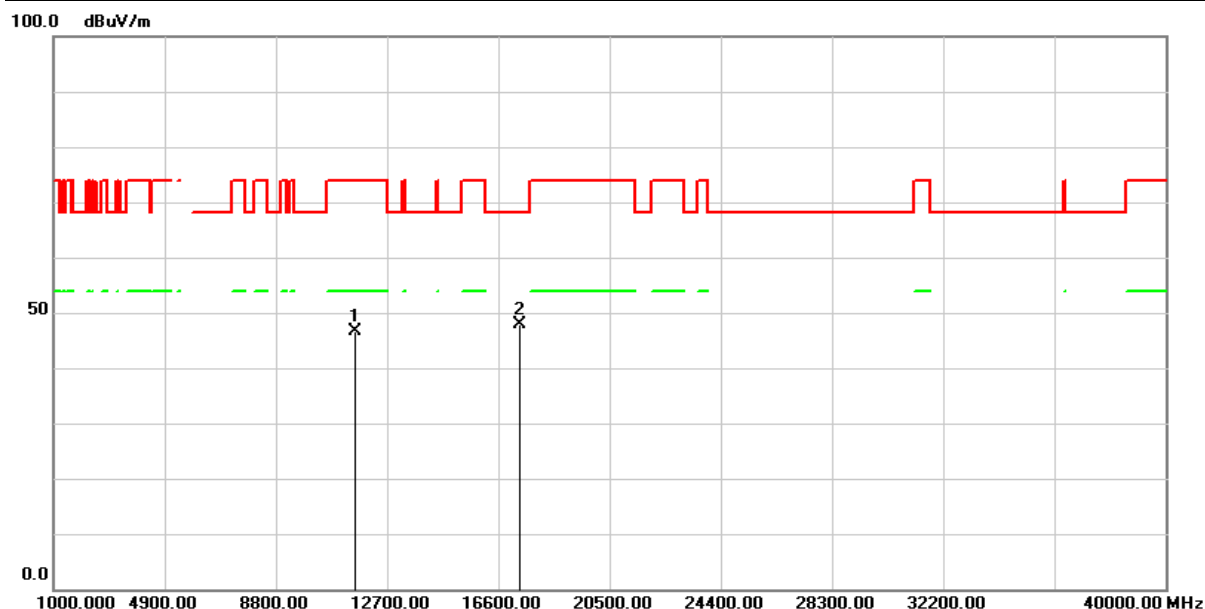


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11570.000       | 56.13            | -9.40                 | 46.73           | 74.00          | -27.27      | peak   |
| 2   | 17355.000       | 49.62            | -1.65                 | 47.97           | 68.20          | -20.23      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH157(5785MHz)                    | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 52 %       |

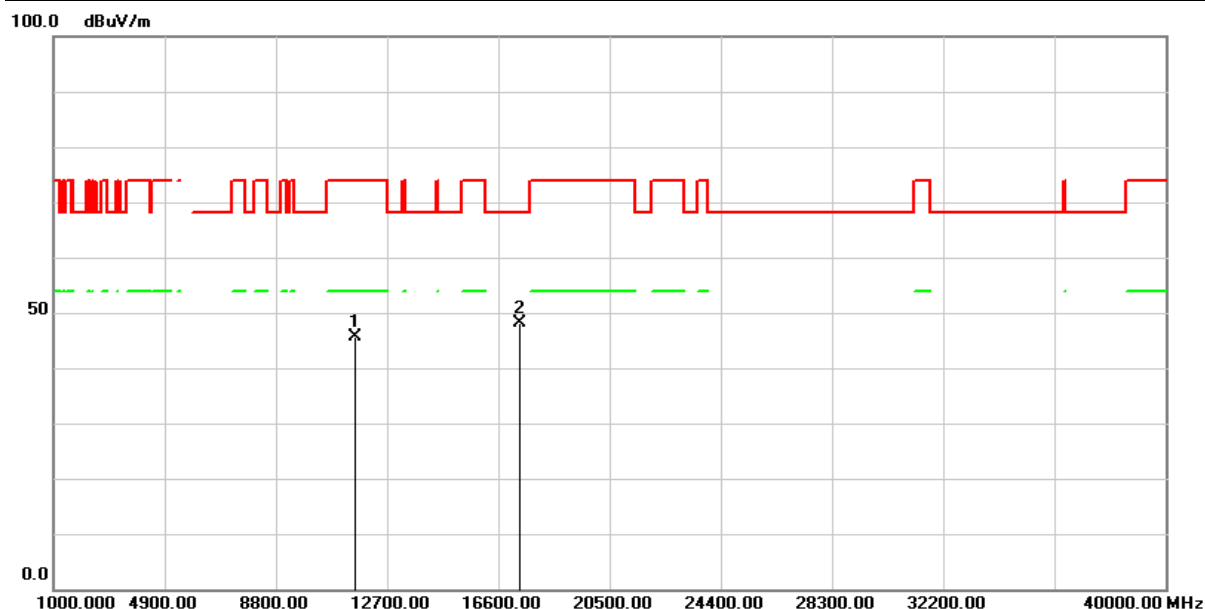


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11570.000       | 55.08            | -9.40                 | 45.68           | 74.00          | -28.32      | peak   |
| 2   | 17355.000       | 49.87            | -1.65                 | 48.22           | 68.20          | -19.98      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH165(5825MHz)                    | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 52 %       |

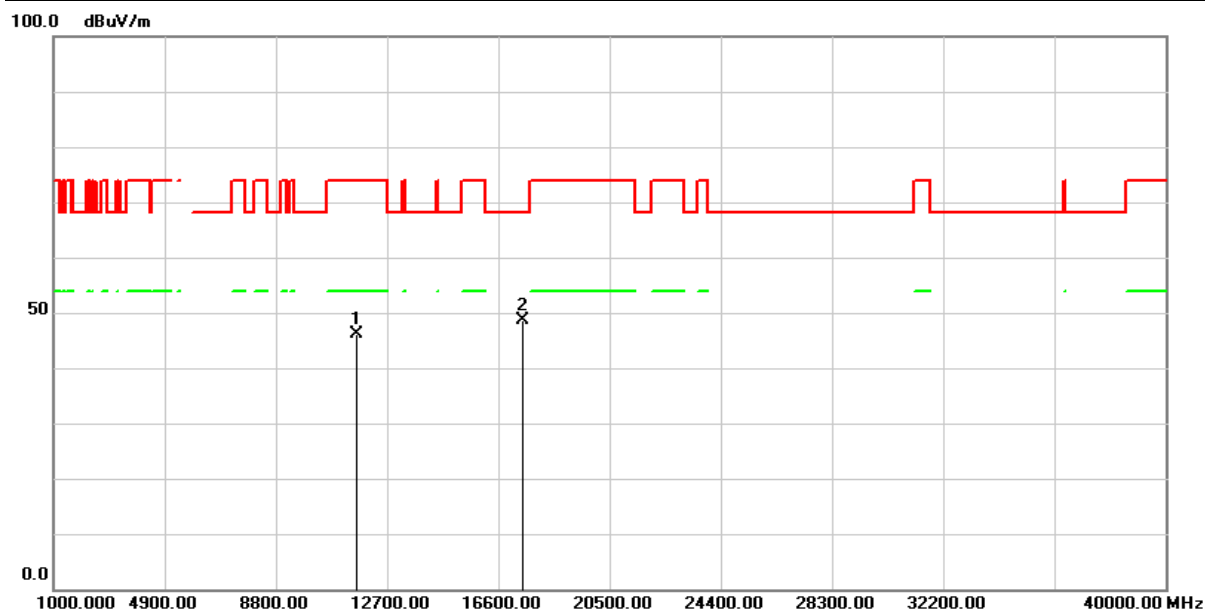


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11650.000       | 55.98            | -9.82                 | 46.16           | 74.00          | -27.84      | peak   |
| 2   | 17475.000       | 49.57            | -0.85                 | 48.72           | 68.20          | -19.48      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH165(5825MHz)                    | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 52 %       |

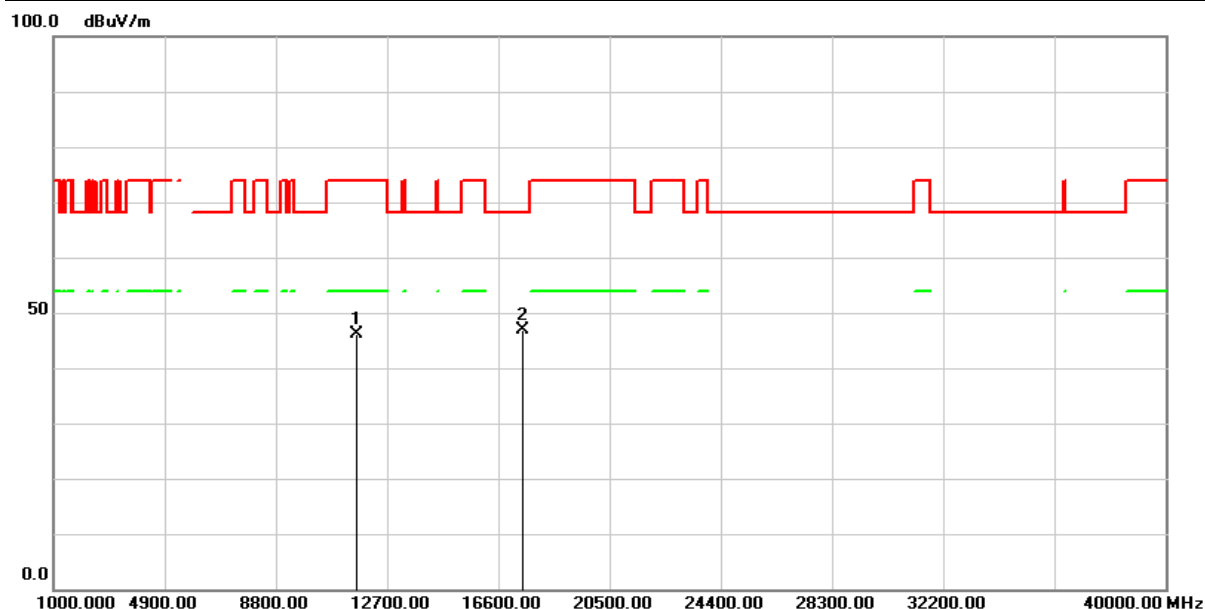


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11650.000       | 55.94            | -9.82                 | 46.12           | 74.00          | -27.88      | peak   |
| 2   | 17475.000       | 47.64            | -0.85                 | 46.79           | 68.20          | -21.41      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH36(5180MHz)                           | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 52 %       |

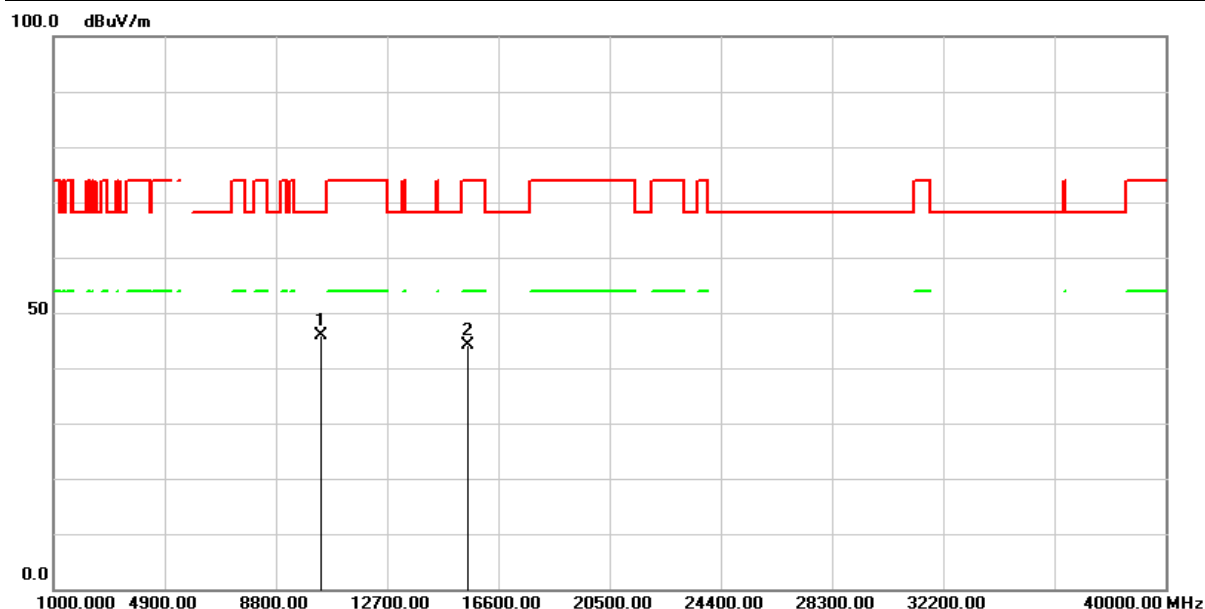


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10360.000       | 55.81            | -10.05                | 45.76           | 68.20          | -22.44      | peak   |
| 2   | 15540.000       | 51.86            | -7.80                 | 44.06           | 74.00          | -29.94      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH36(5180MHz)                           | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 52 %       |

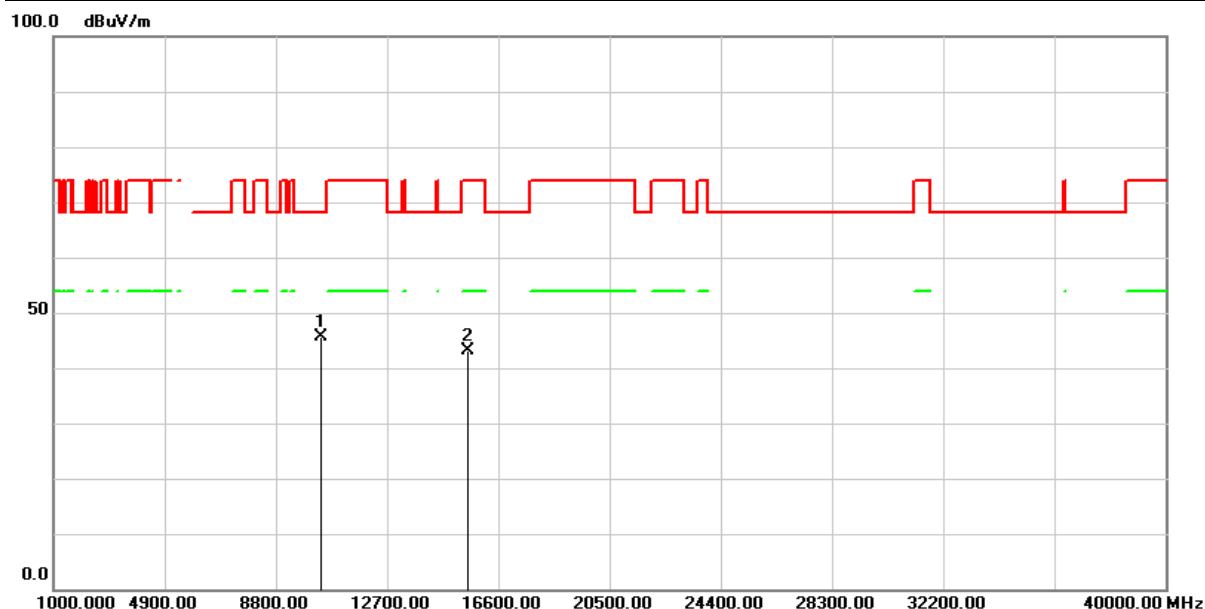


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10360.000       | 55.70            | -10.05                | 45.65           | 68.20          | -22.55      | peak   |
| 2   | 15540.000       | 51.04            | -7.80                 | 43.24           | 74.00          | -30.76      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH44(5200MHz)                           | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 52 %       |

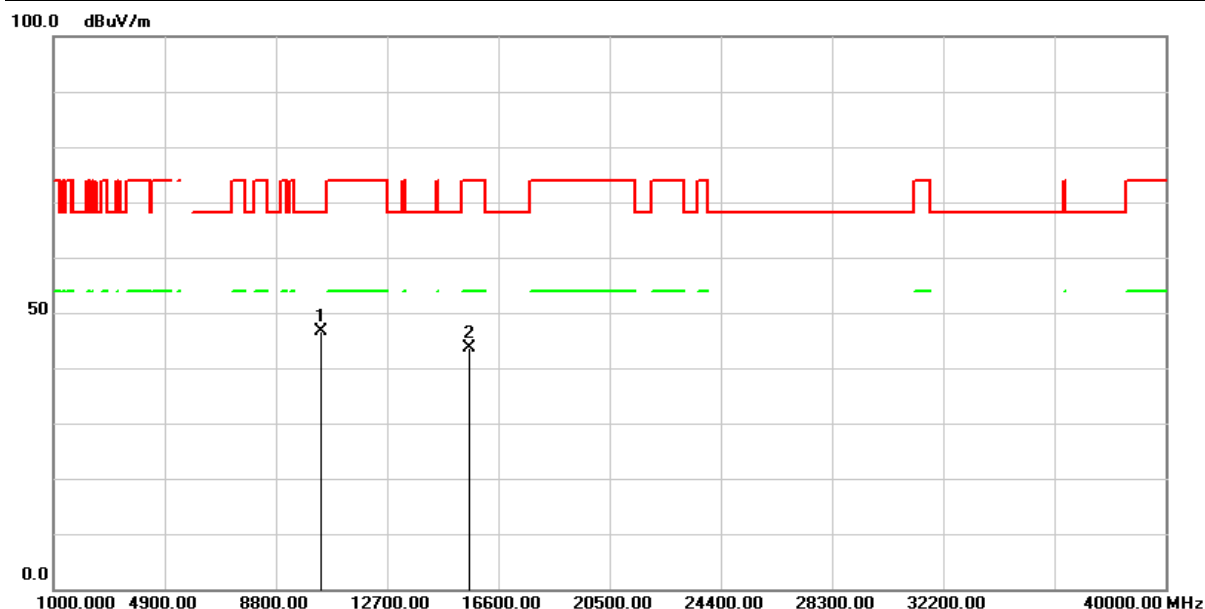


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10400.000       | 56.47            | -9.95                 | 46.52           | 68.20          | -21.68      | peak   |
| 2   | 15600.000       | 51.41            | -7.79                 | 43.62           | 74.00          | -30.38      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH44(5200MHz)                           | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 52 %       |

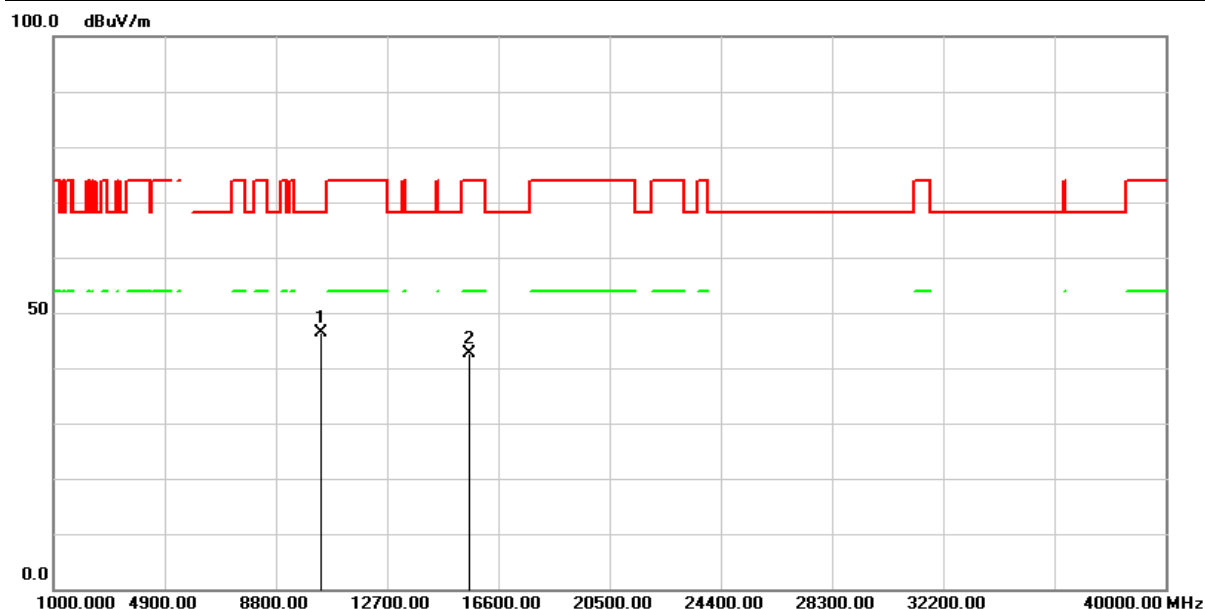


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10400.000       | 56.32            | -9.95                 | 46.37           | 68.20          | -21.83      | peak   |
| 2   | 15600.000       | 50.31            | -7.79                 | 42.52           | 74.00          | -31.48      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH48(5240MHz)                           | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 52 %       |

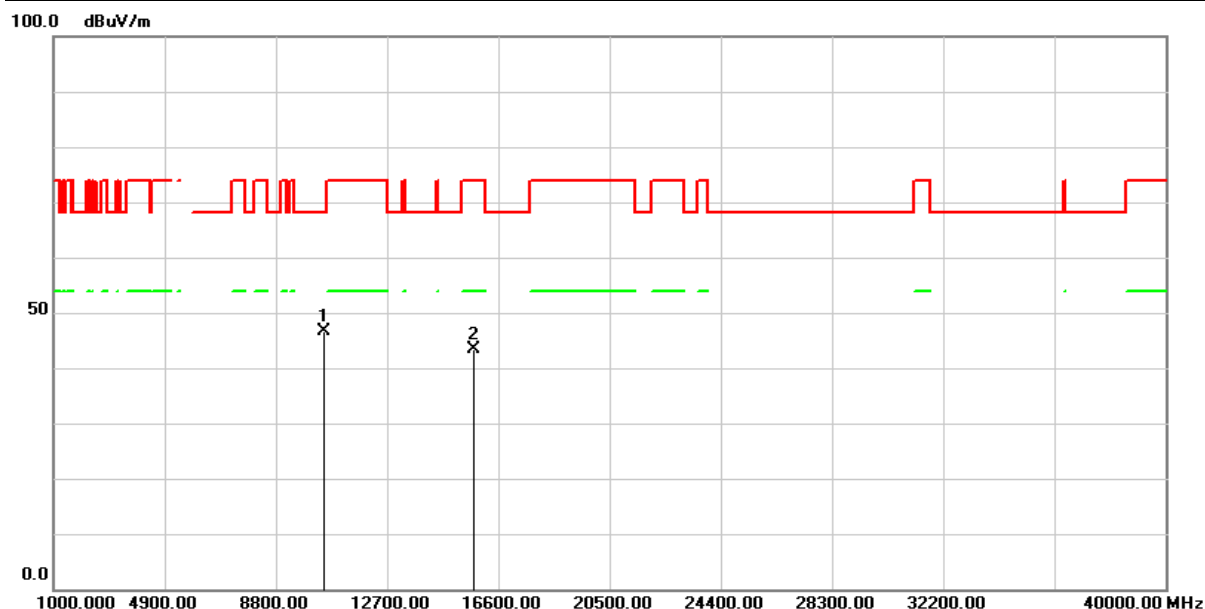


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10480.000       | 56.69            | -9.97                 | 46.72           | 68.20          | -21.48      | peak   |
| 2   | 15720.000       | 51.03            | -7.62                 | 43.41           | 74.00          | -30.59      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH48(5240MHz)                           | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 52 %       |

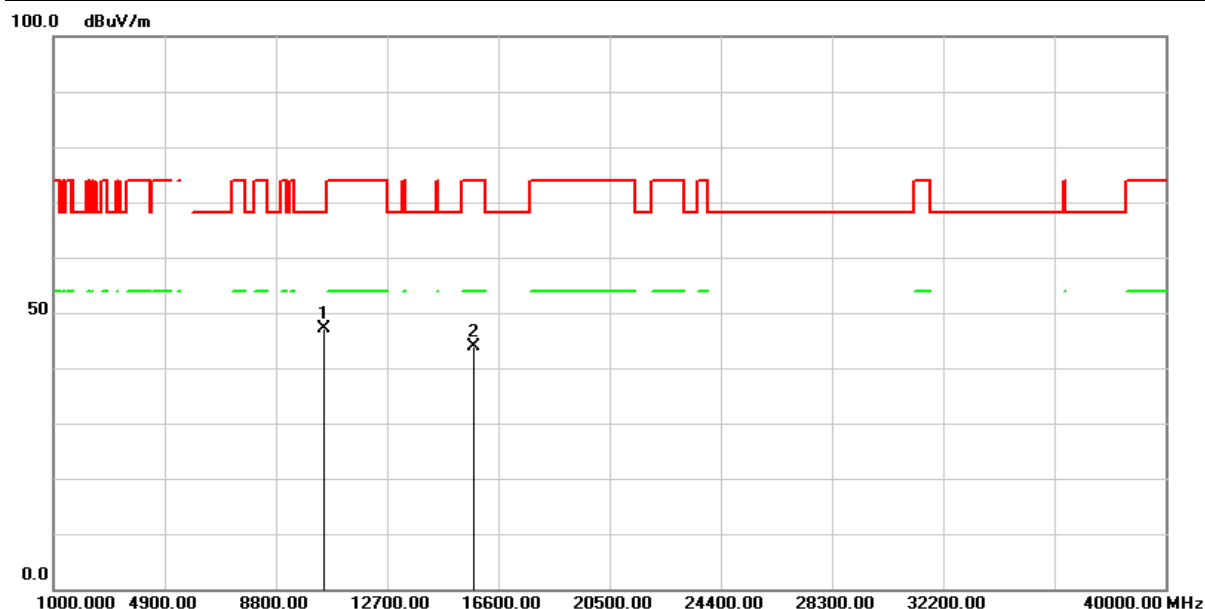


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10480.000       | 57.04            | -9.97                 | 47.07           | 68.20          | -21.13      | peak   |
| 2   | 15720.000       | 51.59            | -7.62                 | 43.97           | 74.00          | -30.03      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH52(5260MHz)                           | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 52 %       |

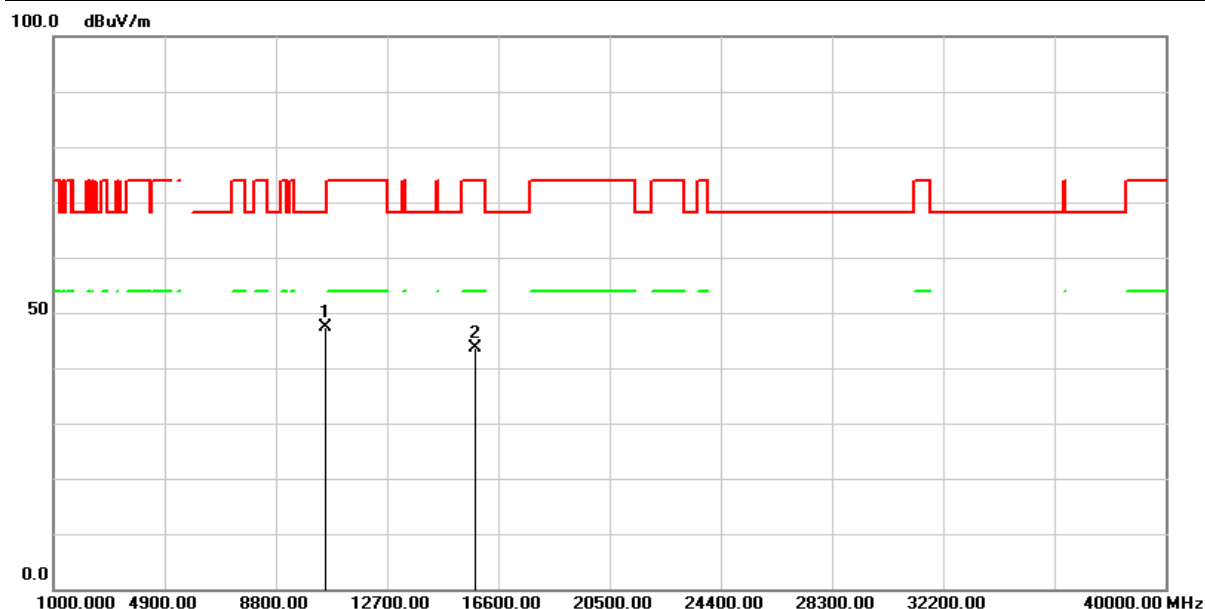


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 57.30            | -10.01                | 47.29           | 68.20          | -20.91      | peak   |
| 2   | 15780.000       | 51.12            | -7.51                 | 43.61           | 74.00          | -30.39      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH52(5260MHz)                           | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 52 %       |

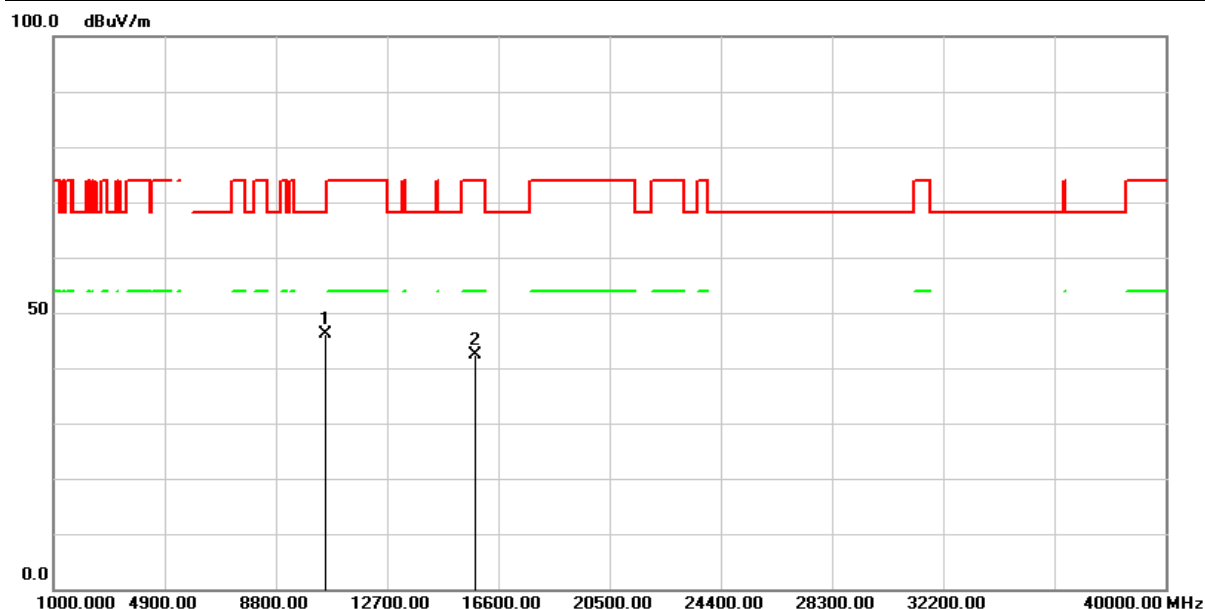


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 56.21            | -10.01                | 46.20           | 68.20          | -22.00      | peak   |
| 2   | 15780.000       | 49.97            | -7.51                 | 42.46           | 74.00          | -31.54      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH60(5300MHz)                           | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 52 %       |

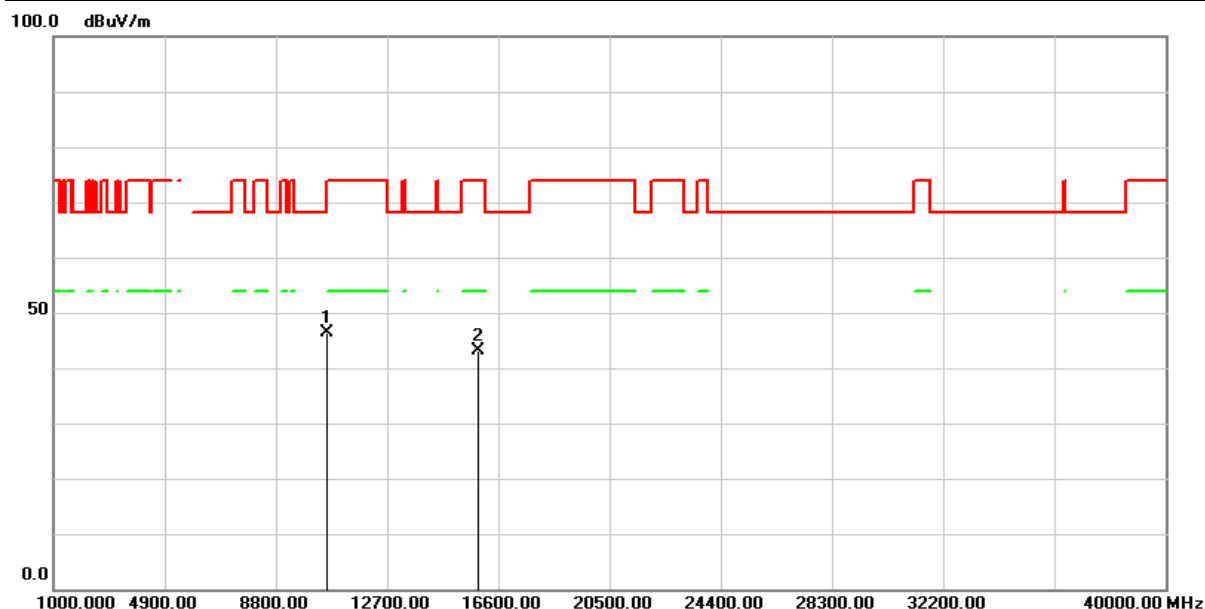


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10600.000       | 56.37            | -9.94                 | 46.43           | 68.20          | -21.77      | peak   |
| 2   | 15900.000       | 50.26            | -7.20                 | 43.06           | 74.00          | -30.94      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH60(5300MHz)                           | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 52 %       |

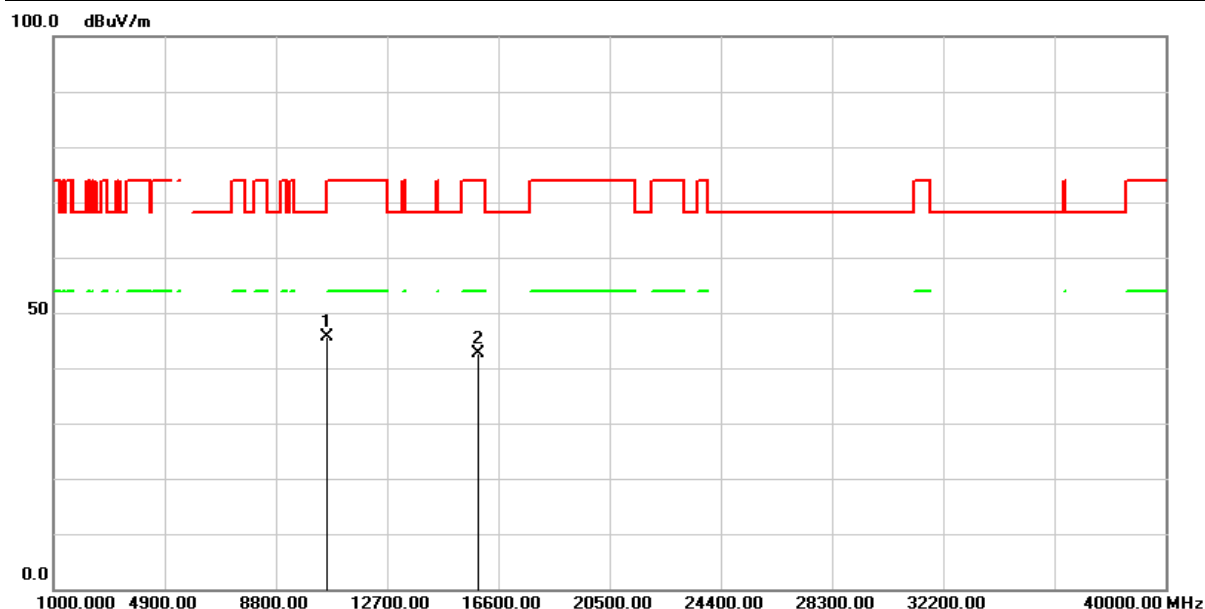


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10600.000       | 55.58            | -9.94                 | 45.64           | 68.20          | -22.56      | peak   |
| 2   | 15900.000       | 49.86            | -7.20                 | 42.66           | 74.00          | -31.34      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH64(5320MHz)                           | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 52 %       |

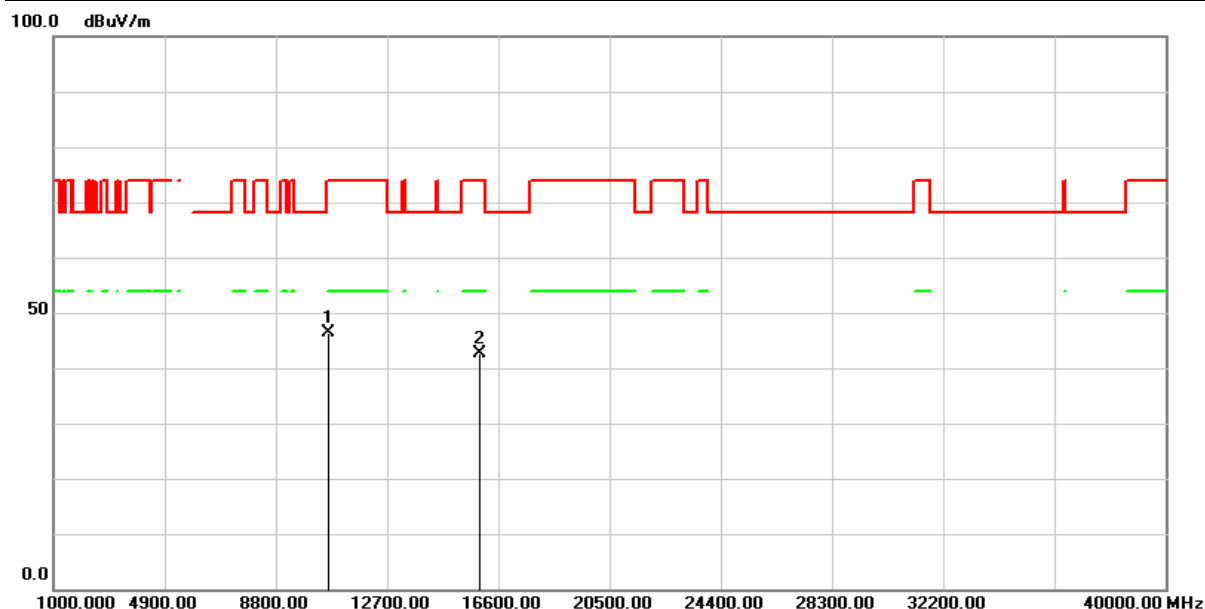


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10640.000       | 56.26            | -9.87                 | 46.39           | 74.00          | -27.61      | peak   |
| 2   | 15960.000       | 50.04            | -7.29                 | 42.75           | 74.00          | -31.25      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH64(5320MHz)                           | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 52 %       |

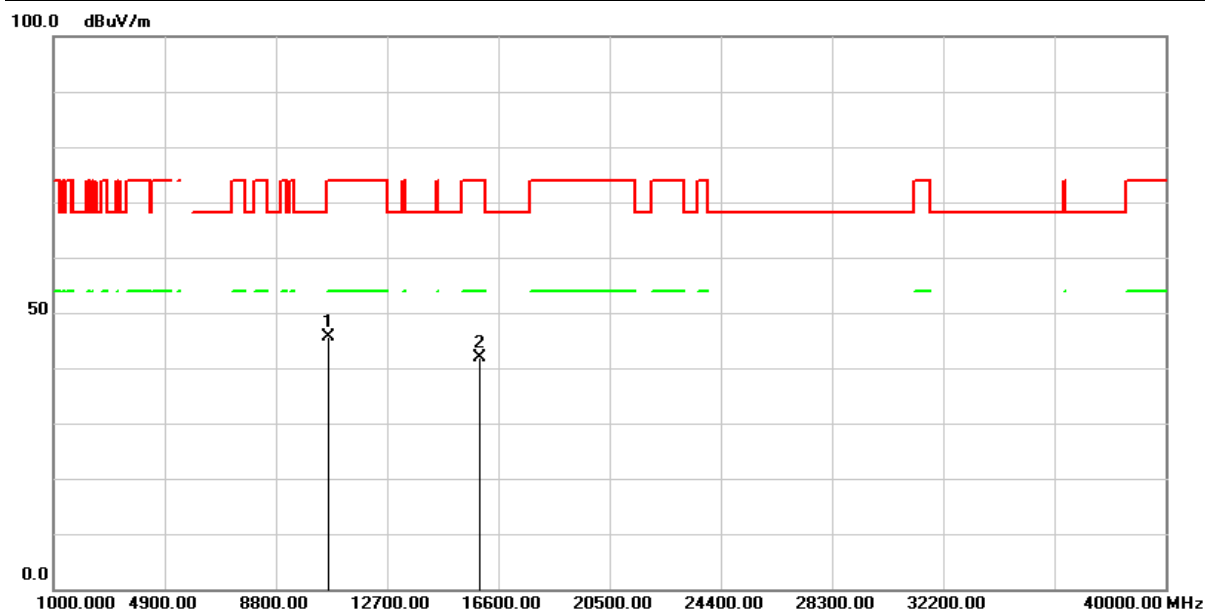


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10640.000       | 55.57            | -9.87                 | 45.70           | 74.00          | -28.30      | peak   |
| 2   | 15960.000       | 49.22            | -7.29                 | 41.93           | 74.00          | -32.07      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH100(5500MHz)                          | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 52 %       |

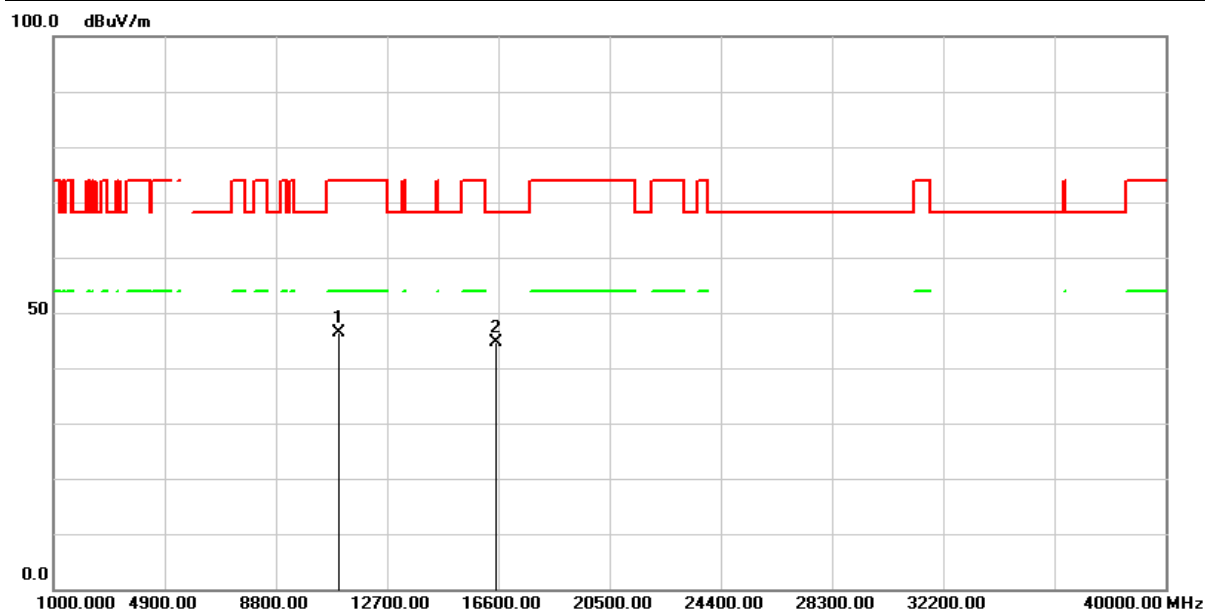


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11000.000       | 56.15            | -9.68                 | 46.47           | 74.00          | -27.53      | peak   |
| 2   | 16500.000       | 50.21            | -5.66                 | 44.55           | 68.20          | -23.65      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/02 |
| <b>Test Channel :</b> | CH100(5500MHz)                          | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 52 %       |

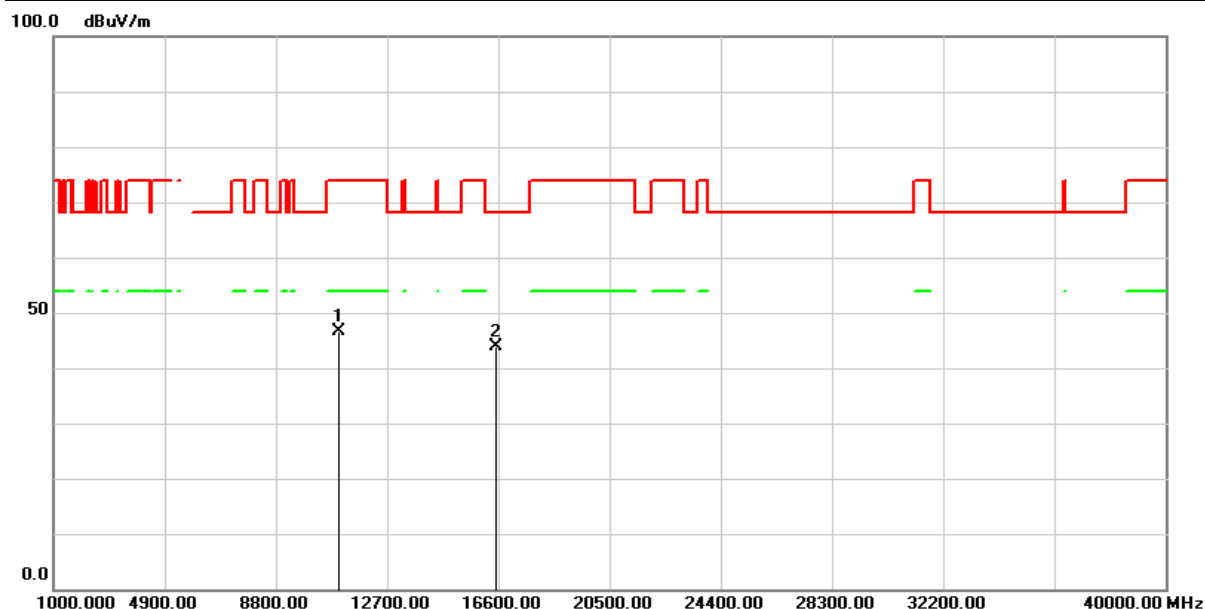


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11000.000       | 56.39            | -9.68                 | 46.71           | 74.00          | -27.29      | peak   |
| 2   | 16500.000       | 49.58            | -5.66                 | 43.92           | 68.20          | -24.28      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/03 |
| <b>Test Channel :</b> | CH116(5580MHz)                          | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 52 %       |

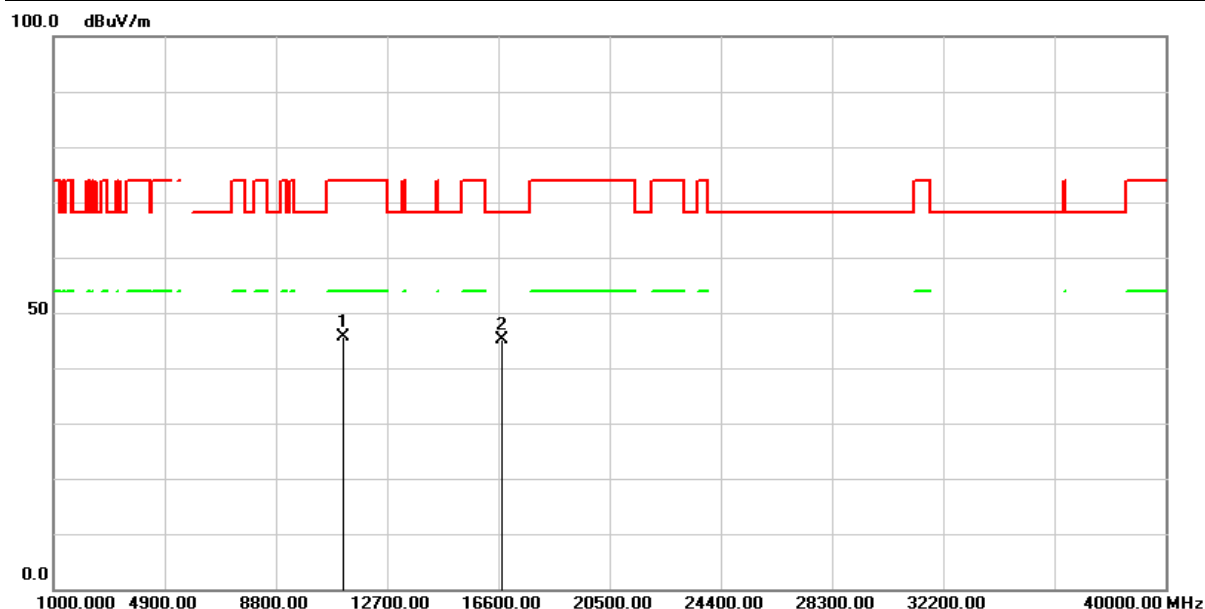


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11160.000       | 55.56            | -9.89                 | 45.67           | 74.00          | -28.33      | peak   |
| 2   | 16740.000       | 49.39            | -4.31                 | 45.08           | 68.20          | -23.12      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/03 |
| <b>Test Channel :</b> | CH116(5580MHz)                          | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 52 %       |

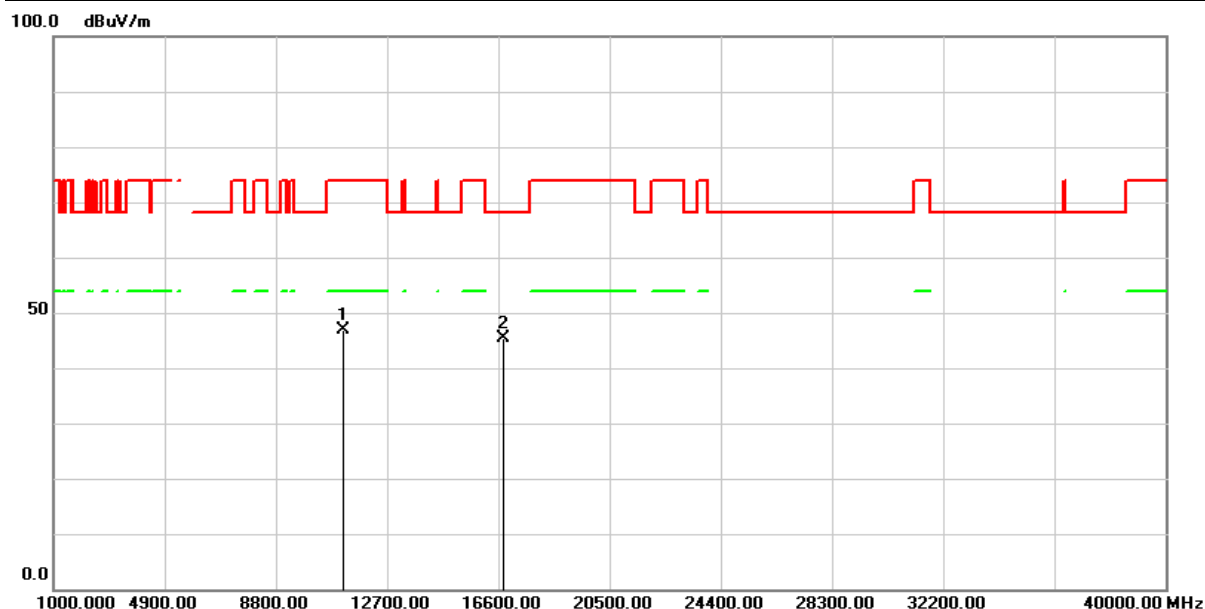


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11160.000       | 56.71            | -9.89                 | 46.82           | 74.00          | -27.18      | peak   |
| 2   | 16740.000       | 49.60            | -4.31                 | 45.29           | 68.20          | -22.91      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/03 |
| <b>Test Channel :</b> | CH140(5700MHz)                          | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 52 %       |

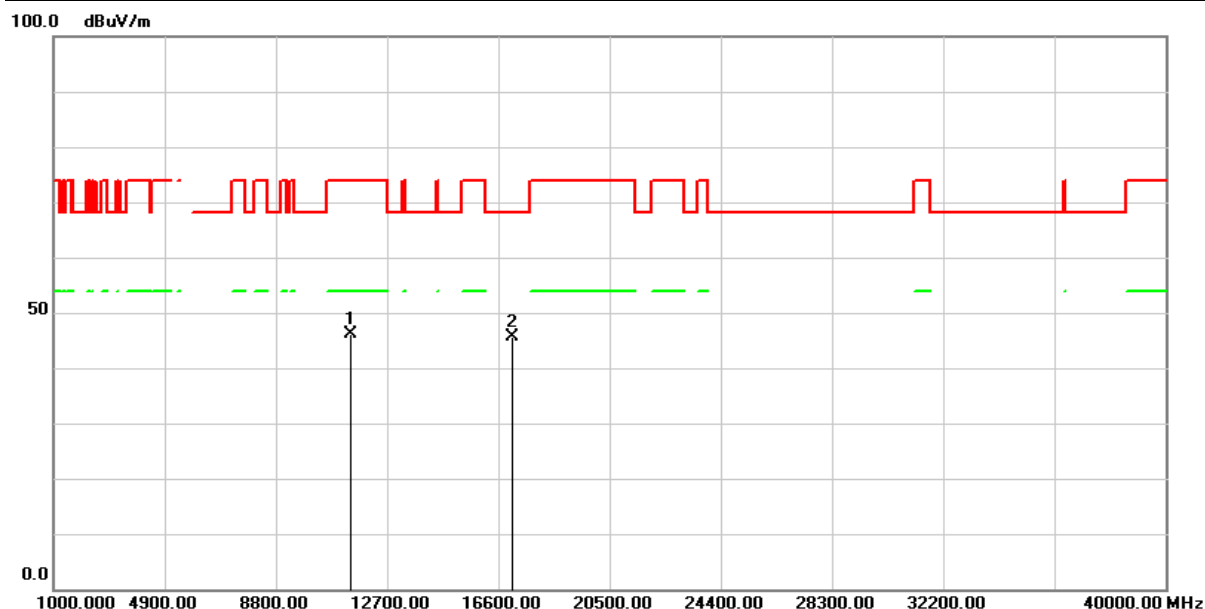


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11400.000       | 55.72            | -9.59                 | 46.13           | 74.00          | -27.87      | peak   |
| 2   | 17100.000       | 48.24            | -2.67                 | 45.57           | 68.20          | -22.63      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/03 |
| <b>Test Channel :</b> | CH140(5700MHz)                          | <b>Temperature :</b>       | 22.9 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 52 %       |

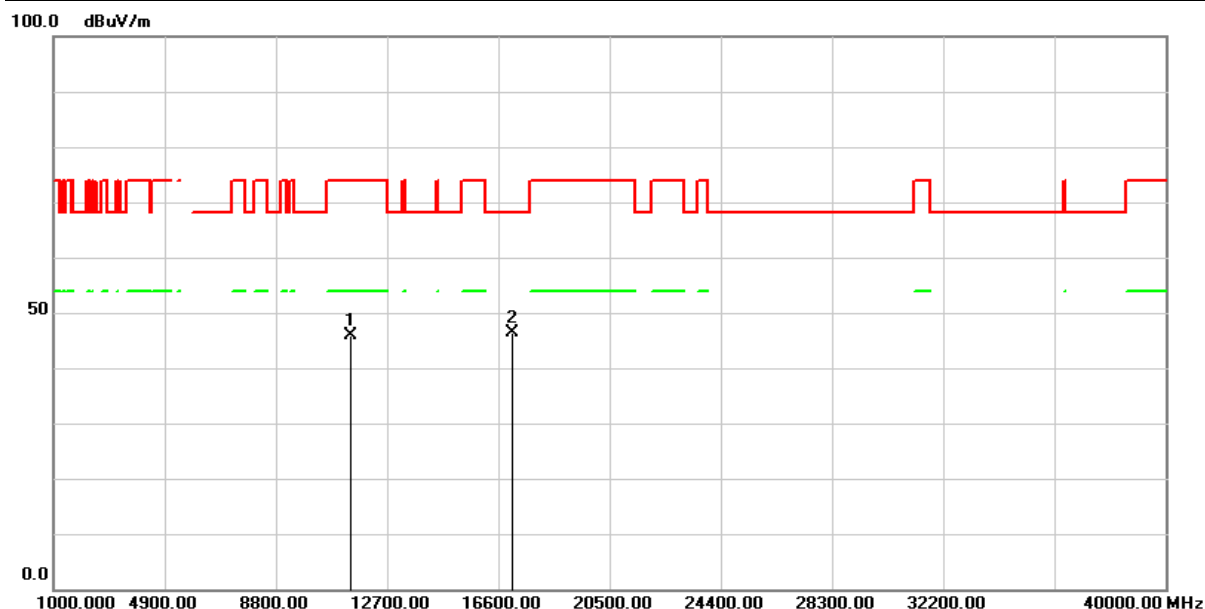


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11400.000       | 55.56            | -9.59                 | 45.97           | 74.00          | -28.03      | peak   |
| 2   | 17100.000       | 49.08            | -2.67                 | 46.41           | 68.20          | -21.79      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH149(5745MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

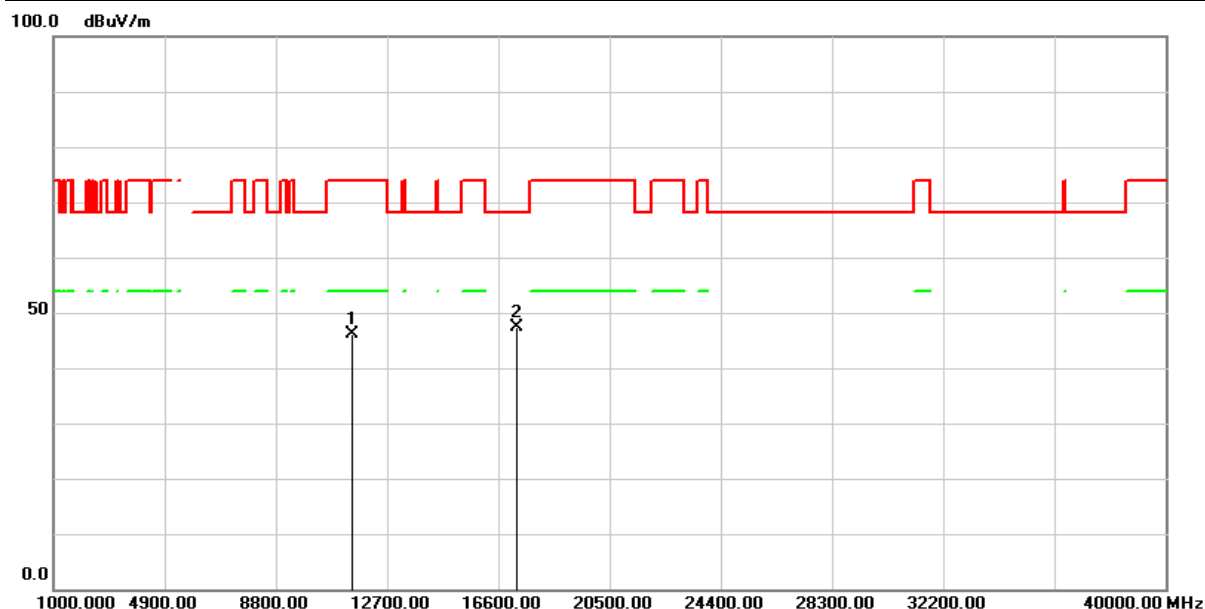


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11490.000       | 55.46            | -9.45                 | 46.01           | 74.00          | -27.99      | peak   |
| 2   | 17235.000       | 49.59            | -2.24                 | 47.35           | 68.20          | -20.85      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH149(5745MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

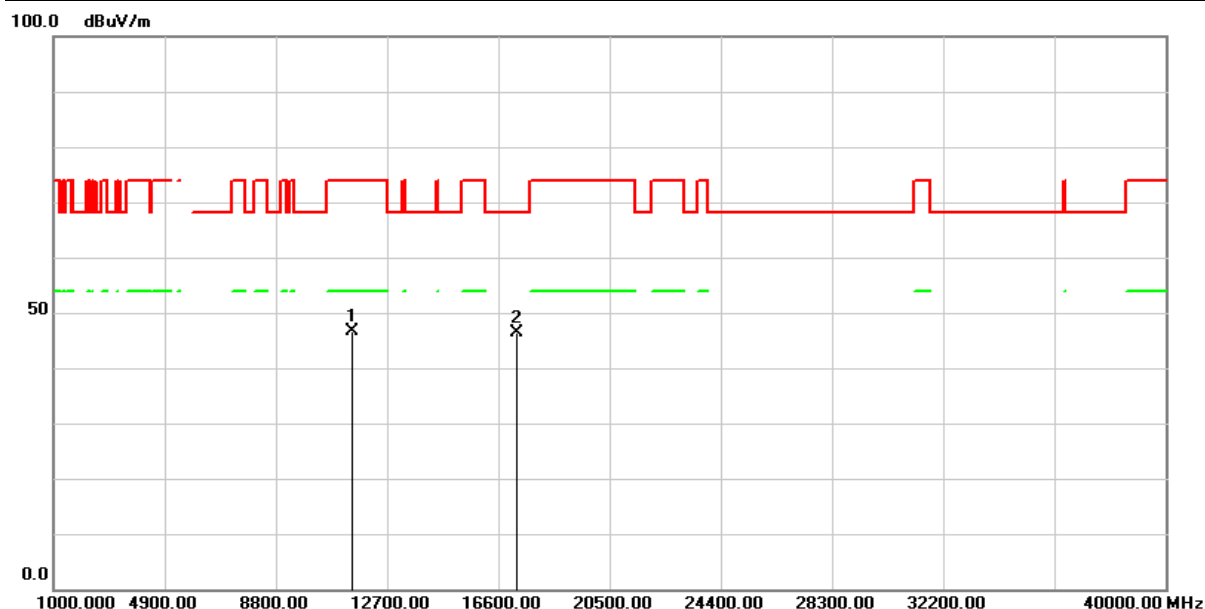


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11490.000       | 56.20            | -9.45                 | 46.75           | 74.00          | -27.25      | peak   |
| 2   | 17235.000       | 48.55            | -2.24                 | 46.31           | 68.20          | -21.89      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH157(5785MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

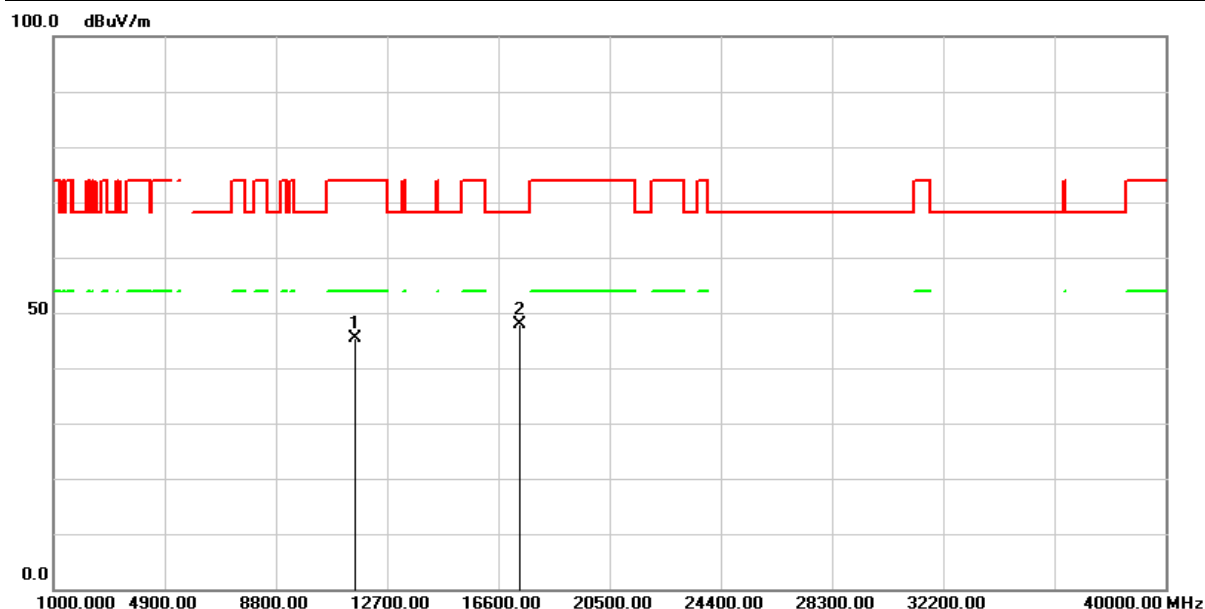


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11570.000       | 54.90            | -9.40                 | 45.50           | 74.00          | -28.50      | peak   |
| 2   | 17355.000       | 49.47            | -1.65                 | 47.82           | 68.20          | -20.38      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH157(5785MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

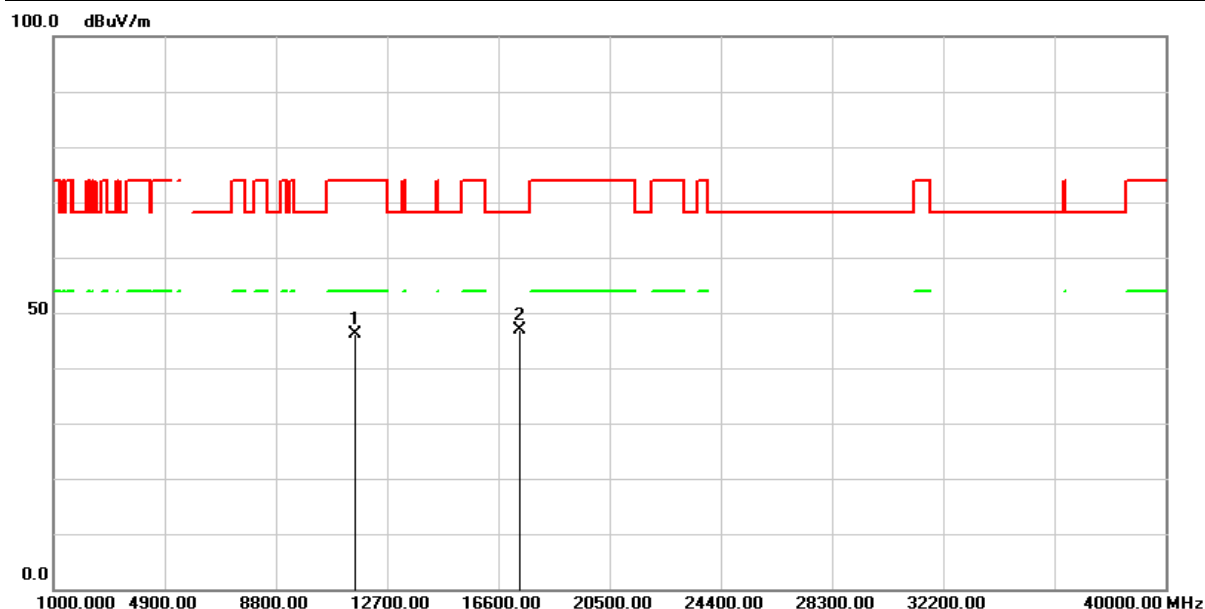


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11570.000       | 55.56            | -9.40                 | 46.16           | 74.00          | -27.84      | peak   |
| 2   | 17355.000       | 48.60            | -1.65                 | 46.95           | 68.20          | -21.25      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH165(5825MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

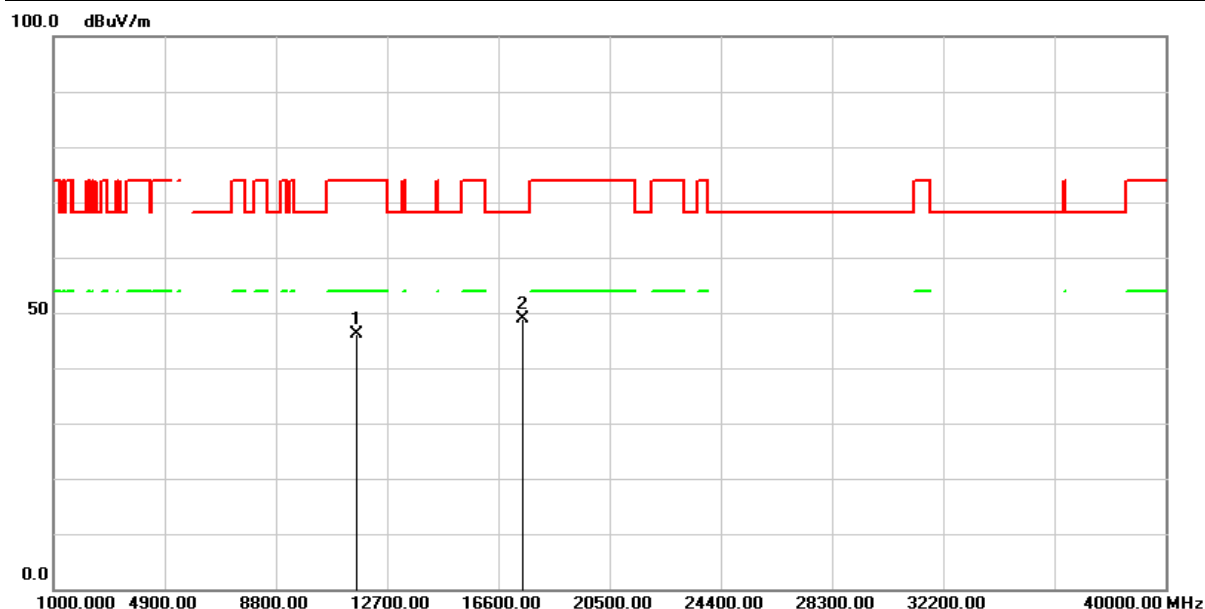


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11650.000       | 55.85            | -9.82                 | 46.03           | 74.00          | -27.97      | peak   |
| 2   | 17475.000       | 49.64            | -0.85                 | 48.79           | 68.20          | -19.41      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 2 : Transmit (802.11ac VHT20 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH165(5825MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

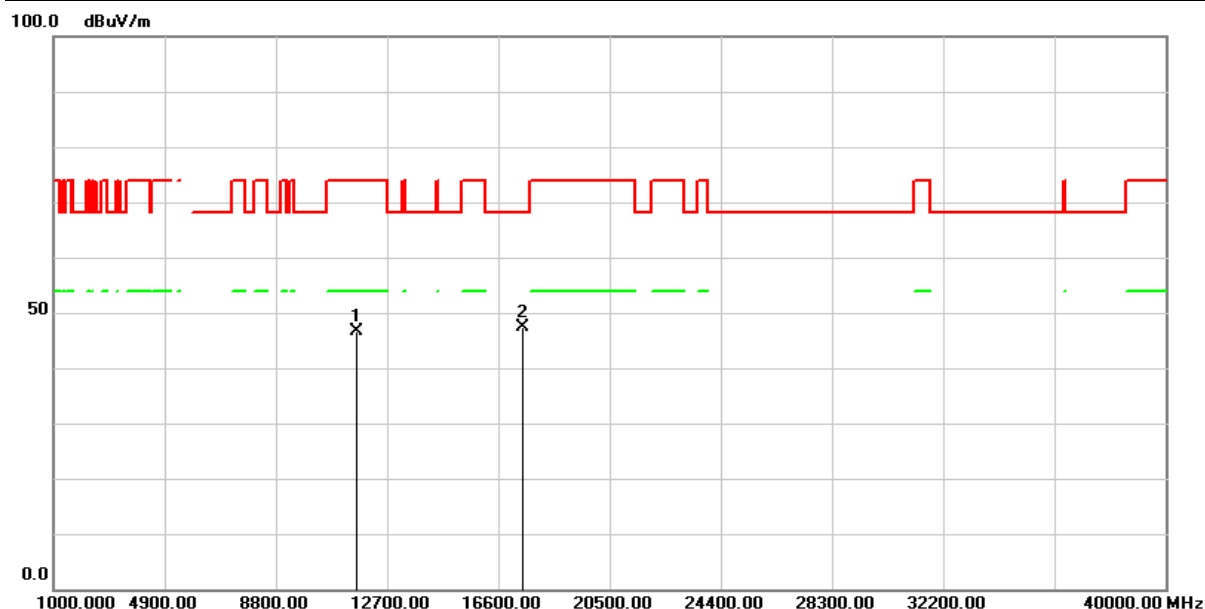


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11650.000       | 56.57            | -9.82                 | 46.75           | 74.00          | -27.25      | peak   |
| 2   | 17475.000       | 48.31            | -0.85                 | 47.46           | 68.20          | -20.74      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH38(5190MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

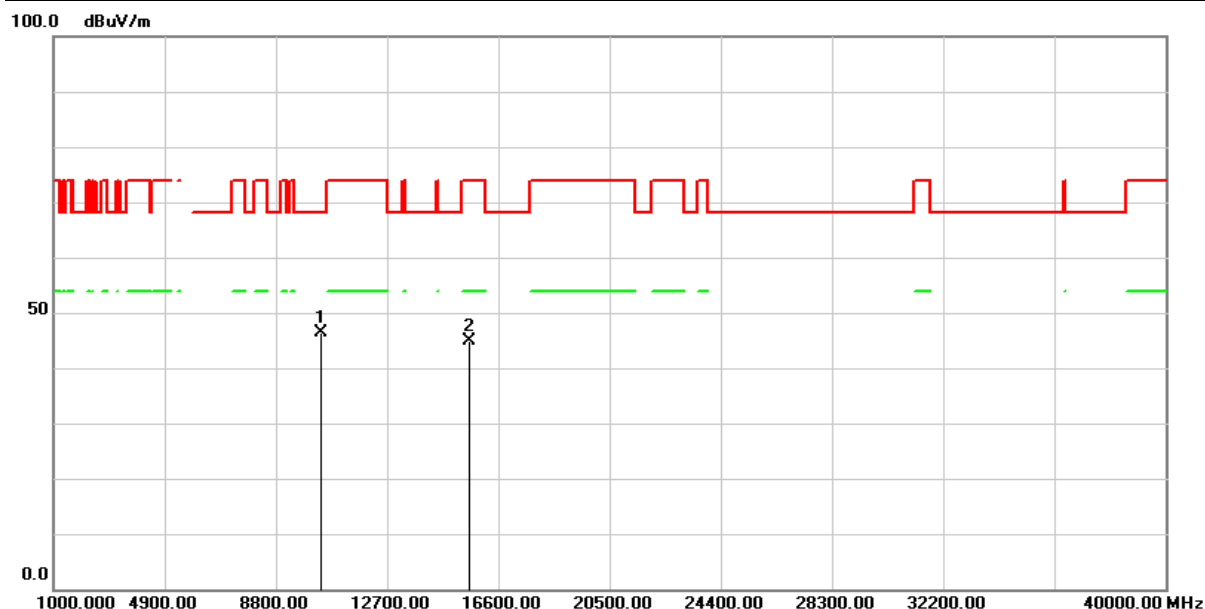


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10380.000       | 56.33            | -10.00                | 46.33           | 68.20          | -21.87      | peak   |
| 2   | 15570.000       | 52.65            | -7.79                 | 44.86           | 74.00          | -29.14      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH38(5190MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

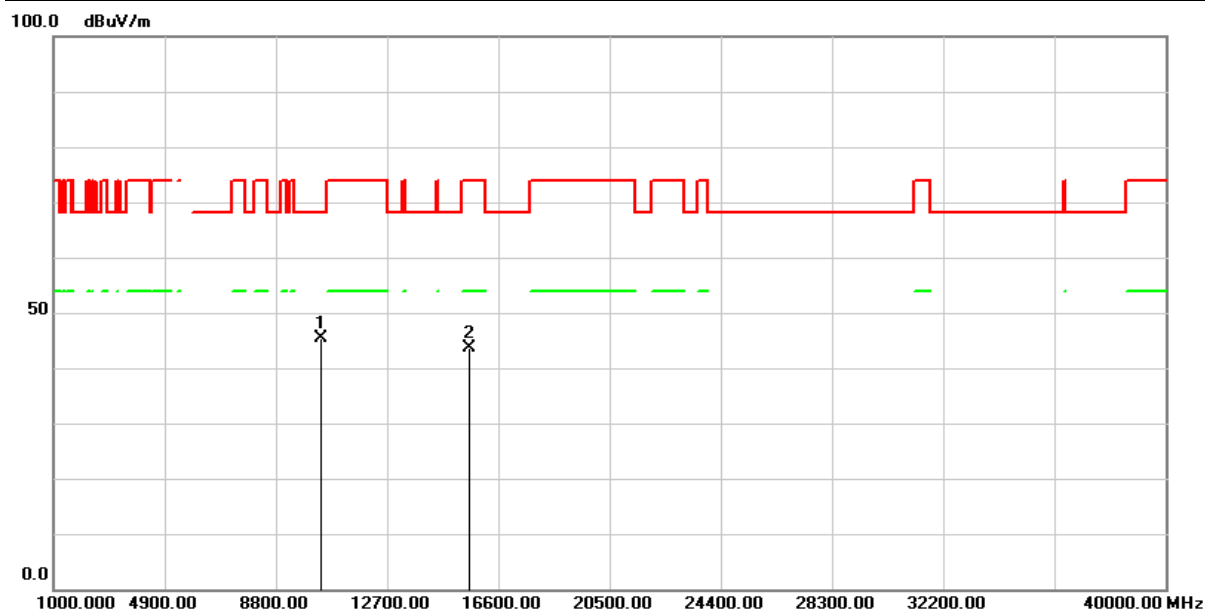


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10380.000       | 55.34            | -10.00                | 45.34           | 68.20          | -22.86      | peak   |
| 2   | 15570.000       | 51.34            | -7.79                 | 43.55           | 74.00          | -30.45      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH46(5230MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

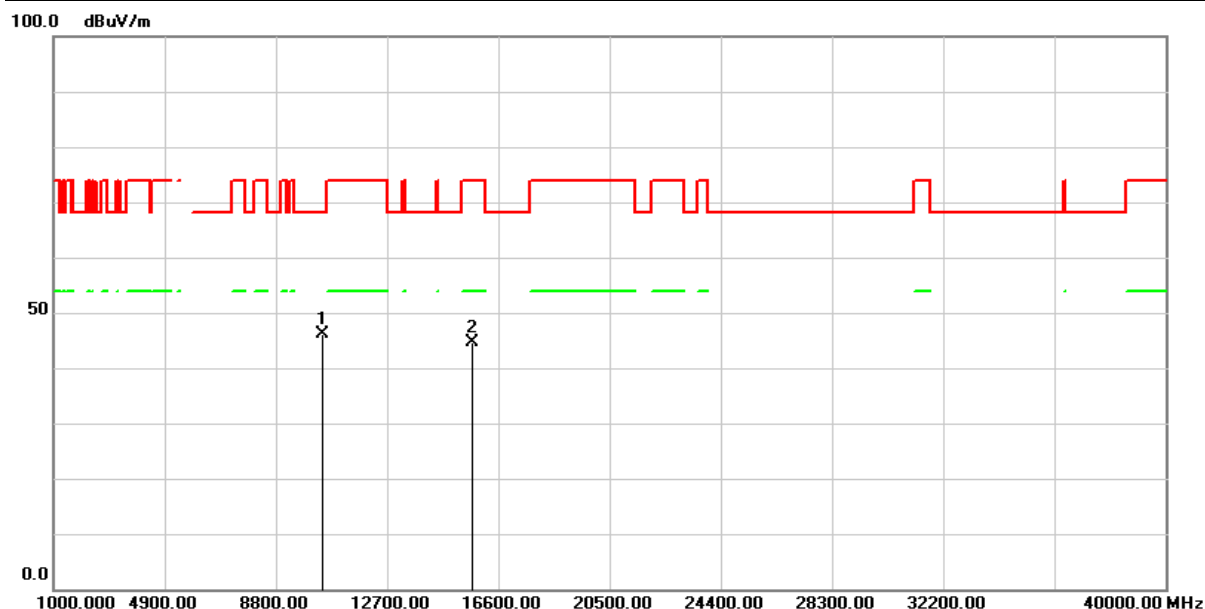


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10460.000       | 56.01            | -9.94                 | 46.07           | 68.20          | -22.13      | peak   |
| 2   | 15690.000       | 52.37            | -7.81                 | 44.56           | 74.00          | -29.44      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH46(5230MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

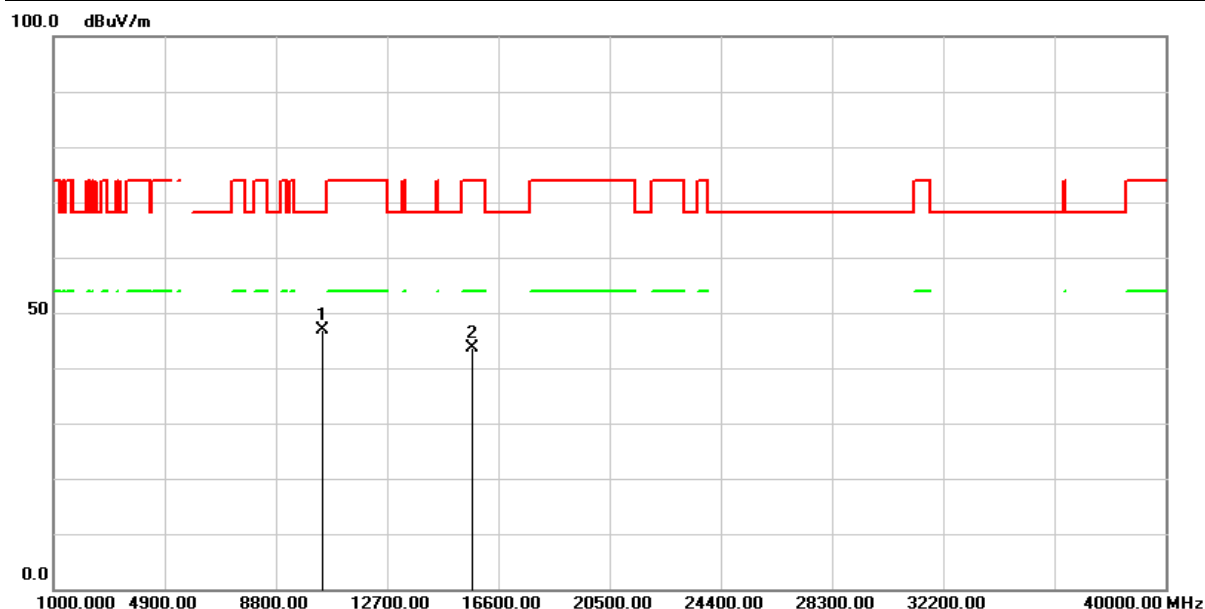


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10460.000       | 56.80            | -9.94                 | 46.86           | 68.20          | -21.34      | peak   |
| 2   | 15690.000       | 51.50            | -7.81                 | 43.69           | 74.00          | -30.31      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH54(5270MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

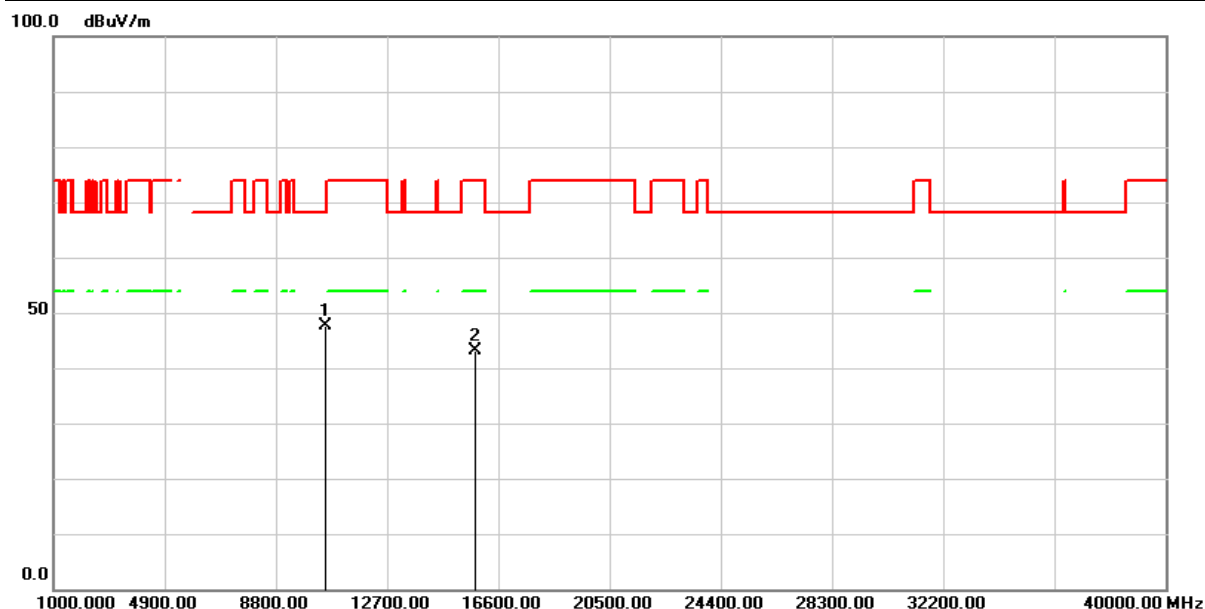


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10540.000       | 57.72            | -10.01                | 47.71           | 68.20          | -20.49      | peak   |
| 2   | 15810.000       | 50.73            | -7.54                 | 43.19           | 74.00          | -30.81      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH54(5270MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

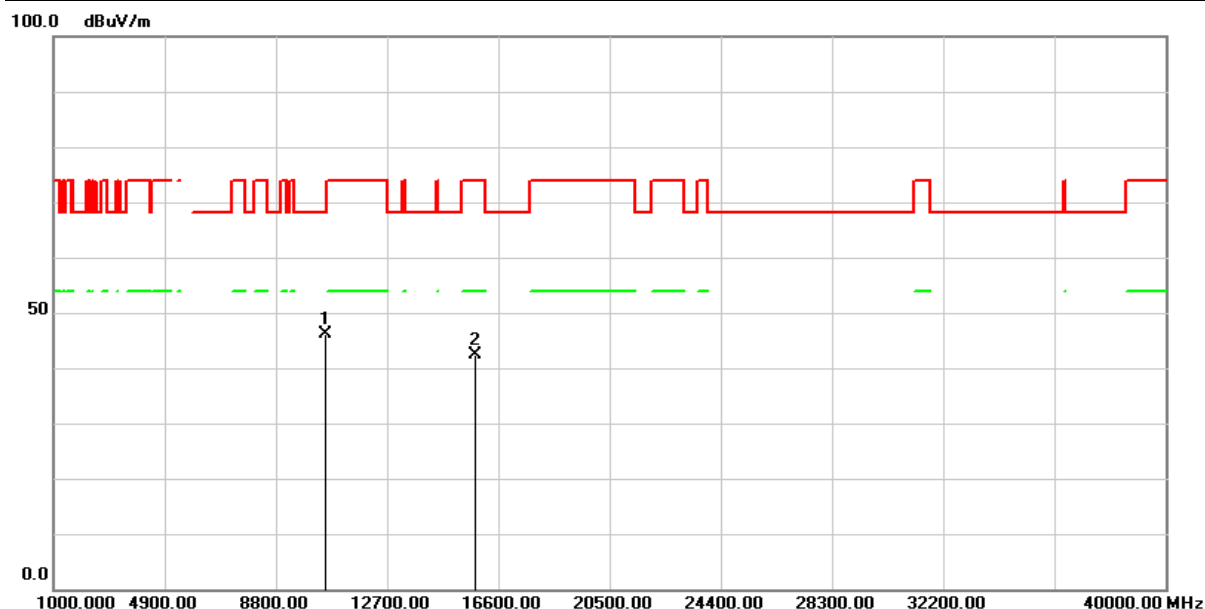


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10540.000       | 56.05            | -10.01                | 46.04           | 68.20          | -22.16      | peak   |
| 2   | 15810.000       | 49.94            | -7.54                 | 42.40           | 74.00          | -31.60      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH62(5310MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

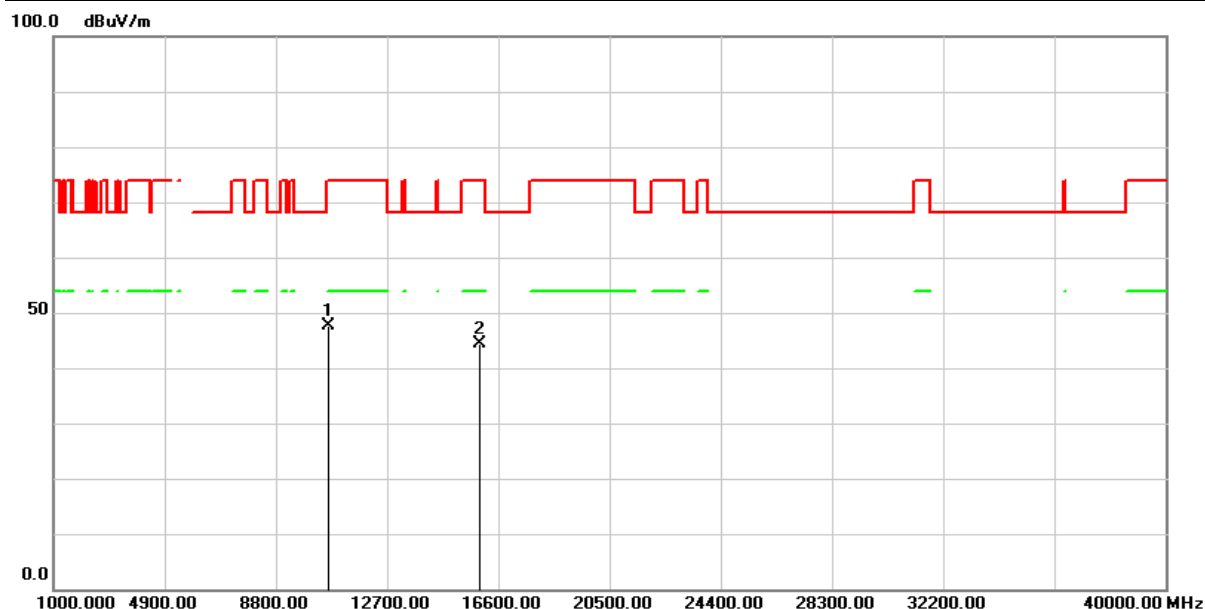


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10620.000       | 57.51            | -9.90                 | 47.61           | 74.00          | -26.39      | peak   |
| 2   | 15930.000       | 51.71            | -7.26                 | 44.45           | 74.00          | -29.55      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH62(5310MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

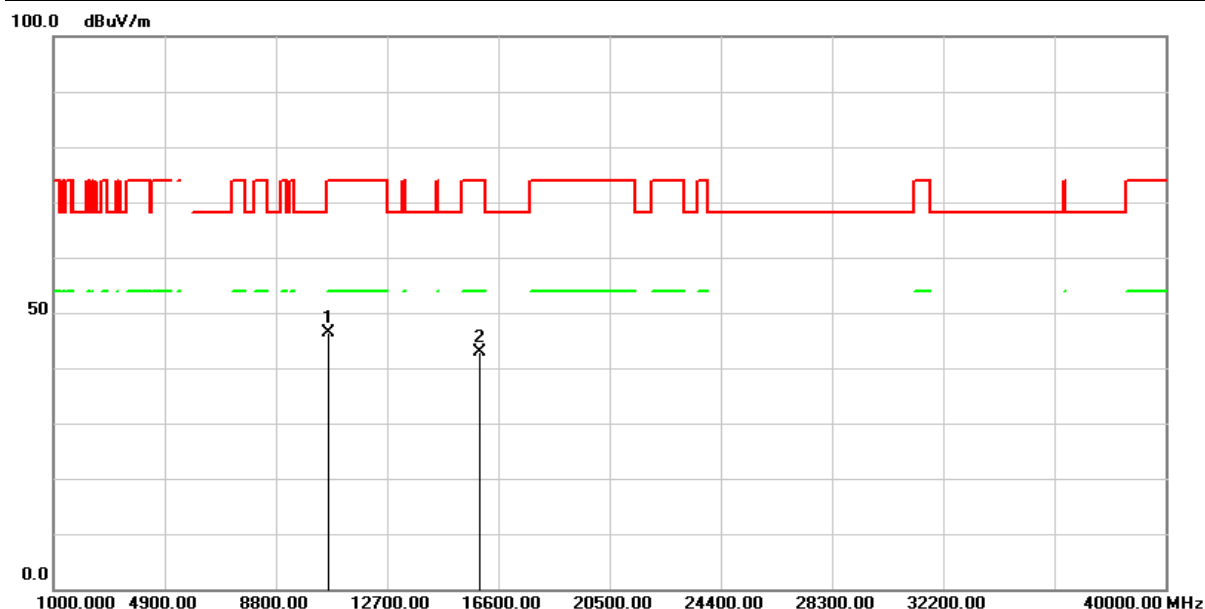


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10620.000       | 56.25            | -9.90                 | 46.35           | 74.00          | -27.65      | peak   |
| 2   | 15930.000       | 50.15            | -7.26                 | 42.89           | 74.00          | -31.11      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH102(5510MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

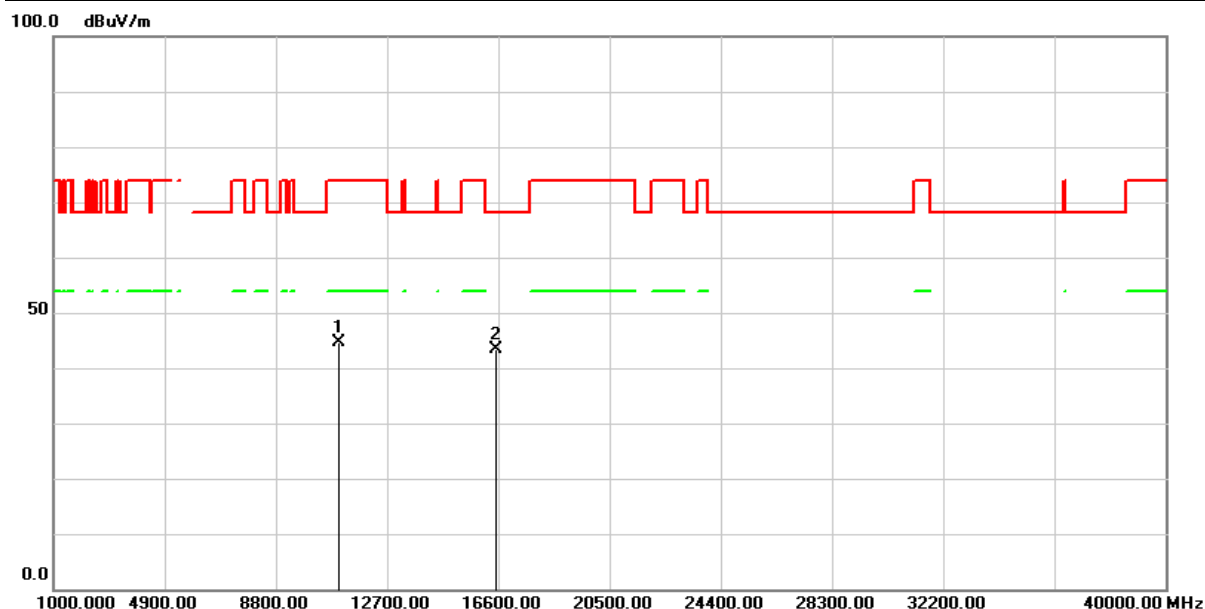


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11020.000       | 54.35            | -9.71                 | 44.64           | 74.00          | -29.36      | peak   |
| 2   | 16530.000       | 48.93            | -5.60                 | 43.33           | 68.20          | -24.87      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH102(5510MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

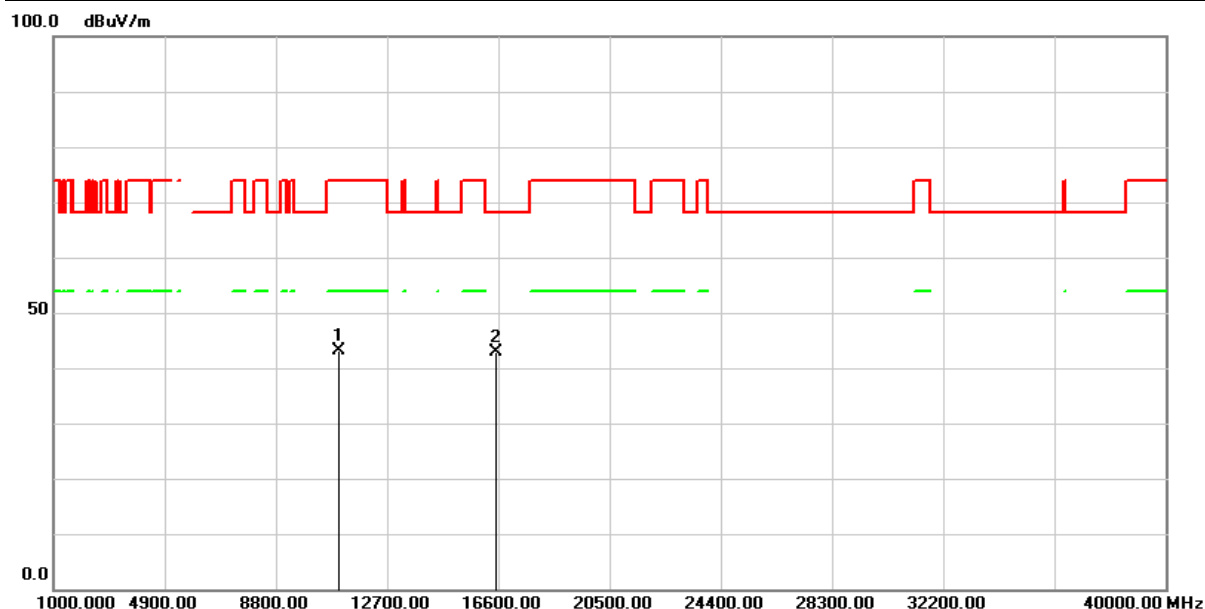


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11020.000       | 52.82            | -9.71                 | 43.11           | 74.00          | -30.89      | peak   |
| 2   | 16530.000       | 48.39            | -5.60                 | 42.79           | 68.20          | -25.41      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH110(5550MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

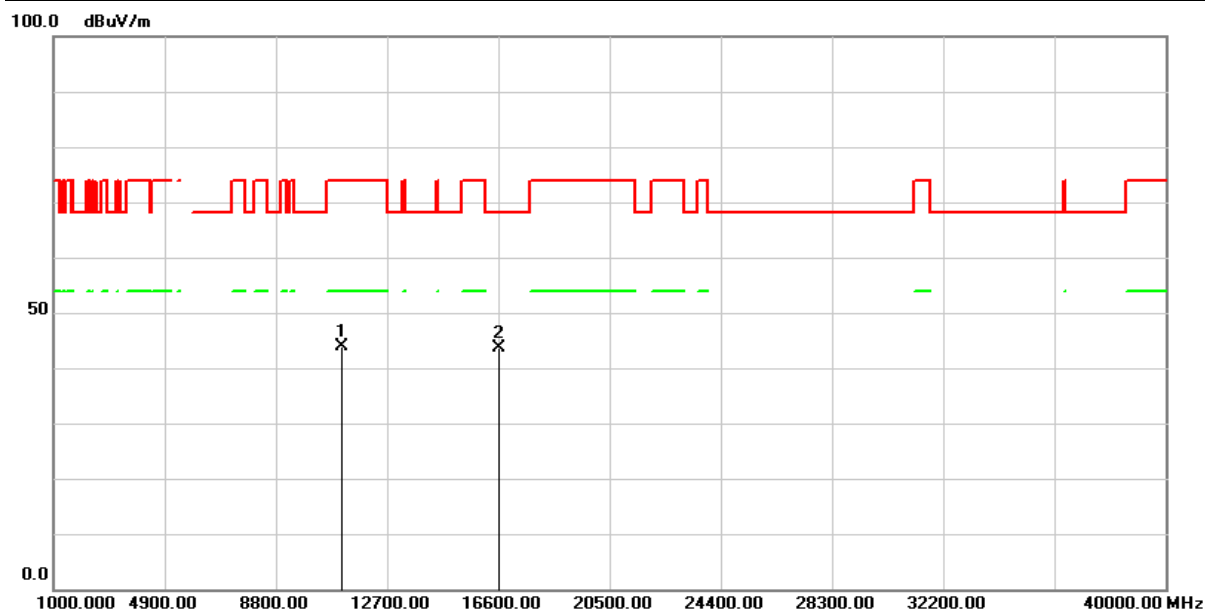


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11100.000       | 53.73            | -9.91                 | 43.82           | 74.00          | -30.18      | peak   |
| 2   | 16650.000       | 48.86            | -5.13                 | 43.73           | 68.20          | -24.47      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH110(5550MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

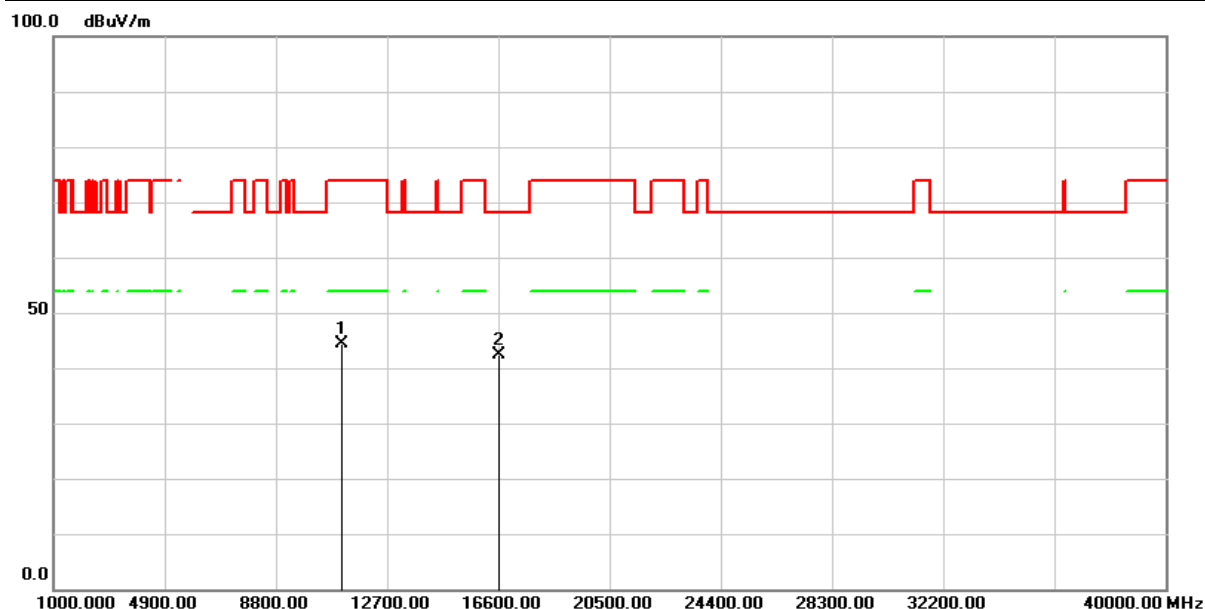


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11100.000       | 54.25            | -9.91                 | 44.34           | 74.00          | -29.66      | peak   |
| 2   | 16650.000       | 47.58            | -5.13                 | 42.45           | 68.20          | -25.75      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH134(5670MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

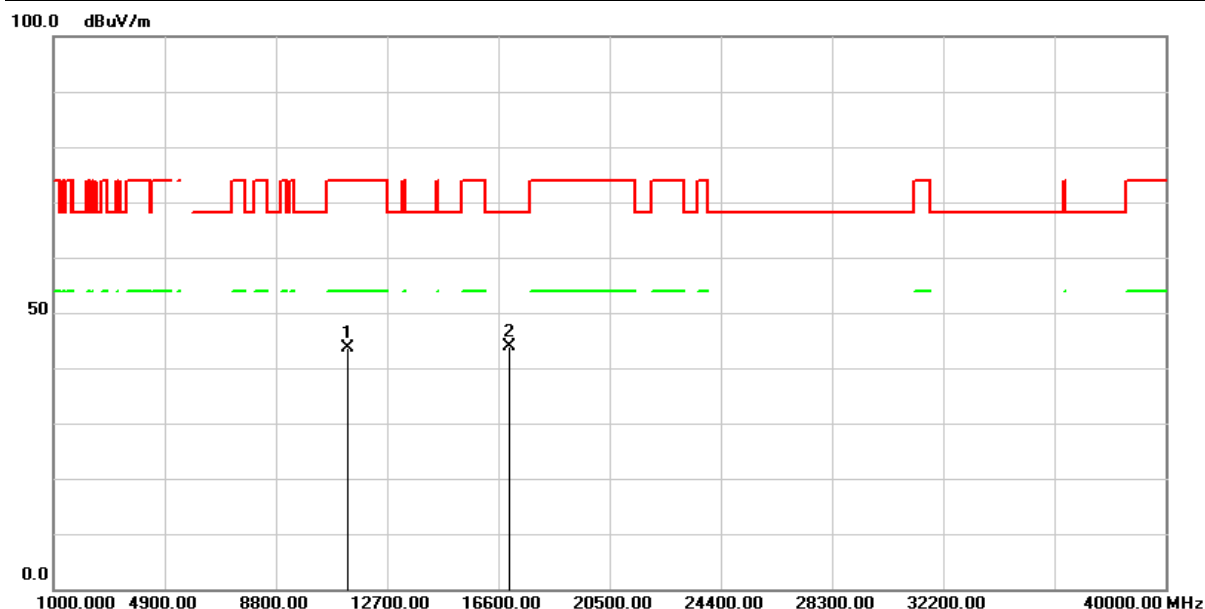


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11340.000       | 53.41            | -9.75                 | 43.66           | 74.00          | -30.34      | peak   |
| 2   | 17010.000       | 46.48            | -2.70                 | 43.78           | 68.20          | -24.42      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH134(5670MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

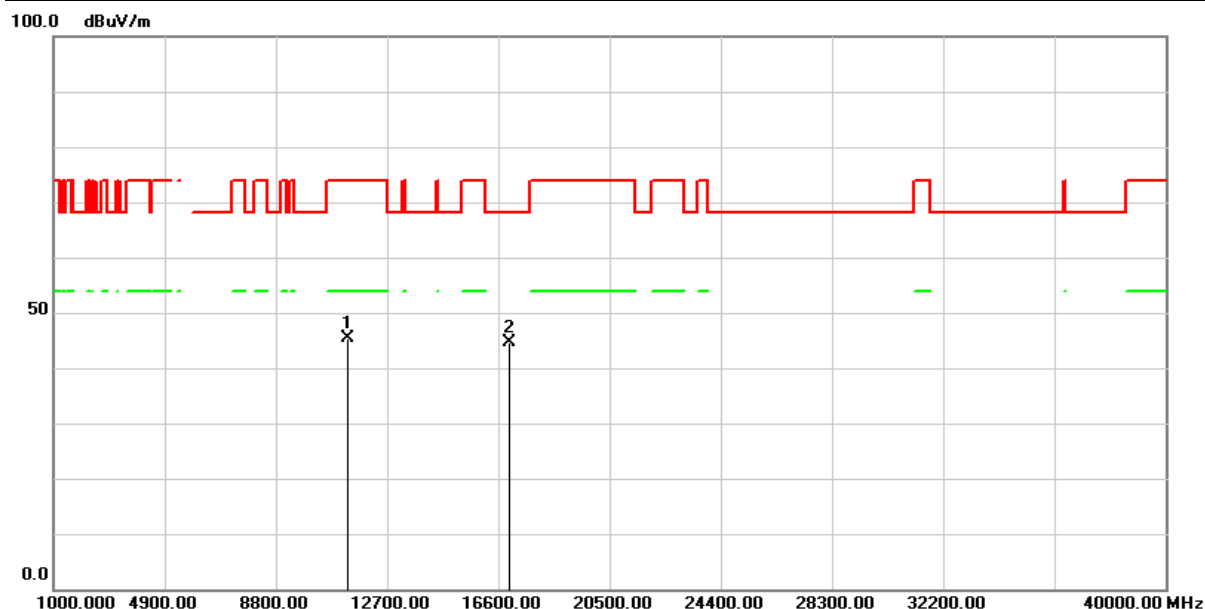


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11340.000       | 55.01            | -9.75                 | 45.26           | 74.00          | -28.74      | peak   |
| 2   | 17010.000       | 47.26            | -2.70                 | 44.56           | 68.20          | -23.64      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH151(5755MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

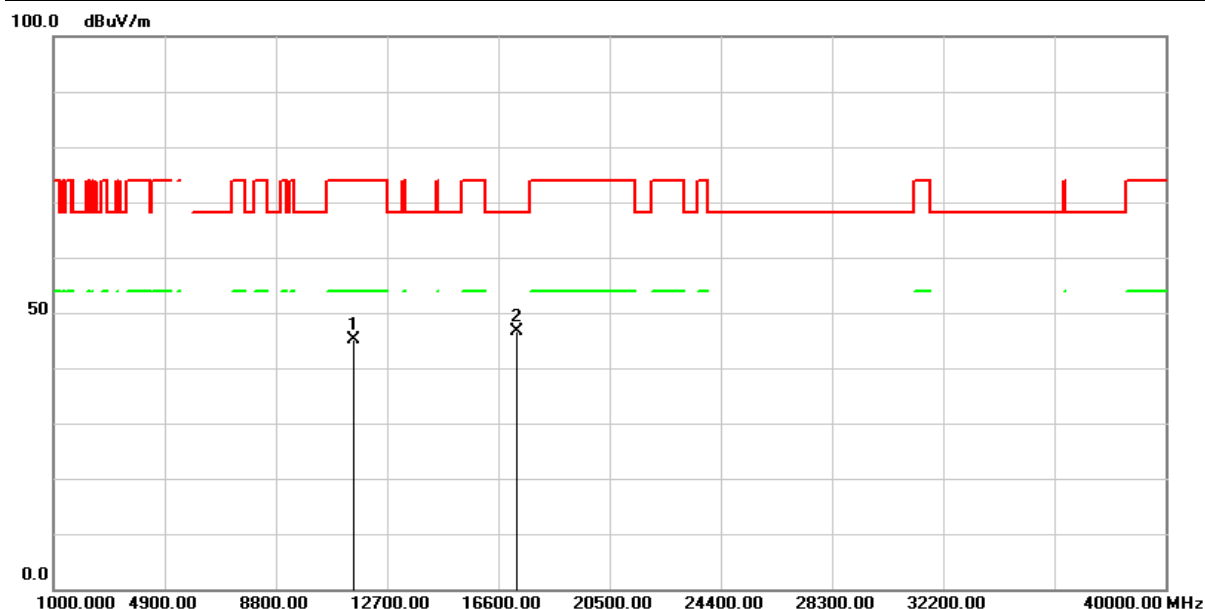


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11510.000       | 54.62            | -9.40                 | 45.22           | 74.00          | -28.78      | peak   |
| 2   | 17265.000       | 48.80            | -2.19                 | 46.61           | 68.20          | -21.59      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH151(5755MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

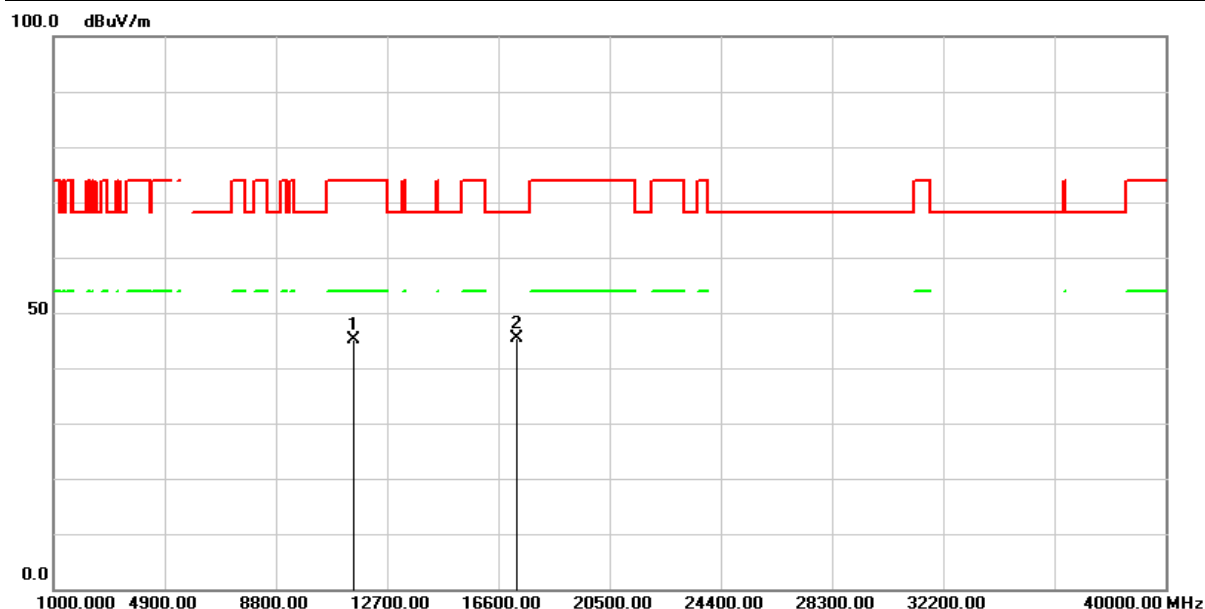


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11510.000       | 54.55            | -9.40                 | 45.15           | 74.00          | -28.85      | peak   |
| 2   | 17265.000       | 47.48            | -2.19                 | 45.29           | 68.20          | -22.91      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH159(5795MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

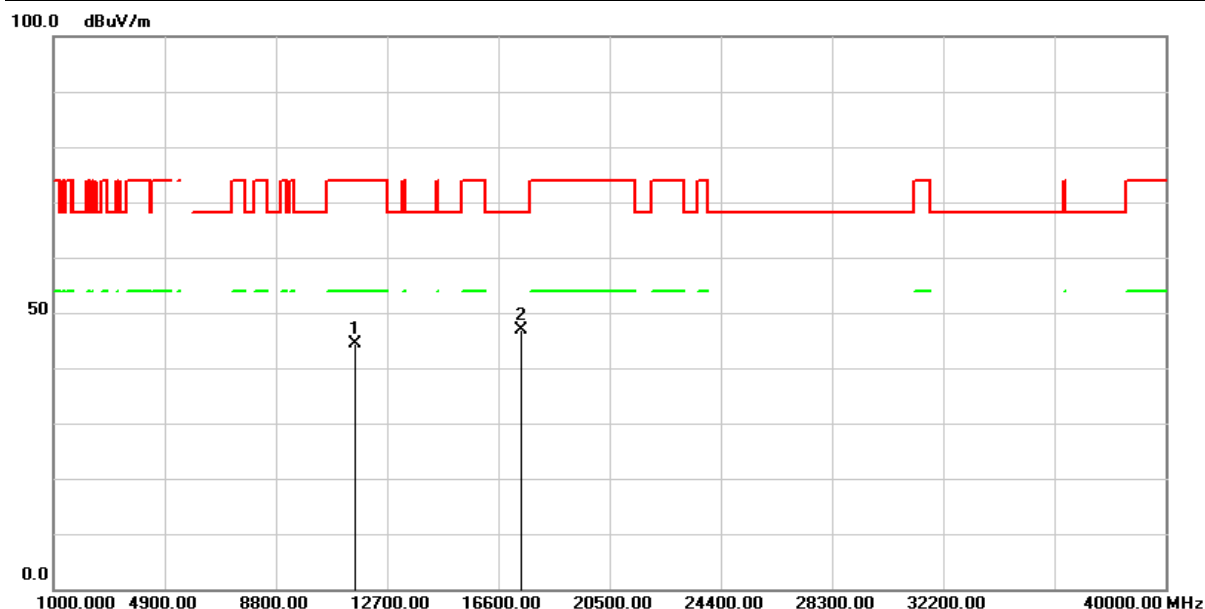


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11590.000       | 53.96            | -9.48                 | 44.48           | 74.00          | -29.52      | peak   |
| 2   | 17385.000       | 48.26            | -1.42                 | 46.84           | 68.20          | -21.36      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 3 : Transmit (802.11ac VHT40 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH159(5795MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

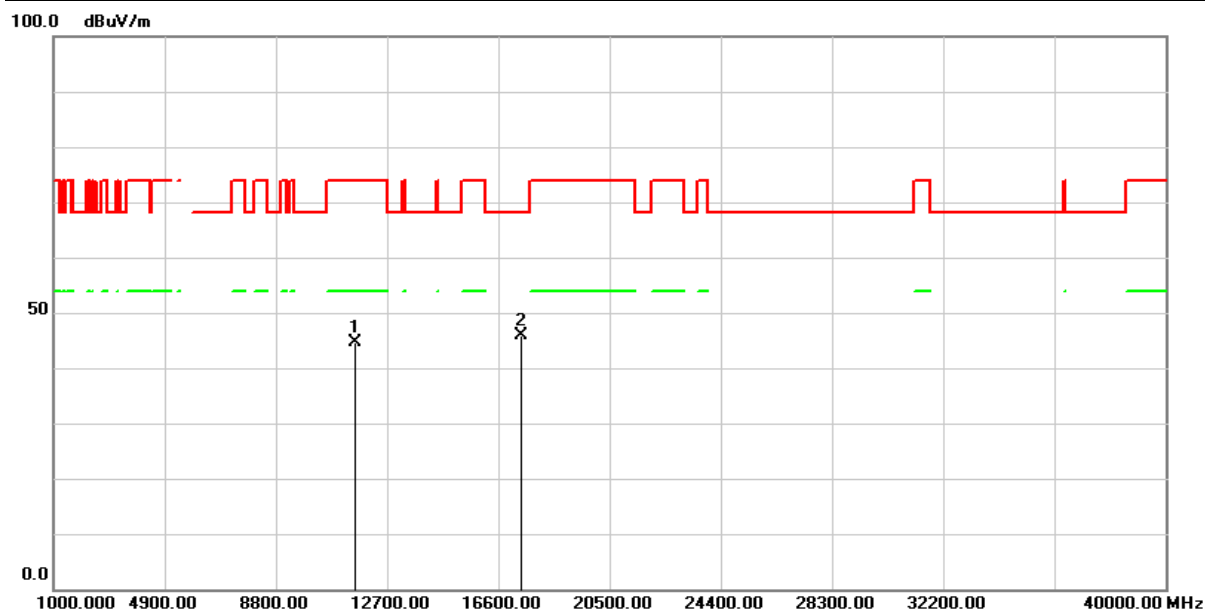


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11590.000       | 54.02            | -9.48                 | 44.54           | 74.00          | -29.46      | peak   |
| 2   | 17385.000       | 47.40            | -1.42                 | 45.98           | 68.20          | -22.22      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH42(5210MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

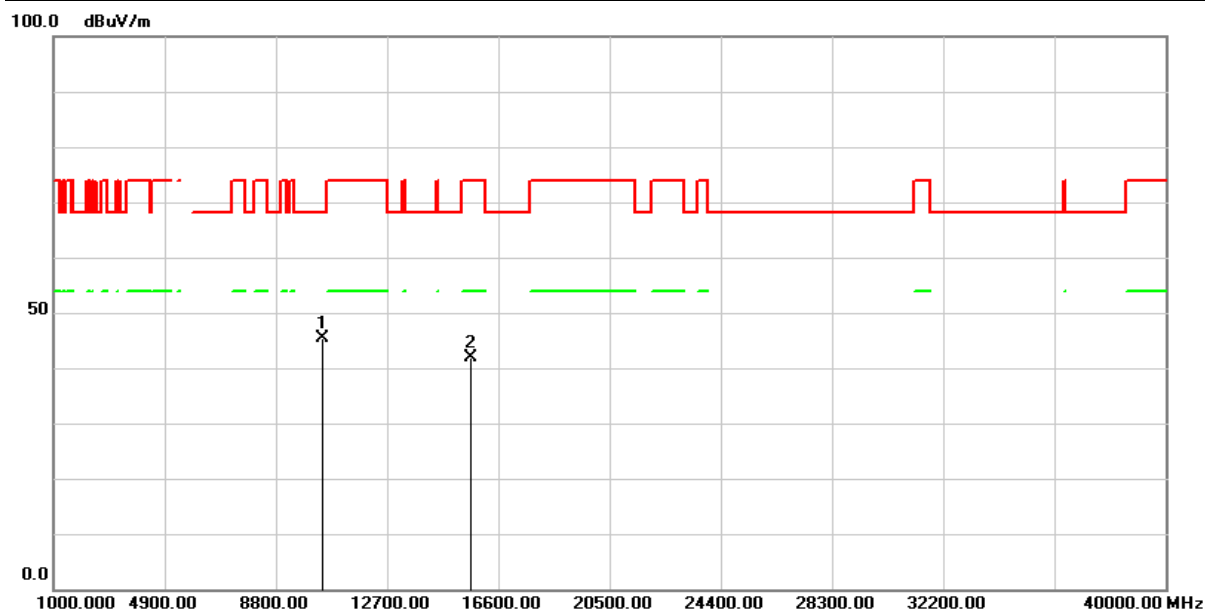


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10420.000       | 55.32            | -9.94                 | 45.38           | 68.20          | -22.82      | peak   |
| 2   | 15630.000       | 49.78            | -7.98                 | 41.80           | 74.00          | -32.20      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH42(5210MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

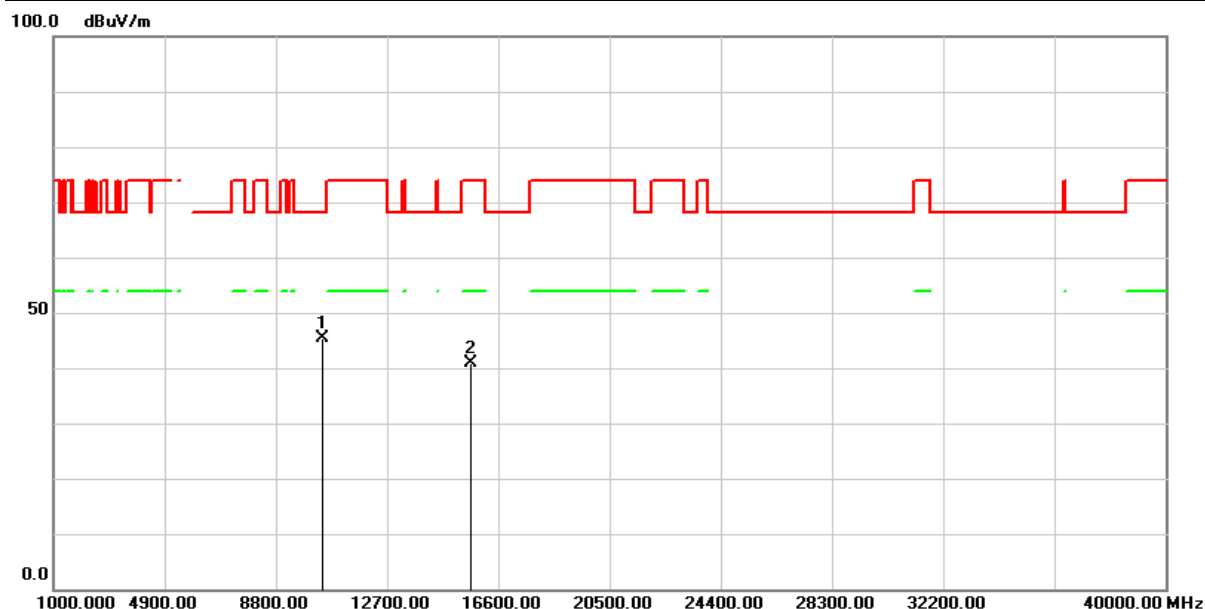


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10420.000       | 55.38            | -9.94                 | 45.44           | 68.20          | -22.76      | peak   |
| 2   | 15630.000       | 48.77            | -7.98                 | 40.79           | 74.00          | -33.21      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH58(5290MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

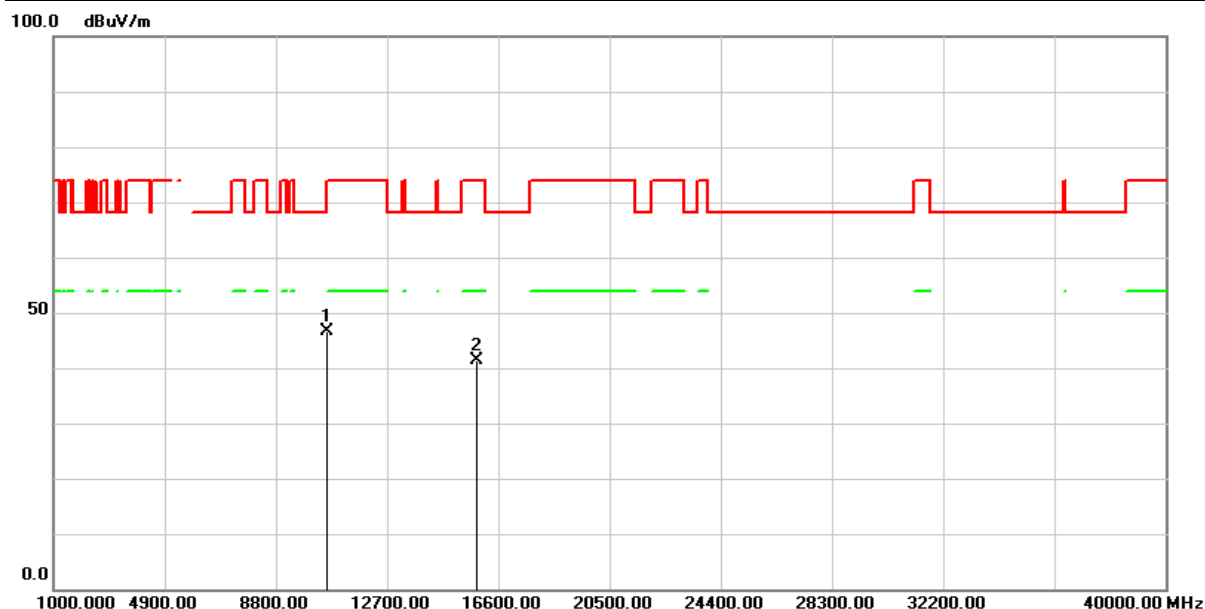


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10580.000       | 56.65            | -9.97                 | 46.68           | 68.20          | -21.52      | peak   |
| 2   | 15870.000       | 48.87            | -7.37                 | 41.50           | 74.00          | -32.50      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH58(5290MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

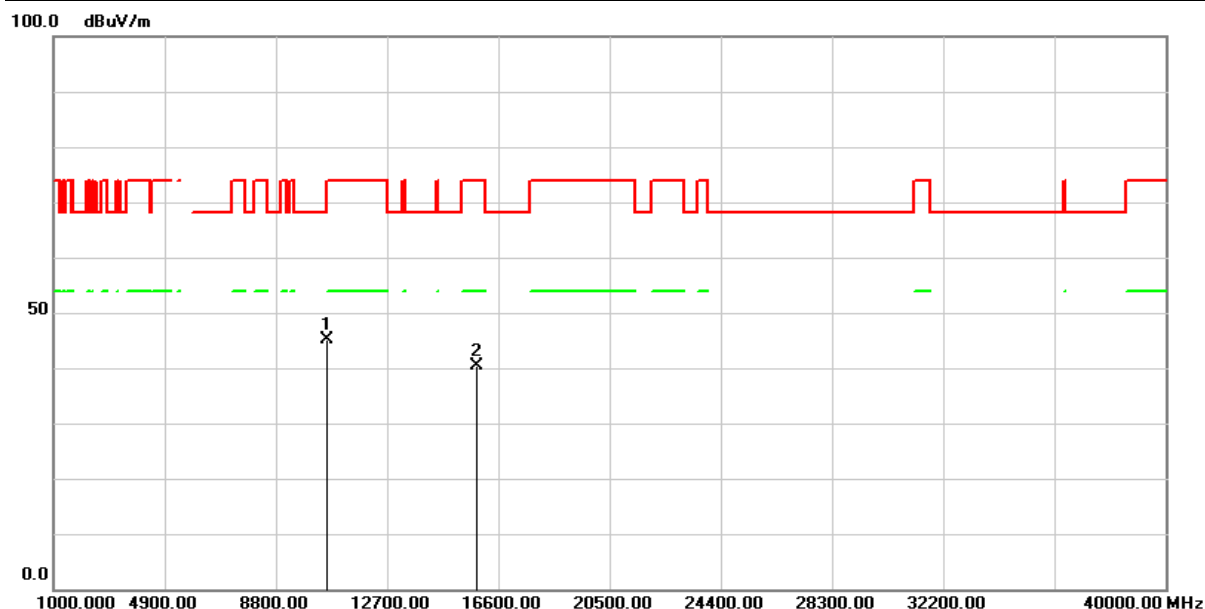


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10580.000       | 55.04            | -9.97                 | 45.07           | 68.20          | -23.13      | peak   |
| 2   | 15870.000       | 47.78            | -7.37                 | 40.41           | 74.00          | -33.59      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH106(5530MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

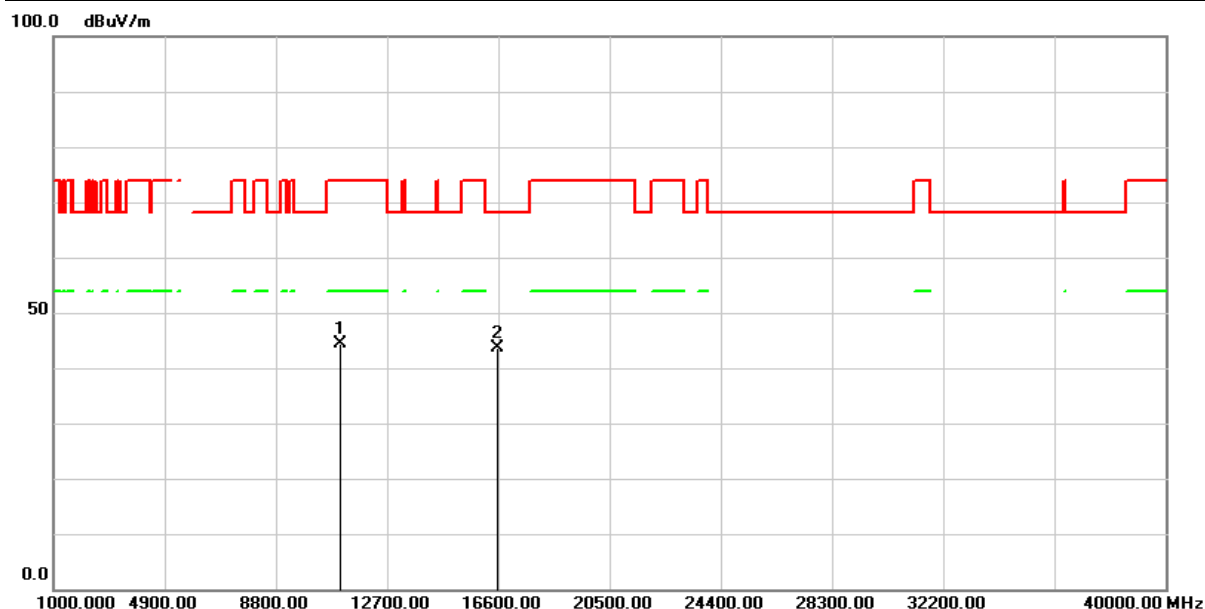


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11060.000       | 54.05            | -9.78                 | 44.27           | 74.00          | -29.73      | peak   |
| 2   | 16590.000       | 49.08            | -5.54                 | 43.54           | 68.20          | -24.66      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH106(5530MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

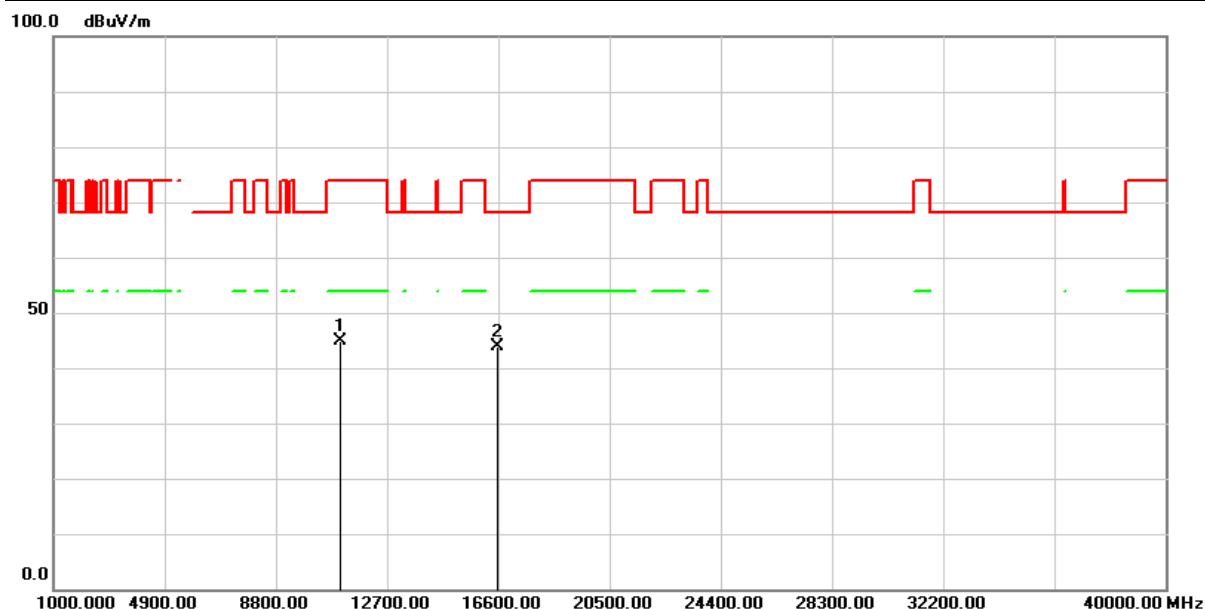


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11060.000       | 54.57            | -9.78                 | 44.79           | 74.00          | -29.21      | peak   |
| 2   | 16590.000       | 49.51            | -5.54                 | 43.97           | 68.20          | -24.23      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH122(5610MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

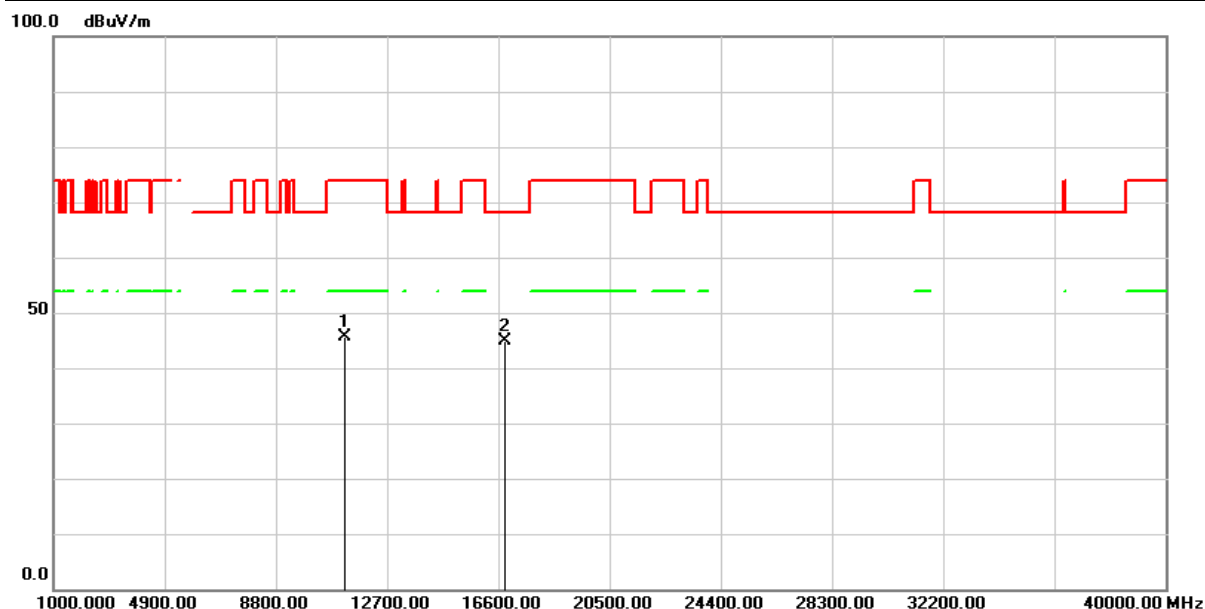


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11220.000       | 55.45            | -9.93                 | 45.52           | 74.00          | -28.48      | peak   |
| 2   | 16830.000       | 48.15            | -3.20                 | 44.95           | 68.20          | -23.25      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH122(5610MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

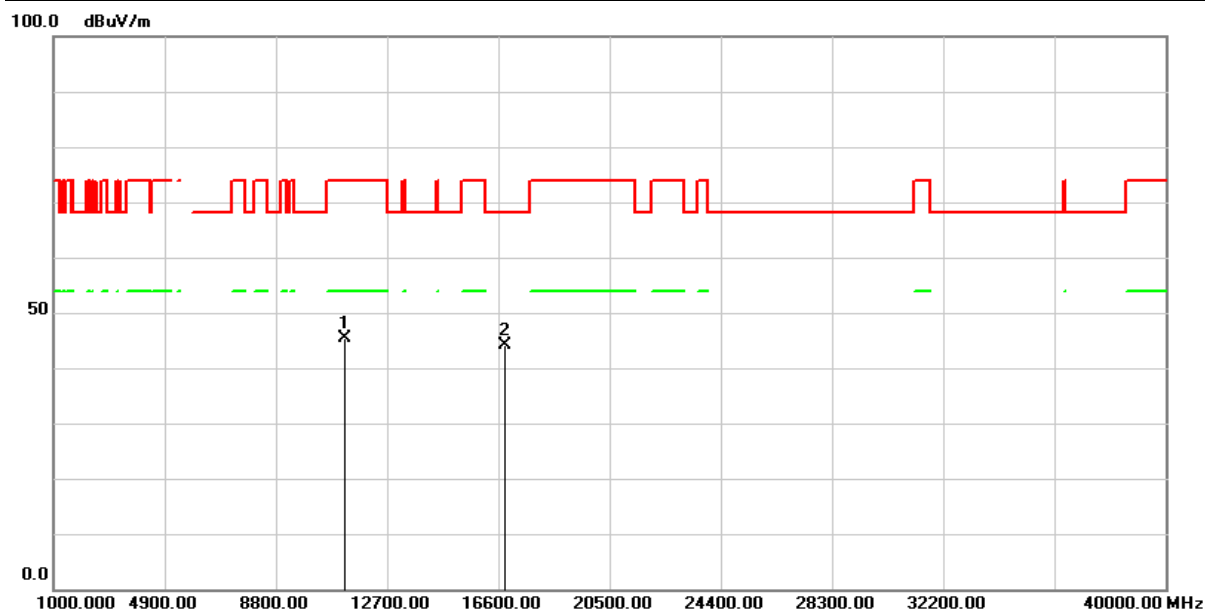


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11220.000       | 55.42            | -9.93                 | 45.49           | 74.00          | -28.51      | peak   |
| 2   | 16830.000       | 47.35            | -3.20                 | 44.15           | 68.20          | -24.05      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH155(5775MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

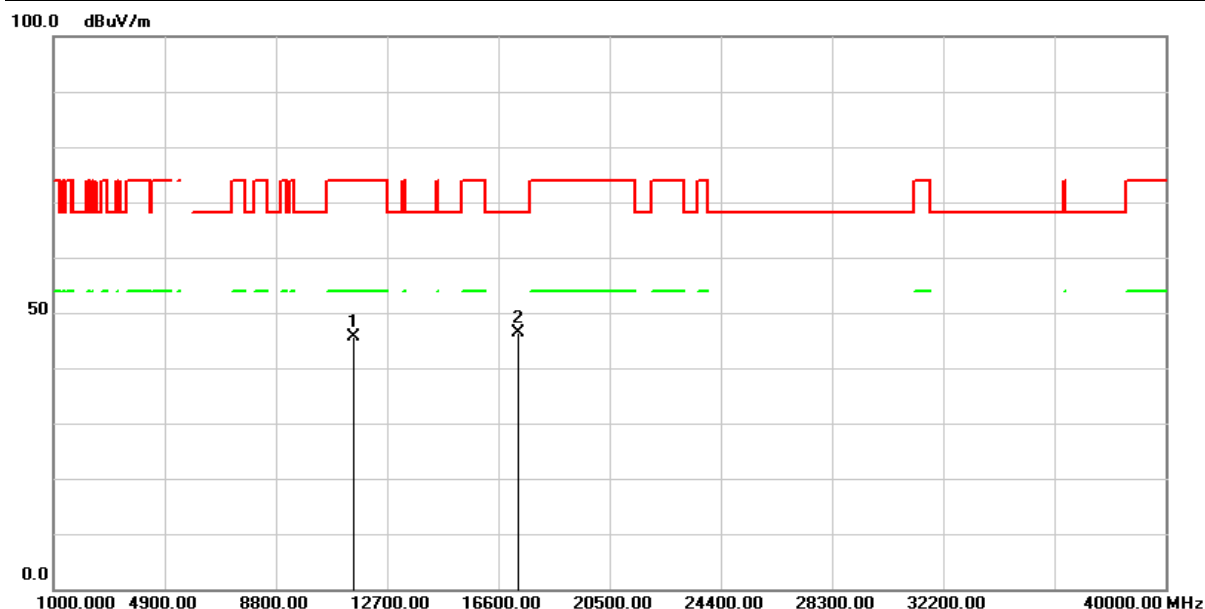


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11550.000       | 55.06            | -9.32                 | 45.74           | 74.00          | -28.26      | peak   |
| 2   | 17325.000       | 48.45            | -1.95                 | 46.50           | 68.20          | -21.70      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 4 : Transmit (802.11ac VHT80 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH155(5775MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

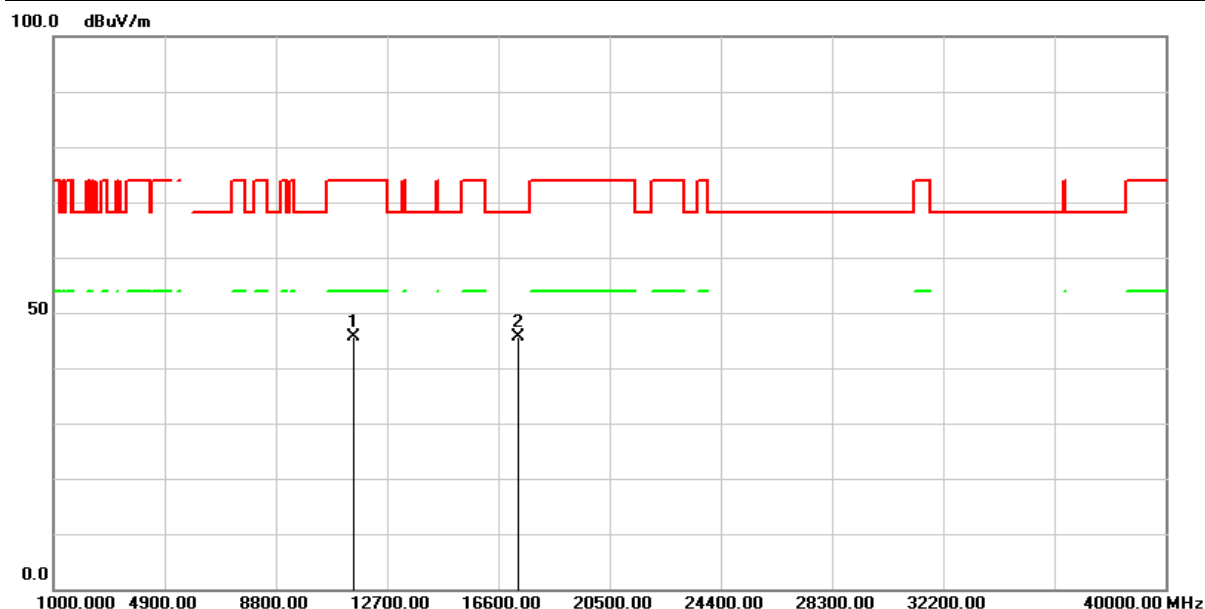


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11550.000       | 55.05            | -9.32                 | 45.73           | 74.00          | -28.27      | peak   |
| 2   | 17325.000       | 47.63            | -1.95                 | 45.68           | 68.20          | -22.52      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH50(5250MHz)                            | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 51 %       |

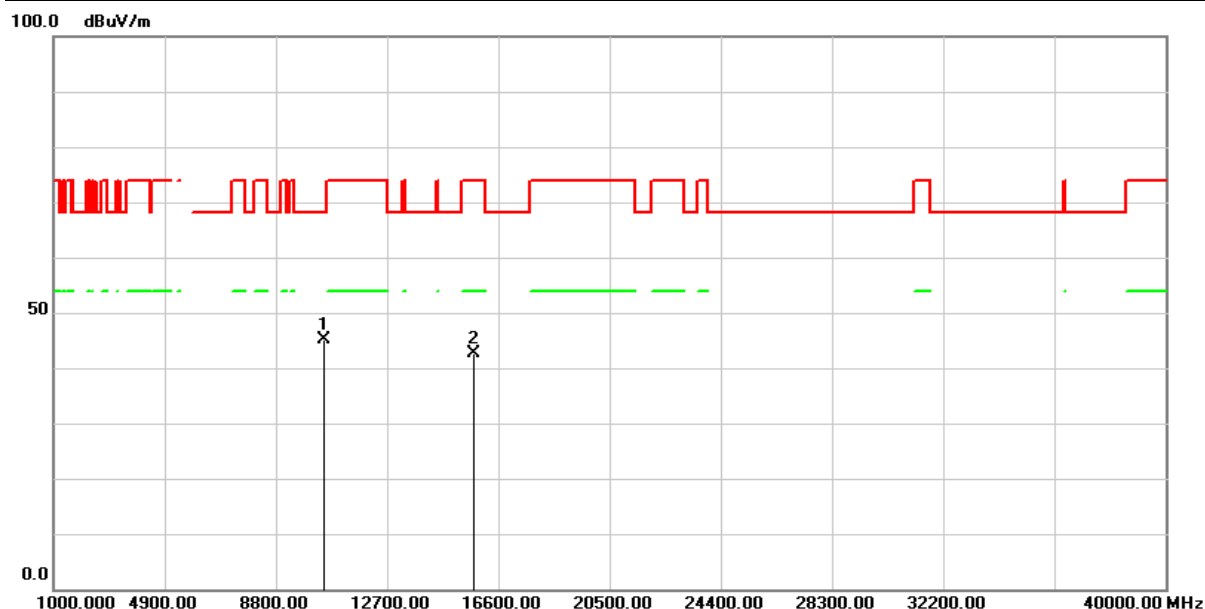


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10500.000       | 55.15            | -10.00                | 45.15           | 68.20          | -23.05      | peak   |
| 2   | 15750.000       | 50.06            | -7.44                 | 42.62           | 74.00          | -31.38      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH50(5250MHz)                            | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 51 %       |

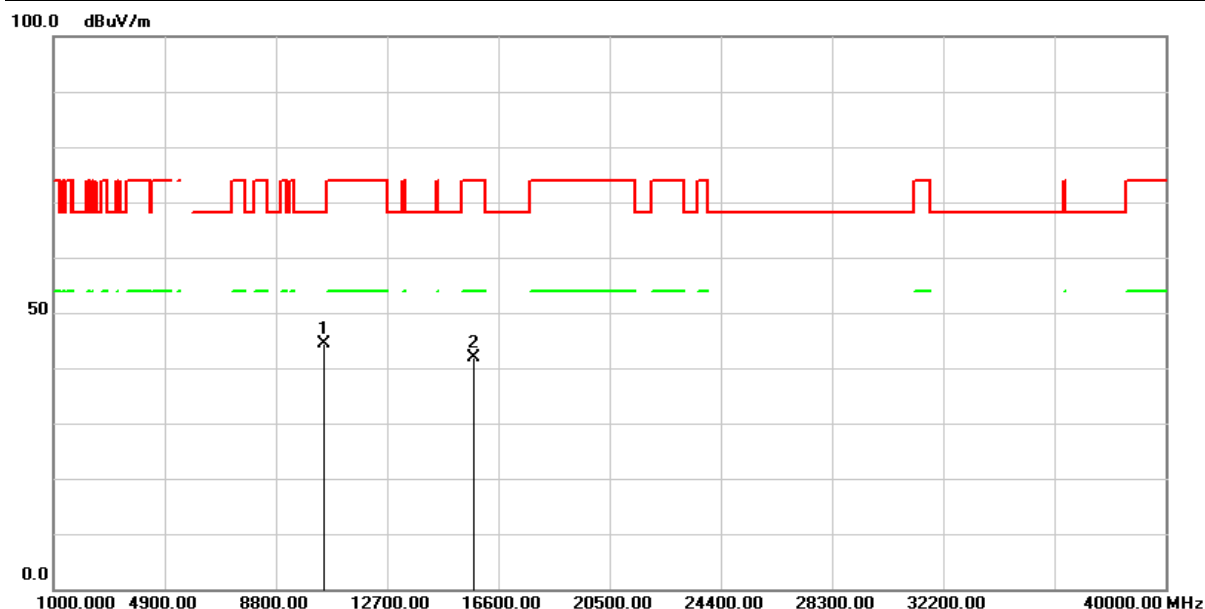


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10500.000       | 54.41            | -10.00                | 44.41           | 68.20          | -23.79      | peak   |
| 2   | 15750.000       | 49.40            | -7.44                 | 41.96           | 74.00          | -32.04      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH114(5570MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 51 %       |

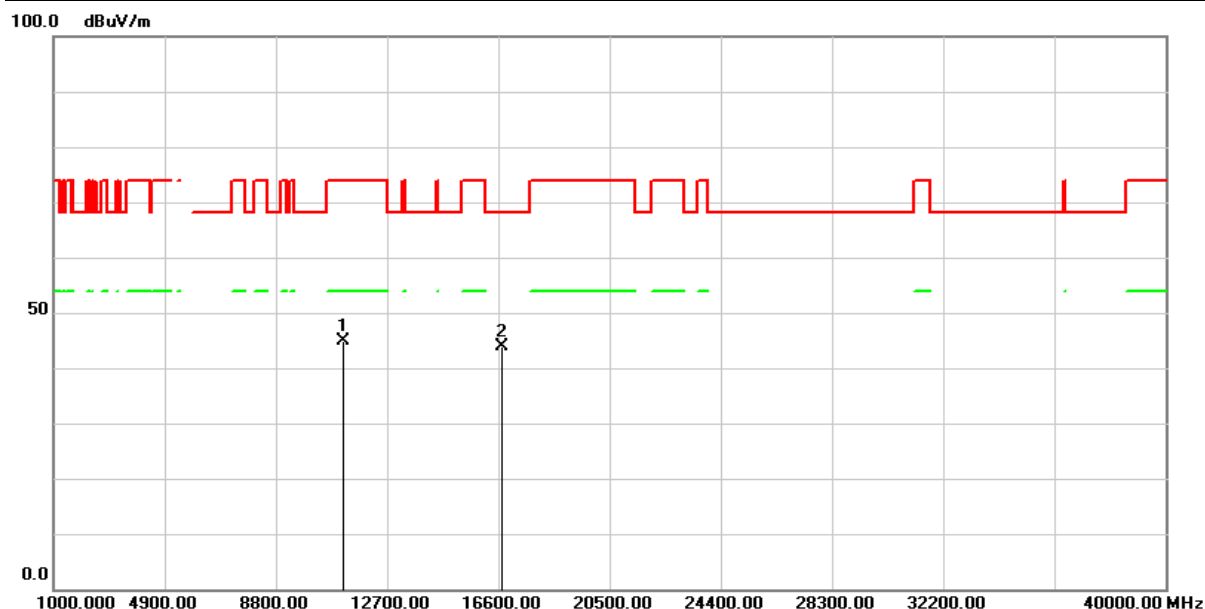


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11140.000       | 54.83            | -9.88                 | 44.95           | 74.00          | -29.05      | peak   |
| 2   | 16710.000       | 48.54            | -4.62                 | 43.92           | 68.20          | -24.28      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 5 : Transmit (802.11ac VHT160 MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH114(5570MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 51 %       |

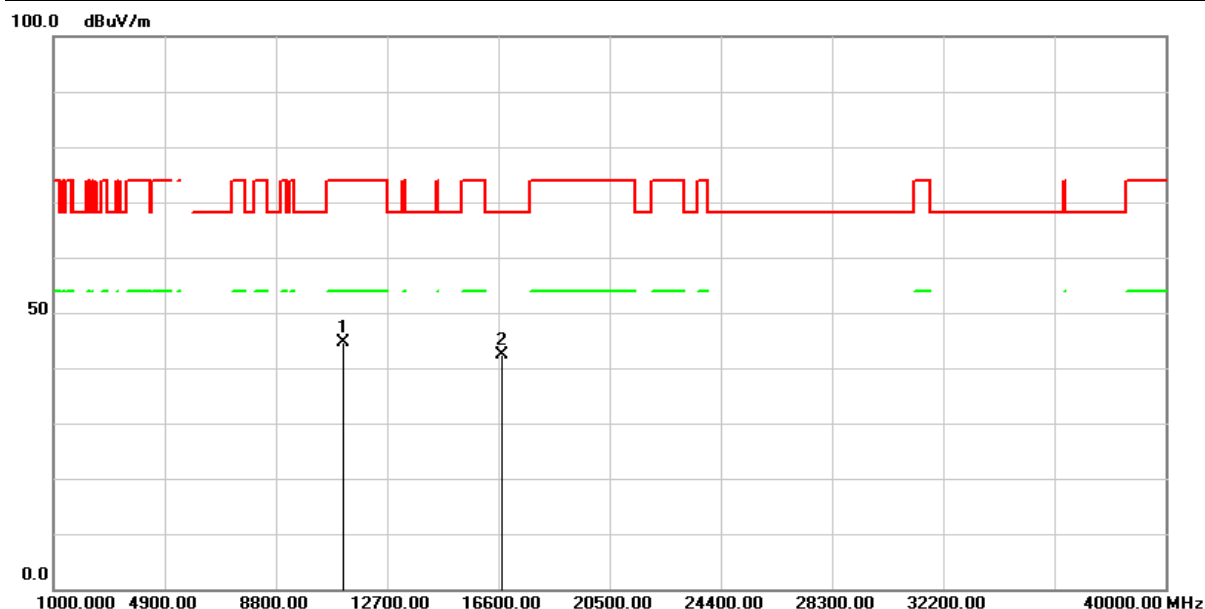


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11140.000       | 54.48            | -9.88                 | 44.60           | 74.00          | -29.40      | peak   |
| 2   | 16710.000       | 46.90            | -4.62                 | 42.28           | 68.20          | -25.92      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH36(5180MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

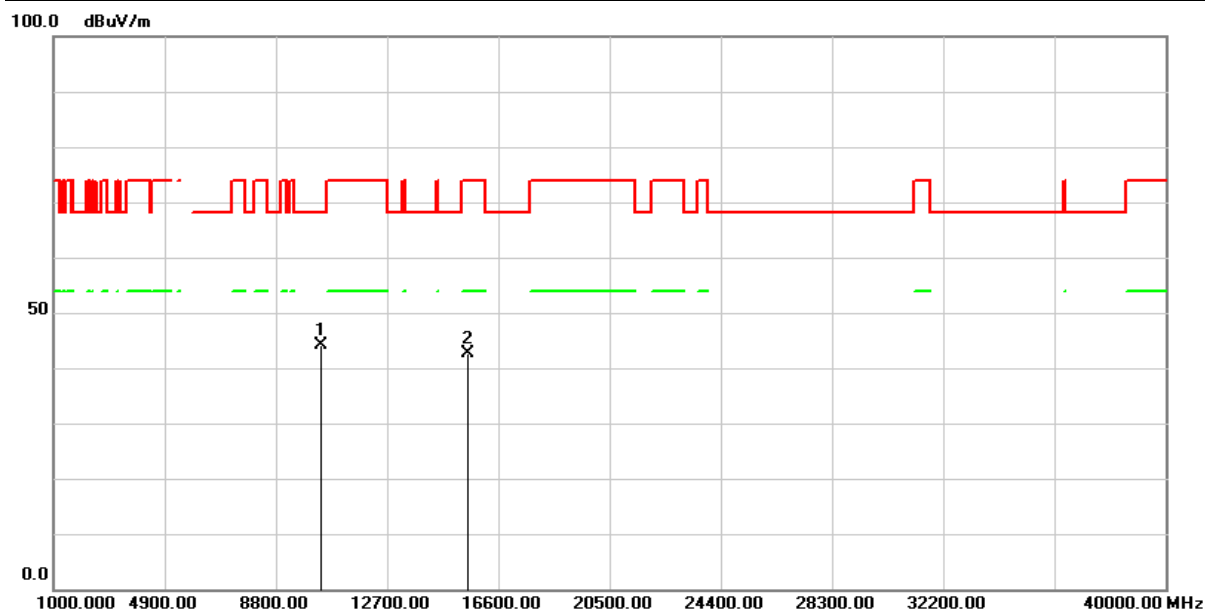


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10360.000       | 54.25            | -10.05                | 44.20           | 68.20          | -24.00      | peak   |
| 2   | 15540.000       | 50.54            | -7.80                 | 42.74           | 74.00          | -31.26      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH36(5180MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

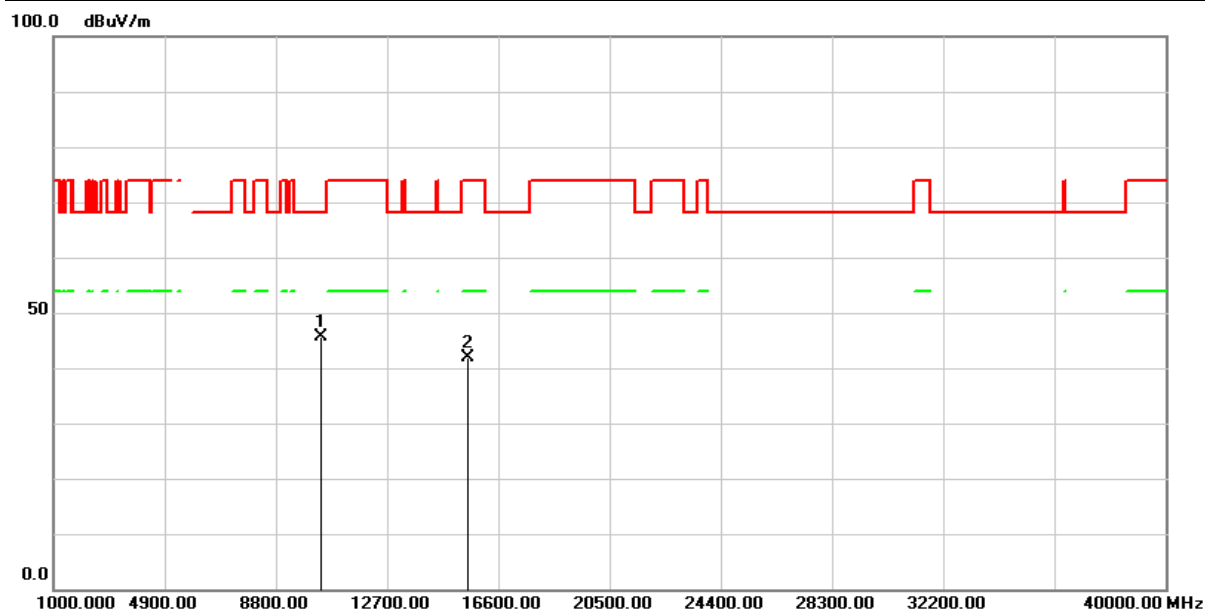


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10360.000       | 55.64            | -10.05                | 45.59           | 68.20          | -22.61      | peak   |
| 2   | 15540.000       | 49.80            | -7.80                 | 42.00           | 74.00          | -32.00      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH44(5200MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

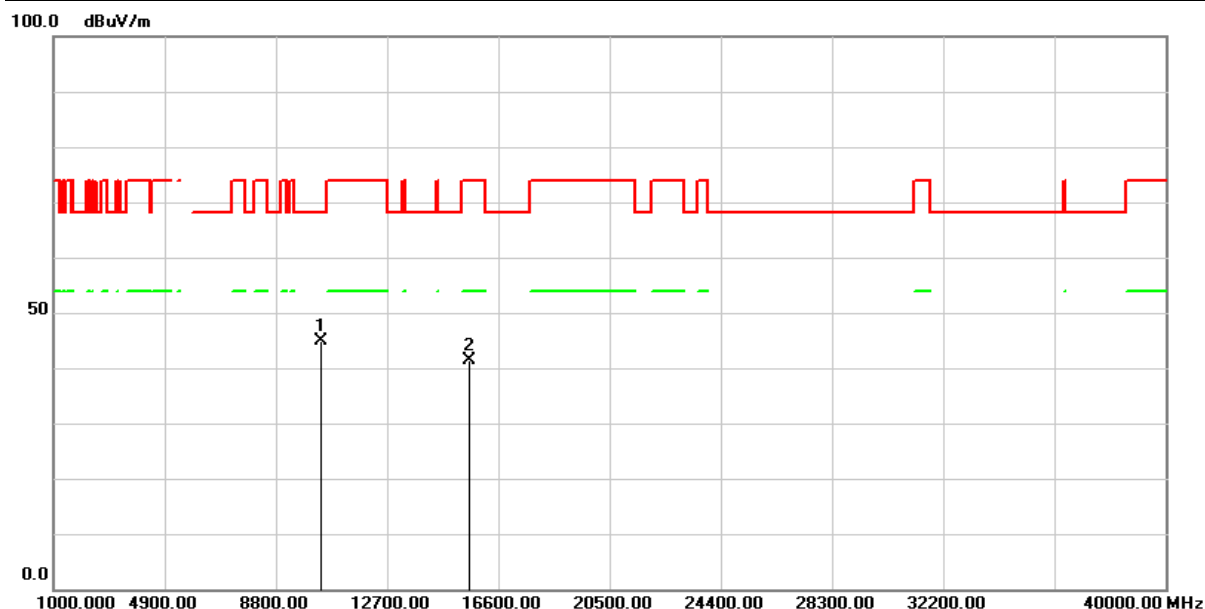


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10400.000       | 54.72            | -9.95                 | 44.77           | 68.20          | -23.43      | peak   |
| 2   | 15600.000       | 49.22            | -7.79                 | 41.43           | 74.00          | -32.57      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH44(5200MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

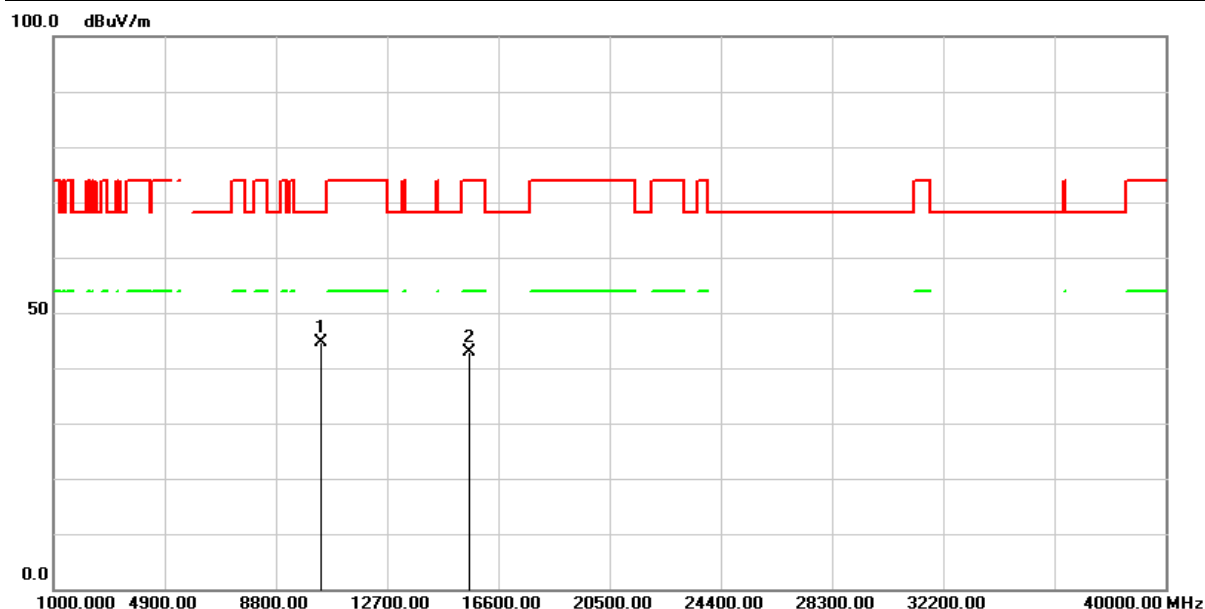


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10400.000       | 54.53            | -9.95                 | 44.58           | 68.20          | -23.62      | peak   |
| 2   | 15600.000       | 50.59            | -7.79                 | 42.80           | 74.00          | -31.20      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH48(5240MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

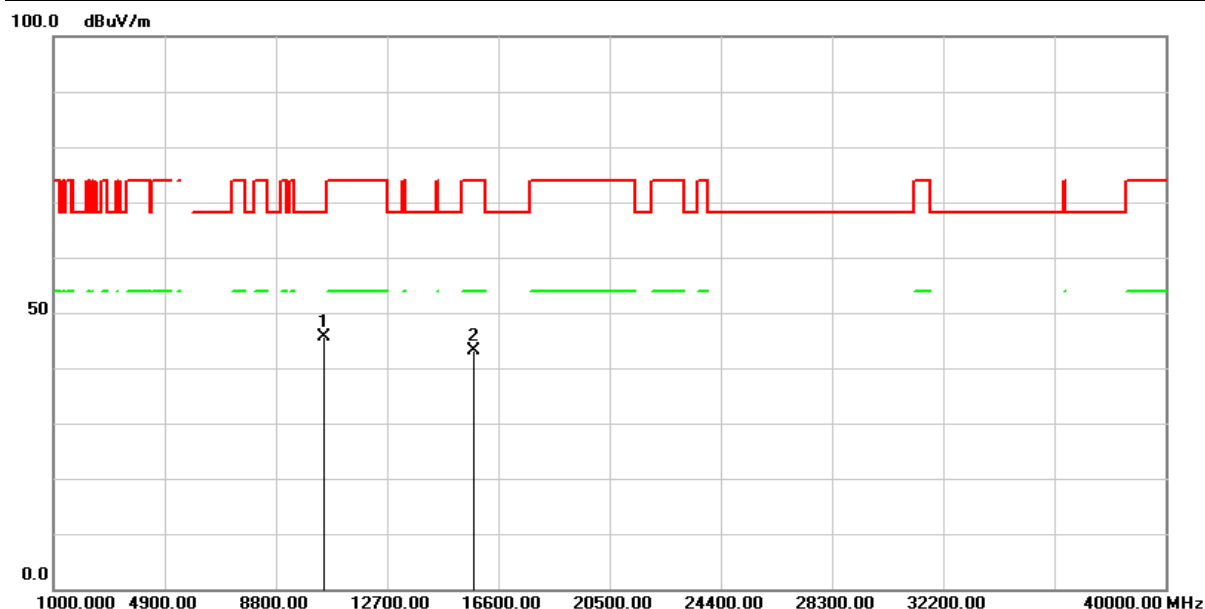


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10480.000       | 55.72            | -9.97                 | 45.75           | 68.20          | -22.45      | peak   |
| 2   | 15720.000       | 50.86            | -7.62                 | 43.24           | 74.00          | -30.76      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH48(5240MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

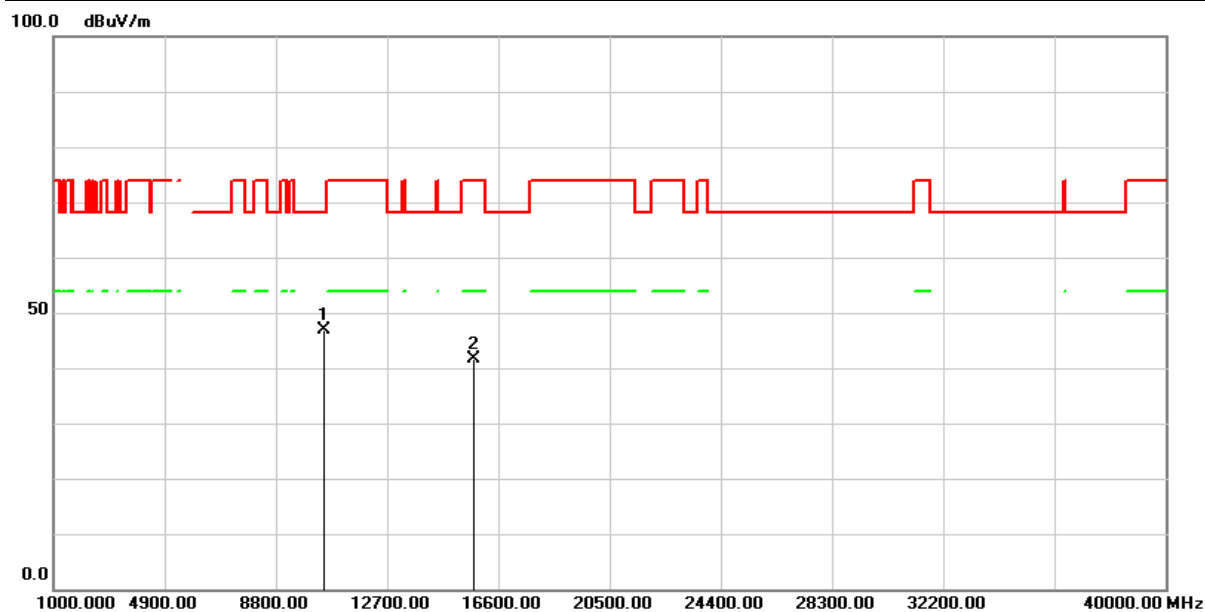


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10480.000       | 56.78            | -9.97                 | 46.81           | 68.20          | -21.39      | peak   |
| 2   | 15720.000       | 49.21            | -7.62                 | 41.59           | 74.00          | -32.41      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH52(5260MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

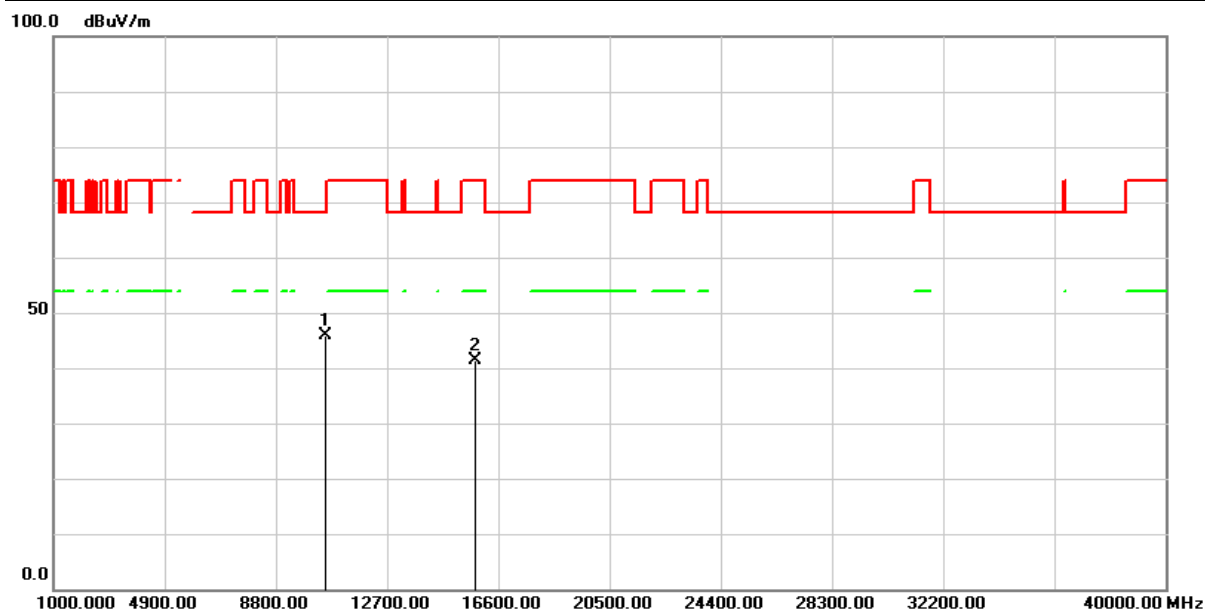


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 55.93            | -10.01                | 45.92           | 68.20          | -22.28      | peak   |
| 2   | 15780.000       | 48.95            | -7.51                 | 41.44           | 74.00          | -32.56      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH52(5260MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

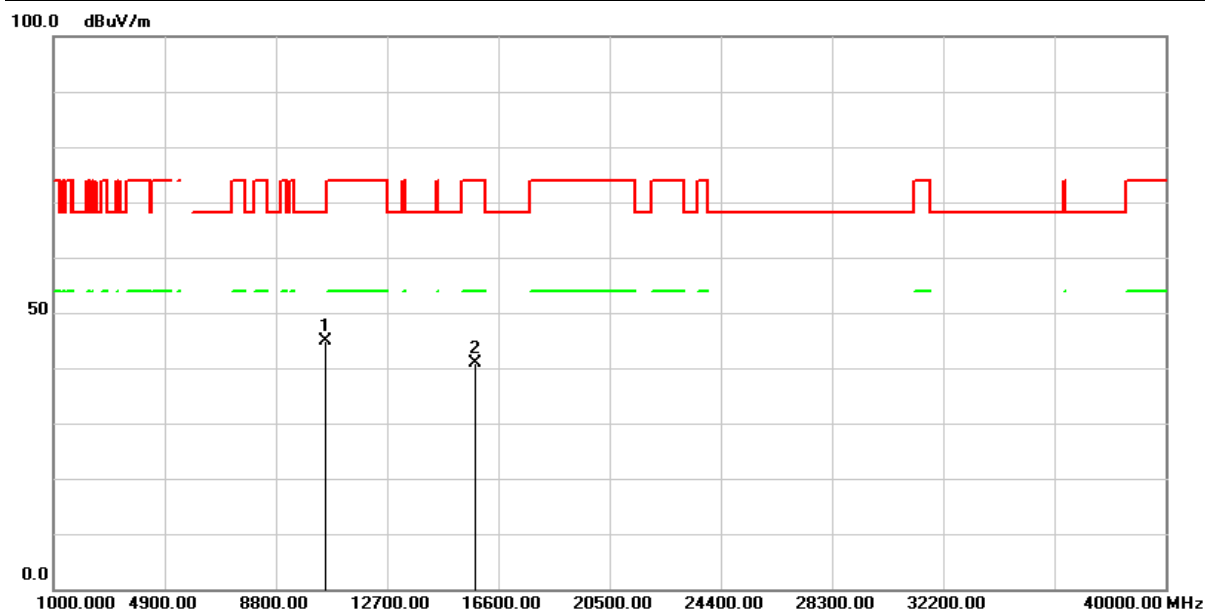


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 54.96            | -10.01                | 44.95           | 68.20          | -23.25      | peak   |
| 2   | 15780.000       | 48.40            | -7.51                 | 40.89           | 74.00          | -33.11      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH60(5300MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

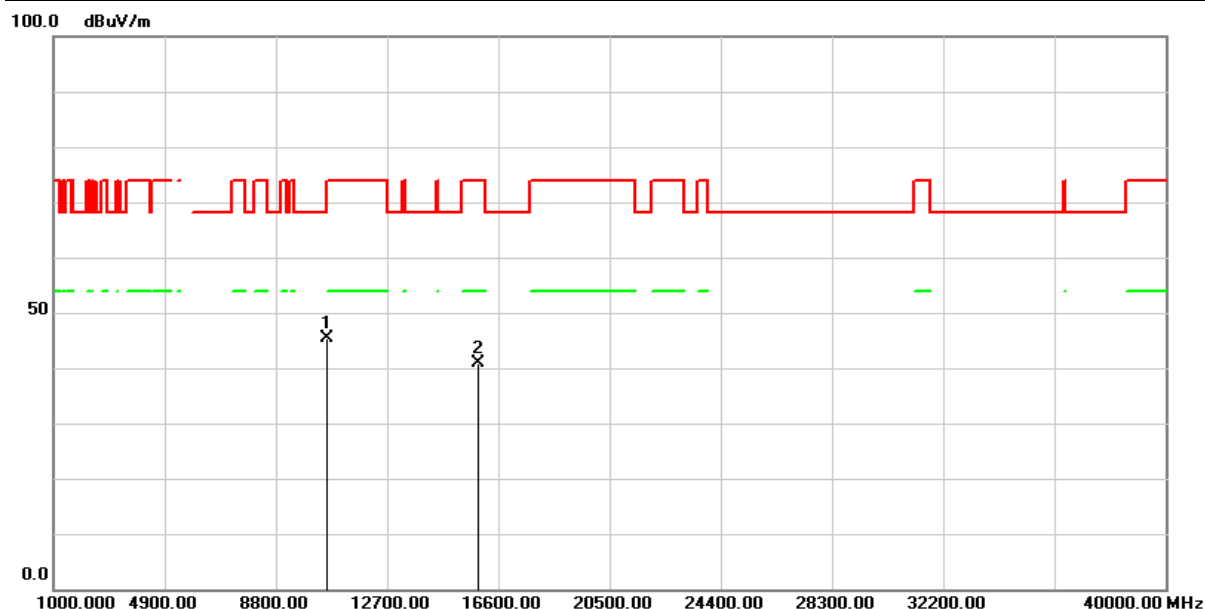


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10600.000       | 55.29            | -9.94                 | 45.35           | 68.20          | -22.85      | peak   |
| 2   | 15900.000       | 48.19            | -7.20                 | 40.99           | 74.00          | -33.01      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH60(5300MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

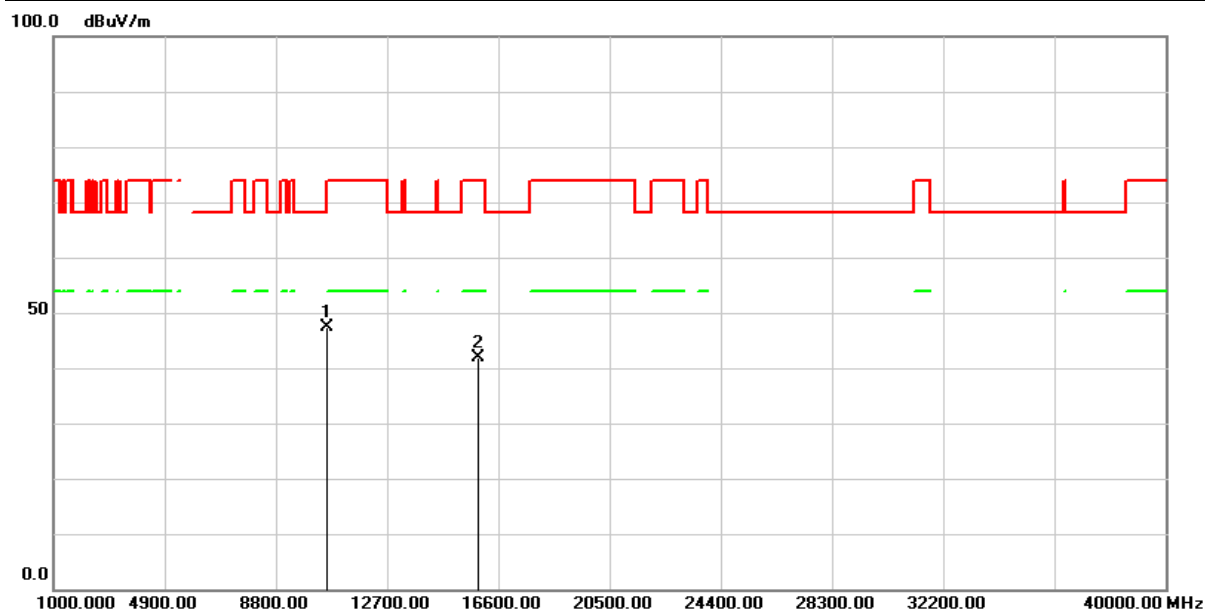


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10600.000       | 57.20            | -9.94                 | 47.26           | 68.20          | -20.94      | peak   |
| 2   | 15900.000       | 49.00            | -7.20                 | 41.80           | 74.00          | -32.20      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH64(5320MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

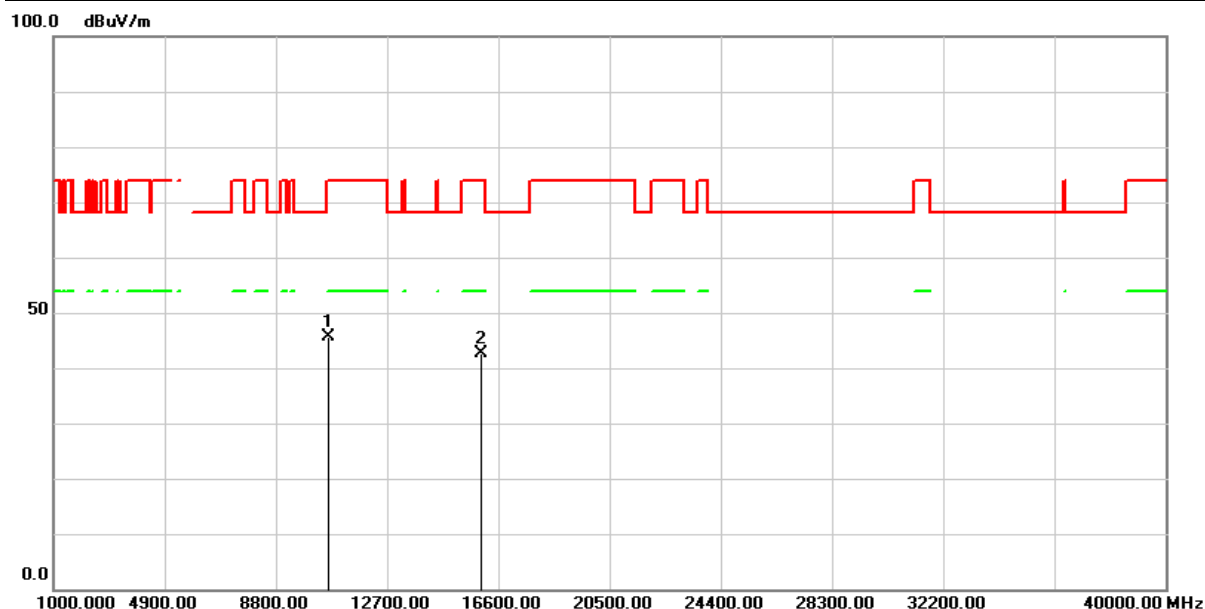


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10640.000       | 55.45            | -9.87                 | 45.58           | 74.00          | -28.42      | peak   |
| 2   | 15960.000       | 49.85            | -7.29                 | 42.56           | 74.00          | -31.44      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH64(5320MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

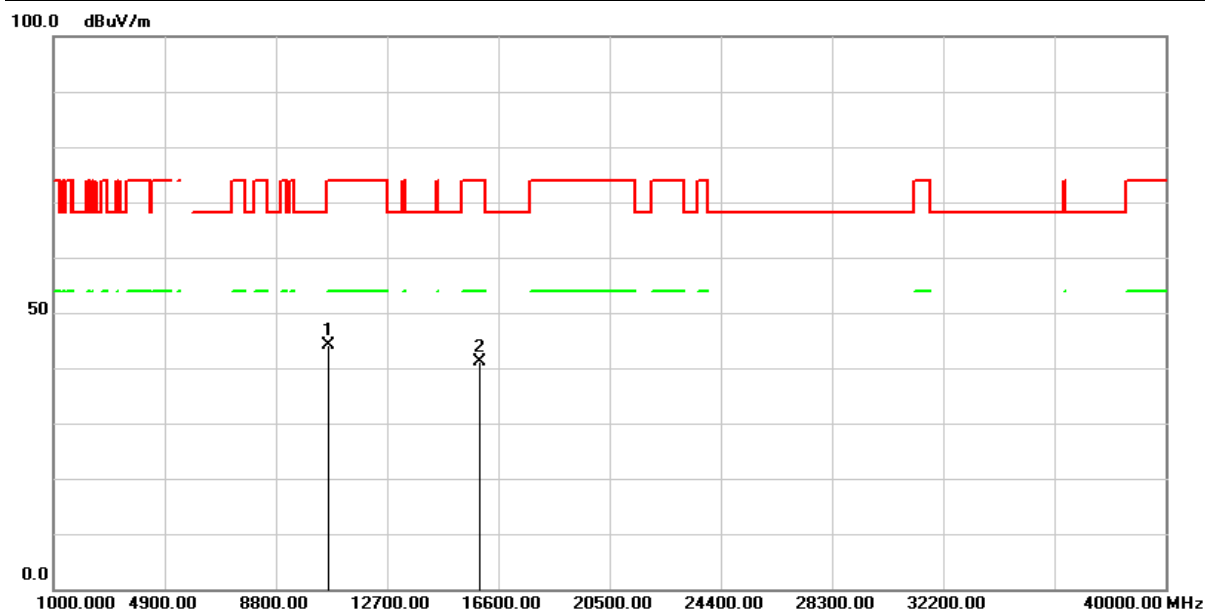


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10640.000       | 54.08            | -9.87                 | 44.21           | 74.00          | -29.79      | peak   |
| 2   | 15960.000       | 48.30            | -7.29                 | 41.01           | 74.00          | -32.99      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH100(5500MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

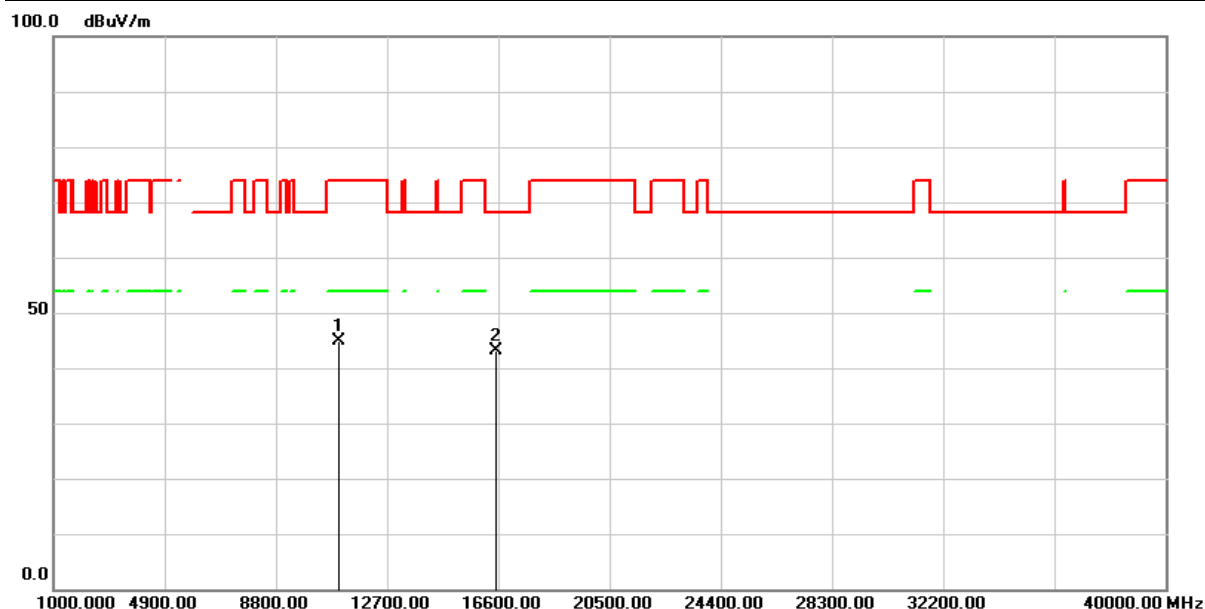


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11000.000       | 54.57            | -9.68                 | 44.89           | 74.00          | -29.11      | peak   |
| 2   | 16500.000       | 48.77            | -5.66                 | 43.11           | 68.20          | -25.09      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH100(5500MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

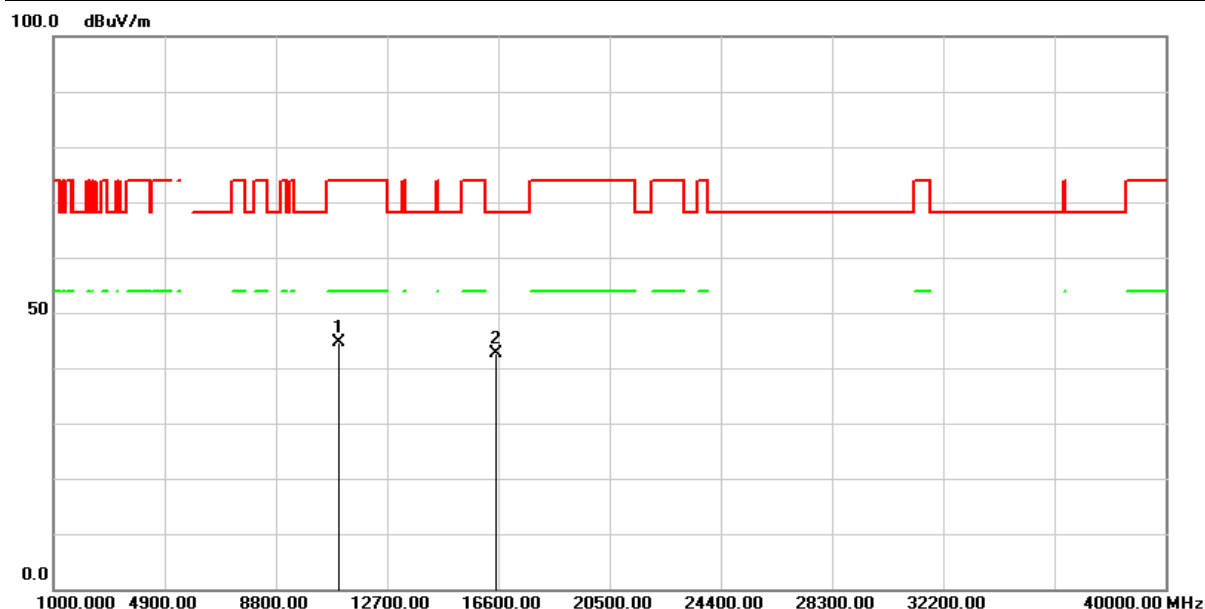


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11000.000       | 54.23            | -9.68                 | 44.55           | 74.00          | -29.45      | peak   |
| 2   | 16500.000       | 48.26            | -5.66                 | 42.60           | 68.20          | -25.60      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH116(5580MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

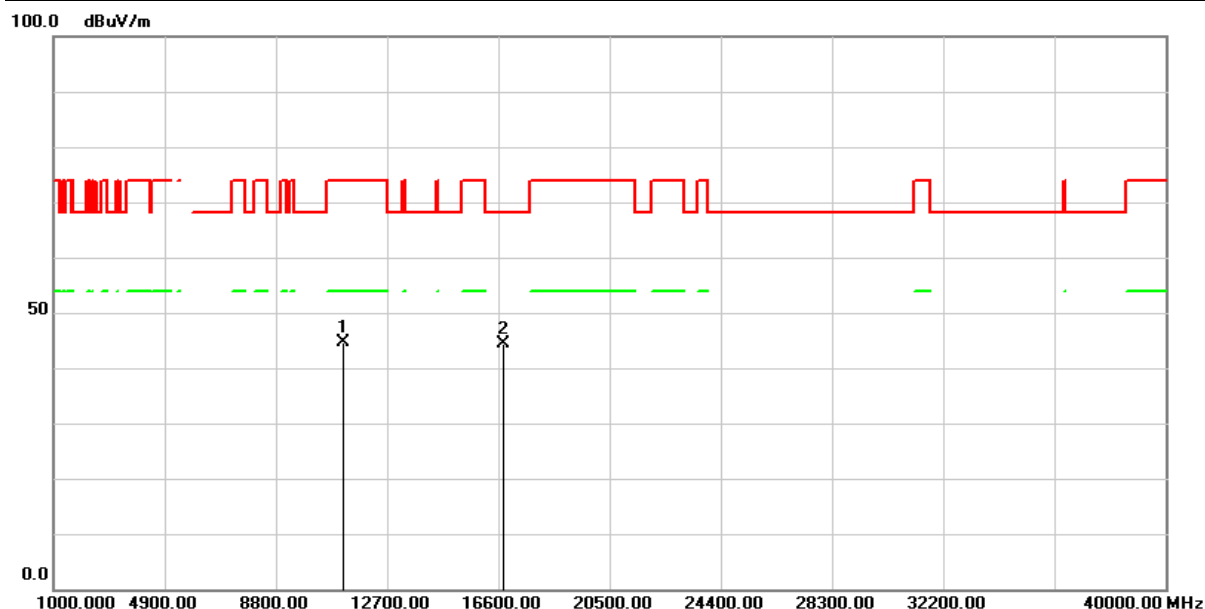


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11160.000       | 54.43            | -9.89                 | 44.54           | 74.00          | -29.46      | peak   |
| 2   | 16740.000       | 48.60            | -4.31                 | 44.29           | 68.20          | -23.91      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH116(5580MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

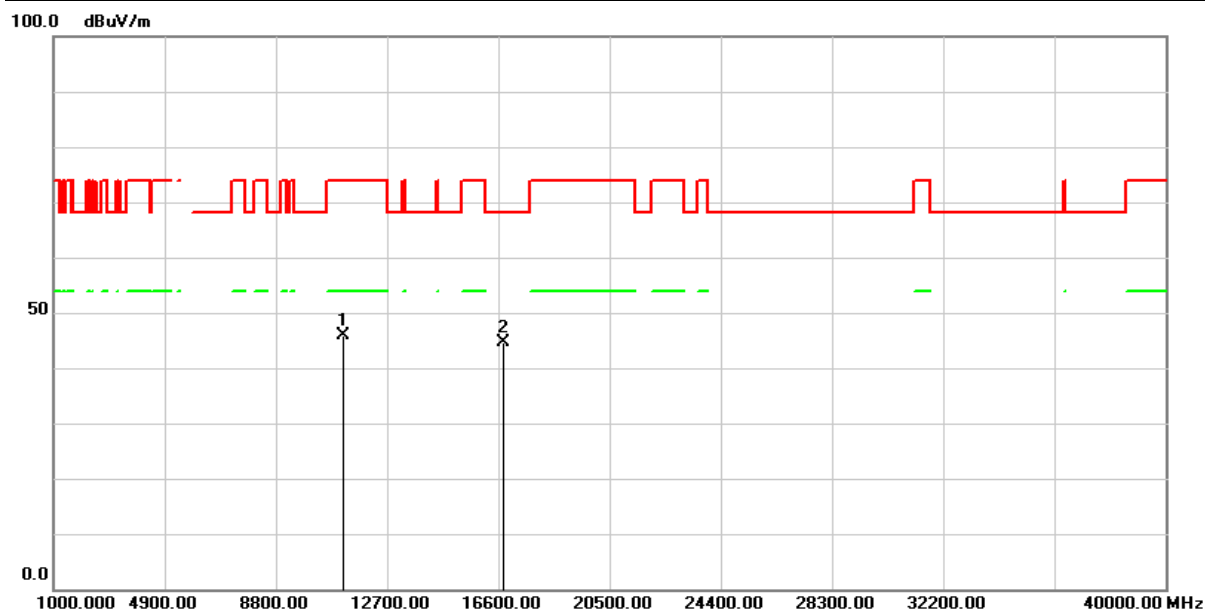


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11160.000       | 55.66            | -9.89                 | 45.77           | 74.00          | -28.23      | peak   |
| 2   | 16740.000       | 48.83            | -4.31                 | 44.52           | 68.20          | -23.68      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/06 |
| <b>Test Channel :</b> | CH140(5700MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

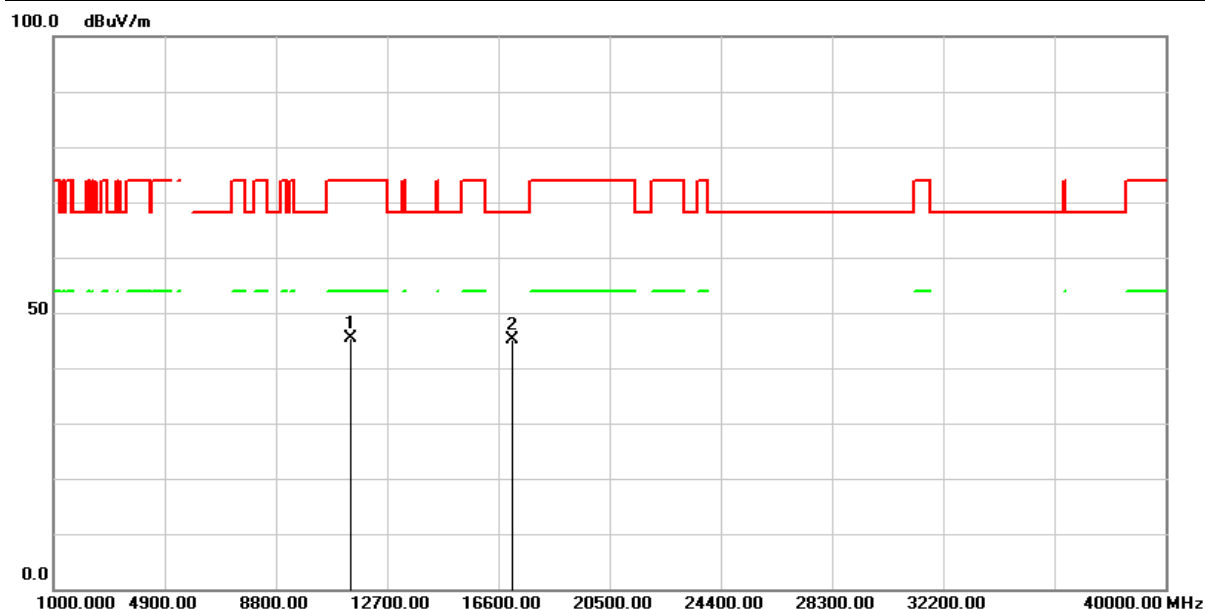


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11400.000       | 54.96            | -9.59                 | 45.37           | 74.00          | -28.63      | peak   |
| 2   | 17100.000       | 47.83            | -2.67                 | 45.16           | 68.20          | -23.04      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH140(5700MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

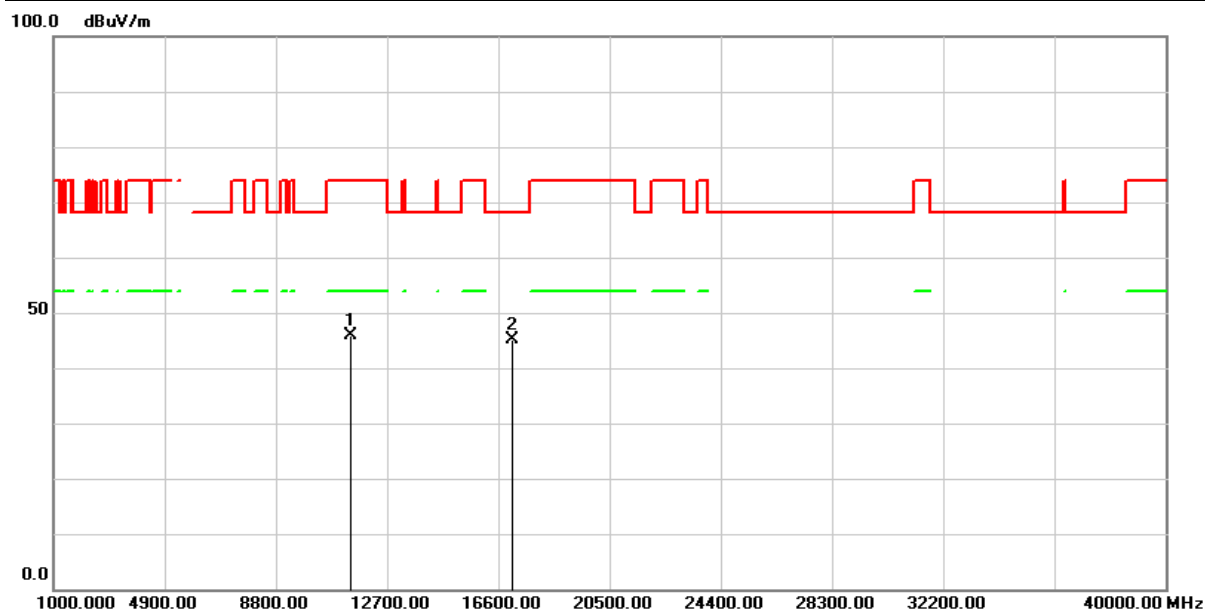


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11400.000       | 55.57            | -9.59                 | 45.98           | 74.00          | -28.02      | peak   |
| 2   | 17100.000       | 47.71            | -2.67                 | 45.04           | 68.20          | -23.16      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH149(5745MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

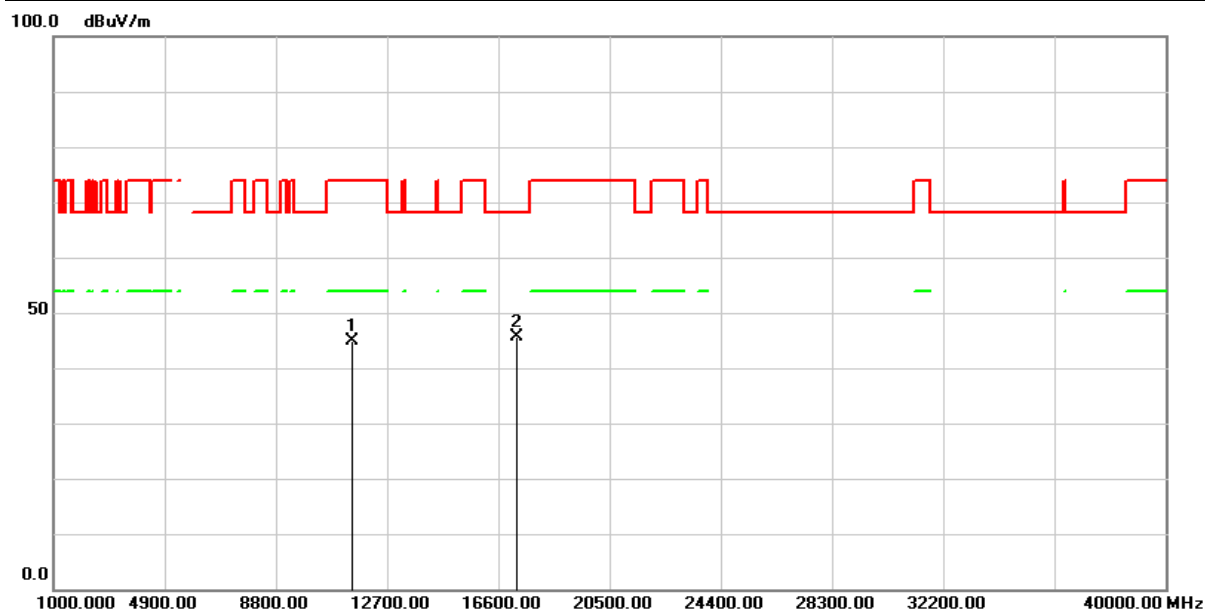


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11490.000       | 54.27            | -9.45                 | 44.82           | 74.00          | -29.18      | peak   |
| 2   | 17235.000       | 47.95            | -2.24                 | 45.71           | 68.20          | -22.49      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH149(5745MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

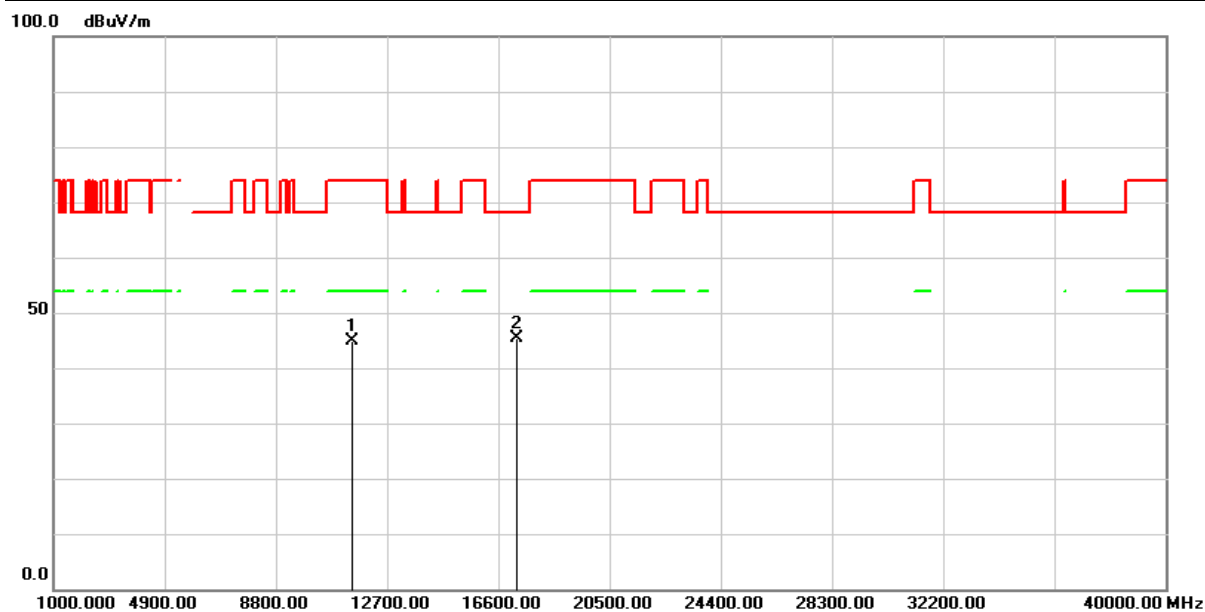


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11490.000       | 54.23            | -9.45                 | 44.78           | 74.00          | -29.22      | peak   |
| 2   | 17235.000       | 47.64            | -2.24                 | 45.40           | 68.20          | -22.80      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH157(5785MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

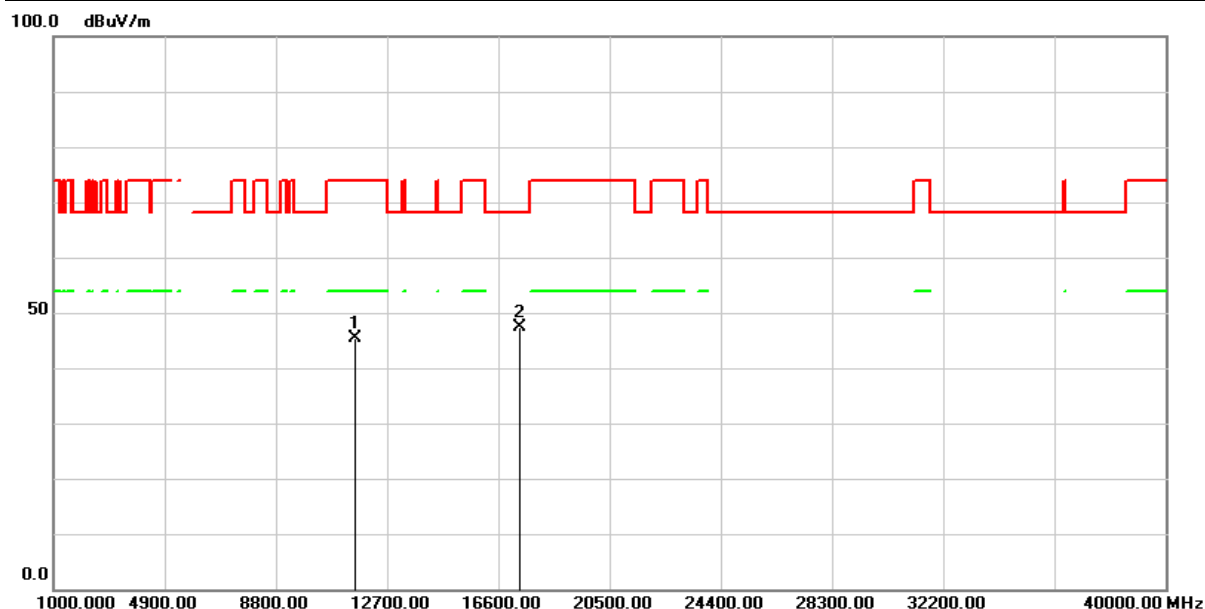


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11570.000       | 54.71            | -9.40                 | 45.31           | 74.00          | -28.69      | peak   |
| 2   | 17355.000       | 49.10            | -1.65                 | 47.45           | 68.20          | -20.75      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH157(5785MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

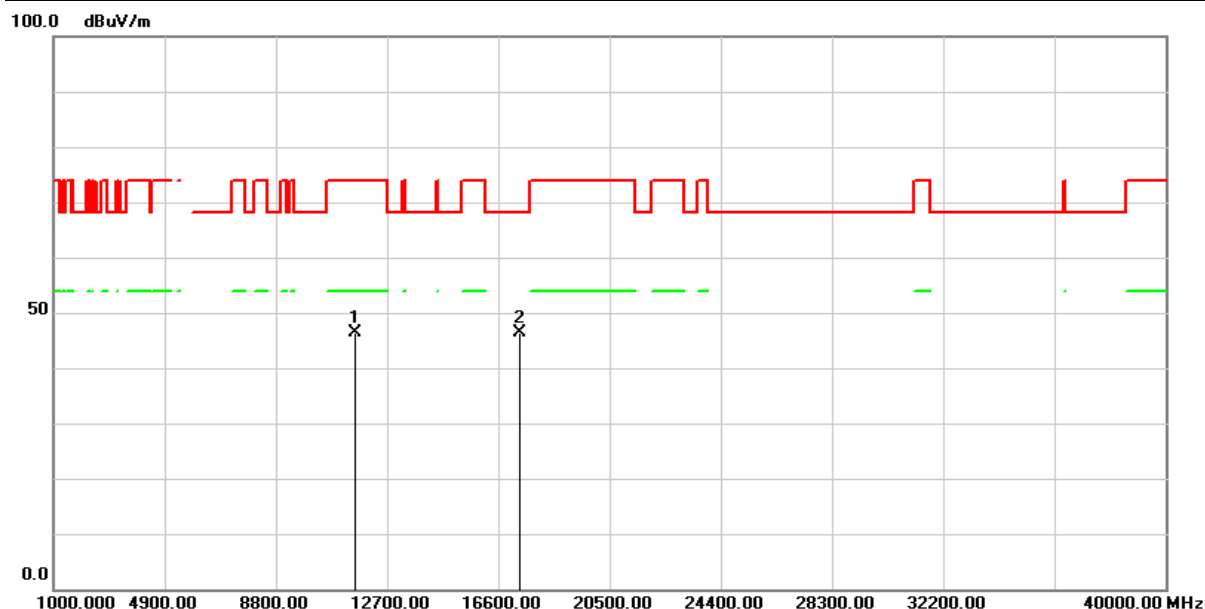


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11570.000       | 55.69            | -9.40                 | 46.29           | 74.00          | -27.71      | peak   |
| 2   | 17355.000       | 48.06            | -1.65                 | 46.41           | 68.20          | -21.79      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH165(5825MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

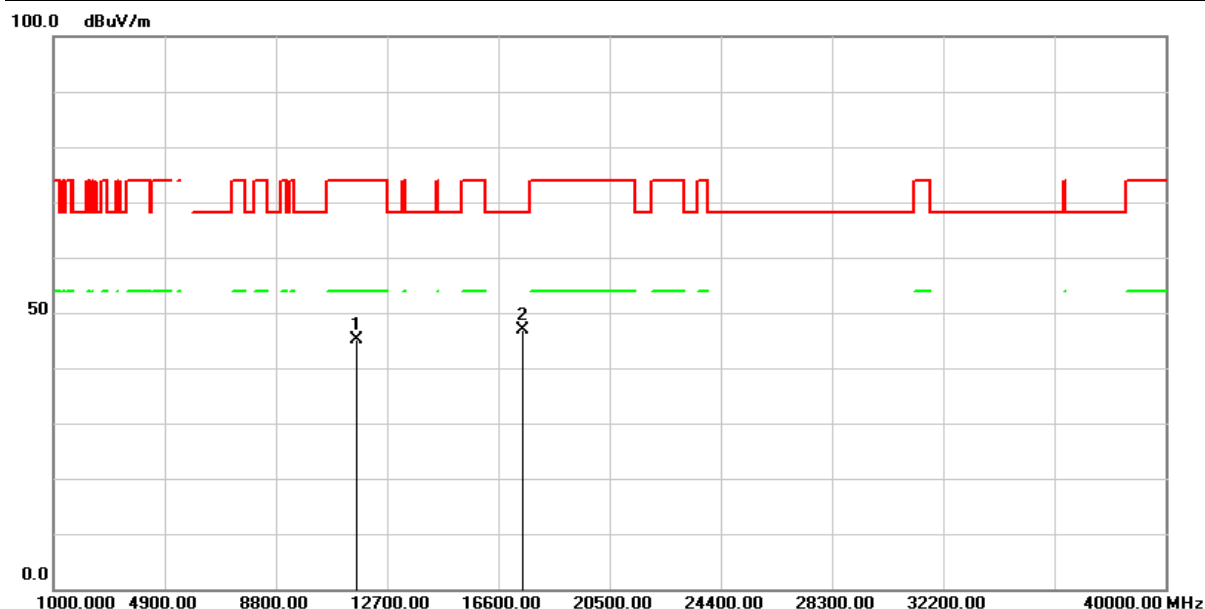


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11650.000       | 55.00            | -9.82                 | 45.18           | 74.00          | -28.82      | peak   |
| 2   | 17475.000       | 47.73            | -0.85                 | 46.88           | 68.20          | -21.32      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 6 : Transmit (802.11ax HE20M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH165(5825MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

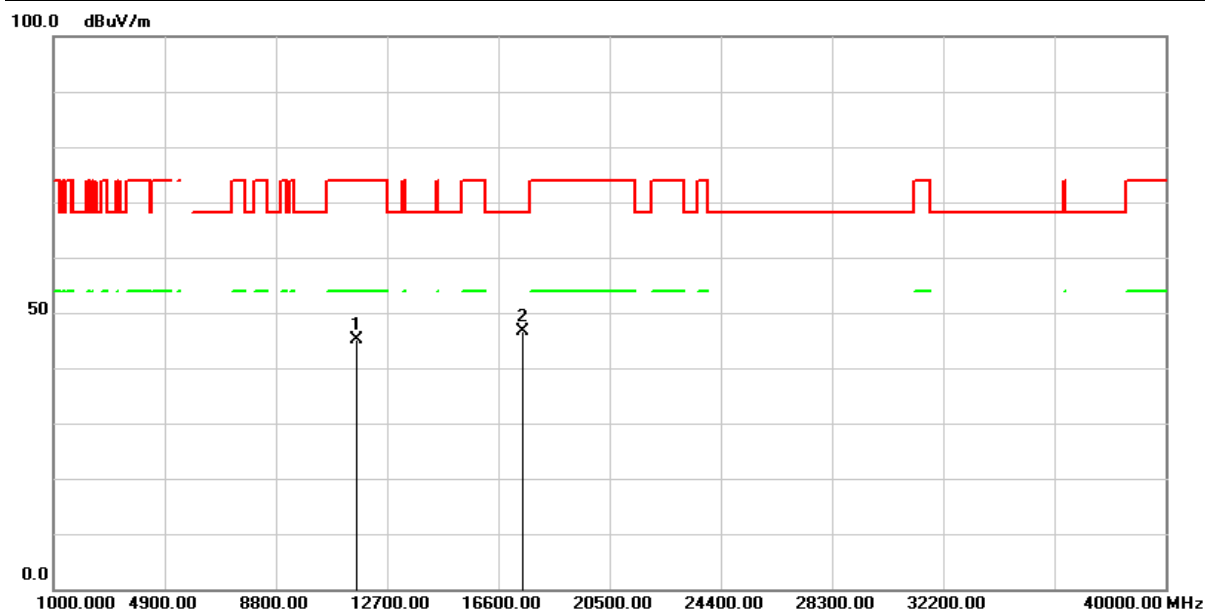


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11650.000       | 54.96            | -9.82                 | 45.14           | 74.00          | -28.86      | peak   |
| 2   | 17475.000       | 47.43            | -0.85                 | 46.58           | 68.20          | -21.62      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH38(5190MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

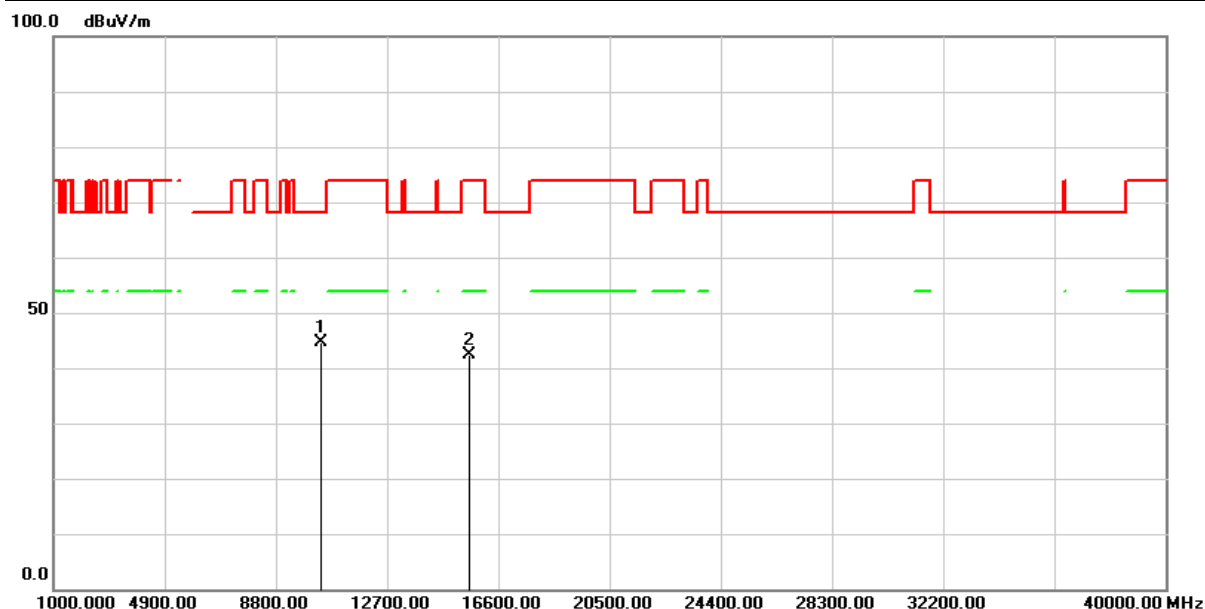


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10380.000       | 54.63            | -10.00                | 44.63           | 68.20          | -23.57      | peak   |
| 2   | 15570.000       | 50.20            | -7.79                 | 42.41           | 74.00          | -31.59      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH38(5190MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

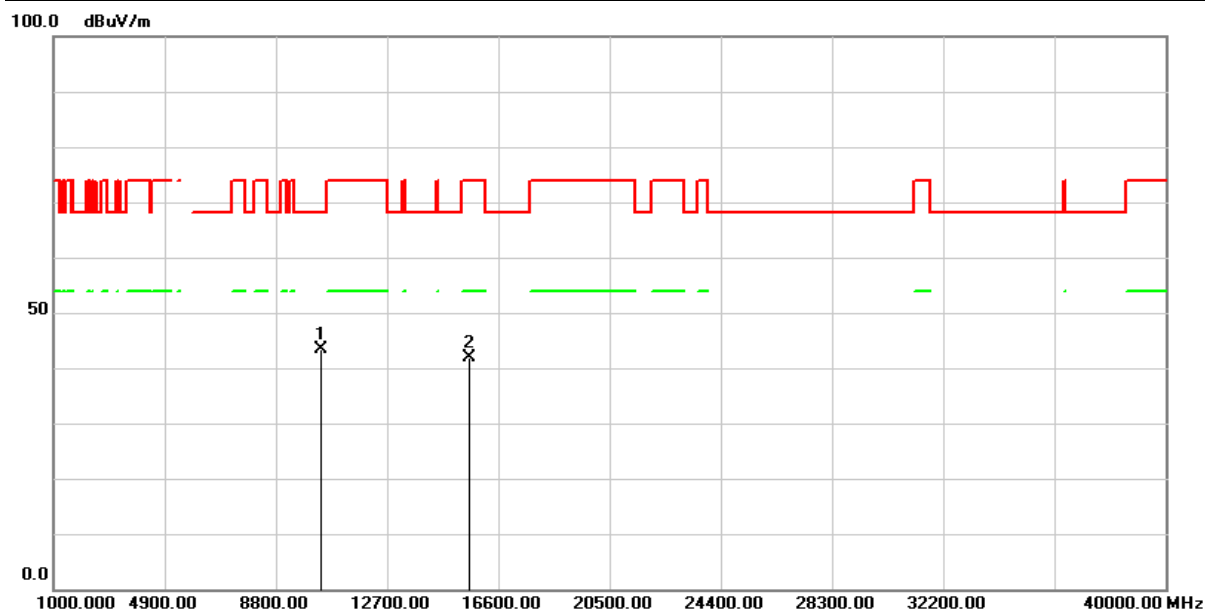


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10380.000       | 53.47            | -10.00                | 43.47           | 68.20          | -24.73      | peak   |
| 2   | 15570.000       | 49.60            | -7.79                 | 41.81           | 74.00          | -32.19      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH46(5230MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

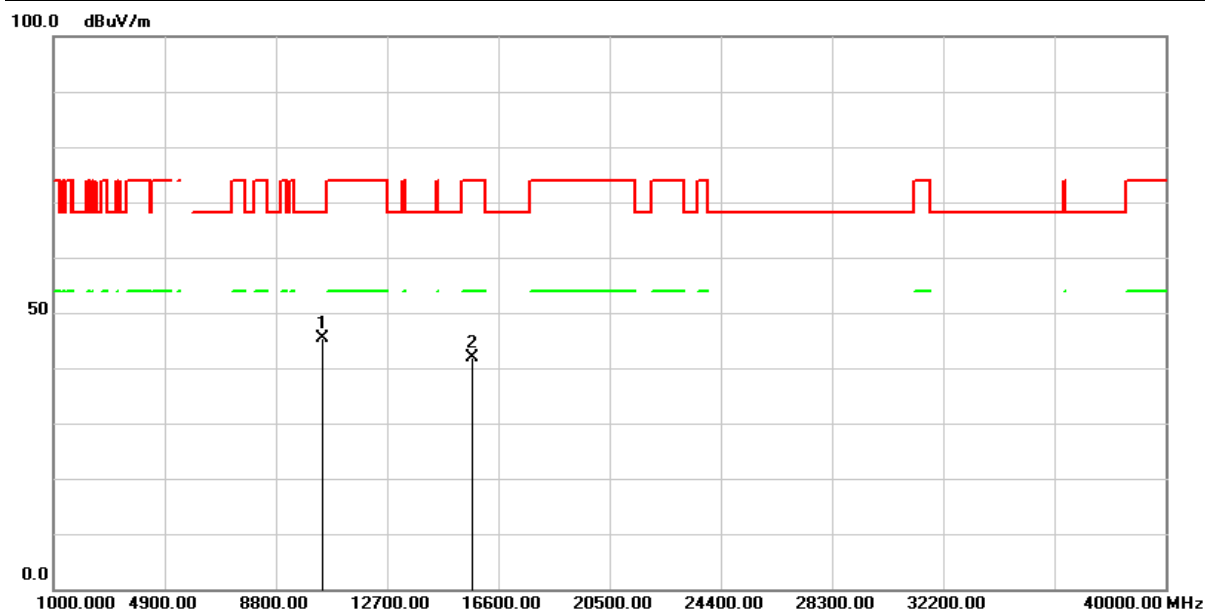


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10460.000       | 55.22            | -9.94                 | 45.28           | 68.20          | -22.92      | peak   |
| 2   | 15690.000       | 49.76            | -7.81                 | 41.95           | 74.00          | -32.05      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH46(5230MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

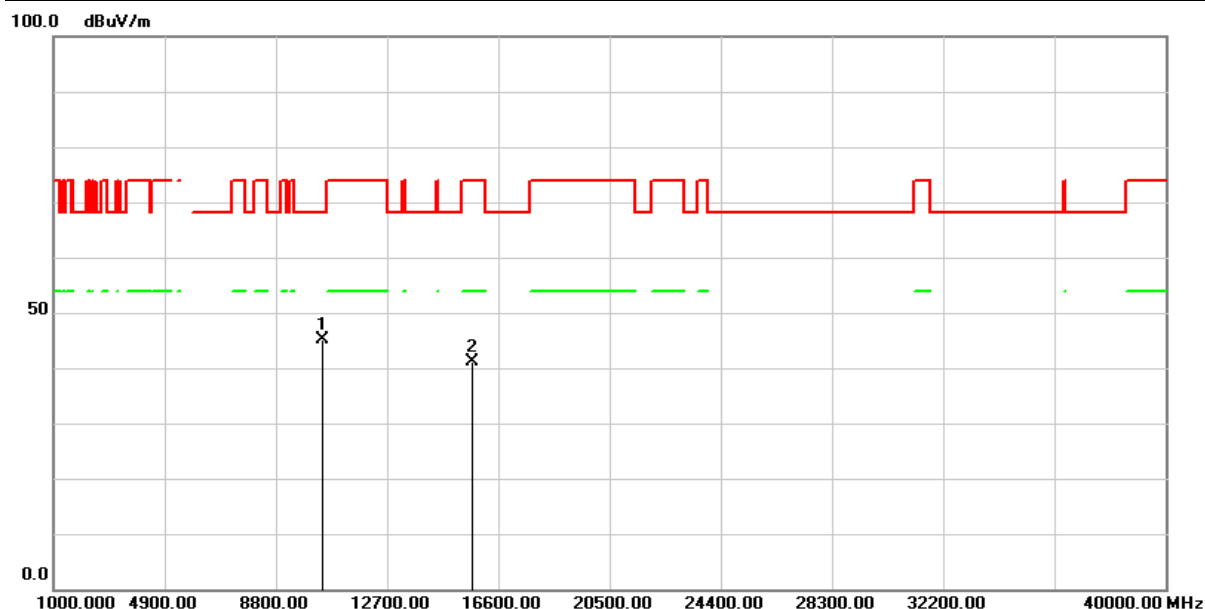


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10460.000       | 55.10            | -9.94                 | 45.16           | 68.20          | -23.04      | peak   |
| 2   | 15690.000       | 49.03            | -7.81                 | 41.22           | 74.00          | -32.78      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH54(5270MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

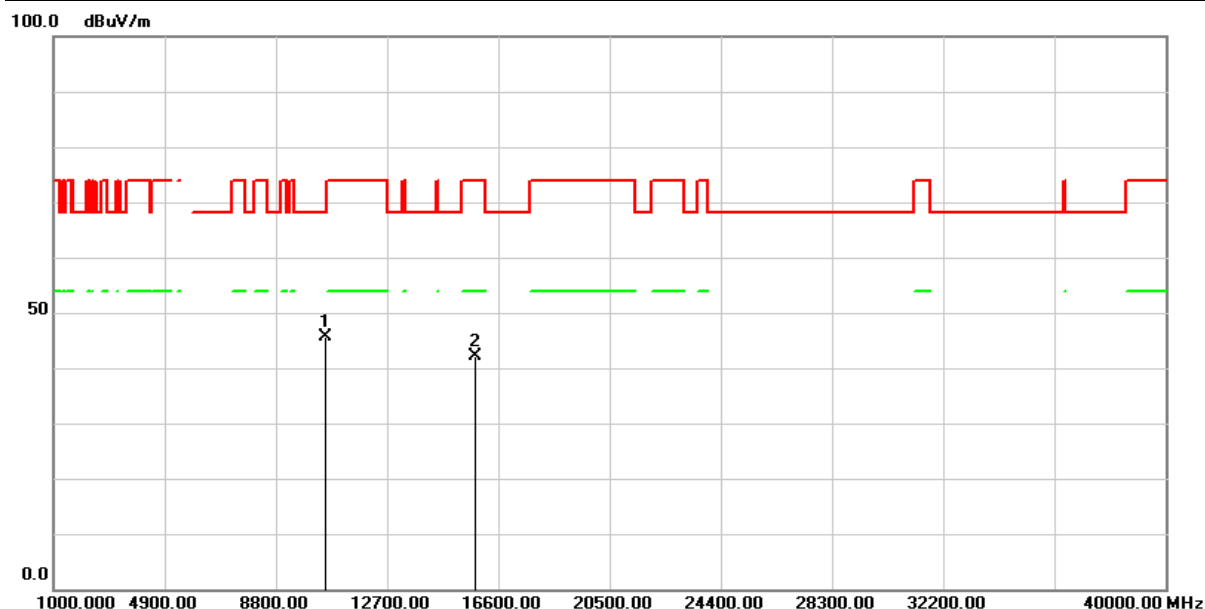


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10540.000       | 55.53            | -10.01                | 45.52           | 68.20          | -22.68      | peak   |
| 2   | 15810.000       | 49.60            | -7.54                 | 42.06           | 74.00          | -31.94      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH54(5270MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

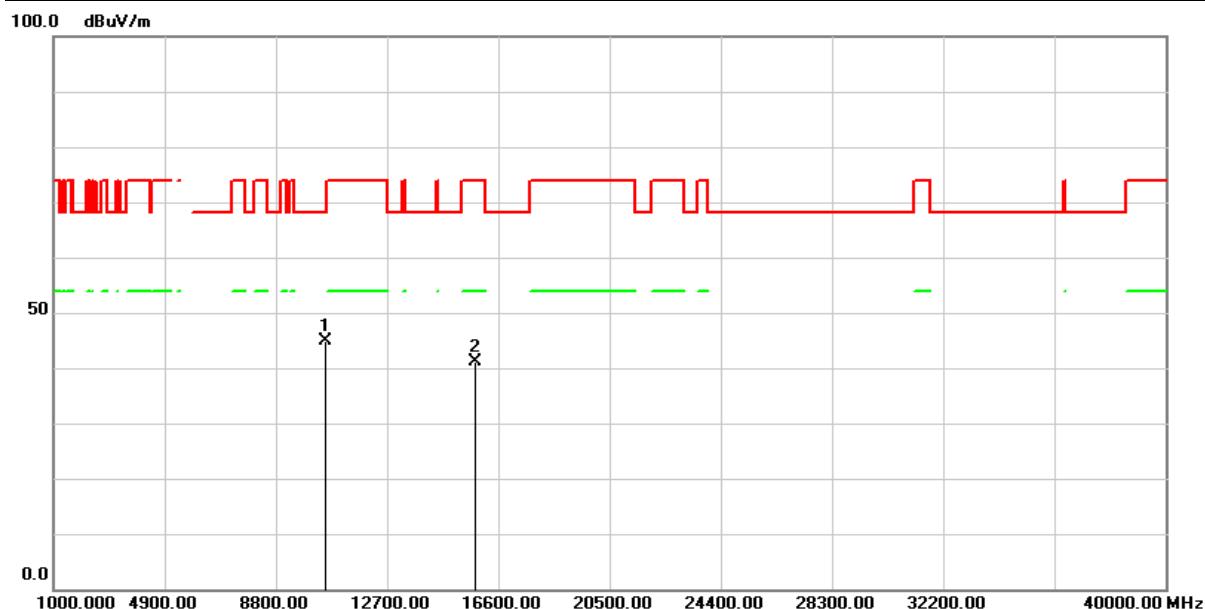


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10540.000       | 54.81            | -10.01                | 44.80           | 68.20          | -23.40      | peak   |
| 2   | 15810.000       | 48.62            | -7.54                 | 41.08           | 74.00          | -32.92      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH62(5310MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

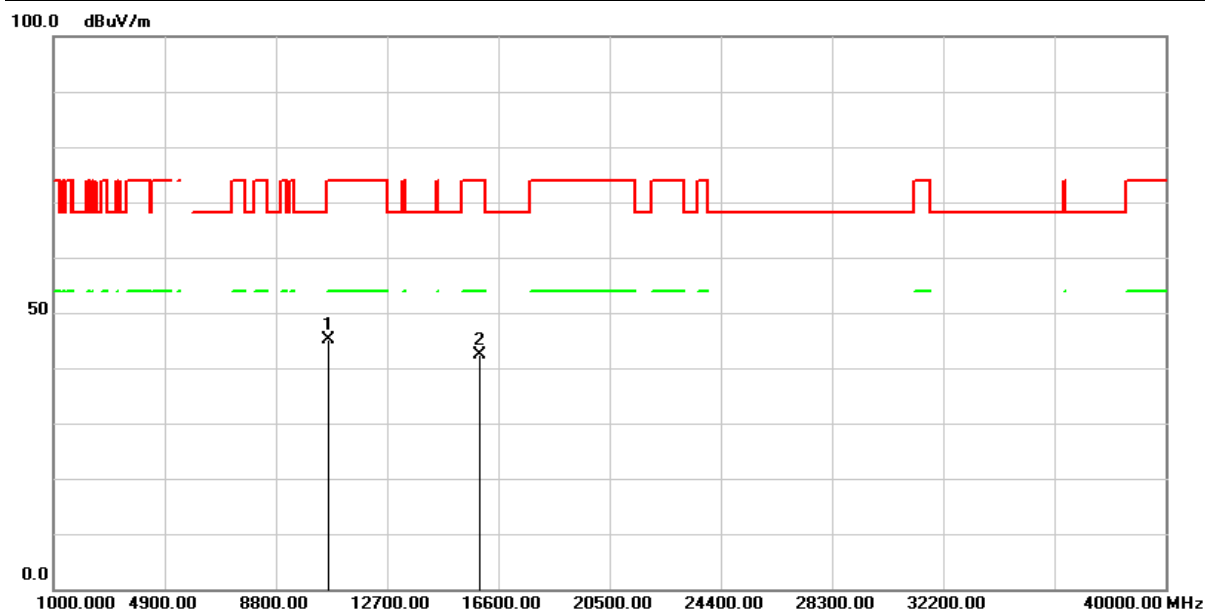


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10620.000       | 54.93            | -9.90                 | 45.03           | 74.00          | -28.97      | peak   |
| 2   | 15930.000       | 49.60            | -7.26                 | 42.34           | 74.00          | -31.66      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH62(5310MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

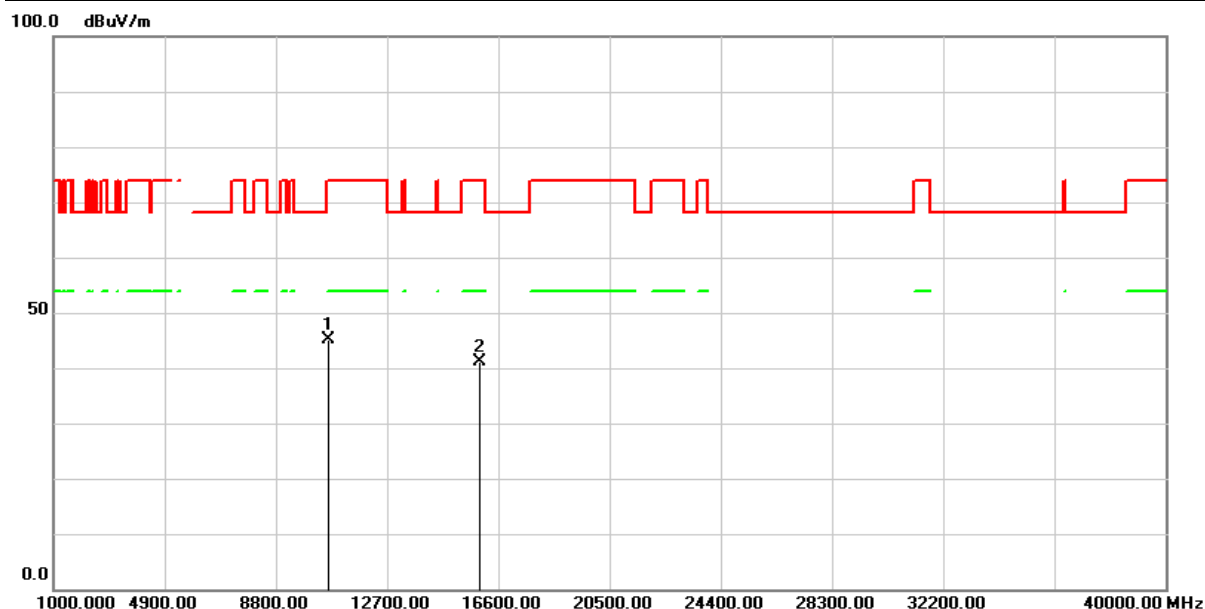


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10620.000       | 55.08            | -9.90                 | 45.18           | 74.00          | -28.82      | peak   |
| 2   | 15930.000       | 48.34            | -7.26                 | 41.08           | 74.00          | -32.92      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH102(5510MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

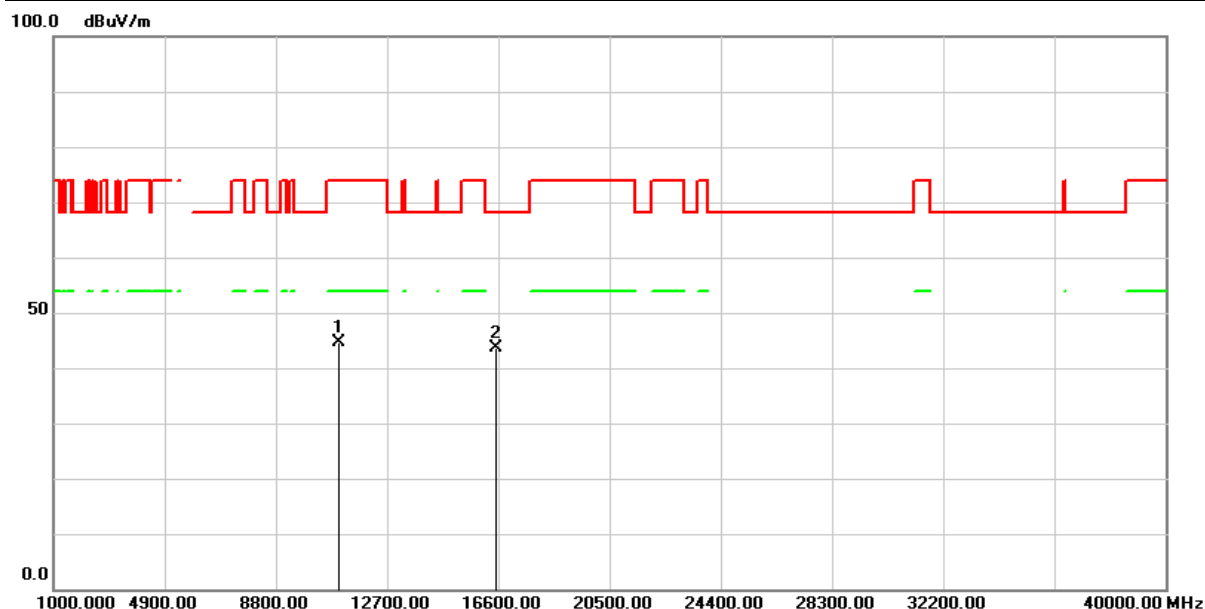


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11020.000       | 54.42            | -9.71                 | 44.71           | 74.00          | -29.29      | peak   |
| 2   | 16530.000       | 49.30            | -5.60                 | 43.70           | 68.20          | -24.50      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH102(5510MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

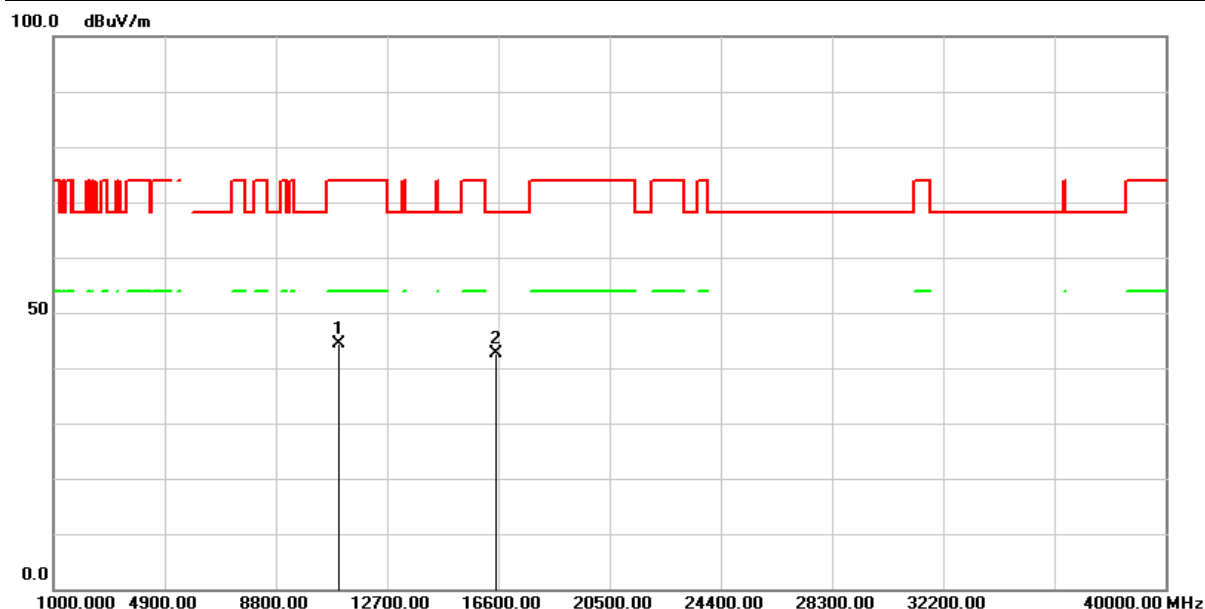


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11020.000       | 53.98            | -9.71                 | 44.27           | 74.00          | -29.73      | peak   |
| 2   | 16530.000       | 48.17            | -5.60                 | 42.57           | 68.20          | -25.63      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH110(5550MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

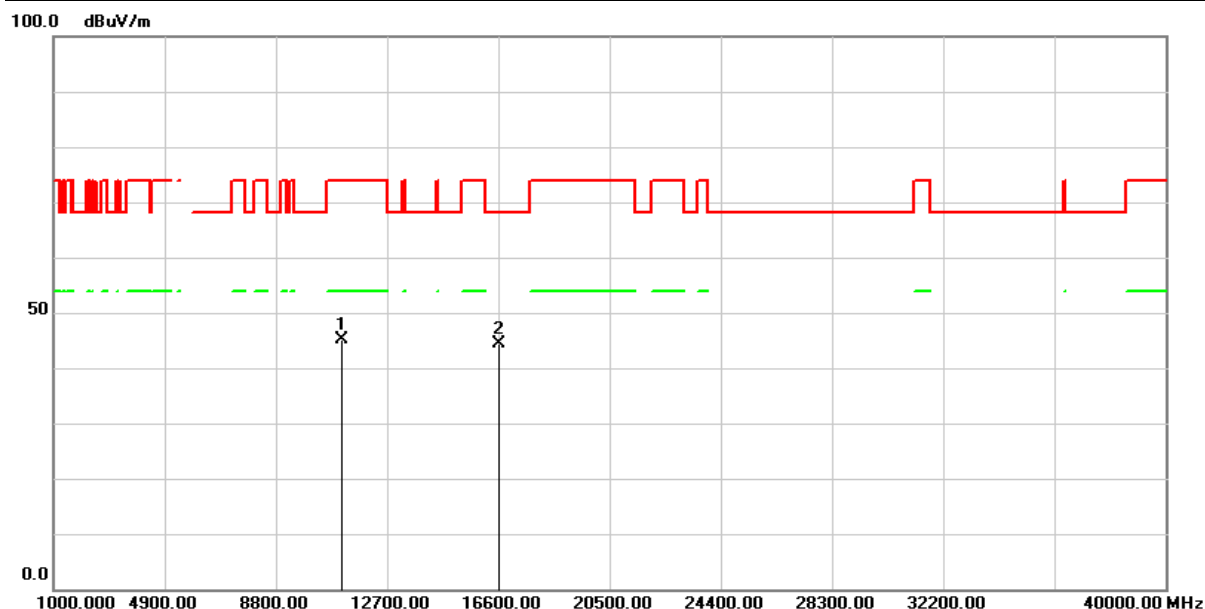


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11100.000       | 55.08            | -9.91                 | 45.17           | 74.00          | -28.83      | peak   |
| 2   | 16650.000       | 49.50            | -5.13                 | 44.37           | 68.20          | -23.83      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH110(5550MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

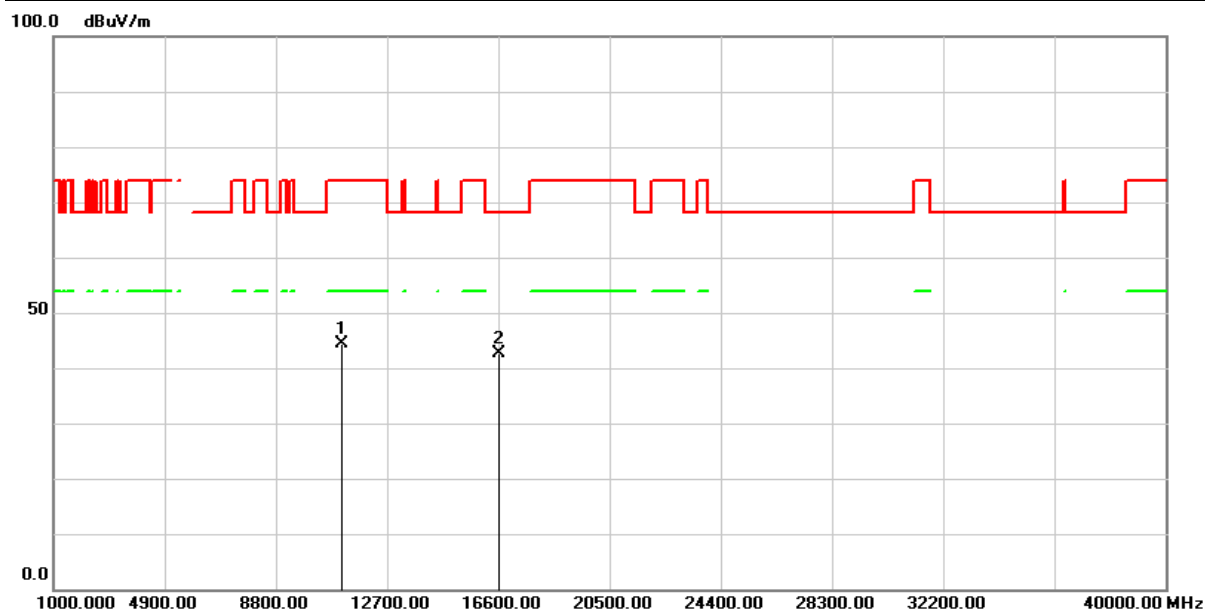


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11100.000       | 54.21            | -9.91                 | 44.30           | 74.00          | -29.70      | peak   |
| 2   | 16650.000       | 47.65            | -5.13                 | 42.52           | 68.20          | -25.68      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH134(5670MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

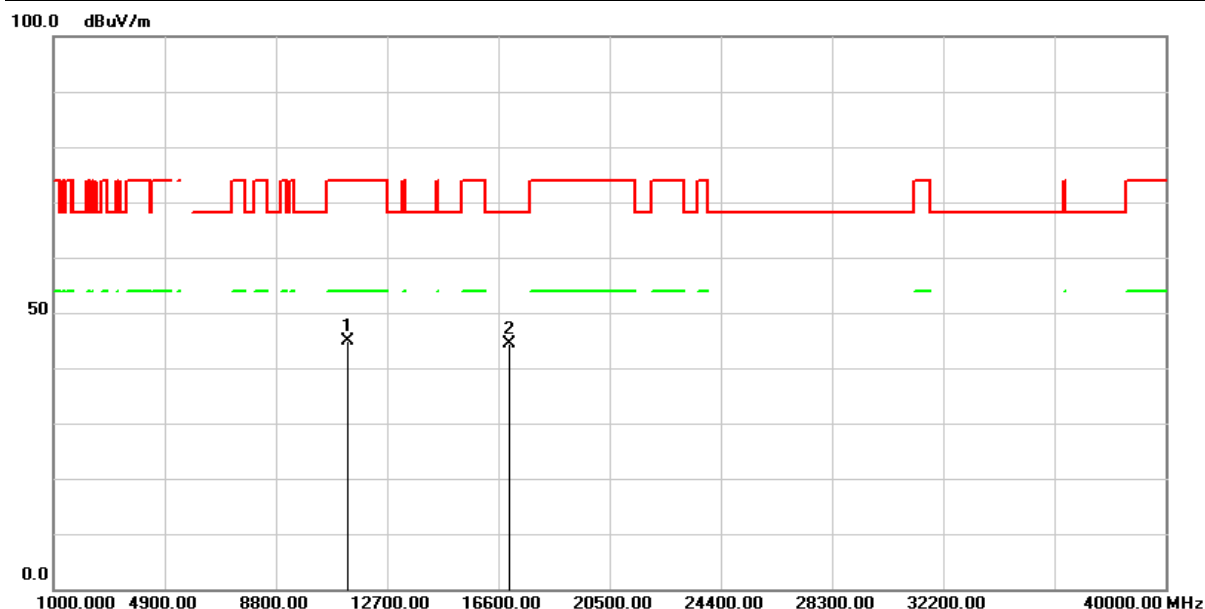


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11340.000       | 54.73            | -9.75                 | 44.98           | 74.00          | -29.02      | peak   |
| 2   | 17010.000       | 47.07            | -2.70                 | 44.37           | 68.20          | -23.83      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH134(5670MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

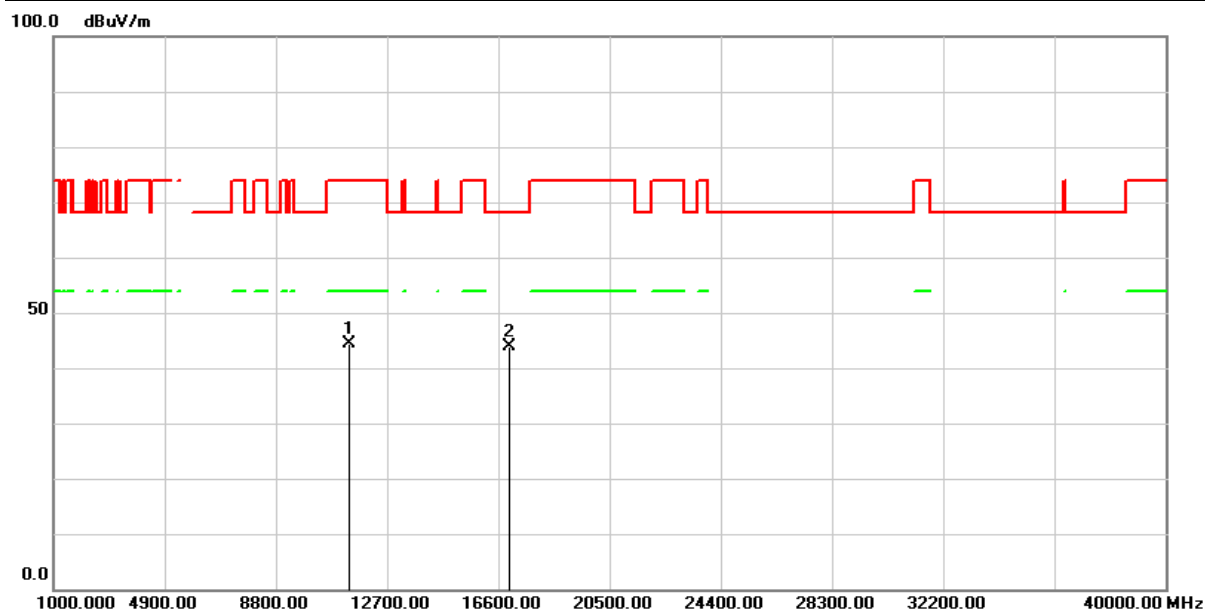


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11340.000       | 54.21            | -9.75                 | 44.46           | 74.00          | -29.54      | peak   |
| 2   | 17010.000       | 46.57            | -2.70                 | 43.87           | 68.20          | -24.33      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH151(5755MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

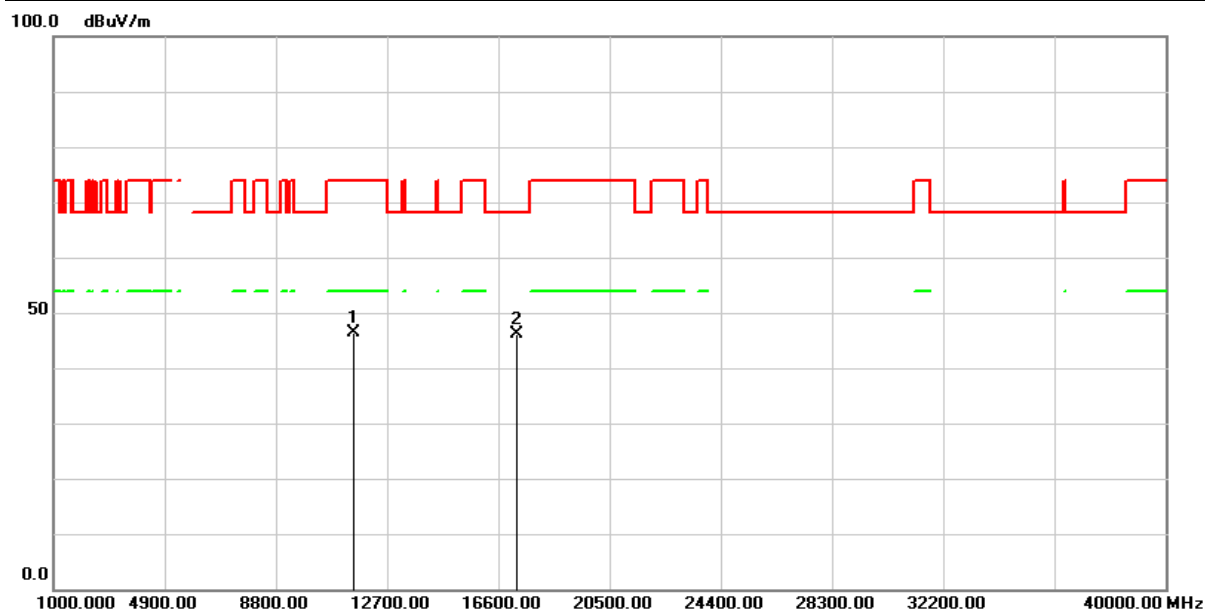


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11510.000       | 55.68            | -9.40                 | 46.28           | 74.00          | -27.72      | peak   |
| 2   | 17265.000       | 48.26            | -2.19                 | 46.07           | 68.20          | -22.13      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH151(5755MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

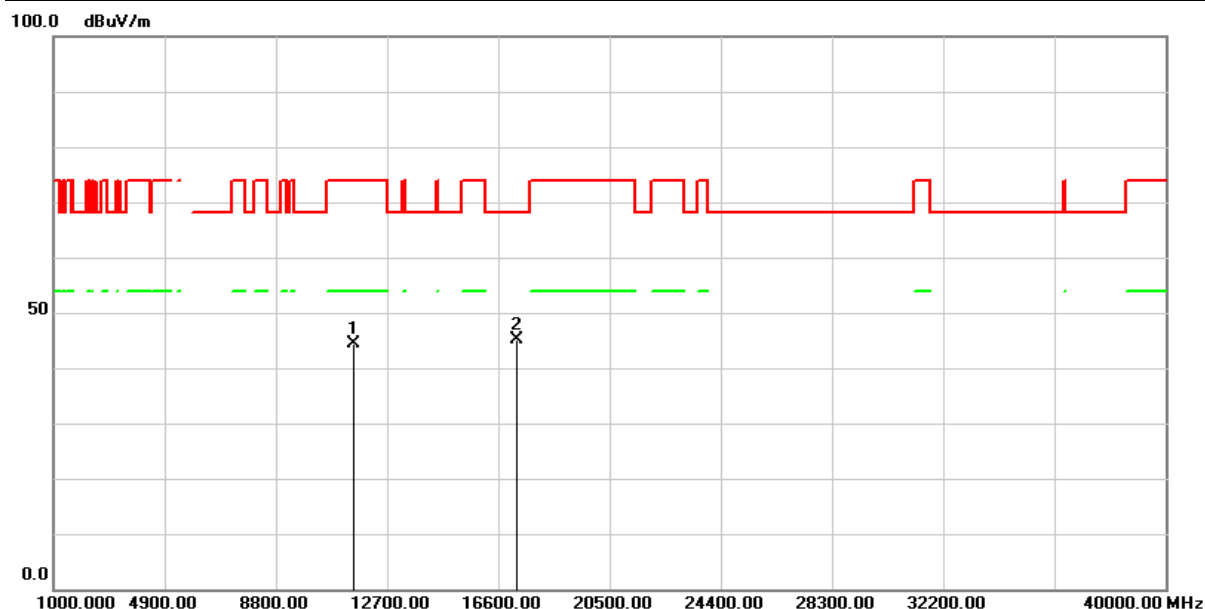


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11510.000       | 53.90            | -9.40                 | 44.50           | 74.00          | -29.50      | peak   |
| 2   | 17265.000       | 47.39            | -2.19                 | 45.20           | 68.20          | -23.00      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH159(5795MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

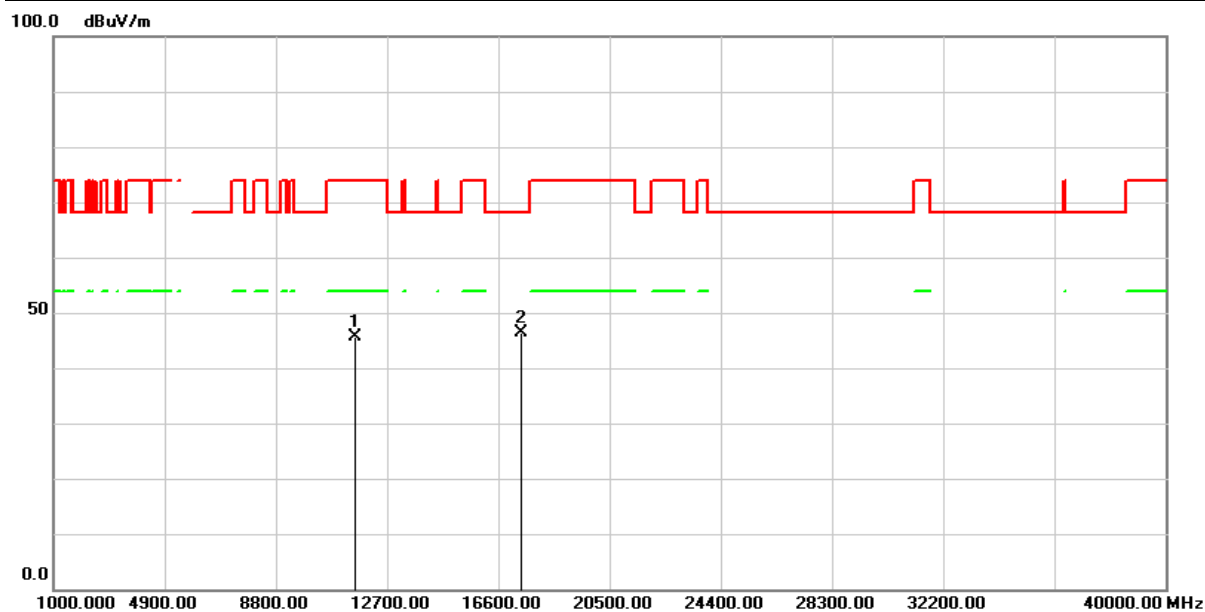


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11590.000       | 55.10            | -9.48                 | 45.62           | 74.00          | -28.38      | peak   |
| 2   | 17385.000       | 47.81            | -1.42                 | 46.39           | 68.20          | -21.81      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 7 : Transmit (802.11ax HE40M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH159(5795MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

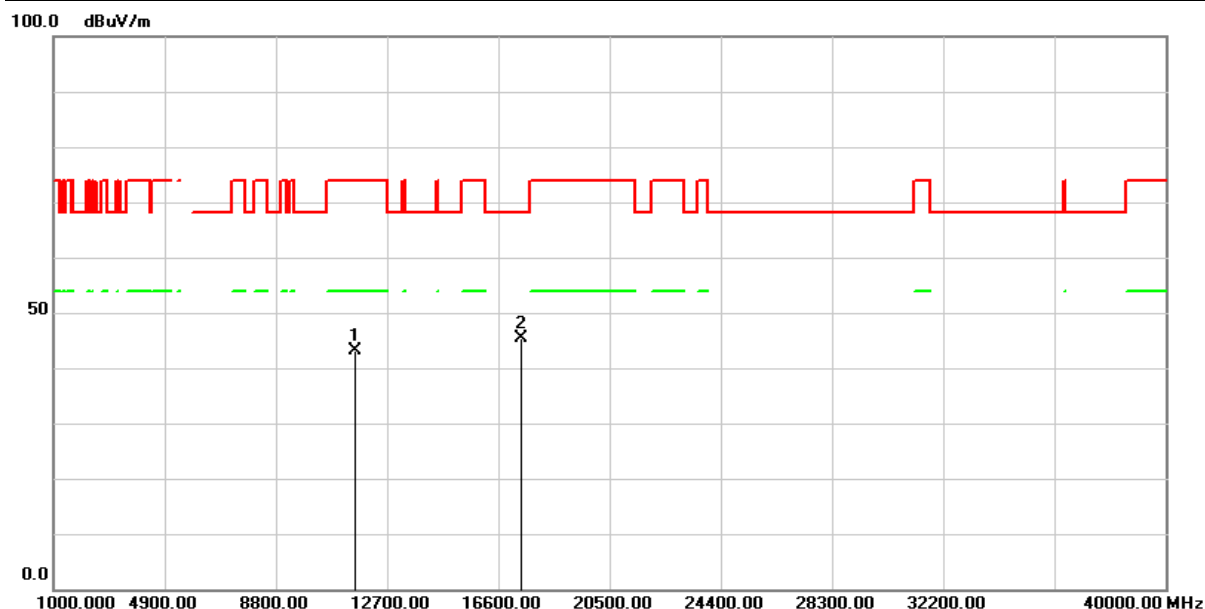


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11590.000       | 52.71            | -9.48                 | 43.23           | 74.00          | -30.77      | peak   |
| 2   | 17385.000       | 46.70            | -1.42                 | 45.28           | 68.20          | -22.92      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH42(5210MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

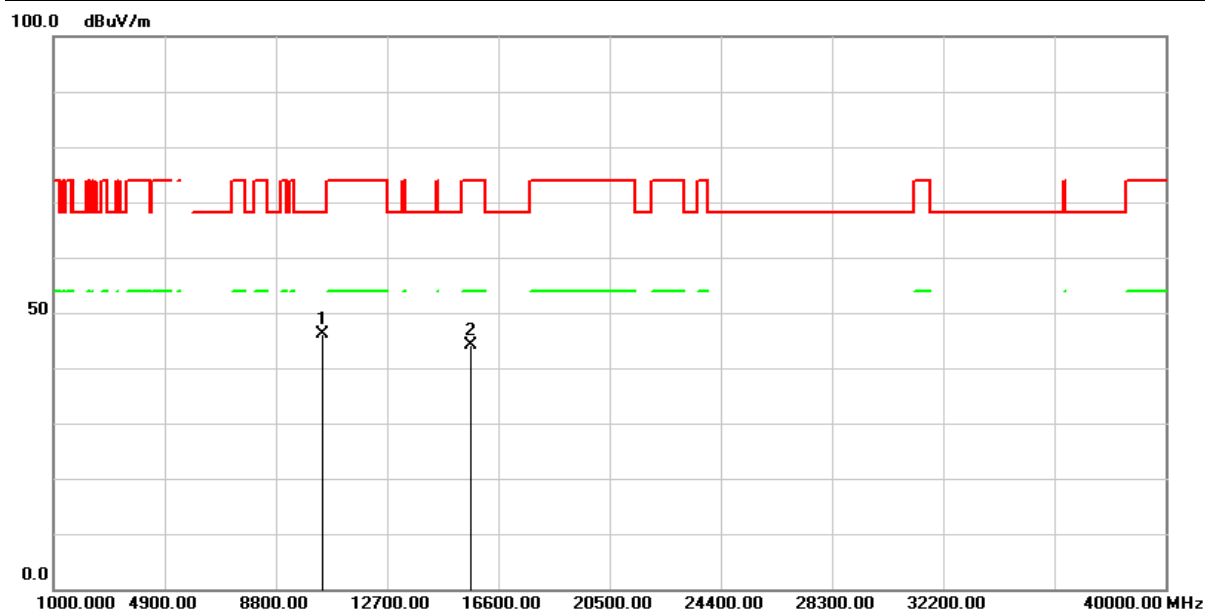


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10420.000       | 56.16            | -9.94                 | 46.22           | 68.20          | -21.98      | peak   |
| 2   | 15630.000       | 52.15            | -7.98                 | 44.17           | 74.00          | -29.83      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH42(5210MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

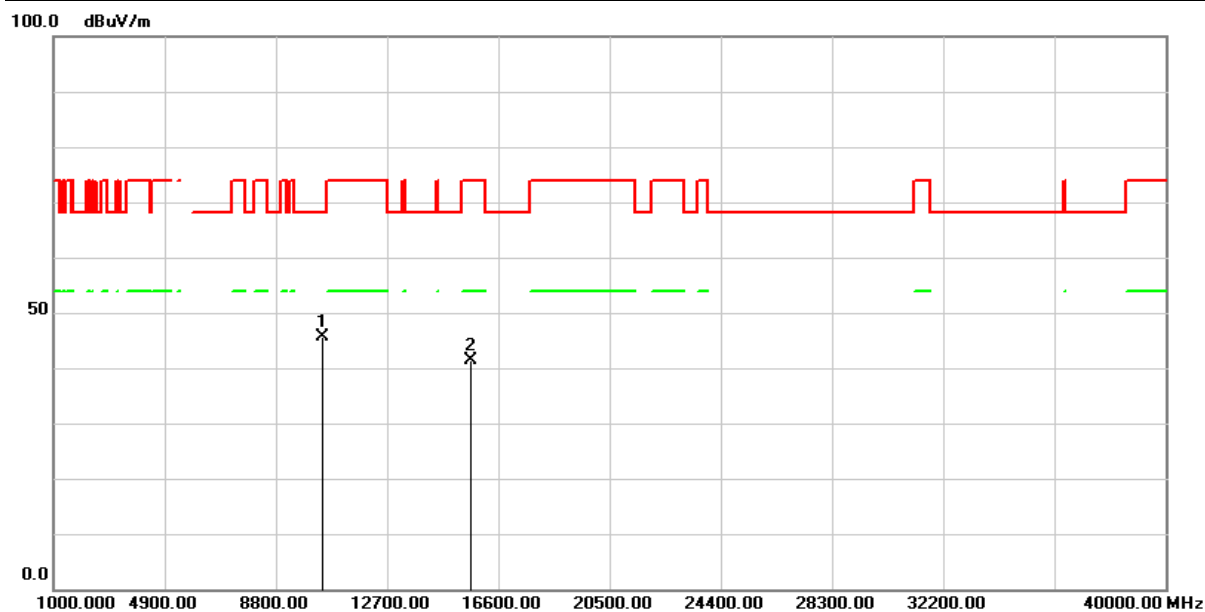


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10420.000       | 55.48            | -9.94                 | 45.54           | 68.20          | -22.66      | peak   |
| 2   | 15630.000       | 49.34            | -7.98                 | 41.36           | 74.00          | -32.64      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH58(5290MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

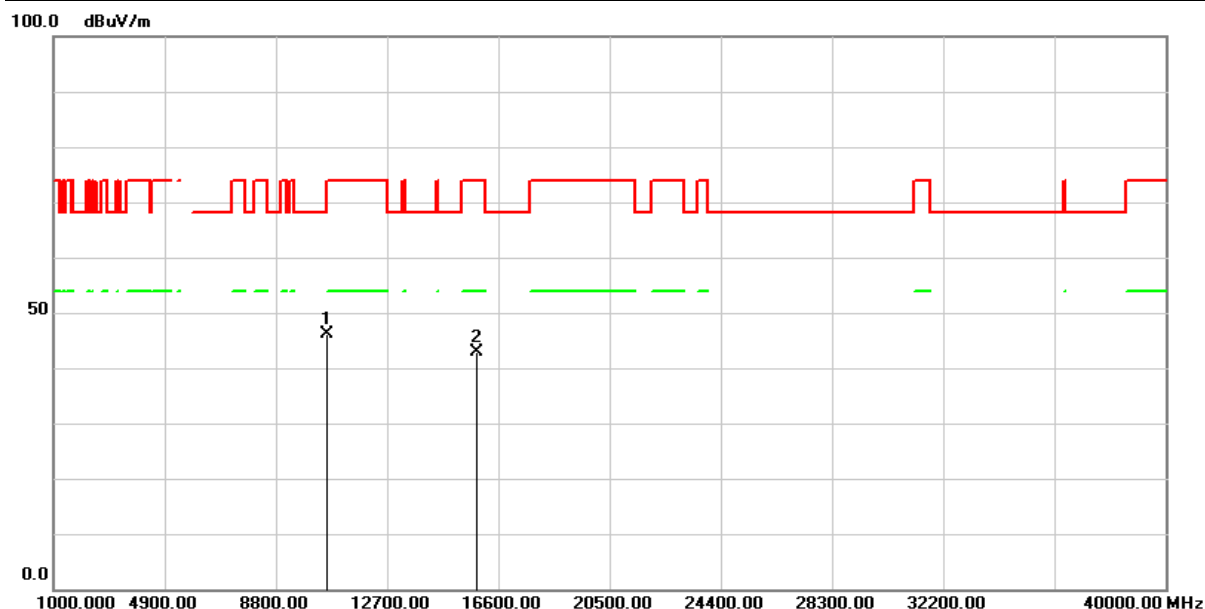


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10580.000       | 56.07            | -9.97                 | 46.10           | 68.20          | -22.10      | peak   |
| 2   | 15870.000       | 50.35            | -7.37                 | 42.98           | 74.00          | -31.02      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH58(5290MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

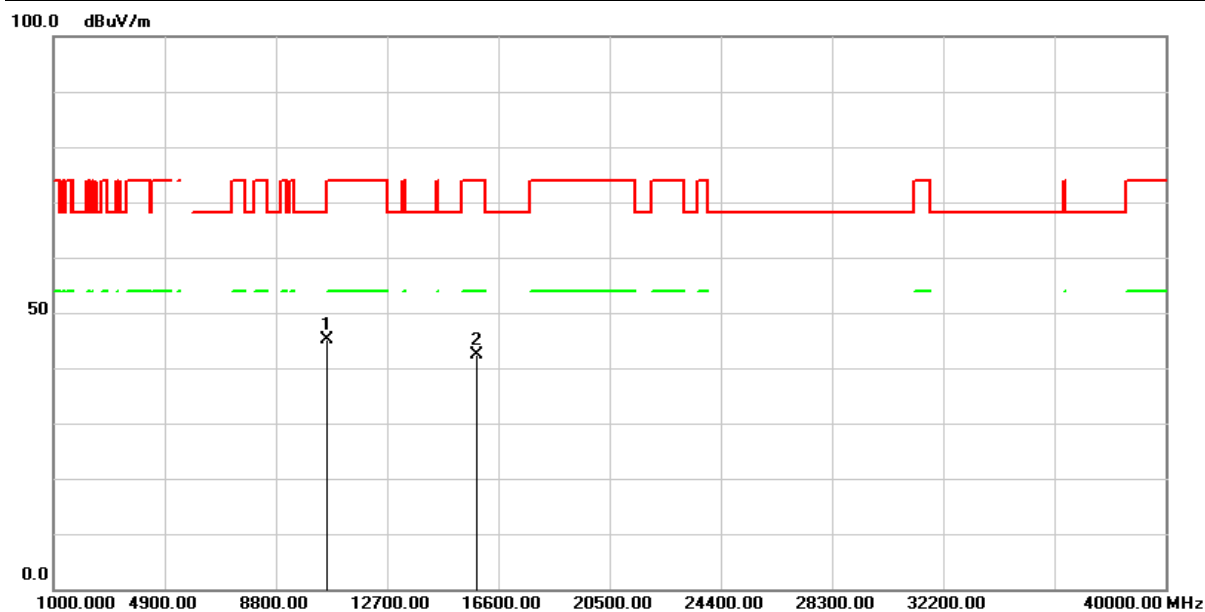


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10580.000       | 55.16            | -9.97                 | 45.19           | 68.20          | -23.01      | peak   |
| 2   | 15870.000       | 49.79            | -7.37                 | 42.42           | 74.00          | -31.58      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH106(5530MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

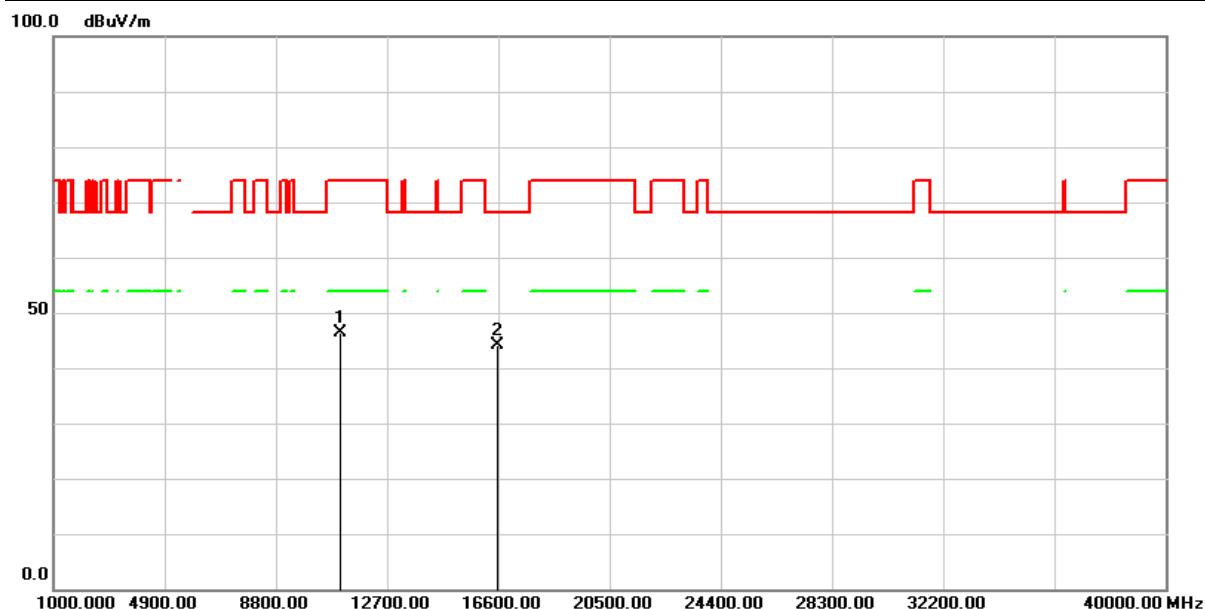


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11060.000       | 56.13            | -9.78                 | 46.35           | 74.00          | -27.65      | peak   |
| 2   | 16590.000       | 49.63            | -5.54                 | 44.09           | 68.20          | -24.11      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH106(5530MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

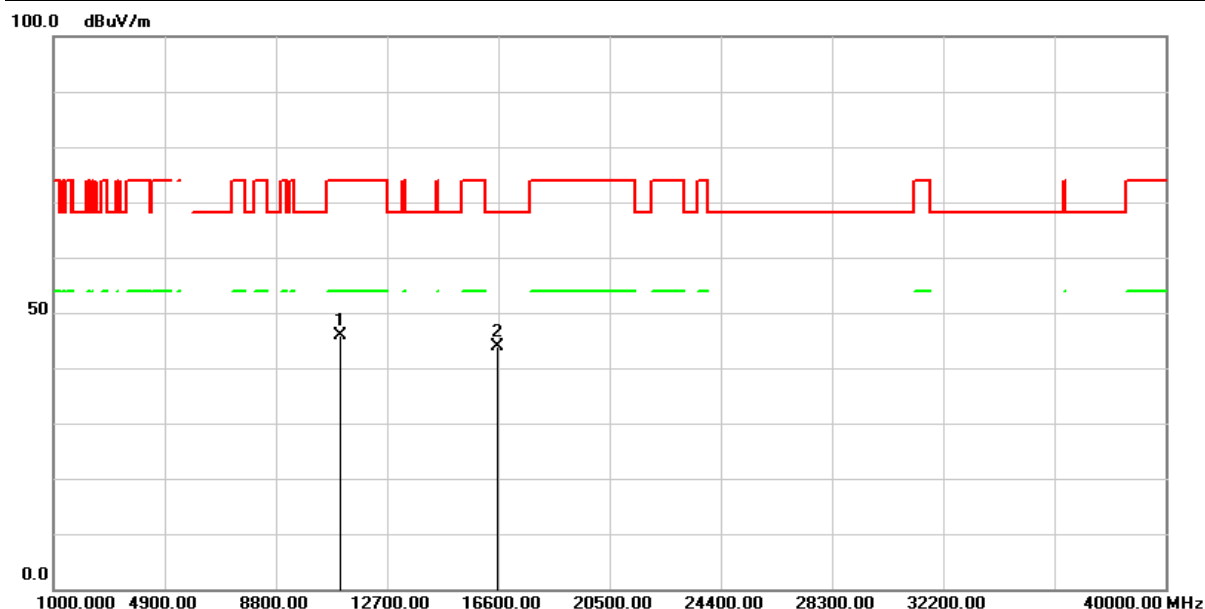


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11060.000       | 55.56            | -9.78                 | 45.78           | 74.00          | -28.22      | peak   |
| 2   | 16590.000       | 49.39            | -5.54                 | 43.85           | 68.20          | -24.35      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH122(5610MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

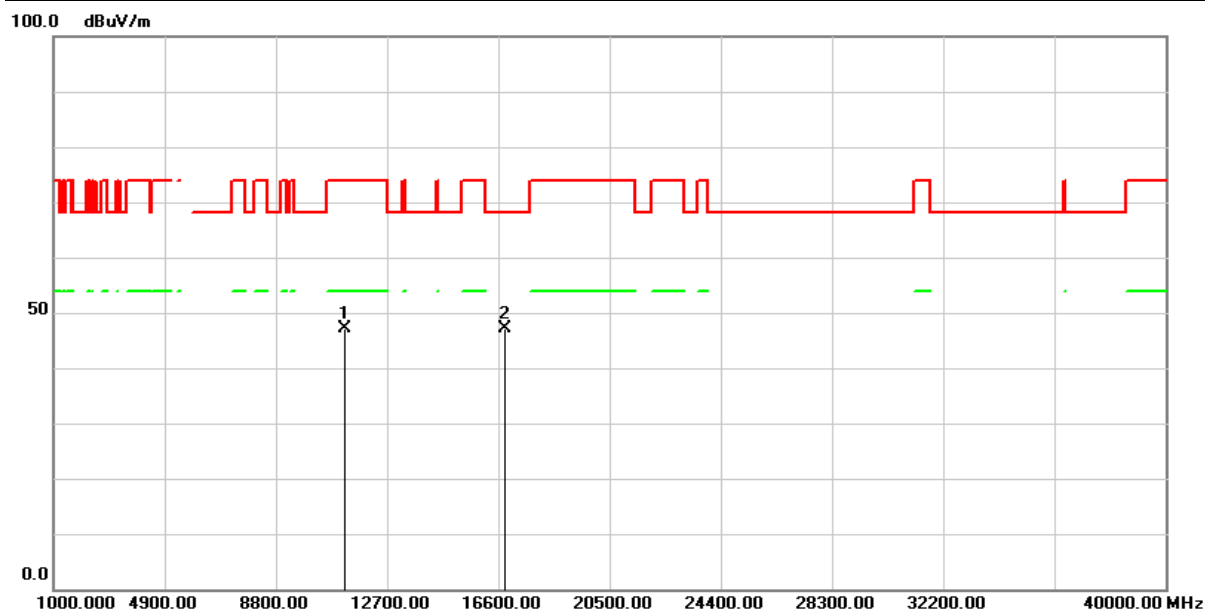


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11220.000       | 57.10            | -9.93                 | 47.17           | 74.00          | -26.83      | peak   |
| 2   | 16830.000       | 50.27            | -3.20                 | 47.07           | 68.20          | -21.13      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH122(5610MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

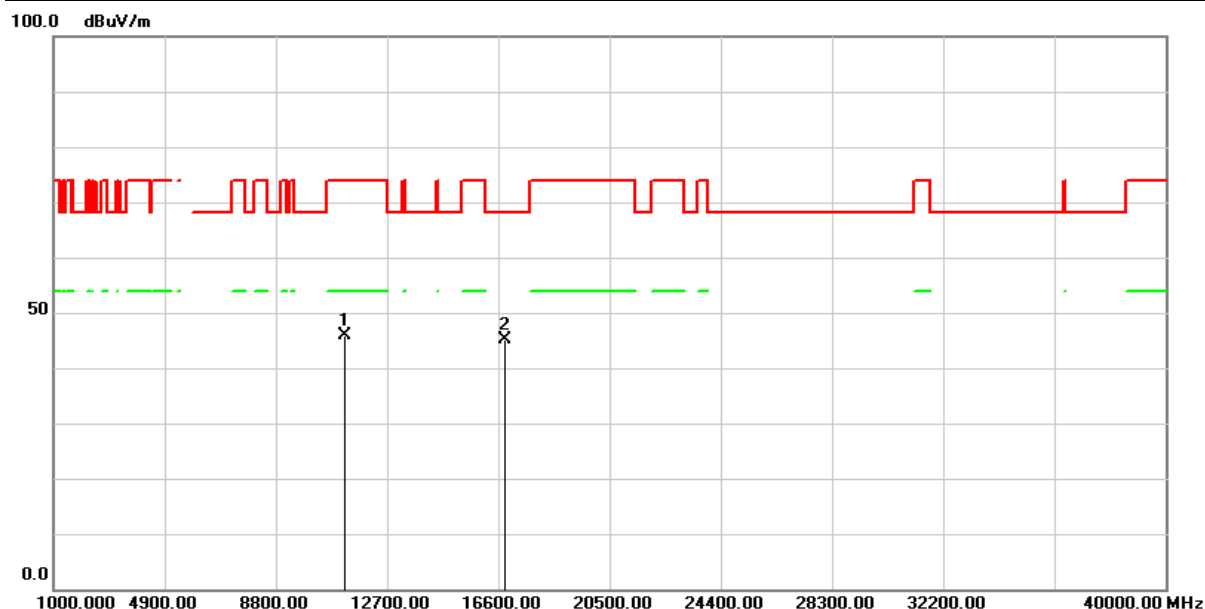


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11220.000       | 55.84            | -9.93                 | 45.91           | 74.00          | -28.09      | peak   |
| 2   | 16830.000       | 48.32            | -3.20                 | 45.12           | 68.20          | -23.08      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH155(5775MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                              | <b>Relative Humidity :</b> | 51 %       |

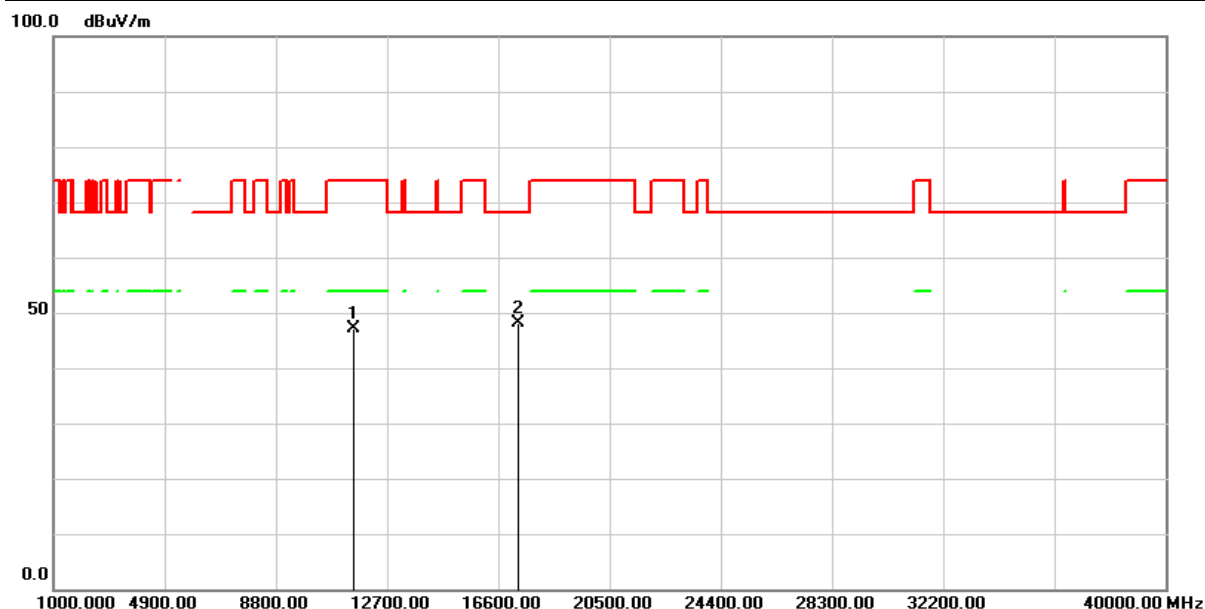


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11550.000       | 56.41            | -9.32                 | 47.09           | 74.00          | -26.91      | peak   |
| 2   | 17325.000       | 50.00            | -1.95                 | 48.05           | 68.20          | -20.15      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                         |                            |            |
|-----------------------|-----------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 8 : Transmit (802.11ax HE80M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH155(5775MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                | <b>Relative Humidity :</b> | 51 %       |

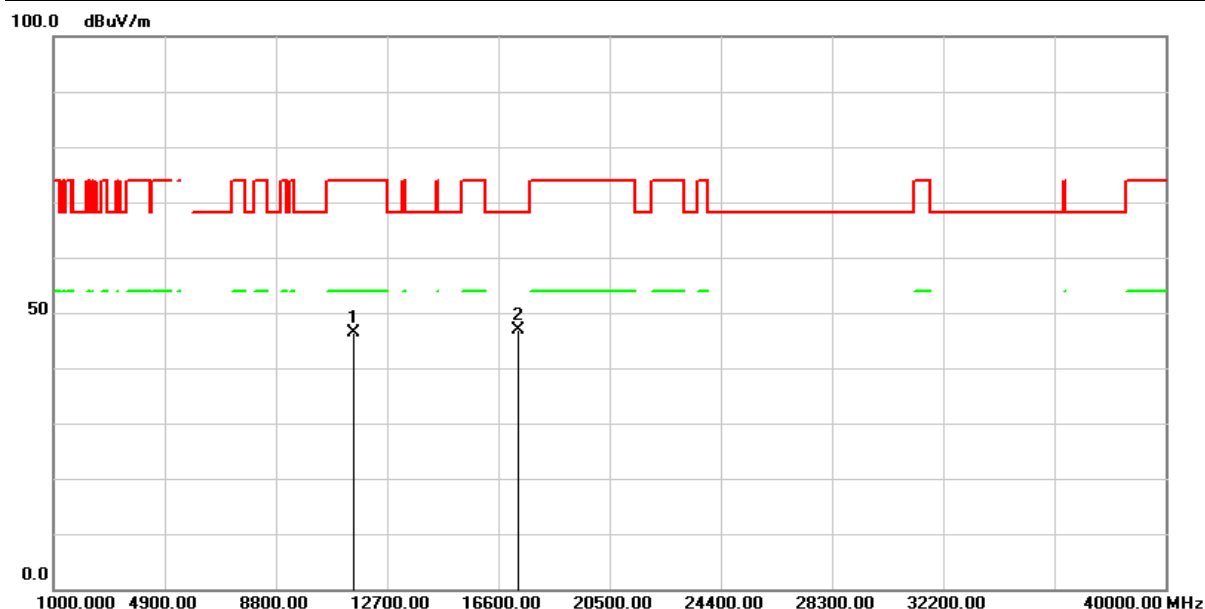


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11550.000       | 55.65            | -9.32                 | 46.33           | 74.00          | -27.67      | peak   |
| 2   | 17325.000       | 48.92            | -1.95                 | 46.97           | 68.20          | -21.23      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 9 : Transmit (802.11ax HE160M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH50 (5250MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 51 %       |

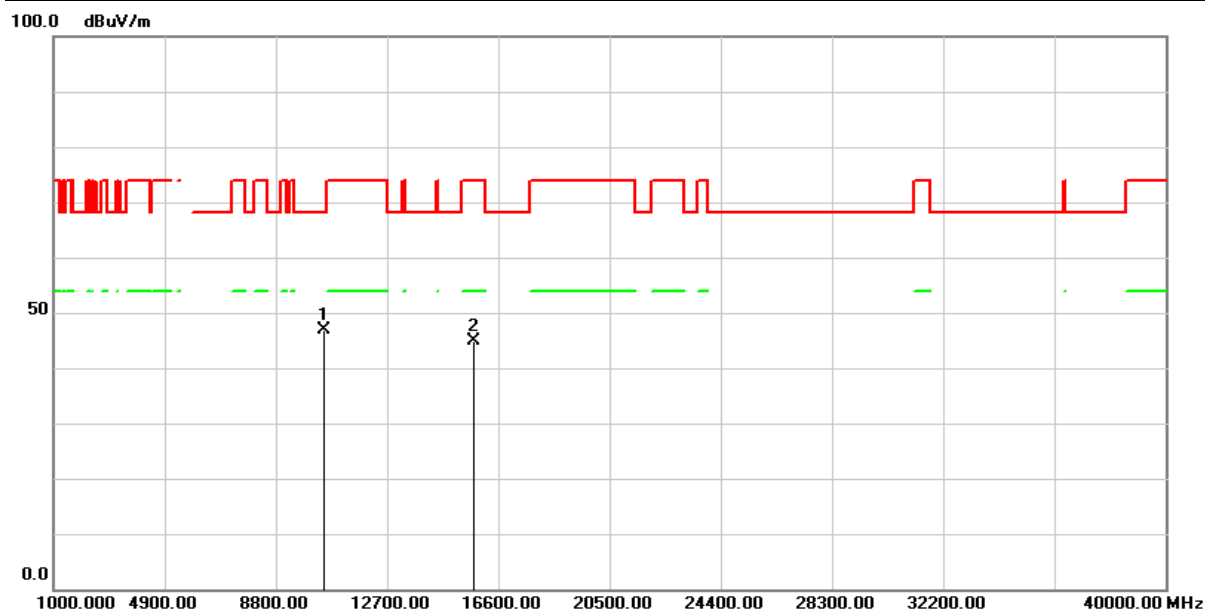


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10500.000       | 56.85            | -10.00                | 46.85           | 68.20          | -21.35      | peak   |
| 2   | 15750.000       | 52.40            | -7.44                 | 44.96           | 74.00          | -29.04      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 9 : Transmit (802.11ax HE160M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH50 (5250MHz)                           | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 51 %       |

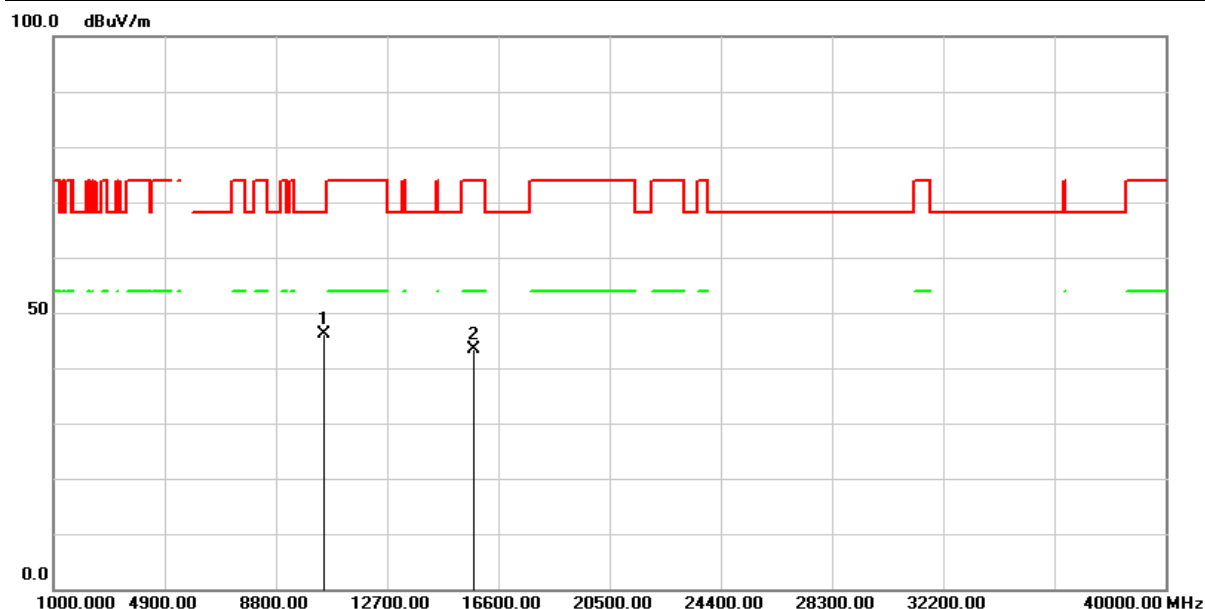


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10500.000       | 56.09            | -10.00                | 46.09           | 68.20          | -22.11      | peak   |
| 2   | 15750.000       | 50.79            | -7.44                 | 43.35           | 74.00          | -30.65      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 9 : Transmit (802.11ax HE160M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH114 (5570MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Horizontal                               | <b>Relative Humidity :</b> | 51 %       |

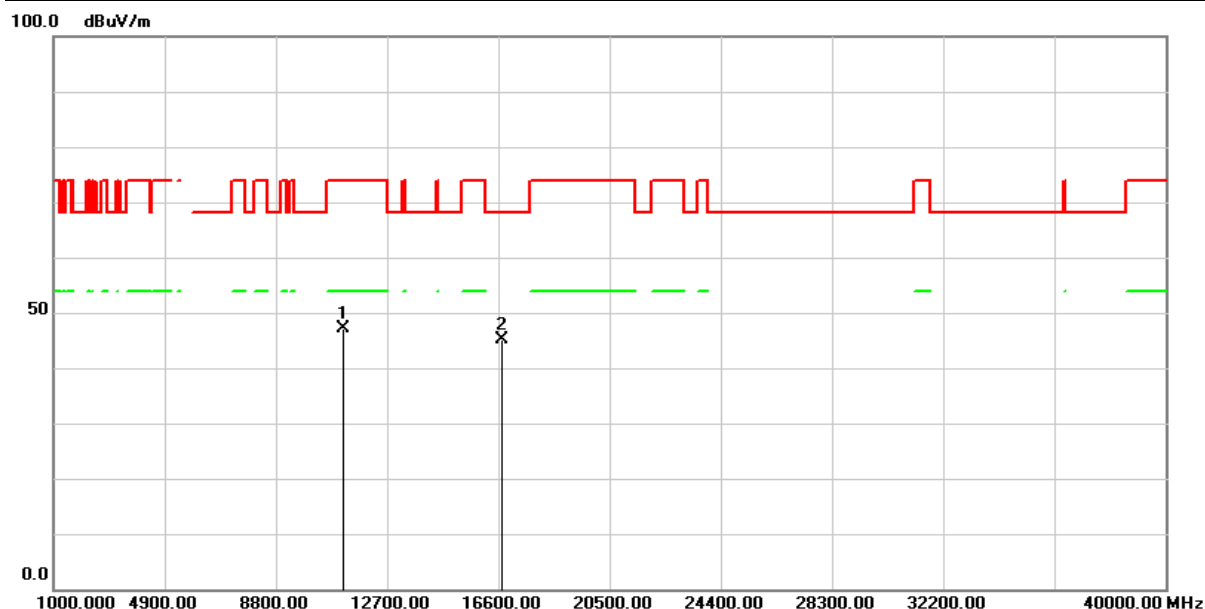


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11140.000       | 56.99            | -9.88                 | 47.11           | 74.00          | -26.89      | peak   |
| 2   | 16710.000       | 49.64            | -4.62                 | 45.02           | 68.20          | -23.18      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                          |                            |            |
|-----------------------|------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 9 : Transmit (802.11ax HE160M MCS0) | <b>Test Date :</b>         | 2024/05/07 |
| <b>Test Channel :</b> | CH114 (5570MHz)                          | <b>Temperature :</b>       | 22.1 °C    |
| <b>Polarization :</b> | Vertical                                 | <b>Relative Humidity :</b> | 51 %       |

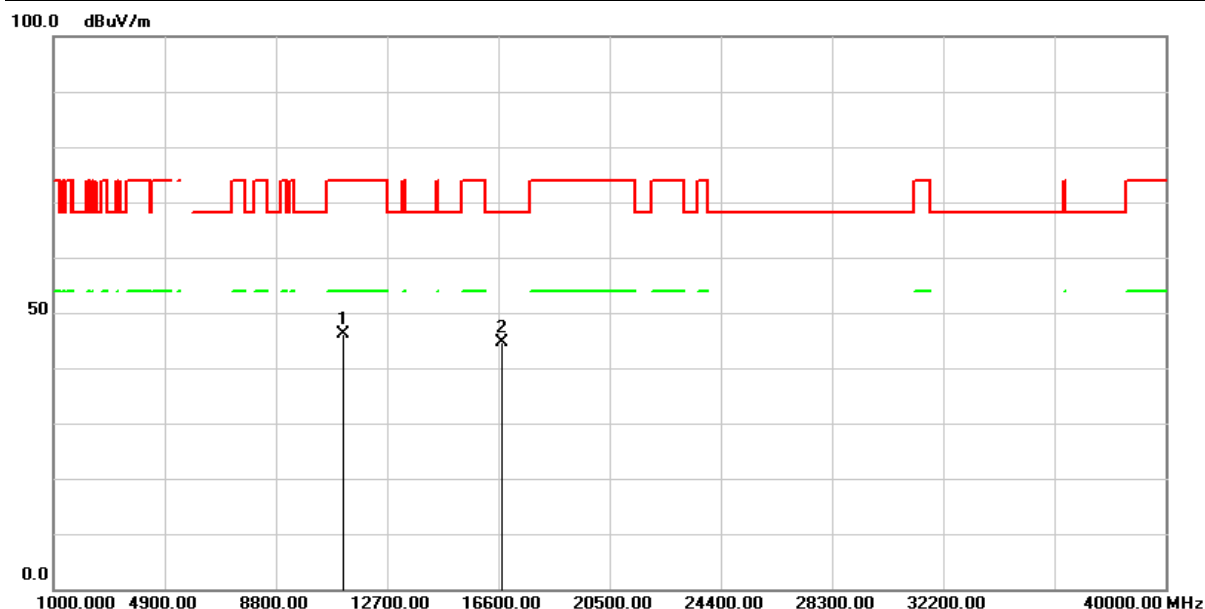


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11140.000       | 55.95            | -9.88                 | 46.07           | 74.00          | -27.93      | peak   |
| 2   | 16710.000       | 49.31            | -4.62                 | 44.69           | 68.20          | -23.51      | peak   |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

### Below 1GHz Data

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/24 |
| <b>Test Channel :</b> | CH40 (5200MHz)                    | <b>Temperature :</b>       | 21.4 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 62 %       |

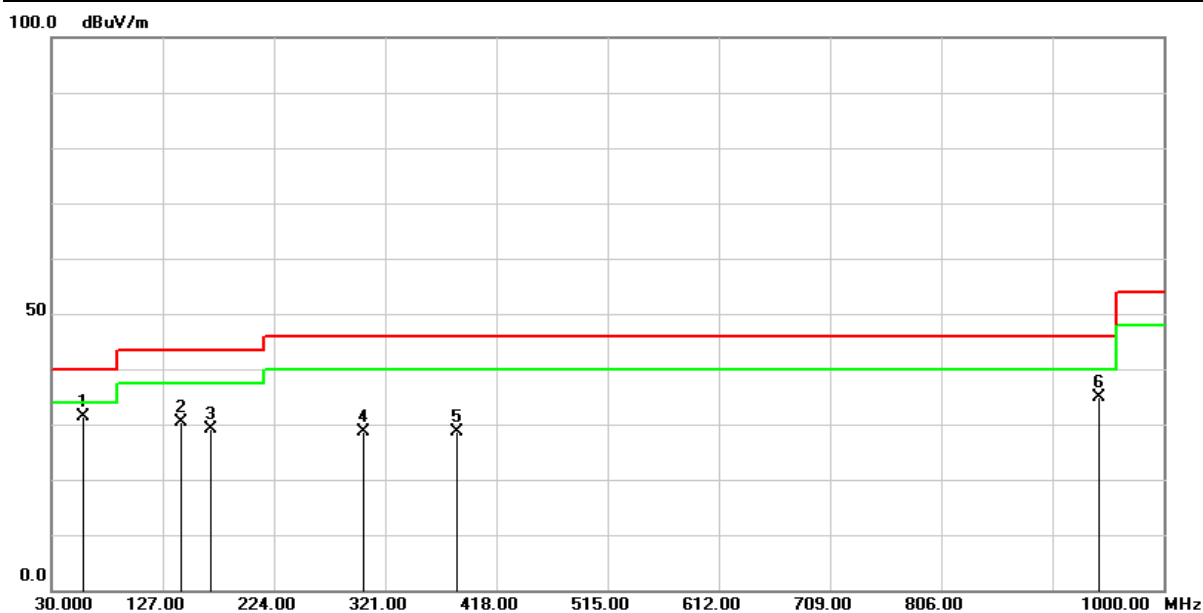


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 57.1600         | 42.09            | -10.79                | 31.30           | 40.00          | -8.70       | QP     |
| 2   | 143.4900        | 41.98            | -11.48                | 30.50           | 43.50          | -13.00      | QP     |
| 3   | 168.7100        | 40.64            | -11.42                | 29.22           | 43.50          | -14.28      | QP     |
| 4   | 301.6000        | 38.84            | -10.20                | 28.64           | 46.00          | -17.36      | QP     |
| 5   | 384.0500        | 36.32            | -7.65                 | 28.67           | 46.00          | -17.33      | QP     |
| 6   | 943.7400        | 30.36            | 4.50                  | 34.86           | 46.00          | -11.14      | QP     |

### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/24 |
| <b>Test Channel :</b> | CH40 (5200MHz)                    | <b>Temperature :</b>       | 21.4 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 62 %       |

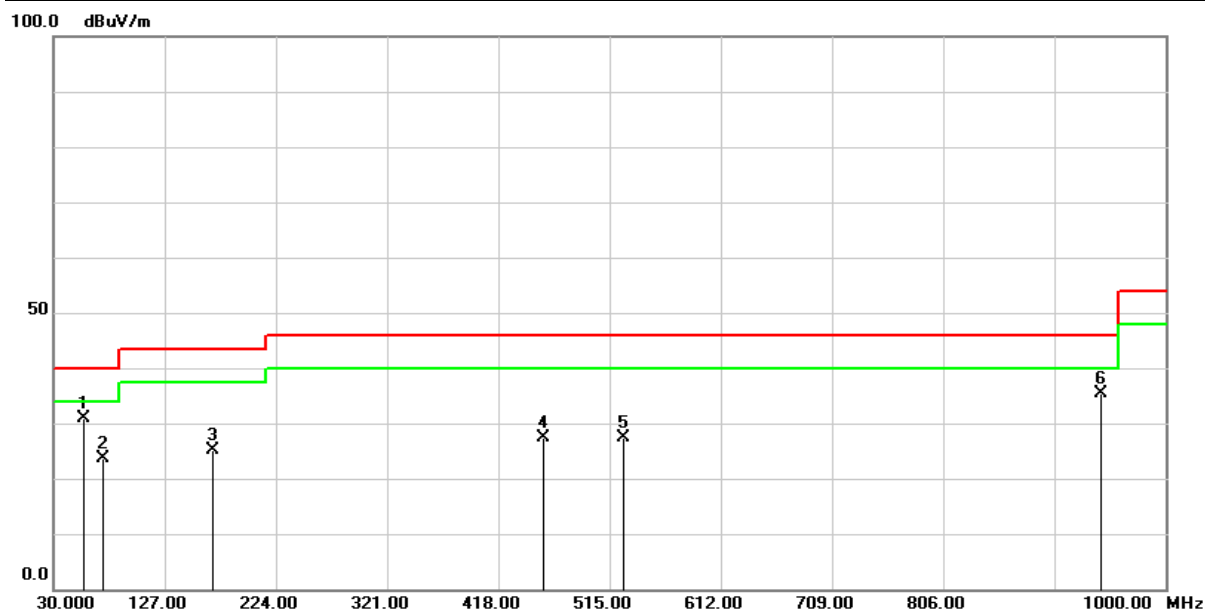


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 56.1900         | 41.46            | -10.66                | 30.80           | 40.00          | -9.20       | QP     |
| 2   | 73.6500         | 37.54            | -13.85                | 23.69           | 40.00          | -16.31      | QP     |
| 3   | 168.7100        | 36.61            | -11.42                | 25.19           | 43.50          | -18.31      | QP     |
| 4   | 456.8000        | 32.81            | -5.47                 | 27.34           | 46.00          | -18.66      | QP     |
| 5   | 526.6400        | 31.42            | -4.11                 | 27.31           | 46.00          | -18.69      | QP     |
| 6   | 943.7400        | 30.92            | 4.50                  | 35.42           | 46.00          | -10.58      | QP     |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/25 |
| <b>Test Channel :</b> | CH52 (5260MHz)                    | <b>Temperature :</b>       | 21.4 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 62 %       |

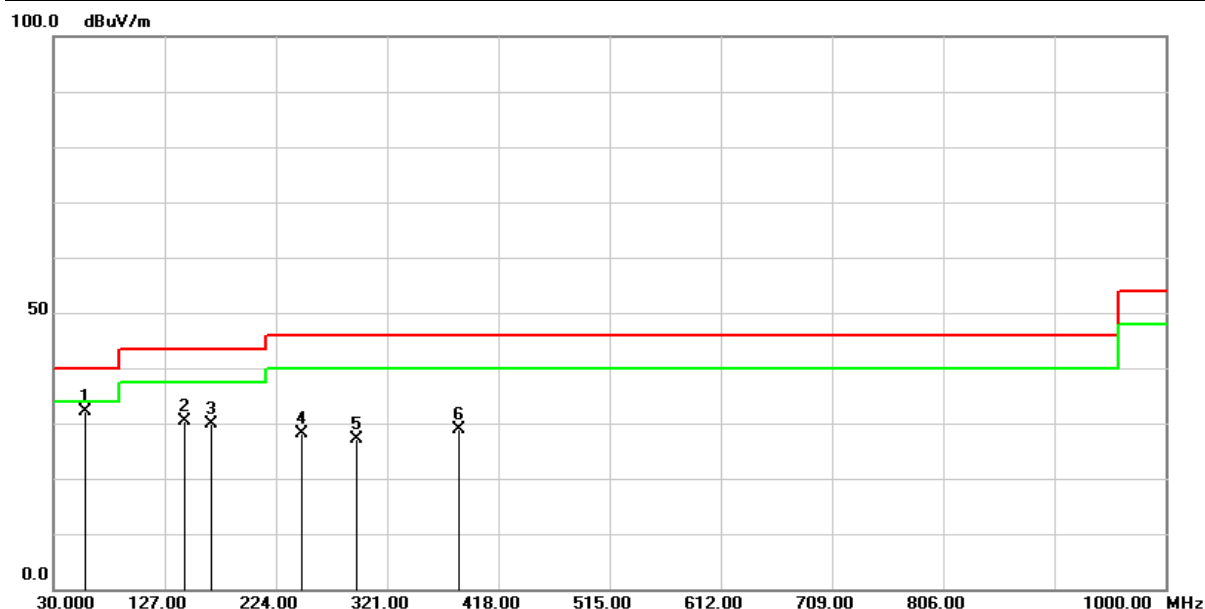


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 57.1600         | 42.97            | -10.79                | 32.18           | 40.00          | -7.82       | QP     |
| 2   | 144.4600        | 41.80            | -11.46                | 30.34           | 43.50          | -13.16      | QP     |
| 3   | 167.7400        | 41.14            | -11.28                | 29.86           | 43.50          | -13.64      | QP     |
| 4   | 246.3100        | 40.30            | -12.14                | 28.16           | 46.00          | -17.84      | QP     |
| 5   | 293.8400        | 37.59            | -10.38                | 27.21           | 46.00          | -18.79      | QP     |
| 6   | 384.0500        | 36.48            | -7.65                 | 28.83           | 46.00          | -17.17      | QP     |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/25 |
| <b>Test Channel :</b> | CH52 (5260MHz)                    | <b>Temperature :</b>       | 21.4 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 62 %       |

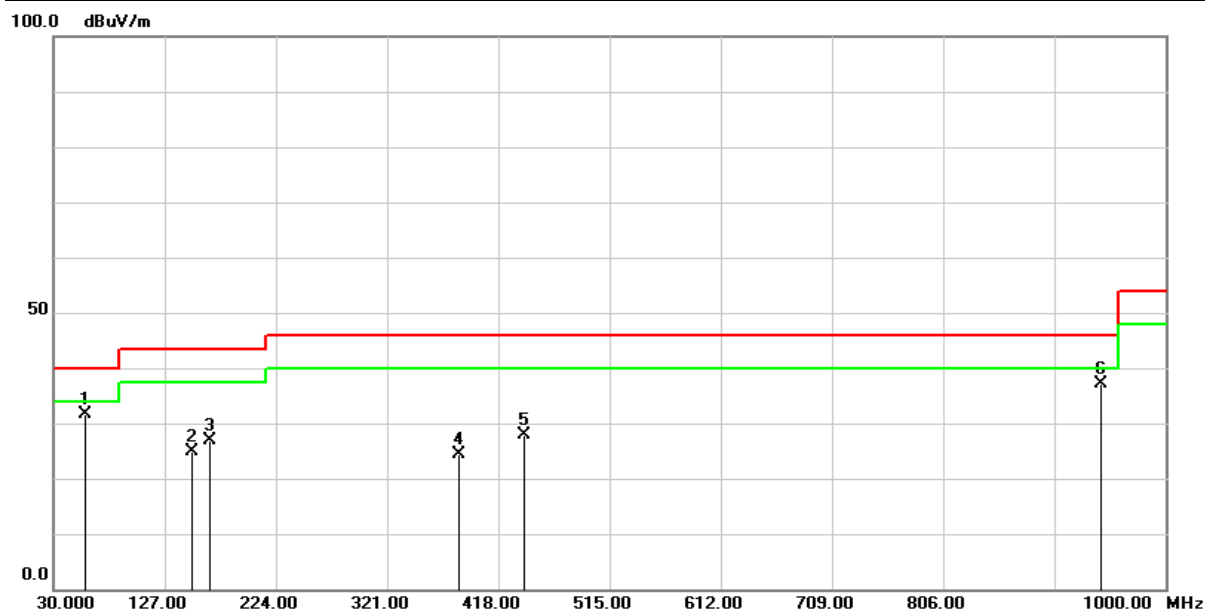


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 57.1600         | 42.37            | -10.79                | 31.58           | 40.00          | -8.42       | QP     |
| 2   | 150.2800        | 36.03            | -11.08                | 24.95           | 43.50          | -18.55      | QP     |
| 3   | 166.7700        | 38.23            | -11.27                | 26.96           | 43.50          | -16.54      | QP     |
| 4   | 384.0500        | 32.13            | -7.65                 | 24.48           | 46.00          | -21.52      | QP     |
| 5   | 440.3100        | 33.56            | -5.80                 | 27.76           | 46.00          | -18.24      | QP     |
| 6   | 943.7400        | 32.58            | 4.50                  | 37.08           | 46.00          | -8.92       | QP     |

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/25 |
| <b>Test Channel :</b> | CH100 (5500MHz)                   | <b>Temperature :</b>       | 21.4 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 62 %       |

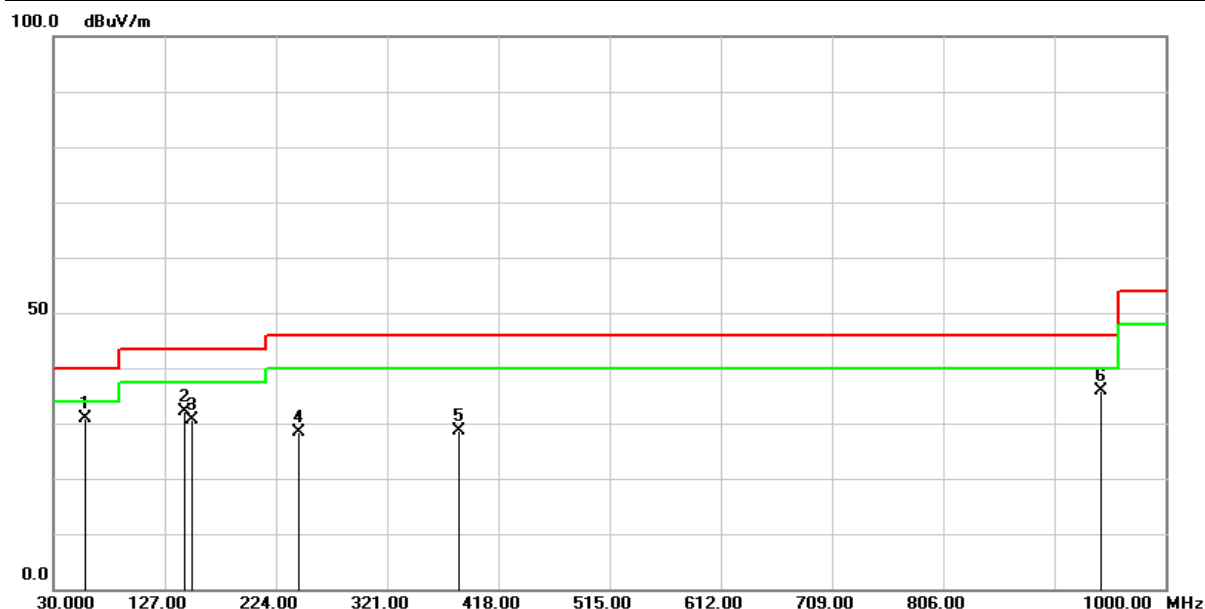


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 57.1600         | 41.61            | -10.79                | 30.82           | 40.00          | -9.18       | QP     |
| 2   | 144.4600        | 43.58            | -11.46                | 32.12           | 43.50          | -11.38      | QP     |
| 3   | 151.2500        | 41.62            | -11.07                | 30.55           | 43.50          | -12.95      | QP     |
| 4   | 244.3700        | 40.48            | -12.16                | 28.32           | 46.00          | -17.68      | QP     |
| 5   | 384.0500        | 36.24            | -7.65                 | 28.59           | 46.00          | -17.41      | QP     |
| 6   | 943.7400        | 31.42            | 4.50                  | 35.92           | 46.00          | -10.08      | QP     |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/25 |
| <b>Test Channel :</b> | CH100 (5500MHz)                   | <b>Temperature :</b>       | 21.4 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 62 %       |

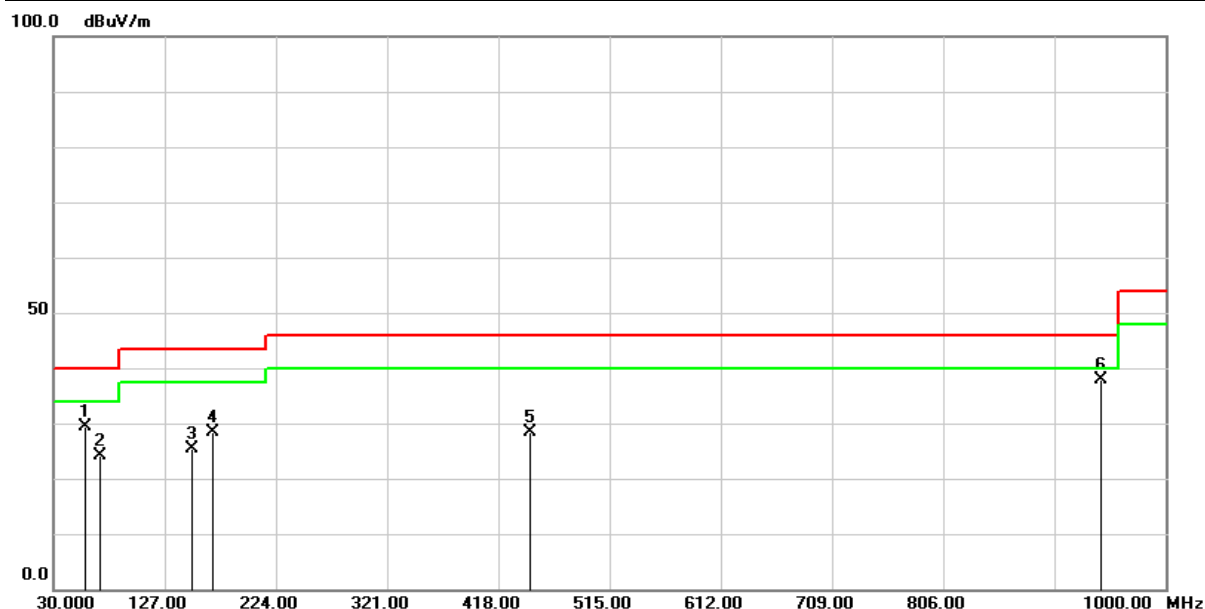


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 57.1600         | 40.29            | -10.79                | 29.50           | 40.00          | -10.50      | QP     |
| 2   | 70.7400         | 37.41            | -13.17                | 24.24           | 40.00          | -15.76      | QP     |
| 3   | 150.2800        | 36.49            | -11.08                | 25.41           | 43.50          | -18.09      | QP     |
| 4   | 168.7100        | 39.92            | -11.42                | 28.50           | 43.50          | -15.00      | QP     |
| 5   | 445.1600        | 33.96            | -5.67                 | 28.29           | 46.00          | -17.71      | QP     |
| 6   | 943.7400        | 33.46            | 4.50                  | 37.96           | 46.00          | -8.04       | QP     |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/25 |
| <b>Test Channel :</b> | CH157 (5785MHz)                   | <b>Temperature :</b>       | 21.4 °C    |
| <b>Polarization :</b> | Horizontal                        | <b>Relative Humidity :</b> | 62 %       |

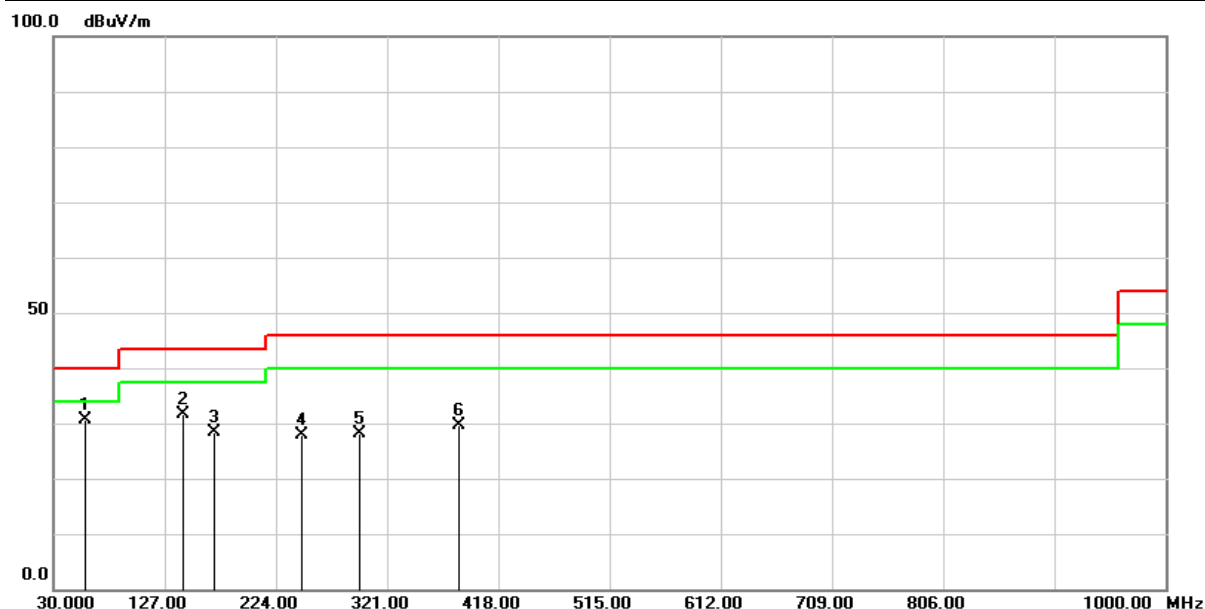


| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 57.1600         | 41.54            | -10.79                | 30.75           | 40.00          | -9.25       | QP     |
| 2   | 143.4900        | 43.02            | -11.48                | 31.54           | 43.50          | -11.96      | QP     |
| 3   | 169.6800        | 39.92            | -11.53                | 28.39           | 43.50          | -15.11      | QP     |
| 4   | 246.3100        | 40.08            | -12.14                | 27.94           | 46.00          | -18.06      | QP     |
| 5   | 296.7500        | 38.42            | -10.32                | 28.10           | 46.00          | -17.90      | QP     |
| 6   | 384.0500        | 37.16            | -7.65                 | 29.51           | 46.00          | -16.49      | QP     |

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

|                       |                                   |                            |            |
|-----------------------|-----------------------------------|----------------------------|------------|
| <b>Test Mode :</b>    | Mode 1 : Transmit (802.11a 6Mbps) | <b>Test Date :</b>         | 2024/04/25 |
| <b>Test Channel :</b> | CH157 (5785MHz)                   | <b>Temperature :</b>       | 21.4 °C    |
| <b>Polarization :</b> | Vertical                          | <b>Relative Humidity :</b> | 62 %       |

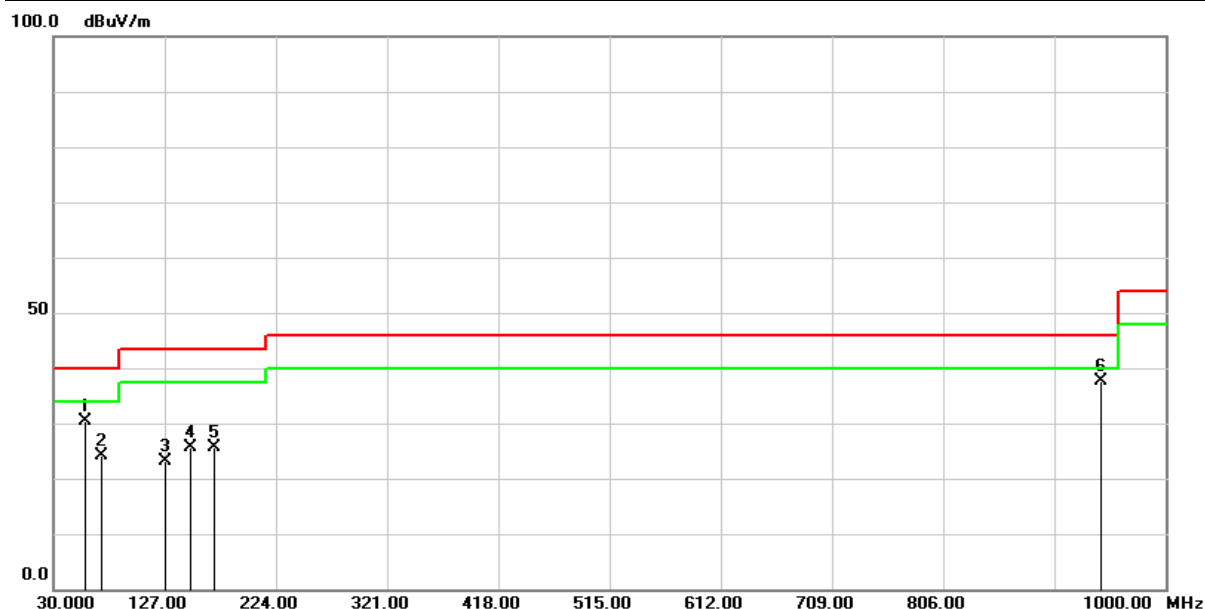

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|------------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 57.1600         | 41.10            | -10.79                | 30.31           | 40.00          | -9.69       | QP     |
| 2   | 71.7100         | 37.43            | -13.23                | 24.20           | 40.00          | -15.80      | QP     |
| 3   | 127.0000        | 36.06            | -12.95                | 23.11           | 43.50          | -20.39      | QP     |
| 4   | 149.3100        | 36.66            | -11.15                | 25.51           | 43.50          | -17.99      | QP     |
| 5   | 170.6500        | 37.11            | -11.56                | 25.55           | 43.50          | -17.95      | QP     |
| 6   | 943.7400        | 33.20            | 4.50                  | 37.70           | 46.00          | -8.30       | QP     |

**Remark :**


1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit, they do not need to be reported.

## 2.6 Frequency Stability

### 2.6.1 Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 2.6.2 Test Setup

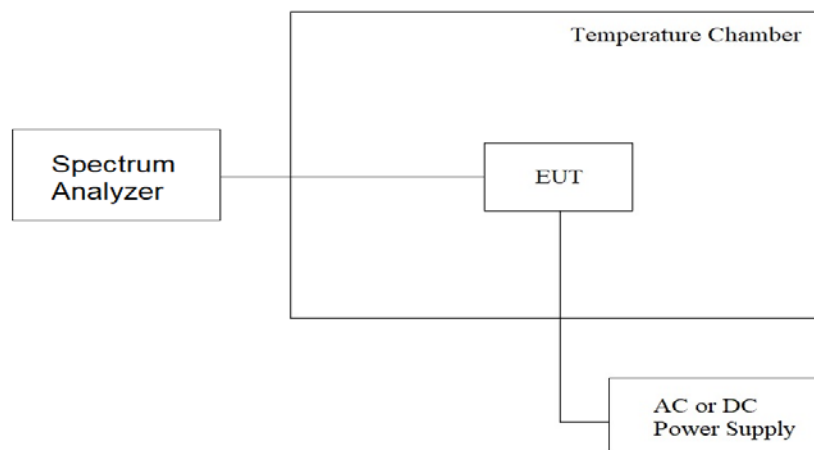

### 2.6.3 Test Procedure

1. The test shall be performed under 85% ~115% of the nominal voltage.
2. Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

## 2.6.4 Test Result

Band I selected frequency: 5180MHz

| Temperature (°C) | Voltage (V) | Tolerance (ppm) |        |        |         | Limit (ppm) | Result |
|------------------|-------------|-----------------|--------|--------|---------|-------------|--------|
|                  |             | Start           | 2 min  | 5 min  | 10 min  |             |        |
| 20               | 108         | -7.529          | -8.494 | 2.896  | -14.479 | 20          | Pass   |
|                  | 120         | 0.772           | 9.846  | -8.108 | 8.494   | 20          | Pass   |
|                  | 132         | -4.440          | 7.722  | -4.054 | -3.668  | 20          | Pass   |

| Temperature (°C) | Voltage (V) | Tolerance (ppm) |         |         |         | Limit (ppm) | Result |
|------------------|-------------|-----------------|---------|---------|---------|-------------|--------|
|                  |             | Start           | 2 min   | 5 min   | 10 min  |             |        |
| 0                | 120         | -11.776         | -12.548 | -5.405  | -2.896  | 20          | Pass   |
| 10               |             | -9.846          | -6.757  | 14.672  | -5.792  | 20          | Pass   |
| 20               |             | -10.811         | -13.514 | 11.197  | 7.915   | 20          | Pass   |
| 30               |             | 0.965           | 18.533  | 18.533  | -18.919 | 20          | Pass   |
| 40               |             | 0.965           | -17.954 | -11.390 | -12.355 | 20          | Pass   |

Band II-A selected frequency: 5300MHz

| Temperature (°C) | Voltage (V) | Tolerance (ppm) |        |        |        | Limit (ppm) | Result |
|------------------|-------------|-----------------|--------|--------|--------|-------------|--------|
|                  |             | Start           | 2 min  | 5 min  | 10 min |             |        |
| 20               | 108         | 5.849           | 7.170  | 14.340 | -3.962 | 20          | Pass   |
|                  | 120         | -14.151         | 15.094 | -6.415 | 15.094 | 20          | Pass   |
|                  | 132         | -0.755          | -1.509 | 13.208 | 12.264 | 20          | Pass   |

| Temperature (°C) | Voltage (V) | Tolerance (ppm) |         |         |         | Limit (ppm) | Result |
|------------------|-------------|-----------------|---------|---------|---------|-------------|--------|
|                  |             | Start           | 2 min   | 5 min   | 10 min  |             |        |
| 0                | 120         | 1.321           | 0.377   | -16.226 | -18.302 | 20          | Pass   |
| 10               |             | -5.472          | 18.113  | 7.925   | -0.377  | 20          | Pass   |
| 20               |             | 7.170           | -10.943 | 18.868  | -6.792  | 20          | Pass   |
| 30               |             | 11.321          | -2.642  | 9.245   | -13.585 | 20          | Pass   |
| 40               |             | 1.321           | 4.340   | -11.321 | -7.170  | 20          | Pass   |

**Band II-C selected frequency: 5580MHz**

| Temperature (°C) | Voltage (V) | Tolerance (ppm) |         |        |         | Limit (ppm) | Result |
|------------------|-------------|-----------------|---------|--------|---------|-------------|--------|
|                  |             | Start           | 2 min   | 5 min  | 10 min  |             |        |
| 20               | 108         | -14.516         | 8.244   | 2.509  | 7.885   | 20          | Pass   |
|                  | 120         | 4.301           | -12.186 | -5.914 | 7.168   | 20          | Pass   |
|                  | 132         | -11.470         | -12.366 | -7.706 | -15.412 | 20          | Pass   |

| Temperature (°C) | Voltage (V) | Tolerance (ppm) |         |         |         | Limit (ppm) | Result |
|------------------|-------------|-----------------|---------|---------|---------|-------------|--------|
|                  |             | Start           | 2 min   | 5 min   | 10 min  |             |        |
| 0                | 120         | 12.724          | -6.989  | -5.018  | 10.753  | 20          | Pass   |
| 10               |             | -12.186         | 5.914   | 12.007  | -1.613  | 20          | Pass   |
| 20               |             | -7.348          | 10.036  | 13.262  | -17.384 | 20          | Pass   |
| 30               |             | -1.254          | 14.695  | 1.254   | 8.244   | 20          | Pass   |
| 40               |             | 13.082          | -13.978 | -16.308 | 4.659   | 20          | Pass   |

**Band III selected frequency: 5745MHz**

| Temperature (°C) | Voltage (V) | Tolerance (ppm) |         |         |        | Limit (ppm) | Result |
|------------------|-------------|-----------------|---------|---------|--------|-------------|--------|
|                  |             | Start           | 2 min   | 5 min   | 10 min |             |        |
| 20               | 108         | 14.447          | -10.966 | -9.922  | 5.744  | 20          | Pass   |
|                  | 120         | -15.666         | 0.348   | -12.359 | 14.273 | 20          | Pass   |
|                  | 132         | 3.481           | 7.311   | 14.099  | 14.621 | 20          | Pass   |

| Temperature (°C) | Voltage (V) | Tolerance (ppm) |         |         |        | Limit (ppm) | Result |
|------------------|-------------|-----------------|---------|---------|--------|-------------|--------|
|                  |             | Start           | 2 min   | 5 min   | 10 min |             |        |
| 0                | 120         | 1.218           | 12.881  | -1.915  | -6.789 | 20          | Pass   |
| 10               |             | 12.881          | -16.884 | -15.840 | -9.922 | 20          | Pass   |
| 20               |             | -13.577         | 11.314  | -1.741  | 12.707 | 20          | Pass   |
| 30               |             | -3.133          | 1.567   | 5.222   | 12.533 | 20          | Pass   |
| 40               |             | 12.881          | 15.666  | 8.181   | 1.741  | 20          | Pass   |

## 2.7 Antenna Requirement

### 2.7.1 Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

An intentional radiator shall be designed to ensure that no antenna other than as furnished by the responsible party shall be used with the device. If transmitting antennas of directional gain greater than 6dBi are using the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi, for compliance to FCC 47CFR 15.407 (a) requirements.

### 2.7.2 Antenna Connected Construction

Non-standard antenna connector is used.

### 2.7.3 Antenna Gain

| No. | Manufacturer                     | Model No. | Antenna Type | Peak Gain                                                                                                           |
|-----|----------------------------------|-----------|--------------|---------------------------------------------------------------------------------------------------------------------|
| 1   | InnoComm Mobile Technology Corp. | Jagar     | PIFA Antenna | 1.98 dBi for 5.15~5.25GHz<br>1.98 dBi for 5.25~5.35GHz<br>1.98 dBi for 5.47~5.725GHz<br>1.98 dBi for 5.725~5.825GHz |


## 2.8 AC Conducted Emissions Measurement

### 2.8.1 Limit

| Frequency (MHz) | FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit |           |
|-----------------|-----------------------------------------------------|-----------|
|                 | Quasi-peak                                          | Average   |
| 0.15 to 0.5     | 66 to 56*                                           | 56 to 46* |
| 0.50 to 5.0     | 56                                                  | 46        |
| 5.0 to 30.0     | 60                                                  | 50        |

\*Decreases with the logarithm of the frequency

### 2.8.2 Test Setup

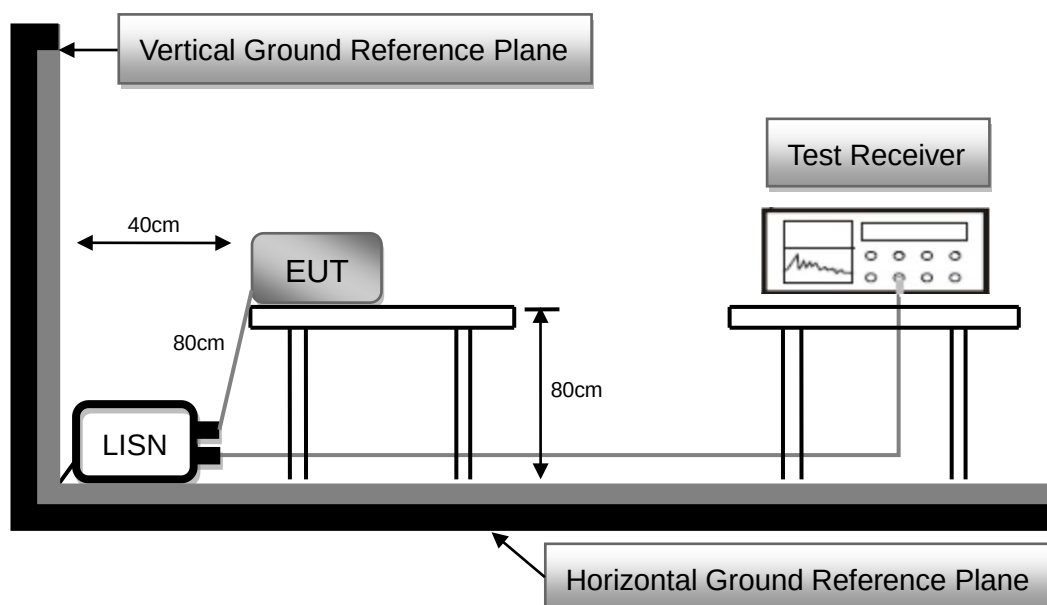


### 2.8.3 Test Procedure

1. The EUT was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The LISN at least be 80 cm from nearest chassis of EUT.
2. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All other support equipments powered from additional LISN(s).
3. Interrelating cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
4. All I/O cables that are not connected to a peripheral shall be bundle in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. The EMI test receiver connected to LISN powering the EUT. The actual test configuration, please refer to EUT test photos.
6. The receiver scanned from 150kHz to 30MHz for emissions in each of test modes. Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz. A scan was taken on both power lines, Line and Neutral, recording at least six highest emissions.
7. The EUT and cable configuration of the above highest emission levels were recorded. The Test Data of the worst case was recorded.

## 2.8.4 Test Result

|                |                       |                  |             |
|----------------|-----------------------|------------------|-------------|
| Test Voltage : | 120Vac, 60Hz          | Frequency Range: | 0.15-30 MHz |
| Test Mode :    | Mode 10 : Normal mode | 6dB Bandwidth :  | 9 kHz       |
| Test Date :    | 2024/06/28            | Phase :          | L           |
| Temperature :  | 26.1°C                | Humidity :       | 45 %        |

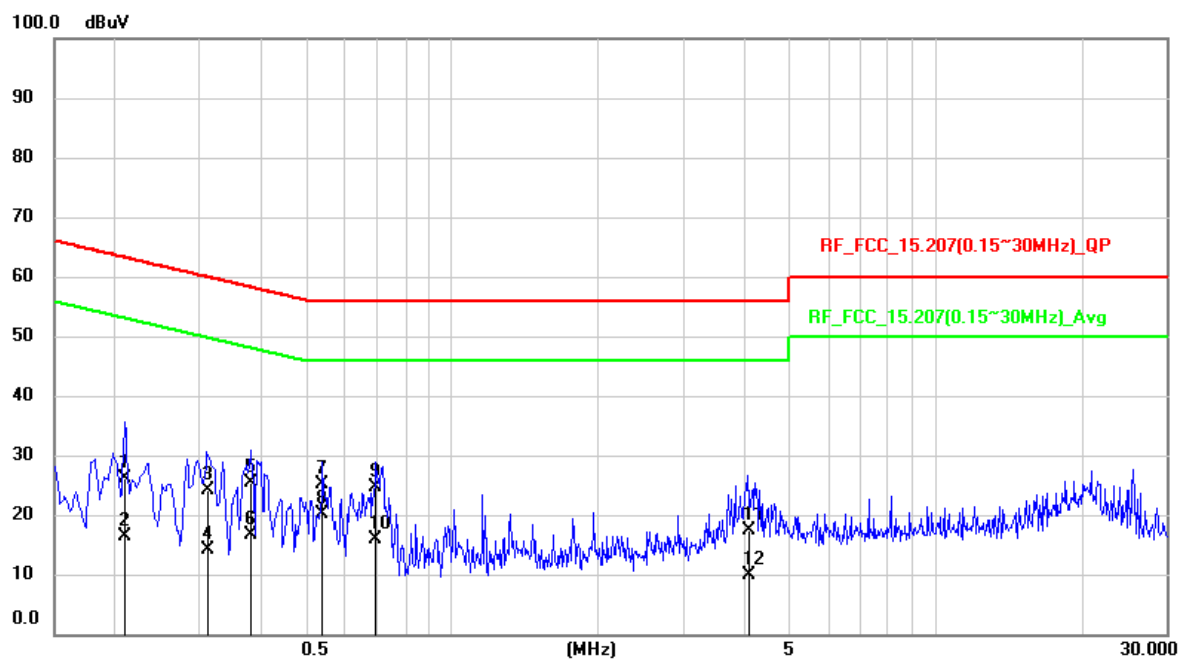


| No. | Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measurement (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------------|--------------------|--------------|-------------|----------|
| 1   | 0.209           | 16.38                | 9.82                | 26.2               | 63.24        | -37.04      | QP       |
| 2   | 0.209           | 6.67                 | 9.82                | 16.49              | 53.24        | -36.75      | AVG      |
| 3   | 0.3119          | 14.36                | 9.83                | 24.19              | 59.92        | -35.73      | QP       |
| 4   | 0.3119          | 4.29                 | 9.83                | 14.12              | 49.92        | -35.8       | AVG      |
| 5   | 0.3824          | 15.65                | 9.84                | 25.49              | 58.23        | -32.74      | QP       |
| 6   | 0.3824          | 6.84                 | 9.84                | 16.68              | 48.23        | -31.55      | AVG      |
| 7   | 0.5387          | 15.35                | 9.84                | 25.19              | 56           | -30.81      | QP       |
| 8   | 0.5387          | 10.34                | 9.84                | 20.18              | 46           | -25.82      | AVG      |
| 9   | 0.6963          | 14.89                | 9.85                | 24.74              | 56           | -31.26      | QP       |
| 10  | 0.6963          | 6.15                 | 9.85                | 16                 | 46           | -30         | AVG      |
| 11  | 4.1143          | 7.5                  | 9.96                | 17.46              | 56           | -38.54      | QP       |
| 12  | 4.1143          | -0.02                | 9.96                | 9.94               | 46           | -36.06      | AVG      |

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

|                |                       |                  |             |
|----------------|-----------------------|------------------|-------------|
| Test Voltage : | 120Vac, 60Hz          | Frequency Range: | 0.15-30 MHz |
| Test Mode :    | Mode 10 : Normal mode | 6dB Bandwidth :  | 9 kHz       |
| Test Date :    | 2024/06/28            | Phase :          | N           |
| Temperature :  | 26.1°C                | Humidity :       | 45 %        |

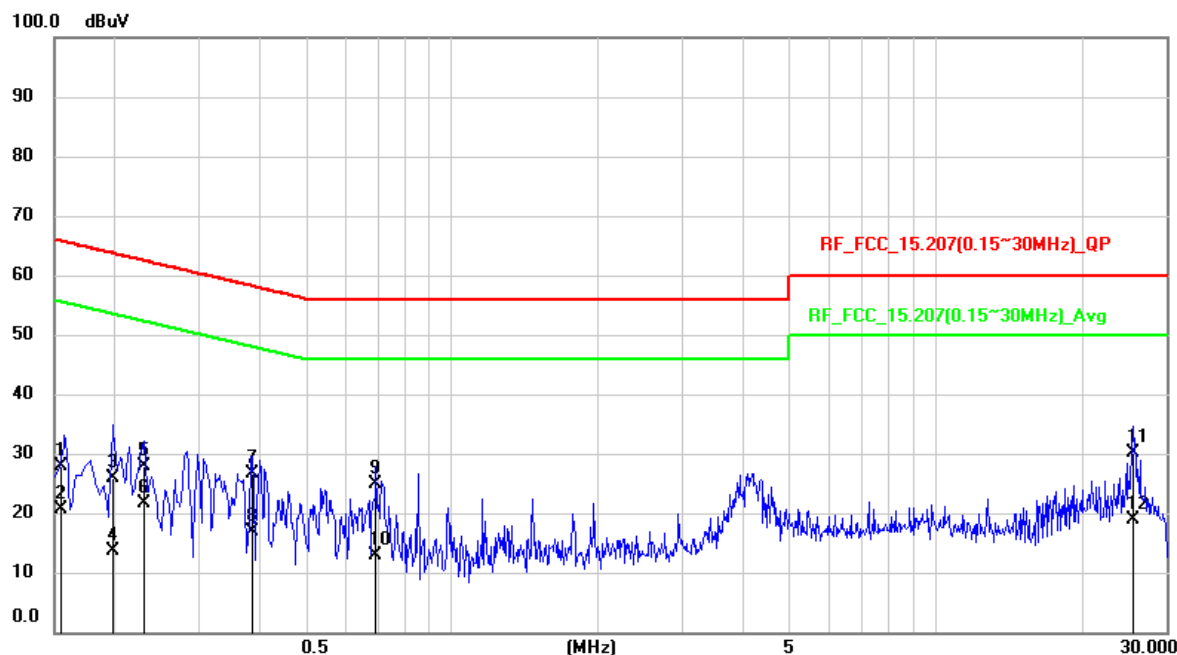

| No. | Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measurement (dBuV) | Limit (dBuV) | Margin (dB) | Detector |
|-----|-----------------|----------------------|---------------------|--------------------|--------------|-------------|----------|
| 1   | 0.1543          | 17.94                | 9.84                | 27.78              | 65.77        | -37.99      | QP       |
| 2   | 0.1543          | 10.88                | 9.84                | 20.72              | 55.77        | -35.05      | AVG      |
| 3   | 0.1989          | 16.12                | 9.82                | 25.94              | 63.66        | -37.72      | QP       |
| 4   | 0.1989          | 3.93                 | 9.82                | 13.75              | 53.66        | -39.91      | AVG      |
| 5   | 0.2312          | 18.05                | 9.82                | 27.87              | 62.41        | -34.54      | QP       |
| 6   | 0.2312          | 11.93                | 9.82                | 21.75              | 52.41        | -30.66      | AVG      |
| 7   | 0.3861          | 16.7                 | 9.84                | 26.54              | 58.15        | -31.61      | QP       |
| 8   | 0.3861          | 7.01                 | 9.84                | 16.85              | 48.15        | -31.3       | AVG      |
| 9   | 0.6963          | 15.03                | 9.85                | 24.88              | 56           | -31.12      | QP       |
| 10  | 0.6963          | 3.07                 | 9.85                | 12.92              | 46           | -33.08      | AVG      |
| 11  | 25.6659         | 19.76                | 10.44               | 30.2               | 60           | -29.8       | QP       |
| 12  | 25.6659         | 8.46                 | 10.44               | 18.9               | 50           | -31.1       | AVG      |

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value –Limit Value

--- END ---