



FCC RF Test Report

APPLICANT : Prime King LLC
EQUIPMENT : Digital Media Receiver
MODEL NAME : PE4Z26
FCC ID : 2BFXH-4985
STANDARD : 47 CFR Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Feb. 16, 2025 ~ Apr. 15, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Product Specification of Equipment Under Test.....	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Test Software.....	6
1.7 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Spurious Emission Measurement in the Restricted Band	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 LIST OF MEASURING EQUIPMENT.....	22
5 MEASUREMENT UNCERTAINTY	23
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR472605D	Rev. 01	Initial issue of report	Jun. 24, 2025
FR472605D	Rev. 02	Updated the version of ANSI C63.10 This report is an updated version, replacing the report issued on Jun. 24, 2025.	Oct. 10, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 30\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	-
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	-
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Prime King LLC

251 Little Falls Drive, Wilmington Delaware 19808

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	PE4Z26
FCC ID	2BFXH-4985
SN Code	Conducted: POG46W014517001A Conduction: G0G3X10244950007 Radiation: G0G3X1024495002X

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2405 MHz ~ 2480 MHz
Number of Channels	16
Channel Spacing	5 MHz
Carrier Frequency of Each Channel	2405 MHz, 2410MHz, ..., 2480MHz
Maximum Output Power to Antenna	14.42 dBm (0.0277 W)
99% Occupied Bandwidth	2.126MHz
Antenna Type / Gain	FPC Loop Antenna type with gain 2.83 dBi
Type of Modulation	OQPSK

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH08-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH08-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24
3.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2020

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (X plane as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	250kbps / Zigbee
Conducted TCs	Mode 1: Zigbee Tx CH11_2405 MHz
	Mode 2: Zigbee Tx CH19_2445 MHz
	Mode 3: Zigbee Tx CH26_2480 MHz
Radiated TCs	Mode 1: Zigbee Tx CH11_2405 MHz
	Mode 2: Zigbee Tx CH19_2445 MHz
	Mode 3: Zigbee Tx CH26_2480 MHz
AC Conducted Emission	Mode 1: Zigbee Link + WLAN Link(2.4G) + Powered by Adapter
Remark: For Radiated TCs, The tests were performance with Adapter.	


RSE Co-location
Zigbee CH26 2480MHz + Low Power Wideband Radio in Wi-Fi 5GHz 5800MHz

2.3 Connection Diagram of Test System

For Conducted Emission

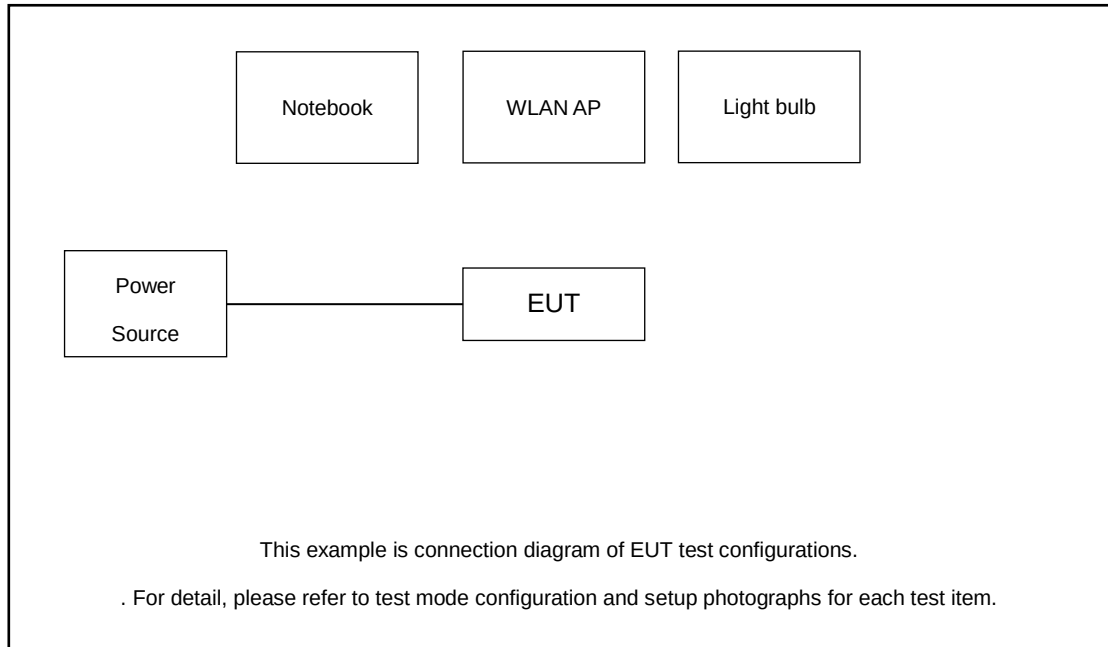

For Radiated Emission

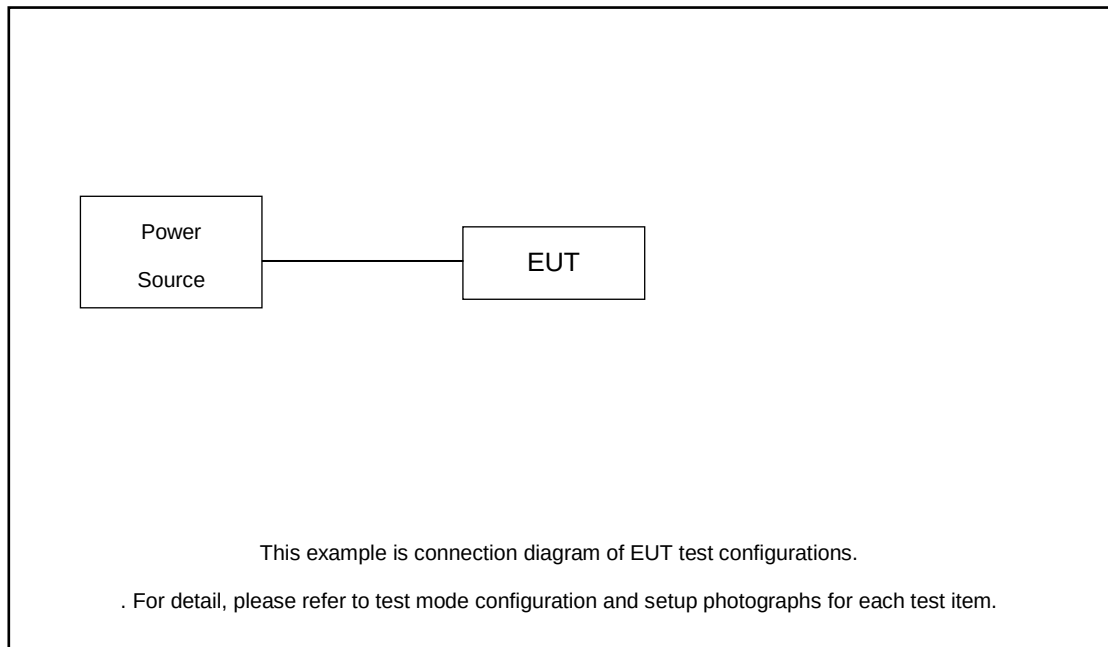

2.4 Support Unit used in test configuration and system

Item	Equipment	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	G480	QDS-BRCM1050I	N/A	Shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m
2.	WLAN AP	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Light bulb	N/A	N/A	N/A	Light bulb

2.5 EUT Operation Test Setup

For ZigBee function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor which are included in RF test system.

$$\text{Offset(dB)} = 22.19 \text{ (dB)}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.8.1 for 6dB BW and 6.9.3 for 99% occupied bandwidth measurements.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. Detector = Peak. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

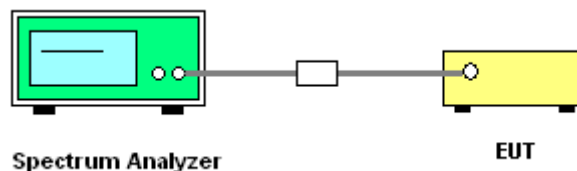

3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Test data refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2020 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

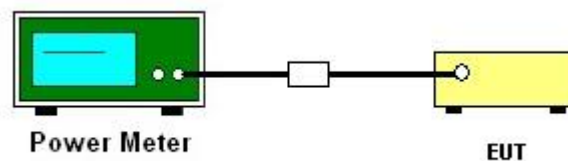

3.2.5 Test Result of Average Output Power

Test data refers to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2020 clause 11.10.5 Method AVGPSD-2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to at least 1.5 times the OBW.
5. Detector = power averaging (rms), Sweep time = auto couple, Trace mode = max hold, Employ trace averaging (rms) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. Add $10 \log(1/D)$, where D is the duty cycle, to the measured PSD in order to compute the average PSD during the actual transmission times.
8. The Measured power density (dBm)/ 100kHz is a reference level and used as 30dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

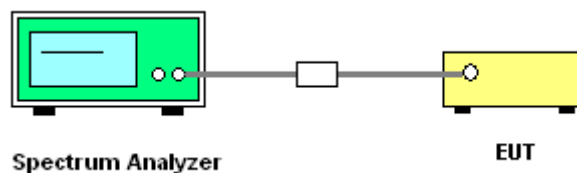

3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2020 clause 11.11.3
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

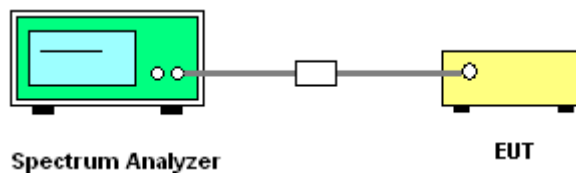

3.4.5 Test Result of Conducted Band Edges Plots

Test data refers to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Test data refers to Appendix A.

3.5 Spurious Emission Measurement in the Restricted Band

3.5.1 Limit of Spurious Emission Measurement in the Restricted Band

Emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2020 clause 6.3, 6.5, 6.6, 11.11 and 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For conducted spurious emission measurement in the restricted band, the RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
7. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.For Co-location Low Power Wideband Radio in Wi-Fi 5GHz average measurement: use duty cycle correction factor method. (Refer to FR472605F Appendix D)
 - Use an RF detector and oscilloscope to measure the duty cycle of the EUT in normal working status.
 - Duty cycle = On time/100 milliseconds
 - On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$.
 - Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
 - Average Emission Level = Peak Emission Level + Duty cycle correction factor
 - Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.5.4 Test Setup


For radiated emissions below 30MHz

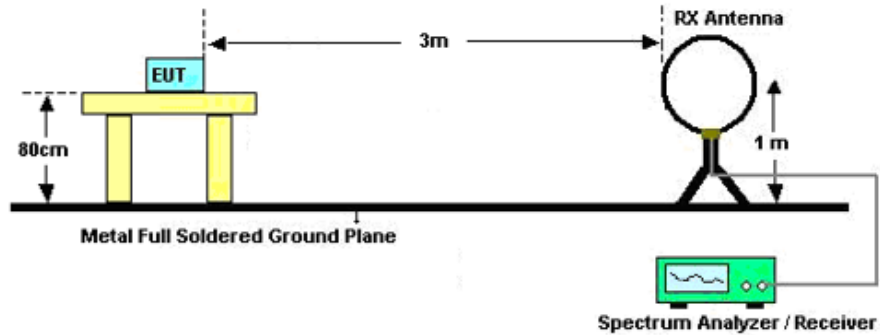

For radiated emissions from 30MHz to 1GHz

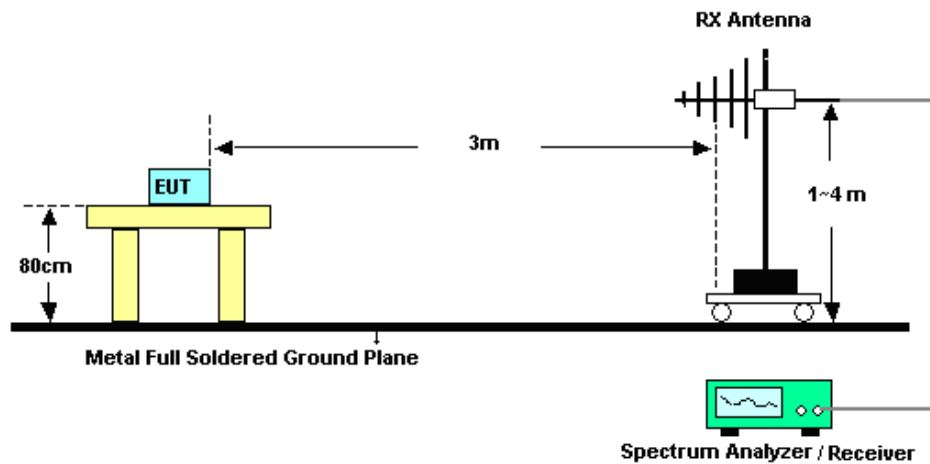

For radiated emissions above 1GHz

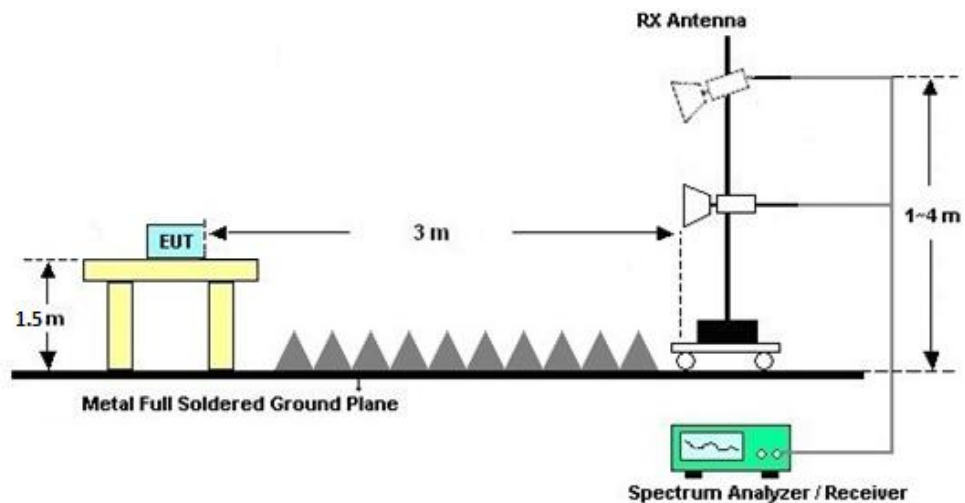

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.5.6 Test Results of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5.8 Duty Cycle

Please refer to Appendix D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

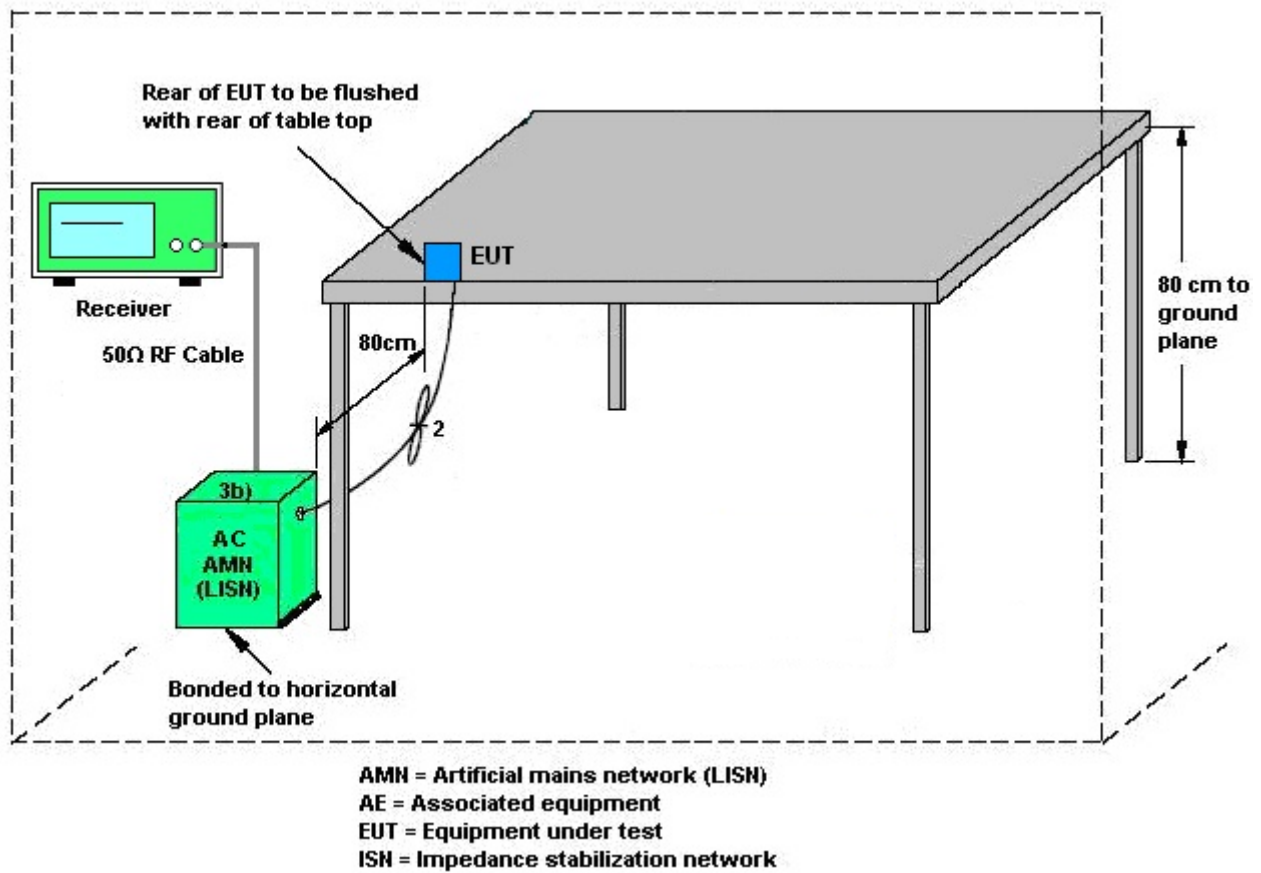

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Feb. 16, 2025~ Feb. 27, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Feb. 16, 2025~ Feb. 27, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Feb. 16, 2025~ Feb. 27, 2025	Jan. 01, 2026	Conducted (TH01-KS)
RF Test System	Tonscend	TS1120-3	N/A	N/A	NCR	Feb. 16, 2025~ Feb. 27, 2025	NCR	Conducted (TH01-KS)
automation control unit	Tonscend	JS0806-2	21H8060473	N/A	NCR	Feb. 16, 2025~ Feb. 27, 2025	NCR	Conducted (TH01-KS)
power control unit	Tonscend	JS0806-4ADC	21J8060495	N/A	NCR	Feb. 16, 2025~ Feb. 27, 2025	NCR	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jul. 04, 2024	Apr. 15, 2025	Jul. 03, 2025	Radiation (03CH08-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57441079	10Hz~44GHz	Oct. 09, 2024	Apr. 15, 2025	Oct. 08, 2025	Radiation (03CH08-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Apr. 15, 2025	Sep. 07, 2025	Radiation (03CH08-KS)
Bilog Antenna	TESEQ	CBL 6111D	59915	30MHz~1GHz	Aug. 18, 2024	Apr. 15, 2025	Aug. 17, 2025	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 06, 2024	Apr. 15, 2025	Jul. 05, 2025	Radiation (03CH08-KS)
high gain Amplifier	EM	EM01G18GA	060890	1GHz~18GHz	Jul. 23, 2024	Apr. 15, 2025	Jul. 22, 2025	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Apr. 15, 2025	Oct. 21, 2025	Radiation (03CH08-KS)
Amplifier	SONOMA	310N	380826	9KHz~1GHz	Jul. 03, 2024	Apr. 15, 2025	Jul. 02, 2025	Radiation (03CH08-KS)
Amplifier	Keysight	83017A	MY53270417	500MHz~26.5GHz	Oct. 09, 2024	Apr. 15, 2025	Oct. 08, 2025	Radiation (03CH08-KS)
Amplifier	EM	EM18G40GGA	060737	18~40GHz	Jan. 03, 2025	Apr. 15, 2025	Jan. 02, 2026	Radiation (03CH08-KS)
6db attenuator	TOJOIN	SMA(JK)	EMC01	2W/DC~18G	Jul. 01, 2024	Apr. 15, 2025	Jun. 30, 2025	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Apr. 15, 2025	NCR	Radiation (03CH08-KS)
Turn Table	EM	EM 1000-T	N/A	0~360 degree	NCR	Apr. 15, 2025	NCR	Radiation (03CH08-KS)
Antenna Mast	EM	EM 1000-A	N/A	1 m~4 m	NCR	Apr. 15, 2025	NCR	Radiation (03CH08-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Apr. 10, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Apr. 10, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Apr. 10, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Apr. 10, 2025	Oct. 08, 2025	Conduction (CO01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Denstiy	±0.90 dB
Frequency	±0.04 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.04 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.40 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: <u>25</u> °C, <u>45</u> %RH	
Test Date: <u>2025.2.16~2025.2.27</u>	Test Engineer: <u>Jiang Jun</u>


DTS Bandwidth


Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
Zigbee	Ant2	2405	1.33	2404.33	2405.66	0.5	PASS
		2445	1.32	2444.34	2445.66	0.5	PASS
		2480	1.33	2479.33	2480.66	0.5	PASS



Test Graphs

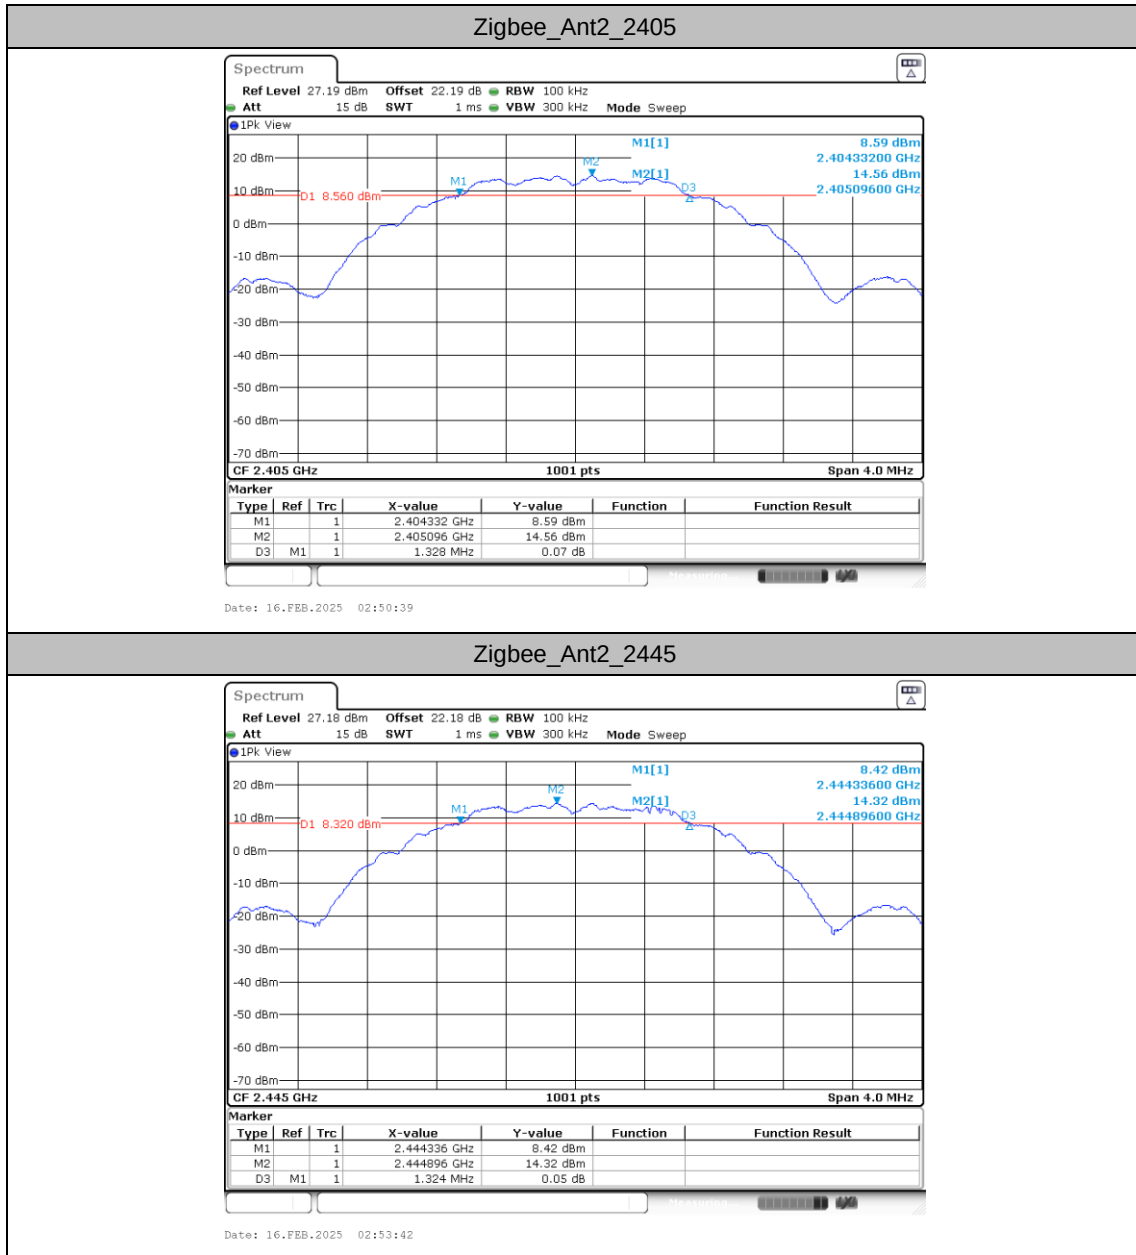

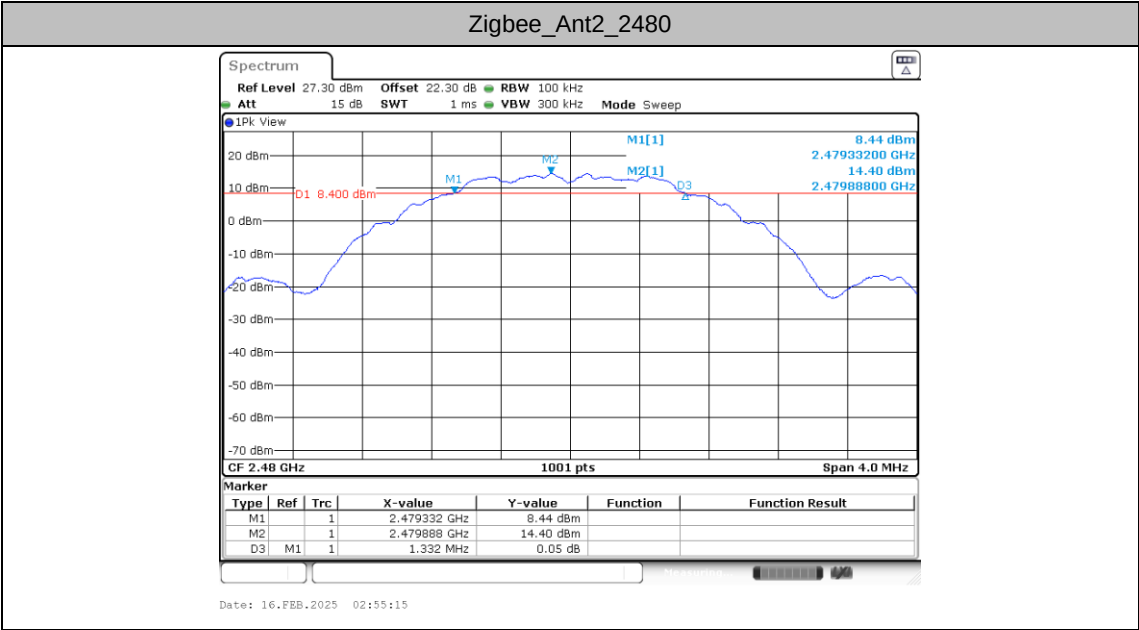



Occupied Channel Bandwidth


Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
Zigbee	Ant2	2405	2.126	2403.9291	2406.0549	---	---
		2445	2.126	2443.9291	2446.0549	---	---
		2480	2.126	2478.9291	2481.0549	---	---



Test Graphs



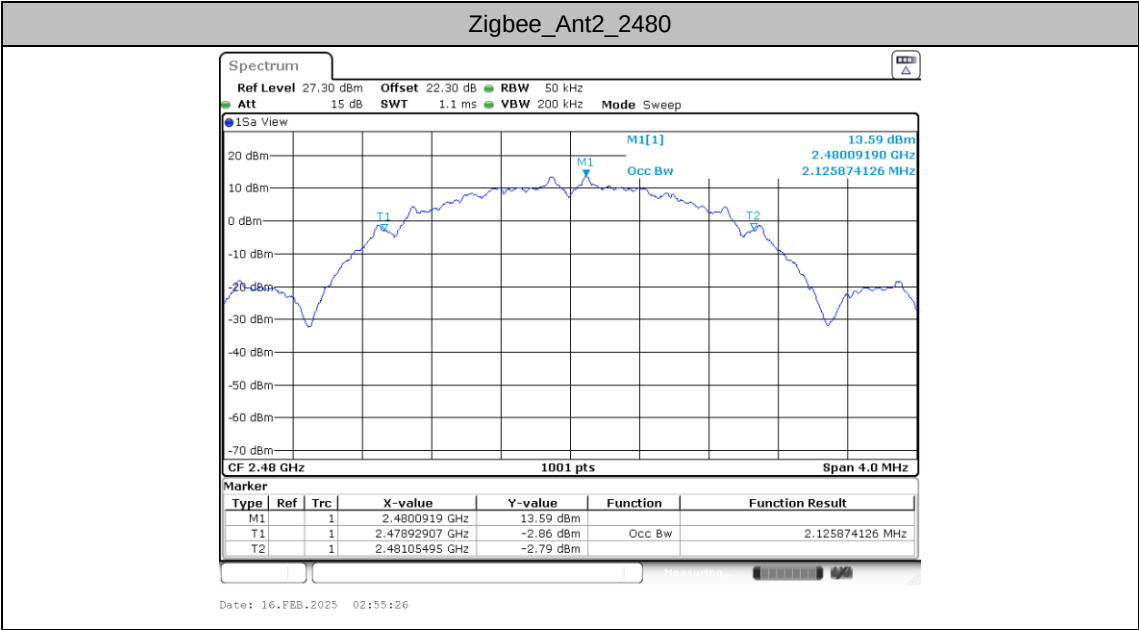



Maximum conducted output power

Test Result

TestMode	Antenna	Setting	CH.	Duty Factor (dB)	Power Setting	Average Conducted Power (dBm)	Limit (dBm)	Verdict
Zigbee	Ant2	14	11	1.50	14	14.25	30	PASS
		14	19	1.50	14	14.33	30	PASS
		14	26	1.50	14	14.42	30	PASS



Maximum power spectral density


Test Result


TestMode	Antenna	Freq(MHz)	Result	Limit[dBm/3kHz]	Verdict
Zigbee	Ant2	2405	-1.85	≤8.00	PASS
		2445	-1.59	≤8.00	PASS
		2480	-2.15	≤8.00	PASS

The Duty Cycle Factor is compensated in the graph



Test Graphs

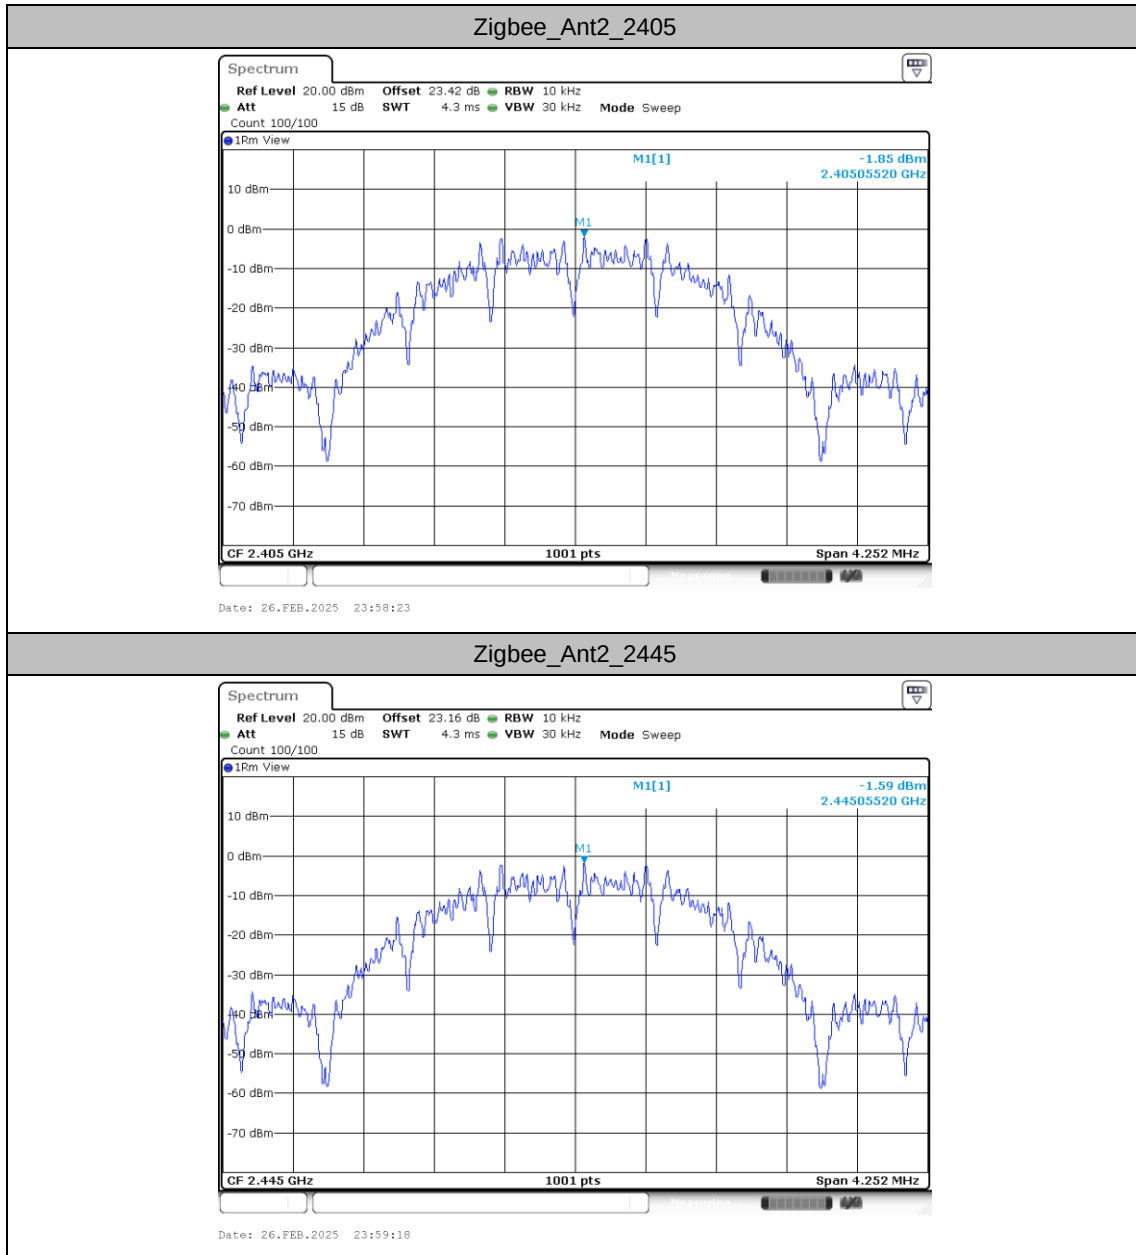

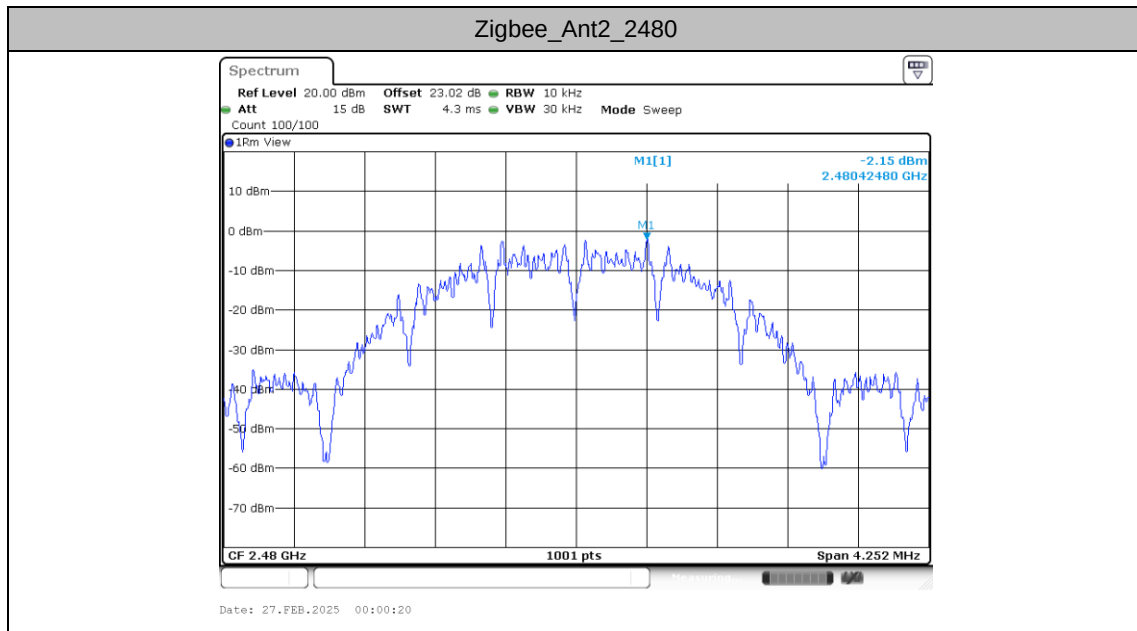



Reference level measurement


Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
Zigbee	Ant2	2405	2405.10	14.55
		2445	2445.09	14.34
		2480	2479.89	14.40



Test Graphs



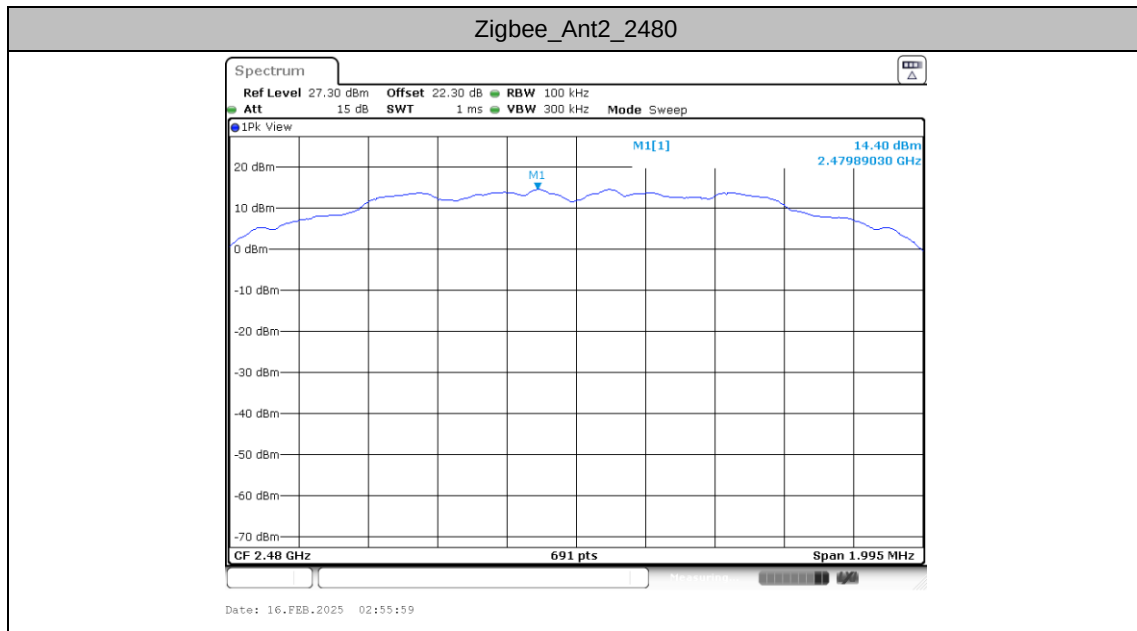




Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm /100KHz]	Result[dBm /100KHz]	Limit[dBm /100KHz]	Verdict
Zigbee	Ant2	Low	2405	14.55	-44.66	≤-15.45	PASS
		High	2480	14.40	-40.96	≤-15.6	PASS



Test Graphs

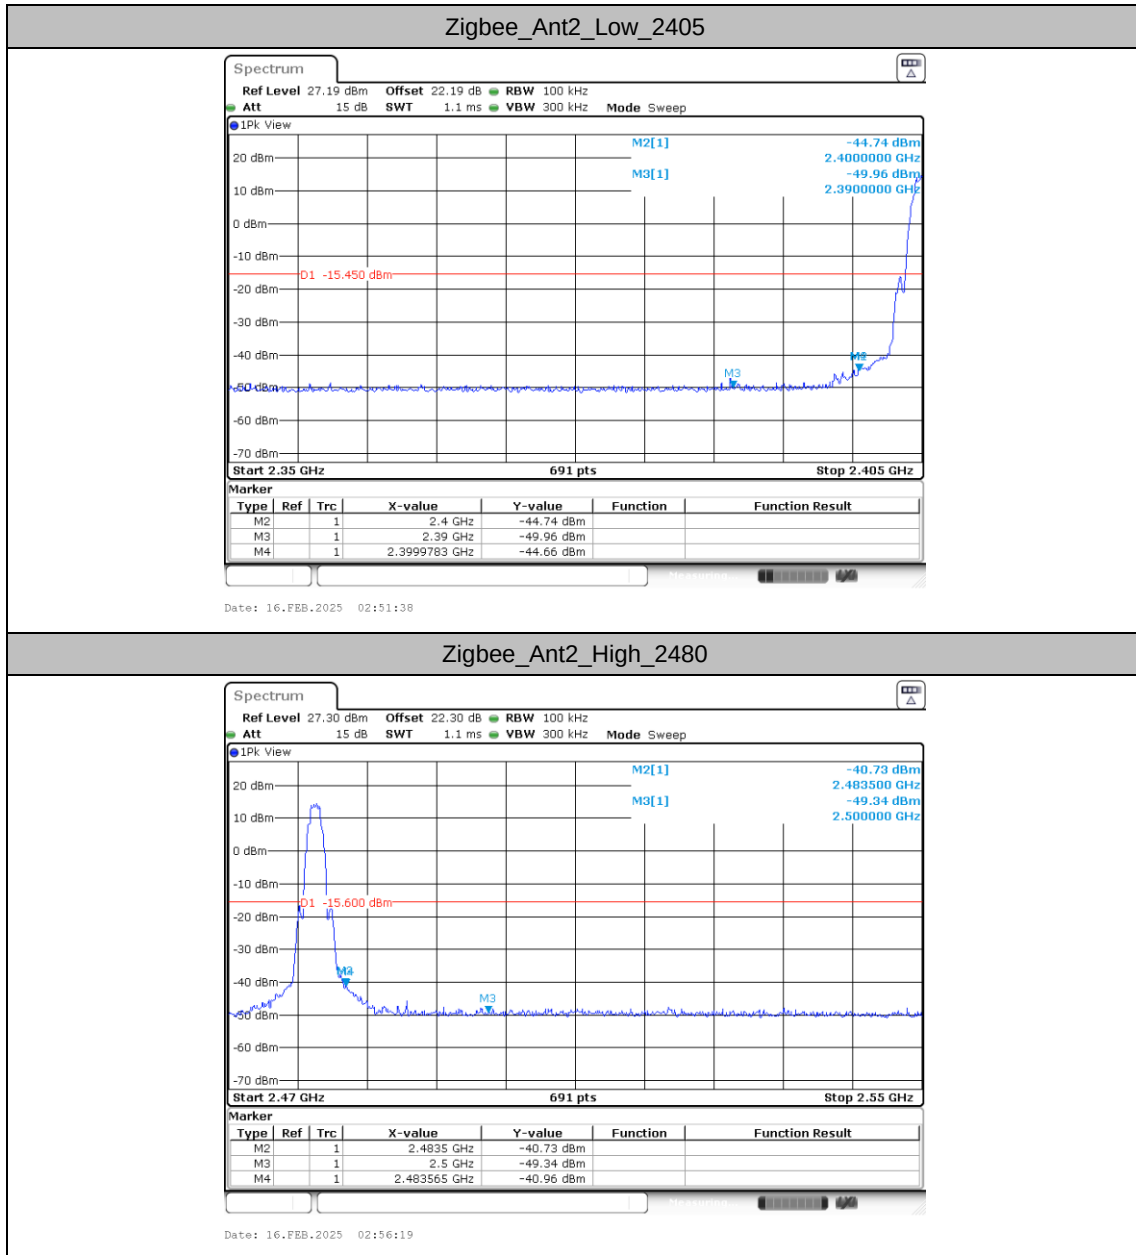




Conducted Spurious Emission


Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
Zigbee	Ant2	2405	30~1000	14.55	-49.45	≤-15.45	PASS
			1000~26500	14.55	-44.35	≤-15.45	PASS
		2445	30~1000	14.34	-49.66	≤-15.66	PASS
			1000~26500	14.34	-43.77	≤-15.66	PASS
		2480	30~1000	14.40	-49	≤-15.6	PASS
			1000~26500	14.40	-43.29	≤-15.6	PASS



Test Graphs

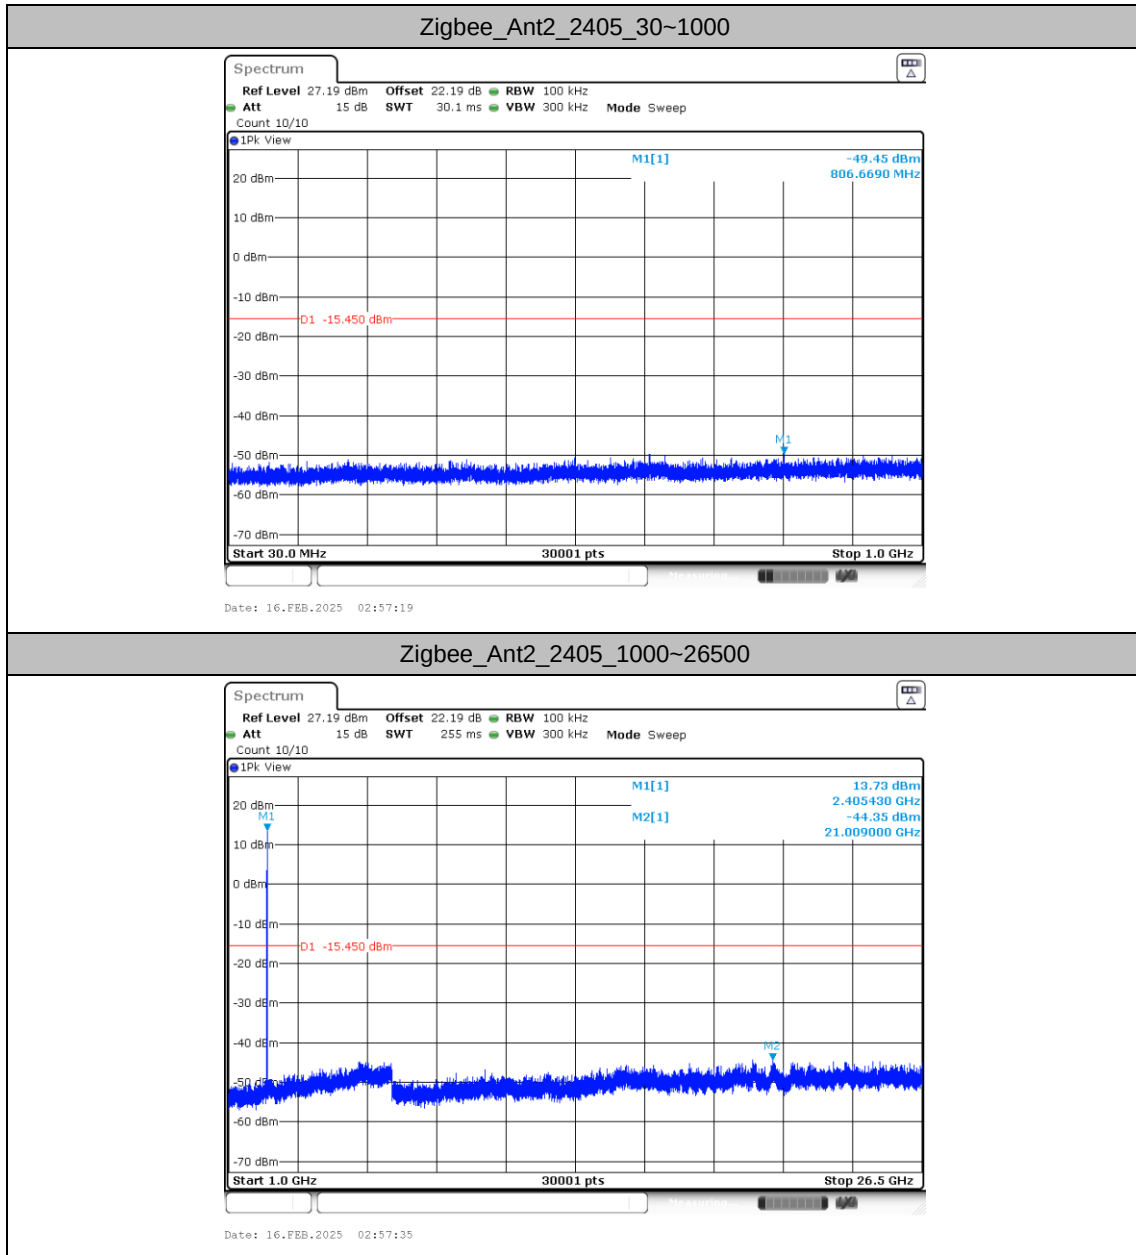


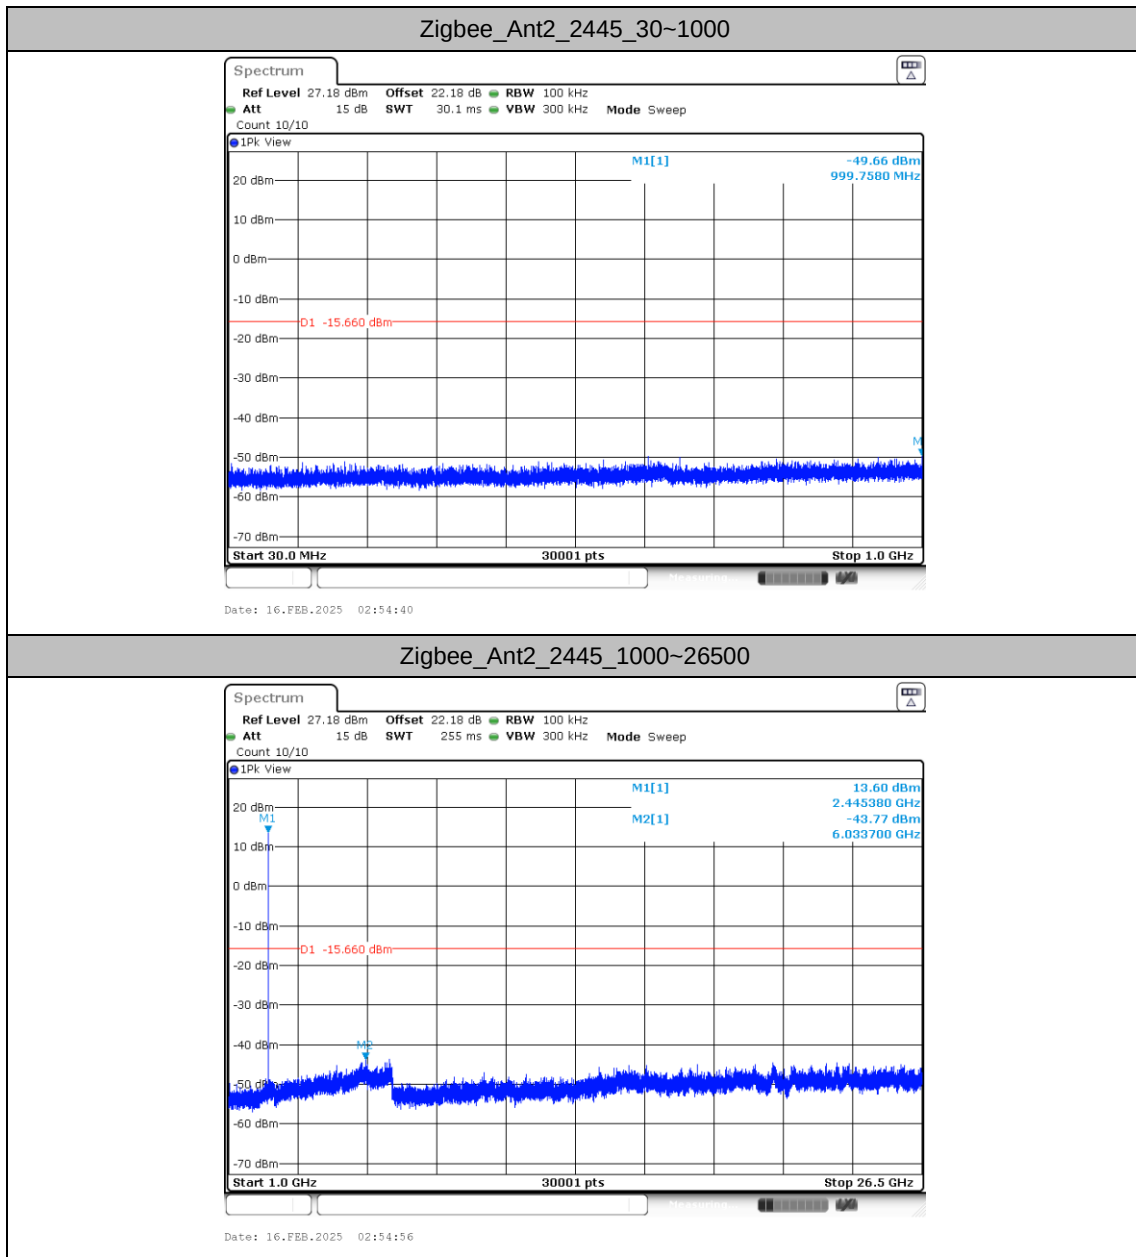

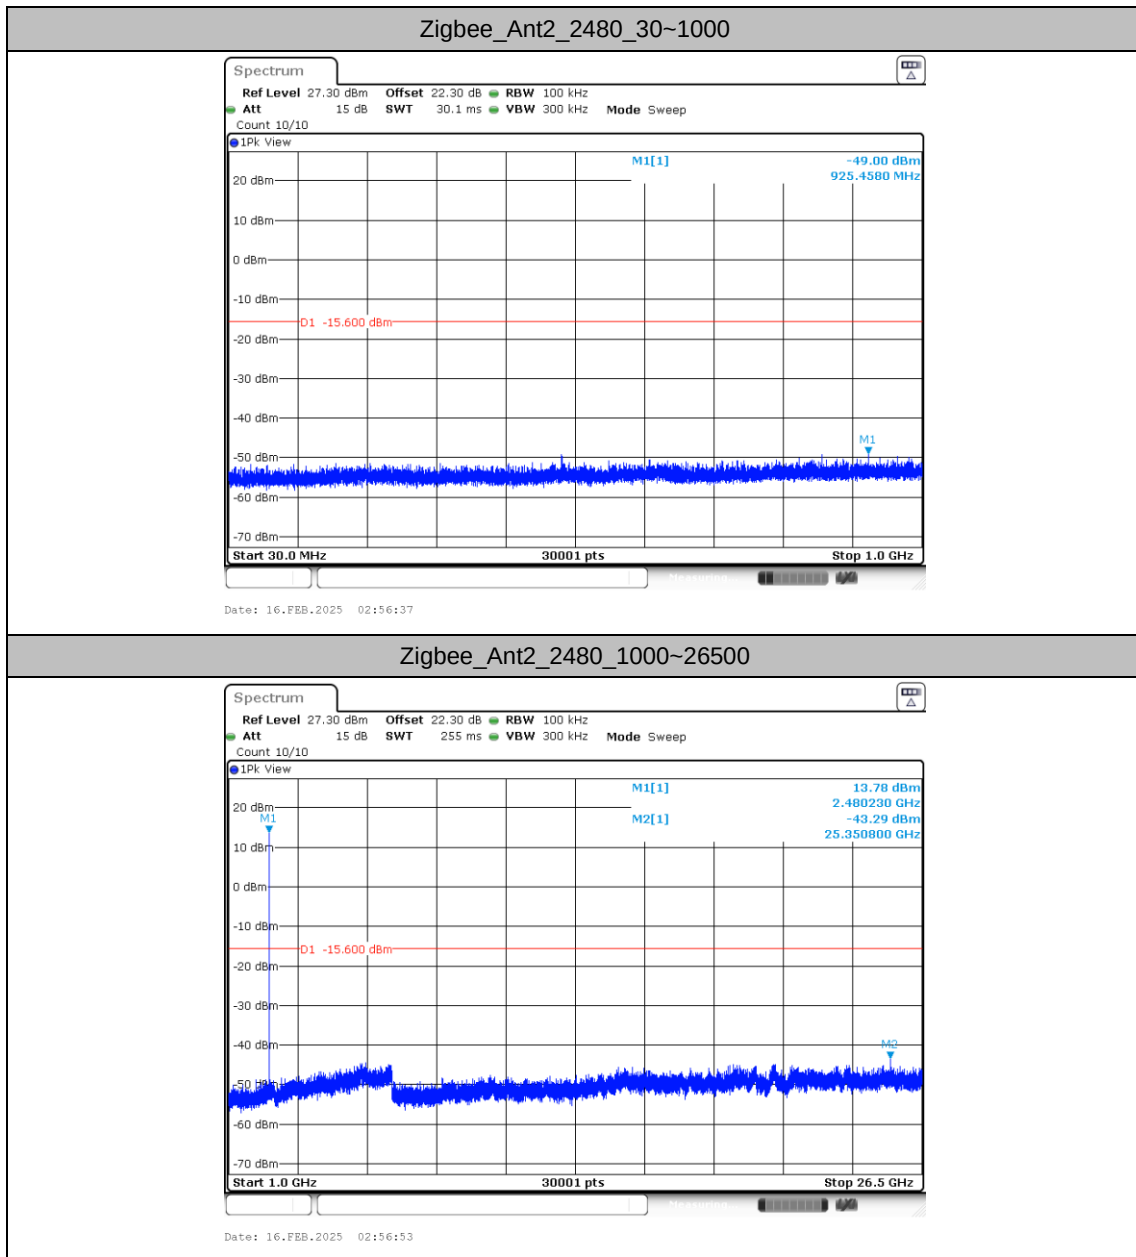

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

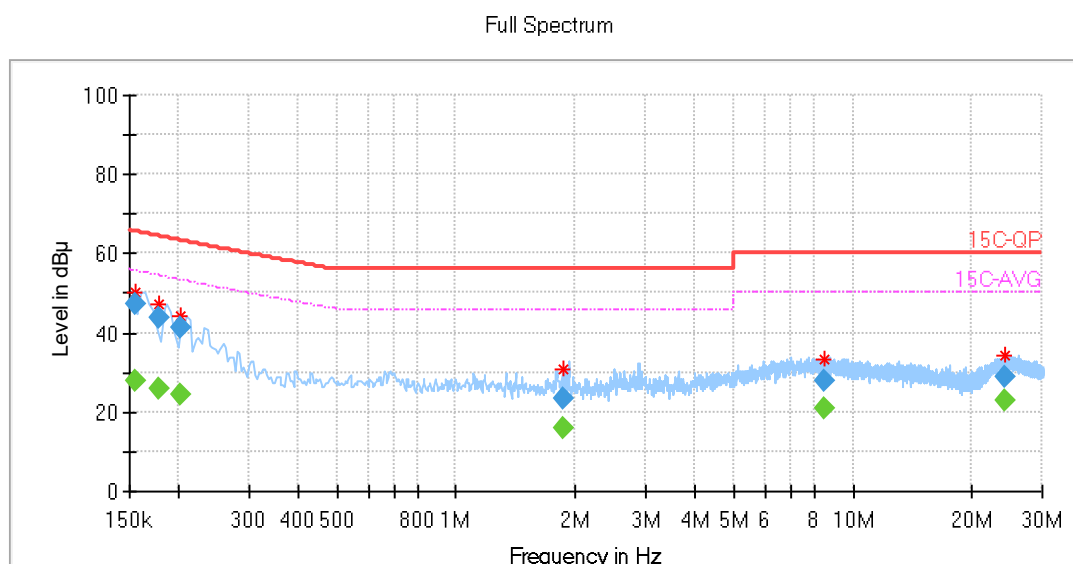


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.155925	---	28.01	55.65	27.63	L1	OFF	20.1
0.155925	47.27	---	65.65	18.38	L1	OFF	20.1
0.178312	---	25.89	54.44	28.55	L1	OFF	20.0
0.178312	44.02	---	64.46	20.45	L1	OFF	20.0
0.200700	---	24.43	53.40	28.97	L1	OFF	20.0
0.200700	41.38	---	63.43	22.05	L1	OFF	20.0
1.864181	---	16.13	46.00	29.87	L1	OFF	19.8
1.864181	23.41	---	56.00	32.59	L1	OFF	19.8
8.472225	---	20.66	50.00	29.34	L1	OFF	20.0
8.472225	27.91	---	60.00	32.09	L1	OFF	20.0
24.061331	---	23.03	50.00	26.97	L1	OFF	20.3
24.061331	28.79	---	60.00	31.21	L1	OFF	20.3



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

Full Spectrum

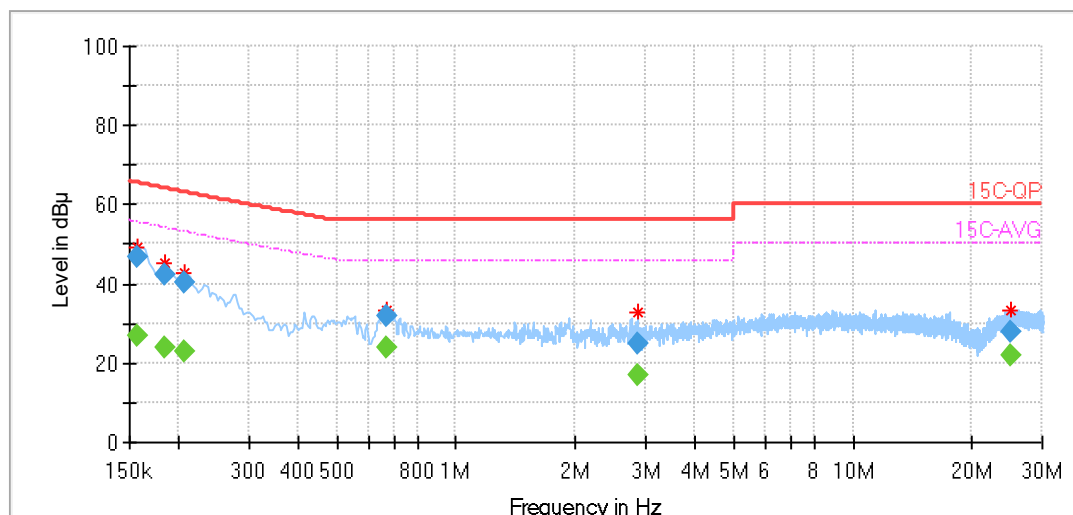

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156694	---	26.62	55.60	28.98	N	OFF	20.2
0.156694	46.83	---	65.61	18.77	N	OFF	20.2
0.185062	---	23.83	54.11	30.28	N	OFF	20.2
0.185062	42.49	---	64.14	21.65	N	OFF	20.2
0.205200	---	22.72	53.21	30.49	N	OFF	20.2
0.205200	40.31	---	63.24	22.93	N	OFF	20.2
0.670894	---	23.76	46.00	22.24	N	OFF	19.9
0.670894	31.80	---	56.00	24.20	N	OFF	19.9
2.882731	---	16.79	46.00	29.21	N	OFF	19.8
2.882731	24.70	---	56.00	31.30	N	OFF	19.8
25.105301	---	21.80	50.00	28.20	N	OFF	20.6
25.105301	27.98	---	60.00	32.02	N	OFF	20.6



Appendix C. Radiated Spurious Emission

Test Engineer :	Koi Ji	Relative Humidity :	41~43%
		Temperature :	20.2~21.5℃





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	2	Zigbee	11	2405	250k	-	-
Mode 2	2400-2483.5	2	Zigbee	19	2445	250k	-	-
Mode 3	2400-2483.5	2	Zigbee	26	2480	250k	-	-
Mode 4	Low Power Wideband Radio in Wi-Fi 5GHz	3	FMCW 140M	Middle	5800	-	-	-
	2400-2483.5	2	Zigbee	26	2480	250k	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Zigbee	11	2373.70	42.97	54.00	-11.03	H	AVERAGE	Pass	Band Edge
1	Zigbee	11	4810.00	47.26	54.00	-6.74	H	AVERAGE	Pass	Harmonic
2	Zigbee	19	-	-	-	-	-	-	-	Band Edge
2	Zigbee	19	4890.00	48.27	54.00	-5.73	H	AVERAGE	Pass	Harmonic
3	Zigbee	26	2483.68	70.90	74.00	-3.10	V	PEAK	Pass	Band Edge
3	Zigbee	26	4960.00	47.30	54.00	-6.70	H	AVERAGE	Pass	Harmonic
4	Zigbee	26	2483.50	49.73	54.00	-4.27	V	AVERAGE	Pass	Band Edge
4	Zigbee	26	4960.00	46.07	74.00	-27.93	H	Peak	Pass	Harmonic
4	Low Power Wideband Radio in Wi-Fi 5GHz	Mid	5800.00	104.29	144.00	-9.71	H	PEAK	Pass	Fundamental
4	Low Power Wideband Radio in Wi-Fi 5GHz	Mid	5800.00	85.27	94.00	-8.73	H	AVERAGE	Pass	Fundamental
4	Low Power Wideband Radio in Wi-Fi 5GHz	Mid	11600.00	45.25	74.00	-28.75	H	PEAK	Pass	Harmonic

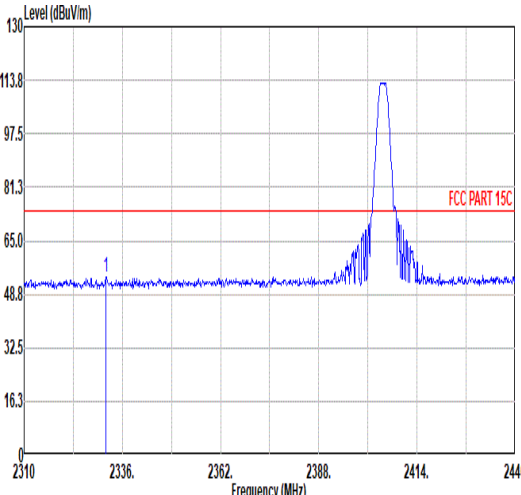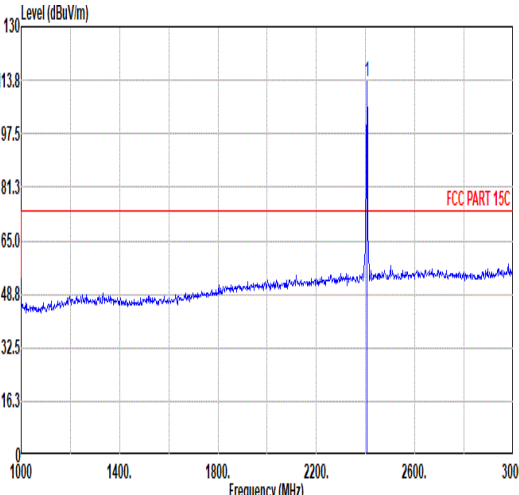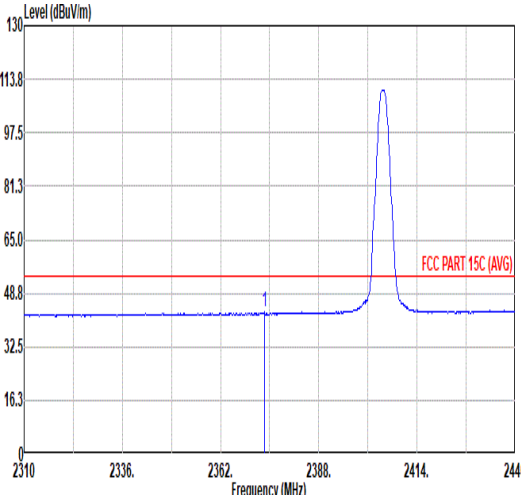
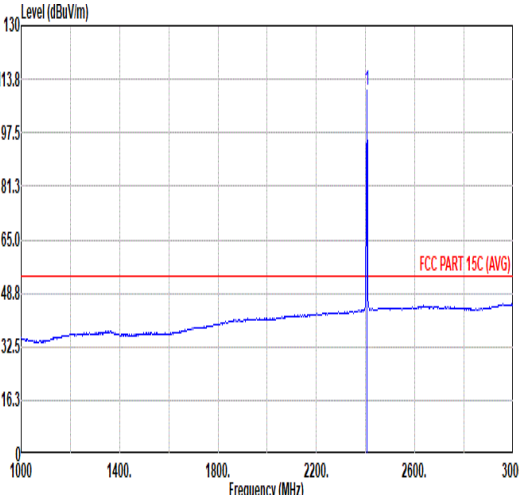


Mode	1																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Zigbee_CH11_2405MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2331.71</td><td>53.89</td><td>74.00</td><td>-20.11</td><td>38.74</td><td>31.90</td><td>7.96</td><td>30.71</td><td>6.00</td><td>300</td><td>290</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2331.71	53.89	74.00	-20.11	38.74	31.90	7.96	30.71	6.00	300	290	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>113.16</td><td>-----</td><td>-----</td><td>97.55</td><td>32.21</td><td>8.08</td><td>30.68</td><td>6.00</td><td>300</td><td>290</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	113.16	-----	-----	97.55	32.21	8.08	30.68	6.00	300	290	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2331.71	53.89	74.00	-20.11	38.74	31.90	7.96	30.71	6.00	300	290	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2405.00	113.16	-----	-----	97.55	32.21	8.08	30.68	6.00	300	290	PEAK																																																																																								
Avg																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2373.70</td><td>42.97</td><td>54.00</td><td>-11.03</td><td>27.59</td><td>32.04</td><td>8.03</td><td>30.69</td><td>6.00</td><td>300</td><td>290</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2373.70	42.97	54.00	-11.03	27.59	32.04	8.03	30.69	6.00	300	290	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2405.00</td><td>110.43</td><td>-----</td><td>-----</td><td>94.82</td><td>32.21</td><td>8.08</td><td>30.68</td><td>6.00</td><td>300</td><td>290</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	110.43	-----	-----	94.82	32.21	8.08	30.68	6.00	300	290	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2373.70	42.97	54.00	-11.03	27.59	32.04	8.03	30.69	6.00	300	290	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2405.00	110.43	-----	-----	94.82	32.21	8.08	30.68	6.00	300	290	AVERAGE																																																																																								

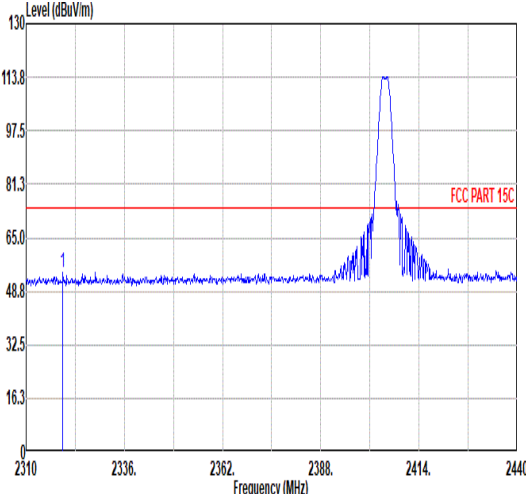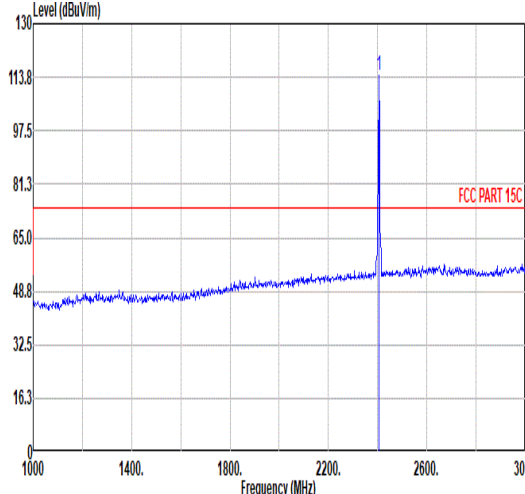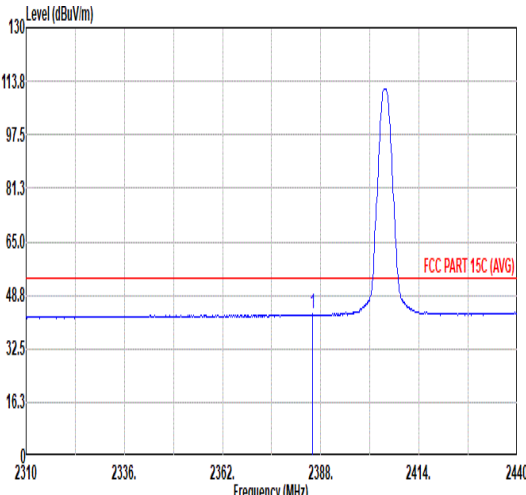
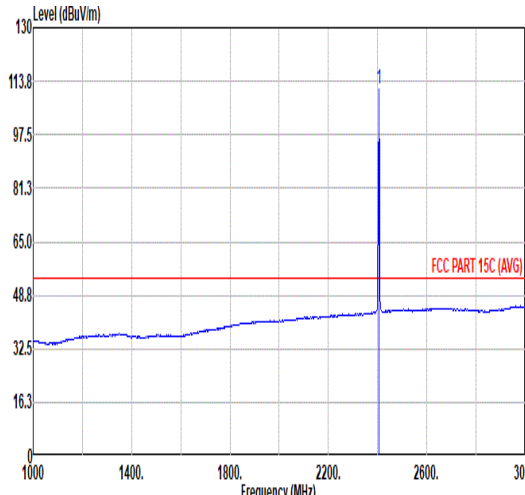


Mode	1																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_Zigbee_CH11_2405MHz																																																																																																		
ANT	2																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2319.75</td><td>54.38</td><td>74.00</td><td>-19.62</td><td>39.26</td><td>31.90</td><td>7.94</td><td>30.72</td><td>6.00</td><td>333</td><td>251</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2319.75	54.38	74.00	-19.62	39.26	31.90	7.94	30.72	6.00	333	251	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>114.11</td><td>-----</td><td>-----</td><td>98.50</td><td>32.21</td><td>8.08</td><td>30.68</td><td>6.00</td><td>333</td><td>251</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	114.11	-----	-----	98.50	32.21	8.08	30.68	6.00	333	251
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2319.75	54.38	74.00	-19.62	39.26	31.90	7.94	30.72	6.00	333	251	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2405.00	114.11	-----	-----	98.50	32.21	8.08	30.68	6.00	333	251	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.79</td><td>42.93</td><td>54.00</td><td>-11.07</td><td>27.46</td><td>32.11</td><td>8.05</td><td>30.69</td><td>6.00</td><td>333</td><td>251</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.79	42.93	54.00	-11.07	27.46	32.11	8.05	30.69	6.00	333	251	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>111.50</td><td>-----</td><td>-----</td><td>95.89</td><td>32.21</td><td>8.08</td><td>30.68</td><td>6.00</td><td>333</td><td>251</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	111.50	-----	-----	95.89	32.21	8.08	30.68	6.00	333	251
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2385.79	42.93	54.00	-11.07	27.46	32.11	8.05	30.69	6.00	333	251	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2405.00	111.50	-----	-----	95.89	32.21	8.08	30.68	6.00	333	251	AVERAGE																																																																																							



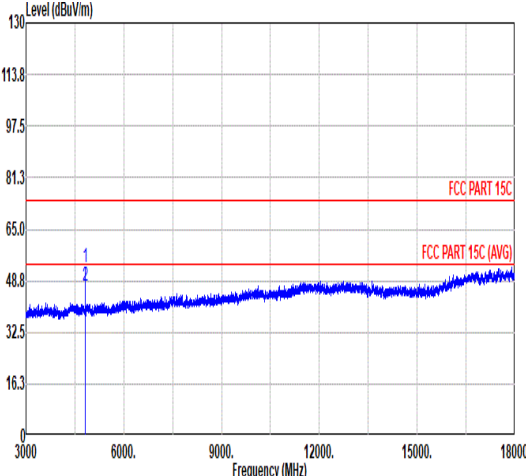
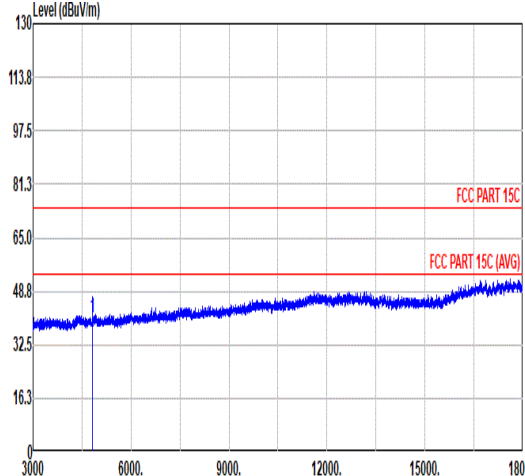


Mode	1																																																																		
	Harmonic																																																																		
	2400-2483.5_Zigbee_CH11_2405MHz																																																																		
ANT	2																																																																		
Pol.	Horizontal																																																																		
Peak Avg																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4810.00</td><td>52.92</td><td>74.00</td><td>-21.08</td><td>72.54</td><td>34.12</td><td>11.55</td><td>65.29</td><td>0.00</td><td>400</td><td>173 PEAK</td></tr><tr><td>2</td><td>4810.00</td><td>47.26</td><td>54.00</td><td>-6.74</td><td>66.87</td><td>34.12</td><td>11.55</td><td>65.28</td><td>0.00</td><td>400</td><td>173 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4810.00	52.92	74.00	-21.08	72.54	34.12	11.55	65.29	0.00	400	173 PEAK	2	4810.00	47.26	54.00	-6.74	66.87	34.12	11.55	65.28	0.00	400	173 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																									
1	4810.00	52.92	74.00	-21.08	72.54	34.12	11.55	65.29	0.00	400	173 PEAK																																																								
2	4810.00	47.26	54.00	-6.74	66.87	34.12	11.55	65.28	0.00	400	173 AVERAGE																																																								
																																																																			
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4810.00</td><td>40.50</td><td>74.00</td><td>-33.50</td><td>60.12</td><td>34.12</td><td>11.55</td><td>65.29</td><td>0.00</td><td>--</td><td>-- PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4810.00	40.50	74.00	-33.50	60.12	34.12	11.55	65.29	0.00	--	-- PEAK													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																									
1	4810.00	40.50	74.00	-33.50	60.12	34.12	11.55	65.29	0.00	--	-- PEAK																																																								



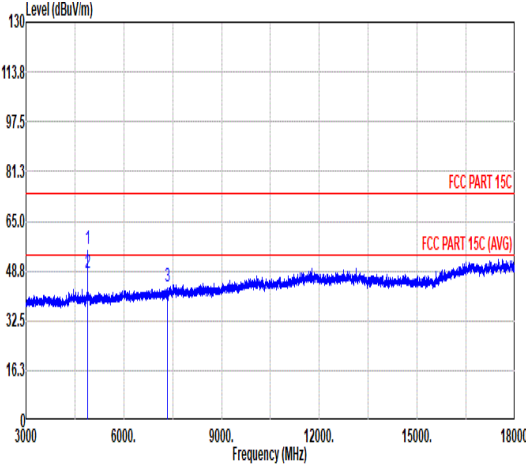
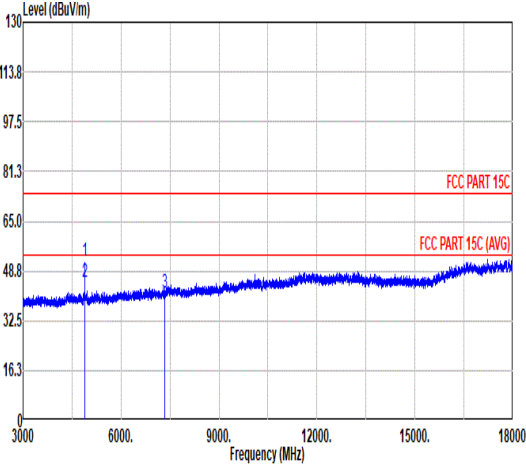


Mode	2																																																																																																																																																							
	Harmonic																																																																																																																																																							
	2400-2483.5_Zigbee_CH19_2445MHz																																																																																																																																																							
ANT	2																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																	
Peak Avg																																																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4890.00</td><td>55.97</td><td>74.00</td><td>-18.03</td><td>75.42</td><td>34.12</td><td>11.71</td><td>65.28</td><td>0.00</td><td>367</td><td>172</td><td>PEAK</td></tr><tr><td>2</td><td>4890.00</td><td>48.27</td><td>54.00</td><td>-5.73</td><td>67.72</td><td>34.12</td><td>11.71</td><td>65.28</td><td>0.00</td><td>367</td><td>172</td><td>AVERAGE</td></tr><tr><td>3</td><td>7335.00</td><td>43.63</td><td>74.00</td><td>-30.37</td><td>60.88</td><td>35.73</td><td>14.51</td><td>67.49</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4890.00	55.97	74.00	-18.03	75.42	34.12	11.71	65.28	0.00	367	172	PEAK	2	4890.00	48.27	54.00	-5.73	67.72	34.12	11.71	65.28	0.00	367	172	AVERAGE	3	7335.00	43.63	74.00	-30.37	60.88	35.73	14.51	67.49	0.00	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4890.00</td><td>52.23</td><td>74.00</td><td>-21.77</td><td>71.68</td><td>34.12</td><td>11.71</td><td>65.28</td><td>0.00</td><td>336</td><td>221</td><td>PEAK</td></tr><tr><td>2</td><td>4890.00</td><td>44.96</td><td>54.00</td><td>-9.04</td><td>64.41</td><td>34.12</td><td>11.71</td><td>65.28</td><td>0.00</td><td>336</td><td>221</td><td>AVERAGE</td></tr><tr><td>3</td><td>7335.00</td><td>41.79</td><td>74.00</td><td>-32.21</td><td>59.04</td><td>35.73</td><td>14.51</td><td>67.49</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4890.00	52.23	74.00	-21.77	71.68	34.12	11.71	65.28	0.00	336	221	PEAK	2	4890.00	44.96	54.00	-9.04	64.41	34.12	11.71	65.28	0.00	336	221	AVERAGE	3	7335.00	41.79	74.00	-32.21	59.04	35.73	14.51	67.49	0.00	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1	4890.00	55.97	74.00	-18.03	75.42	34.12	11.71	65.28	0.00	367	172	PEAK																																																																																																																																												
2	4890.00	48.27	54.00	-5.73	67.72	34.12	11.71	65.28	0.00	367	172	AVERAGE																																																																																																																																												
3	7335.00	43.63	74.00	-30.37	60.88	35.73	14.51	67.49	0.00	--	--	PEAK																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1	4890.00	52.23	74.00	-21.77	71.68	34.12	11.71	65.28	0.00	336	221	PEAK																																																																																																																																												
2	4890.00	44.96	54.00	-9.04	64.41	34.12	11.71	65.28	0.00	336	221	AVERAGE																																																																																																																																												
3	7335.00	41.79	74.00	-32.21	59.04	35.73	14.51	67.49	0.00	--	--	PEAK																																																																																																																																												

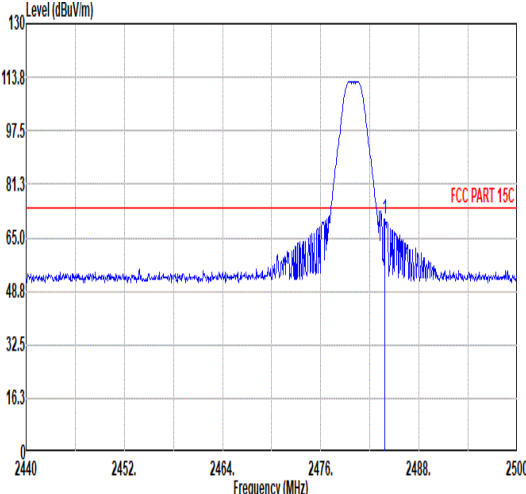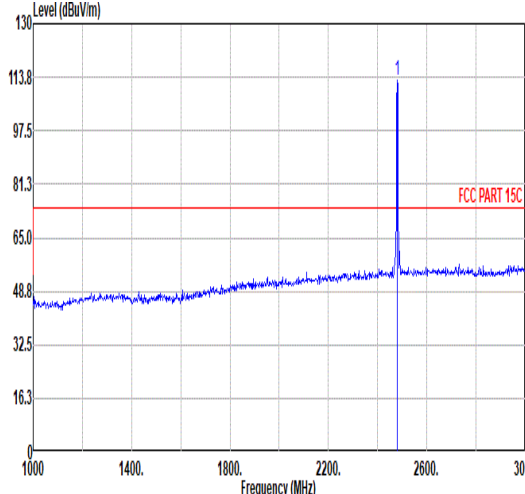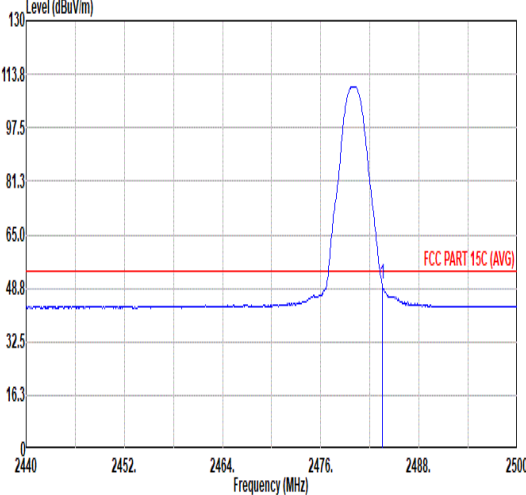
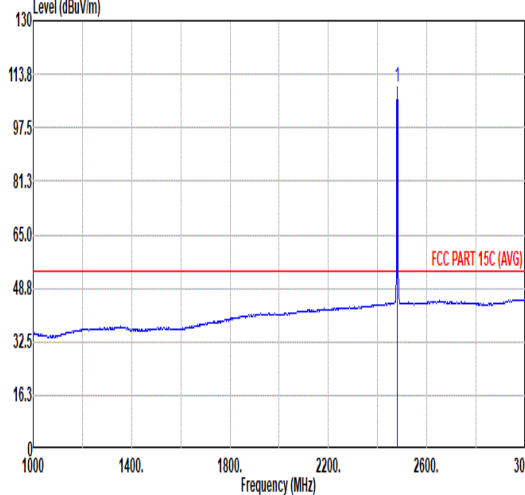



Mode	3																																																																																																						
	Band Edge																																																																																																						
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																						
ANT	2																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																
Peak																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.00</td><td>70.75</td><td>74.00</td><td>-3.25</td><td>54.00</td><td>32.37</td><td>8.23</td><td>30.65</td><td>6.00</td><td>336</td><td>291</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.00	70.75	74.00	-3.25	54.00	32.37	8.23	30.65	6.00	336	291	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>112.69</td><td>-----</td><td>-----</td><td>96.76</td><td>32.36</td><td>8.23</td><td>30.66</td><td>6.00</td><td>336</td><td>291</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	112.69	-----	-----	96.76	32.36	8.23	30.66	6.00	336	291
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	2483.00	70.75	74.00	-3.25	54.00	32.37	8.23	30.65	6.00	336	291	PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	2480.00	112.69	-----	-----	96.76	32.36	8.23	30.66	6.00	336	291	PEAK																																																																																											
Avg																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>50.09</td><td>54.00</td><td>-3.91</td><td>34.14</td><td>32.37</td><td>8.23</td><td>30.65</td><td>6.00</td><td>336</td><td>291</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	50.09	54.00	-3.91	34.14	32.37	8.23	30.65	6.00	336	291	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>110.02</td><td>-----</td><td>-----</td><td>94.09</td><td>32.36</td><td>8.23</td><td>30.66</td><td>6.00</td><td>336</td><td>291</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2480.00	110.02	-----	-----	94.09	32.36	8.23	30.66	6.00	336	291
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	2483.50	50.09	54.00	-3.91	34.14	32.37	8.23	30.65	6.00	336	291	AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	2480.00	110.02	-----	-----	94.09	32.36	8.23	30.66	6.00	336	291	AVERAGE																																																																																											

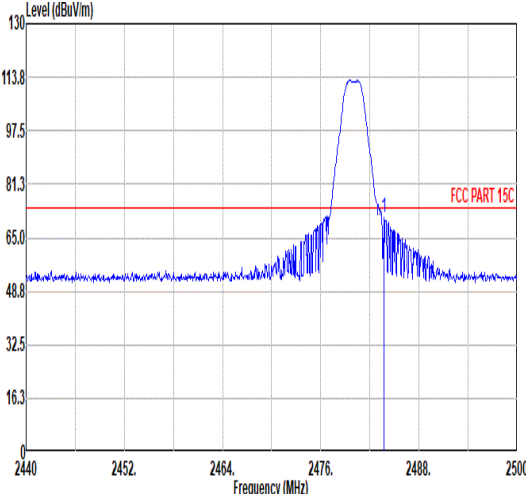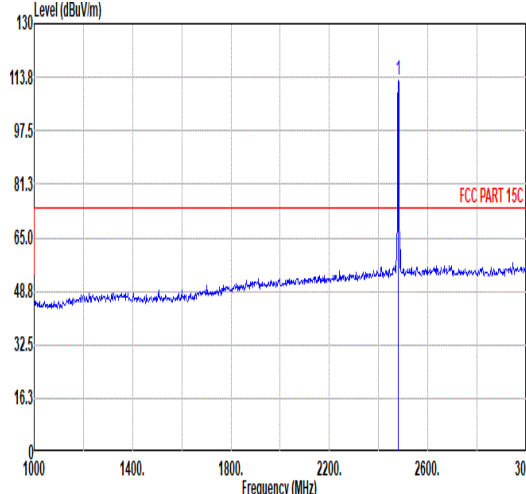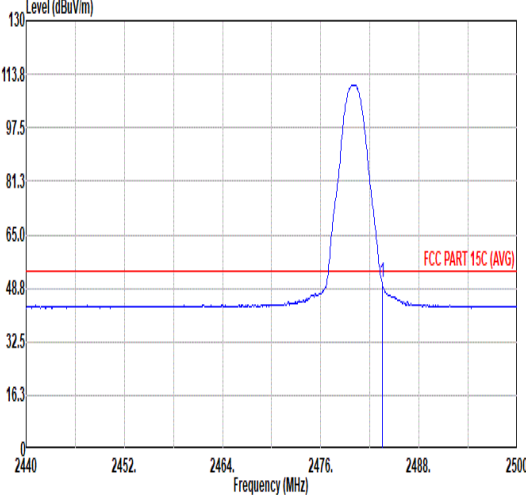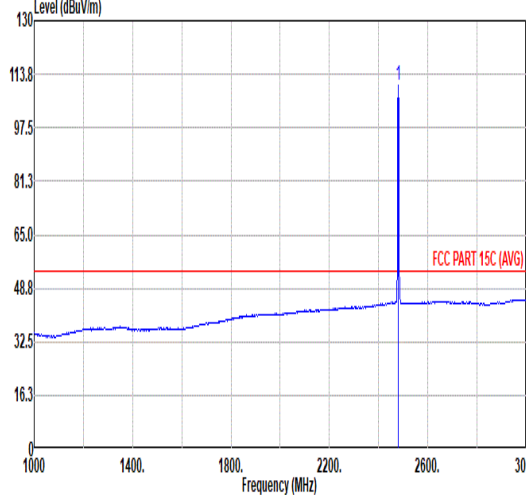





Mode	3																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																														
ANT	2																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>70.90</td><td>74.00</td><td>-3.10</td><td>54.95</td><td>32.37</td><td>8.23</td><td>30.65</td><td>6.00</td><td>300</td><td>243</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	70.90	74.00	-3.10	54.95	32.37	8.23	30.65	6.00	300	243	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>113.07</td><td>-----</td><td>-----</td><td>97.14</td><td>32.36</td><td>8.23</td><td>30.66</td><td>6.00</td><td>300</td><td>243</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	113.07	-----	-----	97.14	32.36	8.23	30.66	6.00	300	243
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.68	70.90	74.00	-3.10	54.95	32.37	8.23	30.65	6.00	300	243	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2480.00	113.07	-----	-----	97.14	32.36	8.23	30.66	6.00	300	243	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>50.29</td><td>54.00</td><td>-3.71</td><td>34.34</td><td>32.37</td><td>8.23</td><td>30.65</td><td>6.00</td><td>300</td><td>243</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	50.29	54.00	-3.71	34.34	32.37	8.23	30.65	6.00	300	243	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>110.38</td><td>-----</td><td>-----</td><td>94.45</td><td>32.36</td><td>8.23</td><td>30.66</td><td>6.00</td><td>300</td><td>243</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	110.38	-----	-----	94.45	32.36	8.23	30.66	6.00	300	243
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.50	50.29	54.00	-3.71	34.34	32.37	8.23	30.65	6.00	300	243	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2480.00	110.38	-----	-----	94.45	32.36	8.23	30.66	6.00	300	243	AVERAGE																																																																																																			

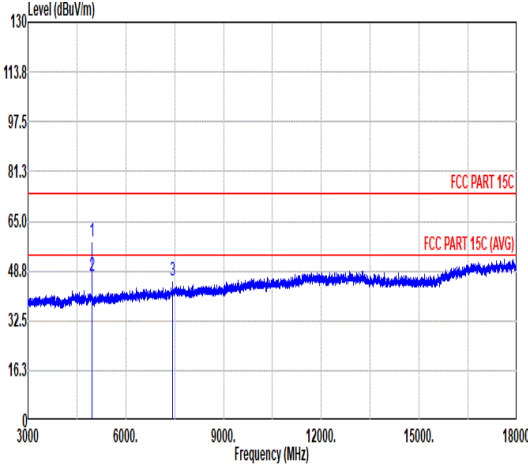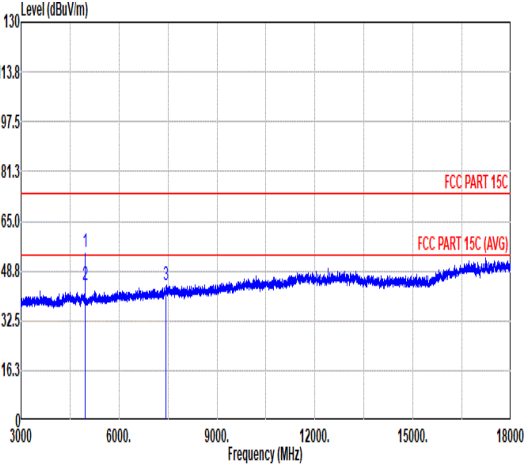





Mode	3																																																																																																																																																							
	Harmonic																																																																																																																																																							
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																																																																							
ANT	2																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																	
Peak Avg																																																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>58.38</td><td>74.00</td><td>-15.62</td><td>78.24</td><td>33.94</td><td>11.85</td><td>65.65</td><td>0.00</td><td>395</td><td>176</td><td>PEAK</td></tr><tr><td>2</td><td>4960.00</td><td>47.30</td><td>54.00</td><td>-6.70</td><td>67.16</td><td>33.94</td><td>11.85</td><td>65.65</td><td>0.00</td><td>395</td><td>176</td><td>AVERAGE</td></tr><tr><td>3</td><td>7440.00</td><td>45.72</td><td>74.00</td><td>-28.28</td><td>62.13</td><td>35.00</td><td>14.63</td><td>66.84</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	58.38	74.00	-15.62	78.24	33.94	11.85	65.65	0.00	395	176	PEAK	2	4960.00	47.30	54.00	-6.70	67.16	33.94	11.85	65.65	0.00	395	176	AVERAGE	3	7440.00	45.72	74.00	-28.28	62.13	35.00	14.63	66.84	0.00	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>54.77</td><td>74.00</td><td>-19.23</td><td>74.63</td><td>33.94</td><td>11.85</td><td>65.65</td><td>0.00</td><td>284</td><td>222</td><td>PEAK</td></tr><tr><td>2</td><td>4960.00</td><td>44.23</td><td>54.00</td><td>-9.77</td><td>64.09</td><td>33.94</td><td>11.85</td><td>65.65</td><td>0.00</td><td>284</td><td>222</td><td>AVERAGE</td></tr><tr><td>3</td><td>7440.00</td><td>44.26</td><td>74.00</td><td>-29.74</td><td>60.67</td><td>35.00</td><td>14.63</td><td>66.84</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	54.77	74.00	-19.23	74.63	33.94	11.85	65.65	0.00	284	222	PEAK	2	4960.00	44.23	54.00	-9.77	64.09	33.94	11.85	65.65	0.00	284	222	AVERAGE	3	7440.00	44.26	74.00	-29.74	60.67	35.00	14.63	66.84	0.00	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																															
	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	4960.00	58.38	74.00	-15.62	78.24	33.94	11.85	65.65	0.00	395	176	PEAK																																																																																																																																												
2	4960.00	47.30	54.00	-6.70	67.16	33.94	11.85	65.65	0.00	395	176	AVERAGE																																																																																																																																												
3	7440.00	45.72	74.00	-28.28	62.13	35.00	14.63	66.84	0.00	--	--	PEAK																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	4960.00	54.77	74.00	-19.23	74.63	33.94	11.85	65.65	0.00	284	222	PEAK																																																																																																																																												
2	4960.00	44.23	54.00	-9.77	64.09	33.94	11.85	65.65	0.00	284	222	AVERAGE																																																																																																																																												
3	7440.00	44.26	74.00	-29.74	60.67	35.00	14.63	66.84	0.00	--	--	PEAK																																																																																																																																												

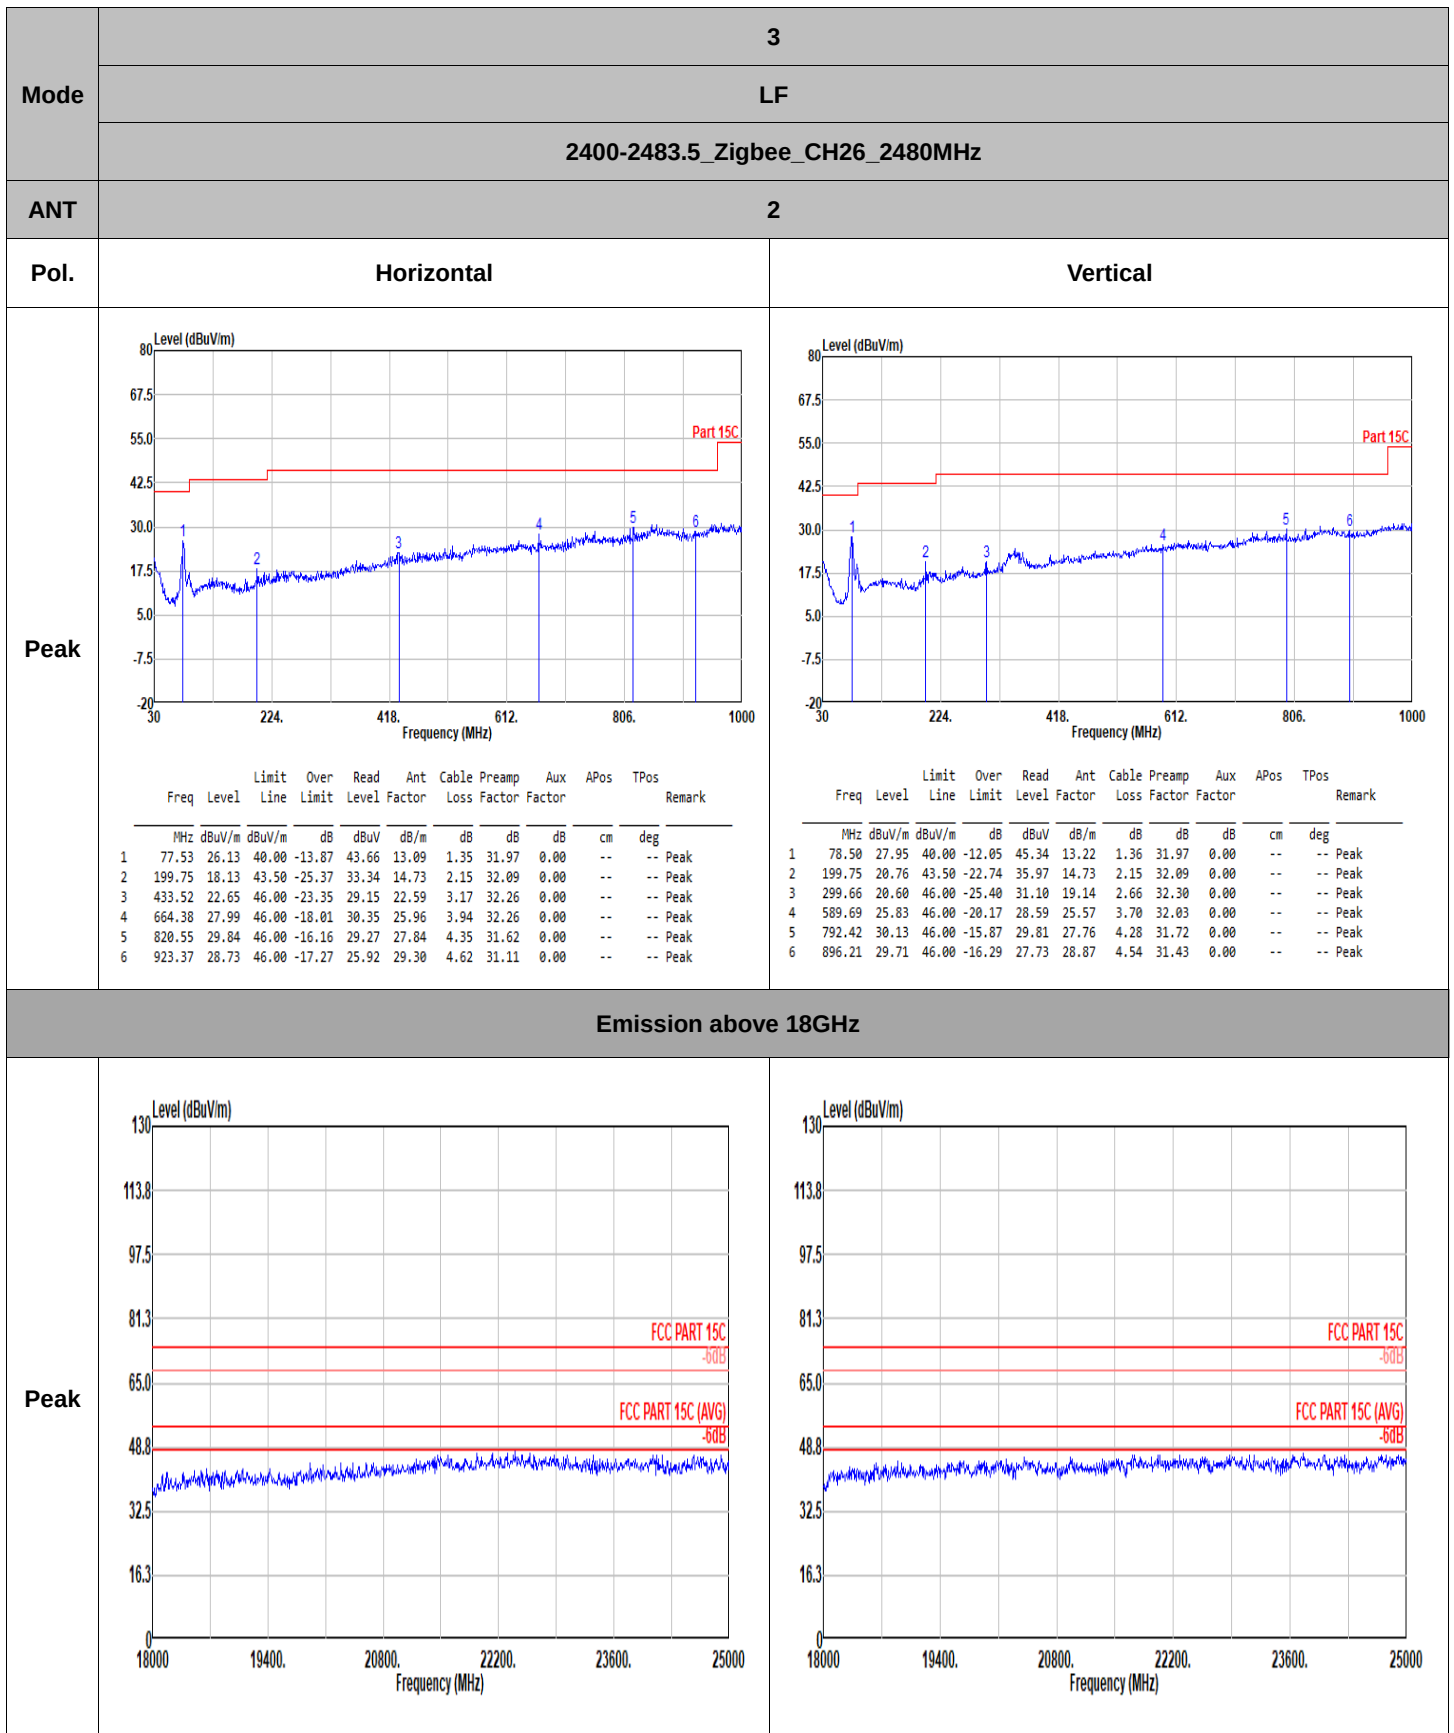

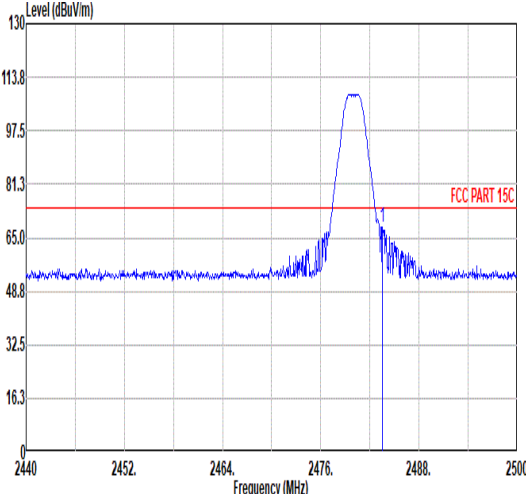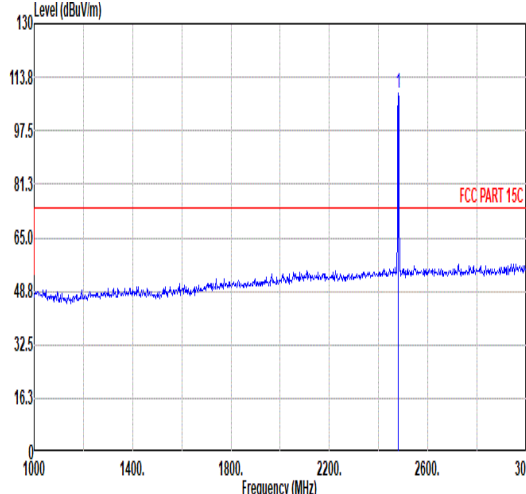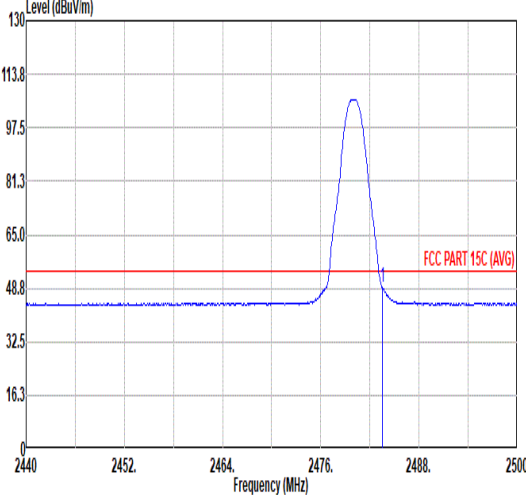
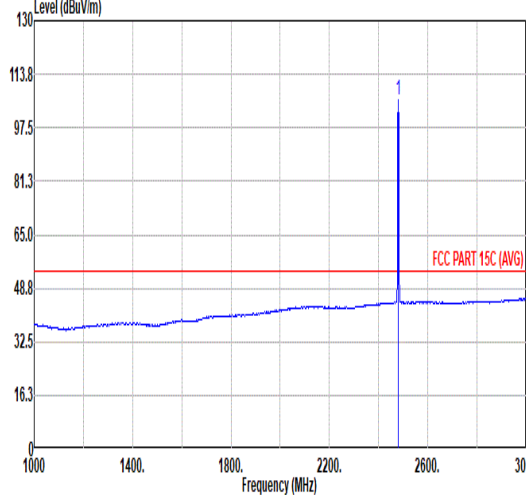


Mode	4																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																			
ANT	2																																																																																																			
Pol.	Horizontal					Fundamental																																																																																														
Peak																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>68.29</td><td>74.00</td><td>-5.71</td><td>55.37</td><td>32.50</td><td>6.83</td><td>32.41</td><td>6.00</td><td>243</td><td>244 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	68.29	74.00	-5.71	55.37	32.50	6.83	32.41	6.00	243	244 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>108.74</td><td>-----</td><td>-----</td><td>95.82</td><td>32.50</td><td>6.83</td><td>32.41</td><td>6.00</td><td>243</td><td>244 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	108.74	-----	-----	95.82	32.50	6.83	32.41	6.00	243	244 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.56	68.29	74.00	-5.71	55.37	32.50	6.83	32.41	6.00	243	244 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	108.74	-----	-----	95.82	32.50	6.83	32.41	6.00	243	244 PEAK																																																																																									
Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>49.13</td><td>54.00</td><td>-4.87</td><td>36.21</td><td>32.50</td><td>6.83</td><td>32.41</td><td>6.00</td><td>243</td><td>244 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	49.13	54.00	-4.87	36.21	32.50	6.83	32.41	6.00	243	244 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>106.12</td><td>-----</td><td>-----</td><td>93.20</td><td>32.50</td><td>6.83</td><td>32.41</td><td>6.00</td><td>243</td><td>244 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	106.12	-----	-----	93.20	32.50	6.83	32.41	6.00	243	244 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.50	49.13	54.00	-4.87	36.21	32.50	6.83	32.41	6.00	243	244 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2480.00	106.12	-----	-----	93.20	32.50	6.83	32.41	6.00	243	244 AVERAGE																																																																																									

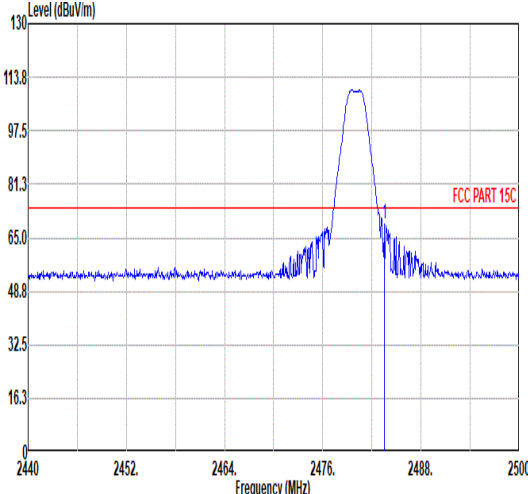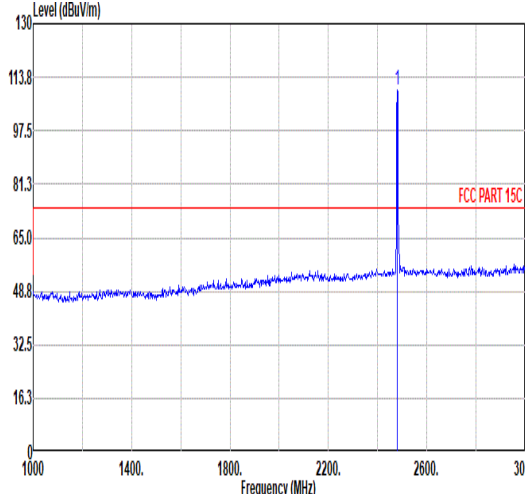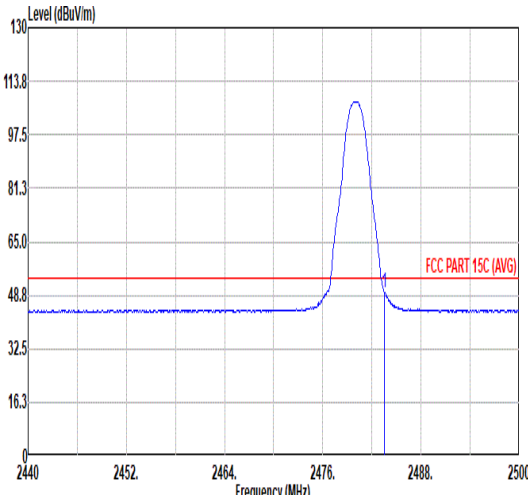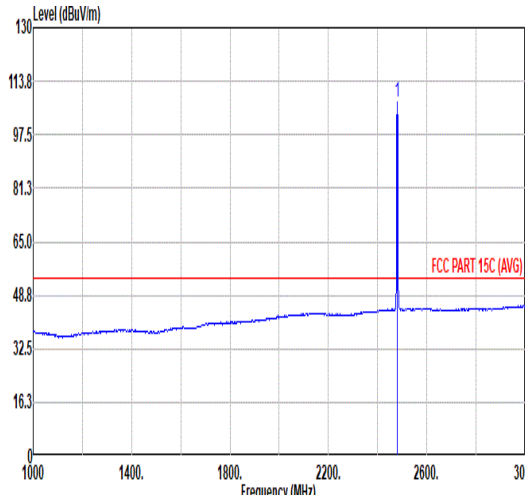

Mode	4																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																				
ANT	2																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>69.23</td><td>74.00</td><td>-4.77</td><td>56.31</td><td>32.50</td><td>6.83</td><td>32.41</td><td>6.00</td><td>331</td><td>266 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	69.23	74.00	-4.77	56.31	32.50	6.83	32.41	6.00	331	266 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>110.11</td><td>-----</td><td>-----</td><td>97.19</td><td>32.50</td><td>6.83</td><td>32.41</td><td>6.00</td><td>331</td><td>266 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	110.11	-----	-----	97.19	32.50	6.83	32.41	6.00	331
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2483.56	69.23	74.00	-4.77	56.31	32.50	6.83	32.41	6.00	331	266 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2480.00	110.11	-----	-----	97.19	32.50	6.83	32.41	6.00	331	266 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>49.73</td><td>54.00</td><td>-4.27</td><td>36.81</td><td>32.50</td><td>6.83</td><td>32.41</td><td>6.00</td><td>331</td><td>266 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	49.73	54.00	-4.27	36.81	32.50	6.83	32.41	6.00	331	266 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>107.53</td><td>-----</td><td>-----</td><td>94.61</td><td>32.50</td><td>6.83</td><td>32.41</td><td>6.00</td><td>331</td><td>266 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	107.53	-----	-----	94.61	32.50	6.83	32.41	6.00	331
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2483.50	49.73	54.00	-4.27	36.81	32.50	6.83	32.41	6.00	331	266 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2480.00	107.53	-----	-----	94.61	32.50	6.83	32.41	6.00	331	266 AVERAGE																																																																																										

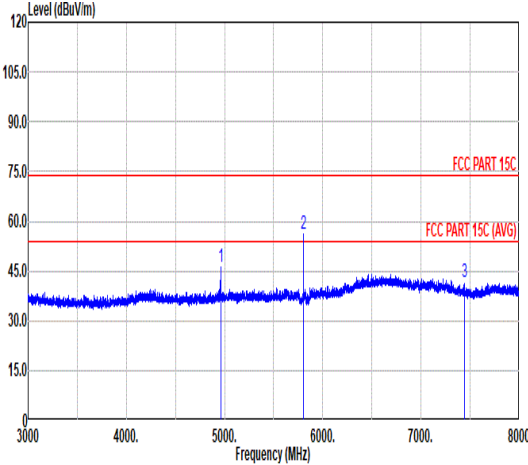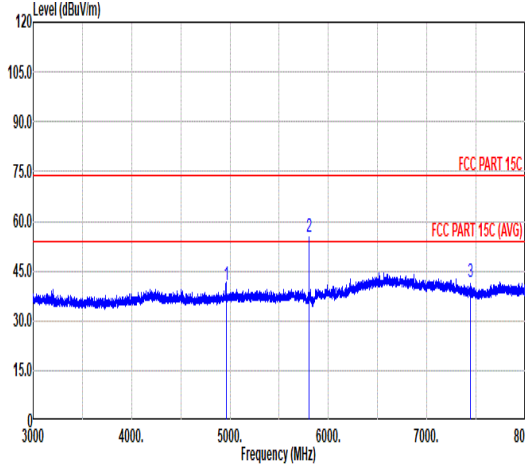



Mode	4																																																																															
	Harmonic																																																																															
	2400-2483.5_Zigbee_CH26_2480MHz																																																																															
ANT	2																																																																															
Pol.	Horizontal																																																																															
Peak Avg																																																																																
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>46.07</td><td>74.00</td><td>-27.93</td><td>68.08</td><td>34.04</td><td>9.70</td><td>65.75</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>5800.00</td><td>56.15</td><td>74.00</td><td>-17.85</td><td>77.36</td><td>34.70</td><td>10.50</td><td>66.41</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>41.68</td><td>74.00</td><td>-32.32</td><td>59.51</td><td>35.78</td><td>11.96</td><td>65.57</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	46.07	74.00	-27.93	68.08	34.04	9.70	65.75	0.00	---	Peak	2	5800.00	56.15	74.00	-17.85	77.36	34.70	10.50	66.41	0.00	---	Peak	3	7440.00	41.68	74.00	-32.32	59.51	35.78	11.96	65.57	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																						
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																					
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	4960.00	46.07	74.00	-27.93	68.08	34.04	9.70	65.75	0.00	---	Peak																																																																					
2	5800.00	56.15	74.00	-17.85	77.36	34.70	10.50	66.41	0.00	---	Peak																																																																					
3	7440.00	41.68	74.00	-32.32	59.51	35.78	11.96	65.57	0.00	---	PEAK																																																																					
Vertical																																																																																
																																																																																
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.79</td><td>74.00</td><td>-33.21</td><td>62.00</td><td>34.04</td><td>9.70</td><td>65.75</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>5800.00</td><td>55.16</td><td>74.00</td><td>-18.84</td><td>76.37</td><td>34.70</td><td>10.50</td><td>66.41</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>41.61</td><td>74.00</td><td>-32.39</td><td>59.44</td><td>35.78</td><td>11.96</td><td>65.57</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	40.79	74.00	-33.21	62.00	34.04	9.70	65.75	0.00	---	PEAK	2	5800.00	55.16	74.00	-18.84	76.37	34.70	10.50	66.41	0.00	---	Peak	3	7440.00	41.61	74.00	-32.39	59.44	35.78	11.96	65.57	0.00	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	4960.00	40.79	74.00	-33.21	62.00	34.04	9.70	65.75	0.00	---	PEAK																																																																					
2	5800.00	55.16	74.00	-18.84	76.37	34.70	10.50	66.41	0.00	---	Peak																																																																					
3	7440.00	41.61	74.00	-32.39	59.44	35.78	11.96	65.57	0.00	---	PEAK																																																																					

Note: #2 of Horizontal and #2 of Vertical are the fundamental of Low Power Wideband Radio in Wi-Fi 5GHz, the levels meet for Peak/AV fundamental limit.





Mode	4																																																																																																																																																																								
	Band Edge																																																																																																																																																																								
	Low Power Wideband Radio in Wi-Fi 5GHz_5800MHz																																																																																																																																																																								
ANT	3																																																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																																																		
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5715.20</td><td>54.53</td><td>74.00</td><td>-19.47</td><td>41.60</td><td>34.50</td><td>10.42</td><td>31.99</td><td>0.00</td><td>300</td><td>165</td><td>PEAK</td></tr><tr><td>2</td><td>5715.20</td><td>35.51</td><td>54.00</td><td>-18.49</td><td>22.58</td><td>34.50</td><td>10.42</td><td>31.99</td><td>0.00</td><td>300</td><td>165</td><td>Average</td></tr><tr><td>3</td><td>5940.80</td><td>55.35</td><td>74.00</td><td>-18.65</td><td>41.56</td><td>35.08</td><td>10.57</td><td>31.86</td><td>0.00</td><td>300</td><td>165</td><td>PEAK</td></tr><tr><td>4</td><td>5940.80</td><td>36.33</td><td>54.00</td><td>-17.67</td><td>22.54</td><td>35.08</td><td>10.57</td><td>31.86</td><td>0.00</td><td>300</td><td>165</td><td>Average</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5715.20	54.53	74.00	-19.47	41.60	34.50	10.42	31.99	0.00	300	165	PEAK	2	5715.20	35.51	54.00	-18.49	22.58	34.50	10.42	31.99	0.00	300	165	Average	3	5940.80	55.35	74.00	-18.65	41.56	35.08	10.57	31.86	0.00	300	165	PEAK	4	5940.80	36.33	54.00	-17.67	22.54	35.08	10.57	31.86	0.00	300	165	Average	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2482.00</td><td>83.98</td><td>-----</td><td>-----</td><td>77.06</td><td>32.50</td><td>6.83</td><td>32.41</td><td>0.00</td><td>300</td><td>165</td><td>Peak</td></tr><tr><td>2</td><td>5800.00</td><td>104.29</td><td>114.00</td><td>-9.71</td><td>90.84</td><td>34.70</td><td>10.50</td><td>31.75</td><td>0.00</td><td>300</td><td>165</td><td>PEAK</td></tr><tr><td>3</td><td>5800.00</td><td>85.27</td><td>94.00</td><td>-8.73</td><td>71.82</td><td>34.70</td><td>10.50</td><td>31.75</td><td>0.00</td><td>300</td><td>165</td><td>Average</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2482.00	83.98	-----	-----	77.06	32.50	6.83	32.41	0.00	300	165	Peak	2	5800.00	104.29	114.00	-9.71	90.84	34.70	10.50	31.75	0.00	300	165	PEAK	3	5800.00	85.27	94.00	-8.73	71.82	34.70	10.50	31.75	0.00	300	165	Average
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	5715.20	54.53	74.00	-19.47	41.60	34.50	10.42	31.99	0.00	300	165	PEAK																																																																																																																																																													
2	5715.20	35.51	54.00	-18.49	22.58	34.50	10.42	31.99	0.00	300	165	Average																																																																																																																																																													
3	5940.80	55.35	74.00	-18.65	41.56	35.08	10.57	31.86	0.00	300	165	PEAK																																																																																																																																																													
4	5940.80	36.33	54.00	-17.67	22.54	35.08	10.57	31.86	0.00	300	165	Average																																																																																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	2482.00	83.98	-----	-----	77.06	32.50	6.83	32.41	0.00	300	165	Peak																																																																																																																																																													
2	5800.00	104.29	114.00	-9.71	90.84	34.70	10.50	31.75	0.00	300	165	PEAK																																																																																																																																																													
3	5800.00	85.27	94.00	-8.73	71.82	34.70	10.50	31.75	0.00	300	165	Average																																																																																																																																																													

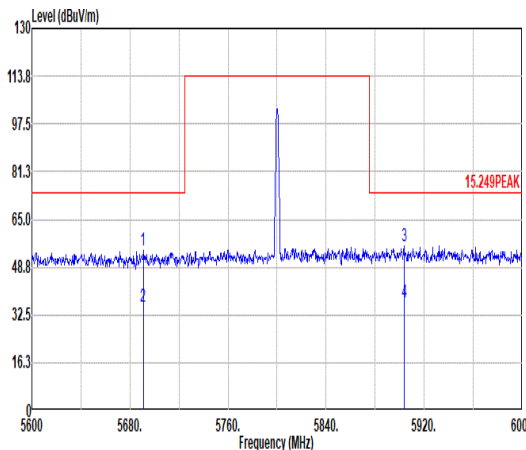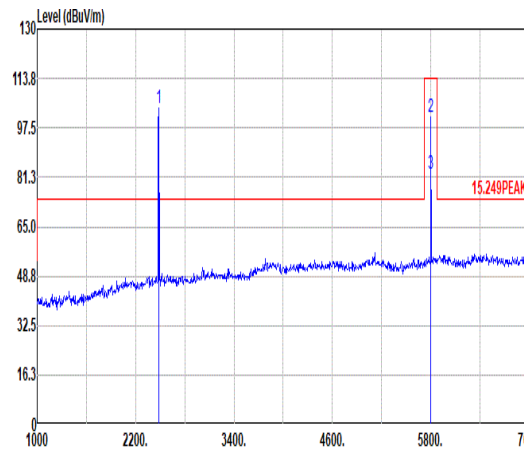

Mode	4																																																																																															
	Band Edge																																																																																															
	Low Power Wideband Radio in Wi-Fi 5GHz_5800MHz																																																																																															
ANT	3																																																																																															
Pol.	Vertical																																																																																															
Peak																																																																																																
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5690.00</td><td>54.29</td><td>74.00</td><td>-19.71</td><td>41.37</td><td>34.52</td><td>10.40</td><td>32.00</td><td>0.00</td><td>253</td><td>226</td><td>PEAK</td></tr><tr><td>2</td><td>5690.00</td><td>35.27</td><td>54.00</td><td>-18.73</td><td>22.35</td><td>34.52</td><td>10.40</td><td>32.00</td><td>0.00</td><td>253</td><td>226</td><td>Average</td></tr><tr><td>3</td><td>5903.60</td><td>56.01</td><td>74.00</td><td>-17.99</td><td>42.36</td><td>35.01</td><td>10.55</td><td>31.91</td><td>0.00</td><td>253</td><td>226</td><td>PEAK</td></tr><tr><td>4</td><td>5903.60</td><td>36.99</td><td>54.00</td><td>-17.01</td><td>23.34</td><td>35.01</td><td>10.55</td><td>31.91</td><td>0.00</td><td>253</td><td>226</td><td>Average</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5690.00	54.29	74.00	-19.71	41.37	34.52	10.40	32.00	0.00	253	226	PEAK	2	5690.00	35.27	54.00	-18.73	22.35	34.52	10.40	32.00	0.00	253	226	Average	3	5903.60	56.01	74.00	-17.99	42.36	35.01	10.55	31.91	0.00	253	226	PEAK	4	5903.60	36.99	54.00	-17.01	23.34	35.01	10.55	31.91	0.00	253	226	Average
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																					
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5690.00	54.29	74.00	-19.71	41.37	34.52	10.40	32.00	0.00	253	226	PEAK																																																																																				
2	5690.00	35.27	54.00	-18.73	22.35	34.52	10.40	32.00	0.00	253	226	Average																																																																																				
3	5903.60	56.01	74.00	-17.99	42.36	35.01	10.55	31.91	0.00	253	226	PEAK																																																																																				
4	5903.60	36.99	54.00	-17.01	23.34	35.01	10.55	31.91	0.00	253	226	Average																																																																																				
Fundamental																																																																																																
Peak																																																																																																
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2482.00</td><td>104.22</td><td>-----</td><td>-----</td><td>97.30</td><td>32.50</td><td>6.83</td><td>32.41</td><td>0.00</td><td>253</td><td>226</td><td>Peak</td></tr><tr><td>2</td><td>5800.00</td><td>101.26</td><td>114.00</td><td>-12.74</td><td>87.81</td><td>34.70</td><td>10.50</td><td>31.75</td><td>0.00</td><td>253</td><td>226</td><td>Peak</td></tr><tr><td>3</td><td>5800.00</td><td>82.24</td><td>94.00</td><td>-11.76</td><td>68.79</td><td>34.70</td><td>10.50</td><td>31.75</td><td>0.00</td><td>253</td><td>226</td><td>Average</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2482.00	104.22	-----	-----	97.30	32.50	6.83	32.41	0.00	253	226	Peak	2	5800.00	101.26	114.00	-12.74	87.81	34.70	10.50	31.75	0.00	253	226	Peak	3	5800.00	82.24	94.00	-11.76	68.79	34.70	10.50	31.75	0.00	253	226	Average													
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																					
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2482.00	104.22	-----	-----	97.30	32.50	6.83	32.41	0.00	253	226	Peak																																																																																				
2	5800.00	101.26	114.00	-12.74	87.81	34.70	10.50	31.75	0.00	253	226	Peak																																																																																				
3	5800.00	82.24	94.00	-11.76	68.79	34.70	10.50	31.75	0.00	253	226	Average																																																																																				

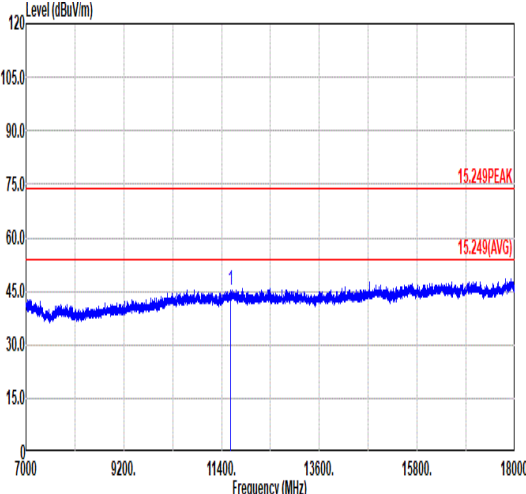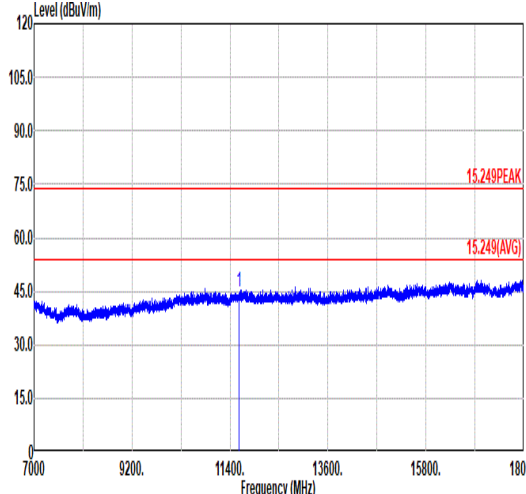

Mode	4																																																																																																									
	Harmonic																																																																																																									
	Low Power Wideband Radio in Wi-Fi 5GHz_5800MHz																																																																																																									
ANT	3																																																																																																									
Pol.	Horizontal						Vertical																																																																																																			
Peak Avg																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11600.00</td><td>45.25</td><td>74.00</td><td>-28.75</td><td>56.55</td><td>38.30</td><td>14.68</td><td>64.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11600.00	45.25	74.00	-28.75	56.55	38.30	14.68	64.28	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11600.00</td><td>44.86</td><td>74.00</td><td>-29.14</td><td>56.16</td><td>38.30</td><td>14.68</td><td>64.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11600.00	44.86	74.00	-29.14	56.16	38.30	14.68	64.28	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	11600.00	45.25	74.00	-28.75	56.55	38.30	14.68	64.28	0.00	---	---	PEAK																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	11600.00	44.86	74.00	-29.14	56.16	38.30	14.68	64.28	0.00	---	---	PEAK																																																																																														

Appendix D. Duty Cycle Plots

Mode	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Zigbee	57.71	1.048	0.954	1kHz

Zigbee mode

