

Appendix B LTE Band 41

1. Effective (Isotropic) Radiated Power Output Data

1.1 Test Result

1.1.1 B41_5MHz_EIRP

Band: 41 / Bandwidth: 5MHz / NTN								
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)		Verdict
		Size	Offset			Result	Limit	
QPSK	2498.5	1	0	23.11	-2.20	20.91	<=33.01	Pass
			13	23.23	-2.20	21.03	<=33.01	Pass
			24	23.17	-2.20	20.97	<=33.01	Pass
		12	0	22.24	-2.20	20.04	<=33.01	Pass
			6	22.25	-2.20	20.05	<=33.01	Pass
			13	22.22	-2.20	20.02	<=33.01	Pass
		25	0	22.18	-2.20	19.98	<=33.01	Pass
	2593	1	0	23.48	-2.20	21.28	<=33.01	Pass
			13	23.58	-2.20	21.38	<=33.01	Pass
			24	23.46	-2.20	21.26	<=33.01	Pass
		12	0	22.56	-2.20	20.36	<=33.01	Pass
			6	22.53	-2.20	20.33	<=33.01	Pass
			13	22.51	-2.20	20.31	<=33.01	Pass
		25	0	22.52	-2.20	20.32	<=33.01	Pass
	2687.5	1	0	23.26	-2.20	21.06	<=33.01	Pass
			13	23.37	-2.20	21.17	<=33.01	Pass
			24	23.23	-2.20	21.03	<=33.01	Pass
		12	0	22.24	-2.20	20.04	<=33.01	Pass
			6	22.25	-2.20	20.05	<=33.01	Pass
			13	22.34	-2.20	20.14	<=33.01	Pass
		25	0	22.22	-2.20	20.02	<=33.01	Pass
16QAM	2498.5	1	0	22.19	-2.20	19.99	<=33.01	Pass
			13	22.26	-2.20	20.06	<=33.01	Pass
			24	22.20	-2.20	20.00	<=33.01	Pass
		12	0	21.23	-2.20	19.03	<=33.01	Pass
			6	21.26	-2.20	19.06	<=33.01	Pass
			13	21.20	-2.20	19.00	<=33.01	Pass
		25	0	21.18	-2.20	18.98	<=33.01	Pass
	2593	1	0	22.59	-2.20	20.39	<=33.01	Pass
			13	22.54	-2.20	20.34	<=33.01	Pass
			24	22.39	-2.20	20.19	<=33.01	Pass
		12	0	21.53	-2.20	19.33	<=33.01	Pass
			6	21.59	-2.20	19.39	<=33.01	Pass
			13	21.61	-2.20	19.41	<=33.01	Pass
		25	0	21.50	-2.20	19.30	<=33.01	Pass
	2687.5	1	0	22.24	-2.20	20.04	<=33.01	Pass
			13	22.30	-2.20	20.10	<=33.01	Pass
			24	22.25	-2.20	20.05	<=33.01	Pass
		12	0	21.28	-2.20	19.08	<=33.01	Pass
			6	21.22	-2.20	19.02	<=33.01	Pass
			13	21.27	-2.20	19.07	<=33.01	Pass
		25	0	21.18	-2.20	18.98	<=33.01	Pass
64QAM	2498.5	1	0	21.00	-2.20	18.80	<=33.01	Pass
			13	20.90	-2.20	18.70	<=33.01	Pass
			24	20.87	-2.20	18.67	<=33.01	Pass
		12	0	19.95	-2.20	17.75	<=33.01	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

		25	6	19.94	-2.20	17.74	<=33.01	Pass
			13	19.89	-2.20	17.69	<=33.01	Pass
			0	19.93	-2.20	17.73	<=33.01	Pass
	2593	1	0	21.16	-2.20	18.96	<=33.01	Pass
			13	21.24	-2.20	19.04	<=33.01	Pass
			24	21.19	-2.20	18.99	<=33.01	Pass
		12	0	20.25	-2.20	18.05	<=33.01	Pass
			6	20.21	-2.20	18.01	<=33.01	Pass
			13	20.23	-2.20	18.03	<=33.01	Pass
		25	0	20.19	-2.20	17.99	<=33.01	Pass
	2687.5	1	0	20.92	-2.20	18.72	<=33.01	Pass
			13	20.97	-2.20	18.77	<=33.01	Pass
			24	20.83	-2.20	18.63	<=33.01	Pass
		12	0	19.86	-2.20	17.66	<=33.01	Pass
			6	19.88	-2.20	17.68	<=33.01	Pass
			13	19.90	-2.20	17.70	<=33.01	Pass
		25	0	19.84	-2.20	17.64	<=33.01	Pass

Note1: EIRP=Conducted Power+Antenna Gain

1.1.2 B41_10MHz_EIRP

Band: 41 / Bandwidth: 10MHz / NTNV								
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)		Verdict
		Size	Offset			Result	Limit	
QPSK	2501	1	0	23.18	-2.20	20.98	<=33.01	Pass
			25	23.20	-2.20	21.00	<=33.01	Pass
			49	23.16	-2.20	20.96	<=33.01	Pass
		25	0	22.16	-2.20	19.96	<=33.01	Pass
			13	22.26	-2.20	20.06	<=33.01	Pass
			25	22.17	-2.20	19.97	<=33.01	Pass
		50	0	22.19	-2.20	19.99	<=33.01	Pass
	2593	1	0	23.41	-2.20	21.21	<=33.01	Pass
			25	23.49	-2.20	21.29	<=33.01	Pass
			49	23.39	-2.20	21.19	<=33.01	Pass
		25	0	22.43	-2.20	20.23	<=33.01	Pass
			13	22.56	-2.20	20.36	<=33.01	Pass
			25	22.56	-2.20	20.36	<=33.01	Pass
		50	0	22.56	-2.20	20.36	<=33.01	Pass
	2685	1	0	23.32	-2.20	21.12	<=33.01	Pass
			25	23.27	-2.20	21.07	<=33.01	Pass
			49	23.19	-2.20	20.99	<=33.01	Pass
		25	0	22.23	-2.20	20.03	<=33.01	Pass
			13	22.32	-2.20	20.12	<=33.01	Pass
			25	22.29	-2.20	20.09	<=33.01	Pass
		50	0	22.35	-2.20	20.15	<=33.01	Pass
16QAM	2501	1	0	22.25	-2.20	20.05	<=33.01	Pass
			25	22.22	-2.20	20.02	<=33.01	Pass
			49	22.20	-2.20	20.00	<=33.01	Pass
		25	0	21.20	-2.20	19.00	<=33.01	Pass
			13	21.27	-2.20	19.07	<=33.01	Pass
			25	21.22	-2.20	19.02	<=33.01	Pass
		50	0	21.21	-2.20	19.01	<=33.01	Pass
	2593	1	0	22.46	-2.20	20.26	<=33.01	Pass
			25	22.58	-2.20	20.38	<=33.01	Pass
			49	22.44	-2.20	20.24	<=33.01	Pass
		25	0	21.46	-2.20	19.26	<=33.01	Pass
			13	21.57	-2.20	19.37	<=33.01	Pass
			25	21.57	-2.20	19.37	<=33.01	Pass
		50	0	21.51	-2.20	19.31	<=33.01	Pass
	2685	1	0	22.32	-2.20	20.12	<=33.01	Pass
			25	22.27	-2.20	20.07	<=33.01	Pass
			49	22.28	-2.20	20.08	<=33.01	Pass



Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

		25	0	21.27	-2.20	19.07	<=33.01	Pass	
			13	21.35	-2.20	19.15	<=33.01	Pass	
			25	21.27	-2.20	19.07	<=33.01	Pass	
		50	0	21.33	-2.20	19.13	<=33.01	Pass	
64QAM	2501	1	0	20.91	-2.20	18.71	<=33.01	Pass	
			25	20.89	-2.20	18.69	<=33.01	Pass	
			49	20.79	-2.20	18.59	<=33.01	Pass	
		25	0	19.88	-2.20	17.68	<=33.01	Pass	
			13	19.98	-2.20	17.78	<=33.01	Pass	
			25	19.90	-2.20	17.70	<=33.01	Pass	
		50	0	19.90	-2.20	17.70	<=33.01	Pass	
		2593	1	0	21.07	-2.20	18.87	<=33.01	Pass
				25	21.13	-2.20	18.93	<=33.01	Pass
	49			21.16	-2.20	18.96	<=33.01	Pass	
	25		0	20.11	-2.20	17.91	<=33.01	Pass	
			13	20.22	-2.20	18.02	<=33.01	Pass	
			25	20.22	-2.20	18.02	<=33.01	Pass	
	50		0	20.20	-2.20	18.00	<=33.01	Pass	
	2685		1	0	21.15	-2.20	18.95	<=33.01	Pass
				25	21.01	-2.20	18.81	<=33.01	Pass
		49		21.02	-2.20	18.82	<=33.01	Pass	
		25	0	19.94	-2.20	17.74	<=33.01	Pass	
			13	20.03	-2.20	17.83	<=33.01	Pass	
			25	19.95	-2.20	17.75	<=33.01	Pass	
		50	0	20.01	-2.20	17.81	<=33.01	Pass	

Note1: EIRP=Conducted Power+Antenna Gain

1.1.3 B41_15MHz_EIRP

Band: 41 / Bandwidth: 15MHz / NTNV								
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)		Verdict
		Size	Offset			Result	Limit	
QPSK	2503.5	1	0	23.16	-2.20	20.96	<=33.01	Pass
			38	23.18	-2.20	20.98	<=33.01	Pass
			74	22.97	-2.20	20.77	<=33.01	Pass
		36	0	22.15	-2.20	19.95	<=33.01	Pass
			18	22.20	-2.20	20.00	<=33.01	Pass
			39	22.15	-2.20	19.95	<=33.01	Pass
		75	0	22.11	-2.20	19.91	<=33.01	Pass
	2593	1	0	23.38	-2.20	21.18	<=33.01	Pass
			38	23.47	-2.20	21.27	<=33.01	Pass
			74	23.65	-2.20	21.45	<=33.01	Pass
		36	0	22.45	-2.20	20.25	<=33.01	Pass
			18	22.55	-2.20	20.35	<=33.01	Pass
			39	22.49	-2.20	20.29	<=33.01	Pass
		75	0	22.47	-2.20	20.27	<=33.01	Pass
	2682.5	1	0	23.36	-2.20	21.16	<=33.01	Pass
			38	23.31	-2.20	21.11	<=33.01	Pass
			74	23.21	-2.20	21.01	<=33.01	Pass
		36	0	22.34	-2.20	20.14	<=33.01	Pass
			18	22.31	-2.20	20.11	<=33.01	Pass
			39	22.24	-2.20	20.04	<=33.01	Pass
		75	0	22.23	-2.20	20.03	<=33.01	Pass
16QAM	2503.5	1	0	22.23	-2.20	20.03	<=33.01	Pass
			38	22.14	-2.20	19.94	<=33.01	Pass
			74	21.99	-2.20	19.79	<=33.01	Pass
		36	0	21.15	-2.20	18.95	<=33.01	Pass
			18	21.17	-2.20	18.97	<=33.01	Pass
			39	21.11	-2.20	18.91	<=33.01	Pass
		75	0	21.13	-2.20	18.93	<=33.01	Pass
	2593	1	0	22.39	-2.20	20.19	<=33.01	Pass
			38	22.44	-2.20	20.24	<=33.01	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


64QAM	2682.5	36	74	22.46	-2.20	20.26	<=33.01	Pass
			0	21.41	-2.20	19.21	<=33.01	Pass
			18	21.52	-2.20	19.32	<=33.01	Pass
			39	21.51	-2.20	19.31	<=33.01	Pass
		75	0	21.50	-2.20	19.30	<=33.01	Pass
			0	22.49	-2.20	20.29	<=33.01	Pass
		1	38	22.33	-2.20	20.13	<=33.01	Pass
			74	22.05	-2.20	19.85	<=33.01	Pass
			0	21.36	-2.20	19.16	<=33.01	Pass
		36	18	21.29	-2.20	19.09	<=33.01	Pass
			39	21.24	-2.20	19.04	<=33.01	Pass
			0	21.26	-2.20	19.06	<=33.01	Pass
	2503.5	1	0	20.96	-2.20	18.76	<=33.01	Pass
			38	20.78	-2.20	18.58	<=33.01	Pass
			74	20.77	-2.20	18.57	<=33.01	Pass
		36	0	19.87	-2.20	17.67	<=33.01	Pass
			18	19.93	-2.20	17.73	<=33.01	Pass
			39	19.80	-2.20	17.60	<=33.01	Pass
		75	0	19.85	-2.20	17.65	<=33.01	Pass
			0	21.10	-2.20	18.90	<=33.01	Pass
		1	38	21.29	-2.20	19.09	<=33.01	Pass
			74	21.07	-2.20	18.87	<=33.01	Pass
			0	20.11	-2.20	17.91	<=33.01	Pass
64QAM	2593	36	18	20.20	-2.20	18.00	<=33.01	Pass
			39	20.18	-2.20	17.98	<=33.01	Pass
			0	20.21	-2.20	18.01	<=33.01	Pass
		75	0	20.21	-2.20	18.01	<=33.01	Pass
			0	21.11	-2.20	18.91	<=33.01	Pass
		1	38	21.08	-2.20	18.88	<=33.01	Pass
			74	20.84	-2.20	18.64	<=33.01	Pass
			0	20.02	-2.20	17.82	<=33.01	Pass
		36	18	19.98	-2.20	17.78	<=33.01	Pass
			39	19.96	-2.20	17.76	<=33.01	Pass
			0	20.00	-2.20	17.80	<=33.01	Pass
	2682.5	1	0	20.96	-2.20	18.76	<=33.01	Pass
			38	20.78	-2.20	18.58	<=33.01	Pass
			74	20.77	-2.20	18.57	<=33.01	Pass
		36	0	19.87	-2.20	17.67	<=33.01	Pass
			18	19.93	-2.20	17.73	<=33.01	Pass
			39	19.80	-2.20	17.60	<=33.01	Pass
		75	0	19.85	-2.20	17.65	<=33.01	Pass
			0	21.10	-2.20	18.90	<=33.01	Pass
		1	38	21.29	-2.20	19.09	<=33.01	Pass
			74	21.07	-2.20	18.87	<=33.01	Pass
			0	20.11	-2.20	17.91	<=33.01	Pass

Note1: EIRP=Conducted Power+Antenna Gain

1.1.4 B41_20MHz_EIRP

Band: 41 / Bandwidth: 20MHz / NTNV								
Modulation	Frequency (MHz)	RB Allocation		Conducted Power (dBm)	Gain (dBi)	EIRP (dBm)		Verdict
		Size	Offset			Result	Limit	
QPSK	2506	1	0	23.17	-2.20	20.97	<=33.01	Pass
			50	23.12	-2.20	20.92	<=33.01	Pass
			99	23.00	-2.20	20.80	<=33.01	Pass
		50	0	23.14	-2.20	20.94	<=33.01	Pass
			25	23.15	-2.20	20.95	<=33.01	Pass
			50	23.08	-2.20	20.88	<=33.01	Pass
		100	0	22.11	-2.20	19.91	<=33.01	Pass
			0	23.42	-2.20	21.22	<=33.01	Pass
		1	50	23.47	-2.20	21.27	<=33.01	Pass
			99	23.37	-2.20	21.17	<=33.01	Pass
			0	23.47	-2.20	21.27	<=33.01	Pass
		50	25	23.56	-2.20	21.36	<=33.01	Pass
			50	23.51	-2.20	21.31	<=33.01	Pass
			0	22.47	-2.20	20.27	<=33.01	Pass
	2593	1	0	23.48	-2.20	21.28	<=33.01	Pass
			50	23.36	-2.20	21.16	<=33.01	Pass
			99	23.11	-2.20	20.91	<=33.01	Pass
		50	0	23.43	-2.20	21.23	<=33.01	Pass
			25	23.47	-2.20	21.27	<=33.01	Pass
			50	23.32	-2.20	21.12	<=33.01	Pass
		100	0	22.37	-2.20	20.17	<=33.01	Pass
			0	22.21	-2.20	20.01	<=33.01	Pass
	2680	1	0	23.17	-2.20	20.97	<=33.01	Pass
			50	23.12	-2.20	20.92	<=33.01	Pass
			99	23.00	-2.20	20.80	<=33.01	Pass
		50	0	23.14	-2.20	20.94	<=33.01	Pass
			25	23.15	-2.20	20.95	<=33.01	Pass
			50	23.08	-2.20	20.88	<=33.01	Pass
		100	0	22.11	-2.20	19.91	<=33.01	Pass
			0	23.42	-2.20	21.22	<=33.01	Pass
		1	50	23.47	-2.20	21.27	<=33.01	Pass
			99	23.37	-2.20	21.17	<=33.01	Pass
			0	23.47	-2.20	21.27	<=33.01	Pass
		50	25	23.56	-2.20	21.36	<=33.01	Pass
			50	23.51	-2.20	21.31	<=33.01	Pass
			0	22.47	-2.20	20.27	<=33.01	Pass
16QAM	2506	1	0	22.21	-2.20	20.01	<=33.01	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

64QAM	2593	50	50	22.12	-2.20	19.92	<=33.01	Pass
			99	21.95	-2.20	19.75	<=33.01	Pass
			0	21.13	-2.20	18.93	<=33.01	Pass
		100	25	21.13	-2.20	18.93	<=33.01	Pass
			50	21.05	-2.20	18.85	<=33.01	Pass
			0	21.12	-2.20	18.92	<=33.01	Pass
		1	0	22.61	-2.20	20.41	<=33.01	Pass
			50	22.72	-2.20	20.52	<=33.01	Pass
			99	22.56	-2.20	20.36	<=33.01	Pass
		50	0	21.44	-2.20	19.24	<=33.01	Pass
			25	21.56	-2.20	19.36	<=33.01	Pass
			50	21.52	-2.20	19.32	<=33.01	Pass
		100	0	21.52	-2.20	19.32	<=33.01	Pass
	2680	1	0	22.48	-2.20	20.28	<=33.01	Pass
			50	22.30	-2.20	20.10	<=33.01	Pass
			99	22.04	-2.20	19.84	<=33.01	Pass
		50	0	21.39	-2.20	19.19	<=33.01	Pass
			25	21.44	-2.20	19.24	<=33.01	Pass
			50	21.28	-2.20	19.08	<=33.01	Pass
		100	0	21.38	-2.20	19.18	<=33.01	Pass
			0	20.94	-2.20	18.74	<=33.01	Pass
			50	20.74	-2.20	18.54	<=33.01	Pass
64QAM	2506	1	99	20.76	-2.20	18.56	<=33.01	Pass
			0	19.86	-2.20	17.66	<=33.01	Pass
			25	19.84	-2.20	17.64	<=33.01	Pass
		50	50	19.76	-2.20	17.56	<=33.01	Pass
			0	19.81	-2.20	17.61	<=33.01	Pass
			0	21.20	-2.20	19.00	<=33.01	Pass
		1	50	21.20	-2.20	19.00	<=33.01	Pass
			99	21.02	-2.20	18.82	<=33.01	Pass
			0	20.15	-2.20	17.95	<=33.01	Pass
	2593	50	25	20.22	-2.20	18.02	<=33.01	Pass
			50	20.16	-2.20	17.96	<=33.01	Pass
			0	20.20	-2.20	18.00	<=33.01	Pass
		1	0	21.17	-2.20	18.97	<=33.01	Pass
			50	21.09	-2.20	18.89	<=33.01	Pass
			99	20.88	-2.20	18.68	<=33.01	Pass
		50	0	20.12	-2.20	17.92	<=33.01	Pass
			25	20.11	-2.20	17.91	<=33.01	Pass
			50	19.94	-2.20	17.74	<=33.01	Pass
		100	0	20.10	-2.20	17.90	<=33.01	Pass

Note1: EIRP=Conducted Power+Antenna Gain



2. Frequency Stability

2.1 Test Result

2.1.1 B41_5MHz

Band: 41 / Bandwidth: 5MHz									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
		Size	Offset				Result	Limit	
QPSK	2498.5	25	0	20	3.27	0.529	0.0002	-2.5 to 2.5	Pass
					3.85	-0.429	-0.0002	-2.5 to 2.5	Pass
					4.43	1.488	0.0006	-2.5 to 2.5	Pass
				-30	3.85	0.515	0.0002	-2.5 to 2.5	Pass
				-20	3.85	-0.787	-0.0003	-2.5 to 2.5	Pass
				-10	3.85	-2.303	-0.0009	-2.5 to 2.5	Pass
				0	3.85	0.486	0.0002	-2.5 to 2.5	Pass
				10	3.85	-0.200	-0.0001	-2.5 to 2.5	Pass
				30	3.85	0.529	0.0002	-2.5 to 2.5	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

				40	3.85	-0.315	-0.0001	-2.5 to 2.5	Pass
				50	3.85	1.130	0.0005	-2.5 to 2.5	Pass
	2593	25	0	20	3.27	3.347	0.0013	-2.5 to 2.5	Pass
					3.85	2.131	0.0008	-2.5 to 2.5	Pass
					4.43	3.819	0.0015	-2.5 to 2.5	Pass
				-30	3.85	2.804	0.0011	-2.5 to 2.5	Pass
				-20	3.85	3.161	0.0012	-2.5 to 2.5	Pass
				-10	3.85	1.273	0.0005	-2.5 to 2.5	Pass
				0	3.85	3.262	0.0013	-2.5 to 2.5	Pass
				10	3.85	3.591	0.0014	-2.5 to 2.5	Pass
				30	3.85	2.704	0.0010	-2.5 to 2.5	Pass
				40	3.85	2.575	0.0010	-2.5 to 2.5	Pass
				50	3.85	2.446	0.0009	-2.5 to 2.5	Pass
	2687.5	25	0	20	3.27	-4.663	-0.0017	-2.5 to 2.5	Pass
					3.85	-3.476	-0.0013	-2.5 to 2.5	Pass
					4.43	-4.950	-0.0018	-2.5 to 2.5	Pass
				-30	3.85	-6.123	-0.0023	-2.5 to 2.5	Pass
				-20	3.85	-3.877	-0.0014	-2.5 to 2.5	Pass
				-10	3.85	-4.735	-0.0018	-2.5 to 2.5	Pass
				0	3.85	-4.692	-0.0017	-2.5 to 2.5	Pass
				10	3.85	-5.322	-0.0020	-2.5 to 2.5	Pass
				30	3.85	-4.249	-0.0016	-2.5 to 2.5	Pass
				40	3.85	-4.649	-0.0017	-2.5 to 2.5	Pass
				50	3.85	-3.691	-0.0014	-2.5 to 2.5	Pass
16QAM	2498.5	25	0	20	3.27	-1.230	-0.0005	-2.5 to 2.5	Pass
					3.85	-0.644	-0.0003	-2.5 to 2.5	Pass
					4.43	0.129	0.0001	-2.5 to 2.5	Pass
				-30	3.85	-0.257	-0.0001	-2.5 to 2.5	Pass
				-20	3.85	-0.143	-0.0001	-2.5 to 2.5	Pass
				-10	3.85	-0.143	-0.0001	-2.5 to 2.5	Pass
				0	3.85	-0.186	-0.0001	-2.5 to 2.5	Pass
				10	3.85	-0.486	-0.0002	-2.5 to 2.5	Pass
				30	3.85	-1.202	-0.0005	-2.5 to 2.5	Pass
				40	3.85	-2.360	-0.0009	-2.5 to 2.5	Pass
				50	3.85	-1.931	-0.0008	-2.5 to 2.5	Pass
	2593	25	0	20	3.27	1.831	0.0007	-2.5 to 2.5	Pass
					3.85	1.874	0.0007	-2.5 to 2.5	Pass
					4.43	1.903	0.0007	-2.5 to 2.5	Pass
				-30	3.85	1.903	0.0007	-2.5 to 2.5	Pass
				-20	3.85	3.233	0.0012	-2.5 to 2.5	Pass
				-10	3.85	3.734	0.0014	-2.5 to 2.5	Pass
				0	3.85	3.290	0.0013	-2.5 to 2.5	Pass
				10	3.85	2.232	0.0009	-2.5 to 2.5	Pass
				30	3.85	1.888	0.0007	-2.5 to 2.5	Pass
				40	3.85	1.431	0.0006	-2.5 to 2.5	Pass
				50	3.85	0.858	0.0003	-2.5 to 2.5	Pass
64QAM	2687.5	25	0	20	3.27	-4.535	-0.0017	-2.5 to 2.5	Pass
					3.85	-3.347	-0.0012	-2.5 to 2.5	Pass
					4.43	-3.004	-0.0011	-2.5 to 2.5	Pass
				-30	3.85	-5.636	-0.0021	-2.5 to 2.5	Pass
				-20	3.85	-4.263	-0.0016	-2.5 to 2.5	Pass
				-10	3.85	-4.320	-0.0016	-2.5 to 2.5	Pass
				0	3.85	-4.163	-0.0015	-2.5 to 2.5	Pass
				10	3.85	-4.578	-0.0017	-2.5 to 2.5	Pass
				30	3.85	-5.336	-0.0020	-2.5 to 2.5	Pass
				40	3.85	-3.319	-0.0012	-2.5 to 2.5	Pass
				50	3.85	-3.290	-0.0012	-2.5 to 2.5	Pass
	2498.5	25	0	20	3.27	-1.431	-0.0006	-2.5 to 2.5	Pass
					3.85	-0.186	-0.0001	-2.5 to 2.5	Pass
					4.43	0.215	0.0001	-2.5 to 2.5	Pass
				-30	3.85	-0.458	-0.0002	-2.5 to 2.5	Pass
				-20	3.85	-1.330	-0.0005	-2.5 to 2.5	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

				-10	3.85	-0.644	-0.0003	-2.5 to 2.5	Pass
				0	3.85	-0.429	-0.0002	-2.5 to 2.5	Pass
				10	3.85	-0.415	-0.0002	-2.5 to 2.5	Pass
				30	3.85	0.744	0.0003	-2.5 to 2.5	Pass
				40	3.85	-0.100	0.0000	-2.5 to 2.5	Pass
				50	3.85	-0.672	-0.0003	-2.5 to 2.5	Pass
	2593	25	0	20	3.27	1.774	0.0007	-2.5 to 2.5	Pass
					3.85	2.332	0.0009	-2.5 to 2.5	Pass
					4.43	1.588	0.0006	-2.5 to 2.5	Pass
				-30	3.85	1.860	0.0007	-2.5 to 2.5	Pass
				-20	3.85	1.616	0.0006	-2.5 to 2.5	Pass
				-10	3.85	1.502	0.0006	-2.5 to 2.5	Pass
				0	3.85	2.389	0.0009	-2.5 to 2.5	Pass
				10	3.85	1.359	0.0005	-2.5 to 2.5	Pass
				30	3.85	1.402	0.0005	-2.5 to 2.5	Pass
				40	3.85	2.632	0.0010	-2.5 to 2.5	Pass
				50	3.85	1.445	0.0006	-2.5 to 2.5	Pass
	2687.5	25	0	20	3.27	-3.319	-0.0012	-2.5 to 2.5	Pass
					3.85	-4.306	-0.0016	-2.5 to 2.5	Pass
					4.43	-3.304	-0.0012	-2.5 to 2.5	Pass
				-30	3.85	-2.646	-0.0010	-2.5 to 2.5	Pass
				-20	3.85	-3.633	-0.0014	-2.5 to 2.5	Pass
				-10	3.85	-2.661	-0.0010	-2.5 to 2.5	Pass
				0	3.85	-2.575	-0.0010	-2.5 to 2.5	Pass
				10	3.85	-3.047	-0.0011	-2.5 to 2.5	Pass
				30	3.85	-4.191	-0.0016	-2.5 to 2.5	Pass
				40	3.85	-2.618	-0.0010	-2.5 to 2.5	Pass
				50	3.85	-3.433	-0.0013	-2.5 to 2.5	Pass

2.1.2 B41_10MHz

Band: 41 / Bandwidth: 10MHz									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
		Size	Offset				Result	Limit	
QPSK	2501	50	0	20	3.27	-4.578	-0.0018	-2.5 to 2.5	Pass
					3.85	-4.406	-0.0018	-2.5 to 2.5	Pass
					4.43	-4.034	-0.0016	-2.5 to 2.5	Pass
				-30	3.85	-4.892	-0.0020	-2.5 to 2.5	Pass
				-20	3.85	-5.050	-0.0020	-2.5 to 2.5	Pass
				-10	3.85	-4.063	-0.0016	-2.5 to 2.5	Pass
				0	3.85	-4.406	-0.0018	-2.5 to 2.5	Pass
				10	3.85	-4.592	-0.0018	-2.5 to 2.5	Pass
				30	3.85	-2.747	-0.0011	-2.5 to 2.5	Pass
				40	3.85	-4.048	-0.0016	-2.5 to 2.5	Pass
				50	3.85	-4.878	-0.0020	-2.5 to 2.5	Pass
	2593	50	0	20	3.27	-0.844	-0.0003	-2.5 to 2.5	Pass
					3.85	-0.215	-0.0001	-2.5 to 2.5	Pass
					4.43	-1.173	-0.0005	-2.5 to 2.5	Pass
				-30	3.85	0.629	0.0002	-2.5 to 2.5	Pass
				-20	3.85	-1.645	-0.0006	-2.5 to 2.5	Pass
				-10	3.85	0.801	0.0003	-2.5 to 2.5	Pass
				0	3.85	-0.658	-0.0003	-2.5 to 2.5	Pass
				10	3.85	-0.229	-0.0001	-2.5 to 2.5	Pass
				30	3.85	0.830	0.0003	-2.5 to 2.5	Pass
				40	3.85	-0.329	-0.0001	-2.5 to 2.5	Pass
				50	3.85	-0.772	-0.0003	-2.5 to 2.5	Pass
	2685	50	0	20	3.27	-3.705	-0.0014	-2.5 to 2.5	Pass
					3.85	-0.944	-0.0004	-2.5 to 2.5	Pass
					4.43	-3.777	-0.0014	-2.5 to 2.5	Pass
				-30	3.85	-3.276	-0.0012	-2.5 to 2.5	Pass
				-20	3.85	-3.376	-0.0013	-2.5 to 2.5	Pass
				-10	3.85	-2.117	-0.0008	-2.5 to 2.5	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

				0	3.85	-2.346	-0.0009	-2.5 to 2.5	Pass
				10	3.85	-4.420	-0.0016	-2.5 to 2.5	Pass
				30	3.85	-3.805	-0.0014	-2.5 to 2.5	Pass
				40	3.85	-3.319	-0.0012	-2.5 to 2.5	Pass
				50	3.85	-3.119	-0.0012	-2.5 to 2.5	Pass
16QAM	2501	50	0	20	3.27	-3.448	-0.0014	-2.5 to 2.5	Pass
					3.85	-3.734	-0.0015	-2.5 to 2.5	Pass
					4.43	-2.775	-0.0011	-2.5 to 2.5	Pass
				-30	3.85	-3.033	-0.0012	-2.5 to 2.5	Pass
				-20	3.85	-3.033	-0.0012	-2.5 to 2.5	Pass
				-10	3.85	-4.749	-0.0019	-2.5 to 2.5	Pass
				0	3.85	-2.403	-0.0010	-2.5 to 2.5	Pass
				10	3.85	-3.805	-0.0015	-2.5 to 2.5	Pass
				30	3.85	-3.777	-0.0015	-2.5 to 2.5	Pass
				40	3.85	-3.061	-0.0012	-2.5 to 2.5	Pass
				50	3.85	-2.475	-0.0010	-2.5 to 2.5	Pass
	2593	50	0	20	3.27	0.458	0.0002	-2.5 to 2.5	Pass
					3.85	-1.931	-0.0007	-2.5 to 2.5	Pass
					4.43	-0.701	-0.0003	-2.5 to 2.5	Pass
				-30	3.85	-0.243	-0.0001	-2.5 to 2.5	Pass
				-20	3.85	0.401	0.0002	-2.5 to 2.5	Pass
				-10	3.85	0.215	0.0001	-2.5 to 2.5	Pass
				0	3.85	-1.574	-0.0006	-2.5 to 2.5	Pass
				10	3.85	-1.345	-0.0005	-2.5 to 2.5	Pass
				30	3.85	0.243	0.0001	-2.5 to 2.5	Pass
				40	3.85	0.386	0.0001	-2.5 to 2.5	Pass
				50	3.85	1.273	0.0005	-2.5 to 2.5	Pass
	2685	50	0	20	3.27	-3.576	-0.0013	-2.5 to 2.5	Pass
					3.85	-3.648	-0.0014	-2.5 to 2.5	Pass
					4.43	-2.275	-0.0008	-2.5 to 2.5	Pass
				-30	3.85	-3.934	-0.0015	-2.5 to 2.5	Pass
				-20	3.85	-4.764	-0.0018	-2.5 to 2.5	Pass
				-10	3.85	-3.190	-0.0012	-2.5 to 2.5	Pass
				0	3.85	-2.418	-0.0009	-2.5 to 2.5	Pass
				10	3.85	-3.462	-0.0013	-2.5 to 2.5	Pass
				30	3.85	-3.405	-0.0013	-2.5 to 2.5	Pass
				40	3.85	-3.805	-0.0014	-2.5 to 2.5	Pass
				50	3.85	-2.131	-0.0008	-2.5 to 2.5	Pass
64QAM	2501	50	0	20	3.27	-4.306	-0.0017	-2.5 to 2.5	Pass
					3.85	-3.433	-0.0014	-2.5 to 2.5	Pass
					4.43	-3.047	-0.0012	-2.5 to 2.5	Pass
				-30	3.85	-2.718	-0.0011	-2.5 to 2.5	Pass
				-20	3.85	-3.705	-0.0015	-2.5 to 2.5	Pass
				-10	3.85	-3.734	-0.0015	-2.5 to 2.5	Pass
				0	3.85	-2.489	-0.0010	-2.5 to 2.5	Pass
				10	3.85	-3.562	-0.0014	-2.5 to 2.5	Pass
				30	3.85	-4.306	-0.0017	-2.5 to 2.5	Pass
				40	3.85	-2.389	-0.0010	-2.5 to 2.5	Pass
				50	3.85	-2.804	-0.0011	-2.5 to 2.5	Pass
	2593	50	0	20	3.27	-1.402	-0.0005	-2.5 to 2.5	Pass
					3.85	0.401	0.0002	-2.5 to 2.5	Pass
					4.43	-0.973	-0.0004	-2.5 to 2.5	Pass
				-30	3.85	-0.486	-0.0002	-2.5 to 2.5	Pass
				-20	3.85	-0.257	-0.0001	-2.5 to 2.5	Pass
				-10	3.85	-1.073	-0.0004	-2.5 to 2.5	Pass
				0	3.85	0.143	0.0001	-2.5 to 2.5	Pass
				10	3.85	-0.572	-0.0002	-2.5 to 2.5	Pass
				30	3.85	-0.429	-0.0002	-2.5 to 2.5	Pass
				40	3.85	-0.629	-0.0002	-2.5 to 2.5	Pass
				50	3.85	-0.143	-0.0001	-2.5 to 2.5	Pass
	2685	50	0	20	3.27	-3.405	-0.0013	-2.5 to 2.5	Pass
					3.85	-2.818	-0.0010	-2.5 to 2.5	Pass



Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

					4.43	-2.074	-0.0008	-2.5 to 2.5	Pass
				-30	3.85	-3.176	-0.0012	-2.5 to 2.5	Pass
				-20	3.85	-2.646	-0.0010	-2.5 to 2.5	Pass
				-10	3.85	-3.920	-0.0015	-2.5 to 2.5	Pass
				0	3.85	-2.232	-0.0008	-2.5 to 2.5	Pass
				10	3.85	-2.646	-0.0010	-2.5 to 2.5	Pass
				30	3.85	-2.861	-0.0011	-2.5 to 2.5	Pass
				40	3.85	-2.031	-0.0008	-2.5 to 2.5	Pass
				50	3.85	-4.821	-0.0018	-2.5 to 2.5	Pass

2.1.3 B41_15MHz

Band: 41 / Bandwidth: 15MHz									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
		Size	Offset				Result	Limit	
QPSK	2503.5	75	0	20	3.27	-2.904	-0.0012	-2.5 to 2.5	Pass
					3.85	-3.119	-0.0012	-2.5 to 2.5	Pass
					4.43	-3.076	-0.0012	-2.5 to 2.5	Pass
				-30	3.85	-3.505	-0.0014	-2.5 to 2.5	Pass
				-20	3.85	-2.918	-0.0012	-2.5 to 2.5	Pass
				-10	3.85	-2.732	-0.0011	-2.5 to 2.5	Pass
				0	3.85	-1.302	-0.0005	-2.5 to 2.5	Pass
				10	3.85	-3.047	-0.0012	-2.5 to 2.5	Pass
				30	3.85	-2.375	-0.0009	-2.5 to 2.5	Pass
				40	3.85	-2.403	-0.0010	-2.5 to 2.5	Pass
				50	3.85	-2.418	-0.0010	-2.5 to 2.5	Pass
	2593	75	0	20	3.27	-0.587	-0.0002	-2.5 to 2.5	Pass
					3.85	-0.386	-0.0001	-2.5 to 2.5	Pass
					4.43	-0.830	-0.0003	-2.5 to 2.5	Pass
				-30	3.85	0.486	0.0002	-2.5 to 2.5	Pass
				-20	3.85	0.644	0.0002	-2.5 to 2.5	Pass
				-10	3.85	0.501	0.0002	-2.5 to 2.5	Pass
				0	3.85	-0.458	-0.0002	-2.5 to 2.5	Pass
				10	3.85	1.130	0.0004	-2.5 to 2.5	Pass
				30	3.85	-0.615	-0.0002	-2.5 to 2.5	Pass
				40	3.85	1.631	0.0006	-2.5 to 2.5	Pass
				50	3.85	-0.072	0.0000	-2.5 to 2.5	Pass
	2682.5	75	0	20	3.27	-3.848	-0.0014	-2.5 to 2.5	Pass
					3.85	-4.835	-0.0018	-2.5 to 2.5	Pass
					4.43	-4.234	-0.0016	-2.5 to 2.5	Pass
				-30	3.85	-5.193	-0.0019	-2.5 to 2.5	Pass
				-20	3.85	-4.692	-0.0017	-2.5 to 2.5	Pass
				-10	3.85	-4.807	-0.0018	-2.5 to 2.5	Pass
				0	3.85	-4.220	-0.0016	-2.5 to 2.5	Pass
				10	3.85	-3.304	-0.0012	-2.5 to 2.5	Pass
				30	3.85	-3.204	-0.0012	-2.5 to 2.5	Pass
				40	3.85	-4.020	-0.0015	-2.5 to 2.5	Pass
				50	3.85	-3.476	-0.0013	-2.5 to 2.5	Pass
16QAM	2503.5	75	0	20	3.27	-1.230	-0.0005	-2.5 to 2.5	Pass
					3.85	-2.961	-0.0012	-2.5 to 2.5	Pass
					4.43	-2.689	-0.0011	-2.5 to 2.5	Pass
				-30	3.85	-1.445	-0.0006	-2.5 to 2.5	Pass
				-20	3.85	-1.445	-0.0006	-2.5 to 2.5	Pass
				-10	3.85	-2.789	-0.0011	-2.5 to 2.5	Pass
				0	3.85	-1.788	-0.0007	-2.5 to 2.5	Pass
				10	3.85	-2.460	-0.0010	-2.5 to 2.5	Pass
				30	3.85	-2.718	-0.0011	-2.5 to 2.5	Pass
				40	3.85	-2.732	-0.0011	-2.5 to 2.5	Pass
				50	3.85	-2.804	-0.0011	-2.5 to 2.5	Pass
	2593	75	0	20	3.27	0.286	0.0001	-2.5 to 2.5	Pass
					3.85	-0.744	-0.0003	-2.5 to 2.5	Pass
					4.43	1.087	0.0004	-2.5 to 2.5	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

64QAM	2682.5	75	0	-30	3.85	1.130	0.0004	-2.5 to 2.5	Pass
				-20	3.85	0.386	0.0001	-2.5 to 2.5	Pass
				-10	3.85	0.415	0.0002	-2.5 to 2.5	Pass
				0	3.85	0.472	0.0002	-2.5 to 2.5	Pass
				10	3.85	0.057	0.0000	-2.5 to 2.5	Pass
				30	3.85	-0.286	-0.0001	-2.5 to 2.5	Pass
				40	3.85	0.157	0.0001	-2.5 to 2.5	Pass
				50	3.85	1.316	0.0005	-2.5 to 2.5	Pass
				20	3.27	-5.164	-0.0019	-2.5 to 2.5	Pass
					3.85	-3.977	-0.0015	-2.5 to 2.5	Pass
					4.43	-3.676	-0.0014	-2.5 to 2.5	Pass
				-30	3.85	-3.347	-0.0012	-2.5 to 2.5	Pass
				-20	3.85	-4.034	-0.0015	-2.5 to 2.5	Pass
				-10	3.85	-3.576	-0.0013	-2.5 to 2.5	Pass
				0	3.85	-3.905	-0.0015	-2.5 to 2.5	Pass
				10	3.85	-4.578	-0.0017	-2.5 to 2.5	Pass
				30	3.85	-5.507	-0.0021	-2.5 to 2.5	Pass
				40	3.85	-5.622	-0.0021	-2.5 to 2.5	Pass
				50	3.85	-4.549	-0.0017	-2.5 to 2.5	Pass
64QAM	2503.5	75	0	20	3.27	-3.233	-0.0013	-2.5 to 2.5	Pass
					3.85	-2.518	-0.0010	-2.5 to 2.5	Pass
					4.43	-2.561	-0.0010	-2.5 to 2.5	Pass
				-30	3.85	-2.675	-0.0011	-2.5 to 2.5	Pass
				-20	3.85	-2.131	-0.0009	-2.5 to 2.5	Pass
				-10	3.85	-2.632	-0.0011	-2.5 to 2.5	Pass
				0	3.85	-2.704	-0.0011	-2.5 to 2.5	Pass
				10	3.85	-2.418	-0.0010	-2.5 to 2.5	Pass
				30	3.85	-3.676	-0.0015	-2.5 to 2.5	Pass
				40	3.85	-3.605	-0.0014	-2.5 to 2.5	Pass
				50	3.85	-2.747	-0.0011	-2.5 to 2.5	Pass
				20	3.27	0.300	0.0001	-2.5 to 2.5	Pass
					3.85	0.873	0.0003	-2.5 to 2.5	Pass
					4.43	0.415	0.0002	-2.5 to 2.5	Pass
				-30	3.85	1.259	0.0005	-2.5 to 2.5	Pass
				-20	3.85	1.473	0.0006	-2.5 to 2.5	Pass
				-10	3.85	0.215	0.0001	-2.5 to 2.5	Pass
				0	3.85	-0.615	-0.0002	-2.5 to 2.5	Pass
				10	3.85	1.574	0.0006	-2.5 to 2.5	Pass
				30	3.85	0.644	0.0002	-2.5 to 2.5	Pass
				40	3.85	1.488	0.0006	-2.5 to 2.5	Pass
				50	3.85	0.672	0.0003	-2.5 to 2.5	Pass
	2682.5	75	0	20	3.27	-4.392	-0.0016	-2.5 to 2.5	Pass
					3.85	-4.907	-0.0018	-2.5 to 2.5	Pass
					4.43	-2.890	-0.0011	-2.5 to 2.5	Pass
				-30	3.85	-4.478	-0.0017	-2.5 to 2.5	Pass
				-20	3.85	-3.648	-0.0014	-2.5 to 2.5	Pass
				-10	3.85	-4.950	-0.0018	-2.5 to 2.5	Pass
				0	3.85	-4.835	-0.0018	-2.5 to 2.5	Pass
				10	3.85	-4.206	-0.0016	-2.5 to 2.5	Pass
				30	3.85	-4.249	-0.0016	-2.5 to 2.5	Pass
				40	3.85	-3.691	-0.0014	-2.5 to 2.5	Pass
				50	3.85	-4.320	-0.0016	-2.5 to 2.5	Pass

2.1.4 B41_20MHz

Band: 41 / Bandwidth: 20MHz									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	Freq. Error (Hz)	Freq. vs. Rated (ppm)		Verdict
		Size	Offset				Result	Limit	
QPSK	2506	100	0	20	3.27	-1.273	-0.0005	-2.5 to 2.5	Pass
					3.85	-1.674	-0.0007	-2.5 to 2.5	Pass
					4.43	-0.415	-0.0002	-2.5 to 2.5	Pass
				-30	3.85	-1.502	-0.0006	-2.5 to 2.5	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

16QAM	2593	100	0	-20	3.85	-0.329	-0.0001	-2.5 to 2.5	Pass
				-10	3.85	-1.616	-0.0006	-2.5 to 2.5	Pass
				0	3.85	-1.717	-0.0007	-2.5 to 2.5	Pass
				10	3.85	-0.501	-0.0002	-2.5 to 2.5	Pass
				30	3.85	-2.503	-0.0010	-2.5 to 2.5	Pass
				40	3.85	-1.044	-0.0004	-2.5 to 2.5	Pass
				50	3.85	-2.575	-0.0010	-2.5 to 2.5	Pass
	2680	100	0	20	3.27	-1.702	-0.0007	-2.5 to 2.5	Pass
					3.85	-0.544	-0.0002	-2.5 to 2.5	Pass
					4.43	0.658	0.0003	-2.5 to 2.5	Pass
				-30	3.85	-0.615	-0.0002	-2.5 to 2.5	Pass
				-20	3.85	-1.030	-0.0004	-2.5 to 2.5	Pass
				-10	3.85	-1.788	-0.0007	-2.5 to 2.5	Pass
				0	3.85	-0.072	0.0000	-2.5 to 2.5	Pass
				10	3.85	-0.515	-0.0002	-2.5 to 2.5	Pass
				30	3.85	0.830	0.0003	-2.5 to 2.5	Pass
				40	3.85	0.486	0.0002	-2.5 to 2.5	Pass
				50	3.85	0.014	0.0000	-2.5 to 2.5	Pass
				20	3.27	-0.186	-0.0001	-2.5 to 2.5	Pass
					3.85	-0.415	-0.0002	-2.5 to 2.5	Pass
					4.43	-1.001	-0.0004	-2.5 to 2.5	Pass
	2506	100	0	-30	3.85	-1.359	-0.0005	-2.5 to 2.5	Pass
				-20	3.85	-1.988	-0.0007	-2.5 to 2.5	Pass
				-10	3.85	-0.916	-0.0003	-2.5 to 2.5	Pass
				0	3.85	-2.203	-0.0008	-2.5 to 2.5	Pass
				10	3.85	-2.003	-0.0007	-2.5 to 2.5	Pass
				30	3.85	-1.702	-0.0006	-2.5 to 2.5	Pass
				40	3.85	-0.129	0.0000	-2.5 to 2.5	Pass
				50	3.85	-1.731	-0.0006	-2.5 to 2.5	Pass
				20	3.27	-1.144	-0.0005	-2.5 to 2.5	Pass
					3.85	-2.160	-0.0009	-2.5 to 2.5	Pass
					4.43	-1.559	-0.0006	-2.5 to 2.5	Pass
				-30	3.85	-0.873	-0.0003	-2.5 to 2.5	Pass
				-20	3.85	-1.473	-0.0006	-2.5 to 2.5	Pass
	2593	100	0	-10	3.85	-0.172	-0.0001	-2.5 to 2.5	Pass
				0	3.85	-1.130	-0.0005	-2.5 to 2.5	Pass
				10	3.85	-1.373	-0.0005	-2.5 to 2.5	Pass
				30	3.85	-0.701	-0.0003	-2.5 to 2.5	Pass
				40	3.85	-0.629	-0.0003	-2.5 to 2.5	Pass
				50	3.85	-1.416	-0.0006	-2.5 to 2.5	Pass
				20	3.27	-0.286	-0.0001	-2.5 to 2.5	Pass
					3.85	0.315	0.0001	-2.5 to 2.5	Pass
					4.43	0.916	0.0004	-2.5 to 2.5	Pass
				-30	3.85	0.143	0.0001	-2.5 to 2.5	Pass
				-20	3.85	-0.343	-0.0001	-2.5 to 2.5	Pass
				-10	3.85	0.658	0.0003	-2.5 to 2.5	Pass
				0	3.85	-0.086	0.0000	-2.5 to 2.5	Pass
	2680	100	0	10	3.85	1.130	0.0004	-2.5 to 2.5	Pass
				30	3.85	1.030	0.0004	-2.5 to 2.5	Pass
				40	3.85	0.000	0.0000	-2.5 to 2.5	Pass
				50	3.85	1.230	0.0005	-2.5 to 2.5	Pass
				20	3.27	-0.701	-0.0003	-2.5 to 2.5	Pass
					3.85	-1.488	-0.0006	-2.5 to 2.5	Pass
					4.43	-1.073	-0.0004	-2.5 to 2.5	Pass
				-30	3.85	-0.458	-0.0002	-2.5 to 2.5	Pass
				-20	3.85	-0.701	-0.0003	-2.5 to 2.5	Pass
				-10	3.85	-1.345	-0.0005	-2.5 to 2.5	Pass
				0	3.85	-0.873	-0.0003	-2.5 to 2.5	Pass
				10	3.85	-0.072	0.0000	-2.5 to 2.5	Pass
				30	3.85	-1.674	-0.0006	-2.5 to 2.5	Pass
				40	3.85	-2.046	-0.0008	-2.5 to 2.5	Pass
				50	3.85	-2.189	-0.0008	-2.5 to 2.5	Pass



Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

64QAM	2506	100	0	20	3.27	-1.101	-0.0004	-2.5 to 2.5	Pass
					3.85	-0.858	-0.0003	-2.5 to 2.5	Pass
					4.43	-1.817	-0.0007	-2.5 to 2.5	Pass
				-30	3.85	-1.245	-0.0005	-2.5 to 2.5	Pass
				-20	3.85	-0.830	-0.0003	-2.5 to 2.5	Pass
				-10	3.85	-1.459	-0.0006	-2.5 to 2.5	Pass
				0	3.85	-1.488	-0.0006	-2.5 to 2.5	Pass
				10	3.85	-2.446	-0.0010	-2.5 to 2.5	Pass
				30	3.85	-1.674	-0.0007	-2.5 to 2.5	Pass
				40	3.85	-1.616	-0.0006	-2.5 to 2.5	Pass
				50	3.85	-1.473	-0.0006	-2.5 to 2.5	Pass
	2593	100	0	20	3.27	0.973	0.0004	-2.5 to 2.5	Pass
					3.85	1.359	0.0005	-2.5 to 2.5	Pass
					4.43	1.016	0.0004	-2.5 to 2.5	Pass
				-30	3.85	-0.072	0.0000	-2.5 to 2.5	Pass
				-20	3.85	-0.458	-0.0002	-2.5 to 2.5	Pass
				-10	3.85	0.172	0.0001	-2.5 to 2.5	Pass
				0	3.85	0.429	0.0002	-2.5 to 2.5	Pass
				10	3.85	-0.257	-0.0001	-2.5 to 2.5	Pass
				30	3.85	0.043	0.0000	-2.5 to 2.5	Pass
				40	3.85	-0.815	-0.0003	-2.5 to 2.5	Pass
				50	3.85	1.616	0.0006	-2.5 to 2.5	Pass
	2680	100	0	20	3.27	-0.830	-0.0003	-2.5 to 2.5	Pass
					3.85	-1.001	-0.0004	-2.5 to 2.5	Pass
					4.43	-0.873	-0.0003	-2.5 to 2.5	Pass
				-30	3.85	-2.017	-0.0008	-2.5 to 2.5	Pass
				-20	3.85	-1.259	-0.0005	-2.5 to 2.5	Pass
				-10	3.85	-2.432	-0.0009	-2.5 to 2.5	Pass
				0	3.85	0.486	0.0002	-2.5 to 2.5	Pass
				10	3.85	-0.572	-0.0002	-2.5 to 2.5	Pass
				30	3.85	-2.089	-0.0008	-2.5 to 2.5	Pass
				40	3.85	-1.316	-0.0005	-2.5 to 2.5	Pass
				50	3.85	0.501	0.0002	-2.5 to 2.5	Pass

3. Modulation Characteristics

3.1 Test Result

3.1.1 B41_5MHz

Band: 41 / Bandwidth: 5MHz / NTN						
Modulation	Frequency (MHz)	RB Allocation		Modulation Characteristics		Verdict
		Size	Offset	Result	Limit	
QPSK	2593	25	0	Refer To Test Graph		Pass
16QAM	2593	25	0	Refer To Test Graph		Pass
64QAM	2593	25	0	Refer To Test Graph		Pass

3.1.2 B41_10MHz

Band: 41 / Bandwidth: 10MHz / NTN						
Modulation	Frequency (MHz)	RB Allocation		Modulation Characteristics		Verdict
		Size	Offset	Result	Limit	
QPSK	2593	50	0	Refer To Test Graph		Pass
16QAM	2593	50	0	Refer To Test Graph		Pass
64QAM	2593	50	0	Refer To Test Graph		Pass

3.1.3 B41_15MHz

Band: 41 / Bandwidth: 15MHz / NTN						
-----------------------------------	--	--	--	--	--	--

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Modulation	Frequency (MHz)	RB Allocation		Modulation Characteristics		Verdict
		Size	Offset	Result	Limit	
QPSK	2593	75	0	Refer To Test Graph		Pass
16QAM	2593	75	0	Refer To Test Graph		Pass
64QAM	2593	75	0	Refer To Test Graph		Pass

3.1.4 B41_20MHz

Band: 41 / Bandwidth: 20MHz / NTNV						
Modulation	Frequency (MHz)	RB Allocation		Modulation Characteristics		Verdict
		Size	Offset	Result	Limit	
QPSK	2593	100	0	Refer To Test Graph		Pass
16QAM	2593	100	0	Refer To Test Graph		Pass
64QAM	2593	100	0	Refer To Test Graph		Pass





Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

3.2 Test Graph


3.2.1 B41_5MHz

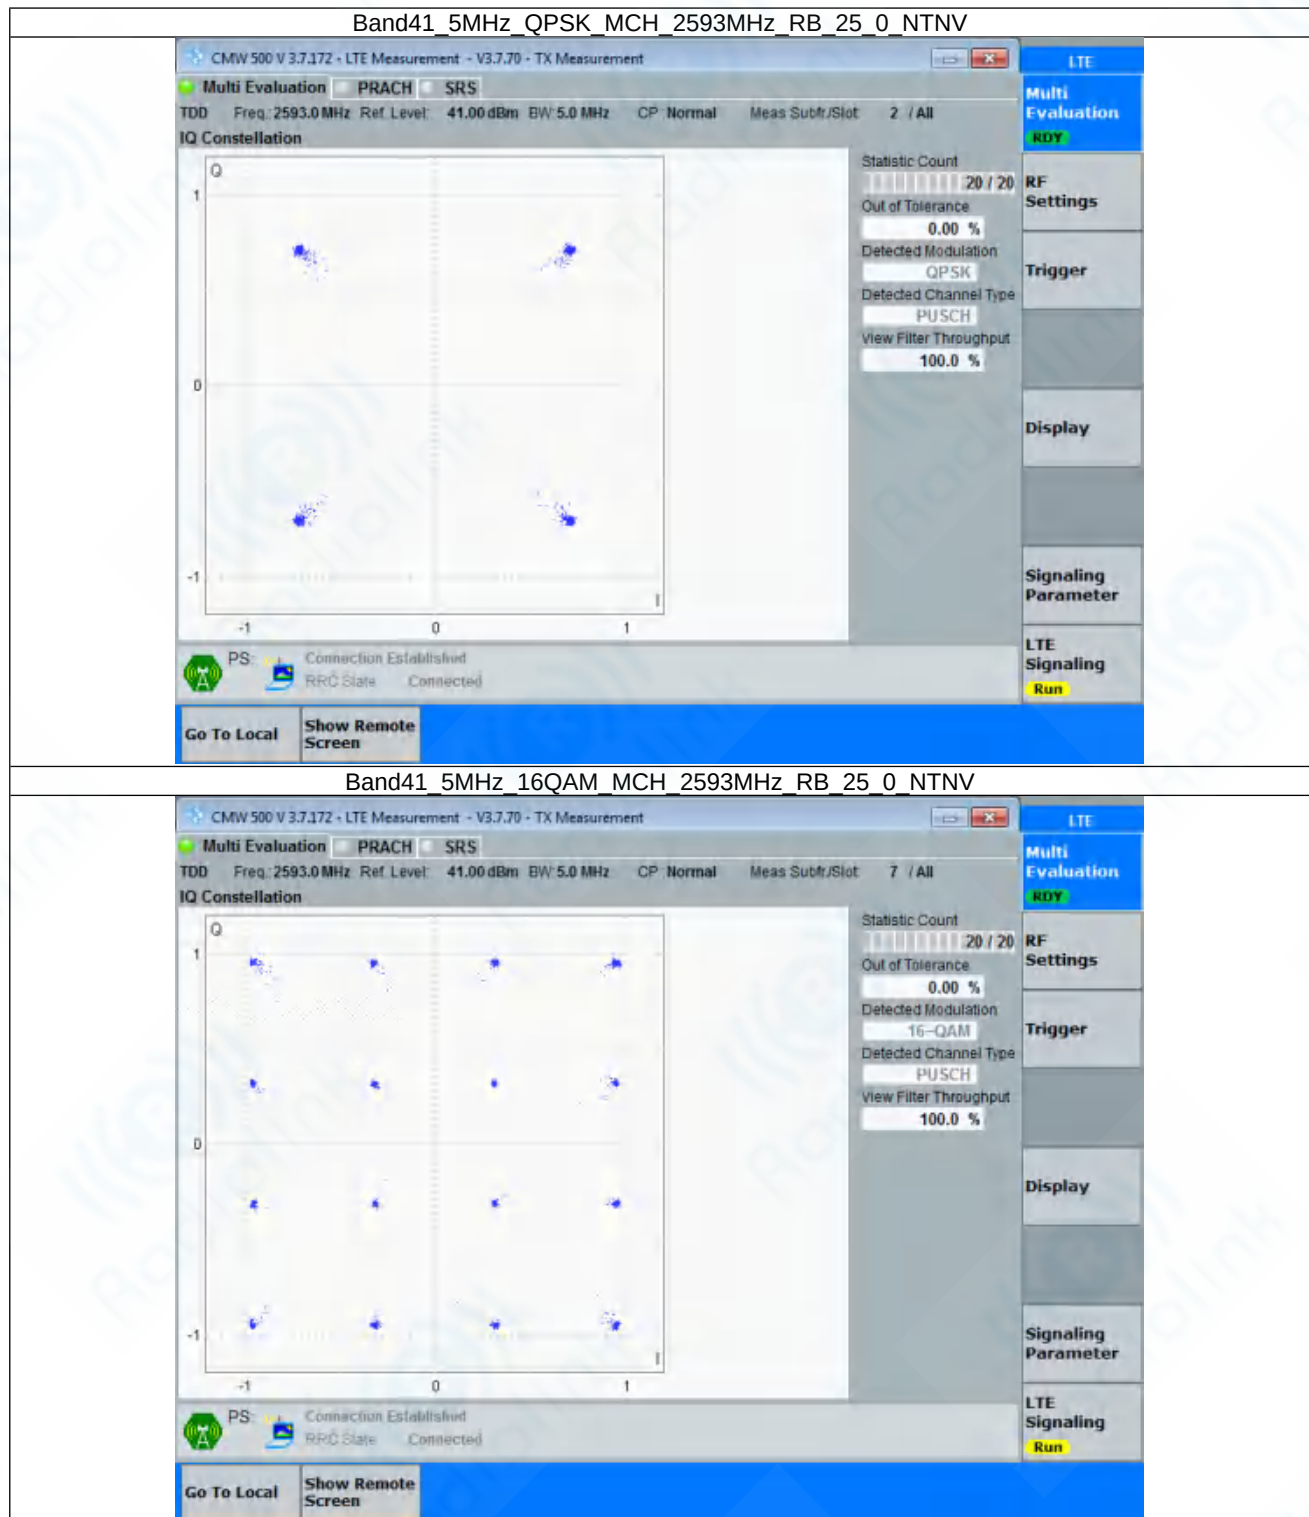

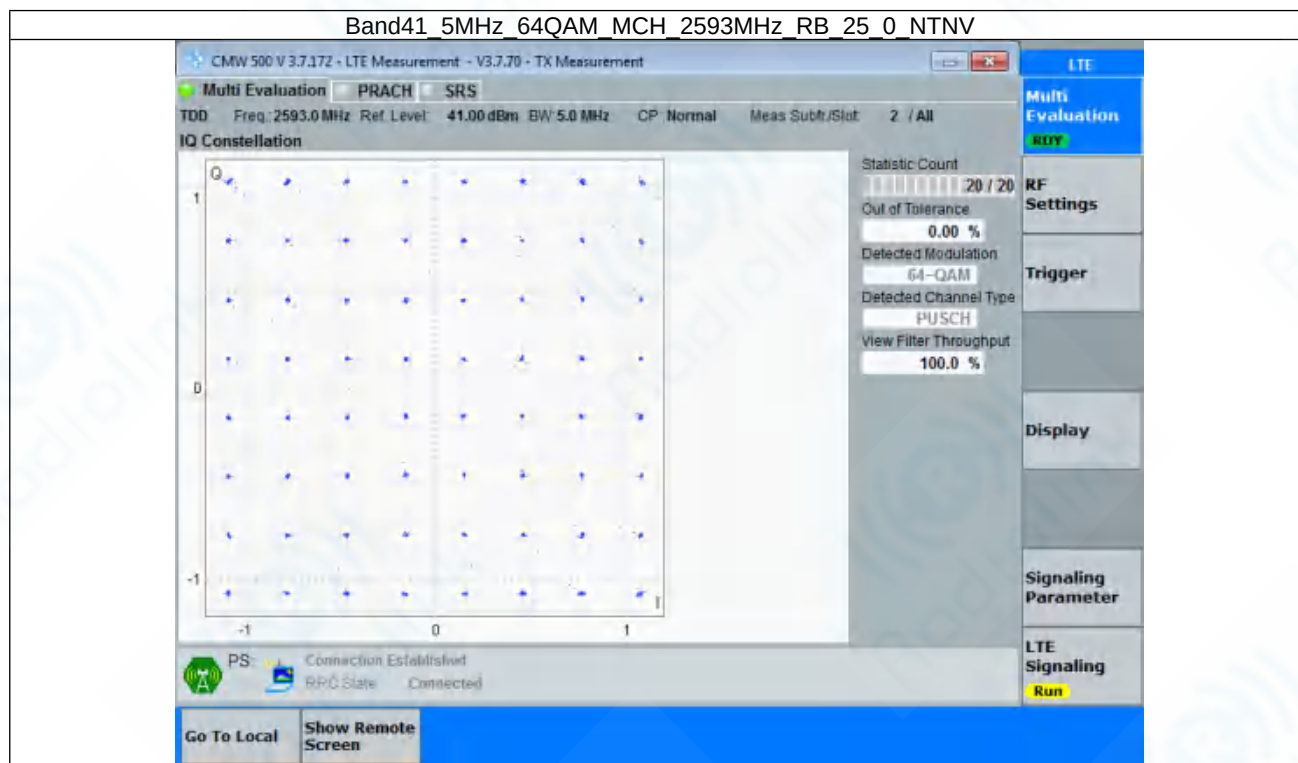**Radiolink Testing (Shenzhen) Co., Ltd.**


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

3.2.2 B41_10MHz

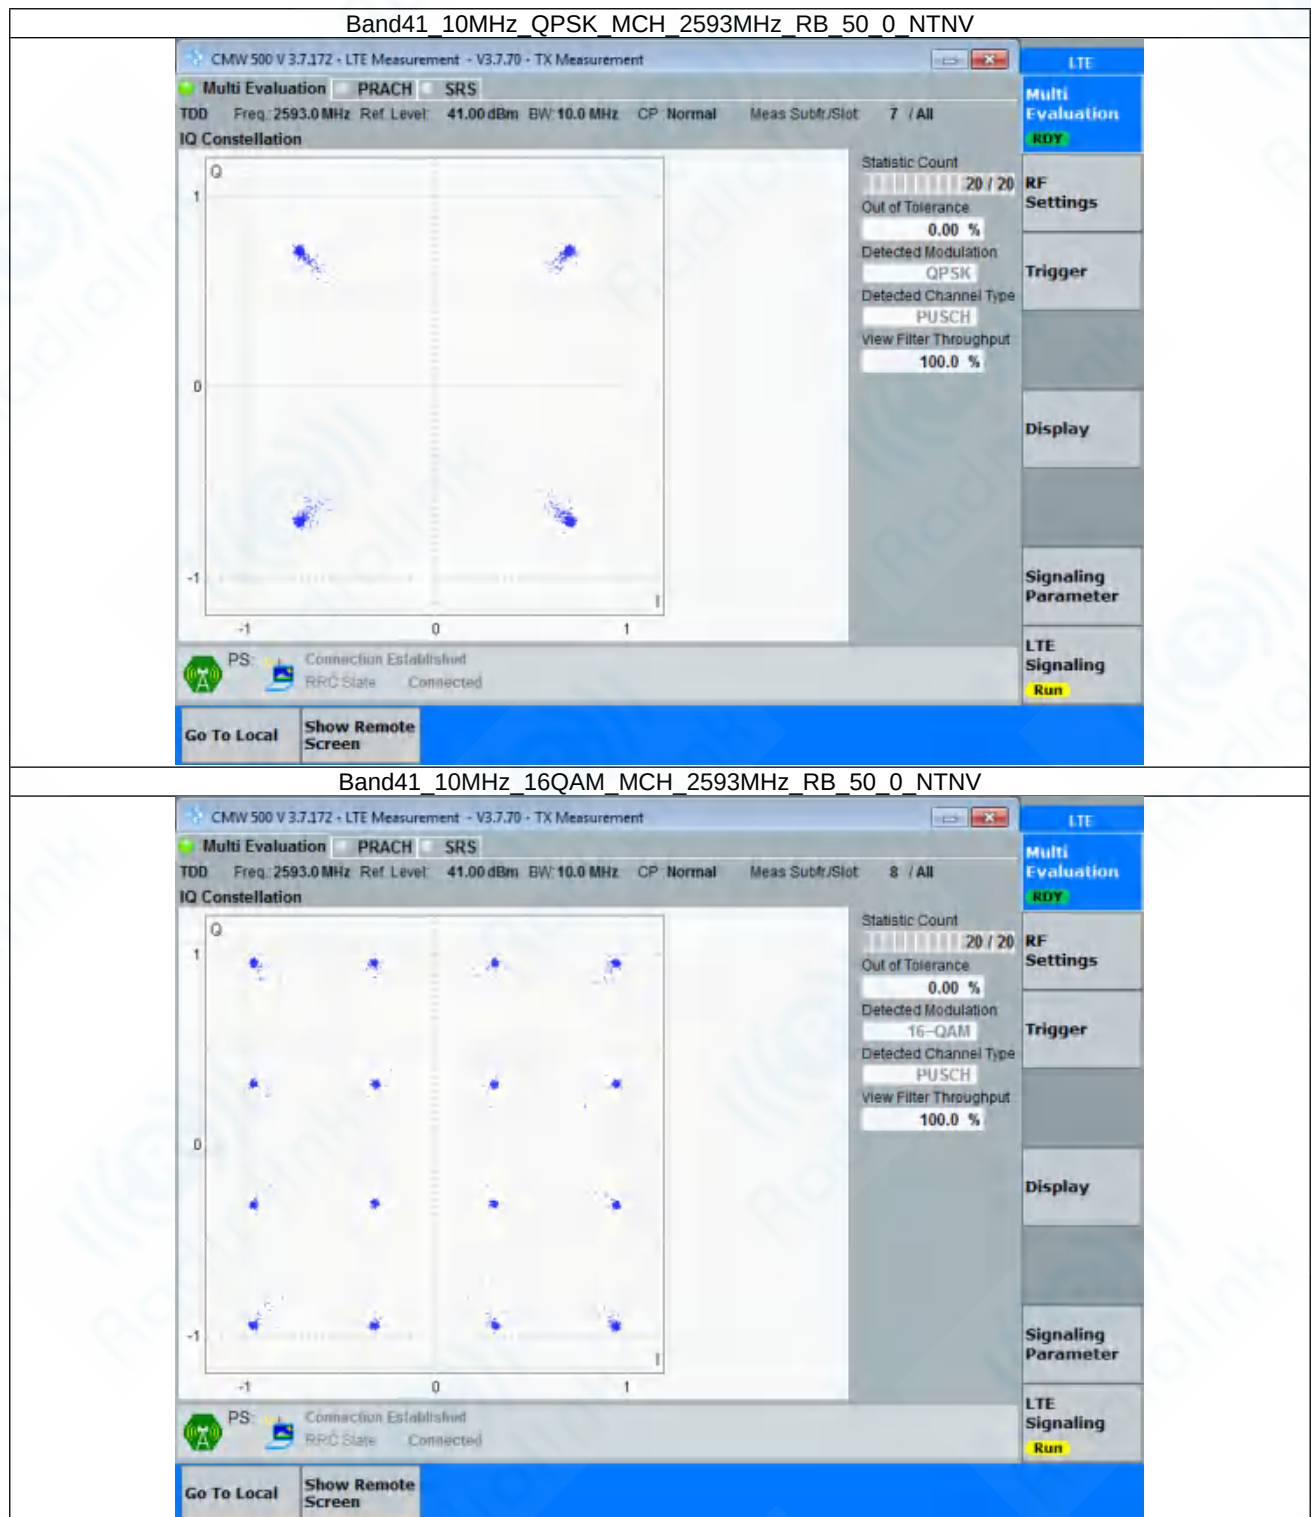

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

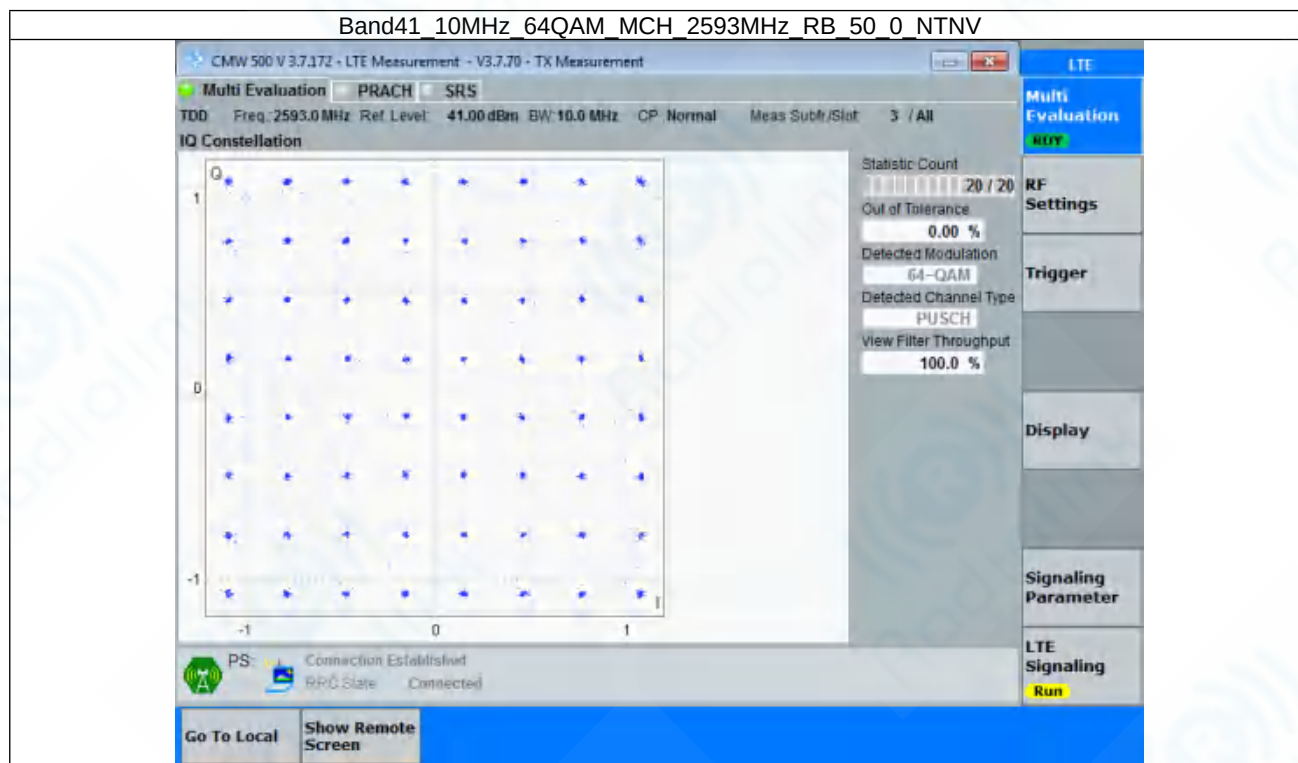

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

3.2.3 B41_15MHz

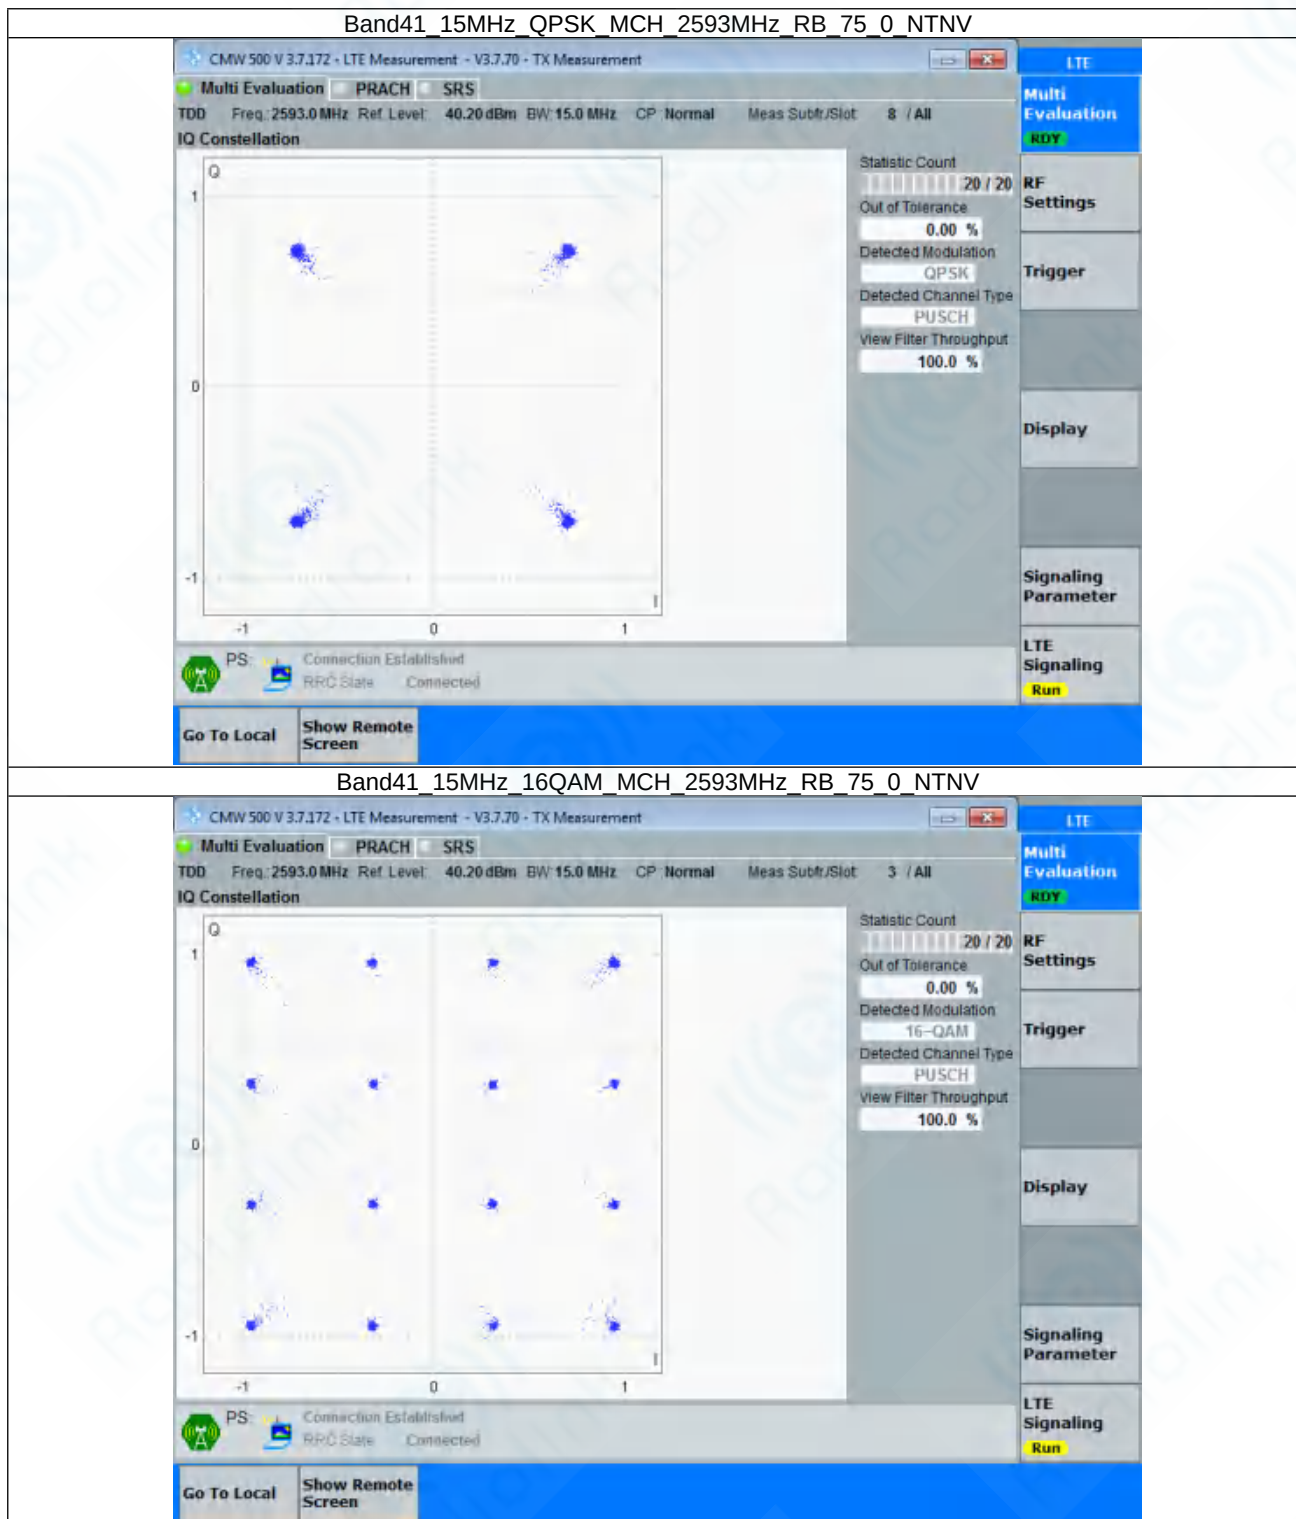

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

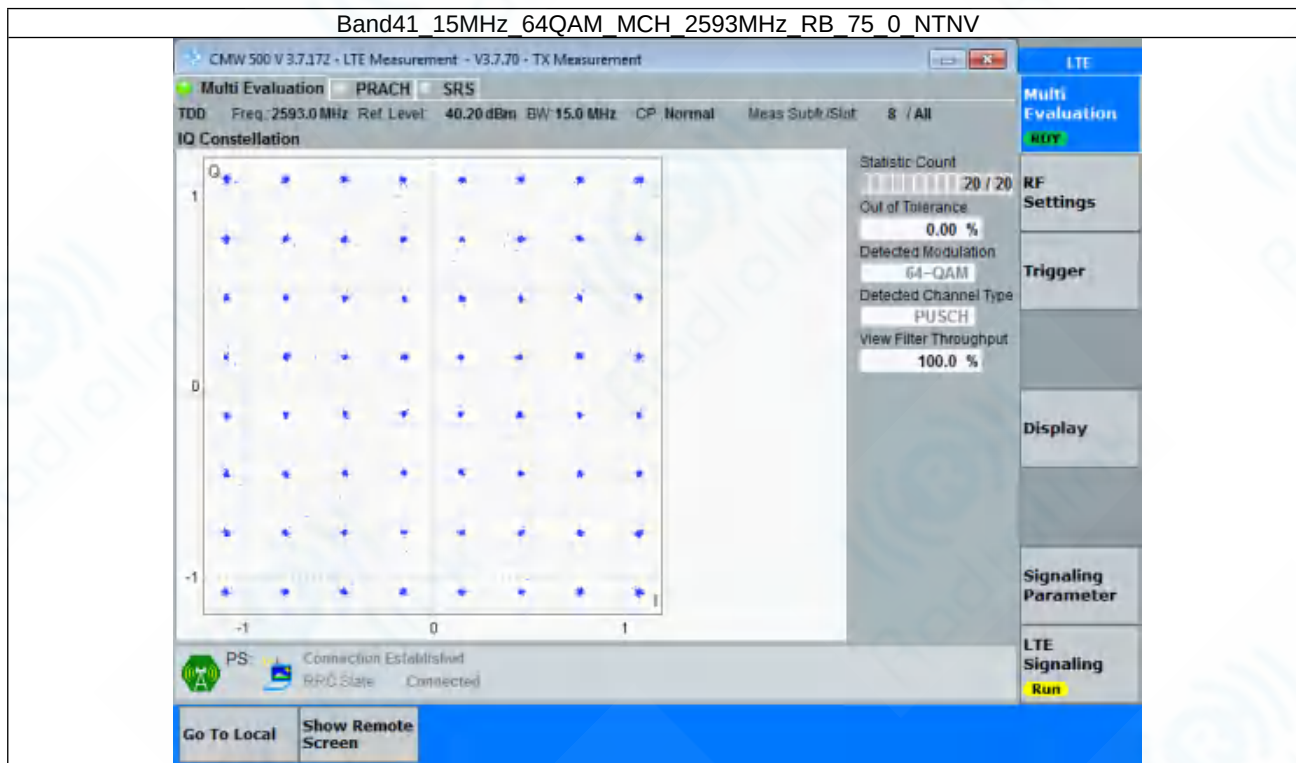



Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

3.2.4 B41_20MHz

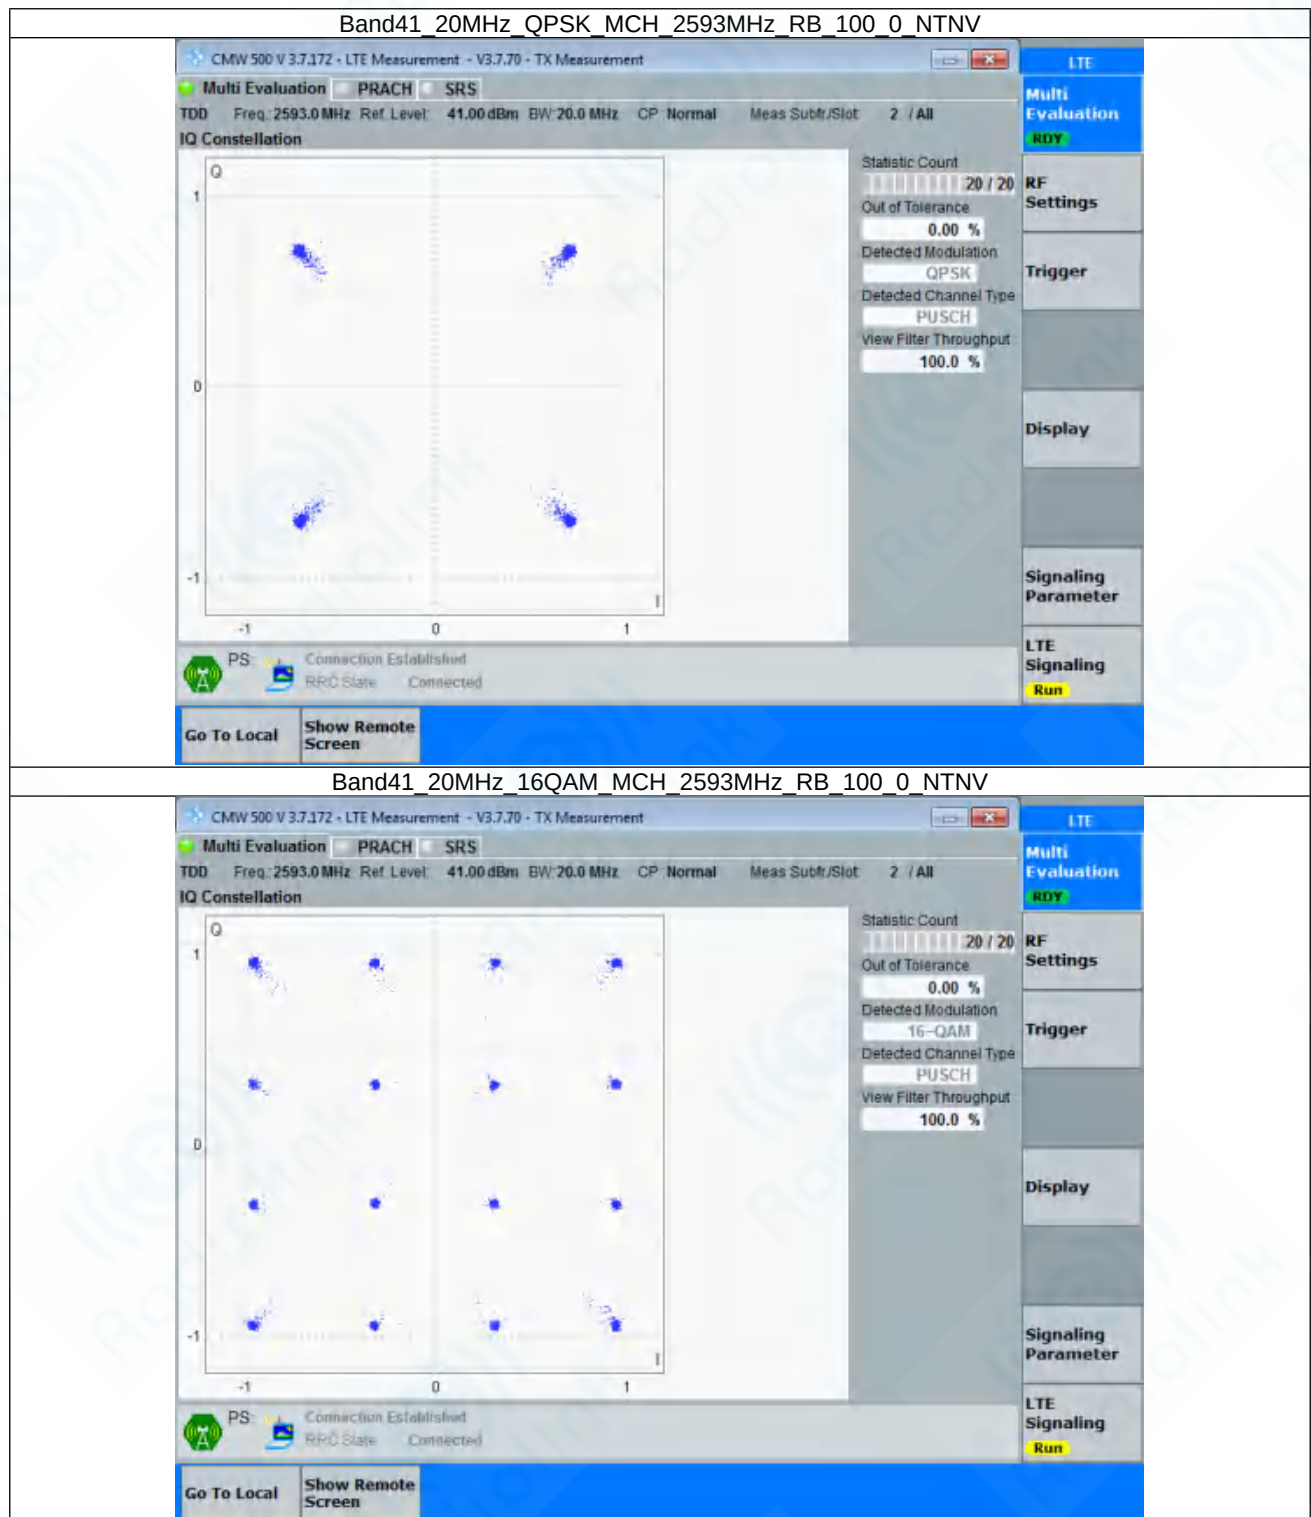

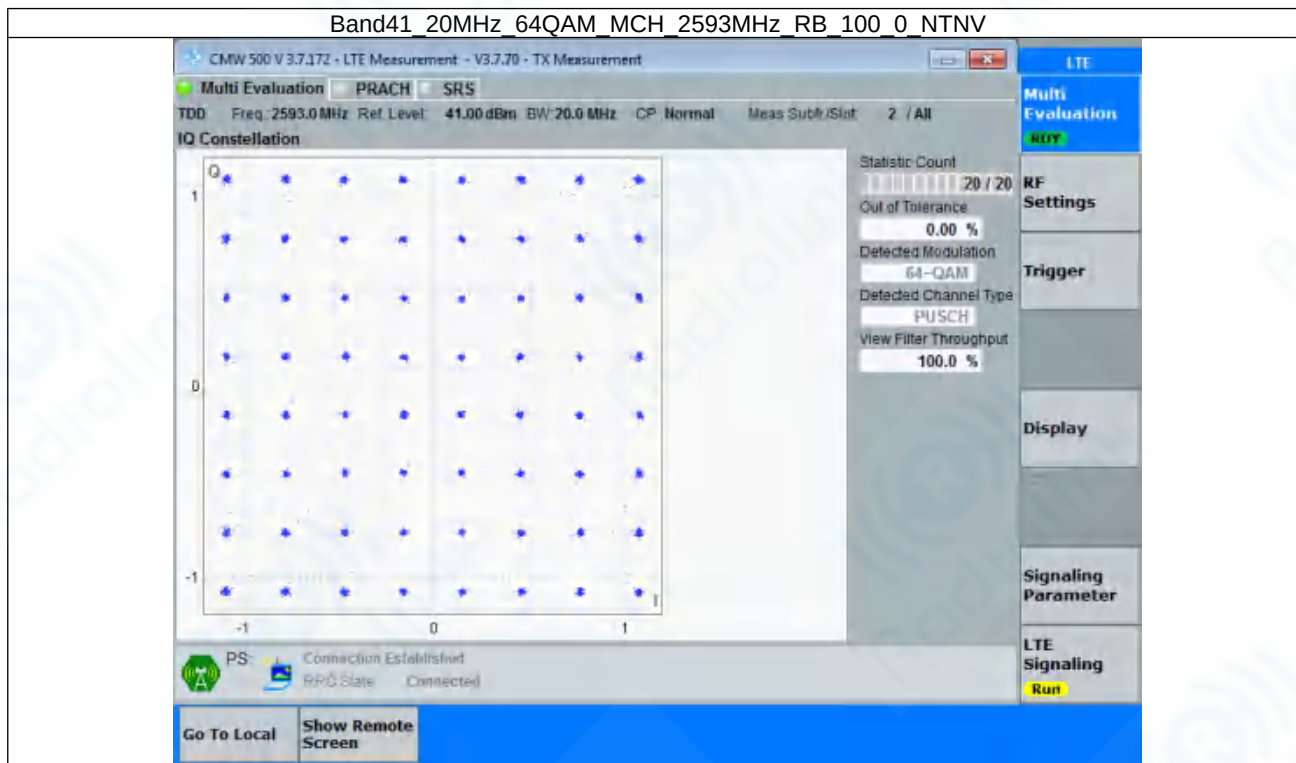

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

4. 99% & 26dB Bandwidth

4.1 Test Result

4.1.1 Band41_OBW

Band: 41 / NTNV							
Bandwidth (MHz)	Modulation	Frequency (MHz)	RB Allocation		99% Occupied Bandwidth (MHz)		Verdict
			Size	Offset	Result	Limit	
5	QPSK	2498.5	25	0	4.602	/	Pass
		2593	25	0	4.590	/	Pass
		2687.5	25	0	4.589	/	Pass
	16QAM	2498.5	25	0	4.605	/	Pass
		2593	25	0	4.588	/	Pass
		2687.5	25	0	4.607	/	Pass
	64QAM	2498.5	25	0	4.601	/	Pass
		2593	25	0	4.618	/	Pass
		2687.5	25	0	4.604	/	Pass
10	QPSK	2501	50	0	9.045	/	Pass
		2593	50	0	9.050	/	Pass
		2685	50	0	9.092	/	Pass
	16QAM	2501	50	0	9.101	/	Pass
		2593	50	0	9.093	/	Pass
		2685	50	0	9.094	/	Pass
	64QAM	2501	50	0	9.055	/	Pass
		2593	50	0	9.089	/	Pass
		2685	50	0	9.102	/	Pass
15	QPSK	2503.5	75	0	14.111	/	Pass
		2593	75	0	14.089	/	Pass
		2682.5	75	0	14.129	/	Pass
	16QAM	2503.5	75	0	14.094	/	Pass
		2593	75	0	14.094	/	Pass
		2682.5	75	0	14.083	/	Pass
	64QAM	2503.5	75	0	14.125	/	Pass
		2593	75	0	14.141	/	Pass
		2682.5	75	0	14.121	/	Pass
20	QPSK	2506	100	0	18.436	/	Pass
		2593	100	0	18.414	/	Pass
		2680	100	0	18.414	/	Pass
	16QAM	2506	100	0	18.485	/	Pass
		2593	100	0	18.457	/	Pass
		2680	100	0	18.477	/	Pass
	64QAM	2506	100	0	18.441	/	Pass
		2593	100	0	18.431	/	Pass
		2680	100	0	18.419	/	Pass

4.1.2 Band41_XDB

Band: 41 / NTNV							
Bandwidth (MHz)	Modulation	Frequency (MHz)	RB Allocation		26dB Bandwidth (MHz)		Verdict
			Size	Offset	Result	Limit	
5	QPSK	2498.5	25	0	6.315	/	Pass
		2593	25	0	5.700	/	Pass
		2687.5	25	0	5.589	/	Pass
	16QAM	2498.5	25	0	5.529	/	Pass
		2593	25	0	5.915	/	Pass
		2687.5	25	0	5.931	/	Pass
	64QAM	2498.5	25	0	5.428	/	Pass
		2593	25	0	5.578	/	Pass
		2687.5	25	0	5.578	/	Pass

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

		2687.5	25	0	5.877	/	Pass
10	QPSK	2501	50	0	11.042	/	Pass
		2593	50	0	10.137	/	Pass
		2685	50	0	10.076	/	Pass
		2501	50	0	10.313	/	Pass
	16QAM	2593	50	0	10.393	/	Pass
		2685	50	0	10.126	/	Pass
		2501	50	0	10.209	/	Pass
	64QAM	2593	50	0	11.618	/	Pass
		2685	50	0	10.822	/	Pass
15	QPSK	2503.5	75	0	19.830	/	Pass
		2593	75	0	19.154	/	Pass
		2682.5	75	0	18.528	/	Pass
	16QAM	2503.5	75	0	17.244	/	Pass
		2593	75	0	18.656	/	Pass
		2682.5	75	0	18.234	/	Pass
	64QAM	2503.5	75	0	21.499	/	Pass
		2593	75	0	20.458	/	Pass
		2682.5	75	0	18.360	/	Pass
20	QPSK	2506	100	0	21.944	/	Pass
		2593	100	0	24.424	/	Pass
		2680	100	0	21.121	/	Pass
	16QAM	2506	100	0	21.346	/	Pass
		2593	100	0	21.345	/	Pass
		2680	100	0	21.222	/	Pass
	64QAM	2506	100	0	25.385	/	Pass
		2593	100	0	24.217	/	Pass
		2680	100	0	23.430	/	Pass

4.2 Test Graph


4.2.1 Band41_OBW

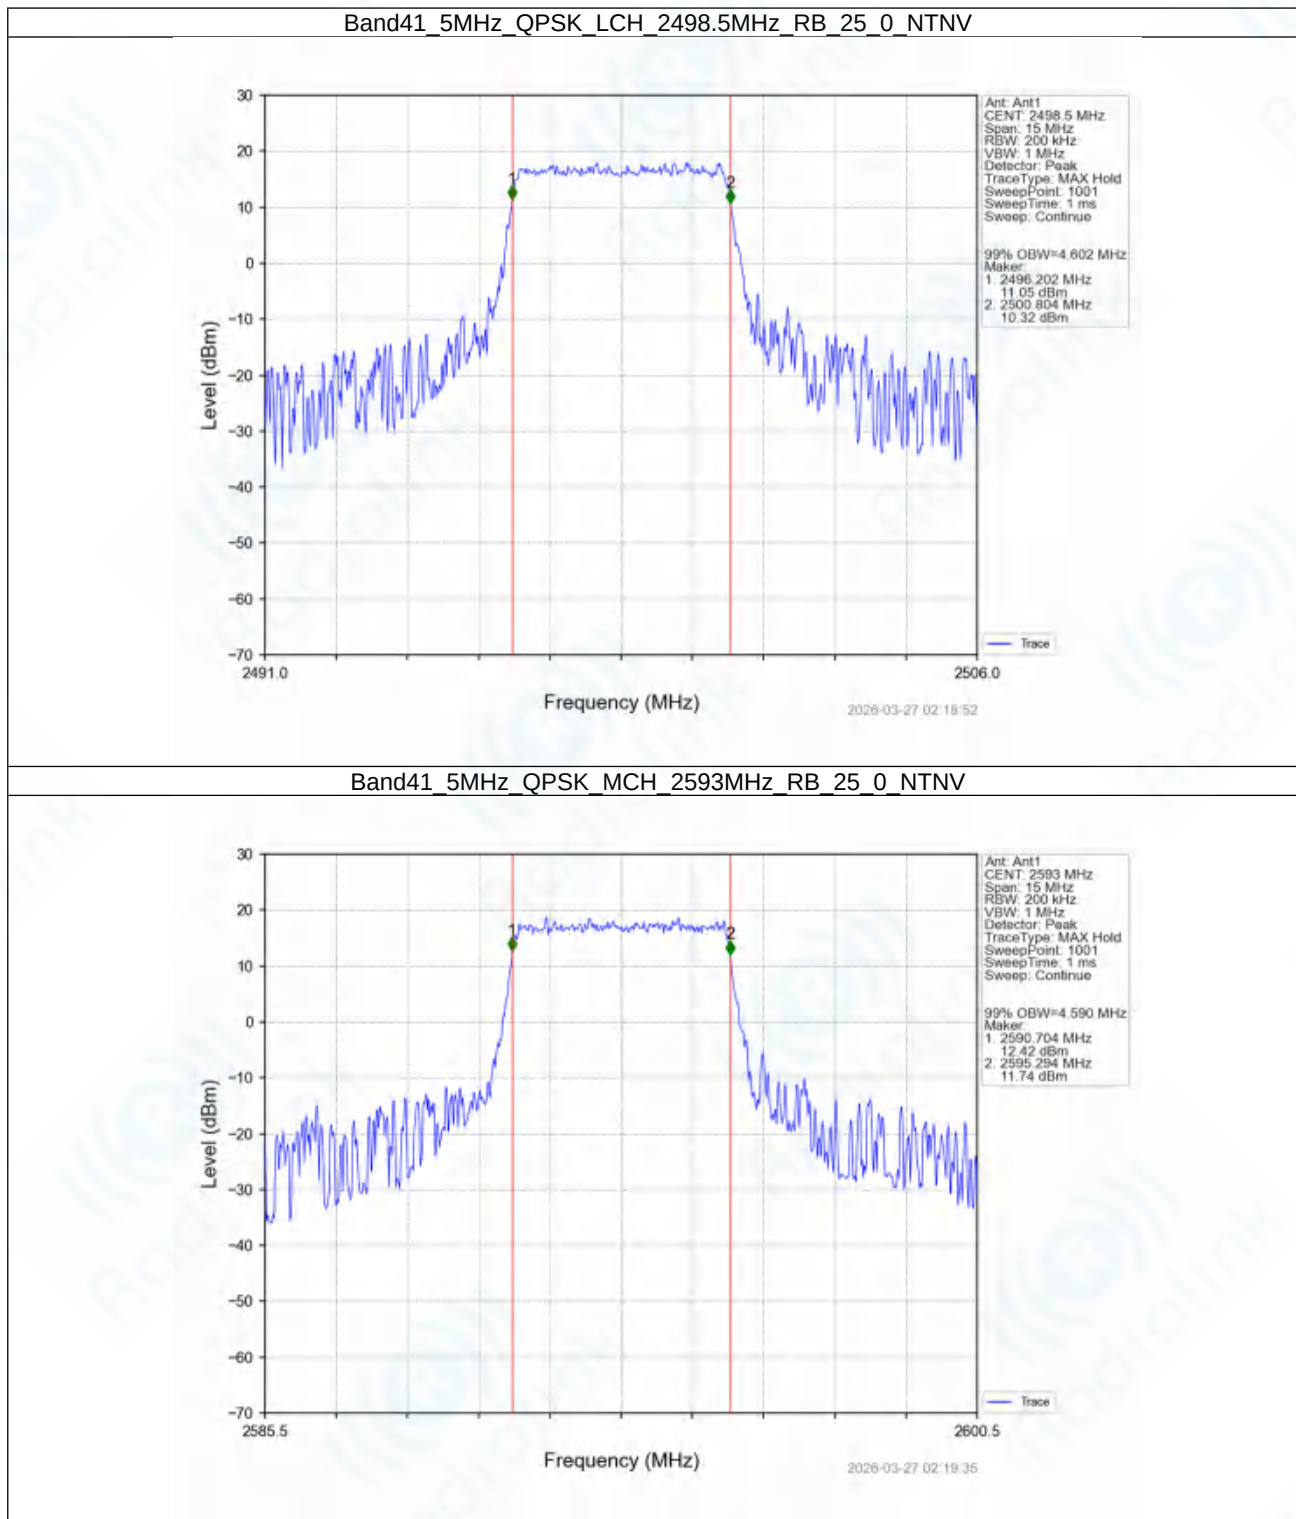


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_5MHz_QPSK_HCH_2687.5MHz_RB_25_0_NTNV

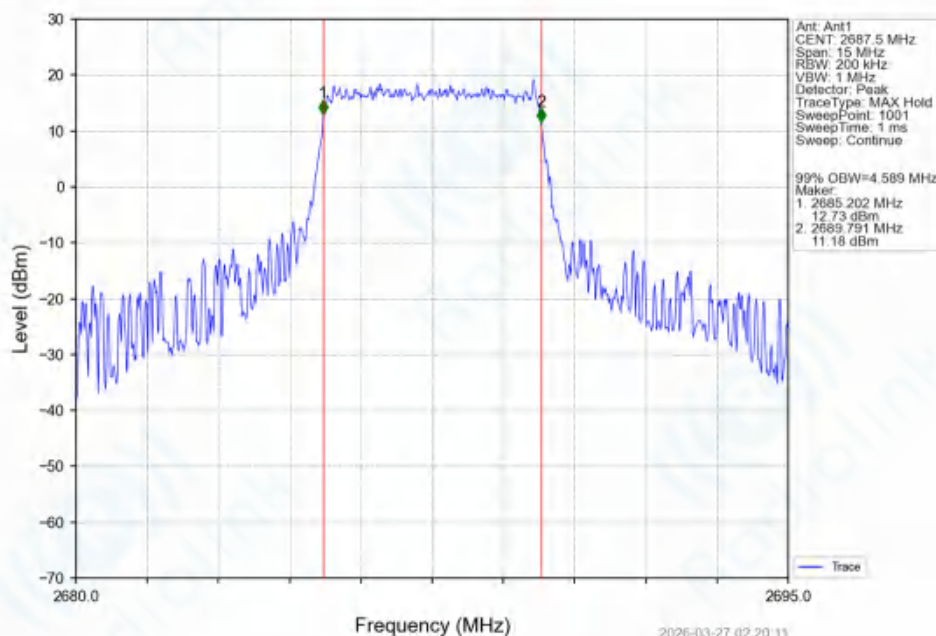


Band41_5MHz_16QAM_LCH_2498.5MHz_RB_25_0_NTNV

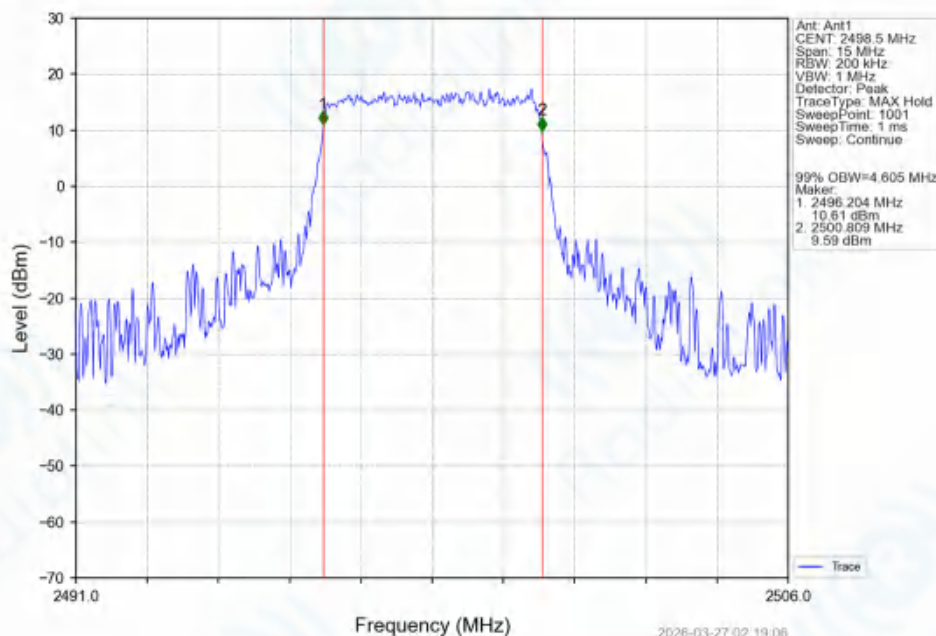


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_5MHz_16QAM_MCH_2593MHz_RB_25_0_NTNV

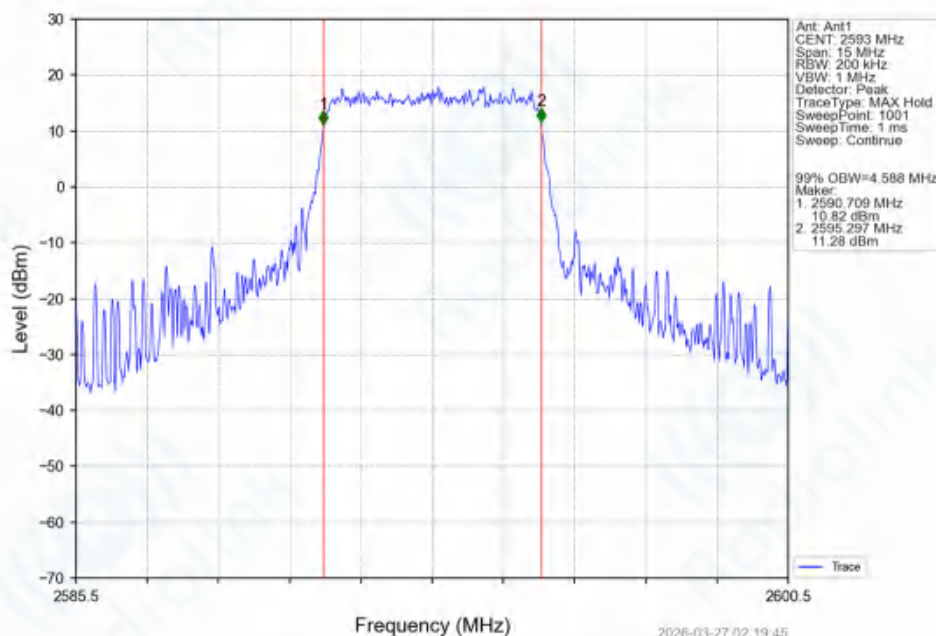


Band41_5MHz_16QAM_HCH_2687.5MHz_RB_25_0_NTNV

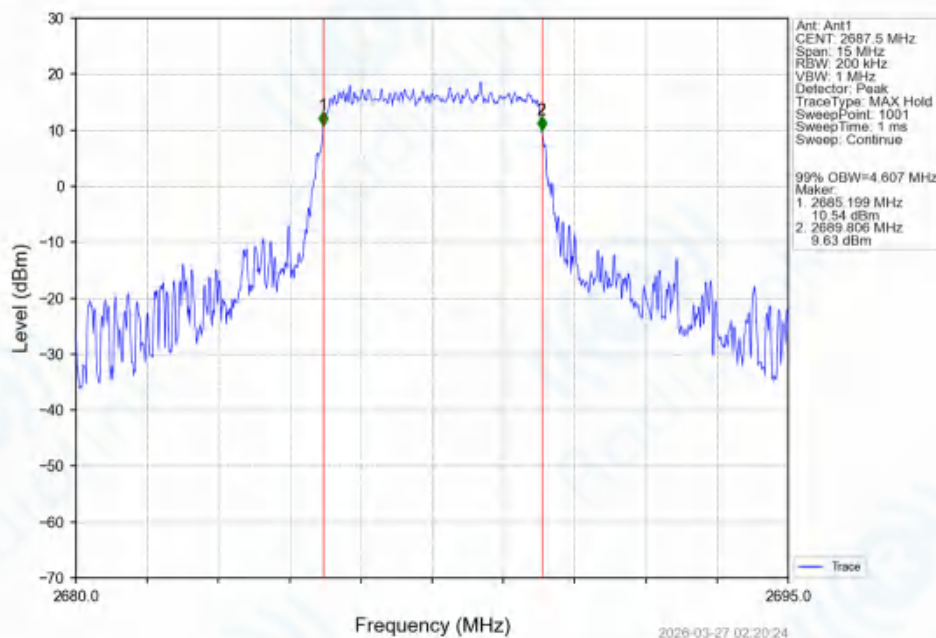

Band41_5MHz_64QAM_LCH_2498.5MHz_RB_25_0_NTNV

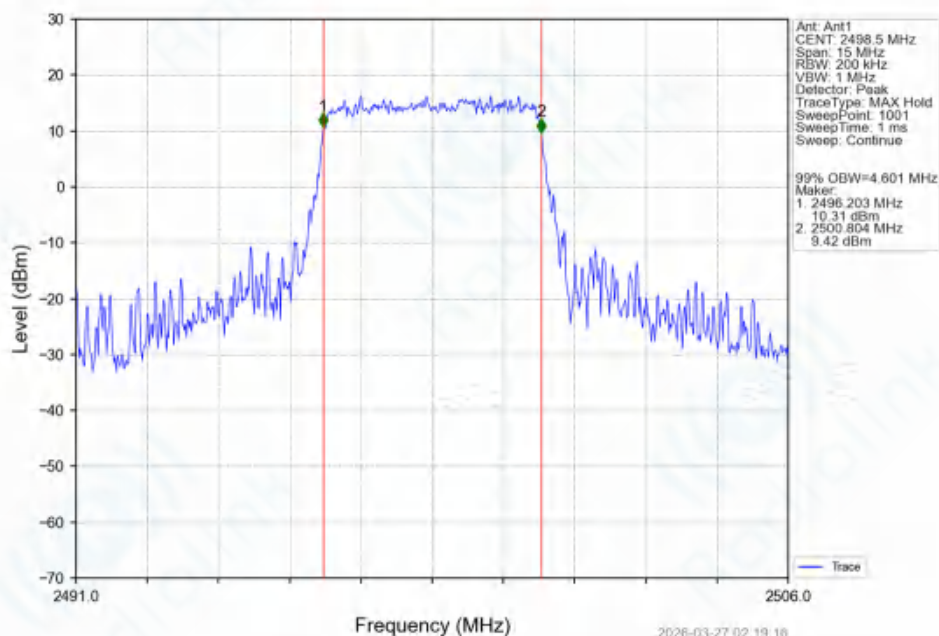


Band41_5MHz_64QAM_MCH_2593MHz_RB_25_0_NTNV

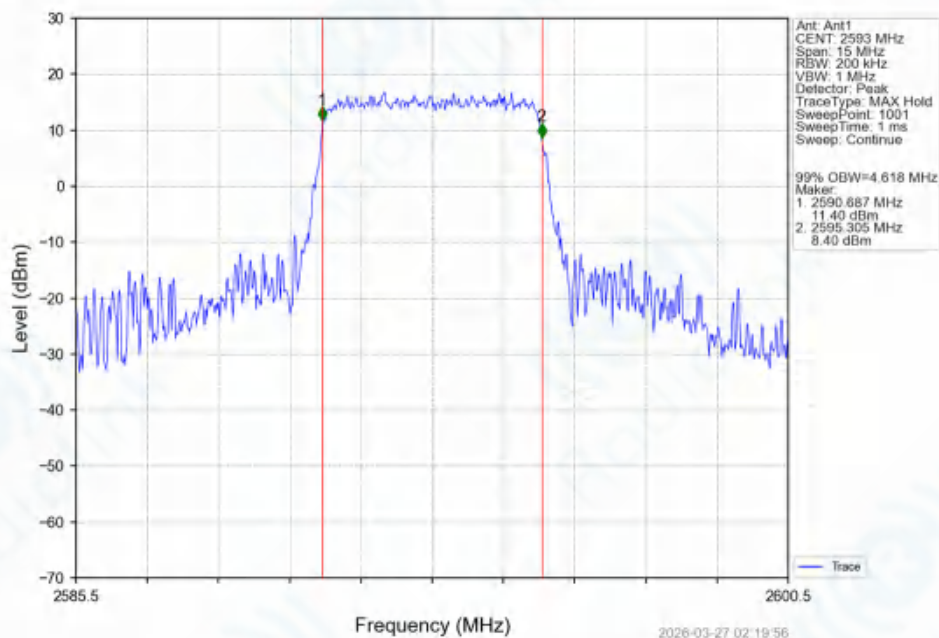

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_5MHz_64QAM_HCH_2687.5MHz_RB_25_0_NTNV

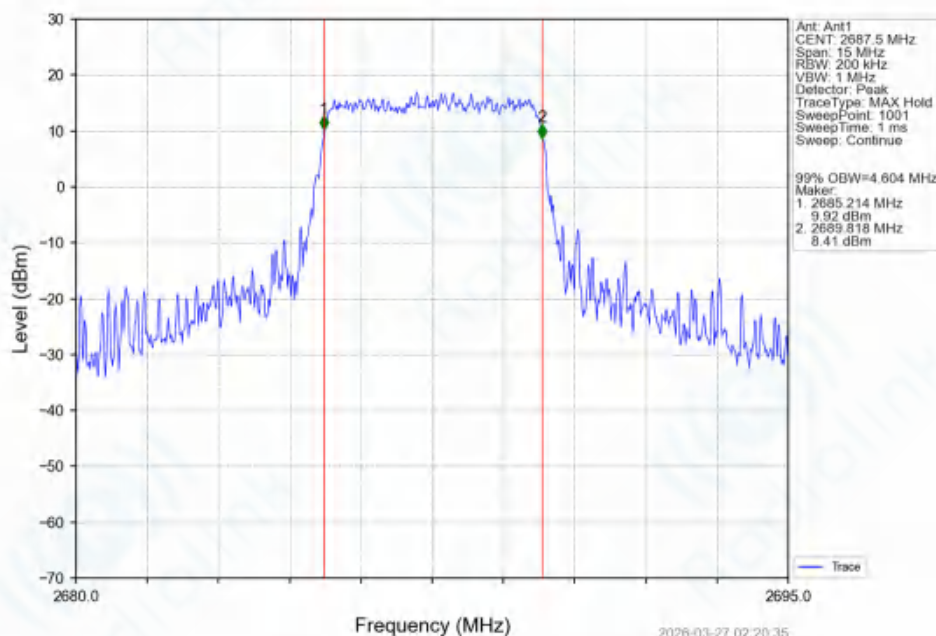


Band41_10MHz_QPSK_LCH_2501MHz_RB_50_0_NTNV

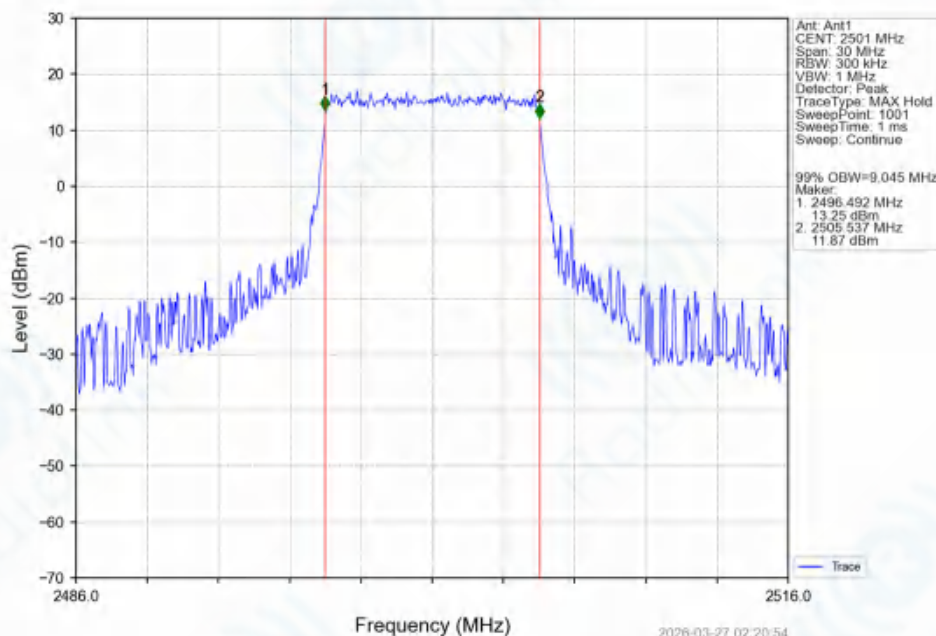


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_10MHz_QPSK_MCH_2593MHz_RB_50_0_NTNV

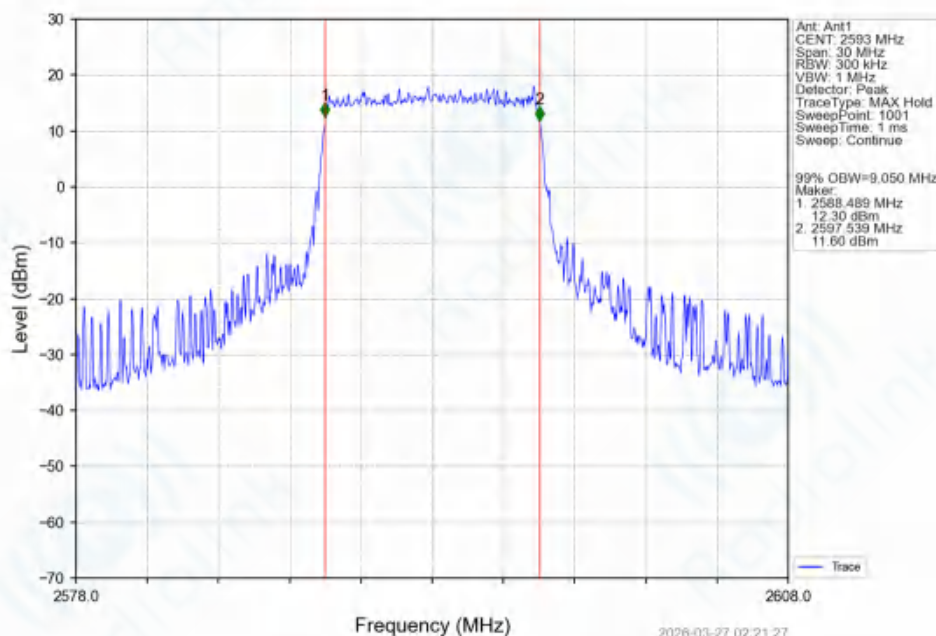


Band41_10MHz_QPSK_HCH_2685MHz_RB_50_0_NTNV

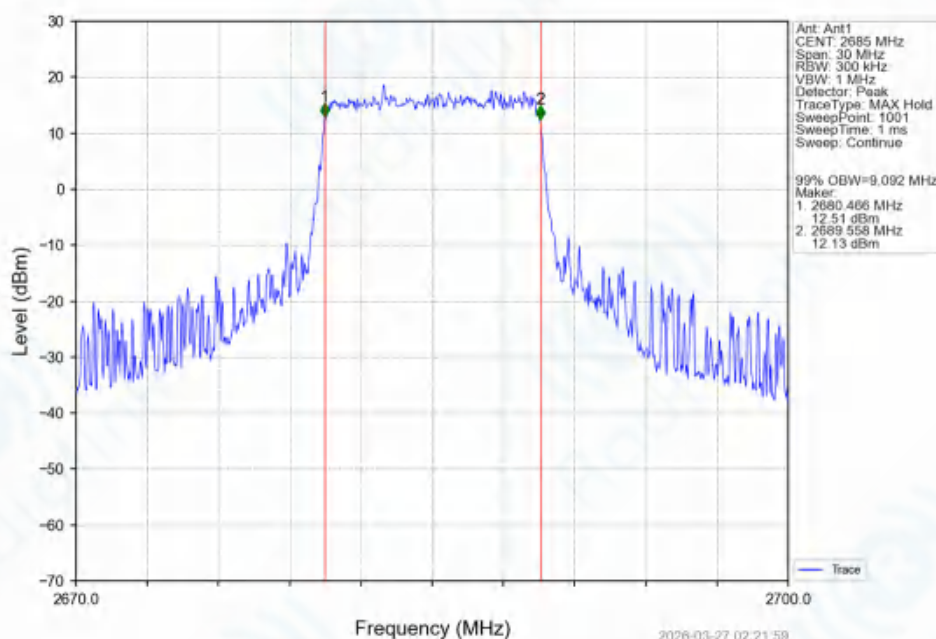

Band41_10MHz_16QAM_LCH_2501MHz_RB_50_0_NTNV

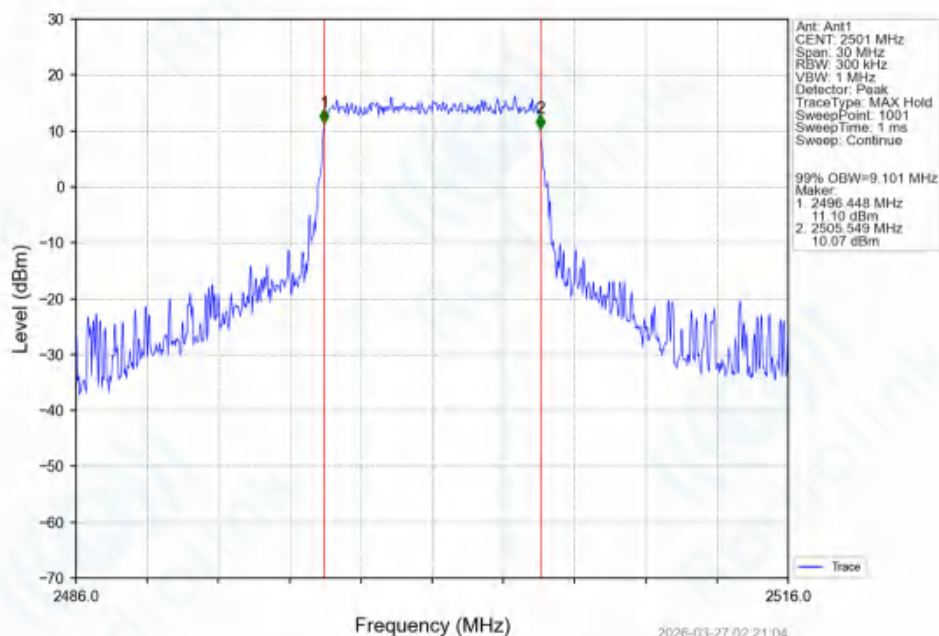


Band41_10MHz_16QAM_MCH_2593MHz_RB_50_0_NTNV

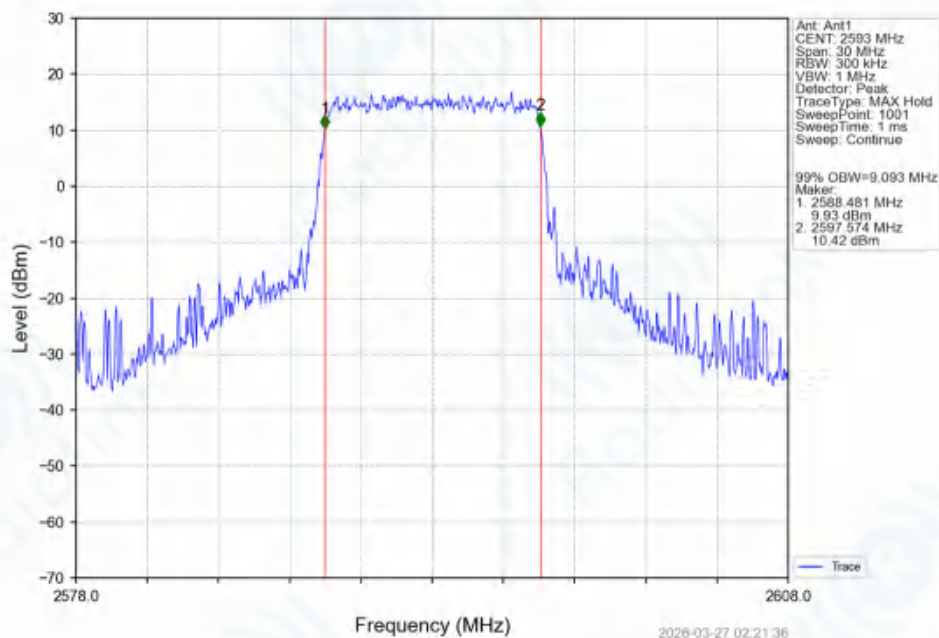


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_16QAM_HCH_2685MHz_RB_50_0_NTNV

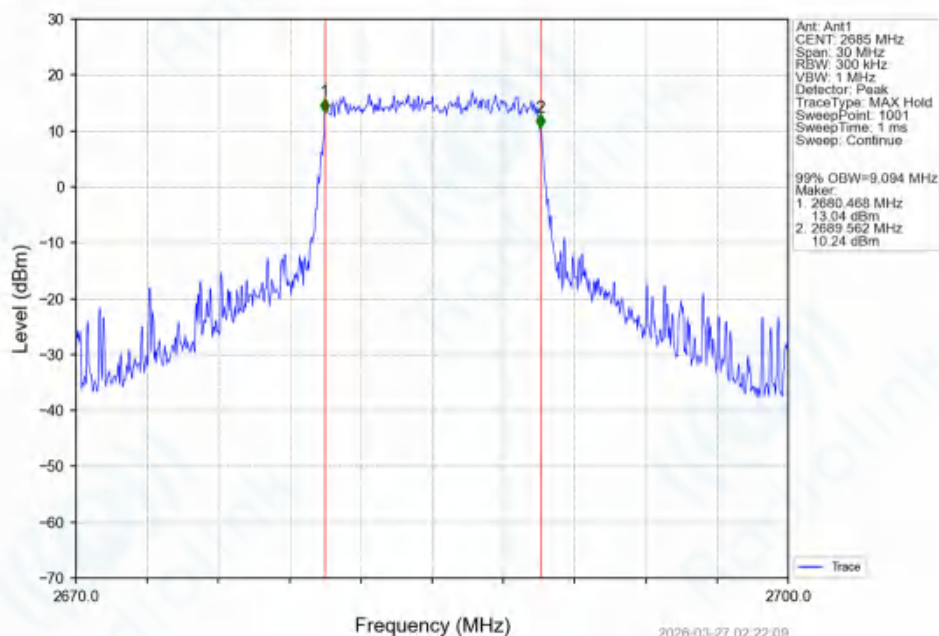


Band41_10MHz_64QAM_LCH_2501MHz_RB_50_0_NTNV

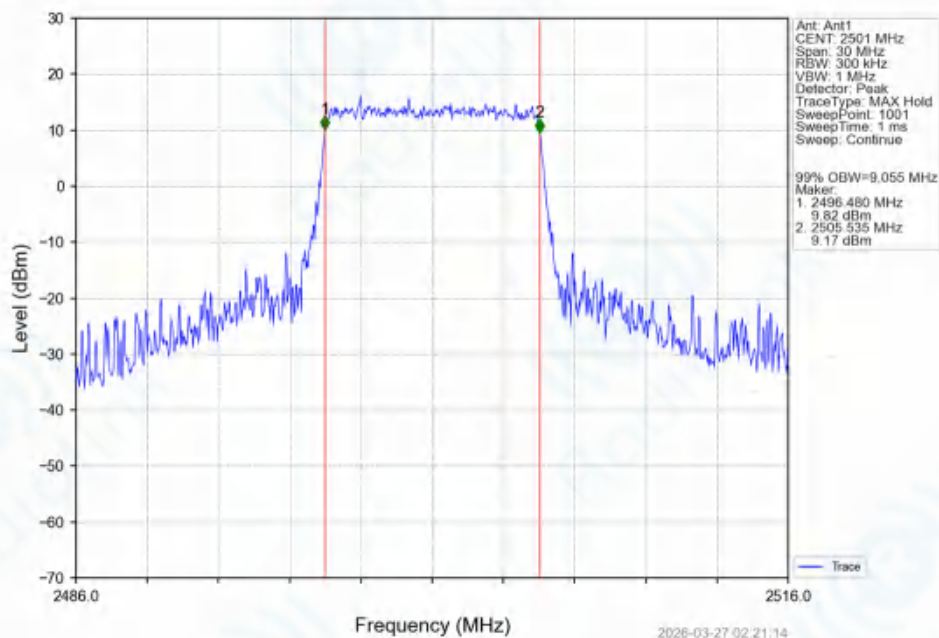


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_10MHz_64QAM_MCH_2593MHz_RB_50_0_NTNV

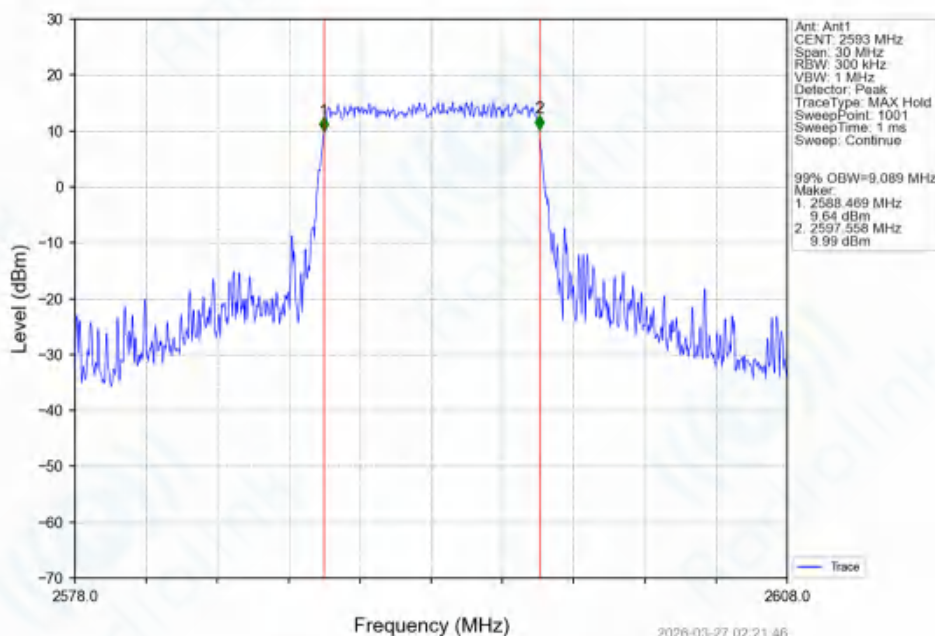


Band41_10MHz_64QAM_HCH_2685MHz_RB_50_0_NTNV

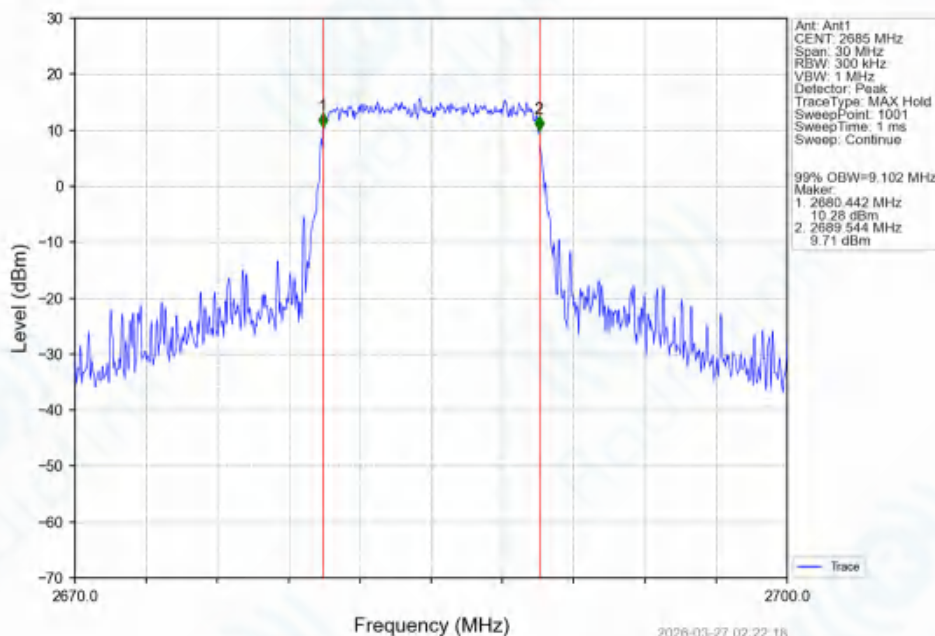

Band41_15MHz_QPSK_LCH_2503.5MHz_RB_75_0_NTNV

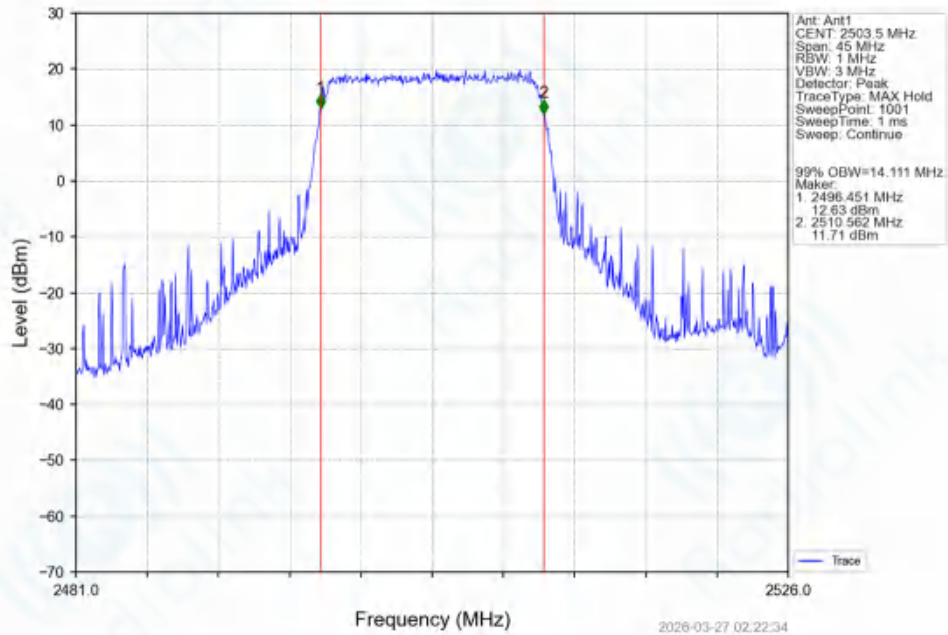


Band41_15MHz_QPSK_MCH_2593MHz_RB_75_0_NTNV

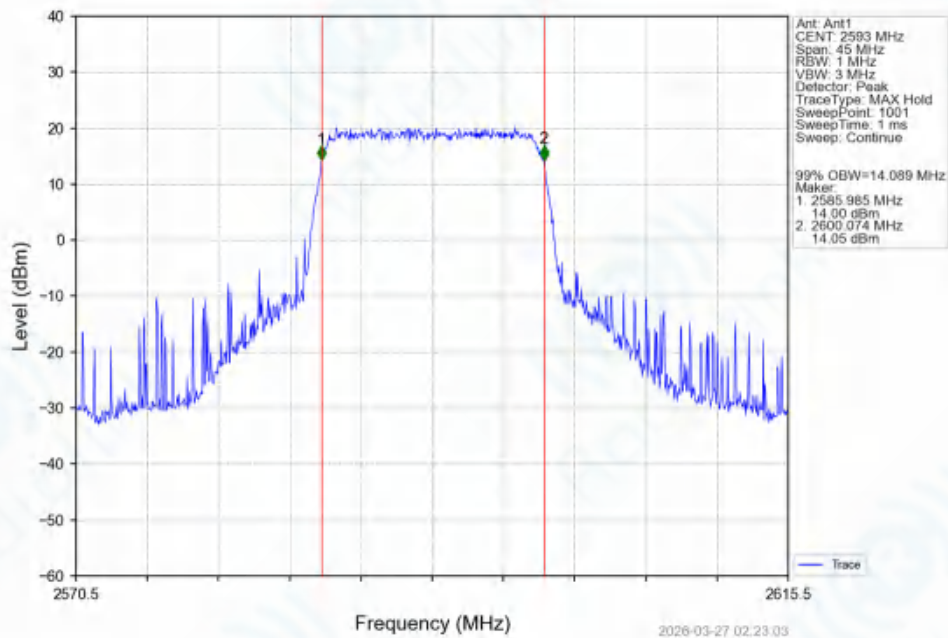
Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

Band41_15MHz_QPSK_HCH_2682.5MHz_RB_75_0_NTNV

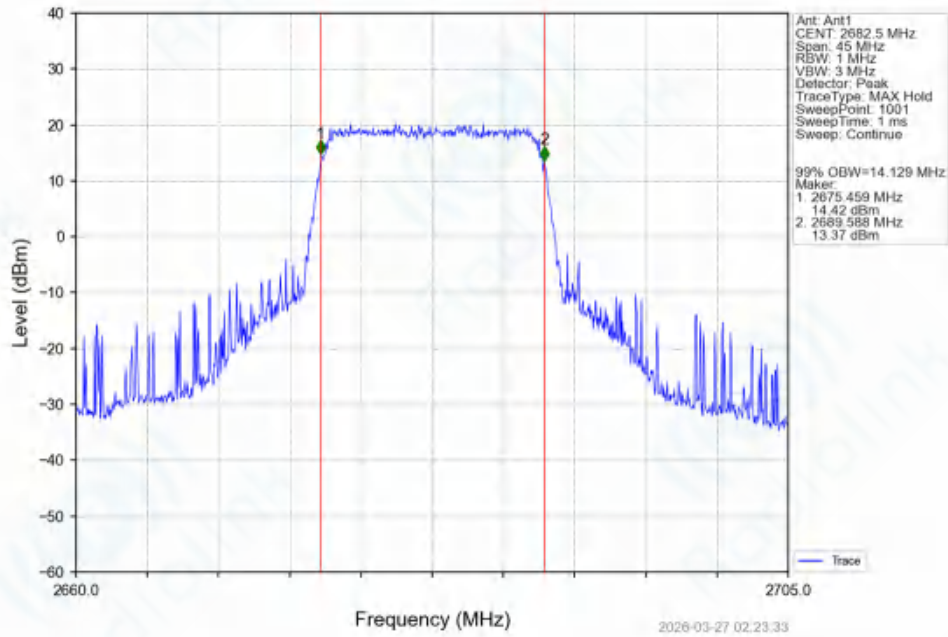


Band41_15MHz_16QAM_LCH_2503.5MHz_RB_75_0_NTNV

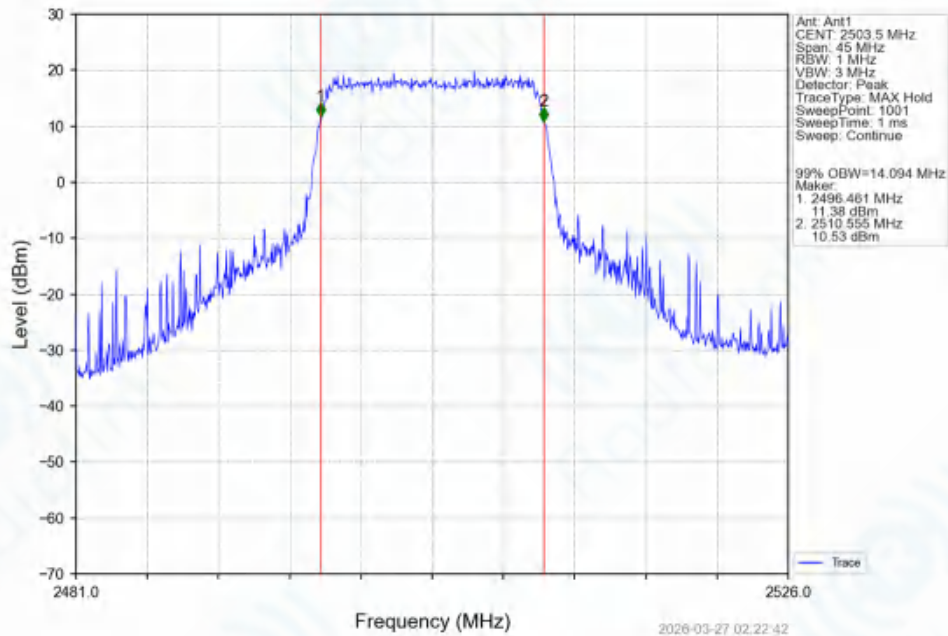


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_15MHz_16QAM_MCH_2593MHz_RB_75_0_NTNV

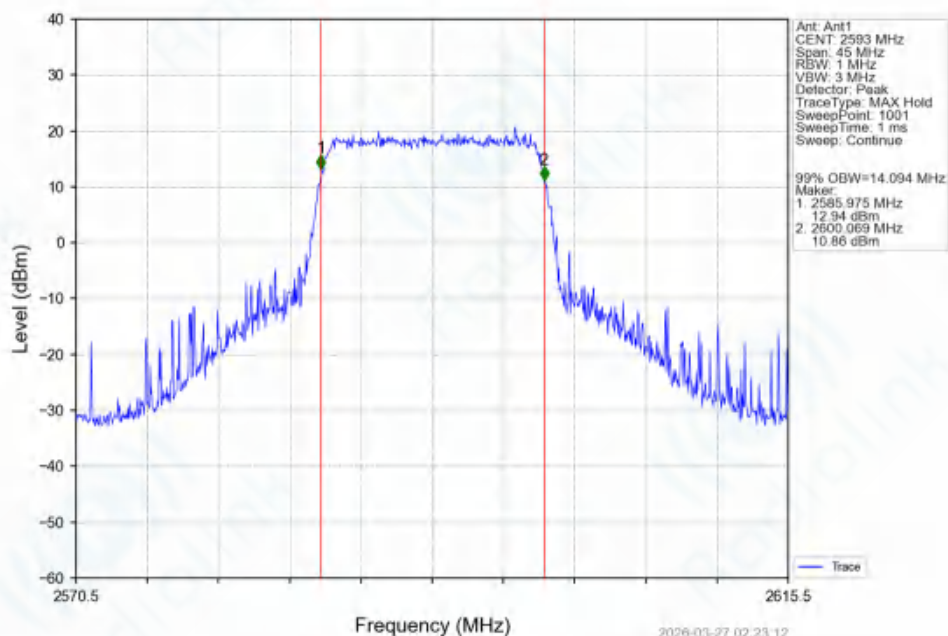


Band41_15MHz_16QAM_HCH_2682.5MHz_RB_75_0_NTNV

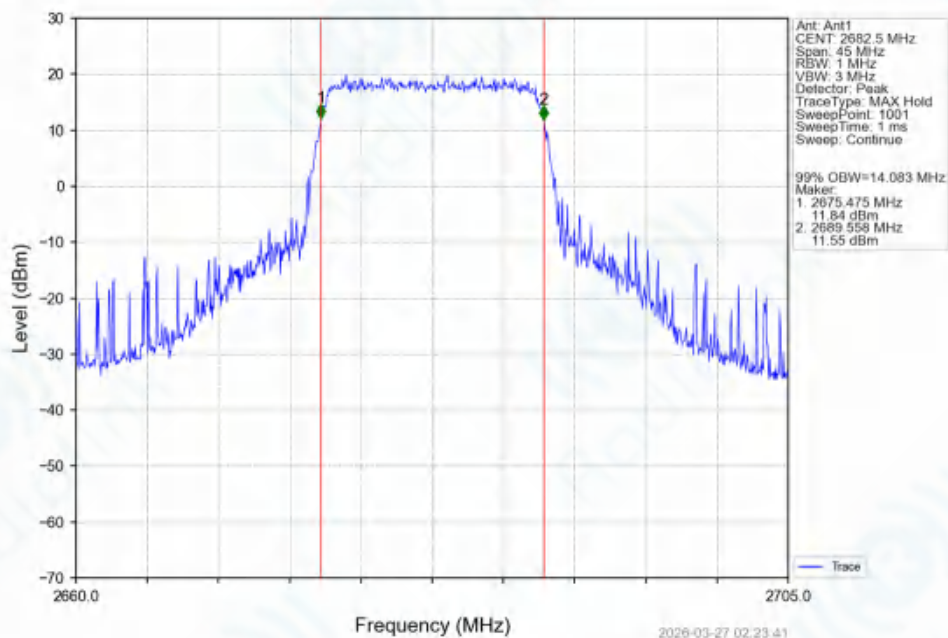

Band41_15MHz_64QAM_LCH_2503.5MHz_RB_75_0_NTNV

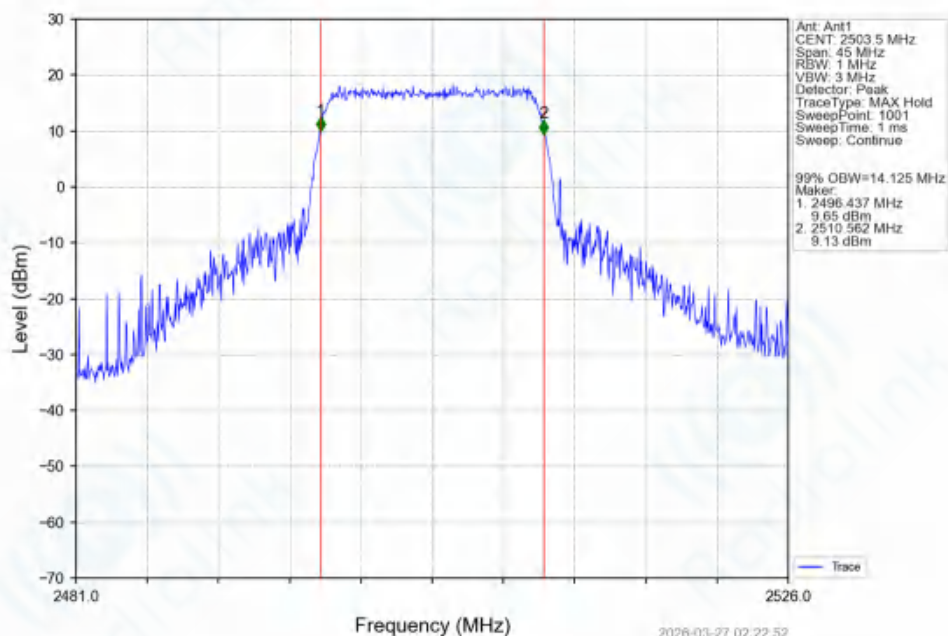


Band41_15MHz_64QAM_MCH_2593MHz_RB_75_0_NTNV

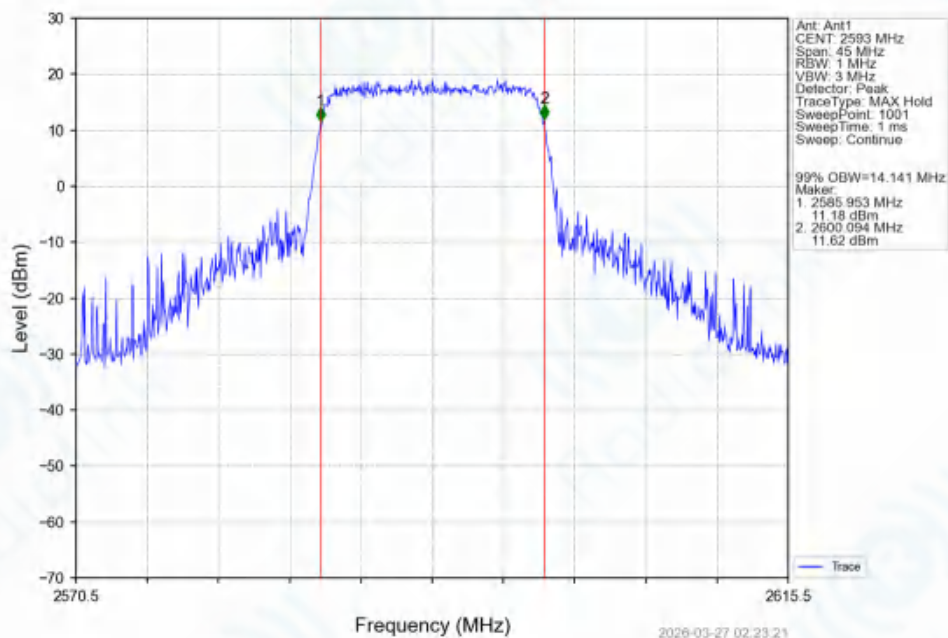


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_15MHz_64QAM_HCH_2682.5MHz_RB_75_0_NTNV

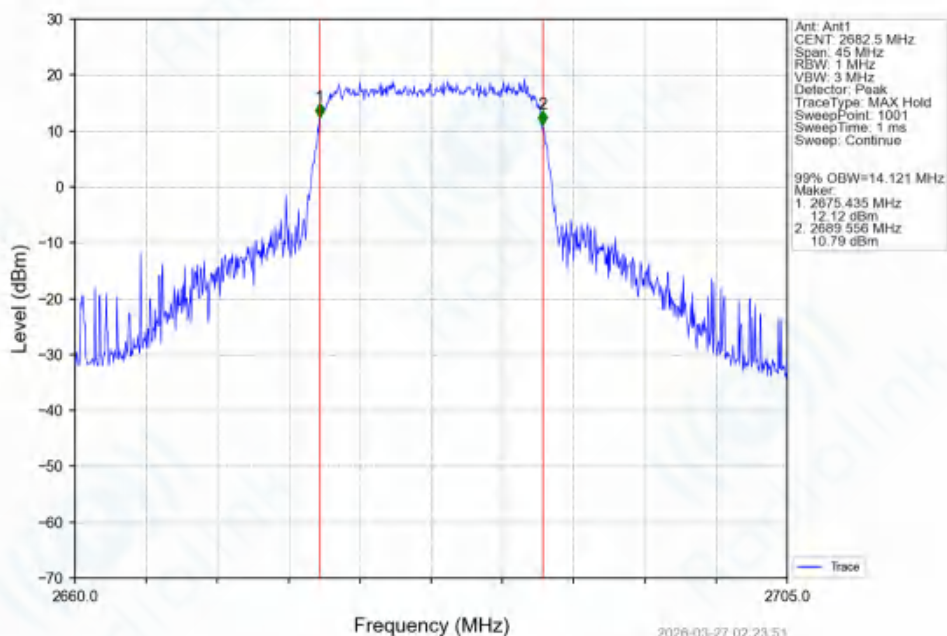


Band41_20MHz_QPSK_LCH_2506MHz_RB_100_0_NTNV

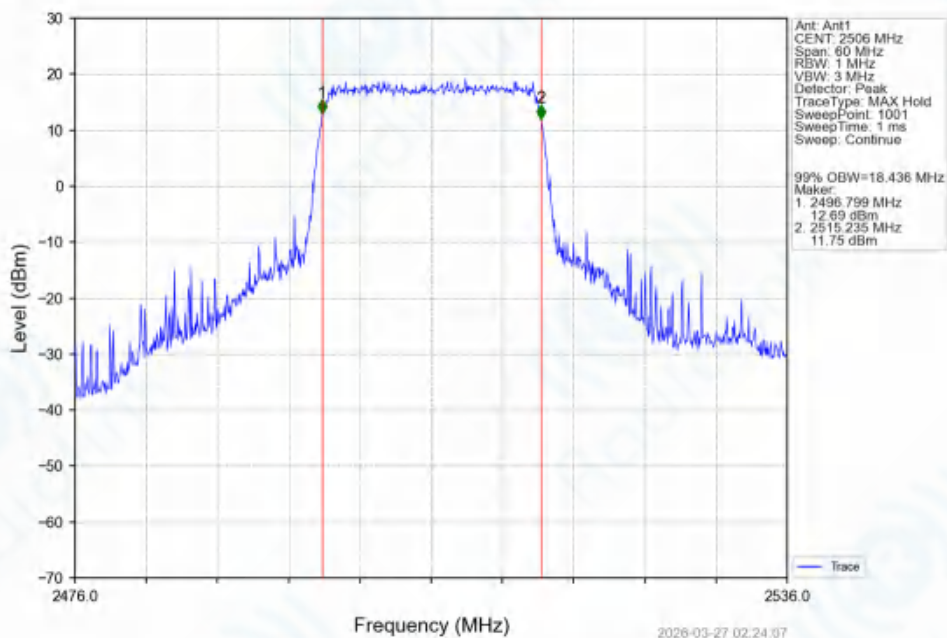


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_20MHz_QPSK_MCH_2593MHz_RB_100_0_NTNV

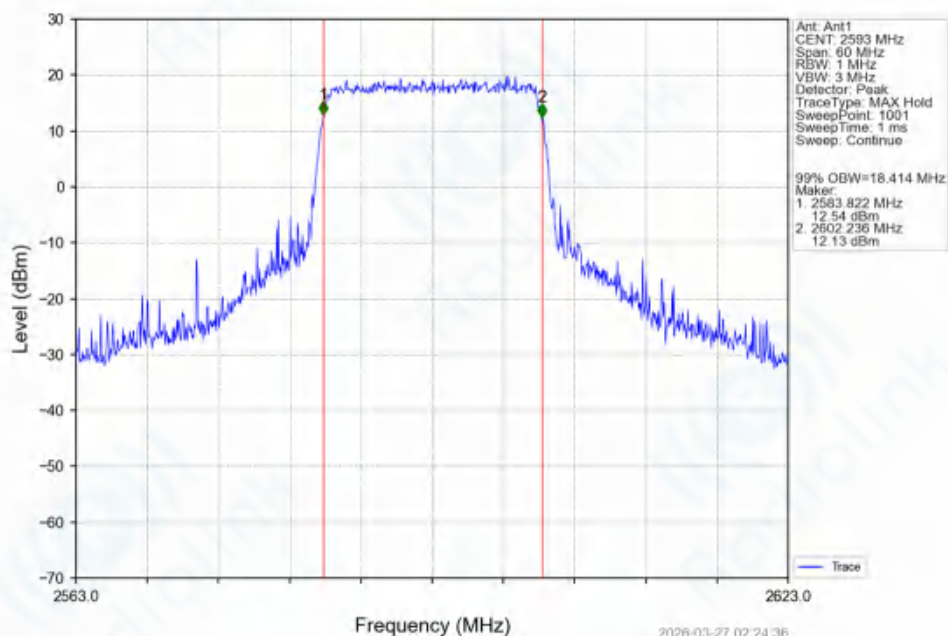


Band41_20MHz_QPSK_HCH_2680MHz_RB_100_0_NTNV

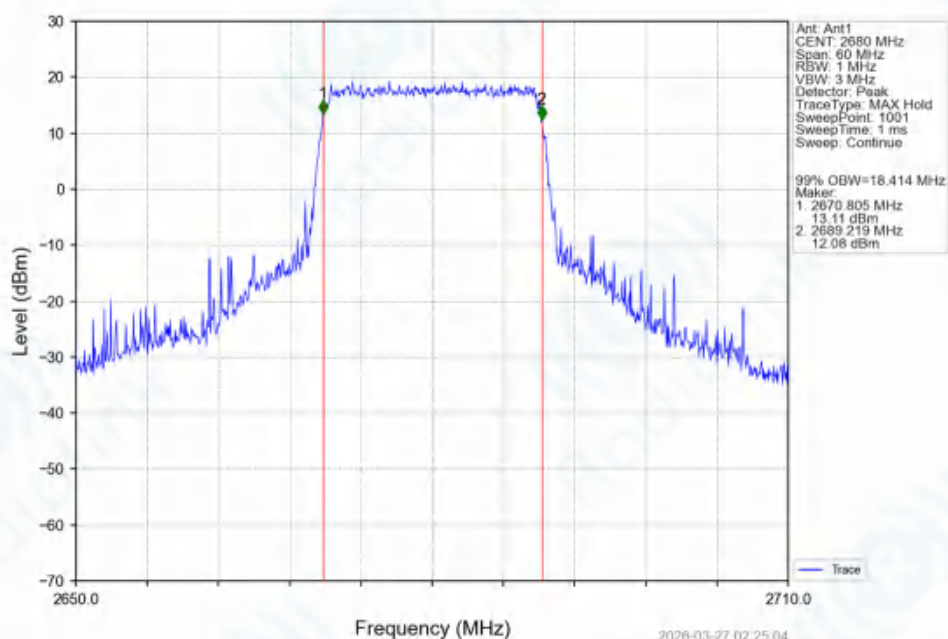

Band41_20MHz_16QAM_LCH_2506MHz_RB_100_0_NTNV

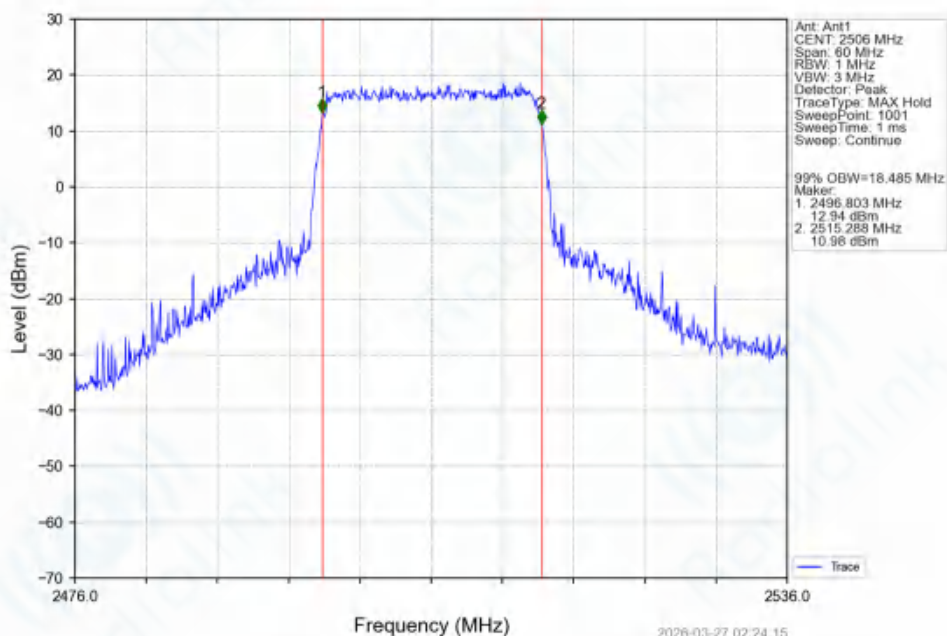


Band41_20MHz_16QAM_MCH_2593MHz_RB_100_0_NTNV

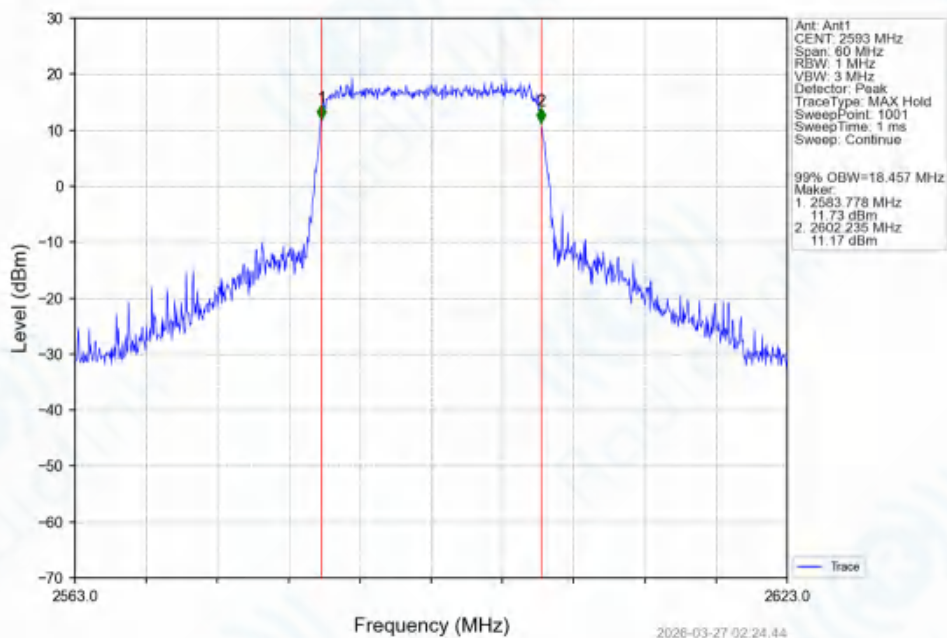

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_20MHz_16QAM_HCH_2680MHz_RB_100_0_NTNV

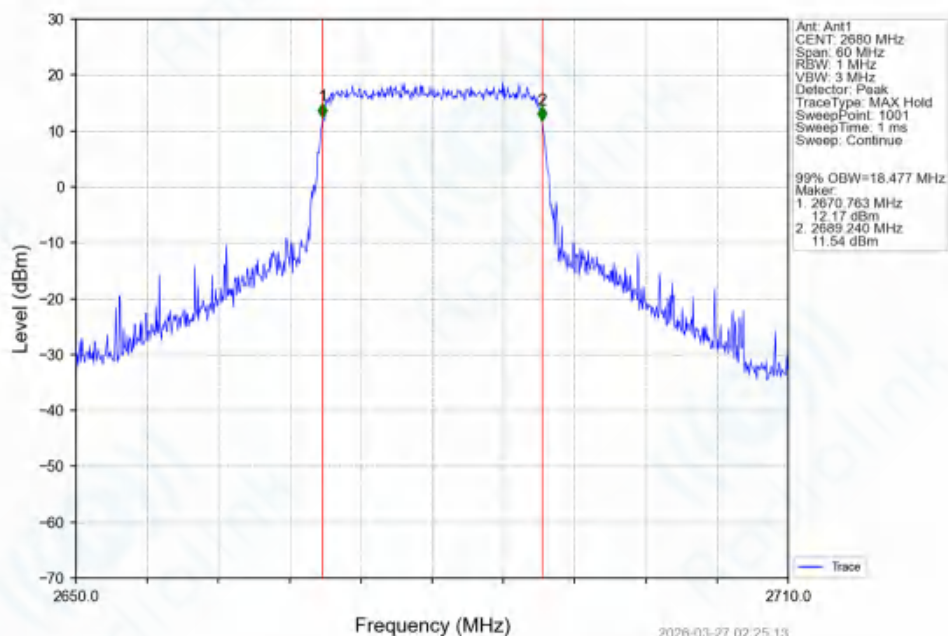


Band41_20MHz_64QAM_LCH_2506MHz_RB_100_0_NTNV

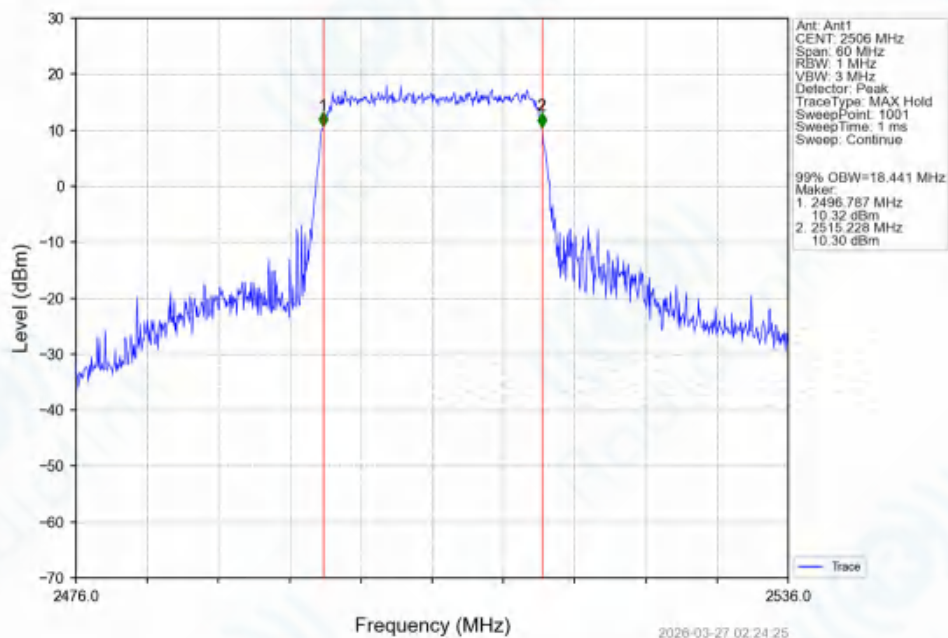


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_20MHz_64QAM_MCH_2593MHz_RB_100_0_NTNV

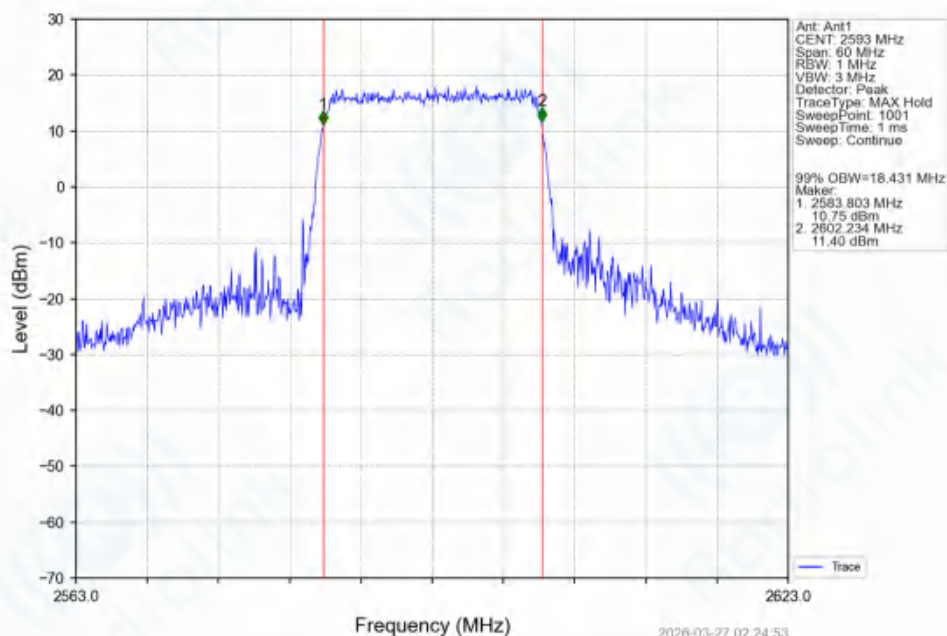

Band41_20MHz_64QAM_HCH_2680MHz_RB_100_0_NTNV

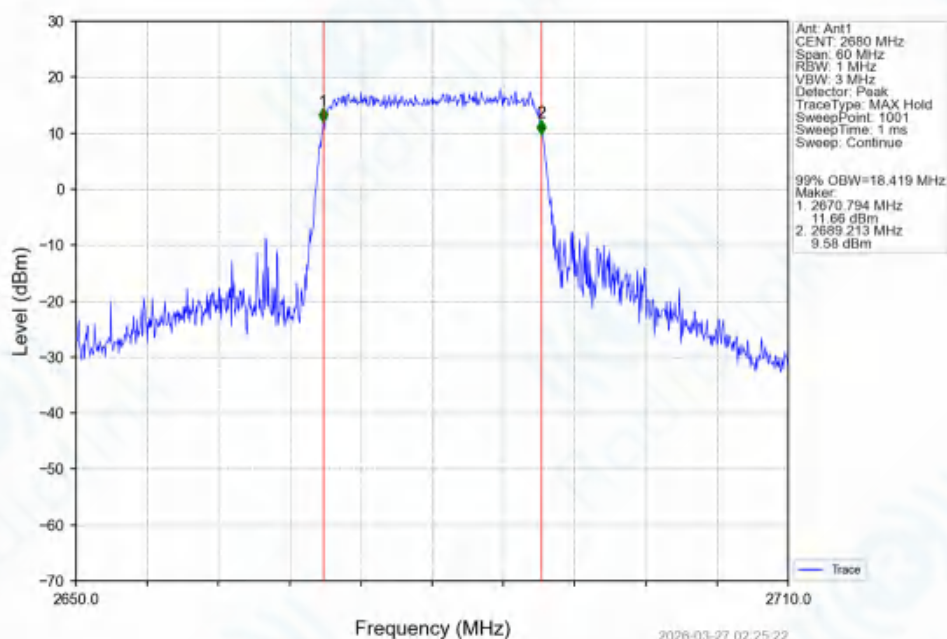


4.2.2 Band41_XDB

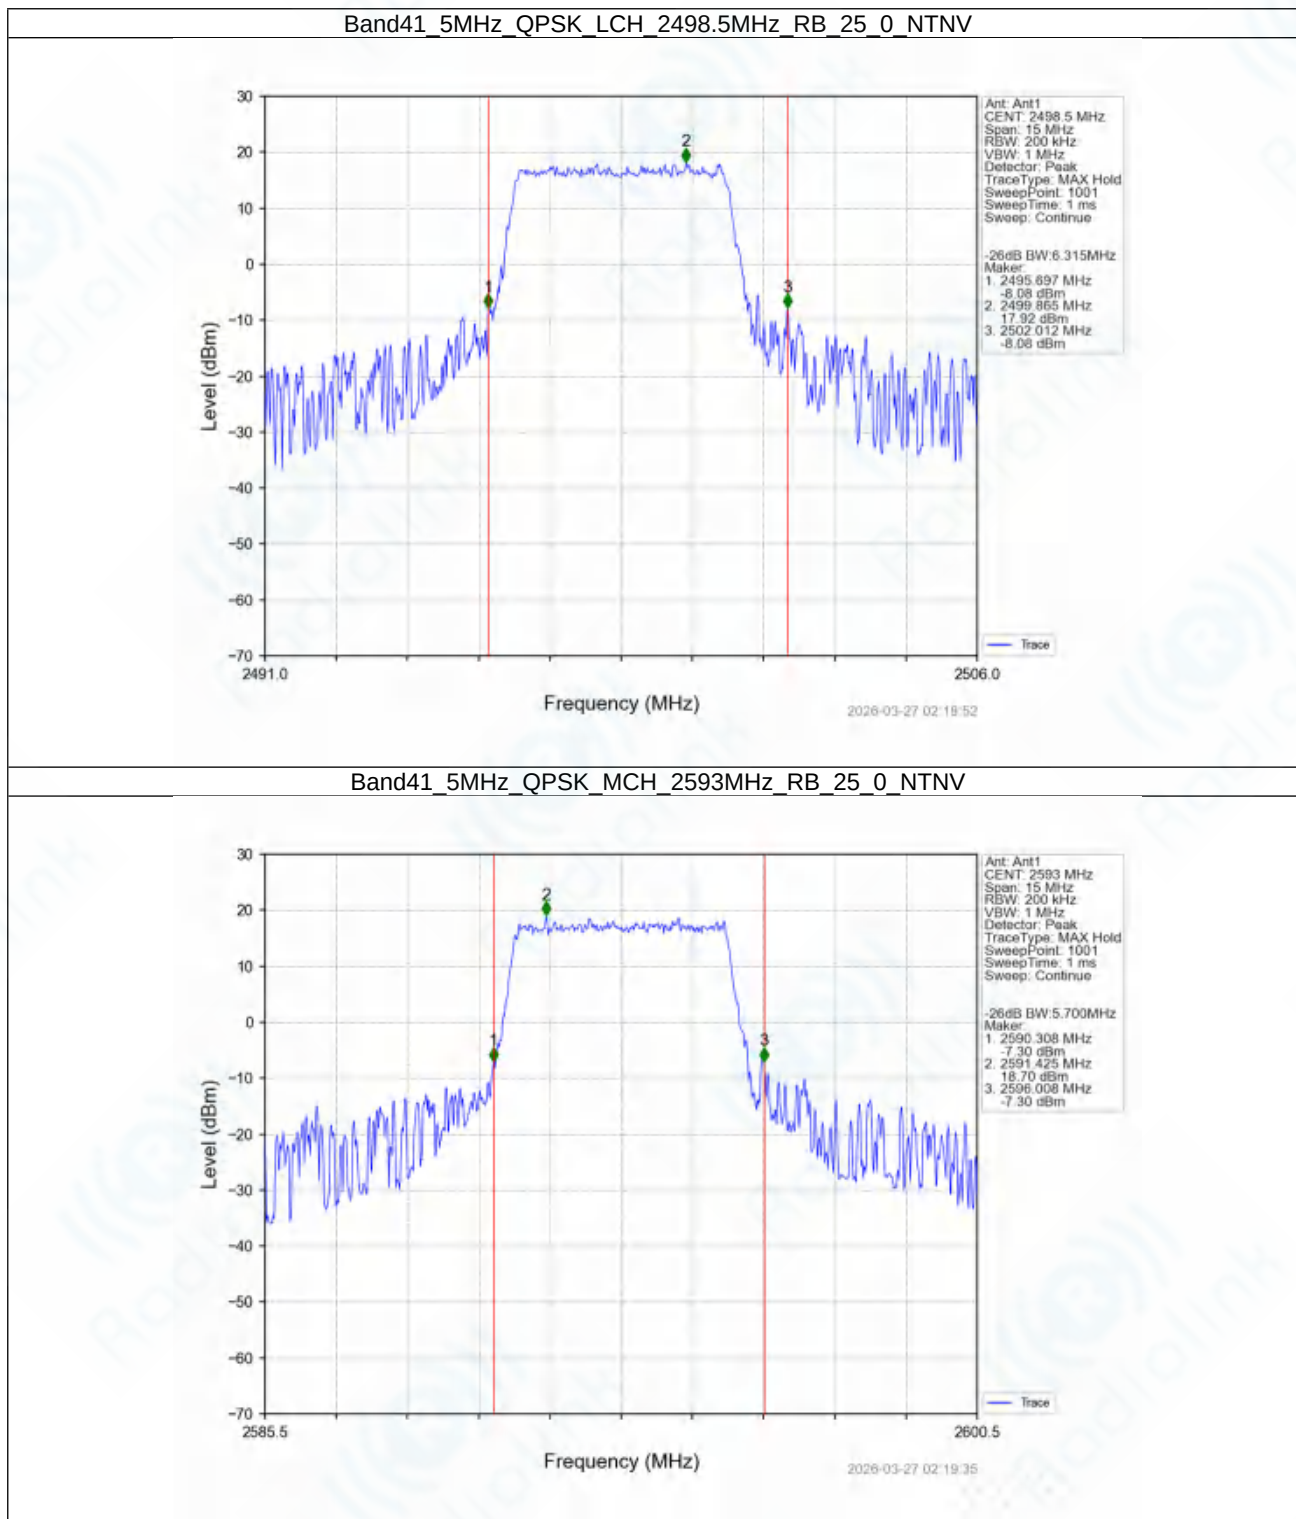


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_5MHz_QPSK_HCH_2687.5MHz_RB_25_0_NTNV

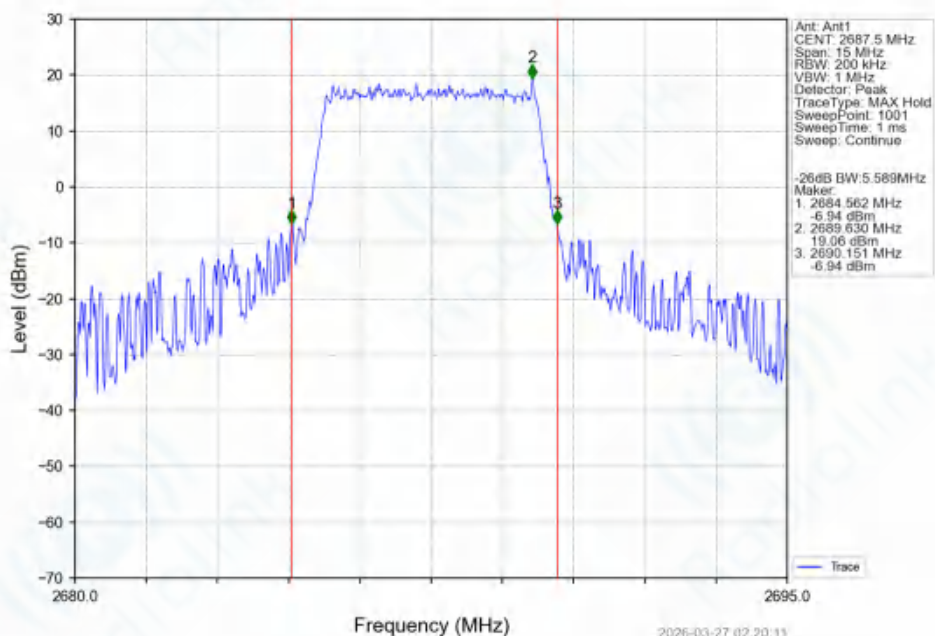


Band41_5MHz_16QAM_LCH_2498.5MHz_RB_25_0_NTNV

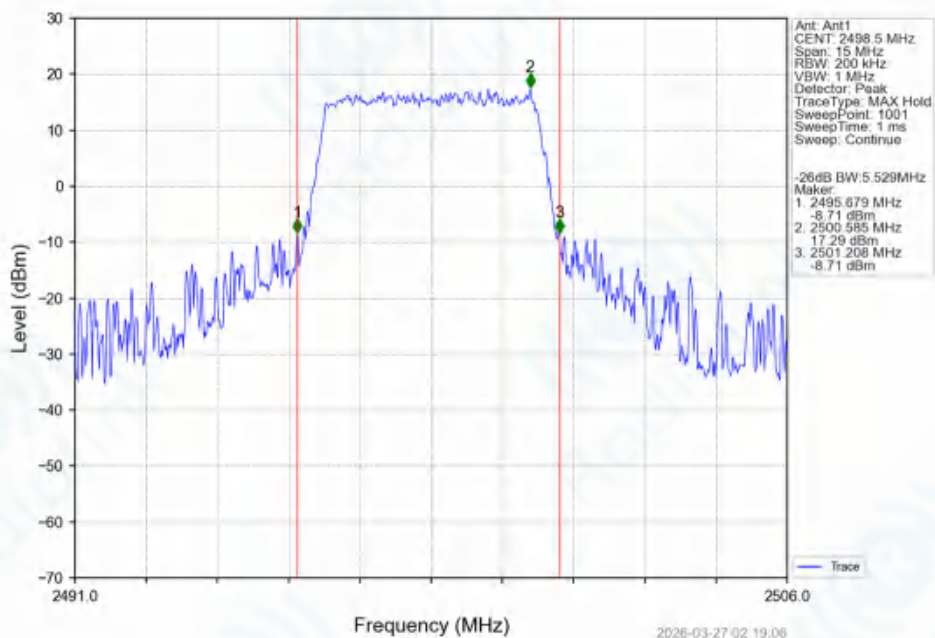


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_5MHz_16QAM_MCH_2593MHz_RB_25_0_NTNV

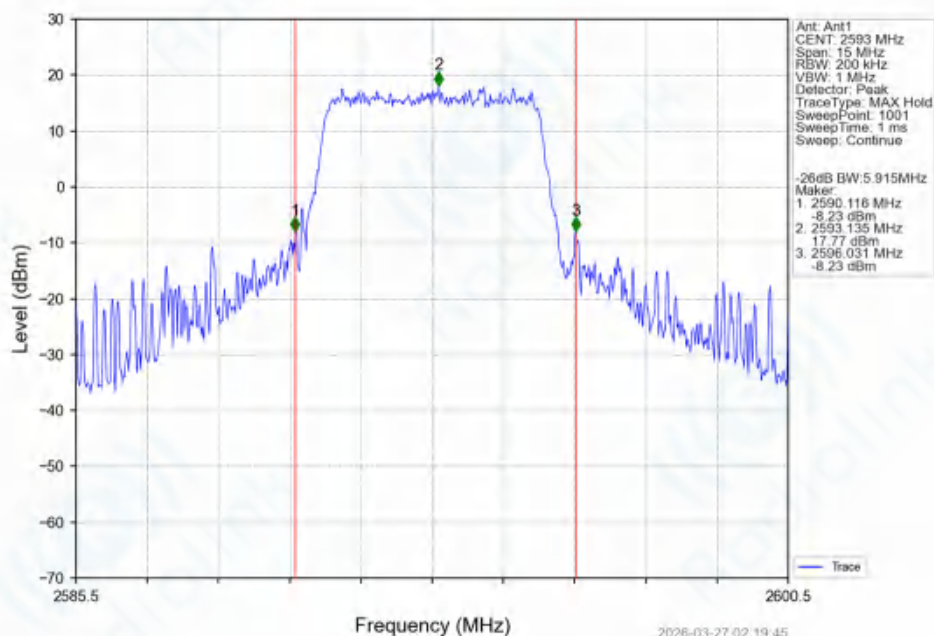


Band41_5MHz_16QAM_HCH_2687.5MHz_RB_25_0_NTNV

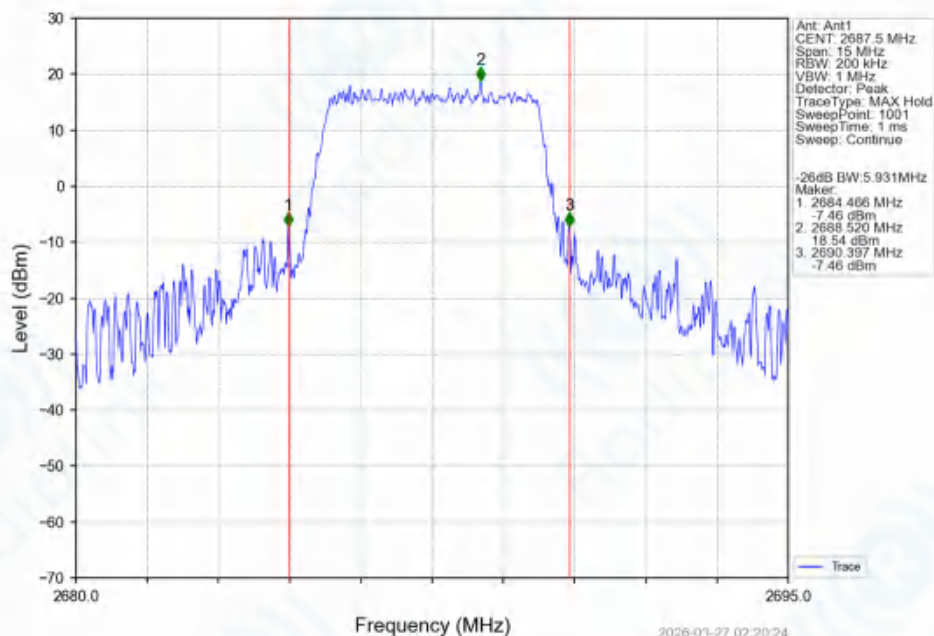

Band41_5MHz_64QAM_LCH_2498.5MHz_RB_25_0_NTNV

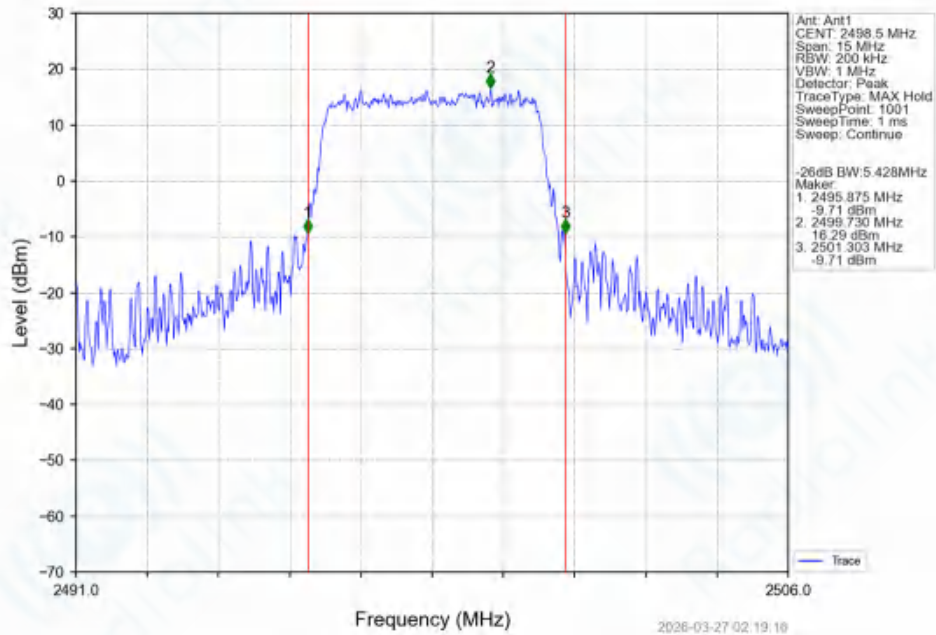


Band41_5MHz_64QAM_MCH_2593MHz_RB_25_0_NTNV

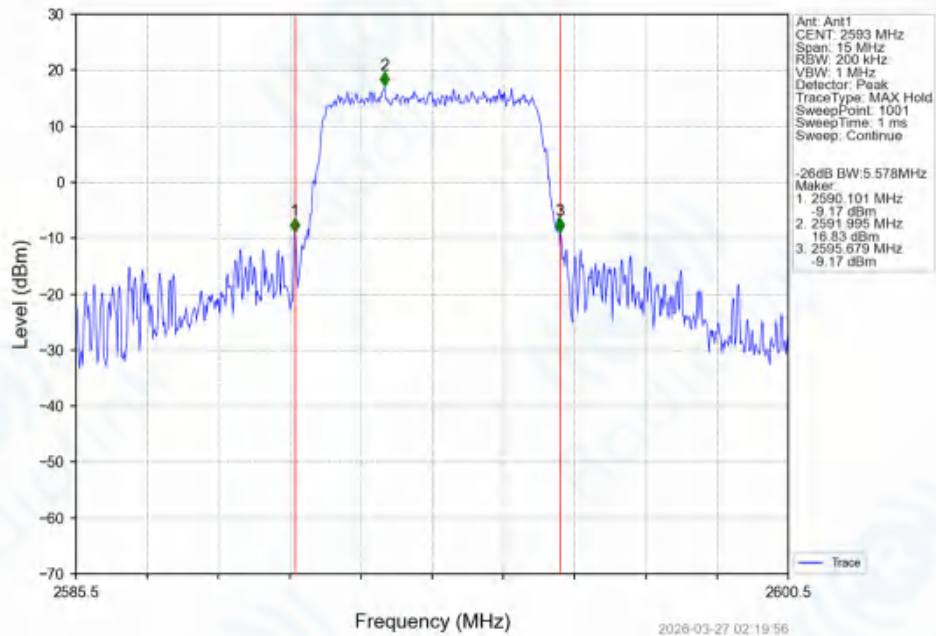


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_5MHz_64QAM_HCH_2687.5MHz_RB_25_0_NTNV

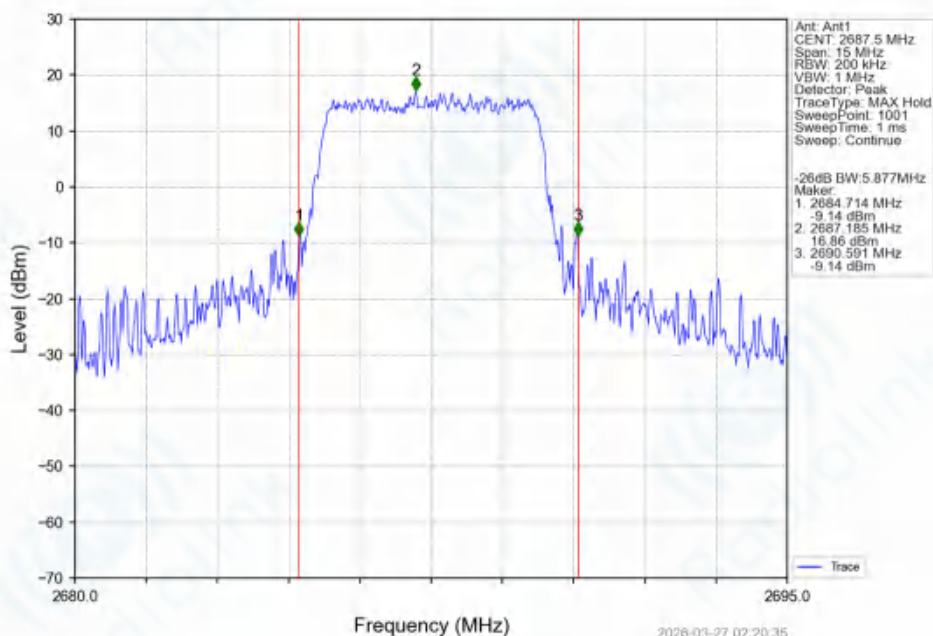


Band41_10MHz_QPSK_LCH_2501MHz_RB_50_0_NTNV

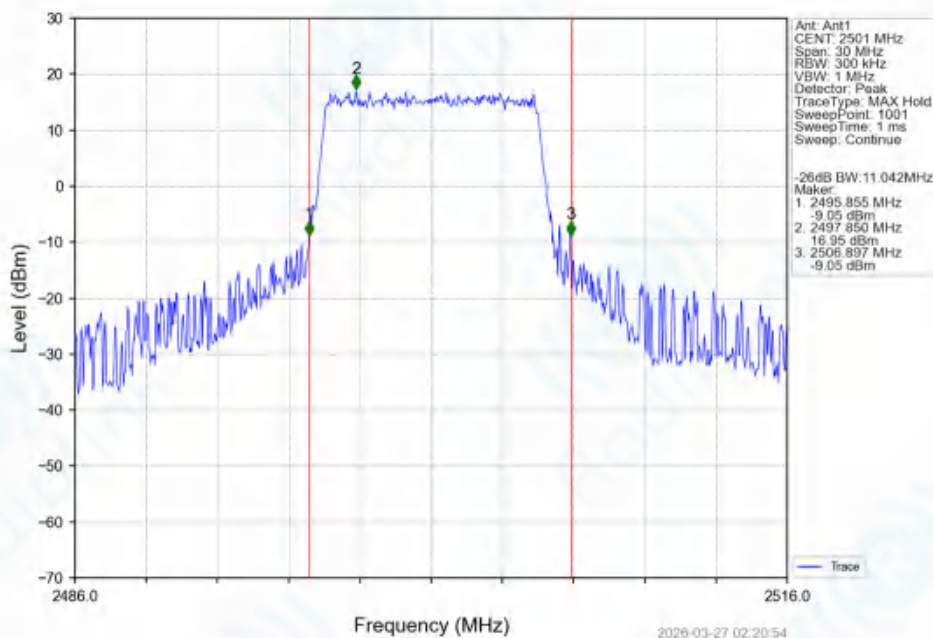


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_10MHz_QPSK_MCH_2593MHz_RB_50_0_NTNV

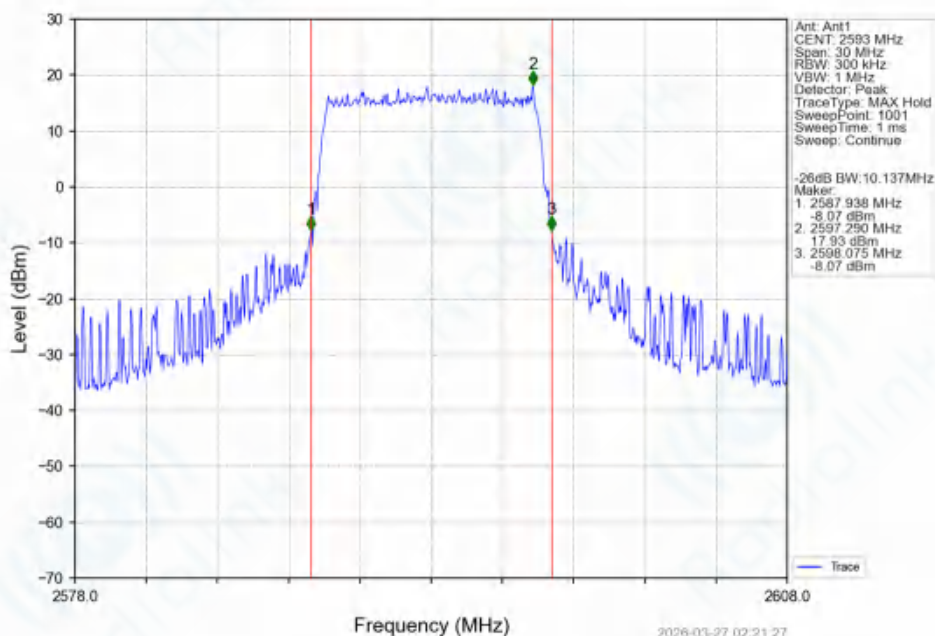


Band41_10MHz_QPSK_HCH_2685MHz_RB_50_0_NTNV

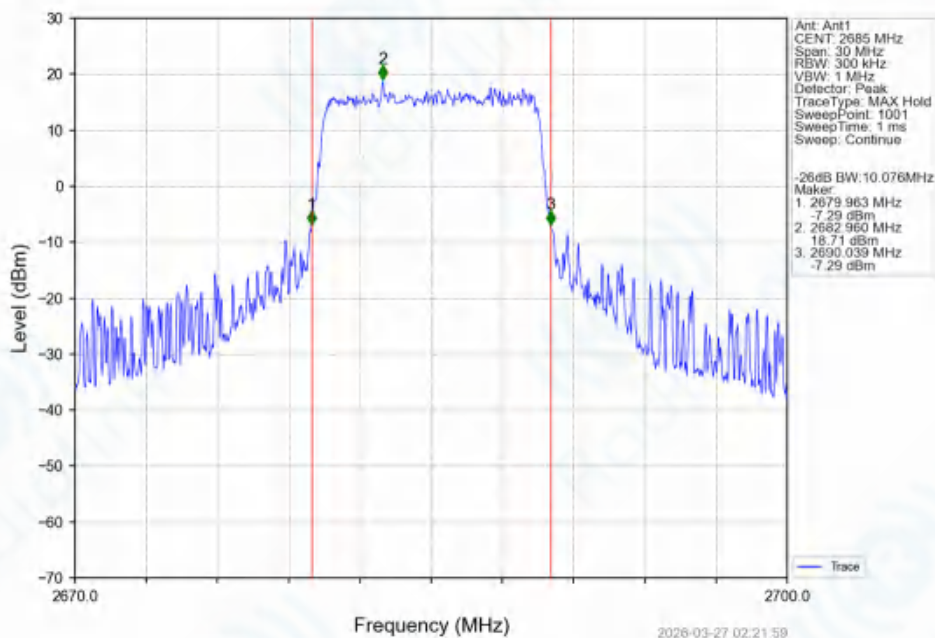

Band41_10MHz_16QAM_LCH_2501MHz_RB_50_0_NTNV

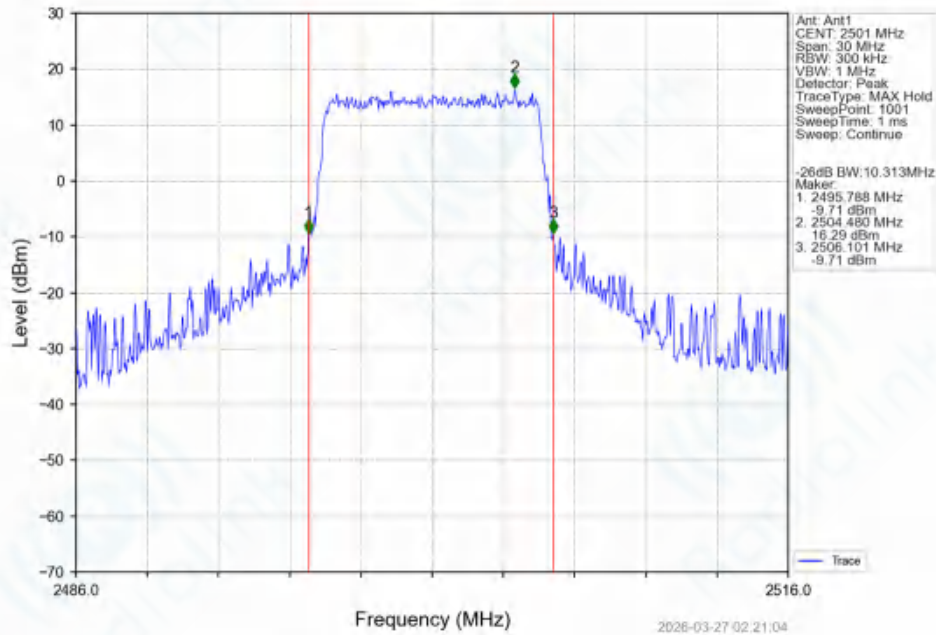


Band41_10MHz_16QAM_MCH_2593MHz_RB_50_0_NTNV

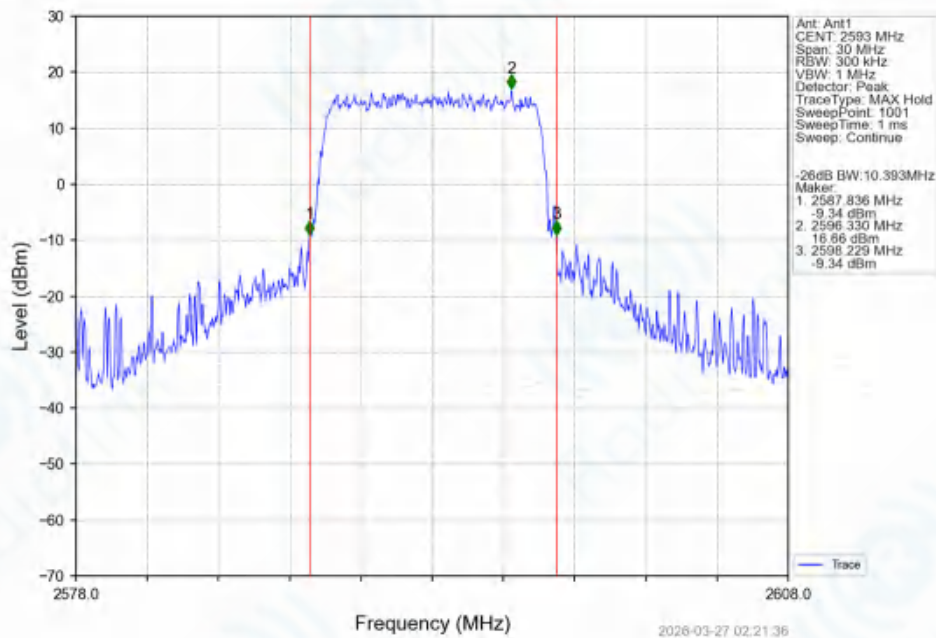

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_16QAM_HCH_2685MHz_RB_50_0_NTNV

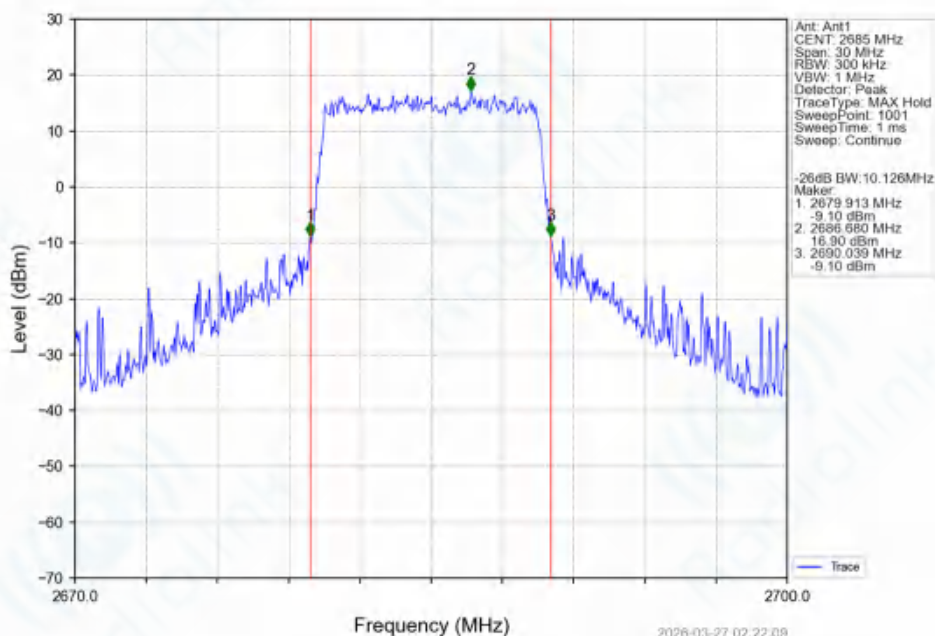


Band41_10MHz_64QAM_LCH_2501MHz_RB_50_0_NTNV

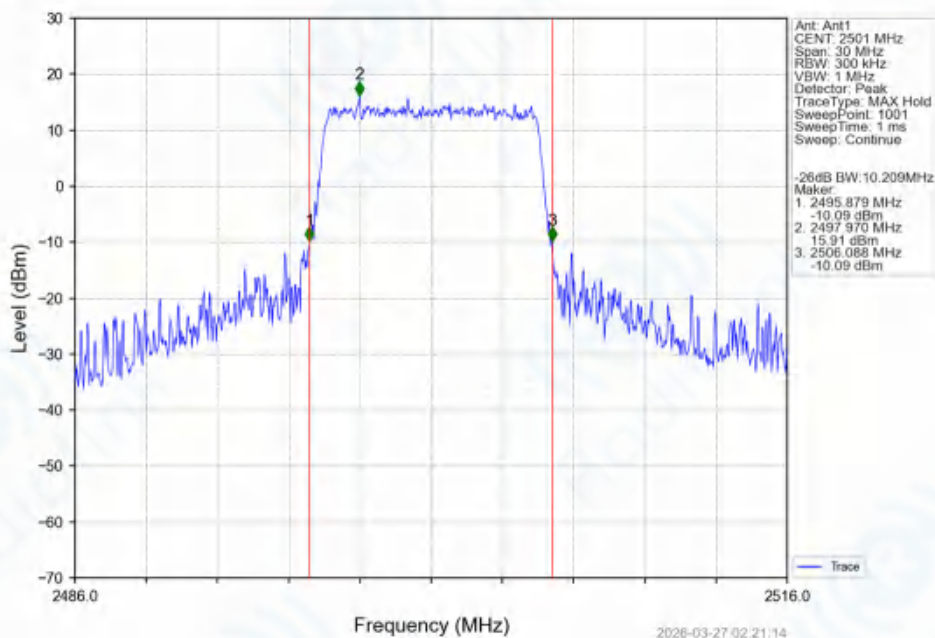


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_10MHz_64QAM_MCH_2593MHz_RB_50_0_NTNV

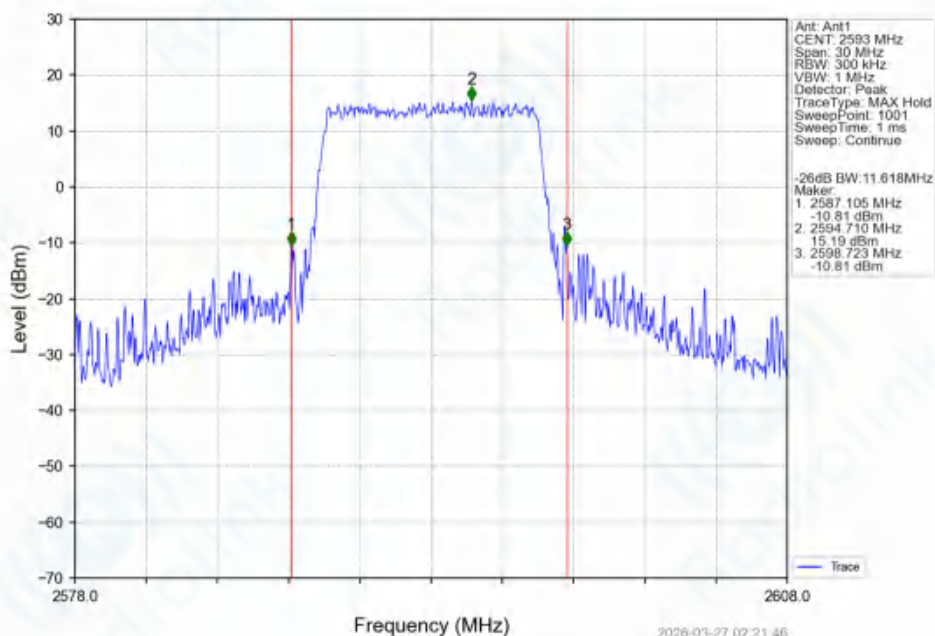


Band41_10MHz_64QAM_HCH_2685MHz_RB_50_0_NTNV

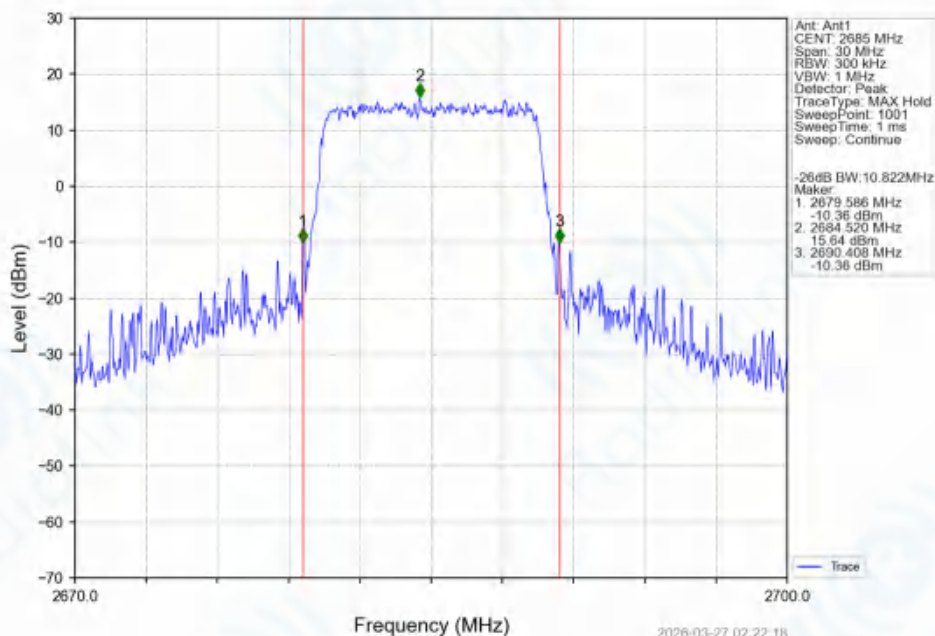

Band41_15MHz_QPSK_LCH_2503.5MHz_RB_75_0_NTNV

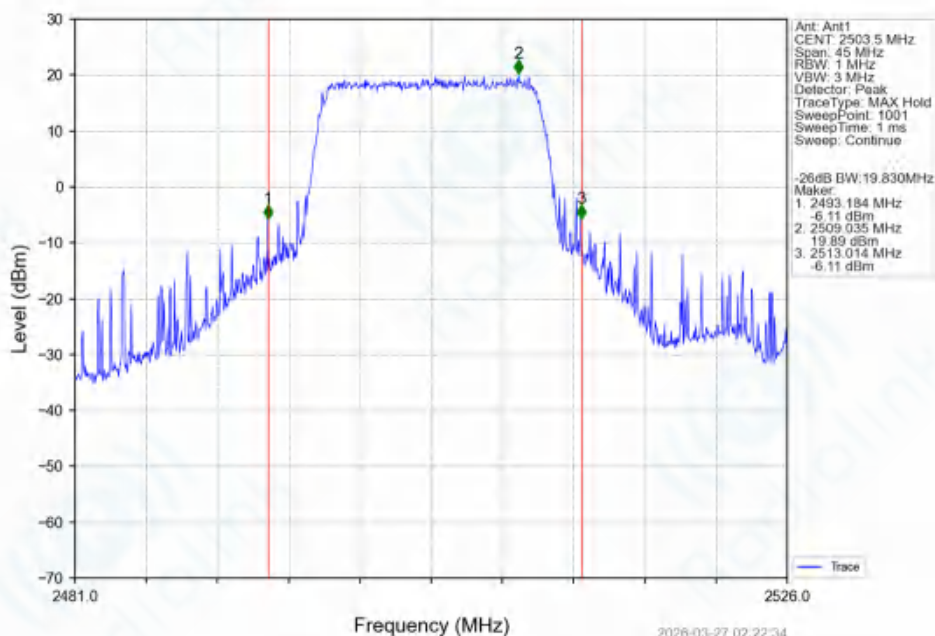


Band41_15MHz_QPSK_MCH_2593MHz_RB_75_0_NTNV

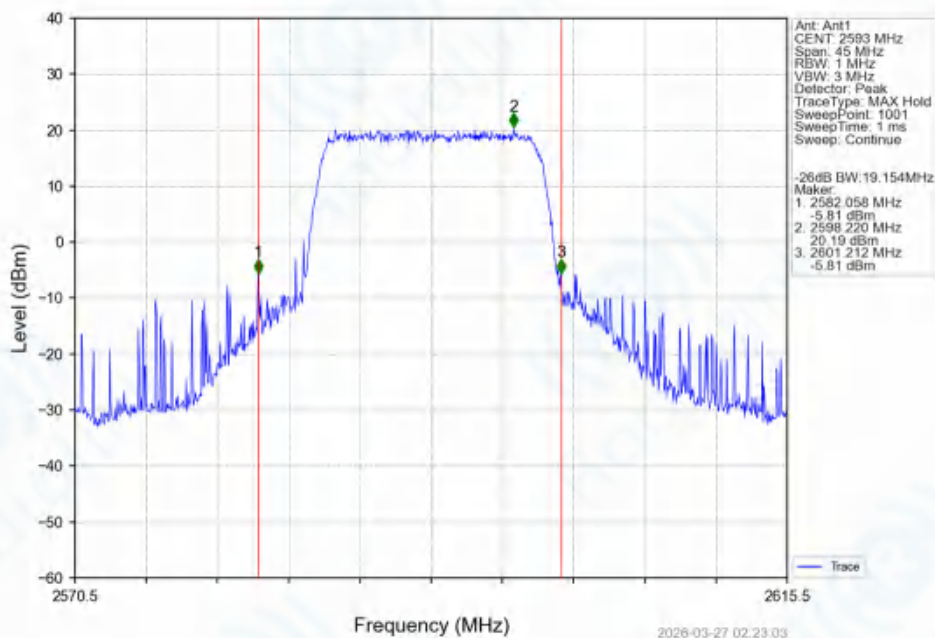

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_15MHz_QPSK_HCH_2682.5MHz_RB_75_0_NTNV

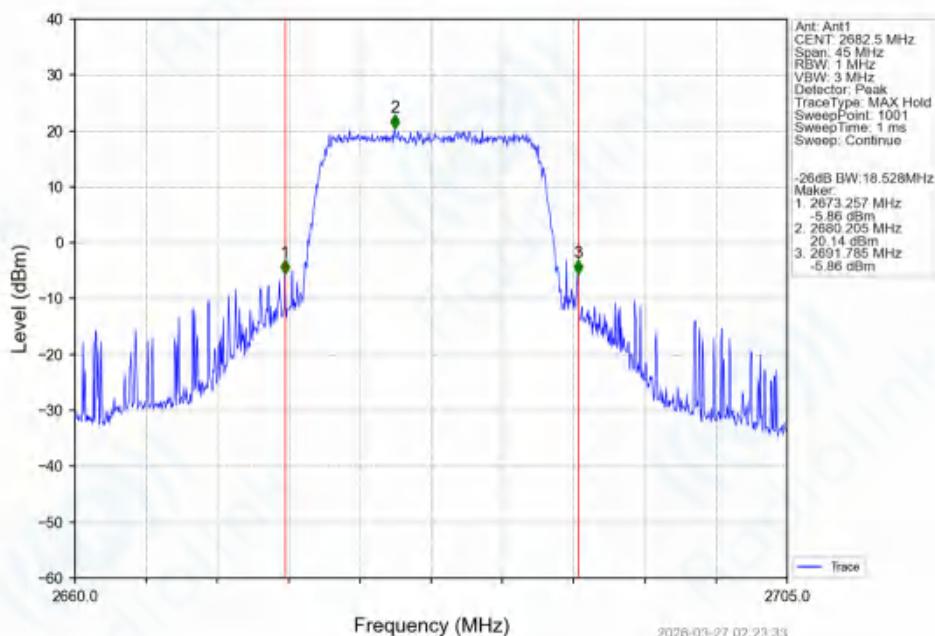


Band41_15MHz_16QAM_LCH_2503.5MHz_RB_75_0_NTNV

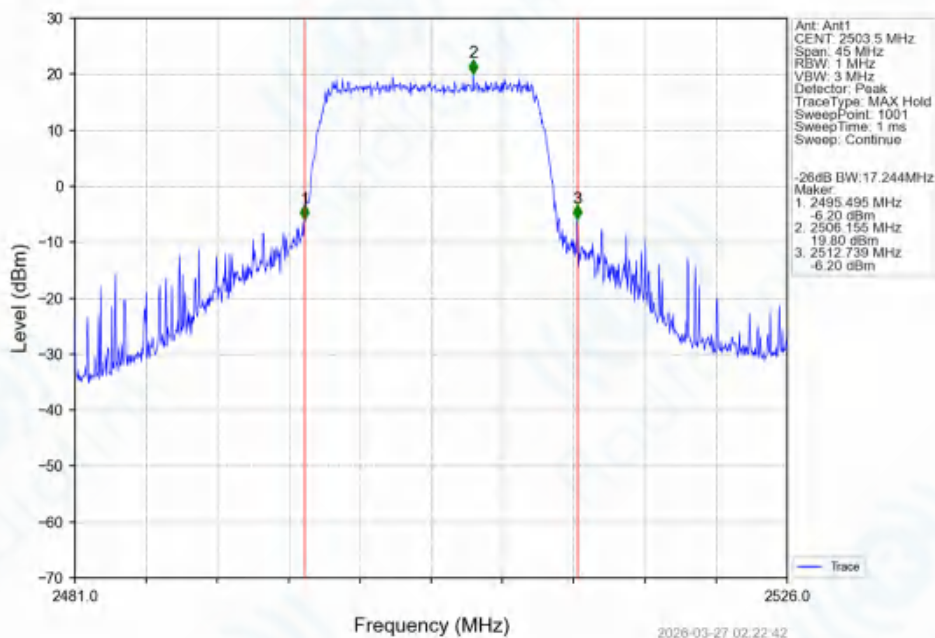


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_15MHz_16QAM_MCH_2593MHz_RB_75_0_NTNV

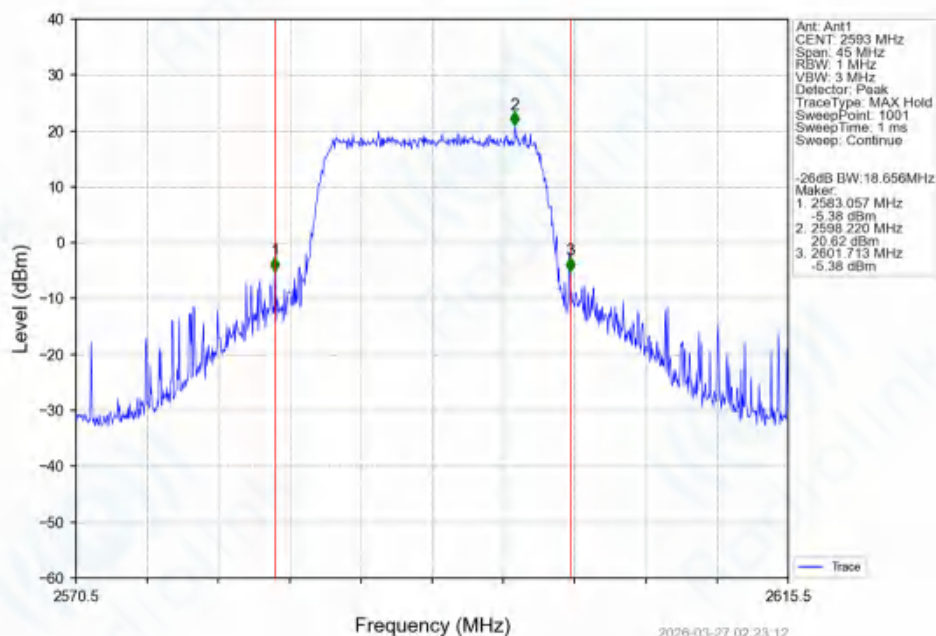


Band41_15MHz_16QAM_HCH_2682.5MHz_RB_75_0_NTNV

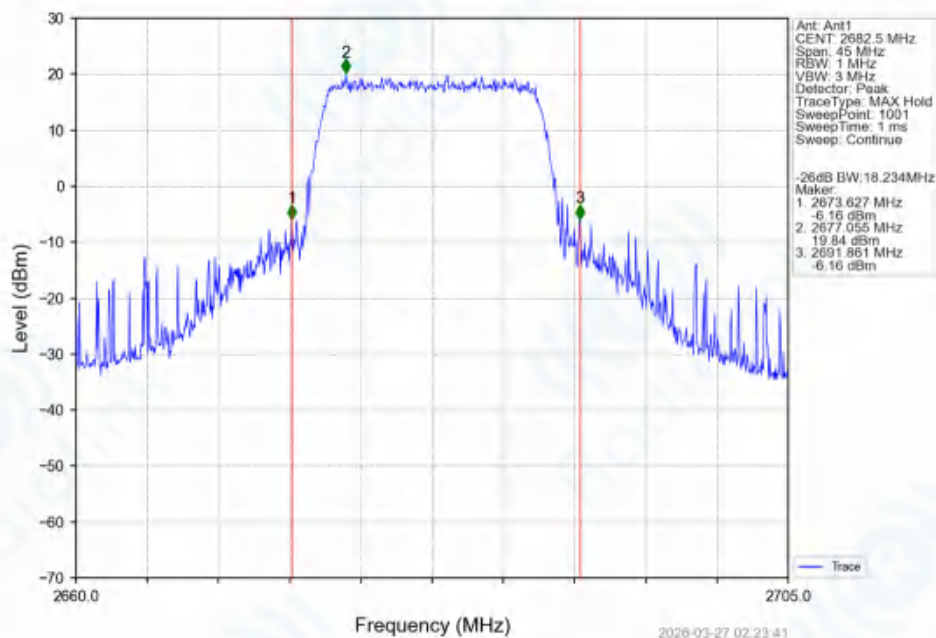

Band41_15MHz_64QAM_LCH_2503.5MHz_RB_75_0_NTNV

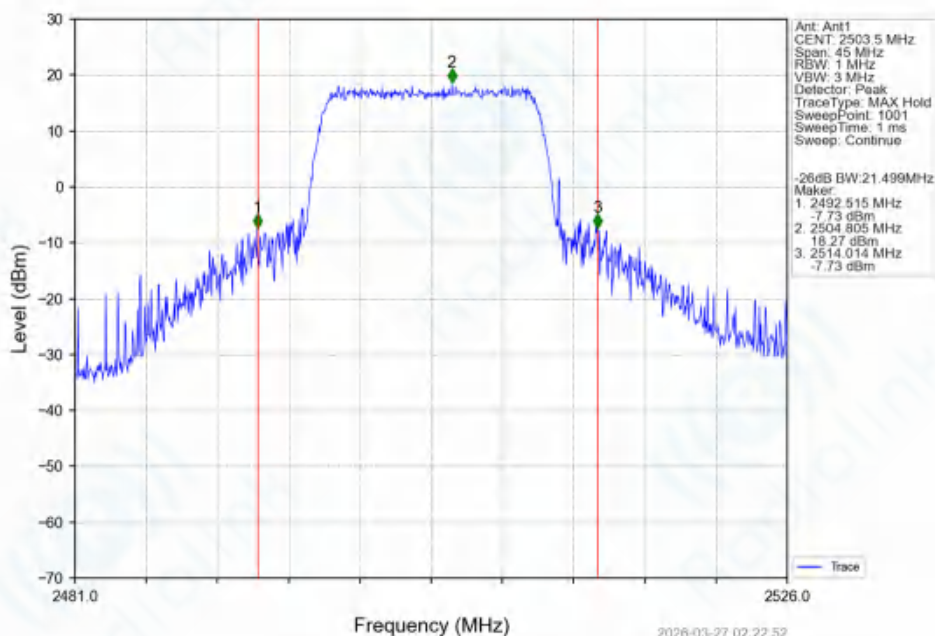


Band41_15MHz_64QAM_MCH_2593MHz_RB_75_0_NTNV

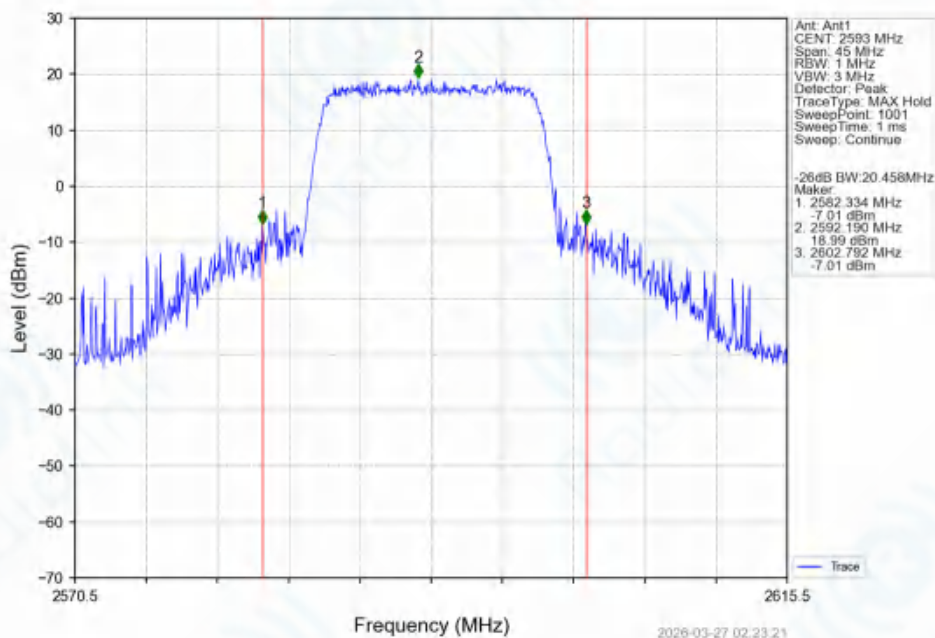


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_15MHz_64QAM_HCH_2682.5MHz_RB_75_0_NTNV

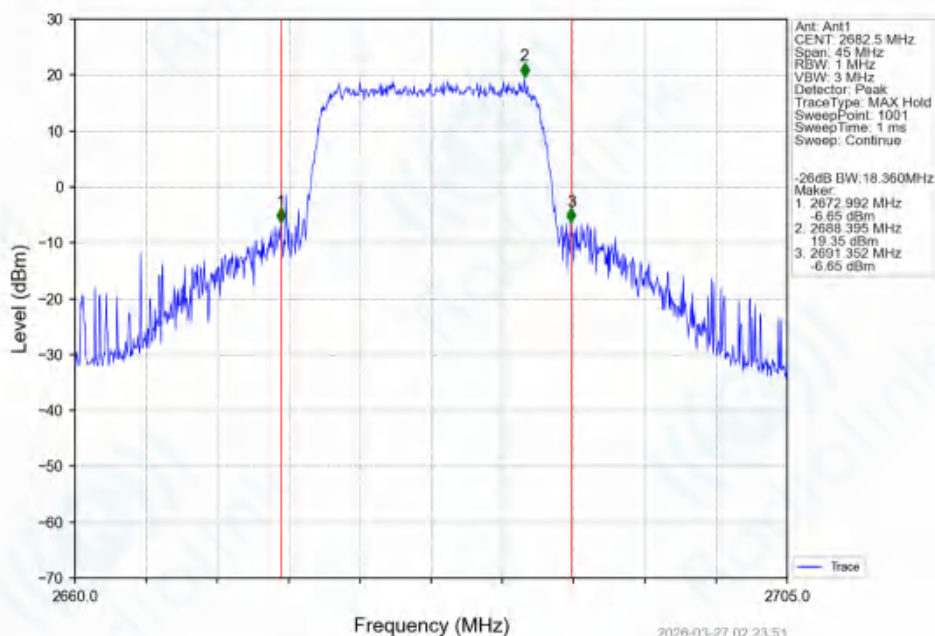


Band41_20MHz_QPSK_LCH_2506MHz_RB_100_0_NTNV

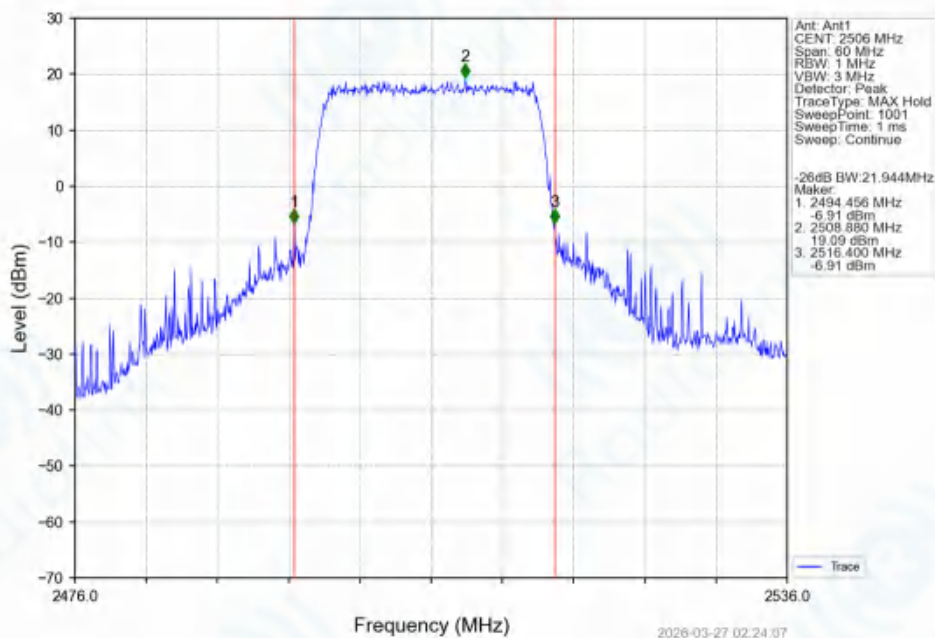


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_20MHz_QPSK_MCH_2593MHz_RB_100_0_NTNV

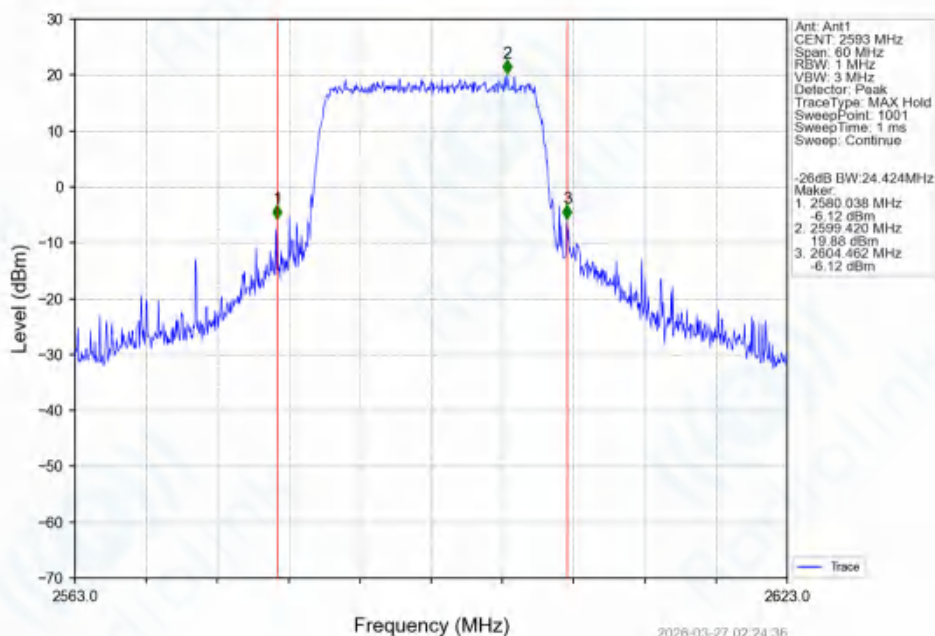


Band41_20MHz_QPSK_HCH_2680MHz_RB_100_0_NTNV

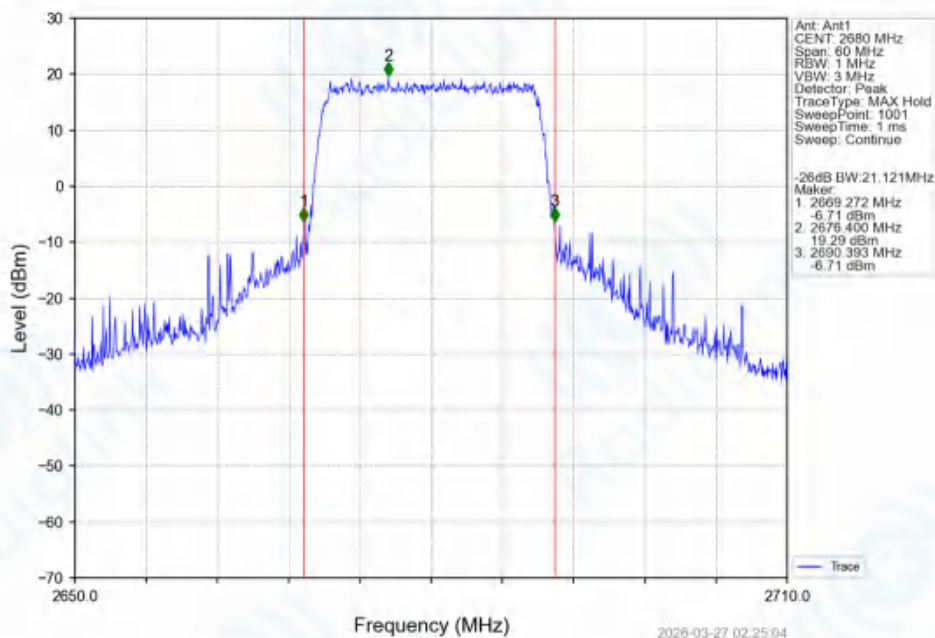

Band41_20MHz_16QAM_LCH_2506MHz_RB_100_0_NTNV

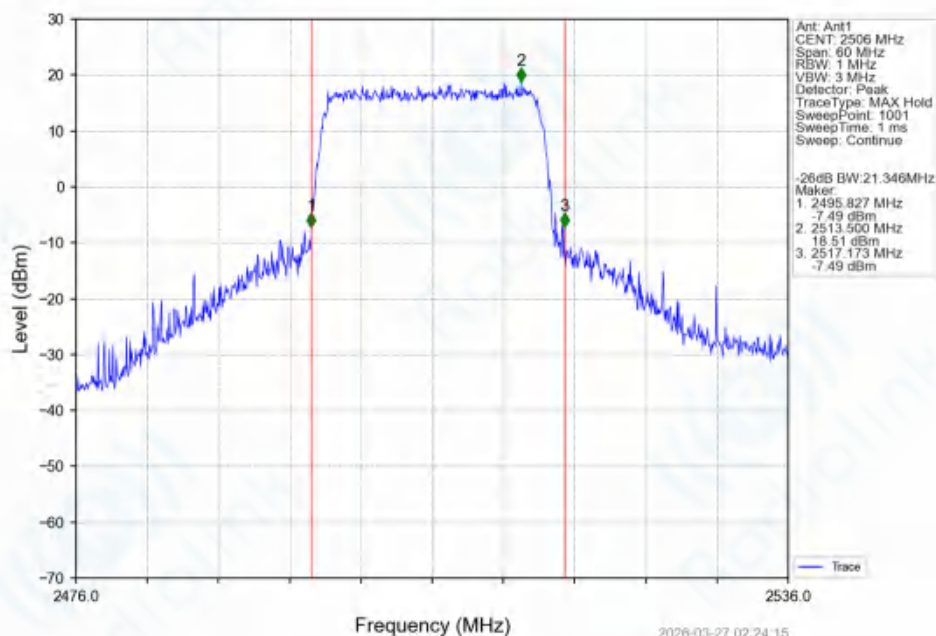


Band41_20MHz_16QAM_MCH_2593MHz_RB_100_0_NTNV

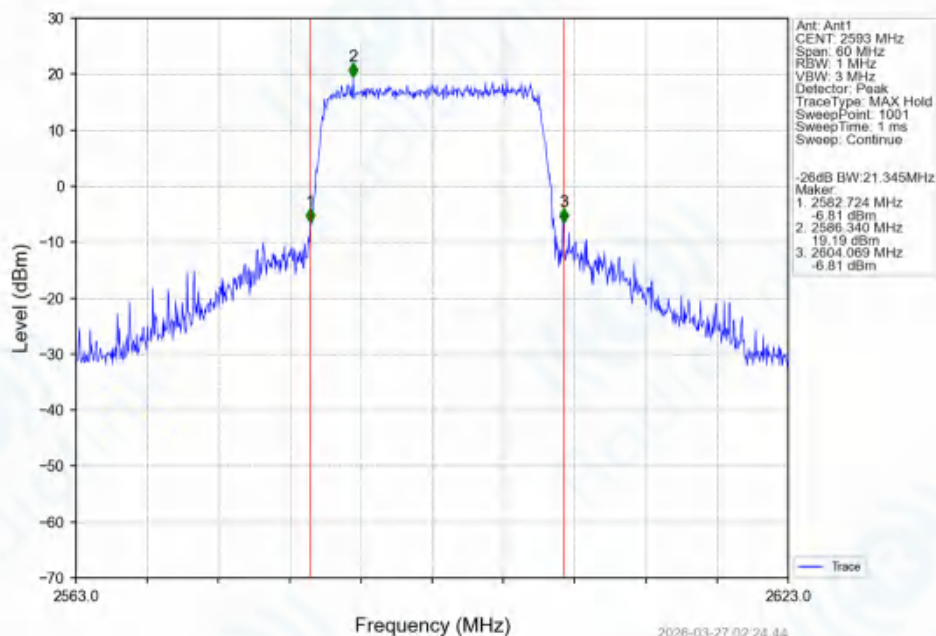


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_20MHz_16QAM_HCH_2680MHz_RB_100_0_NTNV

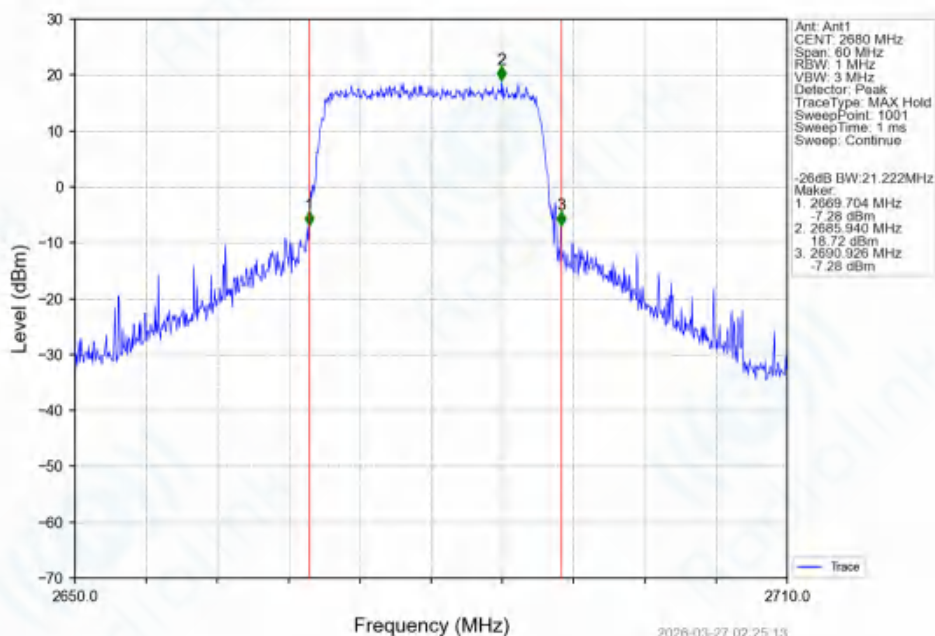


Band41_20MHz_64QAM_LCH_2506MHz_RB_100_0_NTNV

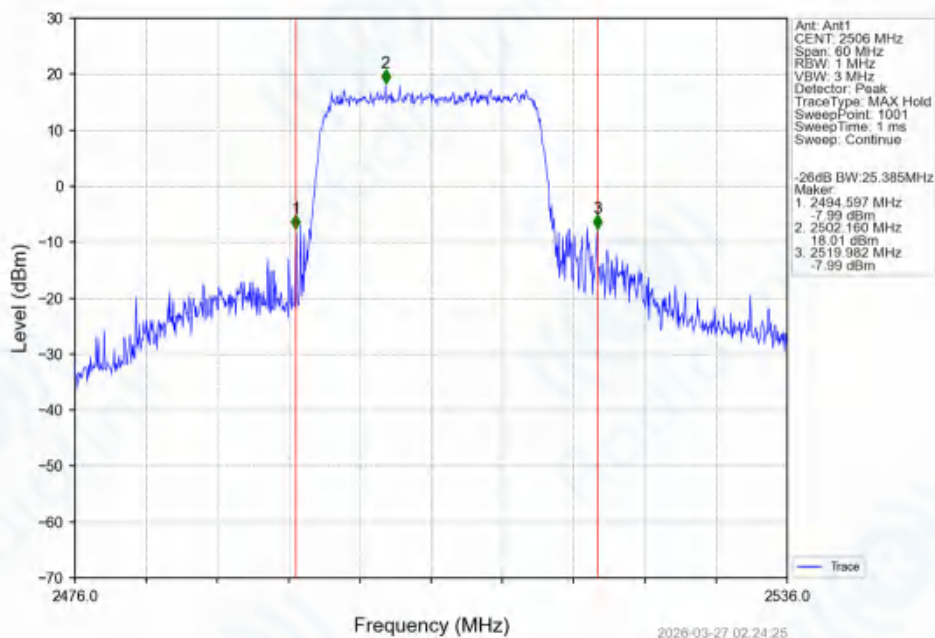


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_20MHz_64QAM_MCH_2593MHz_RB_100_0_NTNV

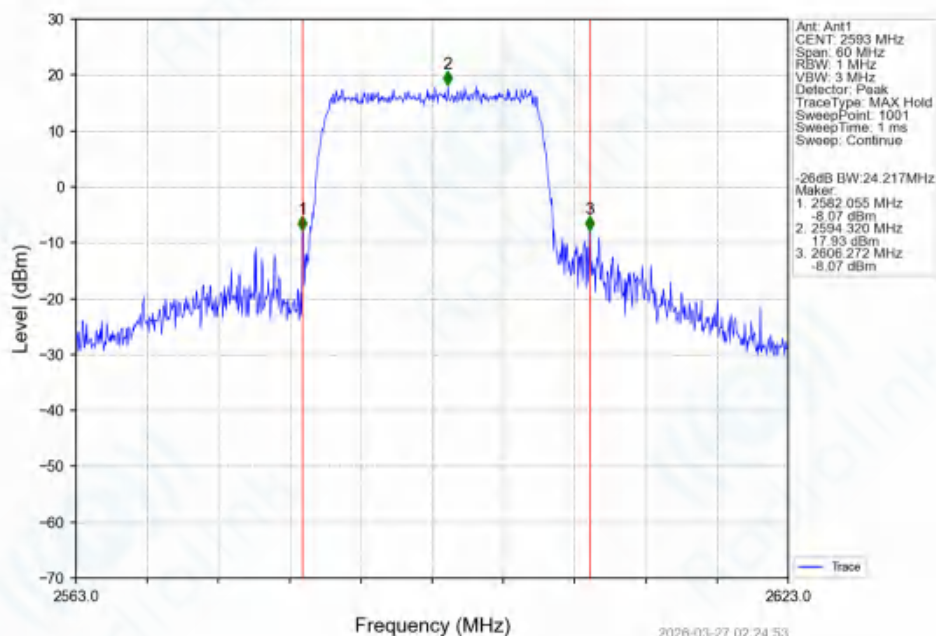

Band41_20MHz_64QAM_HCH_2680MHz_RB_100_0_NTNV

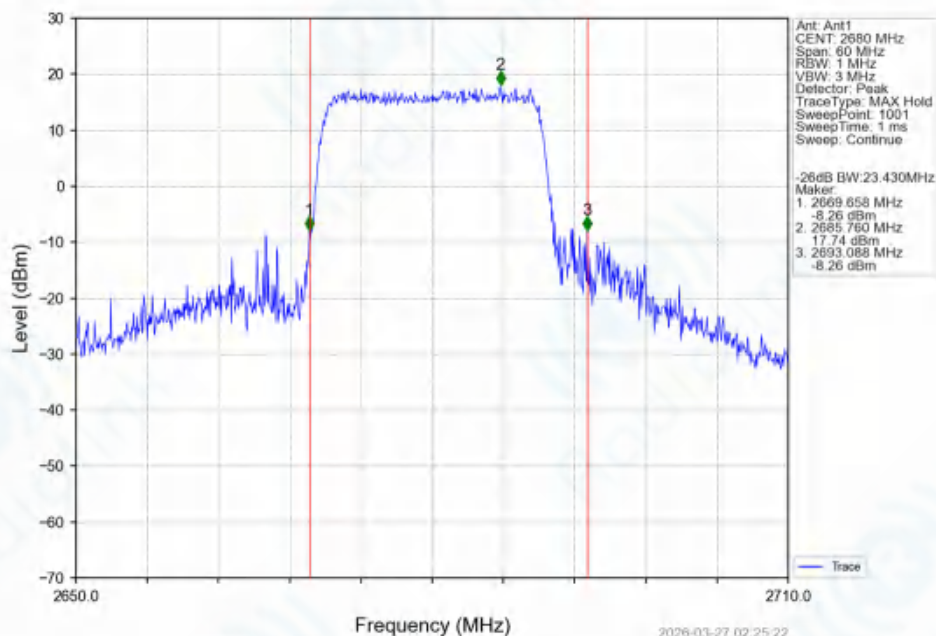

5. Peak-Average Ratio

5.1 Test Result

5.1.1 B41_5MHz

Band: 41 / Bandwidth: 5MHz / NTNV						
Modulation	Frequency (MHz)	RB Allocation		Peak-Average Ratio (dB)		Verdict
		Size	Offset	Result	Limit	
QPSK	2498.5	25	0	6.85	<=13	Pass
	2593	25	0	6.69	<=13	Pass
	2687.5	25	0	6.61	<=13	Pass
16QAM	2498.5	25	0	7.62	<=13	Pass
	2593	25	0	7.58	<=13	Pass
	2687.5	25	0	7.68	<=13	Pass
64QAM	2498.5	25	0	8.43	<=13	Pass
	2593	25	0	8.73	<=13	Pass
	2687.5	25	0	8.84	<=13	Pass

5.1.2 B41_10MHz

Band: 41 / Bandwidth: 10MHz / NTNV						
Modulation	Frequency (MHz)	RB Allocation		Peak-Average Ratio (dB)		Verdict
		Size	Offset	Result	Limit	
QPSK	2501	50	0	6.66	<=13	Pass
	2593	50	0	6.63	<=13	Pass
	2685	50	0	6.68	<=13	Pass
16QAM	2501	50	0	7.73	<=13	Pass
	2593	50	0	7.71	<=13	Pass
	2685	50	0	7.73	<=13	Pass
64QAM	2501	50	0	8.73	<=13	Pass
	2593	50	0	8.87	<=13	Pass
	2685	50	0	8.51	<=13	Pass

5.1.3 B41_15MHz

Band: 41 / Bandwidth: 15MHz / NTNV						
Modulation	Frequency (MHz)	RB Allocation		Peak-Average Ratio (dB)		Verdict
		Size	Offset	Result	Limit	
QPSK	2503.5	75	0	6.46	<=13	Pass
	2593	75	0	6.54	<=13	Pass
	2682.5	75	0	6.57	<=13	Pass
16QAM	2503.5	75	0	7.36	<=13	Pass
	2593	75	0	7.57	<=13	Pass
	2682.5	75	0	7.65	<=13	Pass
64QAM	2503.5	75	0	8.91	<=13	Pass
	2593	75	0	8.51	<=13	Pass
	2682.5	75	0	8.46	<=13	Pass

5.1.4 B41_20MHz

Band: 41 / Bandwidth: 20MHz / NTNV						
Modulation	Frequency (MHz)	RB Allocation		Peak-Average Ratio (dB)		Verdict
		Size	Offset	Result	Limit	
QPSK	2506	100	0	6.86	<=13	Pass
	2593	100	0	6.65	<=13	Pass
	2680	100	0	6.83	<=13	Pass
16QAM	2506	100	0	7.70	<=13	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

64QAM	2593	100	0	7.88	≤ 13	Pass
	2680	100	0	7.68	≤ 13	Pass
	2506	100	0	8.42	≤ 13	Pass
	2593	100	0	8.32	≤ 13	Pass
	2680	100	0	8.26	≤ 13	Pass




Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China


Tel: +86 0755 23080694

5.2 Test Graph

5.2.1 B41_5MHz

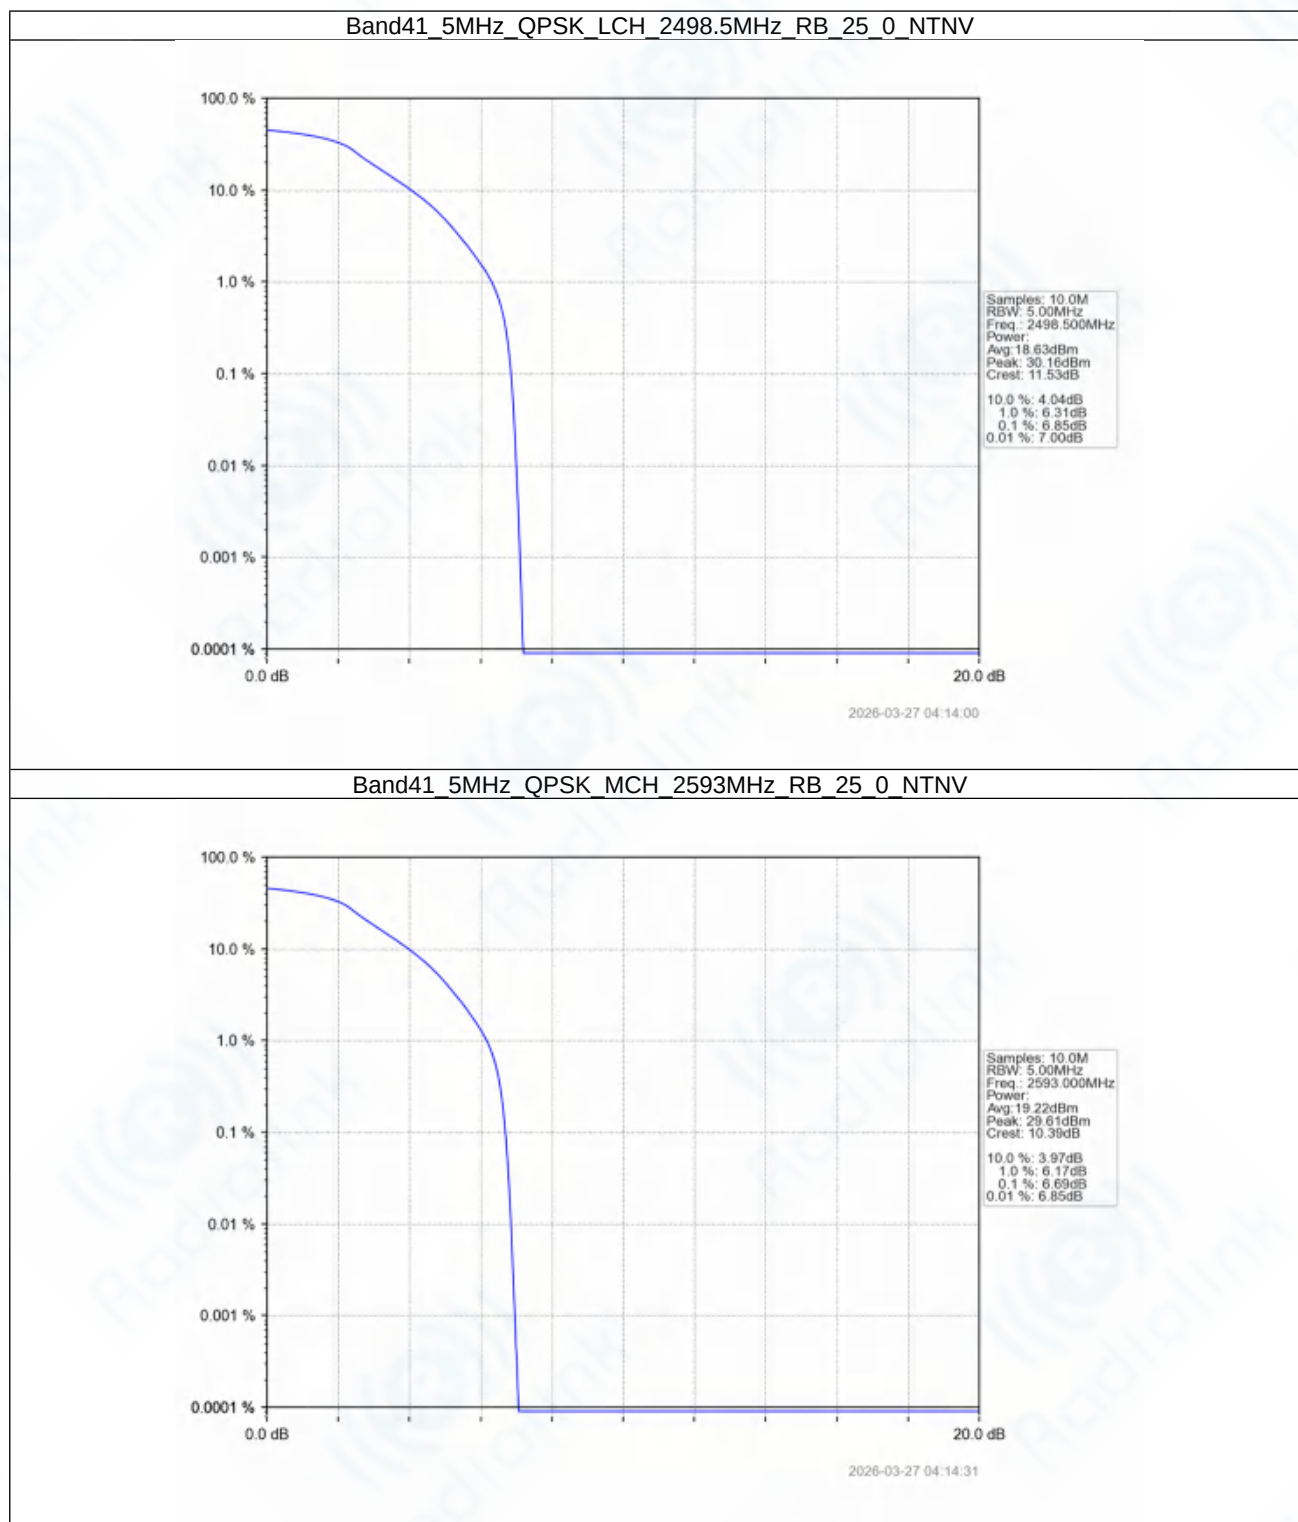


Band41_5MHz_QPSK_HCH_2687.5MHz_RB_25_0_NTNV

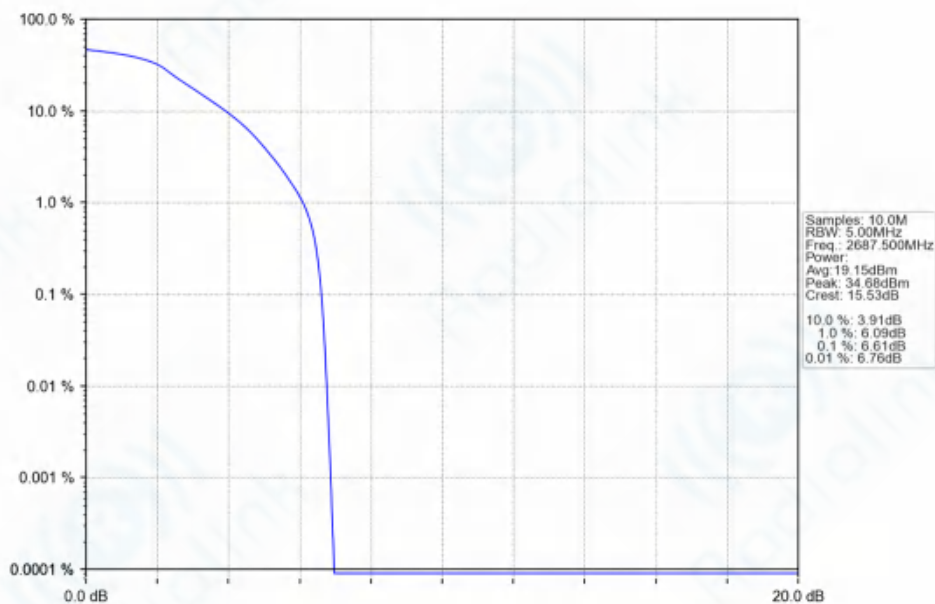

2026-03-27 04:15:05

Band41_5MHz_16QAM_LCH_2498.5MHz_RB_25_0_NTNV

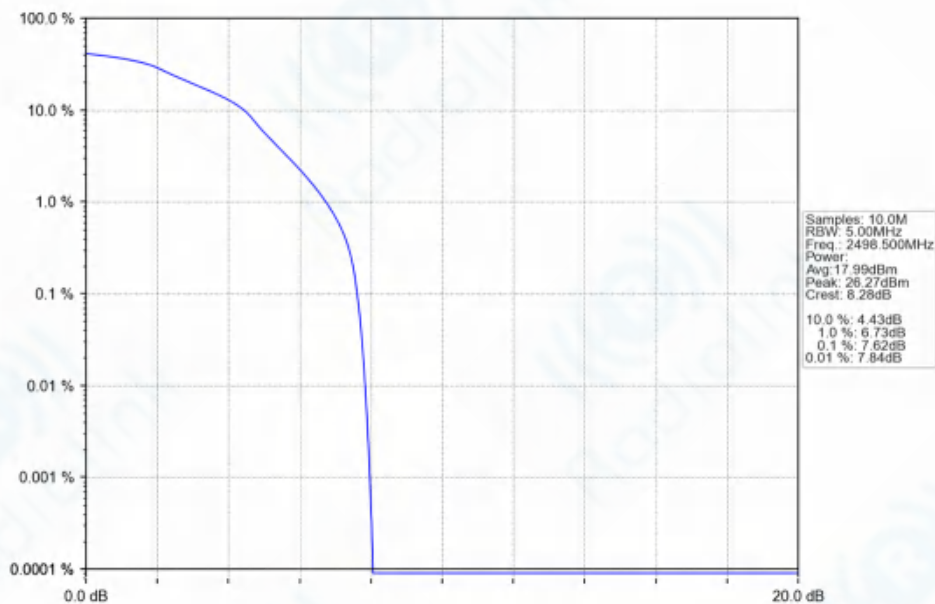


2026-03-27 04:14:10


Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
 Shenzhen, Guangdong Province, China
 Tel: +86 0755 23080694

Band41_5MHz_16QAM_MCH_2593MHz_RB_25_0_NTNV

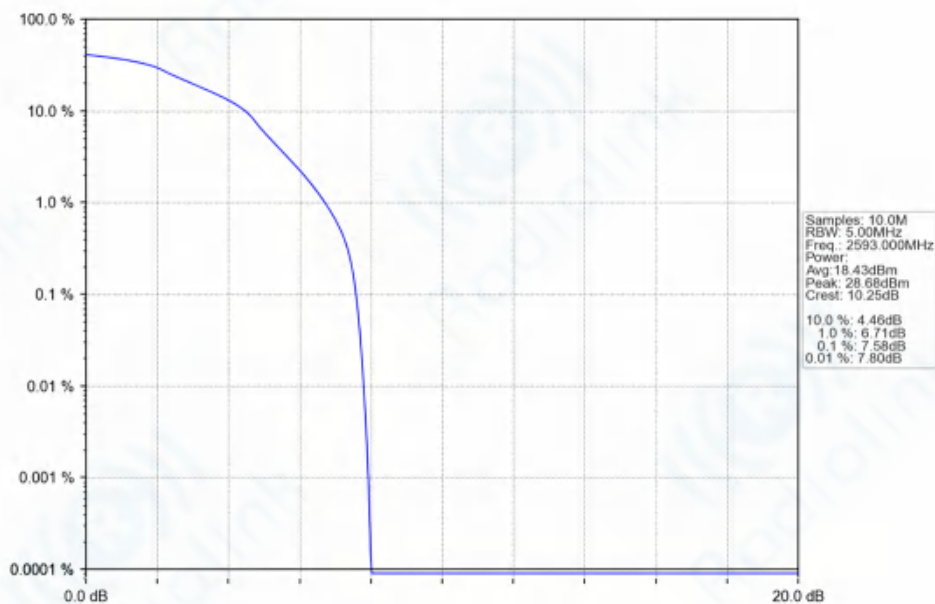

2026-03-27 04:14:42

Band41_5MHz_16QAM_HCH_2687.5MHz_RB_25_0_NTNV

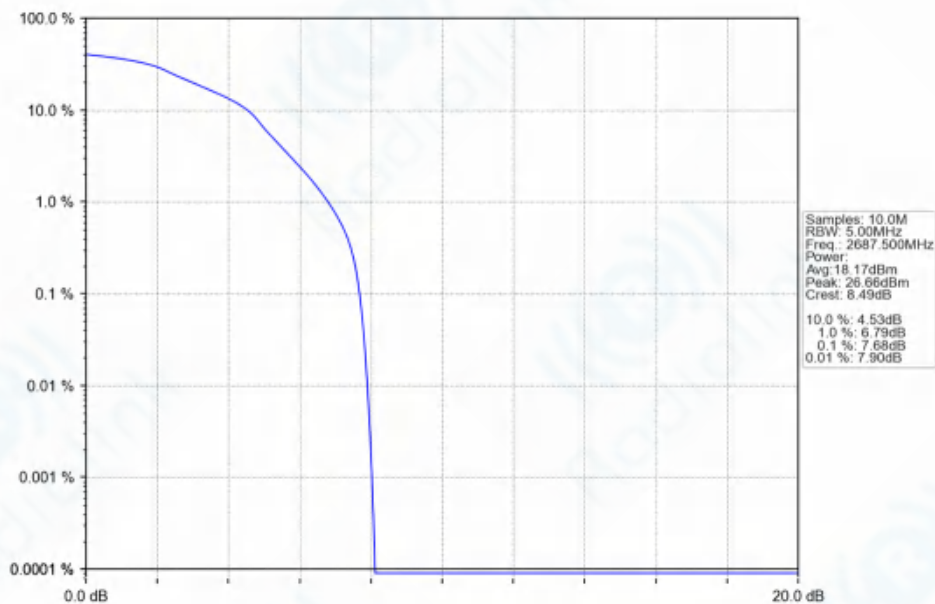


2026-03-27 04:15:15

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
 Shenzhen, Guangdong Province, China
 Tel: +86 0755 23080694

Band41_5MHz_64QAM_LCH_2498.5MHz_RB_25_0_NTNV

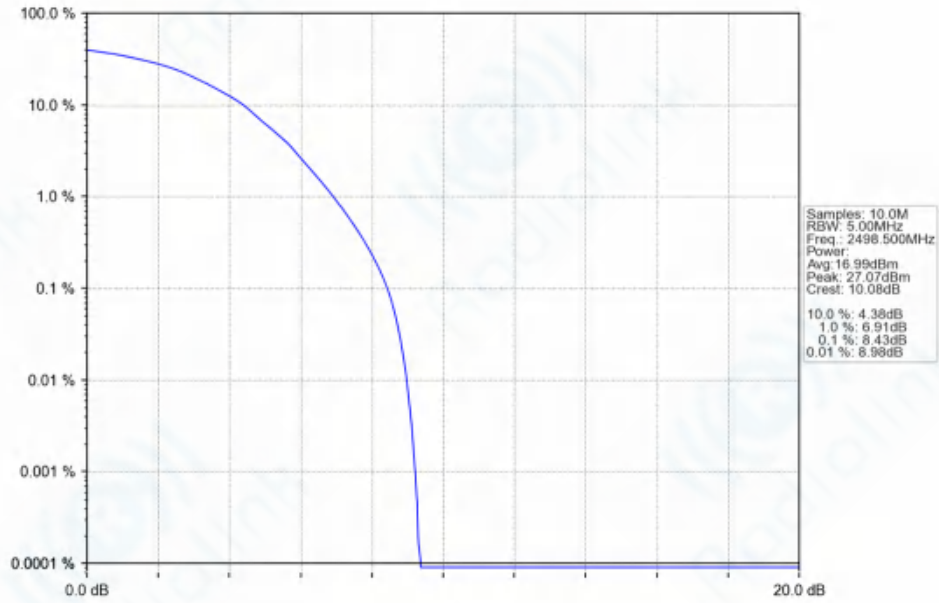


2026-03-27 04:14:20

Band41_5MHz_64QAM_MCH_2593MHz_RB_25_0_NTNV

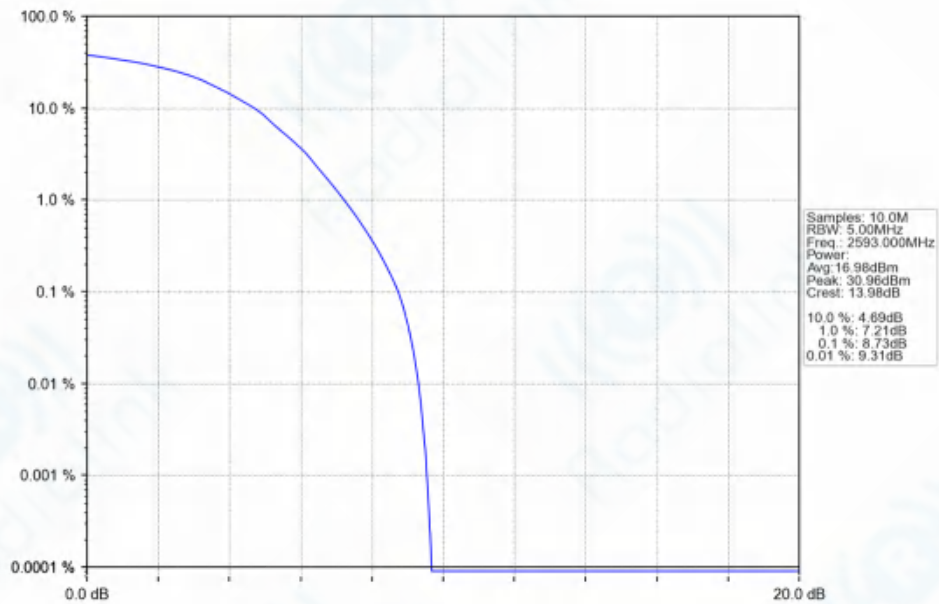


2026-03-27 04:14:53

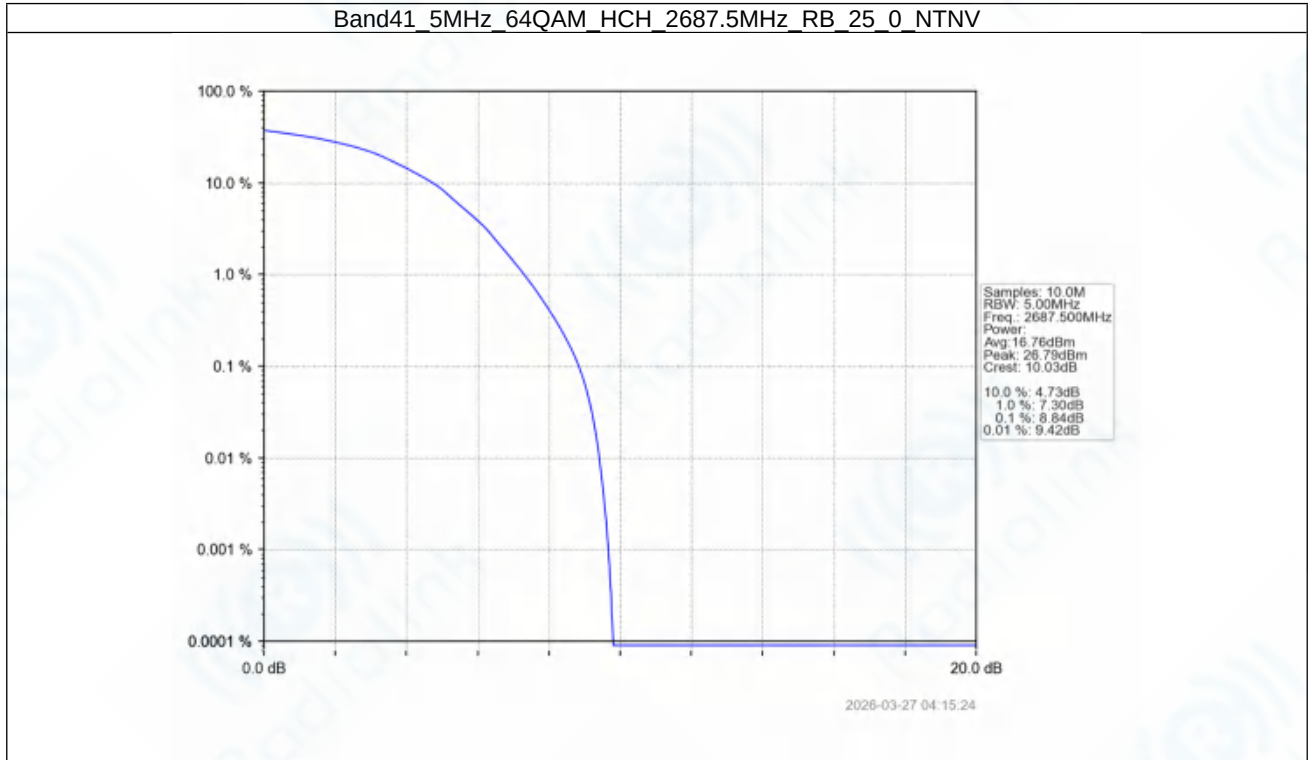

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


5.2.2 B41_10MHz

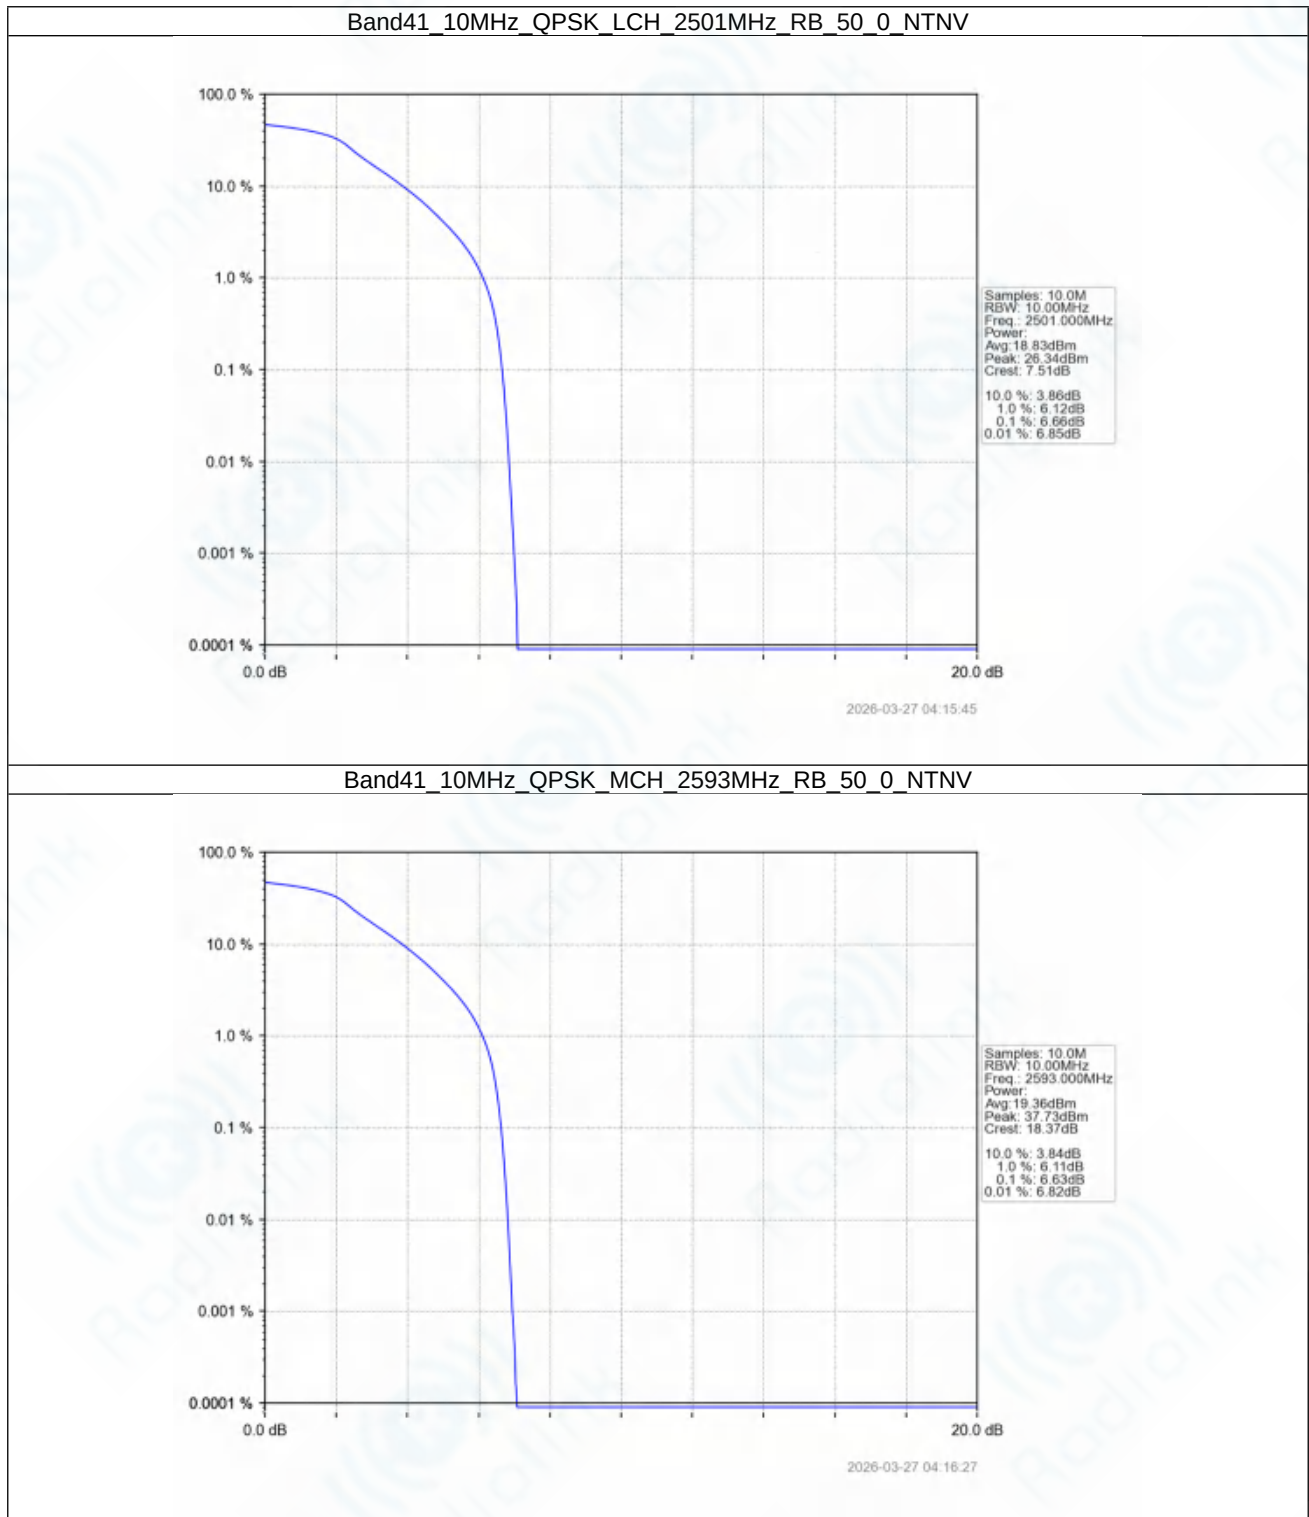

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_QPSK_HCH_2685MHz_RB_50_0_NTNV

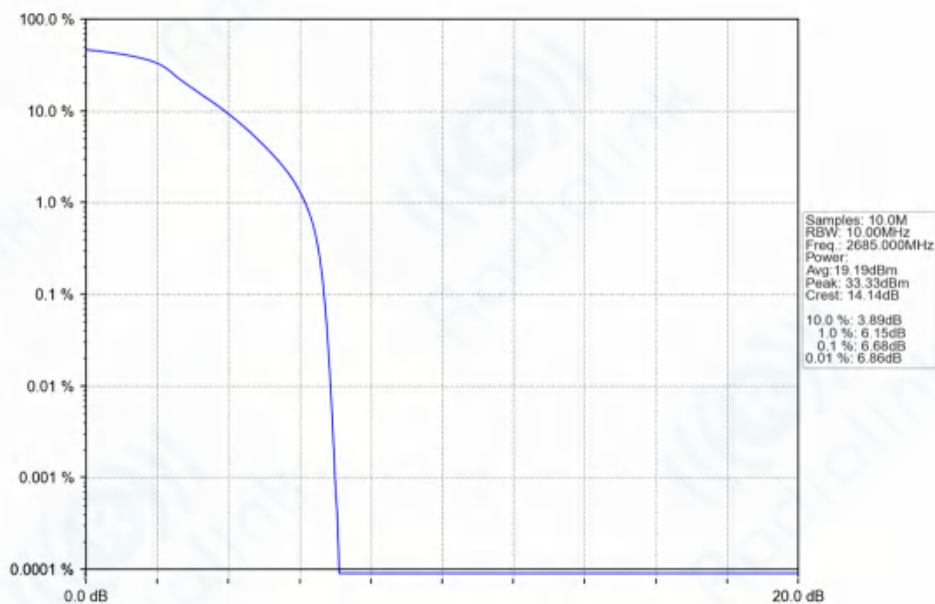


2026-03-27 04:17:11

Band41_10MHz_16QAM_LCH_2501MHz_RB_50_0_NTNV

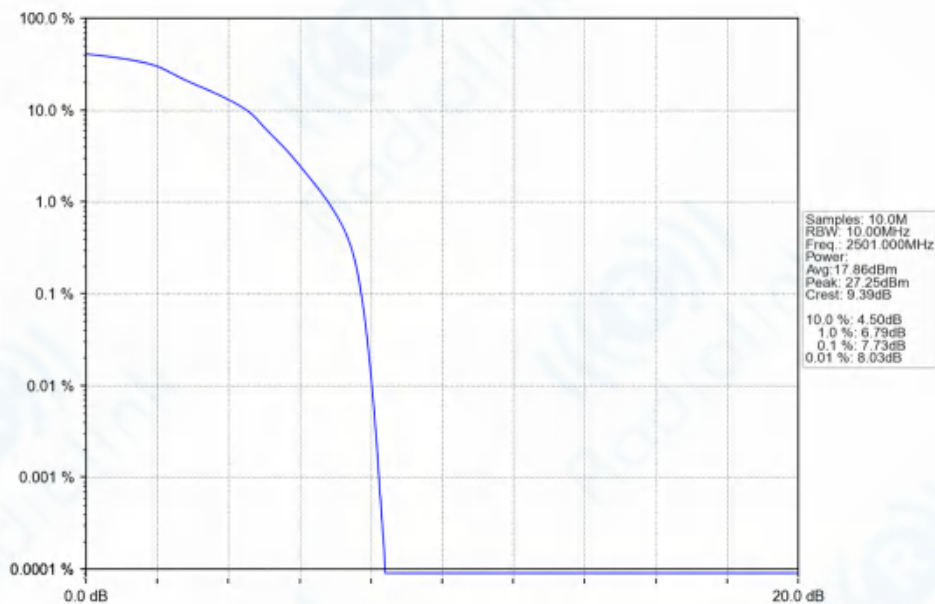


2026-03-27 04:15:58

Band41_10MHz_16QAM_MCH_2593MHz_RB_50_0_NTNV

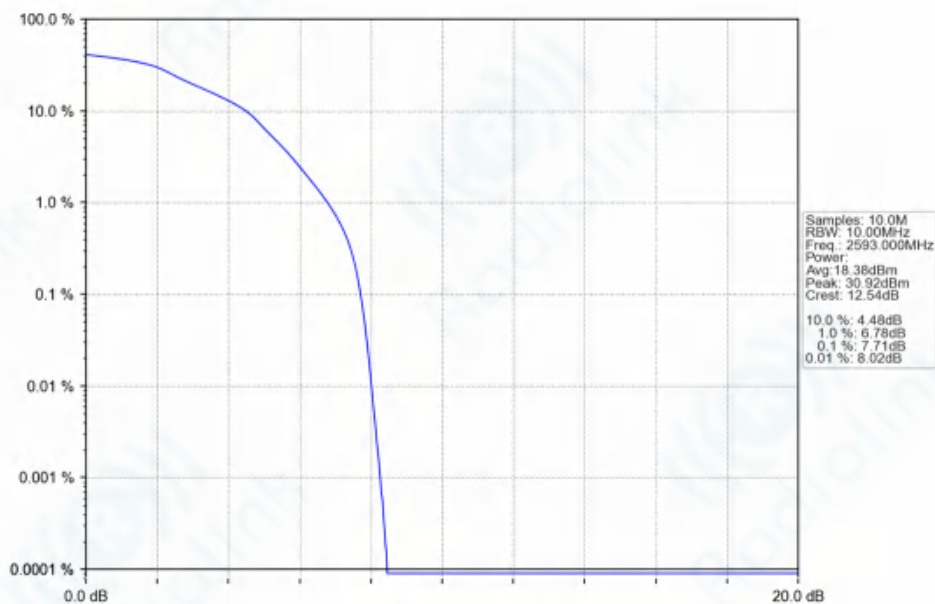

2026-03-27 04:16:42

Band41_10MHz_16QAM_HCH_2685MHz_RB_50_0_NTNV

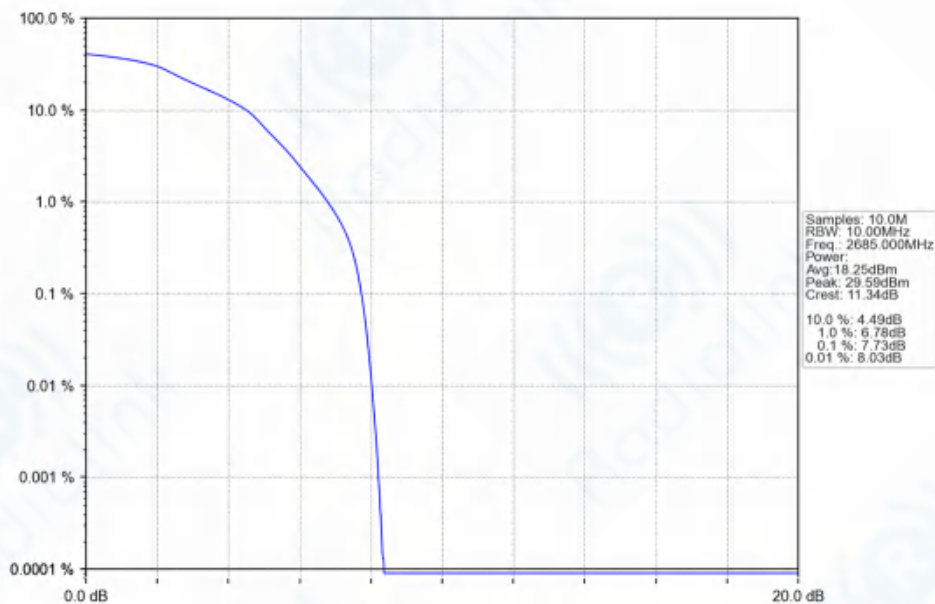


2026-03-27 04:17:24


Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
 Shenzhen, Guangdong Province, China
 Tel: +86 0755 23080694

Band41_10MHz_64QAM_LCH_2501MHz_RB_50_0_NTNV

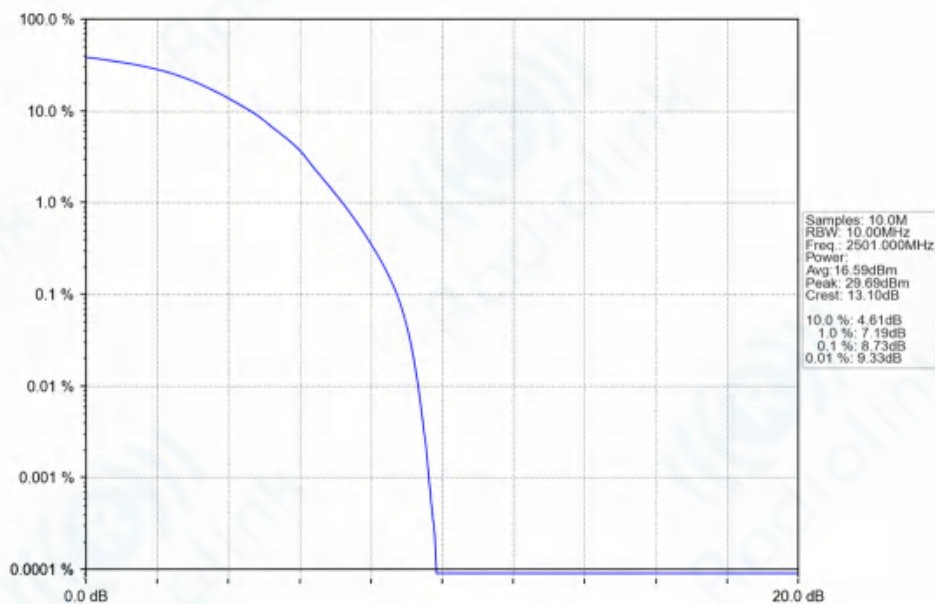

2026-03-27 04:16:12

Band41_10MHz_64QAM_MCH_2593MHz_RB_50_0_NTNV

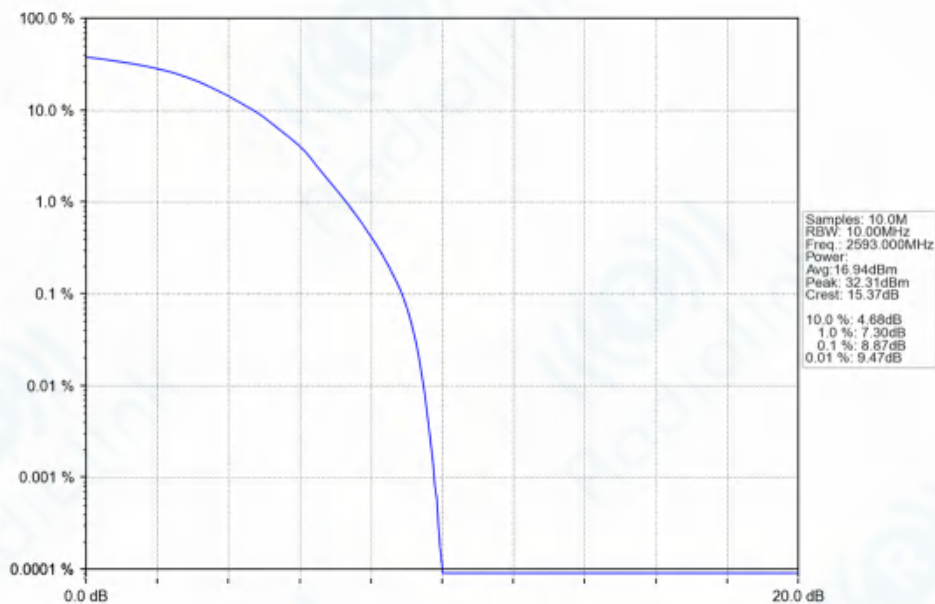


2026-03-27 04:16:56

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China


Tel: +86 0755 23080694

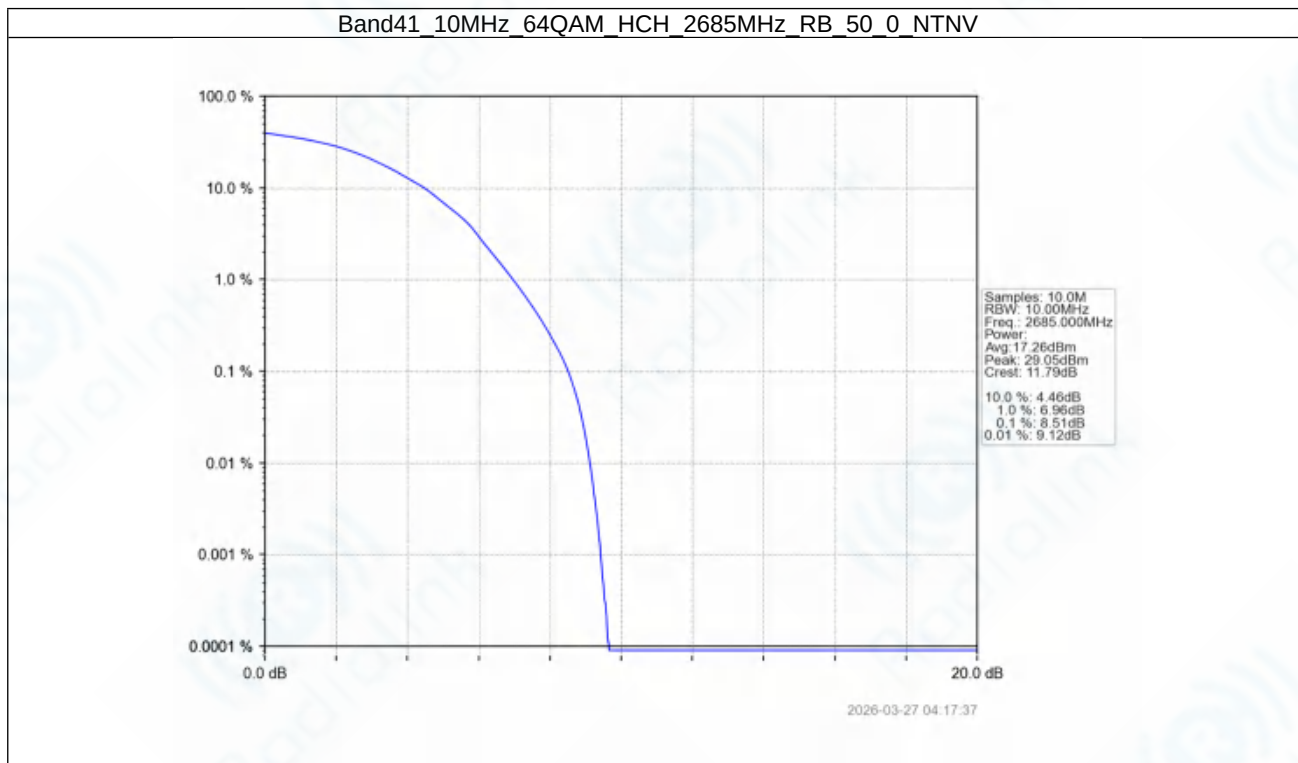

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


5.2.3 B41_15MHz

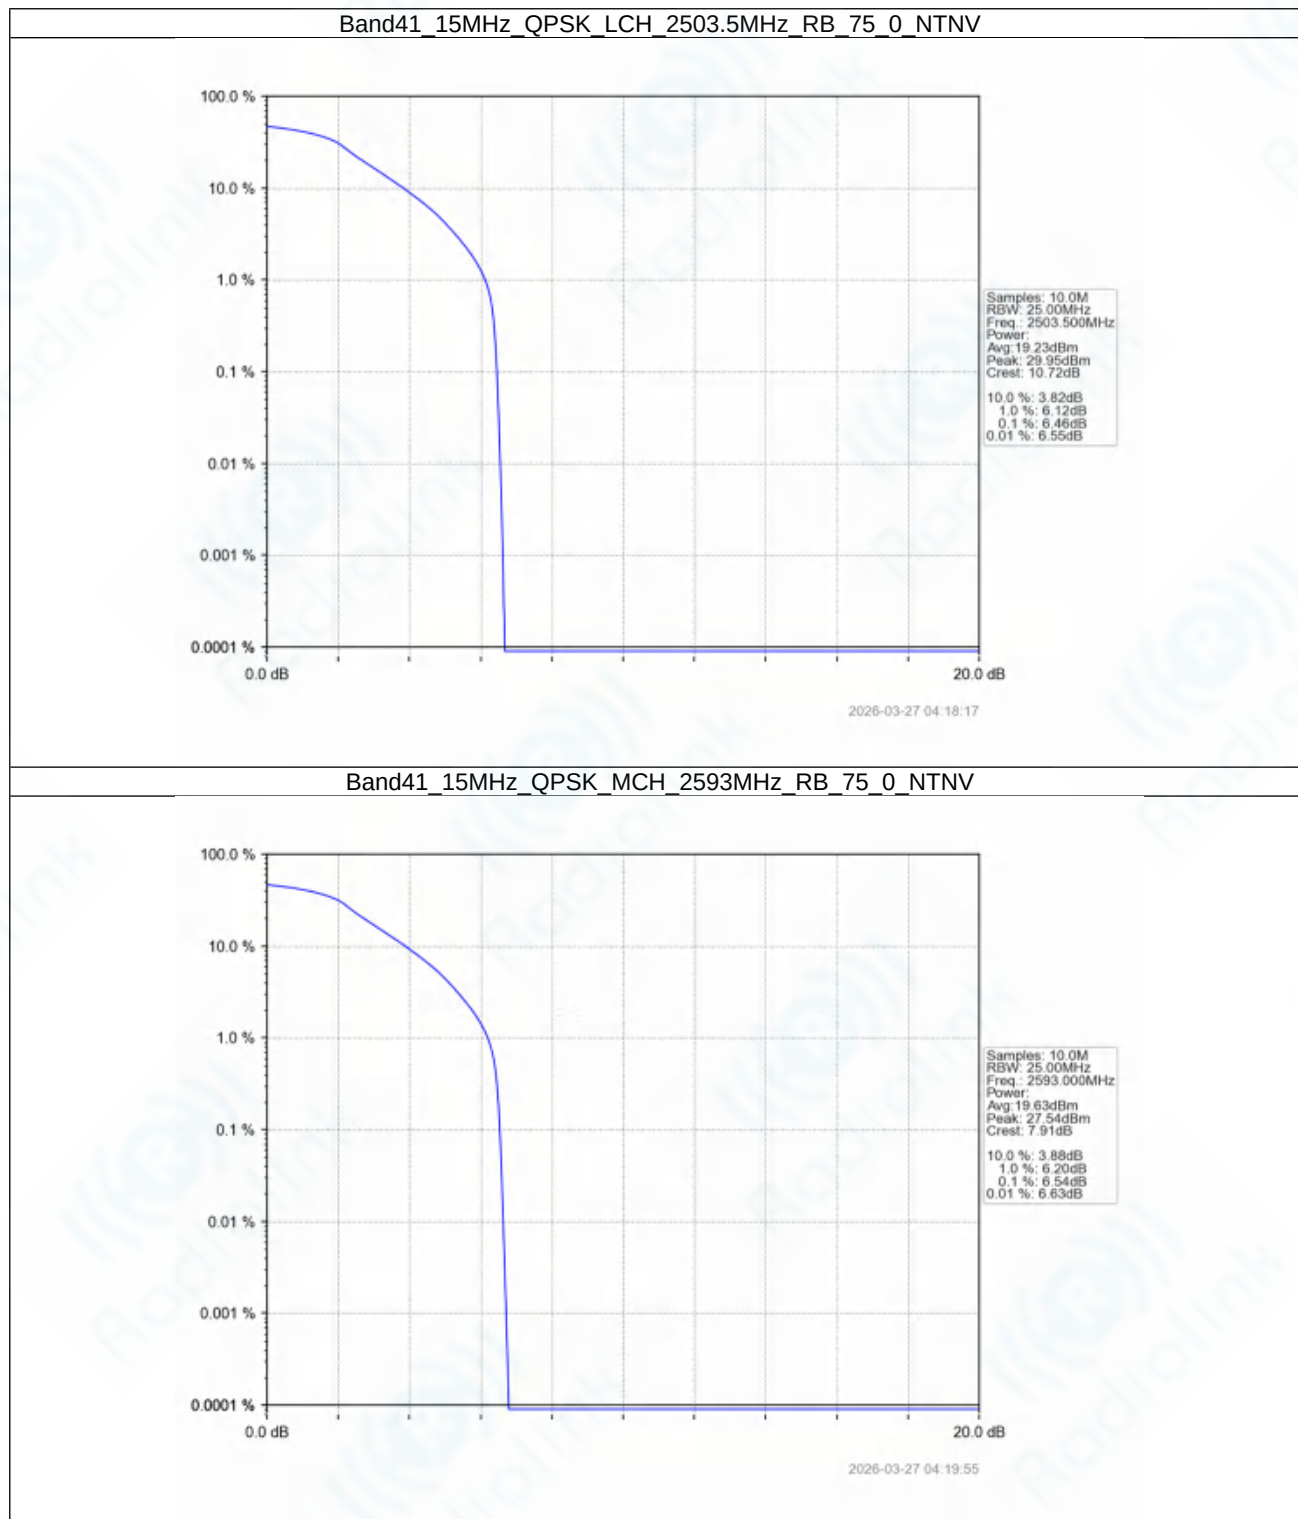


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_15MHz_QPSK_HCH_2682.5MHz_RB_75_0_NTNV

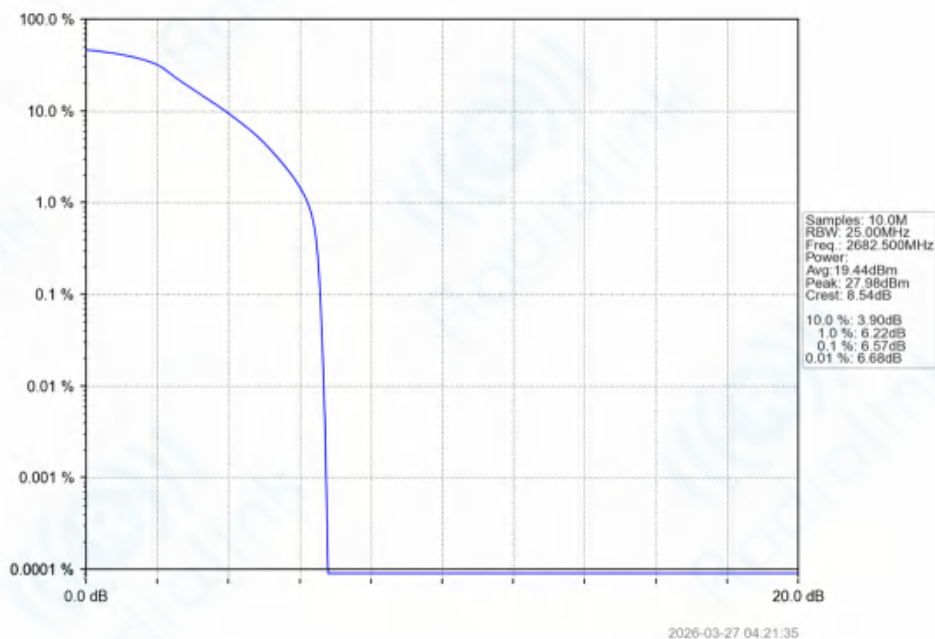


Band41_15MHz_16QAM_LCH_2503.5MHz_RB_75_0_NTNV

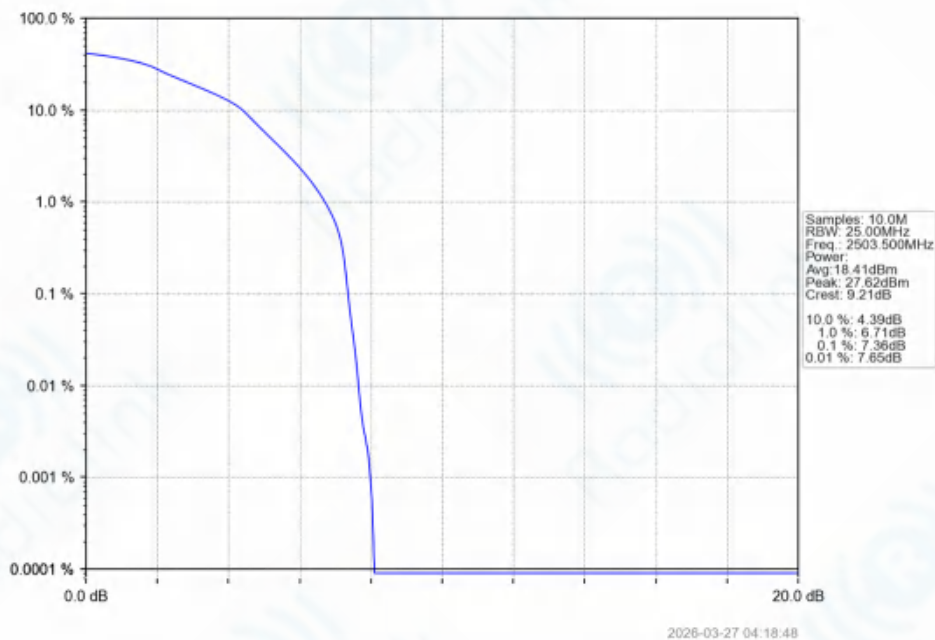
Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China


Tel: +86 0755 23080694

Band41_15MHz_16QAM_MCH_2593MHz_RB_75_0_NTNV

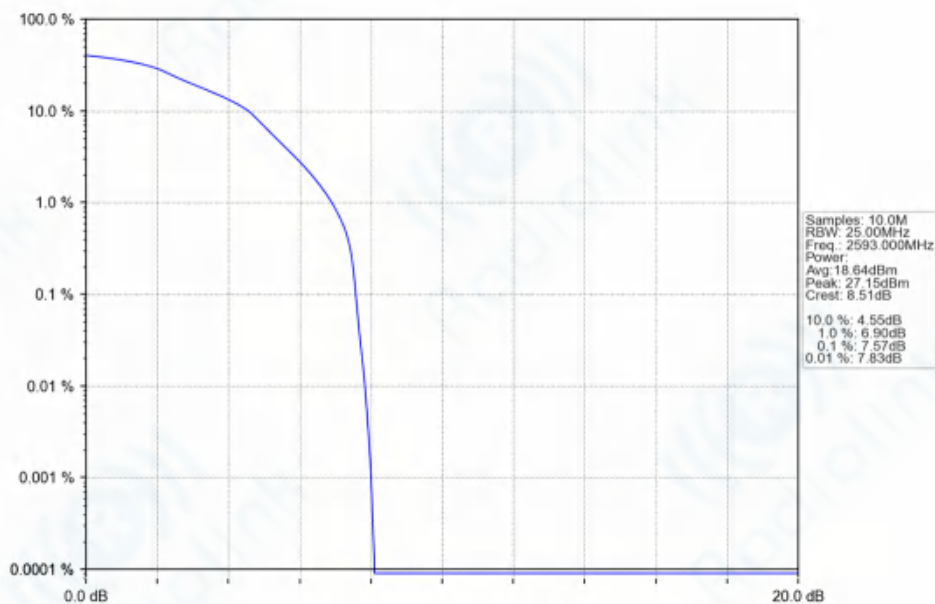


2026-03-27 04:20:28

Band41_15MHz_16QAM_HCH_2682.5MHz_RB_75_0_NTNV

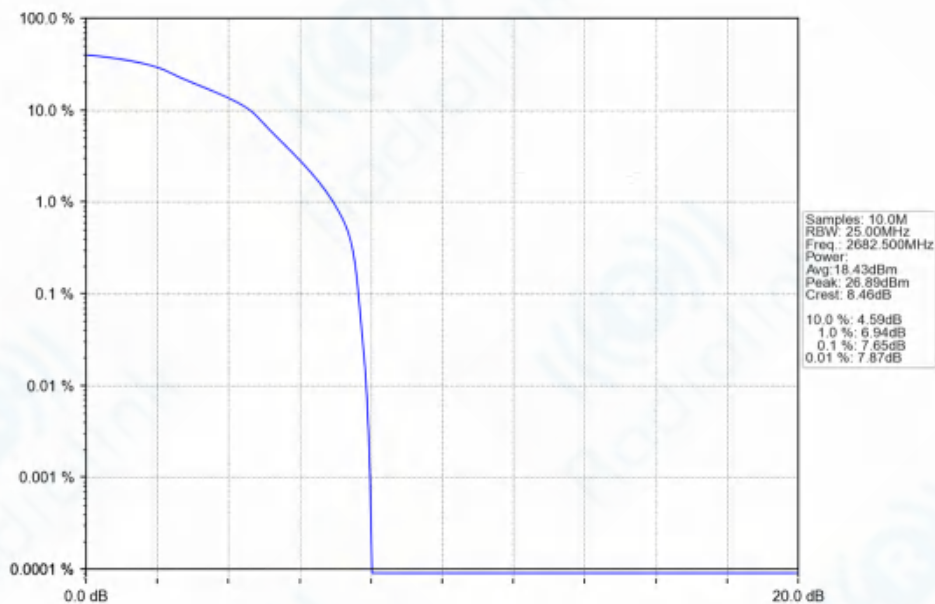


2026-03-27 04:22:06

Band41_15MHz_64QAM_LCH_2503.5MHz_RB_75_0_NTNV

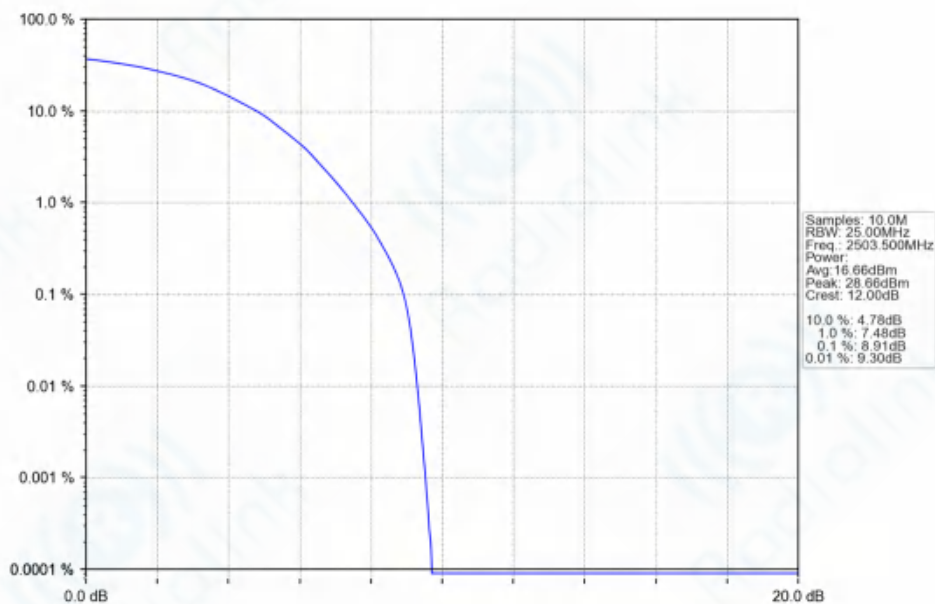

2026-03-27 04:19:21

Band41_15MHz_64QAM_MCH_2593MHz_RB_75_0_NTNV

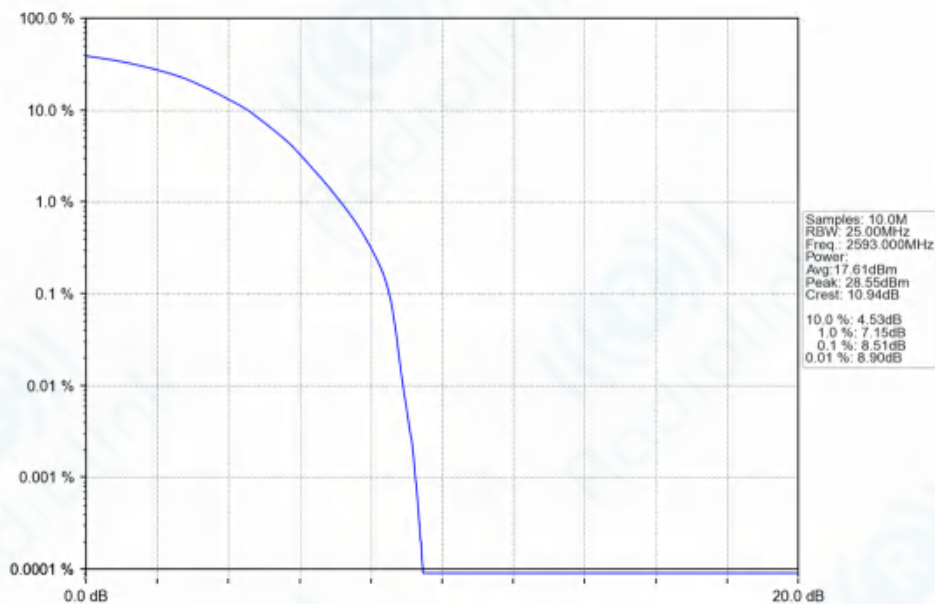


2026-03-27 04:21:01


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China


Tel: +86 0755 23080694

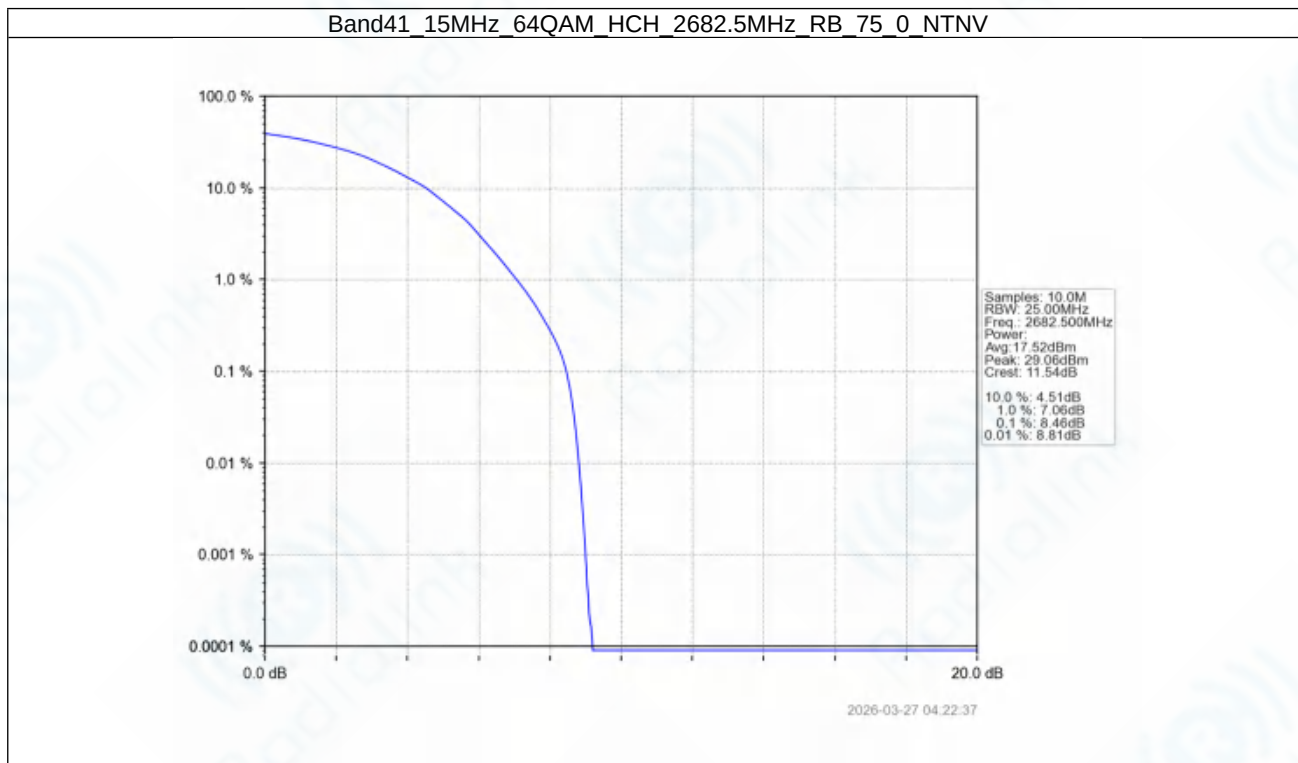


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


5.2.4 B41_20MHz

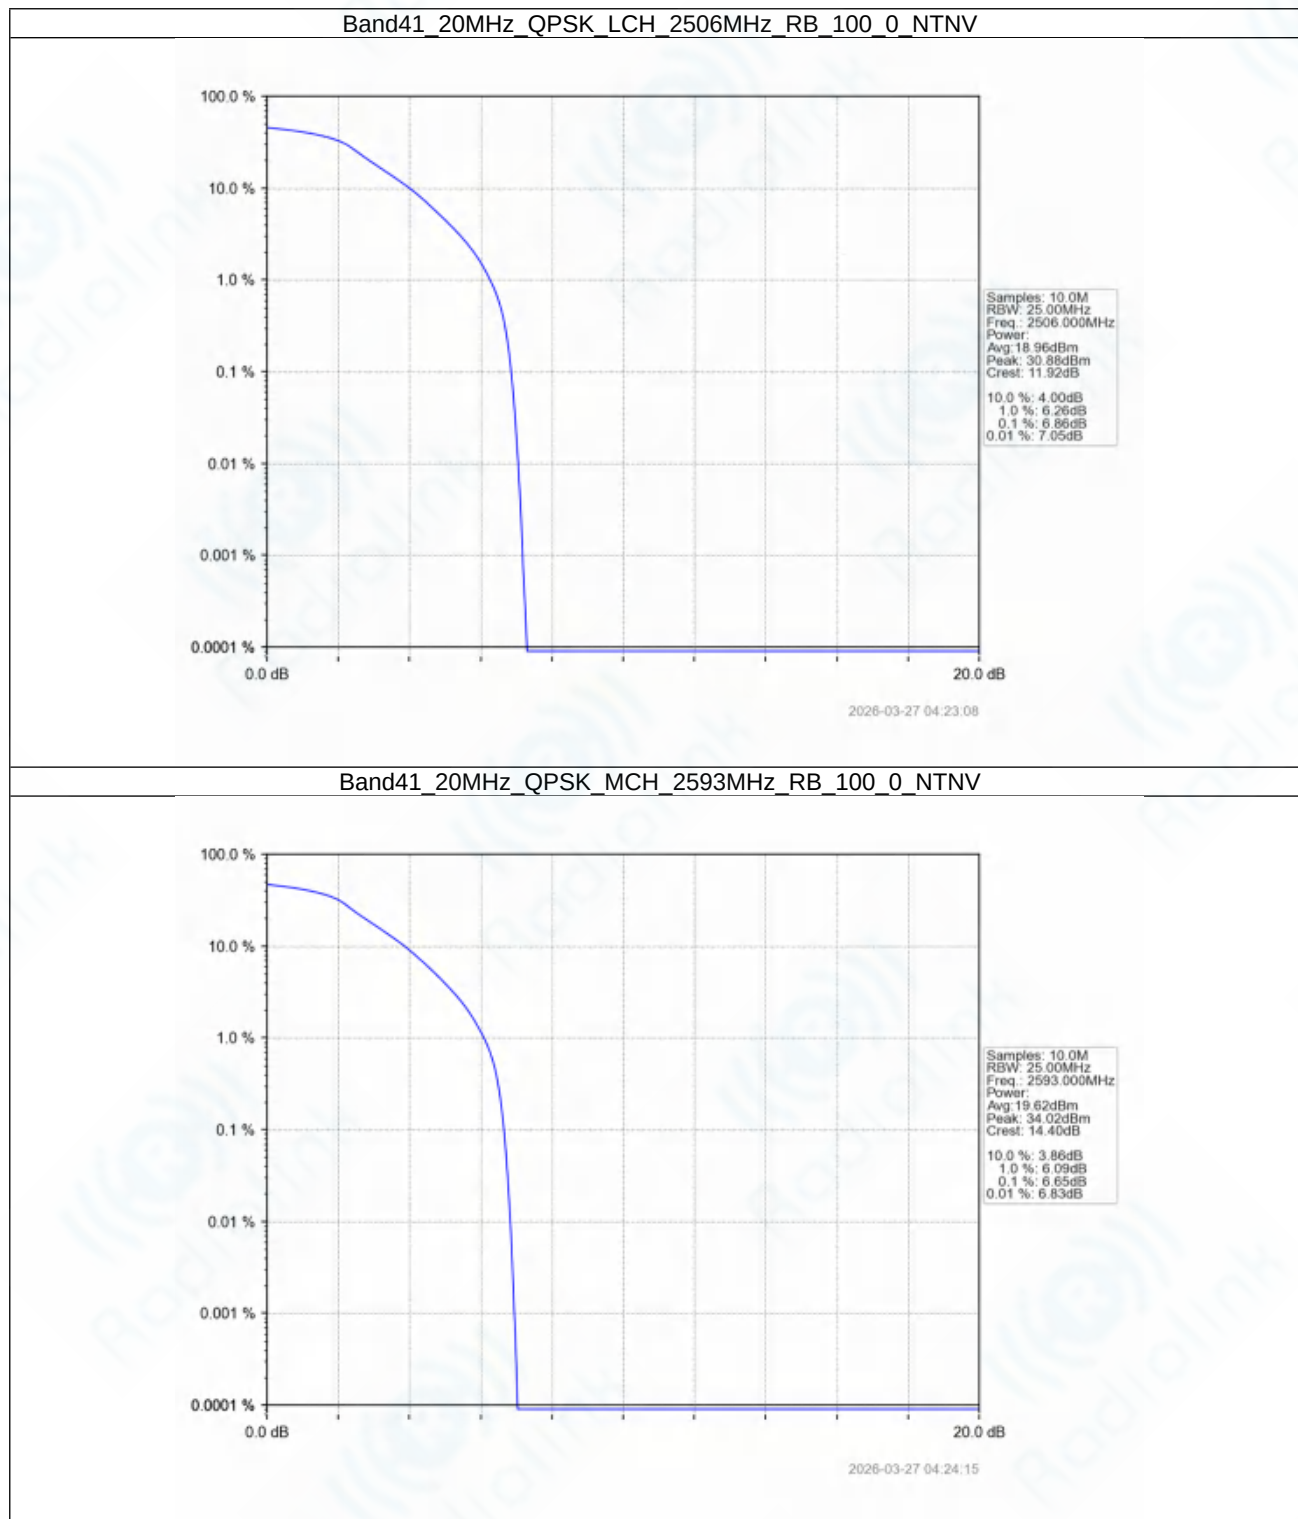

Band41_20MHz_QPSK_HCH_2680MHz_RB_100_0_NTNV

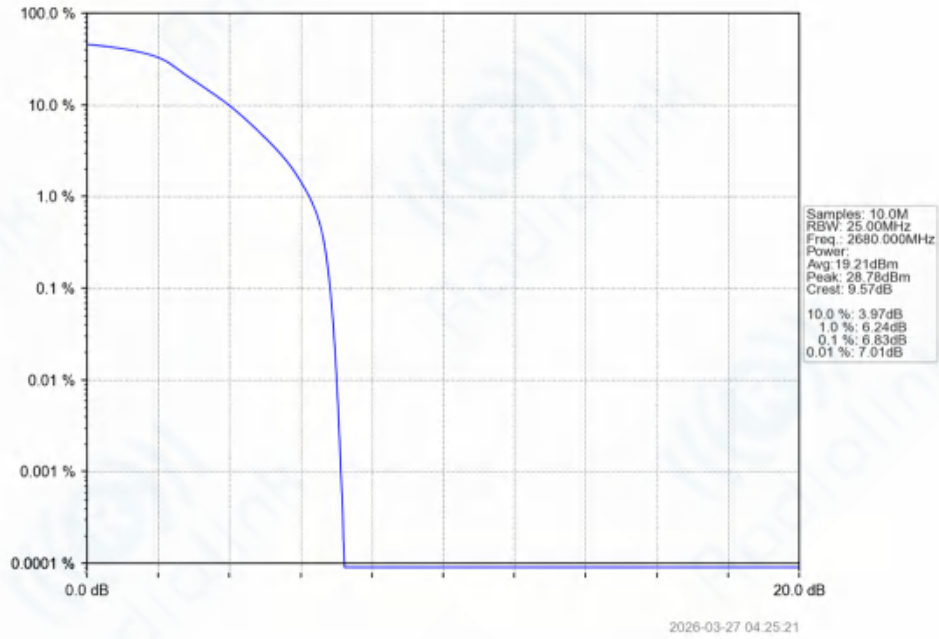


Band41_20MHz_16QAM_LCH_2506MHz_RB_100_0_NTNV

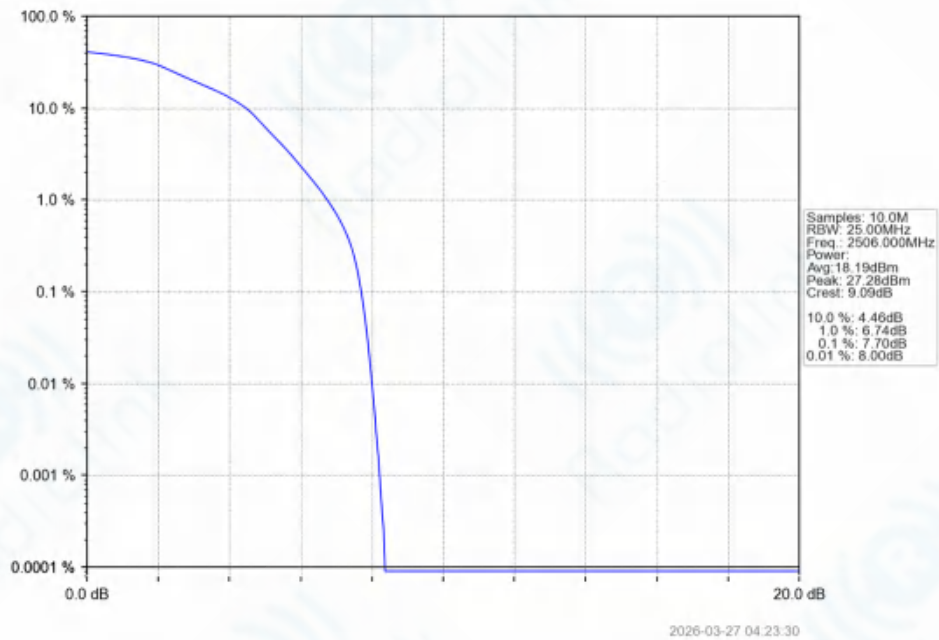

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_20MHz_16QAM_MCH_2593MHz_RB_100_0_NTNV

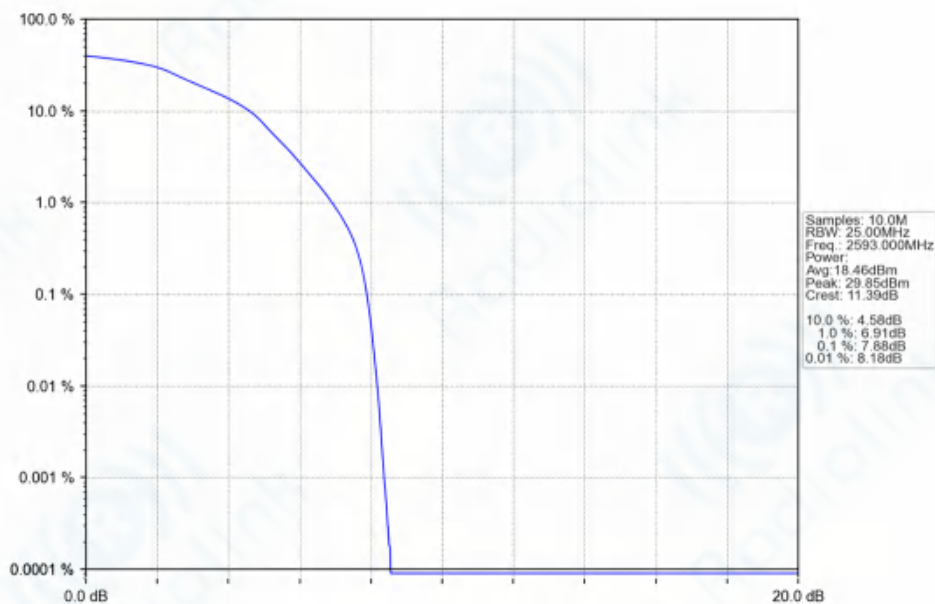

2026-03-27 04:24:36

Band41_20MHz_16QAM_HCH_2680MHz_RB_100_0_NTNV

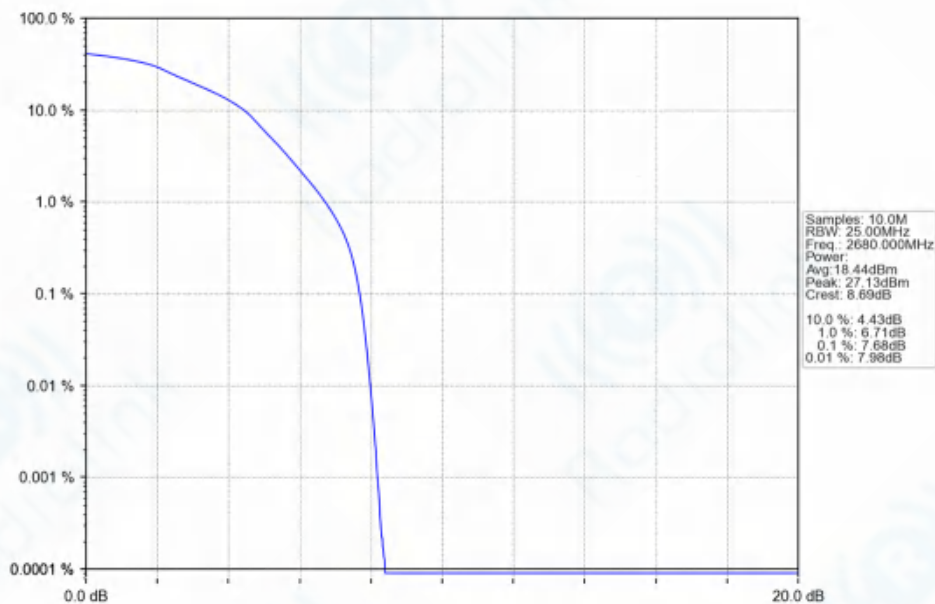


2026-03-27 04:25:43

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China


Tel: +86 0755 23080694

Band41_20MHz_64QAM_LCH_2506MHz_RB_100_0_NTNV

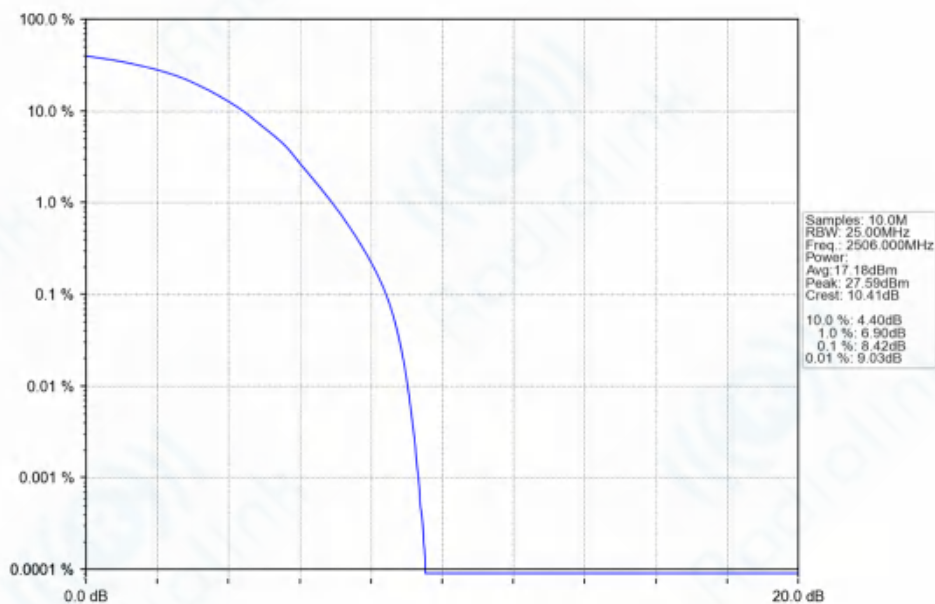


2026-03-27 04:23:51

Band41_20MHz_64QAM_MCH_2593MHz_RB_100_0_NTNV

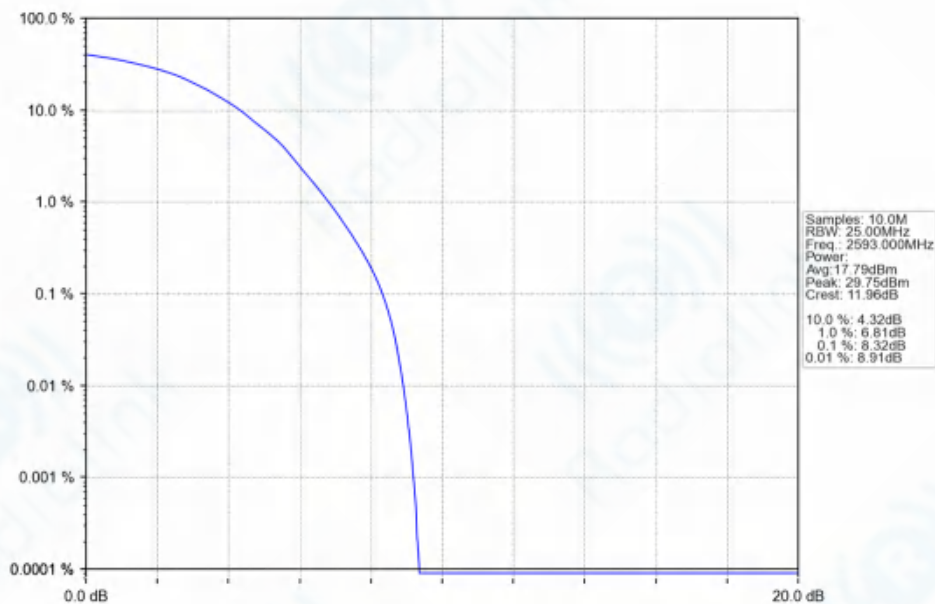

2026-03-27 04:24:57

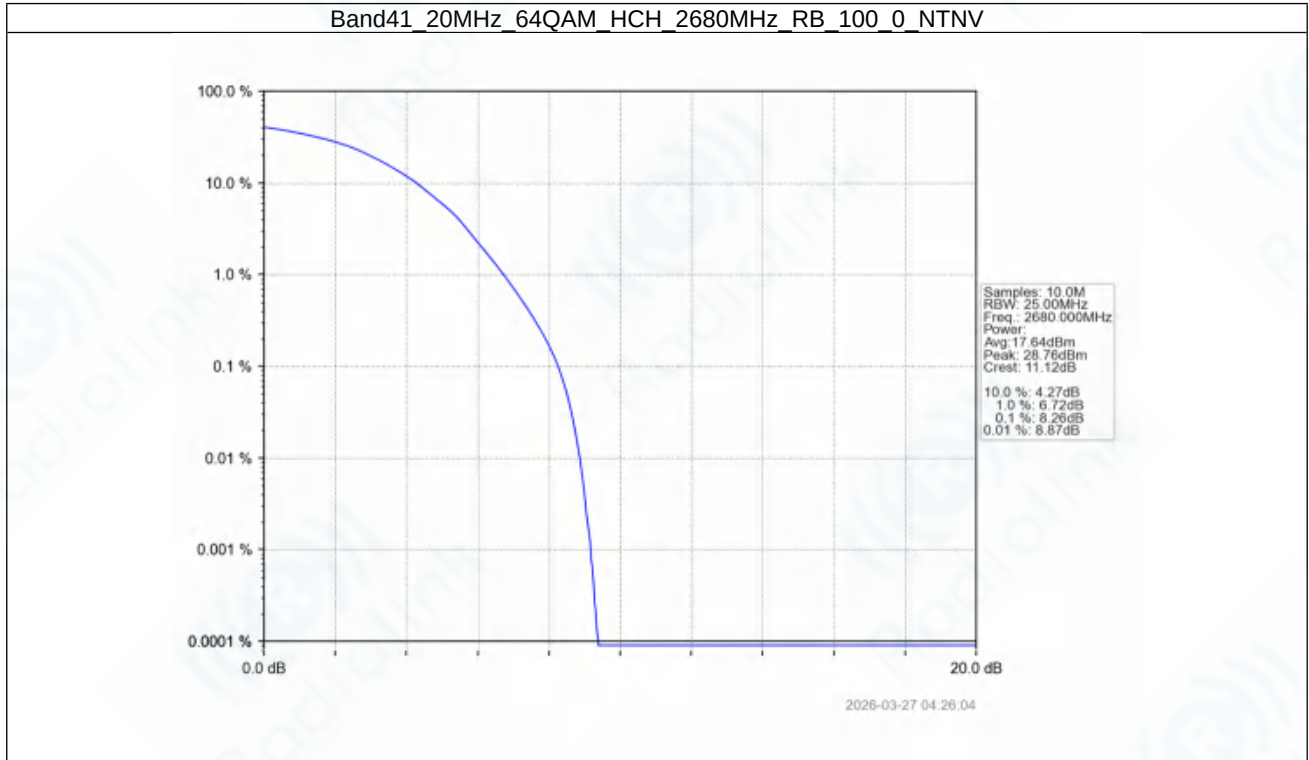

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

6. Spurious Emission

6.1 Test Result

6.1.1 B41_5MHz

Band: 41 / Bandwidth: 5MHz / NTNV						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	2498.5	1	0	Refer To Test Graph		Pass
		25	0	Refer To Test Graph		Pass
	2593	1	0	Refer To Test Graph		Pass
	2687.5	1	0	Refer To Test Graph		Pass
			24	Refer To Test Graph		Pass
		25	0	Refer To Test Graph		Pass
16QAM	2498.5	1	0	Refer To Test Graph		Pass
		25	0	Refer To Test Graph		Pass
	2593	1	0	Refer To Test Graph		Pass
	2687.5	1	0	Refer To Test Graph		Pass
			24	Refer To Test Graph		Pass
		25	0	Refer To Test Graph		Pass
64QAM	2498.5	1	0	Refer To Test Graph		Pass
		25	0	Refer To Test Graph		Pass
	2593	1	0	Refer To Test Graph		Pass
	2687.5	1	0	Refer To Test Graph		Pass
			24	Refer To Test Graph		Pass
	25	0	Refer To Test Graph		Pass	

6.1.2 B41_10MHz

Band: 41 / Bandwidth: 10MHz / NTVN						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	2501	1	0	Refer To Test Graph		Pass
		50	0	Refer To Test Graph		Pass
	2593	1	0	Refer To Test Graph		Pass
	2685	1	0	Refer To Test Graph		Pass
			49	Refer To Test Graph		Pass
		50	0	Refer To Test Graph		Pass
16QAM	2501	1	0	Refer To Test Graph		Pass
		50	0	Refer To Test Graph		Pass
	2593	1	0	Refer To Test Graph		Pass
	2685	1	0	Refer To Test Graph		Pass
			49	Refer To Test Graph		Pass
		50	0	Refer To Test Graph		Pass
64QAM	2501	1	0	Refer To Test Graph		Pass
		50	0	Refer To Test Graph		Pass
	2593	1	0	Refer To Test Graph		Pass
	2685	1	0	Refer To Test Graph		Pass
			49	Refer To Test Graph		Pass
	50	0	Refer To Test Graph		Pass	

6.1.3 B41_15MHz

Band: 41 / Bandwidth: 15MHz / NTV						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	2503.5	1	0	Refer To Test Graph		Pass
		75	0	Refer To Test Graph		Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

	2593	1	0	Refer To Test Graph	Pass
	2682.5	1	0	Refer To Test Graph	Pass
			74	Refer To Test Graph	Pass
		75	0	Refer To Test Graph	Pass
16QAM	2503.5	1	0	Refer To Test Graph	Pass
		75	0	Refer To Test Graph	Pass
	2593	1	0	Refer To Test Graph	Pass
	2682.5	1	0	Refer To Test Graph	Pass
			74	Refer To Test Graph	Pass
		75	0	Refer To Test Graph	Pass
64QAM	2503.5	1	0	Refer To Test Graph	Pass
		75	0	Refer To Test Graph	Pass
	2593	1	0	Refer To Test Graph	Pass
	2682.5	1	0	Refer To Test Graph	Pass
			74	Refer To Test Graph	Pass
		75	0	Refer To Test Graph	Pass

6.1.4 B41_20MHz

Band: 41 / Bandwidth: 20MHz / NTNV						
Modulation	Frequency (MHz)	RB Allocation		Spurious Emission		Verdict
		Size	Offset	Result	Limit	
QPSK	2506	1	0	Refer To Test Graph		Pass
		100	0	Refer To Test Graph		Pass
	2593	1	0	Refer To Test Graph		Pass
	2680	1	0	Refer To Test Graph		Pass
		100	99	Refer To Test Graph		Pass
			0	Refer To Test Graph		Pass
16QAM	2506	1	0	Refer To Test Graph		Pass
		100	0	Refer To Test Graph		Pass
	2593	1	0	Refer To Test Graph		Pass
	2680	1	0	Refer To Test Graph		Pass
		100	99	Refer To Test Graph		Pass
			0	Refer To Test Graph		Pass
64QAM	2506	1	0	Refer To Test Graph		Pass
		100	0	Refer To Test Graph		Pass
	2593	1	0	Refer To Test Graph		Pass
	2680	1	0	Refer To Test Graph		Pass
		100	99	Refer To Test Graph		Pass
			0	Refer To Test Graph		Pass




Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

6.2 Test Graph


6.2.1 B41_5MHz

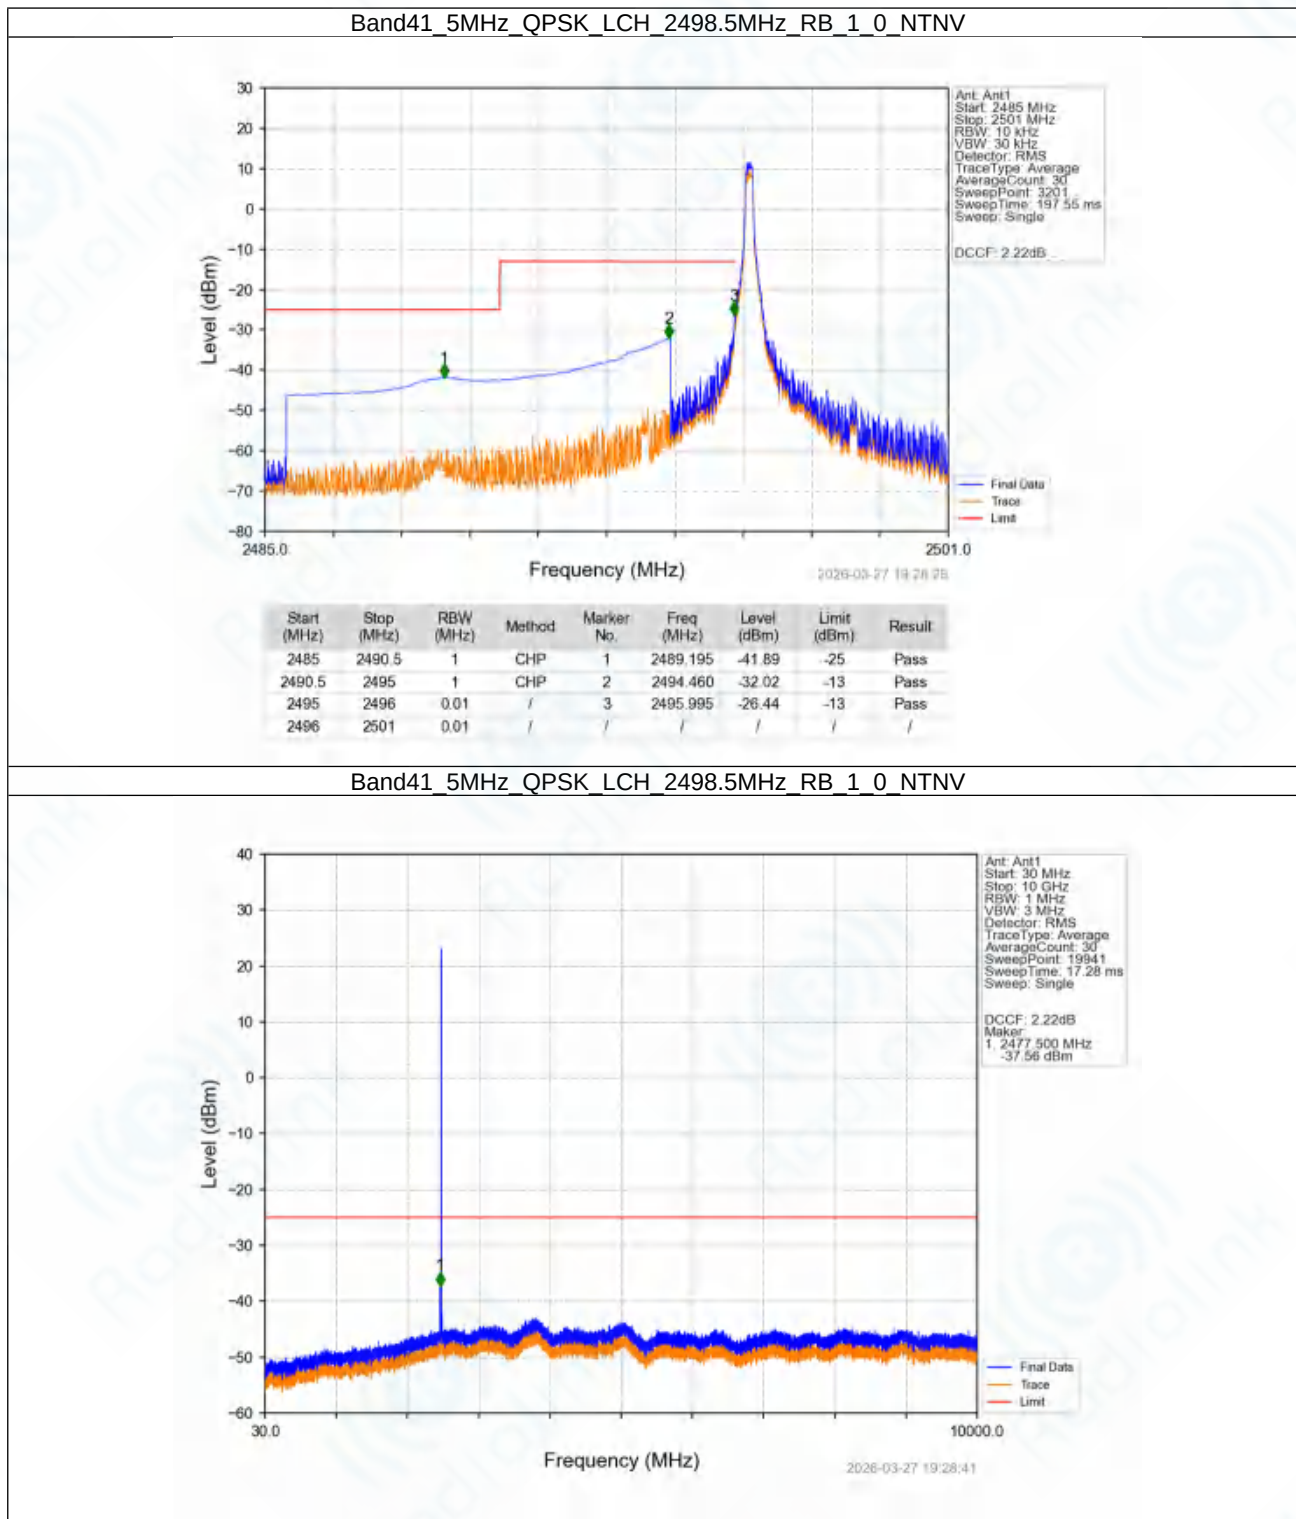


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_5MHz_QPSK_LCH_2498.5MHz_RB_1_0_NTNV

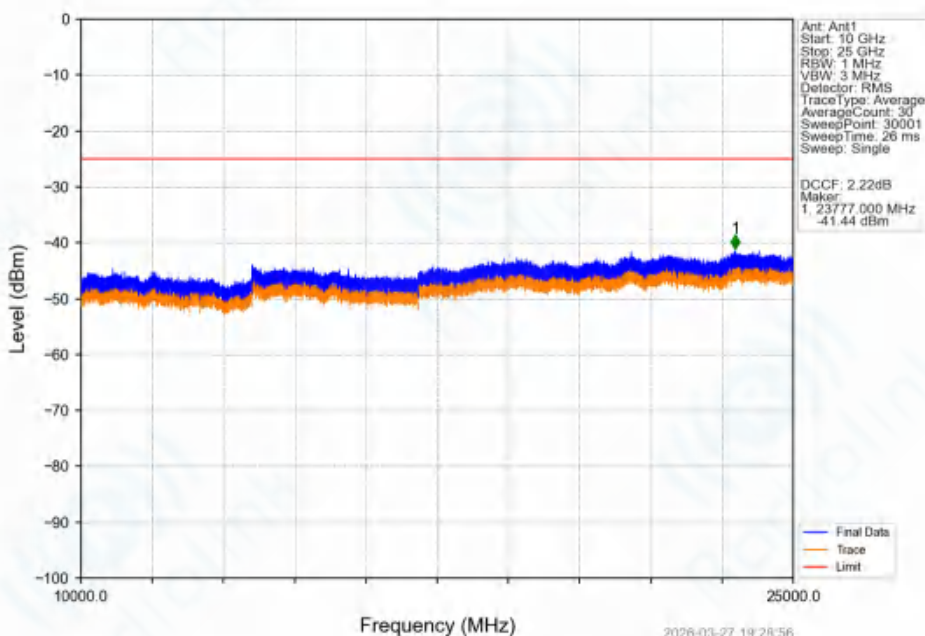


Band41_5MHz_QPSK_LCH_2498.5MHz_RB_1_0_NTNV

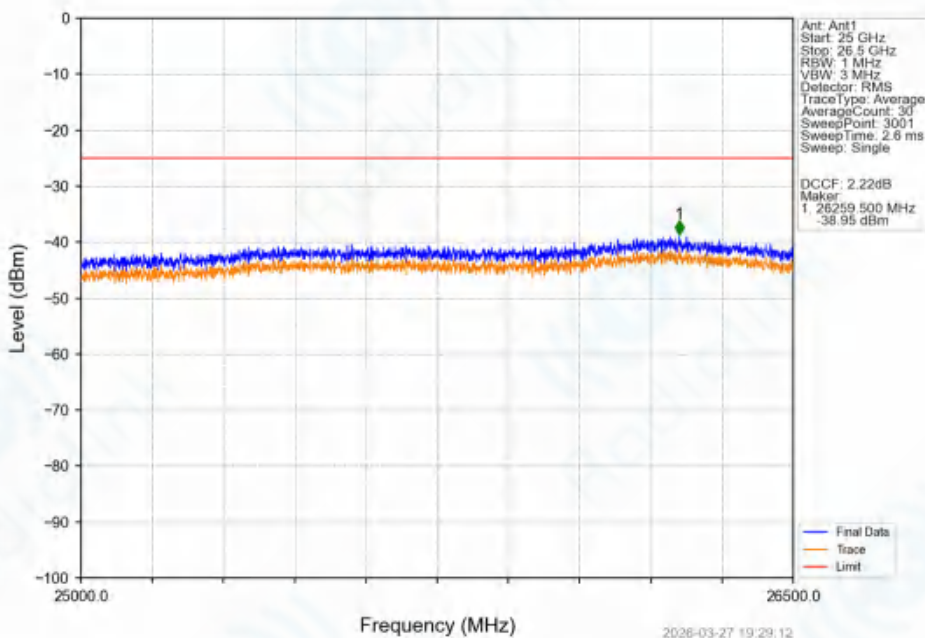

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_5MHz_QPSK_LCH_2498.5MHz_RB_25_0_NTNV

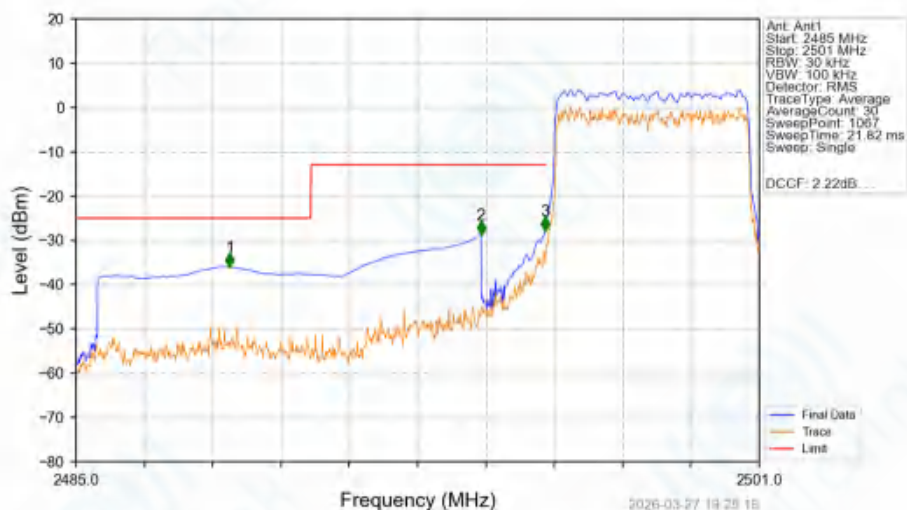


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2488.602	-36.03	-25	Pass
2490.5	2495	1	CHP	2	2494.486	-28.78	-13	Pass
2495	2496	0.063	CHP	3	2495.967	-27.82	-13	Pass
2496	2501	0.063	CHP	/	/	/	/	/


Band41_5MHz_QPSK_MCH_2593MHz_RB_1_0_NTNV

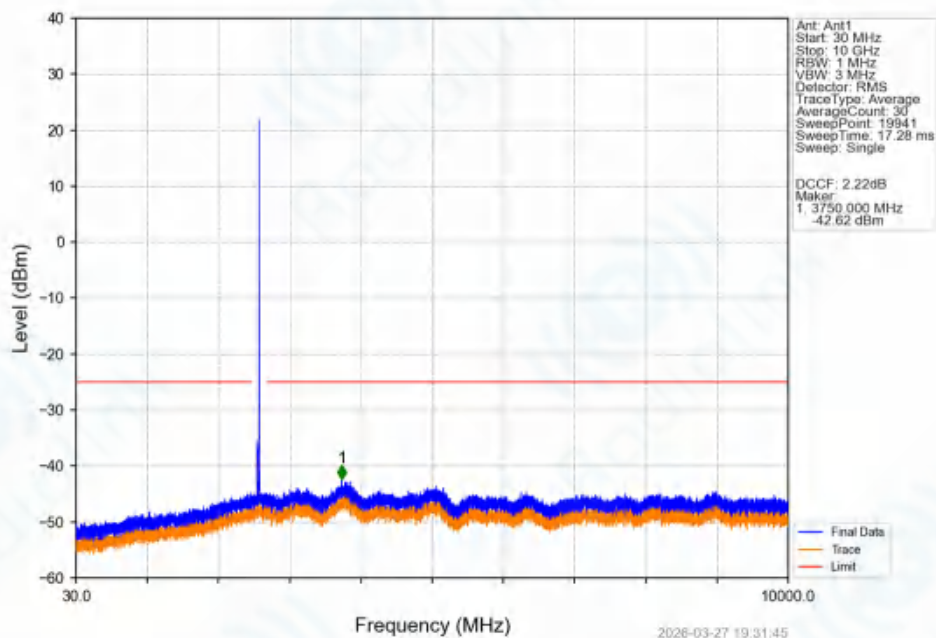

Band41_5MHz_QPSK_MCH_2593MHz_RB_1_0_NTNV

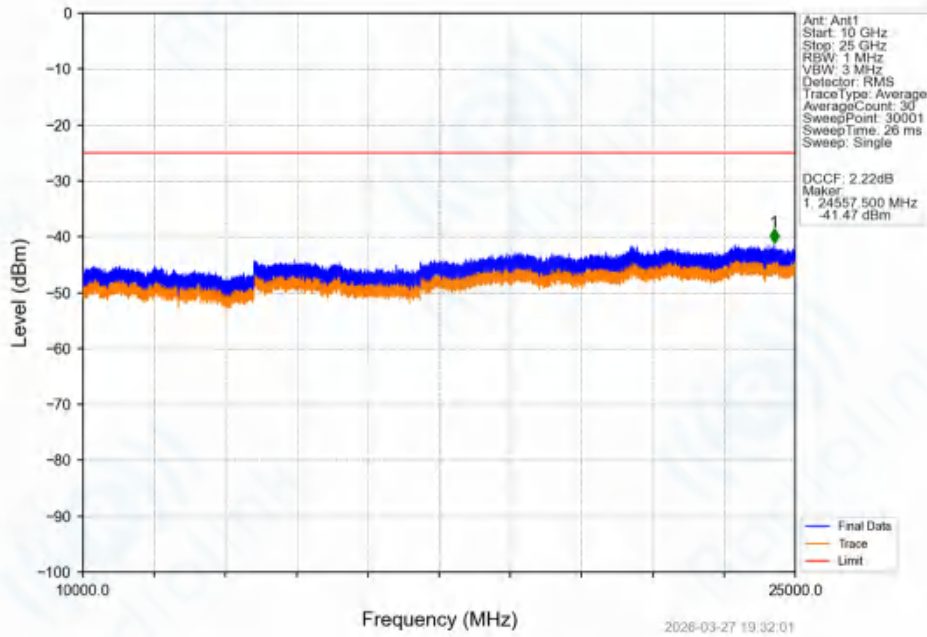

Band41_5MHz_QPSK_MCH_2593MHz_RB_1_0_NTNV

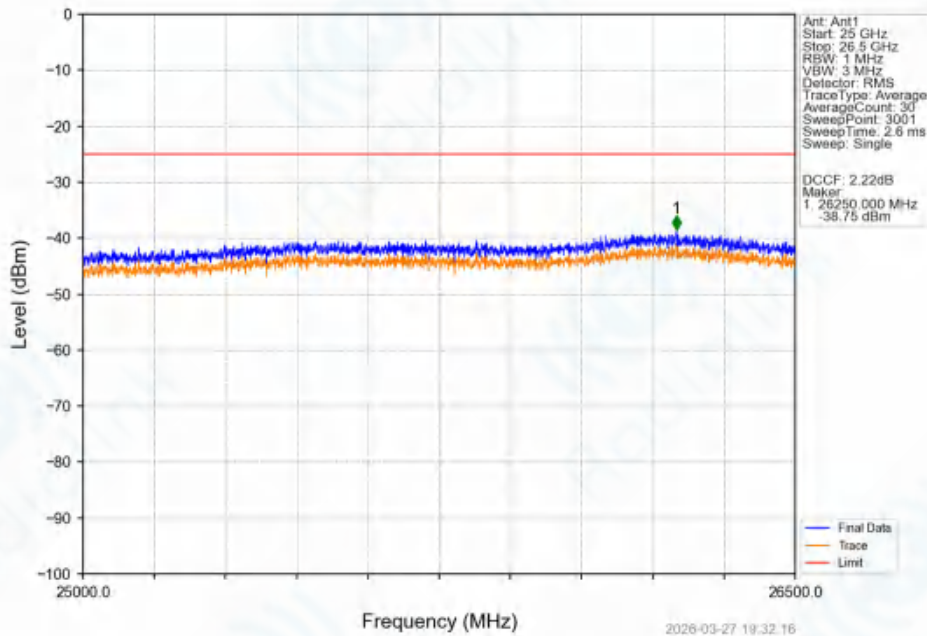


Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

Band41_5MHz_QPSK_HCH_2687.5MHz_RB_1_0_NTNV

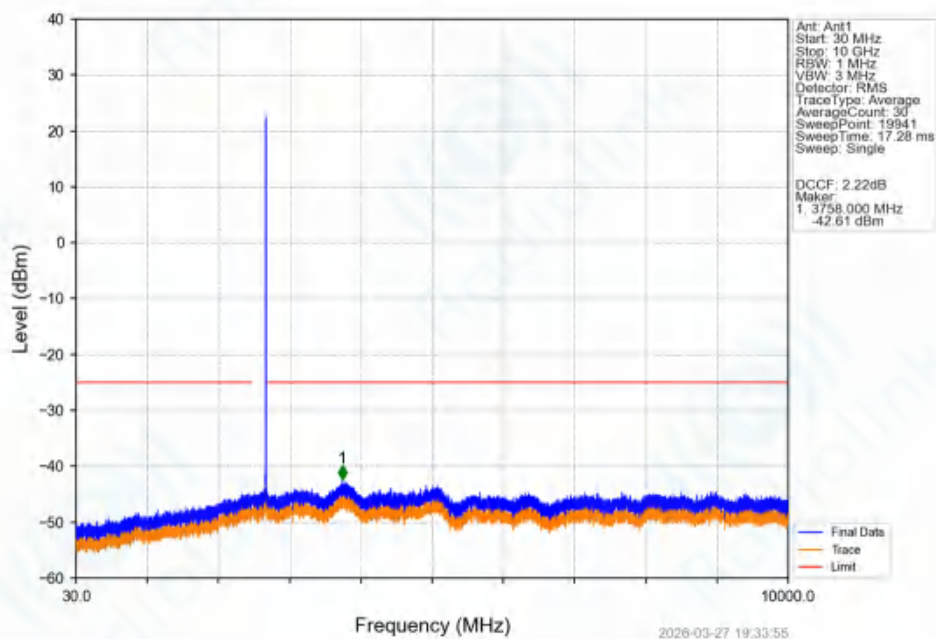


Band41_5MHz_QPSK_HCH_2687.5MHz_RB_1_0_NTNV

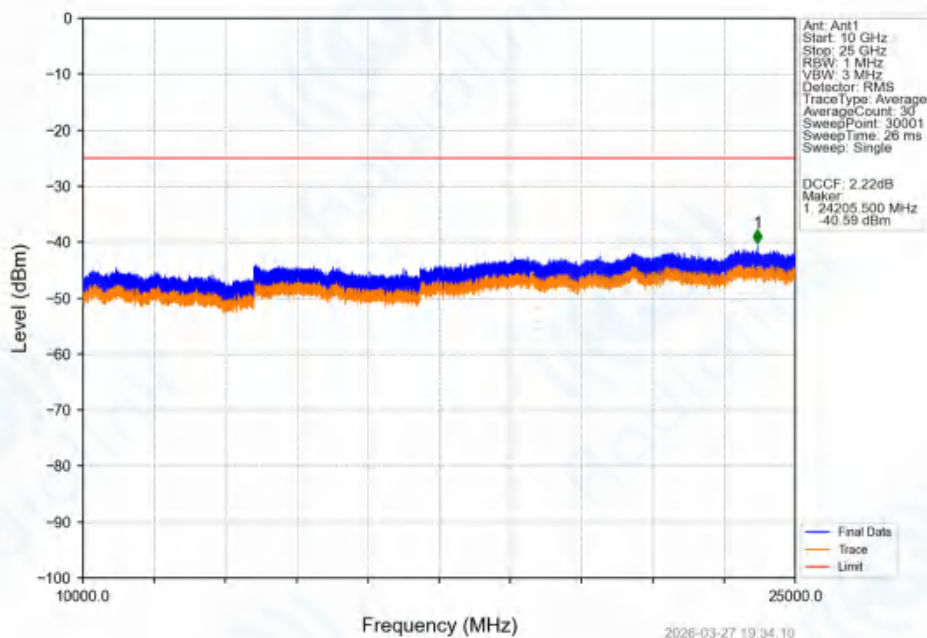


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_5MHz_QPSK_HCH_2687.5MHz_RB_1_0_NTNV

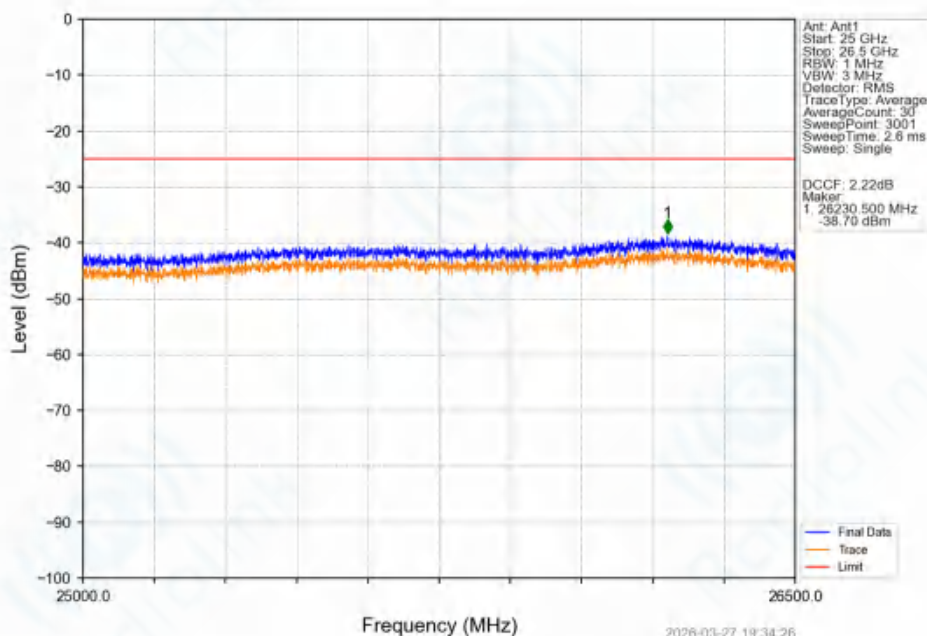


Band41_5MHz_QPSK_HCH_2687.5MHz_RB_1_24_NTNV

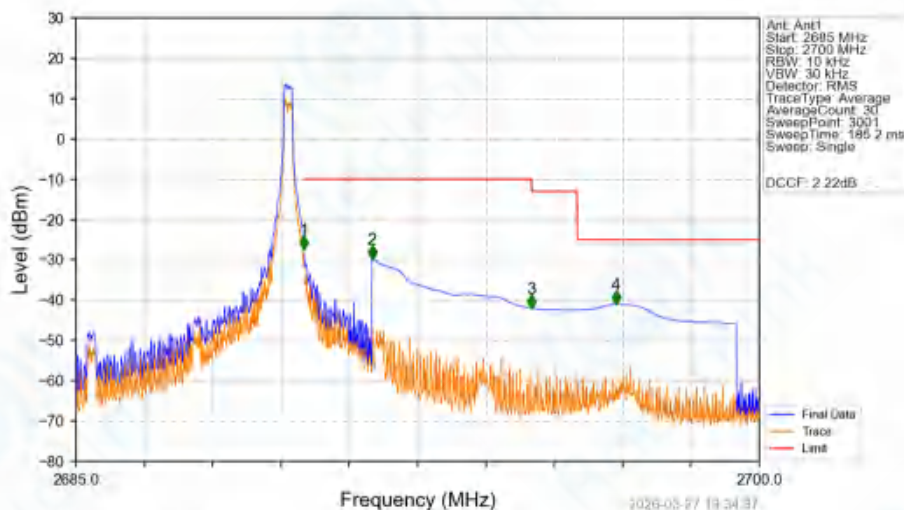


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2685	2690	0.02	CHP	1	2690.005	-27.37	-10	Pass
2690	2691	0.02	CHP	2	2691.500	-29.85	-10	Pass
2691	2695	1	CHP	3	2695.005	-42.00	-13	Pass
2695	2700	1	CHP	4	2696.860	-40.99	-25	Pass

Band41_5MHz_QPSK_HCH_2687.5MHz_RB_25_0_NTNV

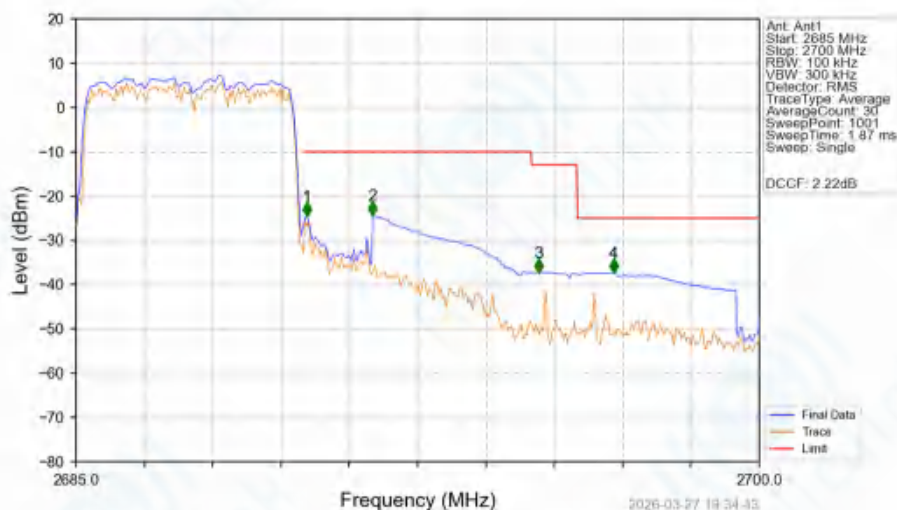

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2685	2690	0.112	CHP	/	/	/	/	/
2690	2691	0.112	CHP	1	2690.070	-24.61	-10	Pass
2691	2695	1	CHP	2	2691.510	-24.44	-10	Pass
2695	2696	1	CHP	3	2695.155	-37.24	-13	Pass
2696	2700	1	CHP	4	2696.805	-37.36	-25	Pass

Band41_5MHz_16QAM_LCH_2498.5MHz_RB_1_0_NTNV

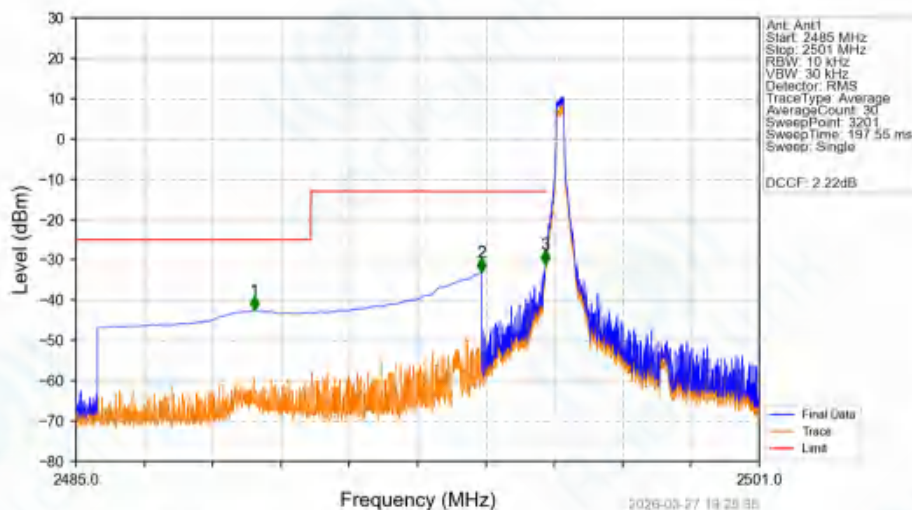


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2489.175	-42.56	-25	Pass
2490.5	2495	1	CHP	2	2494.500	-33.15	-13	Pass
2495	2496	0.01	/	3	2495.990	-31.08	-13	Pass
2496	2501	0.01	/	/	/	/	/	/


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_5MHz_16QAM_LCH_2498.5MHz_RB_1_0_NTNV

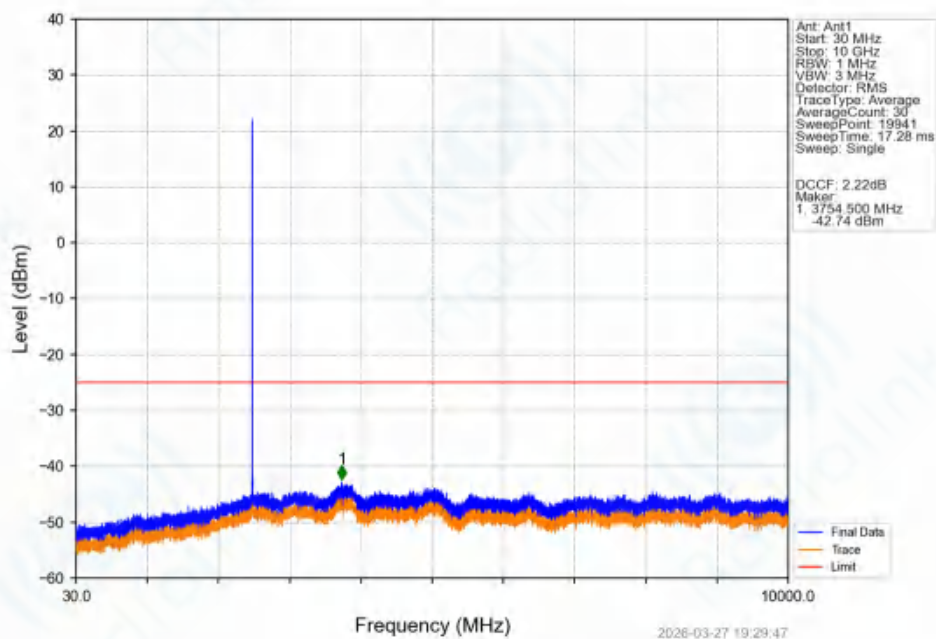


Band41_5MHz_16QAM_LCH_2498.5MHz_RB_1_0_NTNV

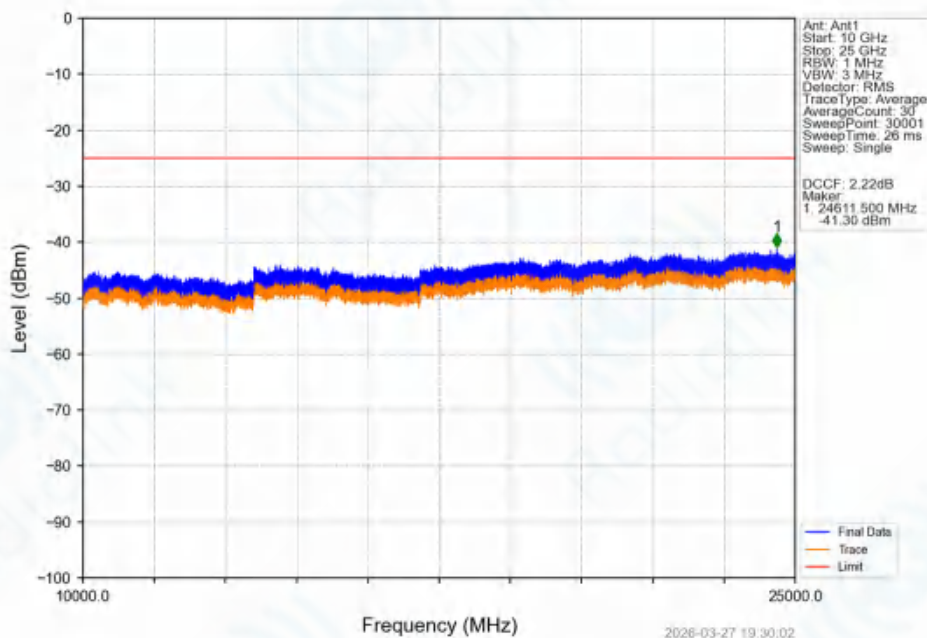


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_5MHz_16QAM_LCH_2498.5MHz_RB_1_0_NTNV

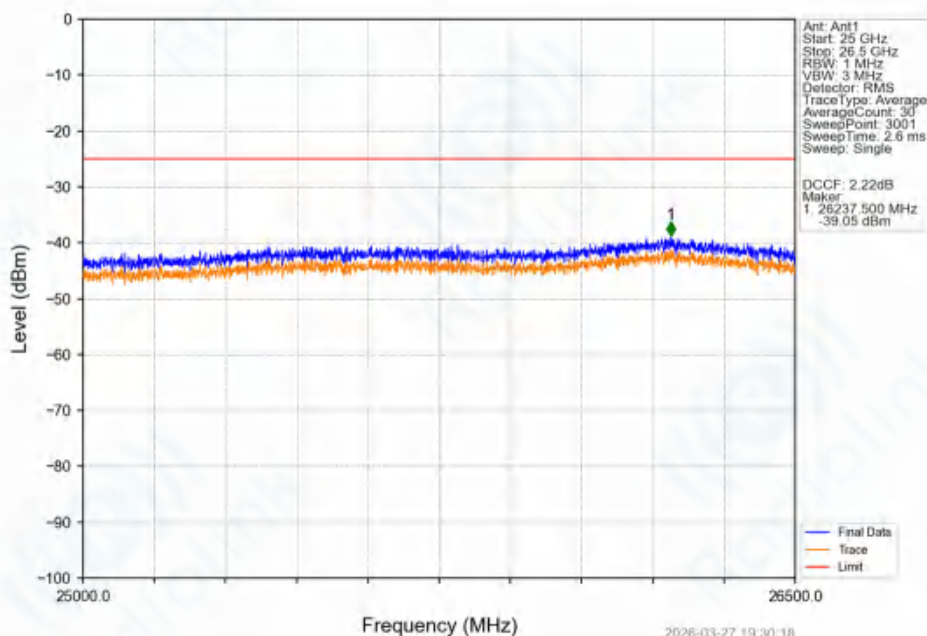

Band41_5MHz_16QAM_LCH_2498.5MHz_RB_25_0_NTNV

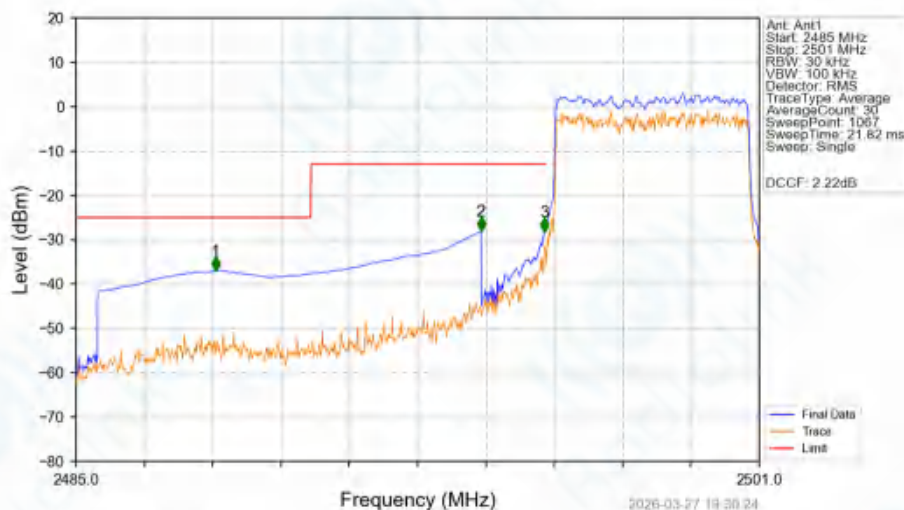


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2488.272	-37.01	-25	Pass
2490.5	2495	1	CHP	2	2494.486	-28.06	-13	Pass
2495	2496	0.055	CHP	3	2495.972	-28.23	-13	Pass
2496	2501	0.055	CHP	/	/	/	/	/


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_5MHz_16QAM_MCH_2593MHz_RB_1_0_NTNV

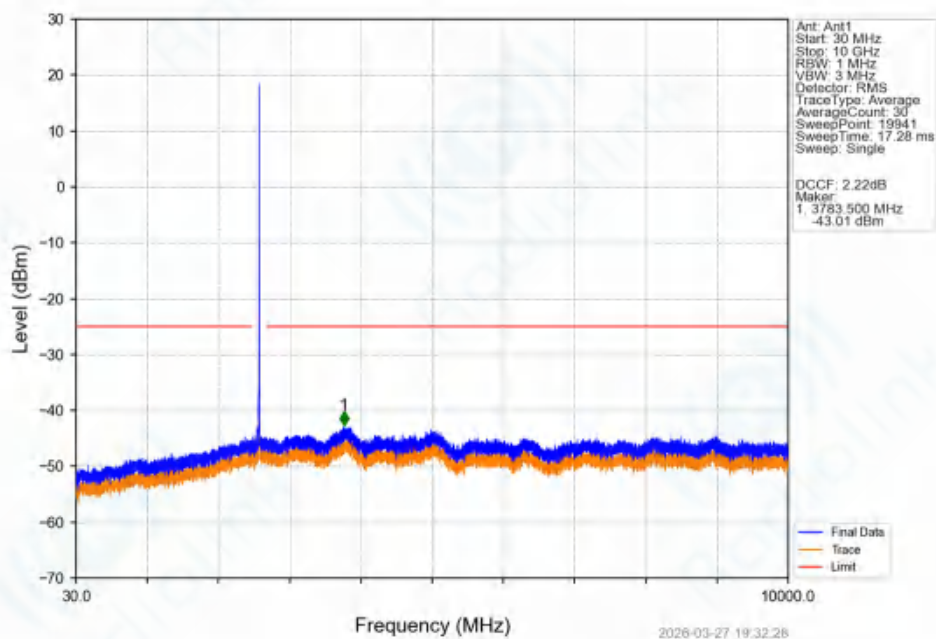


Band41_5MHz_16QAM_MCH_2593MHz_RB_1_0_NTNV

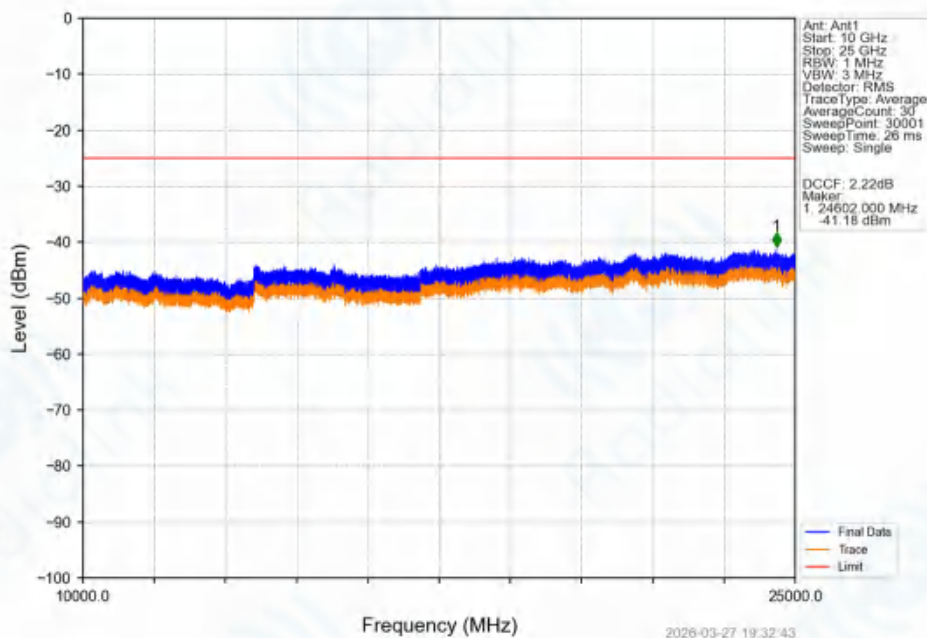


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_5MHz_16QAM_MCH_2593MHz_RB_1_0_NTNV

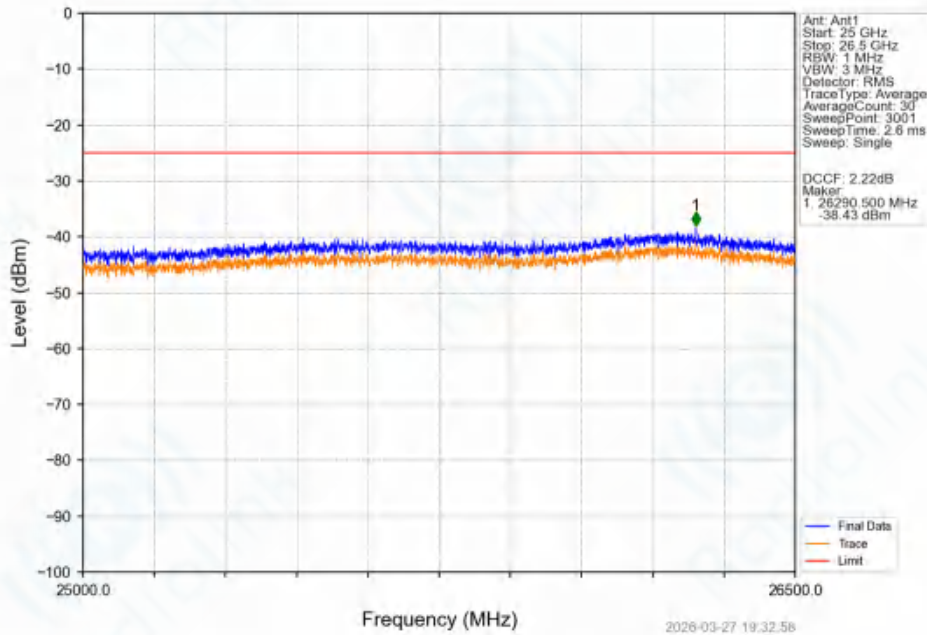


Band41_5MHz_16QAM_HCH_2687.5MHz_RB_1_0_NTNV

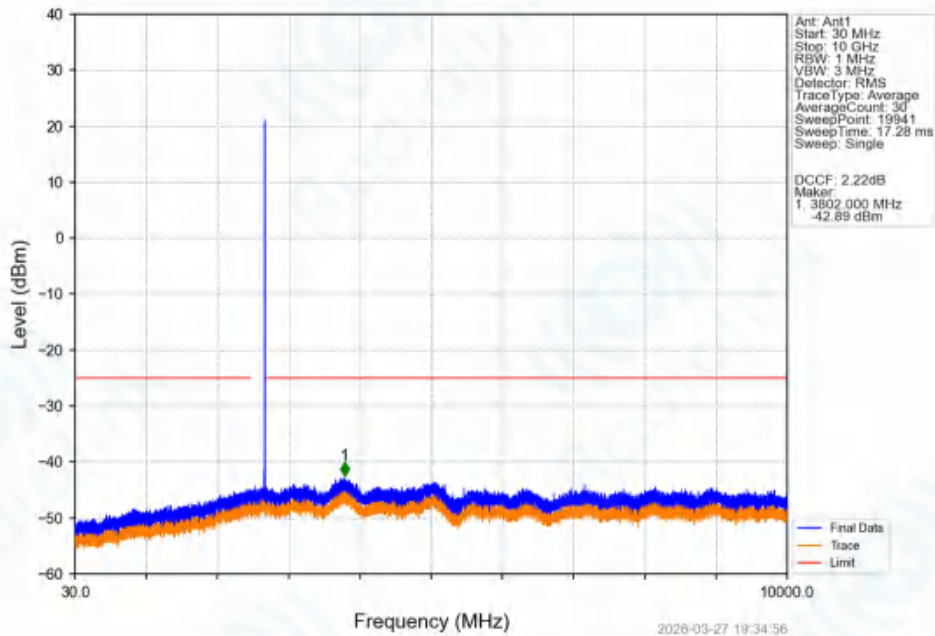
Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694


Band41_5MHz_16QAM_HCH_2687.5MHz_RB_1_0_NTNV

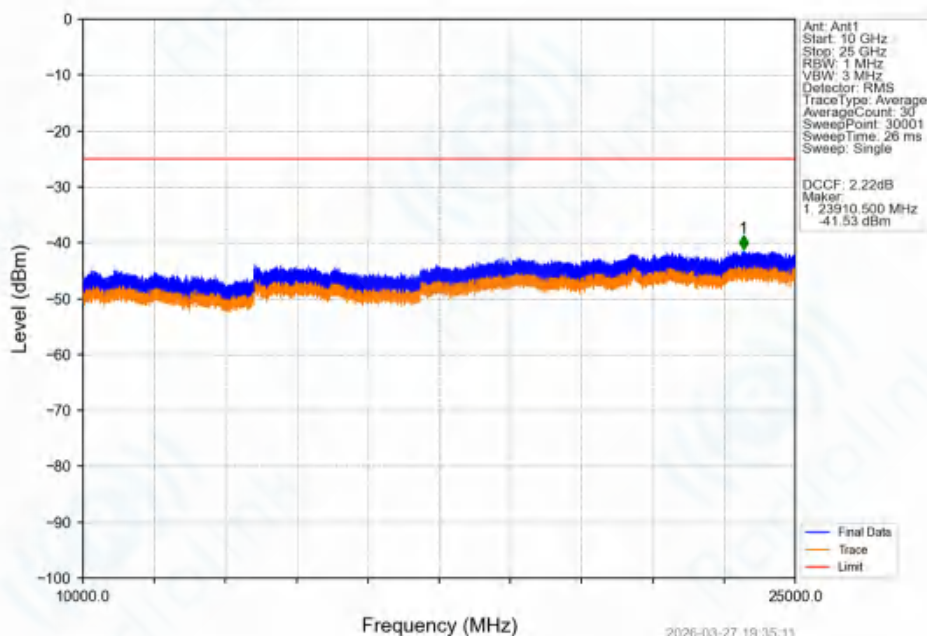

Band41_5MHz_16QAM_HCH_2687.5MHz_RB_1_0_NTNV

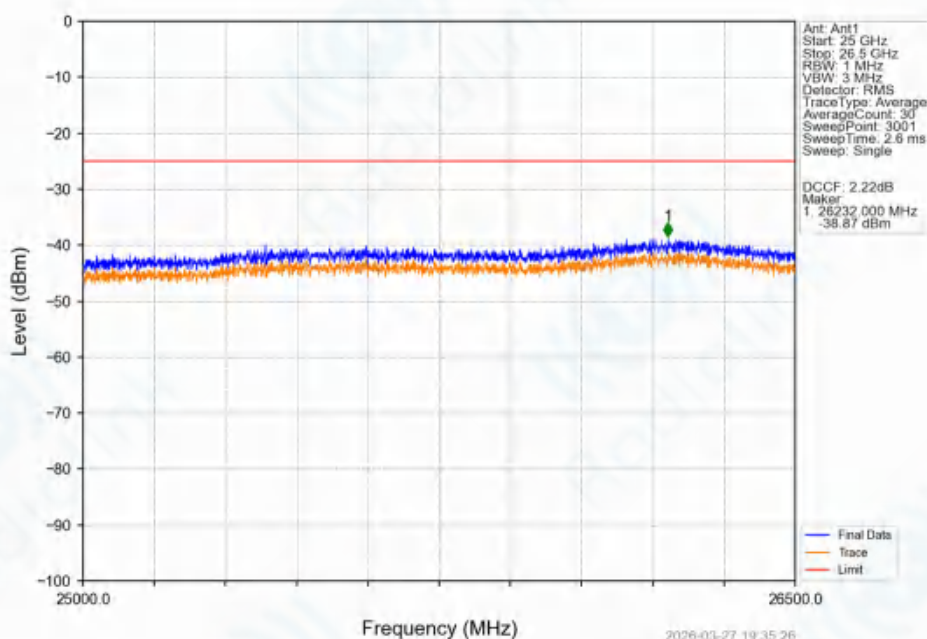


Band41_5MHz_16QAM_HCH_2687.5MHz_RB_1_24_NTNV

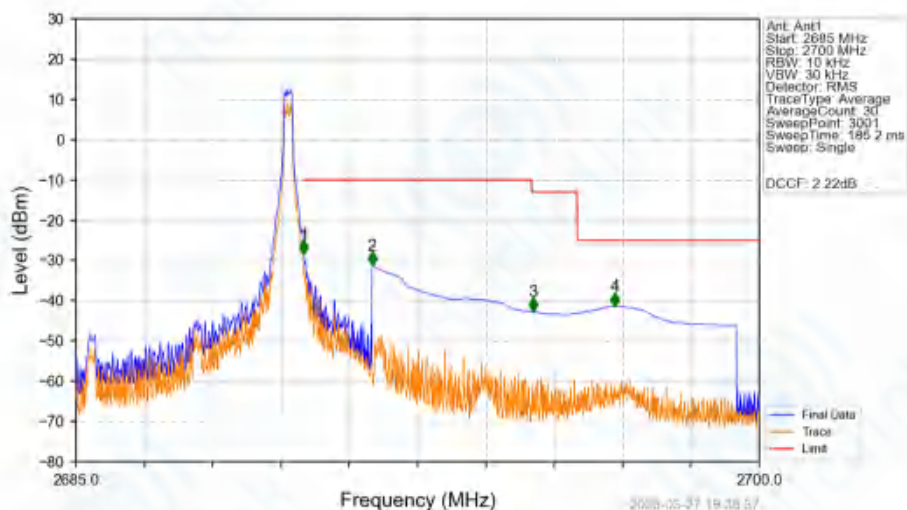

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2685	2690	0.02	CHP	/	/	/	/	/
2690	2691	0.02	CHP	1	2690.005	-28.49	-10	Pass
2691	2695	1	CHP	2	2691.500	-31.34	-10	Pass
2695	2696	1	CHP	3	2695.035	-42.72	-13	Pass
2696	2700	1	CHP	4	2696.830	-41.37	-25	Pass

Band41_5MHz_16QAM_HCH_2687.5MHz_RB_25_0_NTNV

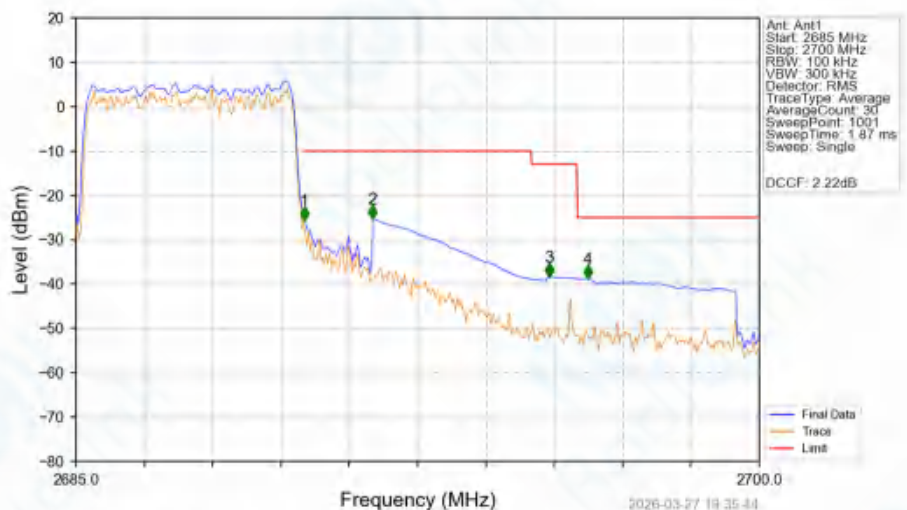


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2685	2690	0.119	CHP	/	/	/	/	/
2690	2691	0.119	CHP	1	2690.010	-25.67	-10	Pass
2691	2695	1	CHP	2	2691.510	-25.27	-10	Pass
2695	2696	1	CHP	3	2695.395	-38.46	-13	Pass
2696	2700	1	CHP	4	2696.235	-38.78	-25	Pass


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_5MHz_64QAM_LCH_2498.5MHz_RB_1_0_NTNV

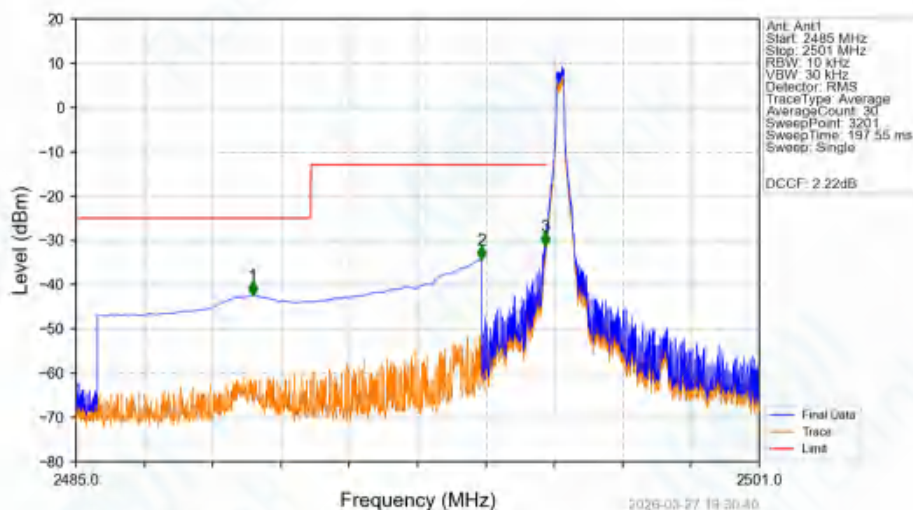


Band41_5MHz_64QAM_LCH_2498.5MHz_RB_1_0_NTNV

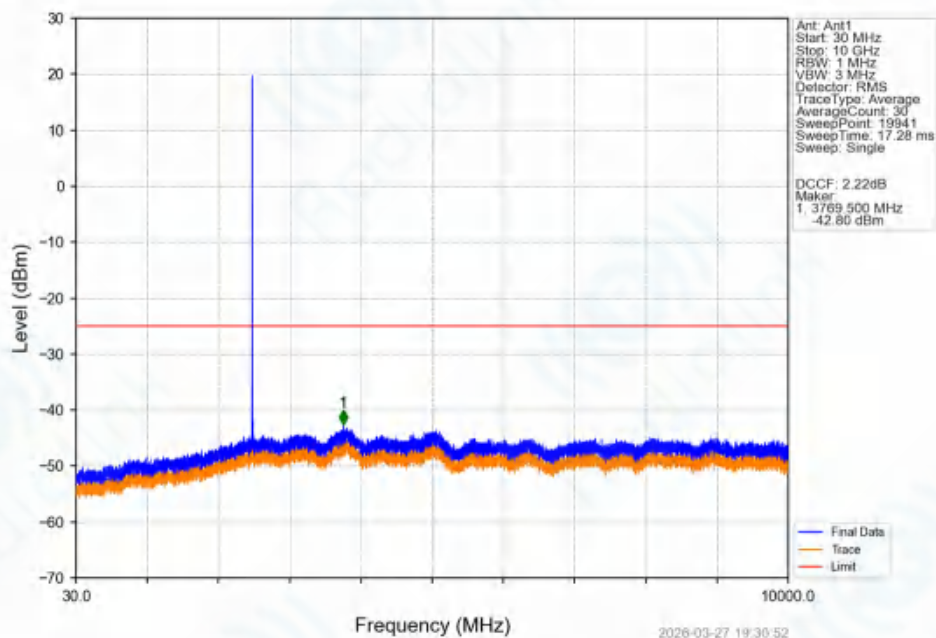


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_5MHz_64QAM_LCH_2498.5MHz_RB_1_0_NTNV

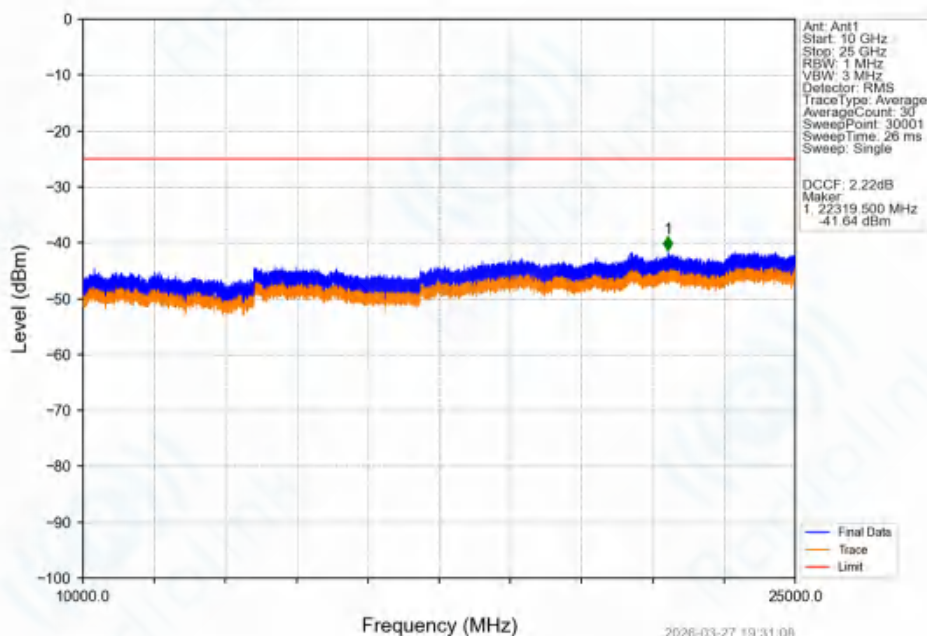


Band41_5MHz_64QAM_LCH_2498.5MHz_RB_1_0_NTNV

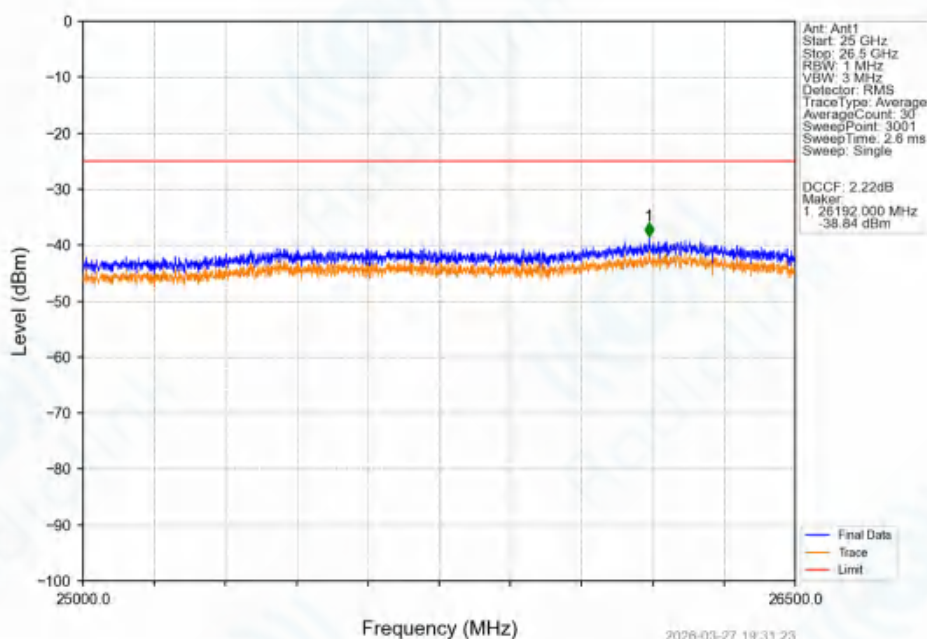

Band41_5MHz_64QAM_LCH_2498.5MHz_RB_25_0_NTNV

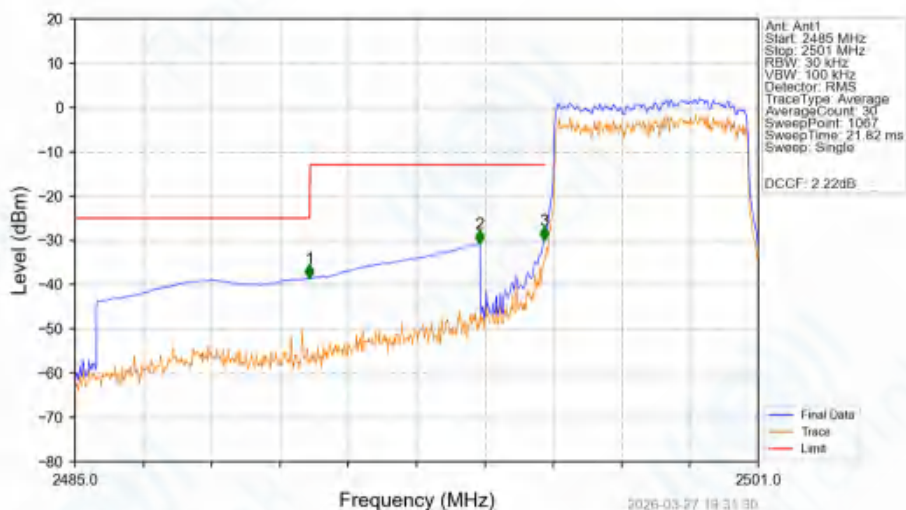


Band41_5MHz_64QAM_MCH_2593MHz_RB_1_0_NTNV

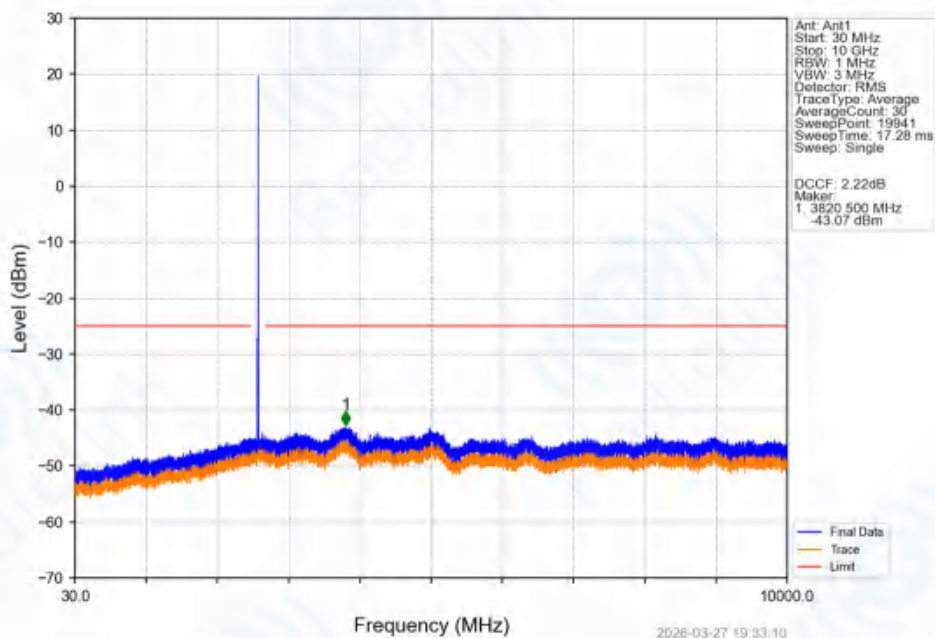


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_5MHz_64QAM_MCH_2593MHz_RB_1_0_NTNV

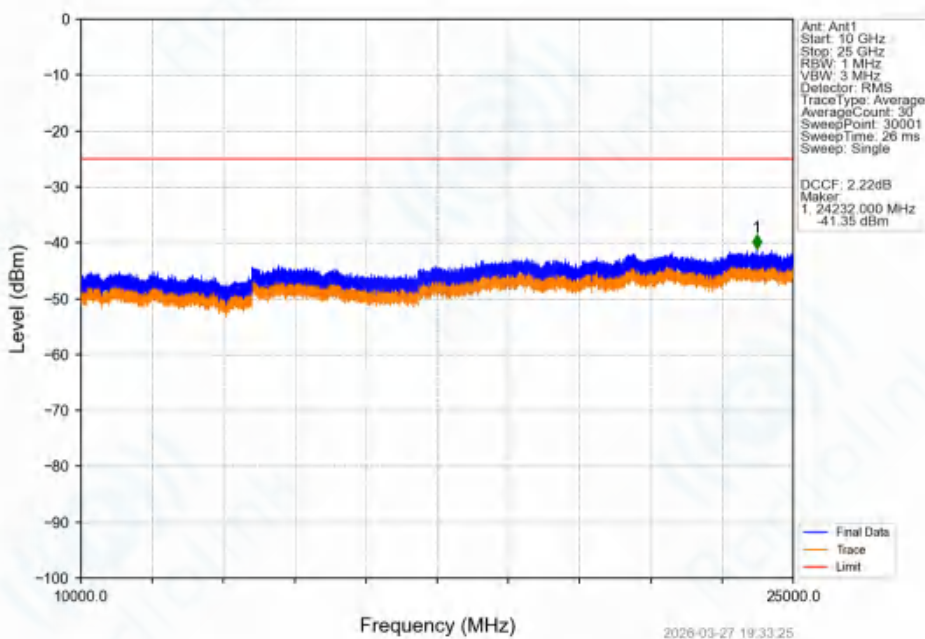


Band41_5MHz_64QAM_MCH_2593MHz_RB_1_0_NTNV

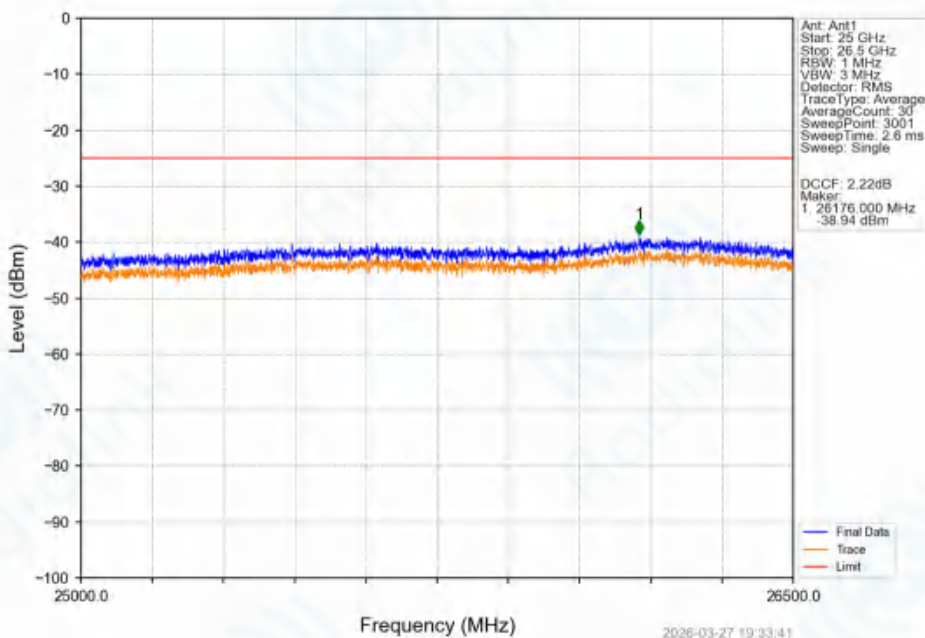


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_5MHz_64QAM_HCH_2687.5MHz_RB_1_0_NTNV

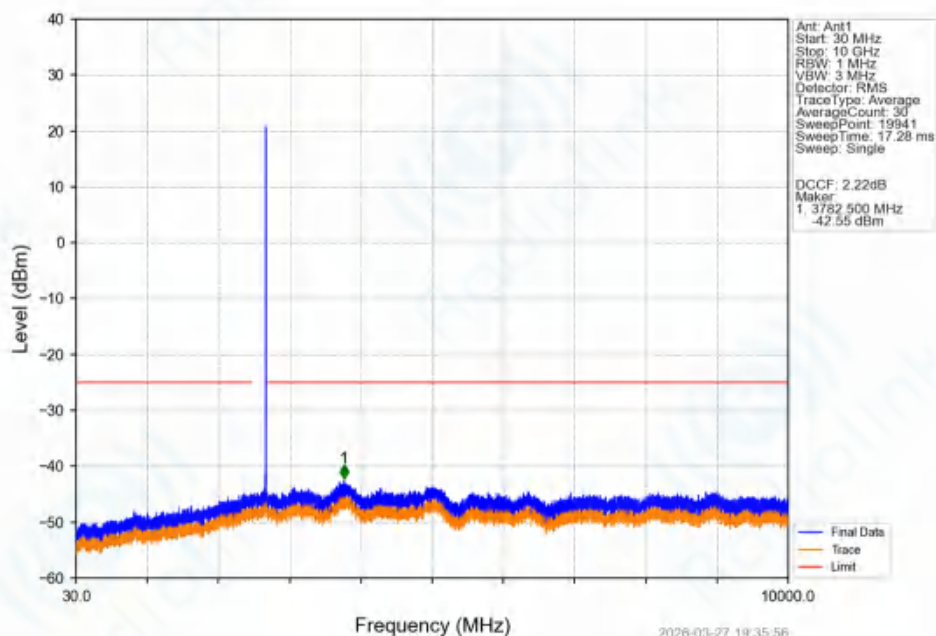


Band41_5MHz_64QAM_HCH_2687.5MHz_RB_1_0_NTNV

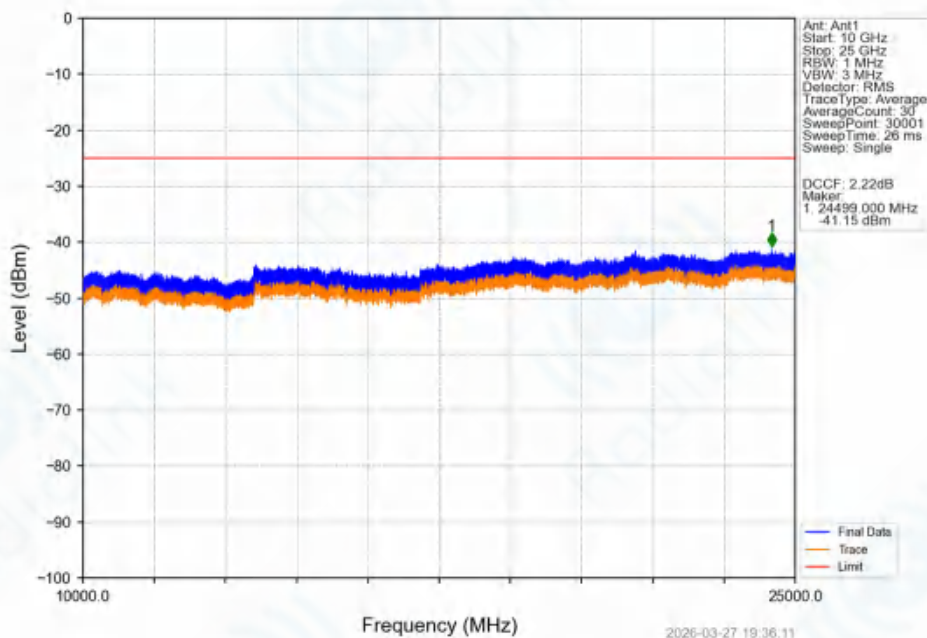

Band41_5MHz_64QAM_HCH_2687.5MHz_RB_1_0_NTNV

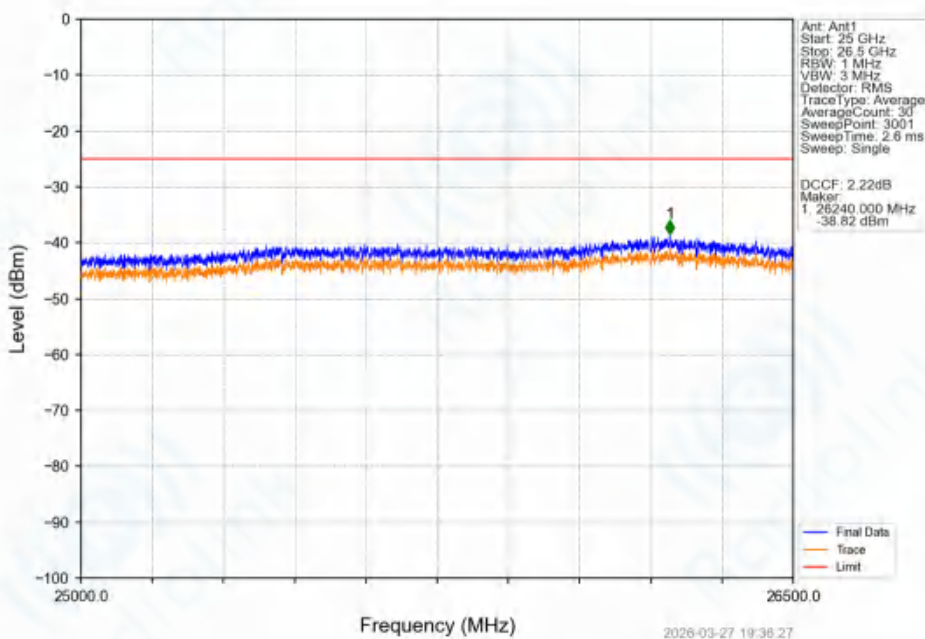

Band41_5MHz_64QAM_HCH_2687.5MHz_RB_1_24_NTNV

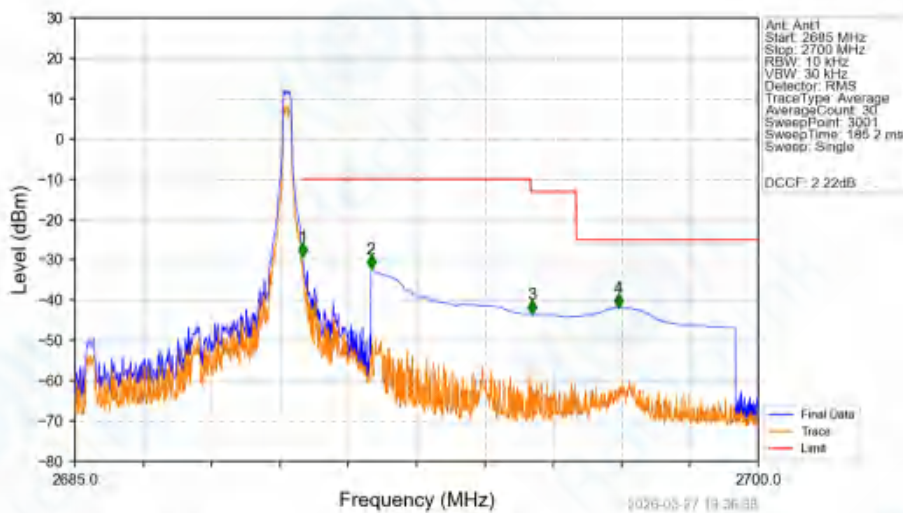


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2685	2690	0.02	CHP	1	/	/	/	/
2690	2691	0.02	CHP	1	2690.005	-29.31	-10	Pass
2691	2695	1	CHP	2	2691.500	-32.29	-10	Pass
2695	2696	1	CHP	3	2695.040	-43.45	-13	Pass
2696	2700	1	CHP	4	2696.925	-41.93	-25	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

Band41_5MHz_64QAM_HCH_2687.5MHz_RB_25_0_NTNV

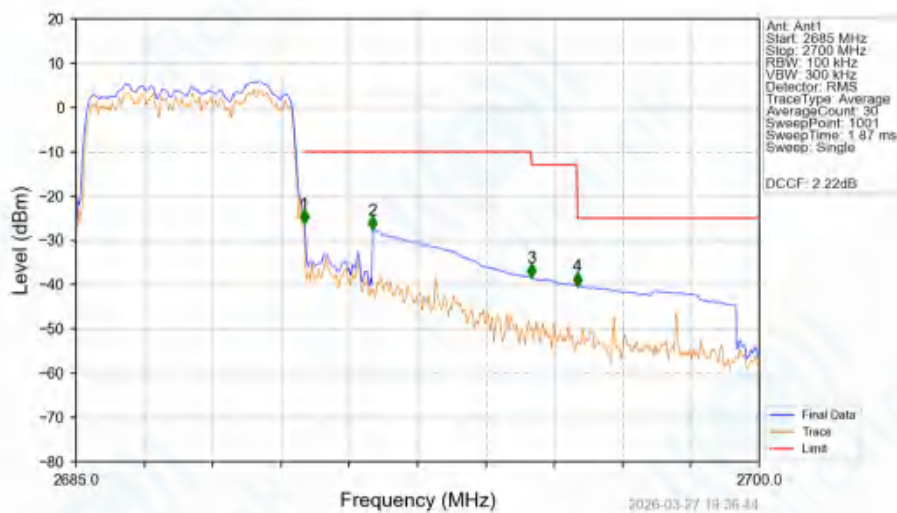


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2685	2690	0.118	CHP	/	/	/	/	/
2690	2691	0.118	CHP	1	2690.010	-26.21	-10	Pass
2691	2695	1	CHP	2	2691.510	-27.66	-10	Pass
2695	2696	1	CHP	3	2695.005	-38.44	-13	Pass
2696	2700	1	CHP	4	2696.010	-40.33	-25	Pass



Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


6.2.2 B41_10MHz

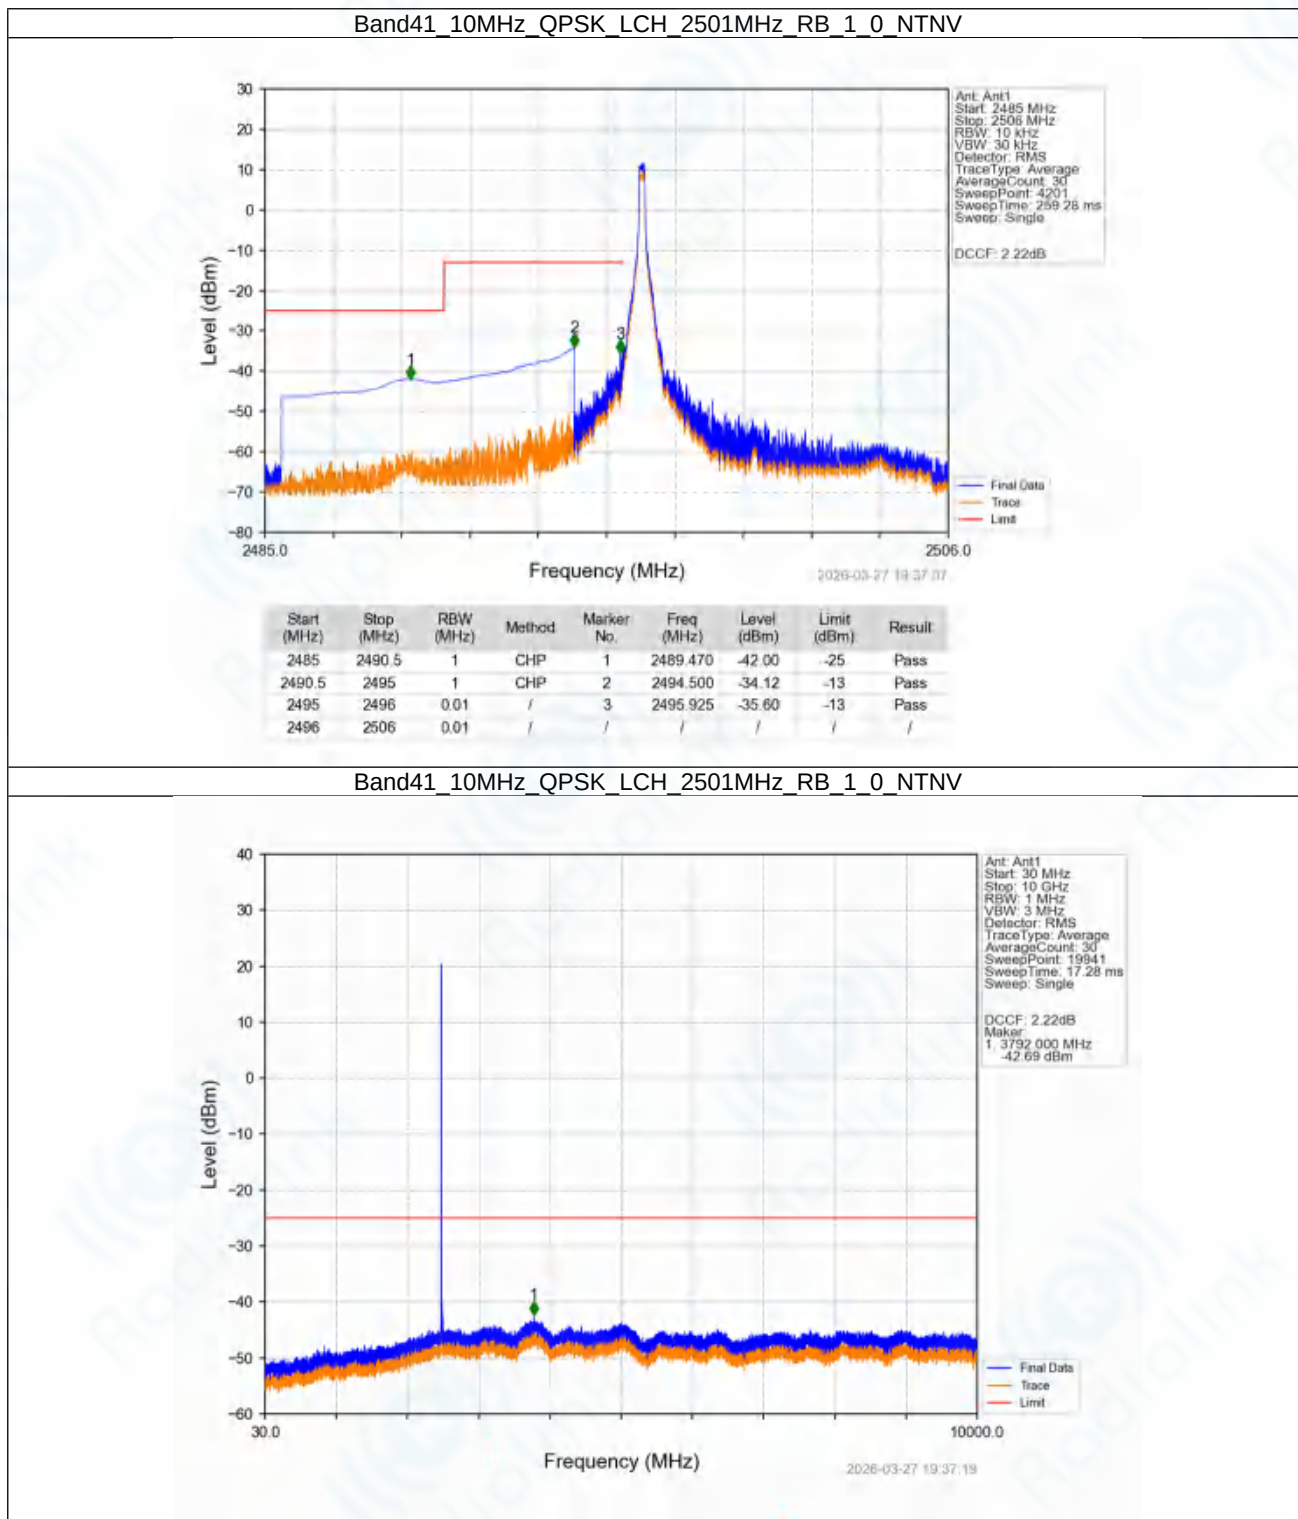


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_QPSK_LCH_2501MHz_RB_1_0_NTNV

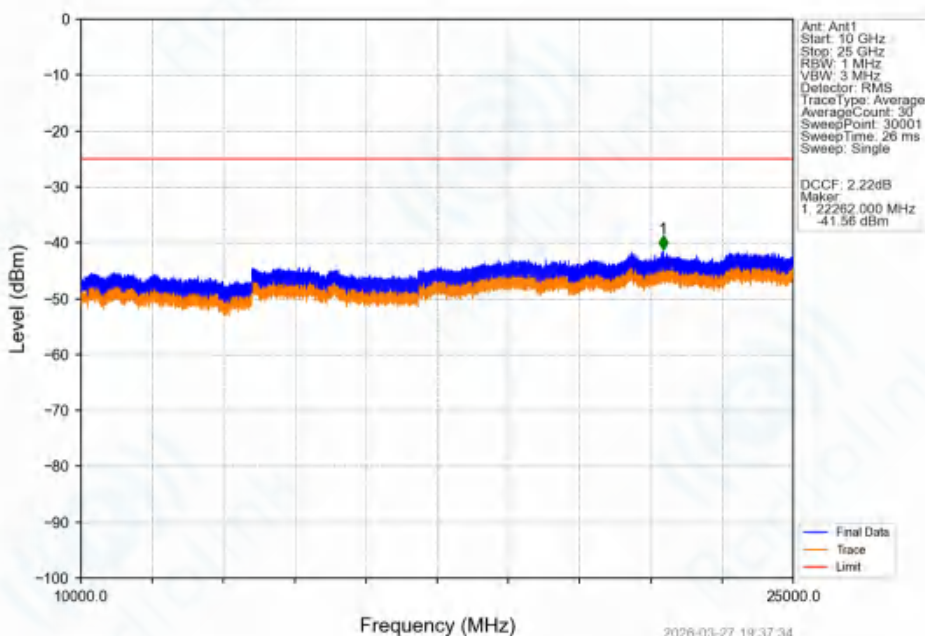


Band41_10MHz_QPSK_LCH_2501MHz_RB_1_0_NTNV

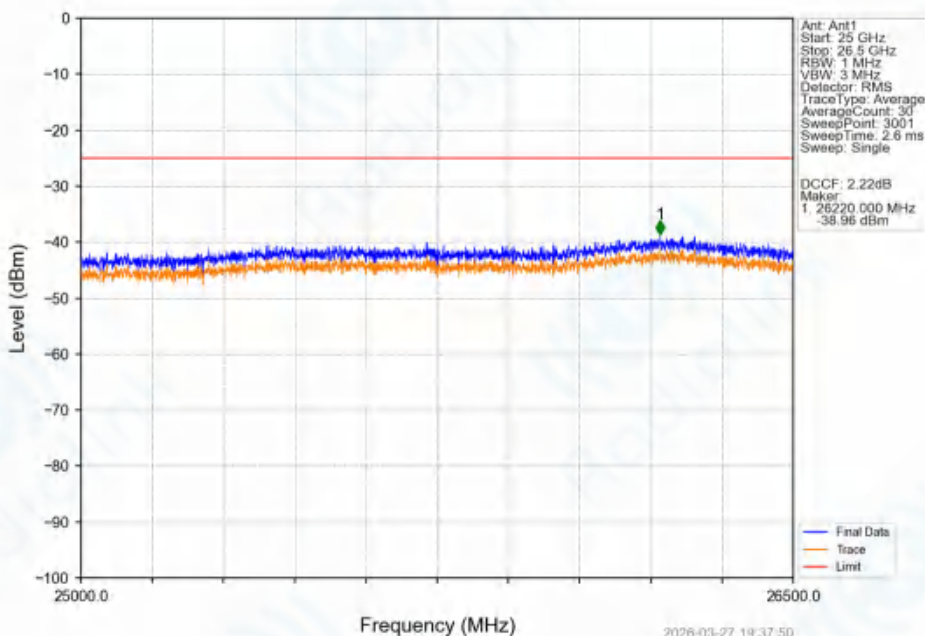


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_QPSK_LCH_2501MHz_RB_50_0_NTNV

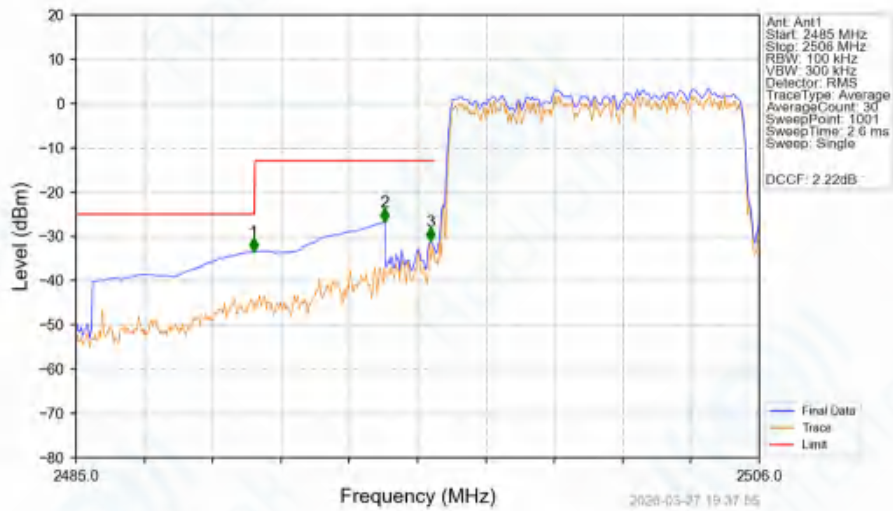

Band41_10MHz_QPSK_MCH_2593MHz_RB_1_0_NTNV

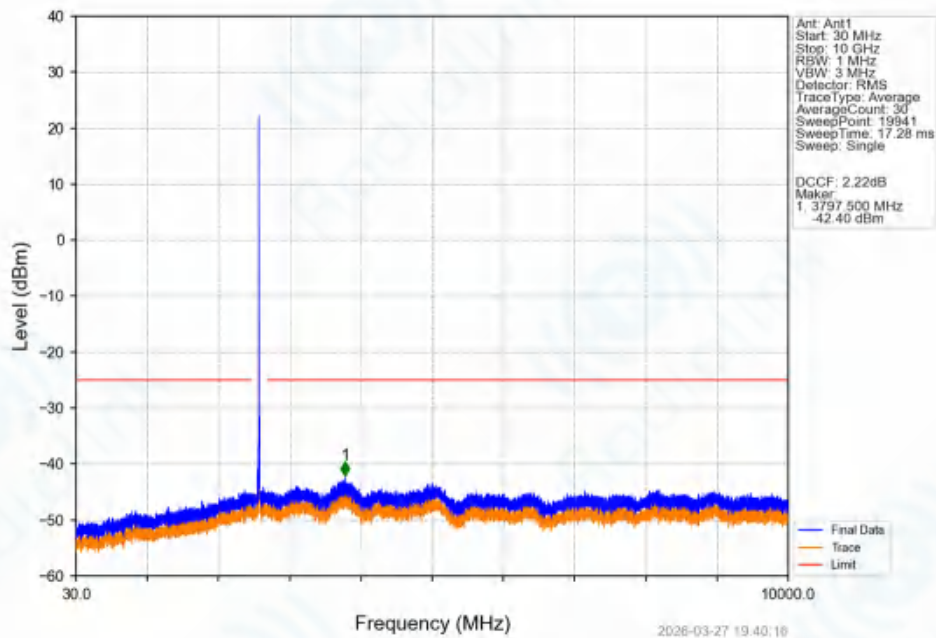


Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694


Band41_10MHz_QPSK_MCH_2593MHz_RB_1_0_NTNV

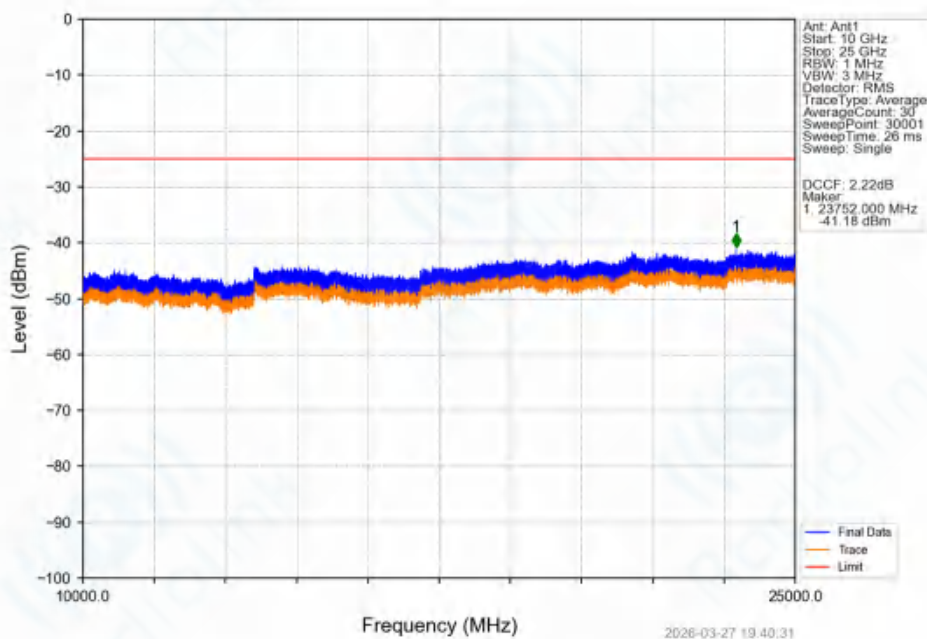


Band41_10MHz_QPSK_MCH_2593MHz_RB_1_0_NTNV

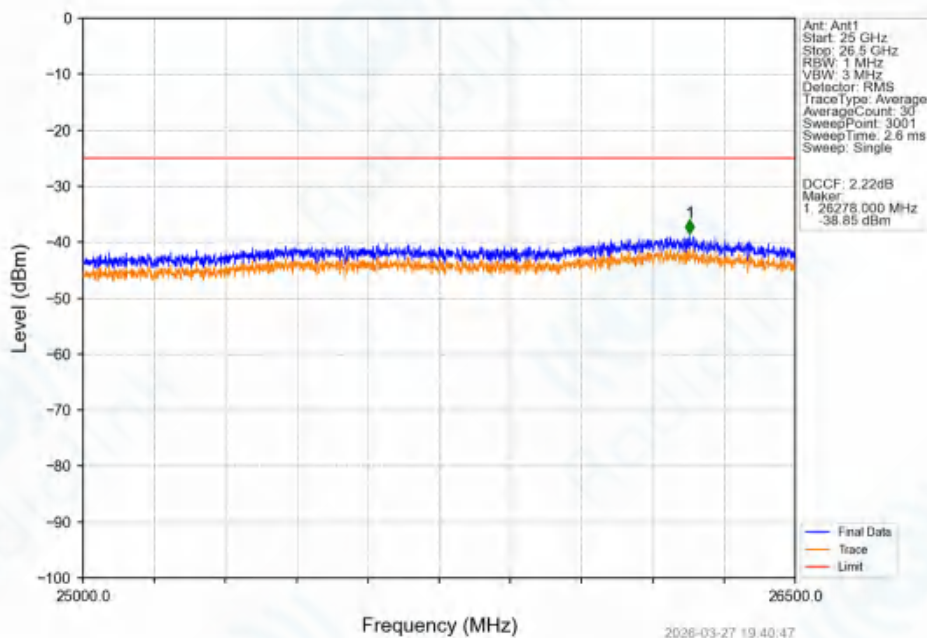

Band41_10MHz_QPSK_HCH_2685MHz_RB_1_0_NTNV

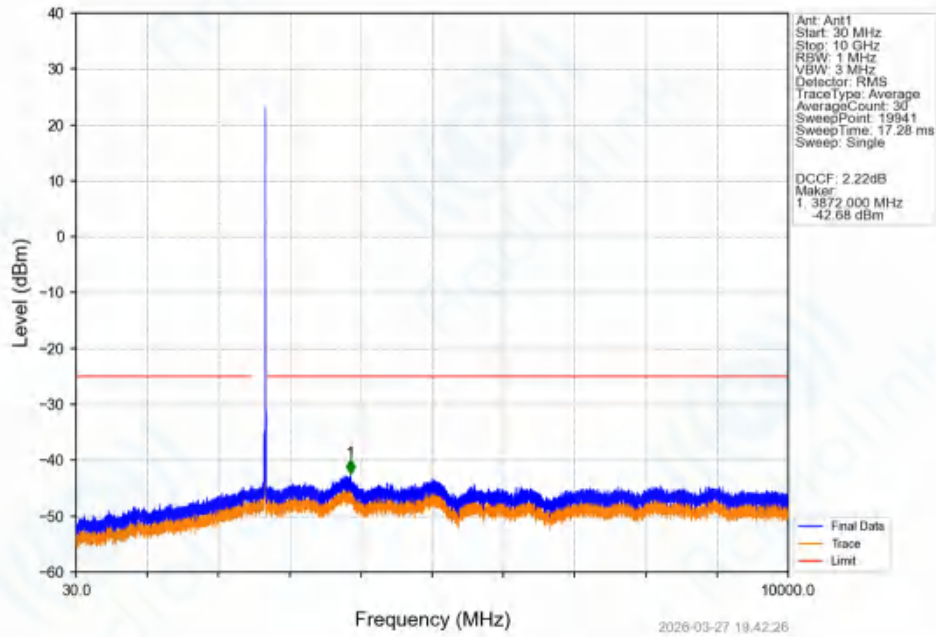


Band41_10MHz_QPSK_HCH_2685MHz_RB_1_0_NTNV

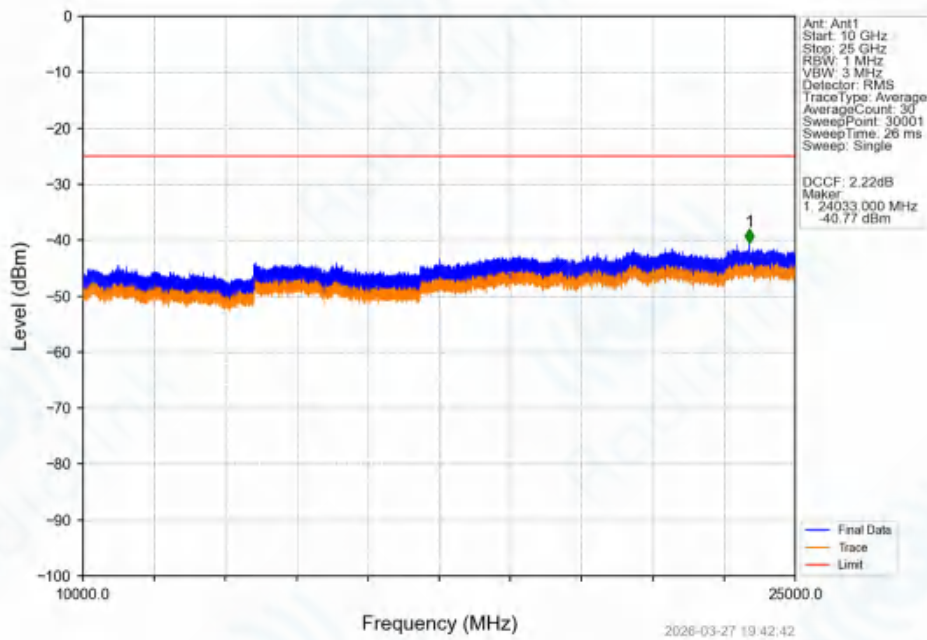


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_QPSK_HCH_2685MHz_RB_1_0_NTNV

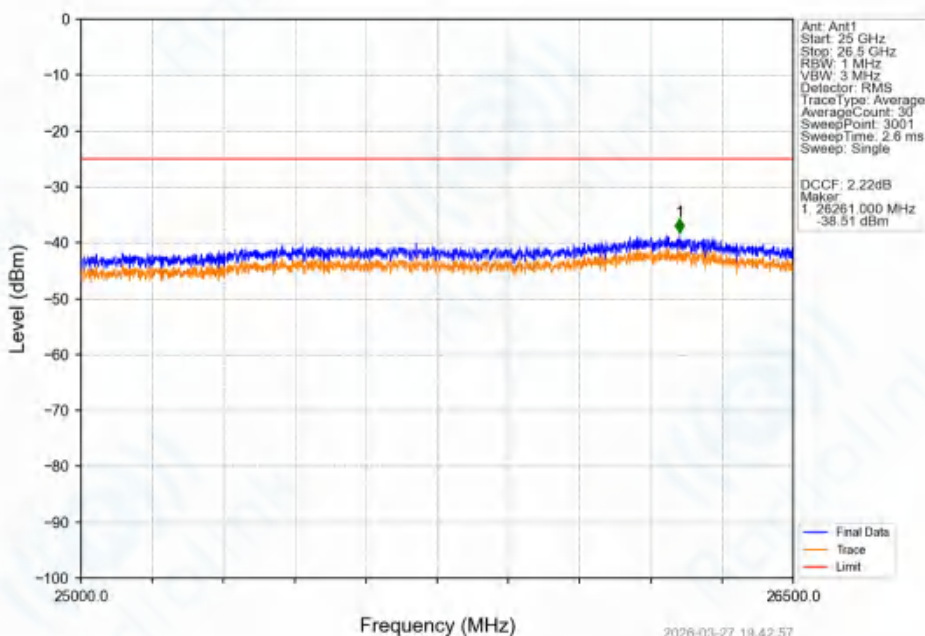

Band41_10MHz_QPSK_HCH_2685MHz_RB_1_49_NTNV

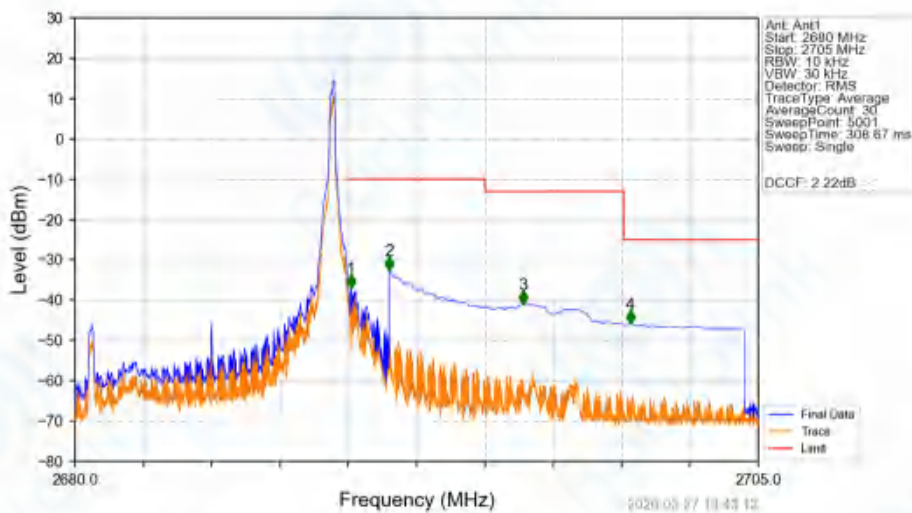


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2680	2690	0.02	CHP	1	2690.105	-36.98	-10	Pass
2690	2691	0.02	CHP	2	2691.500	-32.65	-10	Pass
2691	2695	1	CHP	3	2696.400	-41.04	-13	Pass
2695	2700.076	1	CHP	4	2700.320	-45.85	-25	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China


Tel: +86 0755 23080694

Band41_10MHz_QPSK_HCH_2685MHz_RB_50_0_NTNV

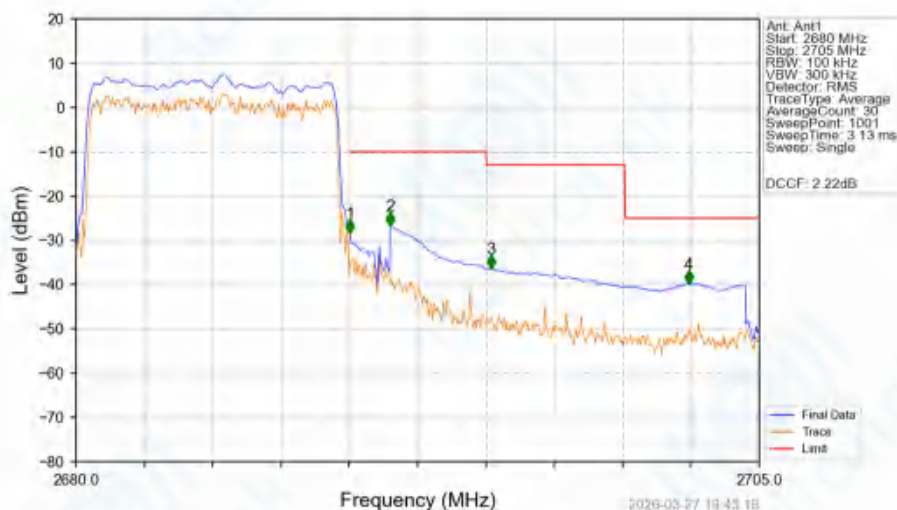


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2680	2690	0.202	CHP	/	/	/	/	/
2690	2691	0.202	CHP	1	2690.025	-28.46	-10	Pass
2691	2695	1	CHP	2	2691.500	-26.79	-10	Pass
2695	2700.076	1	CHP	3	2695.175	-36.48	-13	Pass
2700.076	2705	1	CHP	4	2702.425	-39.82	-25	Pass

Band41_10MHz_16QAM_LCH_2501MHz_RB_1_0_NTNV

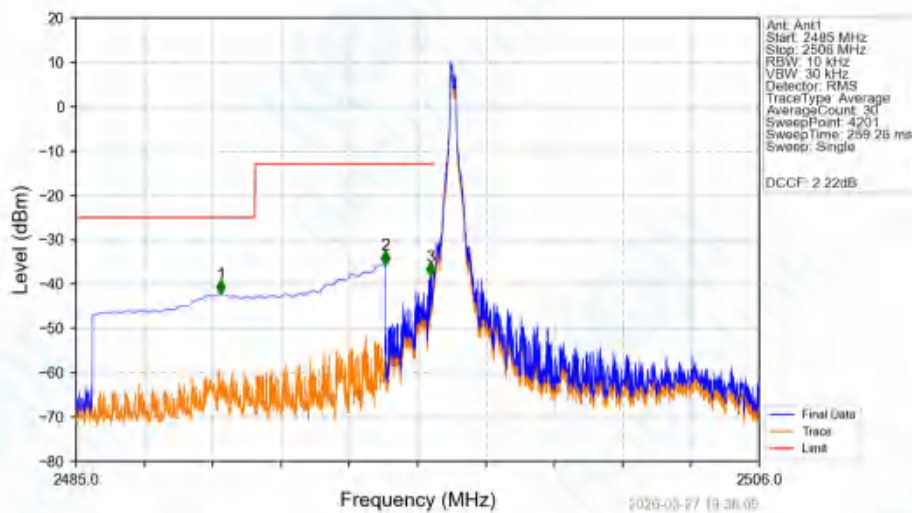


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2489.450	-42.22	-25	Pass
2490.5	2495	1	CHP	2	2494.500	-35.61	-13	Pass
2495	2496	0.01	/	3	2495.900	-38.15	-13	Pass
2496	2506	0.01	/	/	/	/	/	/

Band41_10MHz_16QAM_LCH_2501MHz_RB_1_0_NTNV

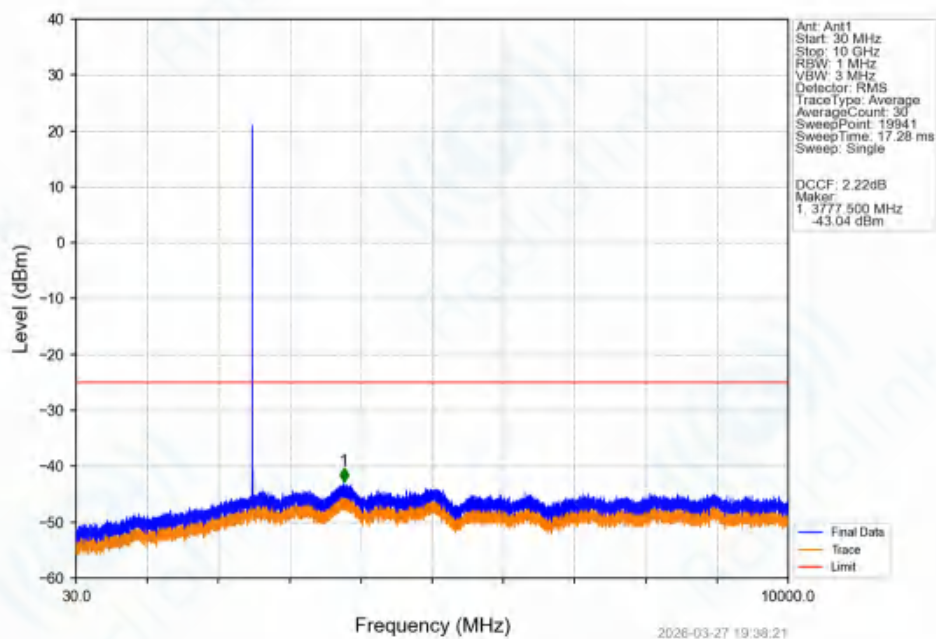


Band41_10MHz_16QAM_LCH_2501MHz_RB_1_0_NTNV

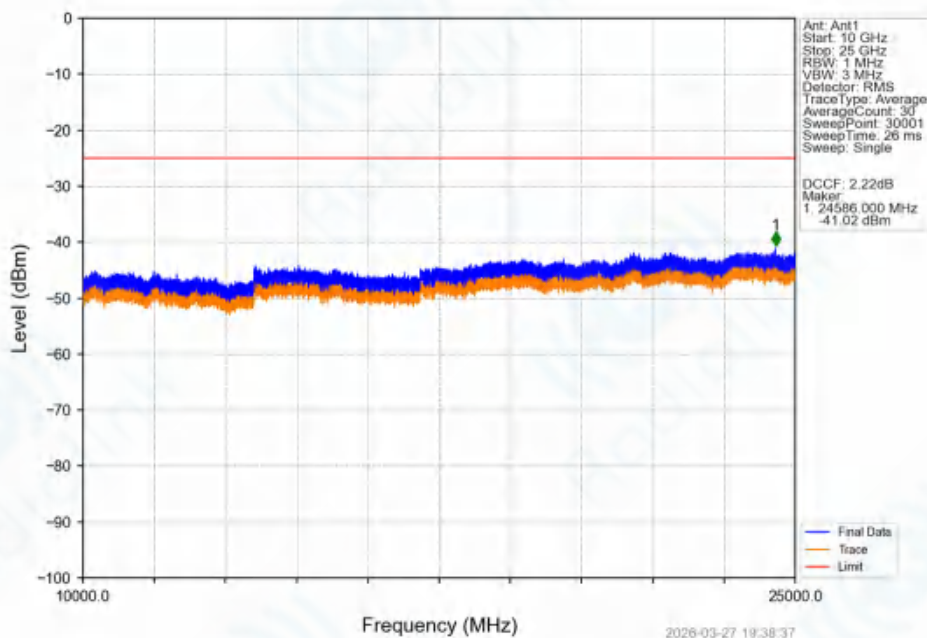


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_16QAM_LCH_2501MHz_RB_1_0_NTNV

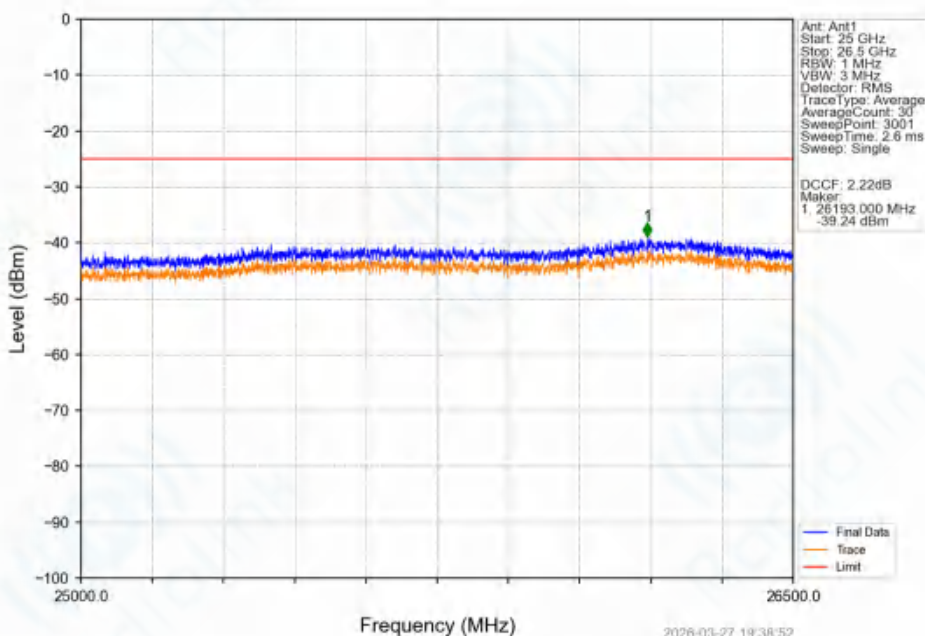

Band41_10MHz_16QAM_LCH_2501MHz_RB_50_0_NTNV

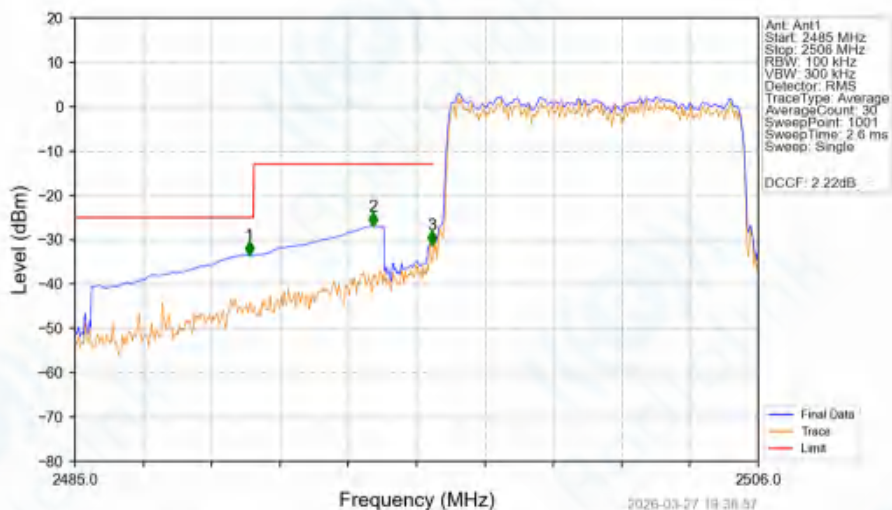


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2490.355	-33.49	-25	Pass
2490.5	2495	1	CHP	2	2494.156	-26.92	-13	Pass
2495	2496	0.103	CHP	3	2495.983	-31.12	-13	Pass
2496	2506	0.103	CHP	/	/	/	/	/

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694


Band41_10MHz_16QAM_MCH_2593MHz_RB_1_0_NTNV

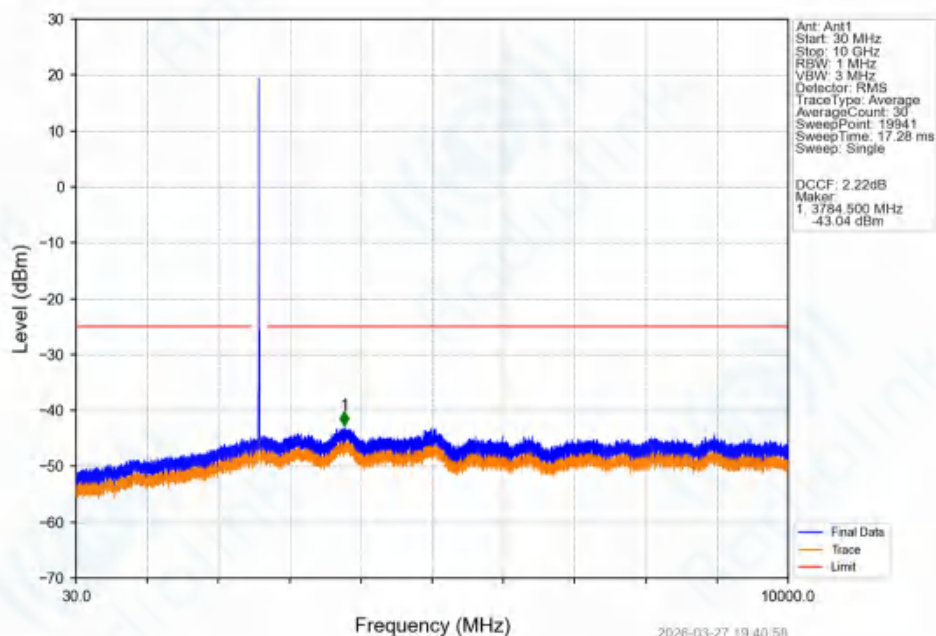


Band41_10MHz_16QAM_MCH_2593MHz_RB_1_0_NTNV

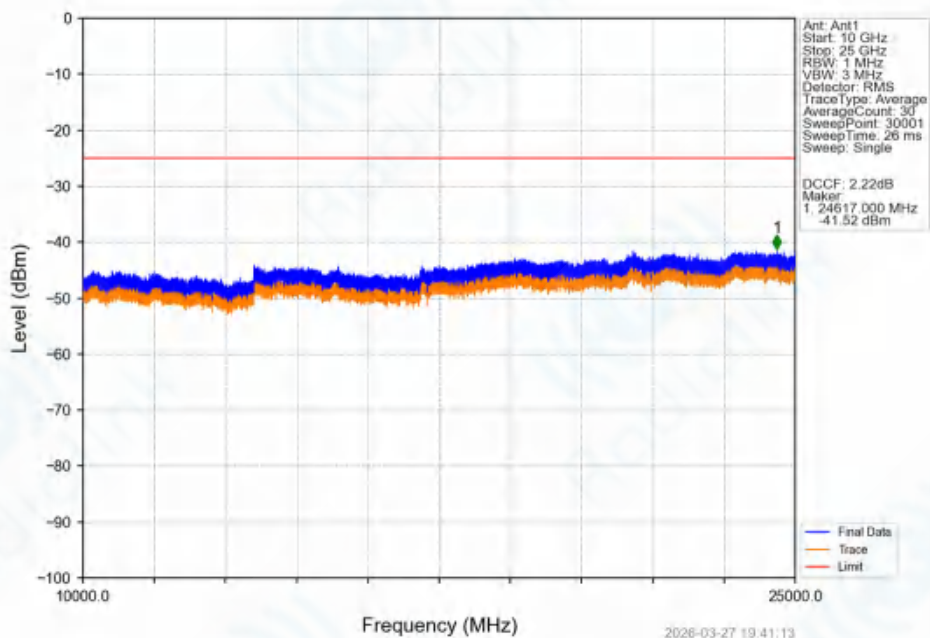

Band41_10MHz_16QAM_MCH_2593MHz_RB_1_0_NTNV

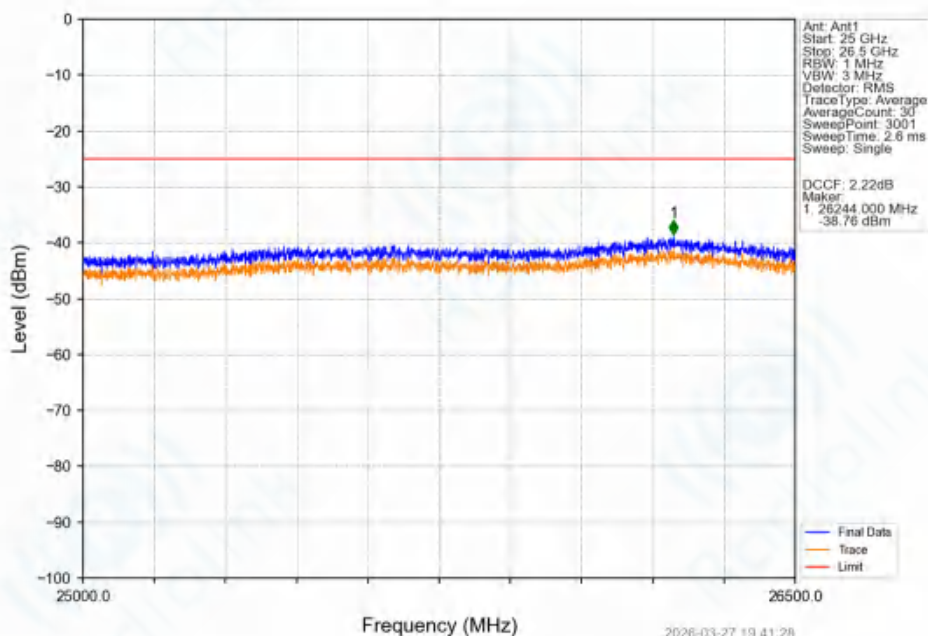


Band41_10MHz_16QAM_HCH_2685MHz_RB_1_0_NTNV

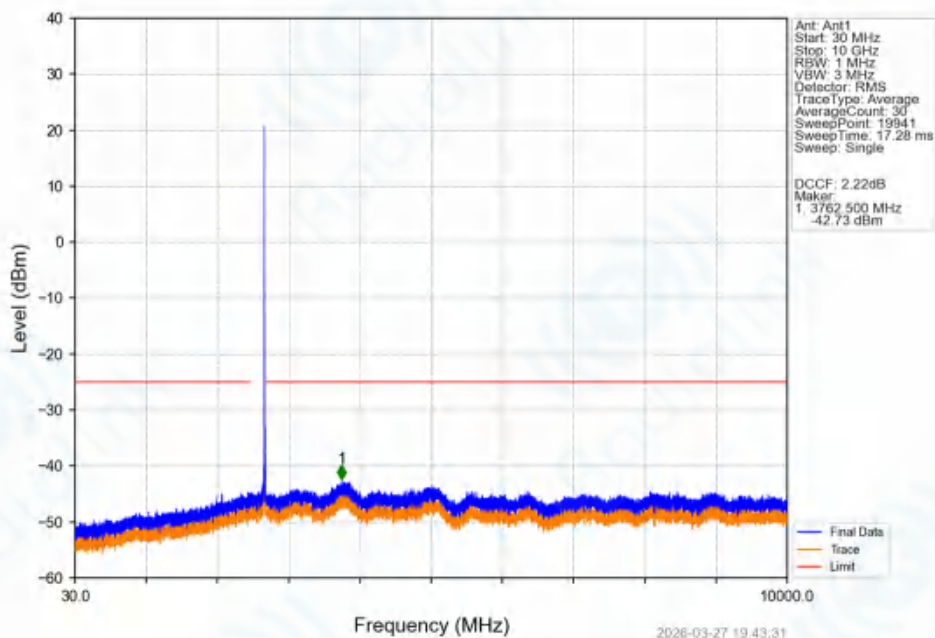


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_16QAM_HCH_2685MHz_RB_1_0_NTNV

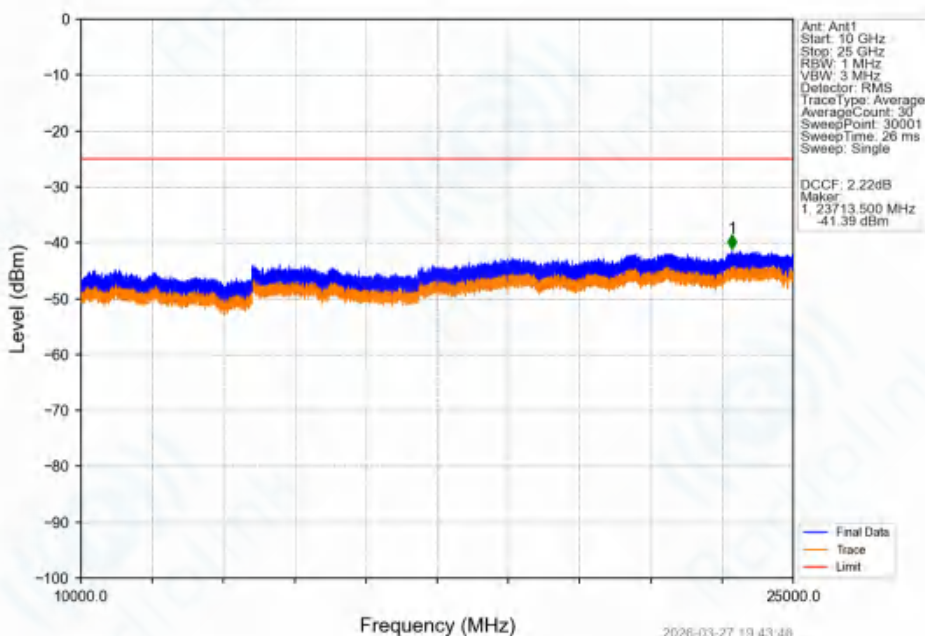


Band41_10MHz_16QAM_HCH_2685MHz_RB_1_0_NTNV

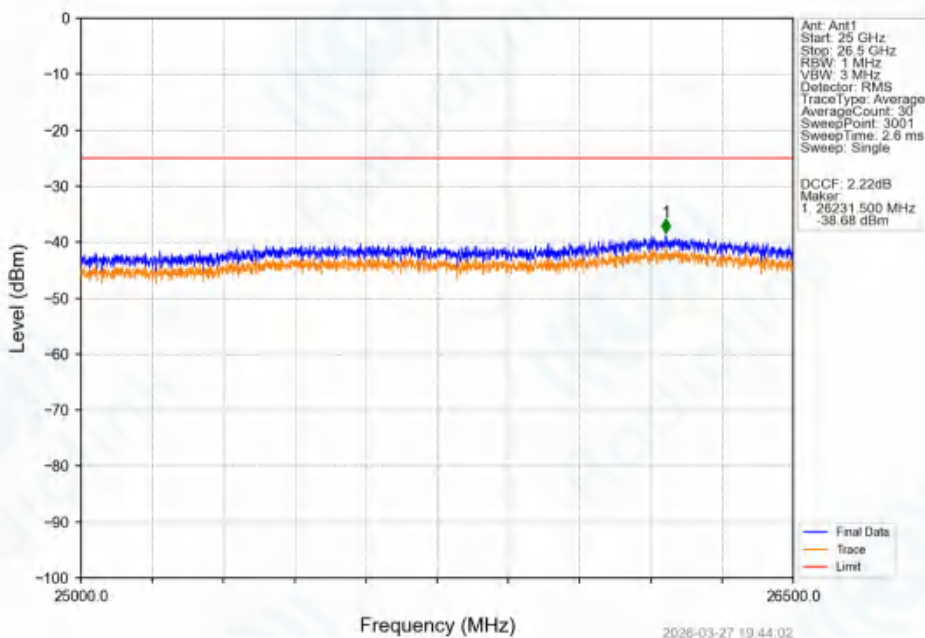

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_16QAM_HCH_2685MHz_RB_1_49_NTNV

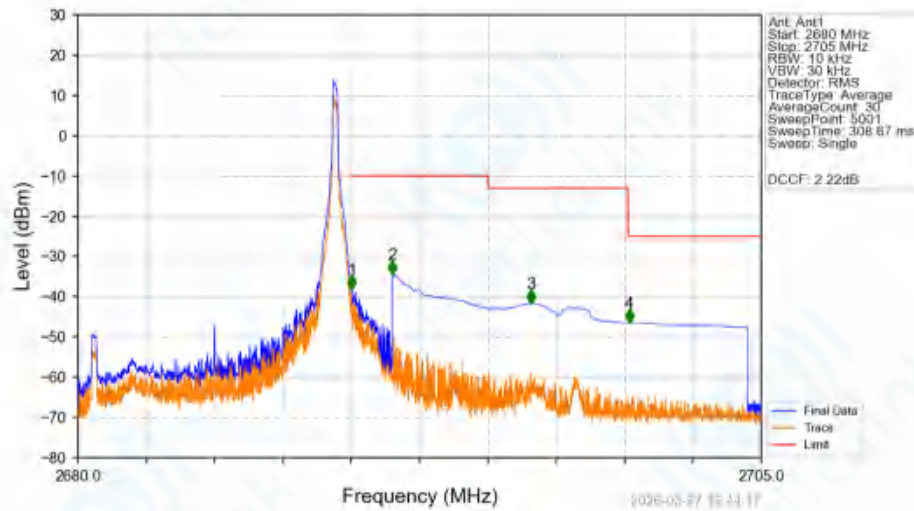


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2680	2690	0.02	CHP	/	/	/	/	/
2690	2691	0.02	CHP	1	2690.025	-38.09	-10	Pass
2691	2695	1	CHP	2	2691.500	-34.55	-10	Pass
2695	2700.126	1	CHP	3	2696.565	-41.61	-13	Pass
2700.126	2705	1	CHP	4	2700.180	-46.46	-25	Pass

Band41_10MHz_16QAM_HCH_2685MHz_RB_50_0_NTNV

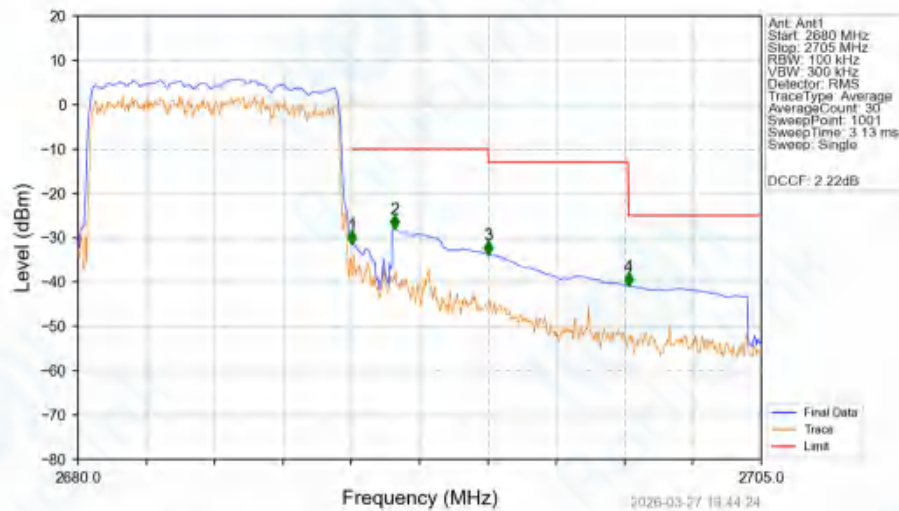


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2680	2690	0.203	CHP	/	/	/	/	/
2690	2691	0.203	CHP	1	2690.025	-31.45	-10	Pass
2691	2695	1	CHP	2	2691.575	-28.04	-10	Pass
2695	2700.126	1	CHP	3	2695.025	-33.81	-13	Pass
2700.126	2705	1	CHP	4	2700.150	-40.89	-25	Pass

Band41_10MHz_64QAM_LCH_2501MHz_RB_1_0_NTNV

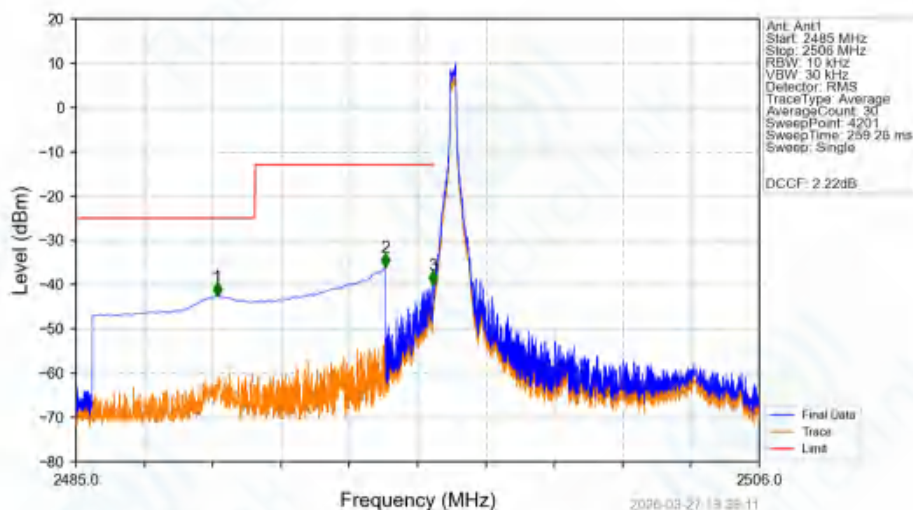


Band41_10MHz_64QAM_LCH_2501MHz_RB_1_0_NTNV

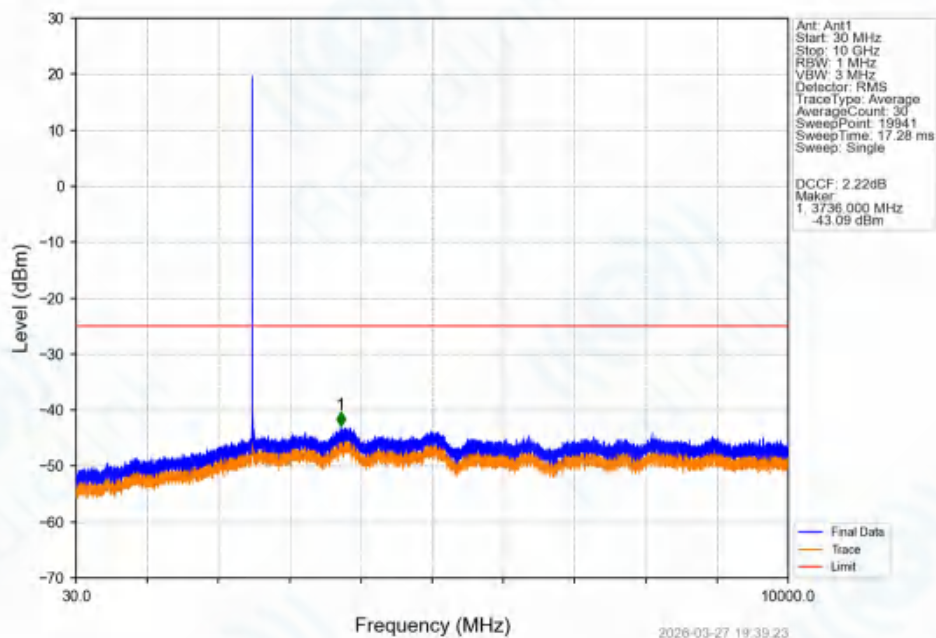


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_64QAM_LCH_2501MHz_RB_1_0_NTNV

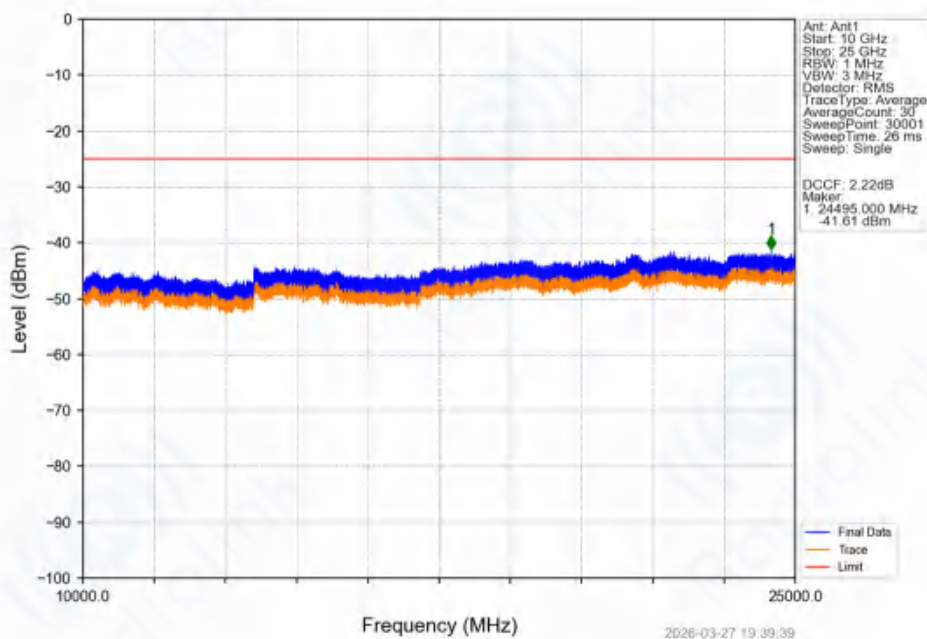


Band41_10MHz_64QAM_LCH_2501MHz_RB_1_0_NTNV

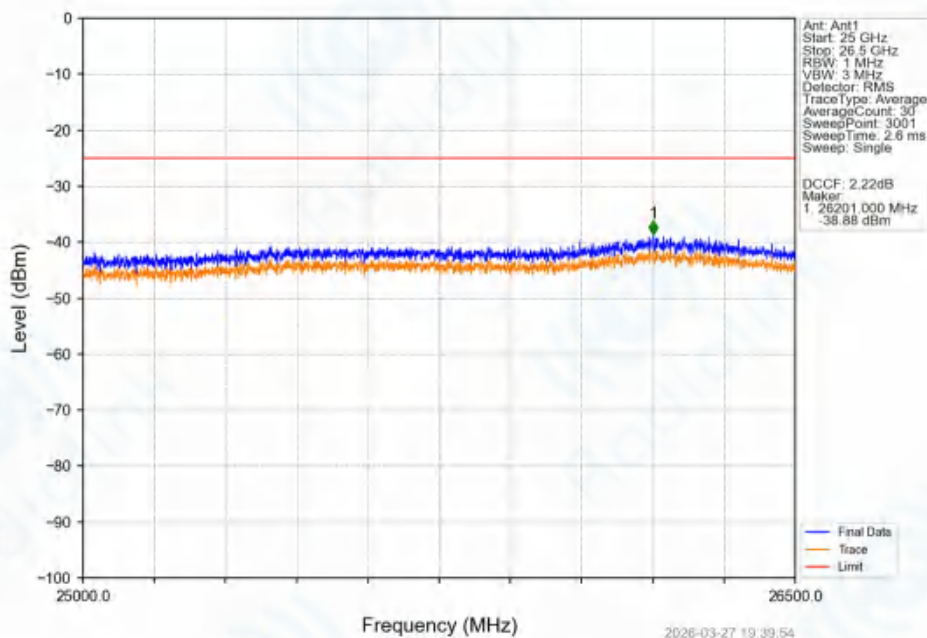

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_64QAM_LCH_2501MHz_RB_50_0_NTNV

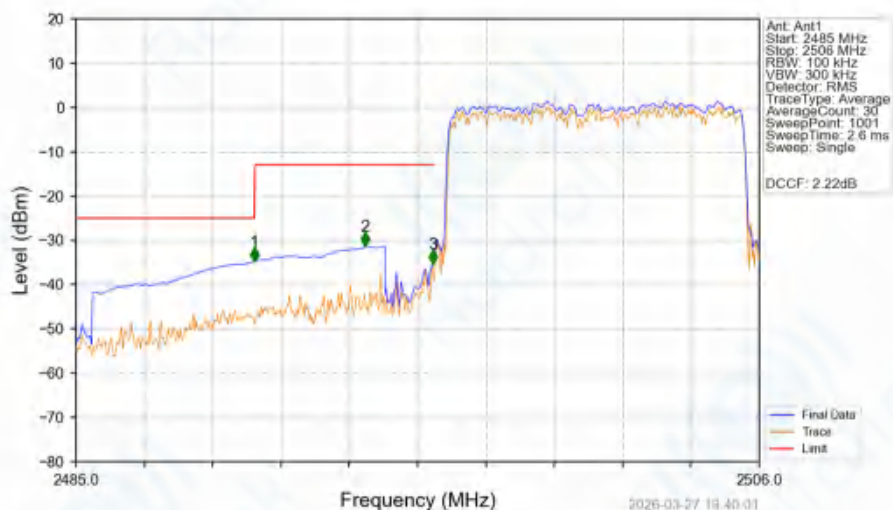


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2490.481	-34.77	-25	Pass
2490.5	2495	1	CHP	2	2493.883	-31.30	-13	Pass
2495	2496	0.102	CHP	3	2495.983	-35.29	-13	Pass
2496	2506	0.102	CHP	/	/	/	/	/


Band41_10MHz_64QAM_MCH_2593MHz_RB_1_0_NTNV

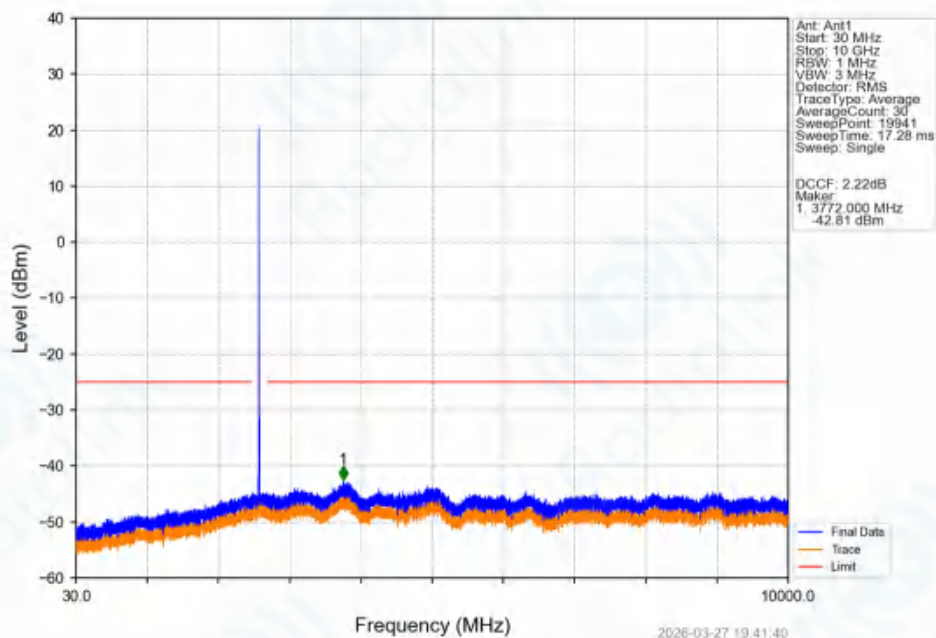

Band41_10MHz_64QAM_MCH_2593MHz_RB_1_0_NTNV

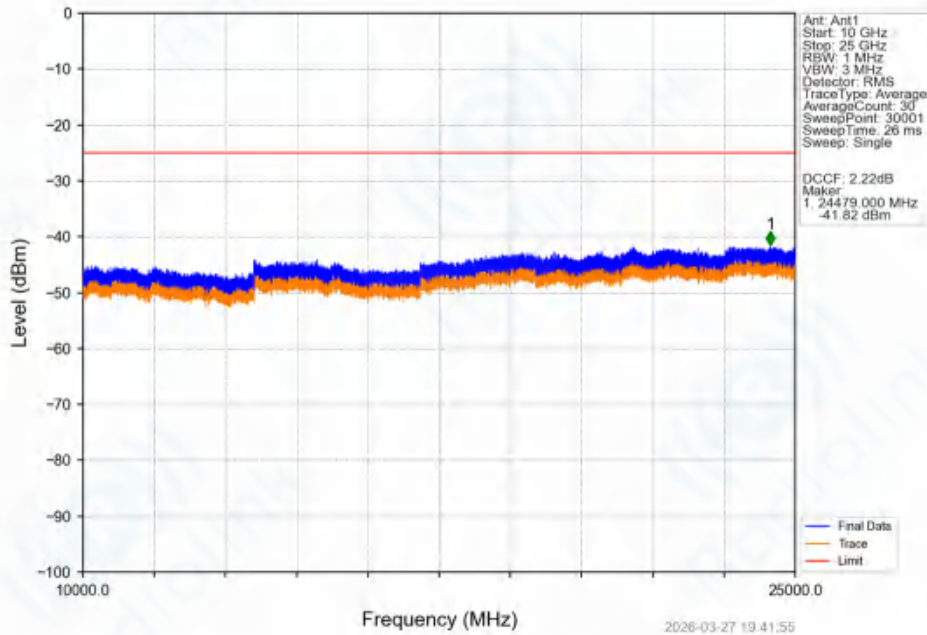


Band41_10MHz_64QAM_MCH_2593MHz_RB_1_0_NTNV

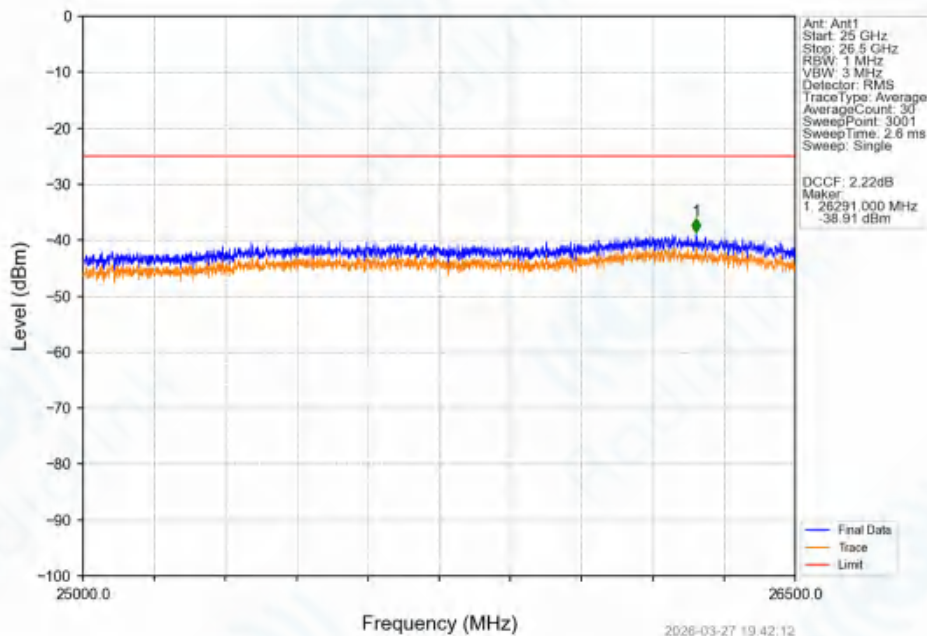


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_64QAM_HCH_2685MHz_RB_1_0_NTNV

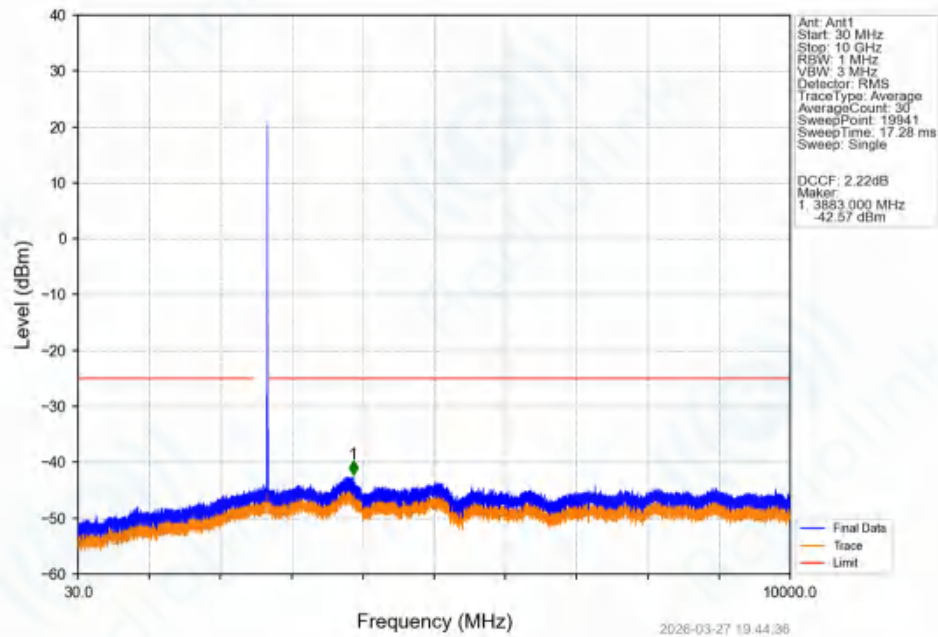


Band41_10MHz_64QAM_HCH_2685MHz_RB_1_0_NTNV

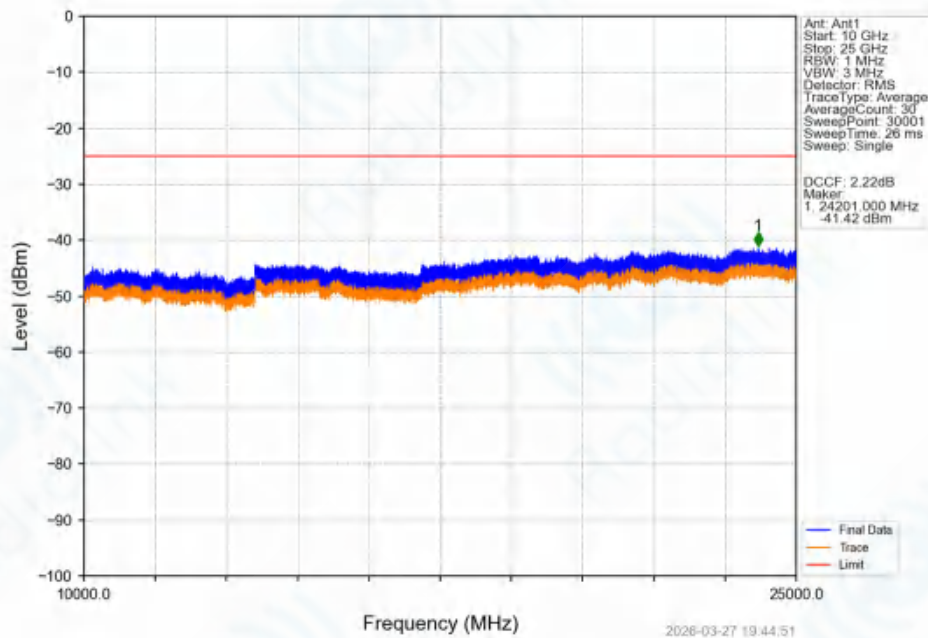


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_64QAM_HCH_2685MHz_RB_1_0_NTNV

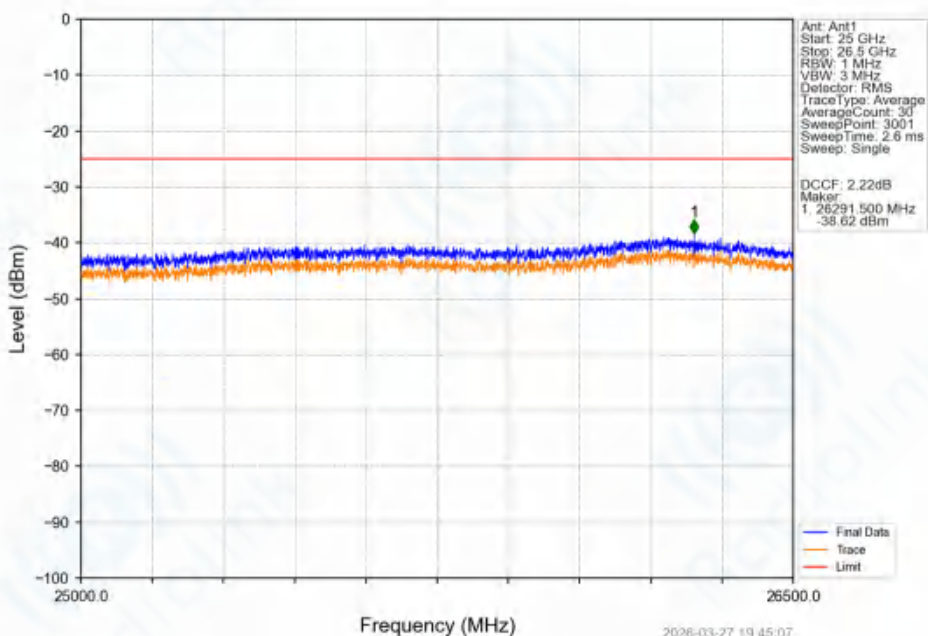

Band41_10MHz_64QAM_HCH_2685MHz_RB_1_49_NTNV

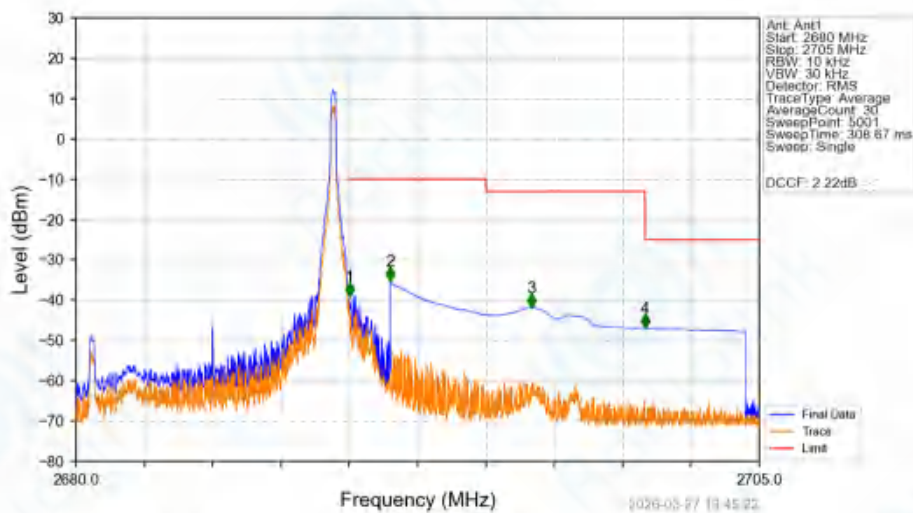


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2680	2690	0.02	CHP	1	2690.005	-39.05	-10	Pass
2690	2691	0.02	CHP	2	2691.505	-35.34	-10	Pass
2691	2695	1	CHP	3	2696.670	-41.81	-13	Pass
2695	2700.822	1	CHP	4	2700.825	-46.97	-25	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_10MHz_64QAM_HCH_2685MHz_RB_50_0_NTNV

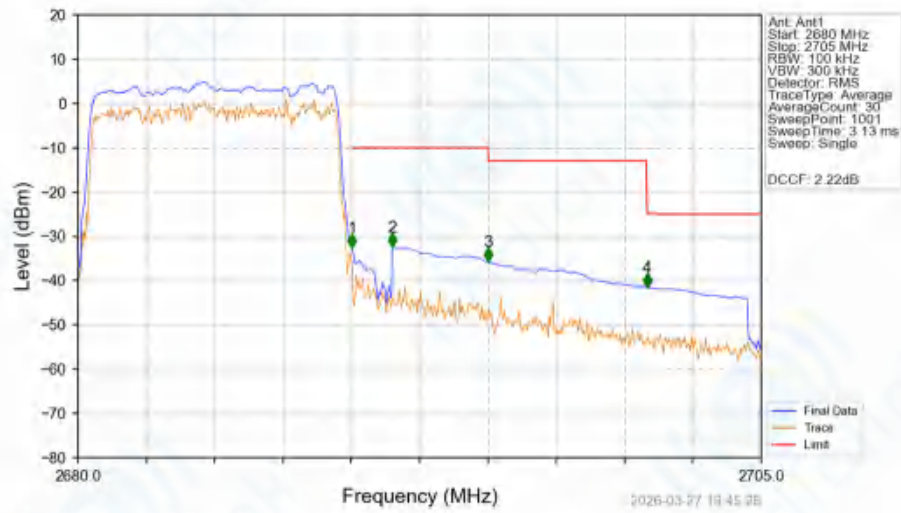

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2680	2690	0.216	CHP	/	/	/	/	/
2690	2691	0.216	CHP	1	2690.025	-32.60	-10	Pass
2691	2695	1	CHP	2	2691.500	-32.47	-10	Pass
2695	2700.822	1	CHP	3	2695.025	-35.75	-13	Pass
2700.822	2705	1	CHP	4	2700.825	-41.50	-25	Pass




Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694


6.2.3 B41_15MHz

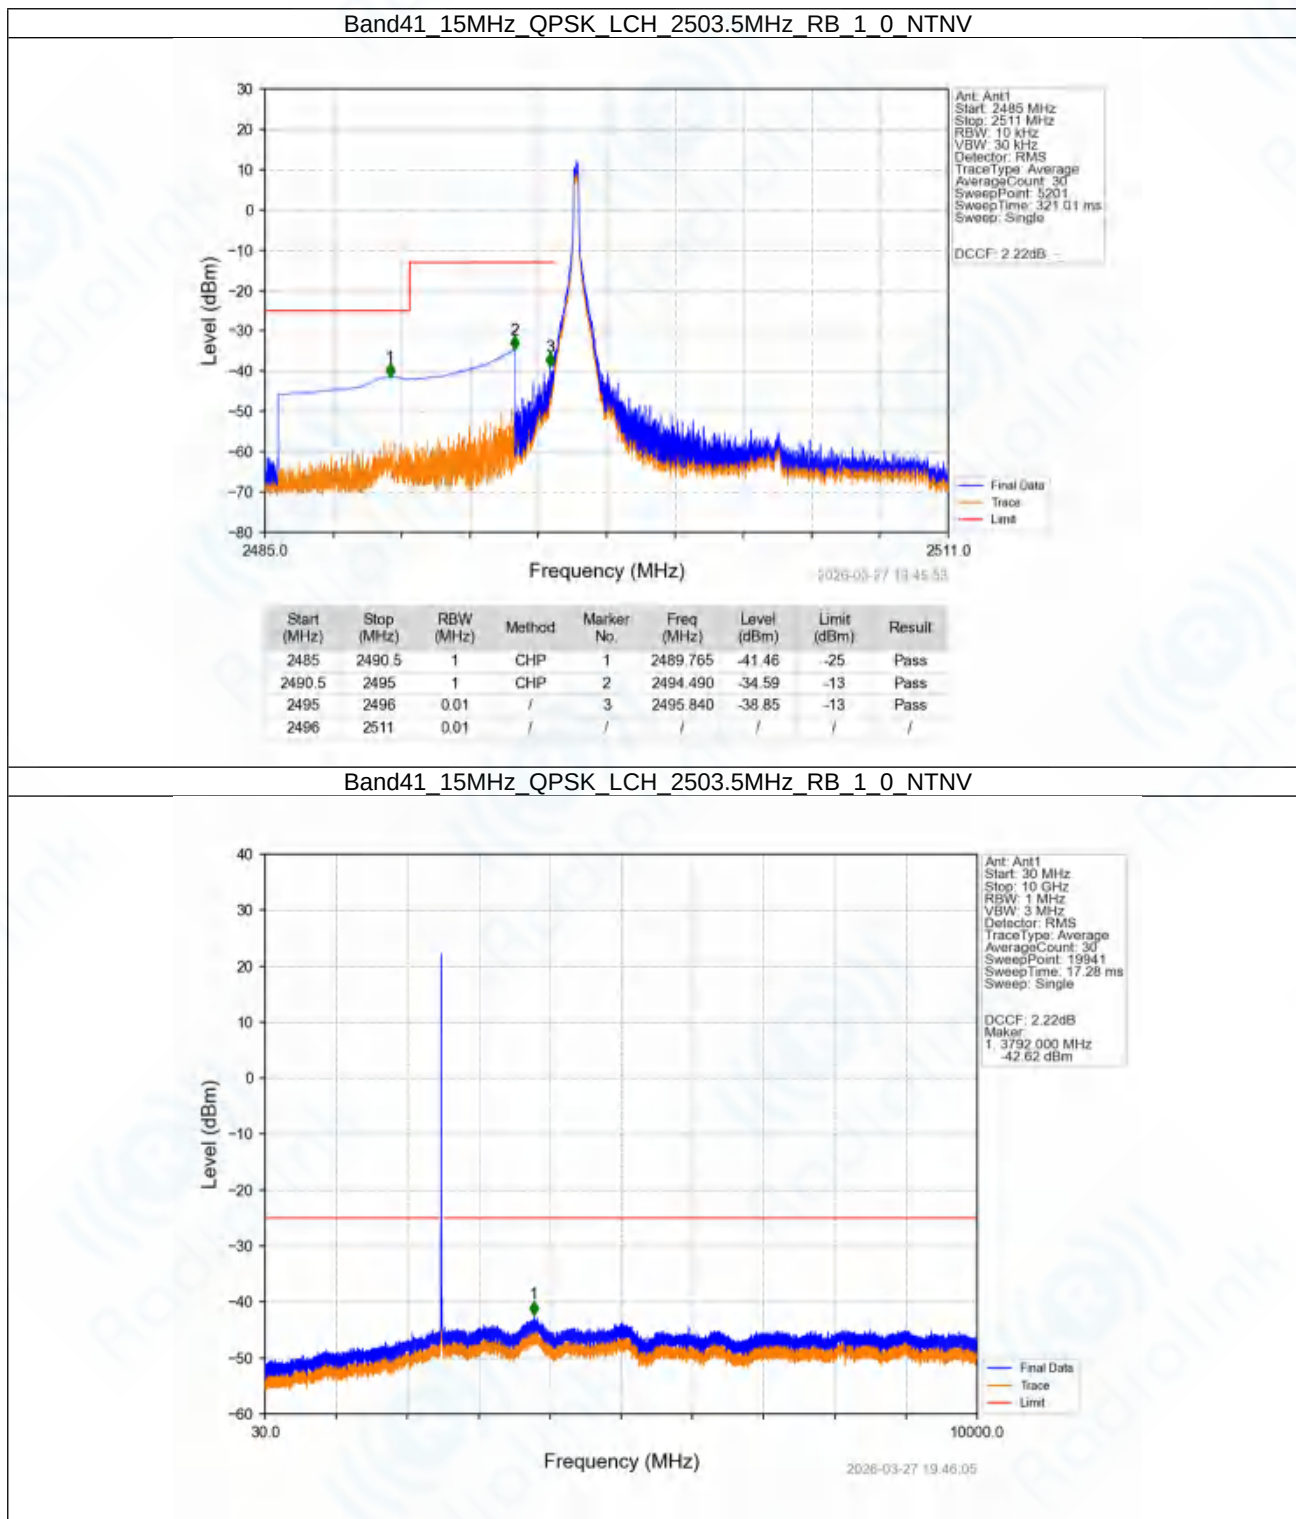


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_15MHz_QPSK_LCH_2503.5MHz_RB_1_0_NTNV

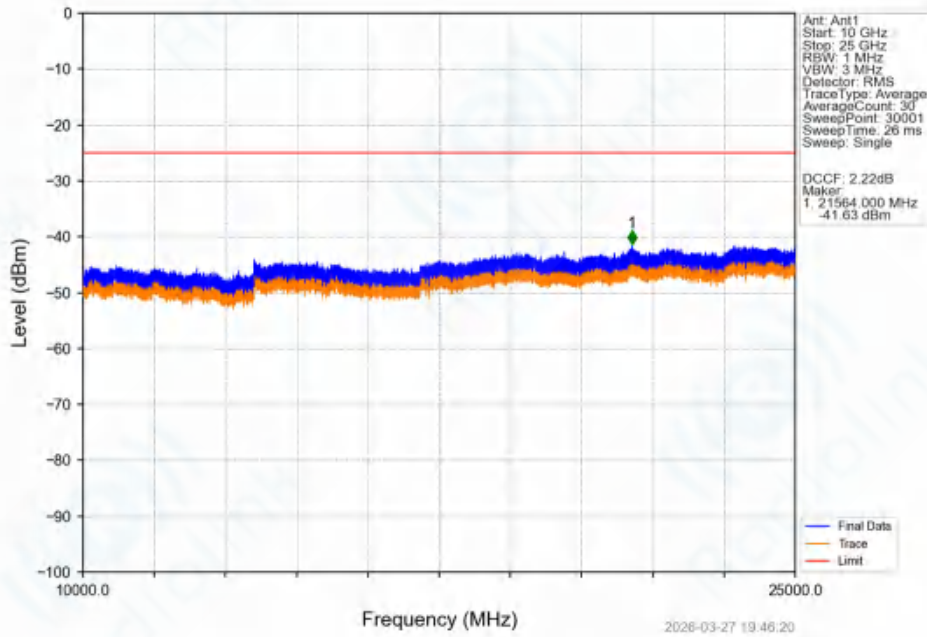


Band41_15MHz_QPSK_LCH_2503.5MHz_RB_1_0_NTNV

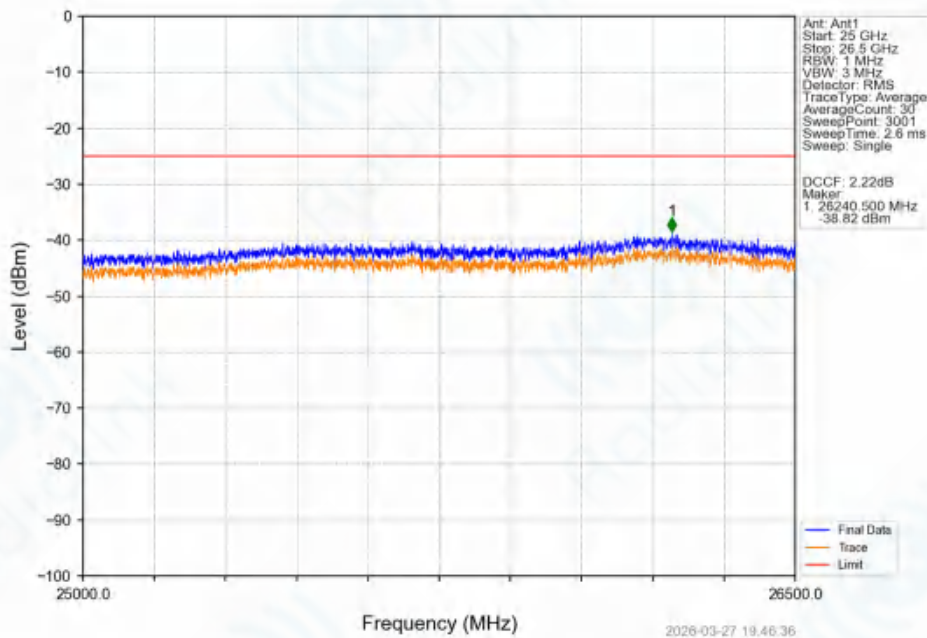

Band41_15MHz_QPSK_LCH_2503.5MHz_RB_75_0_NTNV

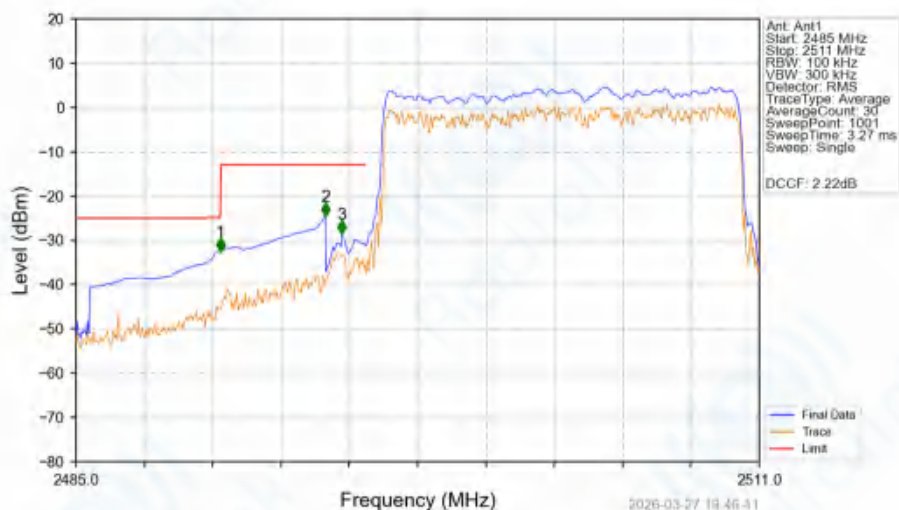


Band41_15MHz_QPSK_MCH_2593MHz_RB_1_0_NTNV

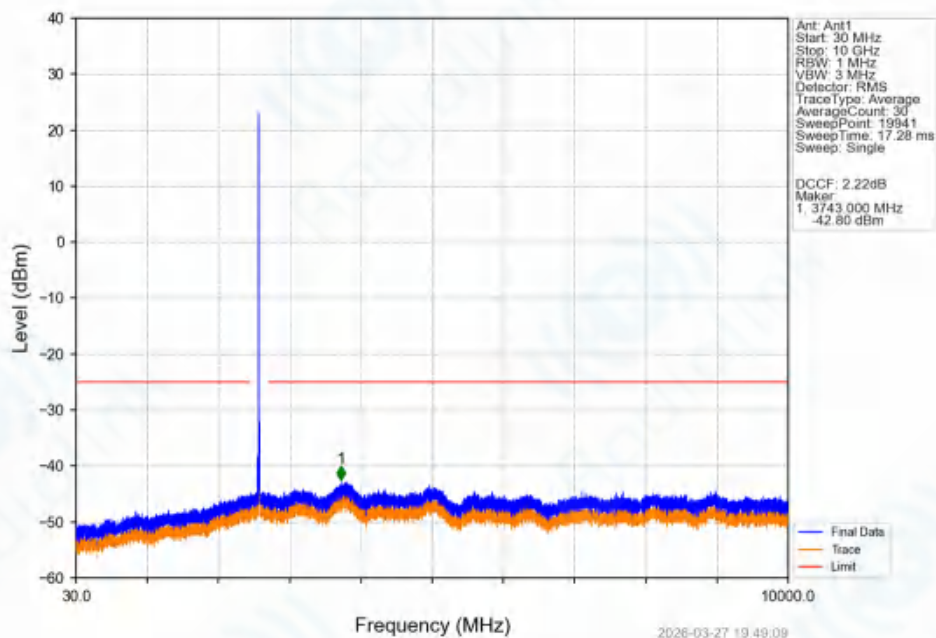


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_15MHz_QPSK_MCH_2593MHz_RB_1_0_NTNV

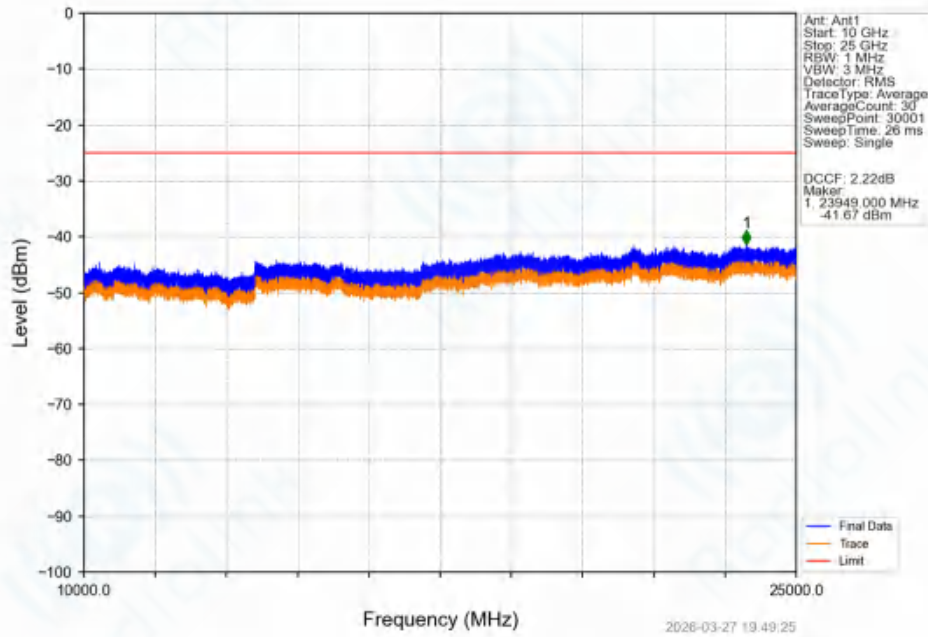

Band41_15MHz_QPSK_MCH_2593MHz_RB_1_0_NTNV

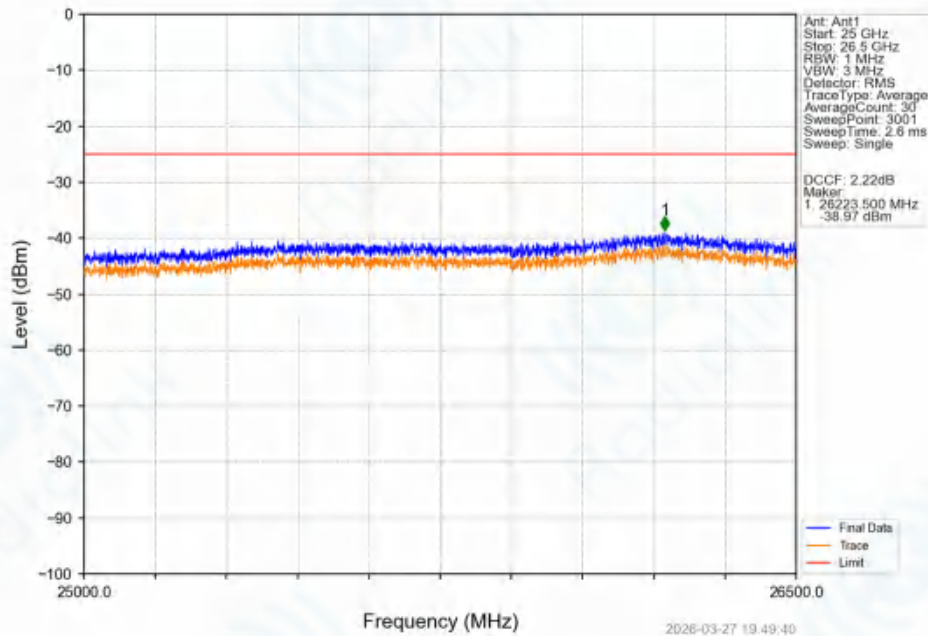


Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694


Band41_15MHz_QPSK_HCH_2682.5MHz_RB_1_0_NTNV

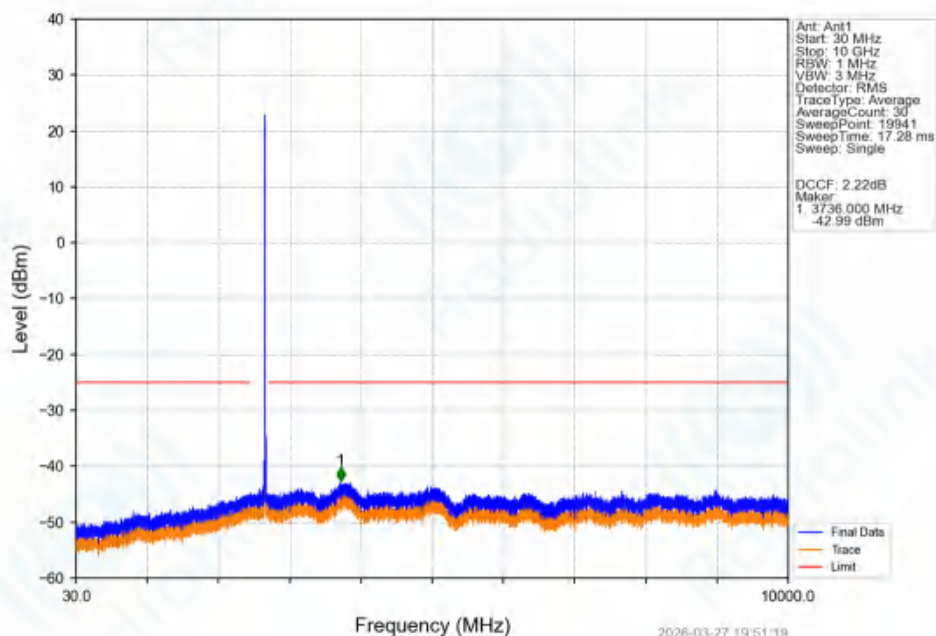


Band41_15MHz_QPSK_HCH_2682.5MHz_RB_1_0_NTNV

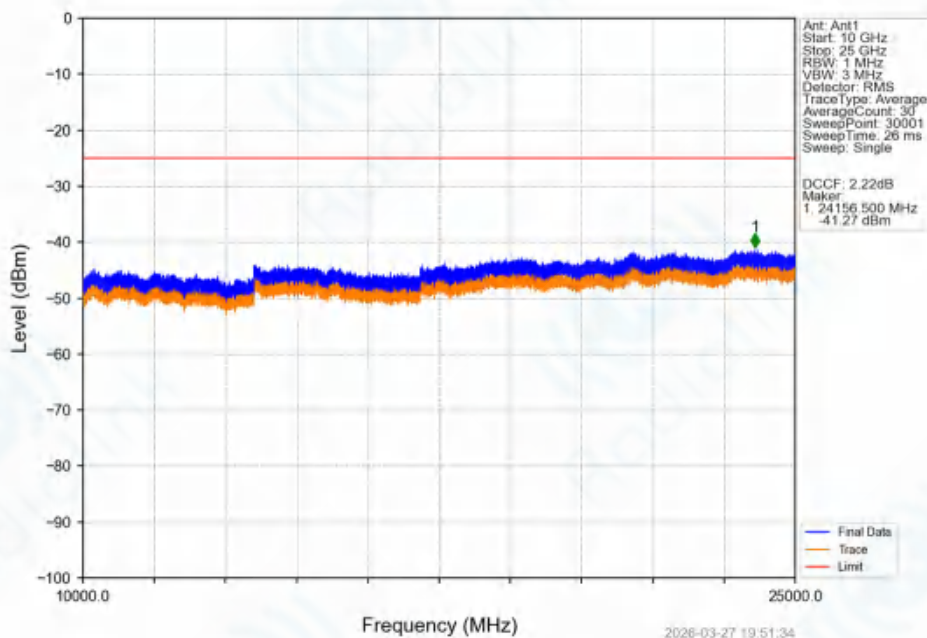

Band41_15MHz_QPSK_HCH_2682.5MHz_RB_1_0_NTNV

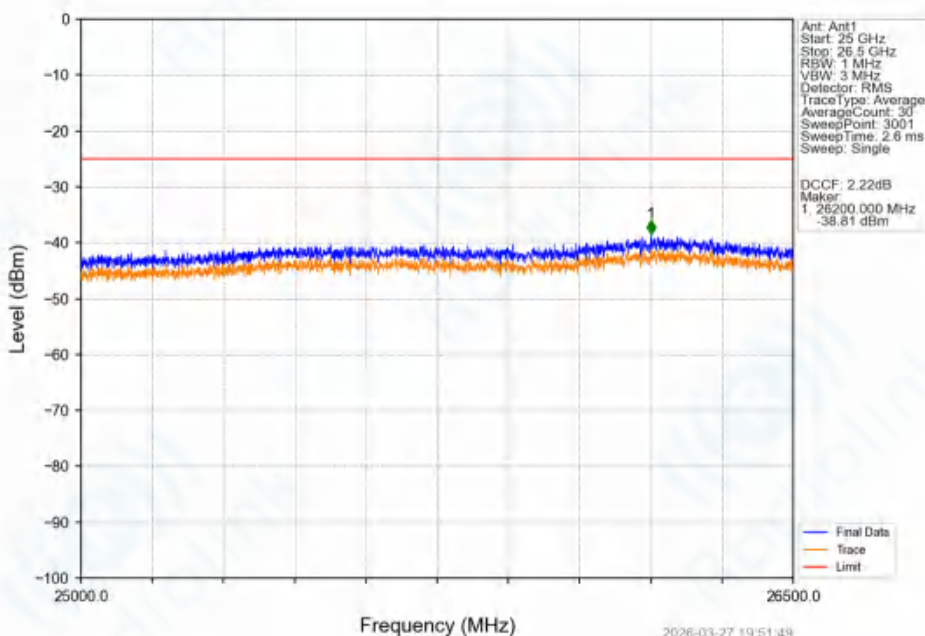

Band41_15MHz_QPSK_HCH_2682.5MHz_RB_1_74_NTNV

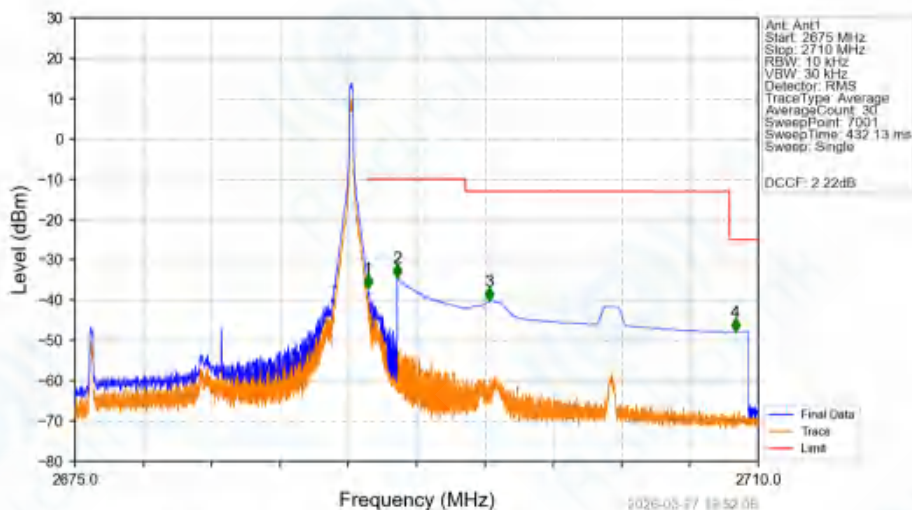


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2675	2690	0.02	CHP	1	2690.005	-36.97	-10	Pass
2690	2691	0.02	CHP	2	2691.500	-34.39	-10	Pass
2691	2695	1	CHP	3	2696.220	-40.26	-13	Pass
2695	2708.528	1	CHP	4	2708.835	-47.87	-25	Pass

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_15MHz_QPSK_HCH_2682.5MHz_RB_75_0_NTNV

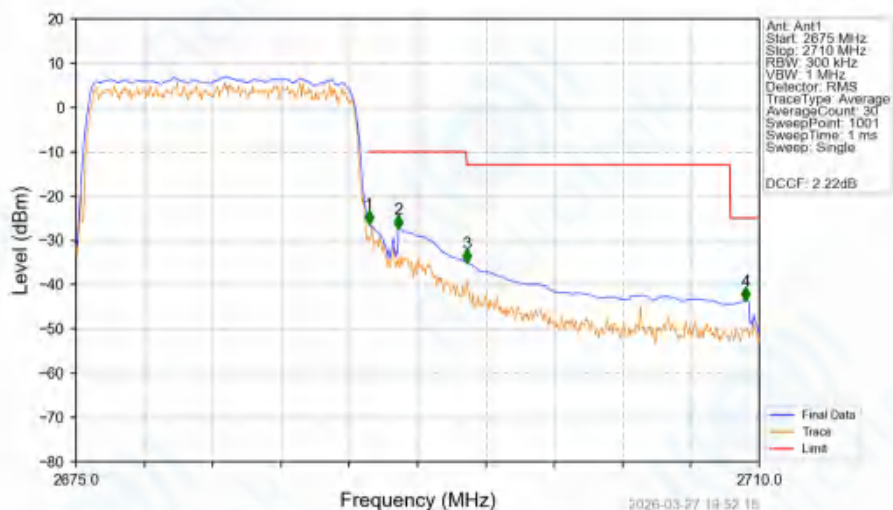

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2675	2690	0.371	CHP	/	/	/	/	/
2690	2691	0.371	CHP	1	2690.015	-26.36	-10	Pass
2691	2695	1	CHP	2	2691.520	-27.44	-10	Pass
2695	2708.528	1	CHP	3	2695.020	-35.16	-13	Pass
2708.528	2710	1	CHP	4	2709.300	-43.75	-25	Pass

Band41_15MHz_16QAM_LCH_2503.5MHz_RB_1_0_NTNV

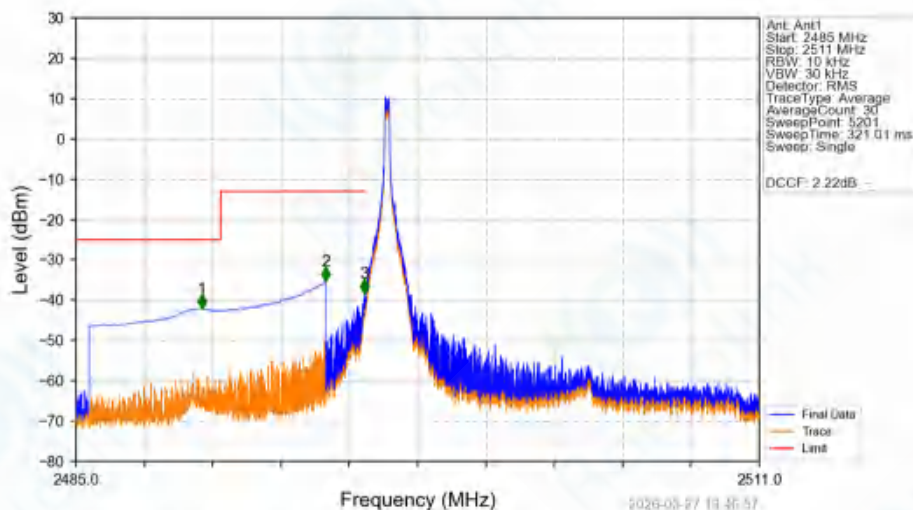


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2489.790	-42.08	-25	Pass
2490.5	2495	1	CHP	2	2494.500	-35.20	-13	Pass
2495	2496	0.01	/	3	2495.960	-38.35	-13	Pass
2496	2511	0.01	/	/	/	/	/	/

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694


Band41_15MHz_16QAM_LCH_2503.5MHz_RB_1_0_NTNV

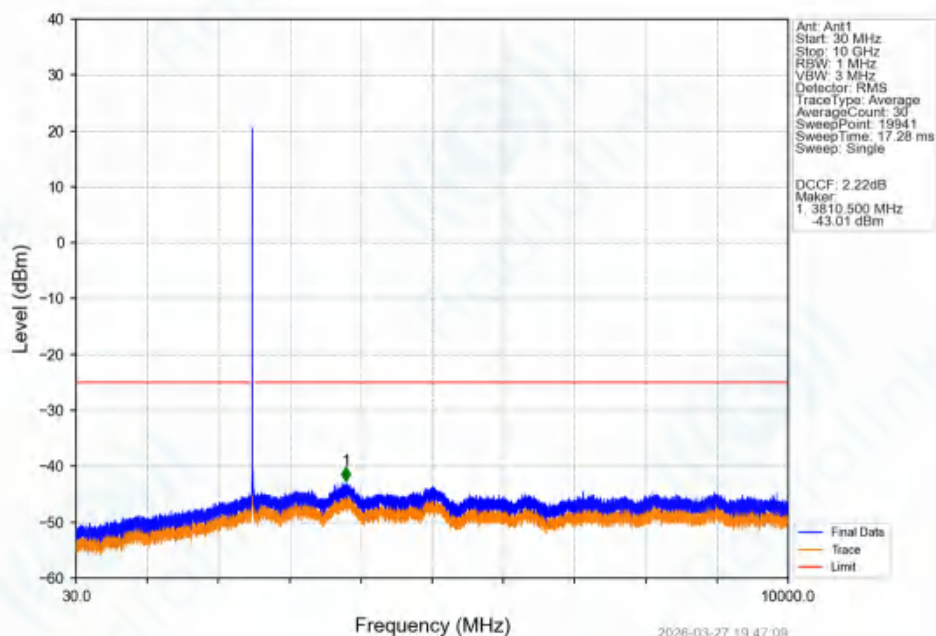


Band41_15MHz_16QAM_LCH_2503.5MHz_RB_1_0_NTNV

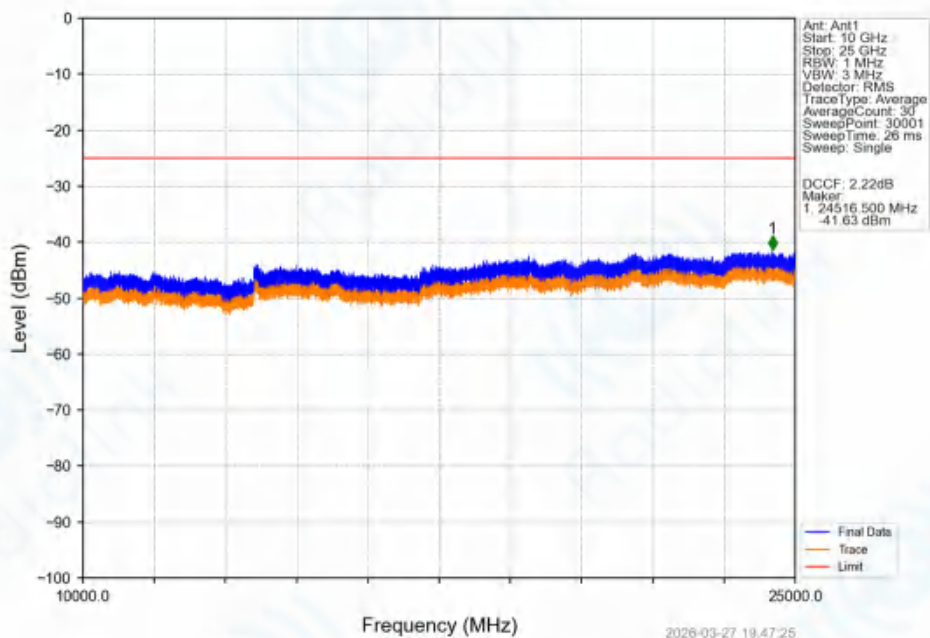

Band41_15MHz_16QAM_LCH_2503.5MHz_RB_1_0_NTNV

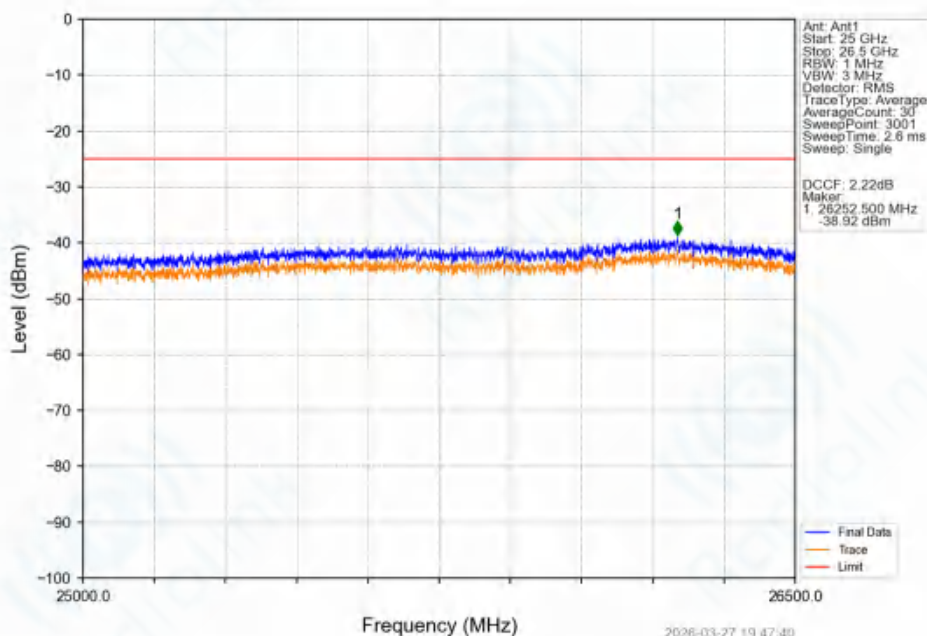

Band41_15MHz_16QAM_LCH_2503.5MHz_RB_75_0_NTNV

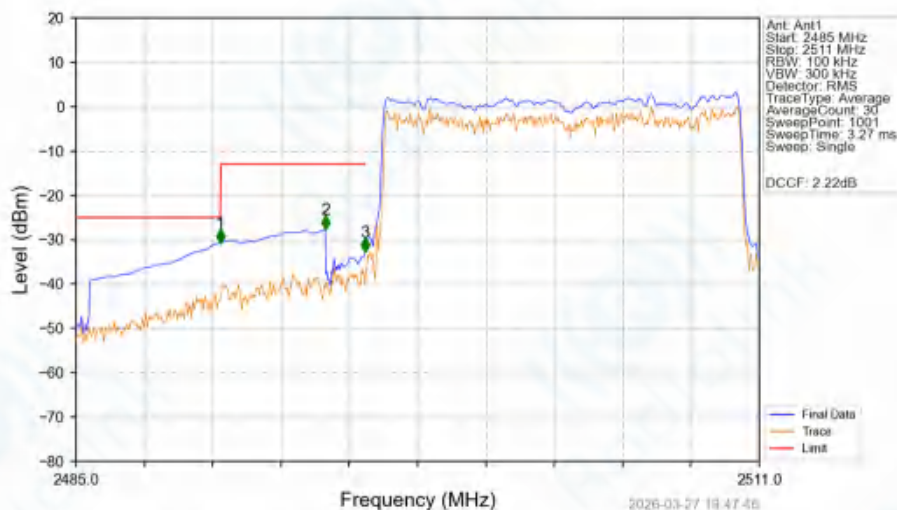


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2490.486	-30.79	-25	Pass
2490.5	2495	1	CHP	2	2494.490	-27.70	-13	Pass
2495	2496	0.172	CHP	3	2495.998	-32.82	-13	Pass
2496	2511	0.172	CHP	/	/	/	/	/


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_15MHz_16QAM_MCH_2593MHz_RB_1_0_NTNV

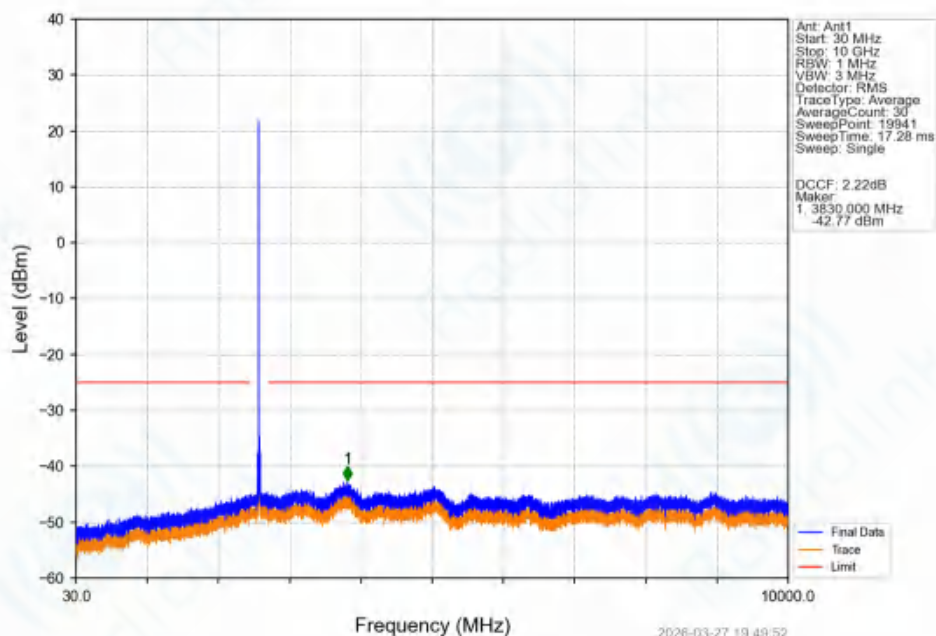


Band41_15MHz_16QAM_MCH_2593MHz_RB_1_0_NTNV

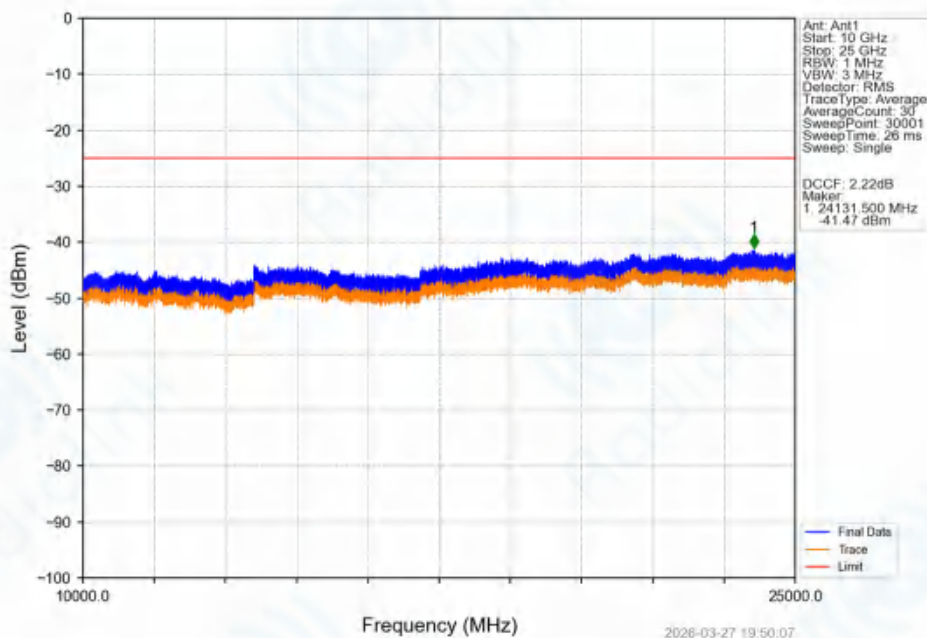


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_15MHz_16QAM_MCH_2593MHz_RB_1_0_NTNV

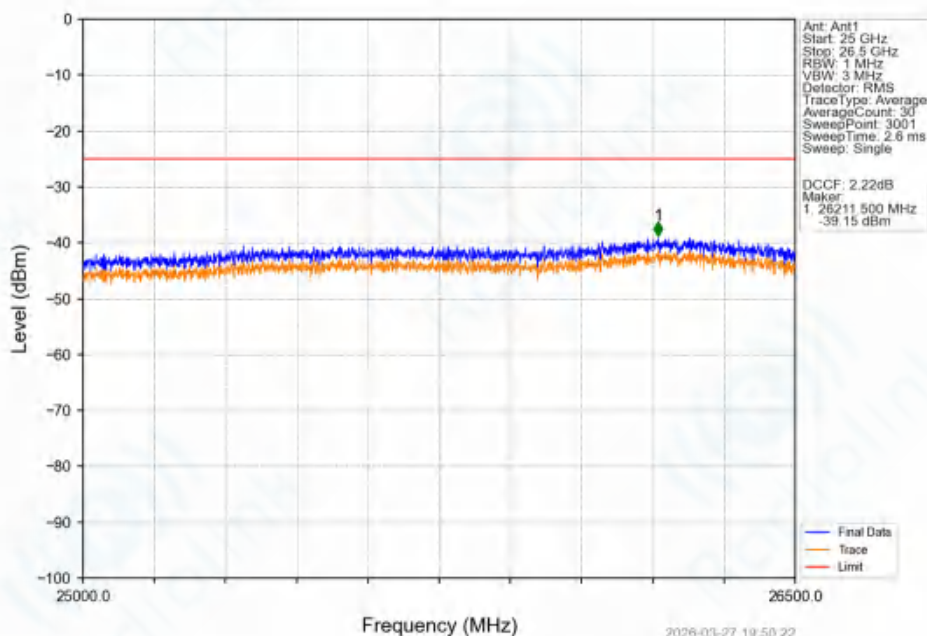


Band41_15MHz_16QAM_HCH_2682.5MHz_RB_1_0_NTNV

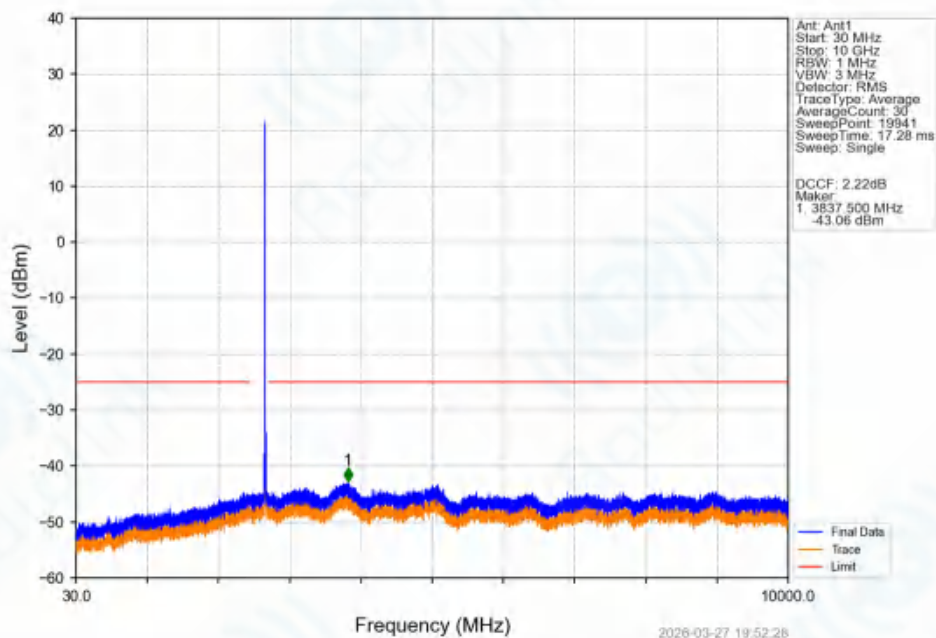

Band41_15MHz_16QAM_HCH_2682.5MHz_RB_1_0_NTNV

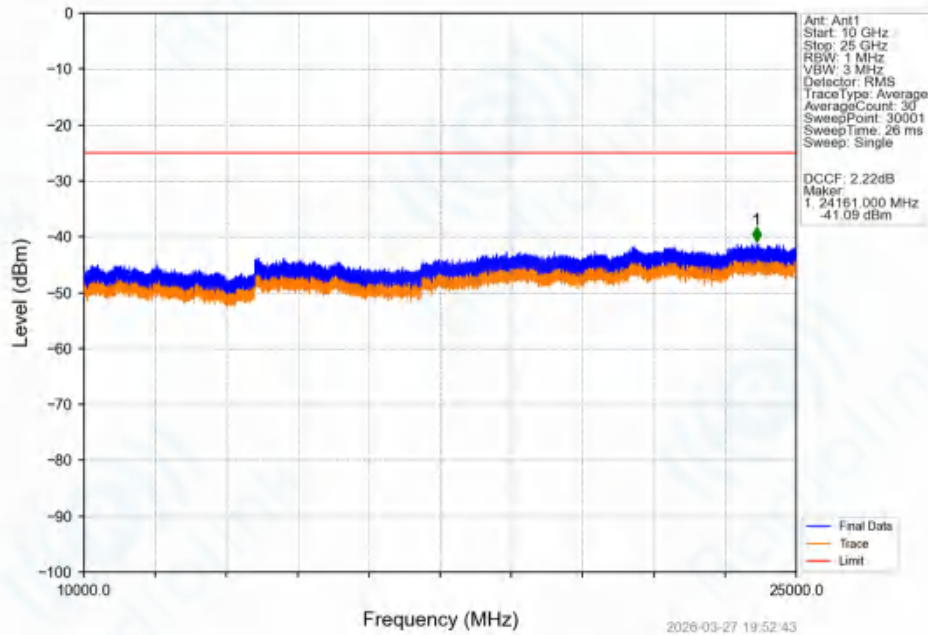


Band41_15MHz_16QAM_HCH_2682.5MHz_RB_1_0_NTNV

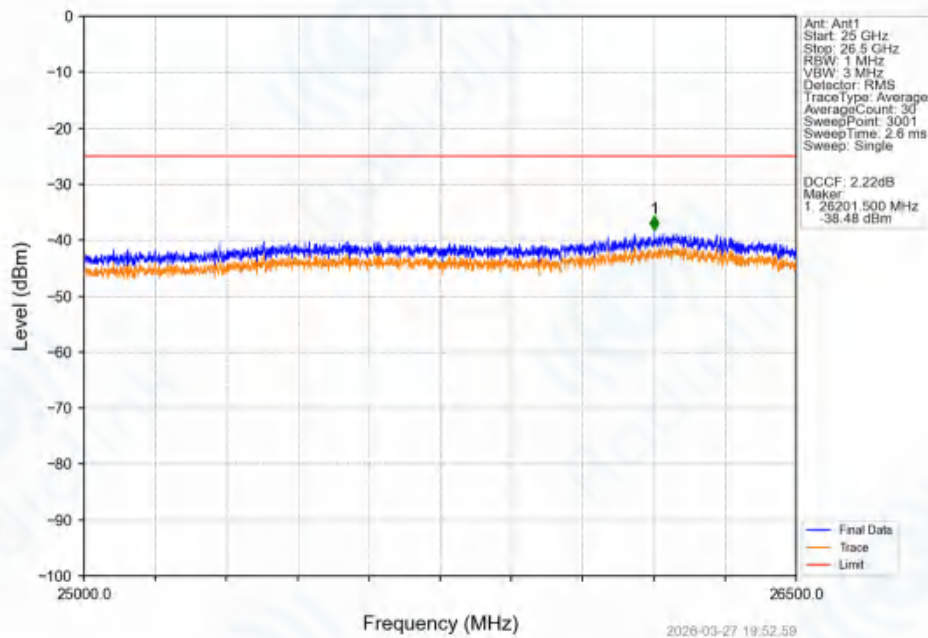

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_15MHz_16QAM_HCH_2682.5MHz_RB_1_74_NTNV

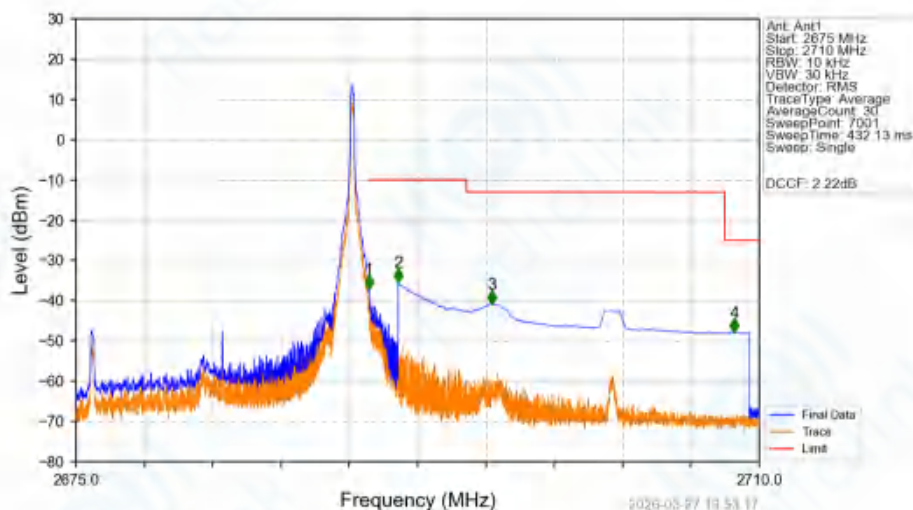

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2675	2690	0.02	CHP	/	/	/	/	/
2690	2691	0.02	CHP	1	2690.010	-37.01	-10	Pass
2691	2695	1	CHP	2	2691.500	-35.40	-10	Pass
2695	2708.234	1	CHP	3	2696.290	-40.81	-13	Pass
2708.234	2710	1	CHP	4	2708.730	-47.95	-25	Pass

Band41_15MHz_16QAM_HCH_2682.5MHz_RB_75_0_NTNV

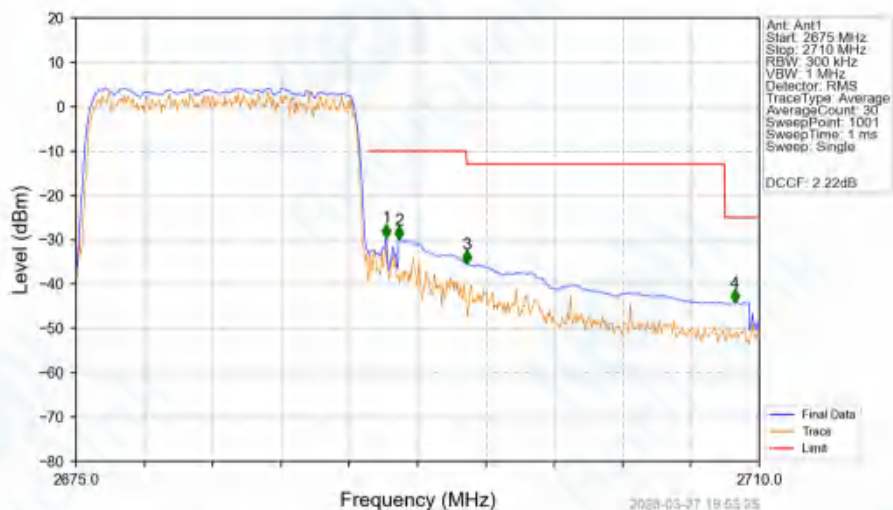


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2675	2690	0.365	CHP	/	/	/	/	/
2690	2691	0.365	CHP	1	2690.890	-29.58	-10	Pass
2691	2695	1	CHP	2	2691.555	-30.07	-10	Pass
2695	2708.234	1	CHP	3	2695.020	-35.51	-13	Pass
2708.234	2710	1	CHP	4	2708.740	-44.18	-25	Pass

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

Band41_15MHz_64QAM_LCH_2503.5MHz_RB_1_0_NTNV

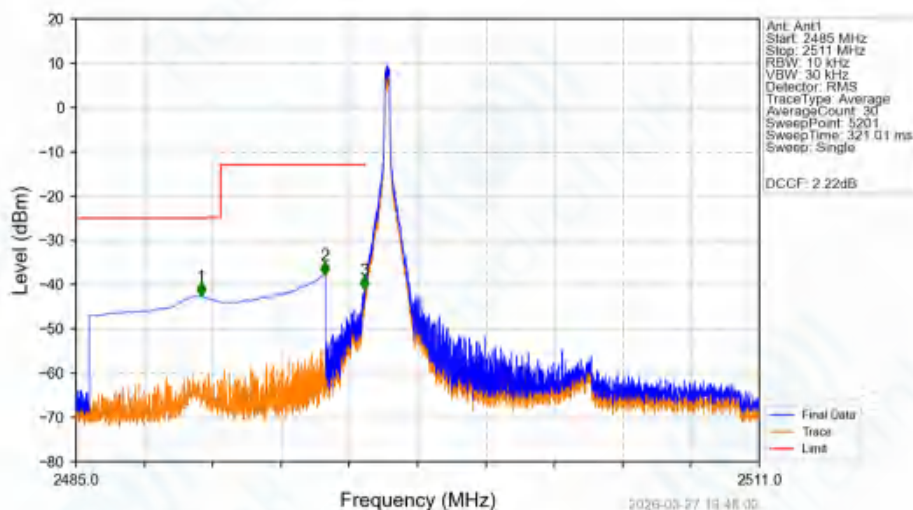


Band41_15MHz_64QAM_LCH_2503.5MHz_RB_1_0_NTNV

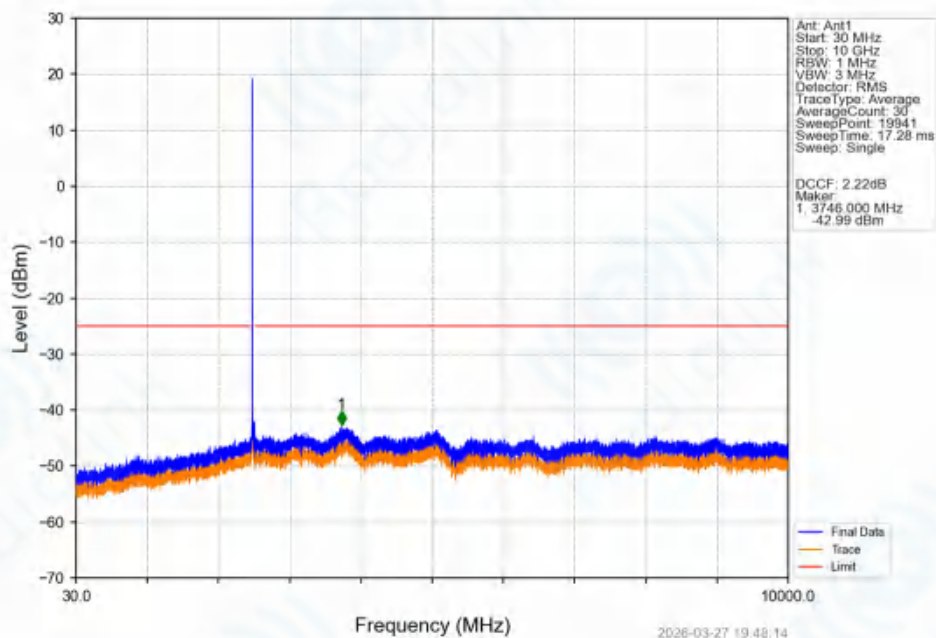


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_15MHz_64QAM_LCH_2503.5MHz_RB_1_0_NTNV

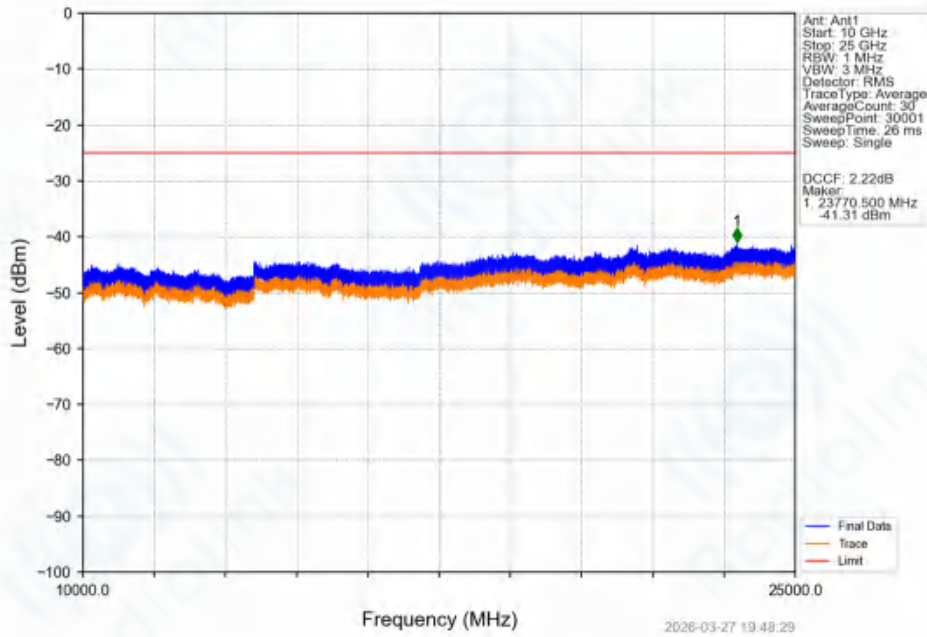

Band41_15MHz_64QAM_LCH_2503.5MHz_RB_1_0_NTNV

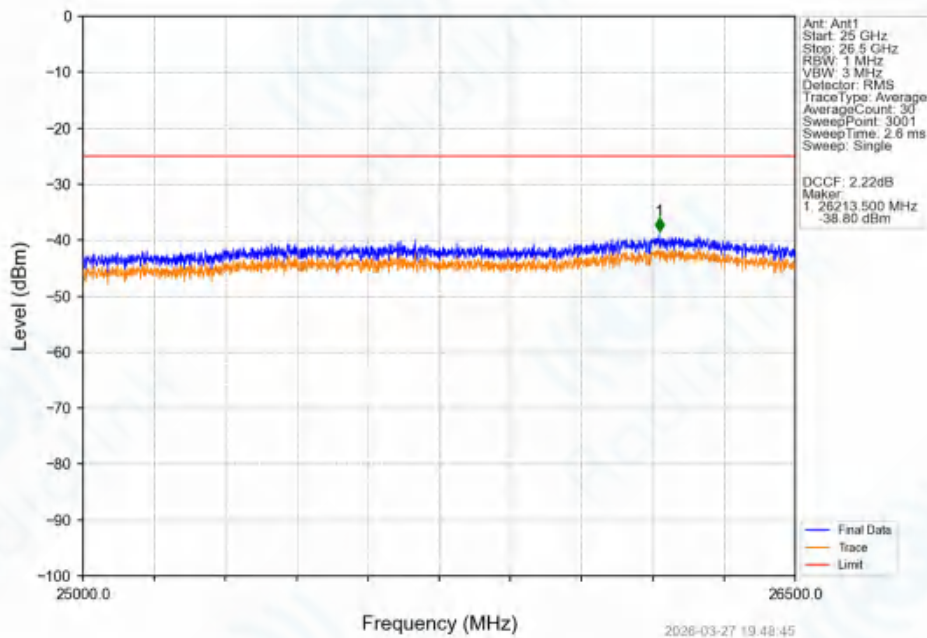


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China


Tel: +86 0755 23080694

Band41_15MHz_64QAM_LCH_2503.5MHz_RB_75_0_NTNV

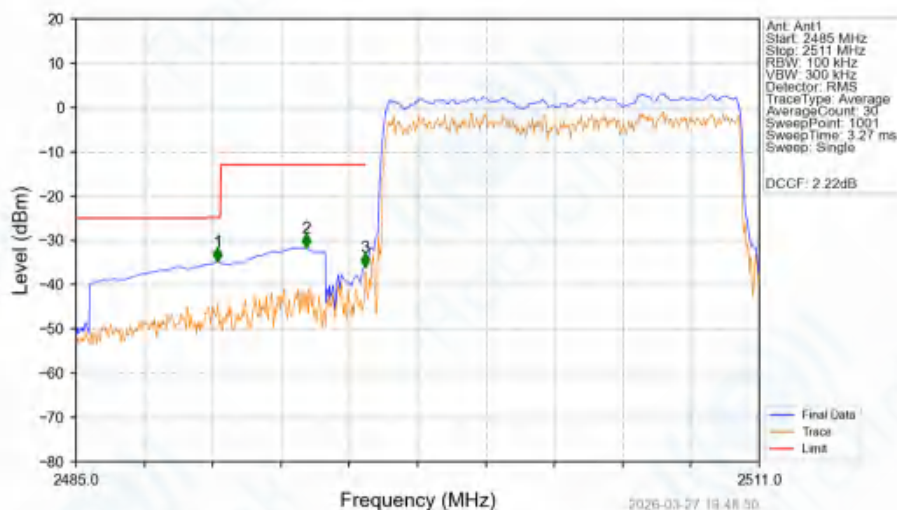

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2490.382	-34.84	-25	Pass
2490.5	2495	1	CHP	2	2493.762	-31.74	-13	Pass
2495	2496	0.215	CHP	3	2495.998	-35.97	-13	Pass
2496	2511	0.215	CHP	/	/	/	/	/


Band41_15MHz_64QAM_MCH_2593MHz_RB_1_0_NTNV

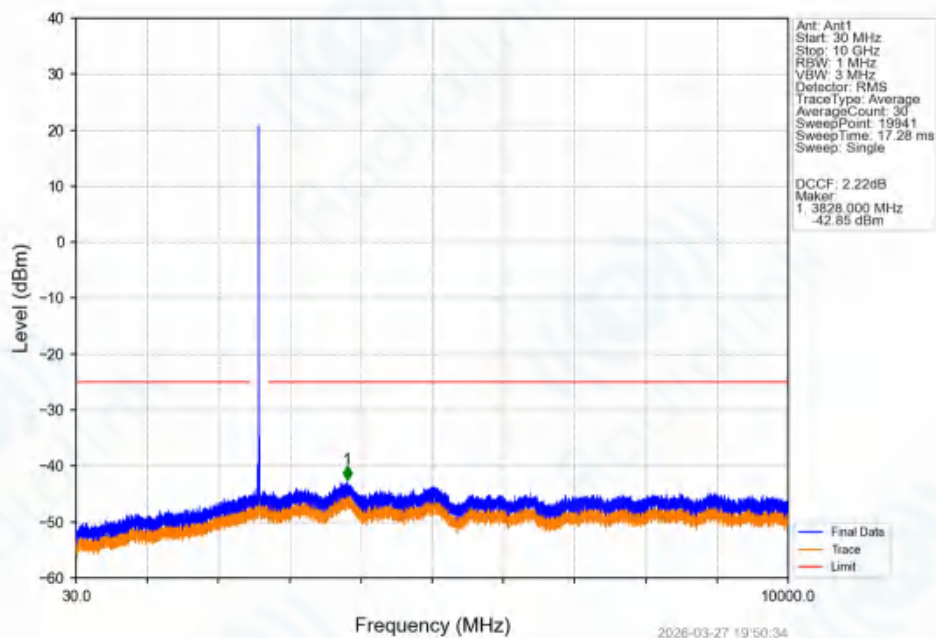


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_15MHz_64QAM_MCH_2593MHz_RB_1_0_NTNV

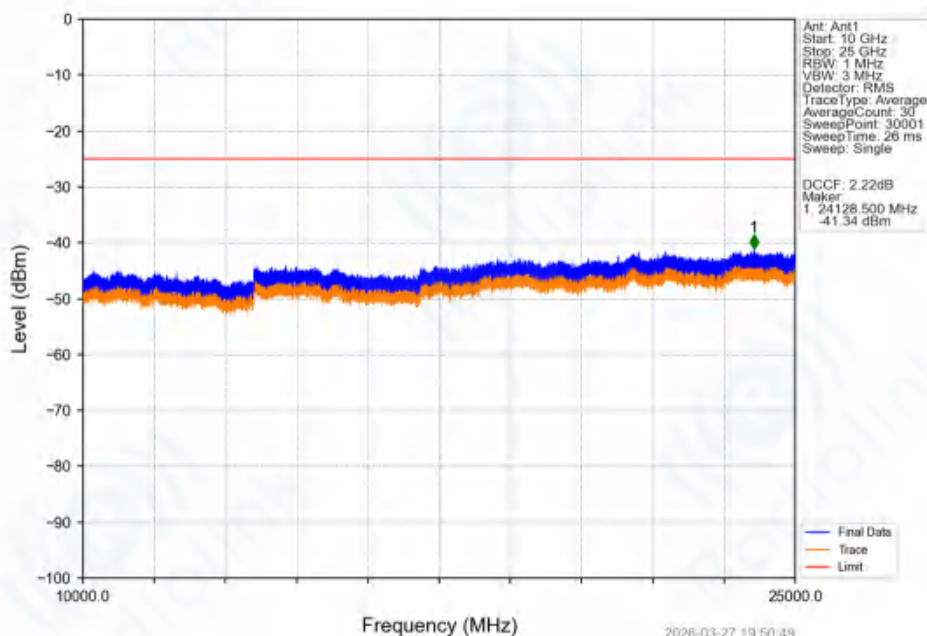


Band41_15MHz_64QAM_MCH_2593MHz_RB_1_0_NTNV

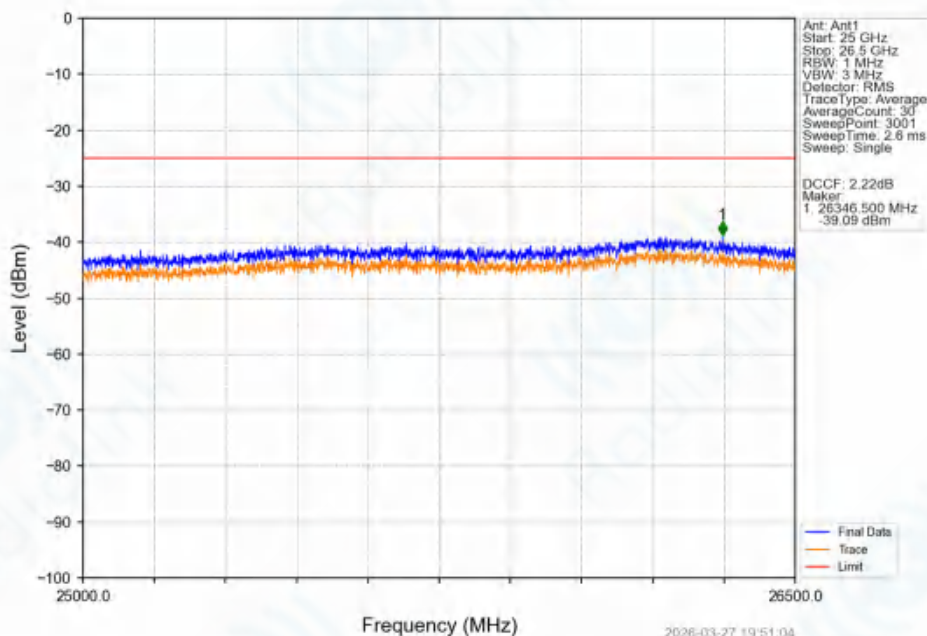

Band41_15MHz_64QAM_HCH_2682.5MHz_RB_1_0_NTNV

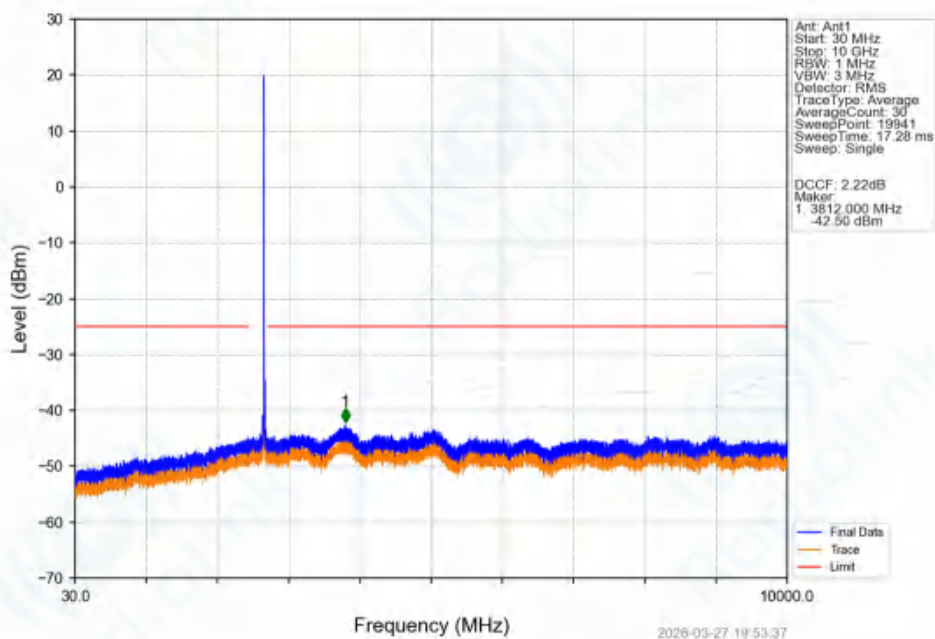


Band41_15MHz_64QAM_HCH_2682.5MHz_RB_1_0_NTNV

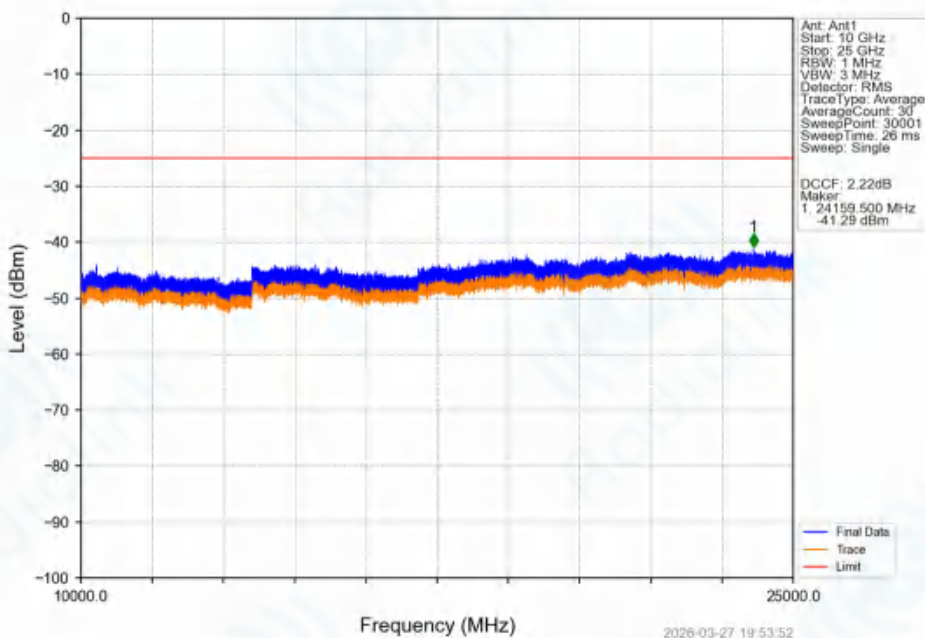


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_15MHz_64QAM_HCH_2682.5MHz_RB_1_0_NTV

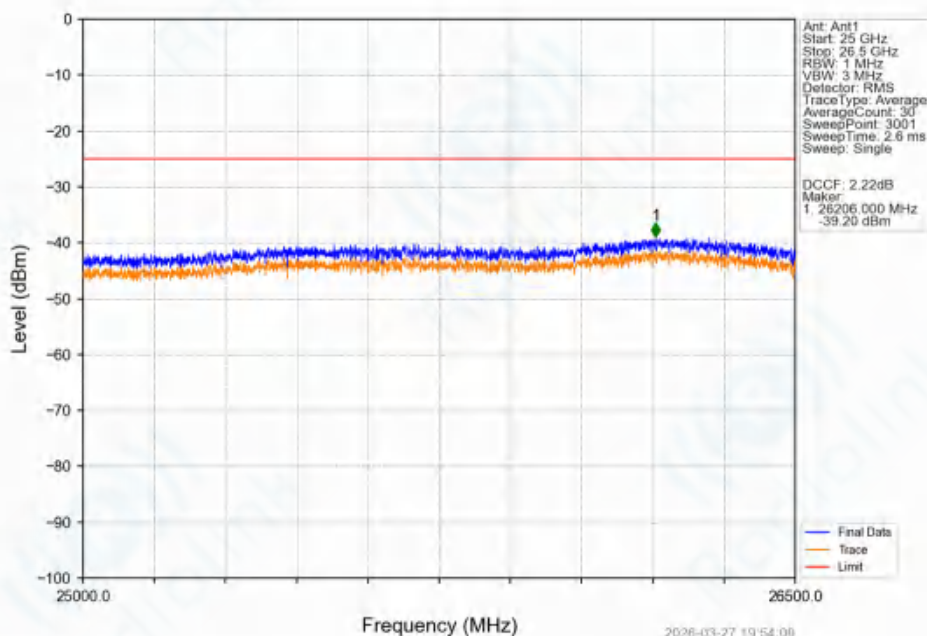

Band41_15MHz_64QAM_HCH_2682.5MHz_RB_1_74_NTV

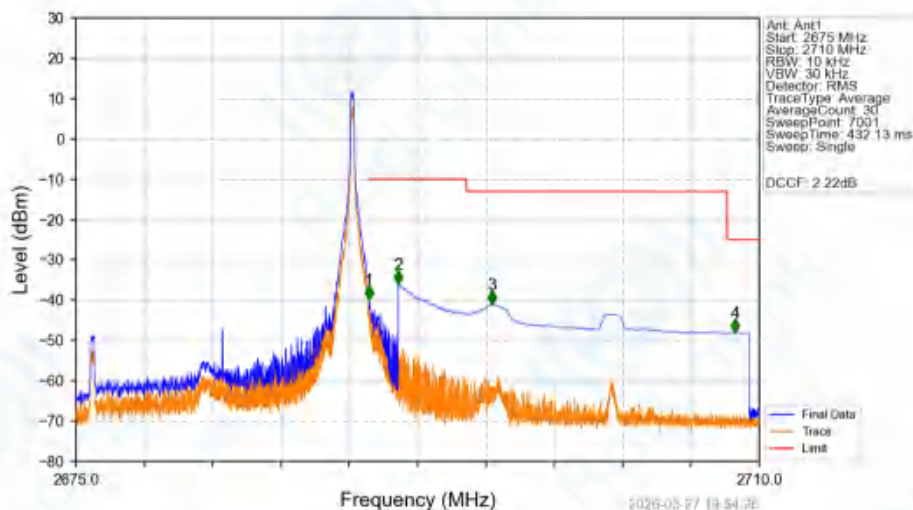


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2675	2690	0.02	CHP	1	2690.005	-39.94	-10	Pass
2690	2691	0.02	CHP	2	2691.500	-36.10	-10	Pass
2691	2695	1	CHP	3	2696.295	-41.13	-13	Pass
2695	2708.36	1	CHP	4	2708.765	-48.15	-25	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China


Tel: +86 0755 23080694

Band41_15MHz_64QAM_HCH_2682.5MHz_RB_75_0_NTNV

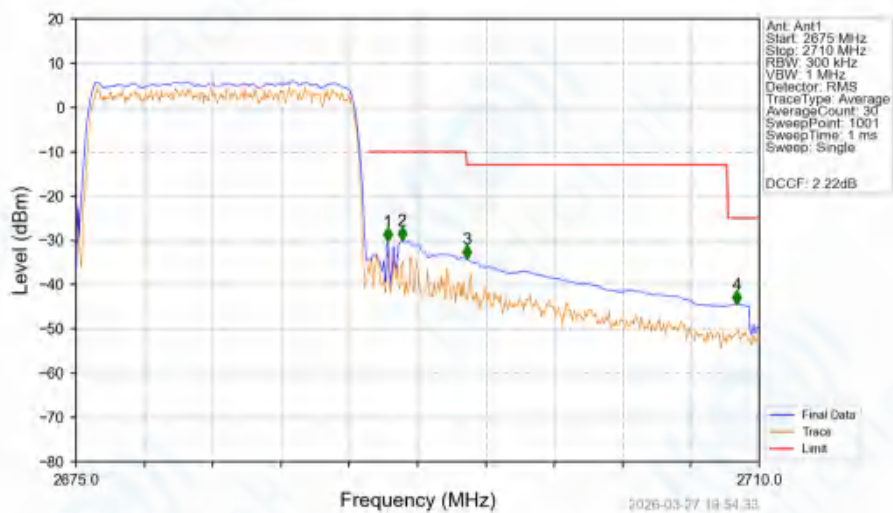

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2675	2690	0.367	CHP	/	/	/	/	/
2690	2691	0.367	CHP	1	2690.960	-30.29	-10	Pass
2691	2695	1	CHP	2	2691.695	-30.09	-10	Pass
2695	2708.36	1	CHP	3	2695.020	-34.21	-13	Pass
2708.36	2710	1	CHP	4	2708.845	-44.42	-25	Pass


6.2.4 B41_20MHz

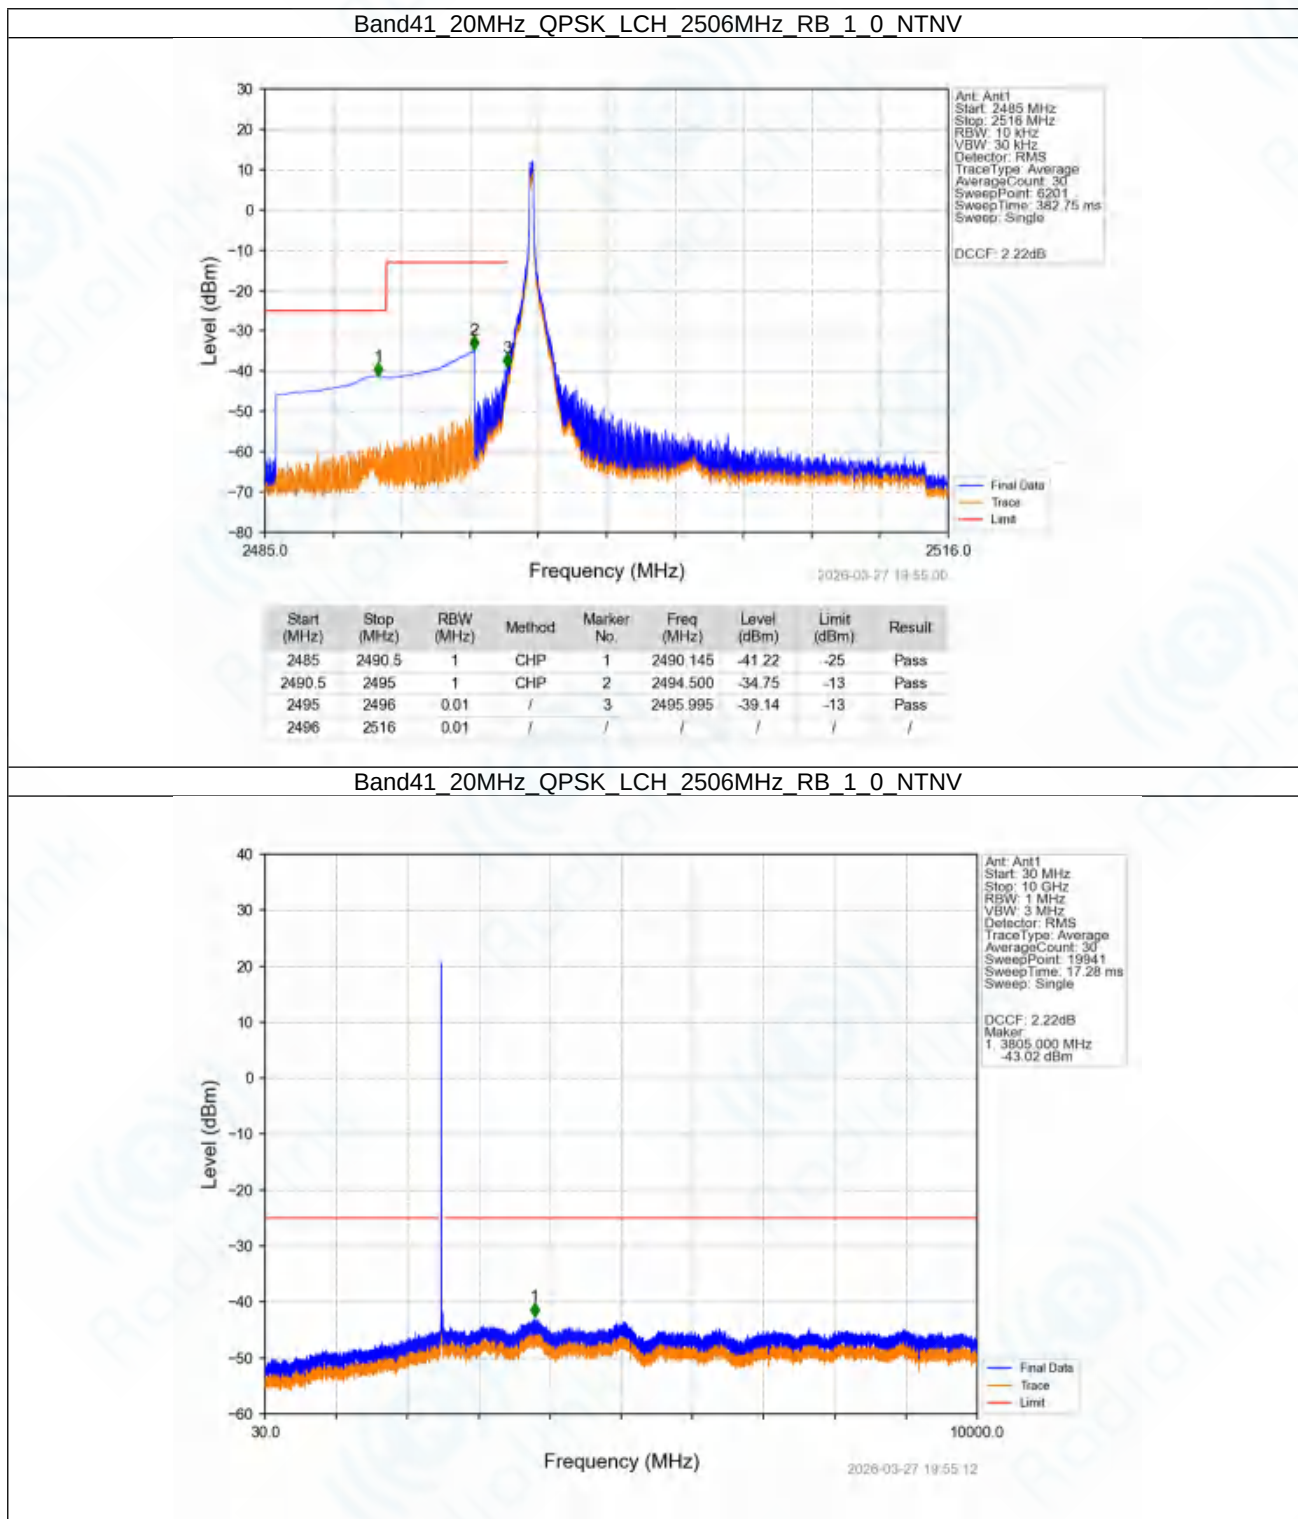


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_20MHz_QPSK_LCH_2506MHz_RB_1_0_NTNV

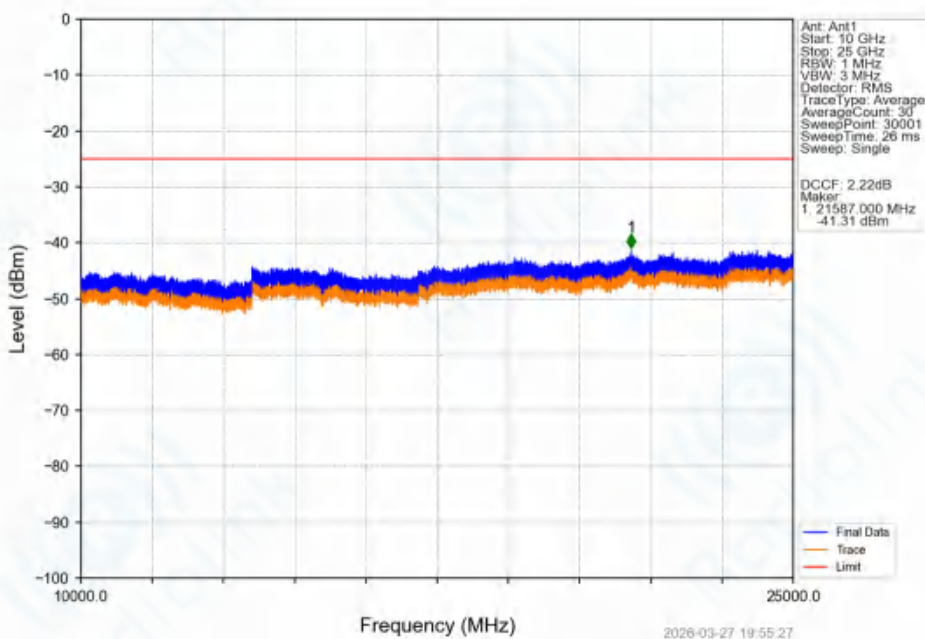


Band41_20MHz_QPSK_LCH_2506MHz_RB_1_0_NTNV

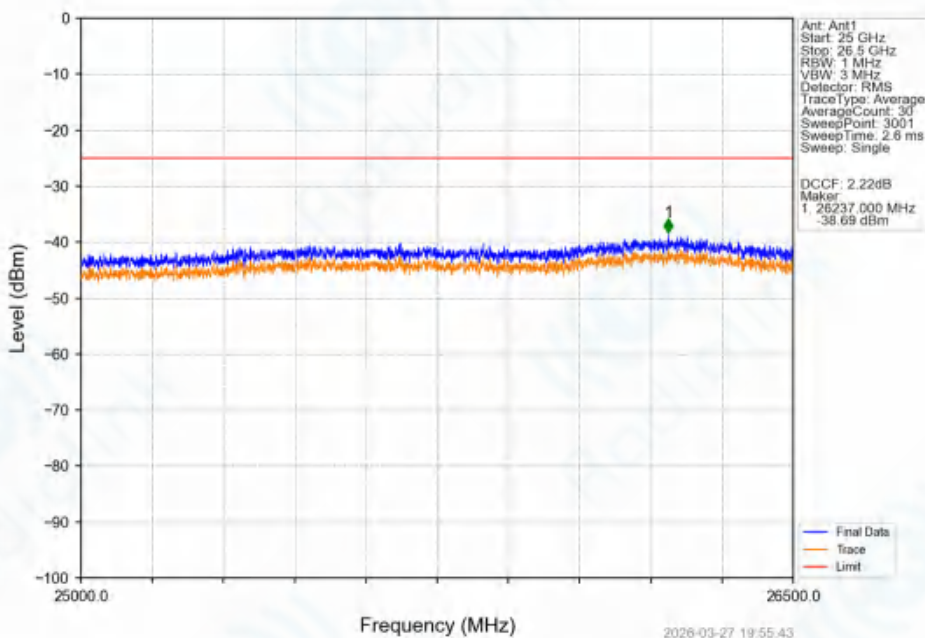

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_20MHz_QPSK_LCH_2506MHz_RB_100_0_NTNV

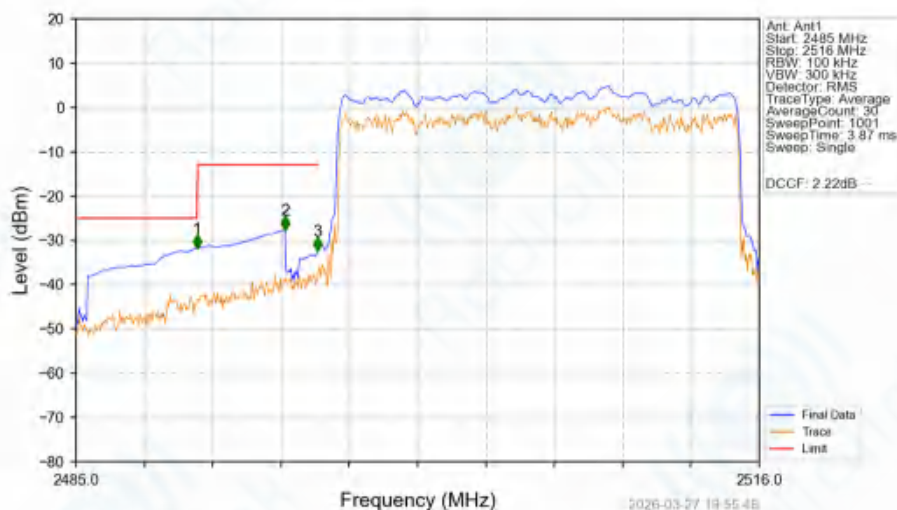


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2490.487	-31.80	-25	Pass
2490.5	2495	1	CHP	2	2494.486	-27.74	-13	Pass
2495	2496	0.219	CHP	3	2495.974	-32.49	-13	Pass
2496	2516	0.219	CHP	/	/	/	/	/


Band41_20MHz_QPSK_MCH_2593MHz_RB_1_0_NTNV

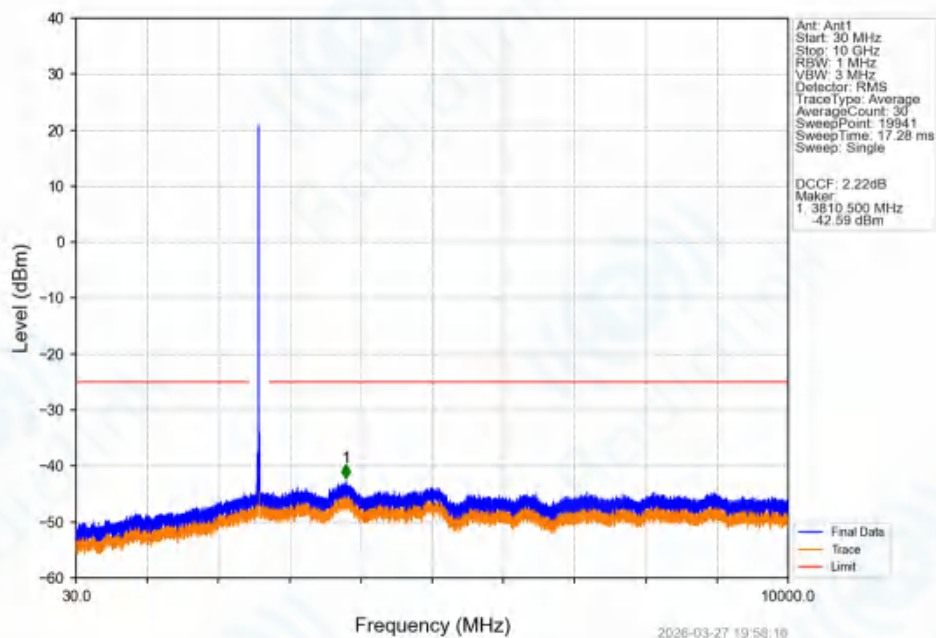

Band41_20MHz_QPSK_MCH_2593MHz_RB_1_0_NTNV

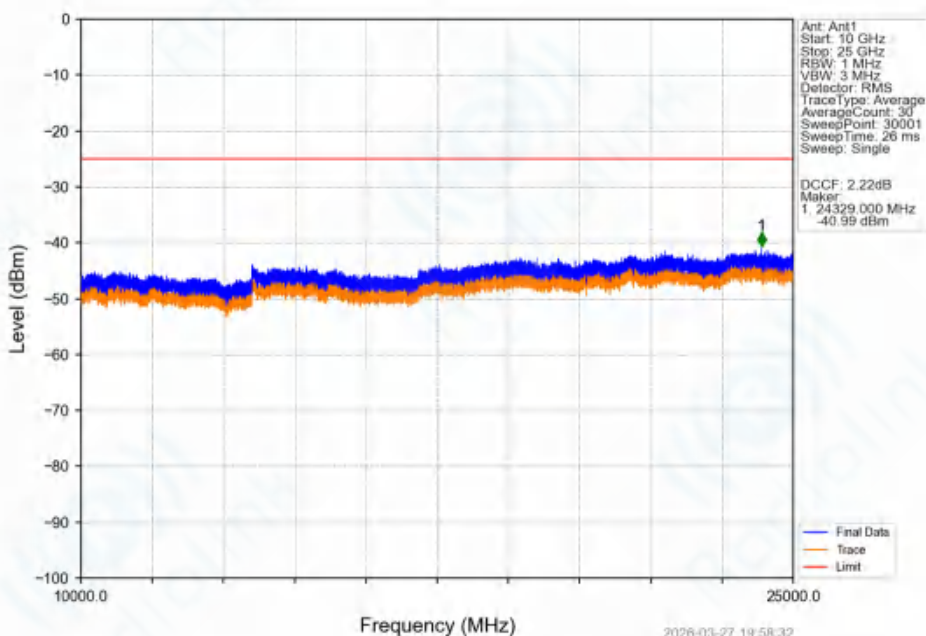


Band41_20MHz_QPSK_MCH_2593MHz_RB_1_0_NTNV

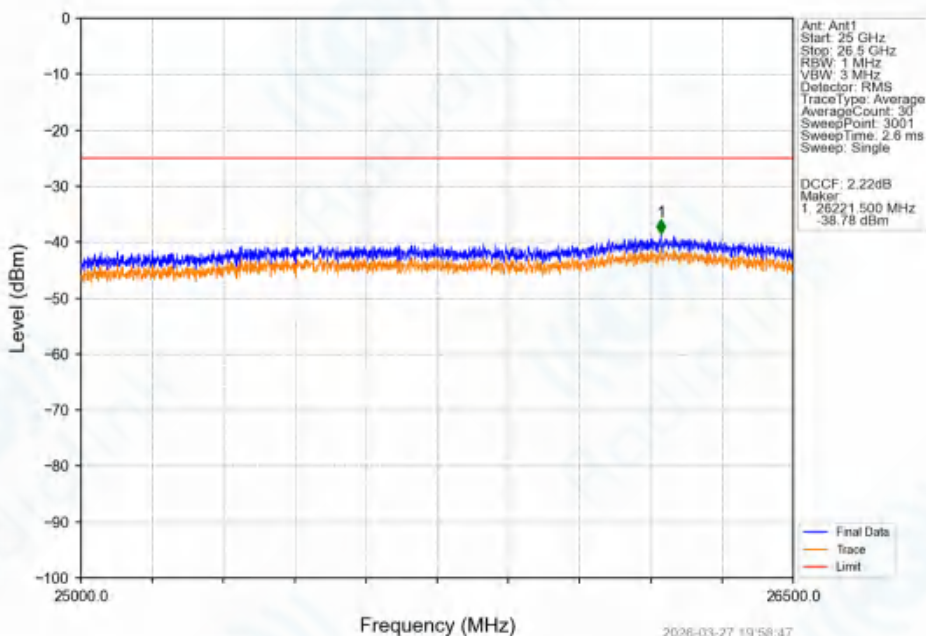

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_20MHz_QPSK_HCH_2680MHz_RB_1_0_NTNV

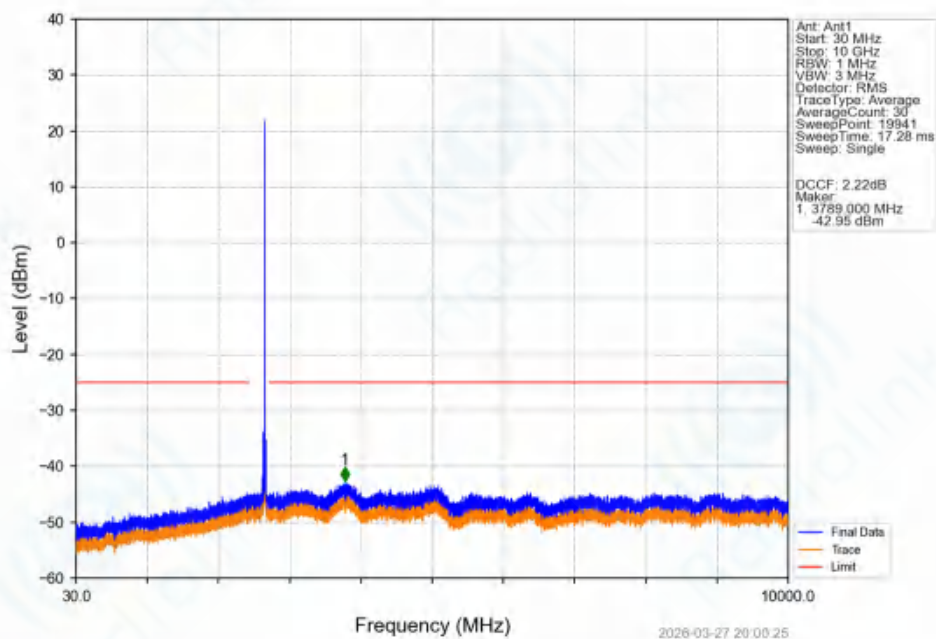


Band41_20MHz_QPSK_HCH_2680MHz_RB_1_0_NTNV

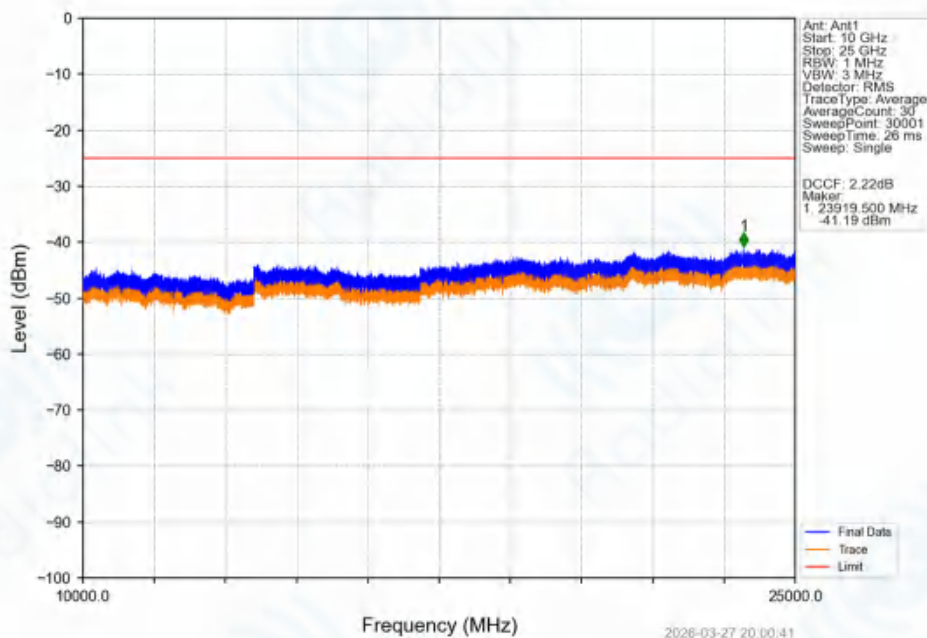


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_20MHz_QPSK_HCH_2680MHz_RB_1_0_NTNV

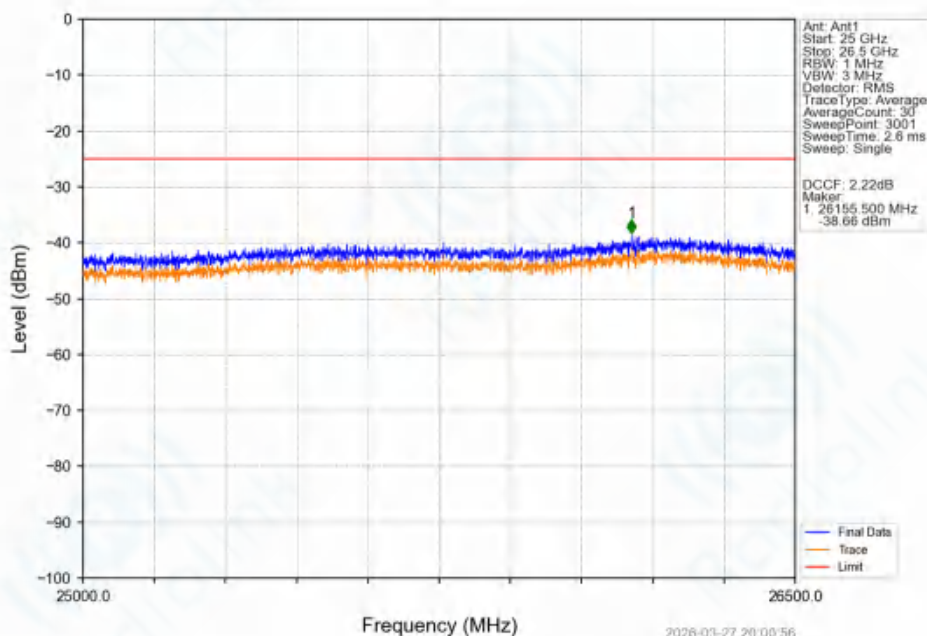


Band41_20MHz_QPSK_HCH_2680MHz_RB_1_99_NTNV

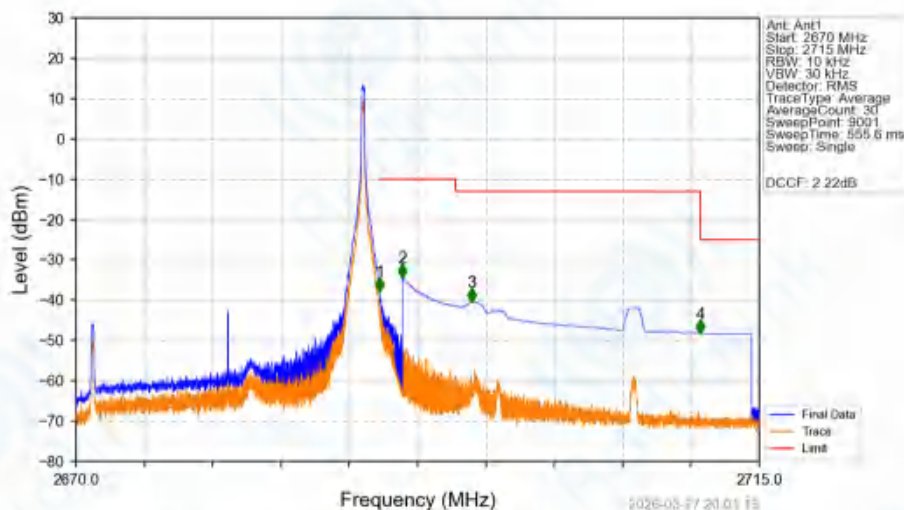


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2670	2690	0.02	CHP	1	2690.005	-37.89	-10	Pass
2690	2691	0.02	CHP	2	2691.500	-34.40	-10	Pass
2691	2695	1	CHP	3	2696.060	-40.42	-13	Pass
2695	2711.121	1	CHP	4	2711.125	-48.30	-25	Pass

Band41_20MHz_QPSK_HCH_2680MHz_RB_100_0_NTNV

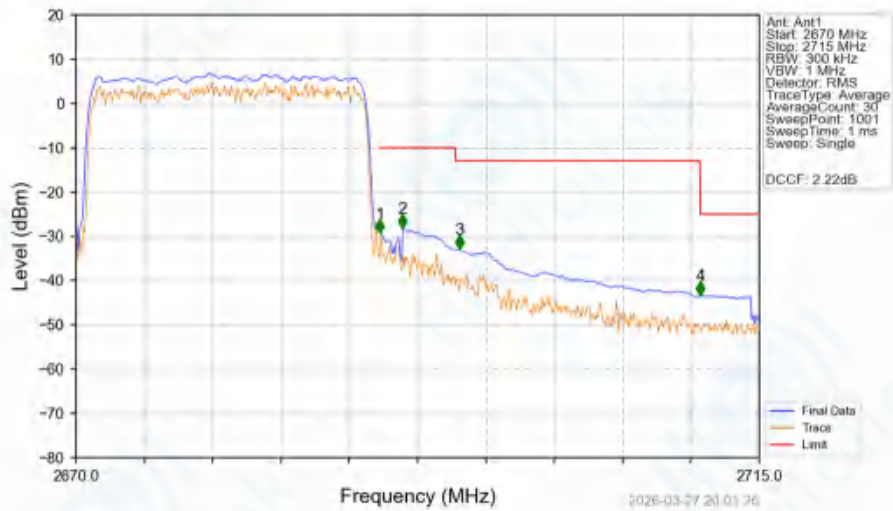

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2670	2690	0.422	CHP	/	/	/	/	/
2690	2691	0.422	CHP	1	2690.025	-29.31	-10	Pass
2691	2695	1	CHP	2	2691.510	-28.21	-10	Pass
2695	2711.121	1	CHP	3	2695.245	-32.94	-13	Pass
2711.121	2715	1	CHP	4	2711.130	-43.41	-25	Pass

Band41_20MHz_16QAM_LCH_2506MHz_RB_1_0_NTNV

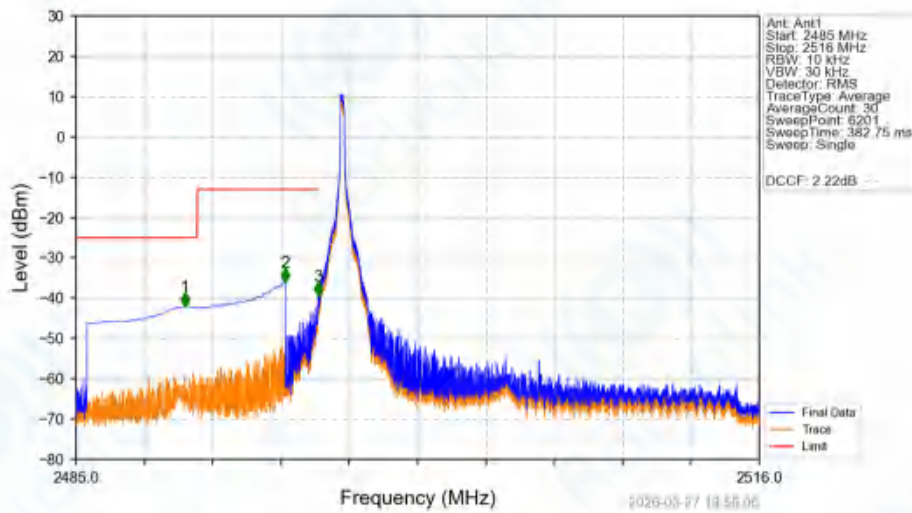


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2489.940	-42.01	-25	Pass
2490.5	2495	1	CHP	2	2494.485	-36.04	-13	Pass
2495	2496	0.01	/	3	2495.990	-39.54	-13	Pass
2496	2516	0.01	/	/	/	/	/	/

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

Band41_20MHz_16QAM_LCH_2506MHz_RB_1_0_NTNV

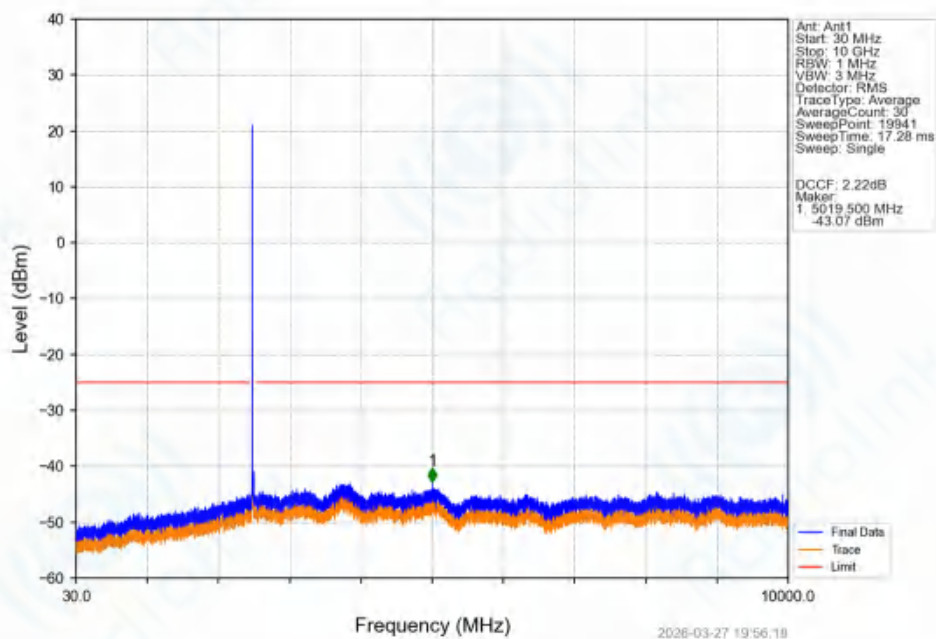


Band41_20MHz_16QAM_LCH_2506MHz_RB_1_0_NTNV

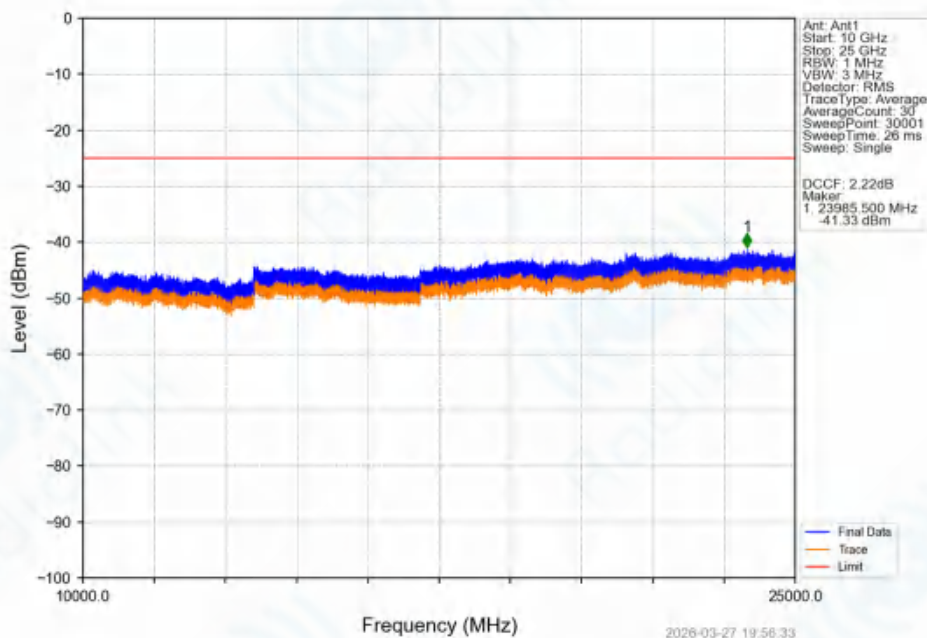


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_20MHz_16QAM_LCH_2506MHz_RB_1_0_NTNV

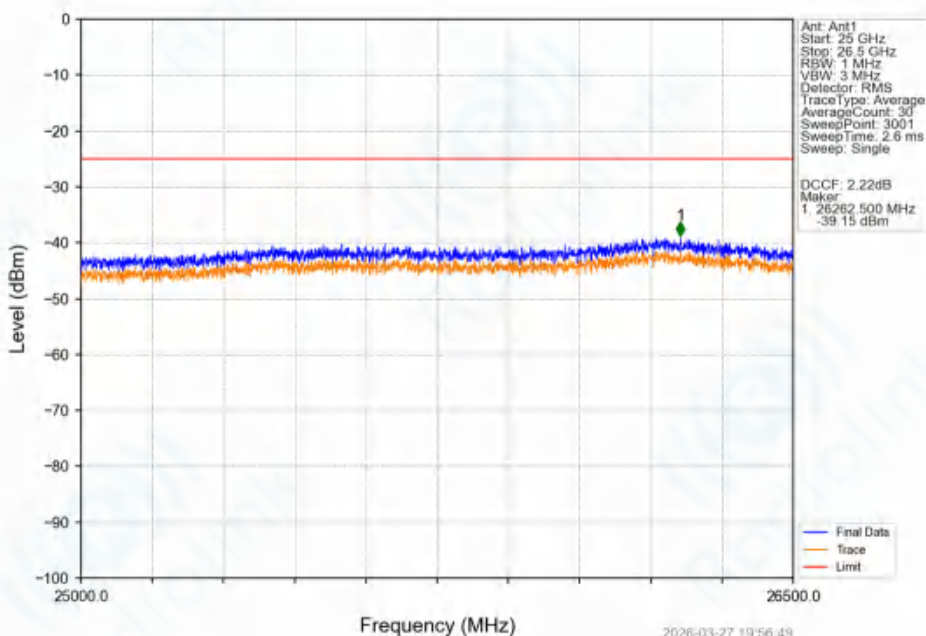


Band41_20MHz_16QAM_LCH_2506MHz_RB_100_0_NTNV

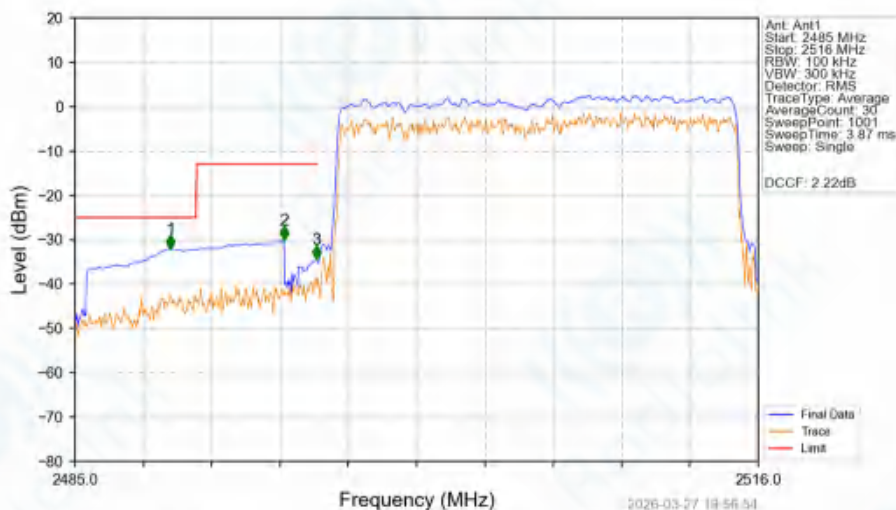


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2489.340	-32.04	-25	Pass
2490.5	2495	1	CHP	2	2494.486	-30.10	-13	Pass
2495	2496	0.213	CHP	3	2495.943	-34.42	-13	Pass
2496	2516	0.213	CHP	/	/	/	/	/

Band41_20MHz_16QAM_MCH_2593MHz_RB_1_0_NTNV

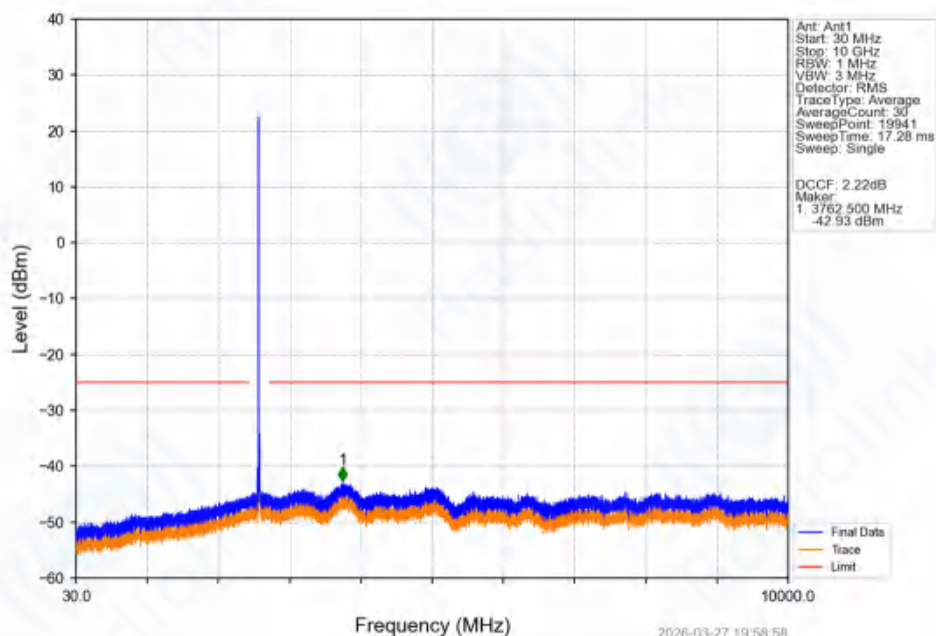


Band41_20MHz_16QAM_MCH_2593MHz_RB_1_0_NTNV

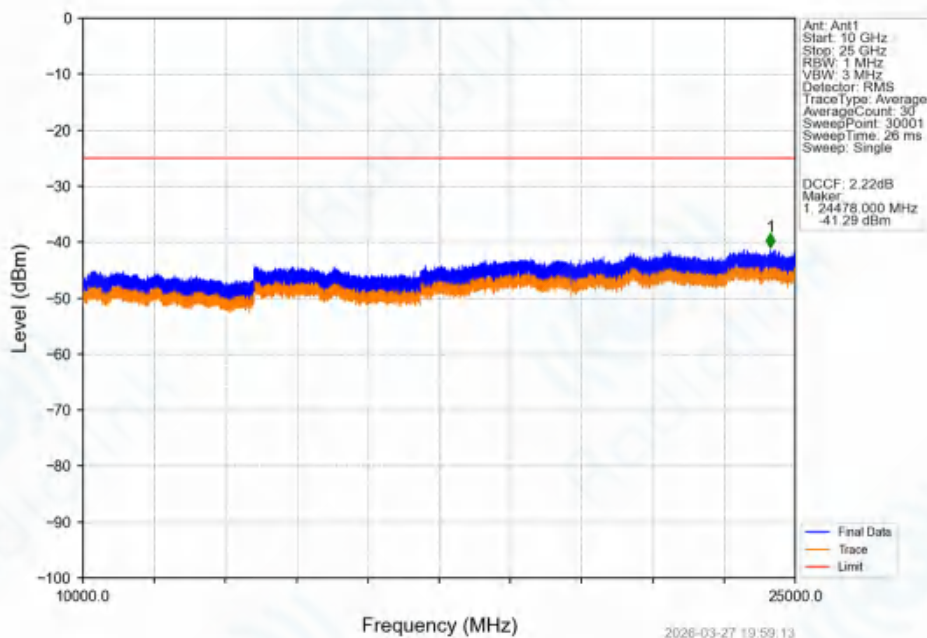


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_20MHz_16QAM_MCH_2593MHz_RB_1_0_NTNV

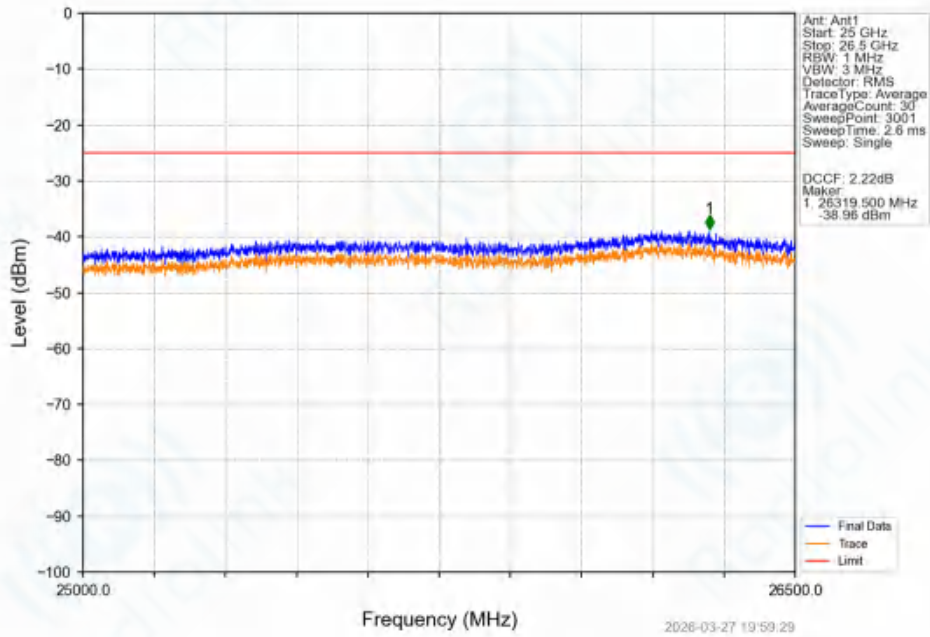


Band41_20MHz_16QAM_HCH_2680MHz_RB_1_0_NTNV

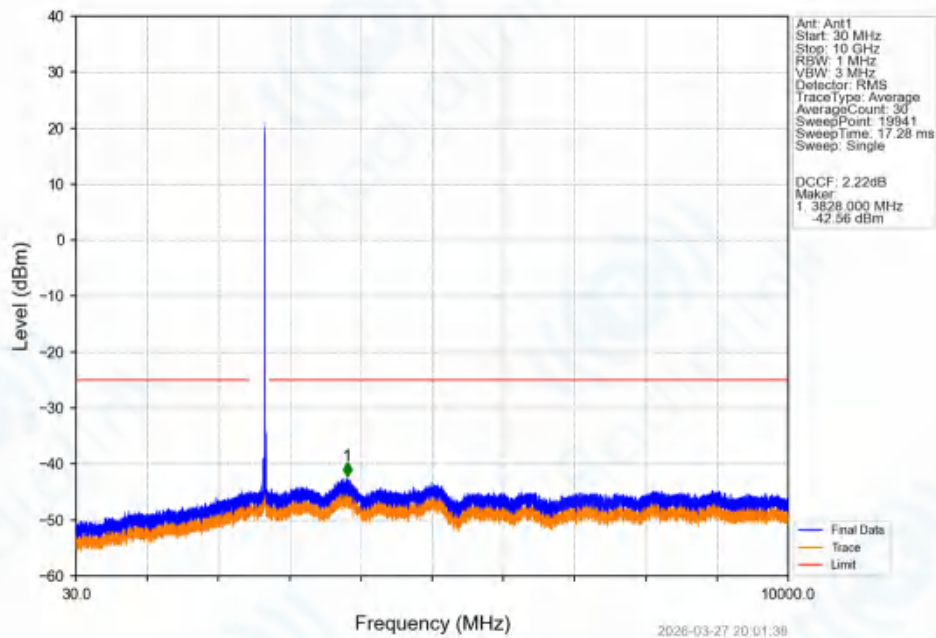
Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694


Band41_20MHz_16QAM_HCH_2680MHz_RB_1_0_NTNV

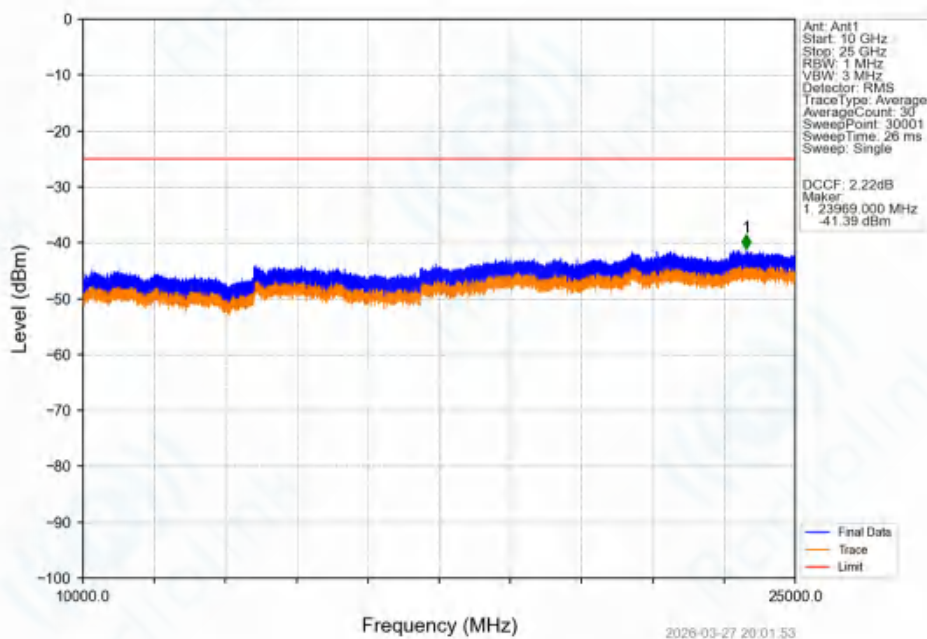


Band41_20MHz_16QAM_HCH_2680MHz_RB_1_0_NTNV

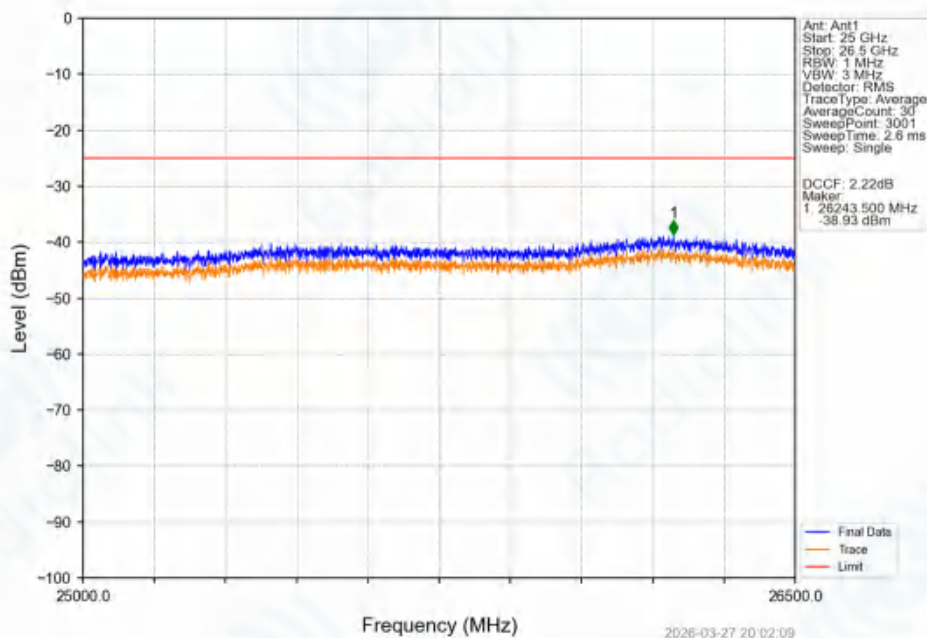

Band41_20MHz_16QAM_HCH_2680MHz_RB_1_99_NTNV

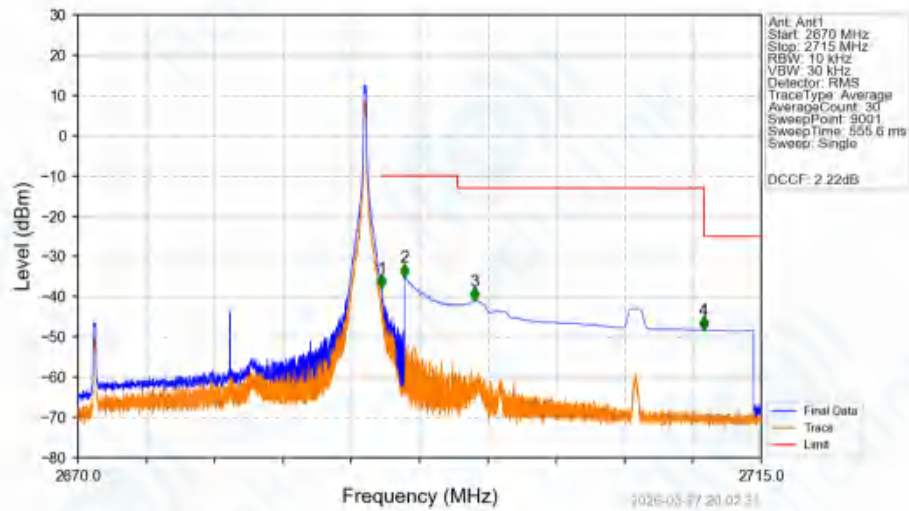


Band41_20MHz_16QAM_HCH_2680MHz_RB_100_0_NTNV

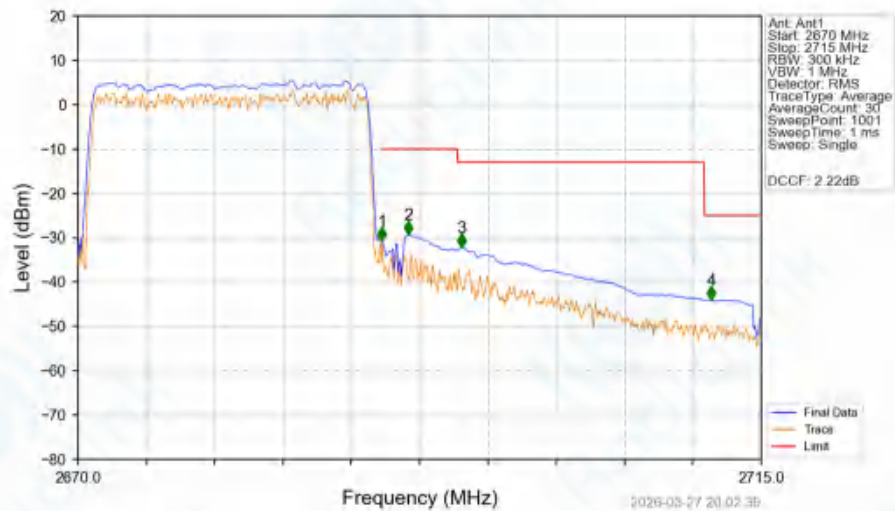


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_20MHz_64QAM_LCH_2506MHz_RB_1_0_NTNV

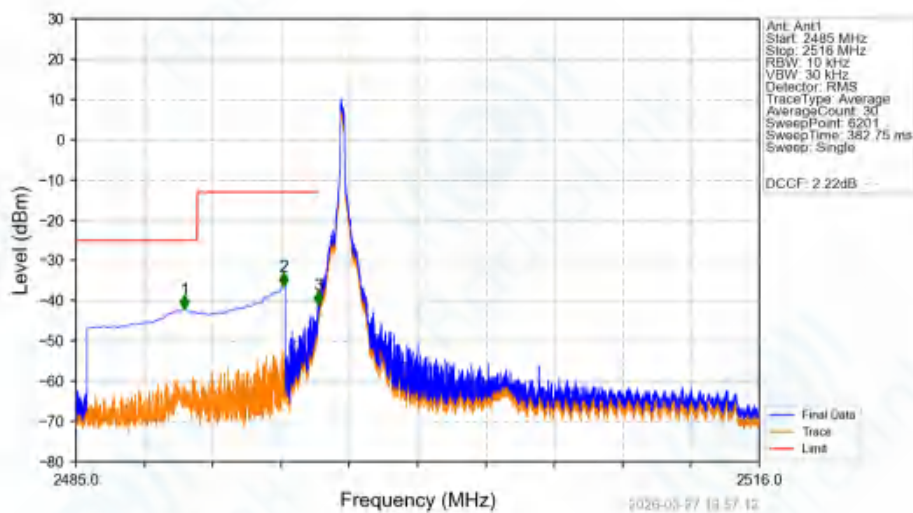


Band41_20MHz_64QAM_LCH_2506MHz_RB_1_0_NTNV

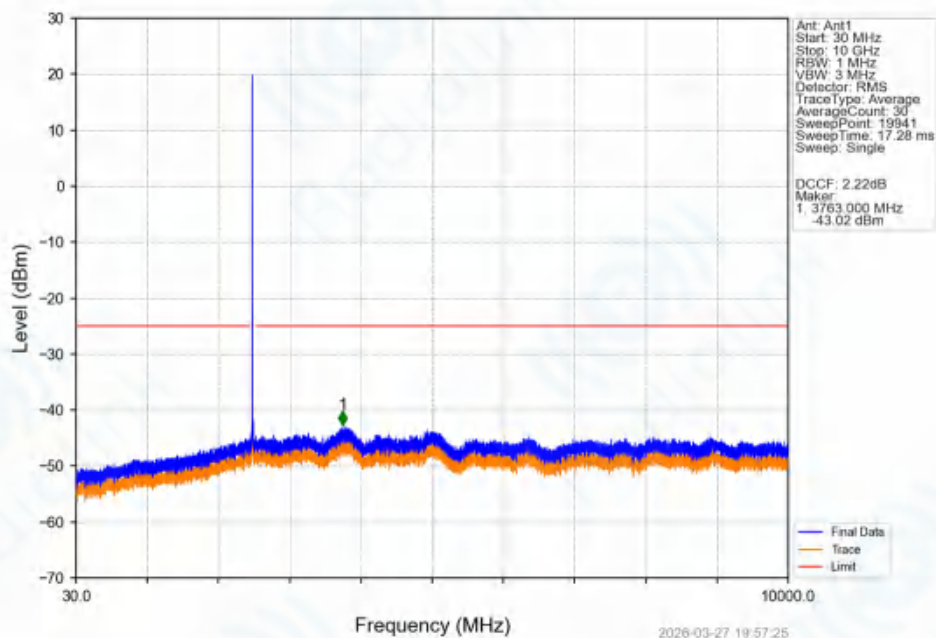


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_20MHz_64QAM_LCH_2506MHz_RB_1_0_NTNV

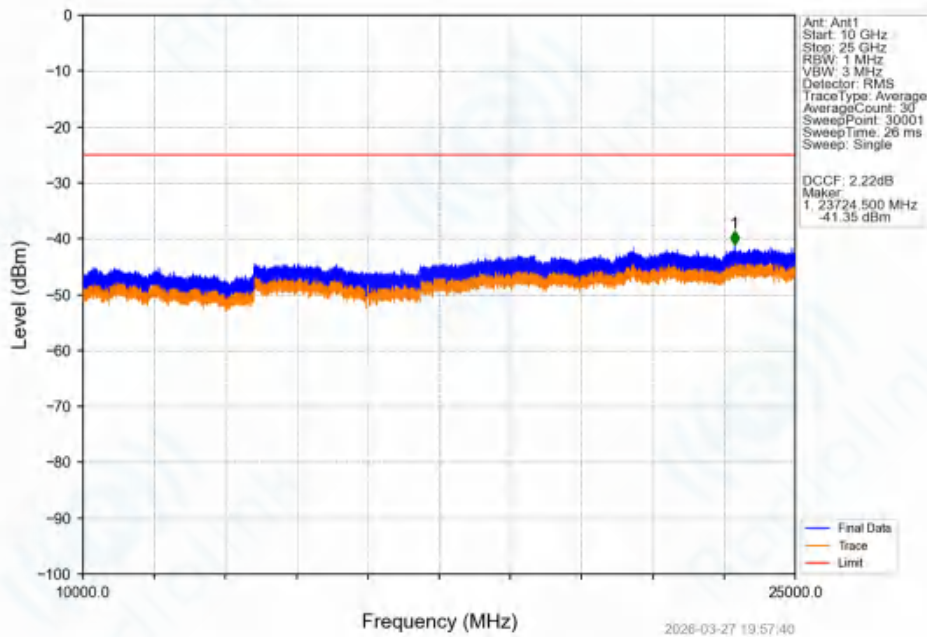


Band41_20MHz_64QAM_LCH_2506MHz_RB_1_0_NTNV

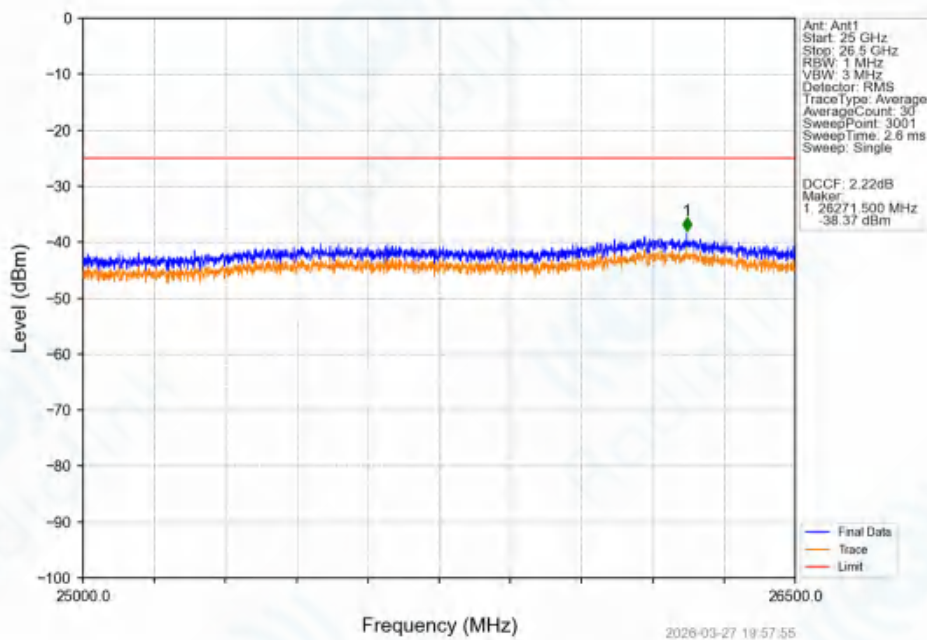

Band41_20MHz_64QAM_LCH_2506MHz_RB_100_0_NTNV

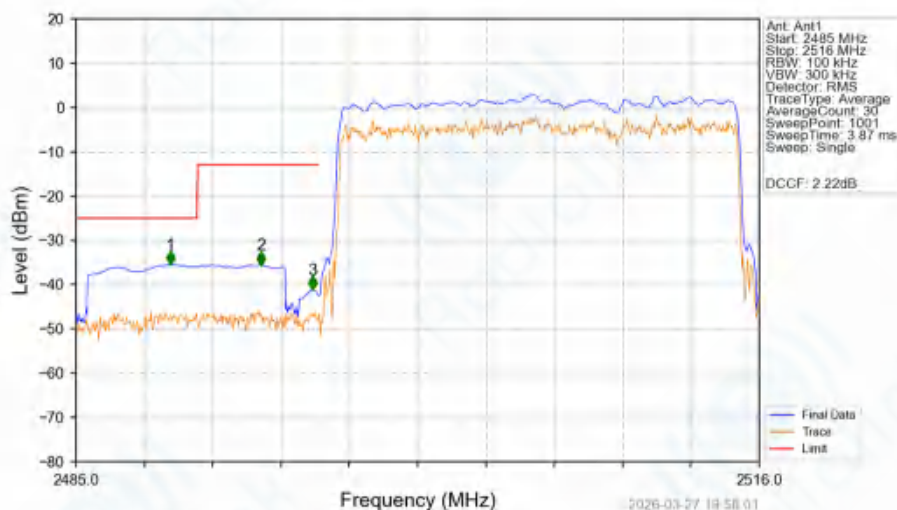


Band41_20MHz_64QAM_MCH_2593MHz_RB_1_0_NTNV

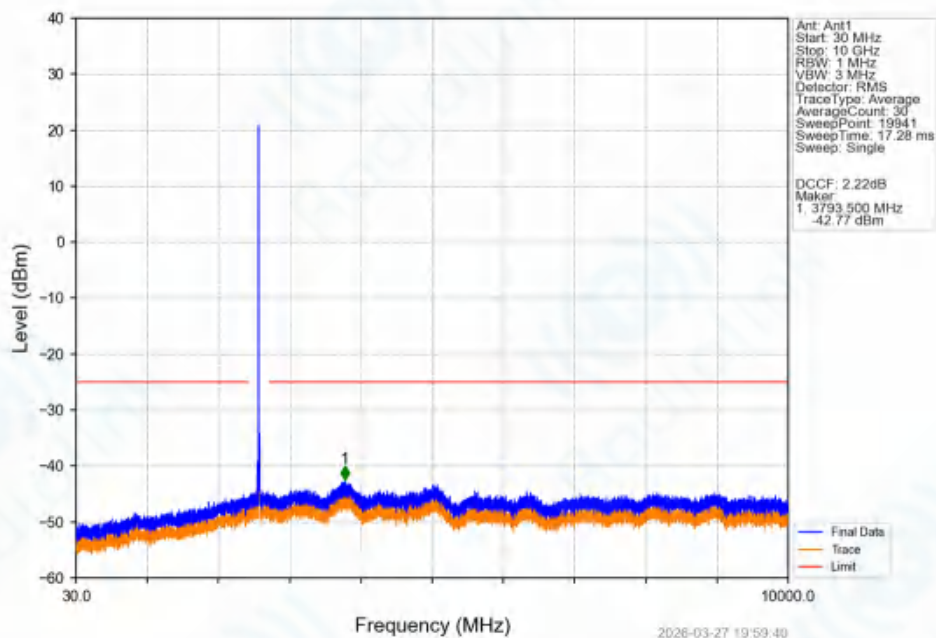


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_20MHz_64QAM_MCH_2593MHz_RB_1_0_NTNV

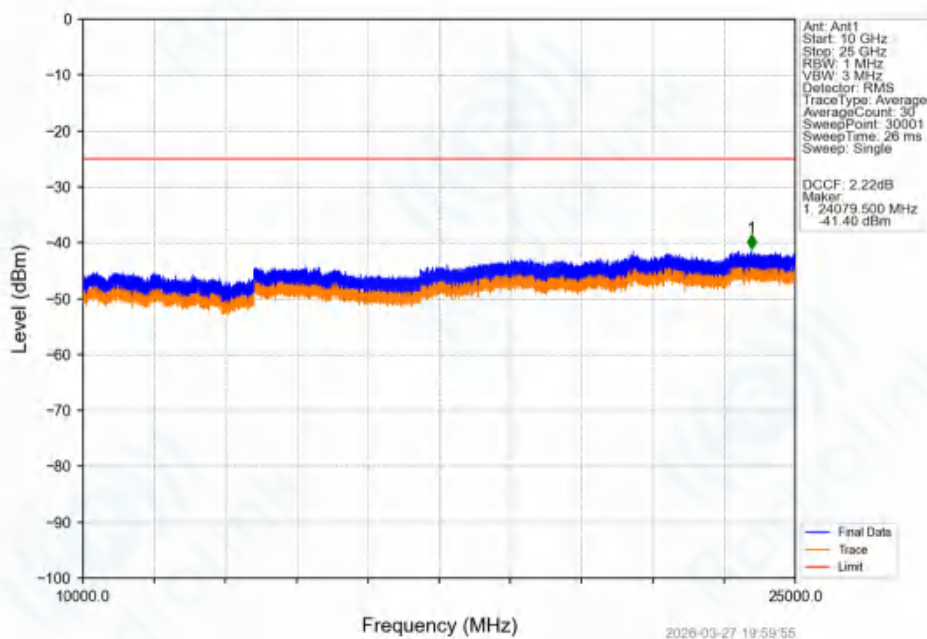


Band41_20MHz_64QAM_MCH_2593MHz_RB_1_0_NTNV

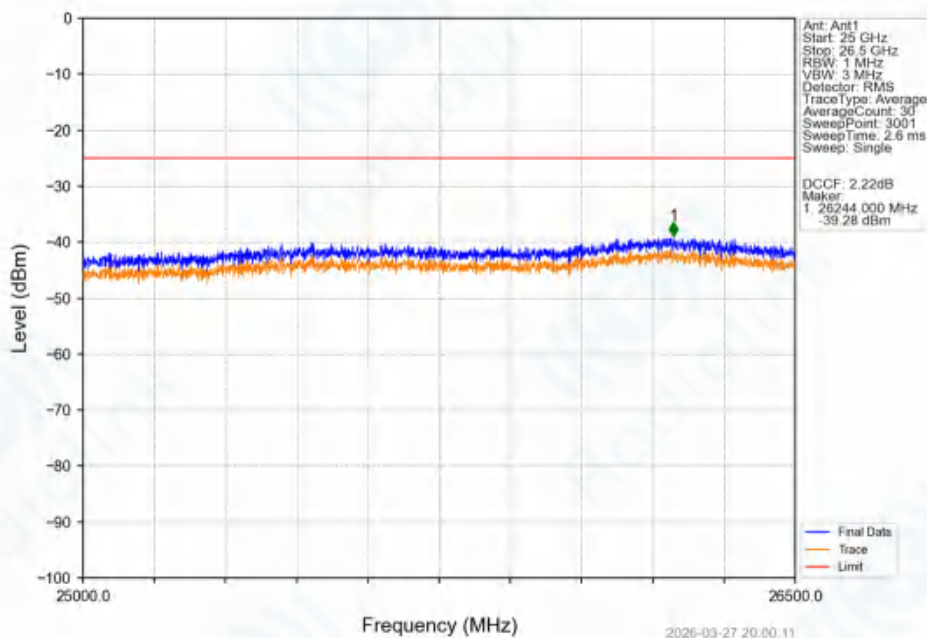


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694


Band41_20MHz_64QAM_HCH_2680MHz_RB_1_0_NTNV

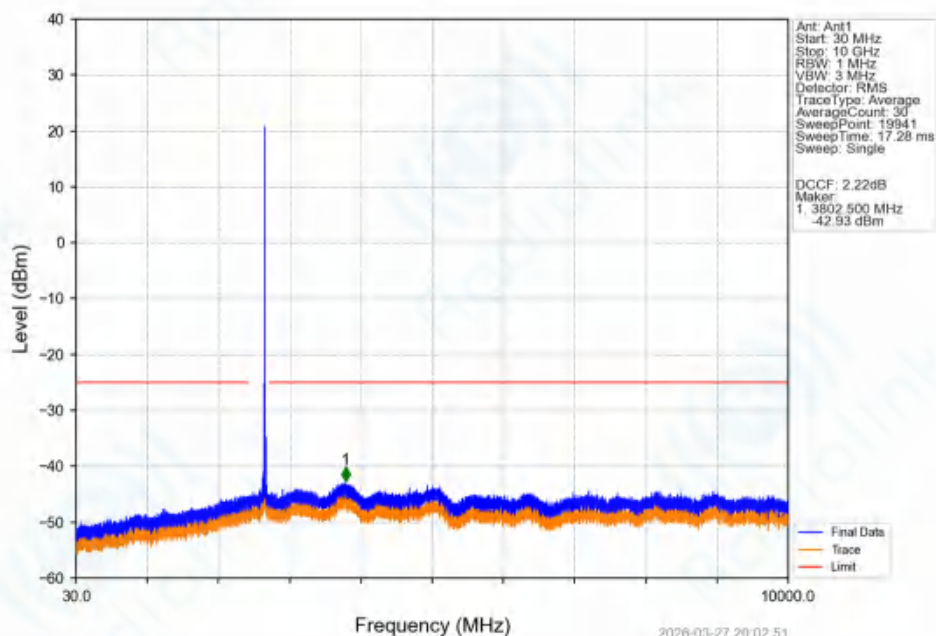


Band41_20MHz_64QAM_HCH_2680MHz_RB_1_0_NTNV

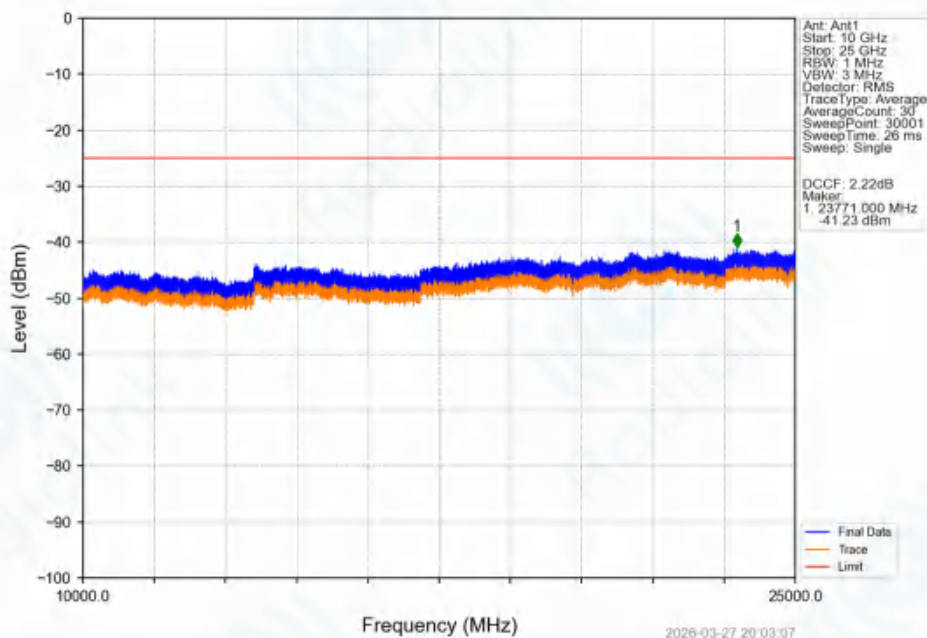

Band41_20MHz_64QAM_HCH_2680MHz_RB_1_0_NTNV

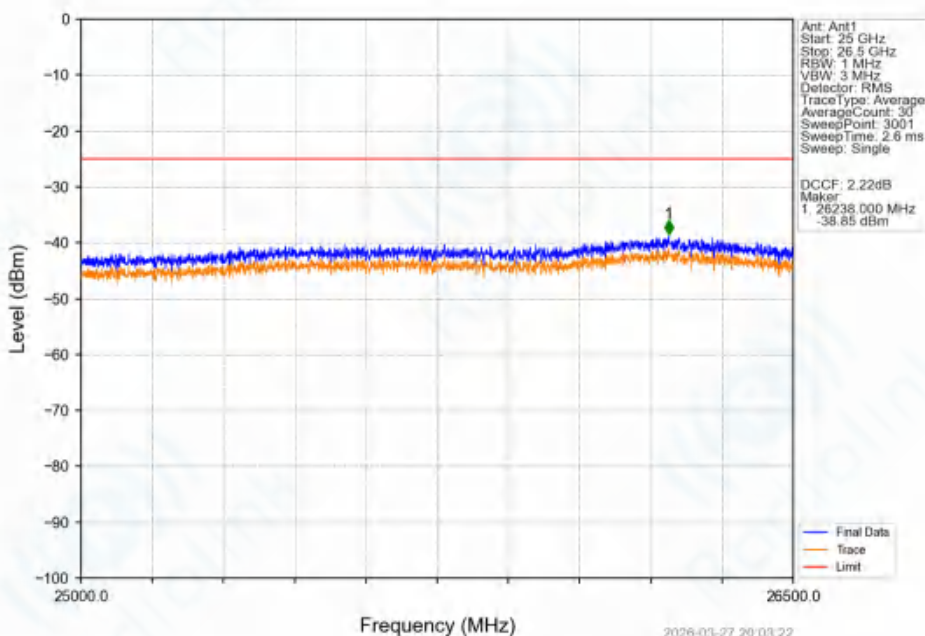

Band41_20MHz_64QAM_HCH_2680MHz_RB_1_99_NTNV

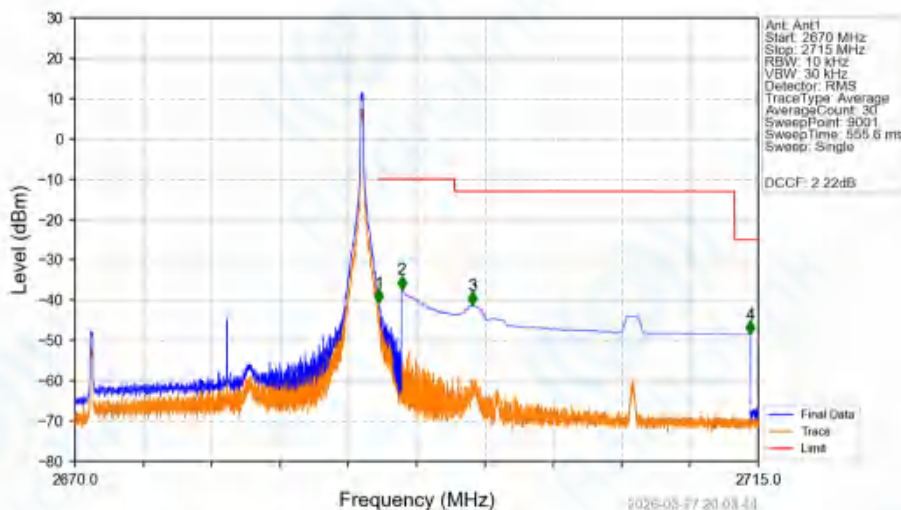


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2670	2690	0.02	CHP	1	2690.005	-40.67	-10	Pass
2690	2691	0.02	CHP	2	2691.525	-37.36	-10	Pass
2691	2695	1	CHP	3	2696.160	-41.35	-13	Pass
2695	2713.43	1	CHP	4	2714.490	-48.46	-25	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

Band41_20MHz_64QAM_HCH_2680MHz_RB_100_0_NTNV

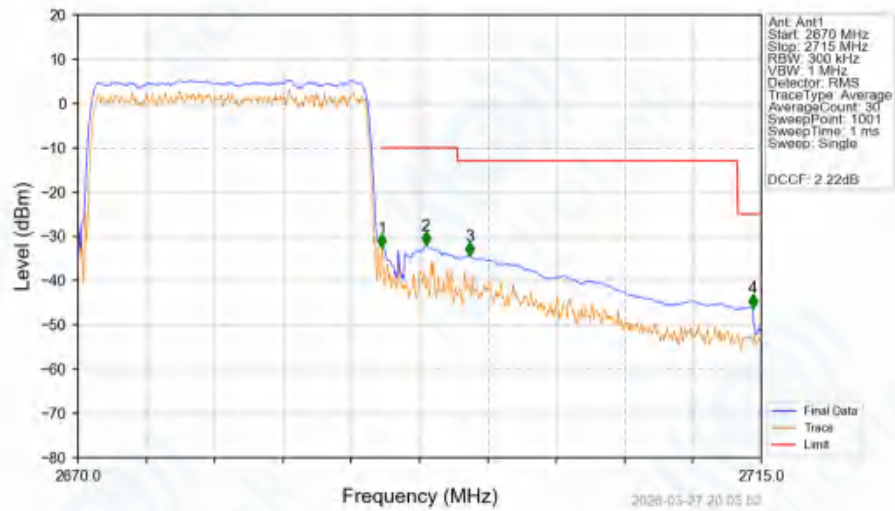

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2670	2690	0.469	CHP	/	/	/	/	/
2690	2691	0.469	CHP	1	2690.025	-32.67	-10	Pass
2691	2695	1	CHP	2	2692.905	-32.03	-10	Pass
2695	2713.43	1	CHP	3	2695.785	-34.40	-13	Pass
2713.43	2715	1	CHP	4	2714.460	-46.16	-25	Pass



Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

7. Frequency Stability (IC)

7.1 Test Result

7.1.1 B41_5MHz

Band: 41 / Bandwidth: 5MHz / NTNV									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	OBW (FL - FH) (MHz)		Limit	Verdict
		Size	Offset			FL	FH		
QPSK	2498.5	25	0	20	3.27	2496.205	2500.806	2496 to 2690	Pass
					3.85	2496.190	2500.813	2496 to 2690	Pass
					4.43	2496.205	2500.810	2496 to 2690	Pass
				-30	3.85	2496.191	2500.811	2496 to 2690	Pass
				-20	3.85	2496.204	2500.821	2496 to 2690	Pass
				-10	3.85	2496.202	2500.808	2496 to 2690	Pass
				0	3.85	2496.198	2500.812	2496 to 2690	Pass
				10	3.85	2496.196	2500.803	2496 to 2690	Pass
				30	3.85	2496.196	2500.798	2496 to 2690	Pass
				40	3.85	2496.199	2500.819	2496 to 2690	Pass
				50	3.85	2496.204	2500.799	2496 to 2690	Pass
	2593	25	0	20	3.27	2590.695	2595.299	2496 to 2690	Pass
					3.85	2590.677	2595.309	2496 to 2690	Pass
					4.43	2590.686	2595.307	2496 to 2690	Pass
				-30	3.85	2590.709	2595.308	2496 to 2690	Pass
				-20	3.85	2590.706	2595.308	2496 to 2690	Pass
				-10	3.85	2590.707	2595.309	2496 to 2690	Pass
				0	3.85	2590.687	2595.314	2496 to 2690	Pass
				10	3.85	2590.702	2595.303	2496 to 2690	Pass
				30	3.85	2590.711	2595.304	2496 to 2690	Pass
				40	3.85	2590.692	2595.307	2496 to 2690	Pass
				50	3.85	2590.713	2595.305	2496 to 2690	Pass
	2687.5	25	0	20	3.27	2685.202	2689.807	2496 to 2690	Pass
					3.85	2685.199	2689.814	2496 to 2690	Pass
					4.43	2685.202	2689.818	2496 to 2690	Pass
				-30	3.85	2685.191	2689.806	2496 to 2690	Pass
				-20	3.85	2685.207	2689.799	2496 to 2690	Pass
				-10	3.85	2685.202	2689.819	2496 to 2690	Pass
				0	3.85	2685.201	2689.812	2496 to 2690	Pass
				10	3.85	2685.201	2689.811	2496 to 2690	Pass
				30	3.85	2685.205	2689.789	2496 to 2690	Pass
				40	3.85	2685.200	2689.810	2496 to 2690	Pass
				50	3.85	2685.186	2689.805	2496 to 2690	Pass
16QAM	2498.5	25	0	20	3.27	2496.200	2500.811	2496 to 2690	Pass
					3.85	2496.208	2500.805	2496 to 2690	Pass
					4.43	2496.174	2500.823	2496 to 2690	Pass
				-30	3.85	2496.194	2500.810	2496 to 2690	Pass
				-20	3.85	2496.186	2500.803	2496 to 2690	Pass
				-10	3.85	2496.206	2500.801	2496 to 2690	Pass
				0	3.85	2496.205	2500.806	2496 to 2690	Pass
				10	3.85	2496.211	2500.807	2496 to 2690	Pass
				30	3.85	2496.210	2500.807	2496 to 2690	Pass
				40	3.85	2496.209	2500.810	2496 to 2690	Pass
				50	3.85	2496.209	2500.808	2496 to 2690	Pass
	2593	25	0	20	3.27	2590.705	2595.303	2496 to 2690	Pass
					3.85	2590.690	2595.311	2496 to 2690	Pass
					4.43	2590.709	2595.318	2496 to 2690	Pass
				-30	3.85	2590.697	2595.306	2496 to 2690	Pass
				-20	3.85	2590.697	2595.311	2496 to 2690	Pass
				-10	3.85	2590.707	2595.296	2496 to 2690	Pass
				0	3.85	2590.706	2595.304	2496 to 2690	Pass



Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

64QAM	2687.5	25	0	10	3.85	2590.701	2595.316	2496 to 2690	Pass
				30	3.85	2590.688	2595.293	2496 to 2690	Pass
				40	3.85	2590.708	2595.311	2496 to 2690	Pass
				50	3.85	2590.706	2595.315	2496 to 2690	Pass
				20	3.27	2685.191	2689.808	2496 to 2690	Pass
					3.85	2685.195	2689.793	2496 to 2690	Pass
					4.43	2685.205	2689.806	2496 to 2690	Pass
				-30	3.85	2685.202	2689.811	2496 to 2690	Pass
				-20	3.85	2685.194	2689.796	2496 to 2690	Pass
				-10	3.85	2685.203	2689.807	2496 to 2690	Pass
				0	3.85	2685.194	2689.803	2496 to 2690	Pass
				10	3.85	2685.193	2689.799	2496 to 2690	Pass
				30	3.85	2685.197	2689.812	2496 to 2690	Pass
				40	3.85	2685.215	2689.807	2496 to 2690	Pass
				50	3.85	2685.208	2689.795	2496 to 2690	Pass
	2498.5	25	0	20	3.27	2496.203	2500.782	2496 to 2690	Pass
					3.85	2496.214	2500.812	2496 to 2690	Pass
					4.43	2496.211	2500.793	2496 to 2690	Pass
				-30	3.85	2496.193	2500.803	2496 to 2690	Pass
				-20	3.85	2496.200	2500.805	2496 to 2690	Pass
				-10	3.85	2496.206	2500.791	2496 to 2690	Pass
				0	3.85	2496.196	2500.810	2496 to 2690	Pass
				10	3.85	2496.199	2500.809	2496 to 2690	Pass
				30	3.85	2496.199	2500.796	2496 to 2690	Pass
				40	3.85	2496.205	2500.795	2496 to 2690	Pass
				50	3.85	2496.204	2500.798	2496 to 2690	Pass
	2593	25	0	20	3.27	2590.694	2595.308	2496 to 2690	Pass
					3.85	2590.695	2595.297	2496 to 2690	Pass
					4.43	2590.698	2595.307	2496 to 2690	Pass
				-30	3.85	2590.699	2595.318	2496 to 2690	Pass
				-20	3.85	2590.698	2595.296	2496 to 2690	Pass
				-10	3.85	2590.708	2595.309	2496 to 2690	Pass
				0	3.85	2590.708	2595.294	2496 to 2690	Pass
				10	3.85	2590.705	2595.296	2496 to 2690	Pass
				30	3.85	2590.706	2595.312	2496 to 2690	Pass
				40	3.85	2590.698	2595.305	2496 to 2690	Pass
				50	3.85	2590.679	2595.299	2496 to 2690	Pass
	2687.5	25	0	20	3.27	2685.198	2689.795	2496 to 2690	Pass
					3.85	2685.205	2689.803	2496 to 2690	Pass
					4.43	2685.206	2689.811	2496 to 2690	Pass
				-30	3.85	2685.204	2689.804	2496 to 2690	Pass
				-20	3.85	2685.195	2689.798	2496 to 2690	Pass
				-10	3.85	2685.215	2689.807	2496 to 2690	Pass
				0	3.85	2685.200	2689.795	2496 to 2690	Pass
				10	3.85	2685.199	2689.806	2496 to 2690	Pass
				30	3.85	2685.209	2689.806	2496 to 2690	Pass
				40	3.85	2685.204	2689.797	2496 to 2690	Pass
				50	3.85	2685.205	2689.806	2496 to 2690	Pass

7.1.2 B41_10MHz

Band: 41 / Bandwidth: 10MHz / NTNV									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	OBW (FL - FH) (MHz)		Limit	Verdict
		Size	Offset			FL	FH		
QPSK	2501	50	0	20	3.27	2496.454	2505.536	2496 to 2690	Pass
					3.85	2496.470	2505.552	2496 to 2690	Pass
					4.43	2496.469	2505.532	2496 to 2690	Pass
				-30	3.85	2496.486	2505.529	2496 to 2690	Pass
				-20	3.85	2496.480	2505.547	2496 to 2690	Pass
				-10	3.85	2496.484	2505.562	2496 to 2690	Pass
				0	3.85	2496.475	2505.553	2496 to 2690	Pass
				10	3.85	2496.471	2505.545	2496 to 2690	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

				30	3.85	2496.474	2505.552	2496 to 2690	Pass
				40	3.85	2496.479	2505.561	2496 to 2690	Pass
				50	3.85	2496.481	2505.564	2496 to 2690	Pass
	2593	50	0	20	3.27	2588.501	2597.547	2496 to 2690	Pass
					3.85	2588.479	2597.544	2496 to 2690	Pass
					4.43	2588.466	2597.540	2496 to 2690	Pass
				-30	3.85	2588.469	2597.535	2496 to 2690	Pass
				-20	3.85	2588.455	2597.561	2496 to 2690	Pass
				-10	3.85	2588.471	2597.539	2496 to 2690	Pass
				0	3.85	2588.483	2597.552	2496 to 2690	Pass
				10	3.85	2588.476	2597.535	2496 to 2690	Pass
				30	3.85	2588.465	2597.560	2496 to 2690	Pass
				40	3.85	2588.497	2597.545	2496 to 2690	Pass
				50	3.85	2588.475	2597.558	2496 to 2690	Pass
	2685	50	0	20	3.27	2680.485	2689.540	2496 to 2690	Pass
					3.85	2680.475	2689.534	2496 to 2690	Pass
					4.43	2680.486	2689.550	2496 to 2690	Pass
				-30	3.85	2680.497	2689.537	2496 to 2690	Pass
				-20	3.85	2680.494	2689.530	2496 to 2690	Pass
				-10	3.85	2680.476	2689.547	2496 to 2690	Pass
				0	3.85	2680.481	2689.537	2496 to 2690	Pass
				10	3.85	2680.481	2689.546	2496 to 2690	Pass
				30	3.85	2680.485	2689.550	2496 to 2690	Pass
				40	3.85	2680.490	2689.533	2496 to 2690	Pass
				50	3.85	2680.466	2689.528	2496 to 2690	Pass
16QAM	2501	50	0	20	3.27	2496.489	2505.551	2496 to 2690	Pass
					3.85	2496.459	2505.564	2496 to 2690	Pass
					4.43	2496.466	2505.532	2496 to 2690	Pass
				-30	3.85	2496.471	2505.561	2496 to 2690	Pass
				-20	3.85	2496.483	2505.537	2496 to 2690	Pass
				-10	3.85	2496.478	2505.550	2496 to 2690	Pass
				0	3.85	2496.473	2505.552	2496 to 2690	Pass
				10	3.85	2496.472	2505.554	2496 to 2690	Pass
				30	3.85	2496.479	2505.536	2496 to 2690	Pass
				40	3.85	2496.470	2505.531	2496 to 2690	Pass
				50	3.85	2496.485	2505.585	2496 to 2690	Pass
	2593	50	0	20	3.27	2588.498	2597.535	2496 to 2690	Pass
					3.85	2588.492	2597.547	2496 to 2690	Pass
					4.43	2588.460	2597.529	2496 to 2690	Pass
				-30	3.85	2588.477	2597.560	2496 to 2690	Pass
				-20	3.85	2588.490	2597.546	2496 to 2690	Pass
				-10	3.85	2588.489	2597.563	2496 to 2690	Pass
				0	3.85	2588.477	2597.534	2496 to 2690	Pass
				10	3.85	2588.440	2597.533	2496 to 2690	Pass
				30	3.85	2588.475	2597.563	2496 to 2690	Pass
				40	3.85	2588.475	2597.546	2496 to 2690	Pass
				50	3.85	2588.475	2597.574	2496 to 2690	Pass
	2685	50	0	20	3.27	2680.463	2689.536	2496 to 2690	Pass
					3.85	2680.472	2689.574	2496 to 2690	Pass
					4.43	2680.502	2689.550	2496 to 2690	Pass
				-30	3.85	2680.484	2689.538	2496 to 2690	Pass
				-20	3.85	2680.502	2689.536	2496 to 2690	Pass
				-10	3.85	2680.472	2689.534	2496 to 2690	Pass
				0	3.85	2680.492	2689.537	2496 to 2690	Pass
				10	3.85	2680.461	2689.527	2496 to 2690	Pass
				30	3.85	2680.469	2689.574	2496 to 2690	Pass
				40	3.85	2680.480	2689.537	2496 to 2690	Pass
				50	3.85	2680.475	2689.556	2496 to 2690	Pass
64QAM	2501	50	0	20	3.27	2496.459	2505.564	2496 to 2690	Pass
					3.85	2496.463	2505.561	2496 to 2690	Pass
					4.43	2496.468	2505.564	2496 to 2690	Pass
				-30	3.85	2496.481	2505.551	2496 to 2690	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

				-20	3.85	2496.486	2505.528	2496 to 2690	Pass
				-10	3.85	2496.475	2505.557	2496 to 2690	Pass
				0	3.85	2496.461	2505.551	2496 to 2690	Pass
				10	3.85	2496.475	2505.563	2496 to 2690	Pass
				30	3.85	2496.471	2505.539	2496 to 2690	Pass
				40	3.85	2496.492	2505.530	2496 to 2690	Pass
				50	3.85	2496.483	2505.559	2496 to 2690	Pass
	2593	50	0	20	3.27	2588.476	2597.564	2496 to 2690	Pass
					3.85	2588.495	2597.547	2496 to 2690	Pass
					4.43	2588.467	2597.528	2496 to 2690	Pass
				-30	3.85	2588.460	2597.551	2496 to 2690	Pass
				-20	3.85	2588.481	2597.528	2496 to 2690	Pass
				-10	3.85	2588.493	2597.535	2496 to 2690	Pass
				0	3.85	2588.474	2597.541	2496 to 2690	Pass
				10	3.85	2588.482	2597.537	2496 to 2690	Pass
				30	3.85	2588.491	2597.558	2496 to 2690	Pass
				40	3.85	2588.475	2597.548	2496 to 2690	Pass
				50	3.85	2588.488	2597.555	2496 to 2690	Pass
				2685	50	0	20	3.27	2680.489
	3.85	2680.464	2689.529					2496 to 2690	Pass
	4.43	2680.475	2689.522					2496 to 2690	Pass
	-30	3.85	2680.477				2689.547	2496 to 2690	Pass
	-20	3.85	2680.481				2689.539	2496 to 2690	Pass
	-10	3.85	2680.462				2689.536	2496 to 2690	Pass
	0	3.85	2680.481				2689.577	2496 to 2690	Pass
	10	3.85	2680.482				2689.528	2496 to 2690	Pass
	30	3.85	2680.471				2689.530	2496 to 2690	Pass
	40	3.85	2680.498				2689.537	2496 to 2690	Pass
	50	3.85	2680.475				2689.555	2496 to 2690	Pass

7.1.3 B41_15MHz

Band: 41 / Bandwidth: 15MHz / NTN									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	OBW (FL - FH) (MHz)		Limit	Verdict
		Size	Offset			FL	FH		
QPSK	2503.5	75	0	20	3.27	2496.460	2510.603	2496 to 2690	Pass
					3.85	2496.466	2510.596	2496 to 2690	Pass
					4.43	2496.448	2510.555	2496 to 2690	Pass
				-30	3.85	2496.475	2510.567	2496 to 2690	Pass
				-20	3.85	2496.435	2510.544	2496 to 2690	Pass
				-10	3.85	2496.469	2510.574	2496 to 2690	Pass
				0	3.85	2496.464	2510.606	2496 to 2690	Pass
				10	3.85	2496.443	2510.547	2496 to 2690	Pass
				30	3.85	2496.470	2510.591	2496 to 2690	Pass
				40	3.85	2496.437	2510.546	2496 to 2690	Pass
				50	3.85	2496.477	2510.561	2496 to 2690	Pass
	2593	75	0	20	3.27	2585.973	2600.061	2496 to 2690	Pass
					3.85	2585.969	2600.036	2496 to 2690	Pass
					4.43	2585.934	2600.108	2496 to 2690	Pass
				-30	3.85	2585.937	2600.092	2496 to 2690	Pass
				-20	3.85	2585.886	2600.077	2496 to 2690	Pass
				-10	3.85	2585.961	2600.093	2496 to 2690	Pass
				0	3.85	2585.953	2600.068	2496 to 2690	Pass
				10	3.85	2585.918	2600.067	2496 to 2690	Pass
				30	3.85	2585.949	2600.069	2496 to 2690	Pass
				40	3.85	2585.942	2600.047	2496 to 2690	Pass
				50	3.85	2585.941	2600.050	2496 to 2690	Pass
	2682.5	75	0	20	3.27	2675.441	2689.543	2496 to 2690	Pass
					3.85	2675.439	2689.556	2496 to 2690	Pass
					4.43	2675.461	2689.558	2496 to 2690	Pass
				-30	3.85	2675.482	2689.531	2496 to 2690	Pass
				-20	3.85	2675.470	2689.571	2496 to 2690	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

				-10	3.85	2675.444	2689.537	2496 to 2690	Pass
				0	3.85	2675.486	2689.552	2496 to 2690	Pass
				10	3.85	2675.467	2689.557	2496 to 2690	Pass
				30	3.85	2675.440	2689.546	2496 to 2690	Pass
				40	3.85	2675.462	2689.555	2496 to 2690	Pass
				50	3.85	2675.442	2689.547	2496 to 2690	Pass
16QAM	2503.5	75	0	20	3.27	2496.484	2510.547	2496 to 2690	Pass
					3.85	2496.472	2510.600	2496 to 2690	Pass
					4.43	2496.458	2510.573	2496 to 2690	Pass
				-30	3.85	2496.500	2510.593	2496 to 2690	Pass
				-20	3.85	2496.482	2510.571	2496 to 2690	Pass
				-10	3.85	2496.432	2510.549	2496 to 2690	Pass
				0	3.85	2496.460	2510.590	2496 to 2690	Pass
				10	3.85	2496.479	2510.585	2496 to 2690	Pass
				30	3.85	2496.463	2510.572	2496 to 2690	Pass
				40	3.85	2496.462	2510.557	2496 to 2690	Pass
				50	3.85	2496.463	2510.544	2496 to 2690	Pass
	2593	75	0	20	3.27	2585.968	2600.046	2496 to 2690	Pass
					3.85	2585.956	2600.055	2496 to 2690	Pass
					4.43	2585.982	2600.069	2496 to 2690	Pass
				-30	3.85	2585.952	2600.045	2496 to 2690	Pass
				-20	3.85	2585.910	2600.060	2496 to 2690	Pass
				-10	3.85	2585.966	2600.078	2496 to 2690	Pass
				0	3.85	2585.961	2600.051	2496 to 2690	Pass
				10	3.85	2585.949	2600.080	2496 to 2690	Pass
				30	3.85	2585.953	2600.055	2496 to 2690	Pass
				40	3.85	2585.957	2600.064	2496 to 2690	Pass
				50	3.85	2585.956	2600.055	2496 to 2690	Pass
	2682.5	75	0	20	3.27	2675.467	2689.555	2496 to 2690	Pass
					3.85	2675.459	2689.559	2496 to 2690	Pass
					4.43	2675.462	2689.530	2496 to 2690	Pass
				-30	3.85	2675.467	2689.540	2496 to 2690	Pass
				-20	3.85	2675.477	2689.556	2496 to 2690	Pass
				-10	3.85	2675.474	2689.549	2496 to 2690	Pass
				0	3.85	2675.444	2689.559	2496 to 2690	Pass
				10	3.85	2675.475	2689.563	2496 to 2690	Pass
				30	3.85	2675.461	2689.548	2496 to 2690	Pass
				40	3.85	2675.447	2689.561	2496 to 2690	Pass
				50	3.85	2675.471	2689.524	2496 to 2690	Pass
64QAM	2503.5	75	0	20	3.27	2496.447	2510.579	2496 to 2690	Pass
					3.85	2496.466	2510.567	2496 to 2690	Pass
					4.43	2496.414	2510.573	2496 to 2690	Pass
				-30	3.85	2496.435	2510.550	2496 to 2690	Pass
				-20	3.85	2496.452	2510.571	2496 to 2690	Pass
				-10	3.85	2496.434	2510.569	2496 to 2690	Pass
				0	3.85	2496.442	2510.563	2496 to 2690	Pass
				10	3.85	2496.424	2510.602	2496 to 2690	Pass
				30	3.85	2496.405	2510.592	2496 to 2690	Pass
				40	3.85	2496.457	2510.551	2496 to 2690	Pass
				50	3.85	2496.420	2510.569	2496 to 2690	Pass
	2593	75	0	20	3.27	2585.974	2600.074	2496 to 2690	Pass
					3.85	2585.974	2600.070	2496 to 2690	Pass
					4.43	2585.934	2600.069	2496 to 2690	Pass
				-30	3.85	2585.916	2600.061	2496 to 2690	Pass
				-20	3.85	2585.947	2600.054	2496 to 2690	Pass
				-10	3.85	2585.914	2600.055	2496 to 2690	Pass
				0	3.85	2585.950	2600.119	2496 to 2690	Pass
				10	3.85	2585.932	2600.067	2496 to 2690	Pass
				30	3.85	2585.929	2600.107	2496 to 2690	Pass
				40	3.85	2585.950	2600.085	2496 to 2690	Pass
				50	3.85	2585.945	2600.054	2496 to 2690	Pass
	2682.5	75	0	20	3.27	2675.428	2689.589	2496 to 2690	Pass



Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

					3.85	2675.423	2689.557	2496 to 2690	Pass
					4.43	2675.467	2689.546	2496 to 2690	Pass
				-30	3.85	2675.466	2689.553	2496 to 2690	Pass
				-20	3.85	2675.471	2689.526	2496 to 2690	Pass
				-10	3.85	2675.451	2689.555	2496 to 2690	Pass
				0	3.85	2675.413	2689.592	2496 to 2690	Pass
				10	3.85	2675.438	2689.550	2496 to 2690	Pass
				30	3.85	2675.401	2689.552	2496 to 2690	Pass
				40	3.85	2675.456	2689.562	2496 to 2690	Pass
				50	3.85	2675.419	2689.550	2496 to 2690	Pass

7.1.4 B41_20MHz

Band: 41 / Bandwidth: 20MHz / NTNV									
Modulation	Frequency (MHz)	RB Allocation		Temp. (°C)	Voltage (VDC)	OBW (FL - FH) (MHz)		Limit	Verdict
		Size	Offset			FL	FH		
QPSK	2506	100	0	20	3.27	2496.801	2515.261	2496 to 2690	Pass
					3.85	2496.755	2515.334	2496 to 2690	Pass
					4.43	2496.804	2515.258	2496 to 2690	Pass
				-30	3.85	2496.819	2515.244	2496 to 2690	Pass
				-20	3.85	2496.818	2515.237	2496 to 2690	Pass
				-10	3.85	2496.774	2515.206	2496 to 2690	Pass
				0	3.85	2496.754	2515.239	2496 to 2690	Pass
				10	3.85	2496.807	2515.254	2496 to 2690	Pass
				30	3.85	2496.793	2515.274	2496 to 2690	Pass
				40	3.85	2496.810	2515.252	2496 to 2690	Pass
				50	3.85	2496.778	2515.249	2496 to 2690	Pass
	2593	100	0	20	3.27	2583.792	2602.227	2496 to 2690	Pass
					3.85	2583.766	2602.235	2496 to 2690	Pass
					4.43	2583.803	2602.286	2496 to 2690	Pass
				-30	3.85	2583.802	2602.248	2496 to 2690	Pass
				-20	3.85	2583.780	2602.281	2496 to 2690	Pass
				-10	3.85	2583.789	2602.248	2496 to 2690	Pass
				0	3.85	2583.801	2602.241	2496 to 2690	Pass
				10	3.85	2583.824	2602.233	2496 to 2690	Pass
				30	3.85	2583.800	2602.312	2496 to 2690	Pass
				40	3.85	2583.775	2602.287	2496 to 2690	Pass
				50	3.85	2583.817	2602.266	2496 to 2690	Pass
	2680	100	0	20	3.27	2670.809	2689.195	2496 to 2690	Pass
					3.85	2670.766	2689.234	2496 to 2690	Pass
					4.43	2670.811	2689.187	2496 to 2690	Pass
				-30	3.85	2670.768	2689.213	2496 to 2690	Pass
				-20	3.85	2670.776	2689.229	2496 to 2690	Pass
				-10	3.85	2670.787	2689.264	2496 to 2690	Pass
				0	3.85	2670.806	2689.252	2496 to 2690	Pass
				10	3.85	2670.801	2689.235	2496 to 2690	Pass
				30	3.85	2670.832	2689.230	2496 to 2690	Pass
				40	3.85	2670.788	2689.216	2496 to 2690	Pass
				50	3.85	2670.826	2689.255	2496 to 2690	Pass
16QAM	2506	100	0	20	3.27	2496.796	2515.258	2496 to 2690	Pass
					3.85	2496.824	2515.276	2496 to 2690	Pass
					4.43	2496.815	2515.249	2496 to 2690	Pass
				-30	3.85	2496.799	2515.226	2496 to 2690	Pass
				-20	3.85	2496.803	2515.201	2496 to 2690	Pass
				-10	3.85	2496.805	2515.198	2496 to 2690	Pass
				0	3.85	2496.784	2515.227	2496 to 2690	Pass
				10	3.85	2496.823	2515.303	2496 to 2690	Pass
				30	3.85	2496.795	2515.235	2496 to 2690	Pass
				40	3.85	2496.775	2515.236	2496 to 2690	Pass
				50	3.85	2496.779	2515.295	2496 to 2690	Pass
	2593	100	0	20	3.27	2583.815	2602.178	2496 to 2690	Pass
					3.85	2583.743	2602.192	2496 to 2690	Pass

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

					4.43	2583.791	2602.241	2496 to 2690	Pass
				-30	3.85	2583.777	2602.243	2496 to 2690	Pass
				-20	3.85	2583.779	2602.281	2496 to 2690	Pass
				-10	3.85	2583.807	2602.252	2496 to 2690	Pass
				0	3.85	2583.816	2602.229	2496 to 2690	Pass
				10	3.85	2583.809	2602.225	2496 to 2690	Pass
				30	3.85	2583.795	2602.238	2496 to 2690	Pass
				40	3.85	2583.791	2602.217	2496 to 2690	Pass
				50	3.85	2583.798	2602.246	2496 to 2690	Pass
	2680	100	0	20	3.27	2670.783	2689.235	2496 to 2690	Pass
					3.85	2670.769	2689.246	2496 to 2690	Pass
					4.43	2670.755	2689.217	2496 to 2690	Pass
				-30	3.85	2670.758	2689.249	2496 to 2690	Pass
				-20	3.85	2670.752	2689.234	2496 to 2690	Pass
				-10	3.85	2670.783	2689.211	2496 to 2690	Pass
				0	3.85	2670.767	2689.222	2496 to 2690	Pass
				10	3.85	2670.788	2689.226	2496 to 2690	Pass
				30	3.85	2670.757	2689.241	2496 to 2690	Pass
				40	3.85	2670.781	2689.278	2496 to 2690	Pass
64QAM	2506	100	0	20	3.27	2496.802	2515.217	2496 to 2690	Pass
					3.85	2496.816	2515.221	2496 to 2690	Pass
					4.43	2496.816	2515.253	2496 to 2690	Pass
				-30	3.85	2496.820	2515.220	2496 to 2690	Pass
				-20	3.85	2496.816	2515.248	2496 to 2690	Pass
				-10	3.85	2496.821	2515.295	2496 to 2690	Pass
				0	3.85	2496.784	2515.234	2496 to 2690	Pass
				10	3.85	2496.818	2515.253	2496 to 2690	Pass
				30	3.85	2496.772	2515.283	2496 to 2690	Pass
				40	3.85	2496.829	2515.256	2496 to 2690	Pass
				50	3.85	2496.814	2515.289	2496 to 2690	Pass
	2593	100	0	20	3.27	2583.806	2602.243	2496 to 2690	Pass
					3.85	2583.812	2602.259	2496 to 2690	Pass
					4.43	2583.831	2602.242	2496 to 2690	Pass
				-30	3.85	2583.732	2602.222	2496 to 2690	Pass
				-20	3.85	2583.781	2602.276	2496 to 2690	Pass
				-10	3.85	2583.785	2602.220	2496 to 2690	Pass
				0	3.85	2583.810	2602.270	2496 to 2690	Pass
				10	3.85	2583.771	2602.236	2496 to 2690	Pass
				30	3.85	2583.782	2602.235	2496 to 2690	Pass
				40	3.85	2583.825	2602.225	2496 to 2690	Pass
				50	3.85	2583.793	2602.282	2496 to 2690	Pass
	2680	100	0	20	3.27	2670.794	2689.220	2496 to 2690	Pass
					3.85	2670.795	2689.223	2496 to 2690	Pass
					4.43	2670.762	2689.223	2496 to 2690	Pass
				-30	3.85	2670.761	2689.304	2496 to 2690	Pass
				-20	3.85	2670.778	2689.217	2496 to 2690	Pass
				-10	3.85	2670.814	2689.231	2496 to 2690	Pass
				0	3.85	2670.827	2689.249	2496 to 2690	Pass
				10	3.85	2670.819	2689.233	2496 to 2690	Pass
				30	3.85	2670.787	2689.260	2496 to 2690	Pass
				40	3.85	2670.766	2689.249	2496 to 2690	Pass
				50	3.85	2670.807	2689.218	2496 to 2690	Pass



8. Form731

8.1 Test Result

8.1.1 Form731_Power

Band	BW	Lower	High	MAX	Value	Hz/ppm	Emission	Rule	MAX
------	----	-------	------	-----	-------	--------	----------	------	-----

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

		Freq	Freq	Power (W)			Designator	Parts	Power (dBm)
41	5	2498.5	2687.5	0.2280	99.0000	ppm	4M60G7D	27M	23.58
41	5	2498.5	2687.5	0.1816	99.0000	ppm	4M62W7D	27M	22.59
41	10	2501	2685	0.2234	99.0000	ppm	9M09G7D	27M	23.49
41	10	2501	2685	0.1811	99.0000	ppm	9M10W7D	27M	22.58
41	15	2503.5	2682.5	0.2317	99.0000	ppm	14M1G7D	27M	23.65
41	15	2503.5	2682.5	0.1774	99.0000	ppm	14M1W7D	27M	22.49
41	20	2506	2680	0.2270	99.0000	ppm	18M4G7D	27M	23.56
41	20	2506	2680	0.1871	99.0000	ppm	18M5W7D	27M	22.72

8.1.2 Form731_EIRP

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
41	5	2498.5	2687.5	0.1374	99.0000	ppm	4M60G7D	27M	21.38
41	5	2498.5	2687.5	0.1094	99.0000	ppm	4M62W7D	27M	20.39
41	10	2501	2685	0.1346	99.0000	ppm	9M09G7D	27M	21.29
41	10	2501	2685	0.1091	99.0000	ppm	9M10W7D	27M	20.38
41	15	2503.5	2682.5	0.1396	99.0000	ppm	14M1G7D	27M	21.45
41	15	2503.5	2682.5	0.1069	99.0000	ppm	14M1W7D	27M	20.29
41	20	2506	2680	0.1368	99.0000	ppm	18M4G7D	27M	21.36
41	20	2506	2680	0.1127	99.0000	ppm	18M5W7D	27M	20.52



Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694