



G5 Wireless Mouse User Manual

IN THE BOX:

Mouse x 1


Type - C Cable x 1

Extension Adapter x 1

Type - A Receiver x 1

User Manual x 1

Type - A to Type - C Adapter x 1

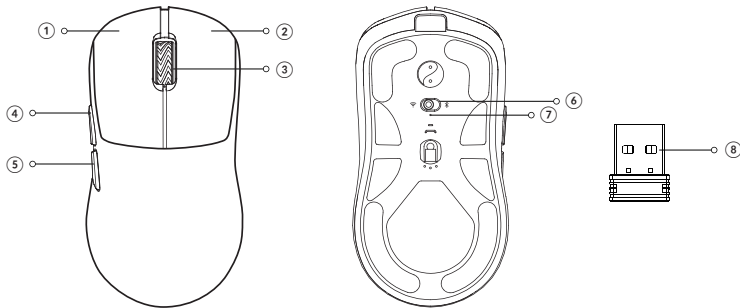


- ① Left button ② Right button ③ Middle wheel button ④ Forward button ⑤ Backward button
- ⑥ Modes switch ⑦ Mouse indicator ⑧ 2.4GHz Type - A receiver

3 Modes of connection

Wired Mode:

1. When the mode switch is in middle position, the mouse won't respond if the cable is not connected.
 2. Connect the cable to the TYPE-C port of the mouse and the USB port on the device. The mouse is ready to use while the indicator lights up.
- * When connected by cable, the mode will default to wired mode even if the toggle is in Bluetooth mode or 2.4GHz mode.

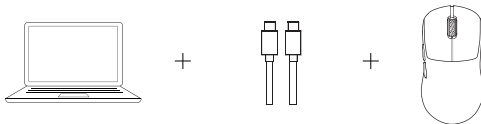


2.4GHz Mode:

1. Switch to "  " mode (2.4GHz mode), and the mouse will automatically turn on 2.4GHz pairing. The mouse indicator will slowly flash green.
2. Find the 2.4GHz receiver and connect it to the device's USB. Once successfully connected, the mouse indicator will turn green and stay on for 3 seconds before dimming off. The mouse is now ready for use.

3. In 2.4GHz pairing mode, the mouse indicator will slowly blink green for 3 minutes. If the mouse is not connected within 3 minutes, the indicator will turn off. If you need to reconnect, hold the "Left button + Middle Wheel + Right button" for 4 seconds to re-enter pairing mode.
- If you need to repair the connection in 2.4GHz mode, please unplug the 2.4GHz receiver first. Then, hold the "Left button + Middle Wheel + Right button" for 4 seconds, wait for the green light indicator to start flashing, and plug the 2.4GHz receiver back in to complete the pairing process.


Note: It is recommended that when pairing the G3 in 2.4GHz mode, the mouse should be within 20cm of the receiver.

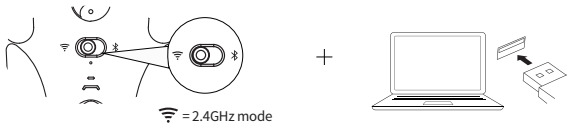

Simultaneously hold for 4 seconds
(to enter the forced pairing mode)




Note: For the best wireless experience, we recommend using the cable and putting the 2.4GHz receiver somewhere on your desk close to your mouse for a lower rate of latency and fewer signal interferences.

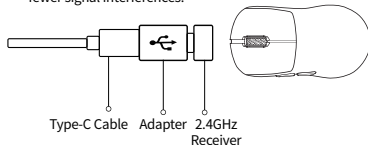


Bluetooth mode

1. Switch to " ⌘ " Mode (Bluetooth), and the mouse will automatically turn on Bluetooth pairing mode. The mouse indicator will slowly flash blue.
2. Open the Bluetooth settings, search for a device named "Keychron G5", then click "connect" to complete pairing.
3. When in Bluetooth pairing mode, the mouse indicator will slowly blink in blue for 3 minutes. If it's not connected within 3 minutes, the mouse indicator will turn off. If you need to reconnect, you need to hold the "Left button+Middle Wheel+Right button" for 4 seconds to re-enter pairing mode. The indicator will slowly blink blue.
4. If the G5 is in Bluetooth mode and needs to pair with a new device, hold the "Left button+Middle Wheel+Right button" for 4 seconds and wait for the blue light to flash on. At this point, Bluetooth has re-entered pairing mode, and you can connect the new device to the G5.




DPI indicator

White light	400 DPI	Yellow light	3200 DPI
Green light	800 DPI	Red light	5000 DPI
Blue light	1600 DPI (default)		




*Note: Please press the middle wheel and forward button simultaneously to switch DPI. For DPI settings over 5000, configuration via the mouse driver is required.




Report Rate

Report rate	Report rate / Hz	Available modes
White	125	2.4G / BT / Wired
Green	500	2.4G / Wired
Blue	1000	2.4G / Wired(default)
Yellow	2000	2.4G / Wired
Red	4000	2.4G / Wired
Purple	8000	2.4G / Wired



*Note: Please press the middle wheel and backward button simultaneously to switch report rate. For more report rate settings, configuration via the mouse driver is required.



Charging indicator explanation

Fully Charged	The mouse indicator will stay GREEN.
Low Power	The mouse indicator will slowly blink RED.
Charging	The mouse indicator will stay RED.

* The mouse is compatible with all USB ports. For the best signal and charging speed, connecting to the USB 3.0 port is recommended when charging or in use.


* If the mouse is connected by the USB Type - C cable when charging but not paired with any devices:

- The mouse indicator will stay RED when charging.
- The mouse indicator will stay GREEN when fully charged.

Note: The product supports up to 5V charging voltage and 250 mA charging current. We are not responsible for any problems caused by improper recharging.


Status indicator

2.4GHz Mode	*The mouse indicator slowly blinks green - Ready to be paired. *The mouse indicator quickly blinks green - Pairing with the previous device.
Bluetooth Mode	*The mouse indicator slowly blinks blue - Ready to be paired. *The mouse indicator quickly blinks blue - Pairing with the previous device.
Low Power	The mouse indicator will slowly blink red.



How to factory reset

Hold down the Left button, Right button, Forward button and Backward button for 4 seconds, and the mouse indicator will blink. It will blink three times to indicate that the factory reset is successful.



Simultaneously hold for 4 seconds
(starts factory reset)

Driver Software

Please visit launcher.keychron.com to use the online Launcher web app to remap the buttons, create macro commands, set mouse system features, and more. If the Launcher cannot recognize your mouse, please reach our support to get the instructions.

*The Keychron Launcher does not support bluetooth connection.

Auto-Sleep mode

Auto-Sleep mode will not be activated when in wired mode. When in Bluetooth mode or 2.4GHz mode, the mouse will go to Auto-Sleep mode after 10 minutes of sitting idle to save the battery. Move or click the mouse to wake it up.

Mouse specification

Size: 120*63*39mm

Weight: 43 $\pm$ 3g

Report rate (polling rate): 125Hz (White) - 500Hz (Green) - 1000Hz (Blue)

- 2000Hz (Yellow) - 4000Hz (Red) - 8000Hz (Purple)

Sensor: PixArt 3950

Resolution: 100 - 30000DPI

Mouse micro switches: Huano Micro Switch (120 million clicks life time)

2.4GHz / Bluetooth connection range: Approx 10m of open space

Battery capacity: 500mAh

Usage duration: 162 Hours (Bluetooth mode)

153 Hours (1000Hz)

37 Hours (8000Hz)

Recharge time: 2 Hours

Charging port: Type - C

Connection mode: 2.4GHz - Bluetooth - Wired

Device name: Keychron G5

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement in portable exposure condition without restriction.