



Q5 Ultra Wireless Mechanical Keyboard

Knob
Version

Fully Assembled Version

Keyboard

1x Fully Assembled Keyboard

Including

1x Aluminum Case

1x PCB

1x PC Plate

1x Sound Absorbing Foam

1x IXPE Foam

1x PET Film

1x Latex Bottom Pad

1x Bottom Case Acoustic Foam


1x Bottom Case PET Film

14x Gaskets (10 Installed and 4 in the Box)

7 sets x Stabilizers

1 set x Keycaps (PBT Double-shot)

1 set x Switches

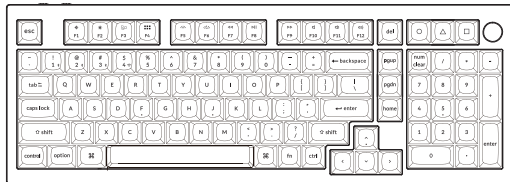

Cable

1x Type-C Cable

1x Type-A to Type-C Adapter

1x Extension Adapter for Receiver

Receiver


1x Type-A 2.4 GHz Receiver

Tools

1x Keycap & Switch Puller

1x Screwdriver


1x Hex Key

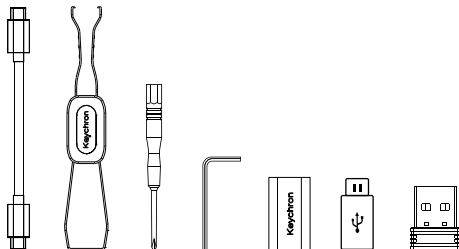

Quick Start Guide


If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

Mac / Windows

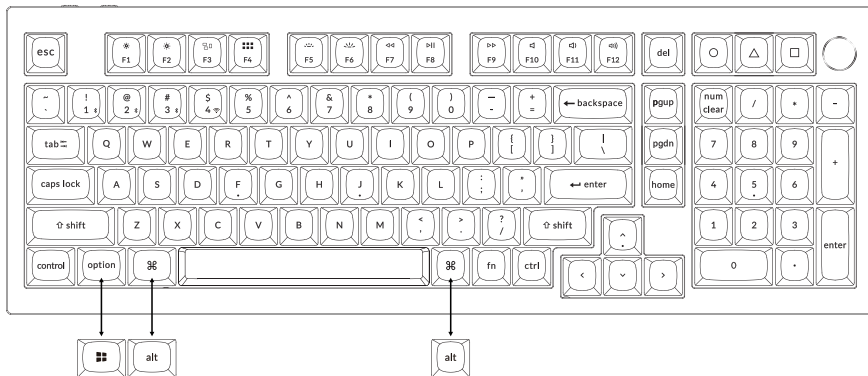

1 Connect 2.4 GHz Receiver

Switch toggle to 2.4 GHz mode




G = 2.4 GHz

Press fn + 4 (for 4 seconds)





fn + 4

Connect the 2.4 GHz receiver to the device USB port.



Note: For the best wireless experience, we recommend using the extension adapter for receiver and putting the 2.4 GHz receiver somewhere on your desk close to your keyboard for a low rate of latency and fewer signal interferences.

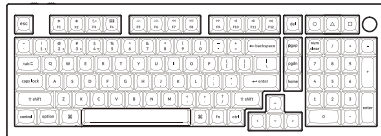

2 Connect Bluetooth



Switch toggle to Bluetooth



G / Cable / BT

Press fn + 1 (for 4 seconds) and pair with device named Keychron Q5 Ultra 8K



fn + 1

3 Connect Cable



+



+




Switch toggle to Cable



G / Cable / BT

4 Switch To The Right System

Please make sure the system toggle on the top right corner has been switched to the same system as your computer's operating system.




5 The Backlight

Press fn + Q to change the lighting effect



fn + Q

Press fn + tab to turn the backlight on/off

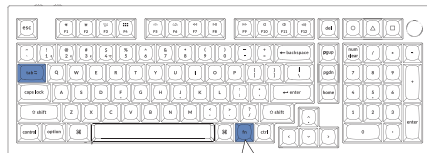

fn + tab

6 Adjust The Backlight Brightness

Press fn + W to increase the backlight brightness



fn + W

Press fn + S to decrease the backlight brightness



fn + S

7 Adjust The Backlight Speed

Press fn + T to increase the light effect speed



fn + T

Press fn + G to decrease the light effect speed



fn + G

8 The Keychron Launcher App


Please visit launcher.keychron.com to use the online Launcher web app to remap the keys, create macro commands, or flash the firmware. If the Launcher cannot recognize your keyboard, please reach our support to get the instructions.




* The online Launcher can only run on the latest version of Chrome, Edge, and Opera browsers.

9 The Layers

There are four layers of key settings on the keyboard. The layer 0 and layer 1 are for the Mac system. The layer 2 and layer 3 are for the Windows system.




If your system toggle is switched to Mac, then the layer 0 will be activated.



If your system toggle is switched to Windows, then the layer 2 will be activated. Remember that if you are using it in Windows mode, please make changes to the layer 2 instead of the top layer (the layer 0). This is a common mistake people are making.



10 Factory Reset & Firmware Update



Troubleshooting? Don't know what's going on with the keyboard?

Factory reset your keyboard

1. Power on your keyboard.
2. Press and hold fn + J + Z (for 4 seconds). The keyboard backlight will flash in red quickly for 3 seconds, indicating that the keyboard has been reset.

Flash your keyboard firmware

1. Visit launcher.keychron.com to open the online Launcher web app.
2. Ensure the keyboard is in Cable or Wired mode and plug in the power cable.
3. Find the 'Firmware Update' tab on the left side of the Launcher and connect your keyboard with it.
4. Follow the instructions on the Launcher and complete the firmware update.

*Step-by-step guide, search the keyword "firmware" on keychron.com.

11 Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.



Q5 ULTRA WIRELESS MECHANICAL KEYBOARD SPECIFICATIONS

Number of keys: 101

Switch type: Mechanical

Battery: 4000mAh

Charging time: Around 5 hours

Charging port: Type-C

Mode: 2.4 GHz/ Cable / Bluetooth

Wireless operating distance: Within 10 meters (open space)

Name of Bluetooth device: Keychron Q5 Ultra 8K

Operating environment: -10 to 50°C

Technical specifications can be subjected to change without notice, we apologize for any inconvenience caused.