

尺寸：80*110mm
材质：150铜版纸过哑膜
折叠：风琴六折页

材质：150铜版纸过哑膜

折叠：风琴六折页

USER MANUAL

✉ support@wowuwoai.tech
🌐 <https://www.wowuwoai.tech>

Scan
here.
TO GET A DIGITAL VERSION

Packing List

Portable charger

USB-C charging cable

User manual

Product Introduction

- ① Keyring
- ② USB-C cable (input/output)
- ③ Magnetic wireless charger
- ④ Lightning cable (output)
- ⑤ USB-A port (output)
- ⑥ USB-C port (input/output)
- ⑦ Power button

Important Information

1. First Use: For optimal performance, fully discharge and then fully charge the power bank the first time you use it.
2. Charging Multiple Devices: Charging multiple devices may reduce charging speed. For best results, charge a single device at a time.

Recharge Your Power Bank

2 Ways to recharge your power bank (AC adapter is not included)

① USB-C port input

② USB-C cable input

Adapter Type	Recharging Mode	Full Charge Time
5V=3A	Normal	5.5-6 hr
9V=2A	Fast Charging	3-4 hr

Charge Your Devices

Wireless Charging: for Apple Watch

Standard Mode: for phone or tablet

Method 1

USB-C cable

Lightning cable

Method 2

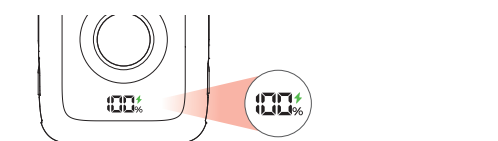
Low-Current Mode: for smartwatches or bluetooth earbuds

Method 1

Method 2

Enter low-current mode: press and hold the power button for 3-5 seconds.

Exit low-current mode: press the power button twice quickly, or it will automatically deactivate after 2 hours of operation.

Power Button and LED Display  Power Button <table> <tr> <td>Press once</td> <td>Turn on the screen</td> </tr> <tr> <td>Press and hold</td> <td>Turn on the low-current mode</td> </tr> <tr> <td>Press twice</td> <td>Exit the low-current mode</td> </tr> </table>  <table> <tr> <td></td> <td>Remaining power</td> </tr> <tr> <td></td> <td>Fast charging mode</td> </tr> <tr> <td></td> <td>Low-current mode</td> </tr> </table>		Press once	Turn on the screen	Press and hold	Turn on the low-current mode	Press twice	Exit the low-current mode		Remaining power		Fast charging mode		Low-current mode	Specification <table> <tr> <td>Product Model</td><td>W9</td></tr> <tr> <td>Input</td><td>Port USB-C:5V=3A 9V=2A 12V=1.5A Cable USB-C:5V=3A 9V=2A 12V=1.5A</td></tr> <tr> <td>Output</td><td>Cable Lightning:5V=2.4A Cable USB-C:5V=3A 9V=2.22A 12V=1.67A Port USB-A:5V=3A 9V=2A 10V=2.25A 12V=1.5A Port USB-C:5V=3A 9V=2.22A 12V=1.67A Watch Wireless Output:2.5W</td></tr> <tr> <td>Total Output</td><td>5V=3A</td></tr> <tr> <td>Product Size</td><td>8x6.9x2.9cm</td></tr> <tr> <td>Operating Temperature</td><td>5°C/41 °F-30°C/86 °F</td></tr> </table>		Product Model	W9	Input	Port USB-C:5V=3A 9V=2A 12V=1.5A Cable USB-C:5V=3A 9V=2A 12V=1.5A	Output	Cable Lightning:5V=2.4A Cable USB-C:5V=3A 9V=2.22A 12V=1.67A Port USB-A:5V=3A 9V=2A 10V=2.25A 12V=1.5A Port USB-C:5V=3A 9V=2.22A 12V=1.67A Watch Wireless Output:2.5W	Total Output	5V=3A	Product Size	8x6.9x2.9cm	Operating Temperature	5°C/41 °F-30°C/86 °F	Troubleshooting Q1: Can all ports provide fast charging simultaneously? A1: When charging multiple devices, total power is shared across ports, which may reduce speed or switch some devices to standard charging. For fastest single-device charging, use fewer ports at once. Q2: Why isn't my device charging, or why is the charging intermittent? A2: Please check in order: 1) Ensure the battery level is above 20%. 2) Check that cables are fully inserted and the watch is centered on the wireless charger. 3) Try a different cable with the USB ports. 4) Fully drain and recharge the power bank to restart it. Q3: Which watch models are compatible with the wireless charger? What should I be aware of? A3: It supports mainstream Apple Watch models (S8, S9, S10, SE) and other 2.5W Qi-standard smartwatches. Center the watch back on the charging area and remove thick or metal cases for reliable charging. Q4: Is it normal for the power bank to feel warm during use? A4: Slight warmth during fast charging or multi-port use is normal. If it becomes excessively hot to the touch, stop use immediately and disconnect all devices.		Q5: How do I maintain the power bank to extend its lifespan? A5: Use and store it in a cool, dry place (ideally between 5°C/41°F and 30°C/86°F). Avoid extreme temperatures, physical damage, and water. For long-term storage, keep the charge between 25% and 50%. Disconnect cables after charging is complete. Important Safety Instructions When using this product, basic precautions should always be followed,including the following: 1) Store the product in a cool and dry place. 2) Do not store the product in hot or humid environments. 3) Use of a power supply or charger not recommended by the product manufacturer may result in a risk of fire or injury to persons. 4) The operating temperature should be between 41 °F to 95°F/5°C to 35°C. 5) Do not disassemble the product. Incorrect reassembly may result in a risk of fire or injury to persons. 6) If the product is not used for long periods of time, charge and discharge it once every three months. 7) When charging a device, the product may feel warm. This is a normal operating condition and should not be cause for concern. 8) Under normal conditions, the battery performance will decline over several years. 9) Do not dispose of the product in heat or fire.		Warning This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: --Reorient or relocate the receiving antenna. --Increase the separation between the equipment and receiver. --Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. --Consult the dealer or an experienced radio/TV technician for help. NOTE: This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter. FCC Radiation Exposure statement The device has been evaluatee to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.		Warranty We use only the highest-quality materials, giving us the confidence to provide you with: ✓ 1-year warranty ✓ Lifetime technical support Whatever you need, we're here to help. Just get in touch with us at: ✉ support@wowuwoai.tech 🌐 https://www.wowuwoai.tech You will get timely assistance. We promise to make things right with our wholehearted service.	
Press once	Turn on the screen																																		
Press and hold	Turn on the low-current mode																																		
Press twice	Exit the low-current mode																																		
	Remaining power																																		
	Fast charging mode																																		
	Low-current mode																																		
Product Model	W9																																		
Input	Port USB-C:5V=3A 9V=2A 12V=1.5A Cable USB-C:5V=3A 9V=2A 12V=1.5A																																		
Output	Cable Lightning:5V=2.4A Cable USB-C:5V=3A 9V=2.22A 12V=1.67A Port USB-A:5V=3A 9V=2A 10V=2.25A 12V=1.5A Port USB-C:5V=3A 9V=2.22A 12V=1.67A Watch Wireless Output:2.5W																																		
Total Output	5V=3A																																		
Product Size	8x6.9x2.9cm																																		
Operating Temperature	5°C/41 °F-30°C/86 °F																																		