




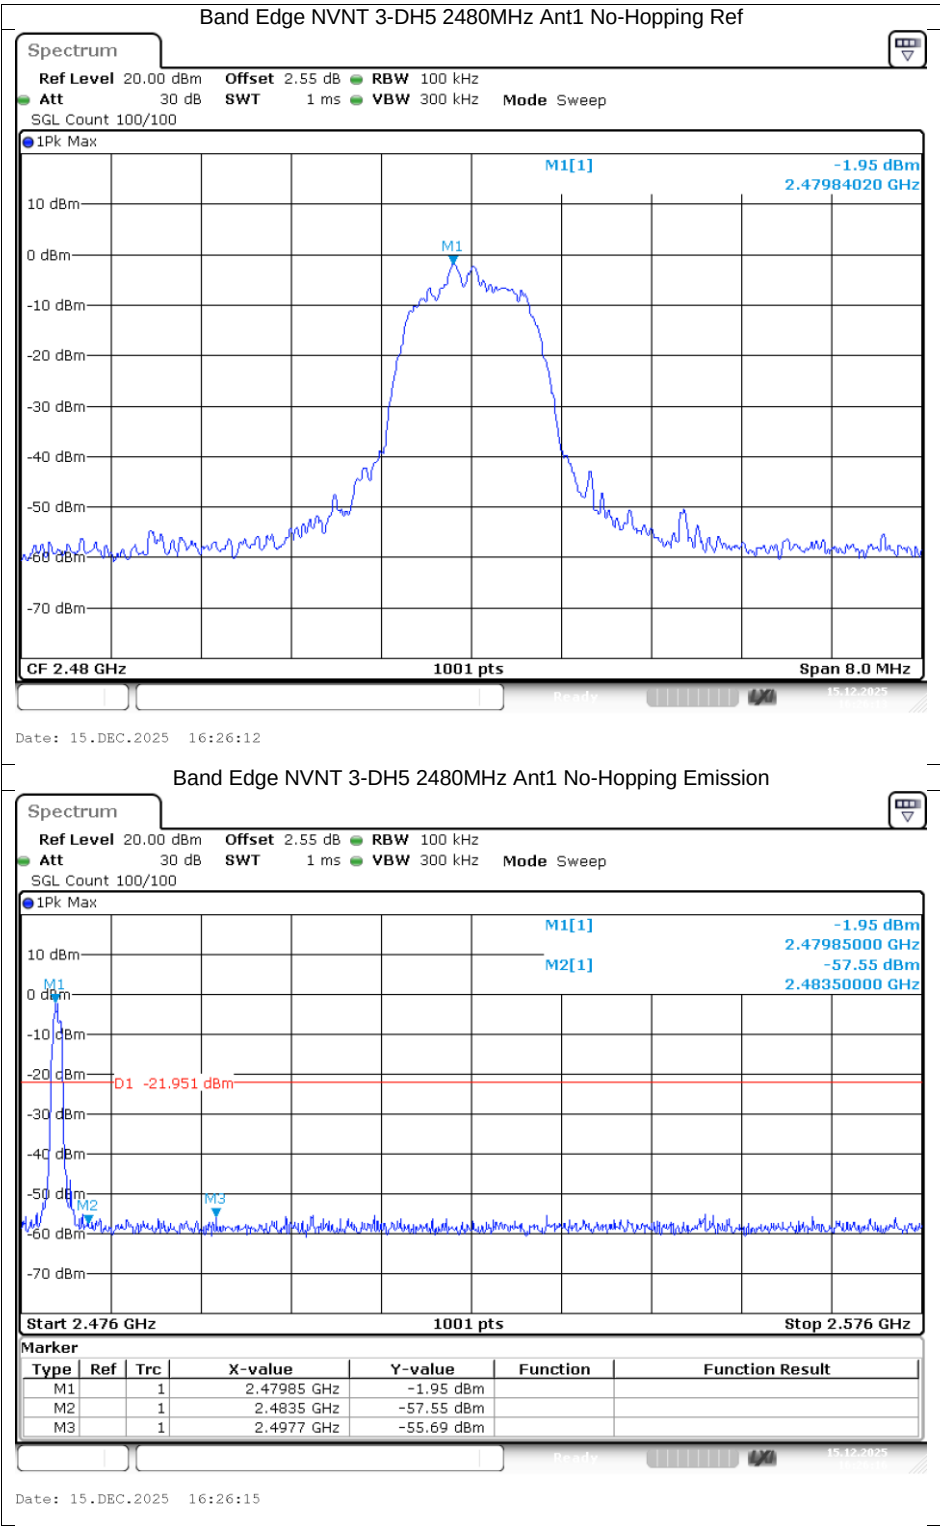



Band Edge (Hopping)


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-51.14	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-52.35	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-50.66	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-52.35	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-49.87	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-52.54	-20	Pass

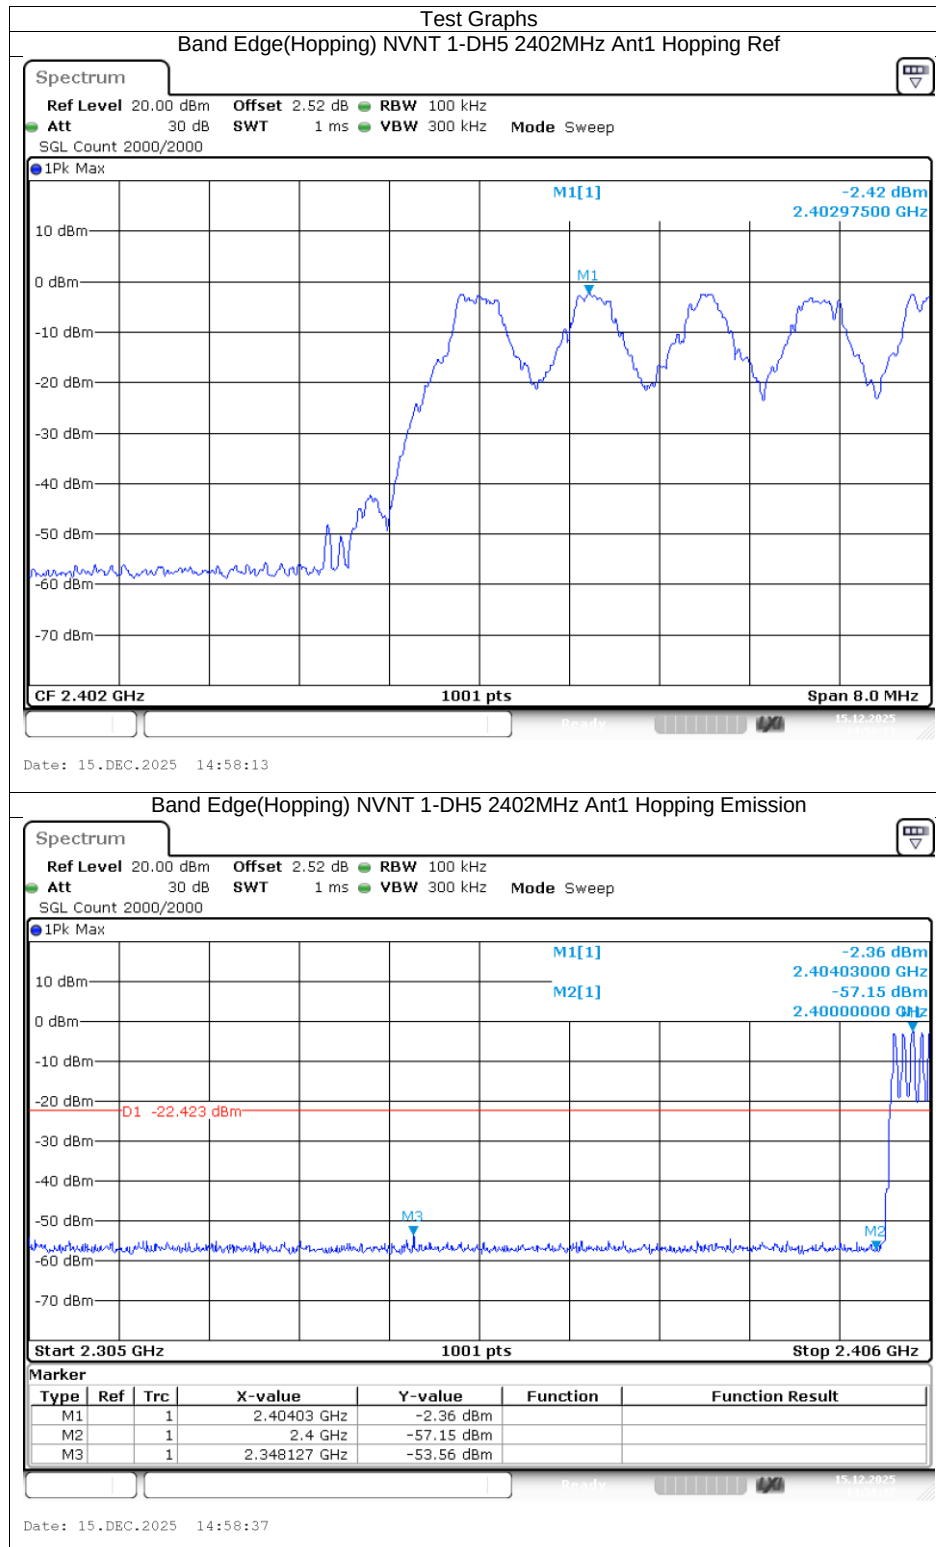

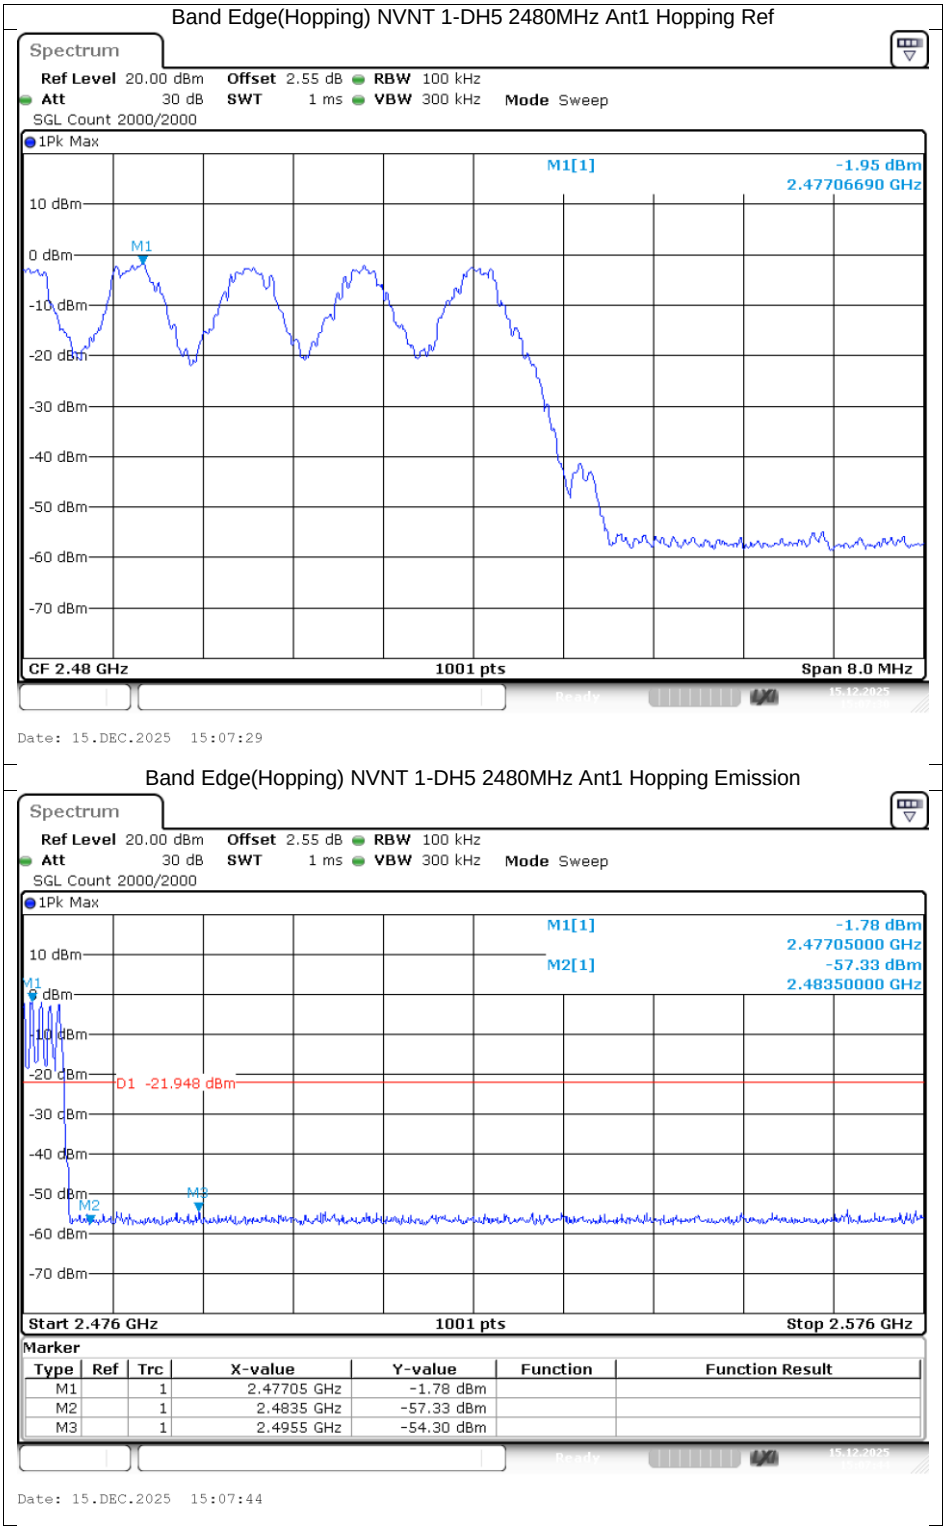

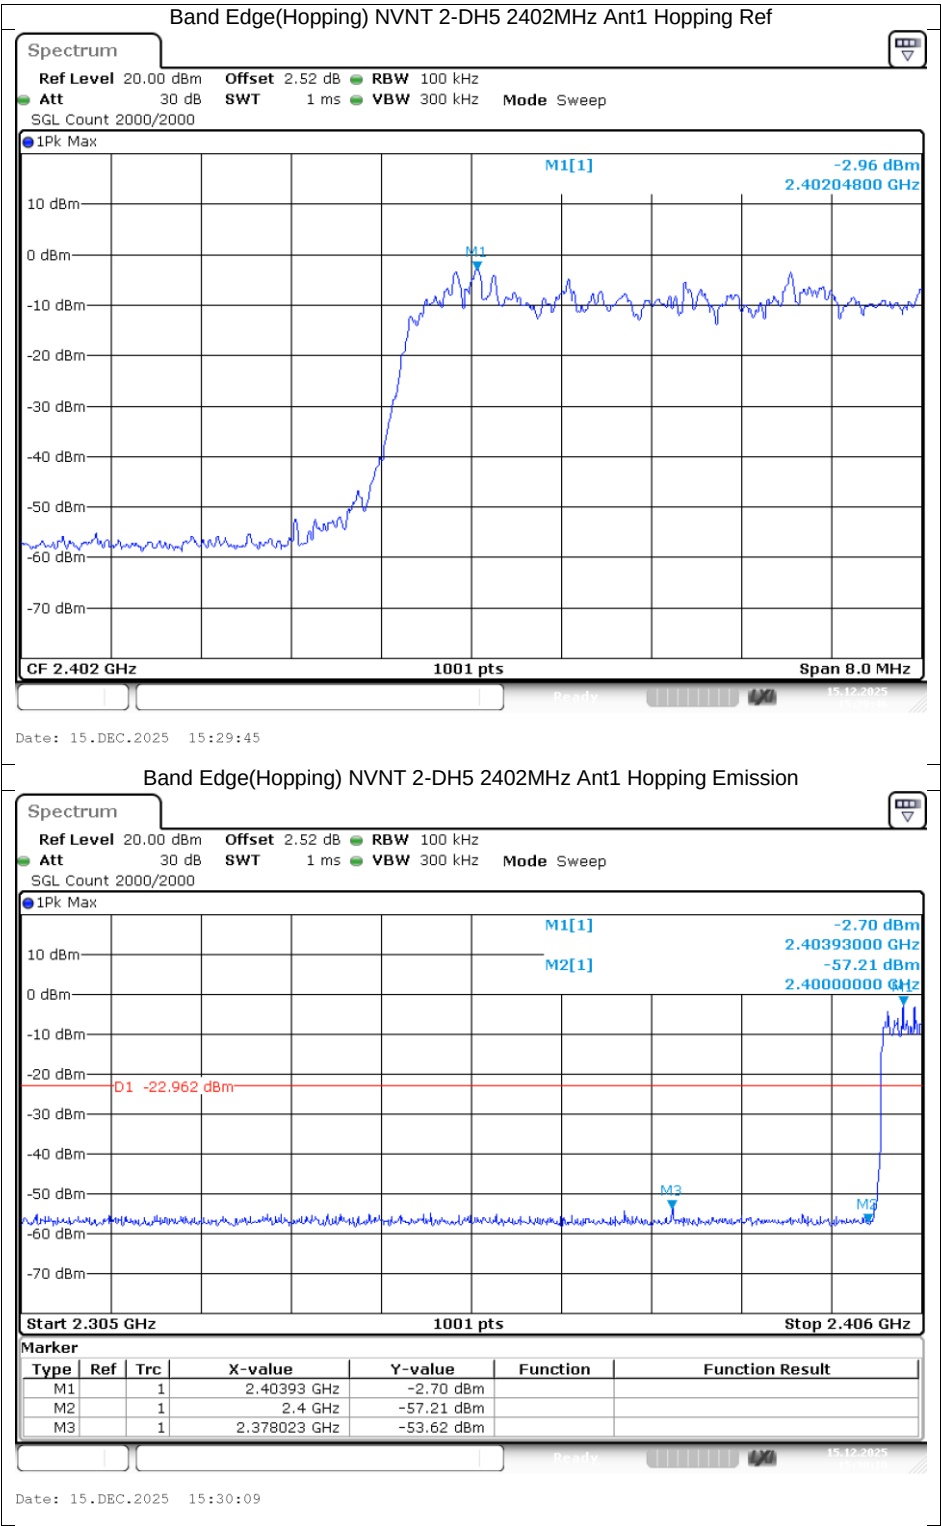

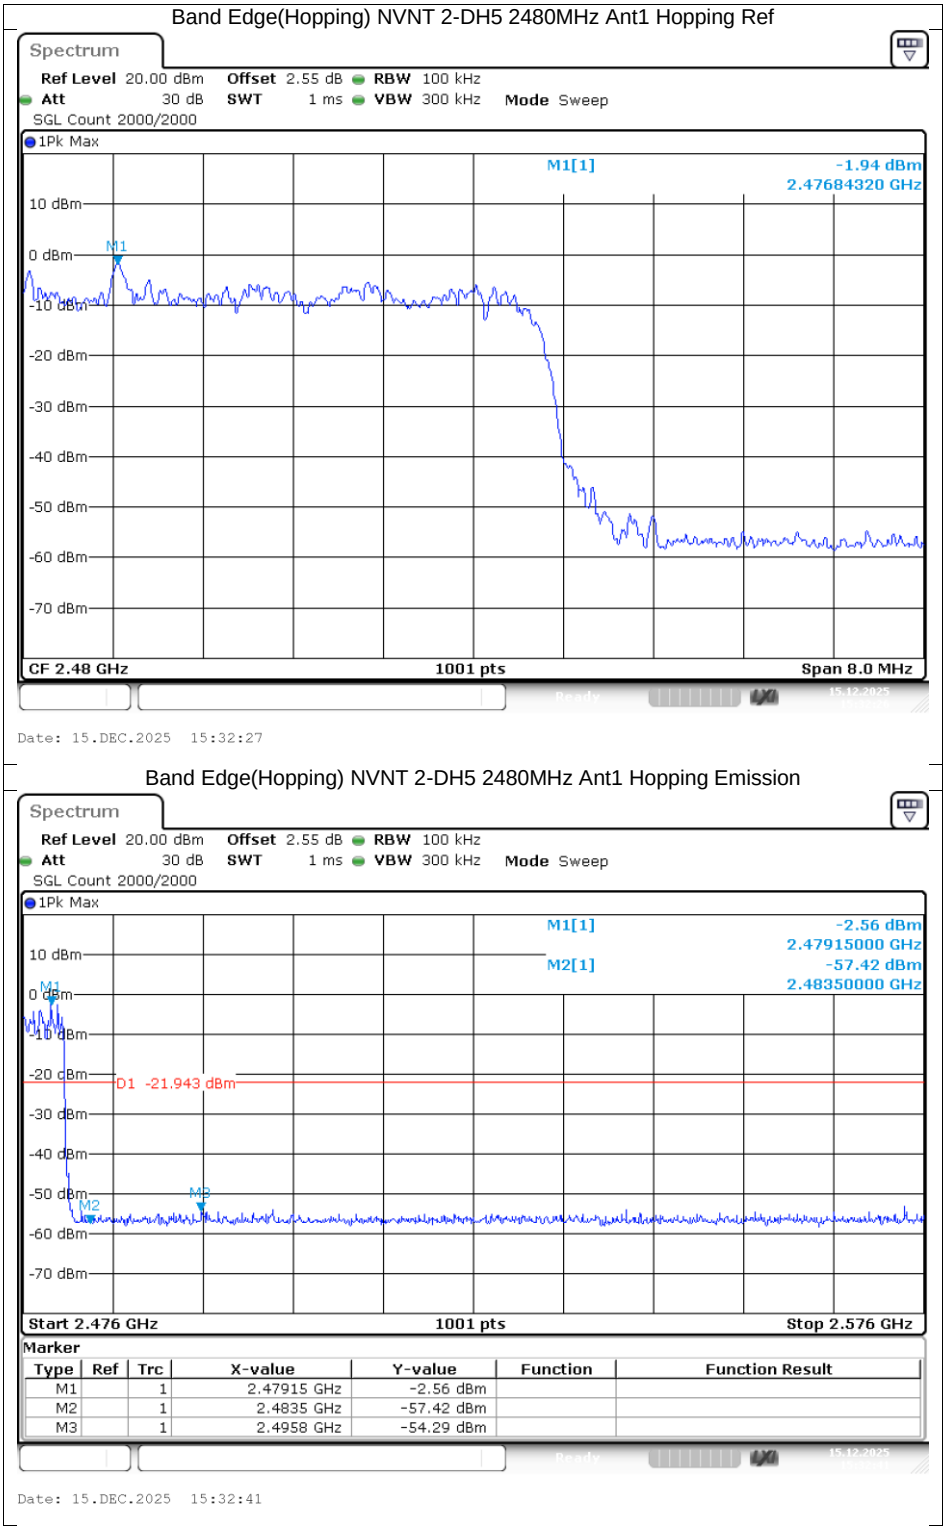


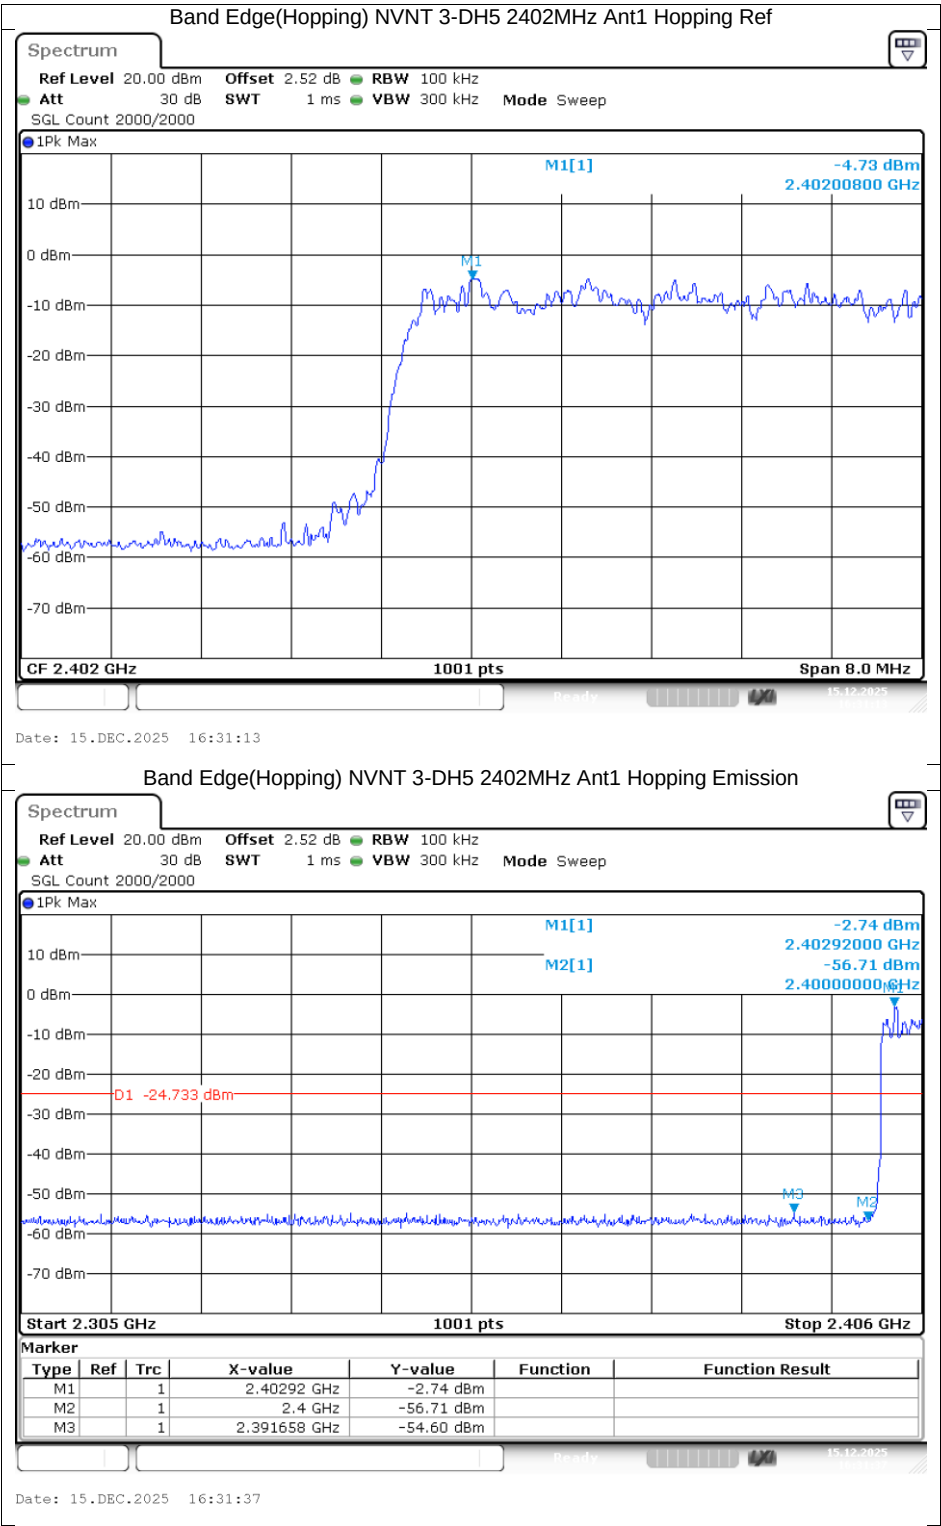






Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-32.5	-20	Pass
NVNT	1-DH5	2441	Ant1	-31.48	-20	Pass
NVNT	1-DH5	2480	Ant1	-33.43	-20	Pass
NVNT	2-DH5	2402	Ant1	-35.31	-20	Pass
NVNT	2-DH5	2441	Ant1	-37.95	-20	Pass
NVNT	2-DH5	2480	Ant1	-34.83	-20	Pass
NVNT	3-DH5	2402	Ant1	-39.08	-20	Pass
NVNT	3-DH5	2441	Ant1	-36.24	-20	Pass
NVNT	3-DH5	2480	Ant1	-38.85	-20	Pass

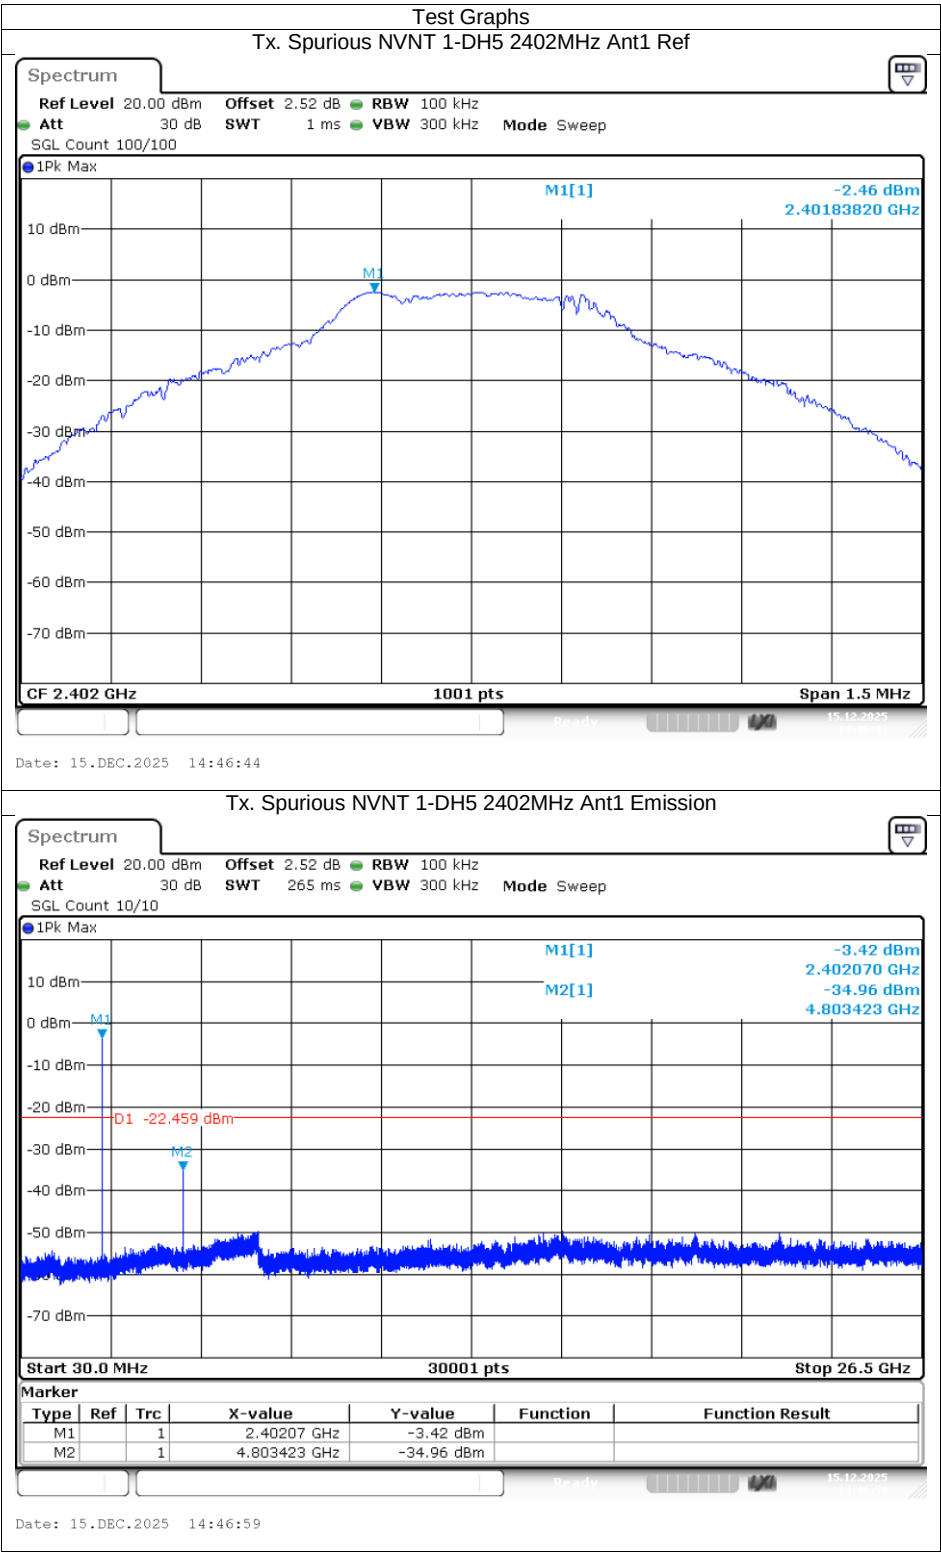


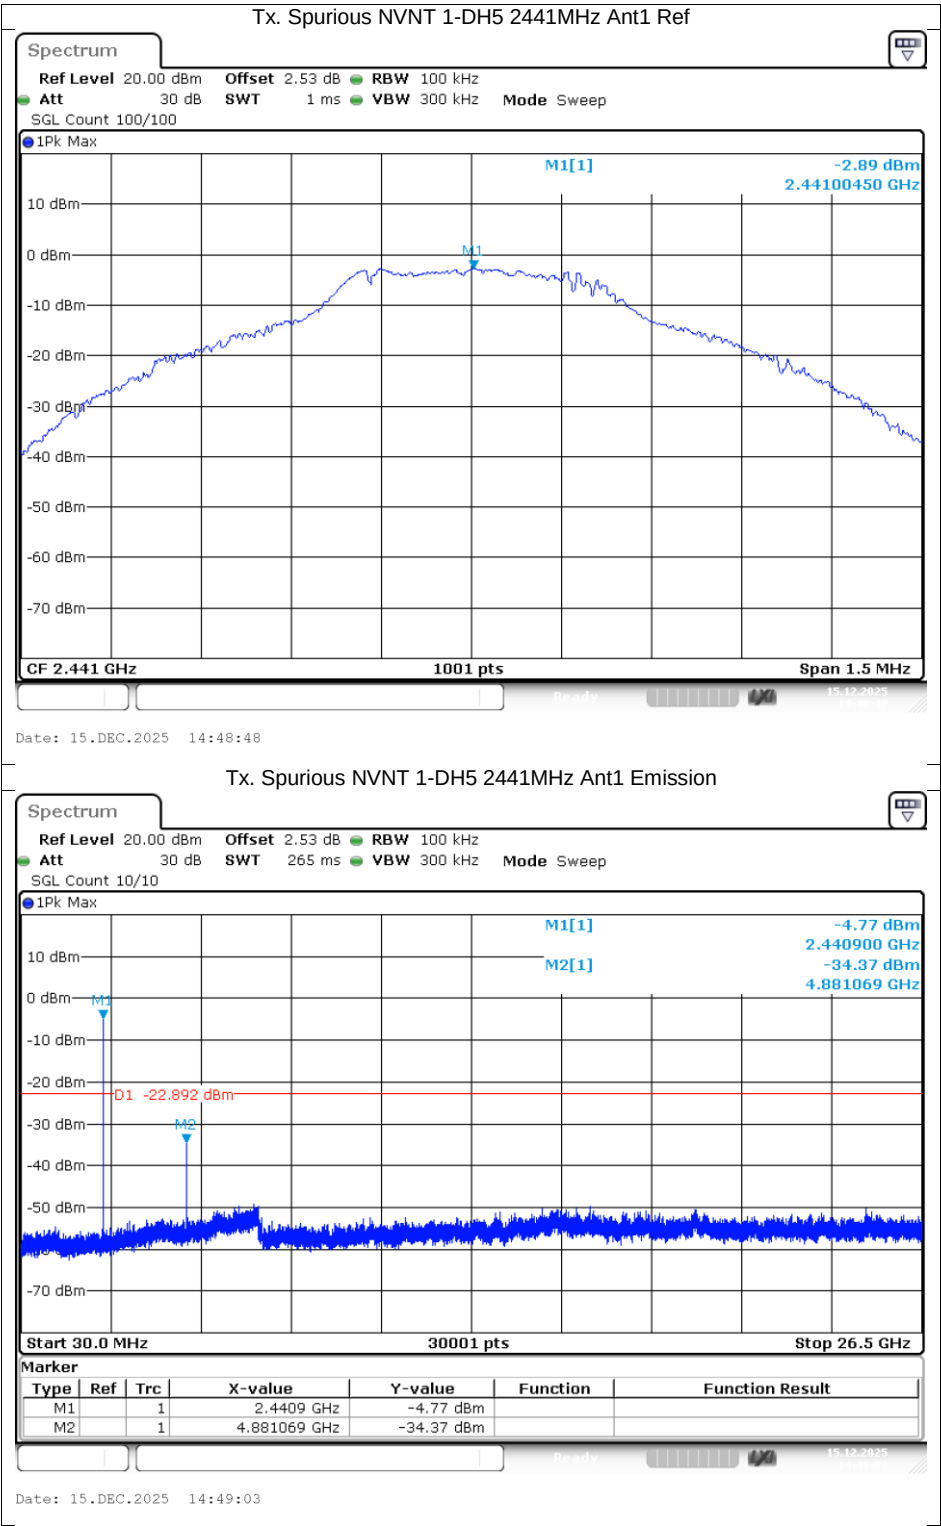


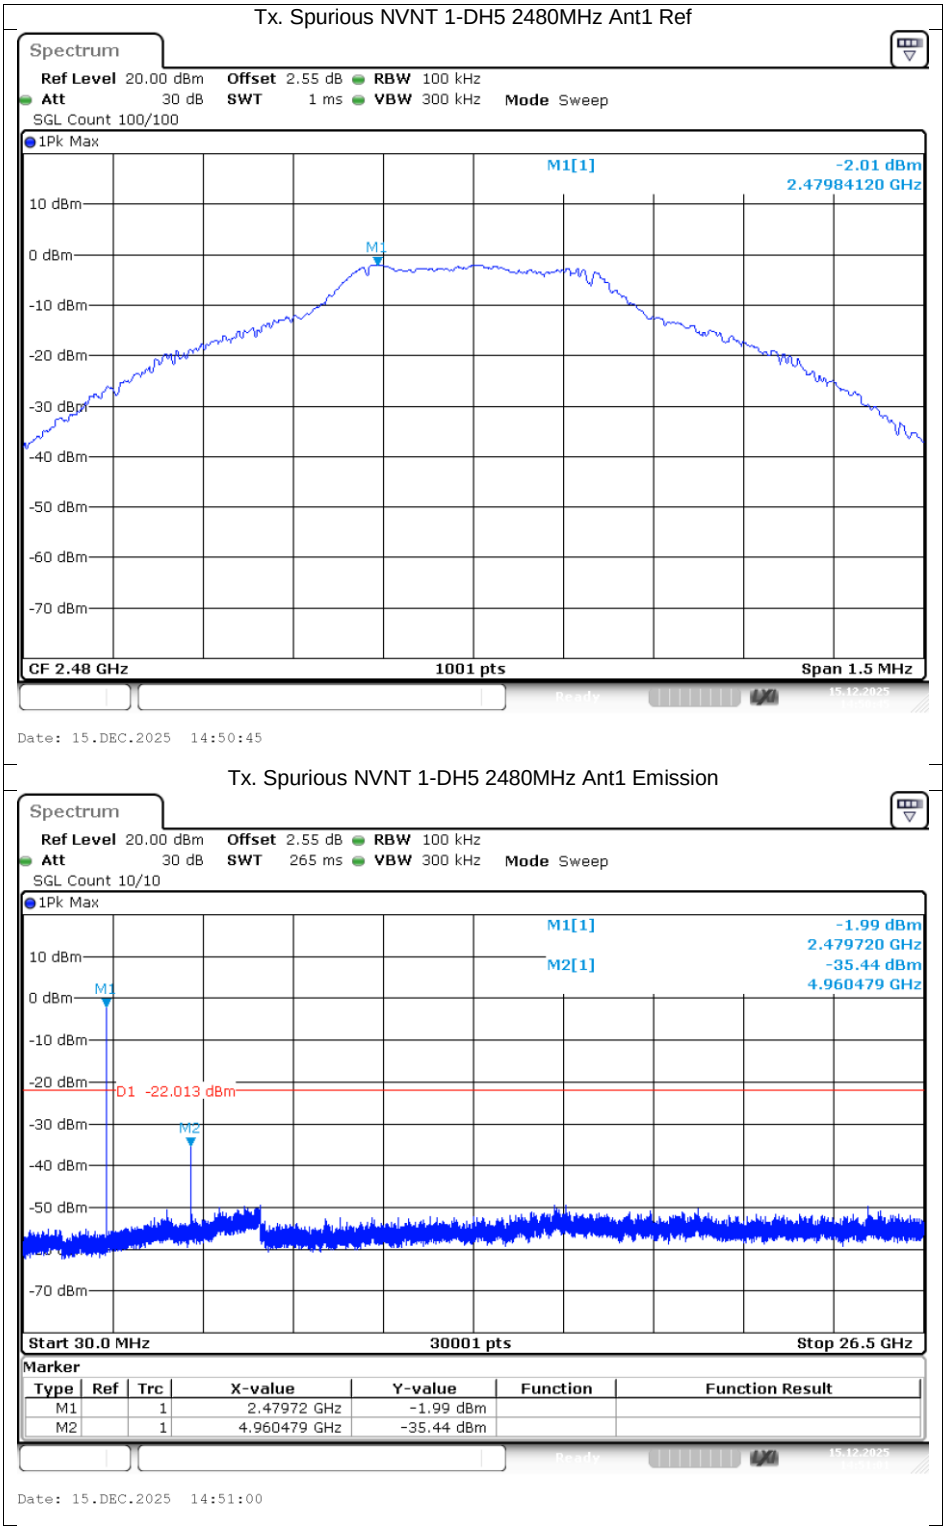


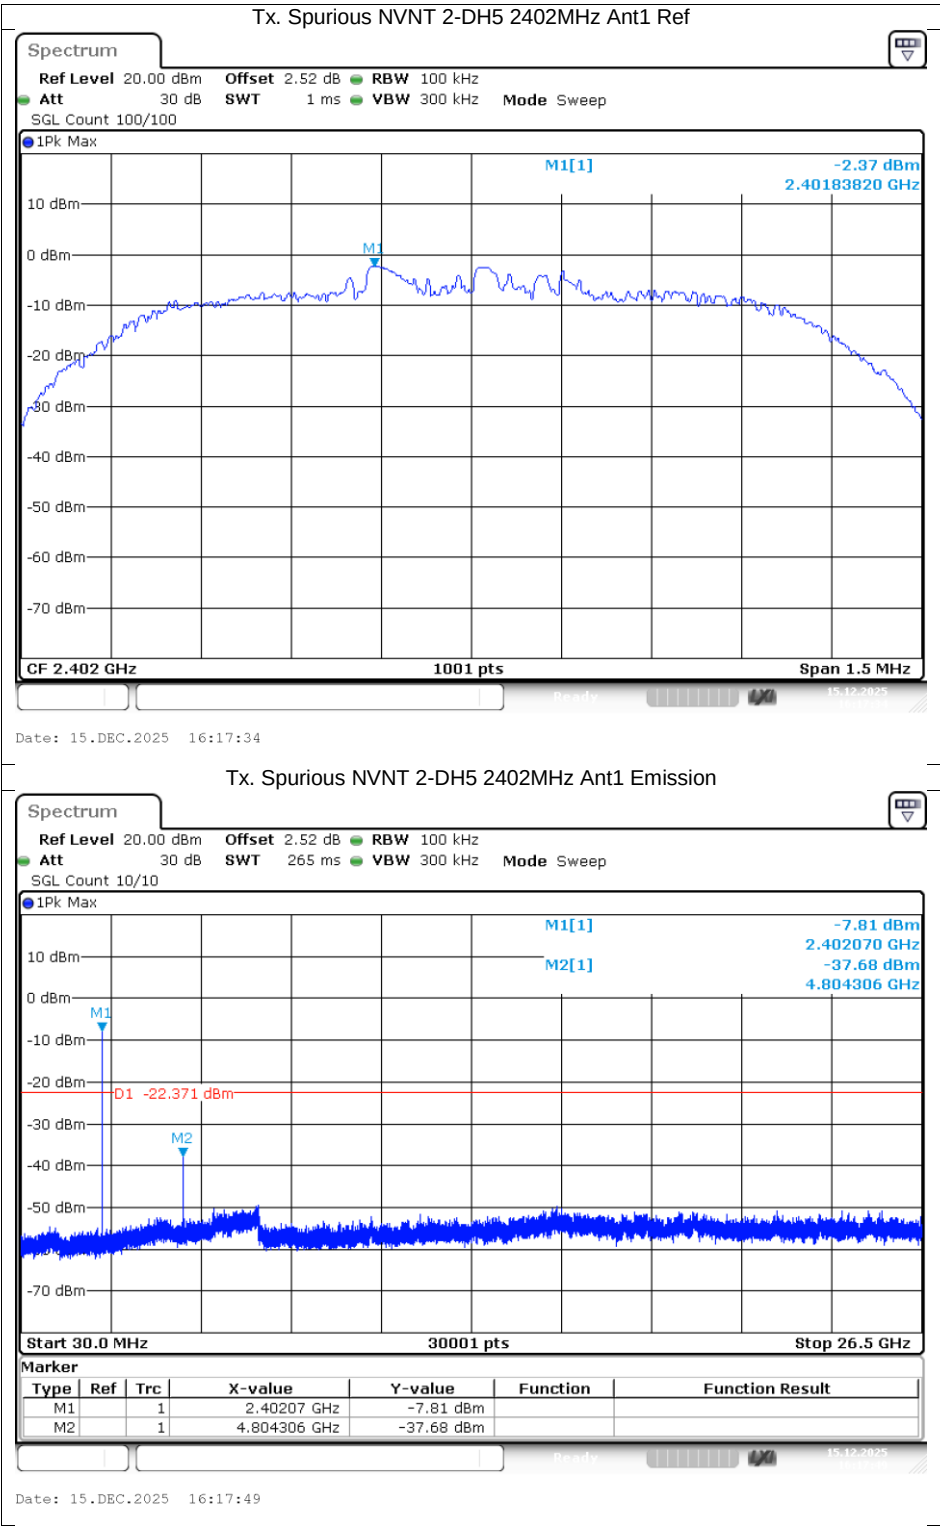


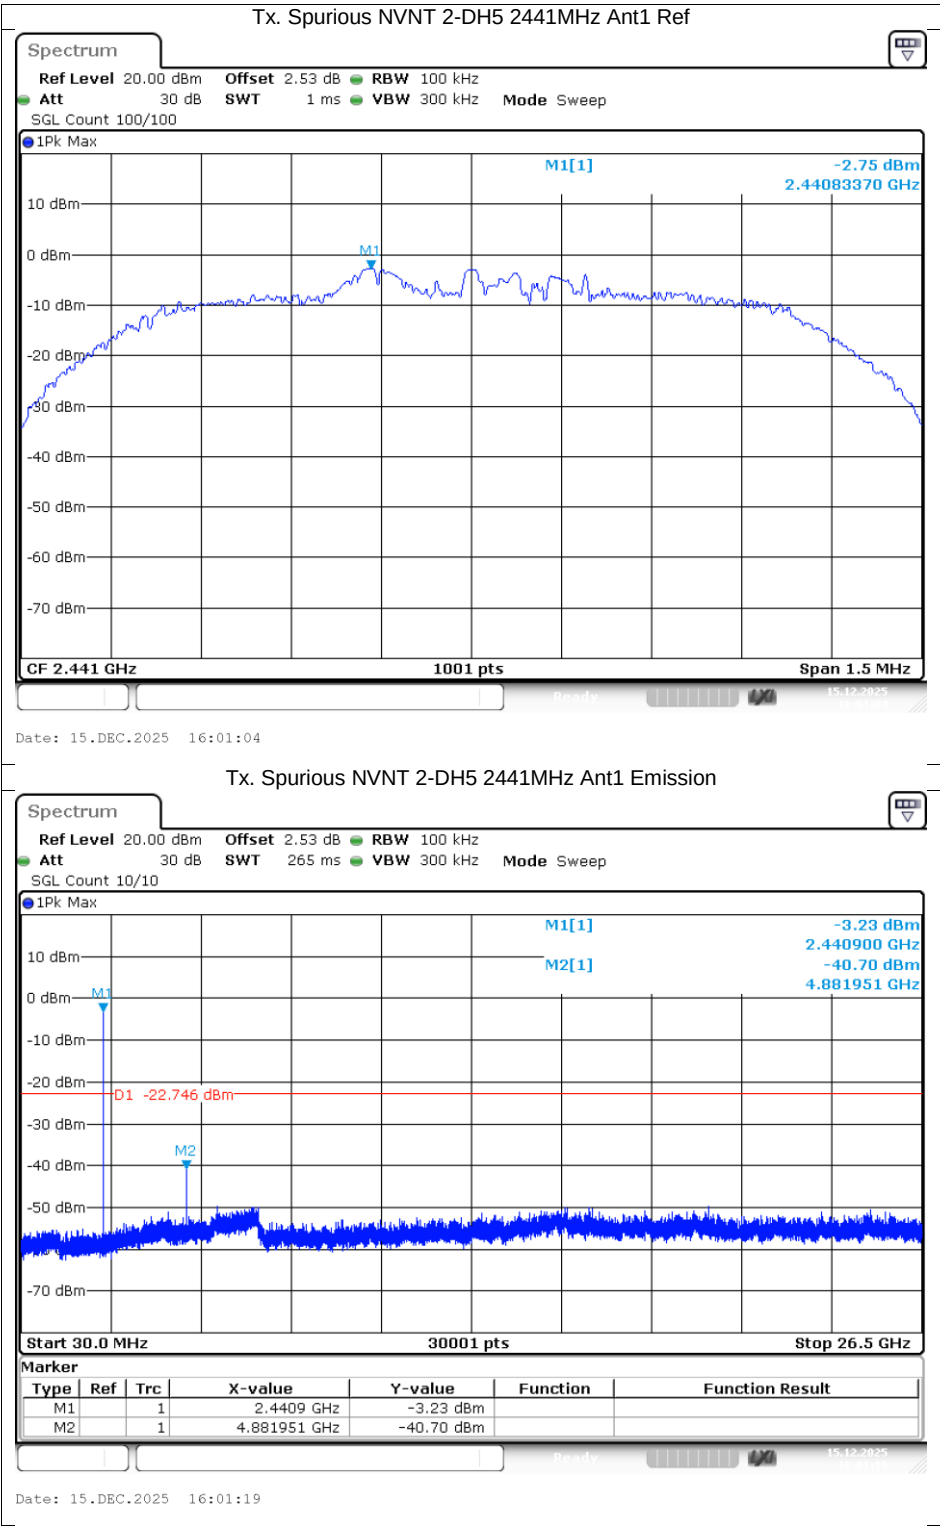

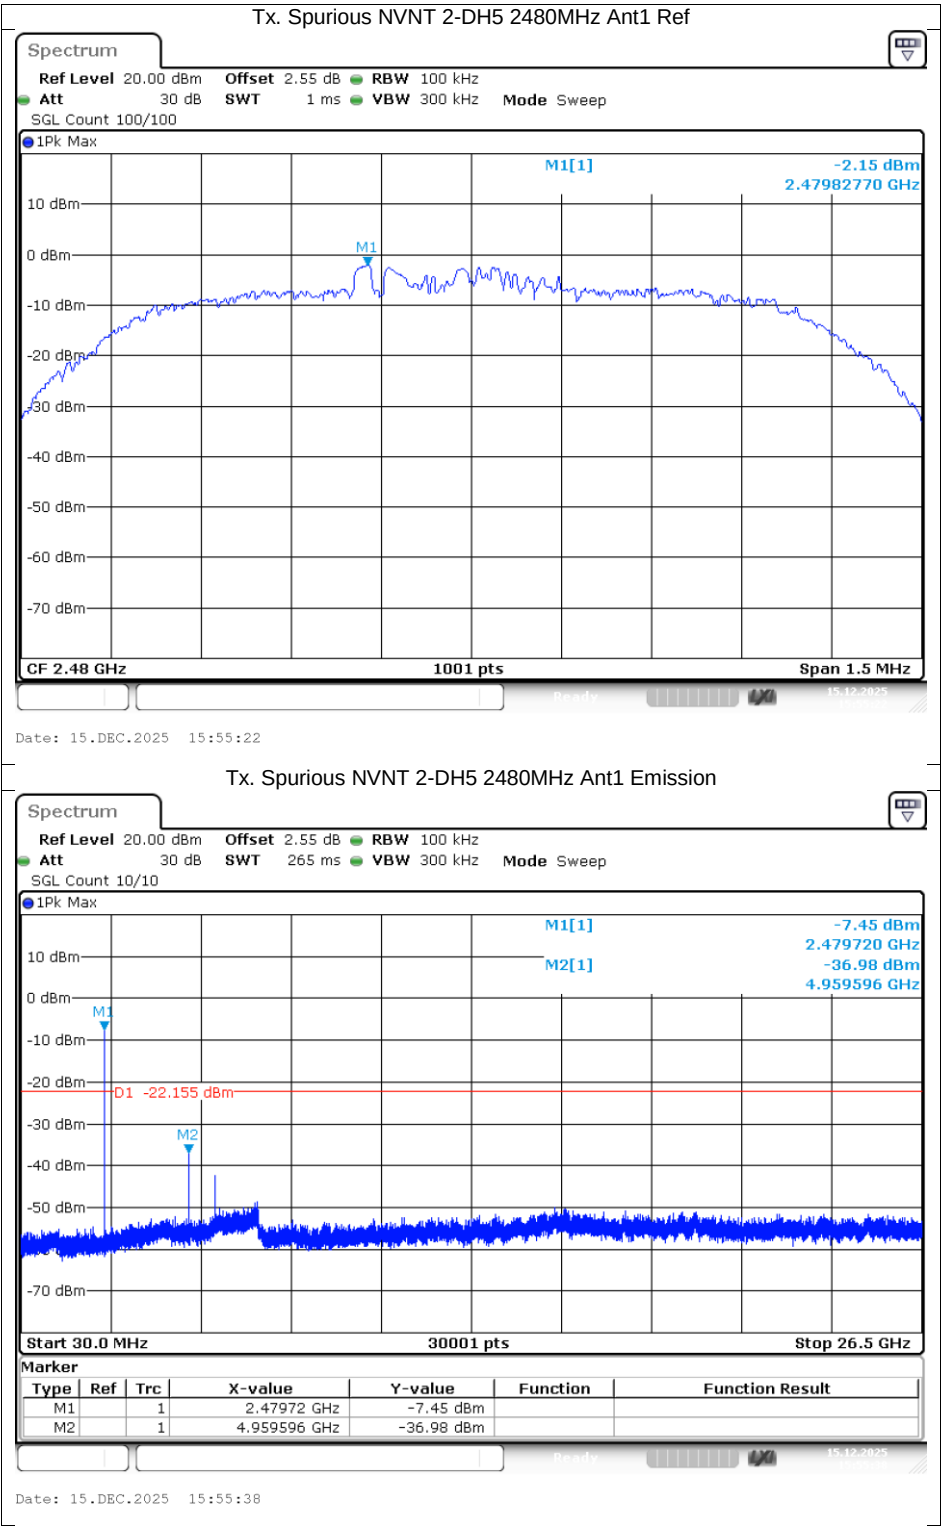

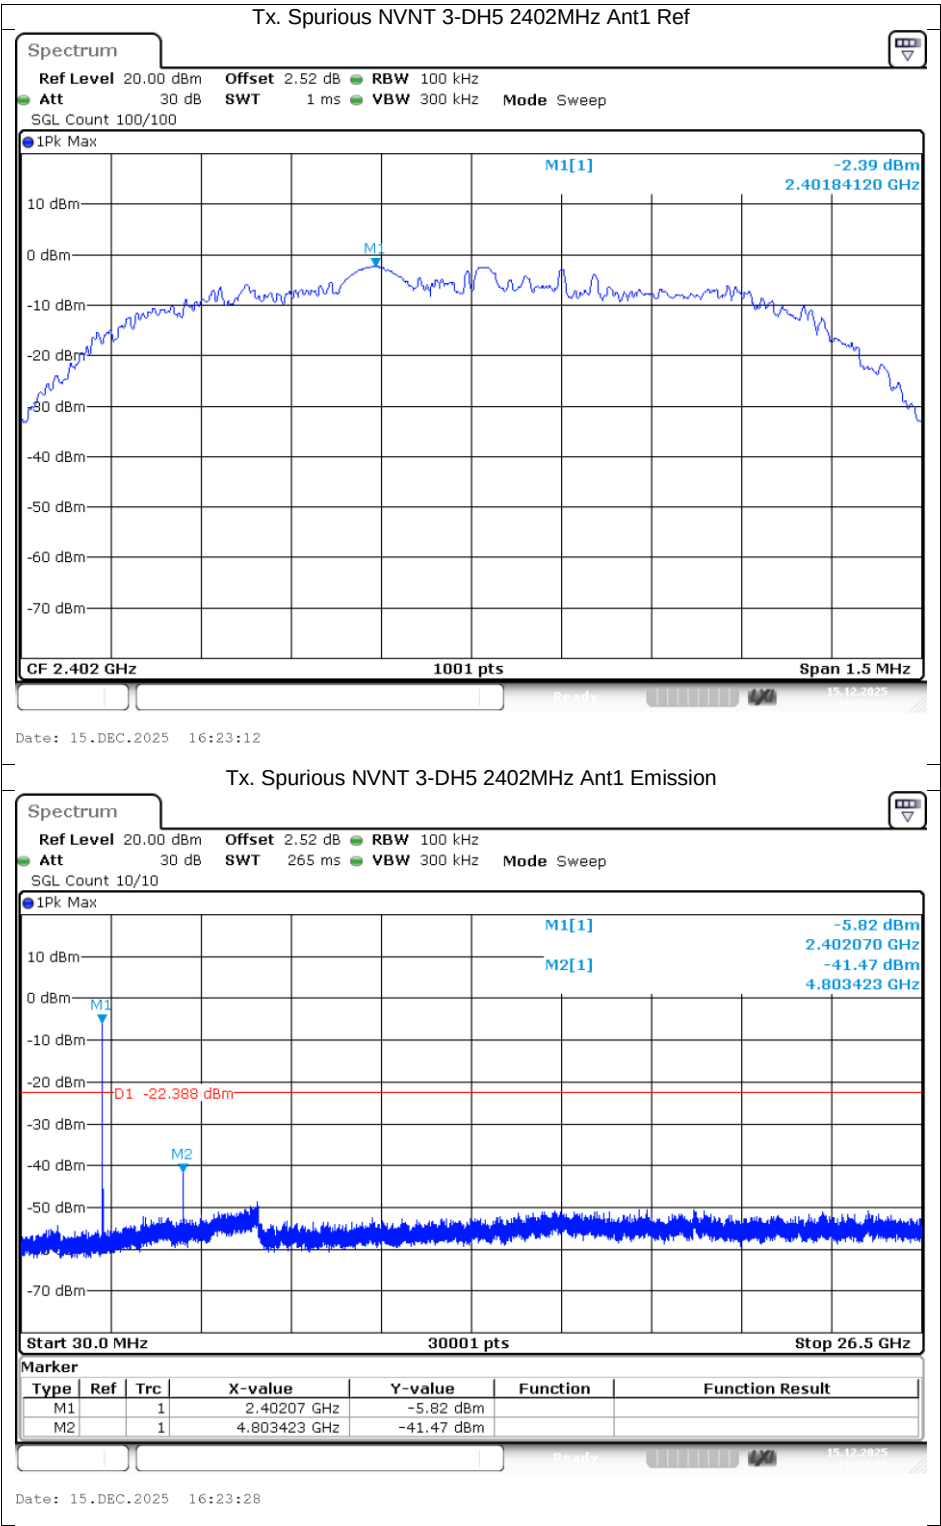

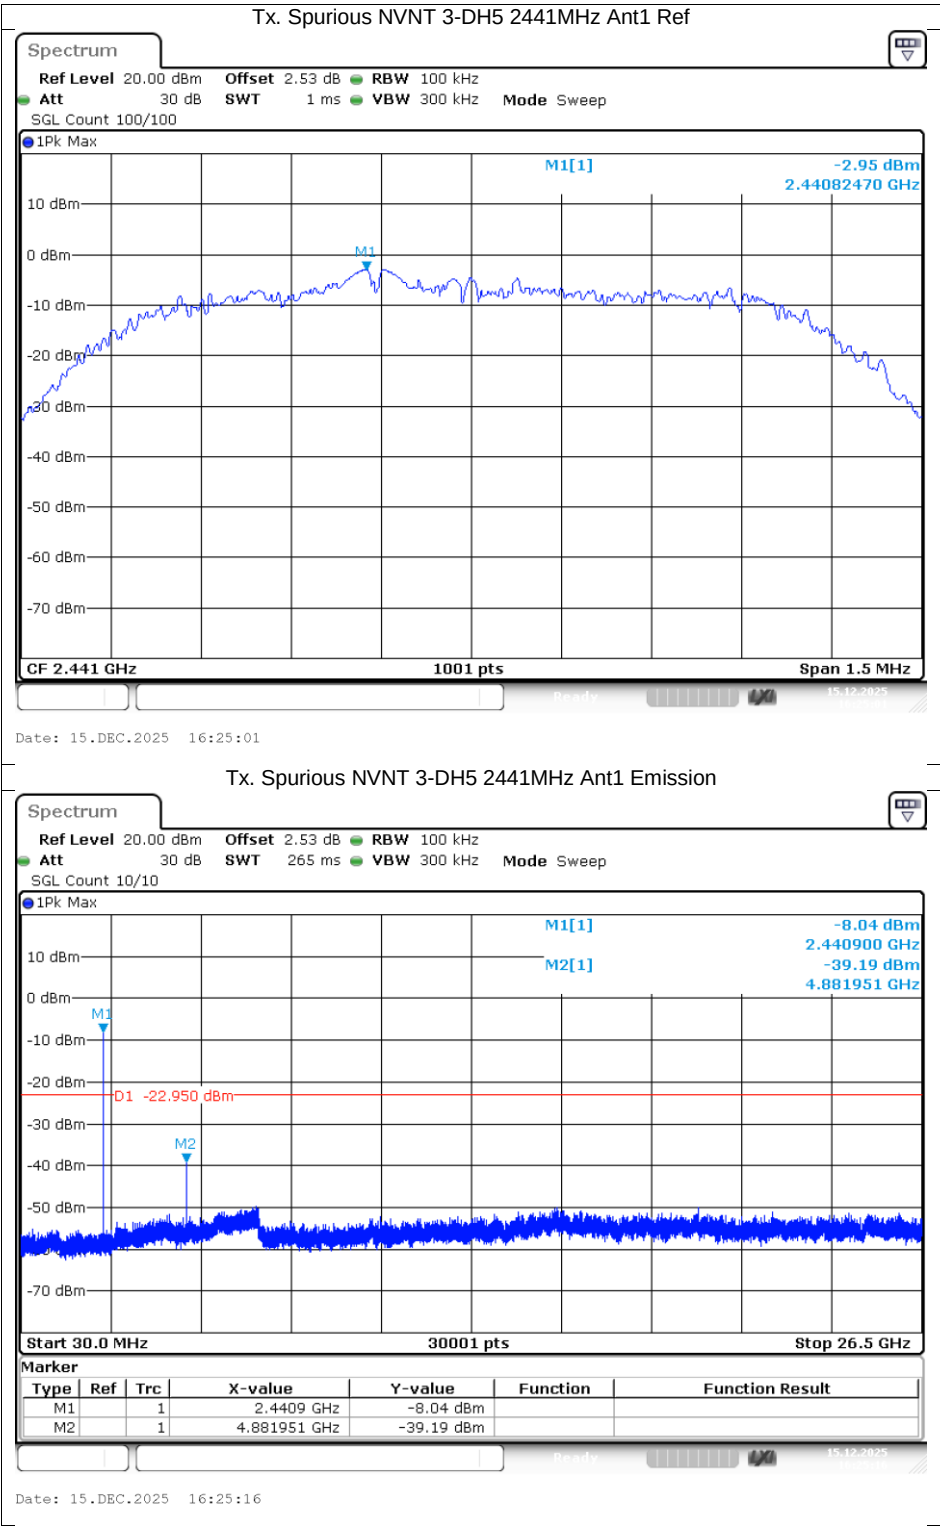


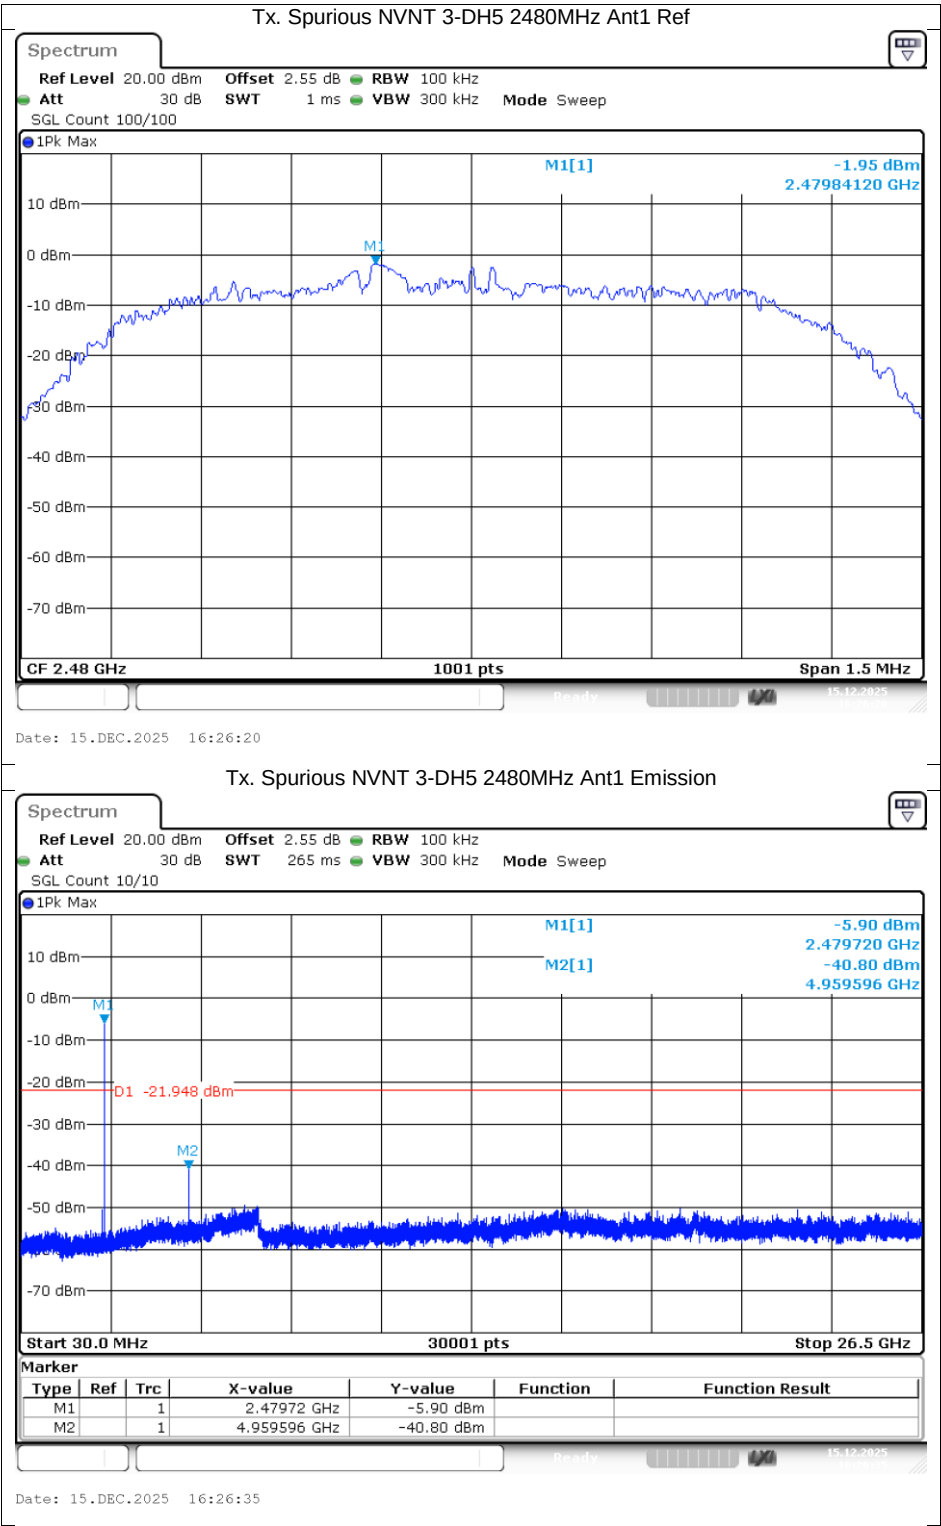



L:

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	-2.49	21	Pass
NVNT	1-DH5	2441	Ant1	-2.66	21	Pass
NVNT	1-DH5	2480	Ant1	-2.25	21	Pass
NVNT	2-DH5	2402	Ant1	-1.81	21	Pass
NVNT	2-DH5	2441	Ant1	-1.94	21	Pass
NVNT	2-DH5	2480	Ant1	-1.6	21	Pass
NVNT	3-DH5	2402	Ant1	-1.33	21	Pass
NVNT	3-DH5	2441	Ant1	-1.44	21	Pass
NVNT	3-DH5	2480	Ant1	-1.07	21	Pass

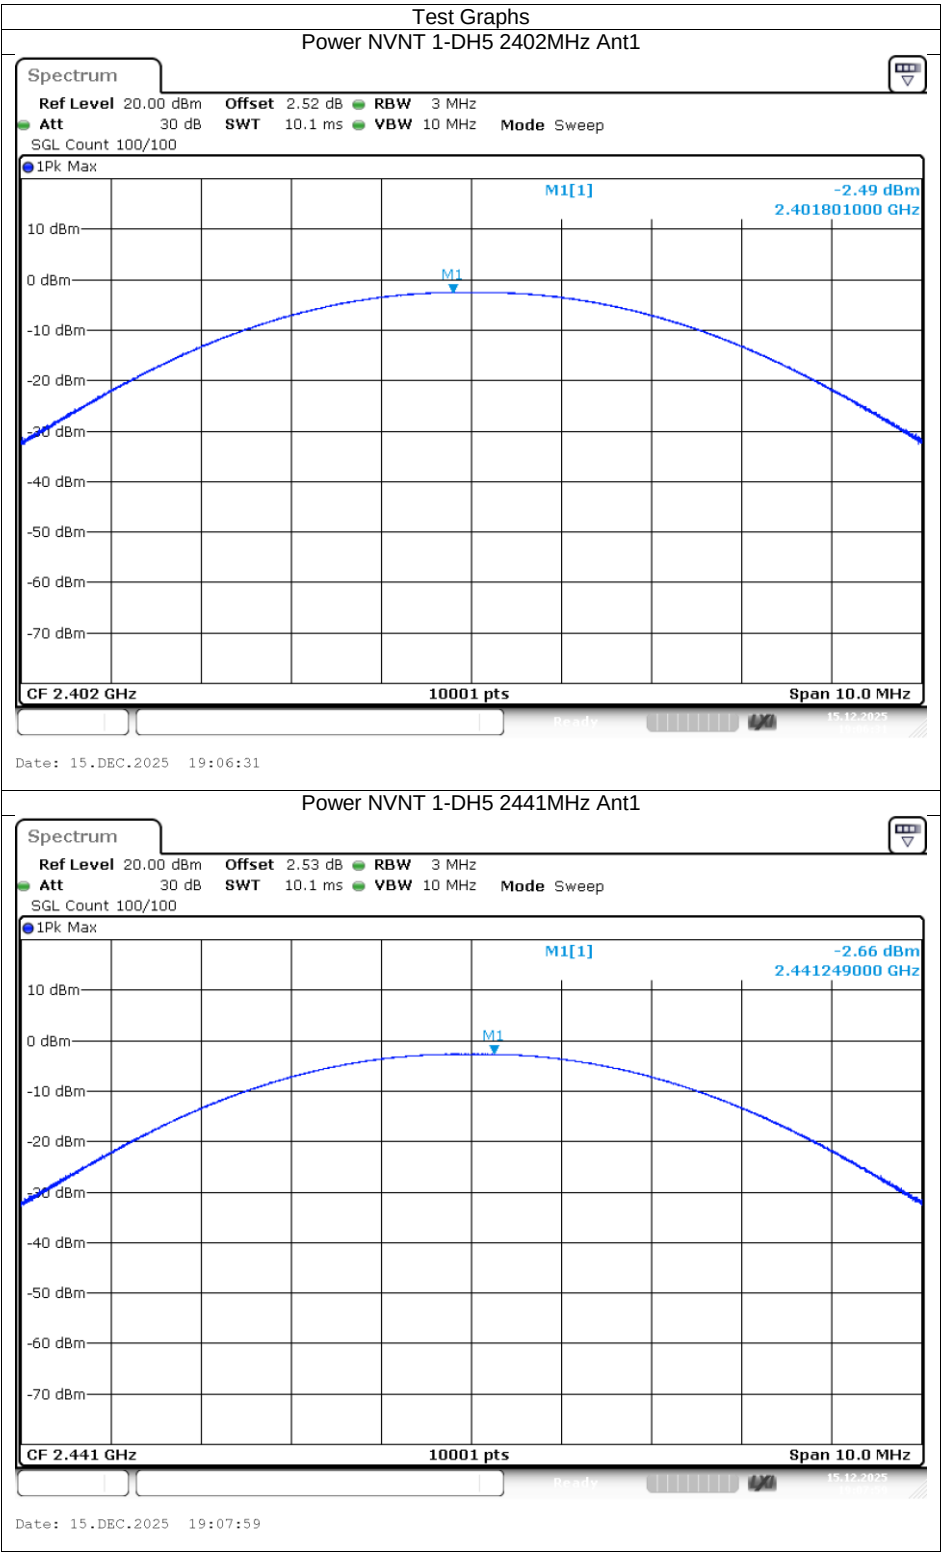

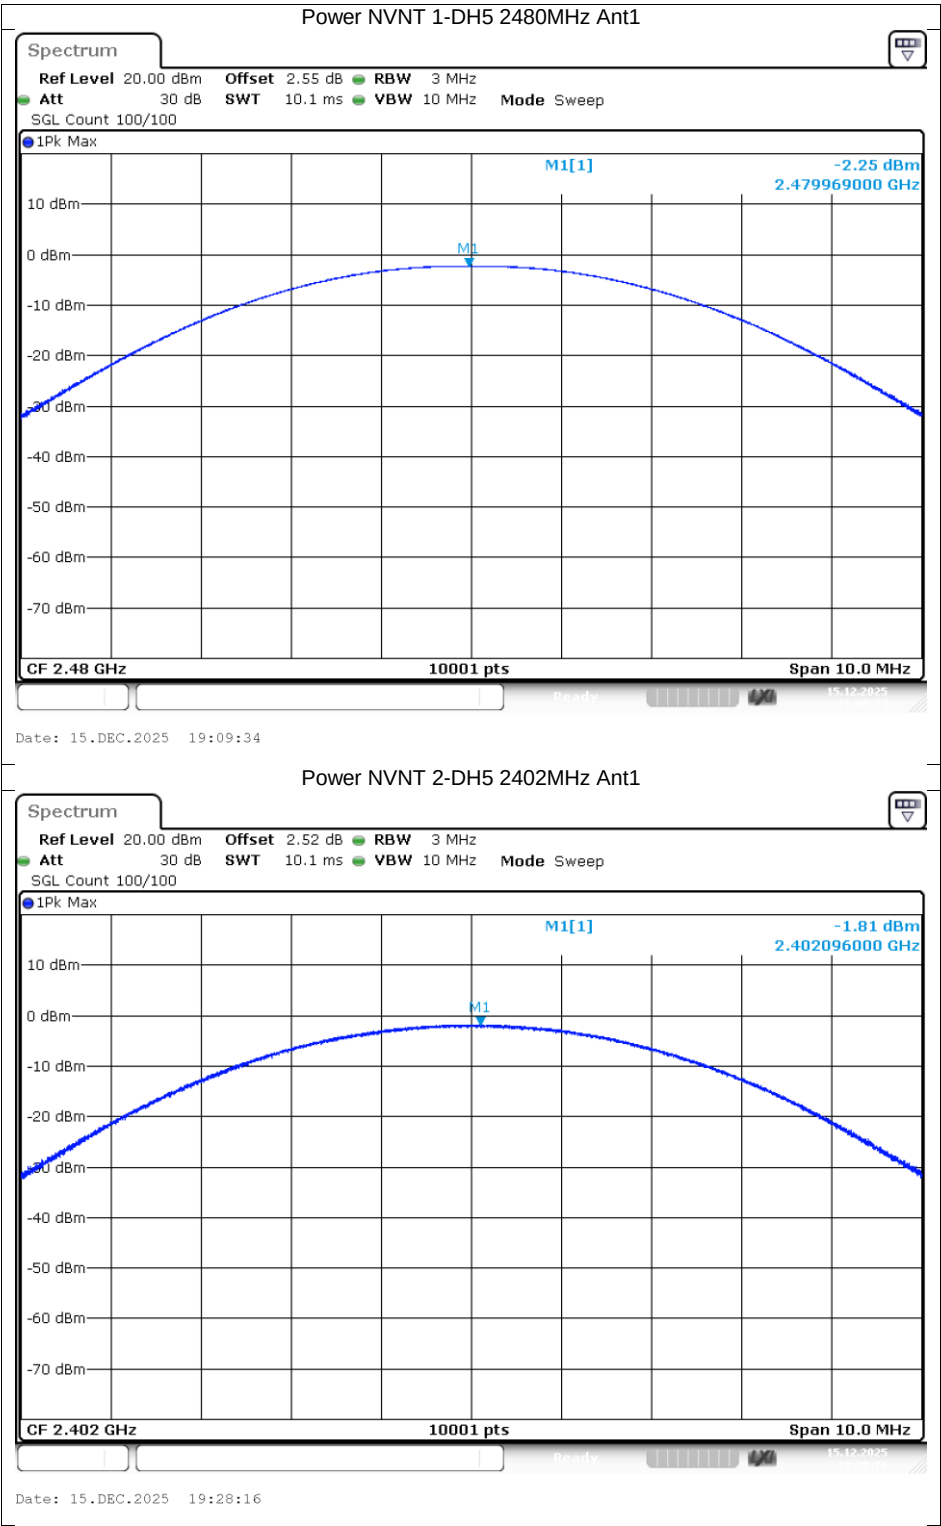

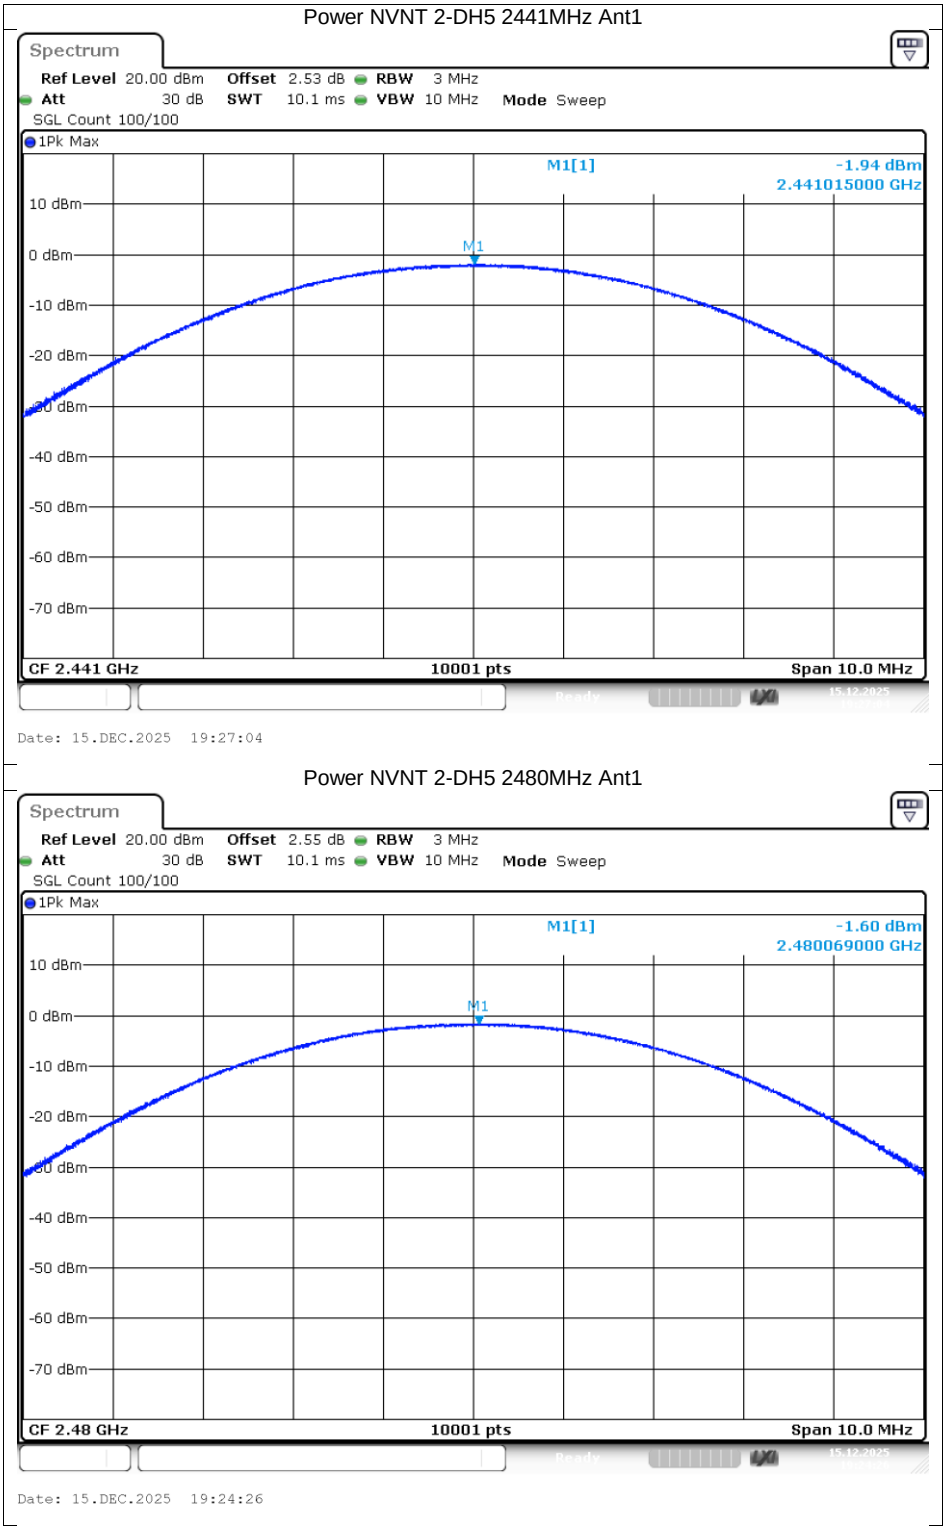





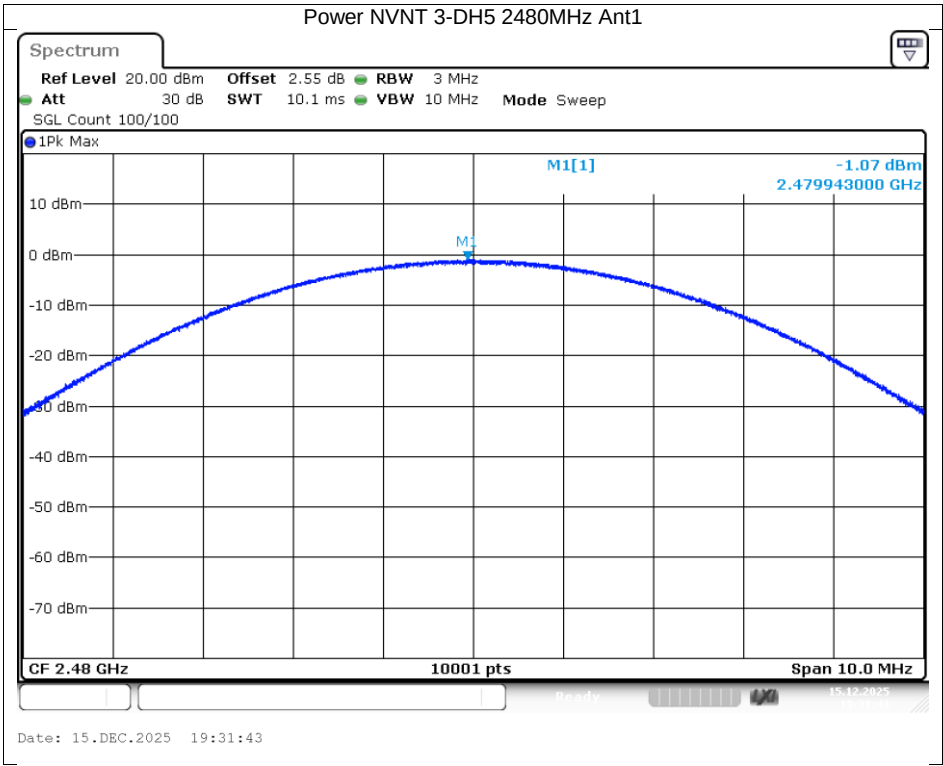



-20dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.93	N/A	N/A
NVNT	1-DH5	2441	Ant1	0.95	N/A	N/A
NVNT	1-DH5	2480	Ant1	0.93	N/A	N/A
NVNT	2-DH5	2402	Ant1	1.23	N/A	N/A
NVNT	2-DH5	2441	Ant1	1.24	N/A	N/A
NVNT	2-DH5	2480	Ant1	1.29	N/A	N/A
NVNT	3-DH5	2402	Ant1	1.33	N/A	N/A
NVNT	3-DH5	2441	Ant1	1.25	N/A	N/A
NVNT	3-DH5	2480	Ant1	1.27	N/A	N/A

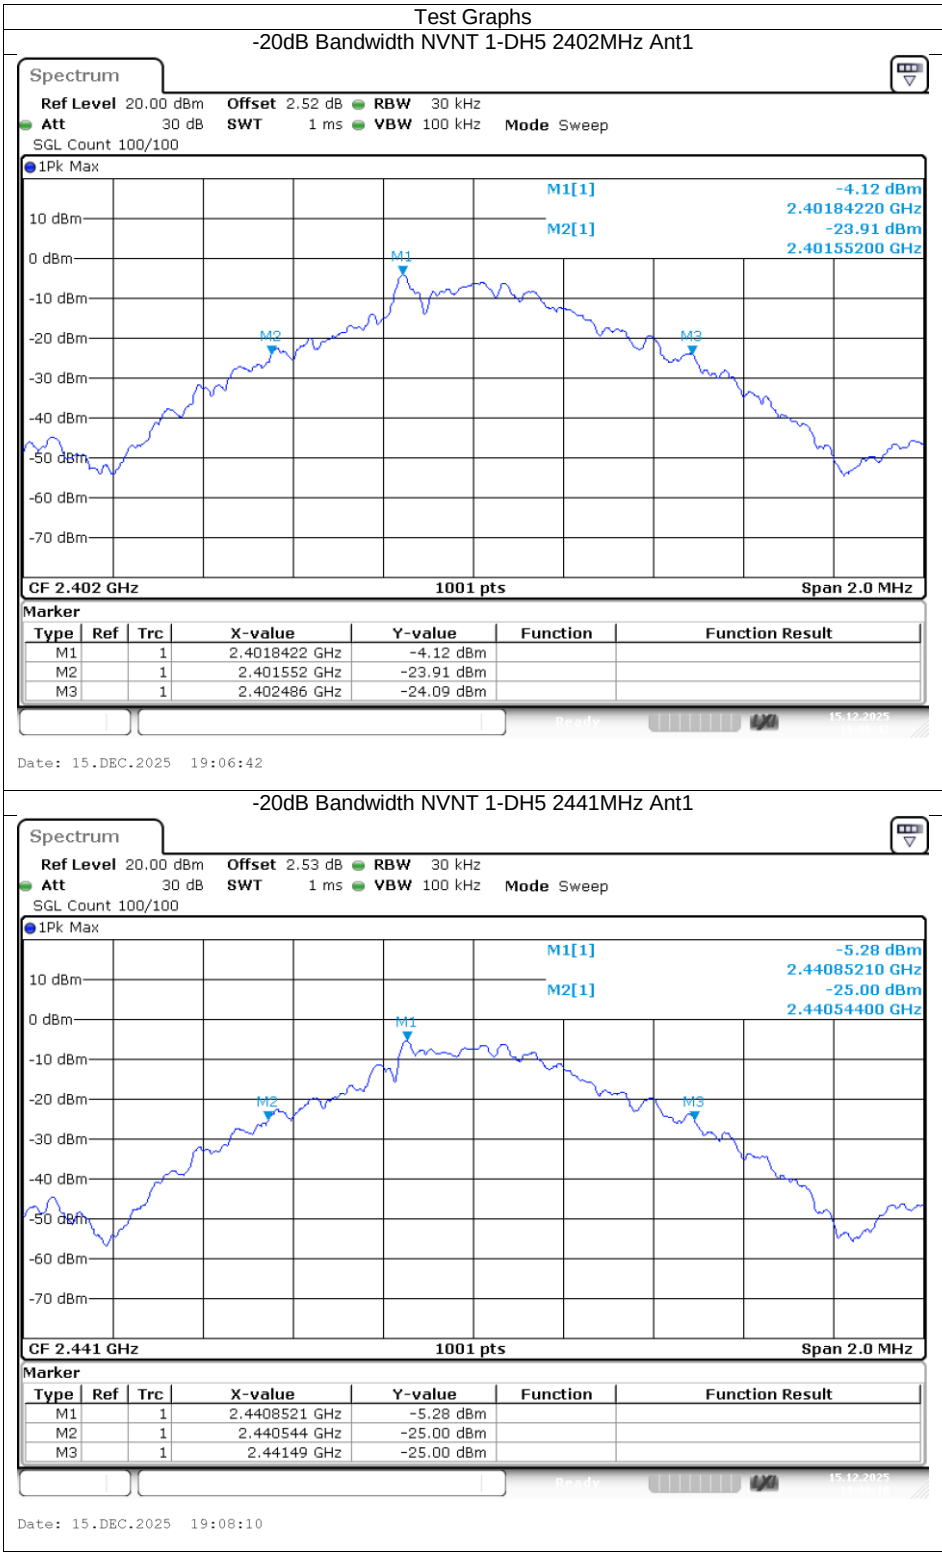

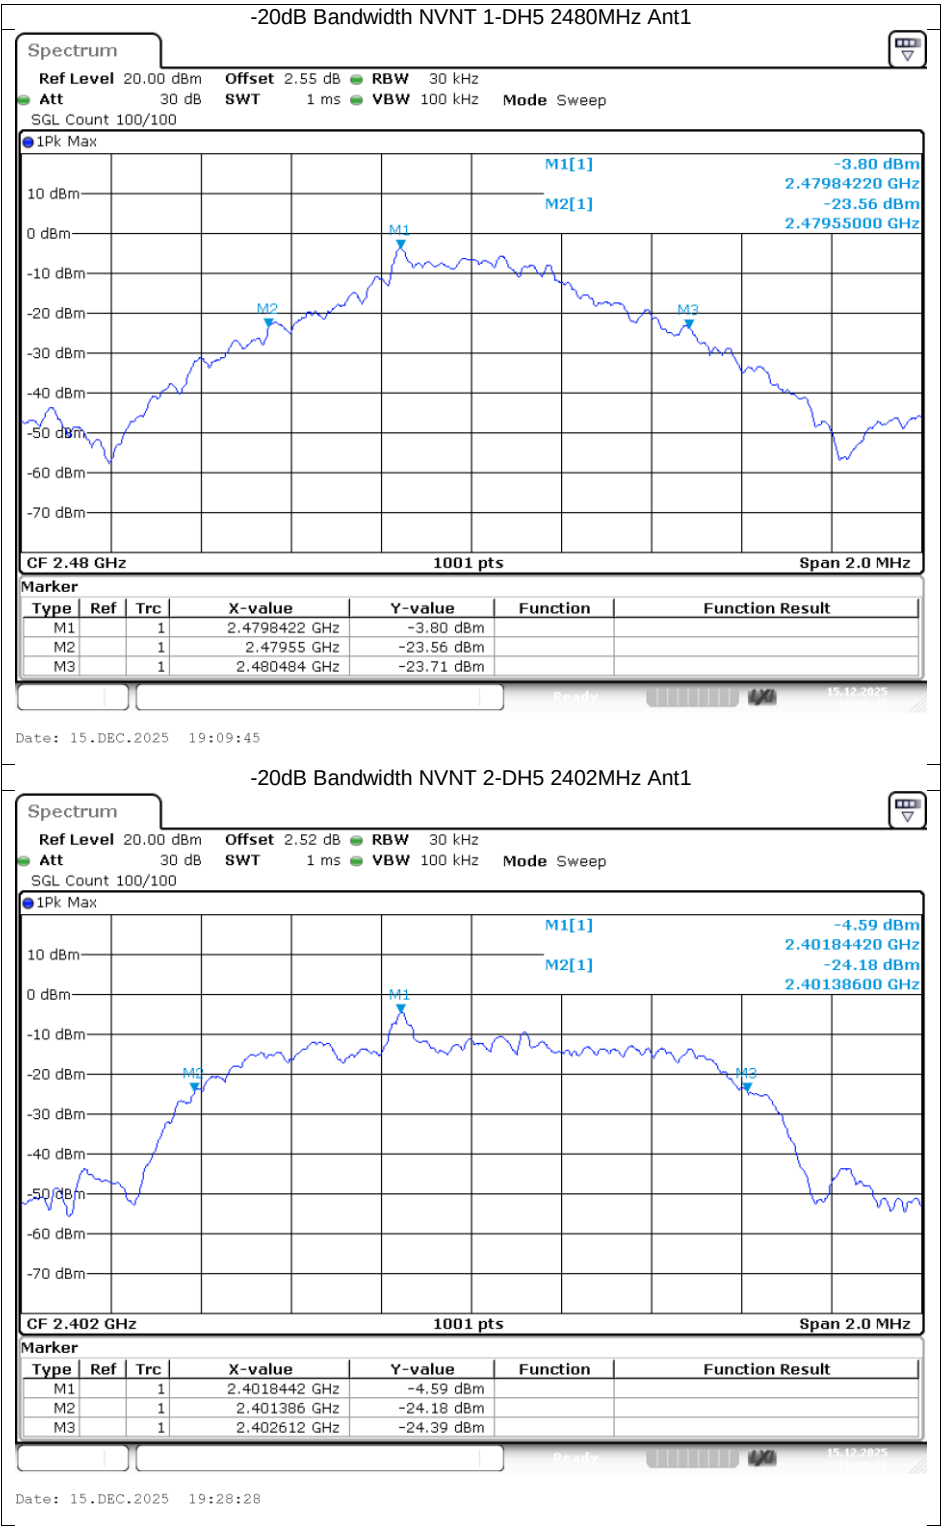

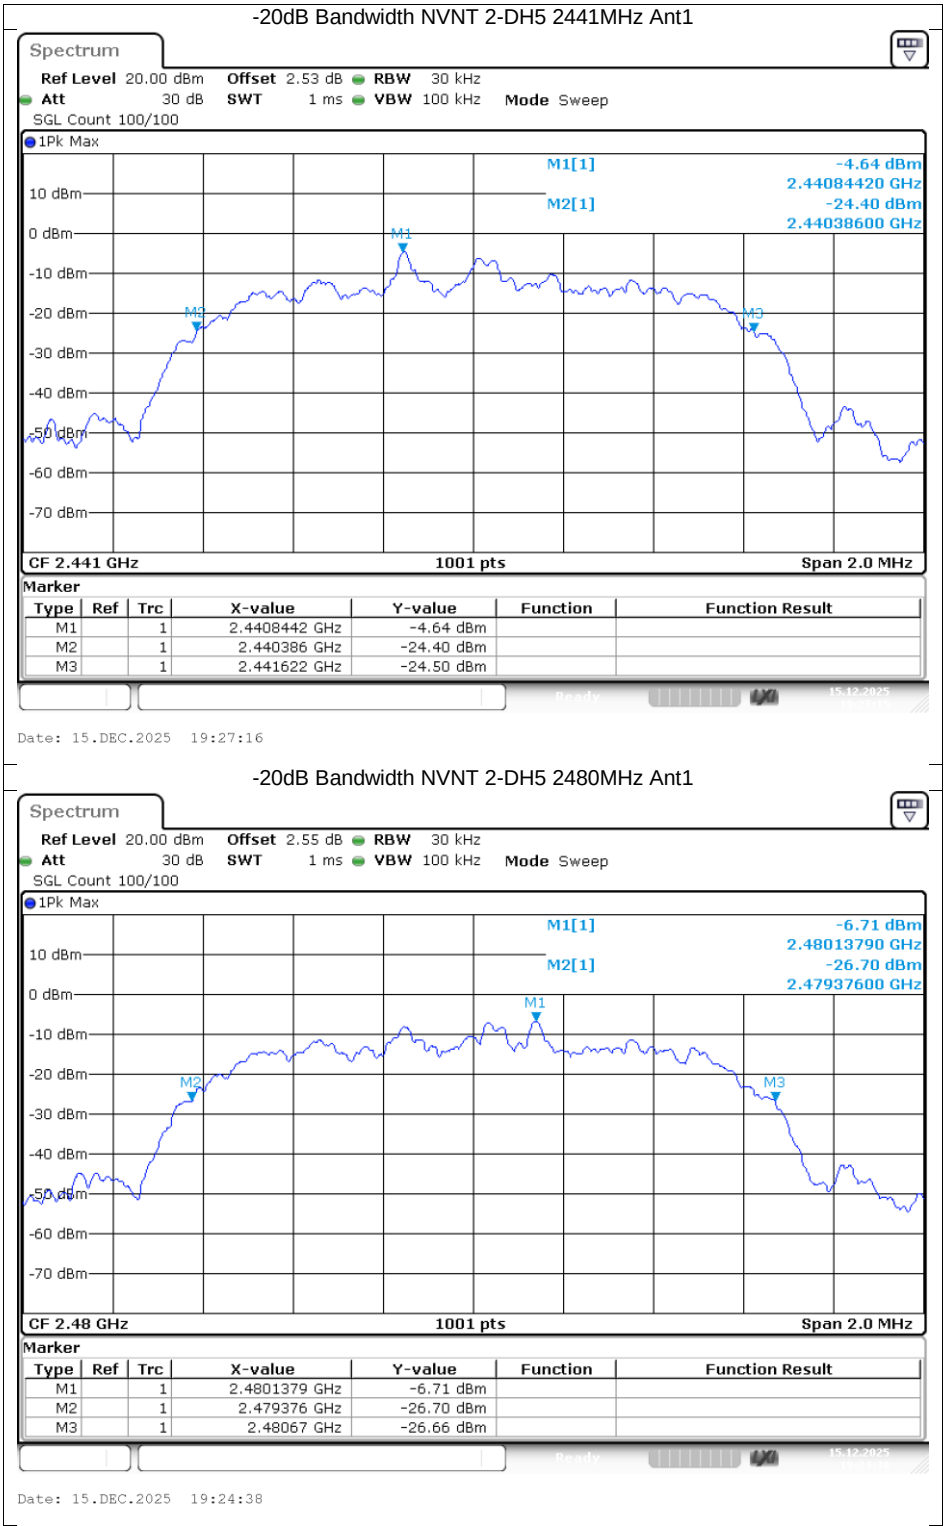


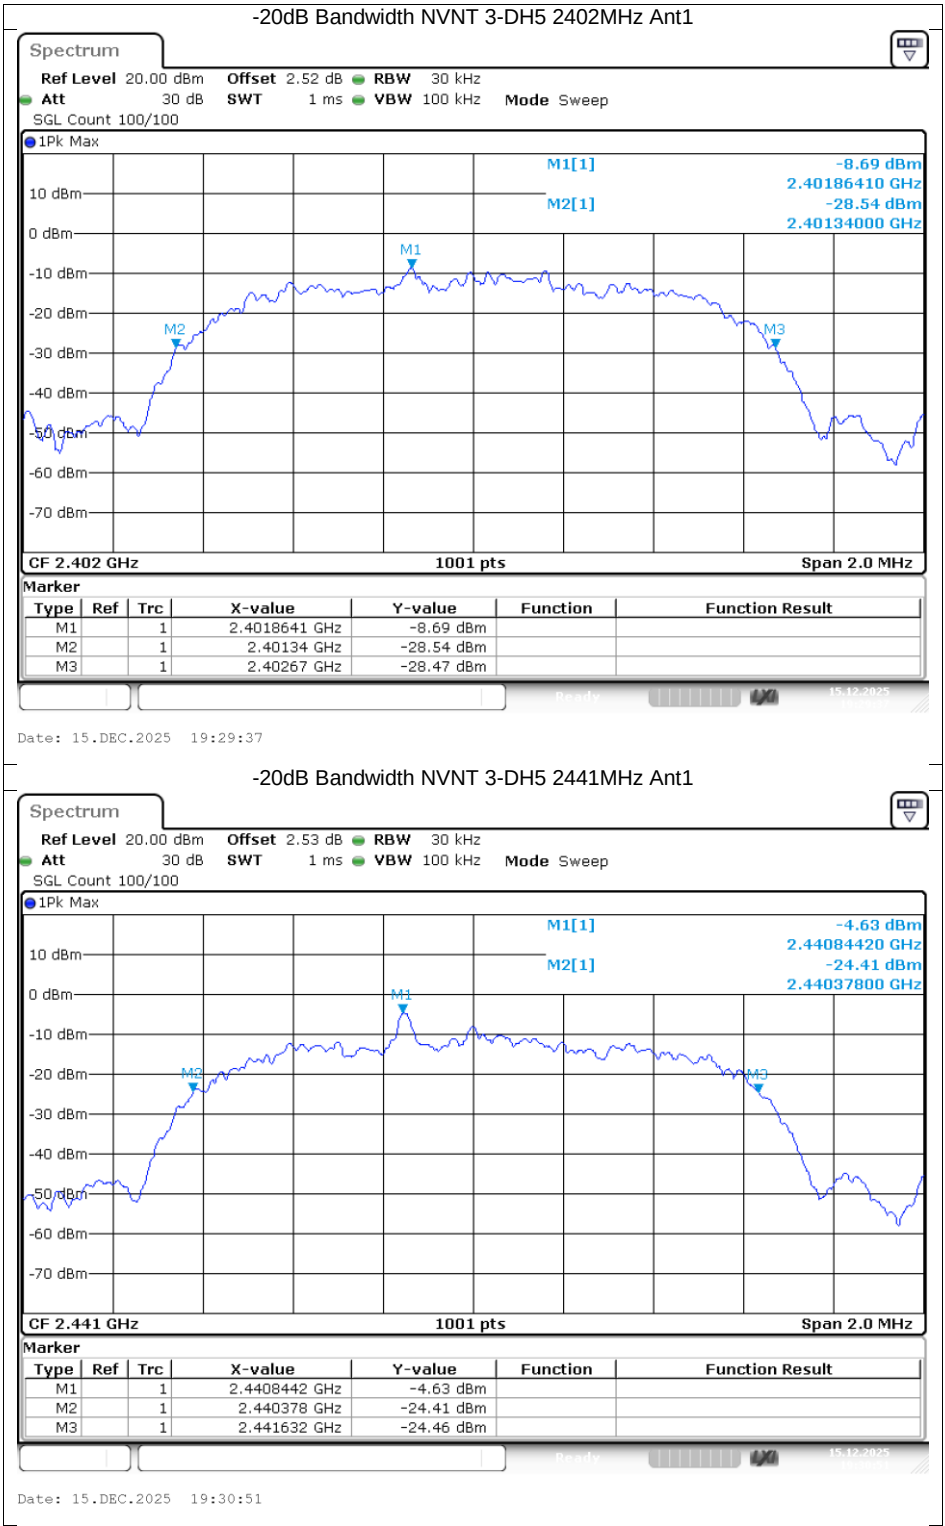


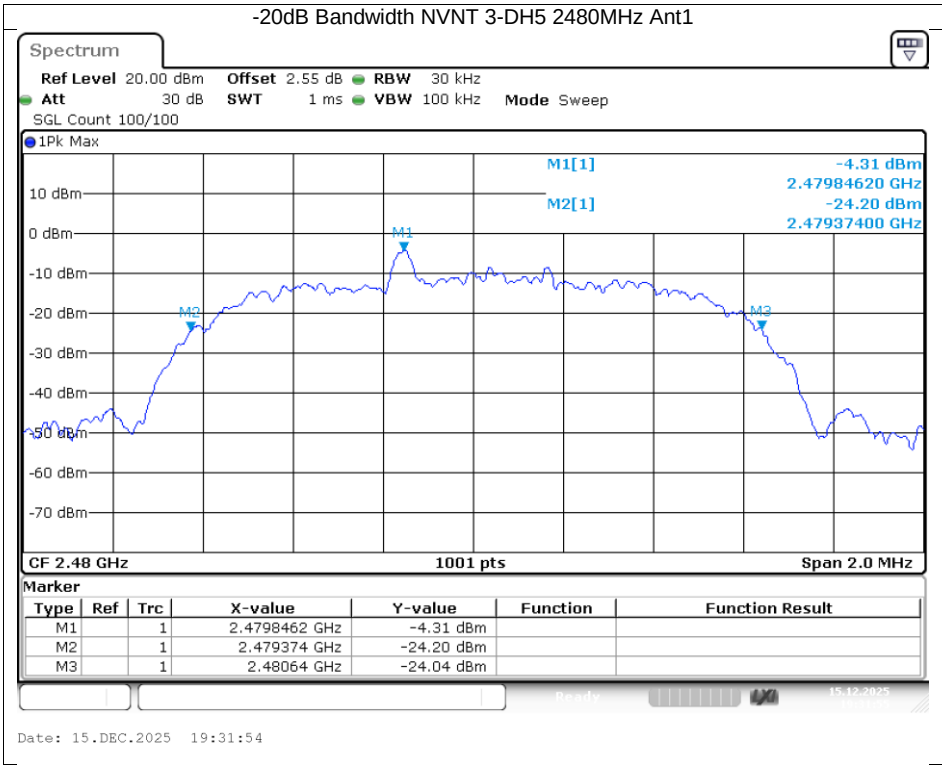



Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.857
NVNT	1-DH5	2441	Ant1	0.866
NVNT	1-DH5	2480	Ant1	0.857
NVNT	2-DH5	2402	Ant1	1.172
NVNT	2-DH5	2441	Ant1	1.193
NVNT	2-DH5	2480	Ant1	1.154
NVNT	3-DH5	2402	Ant1	1.169
NVNT	3-DH5	2441	Ant1	1.169
NVNT	3-DH5	2480	Ant1	1.172

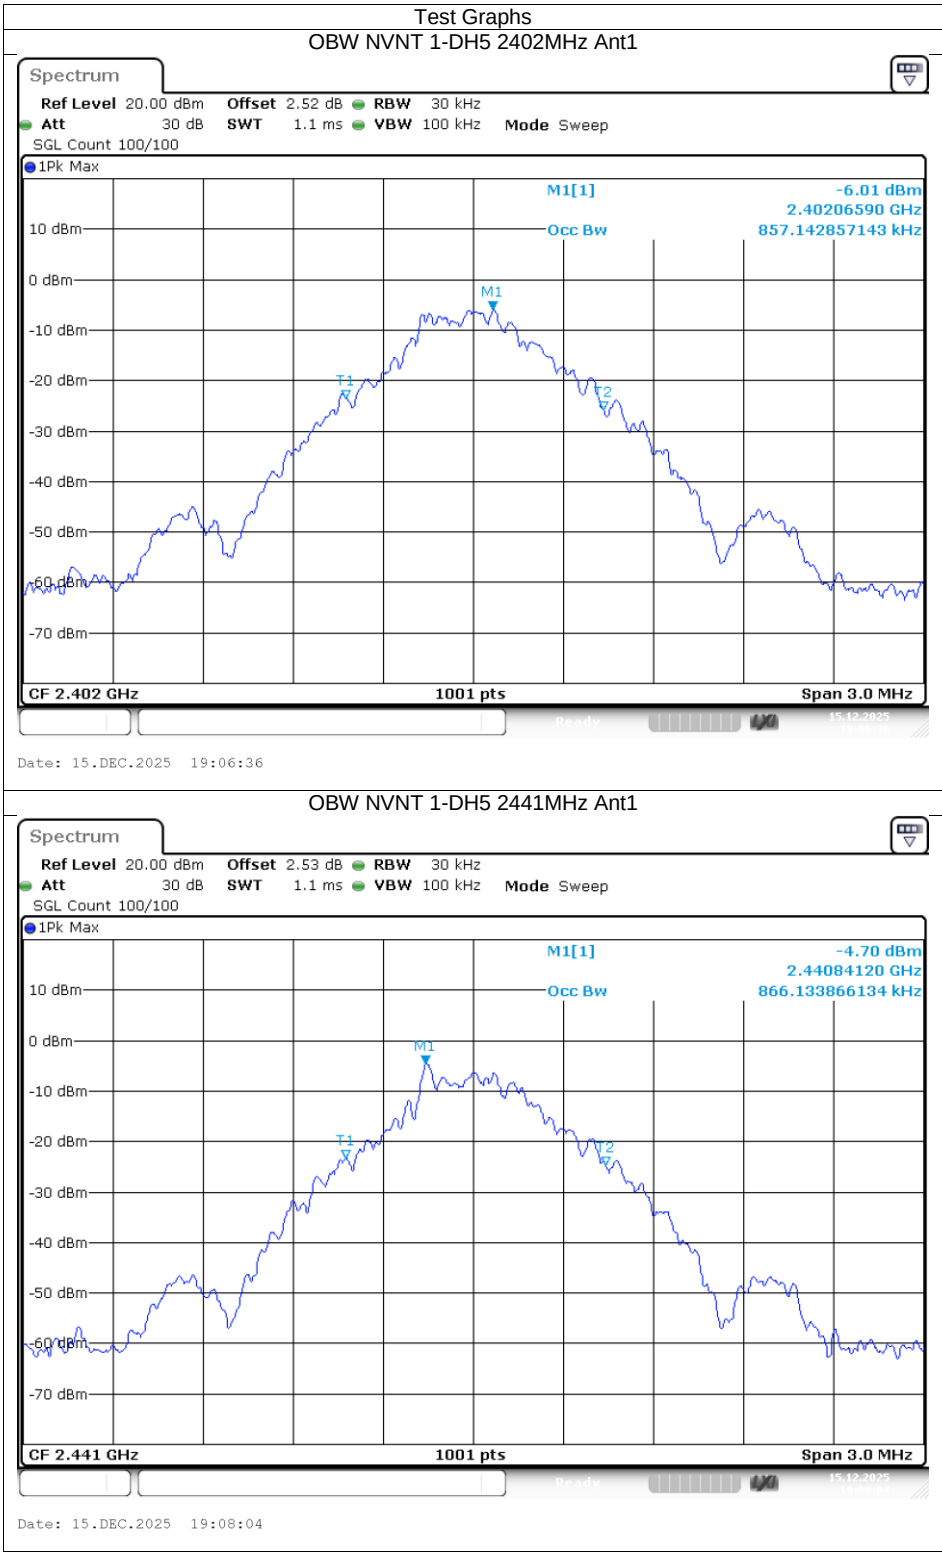

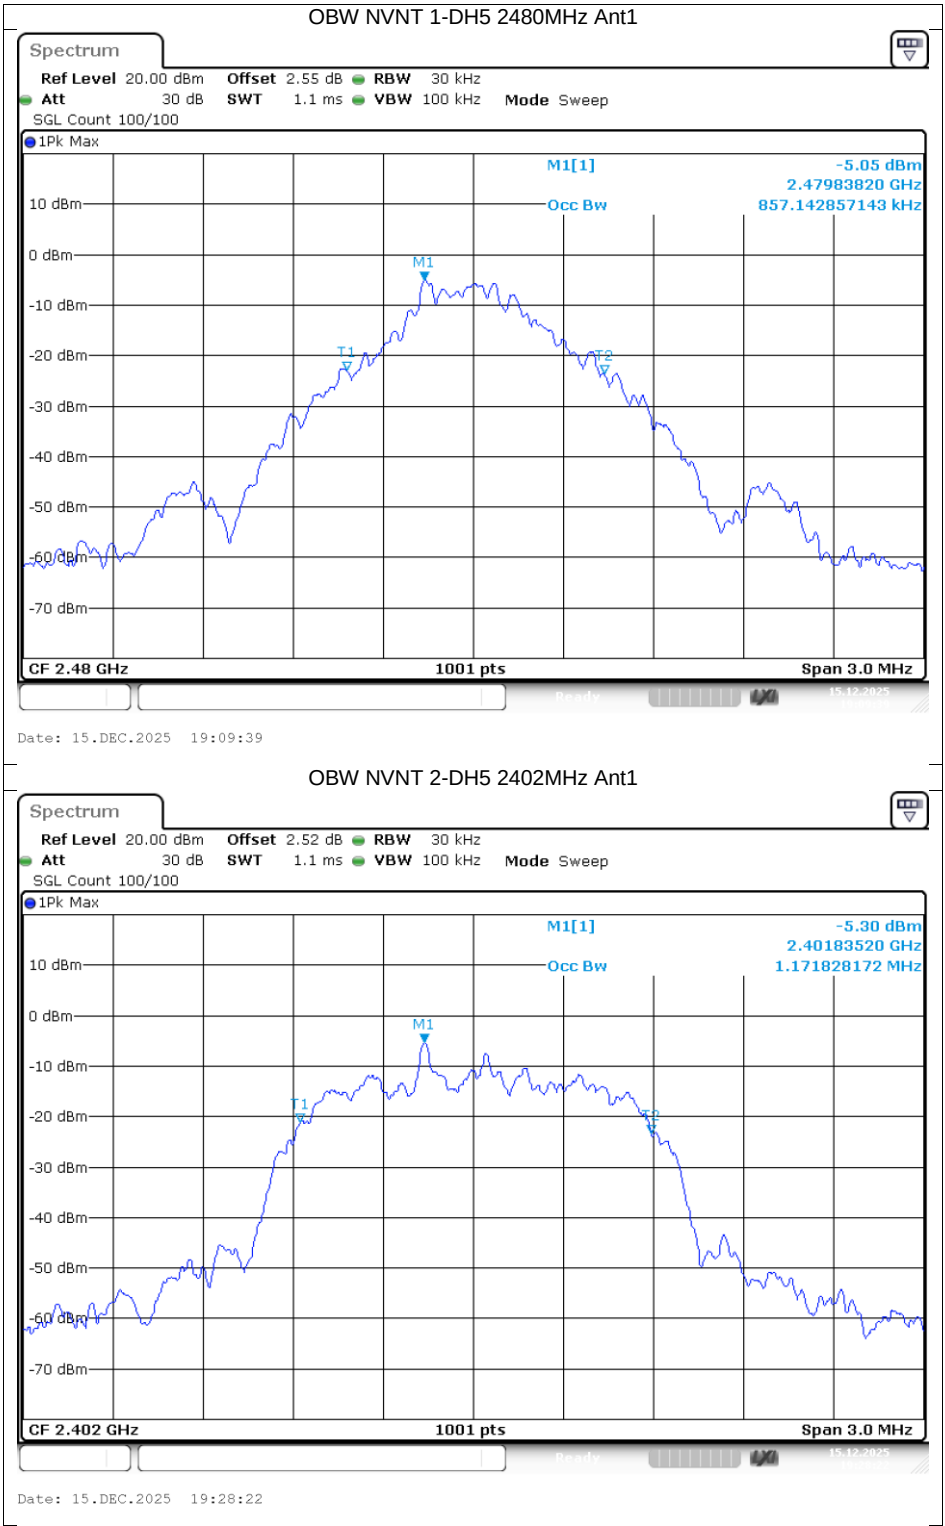

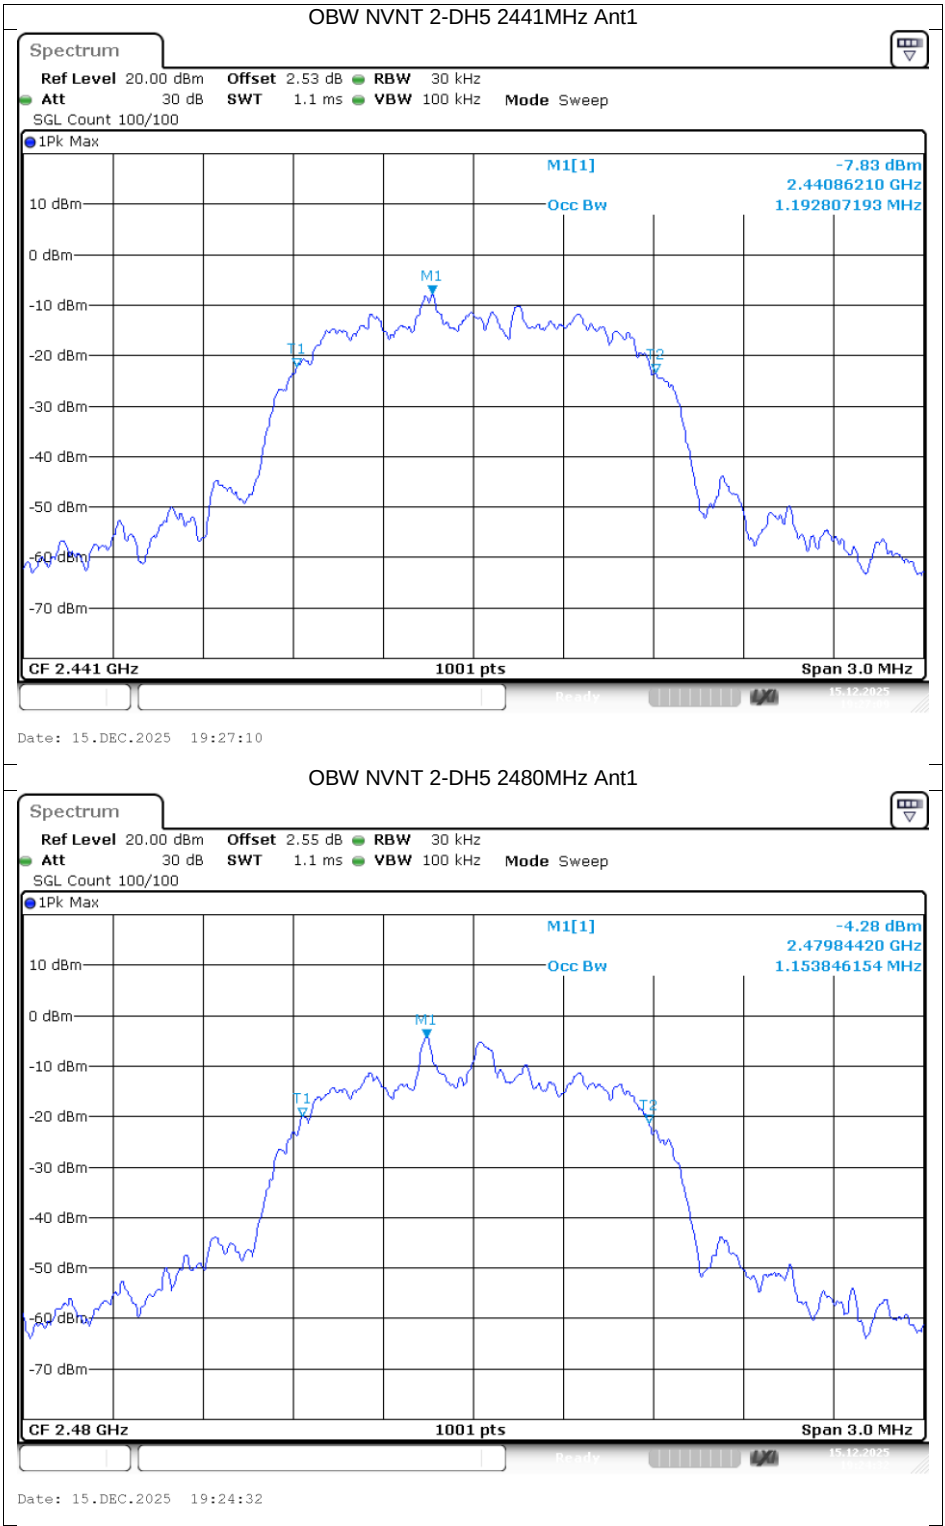


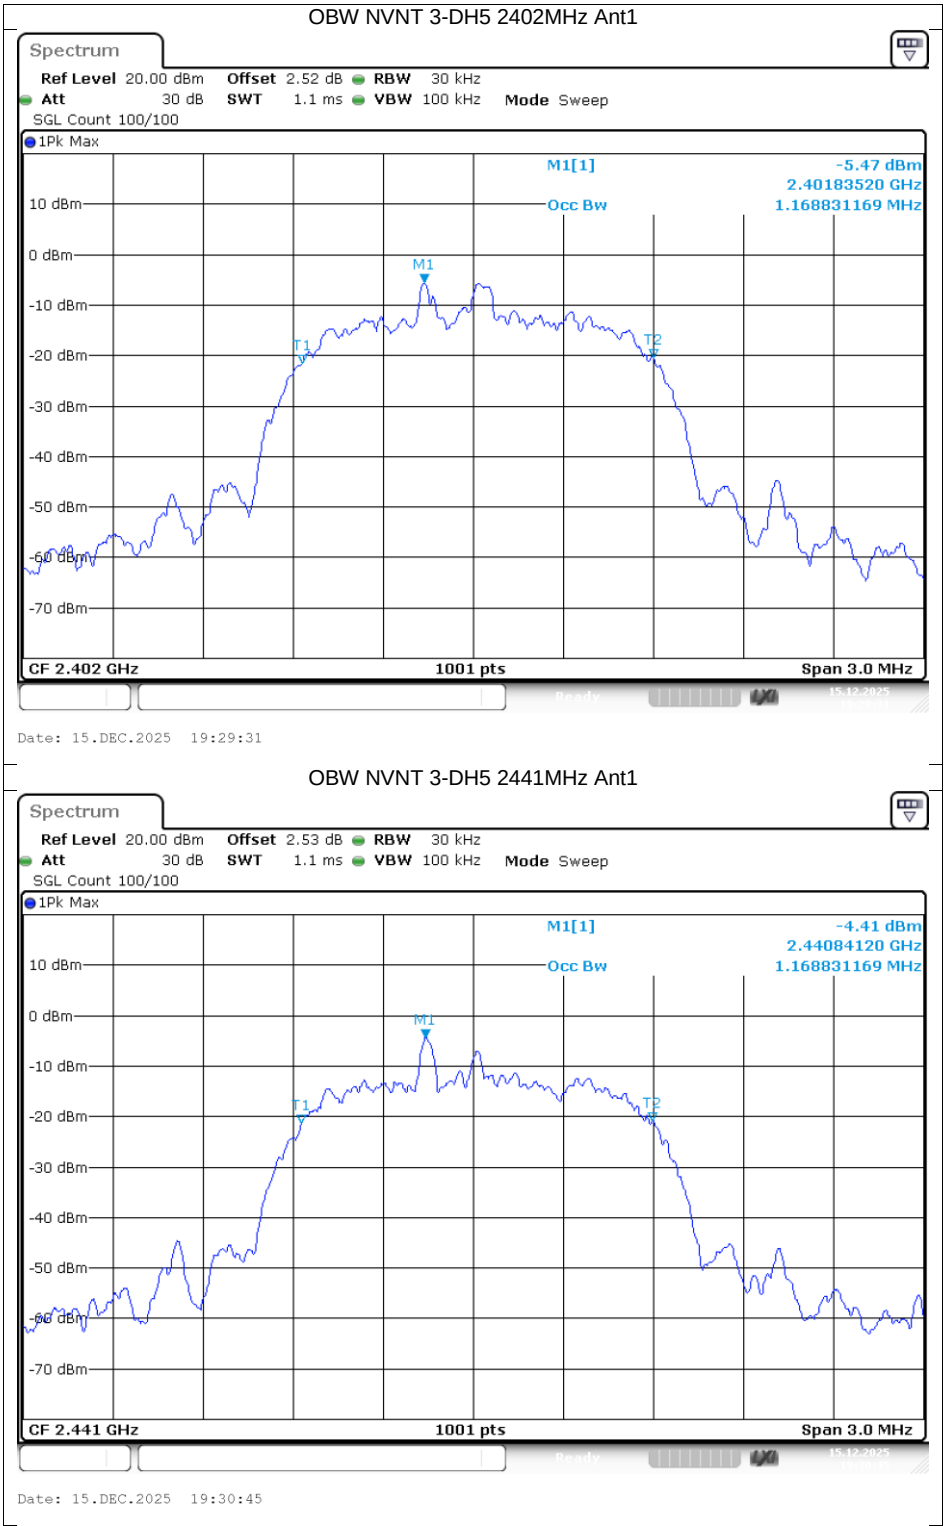


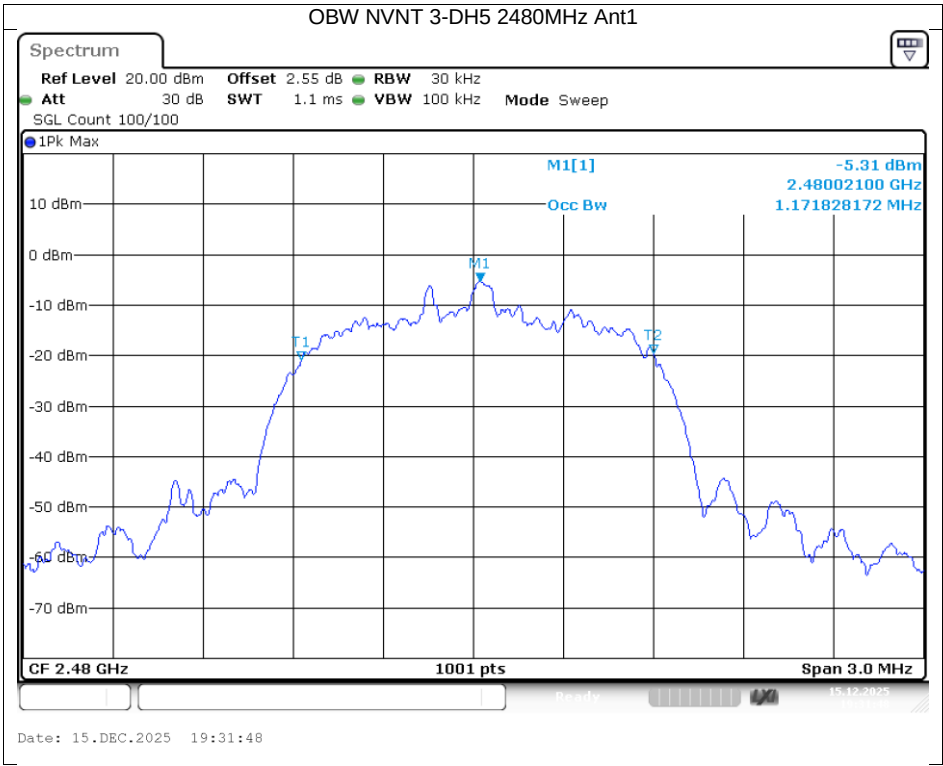



Carrier Frequencies Separation


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.984	2403.068	1.084	0.62	Pass
NVNT	1-DH5	Ant1	2440.974	2442.068	1.094	0.633	Pass
NVNT	1-DH5	Ant1	2479.024	2479.99	0.966	0.62	Pass
NVNT	2-DH5	Ant1	2401.848	2402.85	1.002	0.820	Pass
NVNT	2-DH5	Ant1	2440.838	2441.852	1.014	0.827	Pass
NVNT	2-DH5	Ant1	2478.854	2479.866	1.012	0.860	Pass
NVNT	3-DH5	Ant1	2401.846	2402.85	1.004	0.887	Pass
NVNT	3-DH5	Ant1	2440.842	2441.836	0.994	0.833	Pass
NVNT	3-DH5	Ant1	2478.866	2479.846	0.98	0.847	Pass

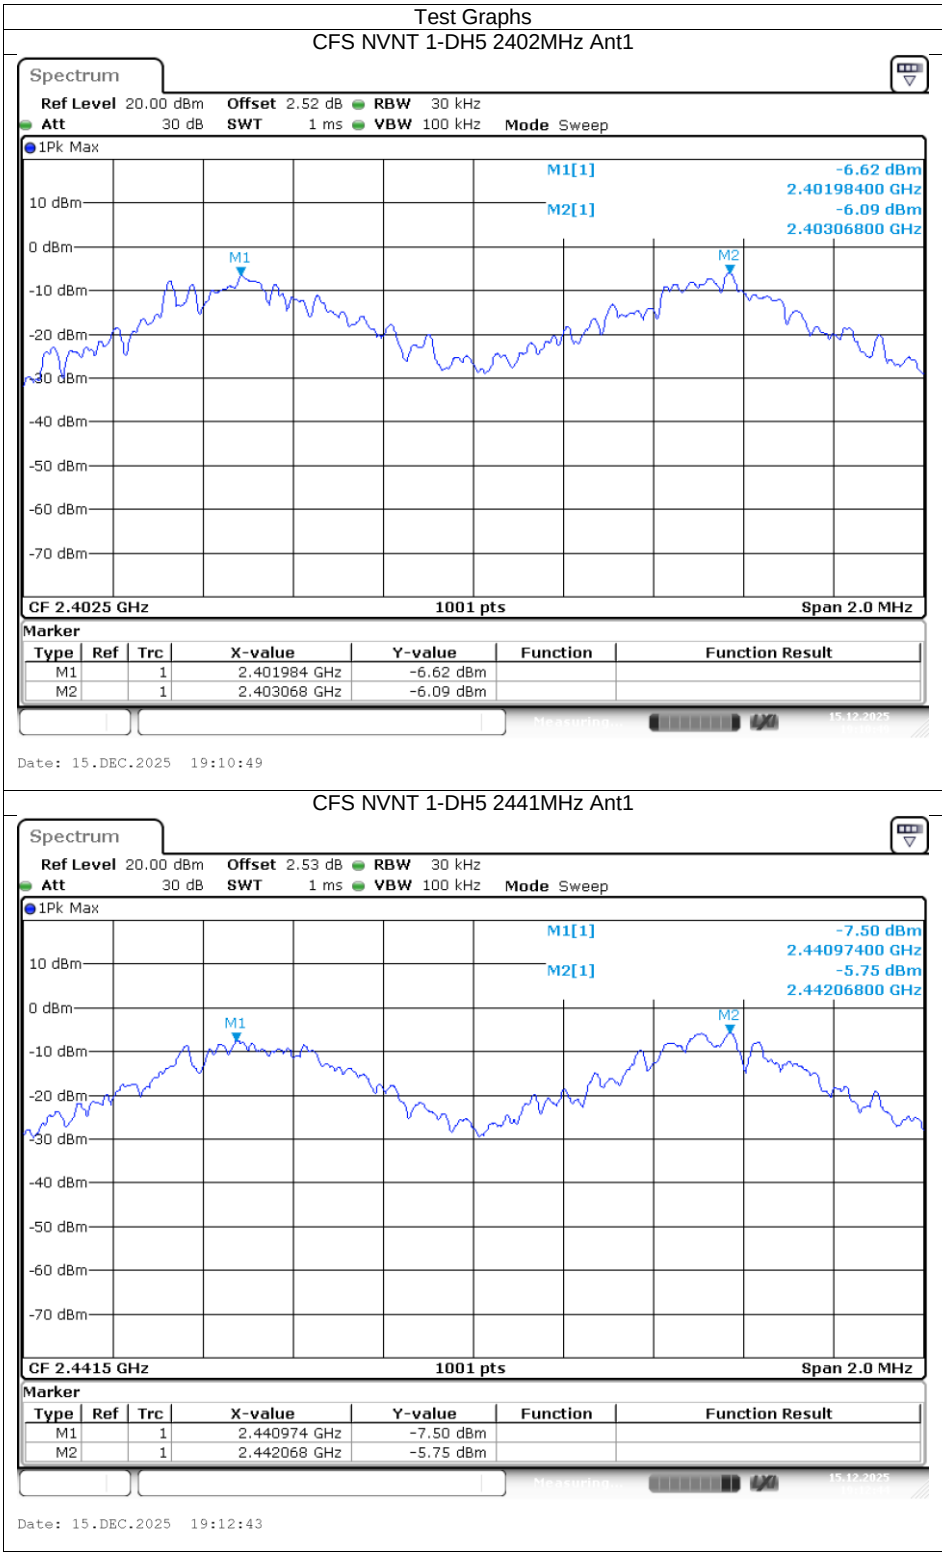

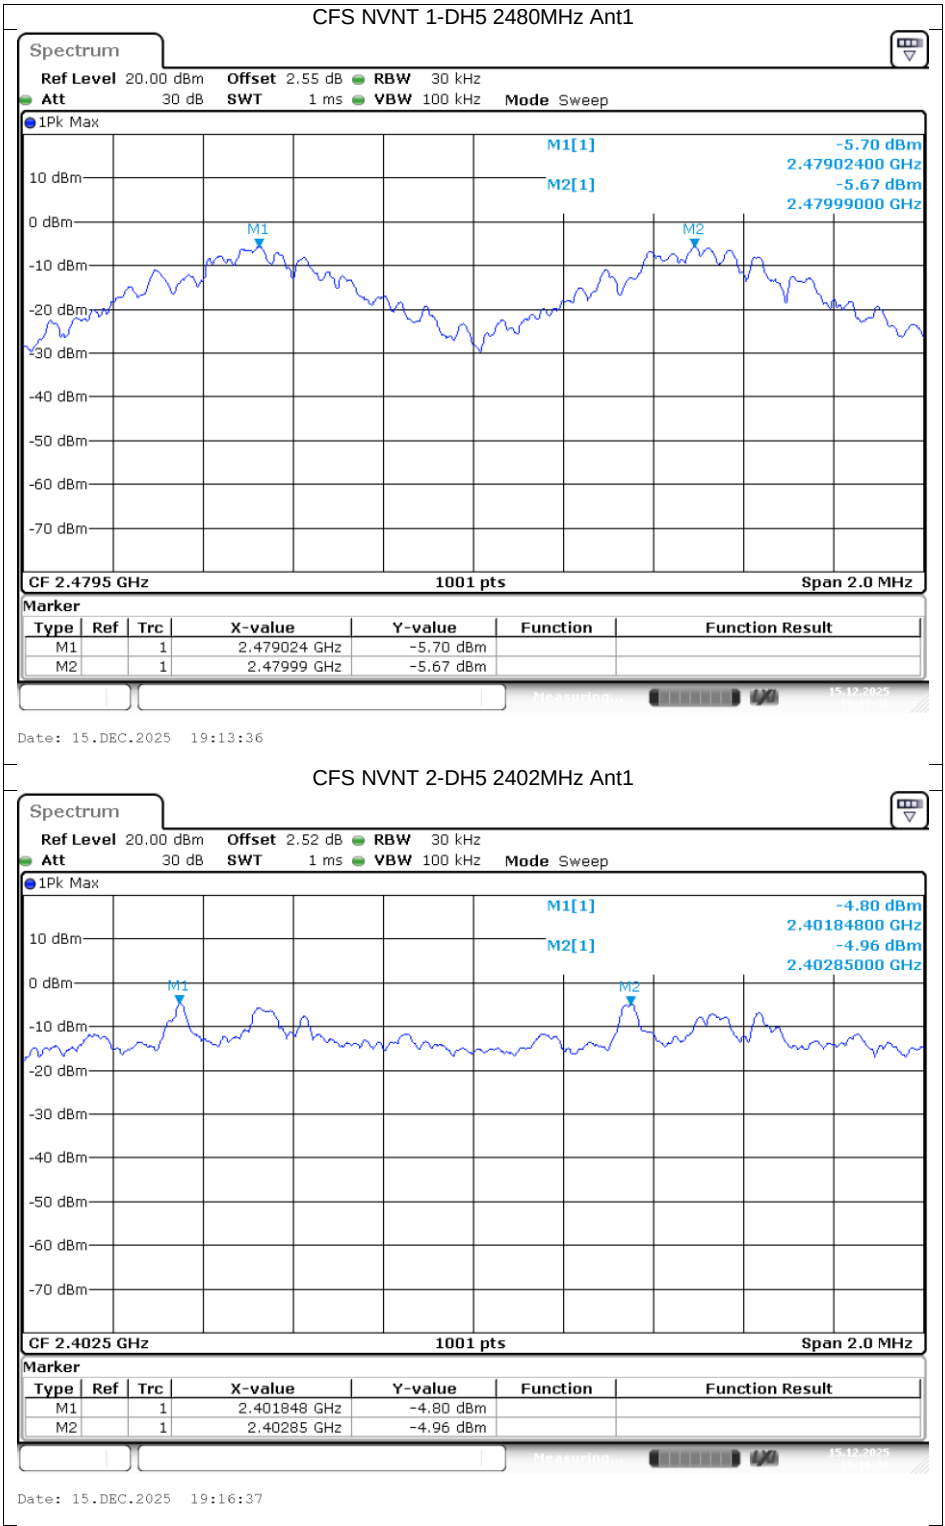

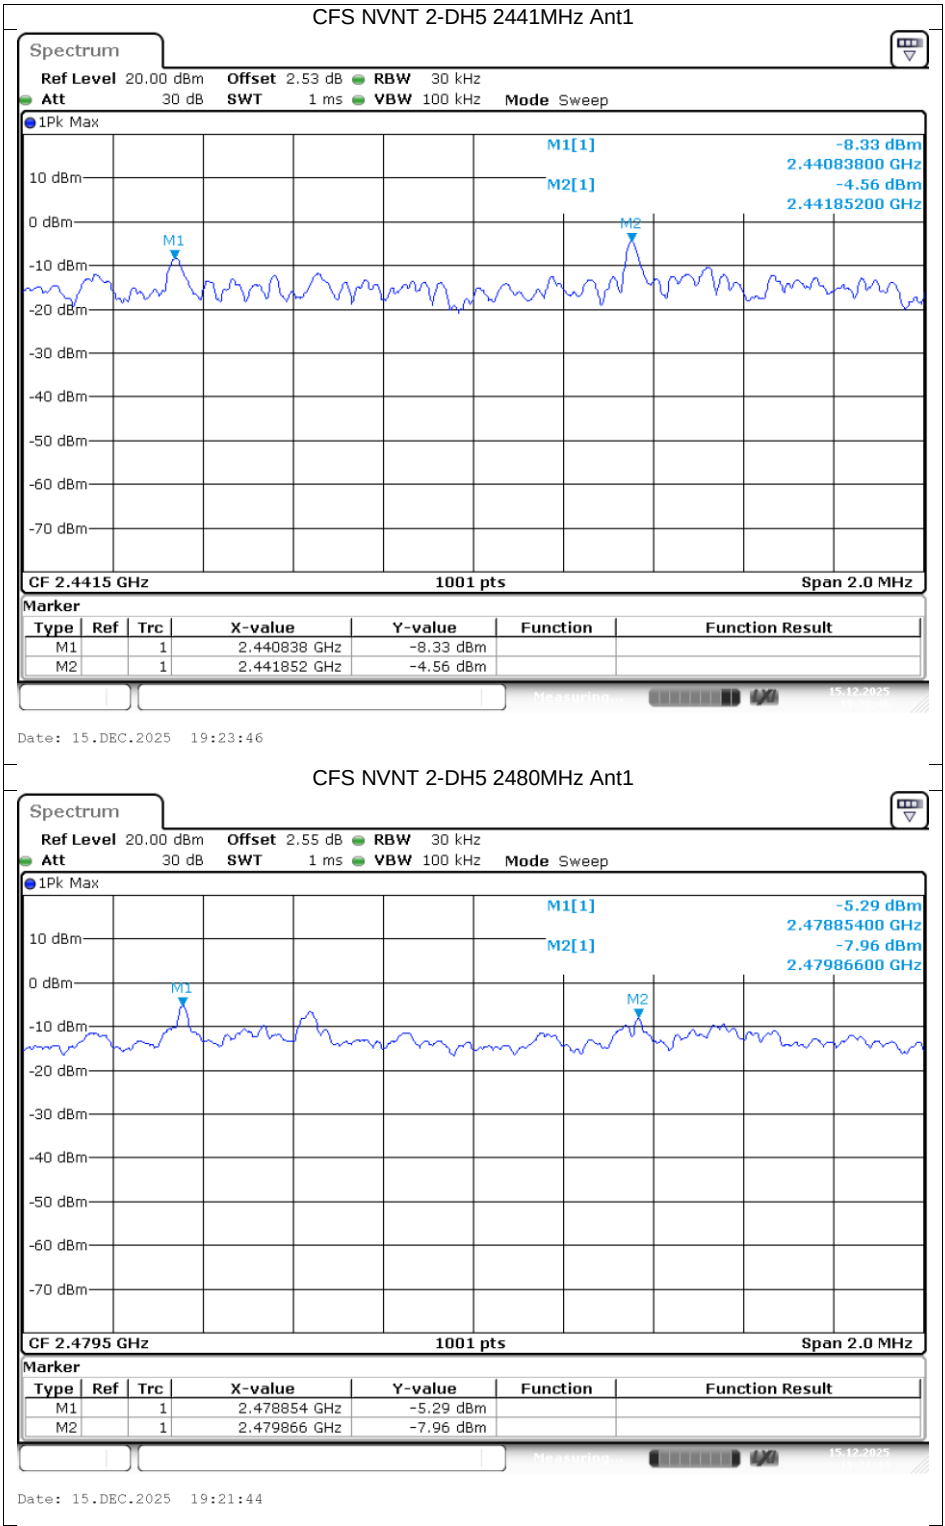


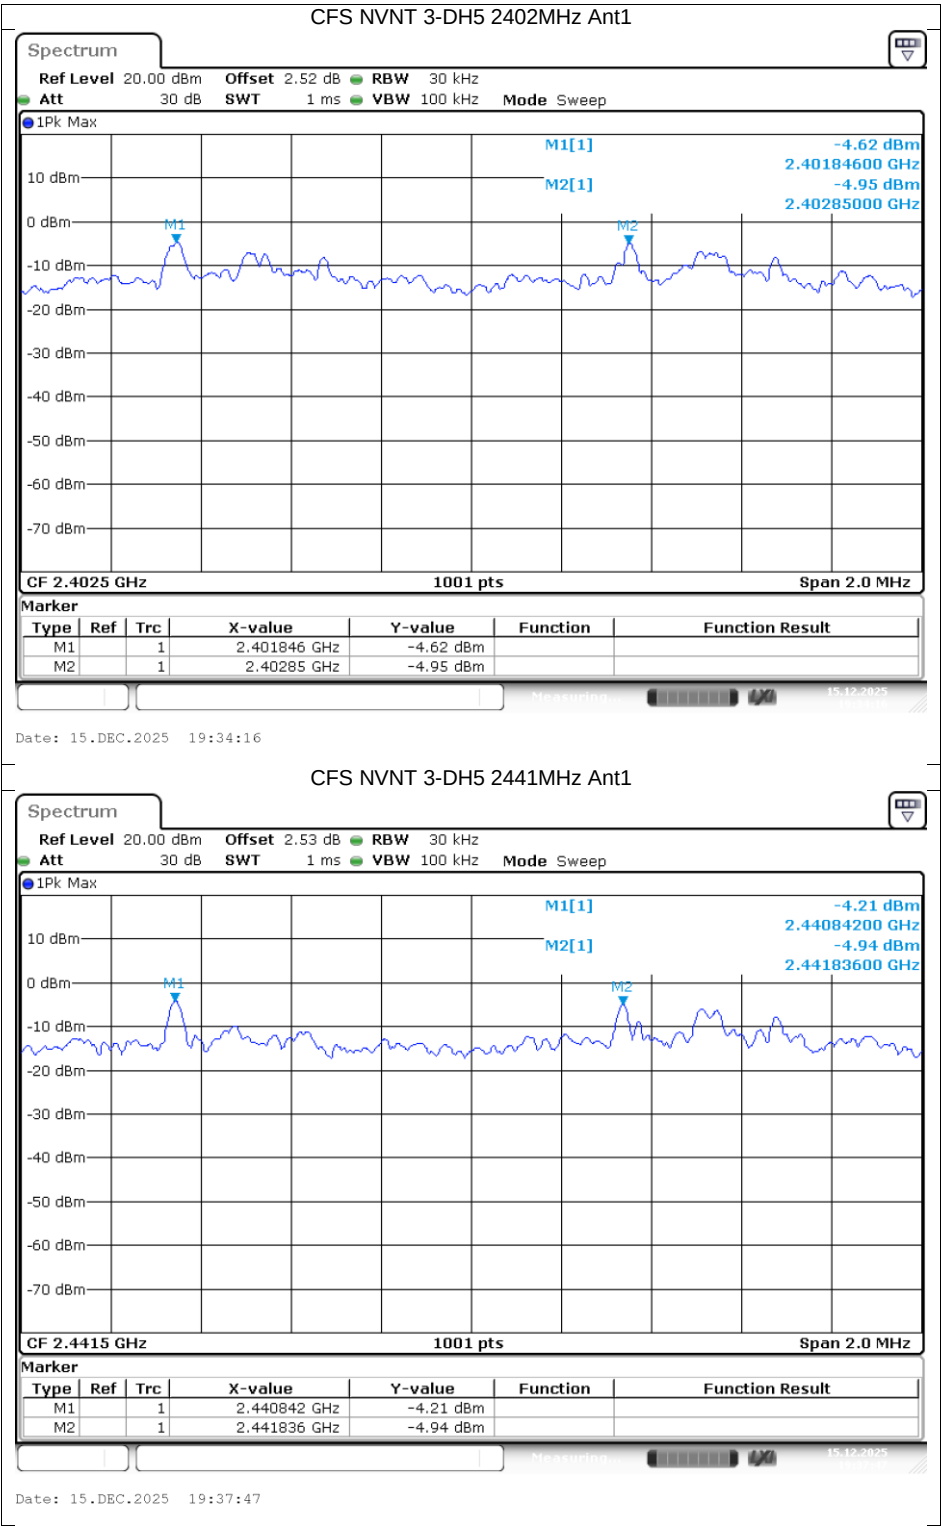


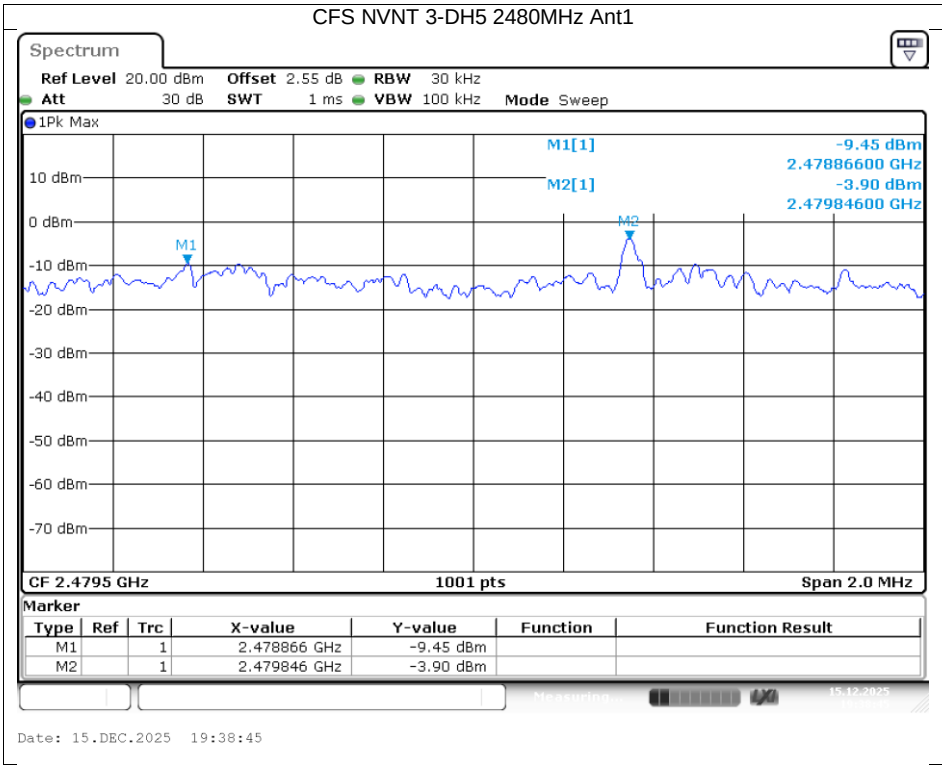

Number of Hopping Channel

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass

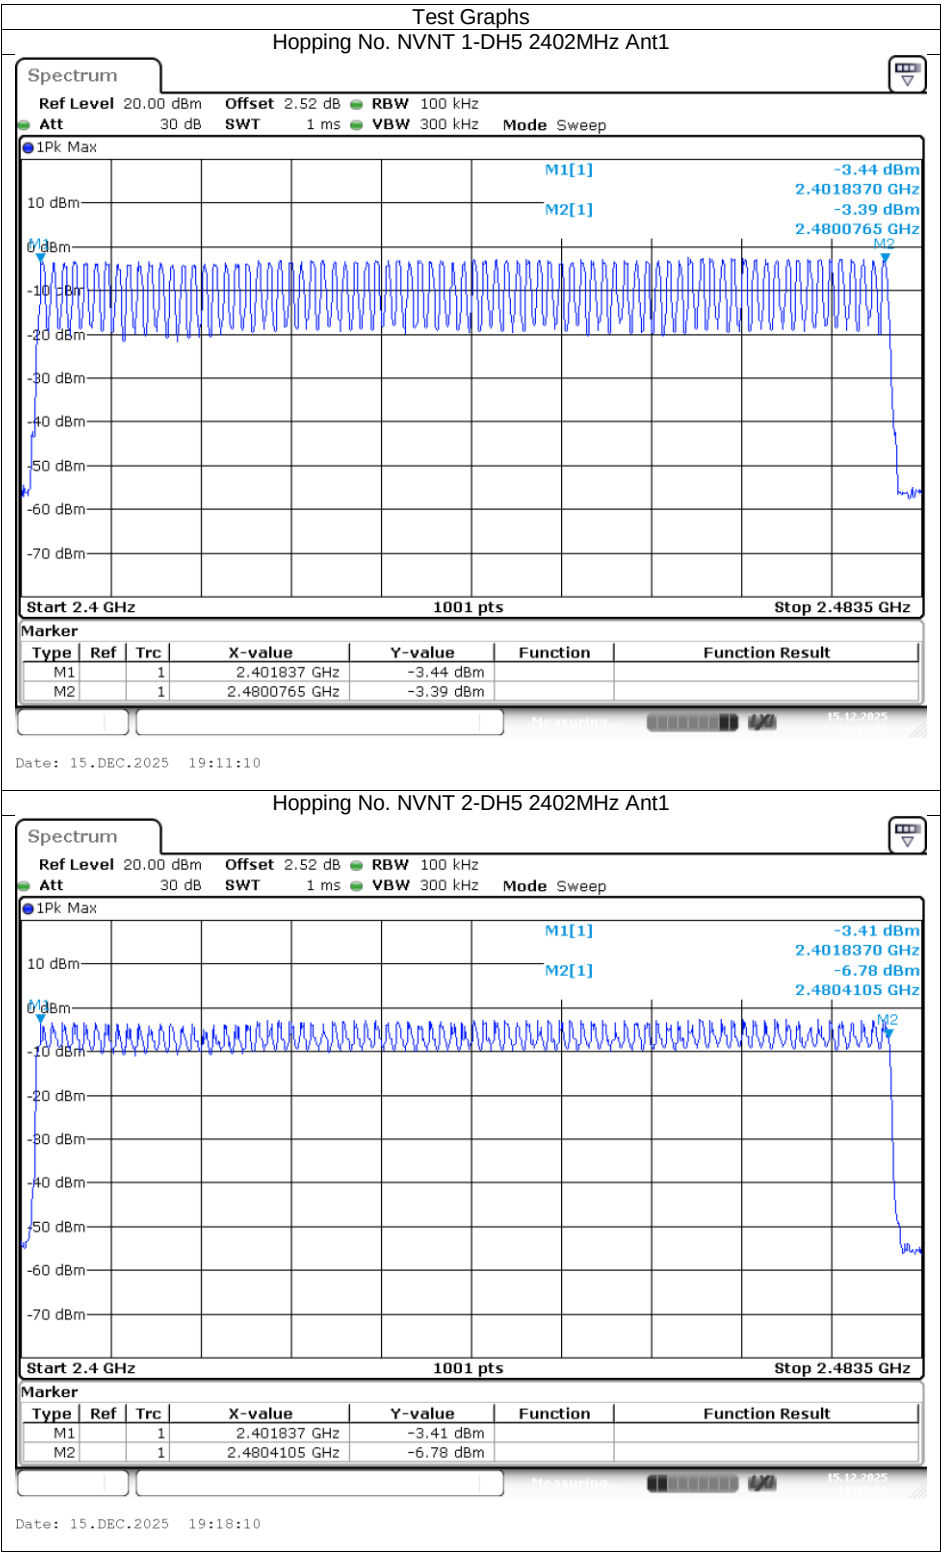

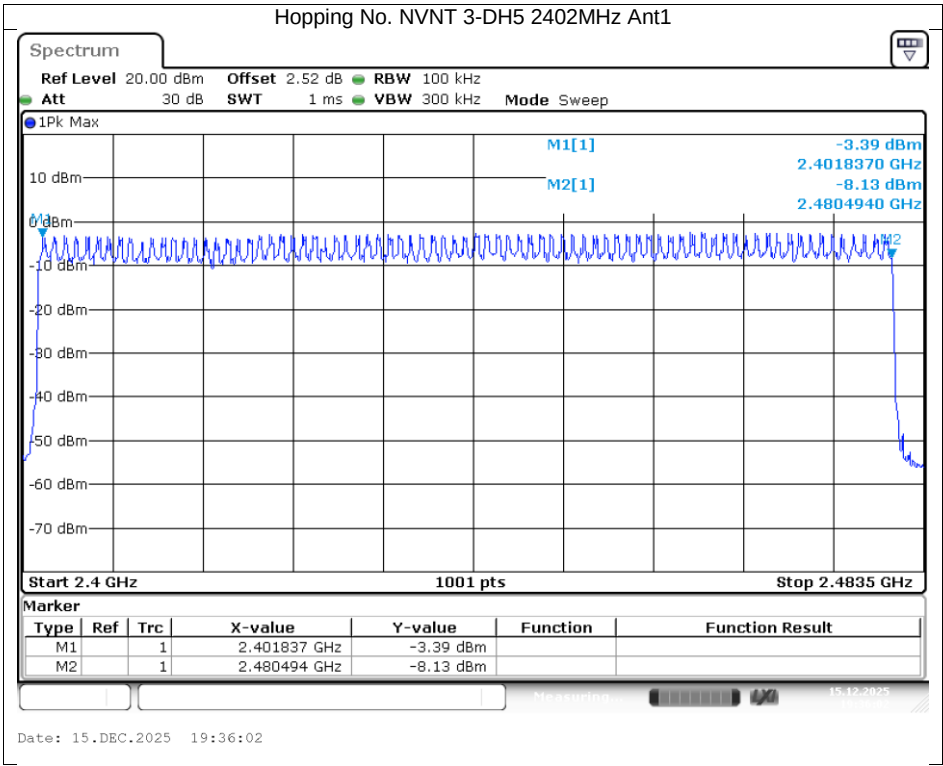

Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.908	319.88	110	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.906	281.882	97	31600	400	Pass
NVNT	1-DH5	2480	Ant1	2.905	284.69	98	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.907	328.491	113	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.914	308.884	106	31600	400	Pass
NVNT	2-DH5	2480	Ant1	2.911	305.655	105	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.917	335.455	115	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.914	288.486	99	31600	400	Pass
NVNT	3-DH5	2480	Ant1	2.916	300.348	103	31600	400	Pass

