




Questions, problems, missing parts?


Before returning to your retailer, call our customer service at 1-800-887-6326
Monday – Friday 9:00 a.m. – 5:00 p.m. CST

PACKAGE CONTENTS

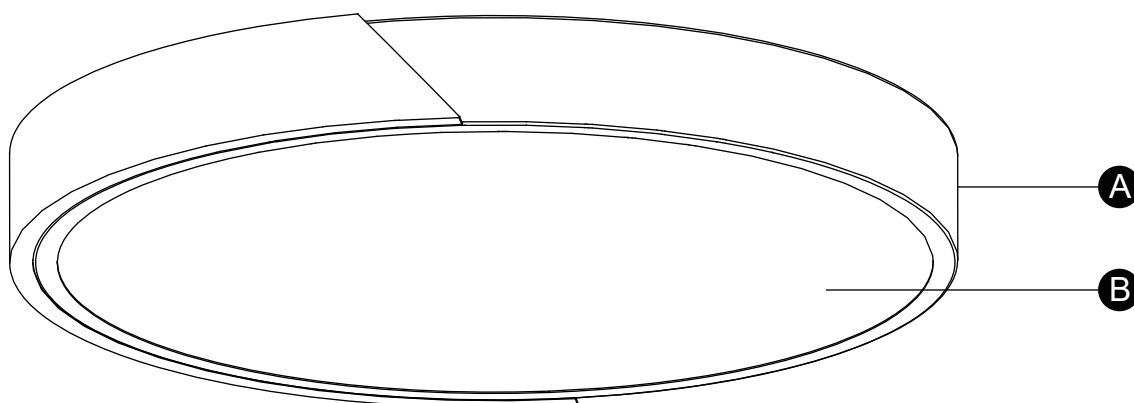

HARDWARE CONTENTS Note: Hardware not shown actual size.

AA



Mounting Screw
X2

BB



Wire Connector
X3

SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

WARNING

- Turn off electricity at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.
- LED electronics can be damaged by electro static discharge (ESD) shock. Before installation, discharge yourself by touching a grounded bare metal surface to remove this hazard. To avoid damage, do not touch the LED module.

CAUTION

- All electrical connections must be in agreement with local codes, ordinances or the national electric code (NEC). Contact your municipal building department to learn about your local codes, permits and/or inspections.
 - Risk of fire – most dwellings built before 1985 have supply wire rated for 140°F/60°C. Consult a qualified electrician before installation.
 - Do not connect this fixture to an electrical system that does not provide a means for equipment grounding. Never use a fixture in a two-wire system that is not grounded. If you are not sure your lighting system has a grounding means, do not attempt to install this fixture. Contact a qualified, licensed electrician for information with regards to proper grounding methods as required by the local electrical code in your area.
 - This fixture is only dimmable with remote control.
- If you are unfamiliar with electrical installation, it is recommended to use a qualified electrician for your installation(s).

PREPARATION


Before beginning assembly, installation or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.

Tools Required for Assembly (not included): Slotted Screwdriver, Phillips Screwdriver, Pliers, Electrical Tape, Wire Cutters, Safety Glasses, Ladder.


ASSEMBLY INSTRUCTIONS

Turn off the power at fuse or circuit box.


1. Attach the two mounting screws (AA) to the holes on outlet box, thread them in part way: 2 to 3 turns only.




2. Connect the black wire to black (power) wire, white wire to white (neutral) wire and copper wire or green / yellow wire to ground wire with supplied wire connectors (BB). Tuck all wires into outlet box.



3. Attach the fixture (A) to the outlet box by inserting two mounting screws (AA) head into the keyholes, then rotate the fixture until it is locked in place, finally secure the mounting screws (AA) tightly with screwdriver (not included).




4. Roll up and tilt the shade into the fixture (A), and then release it until it is laid in fixture side to side.



Turn on the power at fuse or circuit box.

REMOTE CONTROL ASSEMBLY INSTRUCTIONS

Fig.1

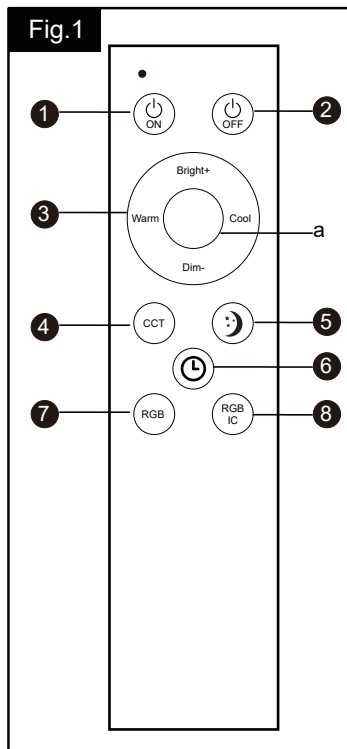

Remote Control

Install two 1.5 volt batteries (type AAA, not included) into the remote control.

Remote control functions:

1. "ON" Button:
Press this button to turn the light on.
2. "OFF" Button:
Press this button to turn the light off.
3. Bright+ Button: Adjust from low brightness to high brightness.
Dim- Button: Adjust from high brightness to low brightness.
Warm Button: Adjust from high color temperature (Daylight) to low color temperature (Warm White).
Cool Button: Adjust from low color temperature (Warm White) to high color temperature (Daylight).
4. "CCT" Color Temperature Button:
Press this button to change the color temperature of the light. There are 5 selectable colors at 2700K, 3000K, 3500K, 4000K, 5000K.
5. "Night Light" Button:
Press this button to put the light into a low brightness.
6. "Timer" Button:
Press the timer button, the light will turn off in one hour. If you want to cancel the timer function, press the OFF button.

7. "RGB" Button:

Press this button to change to a single solid RGB color. There are a total 7 colors to choose from.

8. "RGB IC" Button:


Press this button to change RGB party mode, there are a total 6 RGB party modes to choose from.

Note: This fixture has a memory setting function. If the wall switch is used to turn off the light for more than 10 seconds, it will remember the state before the power was turned off.

If the light fixture cannot be controlled by the remote, please turn off the power first and then turn it on. Next, press and hold the middle button (a) on the remote for 5 seconds to pair. Flashing indicates successful pairing.

The following parts are available for reorder if damaged or missing. Call our toll free at 1-800-887-6326.

Spare Parts List:

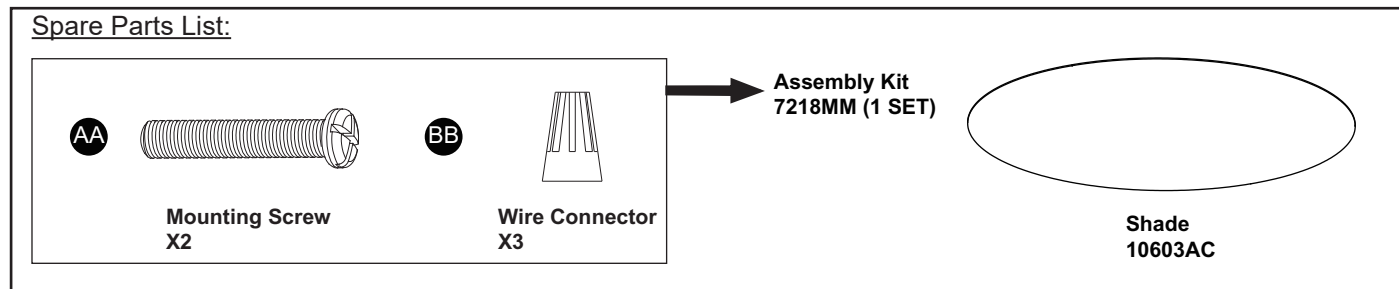

CARE AND MAINTENANCE

- To clean, turn off and wipe with a damp, non-abrasive cloth.

TROUBLESHOOTING

1) The light does not work:

- a) Make sure the wall switch and circuit breaker are on.
- b) Make sure the wiring is correct.

2) Fuse blows or circuit trips when light is turned on.

Check for crossed wires, ensure wiring is correct.

If unable to fix any of the above issues, please consult a certified electrician.

FIVE-YEAR LIMITED WARRANTY: If, during normal use, this PATRIOT LIGHTING® lighting fixture breaks or fails due to a defect in material workmanship within five (5) years from the date of original purchase, simply bring this lighting fixture with the original sales receipt back to your nearest MENARDS® retail store. At its discretion, PATRIOT LIGHTING® agrees to have the product or any defective part(s) repaired or replaced with the same or similar PATRIOT LIGHTING® product or part free of charge, within the stated warranty period, when returned by the original purchaser with original sales receipt. This warranty; (1) excludes expendable parts including but not limited to light bulbs; (2) does not cover damage that has resulted from abuse or misuse; and (3) does not cover any losses, labor, injuries to persons/property or costs. This warranty does give you specific legal rights and you may have other rights, which vary from state to state.



Questions, problems, missing parts?

Before returning to your retailer, call our customer service at 1-800-887-6326

Monday – Friday 9:00 a.m. – 5:00 p.m. CST

FCC Statement

1. This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

The device has been evaluated to meet general RF exposure requirement. This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.